


Woodlawn Wind Farm

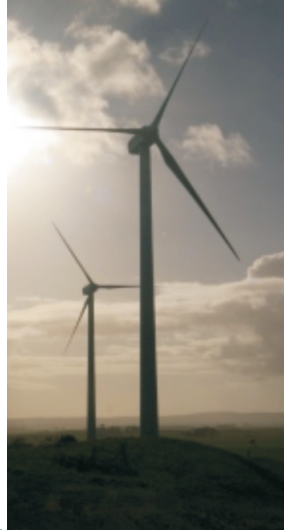

Telecommunications

G

Appendix

Lawrence Derrick & Associates

**WOODLAWN WIND FARM - INVESTIGATION OF
POSSIBLE IMPACTS ON BROADCASTING AND
RADIOCOMMUNICATION SERVICES**

[final]

20 November 2009

**L. J. Derrick B. E. (Elec.) ACMA Accreditation No 008
Lawrence Derrick & Associates
Engineering Consultants & RF Frequency Assigners**

CONTENTS

- 1. BACKGROUND**
- 2. INTRODUCTION**
- 3. DESKTOP STUDY**
- 4. BROADCASTING SERVICES IN THE AREA**
- 5. RADIOCOMMUNICATIONS SERVICES**
- 6. EMI EFFECTS OF WIND TURBINES**
- 7. DISCUSSION OF OVERSEAS EXPERIENCE**
- 8. WOODLAWN SITUATION**
- 9. FORTUITOUS RECEPTION OF BROADCAST SIGNALS**
- 10. MITIGATION TECHNIQUES**
- 11. CONCLUSIONS**

ATTACHMENTS

- 1. Woodlawn Wind Farm Turbine Co ordinates**
- 2. TV Stations & Channels in the Area**
- 3. Radio Link Map 40- 999 MHz Frequencies**
- 4. Radio Link Map above 1000 MHz Frequencies**
- 5. Map of Radio Link Paths near Wind Turbines**
- 6. Path Profile Cowley Hills – Gibraltar Hill**
- 7. Radio Link Systems Data and Clearances**
- 8. Predicted Interference Levels to TV Reception**
- 9. Glossary of Technical Terms**

1. BACKGROUND

Woodlawn Wind Pty Energy Ltd is planning the development of a wind farm near Tarago in NSW, about 70 km north east of Canberra. This will involve the construction of 20 wind turbines, which are anticipated to consist of tapered cylindrical metal towers of up to 80 metre in height with three blades of up to 45 metres in length mounted on top. As part of the environmental study of the proposal, the potential for disruption to radiocommunications and broadcasting in the wind farm area is being assessed. Clearance distances between any point to point microwave link paths and the turbines are also required to avoid any degradation to the performance of the links. Buffer zones from radio sites within or close to the boundaries of the wind farm are also to be specified where necessary.

2. INTRODUCTION

It is considered necessary to include an assessment of impacts of the wind turbines on TV and sound broadcasting reception in the general area of the wind farm from the transmitting stations utilised by residents and to determine if any of the turbines are close to microwave system paths traversing the wind farm site. This report covers the outcomes of a desktop study as outlined below.

3. DESKTOP STUDY

A desk top study has been carried out on the likely impact of typical wind farm turbines and their supporting towers on broadcasting and radiocommunications in the area surrounding the wind farm. This study is based on relevant International Telecommunications Union (ITU) documents and on other professional reports on overseas and Australian experience of wind farm impacts on broadcasting services in the vicinity of any wind turbine structures. For Radiocommunication services sites up to at least 50 Km need to be considered because of the length of point to point paths of up to 100 Km.

Using data from the Australian Communications & Media Authority's (ACMA) RADCOM Database, checks have been made on radiocommunication services within at least a 50 km radius of the wind farm to determine if any of the turbine towers could obstruct line-of-site paths or have any likely detrimental affect on these services. Clearance criteria for ray lines have been indicated for any point to point radio paths crossing or near the wind farm site.

4. BROADCASTING SERVICES IN THE AREA

From ACMA TV and Sound Broadcasting Station listings, and from a map survey of the area surrounding the Woodlawn wind farm site, the following is a general summary of the broadcast transmitter site locations and radio frequency channels which provide cover of the area.

4.1 Analogue Television

It is expected that residents in the area surrounding the wind farm location generally view analogue TV from the Canberra National and Commercial main stations located at Black Mountain which is approx. 50 km from the wind farm site centre. In addition coverage of some locations could be available from the Central Tablelands, Goulburn, Illawarra and even Sydney stations. This is based on the ABC's web site TV service area predictions for the Tarago 2580 Postcode. The station utilised by individual residents for TV reception will depend on the least obstructed path to the transmitters and in some locations reception of channels from more than one station will be possible. In addition to analogue TV channels digital channels are also available from these transmitting locations as discussed in 5.2. A summary of possible channels available from the stations listed is shown in Attachment 2

4.2 Digital Television

Digital television signals are also currently being radiated from the same locations listed in 5.1 under the current transition to digital television around Australia which commenced in 2001. According to the ABC's TV coverage predictions reception of digital TV may be possible in the 2580 postcode in some locations from the Canberra, Goulburn and Illawarra stations.

The Government has announced that digital only transmission in Canberra and other Regional NSW markets in this area will be achieved by 30th June 2012. It is therefore considered that any remedial action necessary for interference to analogue TV reception should focus on a digital solutions where possible.

4.3 FM Sound Broadcasting

Canberra FM Services are radiated from Black Mountain and other FM services are available in the area from Goulburn, Illawarra and other sites.

4.4 MF Sound Broadcasting

As indicated below, wind farm effects on MF radio are highly unlikely and therefore the stations serving the area have not been listed.

4.5 Satellite Pay Television

Some homesteads in the area may have satellite pay TV service antenna installations. Unless a particular subscribers antenna reception direction and elevation is closely aligned with a turbine, which is highly unlikely, no impacts on TV reception is expected.

5. RADIOCOMMUNICATIONS SERVICES

The wind turbine current grid coordinates are listed in Attachment 1. Maps generated from data in the ACMA database are shown in Attachments 3 & 4. Attachment 3 shows all radio sites and point to point links within at least 50 Km of the wind farm and with operational frequencies in the range 40 – 999 MHz.

Attachment 4 is a similar map for links in frequency range above 1 GHz. It should be pointed out that due to the close spacing of adjacent link sites the site number displayed on the PDF maps may not be the appropriate one for a given point to point link due to overlaying of site labels. The wind farm site is shown as a rectangle.

5.1 Point to Point

A number of point to point links are registered for operation within 50 km of the wind farm site. As shown in map in Attachments 3 there are two links which traverse the boundaries of the wind farm. Attachment 4 indicates that there are no microwave links (> 1GHz) with any turbine proximity issues. Clearance requirements are required to ensure turbines are not located close to the ray lines of these two links to avoid any impact on their performance. The ray lines passing near the wind turbines are shown in a zoomed map in Attachment 5

5.2 Cellular Mobile Base Stations

No cellular mobile base stations are registered at sites in the close vicinity of the wind farm.

5.3 Two-Way Mobile

A number of private and Public Utility Point to Multipoint and mobile bases exist in the area surrounding the wind farm site. These bases potentially provide cover to mobiles in a 360 degree arc from their bases. No significant impact from the wind farm on base coverage beyond normal mobile operational performance is predicted in view of the geographic separation between the base antennas and the turbine structures. Of course a mobile unit communicating with a base station when the mobile is located within metres of the wind turbine structures (or indeed near any large building, silo, tower etc) may experience some very local performance change, however moving a short distance would restore performance to normal.

5.4 CB Radio

CB radios are not individually licensed, the equipment being subject to class licensing only. Therefore no records of location or operators of CB radios exist, and the channels are shared without any right of protection from interference. No impact from the wind farm is predicted except perhaps for very local effects to portable or mobile units in the immediate vicinity of the turbines which could be avoided by a small location change of the unit.

5.5 Other Services

The nearest airport at Canberra has radar located at Mt Majura about 40 km away. The adjacent Capital wind farm has some wind turbines closer to this radar site.

6. EMI EFFECTS OF WIND TURBINES

The following is an extract from Ref. 1:

"It is well known that any large structure, whether stationary or moving, in the vicinity of a receiver or transmitter of electromagnetic signals may interfere with those signals and degrade the performance of the transmitter/receiver system. Under certain conditions, the rotor blades of an operating wind turbine may passively reflect a transmitted signal, so that both the transmitted signal and a delayed interference signal (varying periodically at the blade passage frequency) may exist simultaneously in a zone near the turbine. The nature and amount of electromagnetic interference (EMI) in this zone depend on a number of parameters, including location of the wind turbine relative to the transmitter and receiver, type of wind turbine, physical and electrical characteristics of the rotor blades, signal frequency and modulation scheme, receiver antenna characteristics, and the radio wave propagation in the local atmosphere. Other wind turbine components which have been considered to be potential causes of EMI are towers and electrical systems. However, neither of these has been found to be a significant source of interference. Thus, moving blades are the components of most importance in determining EMI levels.

Television Interference from wind turbines is characterised by video distortion that generally occurs in the form of a jittering of the picture that is synchronised with the blade passage frequency.

Effects on FM broadcast reception have been observed only in laboratory simulations."

Point to point links in microwave and lower frequency bands will be affected only if the turbine tower or turbine clearance to the line of site path to the other end of the link is within the second Fresnel zone which is dependent on the operating frequency of the link, the distance of the tower/turbine from the link antenna and the total link distance. D. F. Bacon (Ref. 8) proposes 3 potential degradation mechanisms - near field effects, diffraction and reflection or scattering. The reflection or scattering treatment in the reference suggests greater clearance requirements at positions close to the link terminals than the usually applied Fresnel Zone clearance for certain links with low antenna gain.

7. DISCUSSION OF OVERSEAS EXPERIENCE

Observations and studies have been carried for a number of years in both the USA and the UK on the effects of wind turbines on TV and other radiocommunication services. In 1976 the US Energy Research and Development Administration (ERDA) funded the RadLab at the University of Michigan for investigations into these effects and this continued for 7 years. Ref. 1 summarises the results of theoretical and field measurements.

The BBC's Research Department in the UK has also investigated this subject in some depth, and in 1983 a report was issued (Ref. 2). Another Report (Ref. 3) was issued in 1992 after the Research Department had carried out observations from test transmissions at existing wind farms in Denmark in 1991.

In 1992 the ITU issued a Recommendation (Ref. 4) on the assessment of impairment caused to television reception by a wind turbine.

In a recent exchange of emails, Mr Chris Gandy of the BBC Research Department summarised the conclusions they had come to on this subject as follows - ".....in the UK the only significant broadcast reception difficulties that have successfully been attributed to wind turbines so far have been associated with UHF analogue television, not FM radio and certainly not MF or LF radio. There may be some potential for effects on digital terrestrial television, but possibly only in cases where turbine blades are between the transmitter and the receiver - cases of reflection from the blades are much more common and in the majority of cases should do little damage to our DTT signals because of the guard interval present in each DVB signal. Of course, there will be the odd case where reception was right on the edge of the 'digital cliff' before the turbines were built. Also we have no record of interference with our Digital Radio transmissions in Band III."

Ref 5 summarises the results of model measurements of the level of interference signals scattered by turbine blades and the supporting tower and confirms some of the backscatter estimates calculated in Ref. 4.

It is believed that metal blades were used on the earlier turbines unlike the modern ones where composite material - fibre glass, carbon fibre, plastics are used. In some cases metal exists in the composite material blades for strength reinforcing or for lightning protection. Some references indicate that the composite blades will have a reduced interference potential, however the BBC view is that at UHF TV frequencies the difference will be small.

It is also indicated in some of the reports that due to variable wind speeds and direction, the resulting changes to turbine blade pitch and turbine facing direction will modify any interference levels at a given location in the service area ie interference effects would be time variant.

Ref. 7 issued by the BBC/Ofcom in the UK states that "In practice rarely does the tower or nacelle have any effect on reception; the impact on reception is solely on account of the rotating turbine blades. As the blades are moving objects, in terms of both their rotational speed and orientation, their effect is variable and hard to predict. When the combined effects of a number of turbines that comprise a wind farm are considered, the result is considerably more difficult to predict"

From a study of the above references and others, the following general conclusions are drawn:

- (a) No turbine interference effects are expected to MF radio reception.
- (b) There is a very low probability of perceptible interference to FM radio reception
- (c) Some interference may be experienced to analogue TV services and particularly where the path to the TV transmitter for a given receiver location is through the wind turbine blades or where there is a partly obstructed path to the transmitter and there is a clear path to a turbine. These effects may be restricted up to a distance of about 3 km from the wind farm in forward scatter directions (receiver on opposite side of the wind farm to the TV station).

(d) Digital TV services are unlikely to suffer degraded picture quality, eg, ghosting, where signals have a margin above threshold levels, however a reduction in service area could occur due to time varying reflected signals.

8. WOODLAWN WIND FARM SITUATION

From overseas experience, calculations using the University of Michigan method and the topography of the area:

8.1 No interference from the wind farm is expected to the MF and FM sound broadcasting services in the area.

8.2 Theoretical estimates outlined in Attachment 8, of reflections of the typical analogue VHF and UHF TV transmissions from Black Mountain and other transmitting sites by the turbine blades indicate that some possibility of TV picture degradation exists at times for dwellings located such that wind turbines exist within a +/- 20 degree sector (Ref. 6) from the TV antenna nominal direction of reception, and up to about 3 km from the turbines. Estimates of typical scattering from the blades are based on available data for three blades each have a one sided projected surface area of 67 sq. metres (44 metres long), that the turbine towers will be tapered steel columns about 80 metres high and on using the method outlined in Ref.1. The turbines proposed may have longer blades and the towers are taller and so will have a nominal increase in reflected signal level. These measurements overseas indicate that the calculations using the alternative ITU method (Ref.4) over estimate the scattering /reflection so this method has not been used. It is also difficult to estimate the additive effects of a number of turbines distributed over some distance and on the effect of the undulating terrain on the ratio of the reflected signal to the main wanted TV signal. Some properties are predicted to have some probability of perceptible TV picture degradation for a percentage of time depending on the direction and speed of the wind. At some unfavourably located properties within about 3 km of turbines there is a probability of perceptible analogue TV picture degradation for a percentage of time depending on the direction and speed of the wind.

8.3 Due to the undulating terrain around the wind farm and the possible individual choice of multiple TV transmitting it is difficult to predict where interference may occur

8.4 As indicated above, digital television is not subject to ghosting degradation in high signal strength areas, however some reduction of service area could result from reflected unwanted signals at the limits of the service area. There may be some isolated areas which are shadowed by local hills resulting in reduced signal levels however it is difficult to predict whether digital reception will be impaired in specific locations.

8.5 There are no TV rebroadcast stations listed in the area surrounding the wind farm. The turbines will, therefore, have no impact on rebroadcast signal quality.

8.6 For satellite pay TV services in the area of the wind farm no interference to these services is likely to occur unless the required pointing of their dish antennas to the serving satellite is also in line with a turbine.

8.7 The ACMA RADCOM database has been studied for services within at least 50 km of the wind farm to determine if any point to point services will have their paths obstructed by the wind turbine blades or the supporting towers. Maps derived from the ACMA database showing radio sites and links in the general area surrounding the site are shown in Attachments 3 & 4. Two Radio links have been identified as crossing the boundary of the wind farm site. Attachment 7 provides calculations of the clearance required to achieve 2nd Fresnel clearance near the turbines and shows that the 900 MHz NSW Police link has adequate clearance to the nearest turbines. The 450 MHz NSW Rural Fire Service link path does not have vertical clearance over the turbines as shown in Attachment 6 and has lower than the 2nd Fresnel clearance to the nearest wind turbine WTG 8. If micro siting is not feasible to achieve the required clearance it may be acceptable to operate the link without significant degradation in performance in its current position due to the low operating frequency (450 MHz) and the fact that the area of turbine blades is a small percentage of the Fresnel zone area at the turbine position.

8.8 The Airservices facility at Mt Majura includes aircraft radar which is about 40 km from the wind turbines. The adjacent Capital wind farm has turbines at a lesser distance. On the basis that the currently operating Capital wind farm is acceptable to Airservices it is unlikely that there would be any objection to the more distant Woodlawn wind turbines. Other Airservices radio systems on Mt Majura and on other sites around the Canberra airport are also unlikely to be impacted by turbines due to the separation distance and the nature of the services.

9. FORTUITOUS RECEPTION OF BROADCAST SIGNALS

On some previous projects Responsible Authorities have imposed conditions such as:

"if the qualitative survey establishes any detrimental increase in interference to reception or transmission measures must be taken to mitigate the interference to return the affected reception or transmission to pre-construction quality" (Waubra Vic Planning Permit No PL-SP/05/0150),

This raises two issues, the first being the criteria for interference assessment and the second being the protection of reception of some services outside their designed coverage area - termed fortuitous reception. For analogue television reception which is the most vulnerable service for turbine interference it is proposed to use the ITU grade 4, of a 5 grade impairment scale as the limit of acceptance, which is described as "perceptible but not annoying". On the second point, the ACMA's attitude to protection of reception outside designed service areas is understood to be that the reception is fortuitous and will not be protected. They will therefore plan for reuse of frequencies for new stations which in future may impair reception in areas where it is currently acceptable or useable, often for at least part of the time.

This is, of course, difficult for individuals to accept who, due to their particular location, cannot receive an acceptable service from their planned station. Others may use distant stations to avail themselves of diverse programs. It is not reasonable to attempt to protect these services which are likely to be of low signal level and may vary in quality of reception depending on time of day, weather patterns and season. It is therefore not recommended to mitigate any reception which may be impacted by turbine effects where the receivers are clearly outside the ACMA planned coverage area for the particular service being received.

10. MITIGATION TECHNIQUES

For individuals who experience a degraded FM or TV broadcasting service due to identified interference from the wind farm, possible techniques to reduce the interference to acceptable limits include:

1. Replacement of receiving antenna system with a higher gain more directive model,
2. Reposition antenna in height or horizontally on the dwelling,
3. Install an antenna elsewhere on the property and cable to dwelling,
4. Change the orientation of antennas to receive an alternative station if available, e.g. Illawarra or Goulburn instead of Canberra .
5. Use available digital TV Channels instead of analogue (requiring a digital Set Top Box or digital TV set), and
6. Provision of an alternative satellite service eg, Free to Air or Austar Pay TV Service.
7. Where feasible, consideration could be given to the installation of a TV or FM Repeater station to provide service to groups of residents in a shadow zone.

Potential point to point system and mobile base coverage conflict is not predicted with turbines being located with recommended clearance zones from radio sites or point to point ray lines. There is only one identified link passing the turbines with closer than the 2nd Fresnel clearance and final micro siting adjustments of 1 turbine will avoid any impacts on the link performance.

Any minor affects to MF broadcasting would occur within 10's of metres of the turbines only and with a buffer zone of at least 500m to any dwelling, no corrective action will be required.

11. CONCLUSIONS

Interference to MF and FM sound broadcasting is not expected.

No potential conflicts between point to point radio systems and the wind turbines have been identified which cannot be avoided by using adequate clearances.

Mobile radio and other radiocommunication services in the area are not expected to be significantly impacted by the wind farm or its operation.

TV reception at dwellings within about 3 km of the wind farm turbines and with antennas having turbines located with +/- 20 degrees angle of their reception direction will have some probability of noticeable ghosting at times. Any ghosting experienced may be time variant depending on wind direction and speed.

Digital TV is not susceptible to visible ghosting degradation where the signal level is above a minimum threshold. The area surrounding the wind farm is expected to be a medium level signal area however there may be individual houses located in shadow areas where other mitigating techniques may need to be applied.

For any confirmed wind farm analogue interference problems where TV receiving antenna system improvements are unsuccessful, the use of a set top box with reception of the available digital channels may be the best solution. Existing Digital TV services are expected to provide unimpaired picture to any houses near the turbines which may have experienced picture quality problems as a result of ghosting on analogue TV services from the turbines as long as the signal levels have a margin above a threshold level. In view of the transition to Digital TV in Australia as indicated above analogue transmissions will cease by mid 2012. Provision of digital TV solutions to any degraded analogue reception is simply advancing an inevitable transition to digital reception.

Alternatively a satellite service could be considered if digital TV reception be unsatisfactory in individual cases.

Overseas experience indicates that EMI produced by the wind farm generators and controls is not a problem with reputable world class wind turbine manufacturers and therefore no electrical noise measurements from the electrical generators are warranted.

REFERENCES

1. David E Spera, Wind Turbine Technology, Chapter 9 ASME Press 1994
2. J.L. Eaton, R.I. Black, G.H. Taylor, Interference to Television Reception from Large Wind Turbines, BBC Research Department Report 1983/2
- 3 D.T. Wright, Effects of Wind Turbines on UHF Television Reception, Field Tests in Denmark Nov 1991, BBC Research Department Report 1992/7
4. ITU, ITU-R Recommendation BT805 Assessment of Impairment Caused to Television Reception by a Wind Turbine 1992
5. C. Salema, C. Fernandes, L. Fauro, TV Interference From Wind Turbines Conferencia de Telecomunicacoes April 2001 Portugal

6. ITU, ITU-R, Recommendation BT 419-3 Directivity and Polarisation Discrimination of Antennas in the Reception of Television Broadcasting 1992
7. BBC, Ofcom, UK, The Impact of Large Buildings and Structures (Including Wind Farms) on Terrestrial Television Reception
8. D. F. Bacon, A Proposed Method for Establishing an Exclusion Zone around a Terrestrial Fixed Link outside of which a Wind Turbine will cause Negligible Degradation of the Radio Link, Ofcom UK Report Ver 1.1, 28 Oct 2002

ATTACHMENT 1 –WOODLAWN WIND FARM TURBINE COORDINATES

UTM WGS 84S Zone

55

WTG

E


N

1	734514	6116326
2	734303	6116110
3	734248	6115958
4	733986	6115834
5	733966	6115656
6	733964	6115425
7	733943	6115224
8	733976	6115042
9	734168	6114817
10	734374	6114327
11	734593	6114058
12	735108	6113301
13	735032	6113160
14	735028	6112956
15	735050	6112766
16	734969	6112563
17	734906	6112397
18	734724	6112248
19	734571	6111984
20	734502	6111723

ATTACHMENT 2 - TELEVISION STATIONS & CHANNELS - TARAGO AREA

Transmitter Location/service	Operator	Analog Channels	Digital Channels	Comment
Black Mountain/ Canberra	SBS	28H	30H	UHF
	ABC	9V	9AV	VHF
	WIN	31H	11V	UHF/VHF
	CBN	34H	12V	UHF/VHF
	CTC	7V	6V	VHF
Knights Hill /Illawarra	SBS	53H	54H	UHF
	ABC	56H	51H	UHF
	WIN	59H	36H	UHF
	CBN	65H	38H	UHF
	CTC	62H	37H	UHF
Mt Gray / Goulburn	SBS	58V	59V	UHF
	ABC	55V	56V	UHF
	WIN	61V	62V	UHF
	CBN	64V	65V	UHF
	CTC	10V	68V	VHF/UHF
Mt Canobolas / Central Tablelands	SBS	30H	Reception?	UHF
	ABC	1V	Reception?	VHF
	WIN	40H	Reception?	UHF
	CBN	8V	Reception?	VHF
	CTC	33H	Reception?	UHF

ATTACHMENT 3 - Radio Link Map 40- 999 MHz Frequencies

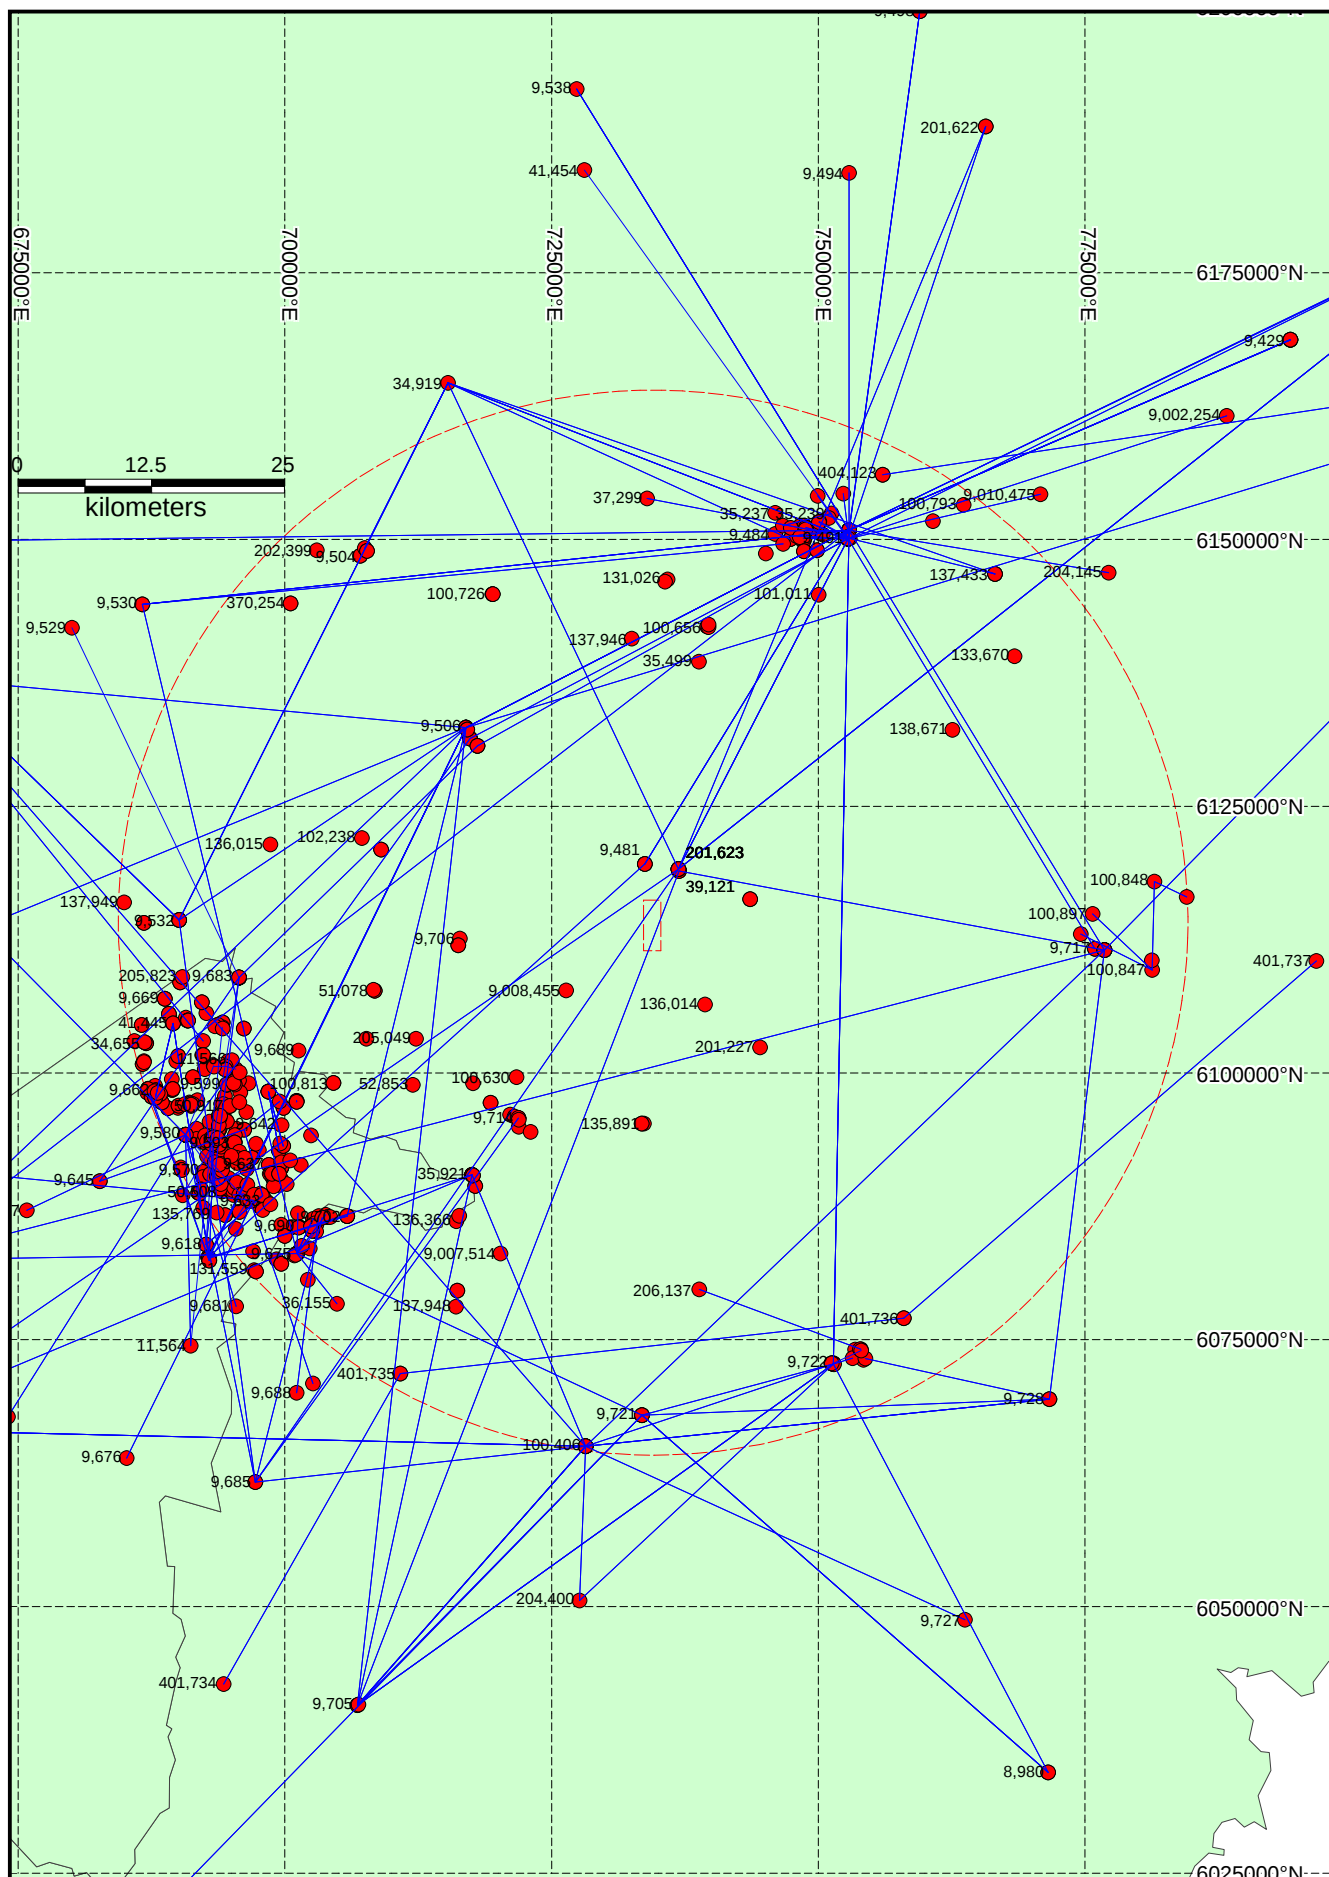

**SPECTRUM
ENGINEERING
AUSTRALIA**

Pty Limited A.C.N. 008 642 028

Radiocommunications Planning and Design

Postal: P.O. Box 3213, BELCONNEN ACT 2617

Telephone: 02 6253 2555

Facsimile: 02 6253 2800

TITLE:

**40-999 MHz Assignments
As Extracted from RRL Database**

FILENAME: 40-999 MHz Woodlawn

DATE: 16/11/2009


PROJECT: Woodlawn

SCALE: N/A

DRWG NO: 1 of 2

BY: SEA

ATTACHMENT 4 - Radio Link Map above 1 GHz Frequencies

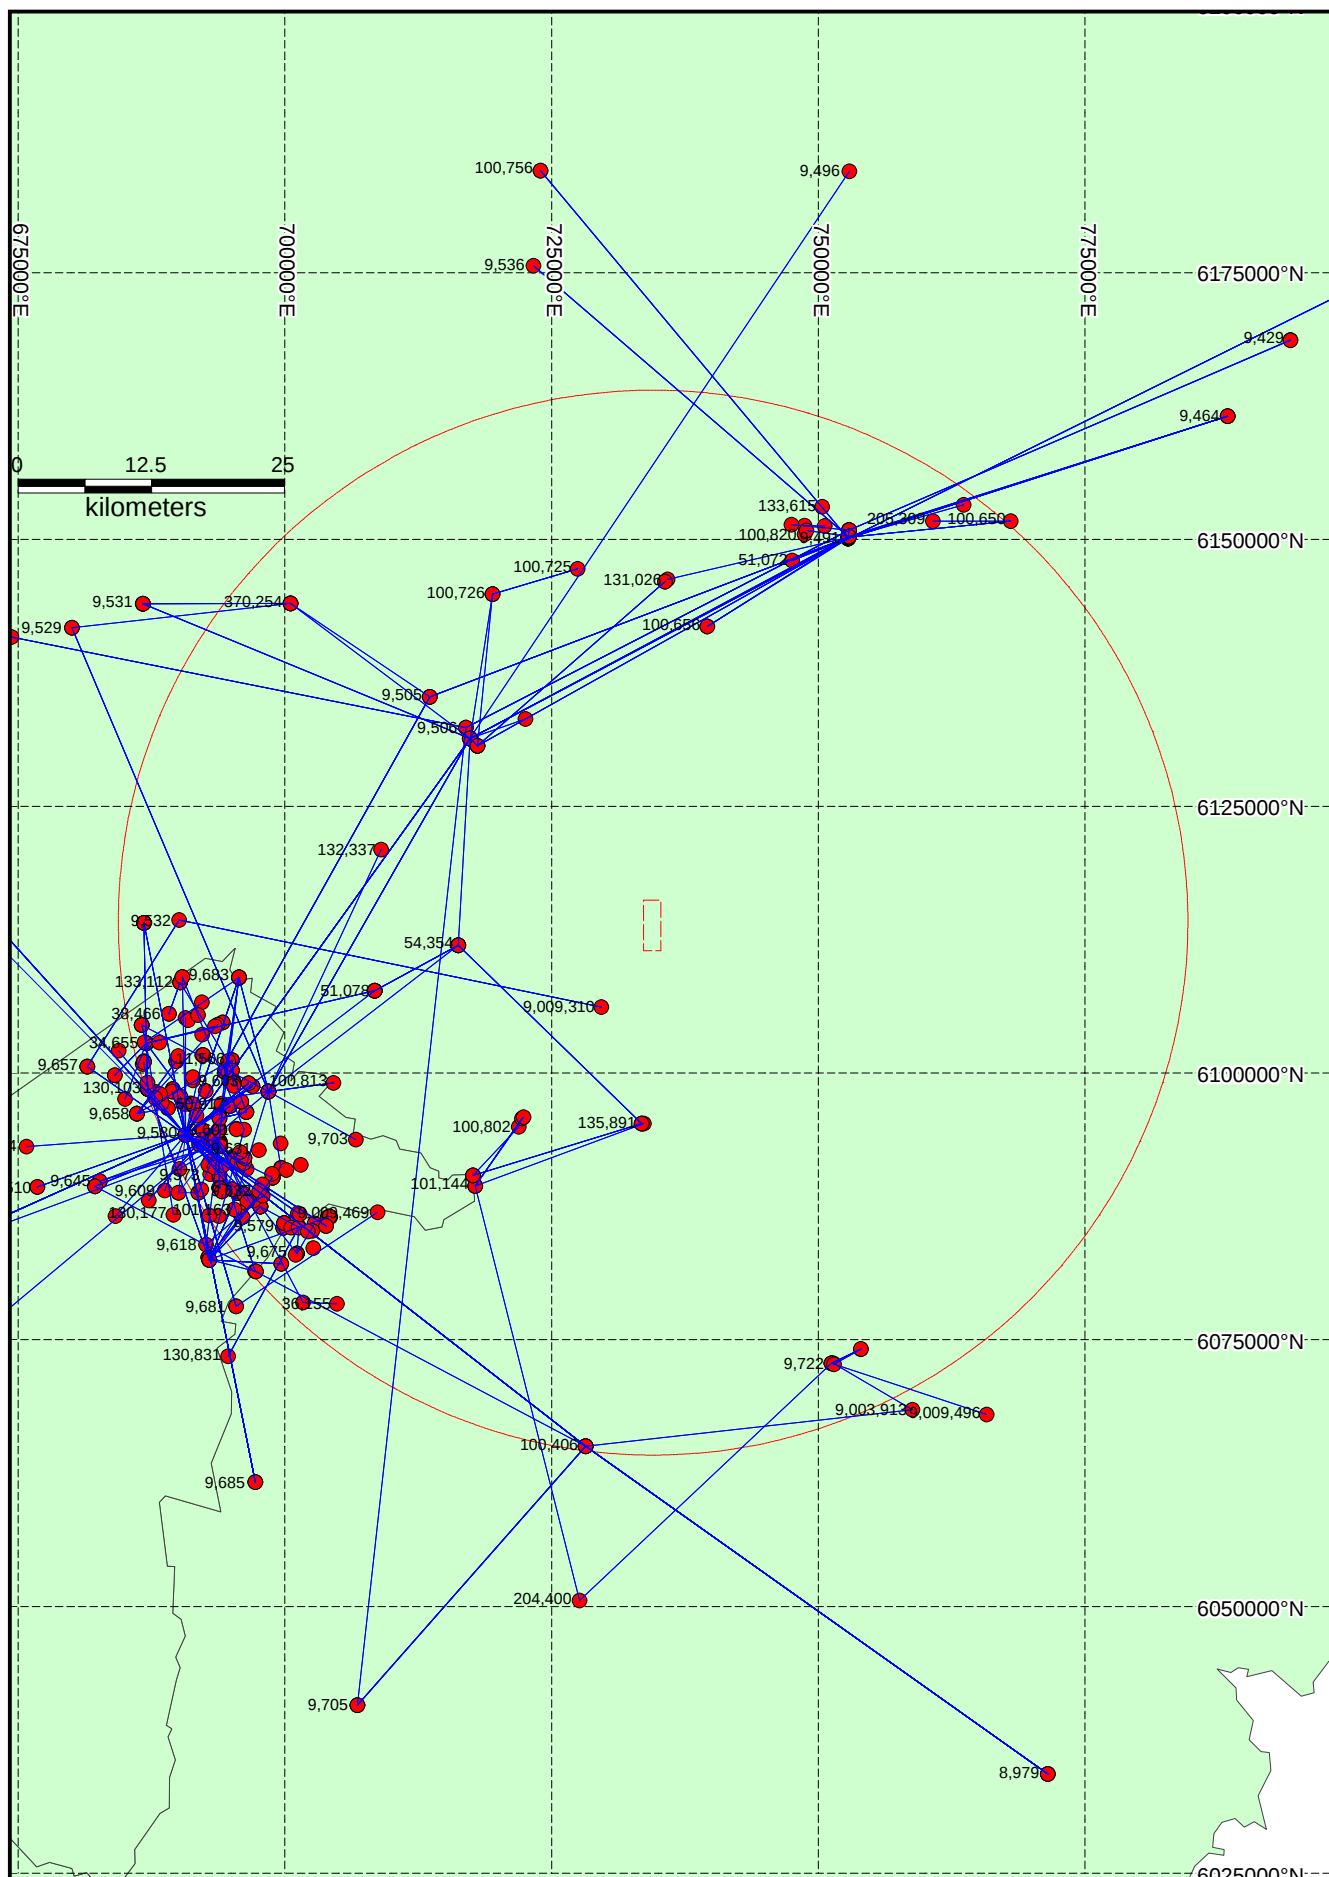

**SPECTRUM
ENGINEERING
AUSTRALIA**

Pty Limited A.C.N. 008 642 028

Radiocommunications Planning and Design

Postal: P.O. Box 3213, BELCONNEN ACT 2617

Telephone: 02 6253 2555

Facsimile: 02 6253 2800

TITLE:

**Above 1 GHz Assignments
As Extracted from RRL Database**

FILENAME: Above 1GHz Woodlawn

DATE: 16/11/2009


PROJECT: Woodlawn

SCALE: N/A


DRWG NO: 2 of 2

BY: SEA

ATTACHMENT 5 – Map of Radio Link Paths Near Wind Turbines

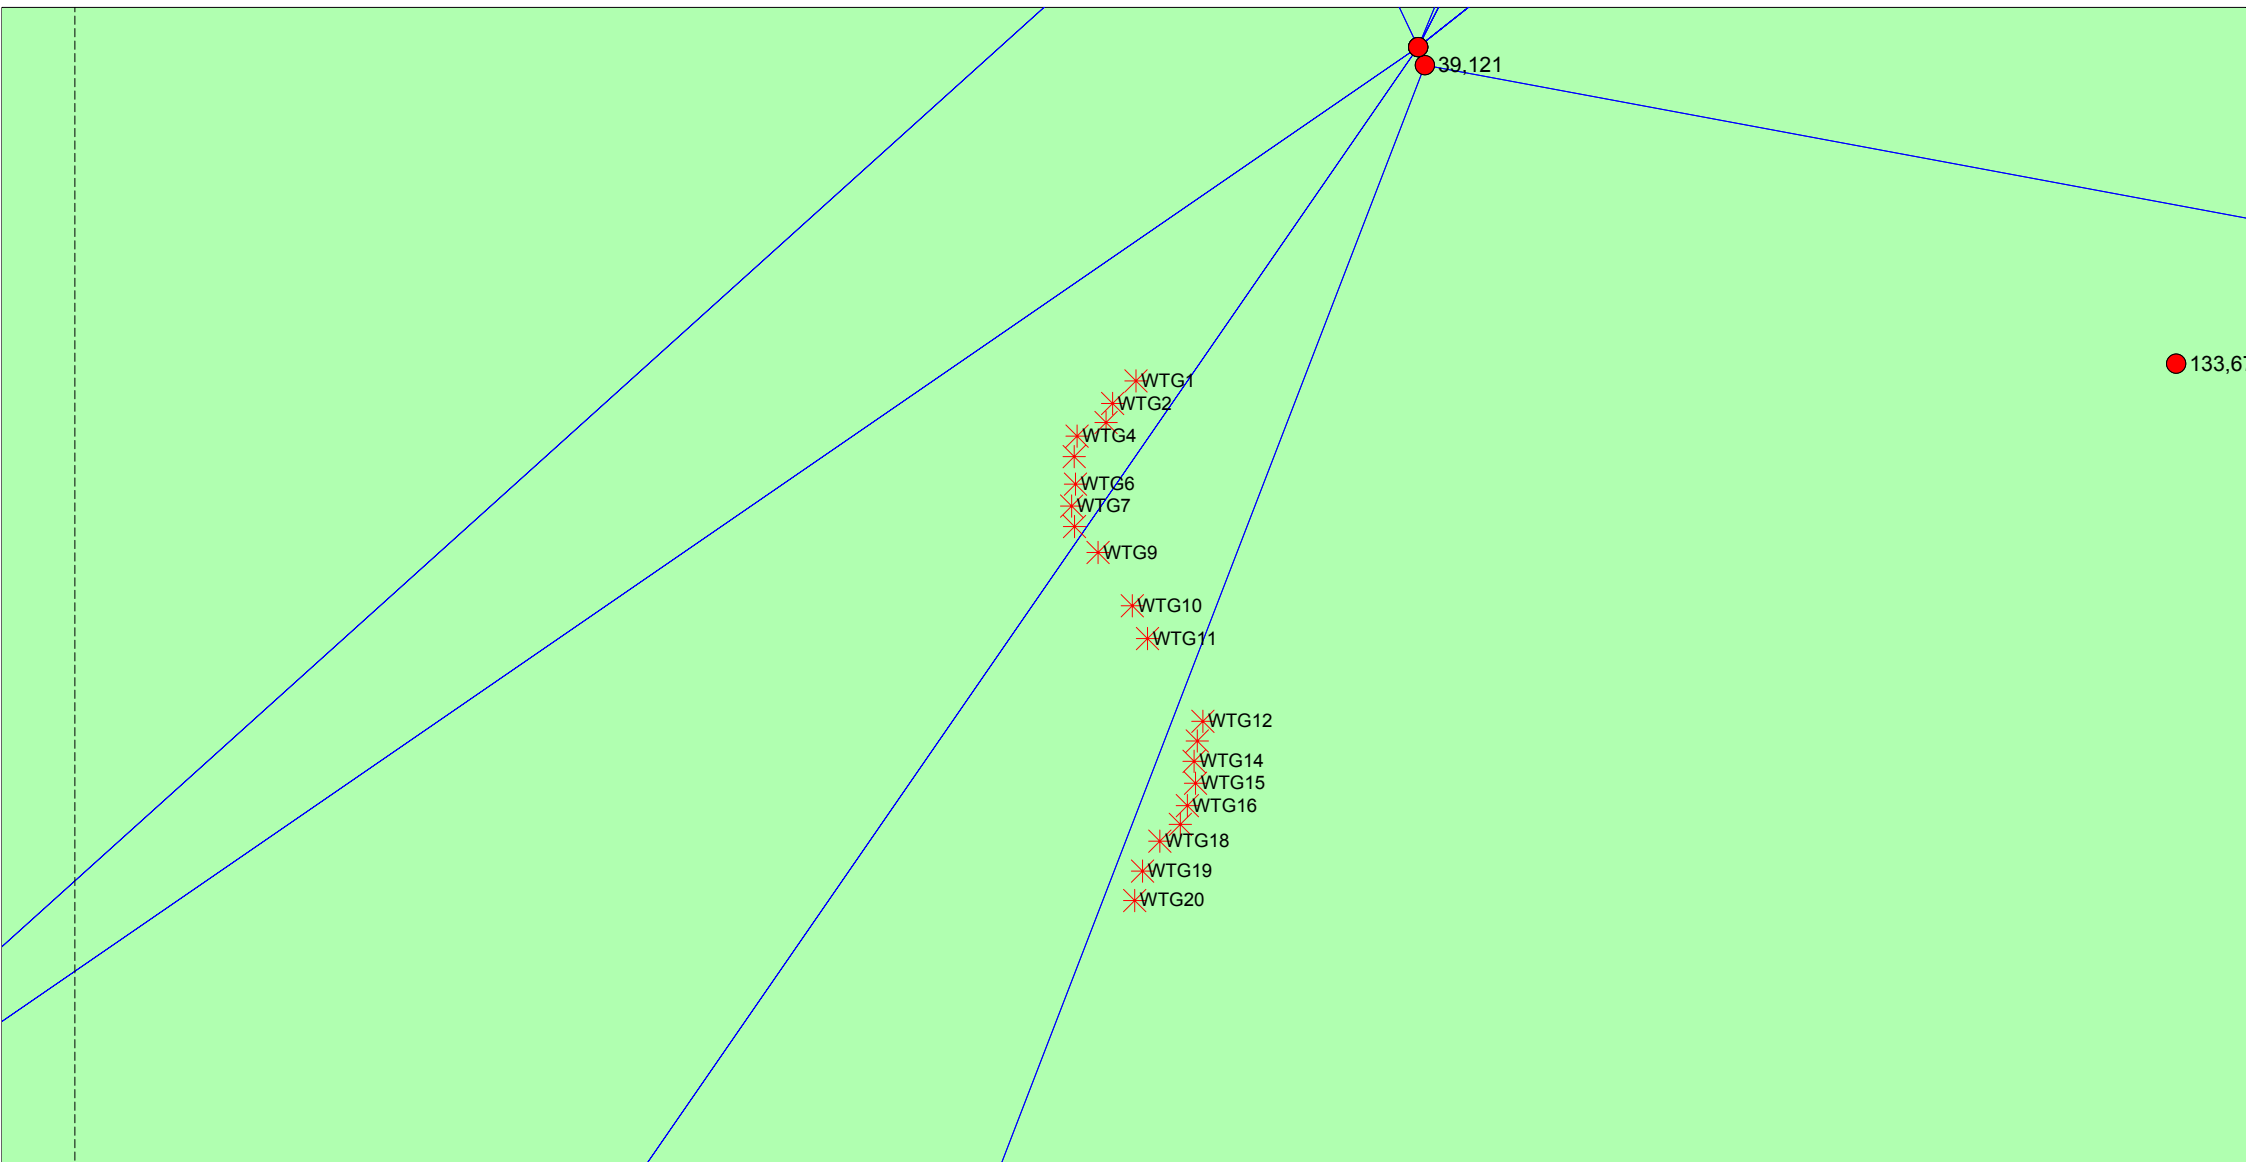

ATTACHMENT 6 – PATH PROFILE COWLEY HILLS TO GIBRALTAR HILL NSW RURAL FIRE SERVICE

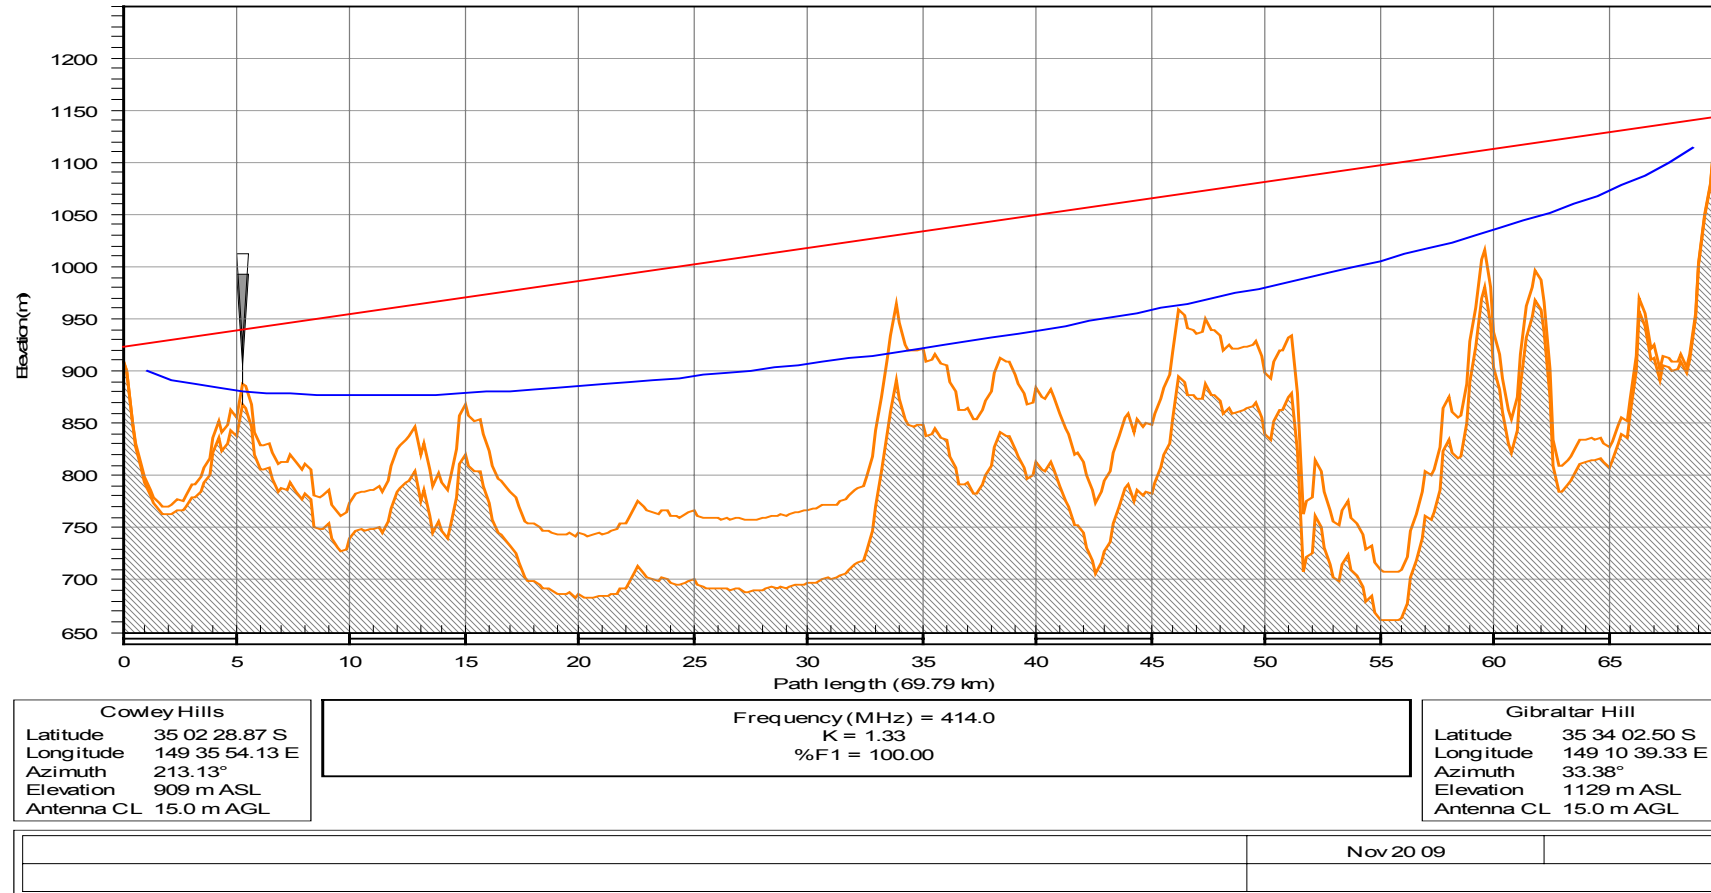

ATTACHMENT 7 – RADIO LINK DATA AND CLEARANCES

A search of the AMCA Radcom Data Base indicates that there are two UHF Point to Point Links which require consideration in maintaining adequate clearance to the wind turbines and their towers for the proposed Woodlawn wind farm layout.

In the event of a point to point system passing near a turbine the recommended clearance from link ray line to turbine blade tip is the Second Fresnel zone radius calculated using the following formula:

$$Y_{min} = \sqrt{2\lambda D1(1 - D1/D2)} \quad (\text{Ref. 1})$$

1. Site 1 Cowley Hills to Site 2 Gibraltar Hill Link

Operator: NSW Rural Fire Service
 Frequency Band 450 MHz
 Calculated Path Length : 69.79 km
 Calculated Bearing From Site 1 : 213.13°T
 Clearance to WTG8 2nd Fresnel Clearance D1

$$\begin{aligned} D1 &= \text{SQRT}(2 \times \lambda \times d1 \times (1 - d1/d2)) \\ &= \text{SQRT}(2 \times (300/450) \times 5220(1 - 5.220/69.790)) \\ &= 80.25 \text{ metres} \end{aligned}$$

The clearance to the tip of 45 metre blades for WTG 8 is 92.9 – 45 = 47.9 metres which is less than the 2nd Fresnel zone clearance of 80.25 metres. If re-positioning of WTG 8 is not feasible further consideration could be given to the acceptability of this reduced clearance given the low frequency of operation of the link and the small percentage of the Fresnel zone area the blades area represents.

2. Site 1 Tarago to Site 2 Mt Eagle Link

Operator: NSW Police
 Frequency Band 900 MHz
 Calculated Path Length : 83.77 km
 Calculated Bearing From Site 1: 199.58°T
 Clearance to WTG13 2nd Fresnel Clearance D1

$$\begin{aligned} D1 &= \text{SQRT}(2 \times \lambda \times d1 \times (1 - d1/d2)) \\ &= \text{SQRT}(2 \times (300/900) \times 6140(1 - 6.14/83.77)) \\ &= 61.59 \text{ metres} \end{aligned}$$

Adequate clearance exists with the current turbine layout, for example the clearance to WTG 13 is 255 – 45 = 210 metres to the tip of the blades of 45 metres in length

SUMMARY OF CLEARANCE REQUIREMENTS

LINK	TOTAL MAX CORRIDOR WIDTH Metres Note 1	Bearing from Site 1 °T	Co-Ordinates of Site 1 WGS 84 Zone 54
Cowley Hills – Gibraltar Hill	305	213.13	E737014 N6119264
Tarago – Mt Eagle	236.3	199.58	E737073 N6119124

Note 1 This corridor width is based on the 2nd Fresnel zone clearance at the centre of the link path which is the maximum. Of course the clearance required reduces as the location moves from the path centre towards the link ends. If a simple constant width corridor is to be specified for turbine clearance it will be conservative at short distances from the link ends. No part of a turbine should protrude into the corridor. For example for the first link listed, with a turbine rotor diameter of 90 metres the centre line of the turbine tower should be at least $152.5 + 90/2 = 197.5$ metres from the link ray line

ATTACHMENT 8 – PREDICTED INTERFERENCE LEVELS TO TELEVISION RECEPTION

The estimates below of reflection of TV signals from generator blades use the formulas in Ref.1 and the details of a Suzlon S88 generator has been used. This is a three bladed 44 metre radius rotor on a tower of 80 metres in height. Information from Suzlon Energy Australia suggests that the blades have the following details:

Planform Area of each Blade approx 67 m² (calculated)
 Coning Angle 4.3 degrees
 Twist of Blade 9.9 degrees
 Lightning Protection bus inside Blade 60mm² stainless steel

Signal Scattering Efficiency η_s

$\eta_s = 0.8 \times 0.41 \times \exp(-2.3\Delta\beta)$ for non-metallic blades

$\Delta\beta = \text{total blade twist} = 9.9/180 \times \pi$

$\eta_s = 0.8 \times 0.41 \times 0.67206$

$= 0.2204$

lightning protection 60mm² cable could increase efficiency by 20% so

$\eta_s = 0.264$

For VHF TV at on say Channels 7 & 9 (190 Mhz)

Effective Number of Blades for receiver in the back scattering zone

$$B_e = 1 + \sin c \left\{ \frac{2\pi R}{\lambda} \sin(2\theta) \cos(k) \right\} \leq B_e \text{ max}$$

$k = \phi_{RT} / 2$ for backward scatter zone

$k = 2\phi_{RT}$ for forward scatter zone

$$B_e = 1 + \sin c \left\{ \frac{2\pi 44}{300/190} \sin 2 \times 4.3 \right\}$$

$$= 1.8672$$

where $B_e \text{ max} = 1 + \frac{\lambda R}{A_p}$ (Note 1.)

$$= 1 + 300/190 \times 44/67 = 2.0369$$

therefore $B_e = 1.8672$ is applicable

$$Z_I = \eta_s \frac{B_e A_p}{\lambda D} \cos(k)$$

$$= 0.264 \times 1.8672 \times 67 \times 190 / (300 \times 1000) \text{ for } D = 1 \text{ km for the maximum}$$

directions

$$= 0.020917$$

$$= -33.6 \text{ db}$$

$$\begin{aligned}
 &= 0.264 \times 1.8672 \times 67 \times 190 / (300 \times 250) \text{ for } D = 250\text{m for the maximum} \\
 \text{directions} \\
 &= .083668 \\
 &= -21.5\text{db}
 \end{aligned}$$

The required wanted to unwanted signal ratio for a just perceptibly degraded TV picture as a function of the time difference between the wanted and unwanted signals is shown in Fig. 2 of Ref. 4 and varies between 28db (<1µs delay) and 34db(>5µs delay). If it was assumed that the wanted signal strength at the residents' TV antennas was the same as at the generator centre, from the above signal scatter ratio estimates perceptible TV picture degradation would occur up to near 500 metres from generators in the forward scatter area. No TV receiving antenna discrimination is possible in the forward scatter case. As, in fact, the signals at the lower height TV antennas in the close in areas will be lower than at the 80m generator height by, for example 6 db, perceptible interference up to 1.0 Km is predicted.

Similar estimates have been made for other UHF channels. The signal scatter ratios for representative UHF channels are summarised below:

Channel 65 (765 MHz) at 1Km $Z_I = -26.8\text{db}$

Channel 34 (570 MHz) at 1Km $Z_I = -29.5\text{db}$

The calculations also show that at 250m

Channel 65, $Z_I = -14.8\text{db}$.

Channel 34, $Z_I = -17.5\text{db}$.

These figures indicate that there is a potential for interference for the UHF channels up to and beyond 1.5 Km from the generators in the forward scatter region.

Scatter from multiple generators would be additive to some degree at each receiver.

Note1. The formula for $B_{e,\max}$ was established for a 3 bladed generator in a recent exchange of emails with Prof. Sengupta, of the University of Michigan, USA, one of the Authors of Ref.1.

ATTACHMENT 9- GLOSSARY OF TECHNICAL TERMS

VHF	Very High Frequency
UHF	Ultra High frequency
EMI	Electromagnetic Interference
VHF Channels	TV Channels 0 to 12 (45 - 230 Mhz)
UHF Channels	TV Channels 28 - 46 (526 - 820 Mhz)
Band 111	VHF TV Channels 5A - 12
First Fresnel Clearance	Clearance to obstructions from the ray line on a radio
	Path which does not produce any additional loss above free space loss
FM	Frequency Modulation
MF	Medium Frequency
LF	Low Frequency (not used for sound broadcasting in Australia)
GSM	European Digital Cellular Mobile System
CDMA	Code Division Multiple Access Cellular Mobile System
ITU	International Telecommunications Union
ACMA	Australian Communications & Media Authority
CB Radio	Citizens Band Radio