
Eastern Creek Business Hub

Design Guidelines - Lot 3

For: Western Sydney Parklands Trust

Date: June 2021

Contents

1.0	Vision	5
2.0	Structure Plan	8
3.0	Design Guidelines	26



Figure 1: Location (Lot 3 shown with red outline) (Nearmap)

1.0 Vision

1.1 Introduction

Lot 3 of the Eastern Creek Business Hub is located at the north western corner of the precinct, to the north of Lot 2. These design guidelines specifically relate to the land bounded by Rooty Hill Road south to the west, Church Street to the north, Beggs Road to the south and environmental conservation land to the east as shown in Figure 1.

The purpose of this document is to –

- Provide the development objectives and controls for Lot 3 of the Eastern Creek Business Hub.
- Establish a building envelope of an appropriate size and layout to accommodate a successful retail outlet centre.
- Integrate the outlet centre with Stage 1 and retain the overall character of a retail centre within a parkland setting.
- Upgrade Church Street and enhance the site's connection to the Council's public recreation facilities and parklands to the north.
- Improve visual connectivity between the site and Rooty Hill Road South and activate street frontages balanced with landscape treatments.
- Identify the required infrastructure to accommodate the development on a staged basis.



Figure 2: Existing Blacktown Council signage located within the site. Located at the Great Western Highway and Rooty Hill Road South intersection.

1.0 Vision

1.2 The Proposal

The objectives of Stage 3 of the Eastern Creek Business Hub are to:

- Establish a building envelope of an appropriate size and layout to accommodate a successful retail outlet centre.
- Integrate the outlet centre with Stage 1 and retain the overall character of a retail centre within a parkland setting.
- Upgrade Church Street and enhance the site's connection to Council's public recreation facilities and parklands to the north.

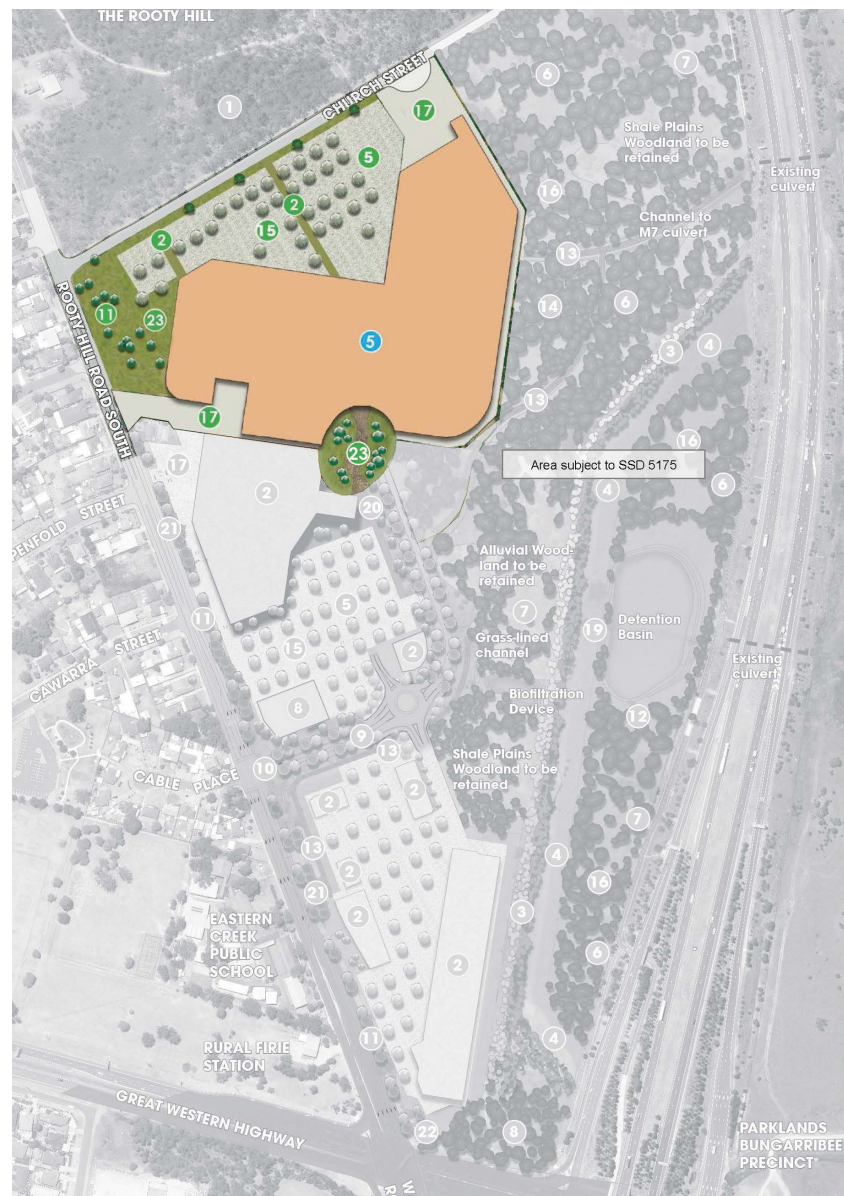


Figure 3: Indicative Landscape Master Plan (i2C)

2.0 Structure Plan

2.1 Access and connectivity

Vehicle access

Vehicle access to Lot 3 of the Business Hub will be from the new access road connecting from Rooty Hill Road South at the signalised intersection aligned with Cable Place, as well as the Church Street access point. The access arrangements for the precinct include the following elements as illustrated in Figure 4.

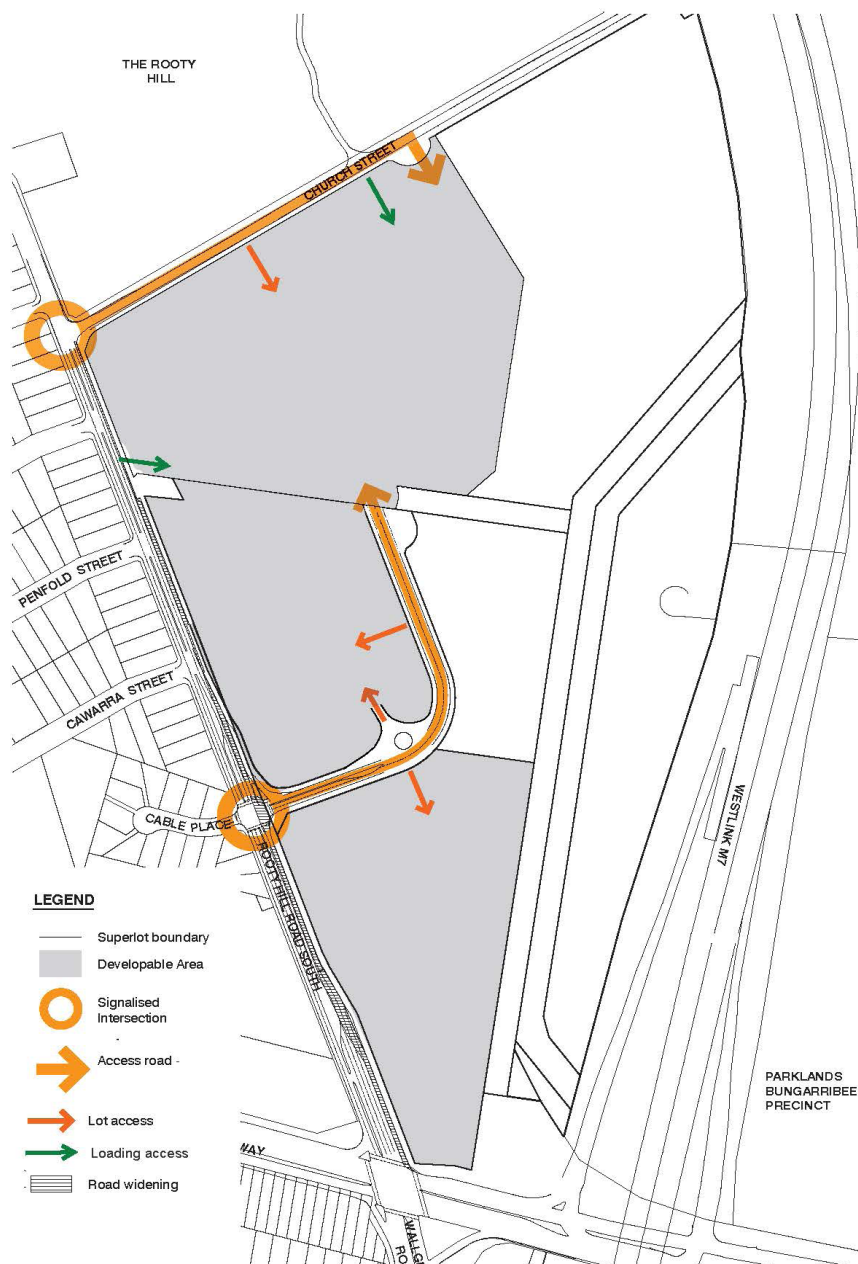


Figure 4: Vehicle access

2.0 Structure Plan

2.2 Access and connectivity

Pedestrian and cycle links

Pedestrian and cycle paths are a central component of connectivity for the Business Hub. Key features of the proposed network are:

- Through-centre link for pedestrian access to Church Street from the internal access road;
- Provision for a shared path along Rooty Hill Road South and footpath along Church Street;
- Controlled pedestrian crossings at the proposed access road signalised intersection
- Footpaths along the internal road
- Connection with the Westlink M7 cycleway and to Rooty Hill Road South

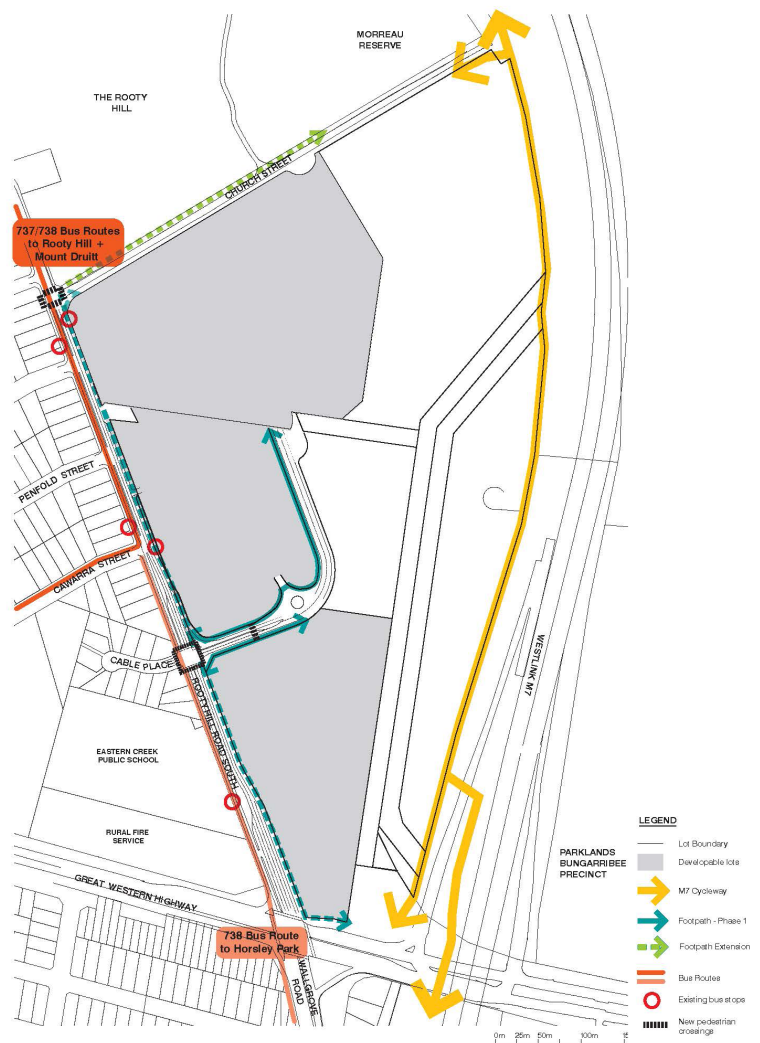


Figure 5: Pedestrian Access

2.0 Structure Plan

2.3 Built form

This Design Guideline document encourages a built form that establishes a strong relationship to the adjacent open space and the wider Western Sydney Parklands.

Key elements of the intended built form are:

- Visually interesting streets and avoid street views that are dominated by long building elevations not buffered by landscaping or monotonous building forms/designs;
- Buildings that address the street with clearly defined entrances;
- Buildings that have an appropriate scale for an employment area;
- Predominantly single level built form with a maximum height of 12m;
- Landscaped setbacks to Rooty Hill Road South that mitigate the visual impact of development to adjoining residential areas;
- A palette of materials that enhances the parkland character of the business hub;
- Development creates cohesive streetscapes and a desirable pedestrian environment integrated with the landscape.
- Appropriate setbacks and landscaping to protect the setting and amenity of the existing dwelling at 151 Rooty Hill Road South.

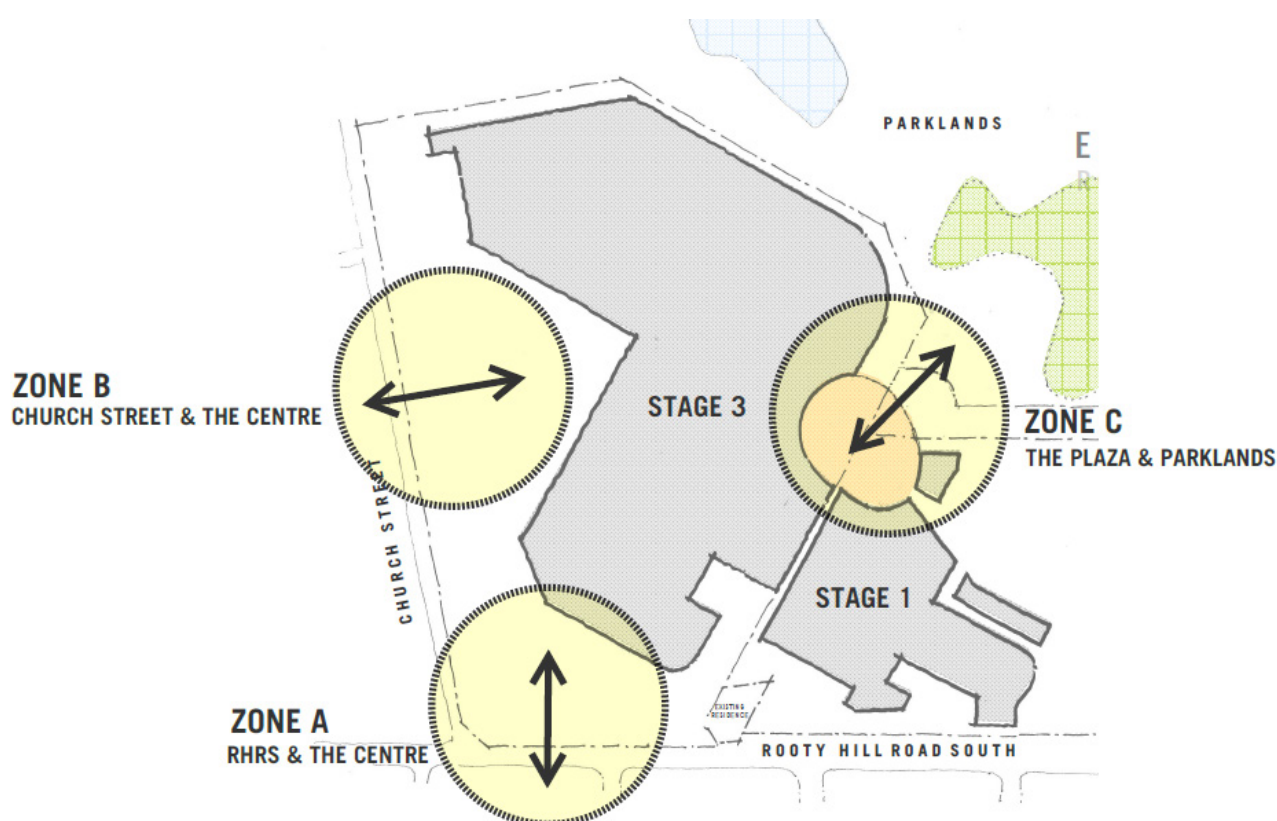


Figure 6: Spatial relationship of Lot 3 with the surrounding area (i2C)

2.0 Structure Plan



Figure 7: High quality landscaping elements incorporated with the built form and streetscapes.



Figure 8: Factory outlet retail centre - The existing DFO factory outlet retail centre in Homebush.

2.0 Structure Plan



Figure 9: Visually prominent sites are encouraged to provide articulated roof-forms that provide site identity at all times of the day.



Figure 10: Open spaces should be designed to include a diverse range of activities to maximise their usefulness to the community.



Figure 11: Street trees within a landscaped setback provide shade and an attractive entry statement to the business hub.



Figure 12: Distinctive signage can provide interest to a simple building form.



Figure 13: Landscape setbacks enhance the parkland character of the site and can still provide a clear and legible address for the development.



Figure 14: Use of simple building elements, materials and colours can create a distinctive building form.

2.0 Structure Plan

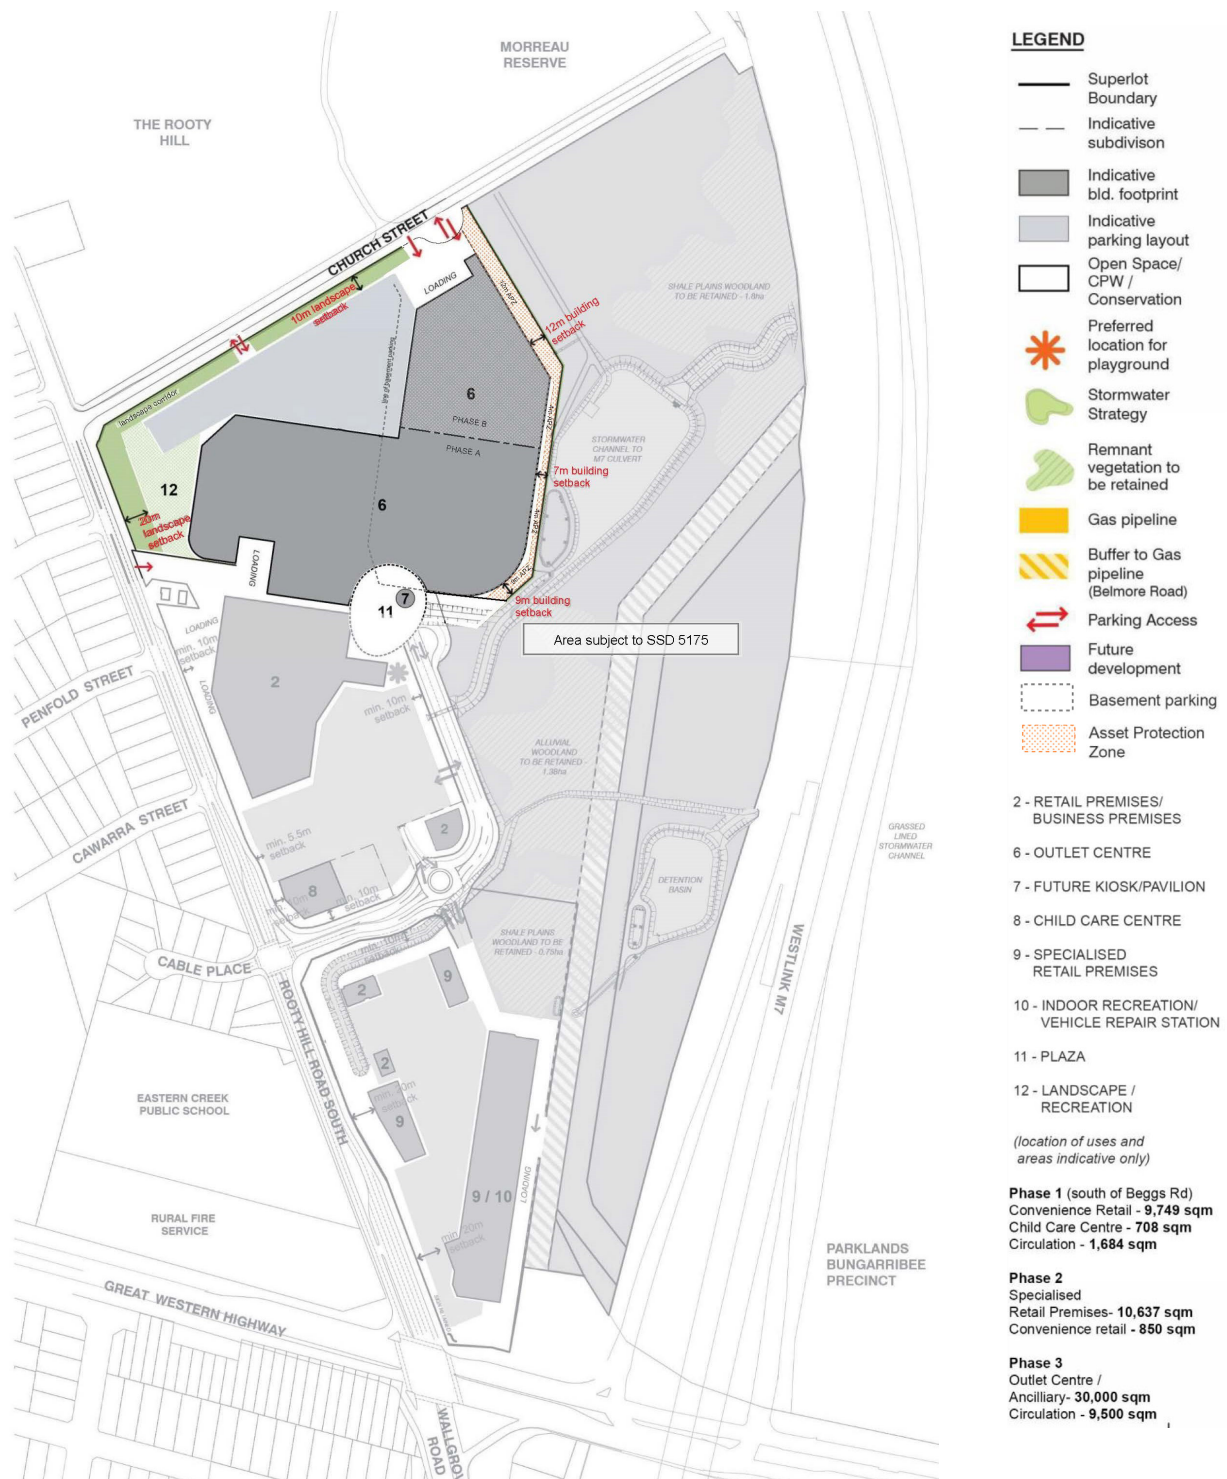


Figure 15: Preferred Indicative Layout

2.0 Structure Plan

2.4 Landscape and public domain

The landscape design philosophy seeks to create a landscape character that responds to the Parklands, The Rooty Hill and Morreau Reserve that is refined and adapted to suit the design character of the proposed urban setting.

The vegetation and landscape will use a mix of indigenous, native and exotic species. The location of planting, and selection of species, seeks to visually absorb the bulk and scale of the proposed development, and to improve streetscape aesthetics and micro climate amenity.

Landscape buffers are to be used to provide a “soft” transition between the business hub and the nearby residential areas, and to Morreau Reserve to the north. Views between the Parklands and adjoining neighbourhoods will have a landscaped character that is influenced by the park edge location.

The design philosophy incorporates the principles of water sensitive urban design (WSUD), adopting measures to direct water to rain gardens and bio-swales where practical. Drainage corridors are designed to work with the natural landform, maximise natural overland flows and allow as much seepage through to the water table as practical.

LANDSCAPE MASTER PLAN
PREFERRED INDICATIVE PLAN & USE

1 LARGE FORMAT RETAILER (w/ undercroft parking)
2 RETAIL PREMISES / BUSINESS PREMISES*
5 OUTLET CENTRE
8 CHILD CARE CENTRE
* Includes bulk liquor outlet
** Include adventure, outdoor / camping centre
(Location of uses and areas indicative only)
(Refer to Architectural Drawing No. S107(C) for further details on land use, set-back, indicative vehicle access and floor area breakdown.)

LANDSCAPE CONCEPT

- 1 Connect and integrate the adjacent CPW throughout site
- 2 Pedestrian connection to Church Street
- 3 Provide planting buffer to gas pipeline (on Belmore Road)
- 4 Gas pipeline easement - no change
- 5 Decorative species in the carpark to provide canopy coverage
- 6 CPW offset planting between development site and M7
- 7 Preservation of Alluvial Woodland and Shale Plains Woodland
- 8 Offsetting of indigenous Cumberland Plain Woodland species to provide a strong 'Parklands' theme to this prominent corner of the site (in consultation with RMV)
- 9 Formal street trees to provide a strong landscape character
- 10 Primary entry accent planting
- 11 Street tree planting to integrate with the local neighbourhood and street characters
- 12 Wetland species in lower lying ground and detention basin
- 13 Stormwater channel planted with native grasses, recharges groundwater
- 14 Provision of connected flora and fauna corridor as much as possible
- 15 ESD and WSUD principles for development site landscape and parking
- 16 Planting philosophy east of the access road is to infill with Cumberland Plain Woodland species and connect up existing stands. This offsets that removed west of the access road
- 17 Truck turning area
- 18 Incorporation of WSUD into carpark design
- 19 Existing channel over gas easement is unchanged
- 20 Preferred location of children's playground
- 21 200L trees planted at 20m centres in seeded grass verge
- 22 Blacktown sign
- 23 Recreation / Landscape

NORTH

Design Guidelines - Eastern Creek Business Hub

3.0 Design Guidelines

3.1 Access and circulation

3.1.1 Vehicular access

Objectives

- O1** Ensure safe and efficient vehicular movements.
- O2** Encourage the optimum efficiency of land use through the provision of shared parking, turning and access routes between neighbouring sites.
- O3** Provide adequate sight distance for safe traffic movement.

Controls

- C1** Vehicular access is to be provided from either the internal access road via the Rooty Hill Road South and Cable Place intersection or the Church Street vehicular access point.
- C2** Vehicular circulation layout is to provide safety for pedestrians.
- C3** A minimum on-site driveway width of 8m is required. Cross over widths are to comply with the relevant Australian Standards.
- C4** Shared access driveways between adjoining lots is encouraged.
- C5** Vehicles are to enter and leave the site in a forward direction.

3.1.2 Pedestrian access

Objectives

- O1** Ensure a high level of pedestrian permeability in Lot 3 of the Eastern Creek Business Hub.

Controls

- C1** Developments are to provide and integrate footpaths with the existing pedestrian network.
- C2** Active ground level uses are encouraged fronting footpaths.
- C3** Footpaths within developable lots are to be separated from vehicular and loading routes.
- C4** Pedestrian paths to/from parking areas should be clearly defined.
- C5** Disabled access is to be provided to footpaths.
- C6** Where pedestrian access is provided between and through buildings, a high level of transparency is to be provided between the internal ground floor space of the building and the pedestrian link.

3.0 Design Guidelines

3.1.3 Loading and servicing

Objectives

- O1** Ensure that loading and servicing is located in the most appropriate location to maintain pedestrian safety and visual amenity.
- O2** Ensure adequate provision is made on each development site for access by cars and trucks and for the loading and unloading of materials and goods.
- O3** Provide off-street maneuvering, loading and docking facilities that are adequate for the operational needs of the activity and use.

Controls

- C1** Access to all loading and unloading is to take place via Church Street and Beggs Road.
- C2** Truck loading and maneuvering areas are to be separated from car parking areas.

3.0 Design Guidelines

3.2 Safety and amenity



Figure 17: Stone gabions are encouraged to be used for informal seating and as a wayfinding device. Stone gabions are used as a landscape feature throughout the Western Sydney Parklands.



Figure 18: Street furniture should be in accordance with the Western Sydney Parklands Design Manual.

3.2.1 Street furniture and lighting

Objectives

- O1** Ensure a high quality, functional, safe and attractive public domain within the Eastern Creek Business Hub.

Controls

- C1** Footpath paving is to be hard wearing, cost effective, practical and have a maintainable surface.
- C2** Street furniture is to be incorporated into the design of the streetscape and is to include a consistent approach to street lighting, street and information signs.
- C3** Design of all street furniture is to be in accordance with the 'Western Sydney Parklands Design Manual - Version 1'
- C4** The location and design of street furniture is to be indicated on a Landscape Masterplan.
- C5** Vehicular street lighting is to be mast top lighting to meet relevant RMS and Austroads standards.
- C6** Pedestrian lighting is to be pole mounted to meet relevant Australian Standards.
- C7** Pedestrian access paths are to be lit for night time usage.
- C8** Appropriate lighting should be provided to all cycle and pedestrian paths, bus stops, car parks and buildings.
- C9** Lighting is to be designed and managed to mitigate light spill impacts on fauna habitat, particularly adjoining the conservation areas.

3.2.2 Safety

Objectives

- O1** Ensure that the siting and design of buildings and spaces contributes to the actual and perceived personal and property safety of workers and visitors and decreases the opportunities for committing crime in an area.
- O2** Ensure development encourages people to use and interact in streets and other public spaces without fear or personal risk.
- O3** Increase the perception of safety in public and semi-public space including streets, car parks and play areas.
- O4** Encourage the incorporation of principles of crime prevention through environmental design (CPTED) into all developments.

Controls

- C1** A Crime Risk Assessment Report is to be lodged as part of any Development Application.
- C2** Buildings should be designed to overlook public domain areas and provide casual surveillance.
- C3** Building entrances should be oriented towards the street or main parking areas to ensure visibility between entrances, foyers, car parking areas and the street.
- C4** Development should provide clear sight lines and well-lit routes between buildings and the street, and along pedestrian and cycle networks within the public domain.

3.0 Design Guidelines

3.3 Heritage

3.3.1 Indigenous heritage

Objectives

- O1** To ensure a meaningful conservation and management outcome for the precinct.

Controls

- C1** For all new developments, consultation with the registered Aboriginal stakeholders should continue and the registered parties should be invited to participate in archaeological fieldwork.
- C2** Ground disturbance works should not take place without archaeological supervision, unless in areas indicated by the archaeologist as being 'cleared for ground disturbance'.
- C3** In the event that avoidance of known sites is not practicable, artefacts would be collected for safekeeping by an archaeologist in consultation with registered Aboriginal stakeholders.

3.3.2 Non-Indigenous Heritage

Objectives

- O1** Protect the interface with Rooty Hill and Morreau Reserve and vistas across the Eastern Creek Business Hub toward the Western Sydney Parklands.
- O2** Ensure any archaeological remains or relics found in the Eastern Creek Business Hub precinct are appropriately recorded and satisfy relevant legislative requirements.

Controls

- C1** A 10m landscape setback is required to Church Street.
- C2** If any archaeological remains or relics are found within the Eastern Creek Business Hub they may only be removed or disturbed once a s140 approval (NSW Heritage Act) is sought from the NSW Heritage Office. This is to be applied for prior to commencement of works in the area.
- C3** All works are to be monitored on an at call basis.

3.0 Design Guidelines

3.4 Environmental management

3.4.1 Water cycle management

Objectives

- O1** Provide appropriately designed, functional water quantity and quality facilities, limitation of downstream discharge peaks and velocities and maintenance of existing downstream water quality.
- O2** Maintenance of environmental flows to ecosystems downstream of the site.
- O3** Ensure a water cycle management strategy that identifies and controls limits of flood affectation and provision of aesthetic design forms that enhance amenity and ecological function.
- O4** Restrict development to above the 1% AEP flood level
- O5** Incorporate water sensitive urban design principles within the development.
- O6** Ensure post-development water quality complies with Council's and the Department of Planning, Industry and Environment's requirements.
- O7** Ensure a sustainable environment that preserves the potential for creating habitat for locally indigenous flora, fauna and aquatic dependent species.

Controls

- C1** Configuration and design of water cycle management strategies at the development application and detailed design stages for all developments.
- C2** Water treatment on all developable lots is to consist of:
 - Implementation of water efficient fittings and appliances in all buildings.
 - Provision of rainwater tanks on each allotment to satisfy the standards of BASIX and Blacktown Council.
 - Water quality treatment is to be designed to achieved Blacktown Council's water quality targets.
 - Discharges from the on lot treatment systems should be directed to a central discharge pit.
 - Discharges from each allotment are to be detained to ensure that total site discharge targets are met.
 - Management of waterway stability from the development is to be in accordance with the NSW Department of Planning, Industry and Environment and Blacktown Council standards.

3.4.2 Soils management

Objective

- O1** Control sediment and erosion during construction and operation.

Controls

- C1** Erosion and sediment control measures are to be implemented during the construction phase in accordance with the standards of Blacktown City Council and the guidelines set out by Landcom (the 'Blue Book').

3.0 Design Guidelines

3.4.3 Salinity

Objective

- O1 To manage and mitigate the impact of, and on, salinity.

Controls

- C1 Salinity is to be considered during earthworks, rehabilitation works and during the siting, design and construction of infrastructure.

3.4.4 Tree retention

Objectives

- O1 Ensure the protection and enhancement of existing trees and strands of vegetation where practical.

Controls

- C1 A Tree Survey Plan is to be submitted with each subdivision DA.
C2 The Tree Survey Plan is to identify the location, type and condition of all existing trees and is to indicate those trees proposed to be removed and those to be retained.
C3 Existing significant trees identified in the ecological impact assessment report are to be retained wherever possible.
C4 Trees to be retained are to be adequately protected through the establishment of 'impact exclusion zones' around each tree.

3.4.5 Weed management

Objectives

- O1 Prevent the spread of weeds from the Eastern Creek Business Hub precinct to the Western Sydney Parklands.
O2 Control the abundance, diversity and impact of existing weed species within Eastern Creek Business Hub.
O3 Prevent the introduction of new weed species to Eastern Creek Business Hub.
O4 Reduce existing weed populations within Eastern Creek Business Hub.

Controls

- C1 Landscaping is to be established as soon as practicable following completion of construction to prevent weeds from infesting disturbed ground.
C2 All mulch and topsoil utilised in landscaping is to be certified weed free by the material supplier or landscaper.
C3 Any plant species identified within the Noxious Weeds Act 1993 are not to be used in any landscaping scheme.

3.0 Design Guidelines

3.5 Built Form

This section applies to the future built form of Lot 3 of the Eastern Creek Business Hub and comprises:

- A - General Design Guidelines (3.5.1 - 3.5.5)
- B - General Development Guidelines (3.5.6 - 3.5.14)
- C - Site Specific Development Controls (3.5.15)

A - General design guidelines

- 3.5.1 General guidelines
- 3.5.2 Street address
- 3.5.3 Building envelope
- 3.5.4 Site coverage
- 3.5.5 Materials and finishes

B - General development guidelines

- 3.5.6 Parking
- 3.5.7 Allotment landscaping
- 3.5.8 Private domain signage
- 3.5.9 Fences
- 3.5.10 Recycling and waste management
- 3.5.11 Outside storage
- 3.5.12 Rooftop mechanical plant
- 3.5.13 Sustainable building design
- 3.5.14 Cut and Fill

C - Site specific development controls

- 3.5.15 Lot 3
 - Covering:
 - Setbacks
 - Height
 - Building articulation
 - Architectural screening
 - Parking
 - Existing vegetation
 - Asset protection zone
 - Frontage landscape zone

3.0 Design Guidelines

A - General design guidelines

3.5.1 General guidelines

Objectives

- O1** Encourage a built form that establishes a strong relationship to the adjacent open space and the nearby Western Sydney Parklands.
- O2** Ensure that built form positively contributes to the existing streetscape of Rooty Hill Road South.
- O3** Ensure that development fronting proposed roads, contributes to cohesive streetscapes and desirable pedestrian environments.
- O4** Encourage a high standard of architectural and sustainable building design for employment and retail buildings.
- O5** Avoid street views of long building elevations not screened by landscaping or that display monotonous building forms and design.
- O6** Encourage distinctive building forms that promote the identity of each tenancy.
- O7** Encourage a high quality built form by encouraging visual interest on elevations fronting streets, parking areas, and open space.
- O8** Integrating built form to context through the use of complementary vertical forms, landscaping and street lighting.

Controls

- C1** All development applications are to be prepared by a registered architect.
- C2** A site analysis plan is required demonstrating site characteristics (site boundaries, north point, contours, location of services and nature of surrounding development etc) and site opportunities and constraints.
- C3** Locate activity including offices, entries and pedestrian areas fronting proposed streets and ensure buildings address streets to improve surveillance and visual interest.
- C4** Buildings visible from the Parklands or from a residential area are to be designed with pitched or skillion roof-forms, that reflect the traditional Australian aesthetic.
- C5** Provide effective sun-shading for windows, wall surfaces and building entries (other than loading docks) by the use of design elements such as overhanging eaves and awnings, undercrofts, colonnades and external sun-shading devices including screens.
- C6** Provide articulated and well detailed elevations including the use of projections and recesses, a variety of quality materials, externally expressed structures and framing systems, glazing, sun shade structures, colours and other forms of architectural detailing. Blank building facades facing street frontages are not permitted.
- C7** Parking areas and service loading areas are to be located behind the landscape setback, be integrated into site layout and building design, and not dominate the primary streetscape of an allotment.

3.0 Design Guidelines



Figure 19: Glazing, lighting and building form help define the pedestrian entry to a building.

3.5.2 Street address

Objectives

- 01 Encourage buildings that address the road with entrances that are clearly visible and accessible (Figure 19).
- 02 Encourage activity fronting the plaza.
- 03 Encourage passive surveillance of public areas.
- 04 Encourage a distinctive and appropriate streetscape character.

Controls

- C1 All buildings to provide a clearly defined pedestrian entry with a canopy, recess, awning and/or colonnade facing the primary street frontage to distinguish that entry (Figure 20).



Figure 20: A break in the building form defines the pedestrian entry.

3.5.3 Building envelope

Objectives

- 01 Ensure that building forms are consistent with the desired precinct character (see Section 2.3 - Built Form) and are of an appropriate scale for an employment area.
- 02 Mitigate the visual impact of relatively large scale development along Rooty Hill Road South.
- 03 Provide adequate distance between buildings and street alignments for landscaping, vehicle maneuvering and noise impact attenuation.
- 04 Use land efficiently.
- 05 Provide view sharing across blocks.
- 06 Encourage attractive and visually coherent streetscapes.
- 07 Ensure noise sensitive land uses are located away from major road frontages.

Controls

- C1 Refer to 3.6.15 - Development Controls for specific building envelope controls that affect to each developable lot.

3.5.4 Site coverage

Objectives

- 01 To ensure new development responds appropriately to the size, scale, configuration and existing natural features of Lot 3.
- 02 Protect the visual amenity of the area by managing the overall bulk and scale of the future development.
- 03 Maximise opportunities for landscaping that enhances the parklands character of the precinct.

3.0 Design Guidelines

3.5.5 Materials and finishes

Objectives

- O1** Ensure the use of building materials which are durable and that maintain a high standard of appearance over time.
- O2** Encourage a palette of materials that enhance the parkland character of the business hub.
- O3** Ensure the economic and energy efficient use of materials in the construction of employment buildings.

Controls

- C1** External materials used for buildings in Lot 3 are to be high quality and durable products and colours that complement the natural landscape character of the locality.
- C2** Primary facades are to be articulated with a minimum of two primary materials.
- C3** The use of colourbond wall cladding combined with expressed timber and steel detailing is encouraged.
- C4** Use natural colours and earth tones.
- C5** Brighter colours should only be used to define building entries and signage. Large proportions of brightly coloured elevations are not appropriate.
- C6** Exposed structures and framings systems are encouraged to break down the bulk of the building.



Figure 21: Exposed structural elements break down the bulk of a horizontal building form.

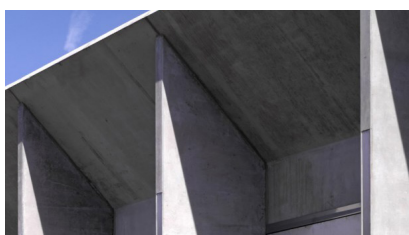


Figure 22: Exposed concrete is a durable material that can be used in a number of ways to articulate a building form.

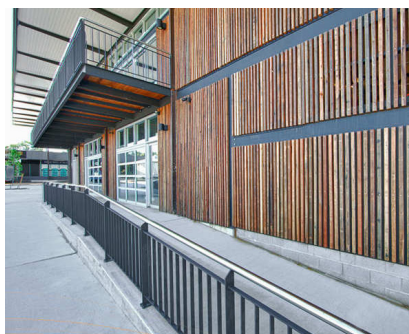


Figure 23: Timber wall cladding can be used to articulate primary elevations.

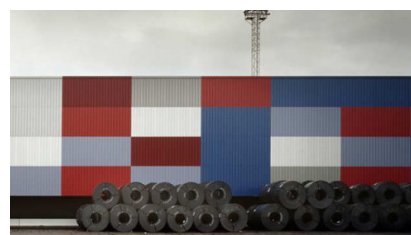


Figure 24: Natural colours and earth tones break down the scale of a long elevation.



Figure 25: Simple facades can be designed to create a suitable street address.

3.0 Design Guidelines

B - General development guidelines

3.5.6 Parking

Objectives

- O1 Ensure that adequate provision is made on each development site for parking.
- O2 Improve the appearance of car parking areas on the streetscape in order to minimise the visual impact of car parking areas on the streetscape (Figure 26).
- O3 Provide shade for car parking areas (Figure 26).
- O4 Provide for bicycle parking areas.
- O5 Ensure best practice Water Sensitive Urban Design measures are integrated into parking layouts (Figure 27).

Controls

- C1 Access routes to car parking areas are to be clearly identified.
- C2 Any parking areas located adjacent the building, is to include a 5m minimum landscaped setback to screen visual impact of car parking from the street.
- C3 Visitor parking is to be clearly marked and easily identifiable and be located closest to the building's main entry.
- C4 All car parking outside the building footprint to be integrated with landscaping to provide shade and visual amenity.
- C5 Allow for shared car parking arrangements between neighbouring allotments for efficient use of access driveways.
- C6 Incorporation of tree planting throughout the carpark to improve amenity and micro-climate effect.
- C7 A minimum 1500mm wide landscape strip is to be provided between banks of car parking to provide shade and minimise visual impact of car parking.
- C8 The following Water Sensitive Urban Design strategies should be incorporated into large parking layouts of 100 cars or greater:
 - Permeable pavements and asphalt to assist with detention of stormwater
 - Planting pits with flush kerbs and wheel stoppers that allow overhang of cars into planting pit
- C9 Parking areas must incorporate a minimum of 1 tree per 8 parking spaces and achieve a 35% coverage of hard stand areas by mature tree canopy.
- C10 A dedicated area for bicycle parking is to be provided within the car park and shall include bicycle racks or similar.

Car parking is to be provided in accordance with the minimum rates in the table below:

Use	Rate
Specialised Retail Premises	1 space/60sqm GFA
Indoor Recreation	1 space/30sqm GFA
Retail	1 space/25sqm GFA
Childcare Centre	1 space/employee, plus 1 space/6 children
Tyre Service Centre	3 spaces/100sqm GFA
Outlet Retail Centre	4.3 spaces/100sqm GLA



Figure 26: Landscaped verges improve the appearance of car parks and provide shade in large parking areas.



Figure 27: Water sensitive parking areas are required for parking layouts 100 cars or greater.

3.0 Design Guidelines

3.5.7 Allotment landscaping

Objectives

- O1 Contribute to effective management of stormwater, biodiversity and energy efficiency and to improve visual amenity.
- O2 Encourage the use of drought tolerant native and locally indigenous/ endemic flora and low maintenance landscape materials.
- O3 Provide for an integrated landscape character throughout the development (Figure 29).
- O4 Assist in the management of salinity.
- O5 Establish natural boundaries between sites.
- O6 Mitigate the visual impact of buildings and hard stand areas through the use of mounds and screen planting.
- O7 Enhance visual integration of development with the open space conservation area.
- O8 Provide for the passive recreational requirements of employees.
- O9 Improve the micro-climate of the area through a reduction in heat-sink effect.

Controls

- C1 Landscaping within the setbacks facing future woodland to contain only endemic Cumberland Plain Woodland species.
- C2 Landscaping is required in the side and rear setbacks of buildings if visible from the street, car parking areas or other areas considered publicly accessible. In addition, the perimeter of open storage areas is to be landscaped to provide buffer screening from public view.
- C3 Low water demand drought resistant vegetation is to be used in landscaping areas, including native salt tolerant trees to high saline affected areas.
- C4 Mulching cover is to be incorporated in landscaped areas (excluding drainage corridors).
- C5 All landscaped areas are to be separated from vehicular areas by means of a kerb, dwarf wall or other effective physical barrier.
- C6 Planting of vegetation is to consider passive surveillance. Excessively dense vegetation that creates a visual barrier is to be avoided.
- C7 Undeveloped areas are to be stabilised to prevent soil erosion. Landscaping including mulching, may be required around the perimeter of undeveloped areas.
- C8 WSUD principles are to be employed to direct surface run-off to areas of planting where possible (Figure 28).
- C9 Embankments are not to be steeper than 1:3.
- C10 A Landscape Plan is to be lodged with all DAs and is to provide the following details:
 - The location of any existing trees (as defined by Western Sydney Parklands) on the property, specifying those to be retained and those to be removed.
 - The location of any trees on adjoining properties that are likely to be damaged as a result of excavations or other site works.
 - The position of each proposed plant. Each plant is to be identified by a code referring to a plant schedule on the plan.
 - Existing and finished ground levels and areas to be filled.
 - The location of any subsoil drain, bio-retention, detention, swale or other WSUD requirements.



Figure 28: Ground materials can assist in the water run-off to planting areas.



Figure 29: A combination of landscape elements enhance the landscape character of an allotment.

3.0 Design Guidelines



Figure 30: Example of pylon signage.



Figure 31: Signage can be integrated into the design of elevations.

3.5.8 Private domain signage

Objectives

- O1** Accommodate the need to identify and promote retail and employment development whilst preventing the unnecessary proliferation of advertising signs or structures.
- O2** Encourage signage that is imaginative, innovative and commensurate with the quality of development within the Eastern Creek Business Hub.
- O3** Ensure signage does not detract from the visual appeal of the Eastern Creek Business Hub.
- O4** Ensure signage is of a high quality of design and construction and an integral element of the built environment and landscape setting.

Controls

- C1** Advertising signage for the business hub should be kept to a minimum and should relate only to the use occurring on the respective property and is to identify the relevant business names.
- C2** A maximum of 1 freestanding sign is permitted along the Lot 3 Rooty Hill Road South frontage. All other signage is to be incorporated into the design of the building.
- C3** Signs are permitted on the pedestrian entries, one on the awning, transom or below parapet that is sized so that it is visible and legible from the principal road frontage and one adjacent to the pedestrian entry door.
- C4** Freestanding signage such as a directory boards for buildings or sites including those with multiple occupancies are to be limited to 2 structures at the entry to the site from a public road, along the road frontage.
- C5** Pylon signage is not to exceed 10m in height from ground level.
- C6** For single developments, the total permissible signage and advertisements are not to exceed 1sqm of advertising per 3m of street frontage.
- C7** Directional signage for car parking areas, loading docks, delivery areas and the like are to be well designed and located at a convenient point close to the main access to a development site.
- C8** The placement, colouring, type and scale of signage erected within individual properties are to be consistent throughout the development and complementary with the architectural style of the building (Figure 31).
- C9** Signs are not to create a hazard for traffic or pedestrians.
- C10** Roof signs or signs that break the roof line of a building are generally not permitted. In exceptional circumstances a roof sign or a sign which breaks the roof line of a building may be permitted where it forms an integral part of, and enhances, the architecture of a building.
- C11** Private domain signage is to be located so as not to obstruct sight lines of motor vehicles or trucks, or impede pedestrian movement.
- C12** Signs are not to cause environmental damage to trees or large shrubs.
- C13** Animated signs with erratic or flashing movements are not permitted. Illuminated signage is to minimise light spill in to the night sky and into the

3.0 Design Guidelines



Figure 32: Illuminated signage should be integrated into the elevation of the building.



Figure 33: Simple signage can be enhanced by moderately illuminated elevations.

adjacent parklands.

- C14** Illuminated signage is also to be energy efficient and to have a consistent light level with the general level of lighting which illuminates shadows and enhances the safety of adjoining public areas (Figure 32-33).
- C15** Illuminated signs which feature exposed lamps or neon tubes are permitted only where they do not detract from the architectural quality of the buildings.
- C16** No support, fixing, suspension or other systems required for the installation of signage is to be exposed, unless designed as an integral feature of the sign. Conduits, wiring and the like is to be concealed.
- C17** The location, size and form of any freestanding signage for the retail pad sites will be subject to detailed assessment at the development application stage.
- C18** The location, size and form of signage on the pad site buildings, will be subject to detailed assessment as part of any relevant Development Application.
- C19** Shopfront signage for individual retail tenancies are to be assessed as part of detailed development applications

3.0 Design Guidelines

3.5.9 Fences

Objectives



Figure 34: An example of fencing around a rock battered drainage channel.



Figure 35: Low feature walls constructed of stone and other natural materials can contribute to the parklands character of the development.

- O1** Provide security for property tenants and visitors and to contribute to the amenity of the business hub
- O2** Ensure fences and walls improve amenity for employees and development and that they contribute positively to adjacent buildings.
- O3** Encourage pedestrian access to businesses from the street.
- O4** Ensure boundary fences and walls between allotments provide security.
- O5** Ensure materials used in fences and walls are of a high quality and consistent with the character of the business hub.
- O6** Restrict the size and type of fences provided along drainage channels to allow for views into and out of the landscaped areas for aesthetic, amenity and safety reasons.

Controls

- C1** No fencing is permitted within the landscaped component of the front setback, unless it can be demonstrated that it is required. Any required fencing must be open style and of a decorative design.
- C2** In general no fencing other than a low feature wall may be erected on any site at the entry driveway. Low feature walls should be utilised for retaining walls, garden beds and the like. (Figure 35)
- C3** No pre-finished and pre-coloured corrugated metal (e.g. Colorbond) or lapped and capped fencing is permitted to any public area.
- C4** The use, design and materials of fences and walls are to be compatible with well designed fences and walls in the public domain.
- C5** Side and rear fences and walls can be built to a maximum height of 1.8m to screen the rear of the allotment from adjacent sites.
- C6** Side fencing is not to be located forward of the landscape zone.
- C7** Side and rear fencing is to allow cross ventilation by the use of open chain wire, timber or metal picket fencing.
- C8** Fencing is to utilise dark colours to reduce visibility.
- C9** Fences alongside rock battered channels that are adjacent to public open space are to a maximum of 1m high, be open structures and include a handrail. These fences are to be designed and/or specified by a registered landscape architect. (Figure 34)

3.5.10 Recycling and waste management

Objectives

- O1** Reduce the amount of waste going to landfill.
- O2** Encourage the recycling of industrial waste.

Controls

- C1** Waste separation, recycling and reuse facilities are to be provided on site.
- C2** Waste facilities are to be fully integrated with the design of the building and/or landscaping.

3.0 Design Guidelines

3.5.11 Outside storage

Objectives

- O1 Mitigate the environmental and visual impact of external processing and storage of materials.

Controls

- C1 Storage of any kind is not permitted within the front setback area.
- C2 Development applications proposing external processes and/or outdoor or open storage areas are to provide details of the parts of the site to be so used, the specific materials to be stored and proposed screening. Outdoor storage areas are not to interfere with access, maneuvering and parking arrangements.

3.5.12 Rooftop mechanical plant

Objectives

- O1 To mitigate the visual impacts of rooftop mechanical plants.

Controls

- C1 Rooftop structures (including plant rooms, air conditioning and ventilation systems) are to be incorporated into the design of the building to create an integrated appearance.
- C2 Roof plant must not be more than 5m in height above the highest adjacent roof line and/or no more than 17m in height measured from the approved ground level.
- C3 Roof Plant must be positioned so that it is setback at least 20m from any external wall.

3.0 Design Guidelines

3.5.13 Sustainable building design

Objectives

- O1** Ensure that developments are environmentally sustainable in terms of energy and water use.
- O2** Minimise consumption of potable water and waste water discharge.
- O3** Maximise opportunities for natural ventilation where appropriate.
- O4** Ensure that development incorporates water conservation and re-use measures into design and operation.

Controls

- C1** Developments are to demonstrate how the design is capable of achieving an ESD level equivalent to a 5 star Green Star standard. Where a GBCA Pilot Tool is available, the applicant may choose to utilise it for the DA submission.
- C2** Buildings are to install rainwater tanks to meet a portion of supply such as outdoor use, toilets or laundry.
- C3** The roof area should be directed to a rainwater tank and should be maximised to both increase the effectiveness and reliability of the reuse system.
- C4** Development is to incorporate water efficient fixtures such as taps, shower heads and toilets. The fixtures are to be rated to at least AAA under the National Water Conservation Rating and Labelling Scheme. Where the building or development is water intensive, specific water conservation objectives are to be resolved.
- C5** Appropriate use of energy efficient materials during construction is to be demonstrated.
- C6** Development should incorporate energy efficient hot water systems, air-conditioning, lighting and lighting control systems.

3.0 Design Guidelines

3.5.14 Cut and Fill

Objectives

- O1** Ensure that the extent of cut and fill required for large scale development does not detract from the visual quality of the building and surrounding landscape.
- O2** Ensure that development is capable of visual integration with the surrounding environment.
- O3** To minimise the effect of disturbance on any land and ensure that dangerous excavations are avoided, or where necessary, properly supported on site.
- O4** To minimise the removal and disposal of resultant spoil from the site.
- O5** Ensure that any imported fill material on site is clean and complies with the contamination and salinity provisions of the development.

Controls

- C1** Embankment batters from the property boundaries are to be at a ratio of 3m:1m (length to height).
- C2** Retaining walls are not to exceed a height of 3 metres.
- C3** Fill greater than 1.8 metres in height is to be terraced at a ratio of 1.5m:3m (length to height).
- C4** Embankment batters and retaining walls are to include landscaping to reduce erosion and provide planting screening of the structures.
- C5** Appropriate soil erosion and saltation measures are to be implemented on the site if appropriate. Details of the proposed measures are to be provided with the Development Application.
- C6** A Development Application that includes cut and fill on a site adjoining a defined naturally formed creek or drainage channel should address the potential environmental impacts of the proposed works on those areas.
- C7** Retaining walls are to be screened with landscaping where possible.
- C8** Retaining walls should not be within 1.5 metres of a property boundary, or within 3 metres of any buildings on the site.
- C9** The importation of fill is to be avoided. Any imported fill, where required, is to be clean of any contamination.

3.0 Design Guidelines

3.5.15 Lot 3

Lot 3 is located at the northern end of the site and has street frontages to both Rooty Hill Road South and Church Street.

Lot 3 will form the final phase of the broader Eastern Creek Business Hub development and the vehicle site access will be via an extension of the Access Road and an upgraded Church Street. This ensures a continuity of development and reduces the visual appearance to residents along Rooty Hill Road South. Developments are to adhere to the following site specific development controls.

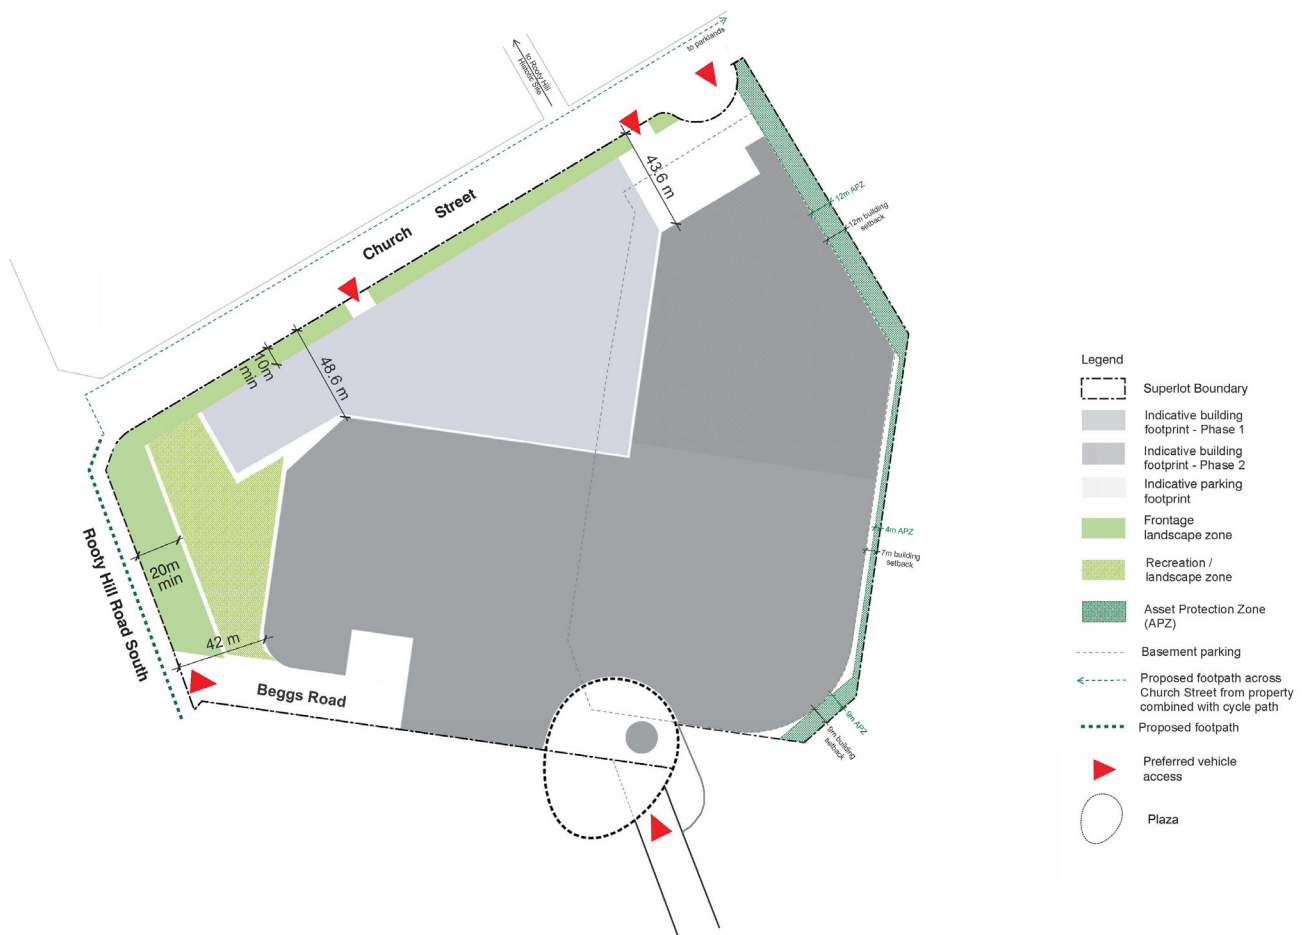


Figure 36: Development Control Plan - Lot 3 (not to scale)

3.0 Design Guidelines

Setbacks

Objectives

- O1** To define and enhance the public domain.
- O2** To reduce the visual impact of new development on the streetscape and surrounding community.
- O3** To ensure that adequate area is available at the front of buildings to accommodate landscaping, access, parking and stormwater requirements.
- O4** To preserve existing perimeter vegetation where possible.

Controls

- C1** 20m minimum setback to Rooty Hill Road South, all of which is to be used as a landscape buffer to the development.
- C2** 10m minimum landscape setback to Church Street.

Height

Objectives

- O1** To prevent the visual impact of unnecessarily tall buildings on the surrounding residential community.
- O2** To ensure that a broad range of outlet retail premises and retail developments be accommodated on site.

Controls

- C1** The maximum building height permissible is 12m from approved ground level. Localised excellences to this control are permitted for rooftop structures in accordance with Section 3.5.12.

Existing vegetation and asset protection zones

Objectives

- O1** To preserve and enhance the remnant vegetation that exists throughout the business hub.
- O2** Restrict proximity of developments to natural assets and bushfire hazards.
- O3** Ensure management strategies are in place to maintain and protect the environmental assets of the site.

Controls

- C1** Management of the woodlands will be undertaken by the Western Sydney Parklands Trust
- C2** A minimum 12m (north east), 4m (east) and 9m (south east) Asset Protection Zone from the woodlands to any future development is required as shown in Fig 39.

3.0 Design Guidelines


Frontage landscape and recreation landscape zones

Objectives

- O1** The built form of the outlet centre should respond to the topography of the RHRS frontage.
- O2** Encourage active recreational uses, potentially in conjunction with a commercial tenancy.
- O3** Promote the character of the outlet centre within a landscaped setting.
- O4** Improve connectivity for pedestrians.
- O5** Incorporate principles of Crime Prevention Through Environmental Design (CPTED) into the design of the RHRS frontage.

Controls

- C1** The western façade of the outlet centre building should be visible from RHRS.
- C2** Incorporate recreational uses and/or landscape elements between RHRS and the outlet centre.
- C3** Provide complementary native planting and retain existing significant trees where possible.
- C4** Provide pedestrian pathways to the entry of the outlet centre.
- C5** A Crime Risk Assessment Report, including an assessment of the RHRS interface, is to be lodged as part of any Development Application.

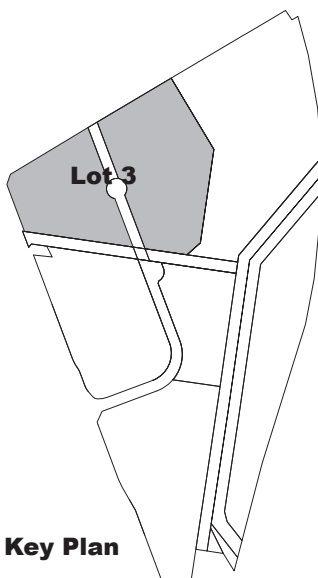

Key Plan

