



Vipac Engineers & Scientists Ltd.

4/5 Leo Lewis Close, Toronto, NSW 2283, Australia

PO Box 306, Toronto, NSW 2283, Australia

t. +61 2 4950 5833 | f. +61 2 4950 4276 | e. hunternvalley@vipac.com.au

w. www.vipac.com.au | A.B.N. 33 005 453 627 | A.C.N. 005 453 627

Vipac Engineers & Scientists

BORG Manufacturing

Gas Fired Co-Generators

Noise Impact Assessment



29N-15-0064-TRP-472771-1

02 Jul 2015



Report Title: Noise Impact Assessment Job Title: Gas Fired Co-Generators		
DOCUMENT NO: 29N-15-0064-TRP-472771-1 PREPARED FOR: BORG Manufacturing 1090 Pacific Highway Somersby, New South Wales, 2250, Australia CONTACT: Victor Bendeovski Tel: +61 2 4340 8271 Fax:		REPORT CODE: TRP PREPARED BY: Vipac Engineers & Scientists Ltd. 4/5 Leo Lewis Close, Toronto, NSW 2283, Australia Tel: +61 2 4950 5833 Fax: +61 2 4950 4276
PREPARED BY: Author:	 Lynne Tan Project Engineer	Date: 15 Jun 2015
REVIEWED BY: Reviewer:	 Darragh Kingston Manager – Hunter Valley/Newcastle Team Leader , Acoustics	Date: 15 Jun 2015
AUTHORISED BY:	 Darragh Kingston Manager – Hunter Valley/Newcastle Team Leader , Acoustics	Date: 15 Jun 2015
REVISION HISTORY		
Revision No.	Date Issued	Reason/Comments
0	15 Jun 2015	Initial Issue
1	02 Jul 2015	Final
2		
DISTRIBUTION		
Copy No. _____	Location	
1	Project	
2	Client (PDF Format)	Uncontrolled Copy
3		
4		
KEYWORDS:		

NOTE: This is a controlled document within the document control system. If revised, it must be marked SUPERSEDED and returned to the Vipac QA Representative. This document contains commercial, conceptual and engineering information that is proprietary to Vipac Engineers & Scientists Ltd. We specifically state that inclusion of this information does not grant the Client any license to use the information without Vipac's written permission. We further require that the information not be divulged to a third party without our written consent

02 Jul 2015

EXECUTIVE SUMMARY

Vipac Engineers and Scientists Ltd (Vipac) was engaged by BORG Manufacturing to carry out a Noise Impact Assessment to assess potential noise impacts associated with two proposed Gas Fired Co-Generator units at the BORG Panel Facility in Oberon, NSW.

The Noise Impact Assessment has been undertaken in accordance with the requirements of the following documents:

- Environmental Protection Authority (EPA) NSW *Industrial Noise Policy* (INP),
- EPA NSW Environment Protection Licence(EPL), *Licence number 3035 dated 15 May 2013*

A Noise Impact Assessment has been undertaken to determine the potential Noise Impact of the proposed Gas Fired Co-Generator operations at the BORG Panels Facility in Oberon, on noise sensitive receptors in the surrounding area.

Noise prediction modelling has been undertaken taking into consideration two scenarios considering both the neutral and worst-case conditions during daytime and night-time. The predicted noise impact from the proposed Gas Fired Co-Generators plant on the noise sensitive receivers in the surrounding area are in the range from 10 to 32 dB(A) during the day and evening/night periods, (refer to **Table 9** and **Table 10**), which are well below the applicable criteria during day, evening and night time.

It should be noted that these predicted noise levels are associated with operation of the Gas Fired Co-Generators alone, and do not include cumulative noise emissions associated with operations at the existing Borg Oberon Facility. It is highly likely that existing plant and equipment operating at the Borg Oberon Facility would mask noise emissions from the proposed Gas Fired Co-Generators.

During a recent compliance noise monitoring survey conducted in December 2014 (Vipac Report Ref: 29N-14-0010-TRP-472593-2), the noise emanating from combined industrial operations at a number of industrial facilities was audible at the majority of the noise monitoring locations as a background noise source but it was not audible on some occasions due to the masking effects of other noise sources in the area such as road traffic noise. It was not possible to determine the noise contribution from operational sources at the Borg Facility alone, due to the effect of noise emissions from a number of additional industrial facilities in the surrounding area. The audible plant noise hum noted at a number of the monitoring locations was attributed from a combination of emissions from all of the industrial facilities in the area, which included Carter Holt Harvey (CHH), Australia Pine Products and also the Borg Panel Facility.

In order to predict the cumulative noise levels from the existing Borg Operations and the proposed Gas Fired Co-Generators, Vipac has assumed that the existing noise contribution from the Borg Oberon Facility is representative of the L_{A90} noise level measured during the December 2014 Noise Compliance Assessment. It should be noted that this assumption is slightly conservative as the measured noise levels at the monitoring locations were also influenced by noise emission contributions from the Carter Holt Harvey (CHH) and Australia Pine Products facilities.

The potential cumulative noise impact from the proposed Gas Fired Co-Generator units is likely to be negligible at each of the noise sensitive receptors (no increase in cumulative noise levels at each of the monitoring locations, except R4, where there is a predicted increase of 1dB) as the existing Borg Operations would mask the noise emissions from the proposed Gas Fired Co-Generators.



TABLE OF CONTENTS

1	INTRODUCTION	5
2	GLOSSARY OF TERMS	5
3	PROJECT DESCRIPTION	5
3.1	Site Location	5
3.2	Noise Sensitive Receivers	7
4	CRITERIA	8
4.1	Environmental Protection Licence (Licence No: 3035) Requirement	8
4.1.1	Condition L4 – Noise Limits	8
4.1.2	Condition 8 – Pollution Studies and Reduction Programs	8
4.2	NSW DECC “Interim Construction Noise Guideline”	8
4.2.1	Residences and Other Sensitive Land Uses	8
5	EXISTING NOISE ENVIRONMENT	10
5.1	Unattended Noise Measurements	10
6	NOISE MODELLING	11
6.1	Geographical Data	11
6.2	Weather Conditions	11
6.3	Noise Sources	11
7	RESULTS – PREDICTED NOISE LEVELS	13
8	CONSTRUCTION NOISE MANAGEMENT	15
9	CONSTRUCTION NOISE MANAGEMENT PLAN	17
10	CONCLUSION	19

1 INTRODUCTION

Vipac Engineers and Scientists Ltd (Vipac) was engaged by BORG Manufacturing to carry out a Noise Impact Assessment to assess potential noise impacts associated with two proposed Gas Fired Co-Generator units at the BORG Panel Facility in Oberon, NSW.

The Noise Impact Assessment has been undertaken in accordance with the requirements of the following documents:

- Environmental Protection Authority (EPA) NSW *Industrial Noise Policy* (INP),
- EPA NSW Environment Protection Licence(EPL), *Licence number 3035 dated 15 May 2013*

2 GLOSSARY OF TERMS

A list of commonly used acoustical terms (and their definition) used in this report is provided below in **Appendix A** as an aid to readers of this report.

Table 1: Definition of Acoustical Terms

Term	Definition
$L_{eq,1hr}$	Equivalent Continuous Noise Level - which, lasting for as long as a given noise event, has the same amount of acoustic energy as the given event for the period of one hour.
$L_{A10,1 hr}$	The noise level, which is equalled or exceeded for 10% of the measurement period of one hour.
$L_{A90,T}$	The noise level, which is equalled or exceeded for 90% of a given measurement period, T. $L_{A90,T}$ is used in Australia as the descriptor for background noise.
$L_{Aeq,T}$	The equivalent continuous A-weighted sound pressure level that has the same mean square pressure level as a sound that varies over time, for a given time period. It can be considered as the average sound pressure level over the measurement period and is commonly used as a descriptor for ambient noise.
L_n	The Sound Pressure levels that is equalled or exceeded for n% of the interval time period. Commonly used noise intervals are L_1 , L_{10} , L_{90} and $L_{99\%}$
$L_{A10,18hrs}$	The L_{10} noise level for the time period extending from 6am to midnight.

3 PROJECT DESCRIPTION

3.1 SITE LOCATION

The Borg Panel Oberon Facility is located to the east of Lowes Mount Road, Oberon, NSW. The Borg Panels Facility is one of the four primary industries that operate in the vicinity of Oberon town, NSW. The other three industries are Highland Pine Products (HPP), Carter Holt Harvey (CHH) and Woodchem (which is part of Borg Panel operations), refer to **Figure 1**.

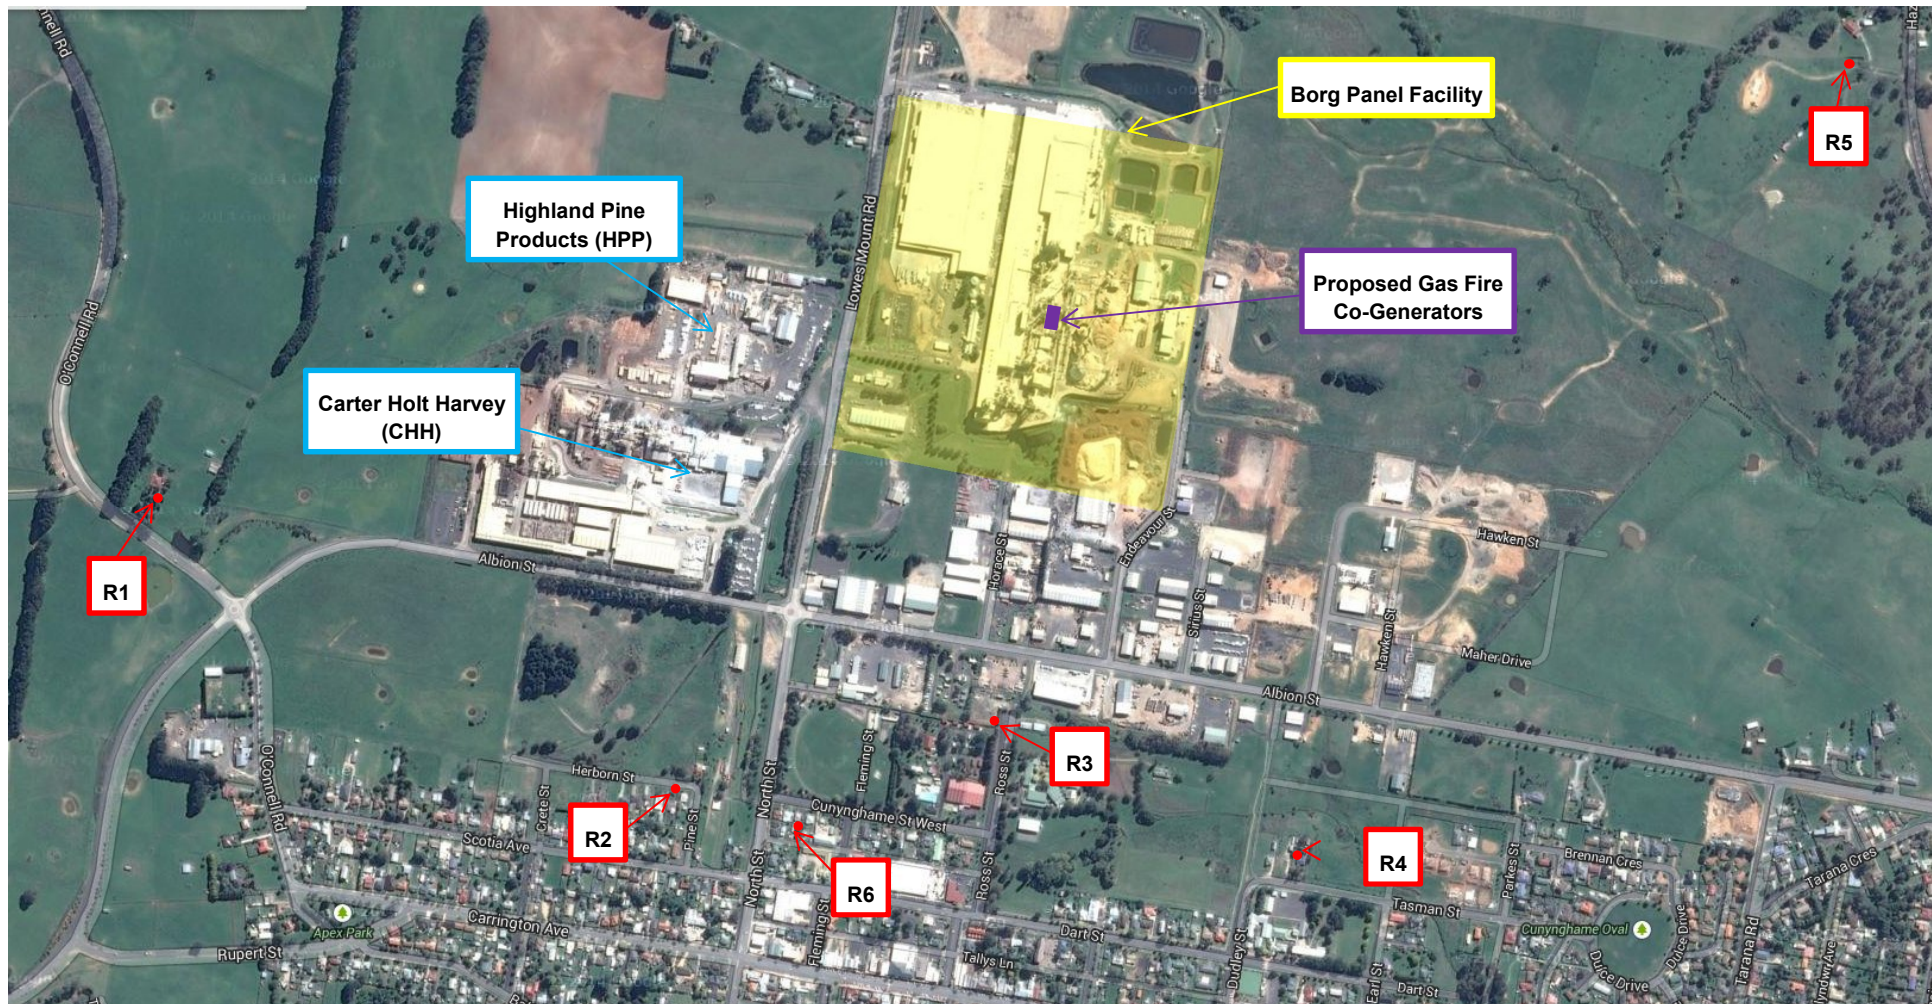


Figure 1: Proposed Gas Fire Co-Generators and Noise Monitoring Locations

02 Jul 2015



3.2 NOISE SENSITIVE RECEIVERS

A list of the nearest potentially affected noise sensitive receivers to the proposed plant is provided below in **Table 1**. The distance is calculated from the boundary of proposed Gas Fired Co-Generator plant to the property boundary of the noise sensitive receivers.

Table 2: Noise Sensitive Receivers

ID	Property/Address	Approximate Distance (m)	Type of Receivers
R1	Near Albion Street and O'Connell Road	1,500 meters to the west of proposed plant	Residential
R2	6 Herborn Street	940 meters to the south-west of proposed plant	Residential
R3	Ross Street	680 meters to the south of proposed plant	Oberon High School
R4	10 Tasman Street	940 meters to the south-east of proposed plant	Residential
R5	131 Hazelgrove Road	1,400 meters to the north-east of proposed plant	Residential
R6	26 Cunynghame Street West	910 meters to the south-west of proposed plant	Residential

4 CRITERIA

4.1 ENVIRONMENTAL PROTECTION LICENCE (LICENCE NO: 3035) REQUIREMENT

4.1.1 CONDITION L4 – NOISE LIMITS

Noise from the premises must not exceed:

- a) 55 dB(A) $L_{Aeq(15mintues)}$ during the day period (7am to 6pm)
- b) 50 dB(A) $L_{Aeq(15mintues)}$ during the evening period (6pm to 10pm) and
- c) At all other times 45dB(A) $L_{Aeq(15mintues)}$, except as expressly provided by the licence (EPL No. 3035)

The noise emission limits identified in EPL No. 3035 apply under all meteorological conditions except:

- a) During rain and wind speeds (at 10m height) greater than 3m/s and
- b) Under “non-significant weather conditions”

4.1.2 CONDITION 8 – POLLUTION STUDIES AND REDUCTION PROGRAMS

U1 - Internal Noise – Oberon High School

Where internal classroom noise exceeds the recommended maximum L_{eq} 40 dB(A) as per Industrial Noise Policy Table 2.1, the licensee must develop a works program to achieve an internal noise less than or equal to 40dB(A) $L_{Aeq(15minutes)}$.

When internal noise criteria are specified, the external noise level may be 10dB(A) greater for buildings with no adequate ventilation or 20dB(A) for buildings with fixed external windows and mechanical ventilation. To be conservative, Vipac has utilised a 10dB(A) reduction for the break-in noise through the structure. Therefore, the external noise criteria for classrooms is 50dB(A) $L_{Aeq(15minutes)}$.

4.2 NSW DECC “INTERIM CONSTRUCTION NOISE GUIDELINE”

The NSW Interim Construction Noise Guideline was developed by the NSW Department of Environment & Climate Change (DECC) and outlines detailed procedures for the assessment and management of Construction Noise Impacts.

The Guidelines present two ways of assessing Construction Noise Impacts – the quantitative method, which is generally suited to longer-term construction projects (usually more than 3 weeks), and the qualitative method, which is generally suited to short-term works (usually not more than 3 weeks) such as infrastructure maintenance.

It is anticipated that the overall period for construction works will be approximately 12 weeks and therefore a quantitative method has been used for this assessment.

4.2.1 RESIDENCES AND OTHER SENSITIVE LAND USES

Table 3 and **Table 4** set out the management levels for noise at residences and sensitive land uses, respectively. Restrictions to the hours of construction may apply to activities that generate noise at residences above the ‘highly noise affected’ noise management level.

Table 3: Noise at residence using Quantitative Assessment

Recommended Hours	Time of Day	Management level ¹ $L_{Aeq}(15min)$
Recommended standard hours	Monday to Friday - 7 am to 6pm Saturday - 8am to 1 pm No Work on Sundays or Public holidays	Noise affected ² $RBL + 10dB$
		Highly noise affected ³ 75dB
Outside recommended standard hours		Noise affected $RBL + 5dB$

Table 4: Noise at sensitive land uses (other than residences) using quantitative assessment

Land use	Management Level, $L_{Aeq}(15min)$ Applies when properties are being used
Offices, retail outlets	External Noise Level 70dB
Places of worship	Internal Noise Level 45dB
School	Internal Noise Level 45dB

Where internal noise levels were specified, 10dB was added to approximate an external noise level.

When assessing construction noise it is understood that several types of plant and equipment can be particularly annoying to nearby residents. In those instances a +5dB penalty is applied to the predicted noise level. Examples of the type of machines and operations that typically fit this category are outlined below:

- Use of 'beeper' style reversing or movement alarms, particularly at night time.
- Use of power saws, such as used for cutting timber, masonry, road pavement or steel work.
- Grinding metal, concrete or masonry.
- Rock drilling.
- Line drilling.
- Vibratory rolling.
- Bitumen milling or profiling.
- Jack hammering, rock hammering or rock breaking.
- Impact piling.

¹ Noise levels apply at the boundary that is most exposed to construction noise and at a height of 1.5 m above ground level. If the property boundary is more than 30m from the residence, the location for measuring or predicting noise levels is at the most noise-affected point within 30m of the residence. Noise levels may be higher at upper floors of the noise-affected residence.

² RBL is the Rating Background Level as defined in the EPA Industrial Noise Policy.

³ $L_{Aeq} 15-minute \geq 75 dB$ is highly likely to generate strong community reactions and should be avoided.

5 EXISTING NOISE ENVIRONMENT

5.1 UNATTENDED NOISE MEASUREMENTS

Vipac previously installed six environmental noise loggers at noise sensitive receivers surrounding the Borg Panel Manufacturing Facility in Oberon. The unattended noise measurements were undertaken in December 2014 at the noise sensitive receivers listed in **Table 1**.

A summary (L_{Aeq} , L_{10} , L_{90} and RBL^1) of the unattended noise logger data is presented in **Table 5** below for the period Monday 17th to Monday 24th December 2014 inclusive following the removal of weather affected data (where wind-speed is greater than 3 ms⁻¹ at 10 metres above ground level and/or rainfall is present), which were extracted from Vipac Report ref: 29N-14-0100-TRP-472593-2.

Table 5: Summary of current ambient noise levels (dBA)

Loc.	Period	L_{Aeq}	L_{A10}	L_{A90}	RBL^1
N01 (Oorong-Albion Street)	Day	54	56	42	41
	Evening	50	52	38	38
	Night	49	52	42	42
N02 (Herborn Street)	Day	72	68	58	58
	Evening	66	64	58	57
	Night	60	62	54	52
N03 (Oberon High School)	Day	57	56	48	48
	Evening	49	50	47	45
	Night	52	54	48	47
N04 (Tasman Street)	Day	47	50	43	43
	Evening	43	45	40	39
	Night	45	47	43	41
N05 (Hazelgrove Road)	Day	49	50	38	37
	Evening	42	44	38	37
	Night	42	43	37	36
N06 (Cunynghame Street)	Day	49	50	44	44
	Evening	47	49	42	42
	Night	47	48	43	42

¹ RBL Rating Background Level is the background level used for assessment purposes as determined by the method outlined in OEH INP.

6 NOISE MODELLING

Noise modelling has been performed using the SoundPLAN® computational noise modelling software package. The use of the SoundPLAN® software and referenced modelling methodology is accepted for use in the state of NSW by the Office of Environment and Heritage (OEH)/Environmental Protection Authority (NSW EPA) for environmental noise modelling purposes. Vipac have undertaken numerous noise modelling and impact assessments previously for a range of projects, including mining and industrial projects using SoundPLAN®.

6.1 GEOGRAPHICAL DATA

Table 6 below lists the drawings/information received and used in the noise model.

Table 6: List of Drawings

Description	Date	Provided by
Site Plan Layout plan	14.04.2015	Borg Manufacturing
Site building dimension	22.05.2014	Borg Manufacturing
Ground elevation of the study area	28.05.2014	Land & Property Information, NSW

6.2 WEATHER CONDITIONS

Four acoustic modelling scenarios were run for the proposed Gas Fired Co-Generator, within the SoundPLAN program using CONCOWE algorithms under both neutral and worst-case weather conditions for the day and night periods. It should be noted that sound will propagate further through the atmosphere under certain weather conditions dependent on air pressure variations, wind speed and direction variations, temperature inversions etc. The 'worst-case' weather conditions chosen were those highly conducive to the propagation of sound.

Table 7 presents the weather parameters used in the CONCOWE calculations based on annual data from the Bureau of Meteorology (BoM) Weather Station at Oberon (Jenolan Caves Road).

Table 7: Sound Plan Weather Parameters

Parameter	Day		Evening/Night	
	Neutral	Worst-Case	Neutral	Worst-Case
Pasquill Stability Category	B	D	D	F
Wind Speed (m/s)	0	3	0	3
Humidity (%)	58	58	79	79
Temperature (deg Celsius)	15	15	10	10
Met Category	3	5	4	6

6.3 NOISE SOURCES

Vipac has been advised by Borg Manufacturing that the generators will be enclosed within a steel enclosure with three opening areas (i.e. air intake and discharge vent) and an exhaust pipe that run from the generator's muffler to process plant. The sound reduction index of the steel enclosure, exhaust pipe and the opening areas have been taken into account in assessing the break-out noise from the generators to the outdoor environment.

In order to calculate the break-out noise from the proposed generators, the following assumptions are made:

- Proposed steel enclosure is internally lined with 50mm thick Rockwool (40kg/m³) 3m (Width) x 8 m (Length) x 2.875m (Height);
- Reverberation time of 0.7s;
- Total Intake Area of 1.58m² (0.45m x 1.75m for each intake area);
- Discharge Area of 1.2m² (2.7m x 0.45m);
- 15m long and 270mm in diameter exhaust pipe
- Sound Pressure Level of Deutz Generator Engine type TBG 620 V12K – 102dB(A) at 1 meter
- Sound Pressure Level of Deutz Generator Exhaust - 120dB(A) at 1 meter

Vipac identified the areas listed in **Table 8** as the weakest points within the generator units and therefore, only these areas were considered in the noise model. Each element of the generator associated with the sound pressure level is detailed in **Table 8**.

Table 8: Sound Pressure Level at 1-metre for each element

Description	Octave Frequency Band (Sound Pressure Level at 1m) dB								Sound Pressure Level at 1m (dBA)
	63Hz	125Hz	250Hz	500Hz	1kHz	2kHz	4kHz	8kHz	
Generator Intake (Area: 0.79m ²)	91	83	83	84	85	83	84	84	91
Generator Discharge (Area: 1.2m ²)	93	85	85	86	87	85	86	86	93
Generator Exhaust	85	73	68	64	61	55	60	60	68

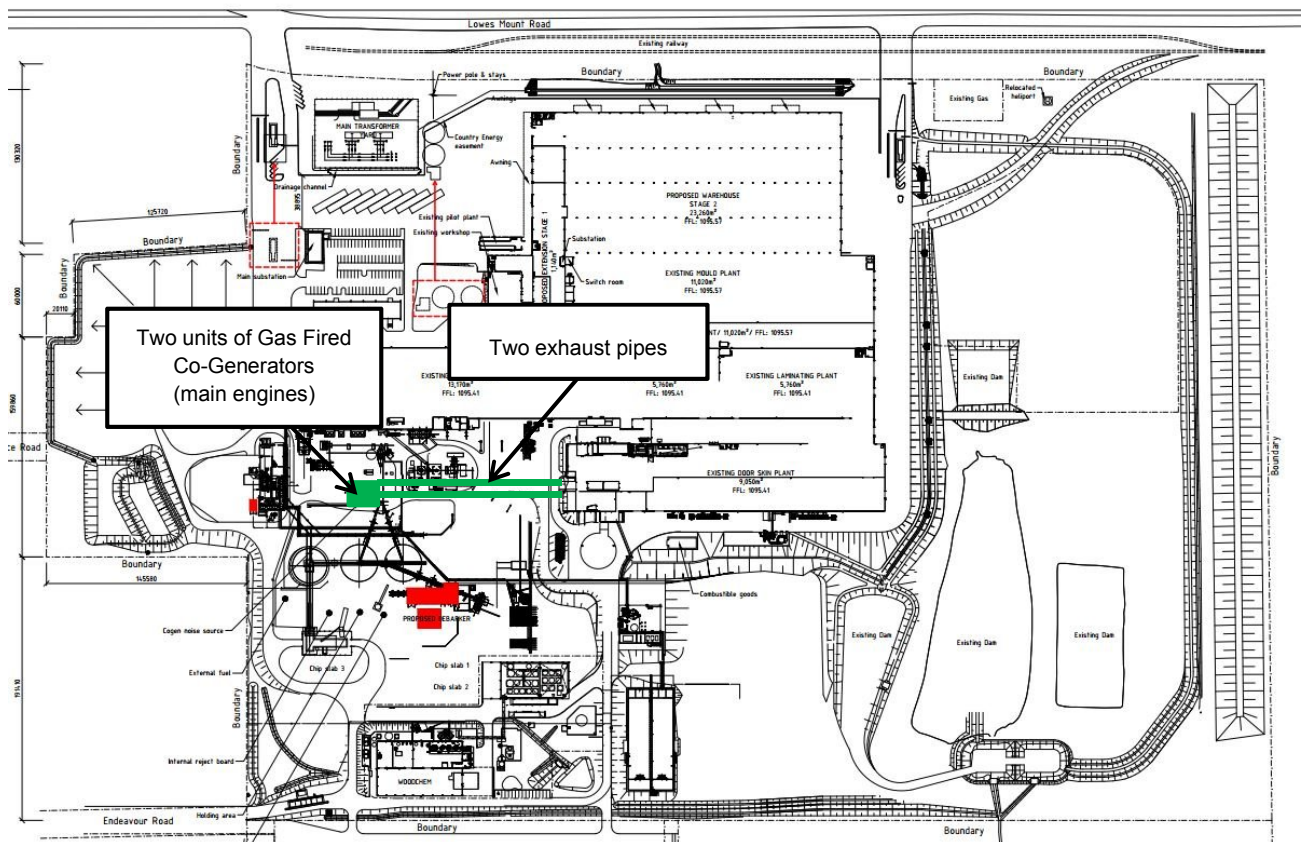


Figure 2: Noise Sources Location

7 RESULTS – PREDICTED NOISE LEVELS

Noise prediction modelling has been carried out to assess the potential impact associated with the two proposed Gas Fired Co-Generator units, on the existing noise environment at the nearest noise sensitive receptors located in proximity to the site. The predicted noise levels representative of the operational phase for both neutral conditions and worst-case conditions are presented in **Table 9** during the day period and **Table 10** during the evening/night periods.

Table 9: Predicted noise levels for proposed Gas Fired Co-Generators – Day Period

Receiver	Neutral	Worst	Criteria (Day)
R1	15	25	55
R2	14	24	55
R3	15	23	50
R4	22	32	55
R5	18	28	55
R6	10	19	55

Table 10: Predicted noise levels for proposed Gas Fired Co-Generators – Evening/Night Periods

Receiver	Neutral	Worst	Criteria (Evening, Night)
R1	21	26	50/45
R2	19	25	50/45
R3	19	24	50/N/A
R4	27	32	50/45
R5	23	28	50/45
R6	14	19	50/45

Noise prediction modelling has been undertaken for the proposed Gas Fired Co-Generators, taking into consideration two scenarios considering both the neutral and worst-case conditions during daytime and night-time. The predicted noise impact from the proposed Gas Fired Co-Generators on the noise sensitive receivers in the surrounding area are in the range from 10 to 32 dB(A) during the day and evening/night periods, (refer to **Table 9** and **Table 10**), which are well below the applicable criteria during day, evening and night time.

It should be noted that these predicted noise levels are associated with operation of the Gas Fired Co-Generators alone, and do not include cumulative noise emissions associated with operations at the existing Borg Oberon Facility. It is highly likely that existing plant and equipment operating at the Borg Oberon Facility would mask noise emissions from the proposed Gas Fired Co-Generators.

During a recent compliance noise monitoring survey conducted in December 2014 (Vipac Report Ref: 29N-14-0010-TRP-472593-2), the noise emanating from combined industrial operations at a number of industrial facilities was audible at the majority of the noise monitoring locations as a background noise source but it was not audible on some occasions due to the masking effects of other noise sources in the area such as road traffic noise. It was not possible to determine the noise contribution from operational sources at the Borg Facility alone, due to the effect of noise emissions from a number of additional industrial facilities in the surrounding area. The audible plant noise hum noted at a number of the monitoring locations was attributed from a combination of emissions from all of the industrial facilities in the area, which included Carter Holt Harvey (CHH), Australia Pine Products and also the Borg Panel Facility.

In order to predict the cumulative noise levels from the existing Borg Operations and the proposed Gas Fired Co-Generators, Vipac has assumed that the existing noise contribution from the Borg Oberon Facility is representative of the L_{A90} noise level measured during the December 2014 Noise Compliance Assessment. It should be noted that this assumption is slightly conservative as the measured noise levels at the monitoring locations were also influenced by noise emission contributions from the Carter Holt Harvey (CHH) and Australia Pine Products facilities.

Cumulative noise levels from the existing Borg Operations and the proposed Gas Fired Co-Generators were assessed for worst-case scenarios, during worst-case weather conditions. **Table 11** presents the cumulative noise levels.

Table 11: Cumulative noise levels (L_{Aeq}) dB

Receiver ID	Day			Evening			Night		
	Existing Borg Operations	Proposed Gas Fired Co-Generator Units	Cumulative Noise Levels	Existing Borg Operations	Proposed Gas Fired Co-Generator Units	Cumulative Noise Levels	Existing Borg Operations	Proposed Gas Fired Co-Generator Units	Cumulative Noise Levels
R1	43	25	43	53	26	53	45	26	45
R2	44	24	44	42	25	42	45	25	45
R3	37	23	37	N/A	N/A	N/A	N/A	N/A	N/A
R4	41	32	42	43	32	43	44	32	44
R5	39	28	39	39	28	39	39	28	39
R6	46	19	46	44	19	44	46	19	46

Table 11 shows that the potential cumulative noise impact from the proposed Gas Fired Co-Generator units is likely to be negligible at each of the noise sensitive receptors (no increase in cumulative noise levels at each of the monitoring locations, except R4, where there is a predicted increase of 1dB) as the existing Borg Operations would mask the noise emissions from the proposed Gas Fired Co-Generators.

It is reiterated that the cumulative noise levels presented above are indicative levels, based on the results of the Noise Compliance Survey undertaken at a number of noise sensitive receptors located in Oberon, in December 2014.

8 CONSTRUCTION NOISE MANAGEMENT

Typical noise levels representative of construction plant that may be used on-site during the construction/installation of the Gas Fired Co-Generators were sourced from previous measurements conducted by Vipac, equipment suppliers and sound power levels provided in Appendix A of AS2436:2010 – Guide to Noise Control on Construction, Maintenance and Demolition Sites.

From this information, noise impacts were theoretically propagated at varying distances from the construction site. Propagation calculations take into account sound intensity losses due to distance, with additional minor losses such as atmospheric absorption, directivity and ground absorption ignored in the calculations. As a result, predicted received noise levels are expected to overstate actual received levels by 1 - 2 dB and thus provide a measure of conservatism. Received noise at each assessed distance, produced by each item of plant on the site, can then be added to determine the potential total received noise at that distance from construction activities and compared to the criteria.

Predicted noise levels associated with potential typical construction works, during the construction/installation of the Gas Fired Co-Generators, are shown in **Table 12**, for a variety of distances to a typical receiver, with no noise barriers or acoustic shielding in place and with each item of plant operating at full power.

Table 12: Predicted Plant Item Noise Levels

Plant Item	L _w [dB(A) re: 1pwatt]	Predicted Sound Pressure Level (SPL), dB(A)							
		10m	25m	50m	100m	200m	400m	800m	1500m
Circular Saw (on load)	113	85	77	71	65	59	53	47	41
Crane	105	77	69	63	57	51	45	39	33
Concrete Mixers 24t	111	83	75	69	63	57	51	45	39
Concrete Pump	108	80	72	66	60	54	48	42	36
Concrete Saw	113	85	77	71	65	59	53	47	41
Excavator (Small)	108	80	72	66	60	54	48	42	36
Flat-Bed Truck	109	81	73	67	61	55	49	43	37
Generator	104	76	68	62	56	50	44	38	32
Semi-Trailer	112	84	76	70	64	58	52	46	40
Tip Truck	108	80	72	66	60	54	48	42	36

Actual cumulative impacts, from several machines operating simultaneously, may be reduced when some machines are operating in shielded areas not wholly visible to receivers. However, it should be noted that, if two or more machines were to operate simultaneously on the site in an exposed location, received noise levels would be increased.

Table 13 shows the potential construction phase noise impacts on noise sensitive receivers. It should be noted that the noise impacts are expected to fluctuate depending on the machines being used, their number and location on site.

Table 13: Predicted Construction Noise Impact - dBA

Receiver type	Period	Predicted Noise Levels -dBA	Noise Management Limit	Highly affected Noise Level
R1	Day - (RBL+10)	34-49	51	75
	Day (RBL +5) (or outside standard hours)	34-49	46	
	Evening - (RBL+5) (or outside standard hours)	34-49	43	
	Night (RBL+5) (or outside standard hours)	34-49	47	
R2	Day - (RBL+10)	38-53	68	75
	Day (RBL +5) (or outside standard hours)	38-53	63	
	Evening - (RBL+5) (or outside standard hours)	38-53	62	
	Night (RBL+5) (or outside standard hours)	38-53	57	
R3	When in use	40-55	55	75
R4	Day - (RBL+10)	38-53	53	75
	Day (RBL +5) (or outside standard hours)	38-53	48	
	Evening - (RBL+5) (or outside standard hours)	38-53	45	
	Night (RBL+5) (or outside standard hours)	38-53	48	
R5	Day - (RBL+10)	33-48	48	75
	Day (RBL +5) (or outside standard hours)	33-48	43	
	Evening - (RBL+5) (or outside standard hours)	33-48	43	
	Night (RBL+5) (or outside standard hours)	33-48	42	
R6	Day - (RBL+10)	38-53	54	75
	Day (RBL +5) (or outside standard hours)	38-53	49	
	Evening - (RBL+5) (or outside standard hours)	38-53	47	
	Night (RBL+5) (or outside standard hours)	38-53	48	

The noise levels that would be apparent during the construction phase are predicted to be within the Noise Management Levels (for “standard construction hours” and also within the “highly noise affected levels”. However, the construction phase noise levels would be expected to exceed the Noise Management Level (outside construction hours) at the majority of the noise sensitive receivers. Therefore, a Construction Noise Management Plan is detailed in **Section 9** to assist with minimising construction noise emissions on-site.



9 CONSTRUCTION NOISE MANAGEMENT PLAN

Construction Noise and Vibration Management Plan		
Component		Details
General / Site. Management Issues		All employees, contractors and subcontractors are to receive an environmental induction. The induction should instruct all persons at the site with regard to all relevant project specific and standard noise and vibration mitigation measures detailed herein including permissible hours of work; any limitations on high noise generating activities; location of nearest sensitive receivers; construction employee parking areas; designated loading/unloading areas and procedures; site opening/closing times (including deliveries); and environmental incident procedures.
		A dedicated person will form a point of contact for the dissemination of general information regarding site operations. Contact persons will also be defined to receive comment or complaints from the community – refer to community liaison/complaints handling plan below.
Hours of Work / Respite Periods		Standard Hours for Construction: 07:00 – 18:00 Monday – Friday 08:00 -13:00 Saturday No Work on Sundays or Public holidays.
		Very noisy activities (such as foundation compaction, concrete cutting or surface grinding for example) should be programmed during standard construction hours. If the work cannot be undertaken during the standard construction hours, it should be completed before 11:00 pm.
Source Controls	General / Work Practices	Avoid unnecessary revving of engines and turn off plant that is not being used / required.
		Use only non-tonal reverse alarms (broadband alternatives are needed). Where possible organise the site so that delivery trucks and haulage trucks only drive forward to avoid the use of reversing alarms.
		Organise and schedule the equipment operations to limit the noisiest machines operating simultaneously.
		Site set up / movement of plant / delivery of materials / waste removal from the site should be undertaken during daytime hours only.

02 Jul 2015



Construction Noise and Vibration Management Plan		
Component		Details
		Truck drivers are to be informed of site access routes, acceptable delivery hours and must minimise extended periods of engine idling.
		Ensure there is no unnecessary shouting or loud stereos/radios on-site. There must be no dropping of materials from heights, throwing of metal items, or slamming of doors.
		Equipment must be inspected on a regular basis and maintained as necessary, to ensure it is in good working order. This must include inspections of the condition and performance of mufflers.
	Equipment Selection and / or Substitution	Where reasonable and feasible the quietest equipment suitable for a task should be used instead of noise-intensive equipment.
		Construction equipment with the most effective mufflers, enclosures and low-noise tool bits and blades must be procured and utilised for the project.
		Where possible mains power should be utilised for temporary work area lighting, dewatering pumps or other temporary power requirements. Where this is not feasible silenced generator sets are to be used instead.
		Vipac recommends that all plant and equipment be certified prior to use.
	Use and Siting of Equipment / activities	Where practical fixed plant should be positioned as far away as possible from sensitive receivers.
		For any concrete cutting works, consideration should be given to having all concrete panels either cast-in-situ or pre-cut to the required dimensions and deliver to site, suitable for erection, without the need for cutting on-site.
Complaints management		Provide a complaints hotline number as a contact point for any complaints regarding the construction work.
Monitoring Requirements	Vibration	Vibration monitoring should be undertaken for works within ten metres of sensitive receivers. It is Vipac’s understanding that there will not be any construction work associated with the proposed Gas Fired Co-Generator units, undertaken within 10m of sensitive receivers.

02 Jul 2015

10 CONCLUSION

A Noise Impact Assessment has been undertaken to determine the potential Noise Impact of the proposed Gas Fired Co-Generator operations at the BORG Panels Facility in Oberon, on noise sensitive receptors in the surrounding area.

Noise prediction modelling has been undertaken taking into consideration two scenarios considering both the neutral and worst-case conditions during daytime and night-time. The predicted noise impact from the proposed Gas Fired Co-Generators plant on the noise sensitive receptors in the surrounding area are in the range from 10 to 32 dB(A) during the day and evening/night periods, (refer to **Table 9** and **Table 10**), which are well below the applicable criteria during day, evening and night time.

It should be noted that these predicted noise levels are associated with operation of the Gas Fired Co-Generators alone, and do not include cumulative noise emissions associated with operations at the existing Borg Oberon Facility. It is highly likely that existing plant and equipment operating at the Borg Oberon Facility would mask noise emissions from the proposed Gas Fired Co-Generators.

During a recent compliance noise monitoring survey conducted in December 2014 (Vipac Report Ref: 29N-14-0010-TRP-472593-2), the noise emanating from combined industrial operations at a number of industrial facilities was audible at the majority of the noise monitoring locations as a background noise source but it was not audible on some occasions due to the masking effects of other noise sources in the area such as road traffic noise. It was not possible to determine the noise contribution from operational sources at the Borg Facility alone, due to the effect of noise emissions from a number of additional industrial facilities in the surrounding area. The audible plant noise hum noted at a number of the monitoring locations was attributed from a combination of emissions from all of the industrial facilities in the area, which included Carter Holt Harvey (CHH), Australia Pine Products and also the Borg Panel Facility.

In order to predict the cumulative noise levels from the existing Borg Operations and the proposed Gas Fired Co-Generators, Vipac has assumed that the existing noise contribution from the Borg Oberon Facility is representative of the L_{A90} noise level measured during the December 2014 Noise Compliance Assessment. It should be noted that this assumption is slightly conservative as the measured noise levels at the monitoring locations were also influenced by noise emission contributions from the Carter Holt Harvey (CHH) and Australia Pine Products facilities.

The potential cumulative noise impact from the proposed Gas Fired Co-Generator units is likely to be negligible at each of the noise sensitive receptors (no increase in cumulative noise levels at each of the monitoring locations, except R4, where there is a predicted increase of 1dB) as the existing Borg Operations would mask the noise emissions from the proposed Gas Fired Co-Generators.