

402-420 Pacific Highway, Crows Nest
SSDA Noise and Vibration Impact Assessment

Project ID	20250655.1
Document Title	SSDA Noise and Vibration Impact Assessment
Attention To	Prosper Atrium Pty Ltd

Revision	Date	Document Reference	Prepared By	Checked By	Approved By
0	7/08/2025	20250655.1/0708A/R0/PF	PF		
1	17/09/2025	20250655.1/1709A/R1/PF	PF		WY
2	19/06/2026	20250655.1/1906A/R2/PF	PF		PF

TABLE OF CONTENTS

1	EXECUTIVE SUMMARY	5
2	INTRODUCTION	6
3	SUBJECT SITE.....	7
4	REFERENCED DOCUMENTS.....	8
5	NOISE SOURCES.....	9
5.1	NOISE SOURCES IDENTIFIED.....	9
5.2	NOISE RECEIVERS IDENTIFIED	9
6	ABBREVIATIONS AND DEFINITIONS	10
7	NOISE INTRUSION GUIDELINES AND ASSESSMENT CRITERIA	11
7.1	SEPPT&I 2021	11
7.2	DNRCBR.....	12
7.3	ADOPTED PROJECT SPECIFIC CRITERIA	12
8	NOISE INTRUSION ASSESSMENT.....	13
8.1	TRAFFIC NOISE INTRUSION ASSESSMENT	13
8.1.1	Measured Existing External Noise Levels	13
8.1.2	Calculation of External Road Noise Levels	14
8.2	COMPLYING MITIGATION	15
8.2.1	Glazed Windows and Doors.....	15
8.2.2	External Roof and Ceiling Construction.....	16
8.2.3	External Walls	16
8.2.4	Ventilation Strategy Discussion	16
9	NOISE EMISSION CRITERIA	17
9.1	NOISE EMISSION GUIDELINE	17
9.1.1	Mechanical Plant and Loading Dock Noise Assessment Criteria - NSW EPA NPI 2017 17	
9.2	SUMMARISED NOISE EMISSION CRITERIA	18
10	NOISE EMISSION ASSESSMENT	19
10.1	MECHANICAL PLANT NOISE	19
10.1.1	Preliminary Mechanical Treatment Advice.....	19
10.2	NOISE FROM THE LOADING DOCK.....	20
11	CONSTRUCTION NOISE AND VIBRATION ASSESSMENT	21
11.1	CONSTRUCTION NOISE MANAGEMENT LEVELS.....	21
11.2	CONSTRUCTION VIBRATION OBJECTIVES.....	22
11.2.1	Assessing Amenity (Human Comfort Guidelines).....	22
11.2.2	Structure Borne Vibration (Damage Criteria)	23
11.3	CONSTRUCTION NOISE EMISSION ASSESSMENT.....	24
11.3.1	Source Noise Data	24
11.3.2	Methodology	25
11.3.3	Recommended Hours of Work.....	25
11.3.4	Predicted Noise Levels	26
11.4	GENERAL DISCUSSION	29
12	NOISE AND VIBRATION MANAGEMENT AND CONTROLS	32
12.1	NOISE AND VIBRATION MONITORING, REPORTING AND RESPONSE PROCEDURES	32
12.1.1	Reporting Requirements	32
12.1.2	Response Procedures	33
12.2	GENERAL NOISE CONTROL METHODS.....	33

12.2.1	Selection of Alternate Appliance or Process.....	33
12.2.2	Acoustic Barriers.....	34
12.2.3	Silencing Devices.....	34
12.2.4	Treatment of Specific Equipment	34
12.2.5	Establishment of Site Practices	34
12.2.6	Notification.....	34
12.3	SITE SPECIFIC RECOMMENDATIONS	35
13	CONTROL OF CONSTRUCTION NOISE AND VIBRATION – PROCEDURAL STEPS	36
14	CONCLUSION	37
APPENDIX A	AMBIENT NOISE MONITORING	38
A.1	UNATTENDED LONG TERM NOISE MONITORING.....	38
A.1.1	Ambient Noise Descriptors	38
A.1.2	Equipment Used	39
A.1.3	Locations Monitored.....	39
A.1.4	Weather Affected and Extraneous/Outlying Data	39
A.2	CALCULATION OF REPRESENTATIVE AMBIENT NOISE LEVELS.....	40
A.2.1	Rating Background Noise Levels.....	40
A.2.2	Ambient Noise Levels – Noise Intrusion Assessment	41
A.3	ATTENDED NOISE MEASUREMENT	41
A.4	UNATTENDED MONITORING DATA GRAPHS.....	42
APPENDIX B	EPA NOISE POLICY FOR INDUSTRY TRIGGER LEVELS.....	54
B.1	NPI TRIGGER LEVELS.....	54
B.1.1	Intrusiveness	54
B.1.2	Amenity.....	54
B.1.3	Maximum Noise Level Assessment.....	56
B.2	PROJECT SPECIFIC TRIGGER LEVELS.....	57
APPENDIX C	SOUNDPLAN MODELLING RESULTS	58

1 EXECUTIVE SUMMARY

This *Noise and Vibration Impact Assessment* has been prepared by Acoustic Logic on behalf of Prosper as part of the Environmental Impact Statement (EIS) for a State Significant Development Application (SSDA) for a mixed use development at 402-420 Pacific Highway, Crows Nest (the site).

The report has been prepared to address the Secretary's Environmental Assessment Requirements (SEARs) issued for the project (SSD-83076206) on 29 April 2025.

The site is located adjacent to Crows Nest Metro Station and is within the Crows Nest Transit Oriented Development (TOD) Accelerated Precinct which has been identified by the NSW Government to support housing delivery. The Crows Nest TOD Precinct has been subject of recent amendments to the planning controls which came into effect in November 2024.

The site comprises 2,127.7sqm of land at 402-420 Pacific Highway, Crows Nest (SP54033) within North Sydney LGA.

The SSD application seeks approval for demolition of existing structures and construction of a 38-storey mixed-use building.

This report concludes that the proposed mixed use residential development appropriately considers noise and vibration impacts subject to the implementation of the following mitigation measures:

- Façade complying constructions presented in Section 8.2 are to be adopted and iterated during the design stage.
- Alternative ventilation strategy (e.g. mechanical ventilation) to be provided for apartment units affected by traffic noise from Pacific Highway. Refer to Section 8.2.4 and Appendix C.
- During construction stage, acoustic barriers (e.g., plywood hoarding) with minimum height of 1.8m to be installed to the northern and eastern of the site along Pacific Hwy and Oxley St to provide noise attenuation.

Following the implementation of the above mitigation measures, the remaining impacts are considered appropriate.

2 INTRODUCTION

This *Noise and Vibration Impact Assessment* has been prepared by Acoustic Logic on behalf of Prosper as part of the Environmental Impact Statement (EIS) for a State Significant Development Application (SSDA) for a mixed use residential development at 402-420 Pacific Highway, Crows Nest (the site).

The SSD application seeks consent for the following:

- Demolition of all existing structures on the site, tree removal, excavation and site preparation works
- Construction of a 38-storey mixed use building comprising
 - Six levels of basement car parking
 - A four-storey podium comprising retail and commercial floor space
 - Above podium resident communal open space and communal floor space
 - 273 residential apartments including affordable housing
 - Rooftop servicing.
- Retention of existing access from Oxley Street to access basement car parking and construction of a new driveway from Oxley Street to access ground floor loading dock
- Associated landscaping and public domain works
- Infrastructure servicing.

The report has been prepared to address the Secretary's Environmental Assessment Requirements (SEARs) issued for the project (SSD-83076206) on 29 April 2025 as detailed in the table below.

Table 1 – SEARs Requirement

Item	Description of SEARs Requirement	Section of Report Where Response is Provided
10. Noise and Vibration	Provide a noise and vibration assessment prepared in accordance with the relevant NSW Environment Protection Authority (EPA) guidelines. The assessment must detail construction and operational noise and vibration impacts on nearby sensitive receivers and structures and outline the proposed management and mitigation measures that would be implemented.	Assessment in accordance with relevant EPA guidelines: Section 9.1.1.
		Construction noise and vibration assessment: Section 11
		Outline of proposed management and mitigation measures: Section 11.4, Section 12 & 13

3 SUBJECT SITE

The site is located adjacent to Crows Nest Metro Station and is within the Crows Nest Transit Oriented Development (TOD) Accelerated Precinct which has been identified by the NSW Government to support housing delivery. The Crows Nest TOD Precinct has been subject of recent amendments to the planning controls which came into effect in November 2024.

The site comprises 2,127.7sqm of land at 402-420 Pacific Highway, Crows Nest (SP54033) within North Sydney LGA.

The site is currently developed with a four storey mixed use building. Vehicular access to existing basement car parking is from Oxley Street via the adjacent landholding with an easement granting right of carriageway.

The uses surrounding the site comprise:

- Crows Nest Metro Station to the east which has approval for over-station development up to 22 storeys of mixed use residential and is subject of a current SSD application for up to 27 storeys
- An existing car wash facility and four storey commercial building to the north which is subject of a proposal for a 52 storey mixed use residential development being considered through the Housing Delivery Authority pathway as SSD with a concurrent rezoning
- A three storey commercial building to the north west with potential for up to 16 storeys of commercial under the Crows Nest TOD controls
- Three to five story mixed use and commercial buildings fronting Pacific Highway located to the south of the site which are subject of a separate SSD application for a 40 storey mixed use residential development
- Three storey multi-dwelling housing to the west with potential for up to 12 storeys of residential under the Crows Nest TOD controls.



Figure 1 – Site location (Source: Mecone Mosaic)

4 REFERENCED DOCUMENTS

This document addresses noise impacts associated with the following:

- Noise intrusion to the project site from traffic at surrounding streets.
- Noise emissions from mechanical plant and loading dock to service the project site (in principle).
- Noise and vibration emissions from construction activities from the site.

AL have utilised the following documents and regulations in the noise assessment of the development:

- NSW Department of Planning *State Environmental Planning Policy Transport & Infrastructure (SEPT&I)* 2021.
- NSW Department of Planning *Developments near Rail Corridors or Busy Roads – Interim Guideline (DNRCBR)* 2008.
- NSW Environmental Protection Authority (**EPA**) *Noise Policy for Industry (NPI)* 2017.
- NSW DECC *Interim Construction Noise Guideline (ICNG)* 2009.
- German Standard DIN 4150-3 *Structural Vibration: Effects of Vibration on Structures*.
- NSW Department of Environment and Conservation (**DECC**) *Assessing Vibration: A Technical Guideline* (Feb 2006).

This assessment has been conducted based on the architectural drawings provided to us, prepared by fjcstudio, project code GBPH.

5 NOISE SOURCES

5.1 NOISE SOURCES IDENTIFIED

The main significant noise source with potential to impact the site is Traffic noise from Pacific Hwy. Reference to the Transport for NSW website indicates that Pacific Hwy carries daily traffic volumes more than 20,000 vehicles per day. Any potential noise impact shall be assessed against NSW Department of Planning **SEPPT&I** 2021 and **DNRCBR** 2008.

5.2 NOISE RECEIVERS IDENTIFIED

The nearest noise receivers around the site include:

- **R1:** Residential Receiver 1 – Residential apartments to the west of the site at 35-51 Nicholson St.
- **R2:** Residential Receiver 2 – Residential apartment building to the south of the site at 378-398 Pacific Hwy.
- **R3:** Residential Receiver 3 – Residential apartment building to the north of the site at 549 Pacific Hwy.
- **C1:** Commercial Receiver 1 – Commercial receivers to the north of the site at 448-452 Pacific Hwy and 40 Oxley St
- **C2:** Commercial Receiver 2 – Crows Nest Metro Station to the east of the site.

A site map, measurement locations and surrounding receivers are presented in Figure 2.



Figure 2 – Site Plan Showing Local Context and Noise Monitoring Locations
(Source: NSW SDT Explorer)

6 ABBREVIATIONS AND DEFINITIONS

The following Abbreviations and definitions are used in this noise impact assessment.

dB	Decibels - unit for the measurement of sound
dB(A)	A-weighted decibels. Unit of measurement for broadband sound with the A-frequency weighting applied to approximate human loudness perception to sounds of different pitch.
L_{eq}	Energy, time averaged sound level
L_{max}	Maximum sound pressure level, fast response
L₉₀	Sound level exceeded for 90% of the measurement period
R_w	Frequency weighted sound reduction index.
NRC	Average absorption co-efficient for the octave bands with centre frequencies of 250Hz to 2 kHz inclusive.
Day*	For noise emissions assessment - the period from 7 am to 6 pm (Monday to Saturday) and 8 am to 6 pm (Sundays and public holidays).
Evening*	For transportation noise - the period from 7 am to 10 pm Refers to the period from 6 pm to 10 pm.
Night*	The period from 10 pm to 7 am (Monday to Saturday), and 10 pm to 8 am (Sundays and public holidays).
Project Trigger Level	For transportation noise - the period from 10 pm to 7am Target receiver noise levels for a particular noise-generating facility.
Assessment Background Level (ABL)	A-weighted background noise level representative of a single period. (Calculated in accordance with NPI unless noted otherwise)
Rating Background Level (RBL)	The overall, single-figure A-weighted background level representing each assessment period (day/evening/night) over the whole monitoring period. (Calculated in accordance with NPI unless noted otherwise)

* Unless nominated otherwise.

7 NOISE INTRUSION GUIDELINES AND ASSESSMENT CRITERIA

The noise intrusion to the project site shall comply with the requirements of the following documents:

- NSW Department of Planning *State Environmental Planning Policy Transport & Infrastructure (SEPPT&I)* 2021.
- NSW Department of Planning *Developments near Rail Corridors or Busy Roads – Interim Guideline (DNRCBR)* 2008, and

7.1 SEPPT&I 2021

RMS Map No. 12D of the traffic volume maps referenced by the SEPPT&I 2021 on RTA website (see below), classifies Pacific Hwy as a road where a noise intrusion assessment is mandatory under clause 2.120 of the SEPPT&I 2021. See RMS average annual daily road traffic volume map number 12D and the approximate location of the site below.



Figure 7-1 RMS map No. 12D and approximate location of proposed development

Clause 2.120 of the SEPPT&I 2021 states the following with regard to the impact of traffic noise on residential development.

2.120 Impact of road noise or vibration on non-road development

(1) This section applies to development for any of the following purposes that is on land in or adjacent to the road corridor for a freeway, a tollway or a transitway or any other road with an annual average daily traffic volume of more than 20,000 vehicles (based on the traffic volume data published on the website of TfNSW) and that the consent authority considers is likely to be adversely affected by road noise or vibration—

(a) residential accommodation...

(3) If the development is for the purposes of residential accommodation, the consent authority must not grant consent to the development unless it is satisfied that appropriate measures will be taken to ensure that the following LAeq levels are not exceeded—

(a) in any bedroom in the residential accommodation—35 dB(A) at any time between 10 pm and 7 am,

(b) anywhere else in the residential accommodation (other than a garage, kitchen, bathroom or hallway)—40 dB(A) at any time.

7.2 DNRCBR

The DNRCBR outlines how to apply SEPPT&I clause 2.120. Section 3.5 of the NSW Department of Planning's 'Development near Rail Corridors and Busy Roads (Interim Guideline)' states:

"The following provides an overall summary of the assessment procedure to meet the requirements of clauses 87 and 102 of the Infrastructure SEPP. The procedure covers noise at developments for both Road and Rail.

- *If the development is for the purpose of a building for residential use, the consent authority must be satisfied that appropriate measures will be taken to ensure that the following LAeq levels are not exceeded:*
 - *in any bedroom in the building: 35 dB(A) at any time 10 pm-7 am*
 - *anywhere else in the building (other than a garage, kitchen, bathroom or hallway): 40 dB(A) at any time."*

AL notes that the Infrastructure SEPP has been superseded by the SEPPT&I clause 2.120 of the previous section.

7.3 ADOPTED PROJECT SPECIFIC CRITERIA

The following table provides the criteria adopted for this assessment based on the applicable instruments and guidelines.

Table 2 – Noise Assessment Criteria

Room	Noise Level dB(A) L_{eq}
Sleeping Areas	35 dB(A) L _{eq} (10pm – 7am)
Living Areas	40 dB(A) L _{eq} (anytime)

8 NOISE INTRUSION ASSESSMENT

A noise intrusion assessment has been undertaken using the following methodology:

- For traffic noise levels at future façade, prediction was made using a SoundPLAN 9.1 model based on unattended and attended noise measurement conducted on site.
- Internal noise levels are then calculated to the centre of the room using the predicted octave band façade incident external noise levels and, for each façade element, correcting for the exposed area, octave band sound transmission loss and room sound power to pressure correction. The room noise level was calculated by accumulating all significant noise paths.

Envelope performance requirements to comply with the noise criteria stipulated in Section 7.3 have been assessed and are provided in Section 8.2.

8.1 TRAFFIC NOISE INTRUSION ASSESSMENT

8.1.1 Measured Existing External Noise Levels

Existing noise levels from the transportation sources have been measured using the methodology outlined in Appendix B3 of the RNP as a basis, and representative noise levels determined from analysis of the data. Appendix A summarises the measurements and data obtained, and the calculated noise descriptors. These are summarised in the following table.

Table 3 – Ambient Noise Level-Unattended Noise monitor

Location	Time of Day	Ambient Noise Level (dB(A) $L_{eq,period}$)
Unattended Noise Monitor Facing Pacific Hwy on rooftop of existing building	Day (7am to 10pm)	65
	Night (10pm to 7am)	61

Table 4 – Ambient Noise Levels – Attended Noise Measurement

Location	Ambient Noise Level (dB(A) $L_{eq,15min}$) Day
2m from kerb of Pacific Hwy	74
2m from kerb of Oxley St	64

8.1.2 Calculation of External Road Noise Levels

The measured noise levels have been used as a basis for predicting noise levels around the development by:

- Accounting for any likely changes in traffic volumes in the long term.

For the subject roads, analysis of traffic volumes of the *Transport Impact Assessment* prepared by JMT Consulting indicates there has been relatively low net traffic increase in traffic volumes. Given this, and the trend to quieter electric vehicles, a zero long term increase in noise has been adopted.

- Correcting for different distances between the noise source compared to the monitoring location.
- Barrier effects, where applicable.
- Reflections off adjacent structures, where significant.

Noise levels around the site have been predicted using the SoundPLAN 9.1 computer model. The model is able to predict façade noise levels, taking into account the factors indicated above.

The model:

- Has been calibrated for each noise source using the relevant measured noise levels, with any long-term change in noise level applied.
- Includes a digitised geo-map of the proposed building and any nearby structures that may affect noise levels at the site.
- ISO 9613-2:2024 "Acoustics – Attenuation of Sound During Propagation Outdoors – Part 2: General Method of Calculation" noise propagation standard was adopted.
- Ground absorption was conservatively calculated with a ground factor of 0 for all areas except for localised parks around the development with a ground factor of 0.6 as recommended in *Engineering Noise Control* (Bies & Hanson).

The modelling assumptions include:

- Noise source heights: Passenger cars and light commercial vehicles at 0.5m above the roadway.
- Data obtained from Geoscape for the surrounding land, roadways and built form.

SoundPLAN modelling outputs for the entire building façades of the proposed developments are provided in Appendix C. SoundPLAN "façade noise maps" do not include a façade reflection allowance and therefore do not require correction.

8.2 COMPLYING MITIGATION

Assessment of façade requirements to achieve required indoor noise levels has been undertaken. Dimensions of rooms, setbacks from roadways, window openings and floor areas have been used.

The following treatment is indicated for the proposed development to comply with the nominated assessment criteria.

8.2.1 Glazed Windows and Doors

Acoustically rated external windows and doors are required. Aluminium framed/sliding glass doors and windows will be satisfactory provided they meet the following criteria.

All external windows and doors listed are required to be fitted with Q-Ion type (or equal) acoustic seals. **(Mohair Seals are unacceptable)**. The suitability of alternative seal types should be determined to an appropriately qualified acoustic expert.

The complying constructions are listed below.

Table 5 – Complying Glazing Constructions

Facade	Space	Glazing Construction	Acoustic Seals
Northern, Eastern and Southern Facades with line of sight to Pacific Hwy	Bedrooms	10.38mm Laminated	Yes
	Living rooms		
Western Facade with no line of sight to Pacific Hwy	Bedrooms	6.38mm Laminated	Yes
	Living rooms		

Thicker glazing may be required for structural, safety or other purposes. Where it is required to use thicker glazing than scheduled, this will also be acoustically acceptable.

It is recommended that only window systems having test results indicating compliance with the required ratings obtained in a certified laboratory be used where windows with acoustic seals have been recommended.

In addition to complying with the minimum scheduled glazing thickness, the R_w rating of the glazing fitted into open-able frames and fixed into the building opening should not be lower than the values listed in Table 6 below. This will require the use of acoustic seals around the full perimeter of open-able frames and the frame will need to be sealed into the building opening using a flexible sealant.

Table 6 – Minimum R_w of Glazing (with Acoustic Seals)

Glazing Assembly	Minimum R_w of Installed Window
6.38mm Laminated	31
10.38mm Laminated	35

8.2.2 External Roof and Ceiling Construction

External roof will be constructed from concrete hence no acoustic upgrade is required.

In the event that any penetrations are required through the external skin, an acoustic sealant should be used to minimise all gaps.

8.2.3 External Walls

External walls constructed from concrete/masonry elements will not require any acoustic upgrading to achieve the acoustic requirements. In the event that any penetrations are required through the external skin, an acoustic grade sealant should be used to minimise all gaps.

8.2.4 Ventilation Strategy Discussion

With respect to natural ventilation of a dwelling, NSW Planning requirements allow internal noise levels to be up to 10 dB(A) higher than the specified criterion with windows and doors to a dwelling open to allow for ventilation.

"If internal noise levels with windows or doors open exceed the criteria by more than 10 dB(A), the design of the ventilation for these rooms should be such that occupants can leave windows closed, if they so desire, and also to meet the ventilation requirements of the Building Code of Australia."

A SoundPLAN noise model of the residential levels of the development was developed to predict façade noise levels result from traffic noise. The traffic noise sources were calibrated based on unattended monitoring data and attended measured spectrums. Details of the modelling results are attached in Appendix C – SoundPlan Modelling Results.

Based on the façade noise levels, the following can be concluded:

- All apartment bedrooms and living rooms with façade facing away from Pacific Hwy will be able to achieve designed internal noise levels with windows or doors open.
- Apartment living rooms on L5 – L21 and bedrooms on L5 – L24 with façade facing Pacific Highway will exceed the 'windows open' threshold with windows or doors open to 5% of the floor area. Specific spaces should refer to SoundPLAN results presented in Appendix C, where façade noise levels exceed 55dB(A) for night-time and 60dB(A) for daytime. Bedrooms and living rooms with façade facing Pacific Highway on other levels will be able to achieve these levels with windows or doors open to 5% of floor area.
- Apartment living rooms on L5 – L12 and bedrooms on L5 – L15 with façade facing Oxley Street will exceed the 'windows open' threshold with windows or doors open to 5% of the floor area. Specific spaces should refer to SoundPLAN results presented in Appendix C, where façade noise levels exceed 55dB(A) for night-time and 60dB(A) for daytime. Bedrooms and living rooms with façade facing Oxley Street on other levels will be able to achieve these levels with windows or doors open to 5% of floor area.
- Apartment bedrooms on L7 – 13 southeastern corner will exceed the 'windows open' threshold with windows or doors open to 5% of the floor area. Specific spaces should refer to SoundPLAN results presented in Appendix C, where façade noise levels exceed 55dB(A) for night-time. Bedrooms on other levels will be able to achieve these levels with windows or doors open to 5% of floor area.

Where external noise levels are predicted to exceed the windows open criteria, an alternative ventilation strategy would need to be employed. It is proposed that mechanically assisted ventilation system will be adopted for this project.

For mechanically assisted ventilation (such as centralised or individual apartment outside air fans), it should be acoustically designed so that internal noise levels within apartments are appropriate, and any external noise emissions to surrounding noise sensitive receivers is within the requirements detailed Section 9.2 of this report.

9 NOISE EMISSION CRITERIA

The following significant noise sources have been identified as requiring assessment:

- Services plant noise emissions.
- Noise from truck movements in the loading dock.

9.1 NOISE EMISSION GUIDELINE

The noise emission guideline applied to the project site is NSW Environmental Protection Authority *Noise Policy for Industry (NPI)* 2017.

9.1.1 Mechanical Plant and Loading Dock Noise Assessment Criteria - NSW EPA NPI 2017

Criteria to assess noise emissions from the operation of the proposed development have been developed using the NPI. This policy was primarily developed to assess noise impacts from industrial development, but can also be adapted to assess other types of development such as commercial buildings and air conditioning plant.

For each receiver type:

- Receivers have been grouped into “catchments”. These are receivers that have been assessed as having similar characteristics (receiver type and ambient noise level). These are shown in Figure 2.
- For each catchment, representative noise assessment trigger levels have been determined based on NPI guidelines. The trigger levels have been adopted in this assessment as criteria. These will be used to indicate whether additional mitigation is needed to manage noise emissions.
- For each catchment, noise emissions have been assessed to the most impacted receiver. This means that impacts at all other receivers within that catchment will be less. Compliance at the most impacted receiver will therefore also result in compliance at all other receivers within the catchment.

For residential receivers, three criteria are assessed:

- Intrusive assessment– that is, how audible is the emitted noise compared to ambient, background noise). Criteria are determined relative to the measured rating background noise level.
- Amenity assessment – that is, how loud is the absolute level of industrial noise, including cumulative noise from other industrial sources. The NPI nominates appropriate amenity noise levels depending on the receiver type and prevailing noise environment/zoning.
- Maximum Noise assessment – will high-level, short-term noise events cause adversely impact sleep at night? Trigger levels are determined relative to the measured night rating background, and assessed outside rooms where sleep is likely to occur.

For residential receivers, noise emissions are assessed against the trigger levels to determine the likely extent of impacts. The lower of the relevant intrusiveness and amenity trigger levels are adopted. Noise emissions lower than the trigger levels indicate there is no adverse impact. A maximum noise level assessment is separately undertaken if night time emissions occur.

For other receiver types, only an “amenity” assessment is required.

Appendix A summarises the results of ambient noise monitoring. Appendix B provides the derivation of NPI trigger levels for each of the receivers. These are summarised in the following table.

9.2 SUMMARISED NOISE EMISSION CRITERIA

Table 7 – Project Specific Trigger Levels

Location/Receiver Type	Time	RBL dB(A) L ₉₀	Trigger Noise Level (dB(A) L _{eq,15min})		
			Intrusiveness	Amenity	Max Event
R1 – R3 Residential	Day	57	62	58	N/A
	Evening	54	59	48	N/A
	Night	47	52	43	52 L_{eq} 62 L_{max}
C1 & C2 Commercial	When in use	N/A	N/A	63	N/A

The project noise trigger levels are indicated by the bolded values in the table above.

10 NOISE EMISSION ASSESSMENT

10.1 MECHANICAL PLANT NOISE

Detailed plant selection and location has not been undertaken at this stage. Satisfactory levels will be achievable through appropriate plant selection, location and if necessary, standard acoustic treatments such as duct lining, acoustic silencers and enclosures.

Noise emissions from all mechanical services to the closest residential, childcare and commercial receivers should comply with the requirements of Section 9.2.

10.1.1 Preliminary Mechanical Treatment Advice

An assessment of initial design of primary plant items is presented below.

- Major fans (typically with a sound power over 80dB(A) – such as kitchen exhaust, major toilet exhaust and major relief air fans) may require acoustic treatment if located externally near sensitive receivers. It is recommended that axial (as opposed to roof mounted fans) are to be used as this will enable acoustic treatment to be incorporated within ductwork running to atmosphere and with attenuators if necessary. In addition to the location of the equipment, acoustic treatments to the major plant items may include silencers, treatment to ducting, time control, operational limitations, and vibration isolation.
- Supply and exhaust fans may be located within plant rooms or in rooftop plant areas. These units typically emit high noise levels and require acoustic treatment such as silencers and internal lined ductwork. Silencer requirements would be determined once fan selections have been completed.
- Other minor plant items, such as bathroom or kitchen exhaust fans, may also be required. These items typically emit relatively low noise levels and may require minimal acoustic treatment of a standard nature, such as internally lining of ductwork.
- Residential Condensers: The project may include external residential condenser units which will be located on condenser farms on each floor or balconies. Providing condenser equipment is selected using suitable noise level data, then acoustic treatments can be implemented such as screening, enclosures, and treatment to exhaust to ensure that the relevant noise emission criteria will be achieved.

Cumulative assessment of both plant noise with other noise sources is recommended when conducting acoustic design of plant items. Compliance with EPA acoustic criteria (as set out in Section 9.2) will be achievable, provided that detailed acoustic review of plant items is undertaken once plant is selected, and acoustic treatments similar to those outlined above are adopted.

The above recommendations are indicative. Detailed acoustic review should be undertaken at CC stage to determine acoustic treatments to control noise emissions to satisfactory levels.

10.2 NOISE FROM THE LOADING DOCK

The entrance/exit of the loading dock is located on Oxley Street with line of sight to the northern façade of residential receiver **R1**. Operational noise levels from the proposed loading dock facilities are predicted and assessed against the NSW EPA *Noise Policy for Industry* criteria detailed in Section 9.1.1 based on information provided in the *Traffic Impact Assessment Report* by JMT Consulting (Project number 2549).

Operational noise emissions are predicted based on the following source noise levels.

Table 8 – Average (L_{eq}) Source Noise Levels

Noise Source	Sound Power Level
Medium Rigid Vehicle slowly manoeuvring at up to 10km/h	100dB(A) L_{eq}
Small Rigid Vehicle slowly manoeuvring at up to 10km/h	90dB(A) L_{eq}

Based on the information above, predicted noise levels from loading dock noise emissions are summarised below:

Table 9 – Predicted Cumulative Noise Levels from the Use of Loading Dock

Receiver	Predicted Noise Level dB(A) $L_{eq(15min)}$ ⁽¹⁾	Criteria Noise Level dB(A) $L_{eq(15min)}$	Complies
R1	38	58 (Daytime) 48 (Evening) 43 (Night)	Complies with criteria

Table Note:

1. Based on up to 1 MRV truck in any given 15min period. Each vehicle is assumed to travel at 10km/h, and have their engines on for up to 1 minute while manoeuvring within the loading dock.

Note that the above assessment is based on the loading dock being occupied by 1 MRV in a single 15-minute period with the loading dock entry open. Further attenuation can be achieved with the roller shutter being installed and closed during loading if required.

11 CONSTRUCTION NOISE AND VIBRATION ASSESSMENT

11.1 CONSTRUCTION NOISE MANAGEMENT LEVELS

Noise associated of construction activities on the site will be assessed in accordance with the NSW DECC *Interim Construction Noise Guideline (ICNG)* 2009.

The “quantitative” assessment procedure, as outlined in the ICNG will be used. The quantitative assessment method requires: Determination of noise generation goals (based on ambient noise monitoring); Prediction of operational noise levels at nearby development; and if necessary, recommendation of noise controls strategies in the event that compliance with noise emission goals is not possible.

DECC guidelines adopt differing strategies for noise control depending on the predicted noise level at the nearest residences:

- **“Noise affected” level** where construction noise is predicted to exceed the “noise affected” level at a nearby residence, the proponent should take reasonable/feasible work practices to ensure compliance with the “noise affected level”. For residential properties, the “noise affected” level occurs when construction noise exceeds ambient levels by more than 10dB(A)_{Leq(15min)}.
- **“Highly noise affected level”** where noise emissions are such that nearby properties are “highly noise affected”, noise controls such as respite periods should be considered. For residential properties, the “highly noise affected” level occurs when construction noise exceeds 75dB(A)_{Leq(15min)} at nearby residences.

A summary of the above recommended noise levels from the ICNG is presented below.

Table 10 – Noise Management Levels at Residential Receiver

Receiver	“Noise Affected” Level dB(A) _{Leq(15min)}	“Highly Noise Affected” Level dB(A) _{Leq(15min)}
R1 – R3	67 (BG+10) externally at façade	75

Where noise from the construction works is above the “noise affected” level, the proponent should apply any feasible and reasonable work practices to minimise noise. The “noise affected level is representative of a level where there may be some community reaction to noise.

If noise emissions are likely to exceed 75 dB(A)_{Leq(15min)} “highly noise affected” at the boundary of surrounding affected residential receivers, the receiver is deemed to be “highly noise affected”. The “highly noise affected” level is representative of a level where strong community reaction to noise is expected. Introduction of management controls such as scheduling of noisy periods is then recommended.

Section 4.1.2 and 4.1.3 of the ICNG also nominates management levels for other sensitive land uses (other than residences). Criteria relevant to this assessment is detailed below;

Table 11 – Noise Management Levels at Other Receivers

Location	“Noise Affected” Level – dB(A) _{Leq(15min)}
Surrounding Commercial Receivers C1 & C2	70 externally at façade

11.2 CONSTRUCTION VIBRATION OBJECTIVES

Vibration associated with demolition and excavation activities on the site will be assessed in conjunction with the following guidelines:

- **For human exposure to vibration** – Department of Environment and Conservation *NSW Assessing Vibration: A Technical Guideline* (Feb 2006) is based on the guidelines contained in BS 6472:1992 *Guide to Evaluate Human Exposure to Vibration in Buildings (1Hz to 80Hz)* for low probability of adverse comment.
- **For structural damage vibration** – German Standard DIN 4150-3 *Structural Vibration: Effects of Vibration on Structures*.

11.2.1 Assessing Amenity (Human Comfort Guidelines)

The NSW EPA's *Assessing Vibration – a technical guideline* is based on the guidelines contained in British Standard BS 6472-1992 'Guide to Evaluate Human Exposure to Vibration Buildings (1Hz to 80Hz)'. This guideline provides procedures for assessing tactile vibration and regenerated noise within potentially affected buildings.

The recommendations of this guideline should be adopted to assess and manage vibration from the site during construction. Where vibration exceeds, or is likely to exceed, the recommended levels then an assessment of reasonable and feasible methods for the management of vibration should be undertaken.

Table 12 – BS 6472 Vibration Criteria

		RMS acceleration (m/s ²)		RMS velocity (mm/s)		Peak velocity (mm/s)	
Place	Time	Preferred	Maximum	Preferred	Maximum	Preferred	Maximum
Continuous Vibration							
Residences	Daytime	0.01	0.02	0.2	0.4	0.28	0.56
Offices	Day or night-time	0.02	0.04	0.4	0.8	0.56	1.1
Workshops		0.04	0.08	0.8	1.6	1.1	2.2
Impulsive Vibration							
Residences	Daytime	0.3	0.6	6.0	12.0	8.6	17.0
Offices	Day or night-time	0.64	1.28	13	26	18	36
Workshops		0.64	1.23	13	26	18	36

Note 1: Continuous vibration relates to vibration that continues uninterrupted for a defined period (usually throughout the daytime or night-time), e.g. continuous construction or maintenance activity. (DECC, 2009).

Note 2: Impulsive vibration relate to vibration that builds up rapidly to a peak followed by a damped decay and that may or may not involve several cycles of vibration (depending on frequency and damping), with up to three occurrences in an assessment period, e.g. occasional loading and unloading, or dropping of heavy equipment. (DECC, 2009).

11.2.2 Structure Borne Vibration (Damage Criteria)

German Standard DIN 4150-3 (2016) provides a guideline for acceptable levels of vibration velocity in building foundations, to assess the effects of vibration on structures. The table give guidance on the maximum accepted values of velocity at the foundation and in the plane of the highest floor of various types of buildings, to prevent any structural damage.

The table following lists the peak particle velocity, which is the maximum absolute value of the velocity signals for the three orthogonal components. This is measured as a maximum value of any of the three orthogonal component particle velocities when measured at the foundation, and the maximum levels measured in the x- and y-horizontal directions in the plane of the floor of the uppermost storey.

It is noted that if measured vibration levels do not exceed the guidelines listed in the following table, damage that will reduce the serviceability of the building will not occur, and if damage to the building does occur, it is assumed that the damage is related to other causes. Furthermore, the DIN4150-3 guideline states the following regarding the limits presented in Table 1 of the standard:

"Exceeding the guideline values does not necessarily lead to damage. Should they be exceeded, however, further investigations may be necessary, such as determining and evaluating the stresses as detailed in 4.3 and 4.4."

Table 13 – Table 1 – DIN 4150-3 (2016)) – Guideline Values for Vibration Velocity, $v_{i,max}$, for Evaluating the Effects of Short-Term Vibration on Structures

	TYPE OF STRUCTURE	Guideline values for $v_{i,max}$ in mm/s				
		Foundation, all directions, $i = x, y, z$, at a frequency of			Topmost floor, horizontal direction, $i = x, y$	Floor slabs, vertical direction, $i = z$
		1Hz to 10Hz	10Hz to 50Hz	50Hz to 100Hz ^(a)	All Frequencies	All Frequencies
L/C	1	2	3	4	5	6
1	Buildings used for commercial purposes, industrial buildings, and buildings of similar design	20	20 to 40	40 to 50	40	20
2	Residential buildings and buildings of similar design and/or occupancy	5	5 to 15	15 to 20	15	20
3	Structures that, because of their particular sensitivity to vibration, cannot be classified under lines 1 and 2 and are of great intrinsic value (e.g. listed buildings) buildings that are under a preservation order)	3	3 to 8	8 to 10	8	20 ^(b)

NOTE: Even if guideline values as in line 1, columns 2 to 5, are complied with, minor damage cannot be excluded.

- a. At frequencies above 100 Hz, the guideline values for 100 Hz can be applied as minimum values.
- b. It may be necessary to lower the guideline value markedly to prevent minor damage

11.3 CONSTRUCTION NOISE EMISSION ASSESSMENT

The proposal is to demolish the existing residential blocks and build A new residential building. An indicative construction scope is summarised as following:

- **Demolition Stage:** Demolish existing residential buildings on site.
- **Excavation Stage:** Excavate and piling for basement levels.
- **Construction Stage:** Construct new residential building.

It is envisaged that construction scope and staging would be further refined in subsequent stages of the development approval and documented (along with additional impacts or considerations) within a *Construction Environmental Management Plan*.

11.3.1 Source Noise Data

In this section, typical equipment/processes anticipated to be used during the construction of the project site are outlined in the table below with A-weighted sound power levels. The equipment list is prepared based on our experience with similar projects. Typically, the most significant sources of noise or vibration generated during a construction project will be demolition and excavation.

Table 14 – Sound Power Levels of Equipment

Equipment /Process	Typical Sound Power Level dB(A)	Duty
Excavator with 10T hydraulic hammer	118	75%
Jackhammer	113	75%
Concrete Saw	118	75%
10t Vibratory roller	109	100%
1t skidsteer loader	110	75%
Piling Rig	112	100%
Mobile Crane	113	25%
Concrete pump	109	100%
Concrete Pump Truck	109	100%
20T Medium Rigid Trucks	103	10%
Powered Hand Tools (Electric)	102	50%

The noise levels presented in the above table are derived from the following sources, namely:

- On-site measurements.
- Table A1 of Australian Standard 2436-2010.
- Data held by this office from other similar studies.

Noise levels take into account correction factors (for tonality, intermittency where necessary).

11.3.2 Methodology

Noise from the loudest typical construction activities for all stages of works have been predicted to the nearest most affected sensitive receivers.

Predictions take into account:

- The distance between the noise source and the receiver.
- The screening effect provided by any building structure or building shell, if applicable. In particular, noise from works proposed during the fit-out stages when the building shell will screen these activities from the surrounding sensitive receivers.

Recommended standard hours for construction work presented in Section 2.2 of the NSW DECC ICNG 2009 has been adopted for this project.

11.3.3 Recommended Hours of Work

The following construction hours are proposed under the standard hours noise management levels of the ICNG:

- Monday to Friday – 7:00am to 6:00pm.
- Saturdays – 8:00am to 1:00pm.
- Sundays and Public Holidays – No works.

11.3.4 Predicted Noise Levels

Maximum noise impacts from the construction equipment listed above have been predicted to the nearest noise receivers and presented below. Given the size of the site predicted noise levels will change significantly depending on where the noise source is located. As such, a noise level range has been presented, giving expected noise levels for activities 'farthest from' to 'nearest to' the receiver.

Table 15 – Predicted Construction Noise Levels – R1 & R2

Activity	Predicted Noise Level	Criteria	Comment
Excavator with 10T hydraulic hammer	62-89	NML 67dB(A) HNML 75dB(A)	Predicted noise levels exceed the HNML 75dB(A) when work close to boundary
Jackhammer	57-84		
Concrete Saw	62-89		
10t Vibratory roller	54-75		Predicted noise levels exceed the NML 67dB(A) when work close to boundary but below HNML 75 dB(A) all the time
1t Skid-steer loader	54-75		
Piling Rig	57-78		Predicted noise levels exceed the HNML 75dB(A) when work close to boundary
Mobile Crane	52-69		Predicted noise levels exceed the NML 67dB(A) when work close to boundary but below HNML 75 dB(A) all the time
Concrete pump	54-75		
Concrete Pump Truck	54-75		
20T Medium Rigid Trucks	38-59		Predicted noise levels below the NML 67dB(A)
Powered Hand Tools (Electric)	44-71		Predicted noise levels exceed the NML 67dB(A) when work close to boundary but below HNML 75 dB(A) all the time

Table 16 – Predicted Construction Noise Levels – R3

Activity	Predicted Noise Level	Criteria	Comment
Excavator with 10T hydraulic hammer	58-74	NML 67dB(A) HNML 75dB(A)	Predicted noise levels exceed the NML 67dB(A) when work close to boundary but below HNML 75 dB(A) all the time
Jackhammer	53-69		
Concrete Saw	58-74		
10t Vibratory roller	50-65		Predicted noise levels below the NML 67dB(A)
1t Skid-steer loader	50-65		
Piling Rig	53-69		Predicted noise levels slightly exceed the NML 67dB(A) when work close to boundary
Mobile Crane	48-62		Predicted noise levels below the NML 67dB(A)
Concrete pump	50-65		
Concrete Pump Truck	50-65		
20T Medium Rigid Trucks	34-49		
Powered Hand Tools (Electric)	40-56		

Table 17 – Predicted Construction Noise Levels – C1

Activity	Predicted Noise Level	Criteria	Comment
Excavator with 10T hydraulic hammer	58-77	NML 70dB(A)	Predicted noise levels exceed the NML 70dB(A) when work close to boundary
Jackhammer	53-72		
Concrete Saw	58-77		
10t Vibratory roller	50-67		Predicted Noise Levels below the NML 70dB(A) all the time
1t Skid-steer loader	50-67		
Piling Rig	53-72		Predicted noise levels slightly exceed the NML 70dB(A) when work close to boundary
Mobile Crane	48-63		Predicted Noise Levels below the NML 70dB(A) all the time
Concrete pump	50-67		
Concrete Pump Truck	50-67		
20T Medium Rigid Trucks	34-51		
Powered Hand Tools (Electric)	40-59		

Table 18 – Predicted Construction Noise Levels – C2

Activity	Predicted Noise Level	Criteria	Comment
Excavator with 10T hydraulic hammer	61-79	NML 70dB(A)	Predicted noise levels exceed the NML 70dB(A) when work close to boundary
Jackhammer	56-74		
Concrete Saw	61-79		
10t Vibratory roller	53-69		Predicted Noise Levels below the NML 70dB(A) all the time
1t Skid-steer loader	53-69		
Piling Rig	56-72		Predicted noise levels exceed the NML 70dB(A) when work close to boundary
Mobile Crane	51-65		Predicted Noise Levels below the NML 70dB(A) all the time
Concrete pump	53-69		
Concrete Pump Truck	53-69		
20T Medium Rigid Trucks	37-53		
Powered Hand Tools (Electric)	43-61		

11.4 GENERAL DISCUSSION

Noise

Noise impacts on nearby development will be dependent on the activity and where on the site the activity is undertaken. Demolition works (e.g., use of hydraulic hammer and concrete saw) tend to be the loudest typical activity. Work close to the site boundaries will have the greatest impact on nearby receivers.

Initial analysis indicates:

- For **Residential Receivers R1** and **R2**, construction noise levels are predicted exceeding the HNML when excavator with hydraulic hammer, jack hammer, concrete saw and piling rigs are used. While noise levels are predicted to be below the HNML when other equipment is used.
- Similarly, construction noise levels at **Commercial receivers C1** and **C2** are predicted to exceed the HNML 70dB(A) when excavator with hydraulic hammer, jack hammer, concrete saw and piling rigs are used.
- Predicted construction noise levels at receivers **R3** are below the HNML for all the proposed equipment.

To assess whether mitigation of these exceedances is feasible or reasonable, the ICNG indicates the following should be considered:

- The levels of impact including noise levels and the number of people affected.
- The benefits of noise mitigation and the number of people protected.
- Cost effectiveness of mitigation.
- Community views.

For **R1**, **R2** and **C1**, the number of impacted receivers is small, and the exceedances will only occur at the façades facing the project site when plant is operating close to the receiver. Any significant mitigation for these receivers is not indicated beyond “good practice” management of the works. Additional controls are recommended in Section 12. Should the application of feasible and reasonable mitigation not reduce noise levels below a satisfactory level then the application of respite periods is recommended.

For all other receivers closer to the project site, this assessment indicates that feasible and reasonable noise mitigation would need to be investigated to by the contractor to minimise noise impacts, based on the procedures and methods in Section 12 and the ICNG.

The most effective mitigation investigation strategy is likely to be:

- Select the quietest plant/activity available (or retrofit acoustic treatment to the plant such as residential class mufflers) to minimise any NML exceedances.
- If any residual exceedances, investigate the use of additional barriers to screen the affected receivers. It is noted that solid hoardings are proposed along the whole perimeter of the site.
- If any remaining residual significant exceedances, investigate time restrictions (e.g. avoiding loud early morning works at the residences) and notification of affected receivers when works likely to exceed the NML's is likely to occur.

Detailed construction noise planning is typically undertaken after engagement of a builder and a construction program is prepared (i.e., after SSDA stage) and therefore, detailed planning is not possible at this stage.

In light of the above, we recommend:

- During preparation of the construction program (CC stage), acoustic review of proposed construction activities and plant/methods should be undertaken to identify work items likely to exceed Noise Management Levels.
- For those activities likely to generate high noise levels, the analysis should identify where on the site are the areas likely to result in high noise levels. This will then assist in determining the likely time period for which high noise levels will occur.
- Identify feasible acoustic controls or management techniques (use of screens, scheduling of noisy works, notification of adjoining land users) when excessive levels may occur.
- For activities where acoustic controls and management techniques still cannot guarantee compliant noise levels, implement a notification process whereby nearby development is made aware of the time and duration of noise intensive construction processes.

Through adoption of the above, noise impacts on nearby development can be suitably managed to prevent excessive impact.

Vibration

The highest levels of vibration are likely to be produced when excavation activities are undertaken with the use of piling rig. This activity would only produce a moderate level of vibration close to the work site. Given the distance attenuation between existing residential receivers and the project site, the impact at the surrounding properties is moderate considering amenity and structure damage.

Where required, vibration monitors may be installed at critical locations to determine any impact. Ongoing review and assessment of vibration impact will be conducted throughout the construction process to determine appropriate vibration levels. The specific location and quantity of vibration monitors to monitor residential houses are to be determined in consultation with the builder and structural engineer.

12 NOISE AND VIBRATION MANAGEMENT AND CONTROLS

Notwithstanding that the assessment indicates noise and vibration emissions will generally comply with the noise and vibration management levels, emissions should be minimised as part of best practice endeavours, and contingency measures should be put into place to respond to complaints or if it is found the processes needed to complete the tasks vary from those envisaged in this assessment.

The recommended measures are provided below.

12.1 NOISE AND VIBRATION MONITORING, REPORTING AND RESPONSE PROCEDURES

Given the relatively low level of impact predicted, monitoring would only be required in response to complaints, if the processes needed to complete the tasks vary from those envisaged in this assessment, or if works outside of standard hours are proposed.

Noise and vibration monitoring may either consist of manned and/or unmanned measurements. Active monitoring may be undertaken during the construction work phase of the project if required in the event complaints are received from neighbours.

In the event that complaints are received from neighbours the following process should be considered:

1. Assessing impacts and determining the offending plant/equipment/process.
2. Locating the plant/equipment/process further away from the affected receiver(s) if possible.
3. Implementing additional acoustic treatment in the form of localised barriers, silencers etc.
4. Selecting alternative equipment/processes.

Where monitoring is required and indicates exceedances of the predicted noise impacts immediate action should be taken to identify any further controls as required to reduce noise emissions so that the noise limits are complied with. Monitoring of the activities following the implementation of these additional controls will be undertaken to confirm compliance.

12.1.1 Reporting Requirements

The following is an example of reporting which may be kept on site:

1. A register of complaints received/communication with the local community shall be maintained and kept on site with information as detailed below.
2. Where noise/vibration complaints require noise/vibration monitoring, results from monitoring shall be retained on site at all times.
3. Any noise exceedances occurring including, the actions taken and results of follow up monitoring.
4. A report detailing complaints received and actions taken shall be presented.
5. All monitoring and reporting shall be conducted in conjunction with the conditions of consent.

12.1.2 Response Procedures

Complaints associated with noise and vibration generated by site activities shall be recorded on a Noise Complaint Form. The person(s) responsible for complaint handling and contact details for receiving of complaints shall be established on site prior to construction works commencing. A sign shall be displayed at the site indicating the site manager and the general public and their contact telephone number.

If a noise complaint is received the complaint should be recorded on a Noise Complaint Form. The complaint form may list:

- The name and address of the complainant (if provided).
- The time and date the complaint was received.
- The nature of the complaint and the time and date the noise was heard.
- The name of the employee who received the complaint.
- Actions taken to investigate the complaint, and a summary of the results of the investigation.
- Indicate what operations were occurring on site at the time of the complaint.
- Required remedial action, if required
- Validation of the remedial action.
- Summary of feedback to the complainant.

The flow chart that follows illustrate the process followed to assess construction activities prior to the start of work on site and well as the ongoing investigation into noise during the construction period.

12.2 GENERAL NOISE CONTROL METHODS

The determination of appropriate additional noise control measures will be dependent on the particular activities and the construction equipment and plant identified as requiring future acoustic treatments to those already identified in this report. This section provides an outline of available methods which have previously been used on similar construction sites and may be possible on this site.

12.2.1 Selection of Alternate Appliance or Process

Where a particular activity or plant and equipment is found to generate noise levels that exceed the management levels, it may be possible to select an alternative approach or plant and equipment. For example, the use of excavator mounted hydraulic hammers of the site may potentially generate high levels of noise. By carrying this activity by using concrete saws or smaller plant here practical, construction noise levels and/or length of exposure to construction noise levels may be reduced.

12.2.2 Acoustic Barriers

The placement of barriers at the source is generally only effective for static plant. Placing barriers at the source cannot effectively attenuate equipment which is on the move or working in rough or undulating terrain.

The degree of noise reduction provided by barriers is dependent on the amount by which the line of sight can be blocked by the barrier. If the receiver is totally shielded from the noise source reductions of up to 15 dB(A) can be affected. Where only partial obstruction of line of sight occurs, noise reductions of 5 to 8 dB(A) may be achieved. Where the barrier does not obstruct line of sight, generally no noise reduction will occur.

Barriers are used to provide shielding and do not act as an enclosure. The material they are constructed from should have a noise reduction performance which is approximately 10dB(A) greater than the maximum reduction provided by the barrier screening. In this case, the use of a material such as 15mm plywood (or equivalent material) would be acceptable for the barriers.

12.2.3 Silencing Devices

Where construction methodologies or plant and equipment permit, investigate the use of silencing devices. These may take the form of engine shrouding, or special industrial silencers fitted to exhausts, for example.

12.2.4 Treatment of Specific Equipment

In certain cases, it may be possible to specially treat a piece of equipment to dramatically reduce the sound levels emitted.

12.2.5 Establishment of Site Practices

This involves the formulation of work practices to reduce noise generation. This includes investigating the possibility of locating fixed plant items as far as possible from residents as well as rotating plant and activities to provide respite to receivers.

12.2.6 Notification

Notification of affected receivers of the progress of works, particularly when short-term activities likely to create higher noise levels occur, can in many cases minimise community reaction.


12.3 SITE SPECIFIC RECOMMENDATIONS

In light of the above, we recommend:

- **Barrier:** acoustic barriers (e.g., plywood hoarding) with minimum height of 1.8m to be installed to the northern and eastern façades of the site along Pacific Hwy and Oxley Street to provide additional noise attenuation.
- **Community consultation/notification:** Notification (leaflet or similar) of nearby residents is recommended, detailing the duration of demolition and piling works.
- **Quiet Work Methods/Technologies:**
 - The primary noise generating activity at the site will be the demolition and excavation period. As much as practicable, use of quieter demolition methods is to be adopted.
 - Excavation is conducted initially using excavator with bucket (quietest excavation method), then use of rock saws or rippers if required. Use of the loudest excavation equipment is used only when other options are not available.
 - It is recommended to use rock saws near all boundaries to reduce vibration and noise levels if required.
 - Materials handling/vehicles:
 - Trucks and bobcats to use a non-tonal reversing beacon (subject to OH&S requirements) to minimise potential disturbance of neighbours.
 - Avoid careless dropping of construction materials into empty trucks.
 - Trucks, trailers and concrete trucks (if feasible) should turn off their engines during idling to reduce noise impacts (unless truck ignition needs to remain on during concrete pumping).
- **Complaints handling:**
 - A contact number is displayed outside of the building site, so that in the event that surrounding development believes that a noise breach is occurring, they may contact the site.
 - In the event of complaint, the procedures outlined in Section 13 are adopted. Additional methods of control of construction noise and additional noise control measures which may be adopted by the site are detailed in Section 12.
- **Noise and vibration monitoring:** in case of complaints received from neighbouring residents, long term noise and vibration monitoring shall be conducted at closest receivers.

13 CONTROL OF CONSTRUCTION NOISE AND VIBRATION – PROCEDURAL STEPS

The flow chart presented below illustrates the process that will be followed in assessing construction activities.

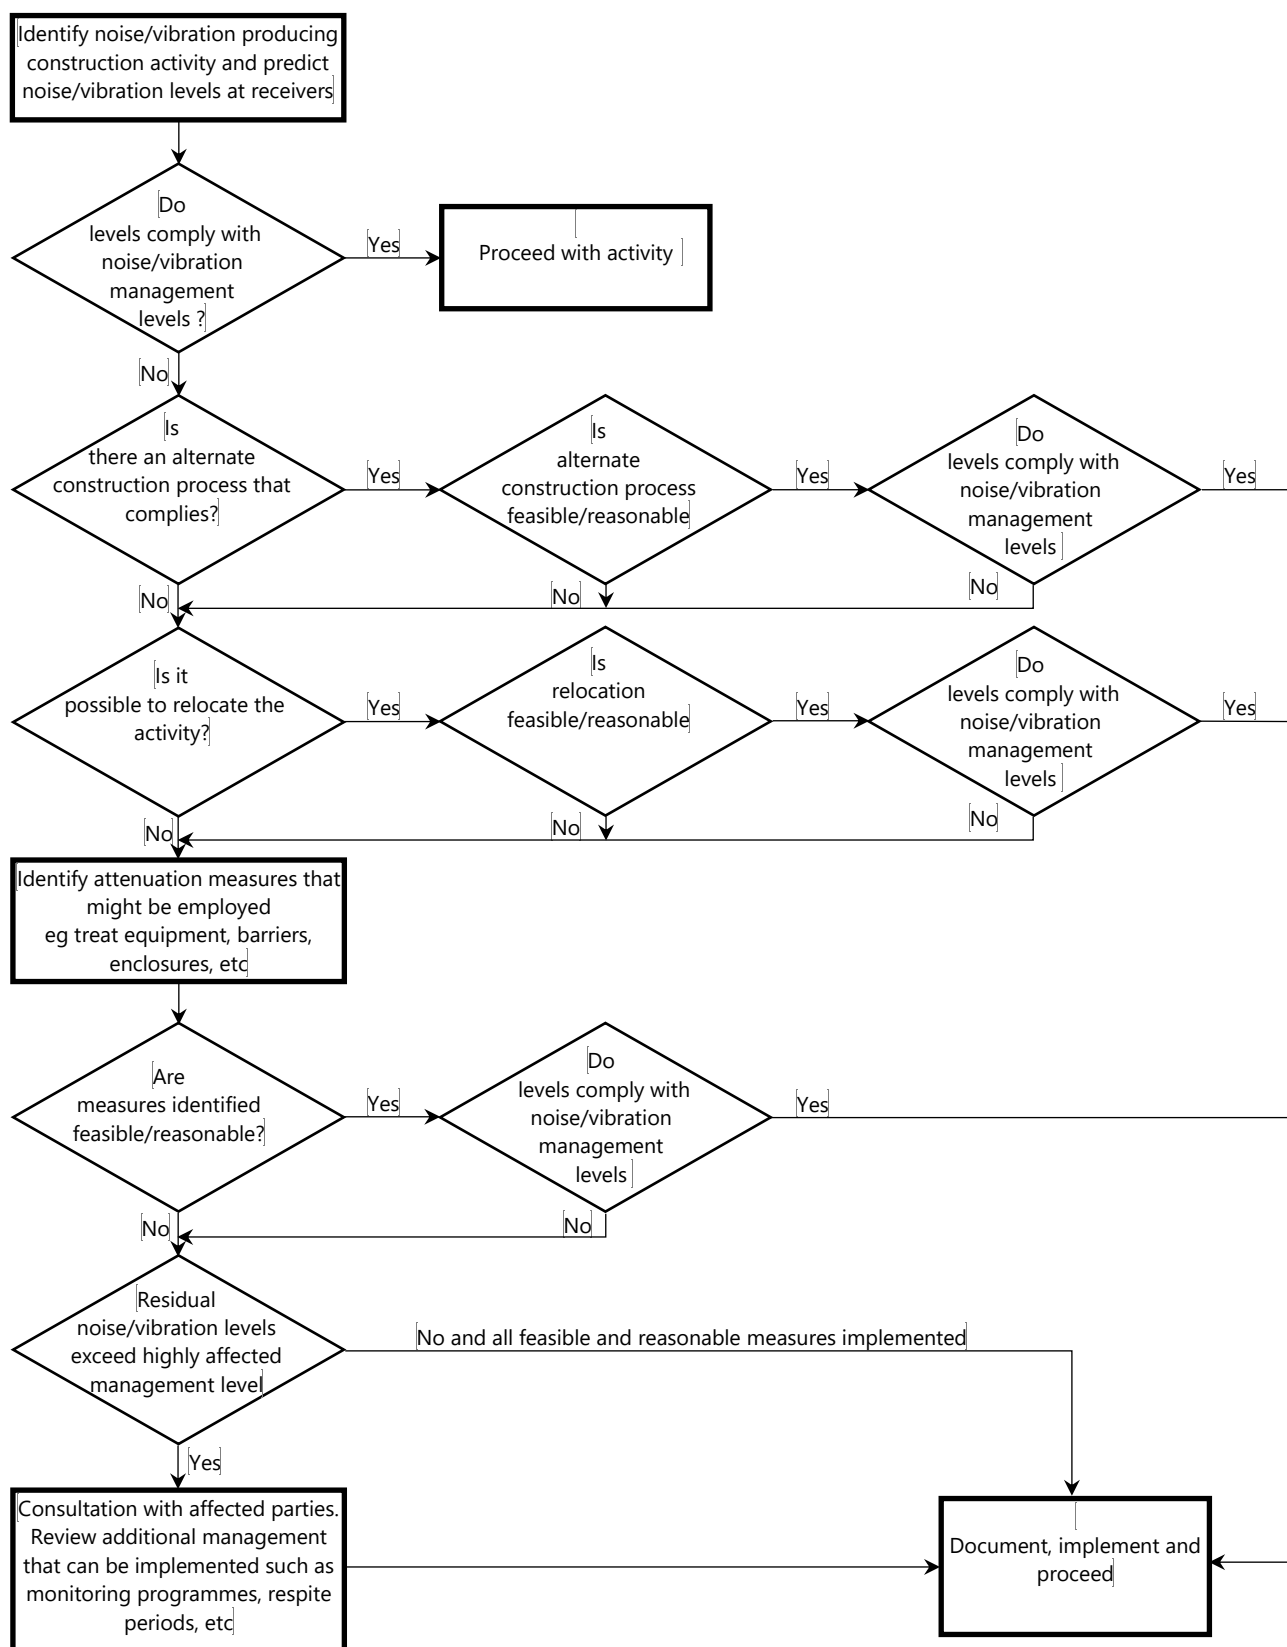

14 CONCLUSION

This report presents an assessment of noise and vibration impacts associated with the proposed 402-420 Pacific Highway, Crows Nest.

Based on the information provided above we conclude the following:

Provided complying constructions presented in Section 8.2 of this report are adopted, internal noise levels for the development will comply with the acoustic requirements of the following documents:

- NSW Department of Planning *State Environmental Planning Policy Transport & Infrastructure (SEPT&I)* 2021.
- NSW Department of Planning *Developments near Rail Corridors or Busy Roads – Interim Guideline (DNRCBR)* 2008, and
- Australian Standard 2107:2016 *Acoustics Recommended Design Sound Levels*.


Noise emission criteria from the operational of the development has been set up using the following document NSW Environmental Protection Authority *Noise Policy for Industry (NPI)* 2017.

Once detailed location and selections of all proposed mechanical plant are known, an acoustic review should be undertaken to ensure compliance with the above. This should be undertaken during CC stage.

Construction noise and vibration management levels have been established and preliminary assessed in this report. A full construction noise and vibration management plan can be prepared in CC stage ensuring compliance with the following:

- NSW DECC Interim Construction Noise Guideline 2009.
- German Standard DIN 4150-3 *Structural Vibration: Effects of Vibration on Structures*.
- NSW Department of Environment and Conservation *Assessing Vibration: A Technical Guideline* (Feb 2006).

Yours faithfully,



Acoustic Logic Pty Ltd
PeiPei Feng

APPENDIX A AMBIENT NOISE MONITORING

This appendix summarises the ambient noise data measured near the subject site, and the calculated noise level descriptors adopted to characterise the existing noise environment.

Monitoring has been undertaken to provide the following ambient data:

- Traffic noise levels from local roads, and
- Background noise levels for the project site.

A.1 UNATTENDED LONG TERM NOISE MONITORING

A.1.1 Ambient Noise Descriptors

Ambient noise constantly varies in level from moment to moment, so it is not possible to accurately determine prevailing noise conditions by measuring a single, instantaneous noise level.

To quantify ambient noise, a 15-minute measurement interval is typically utilised. Noise levels are monitored on a continuous basis over this period, and statistical and integrating techniques are used to characterise the noise being measured.

The principal measurement parameters are:

L_{eq} - represents the average noise energy during a measurement period. This parameter is derived by integrating the noise levels measured over the measurement period. L_{eq} is important in the assessment of noise impact as it closely corresponds with how humans perceive the loudness of steady state and quasi-steady state noise sources (such as traffic noise).

L₉₀ – This is commonly used as a measure of the background noise level as it represents the noise level heard in the quieter periods during the measurement interval. The L₉₀ parameter is used to set noise emission criteria for potentially intrusive noise sources since the disturbance caused by a noise source will depend on how audible it is above the pre-existing noise environment, particularly during quiet periods, as represented by the L₉₀ level.

L₁₀ is used in some guidelines to measure noise produced by an intrusive noise source since it represents the average of the loudest noise levels produced at the source. Typically, this is used to assess noise from licenced venues.

L_{max} is the highest noise level produced during a noise event, and is typically used to assess sleep arousal impacts from short term noise events during the night. It is also used to assess internal noise levels resulting from aircraft and railway ground vibration induced noise.

L₁ is sometimes used in place of L_{max} to represent a typical noise level from a number of high-level, short-term noise events.

A.1.2 Equipment Used

Unattended noise monitoring was conducted using the following equipment:

- Rion NL-42 (Type 2).
- Rion Sound Level calibrator Type NC 74.

The monitoring was continuous, with statistical noise levels recorded at 15-minute intervals throughout the monitoring period. Measurements were taken on "A" frequency weighting and fast time response, unless noted otherwise.

All monitoring equipment used retains current calibration - either manufacturers' calibration or NATA certified calibration. The monitors were field calibrated at the beginning and the end of the measurement with no significant drift in calibration noted.

A.1.3 Locations Monitored

Detailed locations of the noise monitoring are presented in Figure 2.

A.1.4 Weather Affected and Extraneous/Outlying Data

Periods affected by adverse weather conditions are indicated on the following data graphs. Weather data was obtained from records provided by the following Bureau of Meteorology weather stations:

- Fort Denison weather station for wind data.
- Observatory Hill for rain data

The following periods have been identified as likely to contain significant periods of non-representative data and have been excluded from the assessment:

- Wednesday 30/07/2025 Day & Evening.
- Friday 1/8/2025 Day, Evening & Night
- Saturday 2/8/2025 Evening & Night
- Tuesday 5/8/2025 Night

A.2 CALCULATION OF REPRESENTATIVE AMBIENT NOISE LEVELS

The ambient, assessment and rating background levels have been determined from the unattended, long-term noise monitoring data based on the methodology in the Noise Policy for Industry Fact Sheet B.

A.2.1 Rating Background Noise Levels

The following tables summarise the assessment background noise levels (ABL) for each location. Note that where no ABL is indicated, this is because that period was significantly affected by adverse weather or other extraneous noise.

In accordance with the NPI, if the calculated:

- evening rating background noise level is higher than the day level, the day rating background noise level has been adopted for the evening period.
- night rating background noise level is higher than the evening level, the evening rating background noise level has been adopted for the evening period.
- day rating background noise level was less than 35 dB(A), a "default" background of 35 dB(A) has been adopted.
- evening or night rating background noise level was less than 30 dB(A), a "default" background of 30 dB(A) has been adopted.

Where monitoring was conducted within 3m of a significant sound reflecting surface, 2.5 dB(A) has been subtracted from the calculated rating background to account for an increase in noise from reflections.

Table 19 – RBL – Rooftop Logger Facing Pacific Hwy

Date	Noise Level dB(A) L ₉₀ , period		
	Day	Evening	Night
Monday 28/07/2025	-	54	47
Tuesday 29/07/2025	58	54	47
Wednesday 30/07/2025	-	-	47
Thursday 31/07/2025	58	55	47
Friday 1/08/2025	-	-	-
Saturday 2/08/2025	58	-	-
Sunday 3/08/2025	54	54	47
Monday 4/08/2025	58	54	47
Tuesday 5/08/2025	57	54	-
Wednesday 6/08/2025	57	54	47
Calculated RBL	57	54	47

A.2.2 Ambient Noise Levels – Noise Intrusion Assessment

The $L_{eq,15hr}$ (day period, 7am to 10pm) and $L_{eq,9hr}$ (night period, 10pm to 7am) ambient noise level descriptors have been calculated from the data, and are summarised in the following table.

Table 20 – Ambient Noise Levels – Unattended Noise Monitor


Location	Ambient Noise Level (dB(A) $L_{eq,period}$)	
	Day (7am to 10pm)	Night (10pm to 7am)
Rooftop of current building facing Pacific Hwy	65	61


A.3 ATTENDED NOISE MEASUREMENT


Table 21 – Ambient Noise Levels – Attended Noise Measurement


Location	Ambient Noise Level (dB(A) $L_{eq,15min}$) Day
2m from kerb of Pacific Hwy	74
2m from kerb of Oxley St	64


A.4 UNATTENDED MONITORING DATA GRAPHS

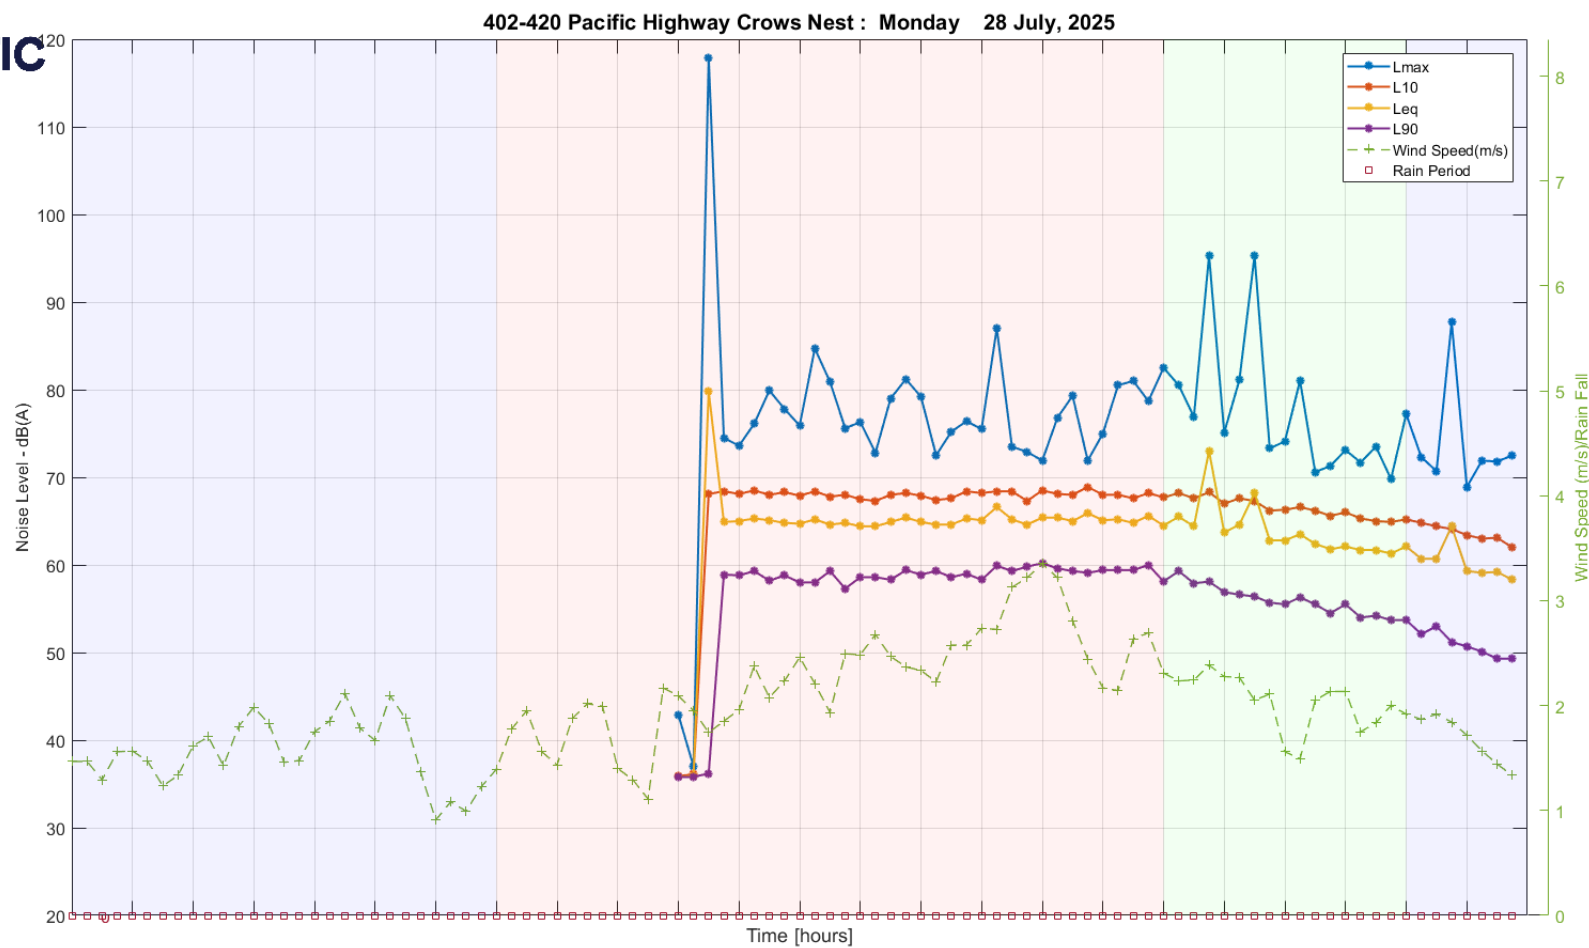


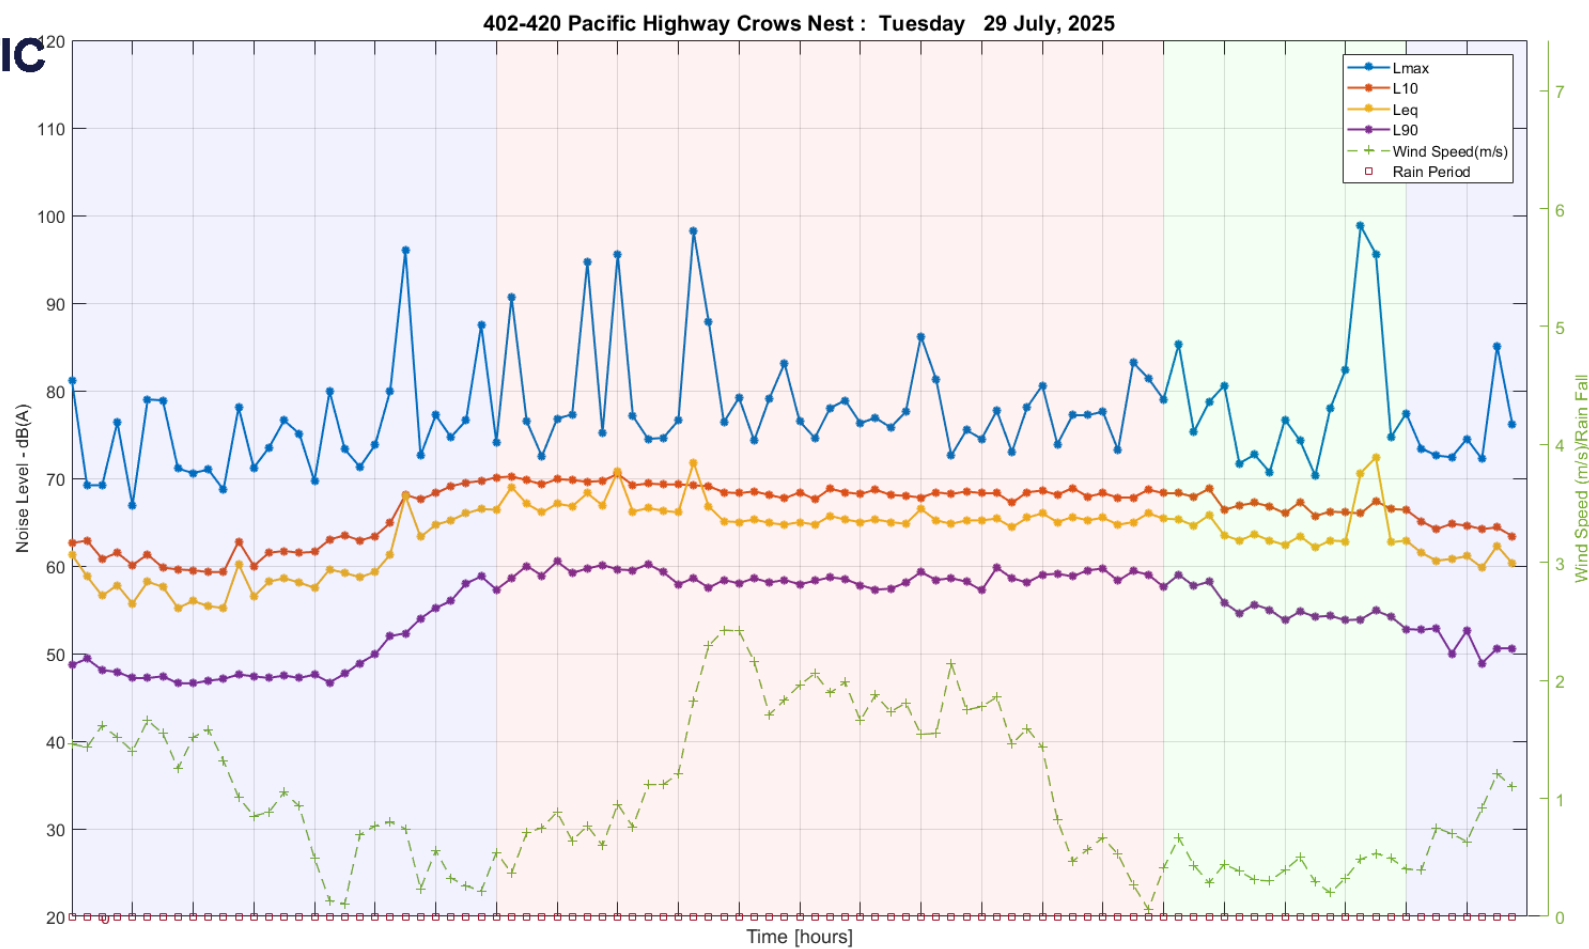


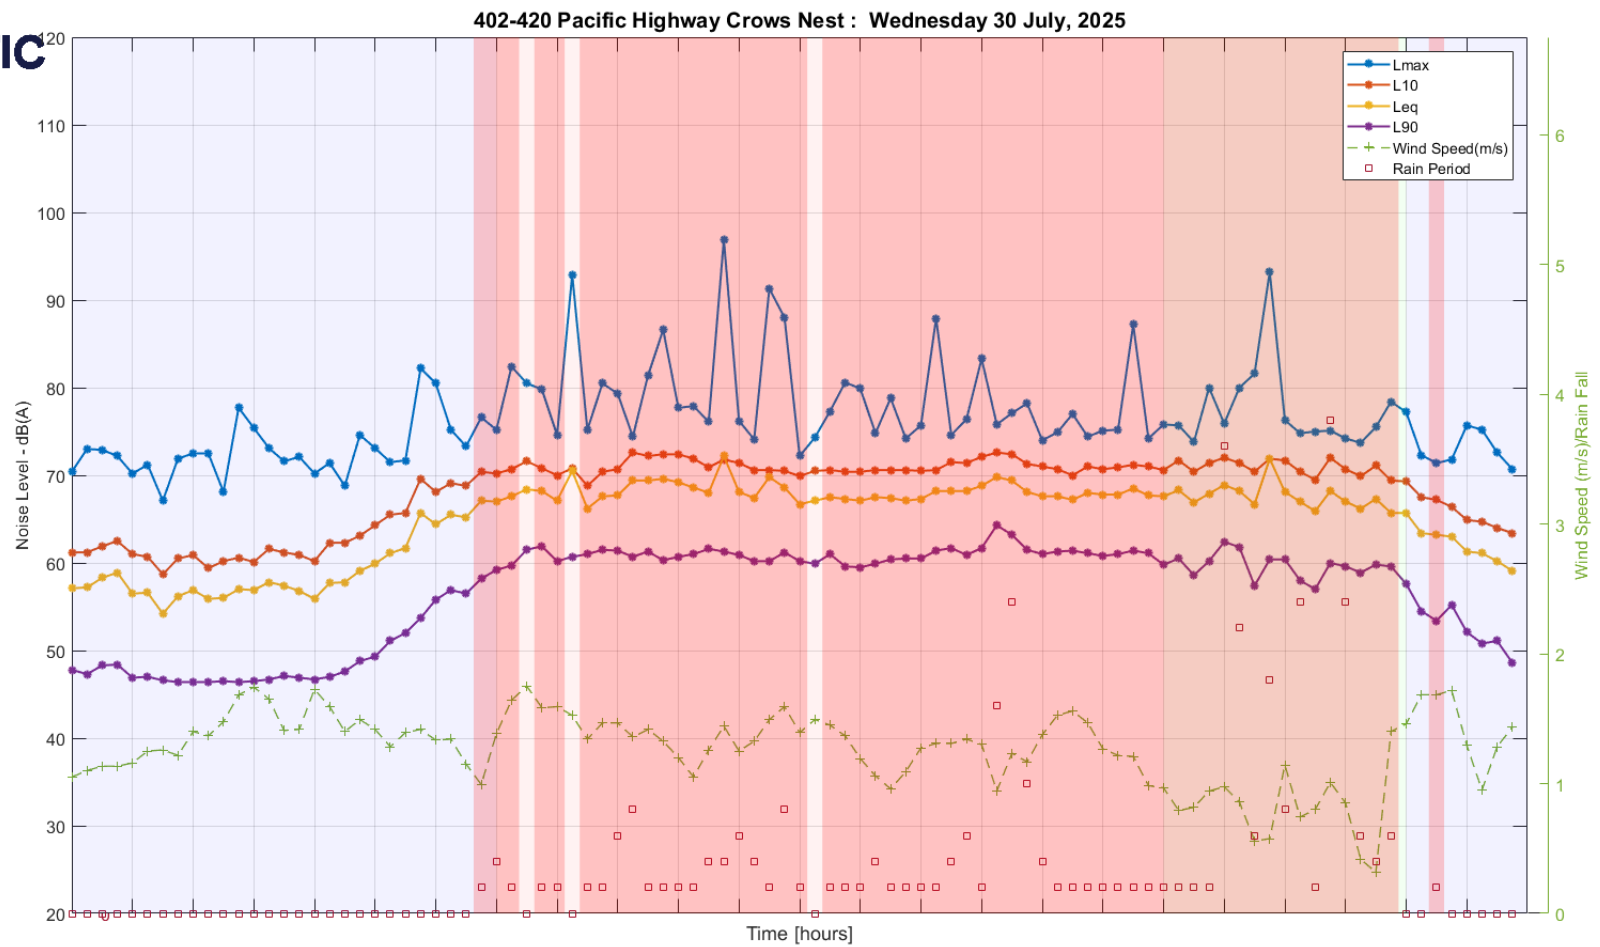


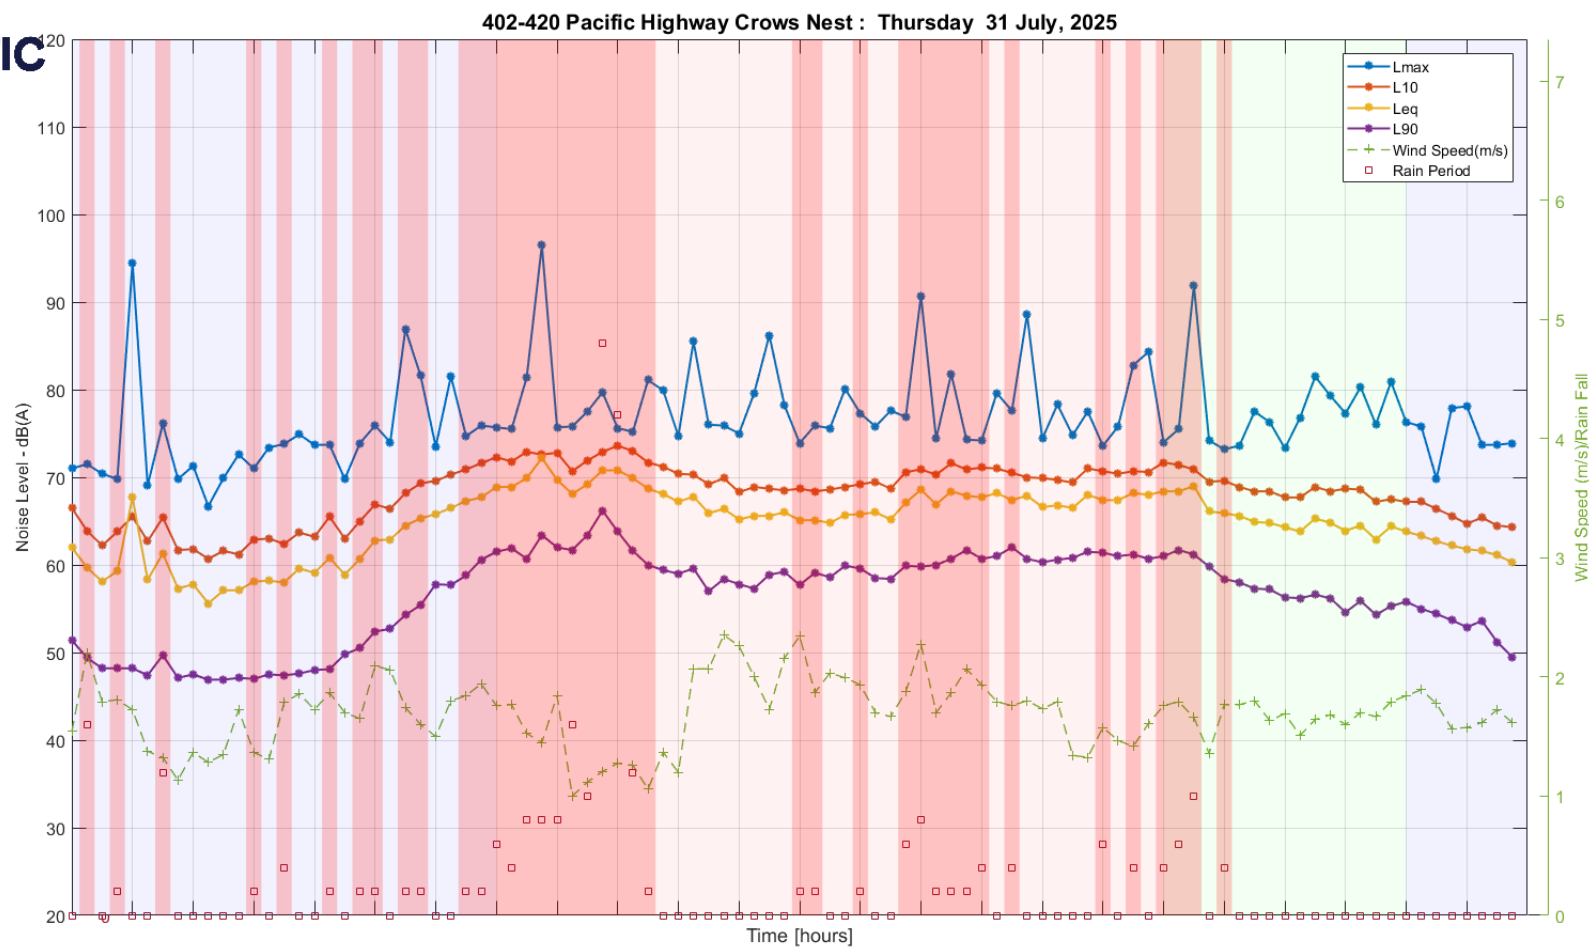


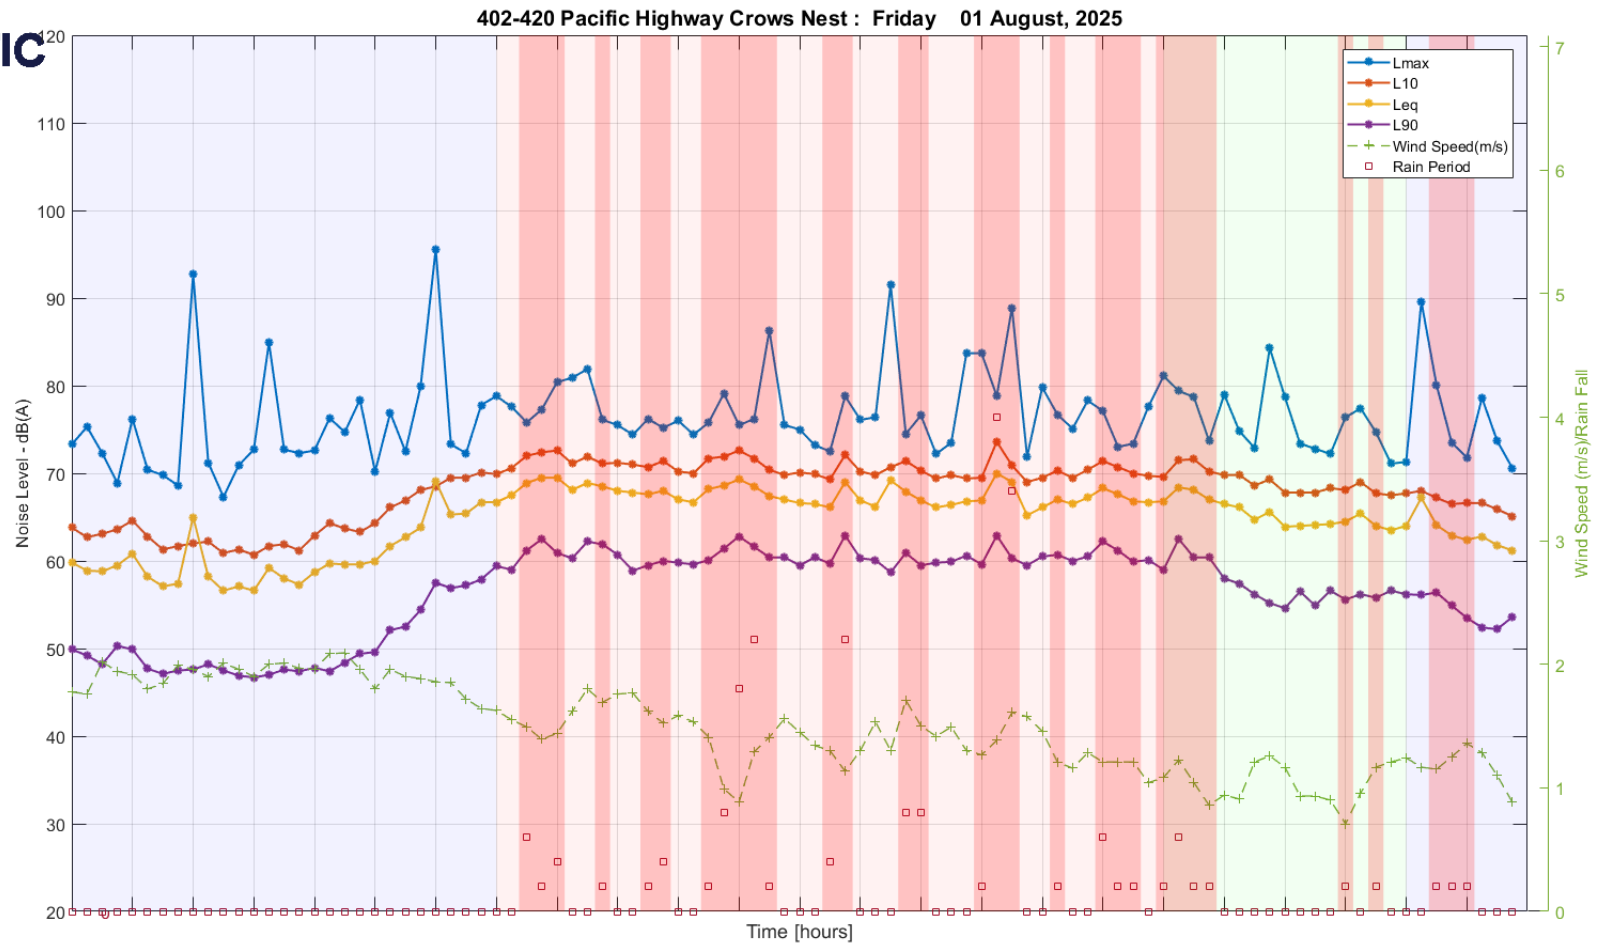


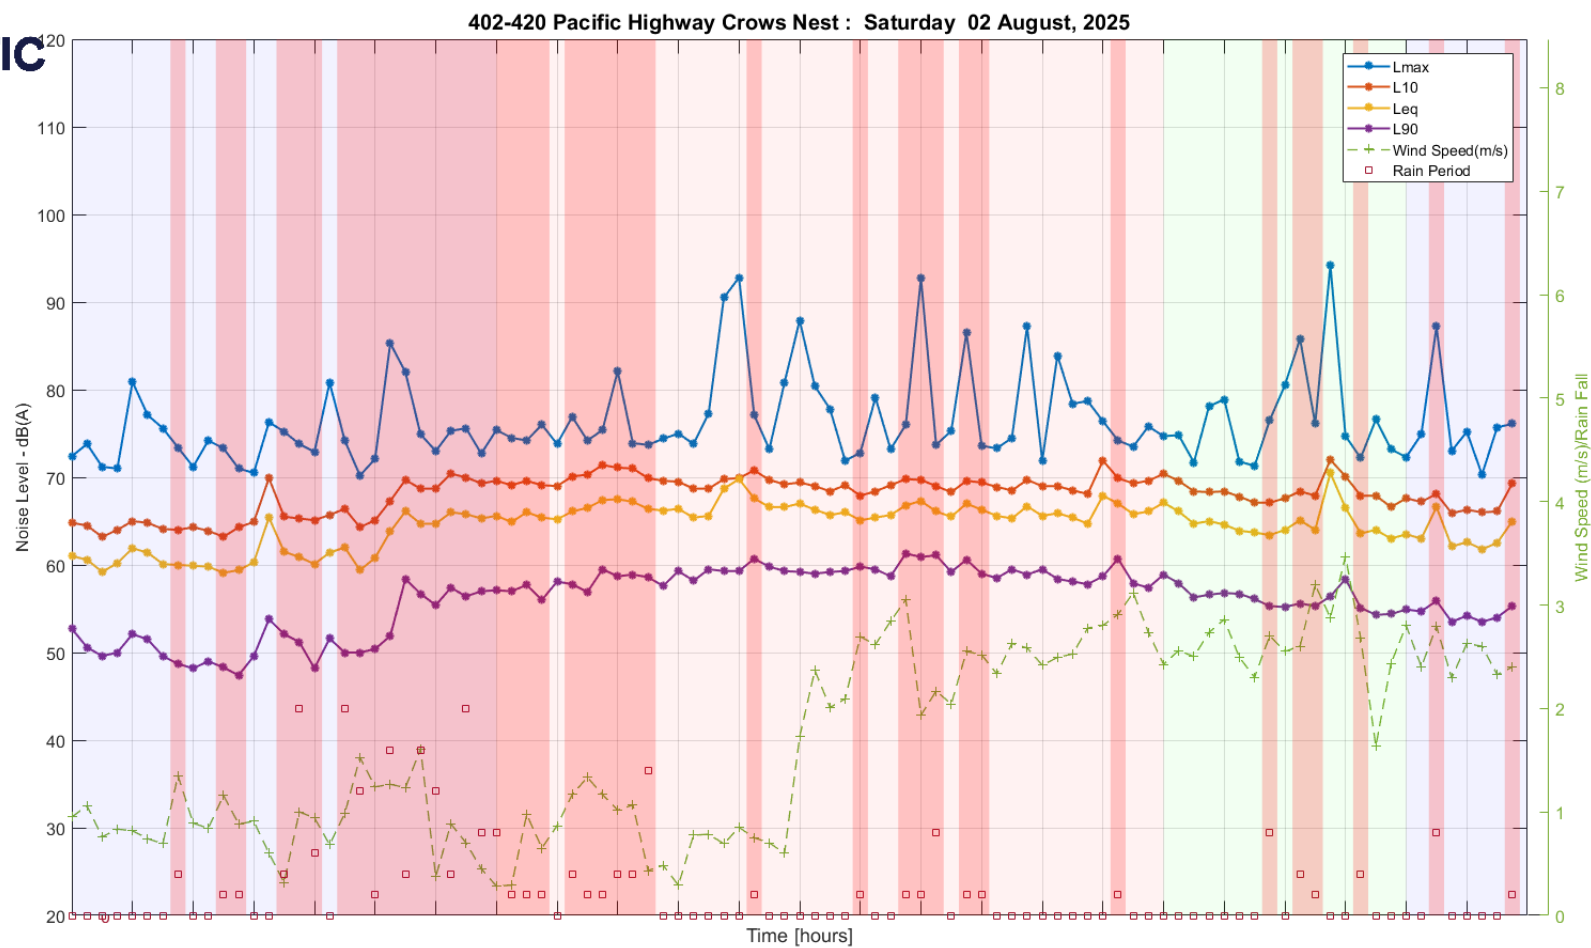


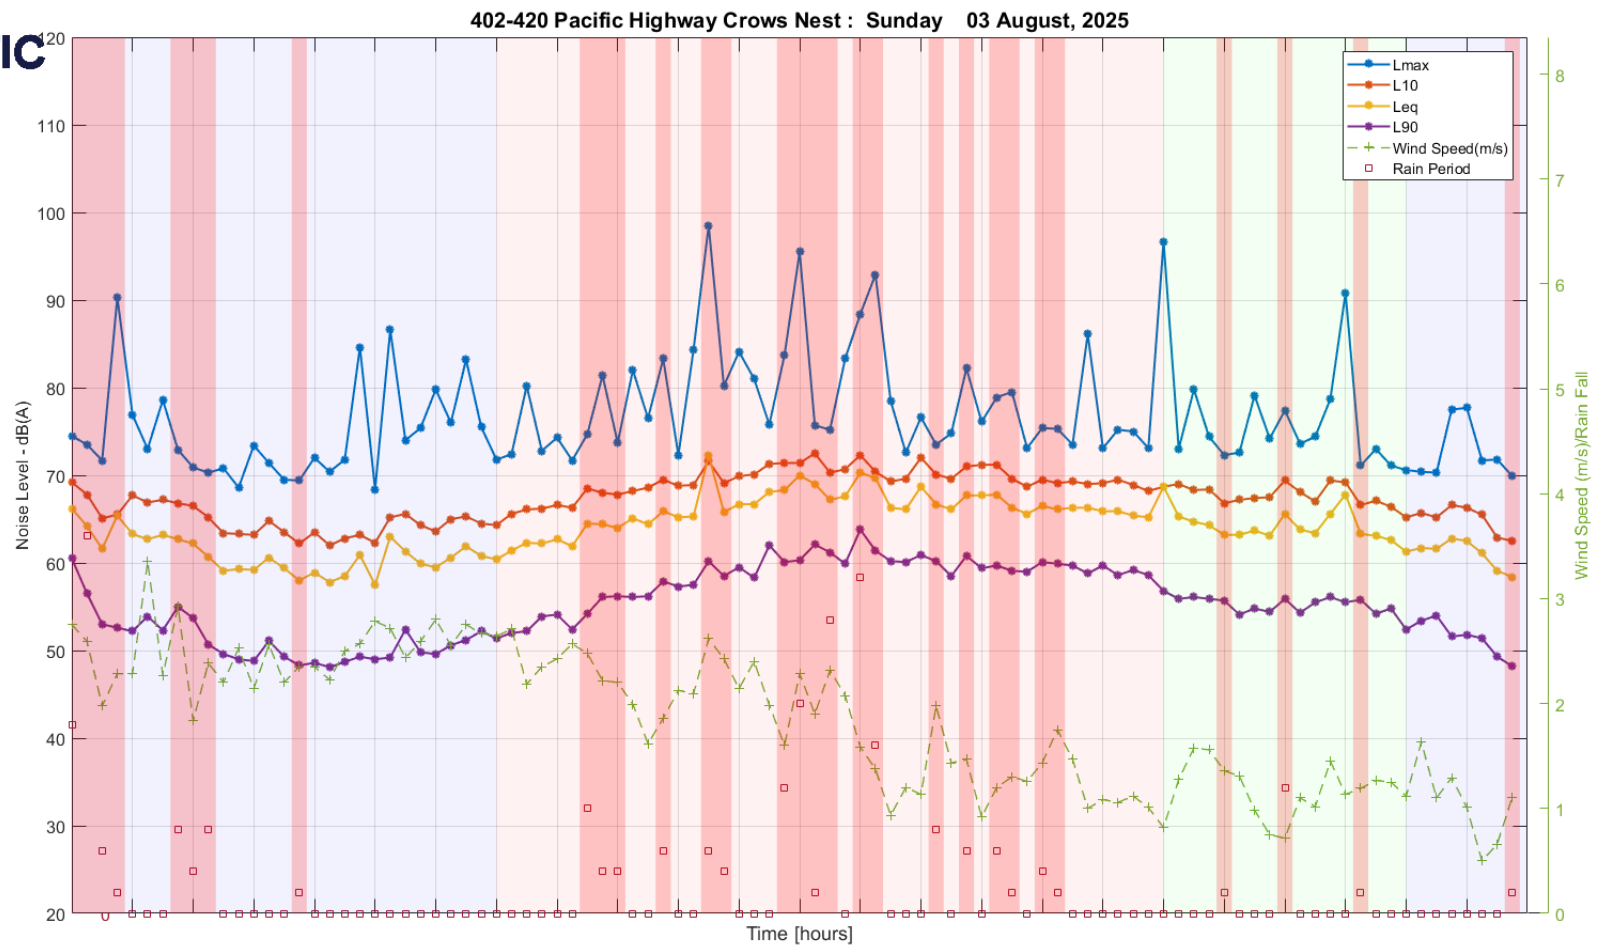

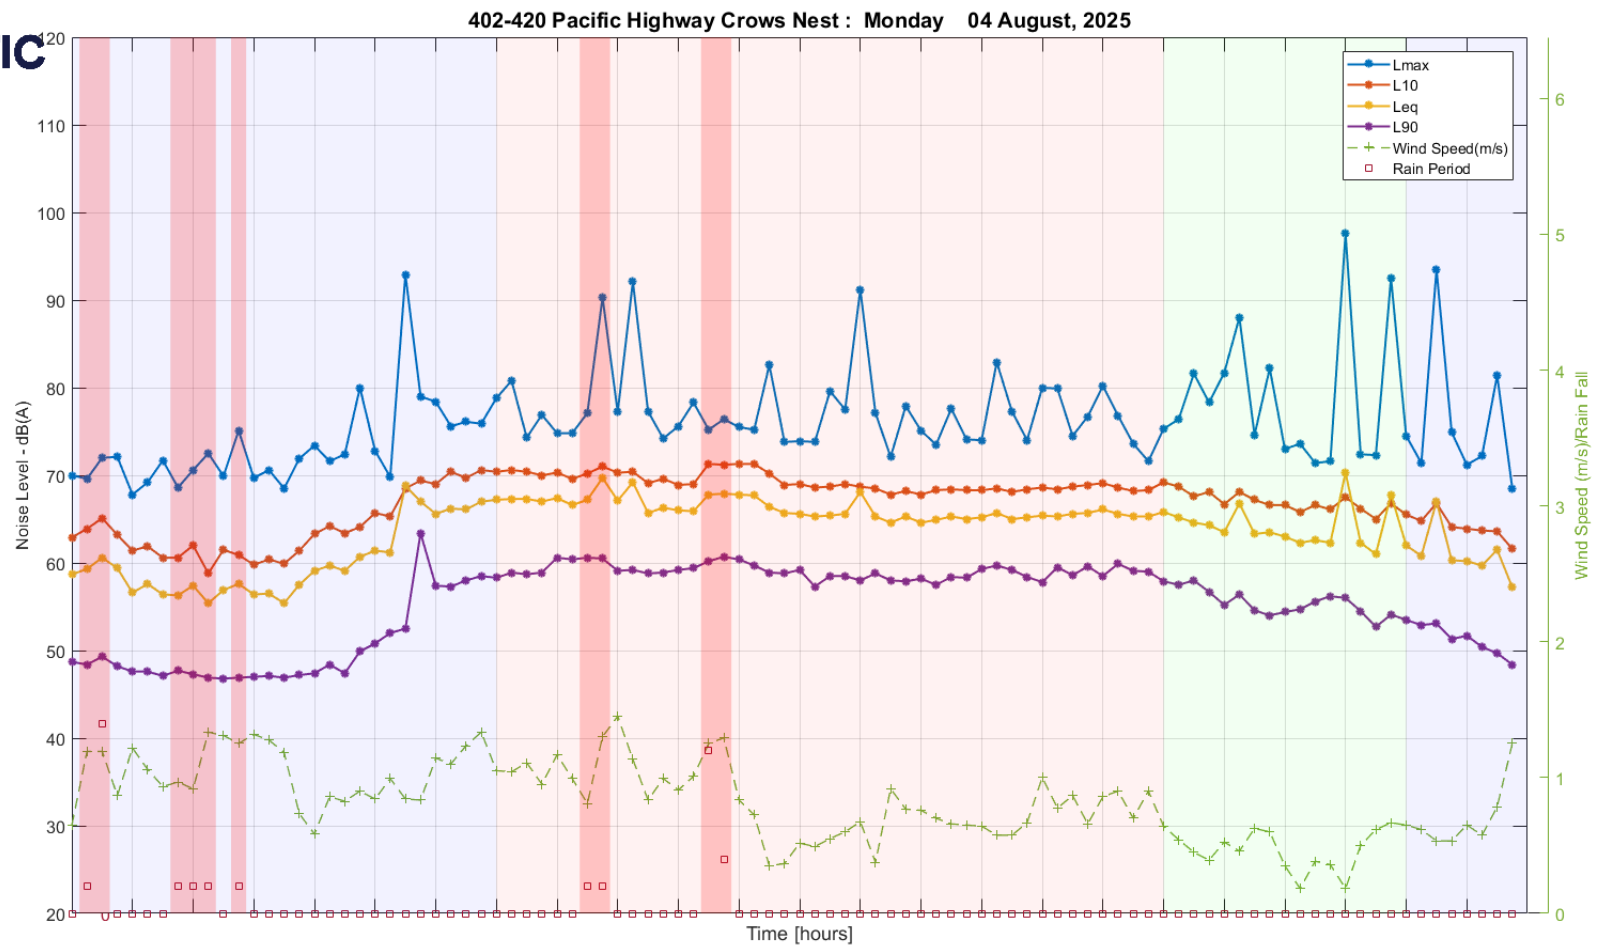

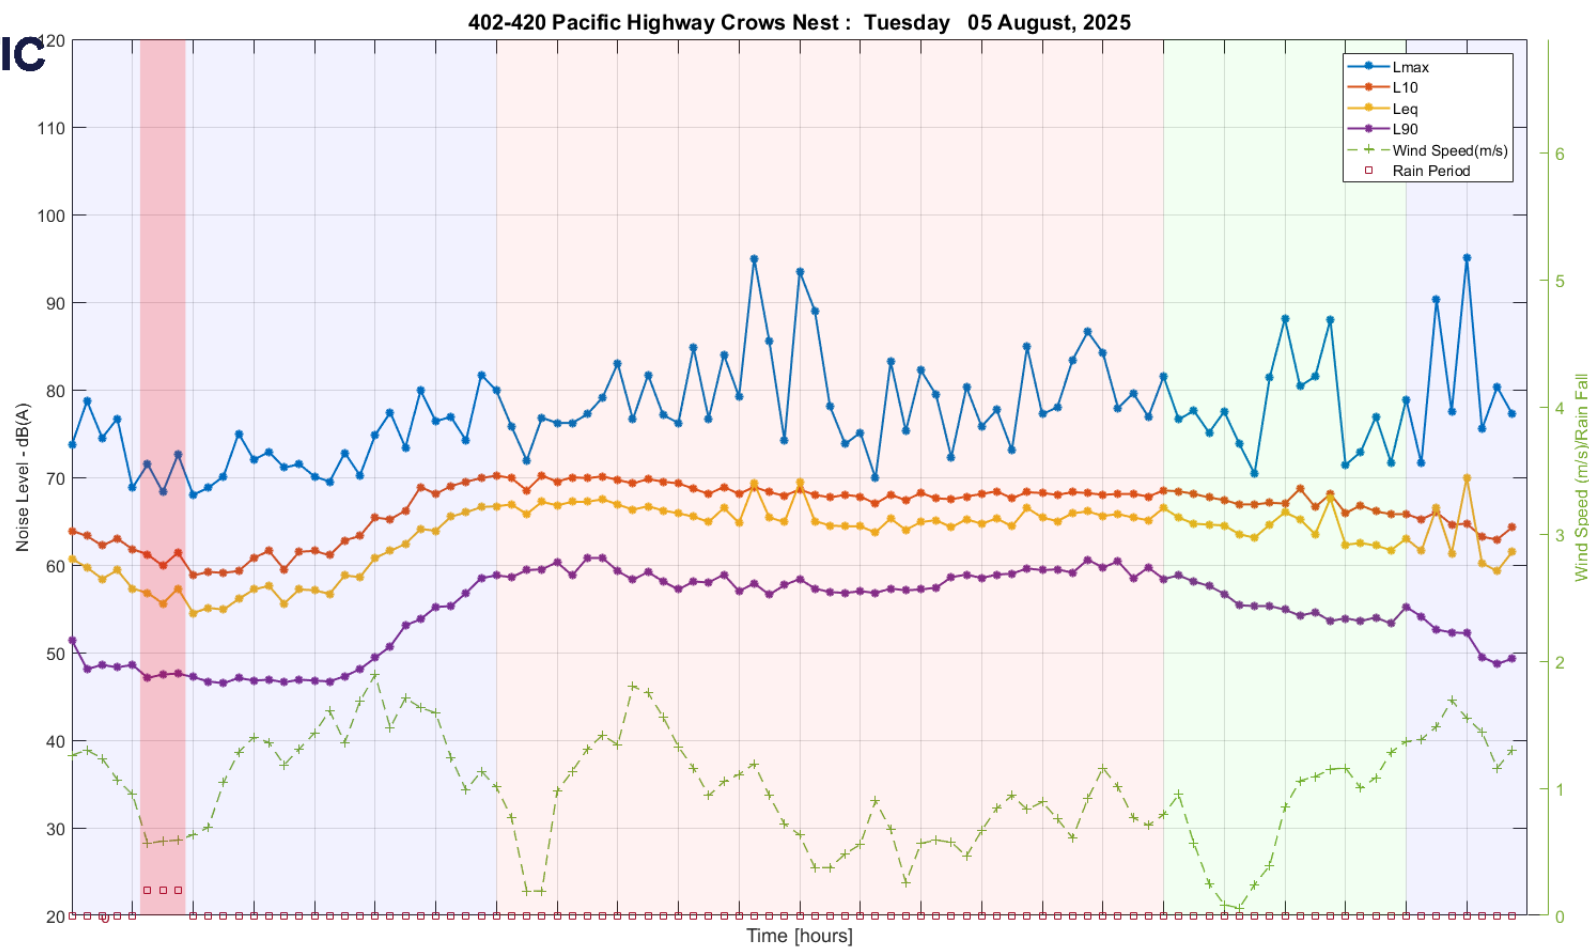

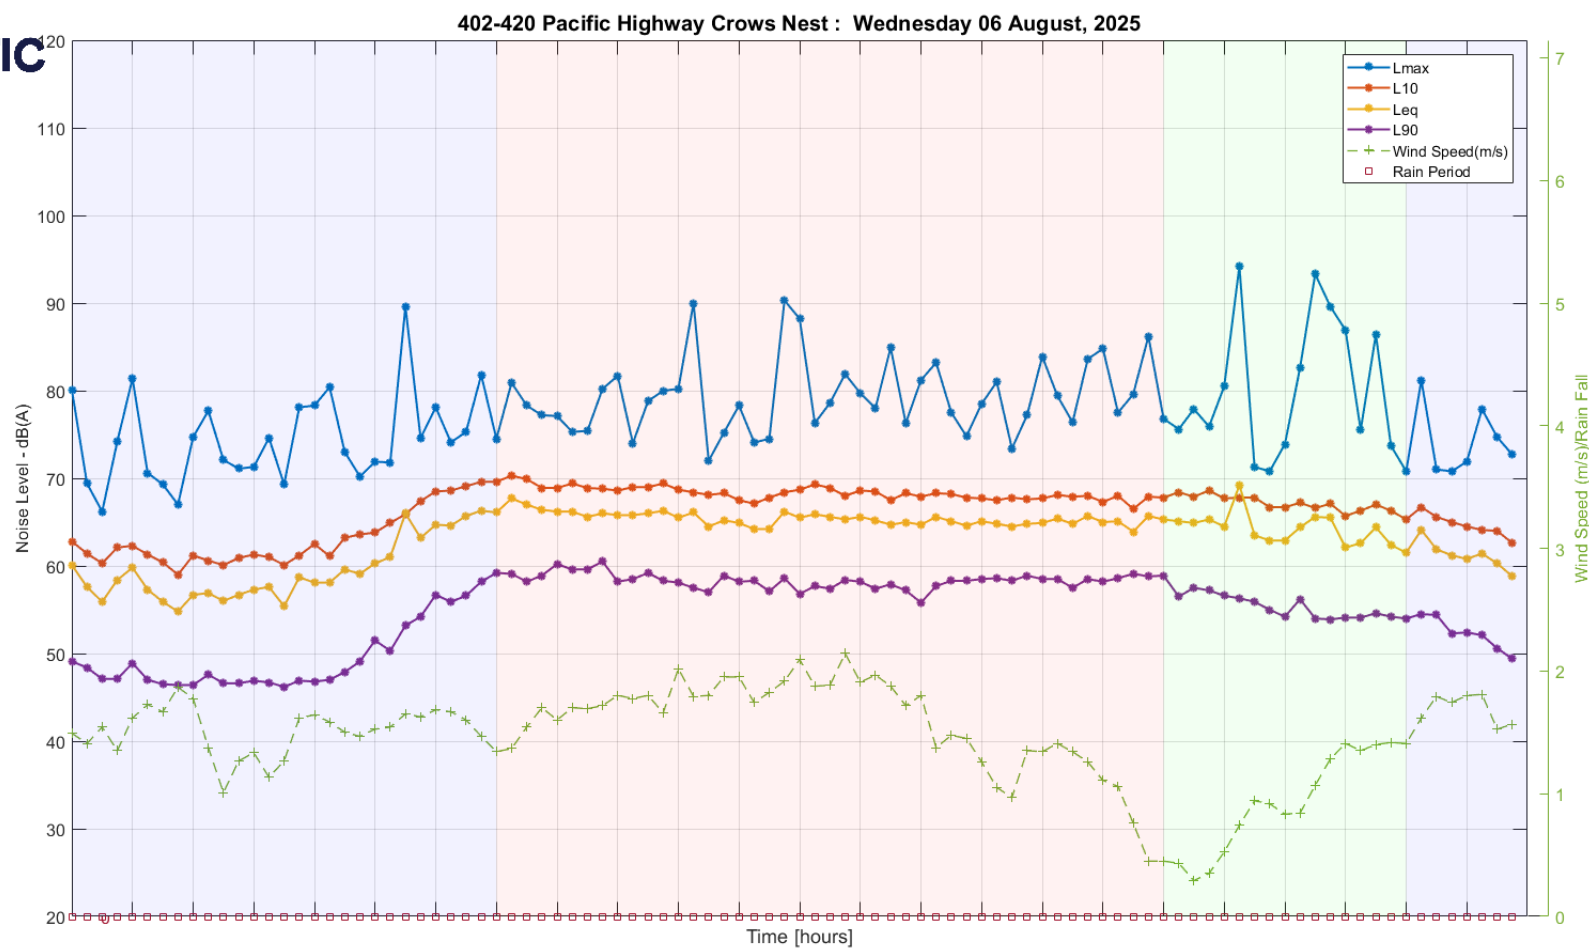

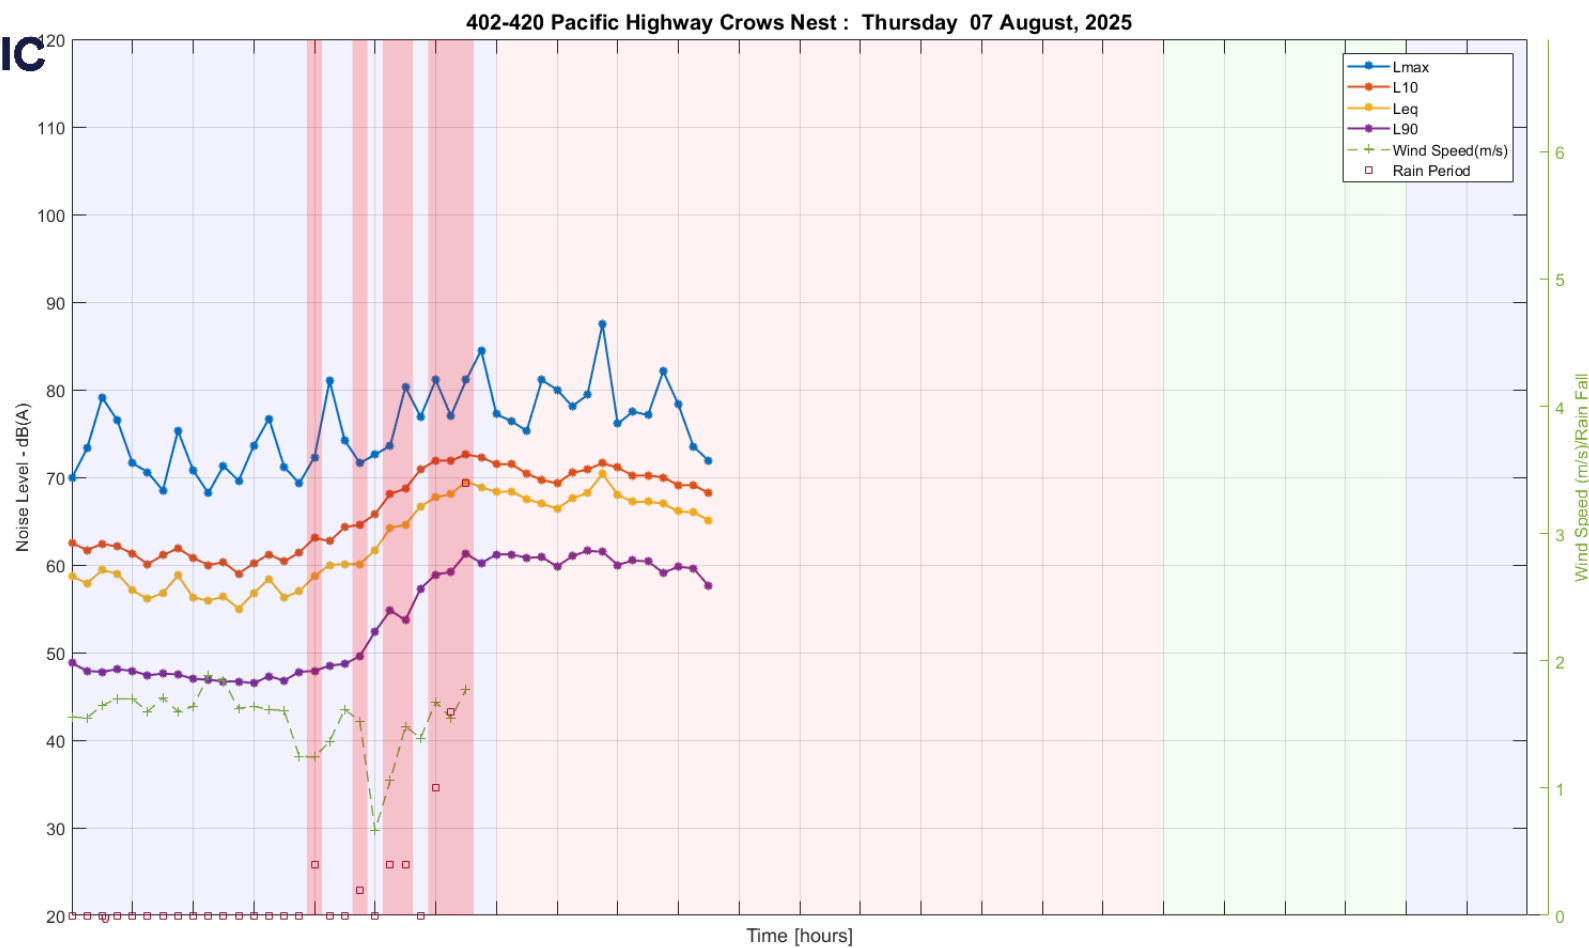

Wind Speed is corrected using factor 0.30 based on logger location

APPENDIX B EPA NOISE POLICY FOR INDUSTRY TRIGGER LEVELS

Project specific assessment trigger levels have been determined for each noise source applying at the identified potentially most impacted receivers.

B.1 NPI TRIGGER LEVELS

The NPI requires noise impacts at residential receivers to be assessed in 3 ways:

- Whether the emitted noise is unreasonably loud relative to ambient background noise. (which the EPA calls the "intrusiveness" trigger level).
- Whether the noise emitted is unreasonably loud in an absolute sense, and consistent with surrounding land use and environment. ("amenity" trigger level)
- For night noise emissions, whether discrete noise events are likely to adversely impact sleep ("maximum noise level" trigger levels).

For other receiver types only the amenity trigger level is relevant.

B.1.1 Intrusiveness

The $L_{eq,15min}$ descriptor is used for the intrusiveness trigger level, and is set at a level that is 5dB(A) above the rating background noise level for the relevant period.

B.1.2 Amenity

Table 2.2 of the NPI (repeated below) sets out acceptable noise levels for various receiver types.

There are 3 categories of residential receivers - rural, suburban, urban. The nearest residential receivers to the subject site are categorised as "urban" receivers. Categories for non-residential uses are also indicated in the table.

The NPI typically requires project amenity noise levels to be calculated in the following manner:

$$L_{Aeq,15min} = \text{Recommended Amenity Noise Level} - 5 \text{ dB(A)} + 3 \text{ dB(A)}$$

NPI Table 2.2: Amenity Noise Levels			
Receiver	Noise Amenity Area	Time of Day	Recommended Amenity Noise Level <i>L_{Aeq}</i>
Residential	Rural	Day	50
		Evening	45
		Night	40
	Suburban	Day	55
		Evening	45
		Night	40
	Urban	Day	60
		Evening	50
		Night	45
Hotels motels caretakers' quarters holiday accommodation permanent resident caravan parks	See column 4	See column 4	5 dB(A) above the recommended amenity noise level for a residence for the relevant noise amenity area and time of day
School classroom – internal	All	Noisiest 1-hour period when in use	35 (see notes for table)
Hospital ward internal external	All	Noisiest 1-hour	35
	All	Noisiest 1-hour	50
Place of worship – internal	All	When in use	40
Area specifically reserved for passive recreation (e.g. national park)	All	When in use	50
Active recreation area (e.g. school playground golf course)	All	When in use	55
Commercial premises	All	When in use	65
Industrial premises	All	When in use	70
Industrial interface (applicable only to residential noise amenity areas)	All	All	Add 5 dB(A) to recommended noise amenity area

Notes: The recommended amenity noise levels refer only to noise from industrial sources. However, they refer to noise from all such sources at the receiver location, and not only noise due to a specific project under consideration. The levels represent outdoor levels except where otherwise stated.

Types of receivers are defined as follows:

- rural residential – see Table 2.3
- suburban residential – see Table 2.3
- urban residential – see Table 2.3
- industrial interface – an area that is in close proximity to existing industrial premises and that extends out to a point where the existing industrial noise from the source has fallen by 5 dB or an area defined in a planning instrument. Beyond this region the amenity noise level for the applicable category applies. This category may be used only for existing situations (further explanation on how this category applies is outlined in Section 2.7)
- commercial – commercial activities being undertaken in a planning zone that allows commercial land uses
- industrial – an area defined as an industrial zone on a local environment plan; for isolated residences within an industrial zone the industrial amenity level would usually apply.

Time of day is defined as follows:

- day – the period from 7 am to 6 pm Monday to Saturday or 8 am to 6 pm on Sundays and public holidays
- evening – the period from 6 pm to 10 pm
- night – the remaining periods.

(These periods may be varied where appropriate, for example, see A3 in Fact Sheet A.)

In the case where existing schools are affected by noise from existing industrial noise sources, the acceptable L_{Aeq} noise level may be increased to 40 dB $L_{Aeq(1hr)}$.

B.1.3 Maximum Noise Level Assessment

The purpose of this assessment is to identify whether discrete, night time noise events have the potential to produce adverse sleep impacts.

Section 2.5 of NPI recommends the following procedure to assess the potential for adverse sleep disturbance.

Where the subject development/ premises night -time noise levels at a residential location exceed:

- $L_{eq(15min)}$ 40 dB(A) or the prevailing RBL (L_{90}) plus 5 dB, whichever is the greater, and/or
- L_{max} 52 dB(A) or the prevailing RBL (L_{90}) plus 15 dB, whichever is the greater,

a detailed maximum noise level event assessment should be undertaken.

The detailed assessment should cover the maximum noise level, the extent to which the maximum noise level exceeds the rating background noise level, and the number of times this happens during the night-time period. Some guidance on possible impact is contained in the review of research results in the NSW Road Noise Policy.

Other factors that may be important in assessing the extent of impacts on sleep include:

- *how often high noise events will occur*
- *the distribution of likely events across the night-time period and the existing ambient maximum events in the absence of the subject development*
- *whether there are times of day when there is a clear change in the noise environment (such as during early-morning shoulder periods)*
- *current scientific literature available at the time of the assessment regarding the impact of maximum noise level events at night.*

Maximum noise level event assessments should be based on the L_{AFmax} descriptor on an event basis under 'fast' time response. The detailed assessment should consider all feasible and reasonable noise mitigation measures with a goal of achieving the above trigger levels.

B.2 PROJECT SPECIFIC TRIGGER LEVELS

The following table summarises the trigger levels applying at each of the identified “most impacted” receivers. These have been determined based on the NPI methodology described above and the measured rating background noise levels.


The trigger levels in bold indicate the most stringent trigger level at each location.

Table 22 – Project Specific Trigger Levels

Location/Receiver Type	Time	RBL dB(A) L ₉₀	Trigger Noise Level (dB(A) L _{eq,15min})		
			Intrusiveness	Amenity	Max Event
R1 – R3 Residential	Day	57	62	58	N/A
	Evening	54	59	48	N/A
	Night	47	52	43	52 L_{eq} 62 L_{max}
C1 & C2 Commercial	When in use	N/A	N/A	63	N/A

Project trigger levels are highlighted in bold.

APPENDIX C SOUNDPLAN MODELLING RESULTS

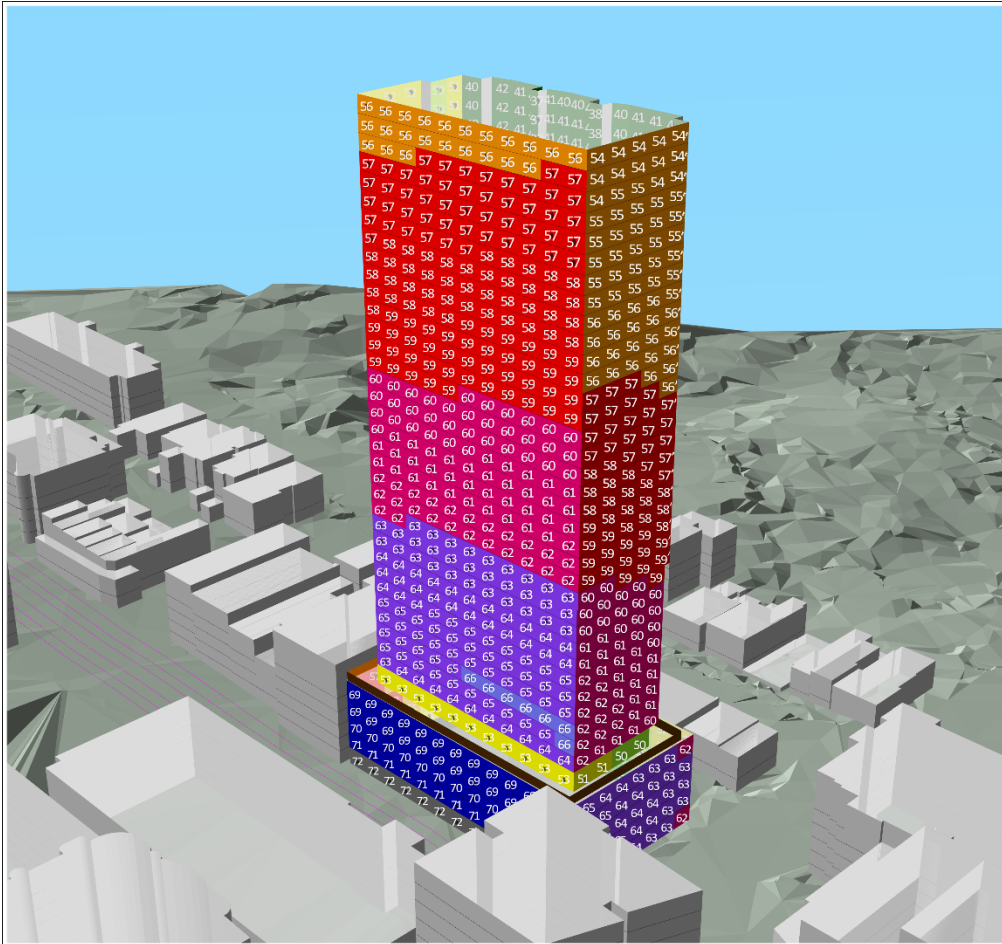

402-420 Pacific Highway Crows Nest

Predicted Road Traffic Noise Levels



Northern & Western Facades

Daytime

Prepared by: P. Feng
Date: 19/06/2026

Noise Level

Leq
in dB(A)

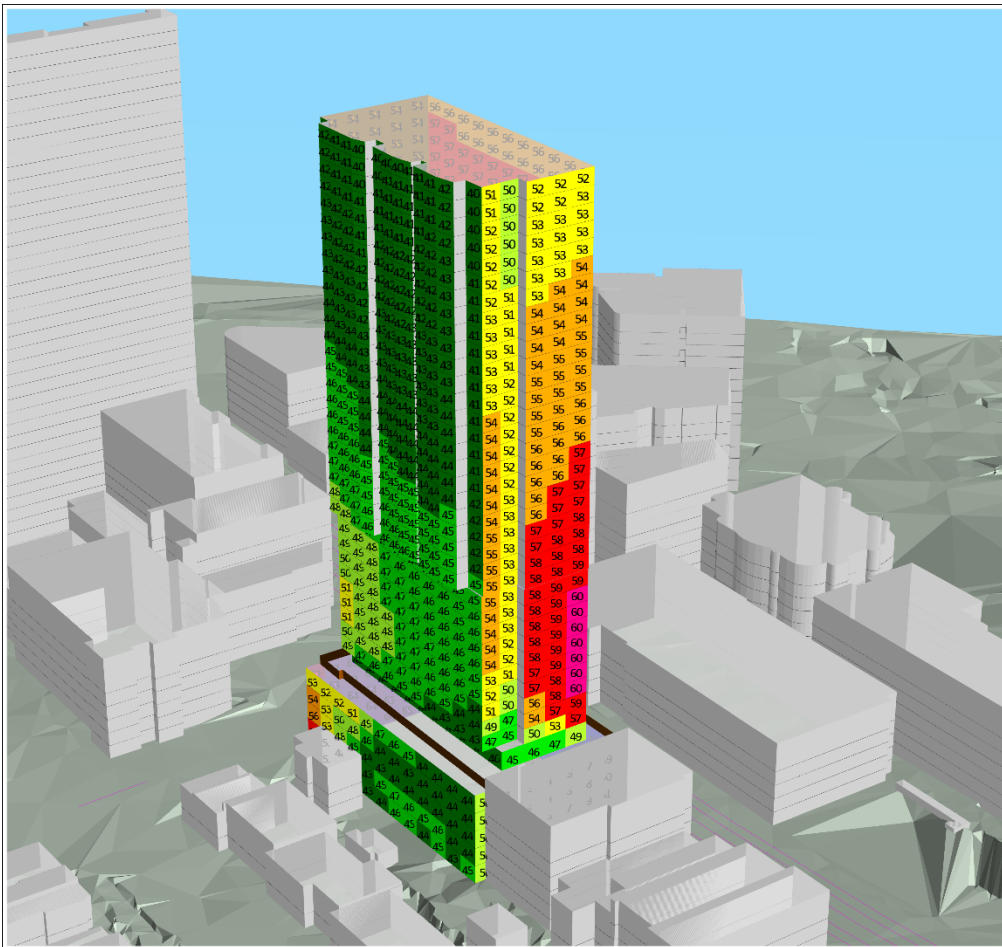

402-420 Pacific Highway Crows Nest

Predicted Road Traffic Noise Levels


Southern & Eastern Facades


Daytime

Prepared by: P. Feng
Date: 19/06/2026

Noise Level

Leq
in dB(A)



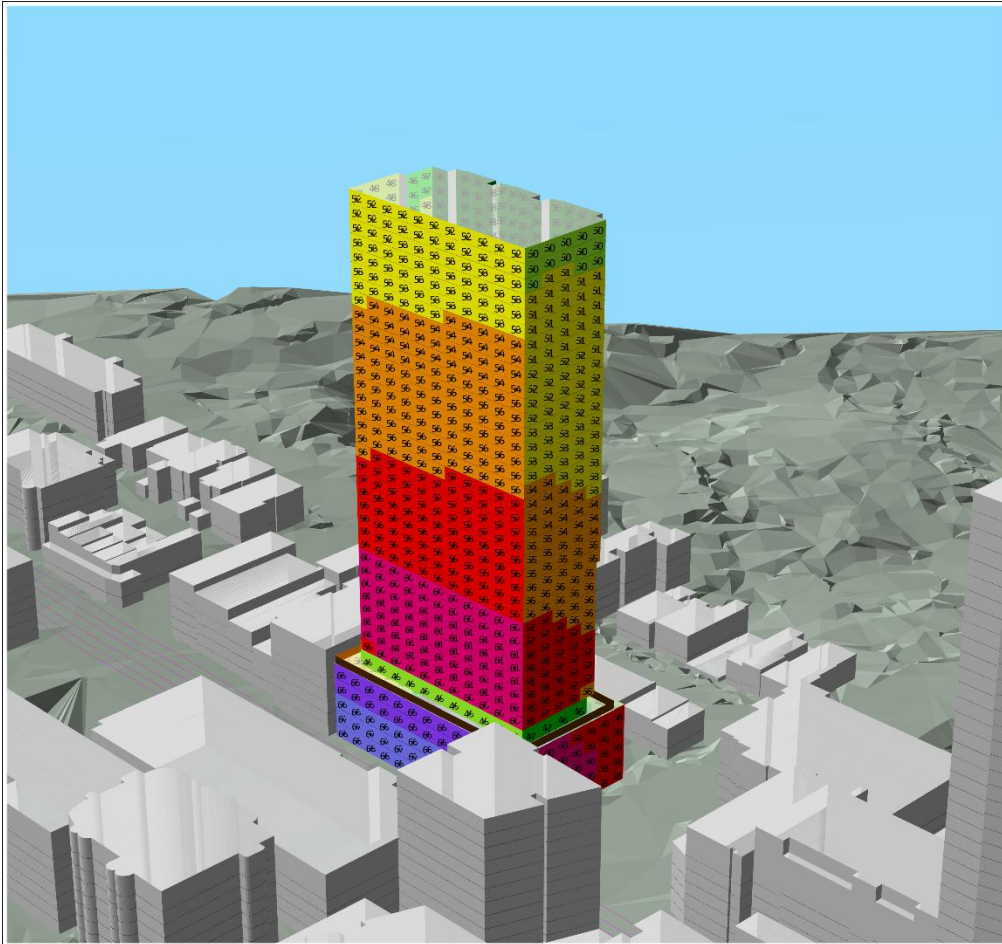

402-420 Pacific Highway Crows Nest

Predicted Road Traffic Noise Levels

Northern & Western Facades

Night time

Prepared by: P. Feng
Date: 19/06/2026

Noise Level

Leq
in dB(A)



402-420 Pacific Highway Crows Nest

Predicted Road Traffic Noise Levels


Southern & Eastern Facades


Night time

Prepared by: P. Feng
Date: 19/06/2026

Noise Level

Leq
in dB(A)



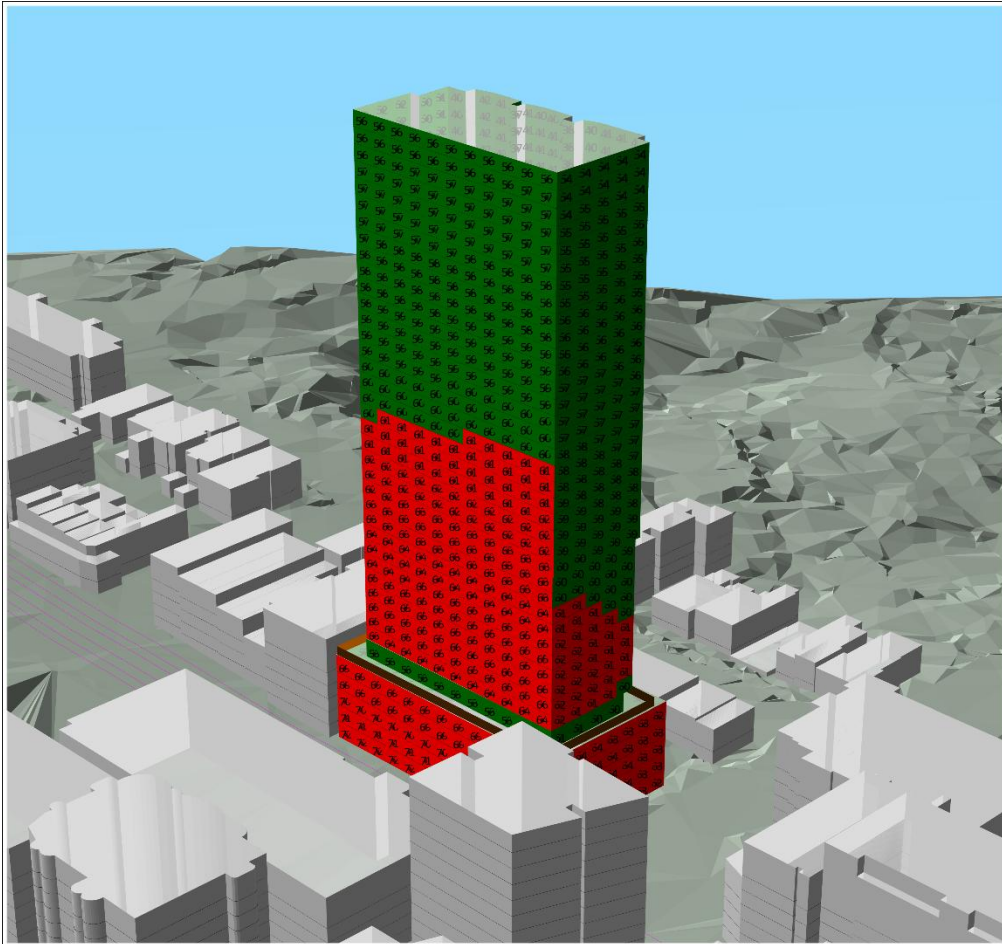

**402-420 Pacific Highway
Crows Nest**

Alternative Ventilation

Northern & Western Facades

Daytime

Prepared by: P. Feng
Date: 19/06/2026

Noise Level

Leq
in dB(A)

≤ 60
> 60



**402-420 Pacific Highway
Crows Nest**

Alternative Ventilation

Southern & Eastern Facades

Daytime


Prepared by: P. Feng
Date: 19/06/2026

Noise Level

Leq
in dB(A)

≤ 60
> 60



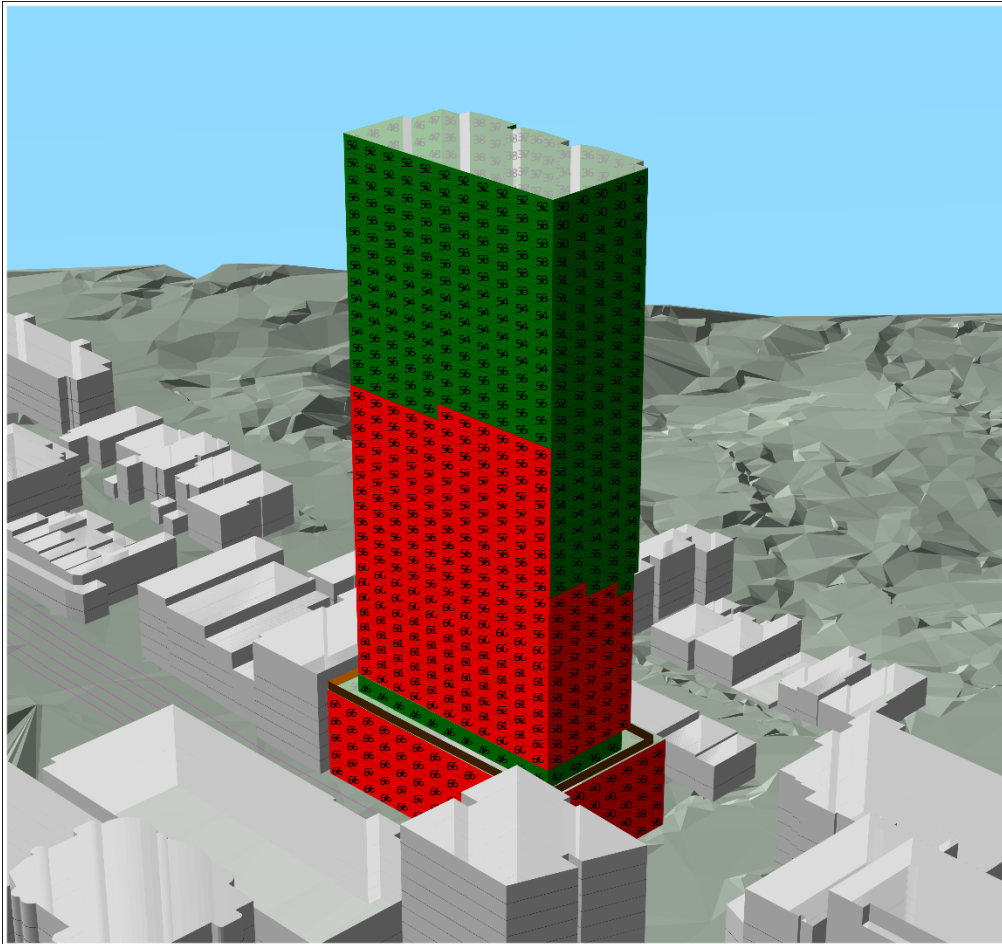

402-420 Pacific Highway Crows Nest

Alternative Ventilation

Northern & Western Facades

Night time

Prepared by: P. Feng
Date: 19/06/2026

Noise Level

Leq
in dB(A)
■ ≤ 55
■ > 55



402-420 Pacific Highway Crows Nest

Alternative Ventilation

Southern & Eastern Facades

Night time

Prepared by: P. Feng
Date: 19/06/2026

Noise Level

Leq
in dB(A)
■ ≤ 55
■ > 55

