

**200 Aldington Road Industrial
Estate, Kemps Creek, Lot 200
DP1285691**

**Stormwater Management Report
SSDA 10479 MOD 7
SSD- 96107226 LOT 0**

CLIENT / STOCKLAND FIFE KEMPS CREEK PTY LTD

DATE / 9/03/2026

CODE/ 19 – 609 00

Commercial in Confidence

All intellectual property rights, including copyright, in designs developed and documents created by AT&L remain the property of this company. Any use made of such design or document without the prior written approval of AT&L will constitute an infringement of the rights of the company which reserves all legal rights and remedies in respect of any such infringement.

The information, including any intellectual property, contained in this proposal is confidential and proprietary to the Company. It may only be used by the person to whom it is provided for the stated purpose for which it is provided and must not be imparted to any third person without the prior written approval of the Company. The Company reserves all legal rights and remedies in relation to any infringement of its rights in respect of its confidential information.

This report has been prepared in accordance with the terms and conditions of appointment. AT&L cannot accept any responsibility for any use of or reliance on the contents of this report by any third party.

This report may be based upon information supplied by other consultants and contractors. To the extent that the report incorporates such material, AT&L takes no responsibility for any loss or damage caused by any error or omission arising from reliance on it.

Document Registration

Issue	Description	Date	Author	Checked	Approved
01	DRAFT FOR REVIEW	09-11-25	Tim Michel/Debbie Fransen	☒	☐
02	Final	19-12-25	Tim Michel/Debbie Fransen	☒	☐
03	FINAL – MOD 6 CONSISTENCY	05-03-26	Tim Michel/Debbie Fransen	☒	☐
03A	AMEND # IN SKC 228	24-06-26	Tim Michel/Debbie Fransen	☒	☐
				☐	☐

Abbreviations

AEP	Annual Exceedance Probability
BAPS	Bochasanwasi Akshar Purushottam Sanstha ('BAPS') temple (adjoining site)
CEMP	Construction Environmental Management Plan
CPESC	Certified Professional in Erosion and Sediment Control
DCP	Mamre Road Precinct Development Control Plan 2021
ESCP	Erosion and Sediment Control Plan
GPT	Gross Pollutant Trap
MOD 7	SSD-10479 Modification 7
MRP	Mamre Road Precinct
OSD	On Site Detention
PCC	Penrith City Council
SSD	State Significant Development
SSDA	State Significant Development Application
WSUD	Water Sensitive Urban Design

Contents

1.	Introduction	6
1.1.	Description of Proposed Modification 7.....	6
1.2.	Description of SSD-96107226 - Lot O.....	6
1.3.	Stormwater Management Strategy	7
2.	Site Description	8
2.1.	Existing Waterways and Vegetation	9
2.1.1.	Environmental Assessment (Narla) and Bio certification Letter (Ecological Aus)	9
2.1.2.	Farms Dams and Aquatic Habitat	9
2.1.3.	DPI Mapping and Watercourses.....	9
2.2.	Geology and Soils.....	10
2.3.	Groundwater	11
2.4.	Predevelopment Catchment Delineation	11
2.5.	Indicative Trunk Drainage Paths	13
3.	Proposed Development.....	14
3.1.	Proposed Development	14
3.2.	Development of Lot O (SSDA 96107226).....	16
3.3.	Post development Catchment Delineation.....	17
3.4.	Water Sources and Demands	21
3.5.	Connection to Sydney Water Future Stormwater Infrastructure	21
3.5.1.	Treatable flows to future wetlands	21
3.5.2.	Basin 28 and Basin 29.....	22
3.5.3.	Wetland 30	23
4.	Stormwater Targets.....	25
5.	Water Sensitive Urban Design Strategy	26
5.1.	Strategy Overview	26
5.1.1.	Stormwater Quality and Flow Management Measures	26
5.1.2.	Stormwater Quantity Management Measures	28
5.2.	Proposed Water Management Measures	28
5.2.1.	GPTs.....	29
5.2.2.	On-site Stormwater Detention (OSD) Design Parameters	29
5.2.3.	Interim sediment ponds	30
5.2.4.	Interim Storage Ponds for harvesting and reuse.....	30
5.2.5.	Reuse	31
5.2.6.	Regional Infrastructure Scheme Service Area	31
6.	Performance Assessment.....	33
6.1.	Hydrological and Hydraulic Modelling.....	33
6.2.	Proposed Site Stormwater Drainage	34
6.3.	Stormwater Quality Modelling	35

6.3.1. MUSIC Model Parameters	35
6.3.2. Modelling	35
6.4. Performance Against Stormwater Targets	36
6.4.1. Stormwater Quality	36
6.4.2. Stormwater Quantity	36
6.4.3. Stormwater Quantity (Flow Duration Targets).....	37
7. Maintenance and Operations	40
8. Compliance Protocol	41
9. Conclusion	42
APPENDIX A – MUSIC MODEL	43
APPENDIX B – SITE LAYOUT	47
APPENDIX C - WSUD MAINTENANCE PLAN (DRAFT)	48
APPENDIX D – DESIGNER DETAILS.....	51
Designer Information	51
APPENDIX E – PCC CHECKLIST	52
APPENDIX F – SSA Letter Ropes Catchment (Estate northern catchment)	54

List of Figures:

Figure 1 – Site Location	8
Figure 2 – Site Location (aerial image)	9
Figure 3 Waterways – Stream order (Extract from Riparian Report, Eco Logical)	10
Figure 4 Test Pit locations (Extract from Geotechnical and Groundwater Summary Report, DP, 2019)	11
Figure 5: Catchment delineation under pre-development conditions.....	12
Figure 6: Mamre Road Precinct Integrated Stormwater Scheme Plan (Extract SWC May 2025)	13
Figure 7: 200 Aldington Road Industrial Estate Proposed Concept Master Plan	14
Figure 8: Proposed Lot F, J, K, E and O Development Plan.....	16
Figure 9: Catchment delineation under post-development conditions.....	17
Figure 10: Post Development Northern Catchment to MRP Scheme Basins 28, 29 and 30 (extract of SKC194).....	19
Figure 11: Post Development Southern Catchment to MRP Scheme Basin 13.....	19
Figure 12 Concept layout of Sydney Water MRP Stormwater Scheme basins 28, 29 and 30.....	22
Figure 13: Wetland 28 and 29 Diversion system (based on concept basin design).	23
Figure 14: Diversion system to Basin 30 (refer 19-609 C1151 for details).	24
Figure 15 Interim Stormwater management measures – (extract SKC228 for MOD7)	28
Figure 16: DRAINS Hydraulic Setup	33
Figure 17: Flow duration curve and targets for proposed development (Southern Catchment)	38
Figure 18: Flow duration curve and targets for proposed development (Northern Catchment)	39
Figure 19 Music Model Southern Catchment – for proposed development stages	43
Figure 20 Music Model Northern Catchment – for proposed development	45

List of Tables:

Table 1: Internal and external catchments under pre-development conditions	12
Table 2: Proposed development (as previously approved/lodged for approval)	15
Table 3: Proposed Lot O Works.....	16
Table 4: Internal and external catchments under post-development conditions	18
Table 5: Summary of Lots, Regional Infrastructure catchments and cumulative development areas (ha)	20
Table 6: Catchment contribution to MRP Scheme Wetland/basins (Ropes Creek) – May 2025	21
Table 7: Operational phase stormwater quality targets – Options 1 and 2	25
Table 8: Operational phase stormwater quantity (flow) targets – Options 1 and 2	25
Table 9: Summary of measures to address stormwater quality and flow management targets for proposed stages of Development.....	27
Table 10: Summary of onsite detention measures.	28
Table 11: OSD Basin parameters	29
Table 12: Sediment Pond parameters (interim measures)	30
Table 13: Interim Storage /Harvesting Pond parameters	31
Table 14: DRAINS hydrological parameters	33
Table 15: Summary of MUSIC modelling results against stormwater quality targets Option 2 – Mean Annual Load...	36
Table 16: Pre-development and post-development flows at discharge point Basin A	36
Table 17: Pre-development and post-development flows at discharge point Basin B	37
Table 18: Whole of life cost (Lot F, J, K, E and O)	40
Table 19: Summary of MUSIC model and treatment paths – Southern Catchment	44
Table 20: Summary of MUSIC model and treatment paths – Northern Catchment	46

1. Introduction

This report has been prepared on behalf of Stockland Fife Kemps Creek (SFKC) to support:

- Modification 7 of SSD-10479 for development of Lot O on the development known as 200 Aldington Road Industrial Estate located in, Kemps Creek; and
- The additional SSD application for on lot development of the following SSD-96107226 LOT O.

The Estate is located to the east of Aldington Road and is legally described as Lot 200 DP 1285691, a consolidation of the former 7 lots, with an area of approximately 72.11 hectares (ha) within the Penrith City Council Local Government Area (LGA).

This is a stand-alone report that is based on the Stormwater Management Report prepared in June 2023 to address conditions 27, 29 and 31 of the SSD-10479 and updates the management methods to account for the additional on lot development now proposed.

1.1. Description of Proposed Modification 7

A seventh modification (Modification 7) to SSD10479 Concept Approval has been prepared for lodgement with the Department of Planning, Housing and Infrastructure (DPHI) relating primarily to a revised layout for Lot O, the building approval is under SSD-96107226. As part of the staged development of the Kemps Creek Industrial Estate, SFKC is seeking to construct a temperature controlled warehouse and distribution centre on Lot O.

Access to the warehouse will be via a mix of recessed docks and on-grade roller shutter doors. The western tenancy will be referred to as Warehouse 1 & Office 1 with the eastern tenancy being referred to as Warehouse 2 & Office 2. Each tenancy is provided a main office component arranged over two-levels with Warehouse 2 also providing a dock office one main warehouse and distribution building with a main dock face on the east side with two recessed docks, ancillary offices, carparking, hardstand vehicle parking, surrounded by perimeter landscaping and visual treatments to achieve pleasant micro-climates and desirable streetscapes.

The proposed changes to the Concept Master Plan under SSD-10479 Modification 7 as amended can be summarised as:

- Changes to the site ingress and egress for Lot O under the Concept Master Plan
- Changes to the building footprint and general arrangement for Lot O under the Concept Master Plan

1.2. Description of SSD-96107226 - Lot O

The works proposed on Lot O of the 200 Aldington Road Estate development are part of a separate SSD application SSD-96107226 and include:

- Stormwater works on Lot O;
- Construction of a temperature controlled warehouse and distribution centre on Lot O.

Stormwater Management Measures for Lot O

- The construction phase stormwater targets for Lot O will be achieved through implementation of the Erosion and Sediment Control measures within the ESCP for Lot O located within Lot O. A separate ESCP report and drawings will be prepared for Lot O on lot development building phase. The ESCP for Lot O will be part of the CEMP for Lot O.

- The existing proposed stages of development in the southern catchment including stage 1 (estate and Lot F), Lot J, Lot K (south) and Lot O continue to achieve the operational stormwater provisions of the DCP through interim stormwater measures and are not reliant on the regional infrastructure.
- The design of these interim basins and measures identified in this stormwater management report will be completed as part of Stage 1 works (SSD 10479). The temporary / interim stormwater management measures are located outside of the boundary of Lot O, but within the Estate boundary.

1.3. Stormwater Management Strategy

This report demonstrates the stormwater management strategies proposed for this development are in accordance with the Mamre Road Precinct Development Control Plan and demonstrates the operational phase stormwater quality and flow targets are achieved for the development site. This report has been prepared in accordance with the Technical Guidance for Achieving Wianamatta-South Creek stormwater management targets.

The proposed interim stormwater infrastructure for the existing development, stage 1 including site infrastructure and Lot F, Lot J, Lot K and Lot E as submitted with MOD 6 has been amended for the addition of development on Lot O. This results in a change to the interim infrastructure in the southern catchment. There is no proposal to modify the previously proposed interim stormwater measures the northern catchment.

The proposed **interim** operational stormwater management infrastructure is located on undeveloped Lot L, N and D with irrigation or reuse and includes:

- sediment pond (within basin A);
- storage pond on Lot N;
- usage of Basin B ponds 1 & 2 as sediment/storage ponds;

This will include irrigation of undeveloped land and may also include supply of recycled water to users on the estate. MUSIC modelling demonstrates the demand/reuse is possible with irrigation of undeveloped land.

2. Site Description

The development, known as 200 Aldington Road Industrial Estate includes a single consolidated lot, Lot 200 DP1285691 formerly 7 lots, with an area of approximately 72 hectares (ha) in Aldington Road, Kemps Creek. The site, highlighted red in Figure 1, falls within the extent of the *State Environmental Planning Policy (Industry and Employment) 2021* ("I&E SEPP") which includes the Mamre Road Precinct.

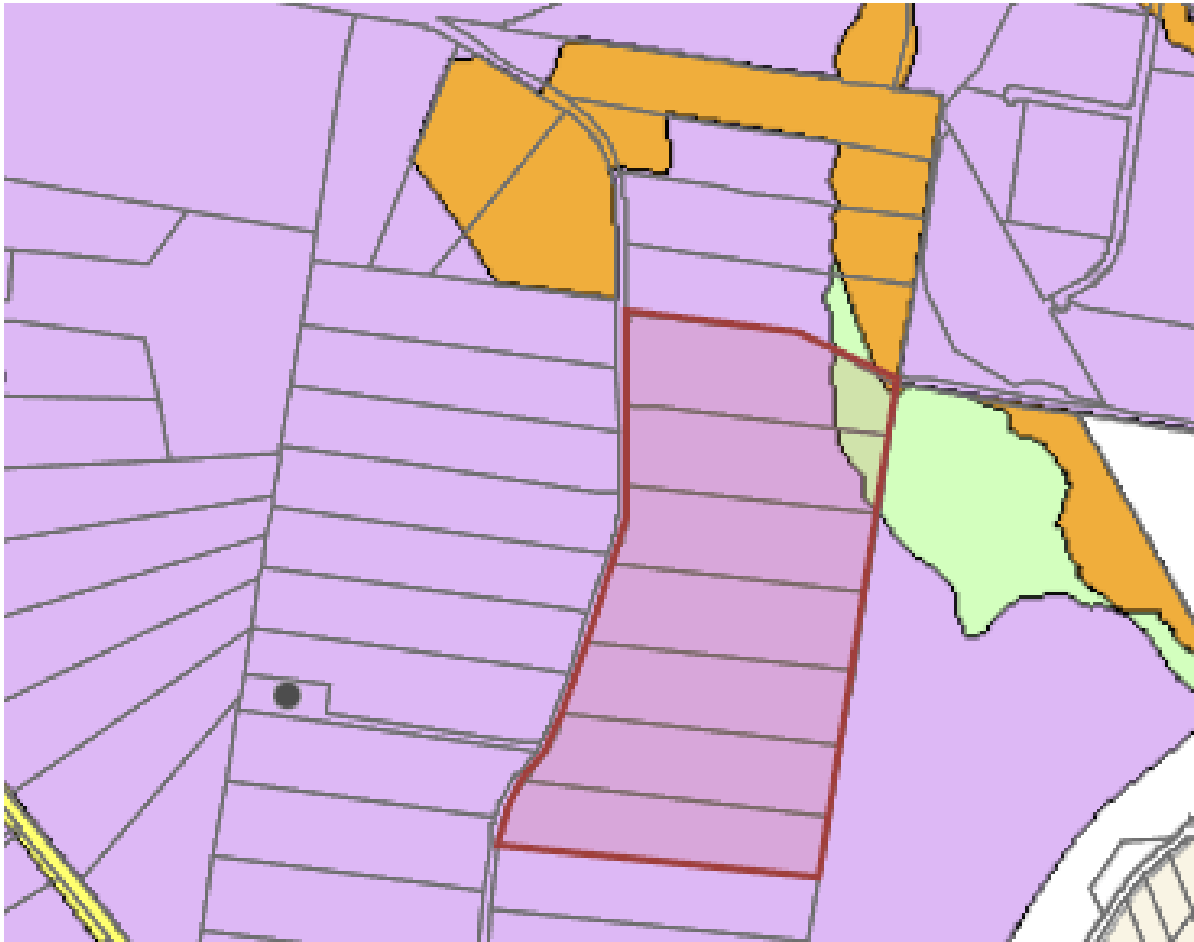


Figure 1 – Site Location

The site is bordered by Aldington Road to the west and existing rural lots to the north, east and south, some of which are subject to Development Applications. Refer to Figure 2 below for aerial image.



Figure 2 – Site Location (aerial image)

2.1. Existing Waterways and Vegetation

The site has been rezoned as IN1 land and comprises various land uses. Including RE2 and C2, with the north-eastern portion designated as non-developable. A 1st order watercourse, categorized as a tributary of Ropes Creek within the South Creek catchment, is located in the north-eastern corner. This watercourse flows in a roughly northerly direction.

2.1.1. Environmental Assessment (Narla) and Bio certification Letter (Ecological Aus)

conducted an environmental assessment that evaluates the potential environmental impacts of the proposed development and provides recommendations for mitigation and management strategies. The details of the assessment can be found in the EIS.

Ecological Aus provided details on bio certification that identified the site is certified urban capable under the Cumberland Plain Conservation Plan (CPCP). This certification concludes that development can proceed without further State or Commonwealth biodiversity approvals.

2.1.2. Farms Dams and Aquatic Habitat

Following the issue of SSDA in May 2023 the farm dams identified as 1-8 in the Riparian Assessment (Ecological, 2022) have been dewatered in accordance with the Dewatering Management Plan in the Construction Environmental Management Plan (CEMP).

2.1.3. DPI Mapping and Watercourses

The Department of Primary Industries (DPI) mapping identified two unnamed watercourses within the study area. The first watercourse, categorized as a 1st order tributary of Kemps Creek, is situated in the southern section of the site. However, no distinctive features of a waterway, such as defined bed and banks or geomorphic characteristics, were observed along the entire length of this mapped watercourse within the site. The second watercourse, also a 1st order tributary, is located in the north-eastern corner of the site. This watercourse originates upstream of the development area and flows in a roughly northerly direction.

Modification 2 as amended does not include construction of basins identified in the MRP scheme in Lot D, however the design allows for construction of these basins as part of future development, subject to a future modification application/approval.



Figure 3 Waterways – Stream order (Extract from Riparian Report, Eco Logical)

2.2. Geology and Soils

The geological composition of the area consists off Triassic age Bringelly Shale from the Wianamatta Group. The formation comprises shale, carbonaceous claystone, laminate, fine to medium grained lithic sandstone and some minor coal bands. In the north-eastern corner of the project, there are Quaternary age fluvial sediments primarily consisting of fine-grained sands, silts and clays.

The majority of the site's soils are classified as non-saline to slightly saline, with only ten samples identified as moderately saline and one as very saline, as reported by ADE. Furthermore, the soils pose no significant aggression to concrete and steel. Management controls including preparation of a Salinity Management Plan have been adopted to mitigate potential impacts of the development.

2.3. Groundwater

Groundwater was observed during investigations by Douglas Partners (2019a) in Pit 4 and Pit 11 at depths of 2.5 m (RL59.1 AHD) and 3 m (RL61 AHD), respectively. Both pits are located in the north-eastern portion of the site, adjacent to the tributary to Ropes Creek (as shown in Figure 4). It is noted that the pits and boreholes were immediately backfilled following excavation, which precluded longer term monitoring of groundwater levels. Groundwater levels are affected by factors such as soil permeability and weather conditions and can therefore vary with time.

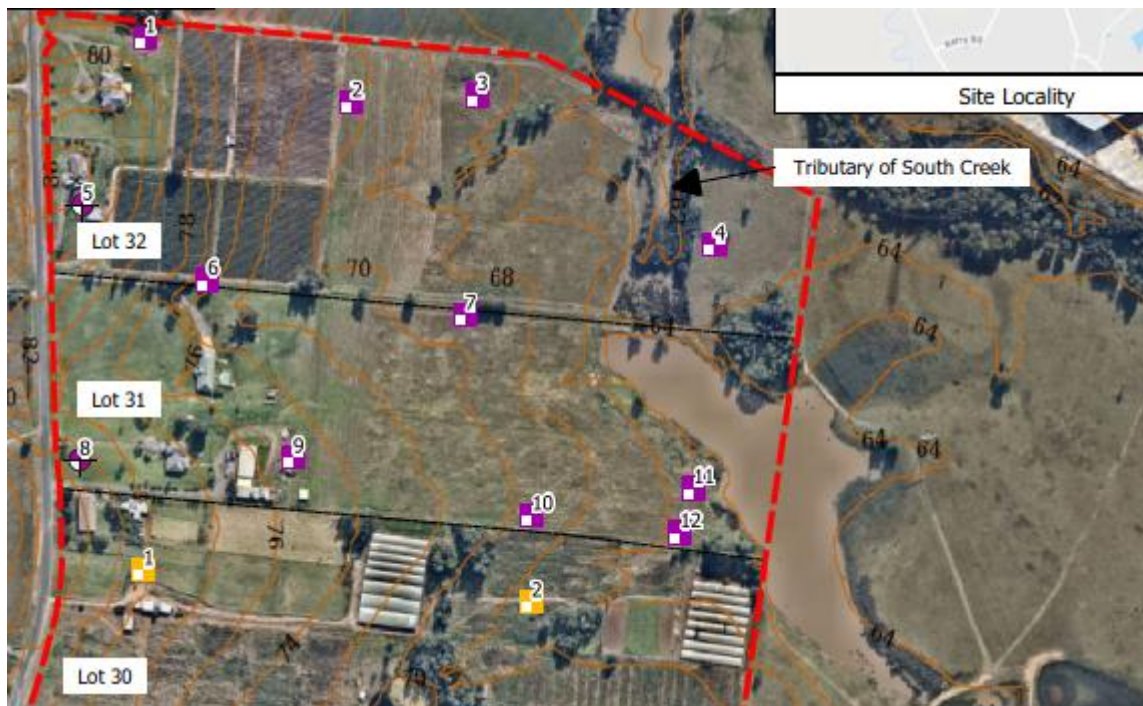


Figure 4 Test Pit locations (Extract from Geotechnical and Groundwater Summary Report, DP, 2019)

2.4. Predevelopment Catchment Delineation

Catchment delineation of the Site under pre-development conditions is presented in Figure 5.



Figure 5: Catchment delineation under pre-development conditions

Pre development the site consisted of four catchments and an external catchment west of Aldington Road that runs on to the site. Catchment 1 discharges to the south, Catchment 3 discharges to the west, Catchment 2, 4 and 5 discharge to the northeast. A summary of the internal catchments under pre-development conditions is presented in Table 1.

Table 1: Internal and external catchments under pre-development conditions

Catchment ID	Area (ha)	Description / Discharge Location
EXISTING CAT 1	19.675	Rural residential lots discharge to the neighbouring property in the south.
EXISTING CAT 2	43.162	Rural residential lots discharge to Ropes Creek by way of an unnamed tributary.
EXISTING CAT 3	5.614	Rural residential lots discharge to the west under Aldington Road.
EXISTING CAT 4	3.663	The riparian corridor in the north-eastern portion of the site no development is proposed in this area.
EXISTING CAT 5	3.669	An external catchment flows along the TransGrid easement to the south of the future northern road (within private property).
Total	72.113	Total Area excludes external catchment CAT 5

2.5. Indicative Trunk Drainage Paths

There is no change in MOD 7 to the proposed trunk drainage path within the estate, located in Lot G, as shown in Figure 6.

The MRP Integrated Stormwater Scheme Plan proposes trunk drainage paths to the north and east of Lot D. The construction of these channels in accordance with the Sydney Water scheme guidelines is dependent on adjacent landowners to the north and east of the site as these channels cross boundaries with adjacent landowners. It is anticipated these issues will be resolved with stakeholders to enable construction of the scheme plan infrastructure within the site however this would be subject to a separate planning application/approval process.

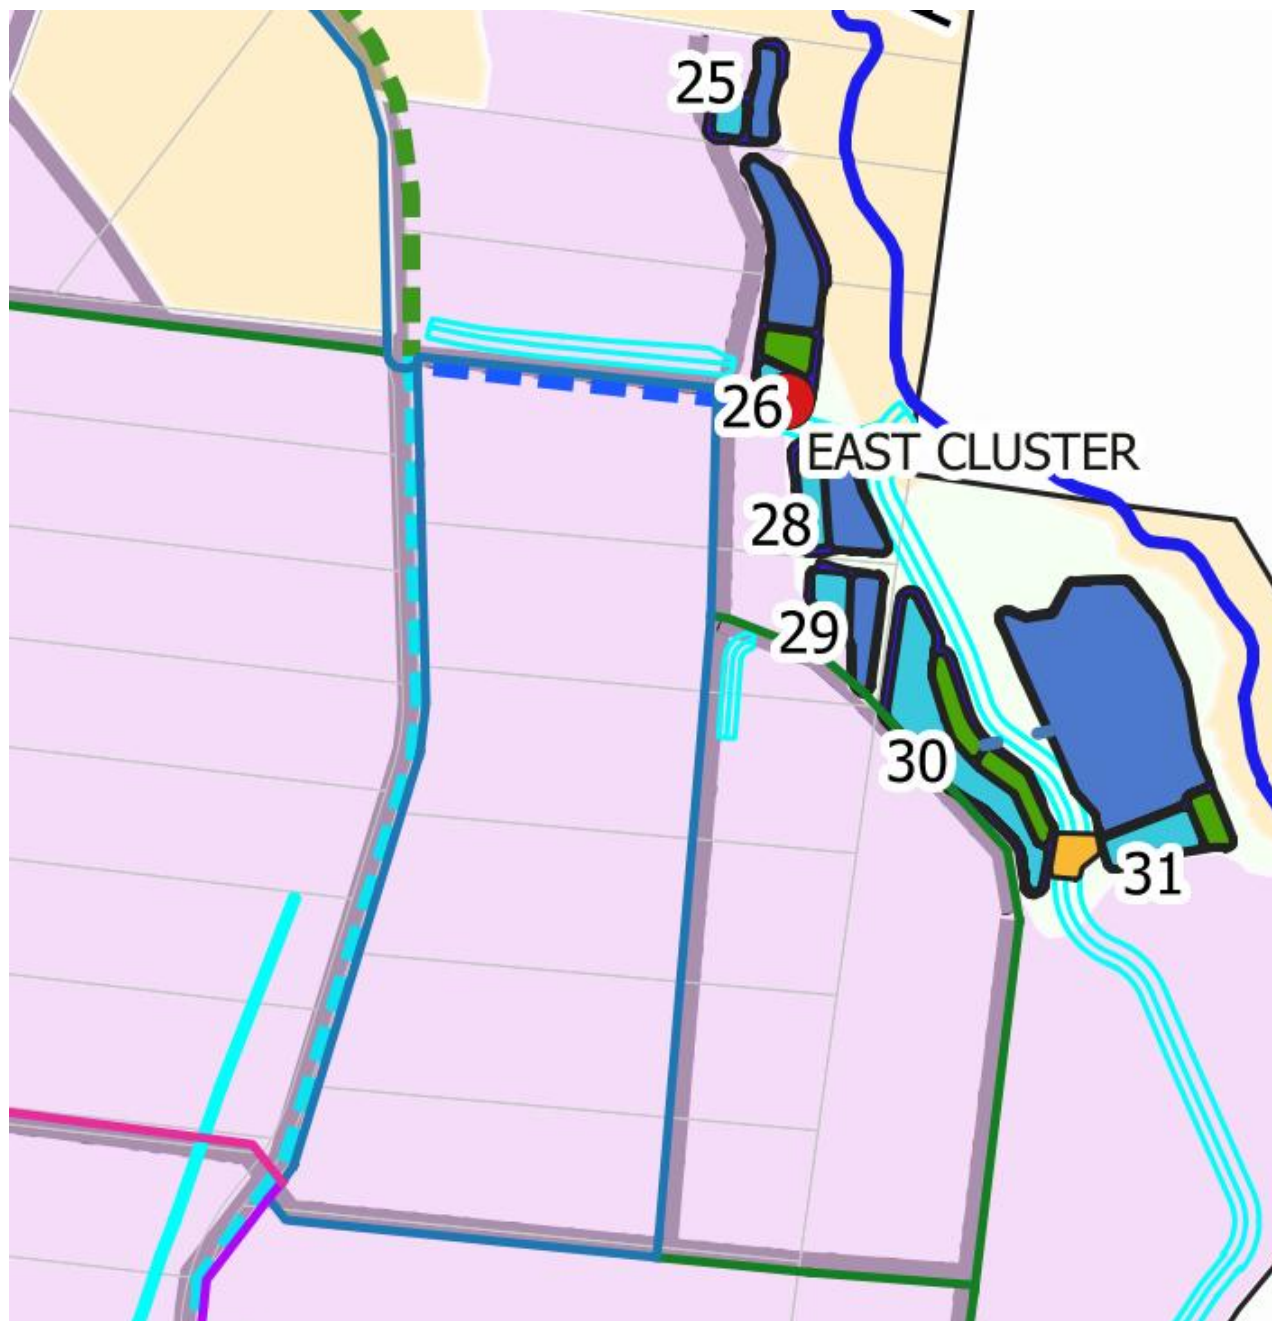


Figure 6: Mamre Road Precinct Integrated Stormwater Scheme Plan (Extract SWC May 2025)

3. Proposed Development

The proposed development comprises a warehouse and logistics estate at Lot 200 DP 1285691, Kemps Creek.

Consent has been granted under SSD-10479 for the Concept and Stage 1 (Lot F) and Lot J and Lot K developments. Development on Lot E has been lodged (as MOD 6). This MOD 7 application seeks to modify the existing consent, to be as shown in Figure 7 for Concept. This Concept development is subject to future development approvals for each of the buildings that are not yet approved. This report includes the proposed building and associated development of Lot O, which is subject to a separate SSDA application SSD-96107226 which is also considered within this report to evaluate the cumulative impact of the development of Stage 1 civil infrastructure and Lot F, Lot J, Lot K, Lot E and Lot O.

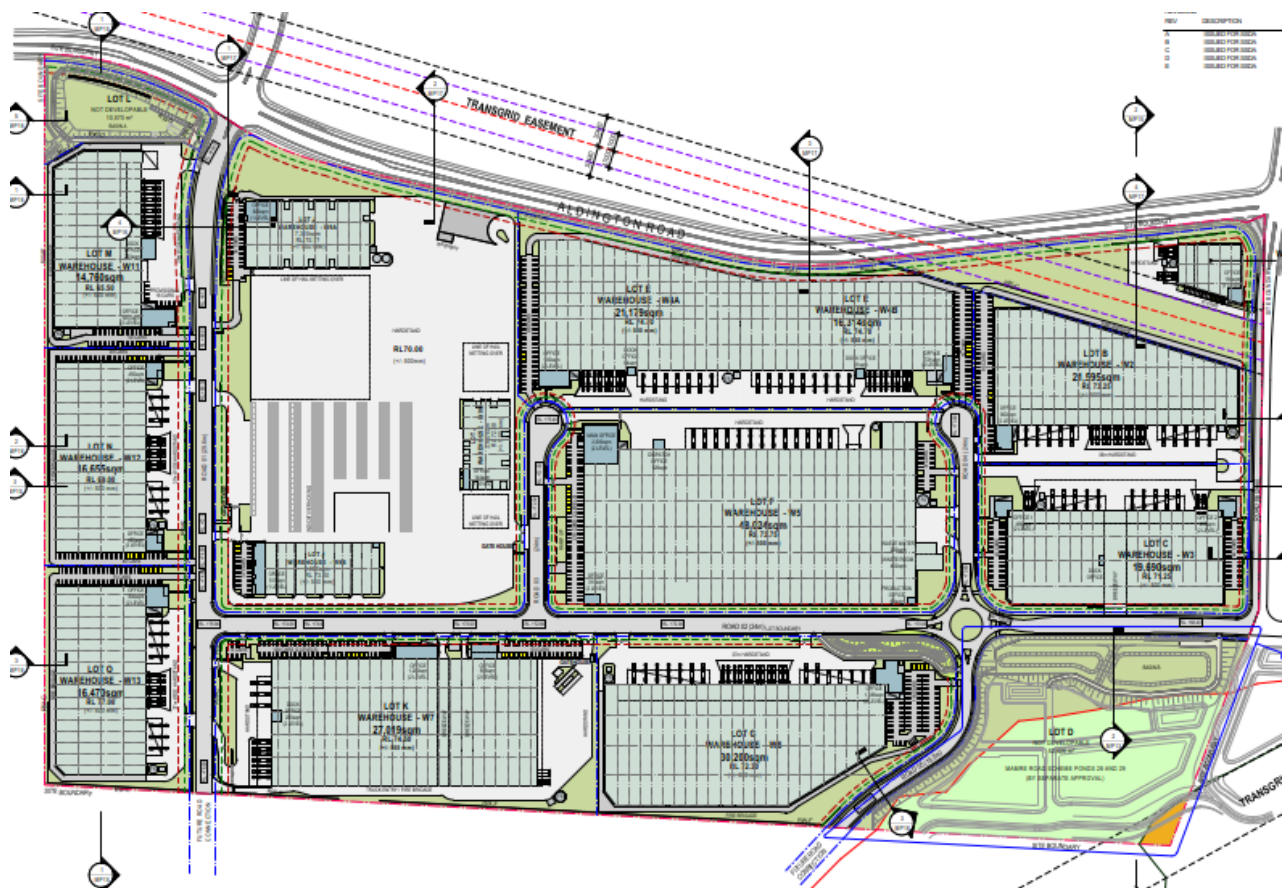


Figure 7: 200 Aldington Road Industrial Estate Proposed Concept Master Plan

3.1. Proposed Development

The previously proposed development stages of Estate civil, Lot F, J, K and E are included in Table 2.

Table 2: Proposed development (as previously approved/lodged for approval)

Element	Description
Stage 1 Estate Works	Site Preparation & Earthworks - Construction of sediment basins. - Bulk earthworks, including cut and fill, road grading and boxing, benching and stabilisation (batters and/or retaining walls). Road Infrastructure - Staged construction of internal estate road network and connection to Aldington Road for primary site access. Stormwater Infrastructure - Staged construction of stormwater drainage, stormwater quality improvement and runoff volume reduction infrastructure. - Construction of two on-site stormwater detention (OSD) basins. One at the northern end of the estate and the other at the southern end of the estate. - Sediment pond within Basin A (interim stormwater measure) - Storage/harvesting pond on Lot N (interim stormwater measure) - Storage pond within Basin B (interim stormwater measure) - Irrigation on undeveloped lots Utilities and Services - Construction of utility service infrastructure to provide water, sewer, electricity, and telecommunications services within the site.
Stage 1 – Development (Lot F)	On Lot Works via MOD 4 - On-lot earthworks to establish site grading and final building pad for Warehouse. - On-lot stormwater, utility infrastructure and services connection. - Site-specific landscaping, signage, and public domain works such as footpaths, street trees and internal site landscaping. - Construction of Lot F (7.84 ha) comprising 5.62ha of roof area consisting of a warehouse and offices, 1.34ha of hardstand and 0.88ha of landscape.
Lot J	On Lot Works via MOD 2 and SSD 61212208 - On-lot earthworks to establish site grading and final building pad for Warehouses. - On-lot stormwater, utility infrastructure and services connection. - Site-specific landscaping, signage, and internal footpaths and landscaping. - Construction of Lot J (12.93ha) comprising 1.84 ha of roof area (W9A,B, C), including offices, gate houses and washbay, hardstand and carparking of 9.15ha.
Lot K	On Lot Works Via MOD 5 and SSD 80264236 - On-lot earthworks to establish site grading and final building pad for Warehouse. - On-lot stormwater, utility infrastructure and services connection. - Site-specific landscaping, signage, and internal footpaths and landscaping. Construction of Lot K (6.21ha) comprising 3.37 ha of roof area including offices, gate house, and hardstand / carparking of 2.07ha
Lot E	On Lot Works via MOD 6 and SSD88510213 - On-lot earthworks to establish site grading and final building pad for a Warehouse. - On-lot stormwater, utility infrastructure and services connection. - Site-specific landscaping, signage, and internal footpaths and landscaping. Construction of Lot E (6.83ha) comprising 4.55 ha of roof area including offices and hardstand / carparking of 1.71ha.

3.2. Development of Lot O (SSDA 96107226)

The proposed Lot O development incorporates key components described in Table 3.

Table 3: Proposed Lot O Works

Element	Description
Development (Lot O)	On Lot Works - On-lot earthworks to establish site grading and final building pad for a Warehouse. - On-lot stormwater, utility infrastructure and services connection. - Site-specific landscaping, signage, and internal footpaths and landscaping. - Construction of Lot O (3.14ha) comprising 1.46ha net GFA (1.76 ha of roof /awning area) including offices, hardstand / carparking of 0.95ha (incl road cul de sac area within Lot O).

A plan showing the extent of works under now proposed is presented in Figure 8. This stormwater management plan demonstrates compliance with the DCP for these works.

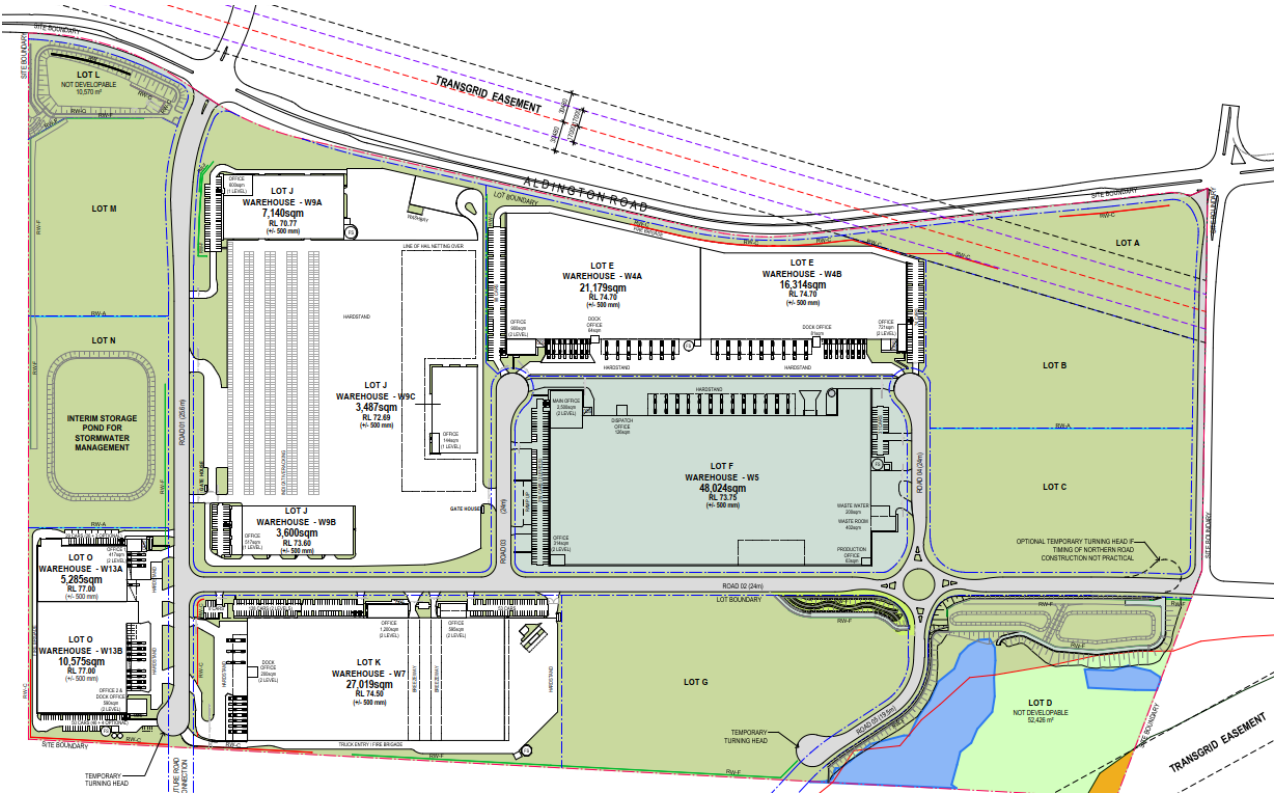


Figure 8: Proposed Lot F, J, K, E and O Development Plan

3.3. Post development Catchment Delineation

Catchment delineation of the site under post-development conditions is presented in Figure 9.



Figure 9: Catchment delineation under post-development conditions

The development site is split into three catchments and an external catchment that runs on to the site. Catchment 1 discharges to the south, Catchment 6 discharges to Aldington Road (land to be dedicated to PCC as road, as part of the Aldington Road Upgrade works), Catchment 2, 4 and 5 discharge to the northeast. A summary of the internal catchments under pre-development conditions is presented in Table 4.

Table 4: Internal and external catchments under post-development conditions

Catchment ID	Area (ha)	Description / Discharge Location
CAT 1	28.26	Road 01 and Lots J - O conveyed to Basin A which outlets to a culvert and channel on the southern property.
CAT 2	39.02	Roads 02 – Road 05, 50% of Future Northern Road, trunk drainage and Lots A – Within this catchment there is a split between discharge via the trunk drainage channel (and in future wetland 30) and discharge to Basin B which outlets to wetland 28 and 29 and future trunk drainage channel.
CAT 3	-	Formerly catchment 3 in predevelopment. No longer considered an independent catchment.
CAT 4	4.19	The riparian corridor in the north-eastern portion of the site. This is the site of proposed wetlands and ponds to be designed and constructed in general accordance with the Sydney Water MRP SWS.
CAT 5	3.67	An external catchment flows north via the proposed drainage network on Aldington Road then east via the trunk drainage channel in Lot 90 (to the north), and then discharges into the proposed trunk drainage channel east of the Road 02. This future natural trunk drainage channel is proposed to be constructed in conjunction with wetland /pond 28 and 29 (subject to approval).
CAT 6	0.65	Land to be dedicated to PCC for the widening of Aldington Road (excl those included in CAT 2 and CAT 3 areas)
Total	72.13	Total Area excludes external catchment CAT 5

Internal catchments within the Site are directed via a network of stormwater drainage infrastructure towards estate-based stormwater management measures, consisting of:

- The sediment basins and ponds will treat stormwater runoff prior to reuse (irrigation or other beneficial use) and / or discharge from the Site.
- Two on site detention basins (OSD) (Basin A and Basin B) are designed to attenuate peak flows as required by the Mamre Road Precinct DCP. These basins are designed for the Concept Development, with development of all developable lots. Further details of the proposed basins are outlined in Section 5.2.2.

The northern catchments contributing to each of the proposed Sydney Water wetlands is depicted in Figure 10, an extract from SKC194 (appendix B), this catchment layout is consistent with the scheme MUSIC model supplied by Sydney Water 1 May 2025.

MOD 7 does not propose any changes to the northern catchment stormwater management plan. Although it does propose to irrigate to undeveloped land in the northern catchment.

The design remains consistent with the most current SSD10479 Condition of Consent D27 (c) which specifies the stormwater management system design must :

(c) be consistent with the latest Sydney Water Scheme Plan and Basin design, unless otherwise agreed with the Regional Stormwater Authority;

The distribution of flow to wetlands 28 and 29 is via control structures located within Basin B.

The southern catchments will contribute to the proposed MRP Stormwater Scheme regional infrastructure basin 13 located west of Mamre Road as shown in Figure 11.

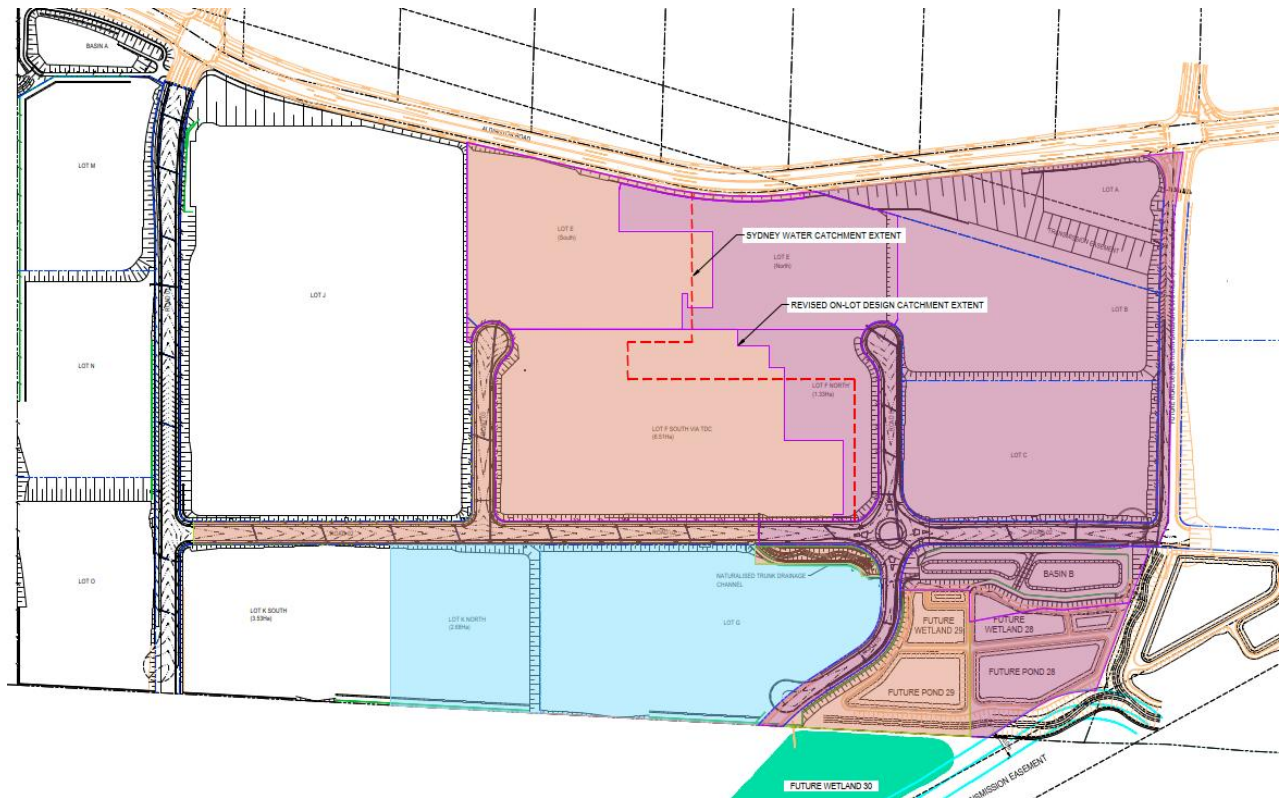


Figure 10: Post Development Northern Catchment to MRP Scheme Basins 28, 29 and 30 (extract of SKC194)

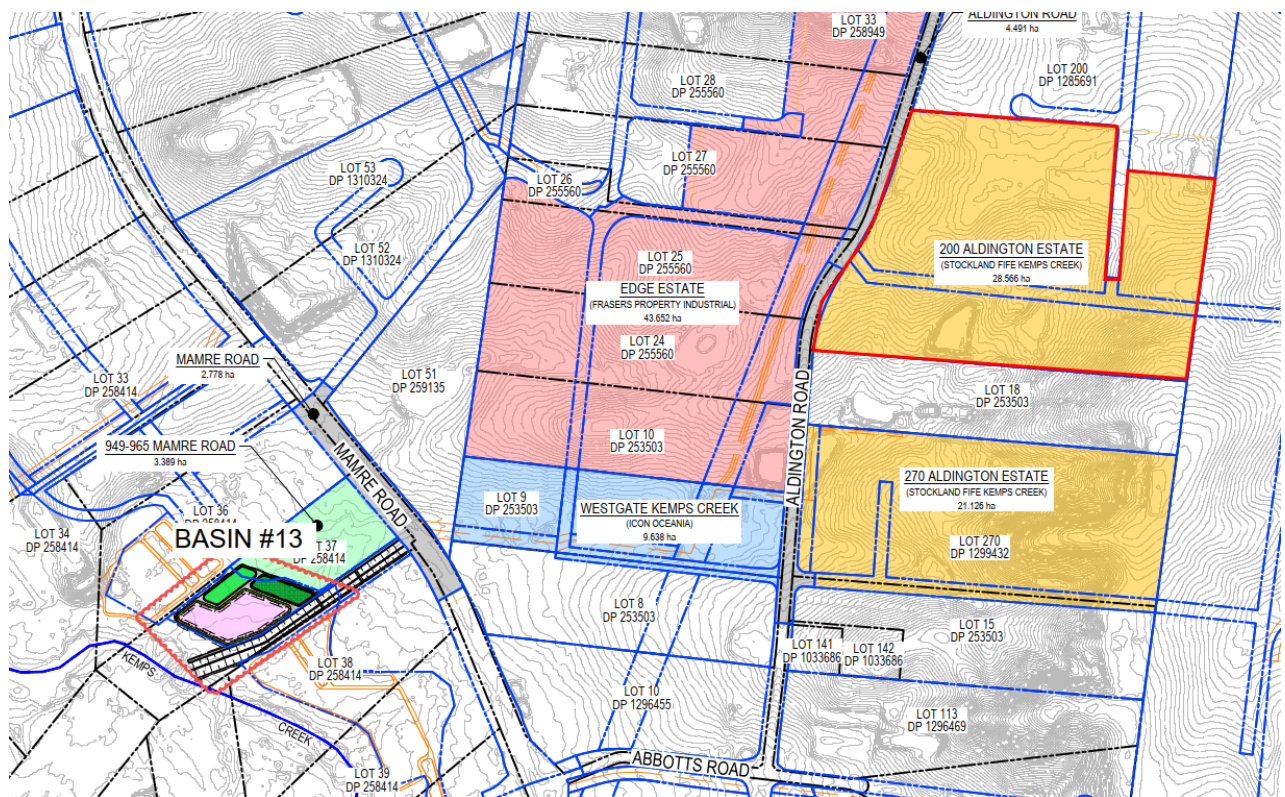


Figure 11: Post Development Southern Catchment to MRP Scheme Basin 13

Table 5: Summary of Lots, Regional Infrastructure catchments and cumulative development areas (ha)

Stage	Lot #	Lot Area (ha)	Cumulative Developed Lot area (ha)	Interim SW scheme	Catchment (North/South)	Regional Infrastructure catchment/basin
1	F	7.84	7.84	Y	N	28 and 29
2	J	12.93	20.77	Y	S	13
3	K	6.21	26.98	Y	S/N	30
	E	6.83	33.81	Y	N	28 and 29
	O	3.14	36.95	Y	S	13
	M	2.84	39.79	N	S	13
	N	3.08	42.87	N	S	13
	G	5.81	48.68	N	N	30
	A	2.63	51.31	N	N	28
	B	3.56	54.87	N	N	28
	C	3.88	58.75	N	N	28

Red text – subject of this report – additional proposed development

Grey text –Development not yet proposed / not proposed at time of operation of Lot O.

3.4. Water Sources and Demands

There are no changes to water sources proposed by this application or modification, the lot will be connected to the potable and recycled water network reticulation network within the estate.

3.5. Connection to Sydney Water Future Stormwater Infrastructure

3.5.1. Treatable flows to future wetlands

The ultimate stormwater management solution for the site is to connect to the Sydney Water MRP SSP.

The development Lot O does NOT change any part of the drainage infrastructure in the ultimate scheme from that proposed under MOD 5.

There are no changes to the alignment or pipe connections associated with the trunk drainage in Lot G and retains the invert level of the connections to Basins 28, 29 and 30. The location of the future discharge to Basin 28 and 29 align with the concept design prepared for the future basins (not included in this modification).

There is no change proposed to catchments contributing to each of the wetlands/basins in Ropes creek (Figure 12 and SKC194) these reflect the MRP scheme plan and MUSIC model provided by Sydney Water on 1/05/2025 and nominated in Table 6.

Table 6: Catchment contribution to MRP Scheme Wetland/basins (Ropes Creek) – May 2025

Wetland /basin ref #	Total Catchment Area to Wetland	Local Catchment Area to Wetland	Local – Total Catchment Ratio	EDD level (mAHD)	Treatable flow rate ² (m ³ /s)	Proportional reduction in treatable flow rate (m ³ /s)	Location of discharge
28	20.31	20.28 ³	1.0	63.48	2.843	2.843	Basin B
29	14.16	14.19 ³	1.0	64.21	3.864	3.864	Basin B
30	63.94	8.20	0.13	65.16	3.320	0.432	Low flow pipe from trunk drainage channel

1. MRP Scheme MUSIC model (1/5/25) identifies the catchment area for wetlands 28 + 29 both via controlled discharges from Basin B.

2. Treatable flow rate for the full contributing catchments (based on MRP Scheme MUSIC model provided by SWC on 1/5/25).

3. Local catchment includes wetland/pond direct catchment

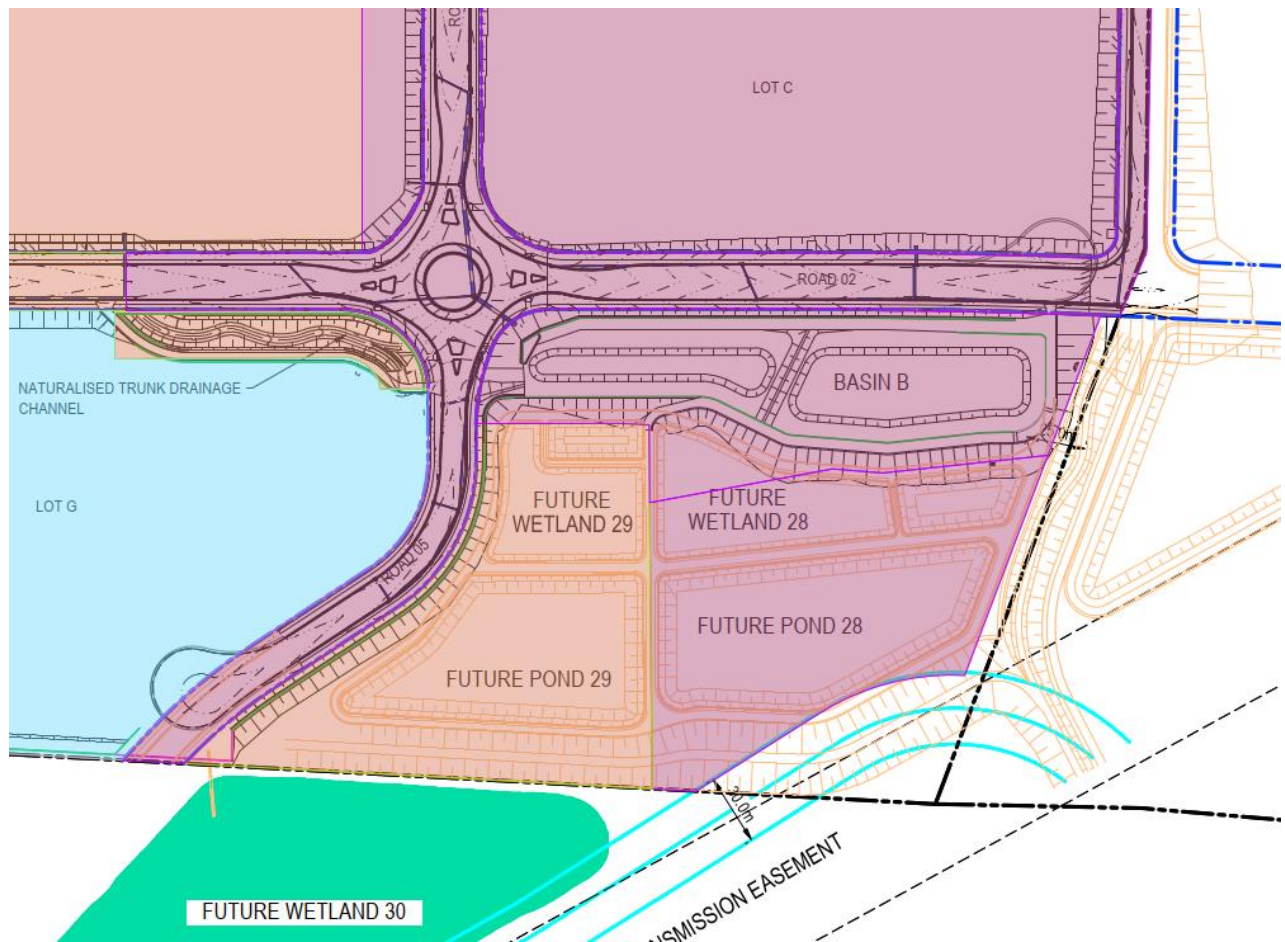


Figure 12 Concept layout of Sydney Water MRP Stormwater Scheme basins 28, 29 and 30

3.5.2. Basin 28 and Basin 29

The Basin B outlet design provides connection to future stormwater infrastructure, to enable the diversion of necessary flows to Basins 28 and 29 (Figure 12 and drawing C1124) for treatment by Sydney Water and ensure that the wetlands receive adequate flows above the EDD for effective treatment and ecological health.

To accomplish this, Basin B (Figure 13) has been divided into two separate but interconnected systems using an internal weir. This division allows for the creation of sufficient driving head or pressure difference between the two systems. The driving head is essential to meet the flow rates required by Sydney Water. By managing the flow through the interconnected systems, the outlets can generate the necessary head to direct the stormwater flows to Wetland 28 and Wetland 29.

Flows in excess of the treatable flow rates for Wetland 28 and Wetland 29 will discharge from Basin B directly to the future trunk drainage channel to the north of Basin B. Refer to Section 5.2.2 for additional information regarding the attenuation of flows in Basin B.

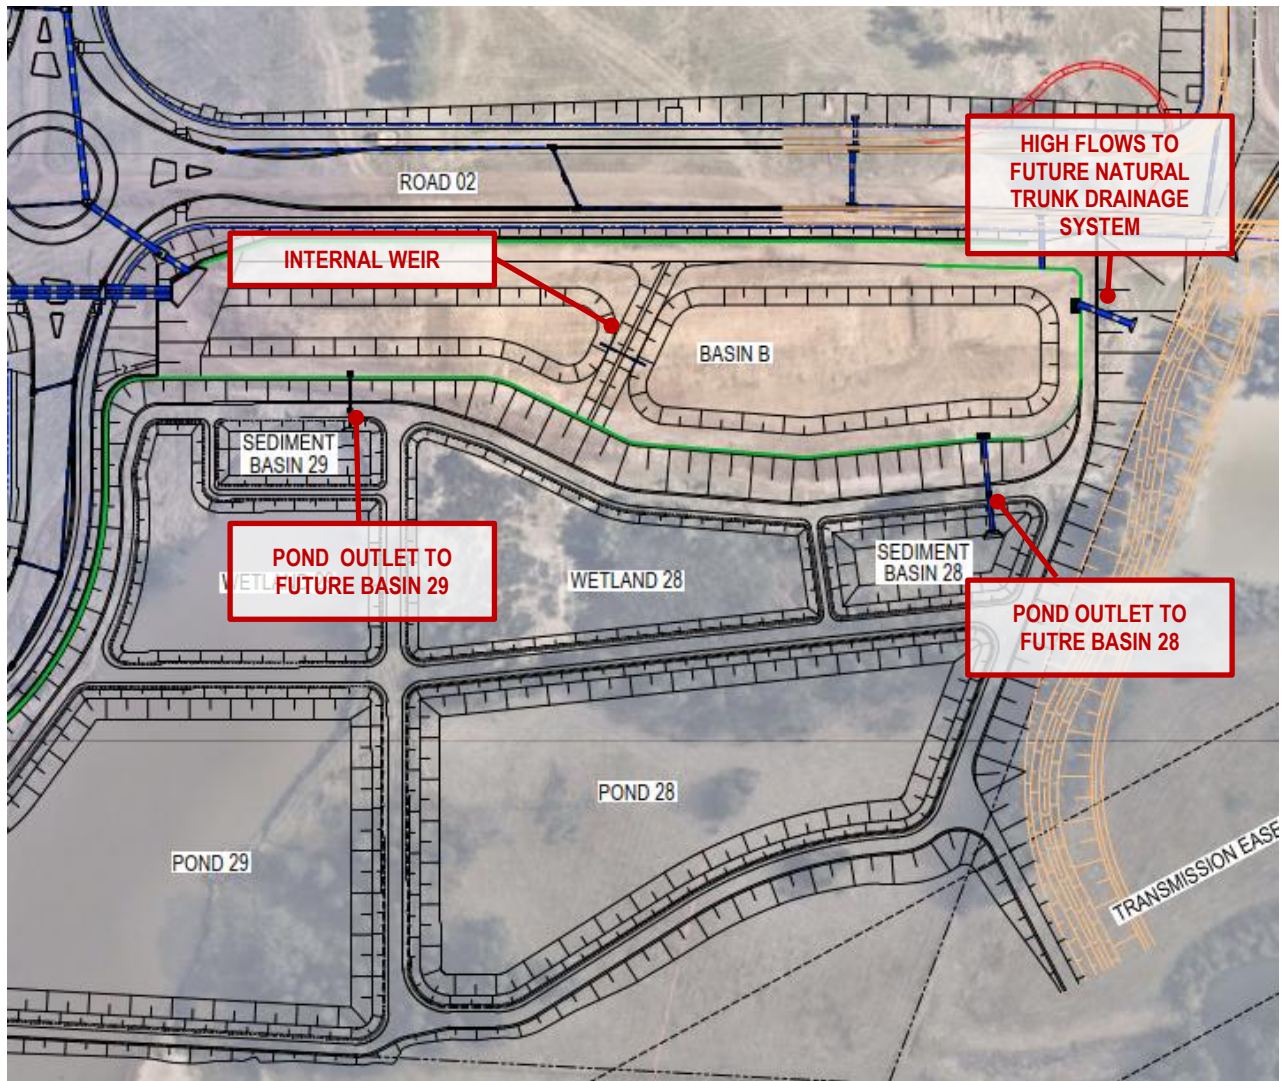


Figure 13: Wetland 28 and 29 Diversion system (based on concept basin design).

3.5.3. Wetland 30

A low flow diversion pipe has been designed to redirect low flows to Sydney Water Wetland 30 in the future. During the interim period (prior to construction of basin 30, by others), this low flow diversion pipe will be capped at the upstream end with a non-return flap valve to prevent water from entering the system. This temporary measure ensures that all flows are directed towards the OSD Basin (Basin B) located on Lot D.

Once the construction of Wetland 30 is completed, the cap on the low flow diversion pipe will be removed to direct the treatable flow to Wetland 30. Additionally, a cap will be retrofitted to the high flow structure connected to the OSD Basin B. This modification will allow water to be diverted to the low flow pipe, enabling the desired functioning of the proposed Wetland 30. Refer Figure 14 for further information.

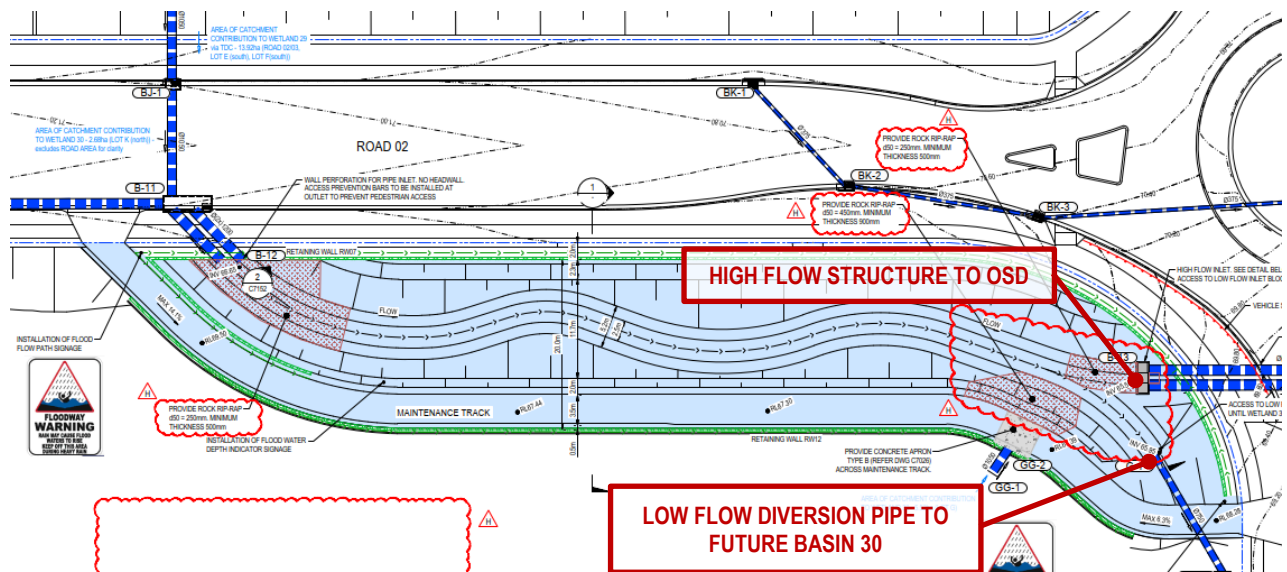


Figure 14: Diversion system to Basin 30 (refer 19-609 C1151 for details).

4. Stormwater Targets

The Mamre Road Precinct DCP establishes the construction and operational phase stormwater quality and quantity (flow) targets for the Site. This Stormwater Management Report addresses operational phase targets only. Construction phase targets are addressed in the separate Erosion and Sediment Control Plan prepared by a CPESC. There is a separate ESCP for each of the on-lot developments, prepared by a CPESC. These ESCPs address construction phase water management requirements for the on-lot runoff prior to completion of building works and stabilisation of the lots.

For the operational phase targets there are two options available for stormwater quality and two options available for stormwater flow. Stormwater quality targets for Option 1 (annual load reduction) and Option 2 (allowable loads) are summarised in **Table 7**.

Table 7: Operational phase stormwater quality targets – Options 1 and 2

Parameter	Option 1 Target (reduction in mean annual load from unmitigated development)	Option 2 Target (allowable mean annual load from development)
Gross pollutants (anthropogenic litter >5mm and coarse sediment >1mm)	90%	< 16 kg/ha/yr
Total suspended solids (TSS)	90%	< 80 kg/ha/yr
Total phosphorus (TP)	80%	< 0.3 kg/ha/yr
Total nitrogen (TN)	65%	< 3.5 kg/ha/yr

Stormwater quantity (flow) targets for Option 1 (mean annual runoff volume) and Option 2 (flow percentiles) are summarised in **Table 8**.

Table 8: Operational phase stormwater quantity (flow) targets – Options 1 and 2

Parameter	Option 1 Target (MARV)	Option 2 Target (flow percentiles)
Mean annual runoff volume (MARV)	≤ 2 ML/ha/yr at the point of discharge to the local waterway	n/a
95%ile flow (L/ha/day at the point of discharge to the local waterway)	n/a	3000 – 15000
90%ile flow (L/ha/day at the point of discharge to the local waterway)	1000 – 5000	1000 – 5000
75%ile flow (L/ha/day at the point of discharge to the local waterway)	n/a	100 – 1000
50%ile flow (L/ha/day at the point of discharge to the local waterway)	5 – 100	5 – 100
10%ile flow (L/ha/day at the point of discharge to the local waterway)	0	n/a
Cease to flow	n/a	Between 10% to 30% of the time

The Mamre Road Precinct DCP requires On site detention (OSD) be provided to ensure no increase in 50% and 1% AEP peak storm flows at the Precinct boundary or at Mamre Road culverts. OSD design is to compensate for any local roads and/or areas within the development site that does not drain to OSD.

5. Water Sensitive Urban Design Strategy

The Water Sensitive Urban Design (WSUD) Strategy for the development incorporates a series of management measures to address stormwater quality, quantity (peak flow attenuation) and flow volume.

5.1. Strategy Overview

This WSUD Strategy has been developed for the development staging. The key elements of this Strategy are presented on 19-609-SKC228 and satisfy the stormwater quality, quantity (peak flow) and flow volume controls presented in Section 4.

5.1.1. Stormwater Quality and Flow Management Measures

The proposed measures to address the operational stormwater quality and flow targets for the proposed stages are summarised in Table 9 Interim strategies are applicable for the period the MRP Stormwater Scheme is not fully operational.

In the northern catchment – sources and treatment there is no change resulting from Mod 7, to that proposed in MOD 6.

In the southern catchment there is a change to the interim stormwater measures resulting from the proposed extra development on Lot O.

Table 9: Summary of measures to address stormwater quality and flow management targets for proposed stages of Development

200 Aldington Road Kemps Creek Development Stages/Lots	Developed area incl Roads (ha)		Stormwater measures (MRP DCP operational stormwater mgmt. controls)									
			GPTs	OSD	Sediment pond and storage basins with temporary irrigation		Temporary Irrigation area required (ha) (by source)			Regional Infrastructure - constructed		SSA utilisation (ref 5.2.6)
Catchment	Northern	Southern			Northern	Southern	Northern	Southern	Total	Northern	Southern	Northern
Estate Infra and Lot F + Lot F - SSD-10479 MOD 4	Lot F 7.84ha Roads 4.65 ha Total 12.49ha	Roads 1.95ha Total 1.95ha	+ Lot F	Estate OSD	Sediment pond and storage in Basin B on Lot D	Sediment pond (in Basin A) and storage on Lot M	2			N/A	N/A	N/A
Lot J • Civil Infra and Lot F - SSD-10448 MOD4 + Lot J - SSD-10479 MOD2 / SSD 61212208	Lot F 7.84ha Roads 4.65 ha Total 12.49ha	Roads 1.95ha Lot J 12.93ha Total 14.88ha	• Lot F + Lot J	Estate OSD	Sediment pond and storage in Basin B on Lot D	Sediment pond (in Basin A) and storage on Lot M	2	4		N/A	N/A	N/A
LOT K • Civil Infra and Lot F - SSD-10448 MOD4 • Lot J - SSD-10479 MOD2 / SSD 61212208 + LOT K - SSD-10479 MOD5 and SSD-80264236	Lot F 7.84ha Roads 4.65 ha Lot K 2.68ha Total 15.17ha	Roads 1.95ha Lot J 12.93ha Lot K 3.53ha Total 18.41ha	• Lot F • Lot J + Lot K	Estate OSD	Sediment pond and storage in Basin B on Lot D	Sediment pond (in Basin A) and storage on Lot M	3.0	6.72	9.72	N/A	N/A	N/A
LOT E • Civil Infra and Lot F - SSD-10448 MOD4 • Lot J - SSD-10479 MOD2 / SSD 61212208 • LOT K - SSD-10479 MOD5 and SSD-80264236 + Lot E - SSD10479 MOD 6 and SSD-85510213	Lot F 7.84ha Roads 4.65 ha Lot K 2.68ha Lot E 6.83ha Total 22.00ha	Roads 1.95ha Lot J 12.93ha Lot K 3.53ha Total 18.41ha	• Lot F • Lot J • Lot K + Lot E	Estate OSD	Sediment pond and storage in Basin B on Lot D	Sediment pond (in Basin A) and storage on Lot N	3.0	9.17	12.17	Basins 28 and 29 on Lot D	N/A	6.83ha
LOT O • Civil Infra and Lot F - SSD-10448 MOD4 • Lot J - SSD-10479 MOD2 / SSD 61212208 • LOT K - SSD-10479 MOD5 and SSD-80264236 • Lot E - SSD 10479 MOD 6 and SSD-85510213 + Lot O - SSD- 96107226	Lot F 7.84ha Roads 4.65 ha Lot K 2.68ha Lot E 6.83ha Total 22.00ha	Roads 1.92ha Lot J 12.93ha Lot K 3.53ha Lot O 3.14ha Total 21.52ha	• Lot F • Lot J • Lot K • Lot E • Lot O	Estate OSD	Sediment pond and storage in Basin B on Lot D	Sediment pond (in Basin A) and storage on Lot N	3.0	15	18.0	Basins 28 and 29 on Lot D	N/A	6.83ha

Black text new for MOD referenced.

Stormwater measures approved under previous applications shown in green.

Civil & Structural Engineers | Project Managers | Water Servicing Coordinators

5.1.2. Stormwater Quantity Management Measures

Two detention basins are proposed within the Estate to satisfy the stormwater quantity targets for the Site. The OSD is permanent and independent of the interim and ultimate Operational Stormwater Management Requirements of the MRP DCP.

A summary of onsite detention (OSD) information is provided in **Table 10**.

Table 10: Summary of onsite detention measures.

Basin Name	Base Area (m ²)	Top Area (m ²)	Basin Depth (m)	Volume (m ³)
Basin A (southern catchment)	892 (Sloped base)	6,500	2.05	11,433
Basin B (northern catchment)	8,500	10,500	1.0	8,220

Further details of these basins are provided in **Section 5.2.2**

5.2. Proposed Water Management Measures

A general description of the proposed stormwater treatment train components is presented in the following sections. Some of these measures are interim and temporary and only required until the Sydney Water MRP Stormwater Scheme is operational. The exceptions are gross pollutants traps (GPTs) and onsite detention (OSD) which are required in the interim and ultimate scenarios. OSD is not included in the MRP Stormwater Scheme. The MUSIC node catchments and proposed stormwater management measures are shown in Figure 15 and appended SKC0228.

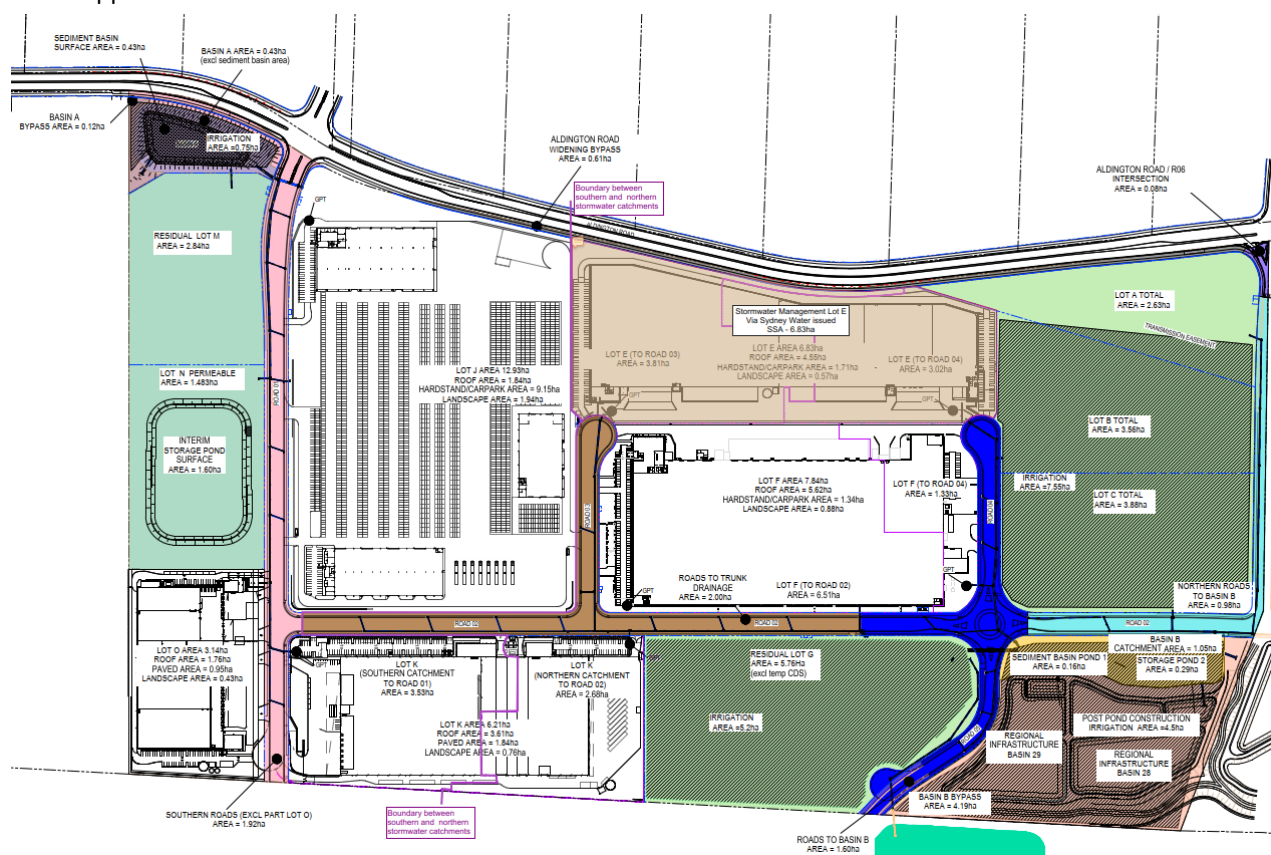


Figure 15 Interim Stormwater management measures – (extract SKC228 for MOD7)

5.2.1. GPTs

The proposed stormwater treatment train will consist of on-lot Gross Pollutant Traps (GPTs) as a means of primary stormwater treatment. GPT's will be delivered on each lot prior to stormwater discharge to the estate-wide stormwater drainage network to capture litter, debris, coarse sediment, as well as some oils and greases.

A high-flow bypass for the GPTs would nominally be equivalent to the 4 EY (3-month ARI) peak flow rate discharging to the GPT. Design flows for the GPTs and their final configuration would be confirmed at the detailed design phase.

5.2.2. On-site Stormwater Detention (OSD) Design Parameters

OSD is required within the development to mitigate post developed flows to pre-developed flow rates for design storm events between the 50% AEP event and the 1% AEP event. Two OSDs are proposed service the full concept master plan development.

The following constraints have been applied to ensure consistency with the technical guidance requirements:

- On-site stormwater detention is designed in accordance with the relevant approval or consent authority requirements.
- Extended detention volume for the treatment system is not included in on-site detention volume (i.e. is assumed to be full, prior to the storm event).
- On-site detention volume is not part of the extended detention of the WSUD measure (i.e. on-site detention volume is not considered in the MUSIC modelling for the WSUD measure).

Key parameters adopted for the OSD are summarised below in Table 11.

Table 11: OSD Basin parameters

Parameter	Southern catchment OSD Basin A MOD 7 (no change to MOD 2)	Northern catchment OSD Basin B MOD 7 (no change to MOD 2)
Inflow from:	Lot J, K (south), M, N, O	Lot A, B, C, E, F, G, K (north)
Base Surface area (m ²)	892 (Tapered base)	8,500
Top Surface area (m ²)	6,500	10,500
Depth (m)	2.05	1.0
Volume (m ³)	11,433	8,220
Outlet Interim	Trunk Drainage Channel (south) via BAPS	Existing retained farm dams
Outlet Ultimate	Trunk Drainage Channel (south) via BAPS	Natural Trunk Drainage Channel (north), Basin 28, 29

5.2.3. Interim sediment ponds

To manage the quality of runoff sediment basins are provided to trap sediment prior to the storage ponds.

In the **southern catchment** a sediment basin is provided in the base of Basin A which has been configured to trap sediment prior to pumping to the storage pond on undeveloped land in Lot N. Low flows are directed to the storage pond via a pump arrangement with a floating intake to allow for the sediment build up below. The moderate and high flows outlets from Basin A continue to operate as in the ultimate design.

The cover blocking the low flow discharge will be removed in the ultimate design (when the MRP Stormwater Scheme is operational). An above ground pump/pipe network will take water from the surface of Basin A to the storage pond on undeveloped land to the east (Lot N), for storage prior to reuse/irrigation. This interim design provides for stage 1 (civil infrastructure and Lot F), Lot J, Lot K (south) and Lot O development.

There is sufficient OSD storage above the level of the sediment pond within Basin A. The volume below the extended detention depth is excluded from OSD volumes.

In the **northern catchment** pond 1 within Basin B will be utilised as a sediment basin prior to discharge into pond 2 which is utilised as storage, prior to irrigation.

Table 12: Sediment Pond parameters (interim measures)

Parameter	Northern Catchment Sediment Pond 1 within Basin B	Southern Catchment Sediment Pond within Basin A
Surface area (m ²)	1,635	4,342
Permanent pool volume (m ³)	654	2,411
Exfiltration rate (mm/hr)	0	0
Evaporation loss (% of PET)	125	125
Extended detention depth (m)	0.40	0.65
Low Flow Outlet (equivalent pipe diameter)	225	600

5.2.4. Interim Storage Ponds for harvesting and reuse

Storage ponds can capture and store large quantities of stormwater runoff, while also being relatively easy to maintain. Key parameters adopted for the storage pond areas, is summarised below in **Table 13**. These ponds will only be required as an interim measure to satisfy the stormwater flow volume targets, until the Mamre Road Precinct Integrated Stormwater Management Scheme is operational.

These interim ponds will provide for Lot F, Lot J, K and O and will be maintained until not required.

Northern Catchment

In the northern catchment an area below the base level of the OSD provided in Basin B (pond 2), will be used to store stormwater for irrigation, thereby reducing runoff volume from the site.

Southern Catchment

In the southern catchment a pond will be constructed on undeveloped land within Lot N to store water for irrigation to manage the runoff volume from the site.

MOD 7 includes a change to the interim storage pond (from MOD 5) in the southern catchment to change the size of the pond and location of the pond, and is consistent with MOD 6, with additional irrigation area.

Table 13: Interim Storage /Harvesting Pond parameters

Parameter	Northern Catchment Storage Pond 2 within Basin B	Southern Catchment Storage Pond within (Lot N)
Inflow from:	Lot A, B, C & G (undeveloped), Lot E developed (via SSA) Lot F & Lot K (north) (developed)	Lot M & N (undeveloped) Lot J , O & K (south) (developed)
Surface area (m ²)	2,937	16,000
Permanent pool volume (m ³)	2,630	13,000
Exfiltration rate (mm/hr)	0	0
Evaporation loss (% of PET)	125	125
Extended detention depth (m)	0.30	0.10
Low Flow Outlet (equivalent pipe diameter)	300	50
Reuse Rate (mm/ha/yr)	600 ^[2]	600 ^[2]
Adopted reuse (m ³ /yr)	18,000 ^[1]	90,000 ^[1]
Area required for irrigation (ha)	3.0	15.0

[1] Applied to undeveloped area

[2] Applied as Monthly Pattern as per MUSIC Modelling Toolkit, not at 50% as 100% of undeveloped area can be irrigated.

Red text identifies changes in MOD 7 since MOD 6

5.2.5. Reuse

The interim ponds and associated reuse systems will incorporate a series of measures to demonstrate ongoing compliance with the stormwater flow controls and to mitigate potential risks associated with stormwater harvesting and reuse. The design and operation of these systems will comply with the principles and guidance outlined in the [Australian Guidelines for Water Recycling: Managing Health and Environmental Risks \(Phase 2\); Stormwater harvesting and reuse](#) (Australian Government, 2009). As a minimum it is expected that the system will incorporate the following:

- A power supply and pump system to transfer water from the pond to the irrigation area.
- Stormwater treatment measures, which may include further filtration or other means. Any required treatment would be subject to detailed design, as well as consideration of the water reuse purpose and exposure, i.e. irrigation or reuse in a boiler. Irrigated areas would be fenced to prevent access by the public/contractors on adjacent sites and a buffer area, thus limiting exposure to irrigation water.
- Multi-channel irrigation controllers including inputs for flow meters, moisture sensors and weather stations may form part of the irrigation system to control, monitor and record irrigation system operation. It is expected that the controller would be a readily available “off-the-shelf” product and would be implemented and operated by the developer. A concept irrigation design from Basin B has been prepared and is appended, a similar design will be utilised for irrigation from any of the ponds.
- A further demand that could provide a beneficial usage of this non potable water is as water for dust suppression during construction within the estate and on nearby construction sites. This is a high quantity of water that could replace the use of potable water from the reticulation network.
- It is suggested that the consent conditions allow flexibility for reuse to be via irrigation or other demands as agreed with Sydney Water to ensure the flexibility in reuse method, and to promote the most appropriate use of recycled water and potable water within the estate.

5.2.6. Regional Infrastructure Scheme Service Area

Sydney Water are the regional stormwater authority for the Mamre Road Precinct.

Sydney Water are to achieve the Wianamatta stormwater quality/flow targets of the relevant DCP's by implementing regional stormwater treatment and harvesting infrastructure.

Sydney Water has developed the Scheme Serviced Area (SSA) to ultimately fast track the delivery of regional infrastructure to minimise the need for on-lot temporary works and developable land.

The Stormwater SSA is an area of land that can be developed without the need for interim/temporary on-lot stormwater quality/quantity infrastructure, excluding those that are required specifically in the DCP, such as gross pollution traps, on-site detention, passively watered street trees, erosion and sediment control and sediment basins.

As the delivery of the Regional infrastructure is progressing it is deemed appropriate to move towards ultimate solutions rather than interim measures to achieve the DCP operational stormwater controls.

Key principles of SSA

Stormwater management targets (including both the adopted water quality and water quantity targets) will be met at all times.

The targets will be assessed by Sydney Water on a sub-catchment basis. Sub-catchments have been determined to be consistent with discharge into the receiving waterway and align with more recent published Stormwater Scheme MUSIC models. The northern catchment of this development is within the Ropes Catchment.

SSA will be generated at the practical completion of construction of stormwater basins (when 'practical completion' is awarded by Sydney Water).

SSA will be allocated by Sydney Water via a Feasibility Advice letter that can be included in the DA/SSDA documentation. The letter will outline:

- a. the amount of SSA being awarded to the developer
- b. the developments/land where the developer can use the SSA which will be based on the land that the developer currently owns within the sub-catchment
- c. processes/requirements for the developer to implement ensuring SSA will be appropriately used

Sydney Water has advised the SSA generated by Basin 28 and 29 delivery is 17.94ha (refer Appendix F), in the northern catchment.

Development on Lot O does not rely on SSA.

6.2. Proposed Site Stormwater Drainage

The proposed drainage network within the Site has been designed to safely convey major and minor flows prior to the estate Onsite Stormwater Detention (OSD) basins and eventually discharging to the north-eastern creek and Sydney Water natural trunk drainage to the south. The following criteria have been adopted for the proposed drainage system:

- Major system (pit and pipe network, overland flow paths and channels): 1% AEP
- Minor system (pit and pipe network): minimum 5% AEP and 1% AEP for trapped catchments.

Lot F On-lot stormwater runoff has two discharge points to the Estate drainage network, this is based on the catchments specified in conditions of consent to ensure discharge to the allocated stormwater scheme basins (by Sydney Water), discussed in Chapter 3 of this report.

The following stormwater drainage pipes and culverts shall be used:

- Under estate roads – rubber ring jointed steel reinforced concrete (375mm diameter and larger) or reinforced concrete box culverts (RCBC).
- On-lot pipes within the buildings – rubber ring jointed uPVC with manufactured bends and fittings.
- On-lot pipes in-ground and external to the buildings – rubber ring jointed steel reinforced concrete (375mm diameter and larger) and uPVC pipes (<375mm diameter).

Stormwater drainage from the roof and through the building will be designed by the building hydraulic engineer. Detailed design drawings of the building hydraulics will be made available during submission of documents for Construction Certificate approval.

A summary of the key hydrological and hydraulic design parameters adopted in DRAINS to develop a major and minor system drainage design for the proposed development are as follows:

- Minor system (pit and pipe) drainage has been designed to accommodate the 5% AEP storm event.
- The combined pit and pipe drainage and overland flow paths have been designed to accommodate the 1% AEP storm event.
- Where trapped low points are unavoidable and potential for flooding private property is a concern, an overland flow path capable of carrying the total 1% AEP storm event has been provided. Alternatively, the pipe and inlet system has been upgraded to accommodate the 1% AEP storm event.
- Rainfall intensities have been adopted using the Bureau of Meteorology Design Rainfall Data System (2019).
- The width of flow in the gutter does not exceed 2.5 metres and pits are spaced no further than 75 metres apart.
- Velocity x depth product shall not exceed 0.4 m²/s for all storms up to and including the 1% AEP event.
- Bypass from any pit on grade shall not exceed 15% of the total flow at the pit for the design minor storm event.
- Blockage factors of 20% and 50% shall be adopted for on-grade and sag pits respectively.
- A hydraulic grade line HGL design method shall be adopted for all road pipe drainage design.
- Pipelines in roadways shall have a minimum diameter of 375mm.
- A desirable minimum grade of 1% for all pipelines is preferred for self-cleansing under low flow velocities. An absolute minimum grade of 0.5% has been adopted.
- Where minimum cover cannot be achieved due to physical constraints the pipe class shall be suitably increased.
- All pipes in trafficable areas will be Reinforced Concrete Pipes (RCP) or Fibre Reinforced Cement (FRC) equivalent.
- Pipes discharging to an overland flow path shall adopt a minimum tailwater level equivalent to respective overland flow level.
- Pit Loss coefficients have been calculated in accordance with the Hare Charts as documented in the Queensland Urban Drainage Manual.

- A minimum 150mm freeboard has been maintained between pit HGL and pit surface levels for the minor design storm event (5% AEP).

6.3. Stormwater Quality Modelling

6.3.1. MUSIC Model Parameters

A MUSIC model of the proposed stormwater management strategy has been created to simulate post-development mean annual loads and treatment train effectiveness. MUSIC model parameters including rainfall and evaporation, rainfall-runoff and source node pollutant generation are consistent with the parameters adopted in the *MUSIC Modelling Toolkit – Wianamatta* (NSW DPIE, 2022).

This model has not changed in the northern catchment since MOD 5, as MOD 6 (Lot E) utilises the SSA letter provided by Sydney Water and the future delivery of basins 28 and 29 on the site.

The model southern catchment has changed with the addition of the development on Lot O.

6.3.2. Modelling

The development stages proposed have been modelled to demonstrate the pollutant concentration and flow targets of the Mamre Road Precinct DCP are achieved. Refer to Appendix A for catchment summary tables and MUSIC model.

The only change in the modelling from MOD 6 is to the southern catchment model that provides for the development of Lot O

6.4. Performance Against Stormwater Targets

6.4.1. Stormwater Quality

MUSIC model results presented as mean annual loads at the receiving node for southern catchment and northern Catchment are presented in Table 15.

Table 15: Summary of MUSIC modelling results against stormwater quality targets Option 2 – Mean Annual Load

		SSDA 10479 MOD 7 Stage 1 (Civil Infrastructure and Lot F) , Lot J, K, O (note Lot E via Regional Infrastructure)	
Parameter	Allowable (kg/ha/yr)	Southern Catchment (kg/ha/yr)	Northern Catchment (kg/ha/yr)
Total Suspended Solids	80	49.32	74.10
Total Phosphorous	0.3	0.21	0.25
Total Nitrogen	3.5	2.41	2.69
Gross Pollutants	16	1.60	0.00

The MUSIC model results presenting allowable mean annual loads demonstrate the proposed stormwater management measures will satisfy the Mamre Road DCP Option 2 allowable loads stormwater quality controls.

Red text indicate changes between MOD 6 and MOD 7.

6.4.2. Stormwater Quantity

The assessment of the performance of stormwater detention for the Estate has been undertaken at two locations, Basin A and Basin B, Post Development of:

- Concept master plan - the development of roads and all lots as per concept master plan.

A summary of the hydraulic results is provided in Table 16 for Basin A and Table 17 for Basin B.

Table 16: Pre-development and post-development flows at discharge point Basin A

Design Storm Event	Pre-Development Peak Flow ^[2] (m ³ /s)	Post Concept MP Development Peak Flow ^[1] (m ³ /s)	Complies (Y/N)
50% AEP	0.79	0.79	Y
20% AEP	1.30	1.16	Y
10% AEP	1.98	1.70	Y
5% AEP	2.52	1.96	Y
2% AEP	3.84	3.22	Y
1% AEP	4.99	4.55	Y

[1] Concept Master plan Development of all lots and roads. [2] Predevelopment flow rates updated as part of the precinct wide Sydney Water hydrology requirements utilising RAFTS methodology. [Note] The peak flow rate is selected in accordance with the ARR2019 ensemble storm method i.e. it is selected from a range of critical storm duration of each storm event from 5 minute to 6 hour duration.

Table 17: Pre-development and post-development flows at discharge point Basin B

Design Storm Event	Pre-Development Peak Flow (m ³ /s) ^[2]	Post Concept MP Development Peak Flow ^[1] (m ³ /s)	Complies (Y/N)
50% AEP	1.36	2.26	N ^[3]
20% AEP	2.52	2.45	Y
10% AEP	3.46	2.74	Y
5% AEP	4.55	3.10	Y
2% AEP	6.25	4.42	Y
1% AEP	7.92	6.63	Y

[1] Concept Master plan - Development of all lots and roads.

[2] Predevelopment flow rates updated as part of the precinct wide Sydney Water hydrology requirements utilising RAFTS methodology. [Note] The peak flow rate is selected in accordance with the ARR2019 ensemble storm method i.e. it is selected from a range of critical storm duration of each storm event from 5 minute to 6 hour duration.

[3] Non compliance is due to Sydney Water target flow requirement to Basins/Wetlands 28,29 and 30


The DRAINS model results demonstrate that the post-development peak flow rates to be less than or equal to pre-development peak flow rates for a range of storm events between (and including) the 50% AEP and 1% AEP design events. Therefore, the stormwater drainage system and detention basins as proposed will satisfy the development controls relating to stormwater detention.

6.4.3. Stormwater Quantity (Flow Duration Targets)

The MUSIC model results demonstrating performance of the proposed stormwater management measures against the stormwater flow targets for Lot F, J, K and O are presented in **Figure 17** and **Figure 18**. The results shown are an extract from the MUSIC modelling Toolkit provided by DPIE and confirm compliance with Option 1 (MARV approach) for the proposed cumulative development scenario that includes interim measures.

As per MOD 6 the operational stormwater targets for Lot E are met through the SSA letter issued by Sydney Water and ultimate measures via Sydney Water Regional Infrastructure located in the north eastern corner, via the construction of regional basins 28 and 29 via separate approval.

Flow Duration Curve (Daily)

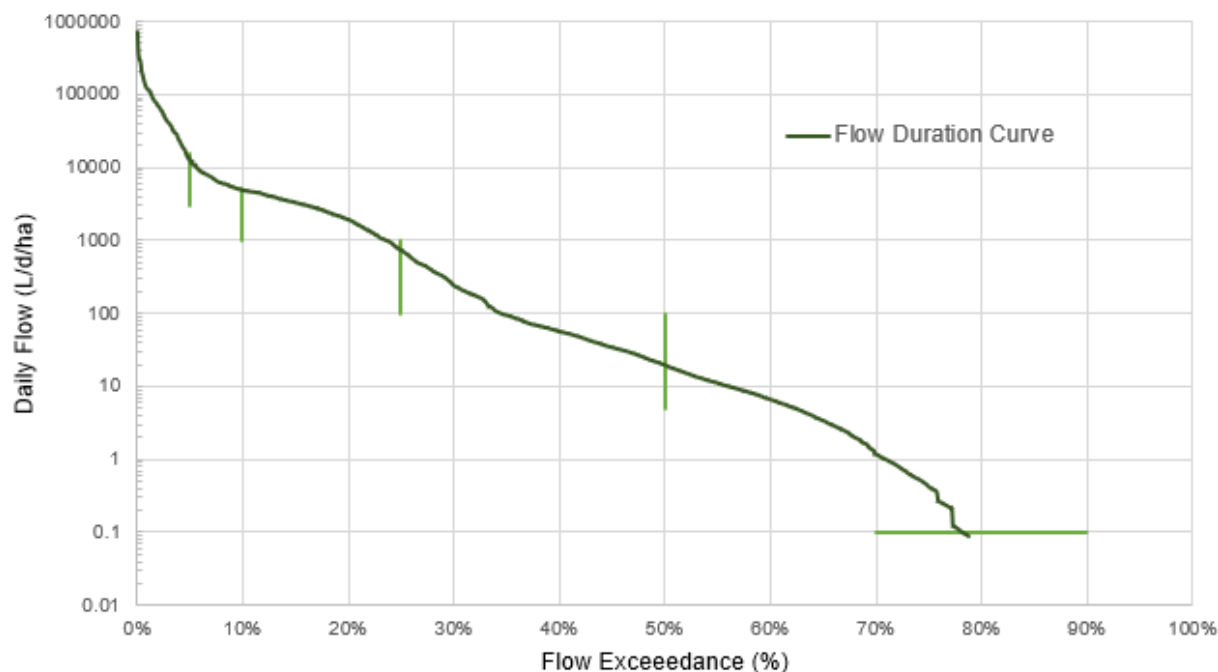

ENTER DEVELOPMENT AREA (in cell F2)			
Development Area	28.43	ha (i.e. the total catchment areas used in MUSIC)	

Stormwater Quantity (flow) Targets Option 2- flow percentiles			
Indices	Result	Comply	Target
95%ile	12,248	Yes	3000 to 15000 L/ha/day
90%ile	4,782	Yes	1000 to 5000 L/ha/day
75%ile	724	Yes	100 to 1000 L/ha/day
50%ile	19	Yes	5 to 100 L/ha/day
Cease to Flow	21%	Yes	10-30%

Stormwater Quantity (flow) Targets Option 1 - MARV			
Indices	Result	Comply	Target
MARV (ML/ha/yr)	1.78	Yes	≤ 2
90%ile	4,782	Yes	1000 to 5000 L/ha/day
50%ile	19	Yes	5 to 100 L/ha/day
10%ile	0	Yes	0 L/ha/day

Figure 17: Flow duration curve and targets for proposed development (Southern Catchment)

ENTER DEVELOPMENT AREA (in cell F2)			
Development Area	43.70	ha (i.e. the total catchment areas used in MUSIC)	
Stormwater Quantity (flow) Targets Option 2- flow percentiles			
Indices	Result	Comply	Target
95%ile	22,096	No	3000 to 15000 L/ha/day
90%ile	4,339	Yes	1000 to 5000 L/ha/day
75%ile	69	No	100 to 1000 L/ha/day
50%ile	11	Yes	5 to 100 L/ha/day
Cease to Flow	11%	Yes	10-30%

Stormwater Quantity (flow) Targets Option 1 - MARV			
Indices	Result	Comply	Target
MARV (ML/ha/yr)	1.65	Yes	≤ 2
90%ile	4,339	Yes	1000 to 5000 L/ha/day
50%ile	11	Yes	5 to 100 L/ha/day
10%ile	0	Yes	0 L/ha/day

Flow Duration Curve (Daily)

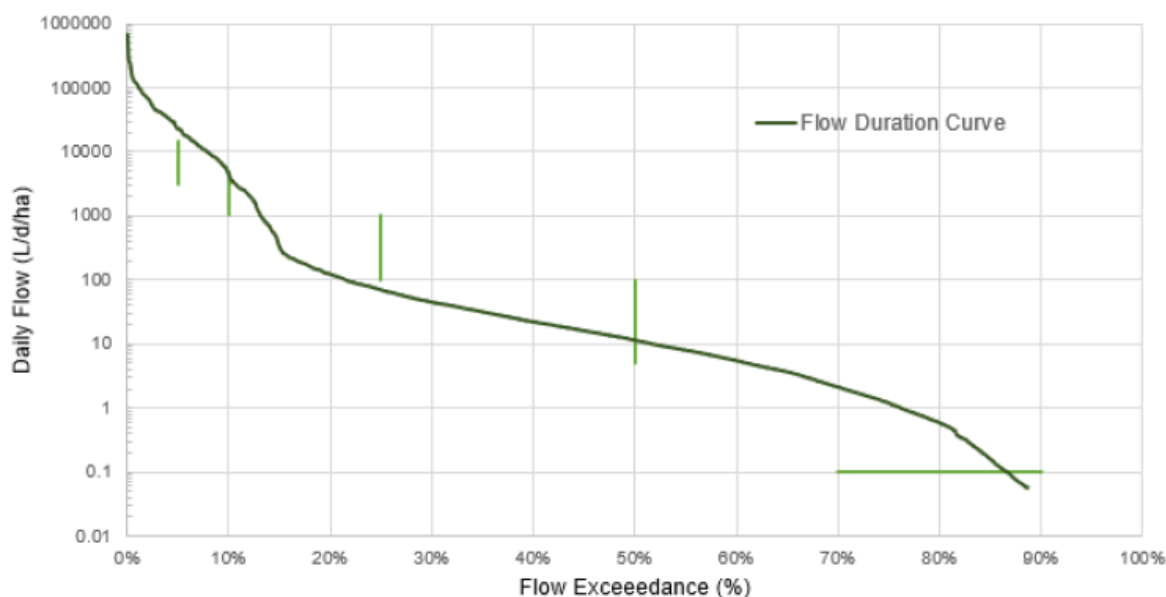


Figure 18: Flow duration curve and targets for proposed development (Northern Catchment)

The results presented above demonstrate the proposed stormwater management measures to be implemented for the Lot F, J, K and O to satisfy the DCP stormwater flow targets for discharge from the southern catchment and northern catchments in the interim scenario.

The development on Lot E is not included in the northern catchment MUSIC model. The addition of Lot E is based on Lot E stormwater operational targets being met by the operation of the Regional Infrastructure (via ponds/basins 28 and 29) by Sydney Water, in addition to the interim scenario until the regional scheme satisfies the MRP DCP operational stormwater controls.

7. Maintenance and Operations

The interim water management strategy elements will remain in private ownership and shared assets will be maintained under the community title through the community association. This includes Lot D (Basin B) and temporary irrigation on undeveloped lots. On lot components including GPTs will be maintained by the tenant of each lot. The cost of operating the WMS is estimated in Table 18. A draft WSUD Maintenance Plan is provided in Appendix C.

In the ultimate scenario when the MRP Stormwater Scheme is operational the on lot GPTs would continue to be maintained and operated by tenants.

OSD basins have not been included in the costs as they are a business as usual cost not a WSUD specific cost. The irrigation of the landscape areas on developed lots is also not considered a WSUD cost and is therefore not included.

The operation of the Regional Scheme is by Sydney Water and costs for this are therefore excluded.

Table 18: Whole of life cost (Lot F, J, K, E and O)

WSUD feature	Capital cost \$	Asset Life	Operational & Maintenance cost / annum \$	Renewal cost \$/ 30 years
CONSTRUCTION				
Sediment ponds during construction Type B Basins	2,500,000	1-5 years	1,500,000	N/A
OPERATIONAL (Lot F, J, K, E and O)				
GPT (Lot J)	500,000	30 years	40,000	100,000
GPTs (Lot F)	300,000	30 years	40,000	100,000
GPTs (Lot K)	300,000	30 years	40,000	100,000
GPTs (Lot E)	300,000	30 years	40,000	100,000
GPTs (Lot O)	150,000	30 years	20,000	50,000
Temporary Sediment basin (within Basin A and Pond 1 (Basin B)	10,000	10 years	5,000	N/A
Temporary Harvesting pond (Lot N) and pond 2 Basin B	100,000	5-10 years	0	N/A
Temporary Irrigation and pump (undeveloped land)	500,000	10 years	70,000	N/A
OPERATIONAL Total	\$2,160,000		\$255,000	\$450,000

8. Compliance Protocol

Ongoing compliance of the stormwater management system, with the MRP DCP waterway health objectives and targets, will be achieved through a program of inspection, monitoring, and analysis. This will be detailed within a subsequent revision of the Stormwater Management Plan that will be submitted within the Operational Environmental Management Plan, required by condition E6 prior to operation of the development.

AT&L propose the following process for identifying and managing non-compliances with the Mamre Road Precinct DCP Integrated Water Cycle Management (IWCM) controls:

- 1) **Non-compliance identification:** Regular inspections and monitoring of the stormwater management system should be conducted to identify any potential non-compliances. This can involve visual assessments, data collection, and analysis of performance indicators.
- 2) **Review regulatory requirements:** The operator of the system is to familiarise themselves with the specific IWCM controls outlined in the regulatory framework. This may include local ordinances, stormwater management guidelines, or environmental protection regulations.
- 3) **Document non-compliances:** Once a non-compliance is identified, carefully document the details, including the specific control(s) not met, location, and associated concerns or issues. Capture photographs, measurements, and any other relevant data to provide comprehensive documentation.
- 4) **Investigate the root causes:** Conduct a thorough investigation to determine the underlying causes of the non-compliance. This may involve reviewing design plans, construction records, maintenance logs, and historical performance data. Consider factors such as inadequate infrastructure, improper maintenance, or unforeseen external factors.
- 5) **Assess impacts:** Evaluate the potential impacts of the non-compliance on water quality, ecosystem health, flood risk, or other relevant factors. Consider both immediate and long-term consequences, as well as potential risks to human health and the environment.
- 6) **Develop corrective action plan:** Based on the investigation findings, develop a comprehensive corrective action plan. This should outline specific measures to address the non-compliance and bring the stormwater management system into compliance with the IWCM controls. Consider the feasibility, cost-effectiveness, and potential long-term benefits of each proposed action.
- 7) **Implement corrective actions:** Execute the corrective actions as outlined in the plan. This may involve repairs, upgrades, maintenance activities, or changes in operational procedures. Ensure that the actions are implemented by qualified personnel adhering to best practices and relevant safety guidelines.
- 8) **Post-implementation assessment:** After implementing the corrective actions, conduct post-assessments to verify the effectiveness of the measures taken. This may include performance monitoring, water quality testing, or hydraulic modelling to evaluate the system's compliance with the IWCM controls.
- 9) **Reporting and communication:** Prepare a detailed report summarizing the non-compliances, investigation findings, corrective actions taken, and post-implementation results. Communicate the outcomes to relevant stakeholders.
- 10) **Ongoing monitoring and maintenance:** Establish a regular monitoring and maintenance program to ensure continued compliance with IWCM controls. This should include periodic inspections, data collection, and maintenance activities to prevent future non-compliances.

9. Conclusion

During construction phases the water quality targets will be achieved by following the Erosion and Sediment Control Plans (ESCPs) prepared by a CPESC for each stage of development.

The stormwater management strategies described within this report demonstrate that the requirements of the MRP DCP are achieved for the stages proposed and are consistent with the conditions of consent.

MUSIC modelling demonstrates the following:

- In the northern catchment the roads, developed Lot F and northern developed Lot K and remainder of the northern catchment runoff is direct to Basin B, where in the interim pond 1 acts as a sedimentation pond and pond 2 provides storage.
- In the southern catchment the roads, developed Lot J , southern part of developed Lot K and Lot O and remainder of the southern catchment runoff is directed to the sediment pond within Basin A then pumped from the surface to the storage/harvesting pond within Lot N and utilised for residual lot irrigation or alternative beneficial reuse – such as for dust suppression. This method and area of irrigation is shown to be sufficient to meet the flow duration curves and pollutant load reductions for the proposed development specified in Section 4.

The operational requirements for Lot E development will be achieved through the regional infrastructure ponds and basins 28 & 29 on Lot D, the Sydney Water SSA letter (Appendix F) supports the Lot E development footprint of 6.83ha which is less than the SSA of 17.94ha generated through operation of basins 28 and 29.

The stormwater management scheme includes both ultimate and interim measures before the MRP Stormwater Scheme is operational.

DRAINS modelling demonstrates the following:

- Onsite detention Basins A and B ensure the 50% AEP to 1% AEP storm events flow rates are not greater than the predevelopment flow rates.
- The distribution of flows to Basin/Wetland 28, 29 and ultimately wetland 30 is as required by the consent conditions.
- The natural trunk drainage channel and low flow pipe within Lot G as required by the conditions of consent and the requirements of the Sydney Water Guidelines.

APPENDIX A – MUSIC MODEL

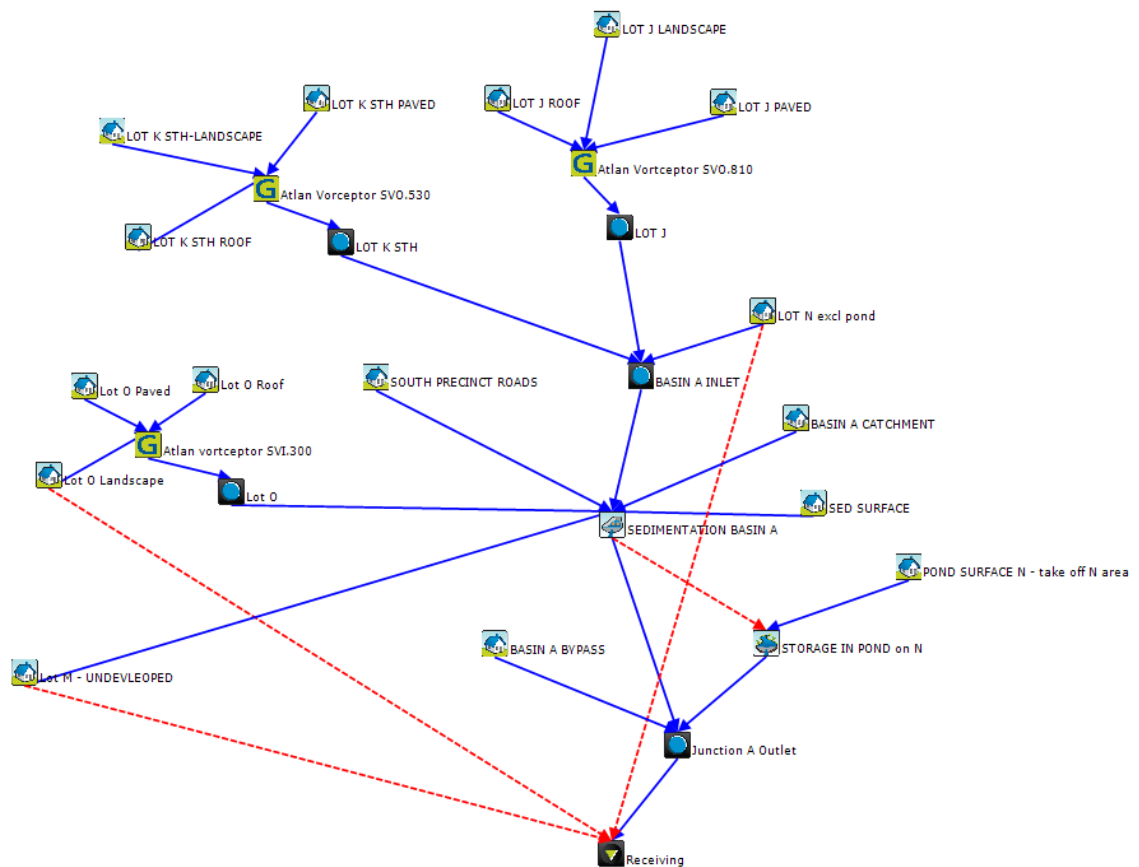


Figure 19 Music Model Southern Catchment – for proposed development stages

Table 19: Summary of MUSIC model and treatment paths – Southern Catchment

Node	Area (ha)	MUSIC node	Node Imperviousness (%)	Treatment Path
SOUTHERN UNDEVELOPED LOTS	5.92	Urban Industrial	0	
LOT M	2.84	Urban Industrial	100	Sedimentation Basin → storage
LOT N	3.08		Varies	
Residual Lot N	1.48	Urban industrial	0	Sedimentation Basin → storage
Lot N Pond surface	1.6	Lined Pond	100	Storage → irrigation
BASIN A CATCHMENT (incl sed surface)	0.86	Urban Industrial	20	Sedimentation basin → storage
BASIN A BYPASS	0.12	Urban Industrial	70	No treatment
SOUTH ROADS (incl. part of Lot L)	1.92	Sealed Road	80	Sedimentation basin → storage
DEVELOPED LOT J	12.93	Varies as below		
LOT J ROOF	1.84	Roof	100	Sedimentation Basin → storage
LOT J PAVED	9.15	Sealed Road	100	Sedimentation Basin → storage
LOT J LANDSCAPE	1.94	Urban Industrial	0	Sedimentation Basin → storage
DEVELOPED LOT K (STH)	3.53	Varies as below		
LOT K ROOF	2.26	Roof	100	Sedimentation Basin → storage
LOT K PAVED	0.92	Sealed Road	100	Sedimentation Basin → storage
LOT K LANDSCAPE	0.35	Urban Industrial	0	Sedimentation Basin → storage
DEVELOPED LOT O	3.14			
LOT O ROOF	1.76	Roof	100	Sedimentation Basin → storage
LOT O PAVED	0.95	Sealed Road	100	Sedimentation Basin → storage
LOT O LANDSCAPE	0.43	Urban Industrial	0	Sedimentation Basin → storage
SOUTHERN CATCHMENT	28.43			

Note: Areas that changed between MOD 6 and MOD 7 are indicated in red text.

The term 'Paved' has been adopted to avoid confusion between sealed road and hardstand. This node is identified in MUSIC X as Sealed Road and includes surfaces that are neither roof or landscape (Industrial).

The south roads area has reduced by the area of road that is part of Lot O as this area is now included as Paved within Lot O.

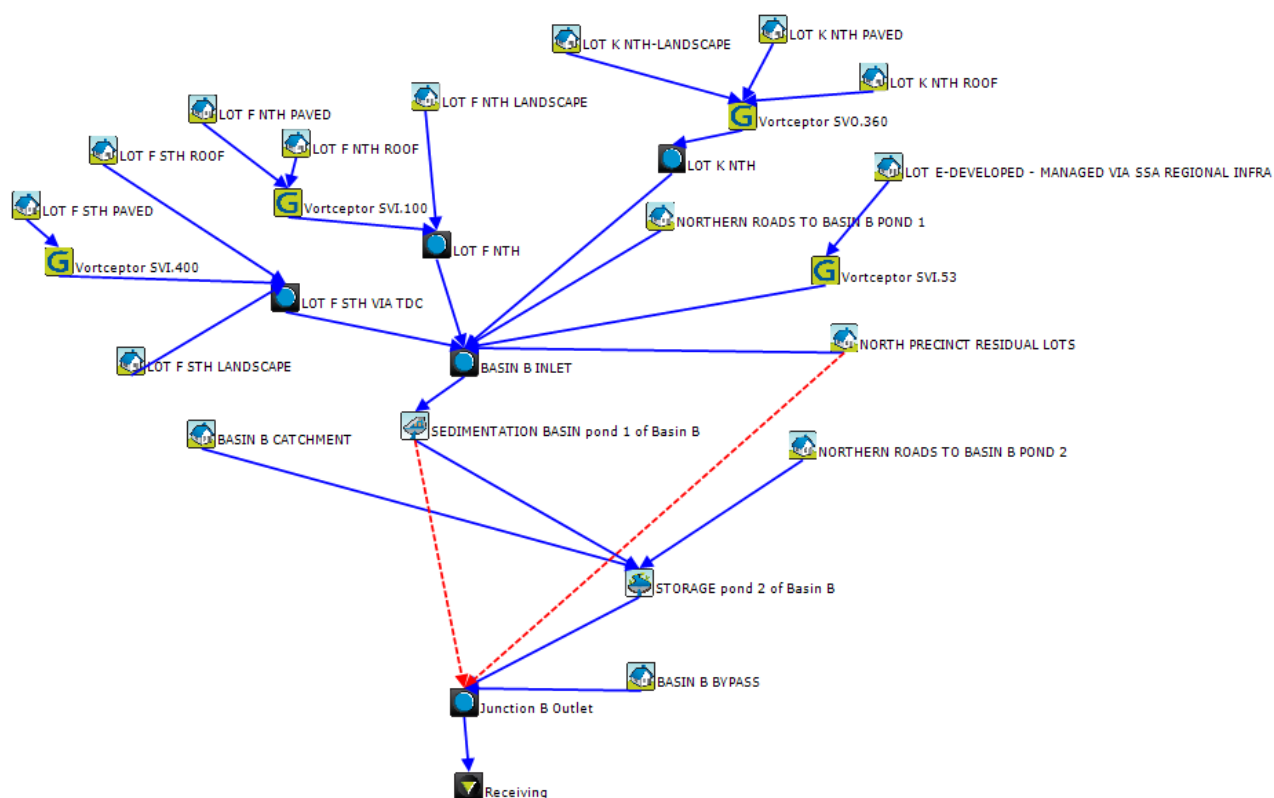


Figure 20 Music Model Northern Catchment – for proposed development

Table 20: Summary of MUSIC model and treatment paths – Northern Catchment

Node	Area (ha)	MUSIC node	Node Imperviousness (%)	Treatment Path
NORTH PRECINCT RESIDUAL LOTS	15.83	Urban industrial	0	
NORTH PRECINCT RESIDUAL LOTS (A, B, C)	10.07	Urban Industrial	0	Basin B pond 1 (sedimentation) pond 2 (storage)
RESIDUAL LOT G excludes temp CDS on Lot G	5.76	Urban Industrial	0	
TOTAL NORTHERN ROADS	4.59	Sealed Road	80	Varies as below
NORTHERN ROADS TO BASIN B (02 & half R06)	0.99	Sealed Road	80	Basin B Pond 2 (storage)
ROADS TO BASIN B (R05 /R04)	1.60	Sealed Road	80	Basin B pond 1 (sedimentation) pond 2 (storage)
ROADS TO TRUNK DRAINAGE	2.00	Sealed Road	80	Basin B pond 1 (sedimentation) pond 2 (storage)
DEVELOPED LOT F^[1]	7.84	Varies		
LOT F LANDSCAPE	0.88	Urban Industrial	0	Basin B pond 1 (sedimentation) pond 2 (storage)
LOT F ROOF	5.62	Roof	100	
LOT F PAVED	1.34	Sealed Road	100	
DEVELOPED LOT K (Nth)	2.68	Varies		
LOT K LANDSCAPE	0.41	Urban Industrial	0	Basin B pond 1 (sedimentation) pond 2 (storage)
LOT K ROOF	1.35	Roof	100	
LOT K PAVED	0.92	Sealed Road	100	
LOT E	6.83	Urban industrial (assumed undeveloped in MUSIC model)	100	Via Basin B to Regional Infrastructure Basin 28 & 29 Ropes Creek -
LOT D	5.24	Urban industrial	Varies	As below
BASIN B CATCHMENT	1.05	Urban industrial	37	Basin B pond 1 (sedimentation) pond 2 (storage)
BASIN B BYPASS (Regional infrastructure basins 28 and 29)	4.19	Urban industrial	0	No treatment
NORTHERN CATCHMENT	43.01			

Note: Areas that changed between MOD 6 and MOD 7 are indicated in red text

Catchment Area amended to exclude Aldington Road upgrade catchments that bypass site (0.69ha).

Removed temp cul de sac head on Lot C reduces road contribution to Basin B.

^[1] The split in the MUSIC model is to represent the two discharge points within the northern catchment and two GPTs, although the treatment path is the same for both Lot F to trunk drainage and Lot F to north.

As noted elsewhere the MUSIC model does not include a developed Lot E as the treatment method is the Regional Infrastructure, as per the SSA letter appended.

APPENDIX B – SITE LAYOUT


Civil Plans

19-609 – C1091 Interim Stormwater Management Basin Plan
19-609 – C1092 Interim Stormwater Management Basin Details

Sketches

19-609-SKC 228 200 Aldington Road SWMP MOD 7

Modified since MOD 6 submission in red

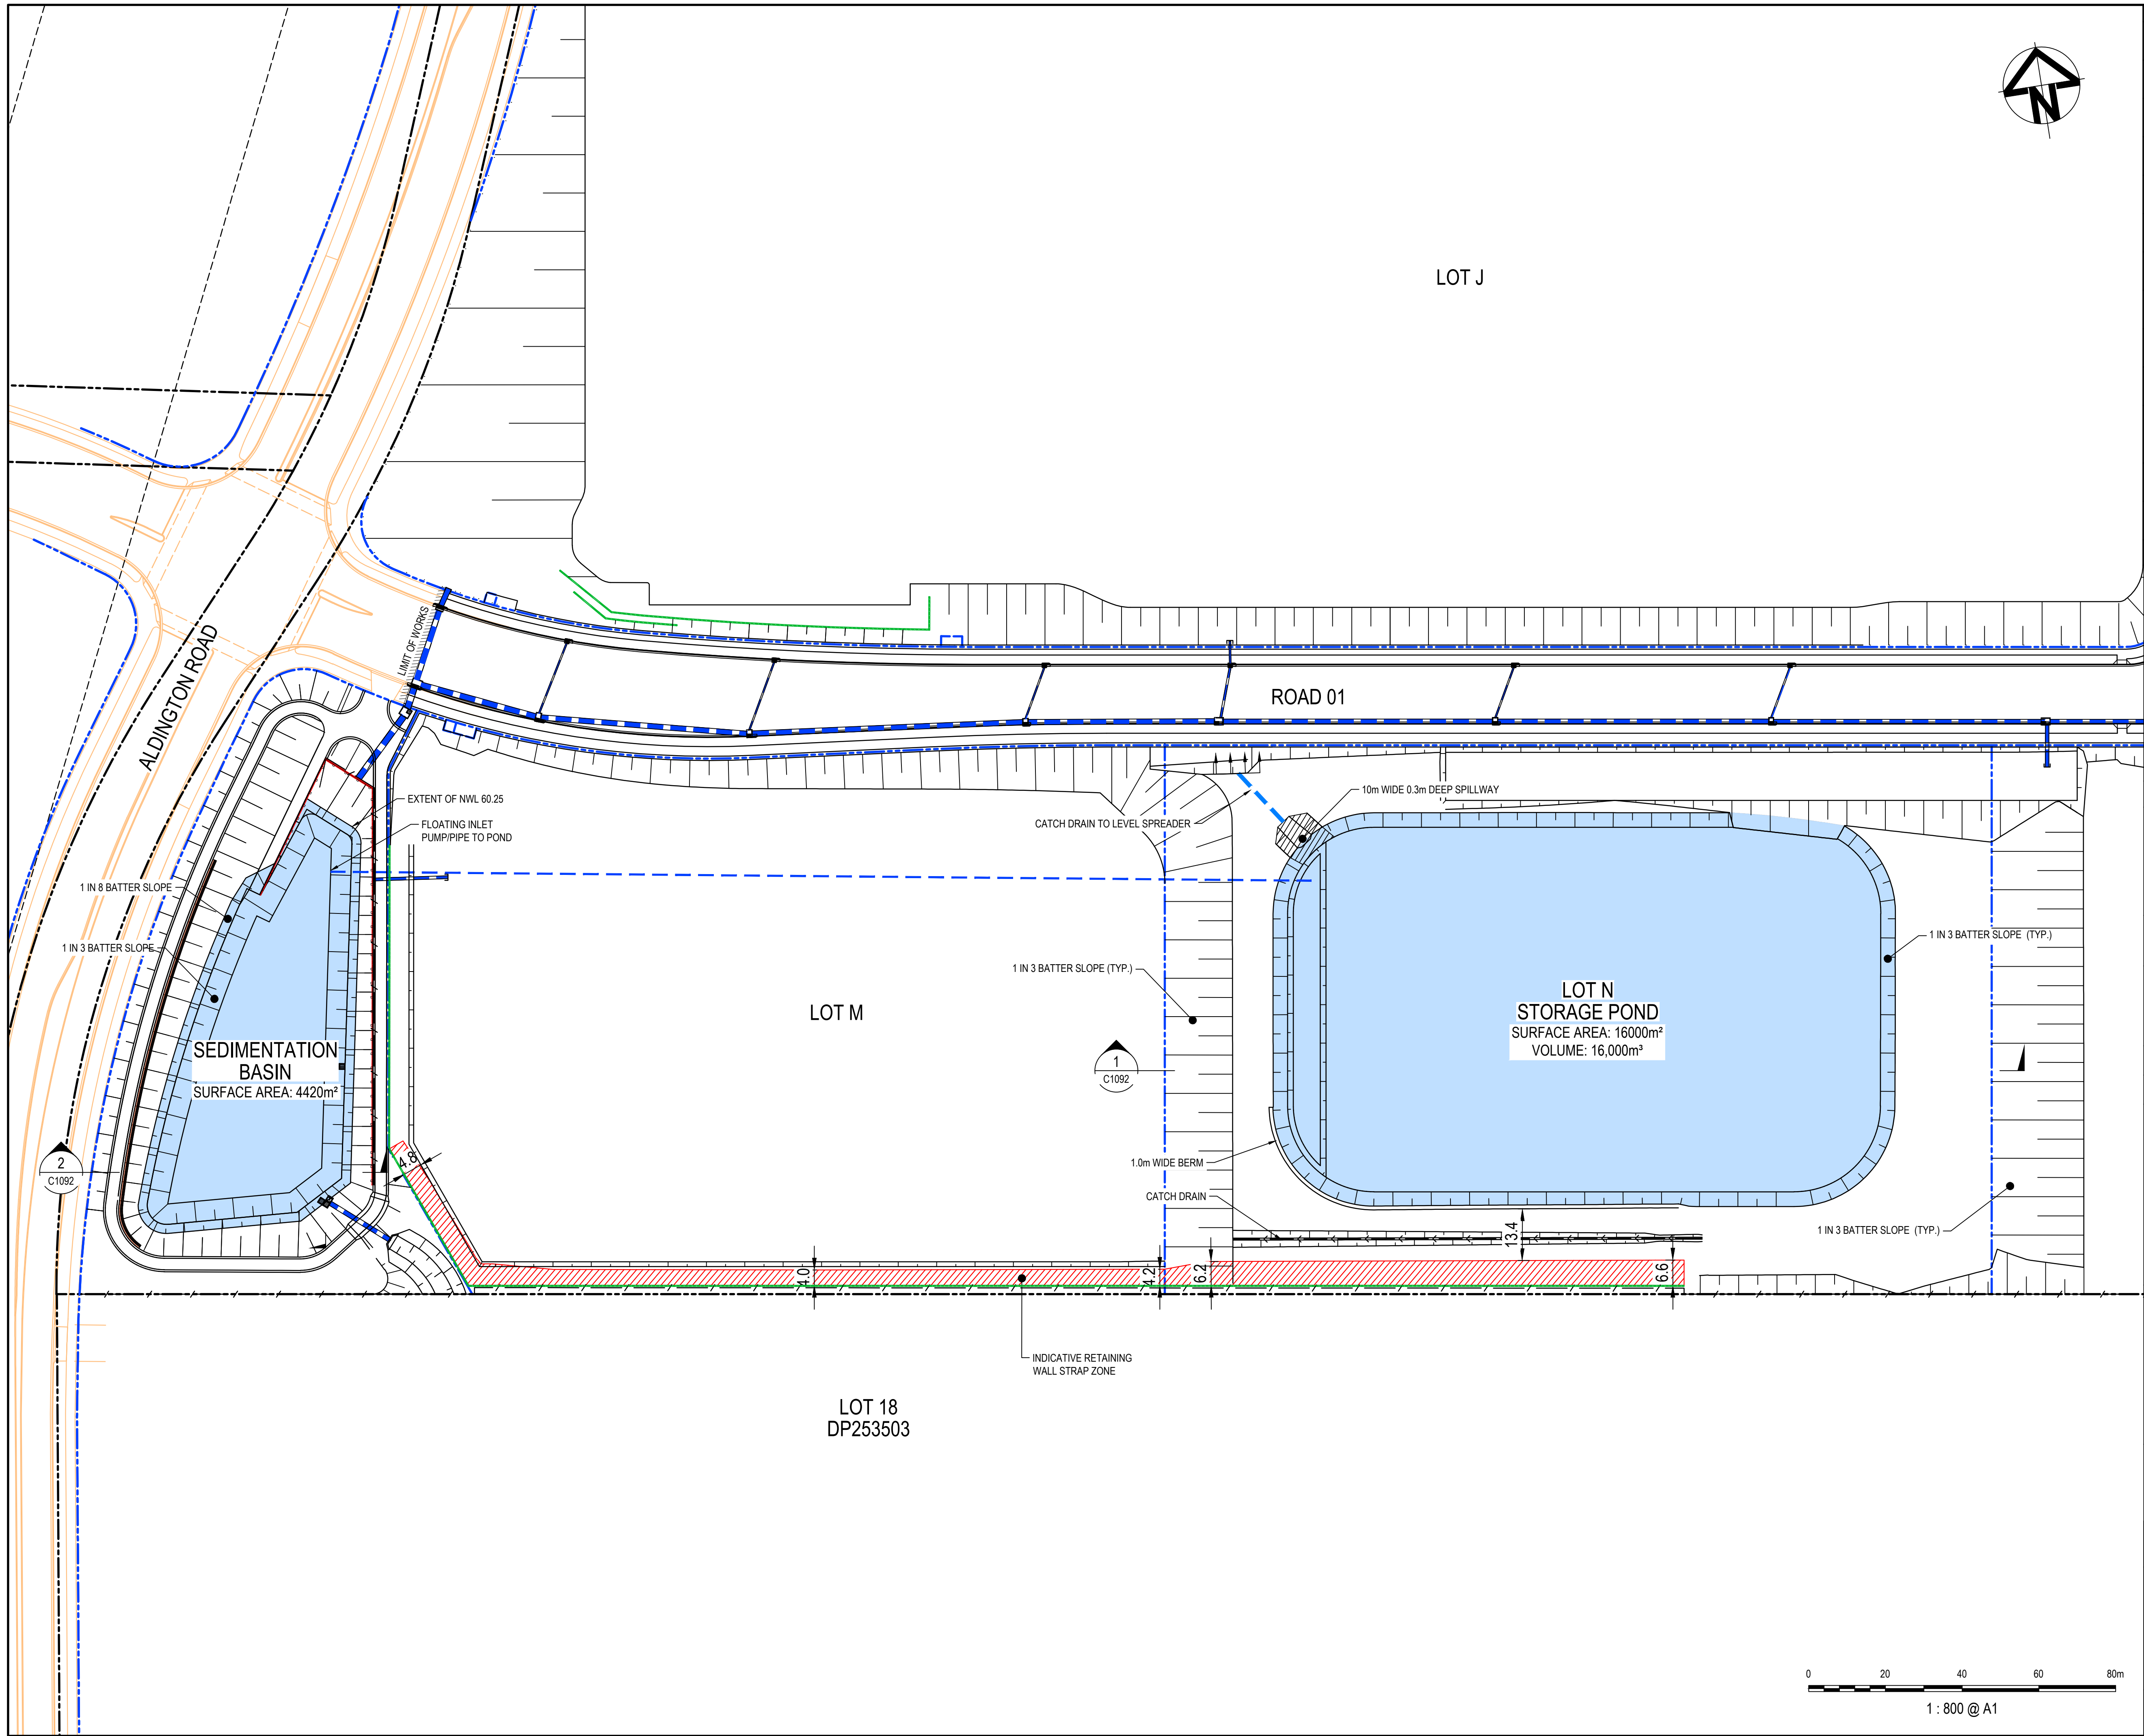

C	ISSUED FOR APPROVAL	11-03-26
B	ISSUED FOR APPROVAL	04-02-26
A	ISSUED FOR APPROVAL	15-12-25
Issue	Description	Date

Status	PRELIMINARY ONLY NOT TO BE USED FOR CONSTRUCTION	A1
--------	---	----

Scales	1 : 800	Drawn JS Designed JH
Height Datum	AHD	Checked DF
Grid	GDA2020	Approved LB

Client 19-609-C1091.dwg

Civil Engineers and Project Managers





Level 7, 153 Walker Street
North Sydney NSW 2060
ABN 96 130 882 405
Tel: 02 9439 1777
Fax: 02 9923 1055
www.atl.net.au
info@atl.net.au

Project
PROPOSED INDUSTRIAL DEVELOPMENT
200 ALDINGTON
SSD10479 MOD6



Title
INTERIM STORMWATER TREATMENT BASINS PLAN

Drawing No.	Project No.	Issue
19-609-C1091	19-609	C

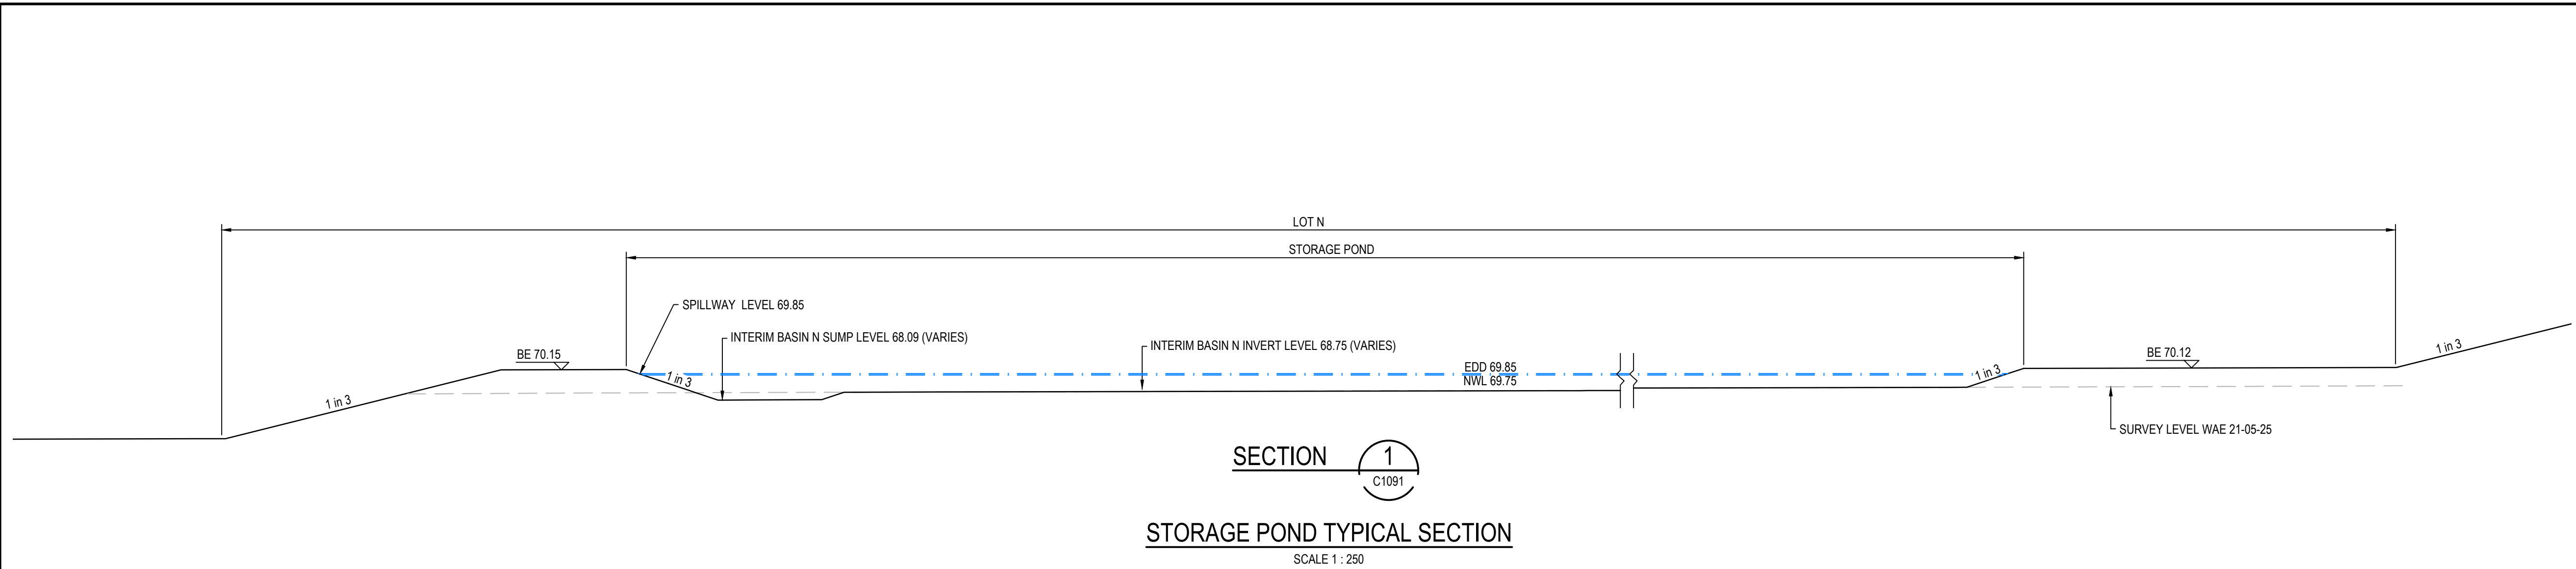

NOTES

1. EITHER AN IN-SITU CLAY LINER, HDPE LINER OR GEOSYNTHETIC CLAY LINER TO BE INSTALLED SUBJECT TO LOCAL CONDITIONS.
2. REFER TO PLANTING SCHEDULE FOR PLANTING REQUIREMENTS
3. NWL = NORMAL WATER LEVEL
4. EDD = EXTENDED DETENTION DEPTH
5. FLOATING INTAKE - PUMP TO TAKE FROM SURFACE TO SEDIMENTATION POND TO STORAGE POND

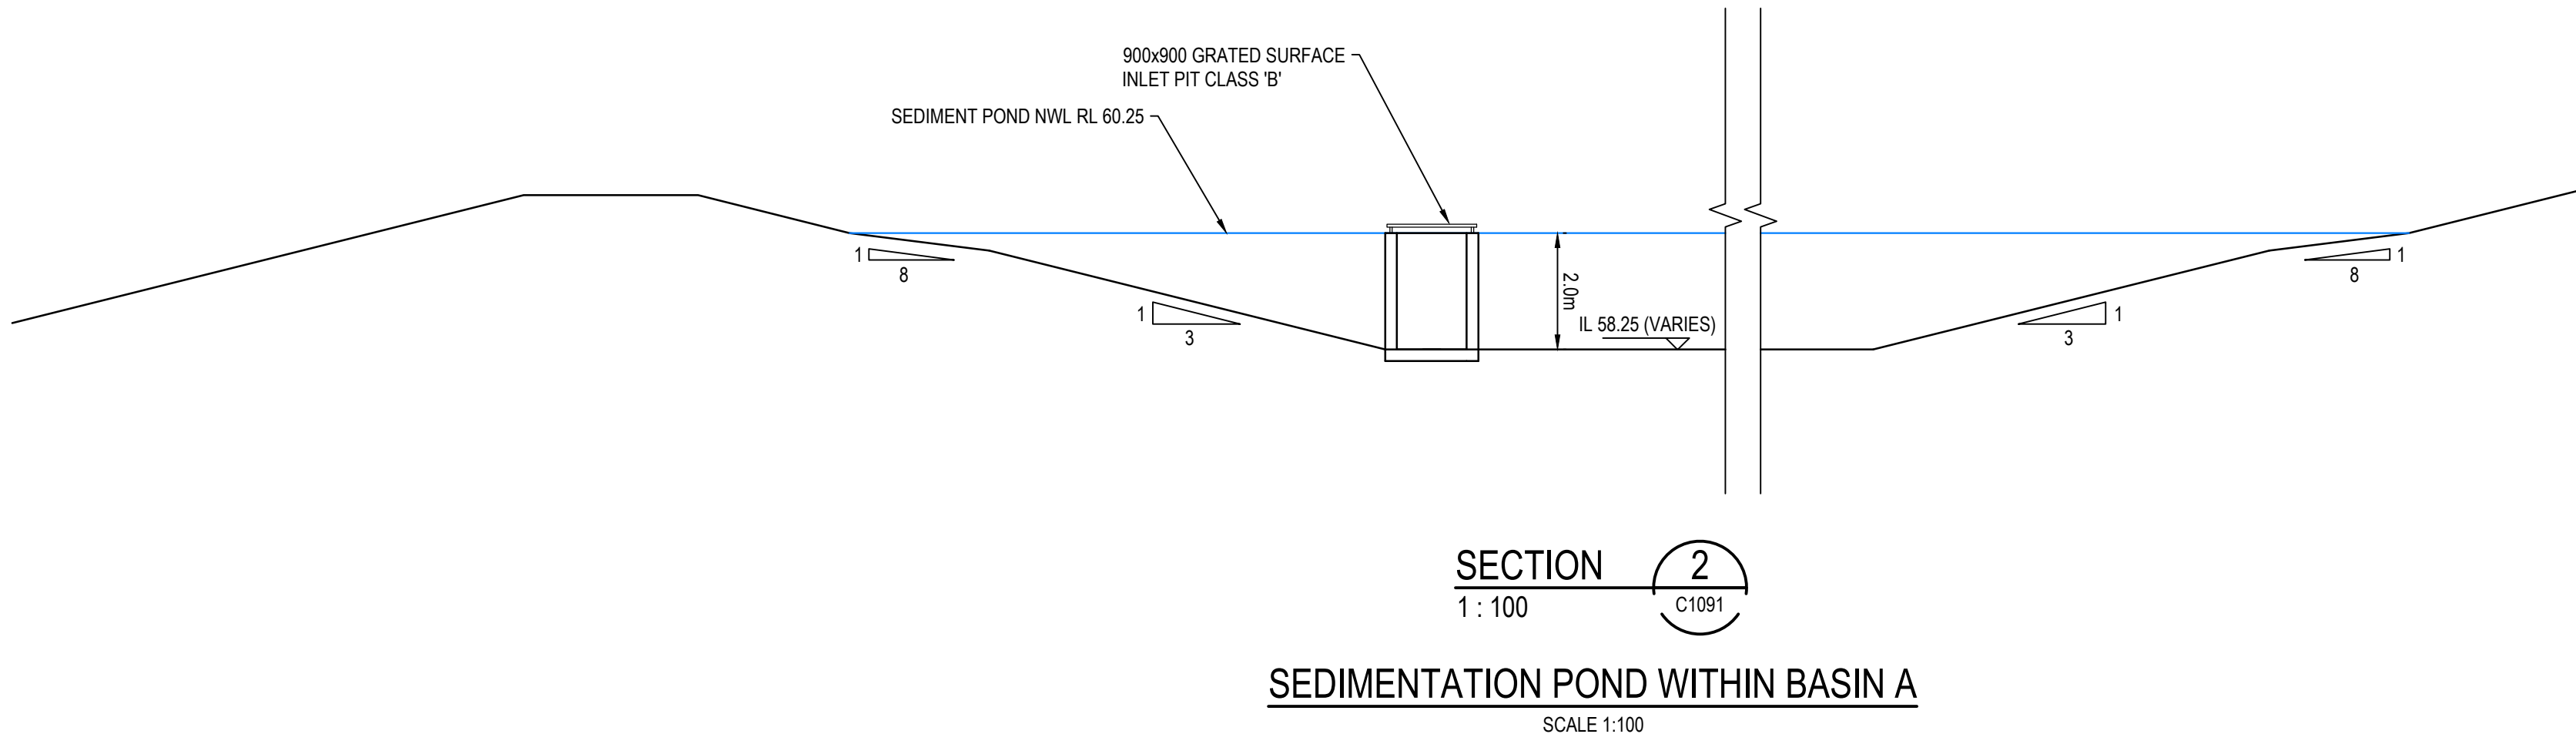

C	ISSUED FOR APPROVAL	11-03-26
B	ISSUED FOR APPROVAL	04-02-26
A	ISSUED FOR APPROVAL	15-12-25
Issue	Description	Date

Status	PRELIMINARY ONLY NOT TO BE USED FOR CONSTRUCTION	A1
--------	---	----

Scales	1 : 100	Drawn JS	
		Designed JH	
Height Datum	AHD	Checked DF	
Grid	GDA2020	Approved LB	

Client 19-609-C1092.dwg



Civil Engineers and Project Managers



Level 7, 153 Walker Street
North Sydney NSW 2060
ABN 96 130 882 405
Tel: 02 9439 1777
Fax: 02 9923 1055
www.atl.net.au
info@atl.net.au


Project

PROPOSED INDUSTRIAL
DEVELOPMENT
200 ALDINGTON
SSD10479 MOD7

Title

INTERIM
STORMWATER
TREATMENT BASINS
DETAILS

Drawing No. 19-609-C1092	Project No. 19-609	Issue C
-----------------------------	-----------------------	------------

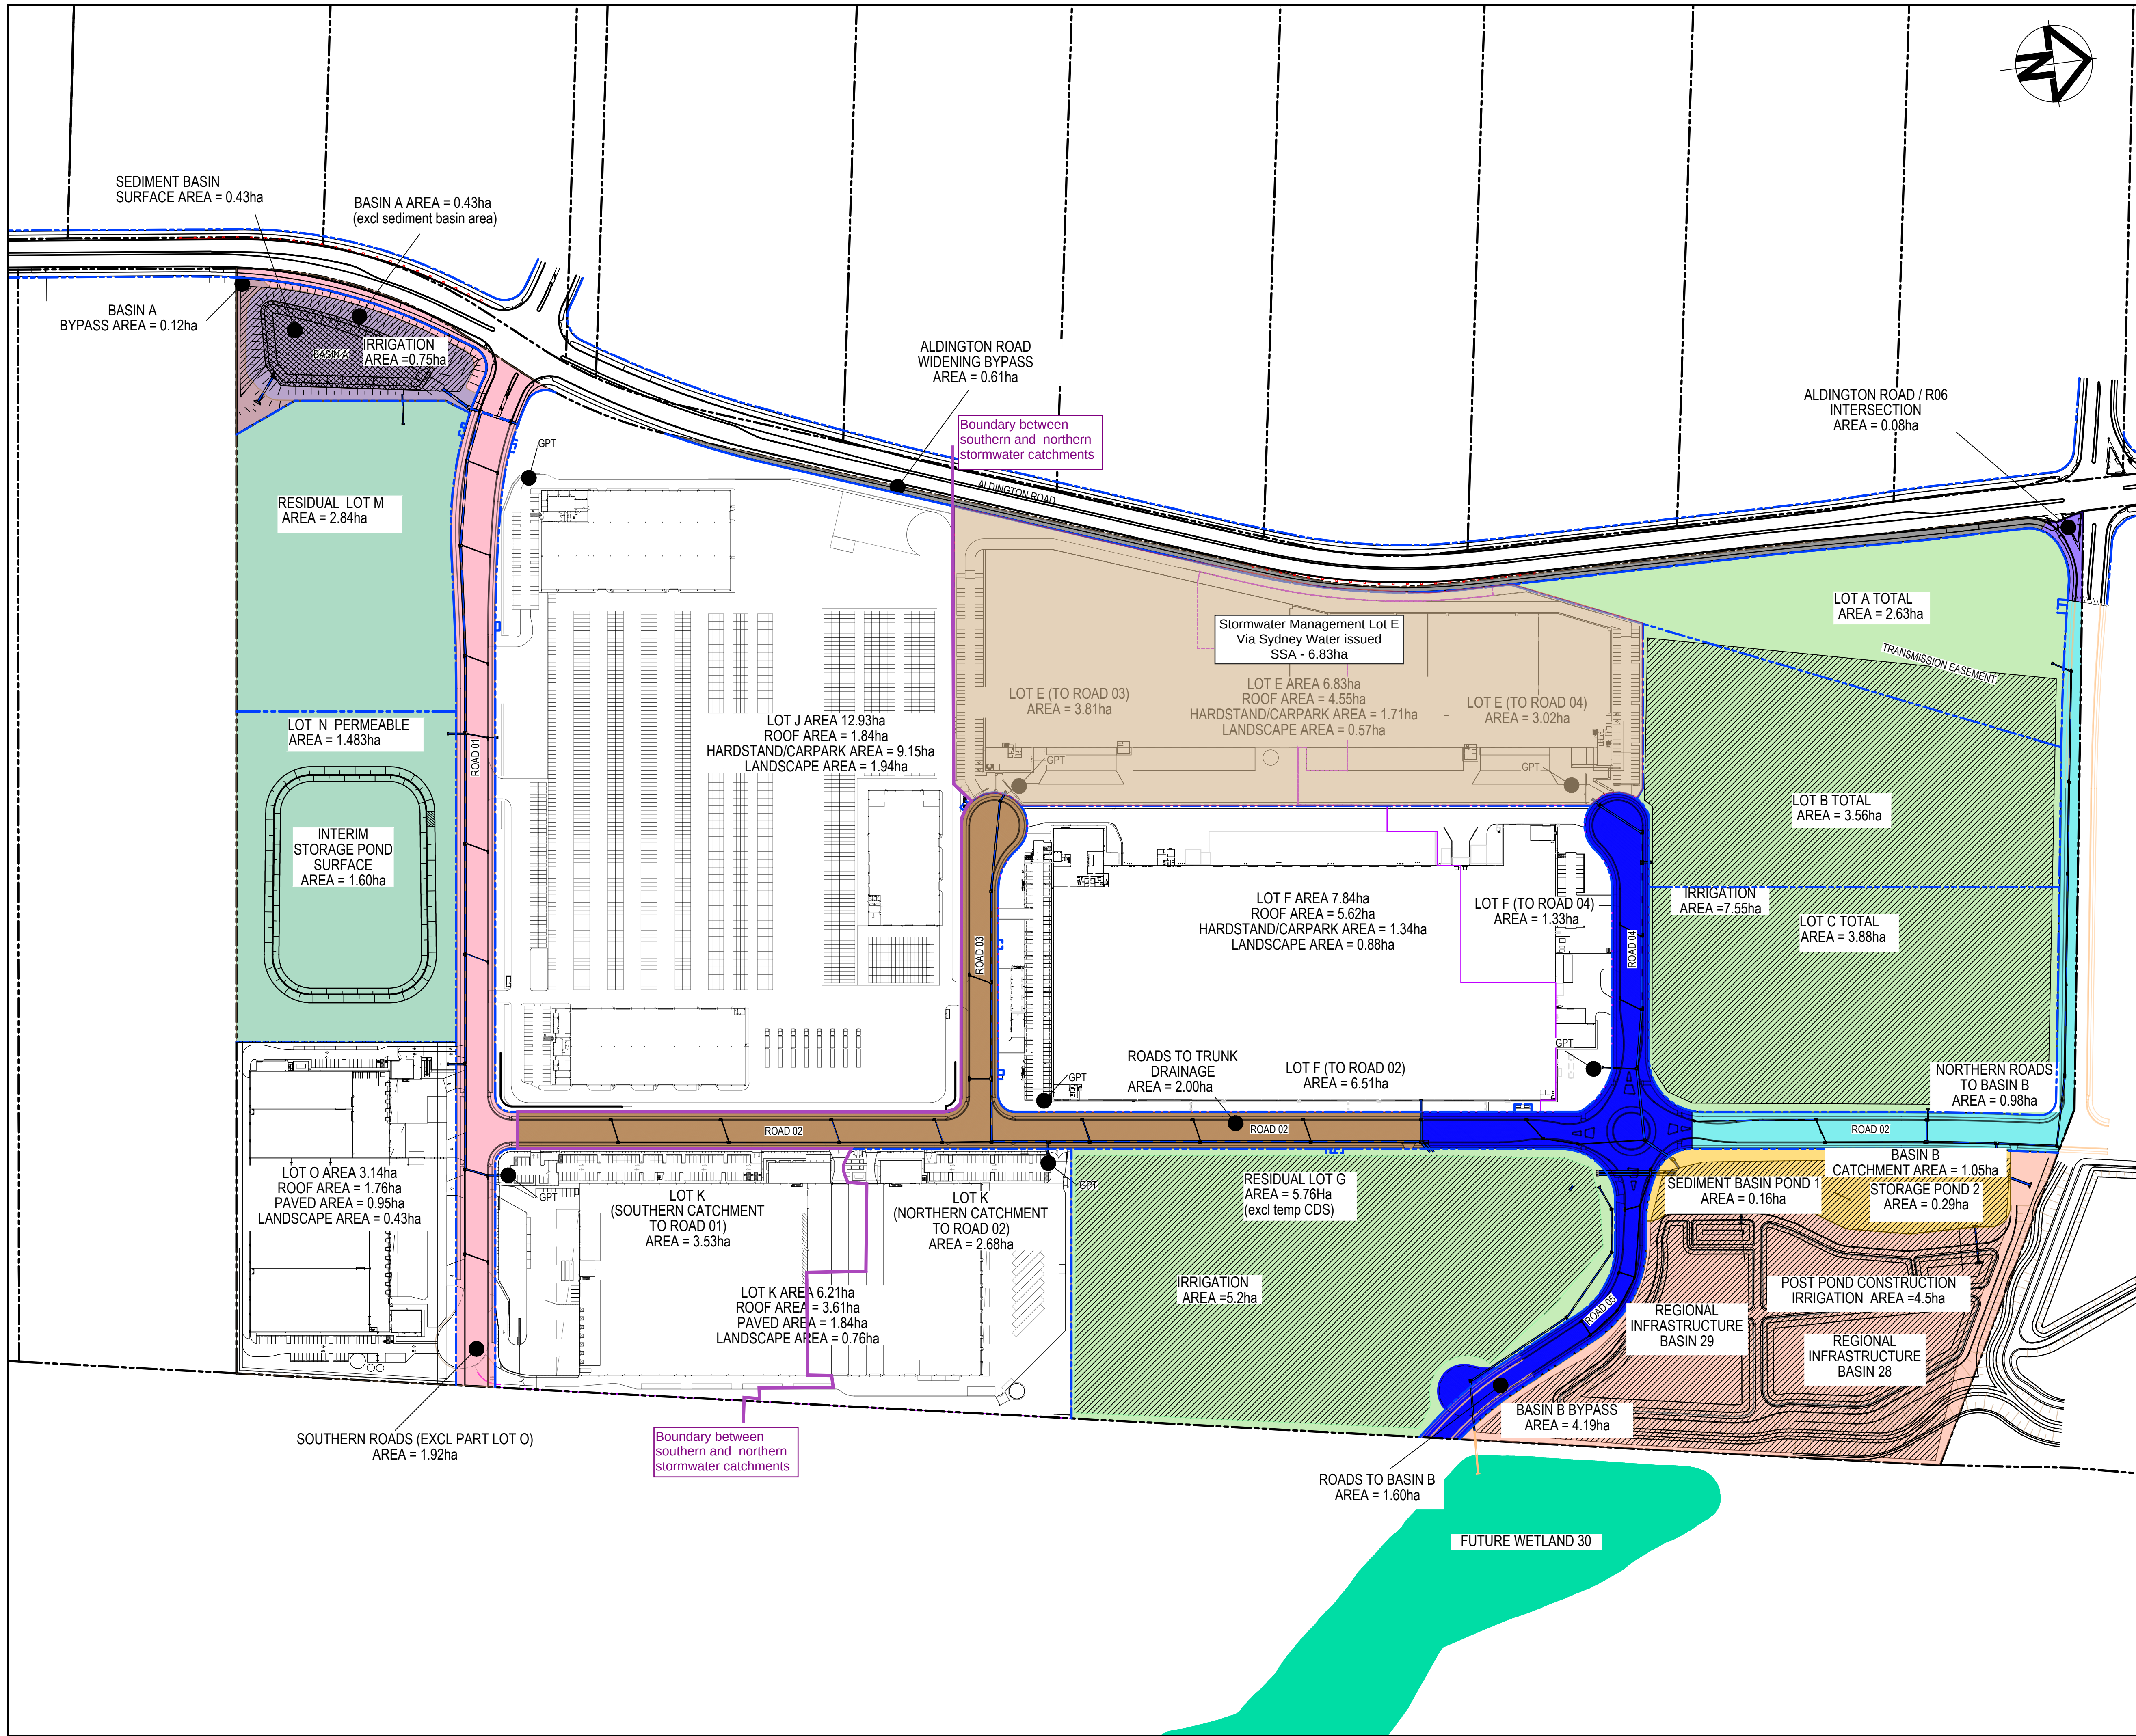

LEGEND

EXISTING	EXISTING BOUNDARY
---	EXISTING EASEMENT
PROPOSED	PROPOSED BOUNDARY
---	PROPOSED EASEMENT
---	EXTERNAL FUTURE WORKS

TOTAL SITE AREA: 72.13 ha

SOUTHERN CATCHMENT TOTAL AREA: 28.42 ha

SOUTHERN RESIDUAL LOTS	AREA: 5.92 ha
TOTAL LOT L (BASIN A EXCL. AREA DRAINING TO ROAD) AREA:	0.98 ha
SOUTHERN ROADS	AREA: 1.92 ha
DEVELOPED LOT J, K (STH), O	AREA: 19.60 ha

NORTHERN CATCHMENT TOTAL AREA: 43.01 ha

NORTHERN RESIDUAL LOTS	AREA: 15.83 ha
TOTAL NORTHERN ROADS	AREA: 4.59 ha
TOTAL LOT D	AREA: 5.24 ha
DEVELOPED LOT F, LOT E & LOT K (NTH)	AREA: 17.35 ha

OTHER AREAS - EXTERNAL TO PROJECT CATCHMENT

ALDINGTON ROAD BYPASS	AREA: 0.61 ha
ALDINGTON ROAD / R06 INTERSECTION	AREA: 0.08 ha

P12A	AMENDED IRRIGATION	24-06-26
P11	AMENDED FOR MOD 7	19-12-25
P10	AMENDED FOR MOD 6	26-09-25
P9	AMENDED AS PER MRP SCHEME CATCHMENTS	12-08-25
P8	FOR INFORMATION	11-05-25
P7	FOR INFORMATION	23-04-25

Issue	Description	Date
-------	-------------	------

0 50 100 150m

1 : 2000 @ A1

Status	FOR INFORMATION		A1
NOT TO BE USED FOR CONSTRUCTION			
Scales	1 : 2000	Drawn JC	
		Designed DF	
Height Datum	AHD	Checked DF	
Grid	GDA2020	Approved	

Client

Civil Engineers and Project Managers

Level 7, 153 Walker Street
North Sydney NSW 2060
ABN 96 130 882 405
Tel: 02 9439 1777
Fax: 02 9923 1055
www.ati.net.au
info@ati.net.au

Project

200 ALDINGTON ROAD INDUSTRIAL DEVELOPMENT SSDA10479 MOD 7

Title

STORMWATER MANAGEMENT AND CATCHMENT PLAN MOD7 (LOT O)

Drawing No.	Project No.	Issue
19-609-SKC228	19-609	P12

APPENDIX C - WSUD MAINTENANCE PLAN (DRAFT)

The shared Water management Strategy elements within the Estate will remain in private ownership. The shared assets will be maintained under the community title through the community association. This includes Lot D and Lot L.

These are draft plans that will need to be updated prior to operation based on final construction details and the maintenance plans should be regularly reviewed and updated as needed, especially if there are changes in regulations, controls or site conditions.

Table C1: Developed Lot GPT maintenance plan

GPT maintenance plan Location: 200 Aldington Road Developed Lots SSDA 10479 and SSD varies.			
Inspection Items	Frequency	Action required	Action taken & date
Visual inspection	3-6 months * or after heavy rain	■ Inspect ▶ Components ▶ Inlet ▶ Outlet ▶ separation screen ▶ diversion chamber ■ Empty filter/bag in accordance with manufacturer instructions ■ Record quantity of debris removed and sediment in sump ■ Dispose of debris appropriately ■ Repair if damaged	
Full dewater and clean	12 months	■ Full sump pump out, jet screen and sump ■ Clean behind screen ■ Visual inspection of vortex separation screen ■ If sediment has built up in diversion chamber Remove sediment	

Operation and Maintenance Manuals are available for most GPTs, the example used is the SPEL Vortceptor which contains full details and an example of inspection & Maintenance Log. [1370-SPEL-Vortceptor-HH.pdf](#)

Table C2: Sediment Basin maintenance plan

Sediment Basin (interim) Maintenance Plan Location: 200 Aldington Road Lot L (within Basin A) Lot D (within Basin B (pond 1))			
Inspection	Frequency	Action required	Action taken & date
Visual Inspection	Monthly	Inspect condition of the basin, Inspect inlet and outlet structures, Inspect erosion control measures, Assess integrity of berms and liners Measure and record sediment levels	
Sediment Removal	At 25% -50% capacity	Remove sediment taking precautions to not damage structures or liner Dispose of sediment appropriately - in accordance with plan	

Table C3: Irrigation maintenance plan

Landscape Irrigation maintenance plan Location: 200 Aldington Road Pump locations Residual land utilised for irrigation. SSDA 10479			
Inspection Items	Frequency	Action required	Action taken & date
System	Daily	Review online monitor/controller – confirm system operational	
Pumps	Monthly	Inspect pumps	
Irrigation nozzles	12 months	Inspect nozzles Remove and replace damaged nozzles	
Irrigation network	6 months	Check for sign of leaks	
Irrigation Controller	3 months	Check for faults Follow manufacturers instructions	

APPENDIX D – DESIGNER DETAILS

Designer Information

Name: Tim Michel

Title: Technical Director Urban Water Management

Qualification: BE (Civil) BA DipEngPrac CPEng NER (Civil & Environmental)

CPESC N: 11555

AT&L Contact number. 02 9439 1777

APPENDIX E – PCC CHECKLIST

 Water Sensitive Urban Design Development Application Checklist													
Site/ Project Name	200 ALDINGTON ROAD INDUSTRIAL ESTATE												
Lot and DP Number:	LOT 200 DP1285691												
DA Number:	SSD10479												
Information Required with DA Submission:													
	<table border="1"> <thead> <tr> <th>Y</th> <th>N</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Has a Water Sensitive Urban Design Strategy been submitted as part of the development application?</td> </tr> <tr> <td>2</td> <td>Is a BASIX Certificate required? If so, Yes - Attach certificate with DA</td> </tr> <tr> <td>3</td> <td> Has the digital version of MUSIC and report on the MUSIC model using data prescribed outlined in Council's Technical Guideline been attached? Have stormwater quality retention criteria (TSS 85%, TP 60%, and TN 45%) and water quantity / drainage requirements been met and documented in the WSUD Strategy? If relevant, have the Water Conservation, Quantity and quantity targets been achieved? </td> </tr> <tr> <td>4</td> <td> Does WSUD Strategy contain the following information? - Review of the WSUD principles and ensure that these are considered throughout development of the WSUD strategy. - Confirmation of the WSUD objectives that are relevant to the development application. - Confirmation of the WSUD targets for potable water conservation, stormwater quality management and stormwater quantity management that are relevant to the development application. - Complete a site analysis to evaluate the site characteristics that potentially will impact on the feasibility of WSUD for the site. WSUD measures that would be appropriate for the development considering the development scale, site characteristics, stormwater quality management function and stormwater quantity management function. - A preliminary WSUD strategy that positions the selected WSUD measures in appropriate locations and arranges the measures in an appropriate series. Numerical modelling utilising MUSIC software to evaluate appropriate sizes of the WSUD measures. Concept designs of the WSUD measures. WSUD strategy report that summarises the methodology and WSUD outcomes, and provide this with the development application for the site. </td> </tr> <tr> <td>5</td> <td>Have the conceptual plans of the proposed stormwater treatment measures been included on the plans? (Detailed engineering plans will be required for the construction certificate)</td> </tr> </tbody> </table>	Y	N	1	Has a Water Sensitive Urban Design Strategy been submitted as part of the development application?	2	Is a BASIX Certificate required? If so, Yes - Attach certificate with DA	3	Has the digital version of MUSIC and report on the MUSIC model using data prescribed outlined in Council's Technical Guideline been attached? Have stormwater quality retention criteria (TSS 85%, TP 60%, and TN 45%) and water quantity / drainage requirements been met and documented in the WSUD Strategy? If relevant, have the Water Conservation, Quantity and quantity targets been achieved?	4	Does WSUD Strategy contain the following information? - Review of the WSUD principles and ensure that these are considered throughout development of the WSUD strategy. - Confirmation of the WSUD objectives that are relevant to the development application. - Confirmation of the WSUD targets for potable water conservation, stormwater quality management and stormwater quantity management that are relevant to the development application. - Complete a site analysis to evaluate the site characteristics that potentially will impact on the feasibility of WSUD for the site. WSUD measures that would be appropriate for the development considering the development scale, site characteristics, stormwater quality management function and stormwater quantity management function. - A preliminary WSUD strategy that positions the selected WSUD measures in appropriate locations and arranges the measures in an appropriate series. Numerical modelling utilising MUSIC software to evaluate appropriate sizes of the WSUD measures. Concept designs of the WSUD measures. WSUD strategy report that summarises the methodology and WSUD outcomes, and provide this with the development application for the site.	5	Have the conceptual plans of the proposed stormwater treatment measures been included on the plans? (Detailed engineering plans will be required for the construction certificate)
Y	N												
1	Has a Water Sensitive Urban Design Strategy been submitted as part of the development application?												
2	Is a BASIX Certificate required? If so, Yes - Attach certificate with DA												
3	Has the digital version of MUSIC and report on the MUSIC model using data prescribed outlined in Council's Technical Guideline been attached? Have stormwater quality retention criteria (TSS 85%, TP 60%, and TN 45%) and water quantity / drainage requirements been met and documented in the WSUD Strategy? If relevant, have the Water Conservation, Quantity and quantity targets been achieved?												
4	Does WSUD Strategy contain the following information? - Review of the WSUD principles and ensure that these are considered throughout development of the WSUD strategy. - Confirmation of the WSUD objectives that are relevant to the development application. - Confirmation of the WSUD targets for potable water conservation, stormwater quality management and stormwater quantity management that are relevant to the development application. - Complete a site analysis to evaluate the site characteristics that potentially will impact on the feasibility of WSUD for the site. WSUD measures that would be appropriate for the development considering the development scale, site characteristics, stormwater quality management function and stormwater quantity management function. - A preliminary WSUD strategy that positions the selected WSUD measures in appropriate locations and arranges the measures in an appropriate series. Numerical modelling utilising MUSIC software to evaluate appropriate sizes of the WSUD measures. Concept designs of the WSUD measures. WSUD strategy report that summarises the methodology and WSUD outcomes, and provide this with the development application for the site.												
5	Have the conceptual plans of the proposed stormwater treatment measures been included on the plans? (Detailed engineering plans will be required for the construction certificate)												

6	Has a Draft Operation and Maintenance Plan which includes details on the following been provided? • Site description (area, imperviousness, land use, annual rainfall, topography etc) • Site access description • Likely pollutant types, sources and estimated loads • Locations, types and descriptions of measures proposed • Operation and maintenance responsibility (council, developer or owner) • Inspection methods • Maintenance methods (frequency, equipment and personnel requirements including Work Health and Safety requirements) • Landscape and weed control requirements • Operation and maintenance costs • Waste management and disposal options, and • Reporting.	Y	
---	--	---	--

APPENDIX F – SSA Letter Ropes Catchment (Estate northern catchment)

14th November 2025

Richard Harris
Fife Capital Pty Ltd
L12, 89 York Street,
Sydney, NSW, 2000

Reference: SSA_001/CN225522

COMMERCIAL IN CONFIDENCE

Re: Letter of Scheme Services Area Allocation for 200 Aldington Road, Stockland Fife Kemps Creek development, SSD-10479

Dear Richard

This letter is being provided to NSW Department of Planning, Housing and Infrastructure (DPHI) to provide clear and concise advice on how Stockland Fife Kemps Creek (SFKC) is delivering Sydney Water Regional Stormwater Basins 28 and 29 in the Ropes Creek sub-catchment to receive Scheme Serviced Area (SSA) in the form of Net Developable Area (NDA) in the site's northern sub-catchment. This letter sets out how the SSA will be allocated, the status of the sub-catchment and expected timeframes/milestones for delivery relating to the SSA allocation.

1. SSA Approach

The SSA approach is used to ensure the NSW Government's waterway objectives (flow and water quality) for the Wianamatta-South Creek catchment are achieved, which are stipulated in section 2.4 of the [Mamre Road Precinct Development Control Plan](#) (DCP).

The SSA approach has been developed by Sydney Water in conjunction with NSW Government Agencies, including the Department of Climate Change, Energy, the Environment and Water (DCCEE) - Conservation Programs, Heritage and Regulation Group (CPHR) and is explained in more detail in the SSA factsheet (Appendix E).

In general, the approach allows for the delivery of regional infrastructure to be fast tracked, whilst still allowing for the waterway health targets to be achieved at all times on a sub-catchment basis. This approach will allow developers who are delivering a regional stormwater basin, as per the [Integrated Stormwater Scheme Plan](#), to be able to develop their site up to the equivalent SSA NDA that basin will create, without the need for on-lot temporary interim stormwater measures. Any remaining SSA NDA will be distributed to other developments or projects within the sub-catchment at Sydney Water's discretion.

Sydney Water Corporation ABN 49 776 225 038

1 Smith Street, Parramatta, NSW 2150 | PO Box 399, Parramatta, NSW 2124

Telephone 13 20 92 Media (24/7) 8849 5151 sydneywater.com.au

Developers may develop NDA above the SSA proposed in this letter if they deliver further regional stormwater basins and receive a further SSA allocation letter or provide temporary interim stormwater measures to the consent authorities satisfaction.

2. Sydney Water review of key development information

Sydney Water has reviewed the information within Table 1 below relating to the 200 Aldington Estate development and provide its endorsement based on the information referenced in the table. Based on this information, the 200 Aldington Estate (the site) will meet the Wianamatta–South Creek operational phase stormwater management (quality and quantity (flow)) and Sydney Water general stormwater planning requirements.

Please be advised that Sydney Water provides its endorsement only on the basis that the 200 Aldington Estate continues to progress based on the milestones as set out in section 4 below. If any substantial changes are made to the milestones, development or the documents considered in Table 1 below which would lead to non-compliance or excessive delay to delivery of the regional scheme, Sydney Water retains its right to revoke its endorsement prior to development approval.

Component	Key outcome	Reference
Proposed development footprint and timing	The development footprint is for the 200 Aldington Estate is 72.13 ha. However, the estate is split into 2 sub-catchments with 28.43 draining south to Kemps Creek and 43.79 ha (37.73 ha of NDA) draining north to Ropes Creek and future basins 28 and 29 (the subject of this letter) Currently Approved in the Ropes Creek (site northern catchment): The Estate currently has approved: - Lot F with 7.84 ha footprint - Roads 2, 3, 4, 5 with a 4.65 ha footprint Totalling 12.49 ha of NDA, using an interim stormwater approach that includes irrigation areas to meet the DCP operational stormwater targets. Future development This leaves 25.24 ha of NDA remaining in the Ropes Creek Catchment, which includes: - Lot E (MOD 6) at 6.83 ha (expected delivery by December 2027) - Lot K north (MOD 5) 2.68 ha footprint (expected approval in Nov/Dec 2025 and delivery by December 2026) - Lot G at 5.81 ha (expected delivery by December 2027) - Lot A at 2.63 ha (expected delivery by June 2028) - Lot B at 3.56 ha (expected delivery by June 2028) - Lot C at 3.88 ha (expected delivery by June 2028)	See Appendix A
Catchment plan analysis	The catchment plan has been reviewed by internal subject matter experts and is consistent with Sydney Water's assumptions.	See Appendix B
MUSIC model	The model has been reviewed by internal subject matter experts and is compliant with Sydney Water's scheme MUSIC model and with the Wianamatta stormwater Targets.	See Appendix C
Completion of Concept Design	The design has been reviewed by internal subject matter experts and is consistent with Sydney Water's scheme plan.	See Appendix D

Table 1 – Key documents reviewed and endorsed by Sydney Water

Sydney Water Corporation ABN 49 776 225 038

1 Smith Street, Parramatta, NSW 2150 | PO Box 399, Parramatta, NSW 2124

Telephone 13 20 92 Media (24/7) 8849 5151 sydneywater.com.au



3. SSA allocation

The following information outlines the SSA NDA that Sydney Water will allocate to Stockland Fife Kemps Creek for the 200 Aldington Estate – SSD10479 Ropes Creek Sub-catchment (sites northern sub-catchment), for the delivery of the proposed basins and the compliance with the stormwater targets within the Sub-catchment.

Basin	SSA created by basin delivery (Ha of NDA)	SSA proposed to be used by developer delivering basin (Ha of NDA)	Remaining SSA once basin delivered (Ha of NDA)
28 & 29	17.937	17.937	0

Table 2 – SSA generated by delivery of basins 28 and 29 to scheme plan design.

As per table 1 there is approximately 25.24 ha of NDA remaining of the 200 Aldington Estate within the Ropes Creek catchment (sites northern sub-catchment) remaining, leaving a 7.30 ha of NDA gap. Therefore, the developer will need to be clear as to how they intend to use this SSA allocation, as there is insufficient SSA for their remaining development in the Ropes sub-catchment as part of the proposed future SSDs. This should form part of the stormwater management plan that will need to be updated and approved by both DPHI and Sydney Water with each future SSD or Modification.

4. SSA milestones to be met by Development

To ensure the timely delivery of basin infrastructure and eligibility for SSA allocation, SFKC agrees to use all reasonable endeavours to progress the investigations, designs, approvals and delivery of the Basins 28 and 29 in accordance with the indicative milestones outlined in Table 3 below.

Sydney Water acknowledges that delays may arise due to factors outside of the Developer's control. Provided that the Developer is in Sydney Water's view, undertaking all reasonable actions to advance the basin's design, approval and delivery, Sydney Water will not revoke its endorsement or reallocate the SSA to another party.

Sydney Water agrees to undertake its complete review and approval process within reasonable and commercially practicable timeframes, not exceeding 20 business days for each formal submission, unless otherwise agreed in writing. If Sydney Water anticipates exceeding this timeframe, it must notify the Developer in writing within five (5) business days of becoming aware, outlining:

- Reasons for the delay(s);
- Outline potential delay duration(s);
- Outline potential opportunities to mitigate overall programme delay.

The Developer must notify Sydney Water in writing within five (5) business days of becoming aware of any potential or unforeseen delays which may affect the indicative timeframes.

If delays arise, Sydney Water and the Developer will consult in good faith to agree on revised milestone dates. Sydney Water will provide written updates to the consent authority and Developer to reflect any revised milestone target dates.

If Sydney Water reasonably determines that the Developer is no longer progressing the design, approvals or delivery of the basin in general accordance with the indicative timeframes within Table 3, or otherwise revised, Sydney Water may issue a formal written notice to the Developer identifying the concerns and requesting action. If, following this notice, the Developer does not resume or continue reasonable progress within a timeframe agreed between the parties (or, failing agreement, within 20 business days), Sydney Water may formally revoke its endorsement and reallocate the

Sydney Water Corporation ABN 49 776 225 038

1 Smith Street, Parramatta, NSW 2150 | PO Box 399, Parramatta, NSW 2124

Telephone 13 20 92 **Media (24/7)** 8849 5151 sydneywater.com.au



basin design, approval and delivery along with the SSA to another party. This decision will be provided in writing to both the Developer and the relevant consent authority.

In such circumstances, the Developer will not be eligible for any reimbursement of costs incurred to date in relation to the basin's design, approvals, or delivery.

Component	Date	Evidence
Completion and endorsement of Functional Design	3 months from letter date	Letter to be provided to Developer with Endorsement
Completion and approval of REF and other approvals	6 months from letter date	REF signed off by Sydney Water
Completion and endorsement of Final Design	7 months from letter date	Designs approved in E-developer
Stormwater Developer Works Agreement	8 months from letter date	SDWA signed by both parties
All approvals prior to starting construction	9 months from letter date	ITP, job spec letter and other documents approved in E-developer
Start of Construction	10 months from letter date	Induction meeting occurred
Finalisation of Construction period	9 months from start of construction	Construction completion package complete

Table 3 – Milestones for the developer to achieve to ensure eligibility to use SSA

If a milestone extension is not negotiated with and agreed by Sydney Water, Sydney Water may decline to enter into the Stormwater Developer Works Agreement with the Developer SFKC and the design and/or delivery of the basin by the Developer SFKC would cease. Sydney Water may also receive and consider applications from other developers to deliver the relevant infrastructure and reallocate the SSA.

Once the basin is built and is signed off as 'Complete' by Sydney Water the SSA indicated in Table 2 will be allocated to SFKC within the Ropes Creek sub-catchment. Construction of the development area reliant on the SSA from the basin may occur concurrently with the basin required to be completed to Sydney Water's satisfaction prior to issuance of Occupancy Certificate for the Development.

As indicated in the SSA Factsheet (Appendix E), despite the delivery of the basin, SFKC is still required to deliver on lot works identified by the relevant DCP such as:

- pervious targets
- construction phase erosion and sediment control basins
- Other stormwater drainage outcomes.

These components will need to be delivered by the developer as per their development consent.

Sydney Water and SFKC will need to work together to ensure the stormwater reuse required to always meet the Wianamatta–South Creek operational phase stormwater management (quality and quantity (flow)) targets is implemented. This may require keeping existing/proposed interim measures and/or allocation of additional irrigation or stormwater reuse within their development footprint/s. Once the full regional scheme is implemented (recycled water scheme operational) these measures may be removed with Sydney Water endorsement.

5. Land acquisition

Basins 28 and 29 are located on land owned by SFKC. Sydney Water will work with SFKC as part of the Stormwater Developer Works Agreement to acquire the basin after the basins are delivered.

6. Process to get to a Stormwater Developer Works Agreement

This letter of SSA allocation (also referred to as the Letter of Intent in Sydney Water's Developer Works Policy) is issued at an early stage of the Developer Delivered Works Process. This letter applies from the early stage of the development process through to when SFKC and Sydney Water enter into a Stormwater Developer Works Agreement, which is essential for the delivery of the regional basins and for the developer to receive reimbursement.

The developer is to consult with Sydney Water to progress to a finalised/executed Stormwater Developer Works Agreement.

7. Approval from Sydney Water

At the time of writing this letter Sydney Water confirms, to the best of its knowledge, that all information provided by the developer meets the agreed requirements set out in the SSA factsheet and through consultation with by NSW Government and Penrith City Council.

If the developer withdraws its State Significant Development Application and/or no longer wishes to deliver the basin, it must provide 30 days' written notice of its intention to withdraw to both Sydney Water and the relevant consent Authority. Similarly, if Sydney Water seeks to revoke its endorsement or terminate this agreement due to non-compliance with the indicative timeframes, it will also provide 30 days' written notice to both the Developer and relevant Statutory planning authority.


Yours sincerely,



Paul Higham
Head of Business Development

Appendix A - Proposed development footprint

Figure 1 - SFKC Concept Proposal for MOD 6

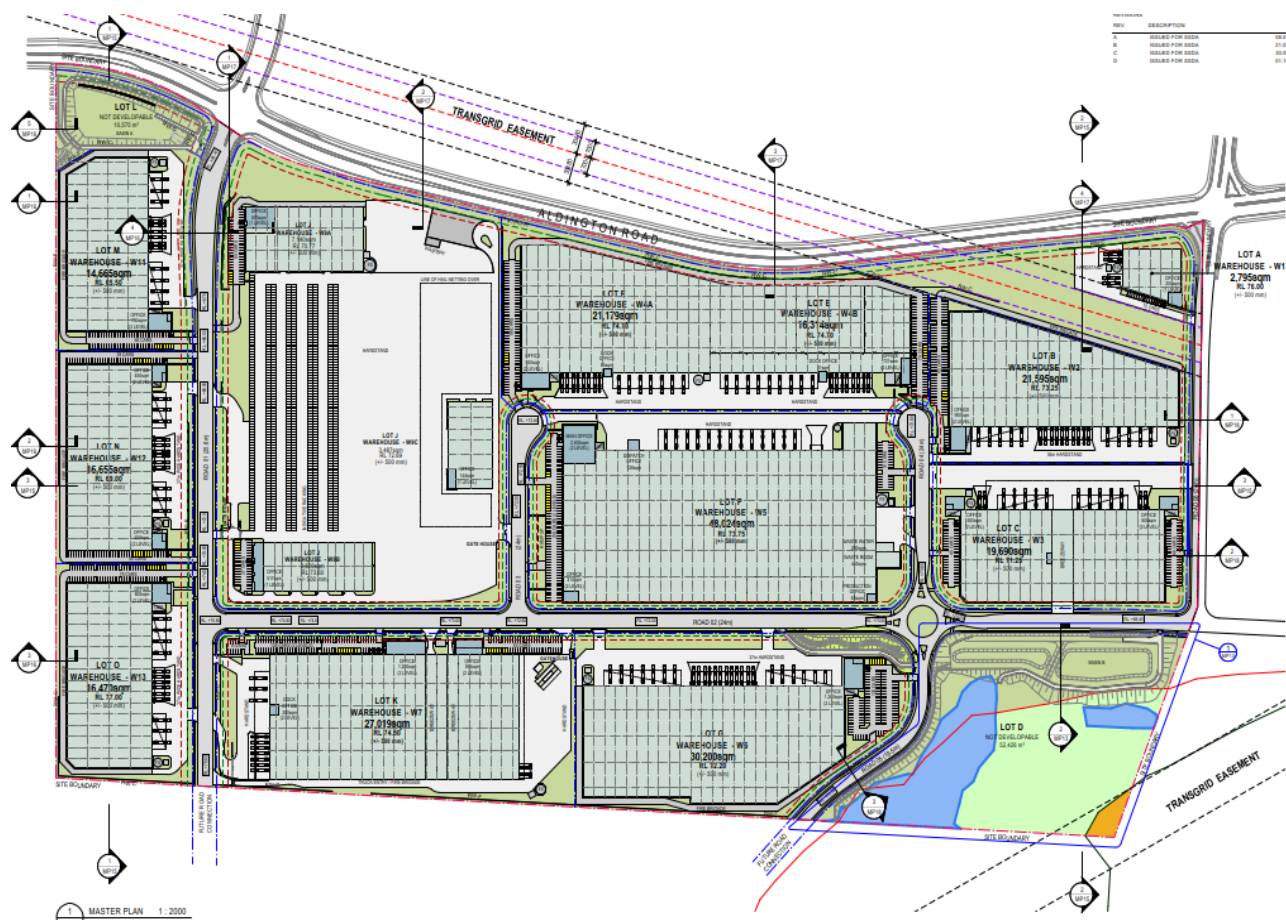

Note: for the catchment split see appendix B.


Sydney Water Corporation ABN 49 776 225 038

1 Smith Street, Parramatta, NSW 2150 | PO Box 399, Parramatta, NSW 2124

Telephone 13 20 92 Media (24/7) 8849 5151 sydneywater.com.au



Figure 2 – SSD 10479 – MOD6, stormwater management and catchment plan.

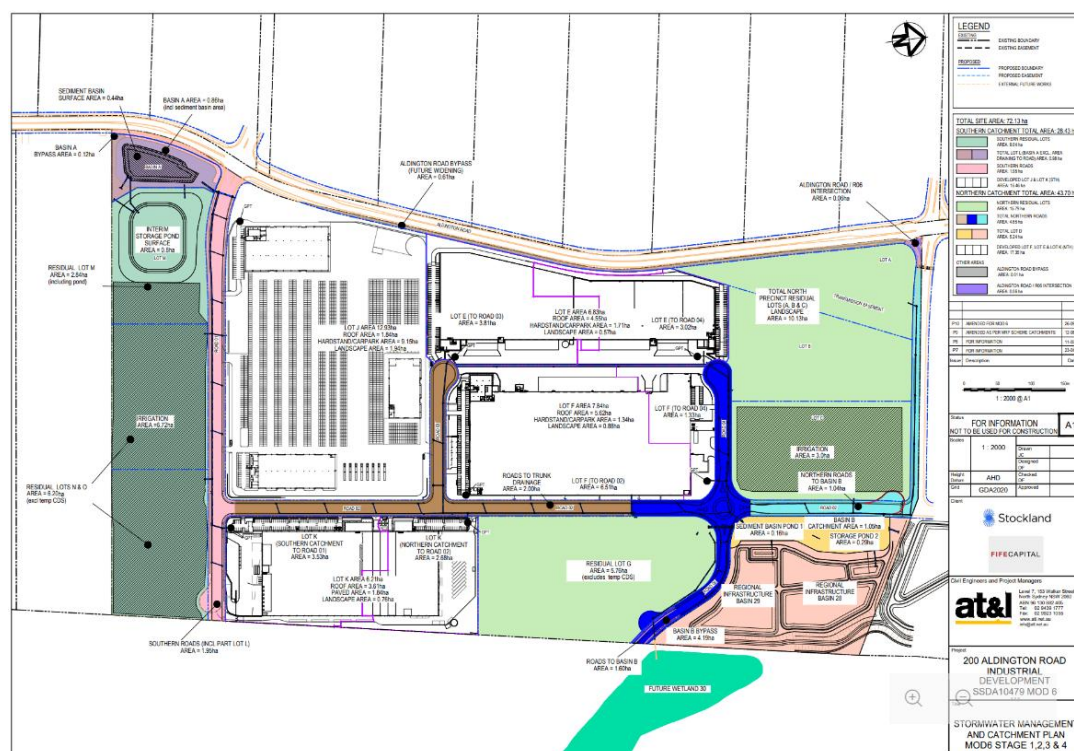

Note: the irrigation area in Lot C is to remain until the regional scheme becomes fully online (2028) or until Sydney Water/DPHI provided approval it can be removed.

Table 1 – Analysis of development site within Ropes Creek Sub-catchment (site Northern Catchment).

Stage	Lot	Area (ha)	NDA (ha)	MOD	SSD	Approval status	Operational Date (anticipated)	Interim SW scheme
Stage 1 roads	Roads	4.65	4.65		10479	5/05/2023	Oct-26	Y
1	F	7.84	7.84	4	79300218	29/07/2025 (MOD4)	Oct-26	Y
2	K (Nth)	2.68	2.68	5	80264236		Nov-26	Y
3	E	6.83	6.83	6	85510213		Dec-27	N
TBC	G	5.81	5.71				Dec-27	N
TBC	A	2.63	0.84				Jun-28	N
TBC	B	3.56	3.56				Jun-28	N
TBC	C	3.88	3.88				Jun-28	N
Basins	D	5.24	1.88					
Aldington Rd	excluded	0.67	0					
Total		43.79	37.73					
NDA Approved with interim			12.49					
Remaining NDA			25.24					
SSA generated by 28/29			17.94					
Gap			7.304					

Sydney Water Corporation ABN 49 776 225 038


1 Smith Street, Parramatta, NSW 2150 | PO Box 399, Parramatta, NSW 2124

Telephone 13 20 92 Media (24/7) 8849 5151 [sydwater.com.au](https://www.sydwater.com.au)



Appendix B - Catchment plan analysis

Figure 1 – sub-catchment plan for 200 Aldington Estate

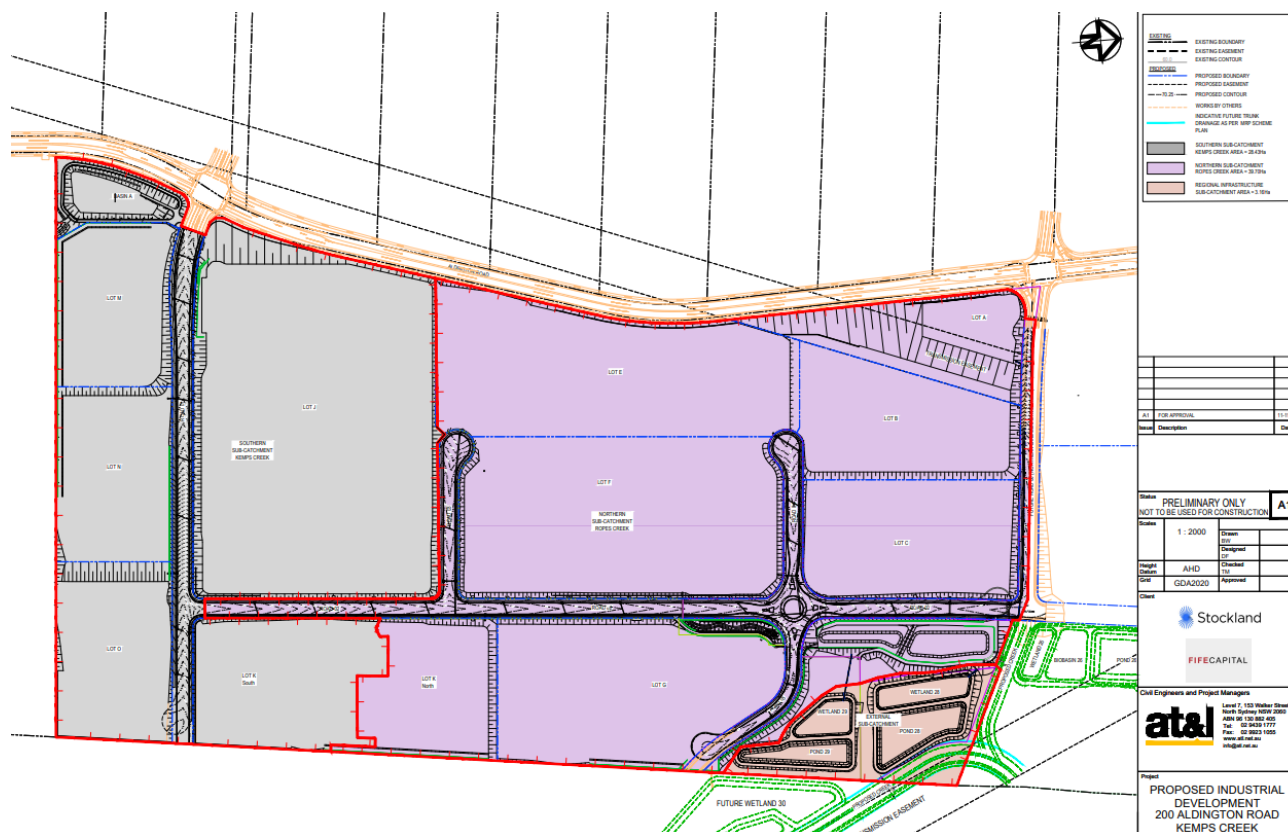

Note: purple area is the Ropes Creek (northern) sub-catchment and the grey area is the Kemps (southern) sub-catchment .

Sydney Water Corporation ABN 49 776 225 038

1 Smith Street, Parramatta, NSW 2150 | PO Box 399, Parramatta, NSW 2124

Telephone 13 20 92 Media (24/7) 8849 5151 sydneywater.com.au



Appendix C - MUSIC model for basin

A. Overview

MUSIC modelling was undertaken by Sydney Water considering the development timeline proposed in Table 1 Appendix A and other anticipated development within the sub-catchment. It is assumed that the construction of Basins 28 and 29 will be completed in 2026, prior to the approval of any lot that uses SSA. A Section 73 certificate will only be issued once the Basins 28 and 29 are delivered to ensure compliance with the Waterway Health Targets.

B. Overall outcome

Table 1 provides an overall outcome of the MUSIC modelling, which indicates the Ropes Creek sub-catchment is compliant to both the quality and quantity (flow reduction) targets per year up until the reservoir is operational.

Year	2026		2027		2028	
Component	Quality	MARV	Quality	MARV	Quality	MARV
Ropes Creek	Compliant	Compliant	Compliant	Compliant	Compliant	Compliant

Table 1: Ropes Creek Sub-catchment and Mamre Road Precinct Compliance Overview Table

C. Ropes Creek Sub-catchment detailed analysis

This section provides the detailed results from the MUSIC model per year.

1. 2026

a. Water quality

	Pre Development	Post Development	Results (kg/ha/yr)	Target (kg/ha/yr)
Total Suspended Solids (kg/yr)	3.66E+04	5.90E+03	26.57	80
Total Phosphorus (kg/yr)	71.2	19.8	0.09	0.3
Total Nitrogen (kg/yr)	4.55E+02	2.14E+02	0.96	4.5
Gross Pollutants (kg/yr)	4.51E+03	9.45E+01	0.43	16

b. MARV

Stormwater Quantity (flow) Targets Option 1 - MARV			
Indices	Result	Comply	Target
MARV (ML/ha/yr)	0.65	Yes	< 2
90%ile	2,905	Yes	1000 to 5000 L/ha/day
50%ile	93	Yes	5 to 100 L/ha/day
10%ile	0	No	0 L/ha/day

2. 2027

a. Water quality

	Pre Development	Post Development	Results (kg/ha/yr)	Target (kg/ha/yr)
Total Suspended Solids (kg/yr)	5.49E+04	8.19E+03	36.88	80
Total Phosphorus (kg/yr)	112	27.5	0.12	0.3
Total Nitrogen (kg/yr)	7.63E+02	3.03E+02	1.36	4.5
Gross Pollutants (kg/yr)	8.52E+03	9.24E+01	0.42	16

Sydney Water Corporation ABN 49 776 225 038

1 Smith Street, Parramatta, NSW 2150 | PO Box 399, Parramatta, NSW 2124

Telephone 13 20 92 Media (24/7) 8849 5151 sydneywater.com.au



b. MARV

Stormwater Quantity (flow) Targets Option 1 - MARV

Indices	Result	Comply	Target
MARV (ML/ha/yr)	0.85	Yes	< 2
90%ile	2,699	Yes	1000 to 5000 L/ha/day
50%ile	100	Yes	5 to 100 L/ha/day
10%ile	0	No	0 L/ha/day

3. 2028

a. Water quality

	Pre Development	Post Development	Results (kg/ha/yr)	Target (kg/ha/yr)
Total Suspended Solids (kg/yr)	1.31E+05	1.22E+04	54.94	80
Total Phosphorus (kg/yr)	257	47.4	0.21	0.3
Total Nitrogen (kg/yr)	1.62E+03	5.36E+02	2.41	4.5
Gross Pollutants (kg/yr)	1.96E+04	3.60E+02	1.62	16

b. MARV

Stormwater Quantity (flow) Targets Option 1 - MARV

Indices	Result	Comply	Target
MARV (ML/ha/yr)	0.85	Yes	< 2
90%ile	2,699	Yes	1000 to 5000 L/ha/day
50%ile	100	Yes	5 to 100 L/ha/day
10%ile	0	No	0 L/ha/day

D. Sign off

This MUSIC modelling was undertaken as per the Wianamatta Technical guidelines. The sign off indicates the modelling has been undertaken to the guidelines and the information used is accurate at the time of development.

Darren Galia
Senior Stormwater Planner (B.eng (Civil), CPENG, NER)




13/11/2025

200 ALDINGTON ROAD, KEMPS CREEK
STORMWATER SCHEME PLAN BASINS 28 AND 29
FEASIBILITY STRATEGIC DESIGN





	AS - REQUIRED FOR INFORMATION	AS - P
ISSUES		
FOR INFORMATION		A
STATUS	N.T.S.	Covered
		Uncovered
WATER QUALITY	RWD	Not Covered
GROUND WATER	GEOTECH	Yes
Stockland		
RIFECAPITAL		
Civil Engineering and Project Management		
Level 7, 932 Market Street Melbourne VIC 3005 Australia Tel: +61(0)3 8629 0777 Fax: +61(0)3 8629 0778 www.atai.com.au info@atai.com.au		
Project:		
REGIONAL STORMWATER INFRASTRUCTURE 200 ALDINGTONE ROAD KEMPS CREEK		
Title:		
COVER SHEET		
Drawing No:		
(18-60-C1100)	18-60-B	PAGE 1 OF 1

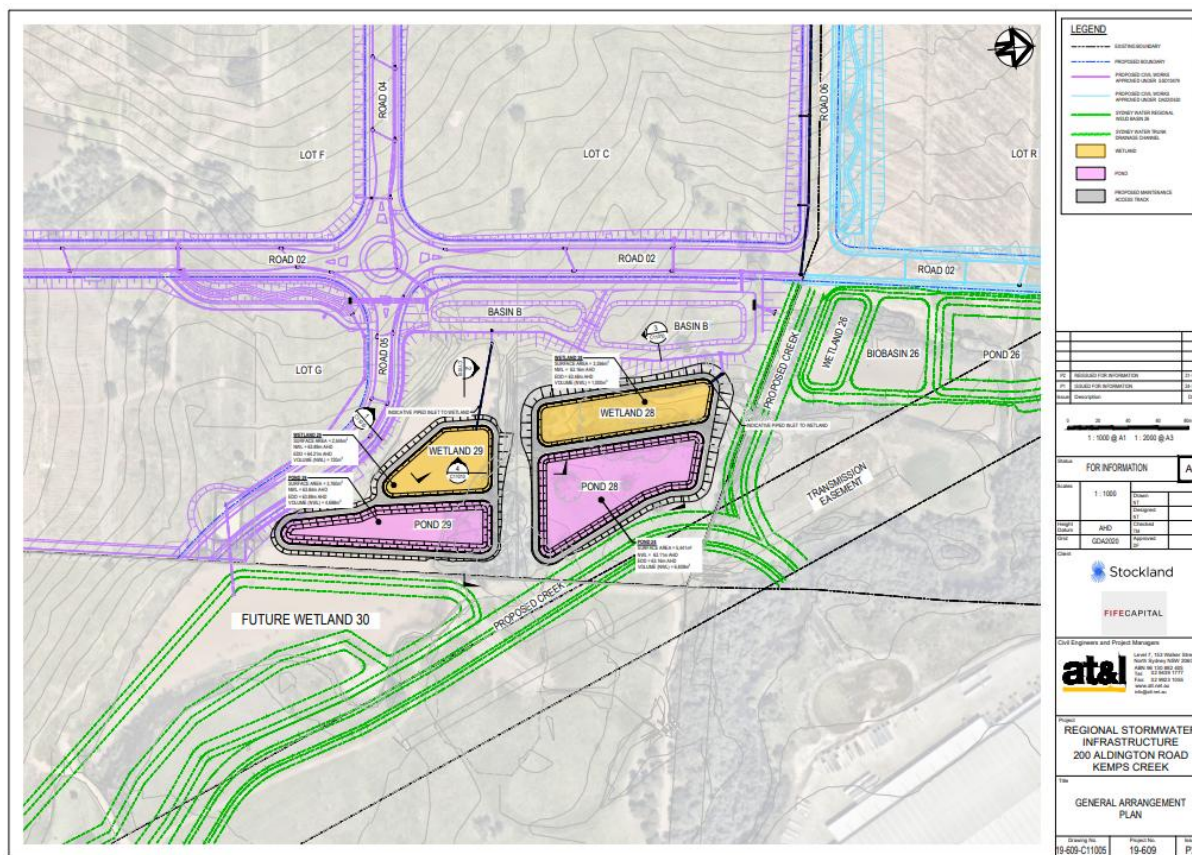







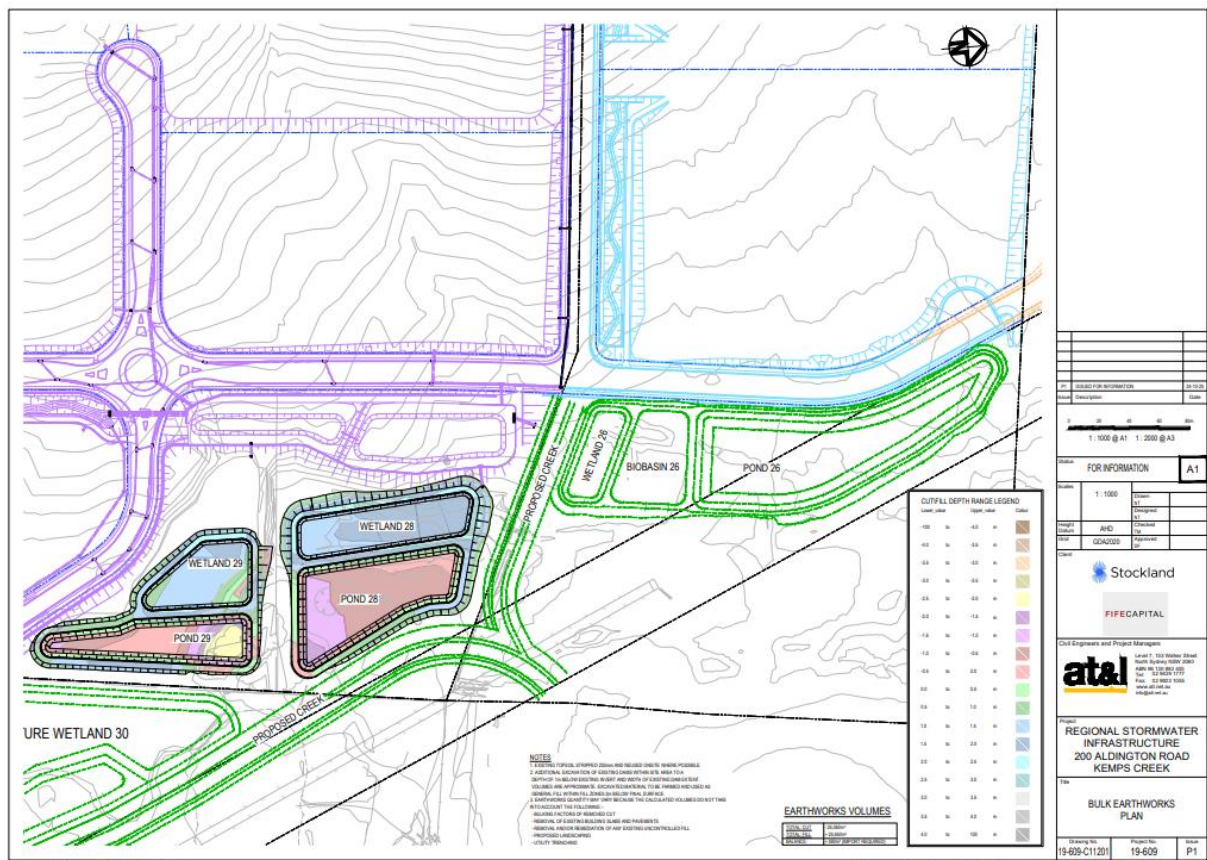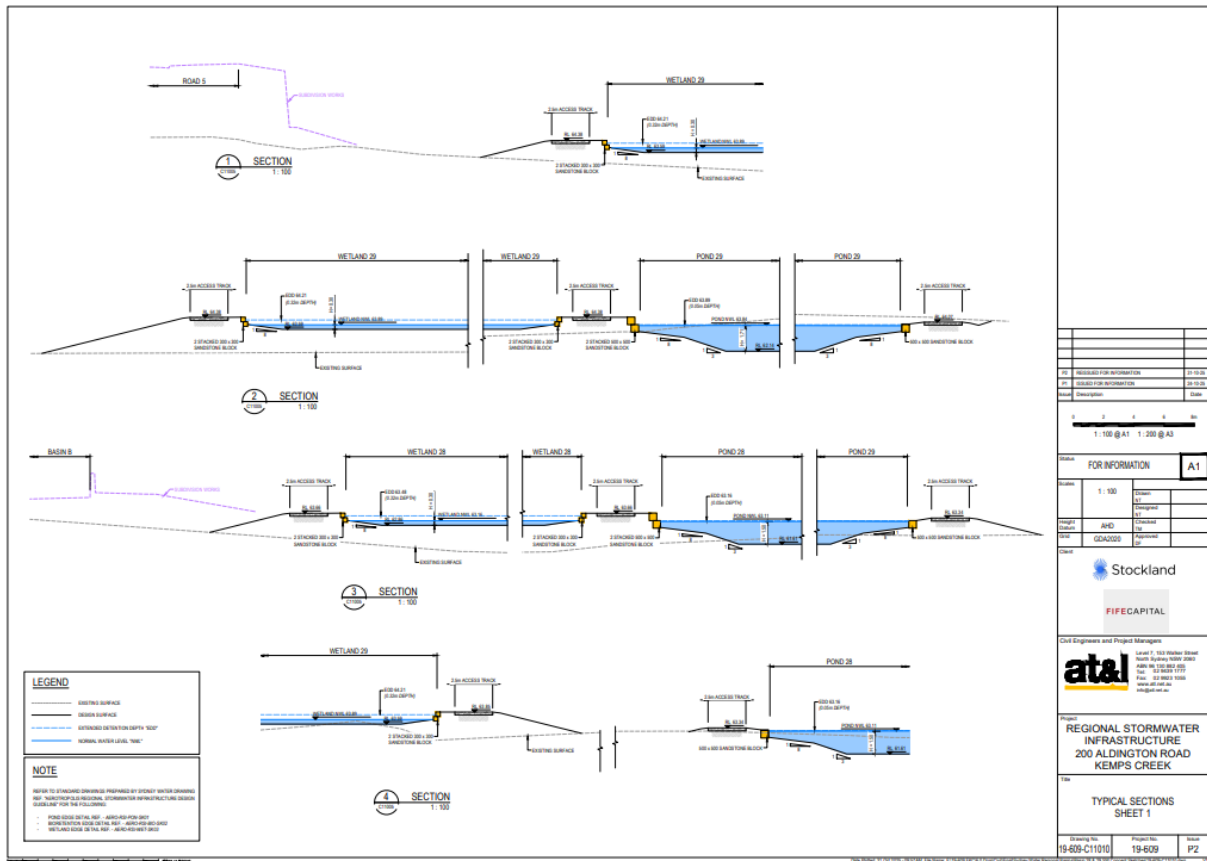

Appendix E - SSA factsheet

Sydney Water Corporation ABN 49 776 225 038

1 Smith Street, Parramatta, NSW 2150 | PO Box 399, Parramatta, NSW 2124

Telephone 13 20 92 Media (24/7) 8849 5151 sydneywater.com.au



Stormwater Scheme Serviced Area

This document provides an explanation of the Stormwater Scheme Serviced Area (SSA), including guiding principles and how it is applied within the Mamre Road and Aerotropolis Initial Precincts.



- Sydney Water are the regional stormwater authority for the Mamre Road and Aerotropolis Initial Precincts
- Sydney Water are to achieve the Wianamatta stormwater quality/flow targets of the relevant DCP's by implementing regional stormwater treatment and harvesting infrastructure
- Sydney Water has developed the SSA to ultimately fast track the delivery of regional infrastructure to minimise the need for on-lot temporary works and developable land.

Current on-lot approach to meet stormwater targets

Development that precedes the delivery of regional stormwater infrastructure must meet the DCP requirements within the development using interim and temporary infrastructure. This process generates several issues:

- An additional cost to the developer through:
 - Designing, modelling, constructing, operating, and managing the interim solution
 - Sterilising developable land until the Sydney Water regional approach is operational (approximately 25-30% of each development would be allocated to meet the controls)
 - Decommissioning of interim infrastructure once the regional scheme is operational.
- A burden on both State Government and Councils for assessing, conditioning, approving and ensuring compliance of interim on-lot systems.

Proposed solution to reduce on-lot controls

To progress to the regional scheme assets, Sydney Water has developed an accounting approach with the following objectives:

1. Provide a robust solution that can be deployed in line with development and achieve the waterway health targets at all times
2. Optimisation of the overall integrated stormwater scheme cost (the "Development Service Plan" – DSP)
3. Incentivise construction of the regional stormwater basins by developers
4. Facilitate development and approvals of employment lands.
5. Be efficient and effective as possible by undertaking regular reviews and when required update the approach.

Principles of SSA accounting scheme

The following principles have been developed to achieve the above objectives and to ensure consistency and transparency.

Definition: The Stormwater Scheme Serviced Area is an area of land that can be developed without the need for interim/temporary on-lot stormwater quality/quantity infrastructure, excluding those that are required specifically in the DCP, such as gross pollution traps, on-site detention, passively watered street trees, erosion and sediment control and sediment basins (refer 13).

Key principles of SSA

1. Stormwater management targets (including both the adopted water quality and water quantity targets) will be met at all times.
2. The targets will be assessed on a sub-catchment basis (as shown in Figure 1 for the Mamre Road Precinct). Sub-catchments have been determined to be consistent with discharge into the receiving waterway and align with more recent published Stormwater Scheme [MUSIC models](#).

Generation of SSA

3. SSA will be generated at the practical completion of construction of stormwater basins (when 'practical completion' is awarded by Sydney Water).
4. The 'currency' will be net developable area (NDA) as per Sydney Water's [net developable area factsheet](#)
5. The amount of area available for development without requiring interim temporary on-lot infrastructure (generally a temporary bioretention or pond with a dedicated irrigation area) to meet the waterway health targets will be based on the following formula:

$$SSA = \left(\frac{\text{Constructed basin footprint}}{\text{Total subcatchment basin footprint}} \right) \times \text{NDA of Subcatchment}$$

6. The formula used assumes the delivered basin will achieve the modelled flow reductions via harvesting/re-use. If the proposed harvesting does not achieve the required flow reductions in the period until the regional recycled water network is operational additional measures will be required.
7. The basin footprints will be based on the values in the most recent published [MUSIC models](#).
8. The above formula is not applicable for the Aerotropolis Initial Precincts as there is no scheme plan. Sydney Water will negotiate with developers on a case-by-case basis until the scheme plan is complete.

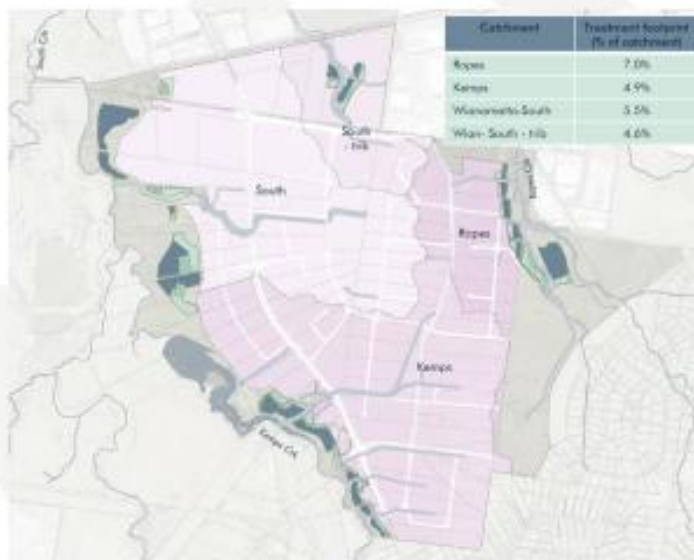


Figure 1 – The four stormwater sub-catchments in the Mamre Road Precinct.

Allocation of Scheme Serviced Area

9. SSA will be allocated by Sydney Water via a Feasibility Advice letter that can be included in the DA/SSDA documentation. The letter will outline:
 - a. the amount of SSA being awarded to the developer
 - b. the developments/land where the developer can use the SSA which will be based on the land that the developer currently owns within the sub-catchment
 - c. processes/requirements for the developer to implement ensuring SSA will be appropriately used
 - d. Resolution pathways if the matters in point c above are not appropriately addressed.
10. SSA can only be used in the sub-catchment in which they are generated and cannot be transferred between sub-catchments (see point 2).

11. SSA cannot be traded as a commodity in any form.
12. SSA will be allocated by Sydney Water to the developer/s who enter into an agreement to construct the basin or by negotiation with involved parties. If multiple developers build one basin the allocation of SSA between the parties will need to be agreed prior to approval.
13. Any 'excess' SSA will be allocated by Sydney Water to other developments or projects (i.e. road upgrades) at their discretion. As all works will be reimbursed in accordance with Sydney Water's Stormwater Developer Works Policy, Sydney Water owns the allocation of excess SSA.
14. Sydney Water expects to allocate 'excess' SSA based on the following:
 - a. to development that has been approved and allocation of SSA will be based on the NDAs for section 73 approvals (in order of approval date); THEN,
 - b. to developments within the sub-catchment that are in the process of lodging a development application (in order of lodgement date).

SSA recipient requirements:

15. Recipients of SSA will be required to meet the construction phase IWCM controls (i.e. stormwater targets) in the relevant DCP for their site. Unless otherwise advised by Sydney Water, sediment basins are to be provided and operated by the developer within the development with a minimum storage volume of 250 m³/hectare. Consistent with the [Technical Guidelines](#), these sediment basins are to remain active until the regional basin becomes operational or until notified by Sydney Water that they can be removed.
 - a. This can generally be achieved by a combined sediment basin and on-site detention system at the lowest area of the development. The staging of development must ensure the sediment basin can stay active until notified by Sydney Water.
16. Recipients of SSA must meet any on-site stormwater detention requirements of Council as outlined in the DCP or as required for floodplain management within the development.

Accounting scheme manager

17. Sydney Water will manage the SSA accounting process and be responsible for and certify that the Stormwater targets are being achieved by Scheme Infrastructure at all times.
18. Sydney Water will provide quarterly reporting on the status of the accounting approach including for each sub-catchment:
 - a. details of basin stage including functional design, detailed design, under construction, practical completion, establishment, and full operation
 - b. total SSA generated
 - c. total SSA allocated
 - d. total net developed area to determine what SSA's have been used and remain
 - e. total impervious and pervious areas
 - f. certification/compliance with the stormwater targets based on MUSIC models.
19. As part of the quarterly reporting Sydney Water will provide details of active sediment basins within development sites.
20. Once a regional basin is built to practical completion, it is at Sydney Water's discretion as to when the components of the basin (i.e. sediment basin, wetland, bioretention, or pond) will become operational. As indicated in note 15 Sydney Water will ensure the waterway health targets are achieved at all times and this might require some infrastructure be operational at different times. Generally, the bioretention and wetland component can take up to 24 months to be fully operational, however the sediment basin and pond will likely be operational at practical completion.

Site works not covered by this SSA approach

21. Development sites must still meet the stormwater requirements identified by the relevant DCP not directly associated with the regional stormwater targets, including:
 - On lot Gross Pollutant Traps
 - On site detention
 - Passively Irrigated Street Trees
 - Naturalised Trunk Drainage Channels and existing waterways
 - Other stormwater drainage outcomes.

Illustrative example 1 (hypothetical example only)

Basins 28 and 29 are within the Ropes Creek catchment. Developer A owns land draining to Basins 28 and 29 as well as the land on which the proposed Basins 28 and 29 are to be constructed. Developer A owns a total of 25 ha of NDA draining to Ropes Creek.

Developer A also owns a small portion of land in the south west draining to South Creek.

Developer A agrees with Sydney Water to construct Basins 28 and 29 and a feasibility advice letter is provided including the amount of SSA (20 ha) that will be allocated and the requirements for construction of the basins. As the SSA is less than the total NDA, no excess SSA is generated.

Developer A constructs Basins 28 and 29 and operates the harvesting components to meet the stormwater targets generating approximately 20 ha of SSA that can be used for the land within the Ropes creek sub-catchment. Developer A's 25 ha of NDA is greater than the SSA (20 ha), hence Dev A needs to either construct additional basins OR request any available excess SSA from Sydney Water OR provide interim on-lot measures for 5 ha of NDA.

The SSA cannot be used by Developer A for NDA draining to another sub-catchment (areas draining to the west).

Sydney Water to provide ongoing certification that stormwater targets are achieved.



Basins 28 and 29 are constructed by Developer A generating 20 ha of SSA.

Illustrative example 2 (hypothetical example only)


Basin 14 is within the Kemps Creek catchment. Developer X and Developer Y both own land draining to Basin 14 as well as part of the land on which the proposed Basin 14 is to be constructed. Dev X and Developer Y each own a total of 30 ha of NDA draining to Kemps Creek. Basin 14 generates 80 ha of SSA.

Developer X and Y reach a commercial agreement to construct all of Basin 14. Developers X and Y agree with Sydney Water to construct all of Basin 14 and a feasibility advice letter is provided to Developers X and Y including the amount of SSA (Developer X and Y both receive 30 ha) that will be generated and the requirements for construction of the basins.

As the SSA generated by construction of Basin 14, and operating the harvesting components to meet the stormwater targets, is greater than the total NDA of Developer X and Y, 20 ha of excess SSA is generated. Sydney Water owns the excess SSA and may allocate this to other developments within the Kemps Creek sub-catchment.

Developers X and Y construct Basin 14 based on their commercial agreement and generate 80 ha of SSA and Developer X and Y can develop all 30 ha of their NDA (as the SSA is greater than the combined NDA).

Sydney Water to provide ongoing certification that stormwater targets are achieved.

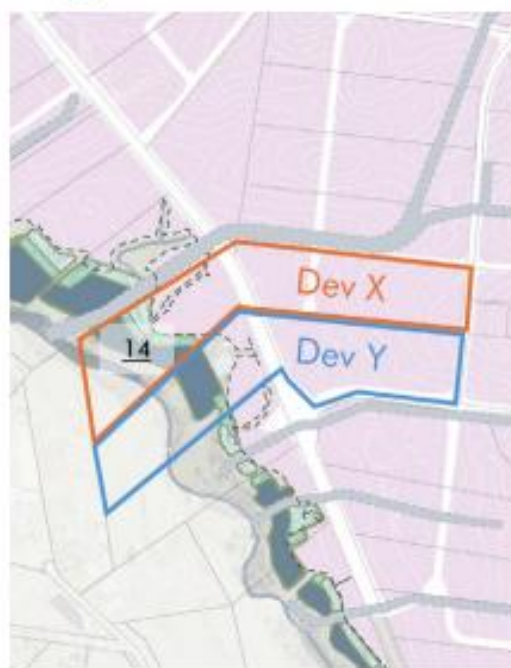

Basin 14 is constructed by Developer X and Y generating 80 ha of SSA.



NORTH SYDNEY

LEVEL 10
124 WALKER STREET
NORTH SYDNEY NSW 2060
02 9439 1777
INFO@ATL.NET.AU

PARRAMATTA

SUITE 1.02 LEVEL 1
60 STATION STREET
PARRAMATTA NSW 2150
02 9068 8517
INFO@ATL.NET.AU

BRISBANE

SUITE A1 LEVEL 20
127 CREEK STREET
BRISBANE QLD 4000
07 3211 9581
INFO-QLD@ATL.NET.AU

MELBOURNE

LEVEL 4
50 MARKET STREET
MELBOURNE VIC 3000
03 9124 7350
INFO-VIC@ATL.NET.AU

atl.net.au