



# TREE SURVEY

ARBORICULTURAL CONSULTANTS

## ARBORICULTURAL IMPACT ASSESSMENT

**TAFE Meadowbank**

**Multi-Trades and Digital Technology Hub**

Version 3

Prepared for:

**GHD**

12 November 2019



## Document information

<b>Title:</b>	TAFE Meadowbank Multi-Trades and Digital Technology Hub
<b>Report type:</b>	Arboricultural Impact Assessment (AIA)
<b>Prepared by:</b>	 <b>Phil Witten</b> Principal Arboricultural Consultant Registered Consulting Arborist No. 2458 AQF 5   ISA   SRA-ANZ   AA   Adv.QTRA
<b>Contact details:</b>	☎ 0425 536 670 ✉ phil@treesurvey.com.au 🌐 www.treesurvey.com.au

## Document status

Document status	Date	Revision description
Draft	29/08/19	Draft issue for client review
Version 1	09/09/19	Updates to the disturbance footprint
Version 2	12/09/19	Updates to recommendation for replacement trees
Version 3	12/11/19	Final version

## Abbreviations

Abbreviation	Description
AQF	Australian Qualifications Framework
AS	Australian Standards
DBH	Diameter at Breast Height
Id	Identification
m	Metre
mm	Millimetre
NDE	Non-Destructive Excavation
NO	Number
NSW	New South Wales
sp.	Species
SRZ	Structural Root Zone
TPZ	Tree Protection Zone
VTA	Visual Tree Assessment

# Contents

<b>1</b>	<b>Background .....</b>	<b>1</b>
1.1	Introduction .....	1
1.2	The proposal .....	1
1.3	The subject trees .....	1
1.4	Documents and plans referenced .....	1
<b>2</b>	<b>Method.....</b>	<b>2</b>
2.1	Visual tree assessment .....	2
2.2	Retention value .....	2
2.3	Tree protection zones.....	3
2.4	Impact assessment .....	4
2.5	Mitigation measures .....	5
<b>3</b>	<b>Results.....</b>	<b>6</b>
3.1	Trees proposed for retention .....	6
3.2	Trees proposed for removal .....	6
<b>4</b>	<b>Recommendations .....</b>	<b>12</b>
4.1	Trees proposed for retention .....	12
4.2	Site-specific tree protection measures .....	12
4.3	Trees proposed for removal .....	12
	<b>Appendix I - Impact assessment .....</b>	<b>13</b>
	<b>Appendix II - Tree protection plan .....</b>	<b>19</b>
	<b>Appendix III - Encroachment within the TPZ.....</b>	<b>22</b>
	<b>Appendix IV - STARS© assessment matrix.....</b>	<b>24</b>

# 1 Background

## 1.1 Introduction

Tree Survey was commissioned by GHD on behalf of TAFE NSW to prepare an Arboricultural Impact Assessment (AIA) for the construction of a combined Multi-Trades and Digital Technology Hub.

The purpose of this report is to:

- Identify the trees within and adjacent to the proposed construction footprint.
- Assess the current health and condition of the subject trees.
- Assess the potential impacts of the development on the subject trees.
- Evaluate the significance of the subject trees and assess their suitability for retention.

## 1.2 The proposal

TAFE NSW is undertaking to deliver new, state-of-the-art, specialist education and training facilities at TAFE Meadowbank. The key features of the combined Multi-Trades and Digital Technology Hub are outlined below:

- Construction of multi-story education and training facility with below-ground parking, amenities, several workshops, and classrooms.
- External works and landscaping to improve pedestrian movement throughout the site.

## 1.3 The subject trees

The subject trees were inspected between 18<sup>th</sup> April and 1<sup>st</sup> June 2019. A total of **114** trees were assessed and included in this report. Further information, observations, and measurements specific to each of the subject trees can be found in the **Appendices**.

## 1.4 Documents and plans referenced

The conclusions and recommendations of this report are based on the *Australian Standard, AS 4970-2009, Protection of Trees on Development Sites*, the findings from the site inspections and analysis of the following documents/plans:

- *Existing Site Survey* provided by GHD as a DWG file.
- *Preliminary Architectural Plans* prepared by Grey Puskand dated 23/06/19.
- *Preliminary Architectural Plans* provided by Grey Puskand as DWG files.

The *Preliminary Architectural Plan* has been used as map layers for **Appendix I**.

## 2 Method

### 2.1 Visual tree assessment

The subject trees were assessed in accordance with a stage one visual tree assessment (VTA) as formulated by Mattheck & Breloer (1994)<sup>1</sup>, and practices consistent with modern arboriculture.

The following limitations apply to this methodology:

- Trees were inspected from ground level, without the use of any invasive or diagnostic tools and testing.
- Tree height and canopy spread were estimated unless otherwise stated.
- Trees within adjacent properties or restricted areas were not subject to a complete visual inspection (i.e., defects and abnormalities may be present but not recorded).
- Tree identification was based on broad taxonomical features present and visible from ground level at the time of inspection.

### 2.2 Retention value

The retention value of a tree or group of trees is determined using a combination of environmental, cultural, physical, and social values.

- **Low:** These trees are not considered important for retention, nor require special works or design modification to be implemented for their retention.
- **Medium:** These trees are moderately important for retention. Their removal should only be considered if adversely affecting the proposed building/works, and all other alternatives have been considered and exhausted.
- **High:** These trees are considered important for retention and should be retained and protected. Design modification or re-location of building/s should be considered to accommodate the setbacks as prescribed by *Australian Standard AS4970 Protection of trees on development sites*.

This tree retention assessment has been undertaken in accordance with the Institute of Australian Consulting Arboriculturalists (IACA) Significance of a Tree, Assessment Rating System (STARS). The system uses a scale of High, Medium, and Low significance in the landscape. Once the landscape significance of a tree has been defined, the retention value can be determined. Each tree must meet a minimum of three (3) assessment criteria to be classified within a category. Further details and the assessment criteria can be found in the **Appendices**.

---

<sup>1</sup> VTA is an internationally recognised practice in the visual assessment of trees as formulated by Mattheck & Breloer (1994). Principle explanations and illustrations are contained within the publication, Field Guide for Visual Tree Assessment by Mattheck, C., and Breloer, H. *Arboricultural Journal*, Vol 18 pp 1-23 (1994).

### 2.3 Tree protection zones

- **Tree protection zone (TPZ):** The TPZ is the optimal combination of crown and root area (as defined by AS 4970-2009) that requires protection during the construction process so that the tree can remain viable. The TPZ is an area that is isolated from the work zone to ensure no disturbance or encroachment occurs in this zone. Tree sensitive construction measures must be implemented if work is to proceed within the TPZ.
- **Structural root zone (SRZ):** The SRZ is the area of the root system (as defined by AS 4970-2009) used for stability, mechanical support, and anchorage of the tree. Severance of structural roots (>50 mm in diameter) within the SRZ is not recommended as it may lead to the destabilisation and/or decline of the tree.

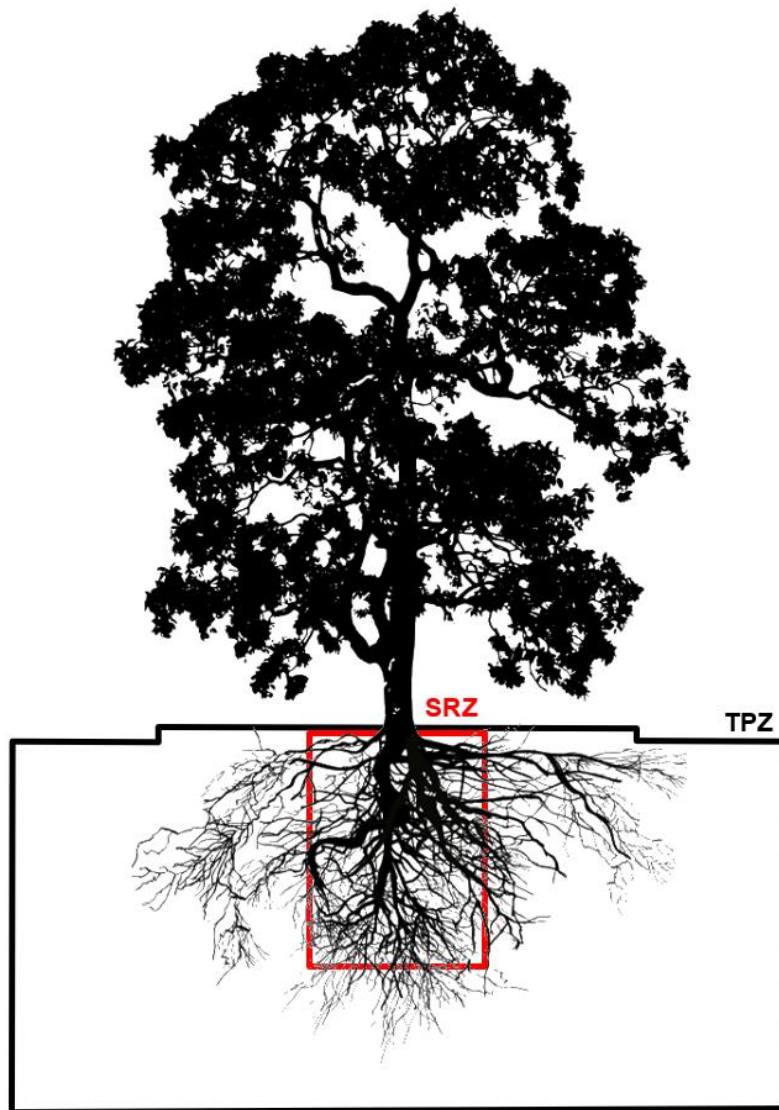


Figure 1: Indicative TPZ and SRZ

## 2.4 Impact assessment

- **No encroachment (0%):** No likely or foreseeable encroachment within the TPZ.
- **Minor encroachment (<10%):** If the proposed encroachment is less than 10% (total area) of the TPZ, and outside of the SRZ, detailed root investigations should not be required. The area lost to this encroachment should be compensated for elsewhere and be contiguous with the TPZ.
- **Major encroachment (>10%):** If the proposed encroachment is greater than 10% of the TPZ, the project arborist must demonstrate that the tree(s) remain viable. The area lost to this encroachment should be compensated for elsewhere and be contiguous with the TPZ. Root investigation by non-destructive methods may be required for any proposed works within this area.

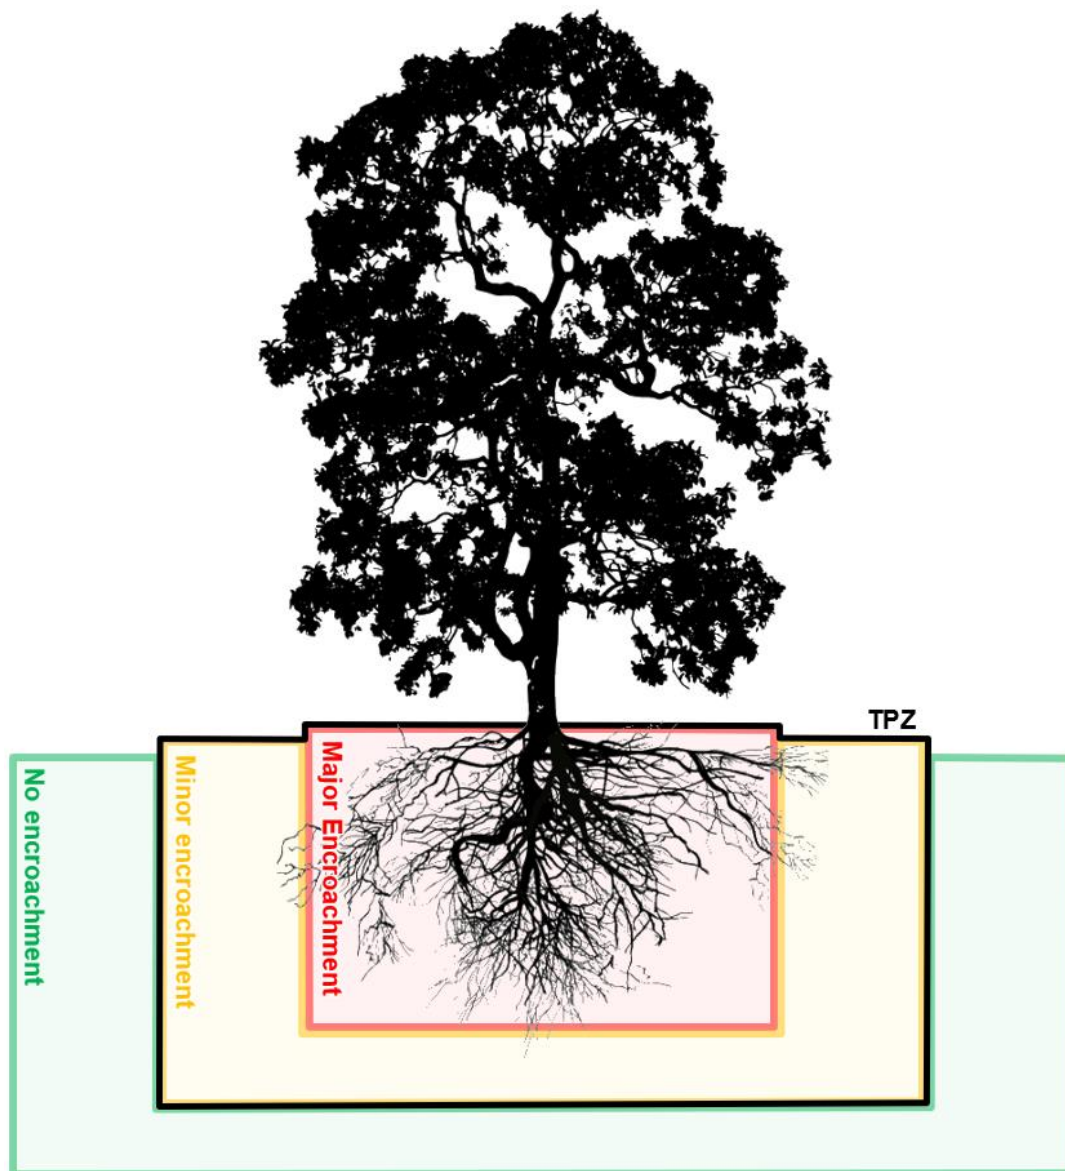


Figure 2: Indicative zones of encroachment within the TPZ



## 2.5 Mitigation measures

Encroachment within the TPZ must be compensated with a range of mitigation measures to ensure that impacts to the subject tree(s) are reduced or restricted wherever possible. Mitigation must be increased relative to the level of encroachment within the TPZ to ensure the subject tree(s) remain viable. The table below outlines requirements under AS 4970-2009, and mitigation measures required within each category of encroachment. These mitigation measures will only apply if trees are proposed to be retained.

**Table 1: Mitigation measures**

Encroachment	Mitigation Measures
<b>No encroachment (0%)</b>	<ul style="list-style-type: none"> <li>N/A</li> </ul>
<b>Minor encroachment (&lt;10%)</b>	<ul style="list-style-type: none"> <li>The area lost to this encroachment should be compensated for elsewhere, contiguous with the TPZ.</li> <li>Detailed root investigations should not be required.</li> <li>Tree protection must be installed.</li> </ul>
<b>Major encroachment (&gt;10%)</b>	<ul style="list-style-type: none"> <li>The project arborist must demonstrate the tree(s) would remain viable.</li> <li>Root investigation by non-destructive methods may be required for any trees proposed for retention.</li> <li>Consideration of relevant factors, including root location and distribution, tree species, condition, site constraints, and design factors.</li> <li>The area lost to this encroachment should be compensated for elsewhere, contiguous with the TPZ.</li> <li>The project arborist will be required to supervise any works within the TPZ.</li> <li>Tree protection must be installed.</li> </ul>

### 3 Results

**Table 2** shows the results of the arboricultural assessment. Key points are:

#### 3.1 Trees proposed for retention

**No encroachment (0%): No likely or foreseeable encroachment within the TPZ:**

- **15** trees are located outside of the proposed construction footprint. No impacts on these trees are foreseeable under the current proposal.
- **Tree 16, 17, 19, 20, 21, 22, 23, 24, 25 and 86** are located along the northern boundary of the site (adjacent to the substation). The proposed work will not impact upon these trees providing mitigation measures are implemented (see **Chapter 4**). Under the current proposal, these trees can be successfully retained.

**Minor encroachment (<10%): The proposed encroachment is less than 10% of the TPZ:**

- **2** trees will be subject to a minor encroachment of less than 10% within the TPZ. The encroachment will not impact upon the SRZ and is unlikely to impact the overall health or condition of the trees. Under the current proposal, these trees can be successfully retained.

#### 3.2 Trees proposed for removal

**Major encroachment (>10%): The proposed encroachment is greater than 10% of the TPZ:**

- **97** trees will be subject to an encroachment of greater than 10% within the TPZ. These trees are located within or directly adjacent to the construction footprint and cannot be retained under the current proposal.
- **Tree 95, 96, 103, 106, 107, 108, 109, 110, 111, 112, 113, 114 and 119** are located within a vegetation clearance corridor and are not directly impacted by the building footprint. These trees are proposed to be removed in order to establish the necessary vegetation clearances required for construction.

Table 2: Results of the arboricultural assessment

Id.	Botanical name	Height (metres)	Spread (metres diameter)	Health	Structure	Age class	Tree significance	Useful life expectancy	Priority for retention	DBH (millimetres diameter)	TPZ (metres radius)	SRZ (metres radius)	Encroachment	% Encroachment within TPZ	Other notes	Proposal
1	<i>Corymbia citriodora</i>	30	20	Good	Good	Mature	High	Medium	High	550	6.6	2.6	Major	63%	Tree is located inside of the construction footprint	Remove
2	<i>Corymbia citriodora</i>	14	8	Good	Good	Semi-mature	Low	Medium	Medium	300	3.6	2	Major	41%	Tree is located adjacent to the construction footprint	Remove
3	<i>Corymbia citriodora</i>	30	20	Good	Good	Mature	High	Medium	High	500	6	2.5	Major	47%	Tree is located adjacent to the construction footprint	Remove
4	<i>Eucalyptus melliodora</i>	16	12	Good	Good	Mature	Medium	Medium	High	350	4.2	2.1	Major	41%	Tree is located adjacent to the construction footprint	Remove
5	<i>Casuarina cunninghamiana</i>	20	14	Good	Fair	Semi-mature	Low	Medium	Low	300	3.6	2	Major	50%	Suppressed canopy	Remove
6	<i>Casuarina cunninghamiana</i>	28	16	Good	Fair	Mature	Low	Medium	Medium	550	6.6	2.6	Major	26%	Included bark junction	Remove
7	<i>Eucalyptus scoparia</i>	14	8	Poor	Poor	Mature	Low	Short	Low	350	4.2	2.1	Major	13%	Severe trunk decay	Remove
8	<i>Eucalyptus scoparia</i>	18	14	Fair	Fair	Mature	Low	Short	Low	550	6.6	2.6	Major	27%	Tree is in decline	Remove
9	<i>Eucalyptus scoparia</i>	10	6	Good	Fair	Semi-mature	Low	Medium	Medium	300	3.6	2	Minor	5%	Tree will be subject to a minor encroachment	Retain
10	<i>Eucalyptus scoparia</i>	18	12	Good	Fair	Mature	Low	Medium	Medium	400	4.8	2.3	Major	19%	Tree is located adjacent to the construction footprint	Remove
11	<i>Cedrus deodara</i>	14	14	Good	Good	Mature	Low	Medium	Medium	500	6	2.5	Major	52%	Tree is located inside of the construction footprint	Remove
12	<i>Eucalyptus robusta</i>	6	6	Fair	Fair	Semi-mature	Low	Medium	Low	200	2.4	1.7	Major	100%	Tree is located inside of the construction footprint	Remove
13	<i>Eucalyptus robusta</i>	12	14	Good	Fair	Semi-mature	Low	Medium	Low	300	3.6	2	Major	100%	Tree is located inside of the construction footprint	Remove
14	<i>Eucalyptus melliodora</i>	28	10	Good	Good	Mature	Medium	Medium	High	450	5.4	2.4	Major	75%	Tree is located inside of the construction footprint	Remove
16	<i>Syzygium luehmannii</i>	6	4	Poor	Fair	Semi-mature	Low	Short	Low	200	2.4	1.7	No	0%	-	Retain
17	<i>Syzygium luehmannii</i>	8	4	Poor	Fair	Semi-mature	Low	Short	Low	200	2.4	1.7	No	0%	-	Retain
19	<i>Syzygium luehmannii</i>	8	6	Good	Good	Semi-mature	Low	Medium	Low	300	3.6	2	No	0%	-	Retain
20	<i>Syzygium luehmannii</i>	10	6	Good	Good	Semi-mature	Low	Medium	Low	250	3	1.9	No	0%	-	Retain
21	<i>Syzygium luehmannii</i>	10	6	Good	Good	Semi-mature	Low	Medium	Low	300	3.6	2	No	0%	-	Retain
22	<i>Syzygium luehmannii</i>	8	4	Good	Fair	Semi-mature	Low	Medium	Low	250	3	1.9	No	0%	-	Retain
23	<i>Syzygium luehmannii</i>	8	4	Good	Fair	Semi-mature	Low	Medium	Low	200	2.4	1.7	No	0%	-	Retain
24	<i>Syzygium luehmannii</i>	6	4	Good	Good	Semi-mature	Low	Medium	Low	200	2.4	1.7	No	0%	-	Retain
25	<i>Syzygium luehmannii</i>	10	4	Good	Good	Semi-mature	Low	Medium	Low	200	2.4	1.7	No	0%	-	Retain
26	<i>Eucalyptus robusta</i>	10	6	Good	Fair	Semi-mature	Low	Medium	Low	250	3	1.9	Major	88%	Suppressed canopy	Remove
27	<i>Eucalyptus robusta</i>	18	8	Good	Good	Semi-mature	Low	Medium	Medium	250	3	1.9	Major	100%	Tree is located inside of the construction footprint	Remove
28	<i>Casuarina cunninghamiana</i>	20	8	Good	Good	Mature	Medium	Medium	High	350	4.2	2.1	Major	100%	Tree is located inside of the construction footprint	Remove

Id.	Botanical name	Height (metres)	Spread (metres diameter)	Health	Structure	Age class	Tree significance	Useful life expectancy	Priority for retention	DBH (millimetres diameter)	TPZ (metres radius)	SRZ (metres radius)	Encroachment	% Encroachment within TPZ	Other notes	Proposal
29	<i>Eucalyptus haemastoma</i>	14	14	Good	Fair	Semi-mature	Low	Medium	Low	300	3.6	2	Major	100%	Tree is growing on a severe lean	Remove
30	<i>Casuarina cunninghamiana</i>	24	12	Good	Fair	Mature	Low	Medium	Medium	350	4.2	2.1	Major	100%	Included bark junction	Remove
31	<i>Casuarina cunninghamiana</i>	20	10	Good	Good	Mature	Medium	Medium	High	350	4.2	2.1	Major	100%	Tree is located inside of the construction footprint	Remove
32	<i>Casuarina cunninghamiana</i>	24	12	Good	Fair	Mature	Low	Medium	Medium	350	4.2	2.1	Major	100%	Included bark junction	Remove
33	<i>Casuarina cunninghamiana</i>	20	8	Good	Fair	Semi-mature	Low	Medium	Low	250	3	1.9	Major	100%	Suppressed canopy	Remove
34	<i>Casuarina cunninghamiana</i>	24	10	Good	Fair	Mature	Low	Medium	Low	350	4.2	2.1	Major	100%	Included bark junction	Remove
37	<i>Casuarina cunninghamiana</i>	18	8	Fair	Fair	Semi-mature	Low	Medium	Low	250	3	1.9	Major	100%	Canopy dieback	Remove
39	<i>Casuarina cunninghamiana</i>	24	16	Good	Fair	Mature	Low	Medium	Medium	350	4.2	2.1	Major	100%	Included bark junction	Remove
40	<i>Eucalyptus haemastoma</i>	20	20	Fair	Poor	Mature	Low	Short	Low	300	3.6	2	Major	100%	Sever basal decay	Remove
41	<i>Eucalyptus nicholii</i>	14	14	Good	Good	Mature	Medium	Medium	High	500	6	2.5	Major	100%	Tree is located inside of the construction footprint	Remove
43	<i>Eucalyptus nicholii</i>	12	10	Good	Fair	Mature	Medium	Medium	High	500	6	2.5	Major	100%	Tree is located inside of the construction footprint	Remove
44	<i>Eucalyptus elata</i>	16	14	Fair	Fair	Mature	Medium	Medium	High	600	7.2	2.7	Major	100%	Tree is located inside of the construction footprint	Remove
47	<i>Casuarina cunninghamiana</i>	12	8	Fair	Fair	Mature	Low	Medium	Medium	200	2.4	1.7	Major	100%	Tree is located inside of the construction footprint	Remove
48	<i>Casuarina cunninghamiana</i>	12	8	Fair	Poor	Mature	Low	Medium	Medium	200	2.4	1.7	Major	100%	Tree is located inside of the construction footprint	Remove
49	<i>Casuarina cunninghamiana</i>	16	14	Good	Good	Mature	Medium	Medium	High	500	6	2.5	Major	100%	Tree is located inside of the construction footprint	Remove
50	<i>Casuarina cunninghamiana</i>	12	8	Fair	Fair	Mature	Medium	Medium	High	250	3	1.9	Major	100%	Tree is located inside of the construction footprint	Remove
52	<i>Casuarina cunninghamiana</i>	10	6	Fair	Fair	Semi-mature	Low	Medium	Medium	200	2.4	1.7	Major	100%	Tree is located inside of the construction footprint	Remove
55	<i>Corymbia gummifera</i>	16	16	Good	Good	Mature	Medium	Medium	High	550	6.6	2.6	Major	100%	Tree is located inside of the construction footprint	Remove
56	<i>Casuarina cunninghamiana</i>	10	8	Fair	Fair	Mature	Low	Medium	Medium	300	3.6	2	Major	93%	Tree is located inside of the construction footprint	Remove
57	<i>Casuarina cunninghamiana</i>	6	6	Fair	Poor	Semi-mature	Low	Medium	Low	200	2.4	1.7	Major	84%	Tree is located inside of the construction footprint	Remove
58	<i>Casuarina cunninghamiana</i>	16	12	Good	Good	Mature	Medium	Medium	High	450	5.4	2.4	Major	52%	Tree is located inside of the construction footprint	Remove
59	<i>Casuarina cunninghamiana</i>	8	6	Fair	Fair	Semi-mature	Low	Medium	Low	200	2.4	1.7	Major	57%	Tree is located inside of the construction footprint	Remove
60	<i>Casuarina cunninghamiana</i>	10	6	Fair	Fair	Mature	Low	Medium	Medium	200	2.4	1.7	Major	83%	Tree is located inside of the construction footprint	Remove
62	<i>Casuarina cunninghamiana</i>	16	10	Good	Good	Mature	Medium	Medium	High	350	4.2	2.1	Major	100%	Tree is located inside of the construction footprint	Remove
63	<i>Casuarina cunninghamiana</i>	12	6	Good	Fair	Mature	Medium	Medium	High	300	3.6	2	Major	100%	Tree is located inside of the construction footprint	Remove
64	<i>Casuarina cunninghamiana</i>	16	16	Good	Fair	Mature	Medium	Medium	High	350	4.2	2.1	Major	100%	Tree is located inside of the construction footprint	Remove
66	<i>Casuarina cunninghamiana</i>	10	6	Fair	Fair	Mature	Medium	Medium	High	300	3.6	2	Major	100%	Tree is located inside of the construction footprint	Remove

Id.	Botanical name	Height (metres)	Spread (metres diameter)	Health	Structure	Age class	Tree significance	Useful life expectancy	Priority for retention	DBH (millimetres diameter)	TPZ (metres radius)	SRZ (metres radius)	Encroachment	% Encroachment within TPZ	Other notes	Proposal
67	<i>Melia azedarach</i>	6	6	Fair	Poor	Semi-mature	Low	Short	Low	200	2.4	1.7	Major	100%	Tree is located inside of the construction footprint	Remove
69	<i>Casuarina cunninghamiana</i>	12	10	Good	Good	Mature	Medium	Medium	High	300	3.6	2	Major	100%	Tree is located inside of the construction footprint	Remove
70	<i>Casuarina cunninghamiana</i>	12	10	Fair	Good	Mature	Medium	Medium	High	300	3.6	2	Major	100%	Tree is located inside of the construction footprint	Remove
71	<i>Eucalyptus haemastoma</i>	12	12	Good	Good	Mature	Medium	Medium	High	350	4.2	2.1	Major	100%	Tree is located inside of the construction footprint	Remove
72	<i>Eucalyptus haemastoma</i>	10	6	Fair	Poor	Mature	Low	Medium	Medium	250	3	1.9	Major	100%	Tree is located inside of the construction footprint	Remove
73	<i>Casuarina cunninghamiana</i>	12	10	Poor	Good	Mature	Medium	Short	Low	250	3	1.9	Major	100%	Tree is located inside of the construction footprint	Remove
74	<i>Casuarina cunninghamiana</i>	10	6	Fair	Good	Mature	Medium	Medium	High	250	3	1.9	Major	100%	Tree is located inside of the construction footprint	Remove
75	<i>Casuarina cunninghamiana</i>	8	6	Fair	Fair	Mature	Medium	Medium	High	200	2.4	1.7	Major	100%	Tree is located inside of the construction footprint	Remove
76	<i>Casuarina cunninghamiana</i>	10	6	Poor	Fair	Dead	Medium	Dead	Low	200	2.4	1.7	Major	100%	Tree is dead	Remove
77	<i>Casuarina cunninghamiana</i>	14	10	Good	Good	Mature	Medium	Medium	High	400	4.8	2.3	Major	100%	Tree is located inside of the construction footprint	Remove
78	<i>Casuarina cunninghamiana</i>	12	12	Fair	Good	Mature	Medium	Medium	High	400	4.8	2.3	Major	100%	Tree is located inside of the construction footprint	Remove
79	<i>Eucalyptus melliodora</i>	10	8	Fair	Fair	Mature	Medium	Medium	High	250	3	1.9	Major	100%	Tree is located inside of the construction footprint	Remove
80	<i>Angophora floribunda</i>	14	12	Fair	Fair	Mature	Medium	Short	Medium	500	6	2.5	Major	100%	Tree is located inside of the construction footprint	Remove
81	<i>Casuarina cunninghamiana</i>	12	6	Fair	Fair	Mature	Medium	Medium	High	250	3	1.9	Major	100%	Tree is located inside of the construction footprint	Remove
82	<i>Casuarina cunninghamiana</i>	14	6	Good	Good	Mature	Medium	Medium	High	250	3	1.9	Major	100%	Tree is located inside of the construction footprint	Remove
83	<i>Casuarina cunninghamiana</i>	12	6	Fair	Fair	Mature	Medium	Medium	High	250	3	1.9	Major	100%	Tree is located inside of the construction footprint	Remove
84	<i>Casuarina cunninghamiana</i>	10	8	Poor	Fair	Mature	Medium	Short	Medium	350	4.2	2.1	Major	100%	Tree is located inside of the construction footprint	Remove
85	<i>Eucalyptus robusta</i>	10	6	Fair	Fair	Mature	Medium	Medium	High	300	3.6	2	Major	100%	Tree is located inside of the construction footprint	Remove
86	<i>Syzygium luehmannii</i>	6	4	Good	Good	Semi-mature	Low	Medium	Low	200	2.4	1.7	No	0%	-	Retain
87	<i>Eucalyptus robusta</i>	14	16	Good	Fair	Mature	Medium	Medium	High	500	6	2.5	Major	69%	Tree is located inside of the construction footprint	Remove
88	<i>Eucalyptus nicholii</i>	12	10	Poor	Fair	Mature	Medium	Short	Medium	450	5.4	2.4	Major	48%	Tree is located adjacent to the construction footprint	Remove
89	<i>Jacaranda mimosifolia</i>	10	14	Fair	Poor	Mature	Medium	Medium	High	400	4.8	2.3	Major	78%	Tree is located inside of the construction footprint	Remove
90	<i>Eucalyptus microcorys</i>	18	16	Good	Fair	Mature	Medium	Medium	High	800	9.6	3	Major	90%	Tree is located inside of the construction footprint	Remove
91	<i>Eucalyptus microcorys</i>	16	14	Good	Good	Mature	Medium	Medium	High	450	5.4	2.4	Major	100%	Tree is located inside of the construction footprint	Remove
92	<i>Fraxinus excelsior</i>	10	6	Fair	Fair	Mature	Medium	Medium	High	300	3.6	2	Major	100%	Tree is located inside of the construction footprint	Remove
93	<i>Fraxinus excelsior</i>	8	4	Fair	Fair	Semi-mature	Medium	Medium	High	250	3	1.9	Major	100%	Tree is located inside of the construction footprint	Remove
94	<i>Fraxinus excelsior</i>	8	6	Fair	Fair	Semi-mature	Medium	Medium	High	250	3	1.9	Major	100%	Tree is located inside of the construction footprint	Remove



Id.	Botanical name	Height (metres)	Spread (metres diameter)	Health	Structure	Age class	Tree significance	Useful life expectancy	Priority for retention	DBH (millimetres diameter)	TPZ (metres radius)	SRZ (metres radius)	Encroachment	% Encroachment within TPZ	Other notes	Proposal
95	<i>Fraxinus excelsior</i>	8	6	Fair	Fair	Mature	Medium	Medium	High	300	3.6	2	Major	-	Tree is located within vegetation clearance corridor	Remove
96	<i>Fraxinus excelsior</i>	10	8	Fair	Fair	Mature	Medium	Medium	High	350	4.2	2.1	Major	-	Tree is located within vegetation clearance corridor	Remove
98	<i>Casuarina cunninghamiana</i>	12	10	Poor	Good	Mature	Medium	Short	Low	350	4.2	2.1	Major	100%	Tree is located inside of the construction footprint	Remove
99	<i>Casuarina cunninghamiana</i>	12	8	Good	Good	Mature	Medium	Medium	High	300	3.6	2	Major	100%	Tree is located inside of the construction footprint	Remove
100	<i>Casuarina cunninghamiana</i>	12	6	Fair	Good	Mature	Medium	Medium	High	300	3.6	2	Major	100%	Tree is located inside of the construction footprint	Remove
103	<i>Fraxinus excelsior</i>	4	4	Poor	Fair	Dead	Low	Dead	Low	100	2	1.5	Major	-	Tree is located within vegetation clearance corridor	Remove
104	<i>Casuarina cunninghamiana</i>	12	8	Good	Good	Mature	Medium	Medium	High	350	4.2	2.1	Major	75%	Tree is located inside of the construction footprint	Remove
106	<i>Casuarina cunninghamiana</i>	14	10	Good	Good	Mature	Medium	Medium	High	350	4.2	2.1	Major	-	Tree is located within vegetation clearance corridor	Remove
107	<i>Eucalyptus robusta</i>	12	12	Fair	Fair	Mature	Medium	Medium	High	350	4.2	2.1	Major	-	Tree is located within vegetation clearance corridor	Remove
108	<i>Casuarina cunninghamiana</i>	14	10	Fair	Good	Mature	Medium	Medium	High	350	4.2	2.1	Major	-	Tree is located within vegetation clearance corridor	Remove
109	<i>Eucalyptus robusta</i>	14	8	Fair	Fair	Mature	Medium	Medium	High	350	4.2	2.1	Major	-	Tree is located within vegetation clearance corridor	Remove
110	<i>Eucalyptus robusta</i>	12	10	Fair	Fair	Mature	Medium	Medium	High	350	4.2	2.1	Major	-	Tree is located within vegetation clearance corridor	Remove
111	<i>Eucalyptus robusta</i>	8	6	Fair	Fair	Mature	Low	Medium	Medium	250	3	1.9	Major	-	Tree is located within vegetation clearance corridor	Remove
112	<i>Eucalyptus microcorys</i>	20	16	Fair	Good	Mature	High	Medium	High	600	7.2	2.7	Major	-	Tree is located within vegetation clearance corridor	Remove
113	<i>Eucalyptus crebra</i>	16	10	Fair	Fair	Mature	Medium	Medium	High	450	5.4	2.4	Major	-	Tree is located within vegetation clearance corridor	Remove
114	<i>Eucalyptus crebra</i>	12	8	Fair	Fair	Mature	Medium	Medium	High	300	3.6	2	Major	-	Tree is located within vegetation clearance corridor	Remove
115	<i>Corymbia gummifera</i>	14	16	Good	Fair	Mature	Medium	Medium	High	450	5.4	2.4	Major	87%	Tree is located inside of the construction footprint	Remove
116	<i>Corymbia gummifera</i>	16	12	Good	Good	Mature	Medium	Medium	High	450	5.4	2.4	Major	92%	Tree is located inside of the construction footprint	Remove
117	<i>Pittosporum undulatum</i>	8	6	Fair	Fair	Mature	Low	Medium	Medium	250	3	1.9	Major	57%	Tree is located inside of the construction footprint	Remove
118	<i>Schinus areira</i>	12	10	Poor	Fair	Over-mature	Low	Short	Low	450	5.4	2.4	Major	38%	Deadwood (>30cm)	Remove
119	<i>Cinnamomum camphora</i>	14	16	Good	Good	Mature	Medium	Medium	High	750	9	2.9	Major	-	Tree is located within vegetation clearance corridor	Remove
121	<i>Cinnamomum camphora</i>	10	12	Fair	Fair	Mature	Low	Medium	Medium	450	5.4	2.4	Major	89%	Tree is located inside of the construction footprint	Remove
122	<i>Corymbia gummifera</i>	16	12	Good	Good	Mature	Medium	Medium	High	450	5.4	2.4	Major	58%	Tree is located inside of the construction footprint	Remove
124	<i>Corymbia gummifera</i>	18	14	Good	Good	Mature	Medium	Medium	High	500	6	2.5	Major	100%	Tree is located inside of the construction footprint	Remove
125	<i>Corymbia gummifera</i>	12	8	Good	Fair	Mature	Low	Medium	Medium	250	3	1.9	Major	100%	Tree is located inside of the construction footprint	Remove
126	<i>Corymbia gummifera</i>	16	10	Good	Fair	Mature	Medium	Medium	High	450	5.4	2.4	Major	51%	Tree is located inside of the construction footprint	Remove
127	<i>Casuarina cunninghamiana</i>	8	4	Fair	Fair	Mature	Low	Medium	Medium	250	3	1.9	Minor	6%	Tree will be subject to a minor encroachment	Retain

Id.	Botanical name	Height (metres)	Spread (metres diameter)	Health	Structure	Age class	Tree significance	Useful life expectancy	Priority for retention	DBH (millimetres diameter)	TPZ (metres radius)	SRZ (metres radius)	Encroachment	% Encroachment within TPZ	Other notes	Proposal
129	<i>Syncarpia glomulifera</i>	10	6	Good	Good	Mature	Low	Medium	Medium	300	3.6	2	No	0%	-	Retain
178	<i>Syncarpia glomulifera</i>	12	12	Good	Good	Mature	Medium	Medium	High	400	4.8	2.3	No	0%	-	Retain
182	<i>Acmena smithii</i>	4	6	Good	Fair	Mature	Low	Medium	Medium	150	2	1.5	No	0%	-	Retain
183	<i>Acmena smithii</i>	4	6	Good	Fair	Mature	Low	Medium	Medium	150	2	1.5	No	0%	-	Retain
808	<i>Lophostemon confertus</i>	6	6	Fair	Poor	Semi-mature	Low	Short	Low	150	2	1.5	Major	95%	Tree is located on the council nature strip	Remove
809	<i>Lophostemon confertus</i>	4	6	Fair	Poor	Semi-mature	Low	Short	Low	150	2	1.5	No	0%	Tree is located on the council nature strip	Retain
810	<i>Hymenosporum flavum</i>	6	6	Good	Poor	Semi-mature	Low	Medium	Medium	200	2.4	1.7	Major	100%	Tree is located inside of the construction footprint	Remove

## 4 Recommendations

### 4.1 Trees proposed for retention

A total of **17** trees are proposed for retention. The following mitigation measures will be required:

- The tree protection plan (**Appendix II**) must be implemented.
- The area lost to the encroachment should be compensated for elsewhere, contiguous with the TPZ (see **Appendix III**).
- Any proposed work within the tree protection zone must be carried out under the supervision of the project arborist.
- Any underground services proposed within the tree protection zone of trees to be retained must be installed using tree sensitive methods such as; horizontal directional drilling, boring, non-destructive excavation.

### 4.2 Site-specific tree protection measures

The following recommendations relate to **Tree 16, 17, 19, 20, 21, 22, 23, 24, 25** and **86**:

- Existing curb and guttering within the structural root zone of these trees should remain in situ (where possible) and be utilised as a part of the new driveway configuration.

### 4.3 Trees proposed for removal


A total of **97** trees are proposed for removal. All tree removal work is to be carried out by an arborist with a minimum AQF Level 3 qualification in Arboriculture, in accordance with *Australian Standard AS 4373-2007, Pruning of Amenity Trees* and the *NSW WorkCover Code of Practice for the Amenity Tree Industry (1998)*.



## Appendix I - Impact assessment

## Arboricultural Impact Assessment

Page 1 of 5

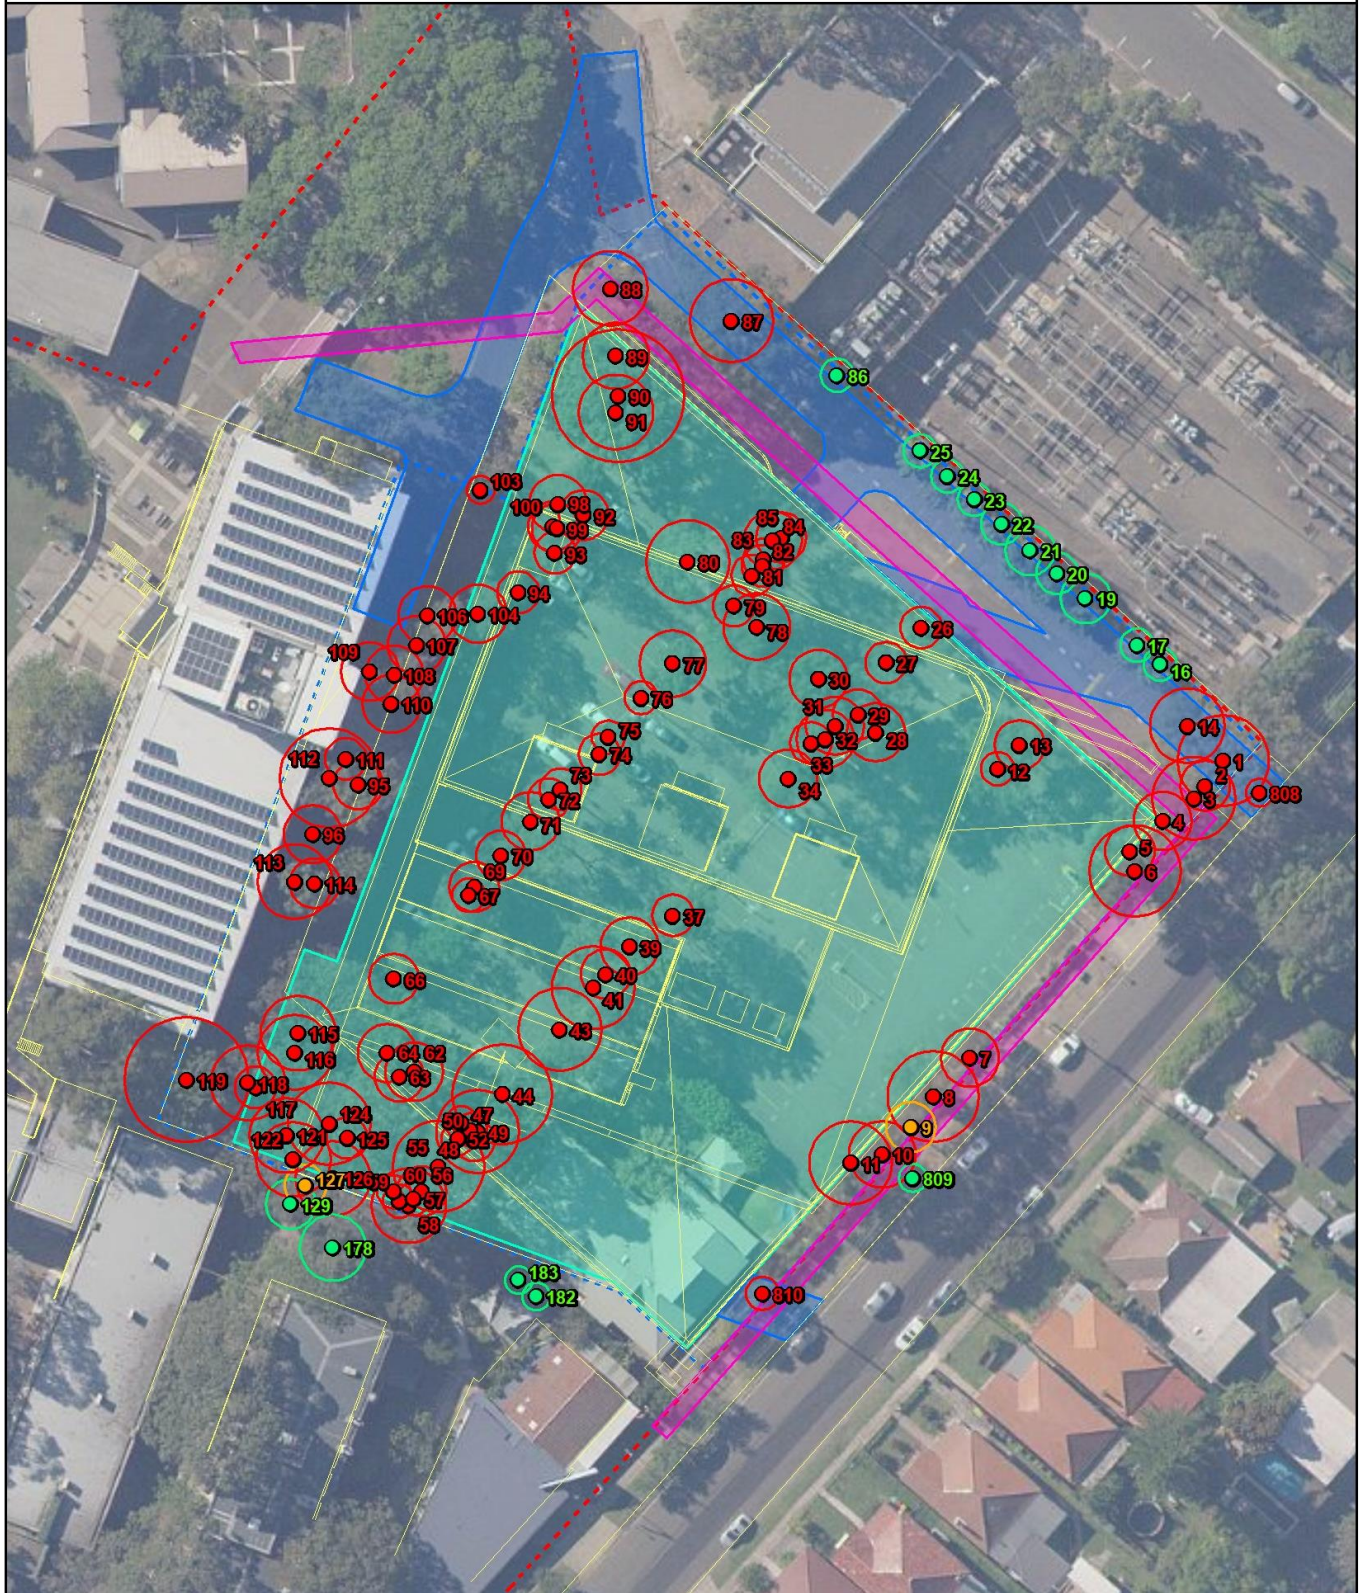

## Legend

## The subject trees

- No encroachment
- Minor encroachment
- Major encroachment

## Protection Zones

- TPZ (continuous line)
- SRZ (dashed line)

## The subject site

- Pedestrian path
- Driveway
- Building envelope

## Other items

- Site layout
- Extent of SSD scope
- Site boundary


0 12.5 25 50  
Meters

**TREE  
SURVEY**  
ARBORICULTURAL CONSULTANTS



## Arboricultural Impact Assessment

Page 2 of 5

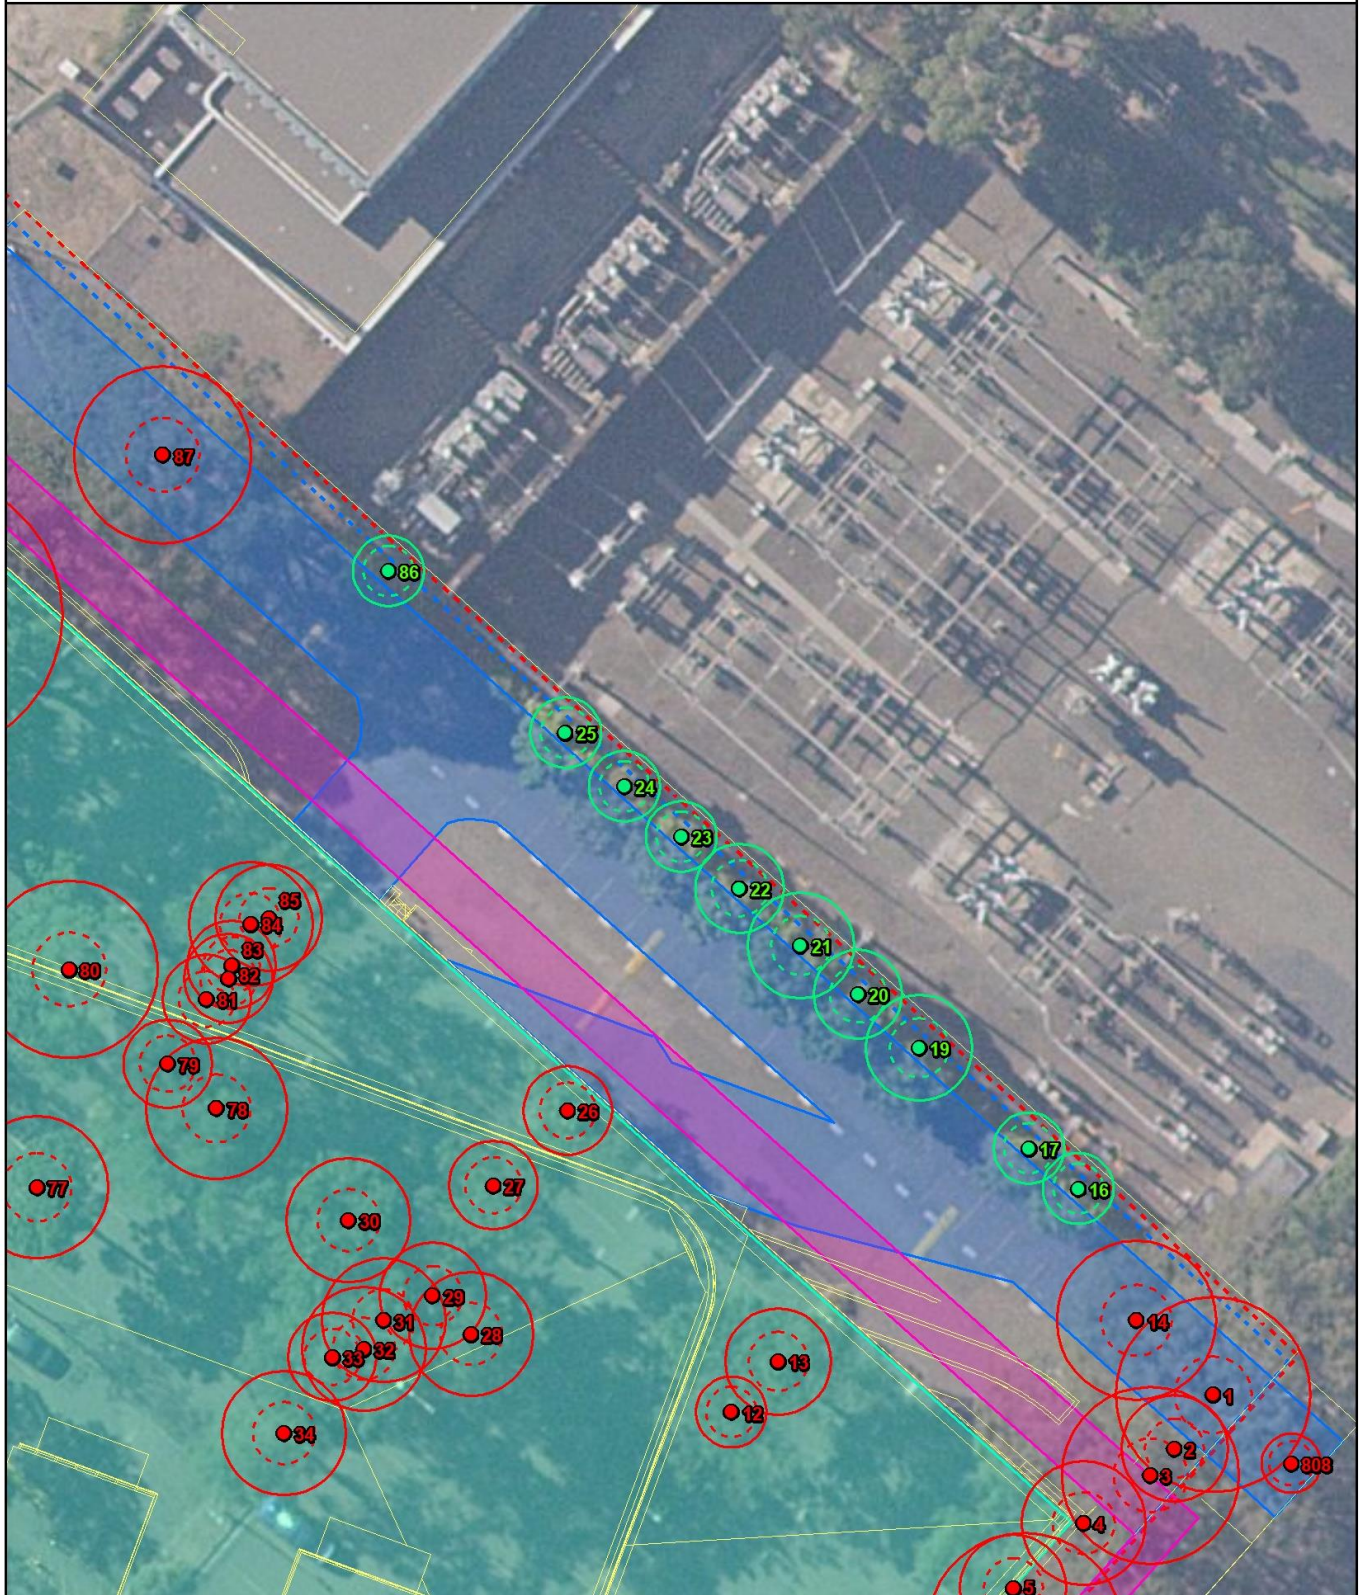

## Legend

## The subject trees

- No encroachment
- Minor encroachment
- Major encroachment

## Protection Zones

- TPZ (continuous line)
- SRZ (dashed line)

## The subject site

- Pedestrian path
- Driveway
- Building envelope

## Other items

- Site layout
- Extent of SSD scope
- Site boundary


0 5 10 20  
Meters

**TREE  
SURVEY**  
ARBORICULTURAL CONSULTANTS



## Arboricultural Impact Assessment

Page 3 of 5

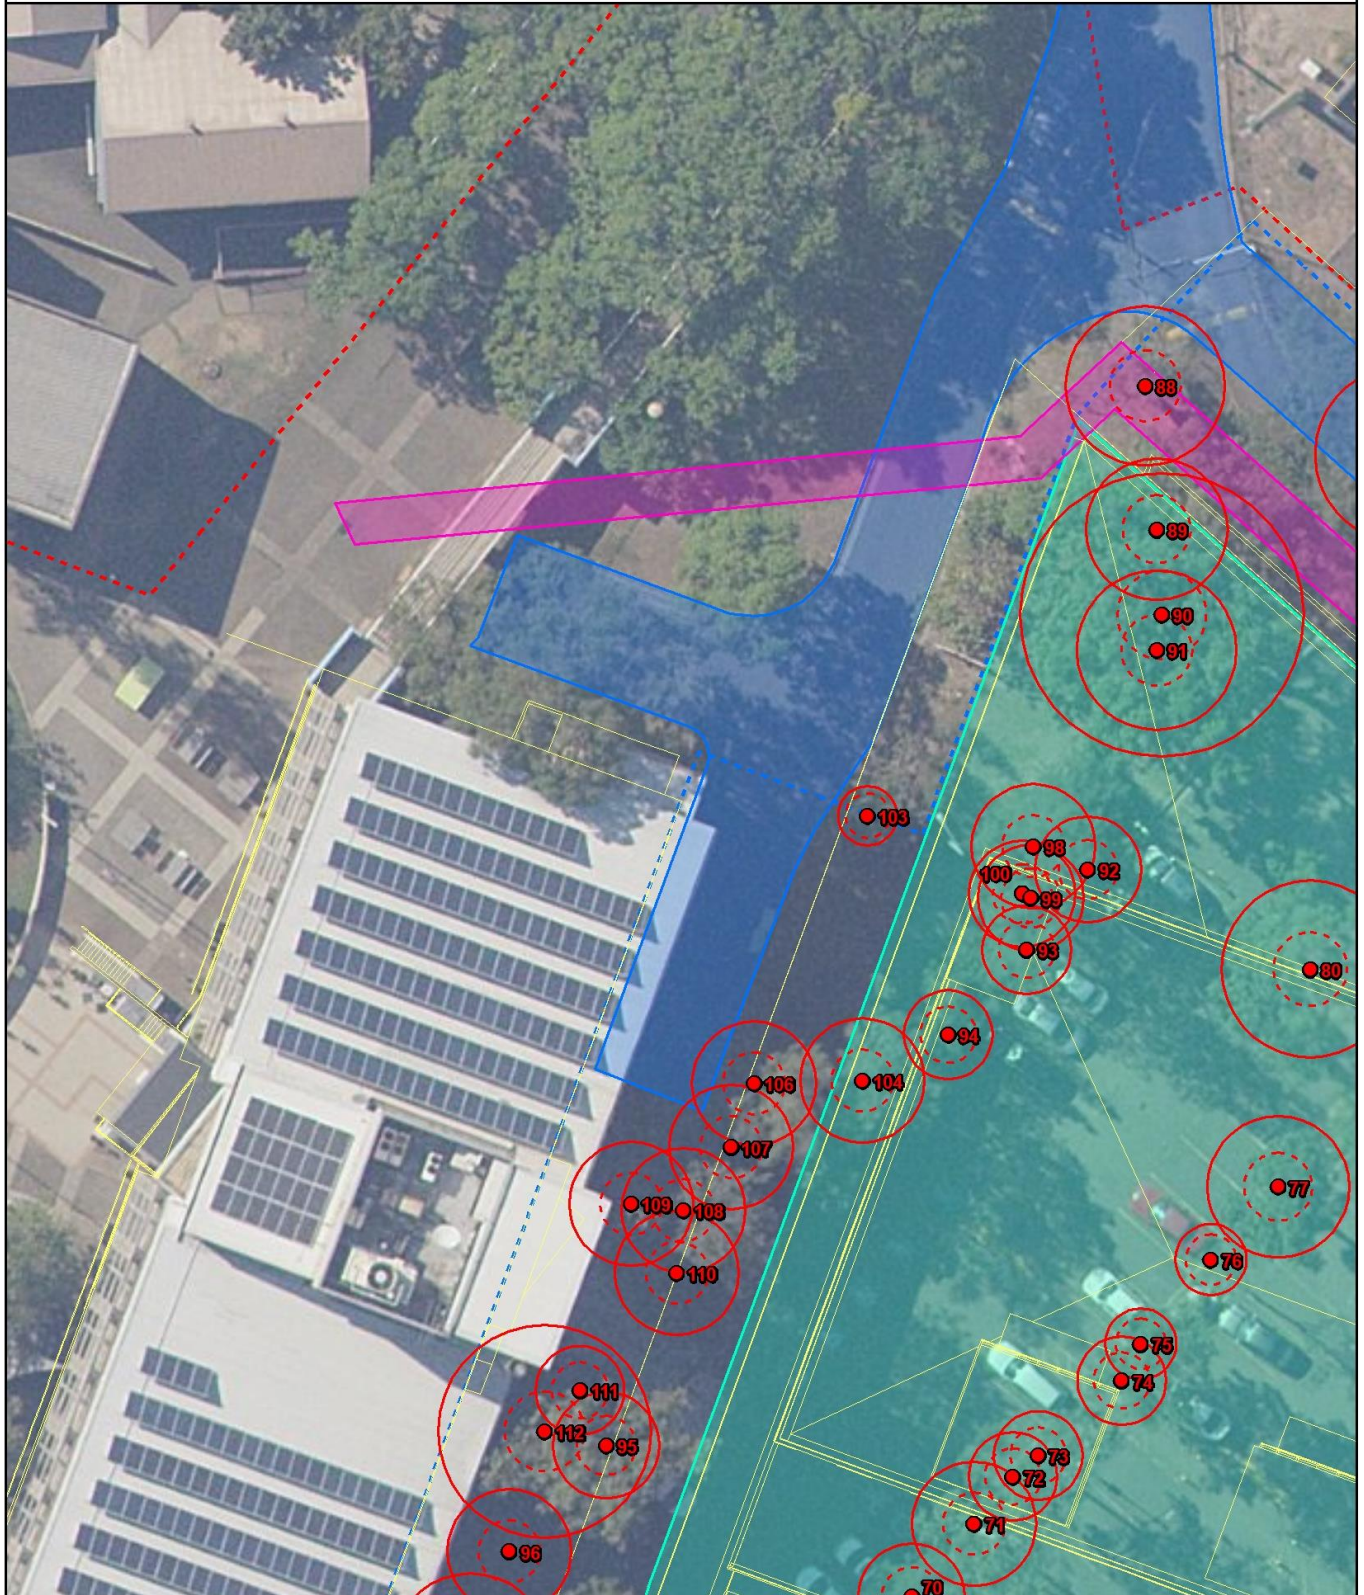

## Legend

## The subject trees

- No encroachment
- Minor encroachment
- Major encroachment

## Protection Zones

- TPZ (continuous line)
- SRZ (dashed line)

## The subject site

- Pedestrian path
- Driveway
- Building envelope

## Other items

- Site layout
- Extent of SSD scope
- Site boundary




**TREE  
SURVEY**  
ARBORICULTURAL CONSULTANTS



## Arboricultural Impact Assessment

Page 4 of 5

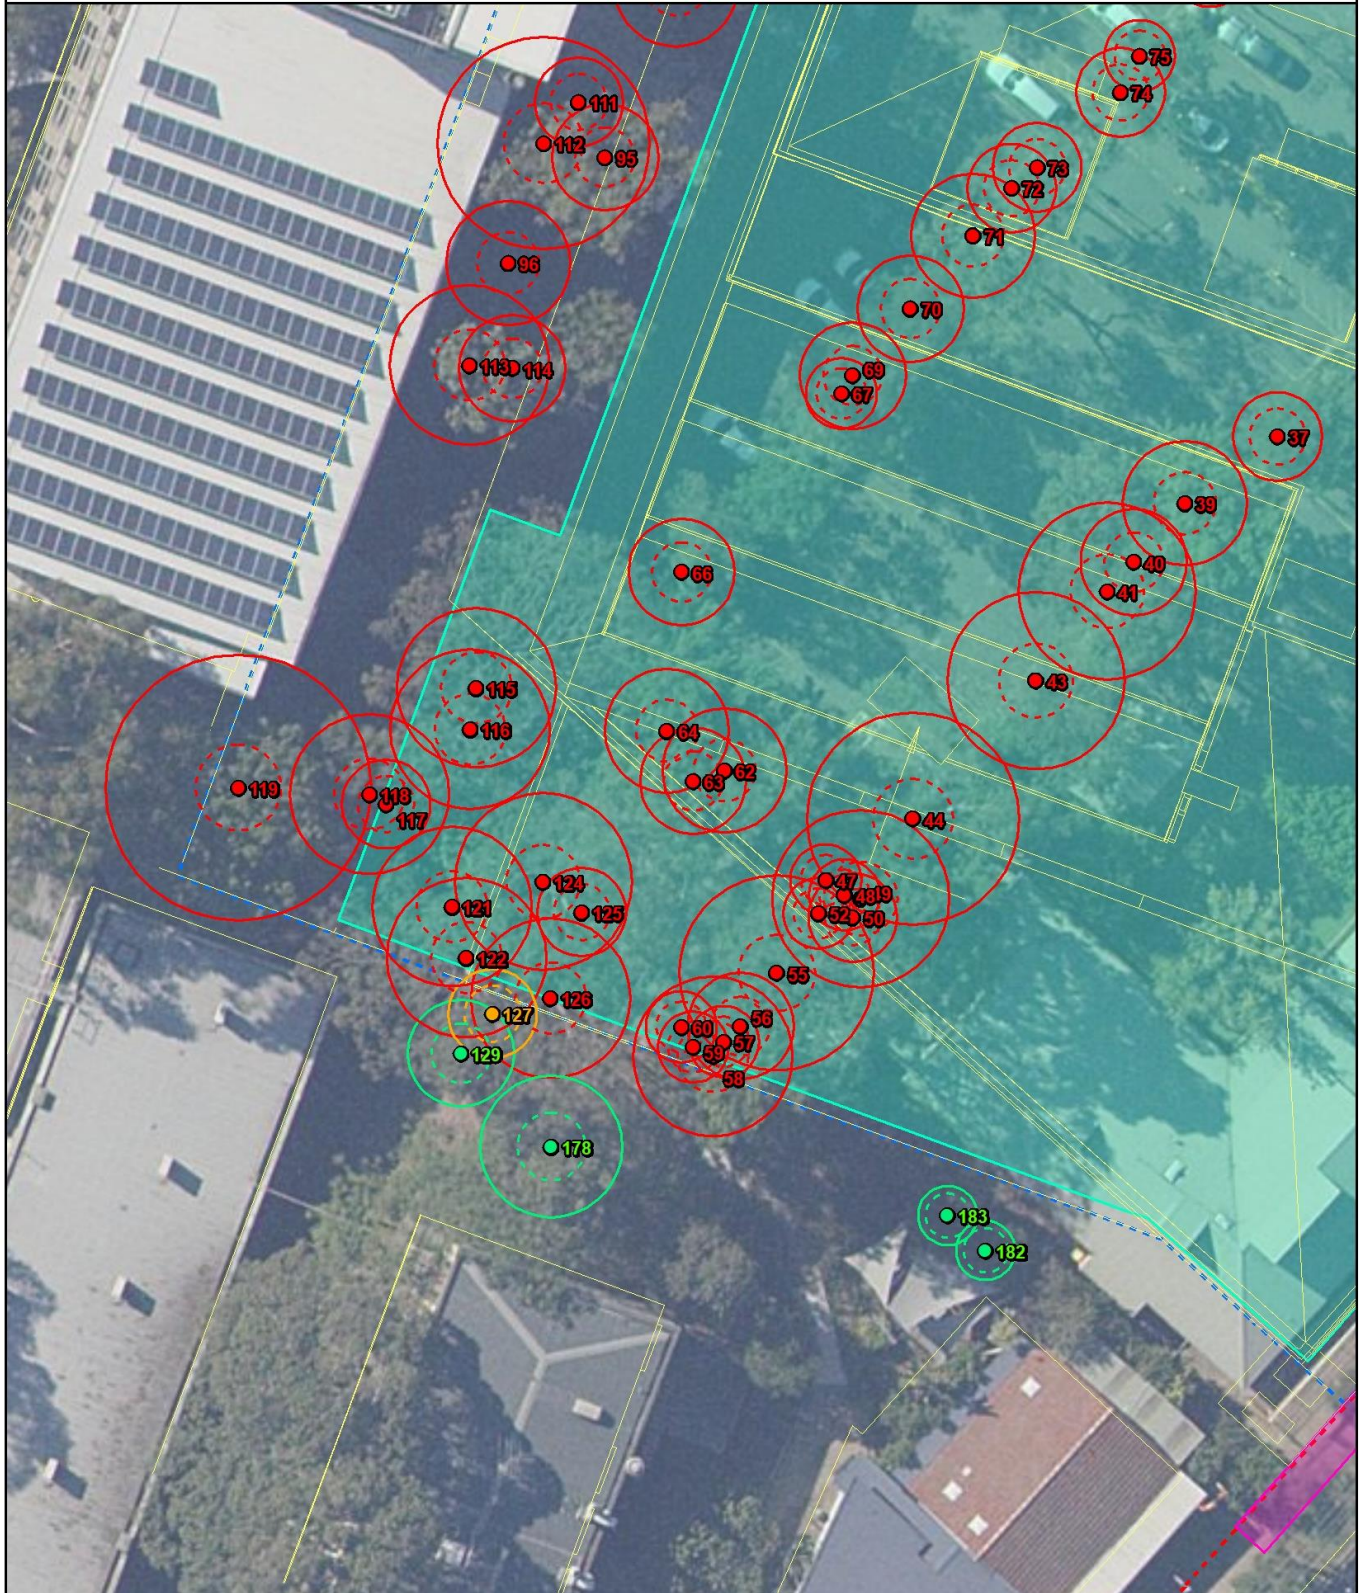

## Legend

## The subject trees

- No encroachment
- Minor encroachment
- Major encroachment

## Protection Zones

- TPZ (continuous line)
- SRZ (dashed line)

## The subject site

- Pedestrian path
- Driveway
- Building envelope

## Other items

- Site layout
- Extent of SSD scope
- Site boundary


0 5 10 20  
Meters

**TREE  
SURVEY**  
ARBORICULTURAL CONSULTANTS



## Arboricultural Impact Assessment

Page 5 of 5

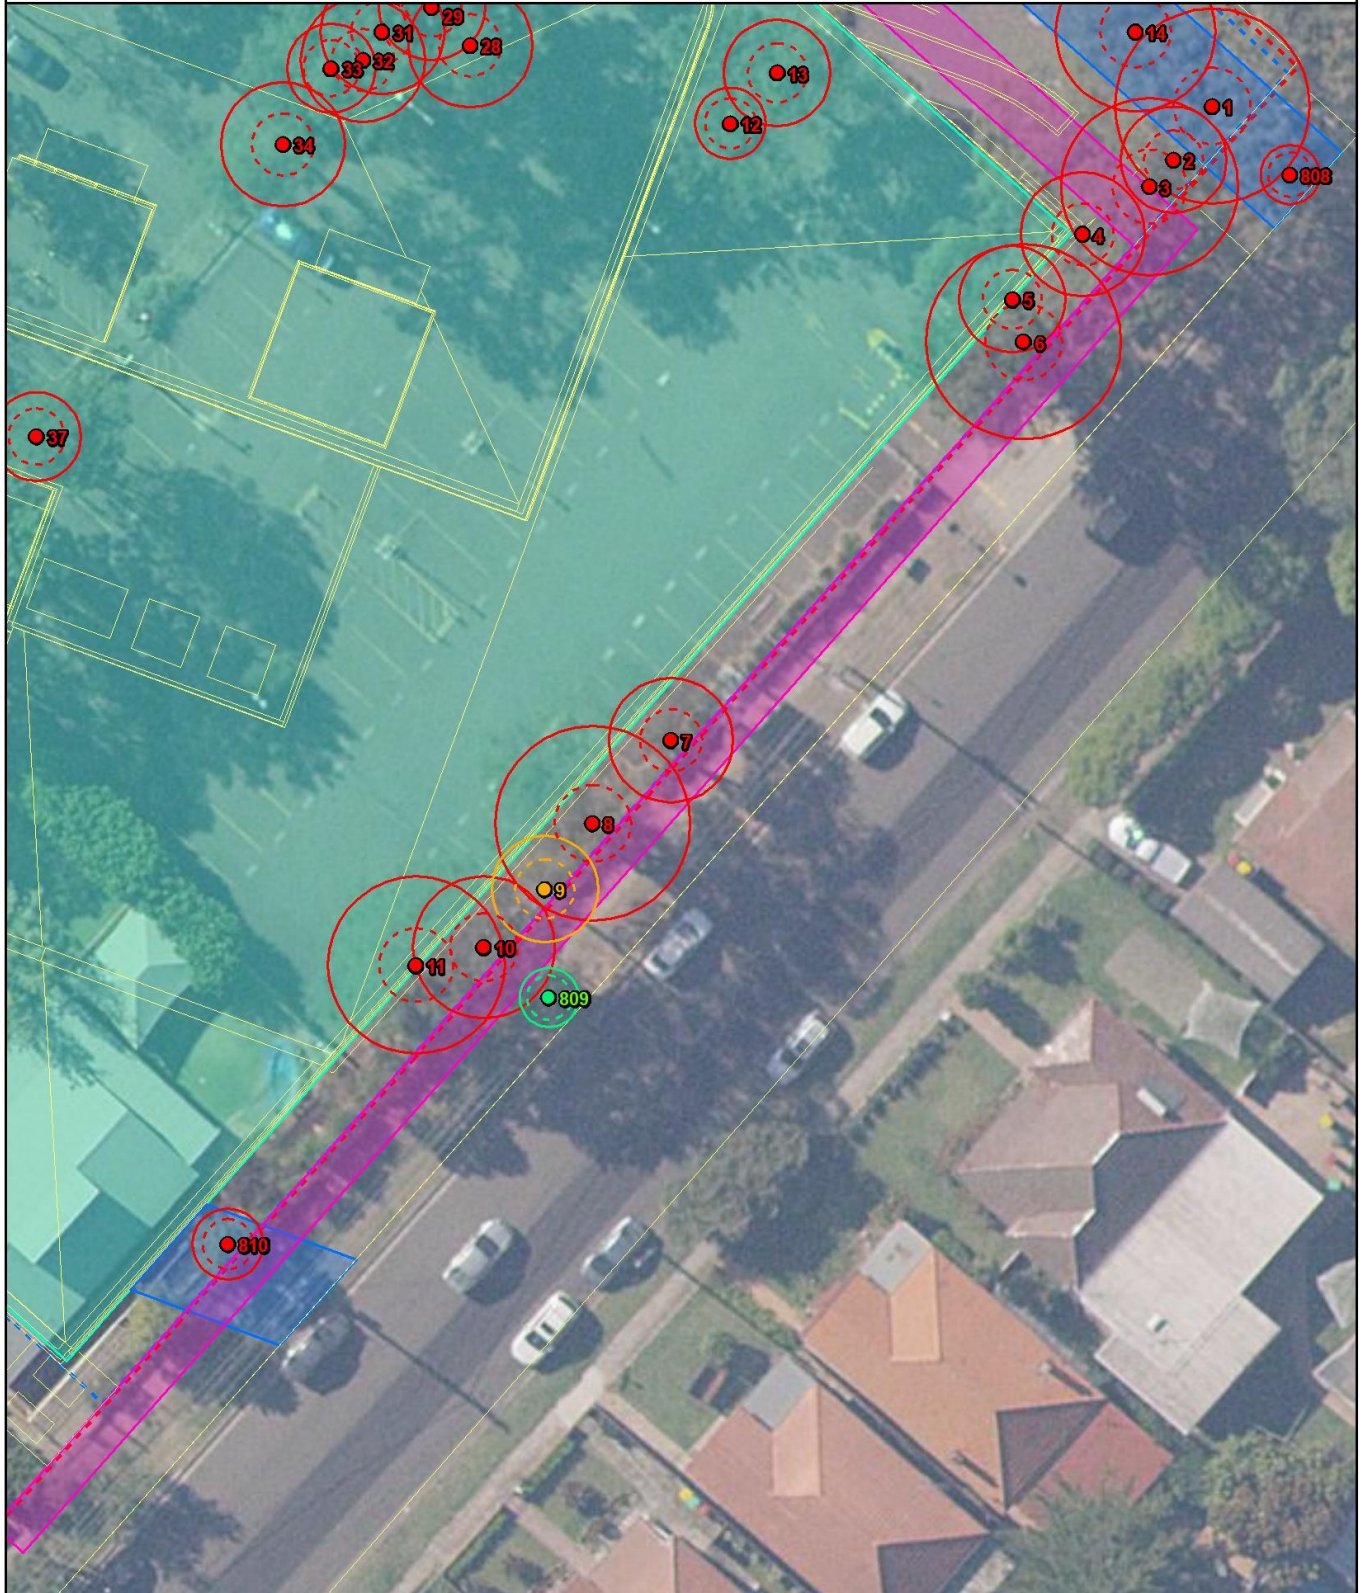

## Legend

## The subject trees

- No encroachment
- Minor encroachment
- Major encroachment

## Protection Zones


- TPZ (continuous line)
- SRZ (dashed line)

## The subject site

- Pedestrian path
- Driveway
- Building envelope

## Other items

- Site layout
- Extent of SSD scope
- Site boundary



**TREE  
SURVEY**  
ARBORICULTURAL CONSULTANTS

## Appendix II - Tree protection plan

### Tree protection fencing

Tree protection fencing must be established at the perimeter of the TPZ. Existing fencing, site hoarding or structures (such as a wall or building) may be used as tree protection fencing, providing the TPZ remains isolated from construction footprint.

Tree protection fencing must be installed prior to site establishment and remain intact until the completion of works. Once erected, protective fencing must not be removed or altered without the approval of the project arborist.

Tree protection fencing shall be:

- Enclosed to the full extent of the TPZ (or as specified in the Recommendations and Tree Protection Plan).
- Temporary mesh panel fencing (minimum height 1.8m).
- Certified and inspected by the project arborist.
- Installed prior to the commencement of works.
- Prominently signposted with 300mm x 450mm boards stating, "NO ACCESS - TREE PROTECTION ZONE".



If tree protection fencing cannot be installed due to sloping or uneven ground, tree protection barriers must be installed as an alternative.

Specifications for tree protection barriers are as follows:

- Star pickets spaced at 2m intervals,
- Connected by a continuous high-visibility barrier/hazard mesh.
- Maintained at a minimum height of 1m.

Where approved works are required within the TPZ, fencing may be a setback to provide construction access. Trunk, branch, and ground protection shall be installed and must comply with *AS 4970-2009, Protection of Trees on Development Sites*. Any additional construction activities within the TPZ of the subject trees must be assessed and approved by the project arborist.

### Trunk protection

Where the provision of tree protection fencing is impractical or must be temporarily removed, trunk protection shall be installed to avoid accidental mechanical damage.

Specifications for trunk protection are as follows:

- A thick layer of carpet underfelt, geotextile fabric or similar wrapped around the trunk to a minimum height of 2m.
- 1.8m lengths of softwood timbers aligned vertically and spaced evenly around the trunk (with a small gap of approximately 50mm between the timbers).
- The timbers must be secured using galvanised hoop strap (aluminium strapping).

The timbers shall be wrapped around the trunk but not fixed to the tree, as this will cause injury/damage to the tree.



## Ground protection


If temporary access for vehicle, plant or machinery is required within the TPZ ground protection shall be installed. The purpose of ground protection is to prevent root damage and soil compaction within the TPZ. Where possible, areas of the existing pavement shall be used as ground protection.

Specifications for light traffic access (<3.5 tonne) are as follows:

- Permeable membrane such as geotextile fabric.
- A layer of mulch or crushed rock (at a minimum depth of 100mm)

Specifications for heavy traffic access (>3.5 tonne) are as follows:

- Permeable membrane such as geotextile fabric.
- A layer of lightly compacted road base (at a minimum depth of 200mm)
- Geotextile fabric shall extend a minimum 300mm beyond the edge of the road base.

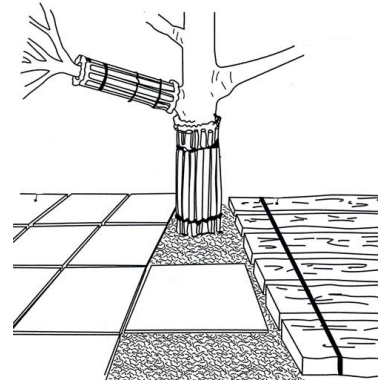

Pedestrian, vehicular and machinery access within the TPZ shall be restricted solely to areas where ground protection has been installed.

## Excavations

All approved excavations (including root investigations) within the TPZ must be carried out using tree sensitive methods under the supervision of the project arborist. These methods may include:

- Manual excavation (hand tools).
- Air spade.
- Hydro-vacuum excavations (sucker-truck).

Where approved by the project arborist, excavations using compact machinery fitted with a flat-bladed bucket is permissible. Excavations using compact machinery shall be undertaken in small increments and guided by the Project Arborist who is to look for and prevent root damage to roots (>50mm in diameter).

Exposed roots shall be protected from direct sunlight, drying out and extremes of temperature by covering with geotextile fabric, and plastic membrane or glad wrap (where practical). Coverings shall be weighted to secure them in place. The geotextile fabric shall be kept damp at all times.

No over-excavation, battering or benching shall be undertaken beyond the footprint of any structure unless approved by the project arborist. Hand excavation and root mapping shall be undertaken along excavation lines within the TPZ prior to the commencement of mechanical excavation (to prevent tearing and shattering of roots from excavation equipment). Any conflicting roots (>50mm in diameter) shall be pruned using clean, sharp secateurs or a pruning saw to ensure a clean-cut, free from tears. All root pruning must be documented and carried out by the project arborist.

## Underground services

All underground services should be routed outside of the TPZ. If underground services need to be installed within the TPZ, they must be installed using tree sensitive excavation methods under the supervision of the project arborist. Alternatively, boring methods such as horizontal directional drilling (HDD) may be used for underground service installation, providing the installation is a minimum depth of 800mm below grade. Excavations for entry/exit pits must be located outside the TPZ.



## Site Inspections

In accordance with the *Australian Standard, AS 4970-2009, Protection of Trees on Development Sites*, inspections must be conducted by the project arborist at the following key project stages:

- Prior to any work commencing on-site (including demolition, earthworks or site clearing) and following the installation of tree protection.
- During any excavations, building works and any other activities carried out within the TPZ of any tree to be retained & protected.
- A minimum of every month during the construction phase from commencement to issue of the occupation certificate.
- Following the completion of the building works.



It shall be the responsibility of the project manager to notify the project arborist prior to any works within the TPZ of any protected tree at a minimum of 48 hours' notice. To ensure the tree protection plan is implemented, hold points have been specified in the schedule of work (**Table 1**).



**Table 1: Schedule of work**

Construction stage	Hold point	Description
Pre-construction	1	Prior to demolition and/or site establishment indicate clearly (with spray paint on trunks) trees marked for removal only.
	2	Tree protection (for trees that will be retained) shall be installed prior to demolition and site establishment. This may include mulching of areas within the TPZ. Project arborist shall inspect and certify tree protection.
During Construction	3	Scheduled inspection of trees by the project arborist should be undertaken monthly during the construction period.
	4	Project arborist to supervise and document all works carried out within the TPZ of trees to be retained.
	5	Inspection of trees by project arborist after all major construction has ceased, following the removal of tree protection measures.
Post Construction	6	Final inspection of trees by project arborist.

## Appendix III - Encroachment within the TPZ

The images below show how encroachment within the tree protection zone can be compensated for elsewhere.

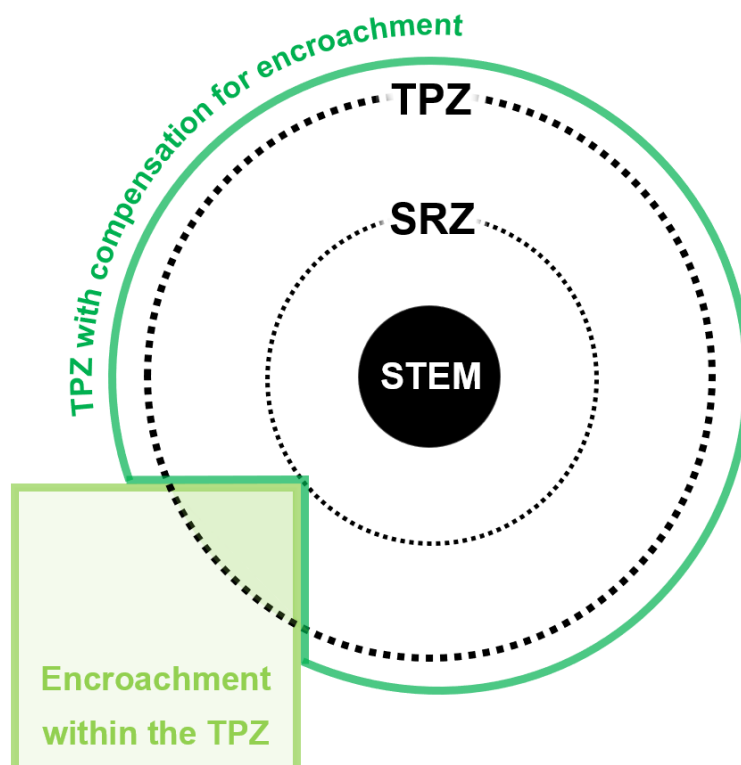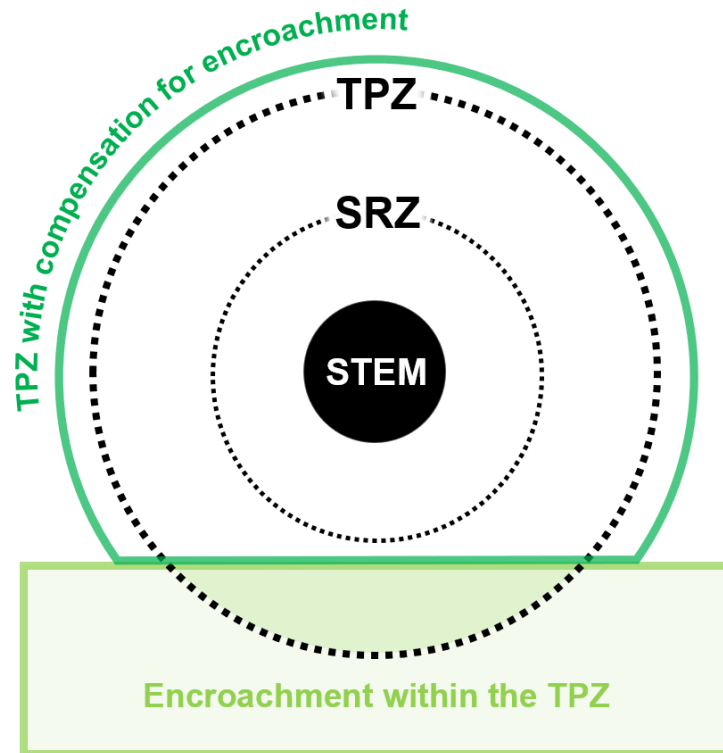

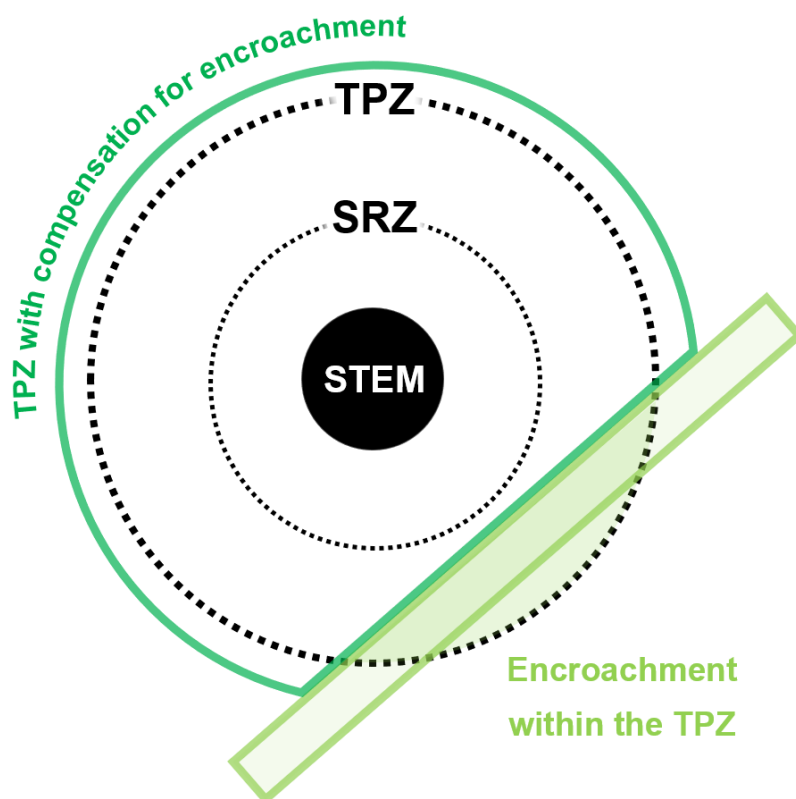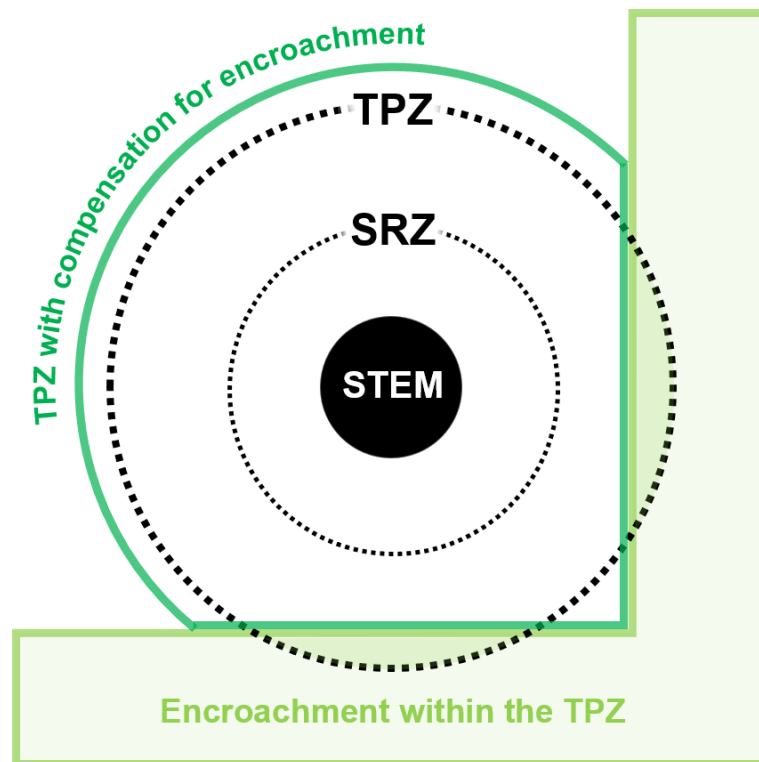

## Reference

Council of Standards Australia (August 2009)  
AS 4970-2009 Protection of Trees on Development Sites  
Standards Australia, Sydney

## Appendix IV - STARS© assessment matrix

Tree Significance - Assessment Criteria		
Low	Medium	High
<p>The tree is in fair-poor condition and good or low vigour.</p> <p>The tree has form atypical of the species</p> <p>The tree is not visible or is partly visible from the surrounding properties or obstructed by other vegetation or buildings</p> <p>The tree provides a minor contribution or has a negative impact on the visual character and amenity of the local area</p> <p>The tree is a young specimen which may or may not have reached dimensions to be protected by local Tree Preservation Orders or similar protection mechanisms and can easily be replaced with a suitable specimen</p> <p>The tree's growth is severely restricted by above or below ground influences, unlikely to reach dimensions typical for the taxa in situ – tree is inappropriate to the site conditions</p> <p>The tree is listed as exempt under the provisions of the local Council Tree Preservation Order or similar protection mechanisms</p> <p>The tree has a wound or defect that has the potential to become structurally unsound.</p> <p>The tree is an environmental pest species due to its invasiveness or poisonous/allergenic properties.</p> <p>The tree is a declared noxious weed by legislation</p>	<p>The tree is in fair to good condition</p> <p>The tree has form typical or atypical of the species</p> <p>The tree is a planted locally indigenous or a common species with its taxa commonly planted in the local area</p> <p>The tree is visible from surrounding properties, although not visually prominent as partially obstructed by other vegetation or buildings when viewed from the street</p> <p>The tree provides a fair contribution to the visual character and amenity of the local area</p> <p>The tree's growth is moderately restricted by above or below ground influences, reducing its ability to reach dimensions typical for the taxa in situ</p>	<p>The tree is in good condition and good vigour</p> <p>The tree has a form typical for the species</p> <p>The tree is a remnant or is a planted locally indigenous specimen and/or is rare or uncommon in the local area or of botanical interest or of substantial age.</p> <p>The tree is listed as a heritage item, threatened species or part of an endangered ecological community or listed on council's significant tree register</p> <p>The tree is visually prominent and visible from a considerable distance when viewed from most directions within the landscape due to its size and scale and makes a positive contribution to the local amenity.</p> <p>The tree supports social and cultural sentiments or spiritual associations, reflected by the broader population or community group or has commemorative values.</p> <p>The tree's growth is unrestricted by above and below ground influences, supporting its ability to reach dimensions typical for the taxa in situ – tree is appropriate to the site conditions.</p>

### Useful Life Expectancy - Assessment Criteria

Remove	Short	Medium	Long
<p>Trees with a high level of risk that would need removing within the next 5 years.</p> <p>Dead trees.</p> <p>Trees that should be removed within the next 5 years.</p> <p>Dying or suppressed or declining trees through disease or inhospitable conditions.</p> <p>Dangerous trees through instability or recent loss of adjacent trees.</p> <p>Dangerous trees through structural defects including cavities, decay, included bark, wounds or poor form.</p> <p>Damaged trees that considered unsafe to retain.</p> <p>Trees that could live for more than 5 years but may be removed to prevent interference with more suitable individuals or to provide space for new planting.</p> <p>Trees that will become dangerous after removal of other trees for the reasons.</p>	<p>Trees that appear to be retainable with an acceptable level of risk for 5-15 years.</p> <p>Trees that may only live between 5 and 15 more years.</p> <p>Trees that may live for more than 15 years but would be removed to allow the safe development of more suitable individuals.</p> <p>Trees that may live for more than 15 years but would be removed during the course of normal management for safety or nuisance reasons.</p> <p>Storm damaged or defective trees that require substantial remedial work to make safe and are only suitable for retention in the short term.</p>	<p>Trees that appear to be retainable with an acceptable level of risk for 15-40 years.</p> <p>Trees that may only live between 15 and 40 more years.</p> <p>Trees that may live for more than 40 years but would be removed to allow the safe development of more suitable individuals.</p> <p>Trees that may live for more than 40 years but would be removed during the course of normal management for safety or nuisance reasons.</p> <p>Storm damaged or defective trees that require substantial remedial work to make safe and are only suitable for retention in the short term.</p>	<p>Trees that appear to be retainable with an acceptable level of risk for more than 40 years.</p> <p>Structurally sound trees located in positions that can accommodate future growth.</p> <p>Storm damaged or defective trees that could be made suitable for retention in the long term by remedial tree surgery.</p> <p>Trees of special significance for historical, commemorative or rarity reasons that would warrant extraordinary efforts to secure their long-term retention.</p>

Tree Significance					
Useful Life Expectancy		High	Medium	Low	
	Long >40 years				
	Medium 15-40 years				
	Short <1-15 years				
	Dead				

Legend for Matrix Assessment	
	<b>Priority for retention (High):</b> These trees are considered important for retention and should be retained and protected. Design modification or re-location of building/s should be considered to accommodate the setbacks as prescribed by the Australian Standard AS4970 Protection of trees on development sites. Tree sensitive construction measures must be implemented if works are to proceed within the Tree Protection Zone.
	<b>Consider for retention (Medium):</b> These trees may be retained and protected. These are considered less critical; however, their retention should remain priority with the removal considered only if adversely affecting the proposed building/works and all other alternatives have been considered and exhausted.
	<b>Consider for removal (Low):</b> These trees are not considered important for retention, nor require special works or design modification to be implemented for their retention.
	<b>Consider for removal (Low):</b> These trees are not considered important for retention, nor require special works or design modification to be implemented for their retention.

## Reference

IACA, 2010, IACA Significance of a Tree, Assessment Rating System (STARS)  
 Institute of Australian Consulting Arboriculturists  
 Australia, [www.iaca.org.au](http://www.iaca.org.au)

