

AWTA PRODUCT TESTING

Australian Wool Testing Authority Ltd - trading as AWTA Product Testing
A.B.N 43 006 014 106


1st Floor, 191 Racecourse Road, Flemington, Victoria 3031
P.O Box 240, North Melbourne, Victoria 3051
Phone (03) 9371 2400

TEST REPORT

Client : Eureka Insulation
126 Jedda Road
Prestons NSW 2170

Test Number : 23-001971
Issue Date : 30/06/2023
Print Date : 14/07/2023

Sample Description Clients Ref : "PerformINS HD Plus Roofing Blanket R2.5"
Foil faced roofing blanket
Colour : Silver
End Use : Roof and Soffit Insulation
Nominal Composition : Glasswool with foil facing
Nominal Mass per Unit Area/Density : 11.4kg/m3
Nominal Thickness : 105mm

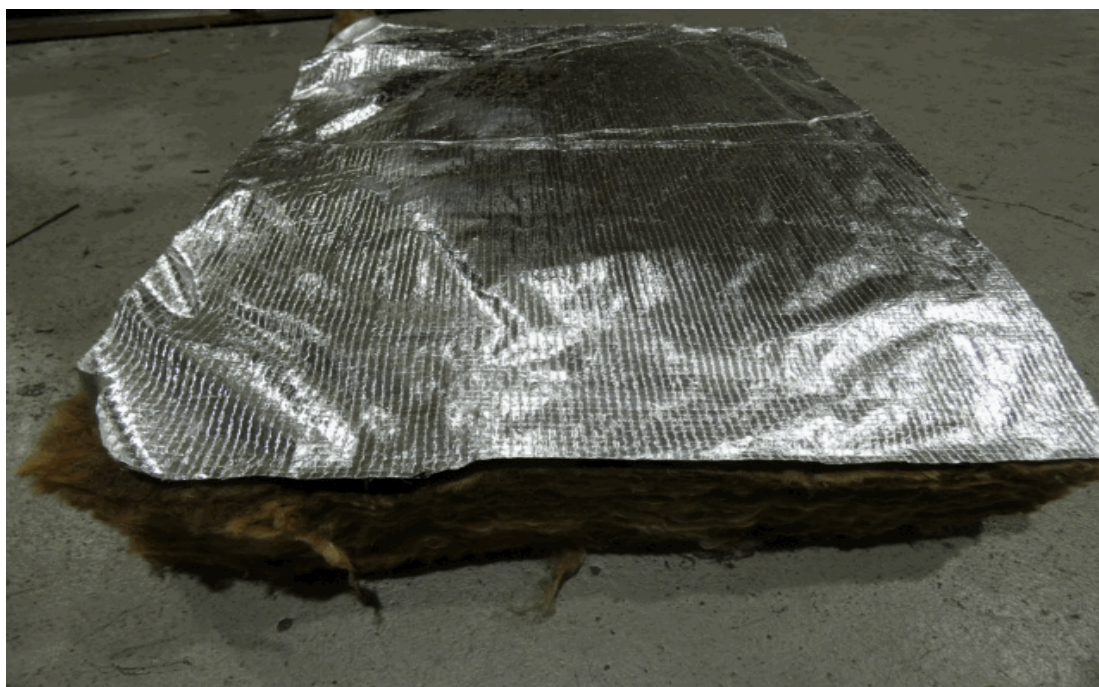

299478

64661

Page 1 of 3

© Australian Wool Testing Authority Ltd
Copyright - All Rights Reserved



Accredited for compliance with ISO/IEC 17025 - Testing
Accreditation Numbers: 983, 985, and 1356

Samples and their identifying descriptions have been provided by the client unless otherwise stated. AWTA Ltd makes no warranty, implied or otherwise, as to the source of the tested samples. The above test results relate only to the sample or samples tested. This document shall not be reproduced except in full and shall be rendered void if amended or altered. This document, the names AWTA Product Testing and AWTA Ltd may be used in advertising providing the content and format of the advertisement have been approved by the Managing Director of AWTA Ltd.



Fiona McDonald

APPROVED SIGNATORY

MICHAEL A. JACKSON B.Sc.(Hons)
MANAGING DIRECTOR

AWTA PRODUCT TESTING

Australian Wool Testing Authority Ltd - trading as AWTA Product Testing
A.B.N 43 006 014 106

1st Floor, 191 Racecourse Road, Flemington, Victoria 3031
P.O Box 240, North Melbourne, Victoria 3051
Phone (03) 9371 2400

TEST REPORT

Client : Eureka Insulation
126 Jedda Road
Prestons NSW 2170

Test Number : 23-001971
Issue Date : 30/06/2023
Print Date : 14/07/2023

AS/NZS 1530.3-1999

Methods for Fire Tests on Building Materials, Components and Structures Part 3: Simultaneous Determination of Ignitability, Flame Propagation, Heat Release and Smoke Release

Face tested:	Face	
Date tested:	29-06-2023	
	Standard Error	Mean
Ignition time	Nil	Nil min
Flame propagation time	Nil	Nil sec
Heat release integral	Nil	Nil kJ/m ²
Smoke release, log d	0.2719	-2.1834
Optical density, d		0.0262 / metre
No of samples which ignited		2
For Samples which ignited		
Smoke Release (Log D) - Mean		-1.5950
Smoke Release (Log D) - Standard Error		0.0000
No of samples which did not ignite		7
For Samples which did not ignite		
Smoke Release (Log D) - Mean		-2.1834
Smoke Release (Log D) - Standard Error		0.2719
Number of specimens tested:		9
Regulatory Indices:		
Ignitability Index		0 Range 0-20
Spread of Flame Index		0 Range 0-10
Heat Evolved Index		0 Range 0-10
Smoke Developed Index		2 Range 0-10

299478

64661

Page 2 of 3

© Australian Wool Testing Authority Ltd
Copyright - All Rights Reserved



Accredited for compliance with ISO/IEC 17025 - Testing
Accreditation Numbers: 983, 985, and 1356

Samples and their identifying descriptions have been provided by the client unless otherwise stated. AWTA Ltd makes no warranty, implied or otherwise, as to the source of the tested samples. The above test results relate only to the sample or samples tested. This document shall not be reproduced except in full and shall be rendered void if amended or altered. This document, the names AWTA Product Testing and AWTA Ltd may be used in advertising providing the content and format of the advertisement have been approved by the Managing Director of AWTA Ltd.



AWTA PRODUCT TESTING

Australian Wool Testing Authority Ltd - trading as AWTA Product Testing
A.B.N 43 006 014 106

1st Floor, 191 Racecourse Road, Flemington, Victoria 3031
P.O Box 240, North Melbourne, Victoria 3051
Phone (03) 9371 2400

TEST REPORT

Client : Eureka Insulation
126 Jedda Road
Prestons NSW 2170

Test Number : 23-001971
Issue Date : 30/06/2023
Print Date : 14/07/2023

Since the heat source for this test is a radiator, a reduction in the reflective properties of certain materials by the deposition of dust and soot, by surface damage and by the formation of surface corrosion products, may produce a significant change in the index numbers from those obtained when the materials were tested in a new and clean condition.

Ignition is initiated by a pilot flame that is held near, but does not touch the specimen. A material that does not ignite during the standard test may ignite if contacted with a pilot flame during the test.

Each test specimen had an unattached backing of 4.5mm thick fibre reinforced cement board.

Each test specimen was restrained on the exposed face by a layer of galvanised welded square mesh made from wire of nominal diameter 0.8mm and nominal spacing 12mm in both directions and the assembly clamped in four places.

These results only apply to the specimen mounted, as described in this report. The result of this fire test may be used to directly assess fire hazard, but it should be recognised that a single test method will not provide a full assessment of fire hazard under all fire conditions.

299478

64661

Page 3 of 3

© Australian Wool Testing Authority Ltd
Copyright - All Rights Reserved



Accredited for compliance with ISO/IEC 17025 - Testing
Accreditation Numbers: 983, 985, and 1356

Samples and their identifying descriptions have been provided by the client unless otherwise stated. AWTA Ltd makes no warranty, implied or otherwise, as to the source of the tested samples. The above test results relate only to the sample or samples tested. This document shall not be reproduced except in full and shall be rendered void if amended or altered. This document, the names AWTA Product Testing and AWTA Ltd may be used in advertising providing the content and format of the advertisement have been approved by the Managing Director of AWTA Ltd.



Fiona McDonald

APPROVED SIGNATORY

MICHAEL A. JACKSON B.Sc.(Hons)
MANAGING DIRECTOR