




CERMAK  
PETERKA  
PETERSEN

WIND ENGINEERING AND AIR QUALITY CONSULTANTS

## Final Report

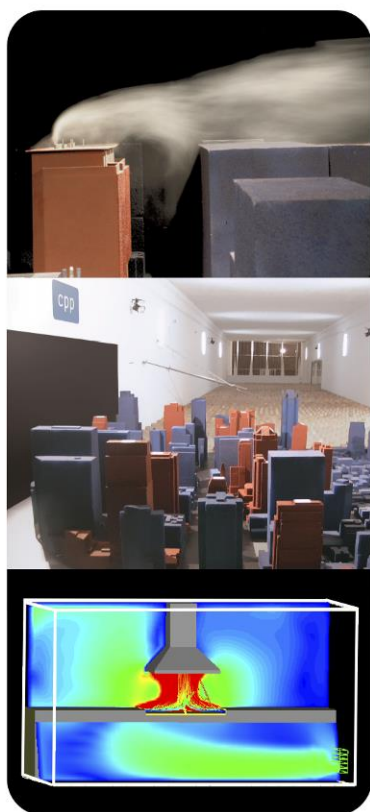

Wind Tunnel Tests for:

### **DARLING SQUARE**

Sydney, Australia

CPP Project 8504

February 2016

Prepared for:

Lend Lease

30 The Bond

30 Hickson Rd

Millers Point

NSW 2000

Prepared by:

Michelle Noguez, Project Engineer

Matt Glanville, Ph.D., Director

## EXECUTIVE SUMMARY

A wind tunnel study of the proposed Darling Square development to be located in Sydney, Australia, was conducted to assess pedestrian wind comfort. A model of the project was fabricated to a 1:400 scale and centred on a turntable in the wind tunnel. Replicas of surrounding buildings within a 570 m radius were constructed and placed on the turntable.

The wind tunnel testing was performed in the natural boundary layer wind tunnel of Cermak Peterka Petersen Pty. Ltd., St Peters. Approach boundary layers representative of the environment surrounding the proposed development were established in the test section of the wind tunnel. The approach wind flow had appropriate turbulence characteristics corresponding to Terrain Category 3, as defined in Standards Australia (2011).

Measurements of winds likely to be experienced by pedestrians were made with a hot-film anemometer at 29 locations for 16 wind directions each. These points were tested around the development in the proposed configuration, focusing especially on access routes, doorways and seating areas. The measurements were combined with site specific wind statistics to produce results of wind speed versus the percentage of time that wind speed is exceeded for each location.

The wind environment around the development was found to be suitable for pedestrian standing and sitting activities at most locations, under the Lawson criteria. Recommendations for wind amelioration are contained in the report. All locations passed the Lawson distress criterion.

## DOCUMENT VERIFICATION

| Date       | Revision                    | Prepared<br>by | Checked<br>by | Approved<br>by |
|------------|-----------------------------|----------------|---------------|----------------|
| 17/08/2015 | Final Report                | MNC            | MG            | MG             |
| 3/02/2016  | Client Provided Information | MNC            | MNC           | MNC            |
| 23/02/2016 | Minor Amendments            | MNC            | MNC           | MNC            |

## TABLE OF CONTENTS

|                                                                      |     |
|----------------------------------------------------------------------|-----|
| EXECUTIVE SUMMARY .....                                              | ii  |
| TABLE OF CONTENTS.....                                               | iii |
| LIST OF FIGURES .....                                                | iii |
| LIST OF TABLES.....                                                  | iv  |
| LIST OF SYMBOLS .....                                                | v   |
| 1. INTRODUCTION .....                                                | 1   |
| 2. CLIENT PROVIDED INFORMATION .....                                 | 2   |
| 2.1 Introduction.....                                                | 2   |
| 2.2 Overview of Proposed Development .....                           | 2   |
| 2.3 Background.....                                                  | 3   |
| 2.4 Public Private Partnership SSD DA (SSD 12_5752) .....            | 4   |
| 2.5 Concept Proposal (SSD 13_5878) .....                             | 4   |
| 2.6 Site Description .....                                           | 5   |
| 2.7 Planning Approvals Strategy .....                                | 7   |
| 3. THE WIND TUNNEL TEST .....                                        | 8   |
| 4. ENVIRONMENTAL WIND CRITERIA .....                                 | 11  |
| 5. DATA ACQUISITION AND RESULTS .....                                | 12  |
| 5.1 Velocities .....                                                 | 12  |
| 5.1.1 Velocity Profiles .....                                        | 12  |
| 5.1.2 Pedestrian Winds.....                                          | 12  |
| 6. DISCUSSION.....                                                   | 15  |
| 7. REFERENCES .....                                                  | 19  |
| Appendix 1: Additional photographs of the CPP wind tunnel model..... | 20  |
| Appendix 2: Directional Wind Results .....                           | 21  |

## LIST OF FIGURES

|                                                                                                                       |    |
|-----------------------------------------------------------------------------------------------------------------------|----|
| Figure 1: Aerial Photograph of the SICEEP Site.....                                                                   | 6  |
| Figure 2: Concept Proposal Development Plots .....                                                                    | 7  |
| Figure 3: Schematic of the closed circuit wind tunnel .....                                                           | 8  |
| Figure 4: Mean velocity and turbulence profiles.....                                                                  | 9  |
| Figure 5: Project location and turntable layout .....                                                                 | 10 |
| Figure 6: Proposed Darling Square model in the wind tunnel viewed from the north.....                                 | 10 |
| Figure 7: Wind rose of direction and speed for Sydney Airport .....                                                   | 14 |
| Figure 8: Pedestrian wind speed measurement locations with comfort/distress ratings – Ground Level .....              | 17 |
| Figure 9: Pedestrian wind speed measurement locations with comfort/distress ratings – Roof, Terraces and Canopy ..... | 18 |
| Figure 10: Darling Square development viewed from the southeast.....                                                  | 20 |
| Figure 11: Darling Square development viewed from the northwest.....                                                  | 20 |

## LIST OF TABLES

|                                                                    |    |
|--------------------------------------------------------------------|----|
| Table 1: Configurations for data acquisition .....                 | 1  |
| Table 2: Summary of Lawson criteria .....                          | 11 |
| Table 3: Summary of wind effects on people, Penwarden (1973) ..... | 14 |

## LIST OF SYMBOLS

|             |                                                         |
|-------------|---------------------------------------------------------|
| $D$         | Characteristic dimension (building height, width, etc.) |
| $n$         | Mean velocity profile power law exponent                |
| $T_u$       | Turbulence intensity, $U_{rms}/U$                       |
| $U$         | Local mean velocity                                     |
| $U_{ref}$   | Reference velocity at reference height $z_{ref}$        |
| $U_{pk}$    | Peak wind speed in pedestrian studies                   |
| $U_{rms}$   | Root-mean-square of fluctuating velocity                |
| $z$         | Height above surface                                    |
| $\nu$       | Kinematic viscosity of approach flow                    |
| $\sigma()$  | Standard deviation of $()$ , $\sigma() = ()'_{rms}$     |
| $\rho$      | Density of approach flow                                |
| $()_{max}$  | Maximum value during data record                        |
| $()_{min}$  | Minimum value during data record                        |
| $()_{mean}$ | Mean value during data record                           |
| $()_{rms}$  | Root mean square about the mean                         |

## 1. INTRODUCTION

Pedestrian acceptability of footpaths, entrances, plazas and terraces is an important design parameter of interest to the building owner and architect. Assessment of the acceptability of the pedestrian level wind environment is desirable during the project design phase so that modifications can be made, if necessary, to create wind conditions suitable for the intended use of the space.

Analytical methods such as computational fluid dynamics (CFD) are not capable, except in very simple geometries, to estimate wind pressures, frame loads, or windiness in pedestrian areas.

Techniques have been developed which permit boundary layer wind tunnel modelling of buildings to determine wind velocities in pedestrian areas. This report includes wind tunnel test procedures, test results, and discussion. Table 1 summarises the model configurations, test methods, and data acquisition parameters used. All the data collection was performed in accordance with Australasian Wind Engineering Society (2001), and American Society of Civil Engineers (1999, 2010).

Table 1: Configurations for data acquisition

| <i>General Information</i>            |                                                                                                                                                                                                          |
|---------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Model length scale                    | 1:400                                                                                                                                                                                                    |
| Surrounding model radius (full-scale) | 570 m                                                                                                                                                                                                    |
| Reference height (full-scale)         | 200 m AGL                                                                                                                                                                                                |
| Approach Terrain Category             | Terrain Category 3                                                                                                                                                                                       |
| <i>Testing Configuration(s)</i>       |                                                                                                                                                                                                          |
| Configuration A                       | <p>Proposed Darling Square development with surrounding buildings, as shown in Figure 5.</p> <p>Pedestrian winds measured at 29 locations for 16 wind directions at 22.5° increments from 0° (north)</p> |

## **2. CLIENT PROVIDED INFORMATION**

### **2.1 Introduction**

This report supports a State Significant Development (SSD) Development Application (DA) submitted to the Minister for Planning pursuant to Part 4 of the Environmental Planning and Assessment Act 1979 (EP&A Act).

The Application (referred to as SSDA 10) follows the approval of a staged SSD DA (SSDA 2) in December 2013. SSDA 2 sets out a Concept Proposal for a new mixed use neighbourhood at Haymarket, now called Darling Square. Darling Square forms part of the Sydney International Convention, Exhibition and Entertainment precinct (SICEEP).

More specifically this subsequent DA seeks approval for the construction and use of a mixed use development within the North development plot of Darling Square and public domain works for the new 'Square'.

### **2.2 Overview of Proposed Development**

The proposal relates to a detailed ('Stage 2') DA for a mixed use development in the North Plot of Darling Square together with domain works for the new Square. The Darling Square Site more broadly is to be developed for a mix of residential and non-residential uses, including but not limited to residential buildings, commercial, retail, community and public space. The North Plot is one of six development plots identified within the approved Concept Proposal.

Under the Concept Proposal, the North Plot is planned to accommodate a small scaled mixed use building. More specifically, this SSD DA seeks approval for the following components of the development:

- Construction and use of a mixed use building including retail, commercial, food and beverage offerings and community uses;
- Public domain and landscaping improvements comprising the creation of a new Square which links with new pedestrian connections, including laneways and the Boulevard; and
- Extension and augmentation of physical infrastructure / utilities as required.

## 2.3 Background

The NSW Government considers that a precinct-wide renewal and expansion of the existing convention, exhibition and entertainment centre facilities at Darling Harbour is required, and is committed to Sydney reclaiming its position on centre stage for hosting world-class events with the creation of SICEEP.

In December 2012, following an extensive and rigorous Expressions of Interest and Request for Proposals process, Darling Harbour Live (a consortium comprising Lend Lease, Hostplus, Capella Capital, AEG Ogden and Spotless) and Lend Lease were announced by the NSW Government as the preferred proponent to transform Darling Harbour and create SICEEP.

Key features of the Preferred Plan include:

- Delivering world-class convention, exhibition and entertainment facilities, including:
  - Up to 40,000m<sup>2</sup> exhibition space;
  - Over 8,000m<sup>2</sup> of meeting rooms space, across 40 rooms;
  - Overall convention space capacity for more than 12,000 people;
  - A ballroom capable of accommodating 2,000 people; and
  - A premium, red-carpet entertainment facility with a capacity of 8,000 persons.
- Providing a hotel complex at the northern end of the precinct.
- A vibrant and authentic new neighbourhood at the southern end of the precinct, now called ‘Darling Square’, including apartments, student accommodation, shops, cafes and restaurants.
- Renewed and upgraded public domain that has been increased by a hectare, including an outdoor event space for up to 27,000 people at an expanded Tumbalong Park; and
- Improved pedestrian connections linking to the proposed Ultimo Pedestrian Network (now The Goods Line) drawing people between Central, Chinatown and Cockle Bay Wharf as well as east-west between Ultimo/Pymont and the City.

On 21 March 2013 a critical step in realising the NSW Government’s vision for the SICEEP Project was made, with the lodgement of the first two SSD DAs with the (now) Department of Planning and Environment. The key components of these proposals are outlined below.



## **2.4 Public Private Partnership SSD DA (SSD 12\_5752)**

The Public-Private Partnership (PPP) SSD DA (SSDA 1) includes the core facilities of the SICEEP Project, comprising the new, integrated and world-class convention, exhibition and entertainment facilities along with ancillary commercial premises and public domain upgrades. SSDA1 was approved on 22 August 2013.

## **2.5 Concept Proposal (SSD 13\_5878)**

The Concept Proposal SSD DA (SSDA 2) establishes the vision and planning and development framework which will be the basis for the consent authority to assess detailed development proposals within the Darling Square Site. SSDA2 was approved on 5 December 2013. The Stage 1 Concept Proposal approved the following key components and development parameters:

- Indicative staging of demolition and development of future development plots;
- Land uses across the site including residential and non-residential uses;
- Street and laneway layouts and pedestrian routes;
- Open spaces and through-site links;
- Six separate development plots, development plot sizes and separation, building envelopes, building separation, building depths, building alignments, and benchmarks for natural ventilation and solar access provisions;
- A maximum total gross floor area (non-residential and residential GFA);
- Above ground car parking including public car parking;
- Residential car parking rates;
- Design Guidelines to guide future development and the public domain; and
- A remediation strategy.

The Concept Proposal was modified on 26 November 2015 to increase the amount of non-residential GFA. This minor increase in GFA was allocated to the approved North-West Plot building to meet tenant requirements. In addition to the approval of SSDA2, the following approvals have been granted for various stages of Darling Square site:

- Darling Drive (part) development plot (SSDA3) for the construction and use of a residential building (student accommodation) and the provision of associated public domain works approved on 7 May 2014;
- North-West development plot (SSDA4) for the construction and use of a mixed use commercial development and public car park building and associated public domain works approved on 7 May 2014; and
- South-West development plot (SSDA5) – construction and use of a mixed use residential development and associated public domain works approved on 21 May 2014.
- North-East development plot (SSDA7) – construction and use of a mixed use residential development and associated public domain works approved on 16 April 2015.

Approval was also granted on 15 June 2014 for SSDA6 which includes the construction and use of the International Convention Centre (ICC) Sydney Hotel and provision of public domain works. Approval was also granted for SSDA8 on 16 October 2015 which comprised the ICC Hotel fitout, external lighting and subdivision.

This report has been prepared to support a detailed Stage 2 SSD DA for the mixed use development and public domain works within Darling Square (SSDA 10), consistent with the Concept Proposal (SSDA 2).

## **2.6 Site Description**

The SICEEP Site is located within Darling Harbour. Darling Harbour is a 60 hectare waterfront precinct on the south-western edge of the Sydney Central Business District that provides a mix of functions including recreational, tourist, entertainment and business.

With an area of approximately 20 hectares, the SICEEP Site is generally bound by the light rail Line to the west, Harbourside shopping centre and Cockle Bay to the north, Darling Quarter, the Chinese Garden and Harbour Street to the east, and Hay Street to the south (refer to Figure 1). The Darling Square Site is:

- located in the south of the SICEEP Site, within the northern portion of the suburb of Haymarket;
- bounded by the Powerhouse Museum to the west, the Pier Street overpass and Little Pier Street to the north, Harbour Street to the east, and Hay Street to the south; and

- irregular in shape and occupies an area of approximately 37,700m<sup>2</sup>.

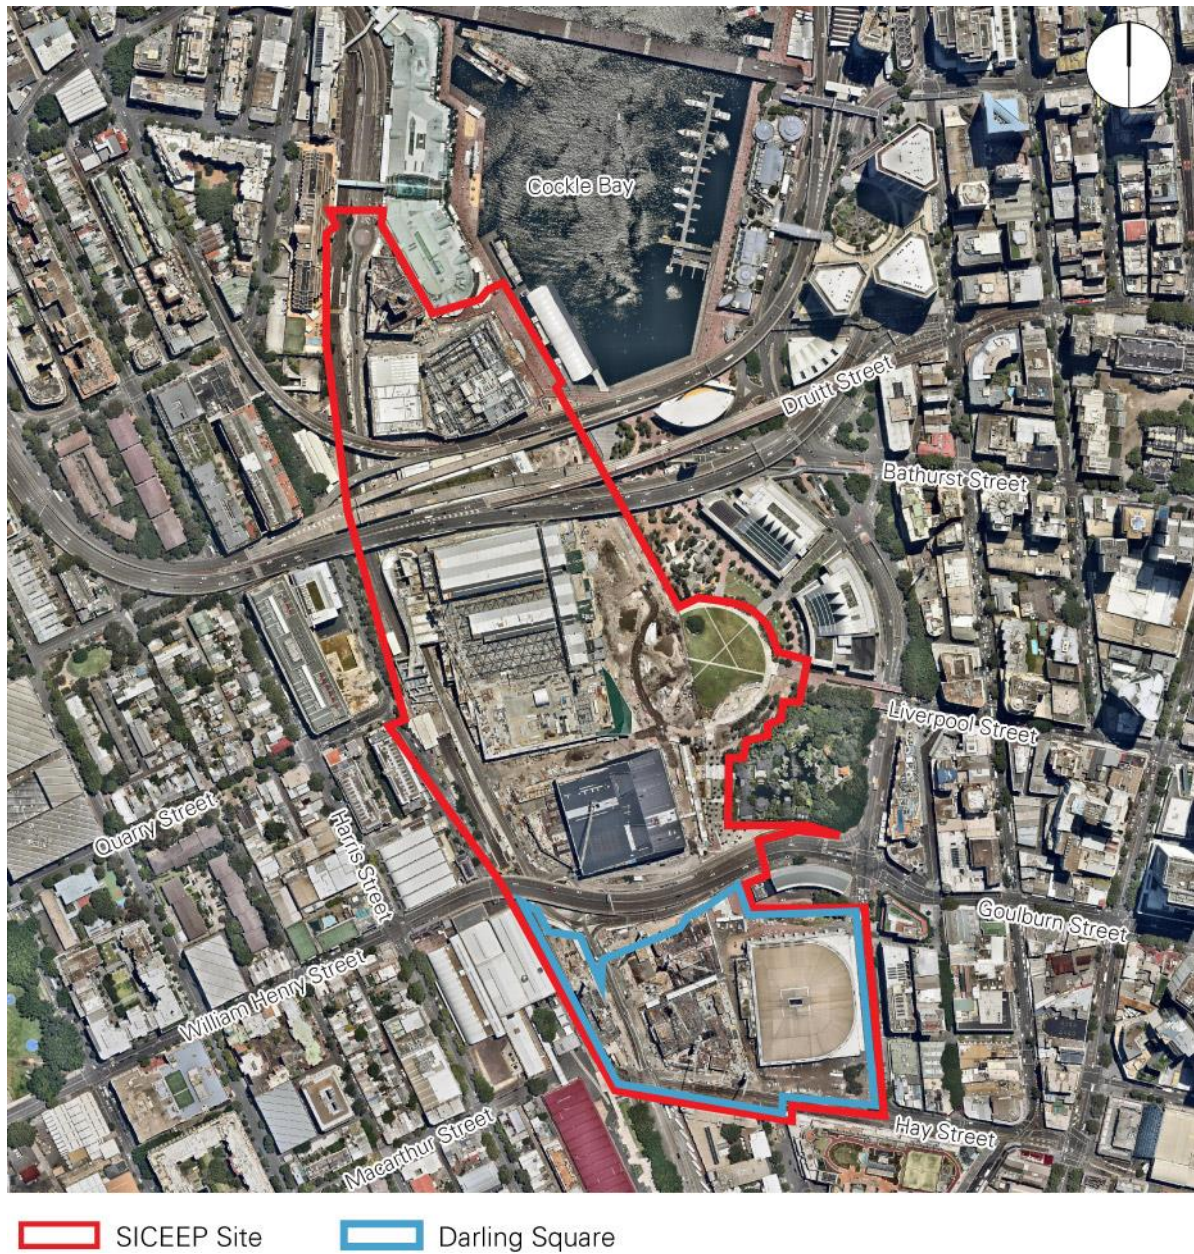


Figure 1: Aerial Photograph of the SICEEP Site

The Concept Proposal DA provides for six (6) separate development plots across the Darling Square Site (refer to Figure 2):

1. North Plot;
2. North East Plot;
3. South East Plot;

4. South West Plot;
5. North West Plot; and
6. Western Plot (Darling Drive).

The Application Site area relates to the North Plot and adjoining 'Square' as detailed within the architectural and landscape plans submitted in support of the DA.

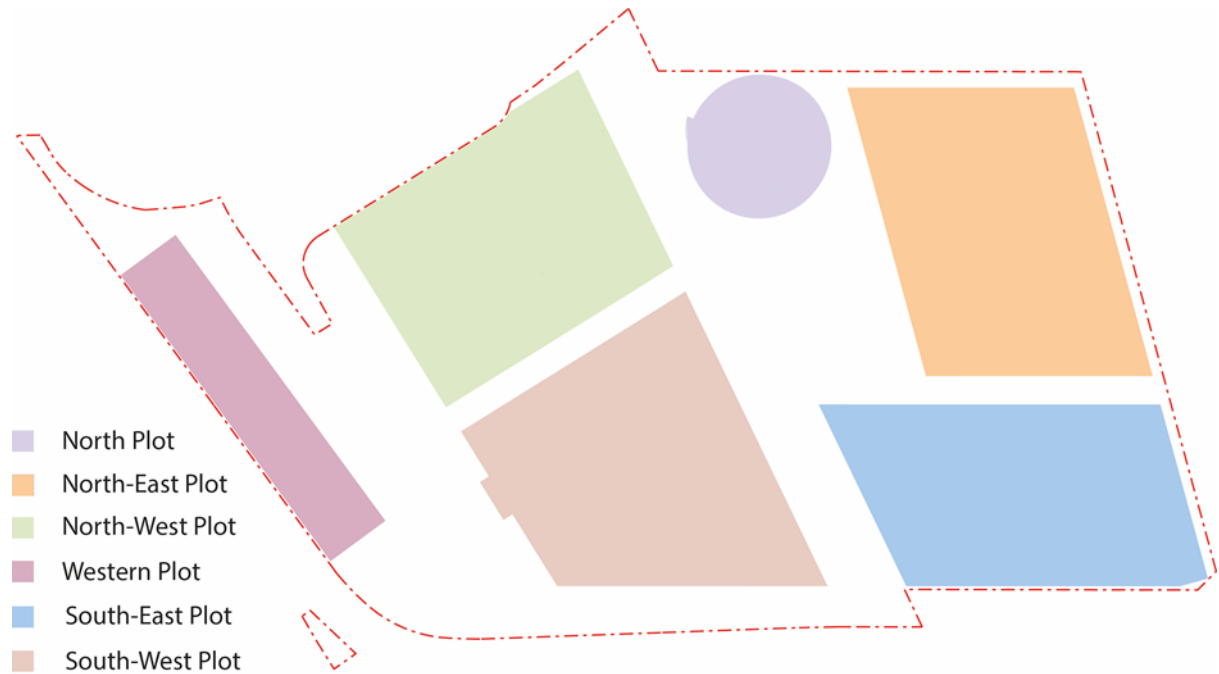


Figure 2: Concept Proposal Development Plots

## 2.7 Planning Approvals Strategy

The SICEEP Project has resulted in the lodgement of numerous SSD DAs for the various components of the redevelopment project. Future applications will continue to be lodged in accordance with the Concept Proposal SSD DA for the remaining development plots of the Darling Square Site.



### 3. THE WIND TUNNEL TEST

Modelling of the aerodynamic flow around a structure requires special consideration of flow conditions to obtain similitude between the model and the prototype. A detailed discussion of the similarity requirements and their wind tunnel implementation can be found in Cermak (1971, 1975, 1976). In general, the requirements are that the model and prototype be geometrically similar, that the approach mean velocity and turbulence characteristics at the model building site have a vertical profile shape similar to the full-scale flow, and that the Reynolds number for the model and prototype be equal. Due to modelling constraints the Reynolds number cannot be made equal and Australasian Wind Engineering Society Quality Assurance Manual (2001) suggests a minimum Reynolds number of 50,000, based on minimum model width and wind velocity at the top of the model; in this study the modelled Reynolds number was over 50,000.

The wind tunnel test was performed in the boundary layer wind tunnel shown in Figure 3. The wind tunnel test section is 3.0 m wide, by 2.4 m high with a porous slatted roof for passive blockage correction. This wind tunnel has a 21 m long test section, the floor of which is covered with roughness elements, preceded by a vorticity generating fence and spires. The spires, barrier, and roughness elements were designed to provide a modelled atmospheric boundary layer approximately 1.2 m thick with a mean velocity and turbulence intensity profile similar to that expected to occur in the region approaching the modelled area. The approach wind characteristics used for the model test are shown in Figure 4, and are explained more fully in Section 5.1.1.



Figure 3: Schematic of the closed circuit wind tunnel

A model of the proposed development and surrounds to a radius of 570 m was constructed at a scale of 1:400, which was consistent with the modelled atmospheric flow, permitted a reasonable test model size with an adequate portion of the adjoining environment to be included in a proximity model, Figure 5, and was within wind tunnel blockage limitations.

Significant variations in the building surface were formed into the model. The models were mounted on the turntable located near the downstream end of the wind tunnel test section, Figure 6. The turntable permitted rotation of the modelled area for examination of velocities from any approach wind direction. Additional photos of the testing are included in Appendix 1.

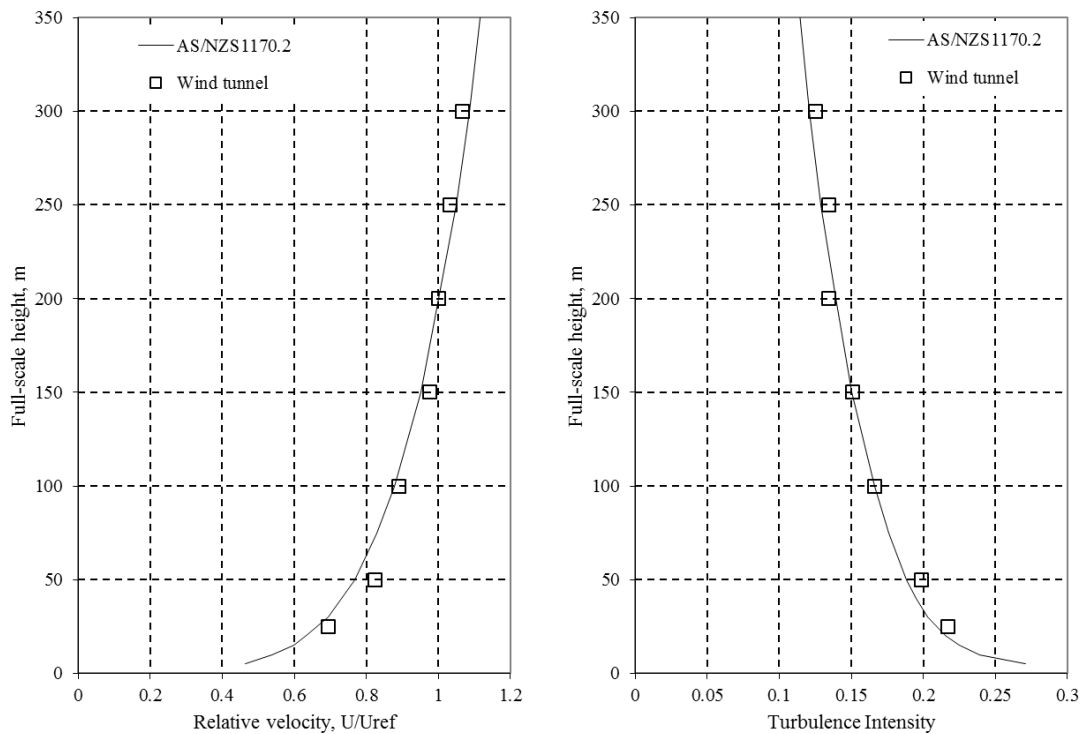


Figure 4: Mean velocity and turbulence profiles



Figure 5: Project location and turntable layout



Figure 6: Proposed Darling Square model in the wind tunnel viewed from the north

#### 4. ENVIRONMENTAL WIND CRITERIA

Over the years, a number of researchers have added to the knowledge of wind effects on pedestrians by suggesting criteria for comfort and safety. Because pedestrians will tolerate higher wind speeds for a smaller period of time than for lower wind speeds, these criteria provide a means of evaluating the overall acceptability of a pedestrian location. Also, a location can be evaluated for its intended use, such as for an outdoor café or a footpath. One of the most widely accepted set of criteria was developed by Lawson (1990), which is described in Table 2.

Lawson's criteria have categories for comfort, based on wind speeds exceeded five percent of the time, allowing planners to judge the usability of locations for various intended purposes ranging from "Business Walking" to "Pedestrian sitting". The level and severity of these comfort categories can vary based on individual preference, so calibration to the local wind environment is recommended when evaluating the Lawson ratings. The criteria also include a distress rating, for safety assessment, which is based on occasional (once or twice per year) wind speeds<sup>1</sup>. In both cases, the wind speed used the larger of a mean or gust equivalent-mean (GEM) wind speed. The GEM is defined as the peak gust wind speed divided by 1.85; this is intended to account for locations where the gustiness is the dominant characteristic of the wind. Assessment using the Lawson criteria provides a similar classification as using once per annum gust criteria, however provides significantly more information regarding the serviceability wind climate.

Table 2: Summary of Lawson criteria

| <b>Comfort</b> (maximum of mean or gust equivalent mean (GEM <sup>+</sup> ) wind speed exceeded 5% of the time) |                                                                                                                                                                   |
|-----------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| < 4 m/s                                                                                                         | Pedestrian Sitting (considered to be of long duration)                                                                                                            |
| 4 - 6 m/s                                                                                                       | Pedestrian Standing (or sitting for a short time or exposure)                                                                                                     |
| 6 - 8 m/s                                                                                                       | Pedestrian Walking                                                                                                                                                |
| 8 - 10 m/s                                                                                                      | Business Walking (objective walking from A to B or for cycling)                                                                                                   |
| > 10 m/s                                                                                                        | Uncomfortable                                                                                                                                                     |
| <b>Distress</b> (maximum of mean or GEM wind speed exceeded 0.022% of the time)                                 |                                                                                                                                                                   |
| <15 m/s                                                                                                         | not to be exceeded more than two times per year (or one time per season) for general access area                                                                  |
| <20 m/s                                                                                                         | not to be exceeded more than two times per year (or one time per season) where only able bodied people would be expected; frail or cyclists would not be expected |

<sup>1</sup> The rating of "uncomfortable" in Table 2 is the word of the acceptance criteria author and may not apply directly to any particular project. High wind areas are certainly not uncomfortable all the time, just on windier days. The word uncomfortable, in our understanding, refers to acceptability of the site by pedestrians for typical pedestrian use; i.e., on the windiest days, pedestrians will not find the areas "acceptable" for walking and will tend to avoid such areas if possible. The distress rating fail indicates some unspecified potential for causing injury to a less stable individual who might be blown over. The likelihood of such events is not well described in the literature and is likely to be strongly affected by individual differences, presence of water, blowing dust or particulates, and other variables in addition to the wind speed.



## 5. DATA ACQUISITION AND RESULTS

### 5.1 Velocities

Velocity profile measurements were taken to verify that appropriate boundary layer flow approaching the site was established and to determine the likely pedestrian level wind climate around the test site. Pedestrian wind measurements and analysis are described in Section 5.1.2. All velocity measurements were made with hot-film anemometers, which were calibrated against a Pitot-static tube in the wind tunnel. The calibration data were described by a King's Law relationship (King, 1914)

#### *5.1.1 Velocity Profiles*

Mean velocity and turbulence intensity profiles for the boundary layer flow approaching the model are shown in Figure 4. Turbulence intensities are related to the local mean wind speed. These profiles have the form as defined in Standards Australia (2011) and are appropriate for the approach conditions.

#### *5.1.2 Pedestrian Winds*

The proposed development is located in Sydney's Darling Harbour. The site is bounded by The Boulevard, The Square and Little Pier Street. The development is surrounded by Sydney's CBD high rise buildings to the east quadrant and by medium rise buildings to the west quadrant. The site is more exposed to winds from the north.

For this report wind speed measurements were recorded at 29 locations to evaluate pedestrian comfort in and around the project site, Figure 8 and Figure 9. All points tested were for the configurations described in Table 1. Velocity measurements were made at the model scale equivalent of 1.5 to 2.1 m above the surface for 16 wind directions at 22.5° intervals. Locations were chosen to determine the degree of pedestrian comfort primarily for the outdoor leisure areas, as well as at building corners where relatively severe conditions are frequently found, near building entrances, and on adjacent pavements with pedestrian traffic.

The hot-film signal was sampled for a period corresponding to one hour in prototype. All velocity data were digitally filtered to obtain the two to three second running mean wind speed at each point; this is the minimum size of a gust affecting a pedestrian and is the basis for the various acceptability criteria.

These local wind speeds,  $U$ , were normalised by the tunnel reference velocity  $U_{ref}$ . Mean and turbulence statistics were calculated and used to calculate the normalised effective peak gust using:

$$\frac{U_{pk}}{U_{ref}} = \frac{U + 3 \cdot U_{rms}}{U_{ref}}.$$

The mean and gust equivalent mean velocities relative to the free stream wind tunnel reference velocity at a full-scale elevation of 200 m are plotted in polar form in Appendix 2. The graphs show velocity magnitude and the approach wind direction for which that velocity was measured. The polar plots aid in visualisation of the effects of the nearby structures or topography, the relative significance of various wind azimuths, and whether the mean or gust wind speed is of greater importance.

To enable a quantitative assessment of the wind environment, the wind tunnel data were combined with wind frequency and direction information measured by the Bureau of Meteorology at a standard height of 10 m at Sydney Airport from 1995 to 2011, Figure 7.

From these data, directional criterion lines for the Lawson rating wind speeds have been calculated and included on the polar plots in Appendix 2; this gives additional information regarding directional sensitivity at each location.

The criteria of Lawson consider the integration of the velocity measurements with local wind climate statistical data summarized in Figure 7 to rate each location. From the cumulative wind speed distributions for each location, the percentage of time each of the Lawson comfort rating wind speeds are exceeded are presented in tabular form under the polar plots in Appendix 2. In addition to the rating wind speeds, the percentage of time that 2 m/s is exceeded is also reported. This has been provided as it has been found that the limiting wind speed for long-term stationary activities such as fine outdoor dining should be about 2 to 2.5 m/s rather than 4 m/s.

Interpretation of these wind levels can be aided by the description of the effects of wind of various magnitudes on people. The earliest quantitative description of wind effects was established by Sir Francis Beaufort in 1806, for use at sea; the Beaufort scale is reproduced in Table 3 including qualitative descriptions of wind effects.

The tables in Appendix 2 additionally provide the wind speed exceeded 5% and 0.022% of the time for direct comparison with the Lawson comfort and distress criteria and the associated Lawson ratings for both mean and GEM wind speeds. A colour coded summary assessment of pedestrian

comfort and safety with respect to the Lawson criteria is presented in, Figure 8 and Figure 9, for each test location. The implications of the results are discussed in Section 6.

### Sydney Airprt

Annual, All hours  
1995-2011

Calm 1.2 %

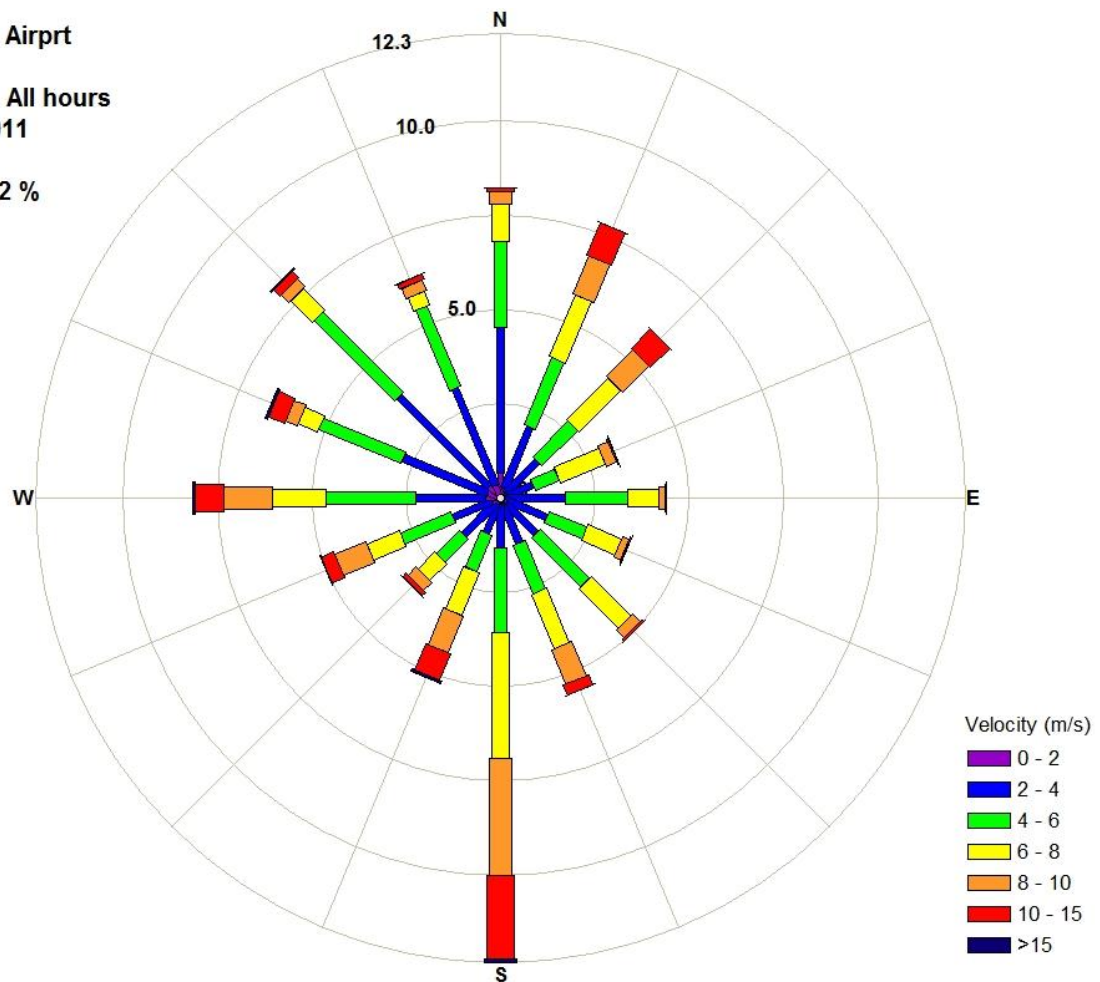


Figure 7: Wind rose of direction and speed for Sydney Airport

Table 3: Summary of wind effects on people, Penwarden (1973)

| Description     | Beaufort Number | Speed (m/s) | Effects                                                                                                                                                      |
|-----------------|-----------------|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Calm, light air | 0, 1            | 0–2         | Calm, no noticeable wind.                                                                                                                                    |
| Light breeze    | 2               | 2–3         | Wind felt on face.                                                                                                                                           |
| Gentle breeze   | 3               | 3–5         | Wind extends light flag. Hair is disturbed. Clothing flaps                                                                                                   |
| Moderate breeze | 4               | 5–8         | Raises dust, dry soil, and loose paper. Hair disarranged.                                                                                                    |
| Fresh breeze    | 5               | 8–11        | Force of wind felt on body. Drifting snow becomes airborne. Limit of agreeable wind on land.                                                                 |
| Strong breeze   | 6               | 11–14       | Umbrellas used with difficulty. Hair blown straight. Difficult to walk steadily. Wind noise on ears unpleasant. Windborne snow above head height (blizzard). |
| Near gale       | 7               | 14–17       | Inconvenience felt when walking.                                                                                                                             |
| Gale            | 8               | 17–21       | Generally impedes progress. Great difficulty with balance in gusts.                                                                                          |
| Strong gale     | 9               | 21–24       | People blown over by gusts.                                                                                                                                  |

## 6. DISCUSSION

The wind climatology chart of Figure 7 indicates that the most frequent strong winds are from the south quadrant. The locations tested around the development site are susceptible to winds from the different directions, depending on the relative location of the point tested to the geometry of the proposed development and surrounds. The influence of wind direction on the suitability of a location for an intended purpose can be ascertained from the graphs in Appendix 2.

The primary conclusions of the pedestrian study can be understood by reviewing the colour coded images of Figure 8 and Figure 9, which depict the locations selected for investigation of pedestrian wind comfort along with the Lawson criteria rating for both comfort and distress. Note that testing was performed without planned trees, or other plantings to provide a worst case assessment; heavy landscape planting typically reduces the wind speeds by less than 10%. The central colour indicates the comfort rating for the location, and the colour of the outer ring indicates whether the location passes the distress criterion. Mitigation measures are likely to be required for red locations, and may be necessary for other locations depending on the intended use of the space. Although conditions may be classified acceptable there may be certain wind directions that cause regular strong events, these can be determined by an inspection of the plots in Appendix 2.

It is evident from Figure 8, that the wind environment around the proposed development, at ground level on The Square and Little Pier Street, is generally satisfactory for pedestrian sitting and standing activities under the Lawson criterion. The windiest ground level locations are along the Boulevard. All locations pass the Lawson distress criterion.

Environmental wind conditions along The Boulevard, Locations 2 to 10, rated as suitable for pedestrian standing and walking activities; with the exception of Location 3 which classified as suitable for pedestrian sitting activities due to shielding provided by the building undercroft, and Location 7 which is shielded by the proposed development. All locations passed the distress criterion. Polar plots, in Appendix 2, show these locations are primarily influenced by winds from the northeast and southwest quadrants channelling through The Boulevard. Winds at locations 4 and 6 are at the Lawson walking criterion and exceed levels suitable for long term stationary type activities such as dining. Vertical screening at these locations could provide local wind protection.

Locations 1 and 11, along Little Pier Street, classified as suitable for pedestrian standing activities, under the Lawson criterion, and passed the distress criterion. Polar plots show this area is highly influenced by winds from the north quadrant.

Wind conditions at The Square, Locations 12 to 20, rated as suitable for pedestrian sitting and standing activities, and passed the distress criterion. Polar plots show The Square experiences relatively calm wind conditions due to shielding provided by the North East Plot and South East Plot developments.

Locations 14 and 15 are relatively calm yet wind pressures against the southern façade combined with the northern facade are expected to give regularly high differential pressures. This will result in strong internal building flows particularly in internal passageways aligned north-south. It is recommended the building be sealed on either the northern or southern perimeter of the building (180 degree seal) or through the centre diameter aligned east-west.

Figure 9 shows environmental wind conditions at roof level, Locations 21 and 22, rated for pedestrian walking under the Lawson criterion. Locations 23 to 25, at the Restaurant Terrace, rated as suitable for pedestrian standing and sitting activities. The terrace is expected to be used for stationary outdoor seating and dining. Polar plots show Location 23 is highly exposed to winds from the north quadrant.

Locations 26 and 27, at the Library Terrace, classified as suitable for pedestrian standing activities.

Finally, Locations 28 and 29 measured wind velocities on the Canopy intended to be used for structural design. Polar plots show the south section of the canopy is shielded by the South East Plot development from south-westerly winds.

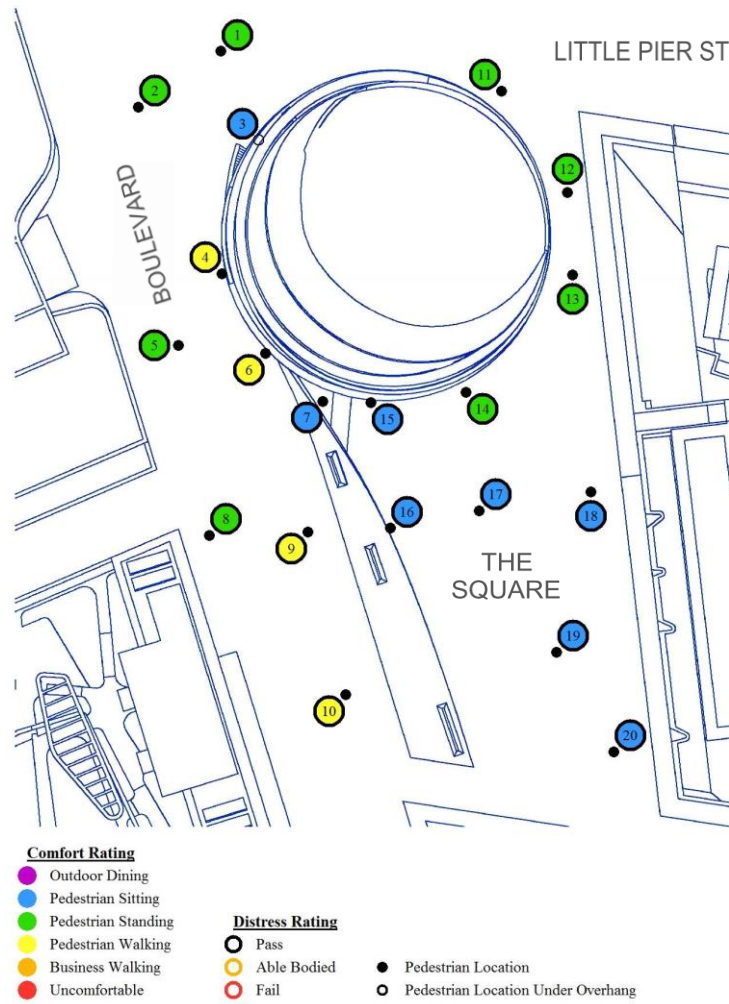


Figure 8: Pedestrian wind speed measurement locations with comfort/distress ratings – Ground Level



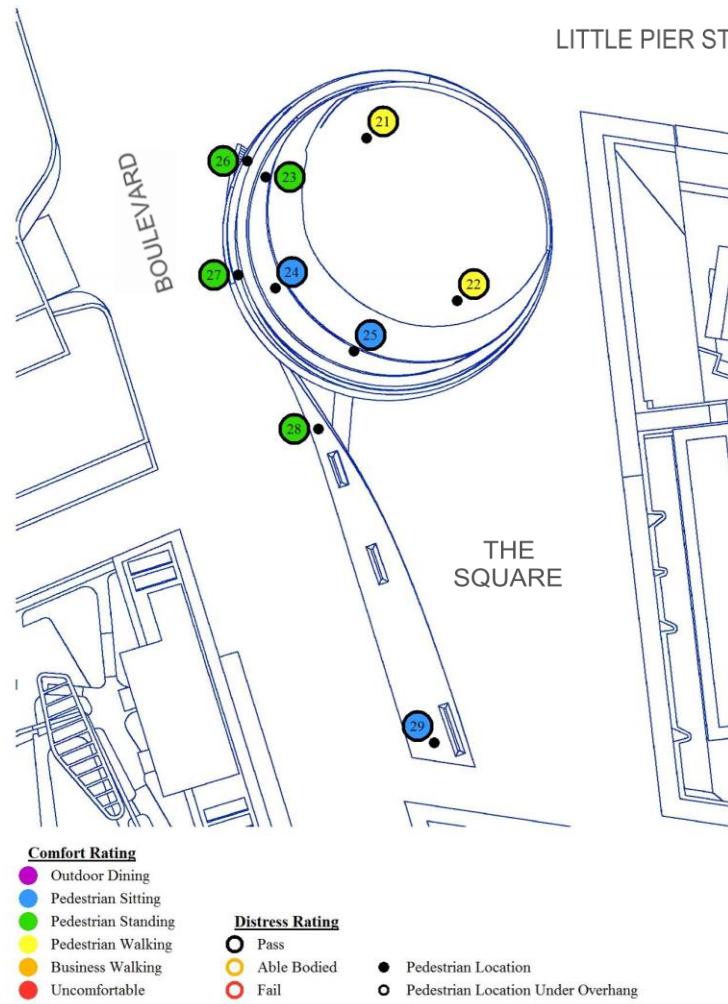


Figure 9: Pedestrian wind speed measurement locations with comfort/distress ratings – Roof, Terraces and Canopy

## 7. REFERENCES

- American Society of Civil Engineers (1999), *Wind Tunnel Model Studies of Buildings and Structures* (ASCE Manual of Practice Number 67).
- American Society of Civil Engineers (2010), *Minimum Design Loads for Buildings and Other Structures* (ASCE 7–10).
- Australasian Wind Engineering Society (2001), *Wind Engineering Studies of Buildings* (AWES-QAM-1-2001).
- Cermak, J.E. (1971), "Laboratory Simulation of the Atmospheric Boundary Layer," *AIAA JI.*, Vol. 9, September.
- Cermak, J.E. (1975), "Applications of Fluid Mechanics to Wind Engineering," A Freeman Scholar Lecture, *ASME Journal of Fluids Engineering*, Vol. 97, No. 1, March.
- Cermak, J.E. (1976), "Aerodynamics of Buildings," *Annual Review of Fluid Mechanics*, Vol. 8, pp. 75 – 106.
- King, C.V. (1914), "On the Convection of Heat from Small Cylinders in a Stream of Fluid," *Philosophical Transactions of the Royal Society*, London, Vol. A214, p. 373.
- Lawson, T.V. (1990), "The Determination of the Wind Environment of a Building Complex before Construction" Department of Aerospace Engineering, University of Bristol, *Report Number TVL 9025*.
- Penwarden, A.D. (1973), "Acceptable wind speeds in towns", *Building Science*, Vol.8, pp. 259-267.
- Standards Australia (2011), *Australian/New Zealand Standard, Structural Design Actions, Part 2: Wind Actions* (AS/NZS1170 Pt.2).

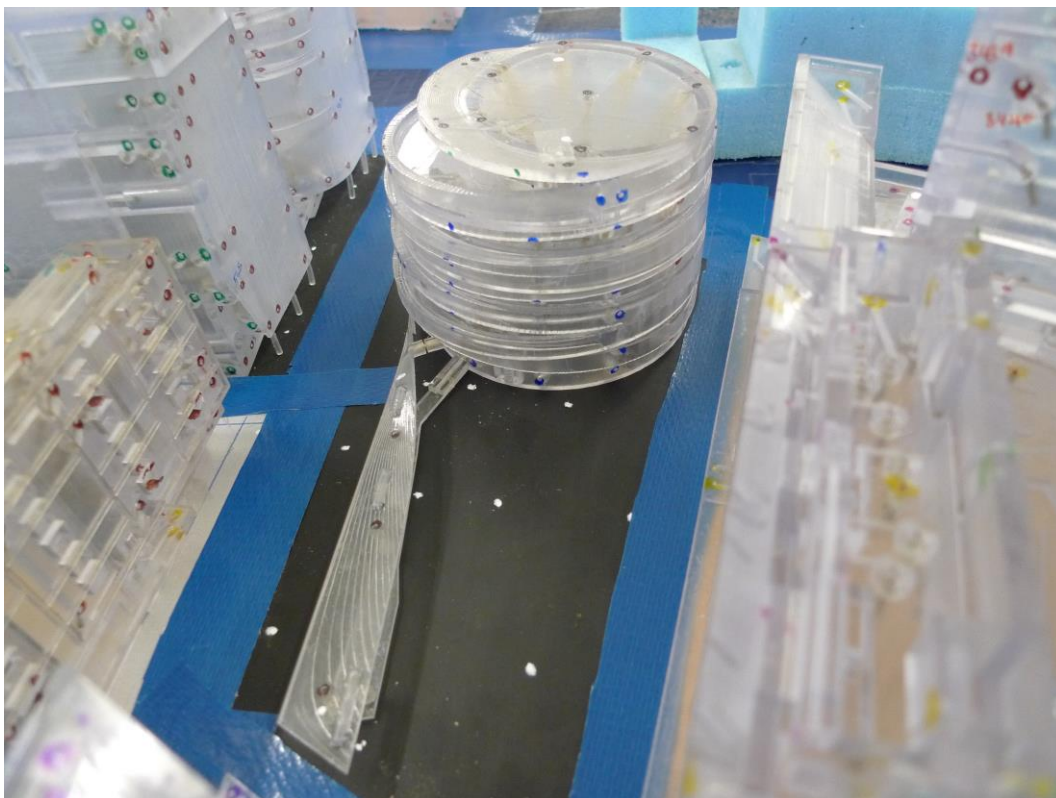
**Appendix 1: Additional photographs of the CPP wind tunnel model**

Figure 10: Darling Square development viewed from the southeast


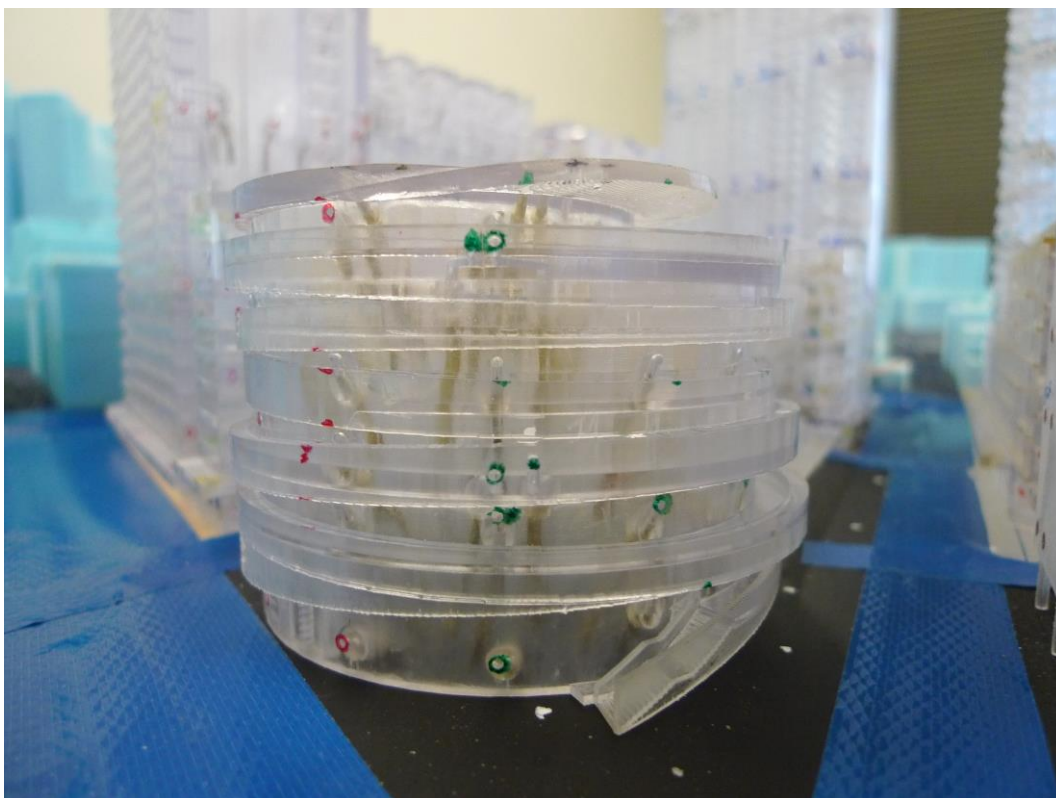


Figure 11: Darling Square development viewed from the northwest

## Appendix 2: Directional Wind Results


## LOCATION 1

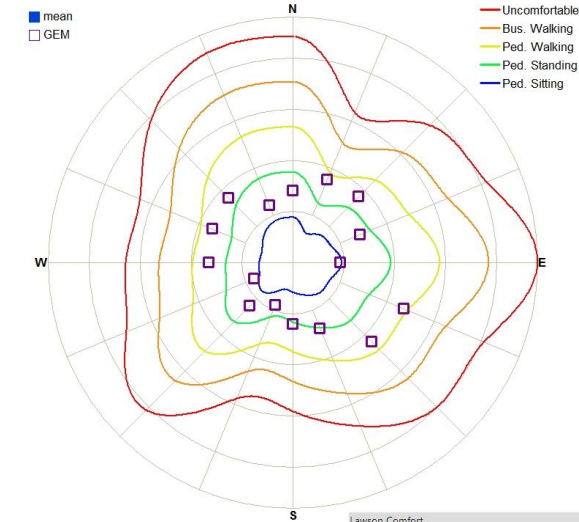

| % of time in excess of wind speed V |       |       |          |
|-------------------------------------|-------|-------|----------|
| V (m/s)                             | MEAN  | GEM   | COMBINED |
| 2                                   | 29.91 | 50.34 | 50.34    |
| 4                                   | 3.23  | 9.21  | 9.21     |
| 6                                   | 0.11  | 0.97  | 0.97     |
| 8                                   | 0.00  | 0.05  | 0.05     |
| 10                                  | 0.00  | 0.01  | 0.01     |

| Lawson Comfort |             |              |              |
|----------------|-------------|--------------|--------------|
| (5%)           | MEAN        | GEM          | COMBINED     |
| V (m/s)        | 3.6         | 4.6          | 4.6          |
| Rating         | Ped Sitting | Ped Standing | Ped Standing |
| Lawson Safety  |             |              |              |
| (0.022%)       | MEAN        | GEM          | COMBINED     |
| V (m/s)        | 6.7         | 8.6          | 8.6          |
| Rating         | Pass        | Pass         | Pass         |


## LOCATION 2

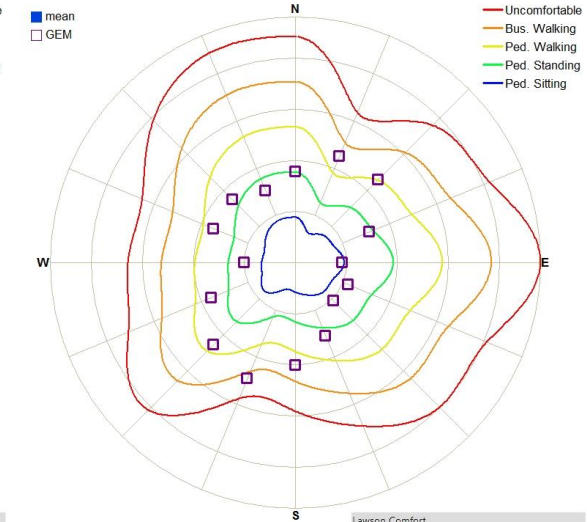

| % of time in excess of wind speed V |       |       |          |
|-------------------------------------|-------|-------|----------|
| V (m/s)                             | MEAN  | GEM   | COMBINED |
| 2                                   | 41.94 | 56.17 | 56.17    |
| 4                                   | 14.25 | 20.04 | 20.04    |
| 6                                   | 2.61  | 5.07  | 5.07     |
| 8                                   | 0.28  | 0.70  | 0.70     |
| 10                                  | 0.04  | 0.10  | 0.10     |

| Lawson Comfort |              |              |              |
|----------------|--------------|--------------|--------------|
| (5%)           | MEAN         | GEM          | COMBINED     |
| V (m/s)        | 5.3          | 6.0          | 6.0          |
| Rating         | Ped Standing | Ped Standing | Ped Standing |
| Lawson Safety  |              |              |              |
| (0.022%)       | MEAN         | GEM          | COMBINED     |
| V (m/s)        | 10.6         | 11.7         | 11.7         |
| Rating         | Pass         | Pass         | Pass         |


## LOCATION 3

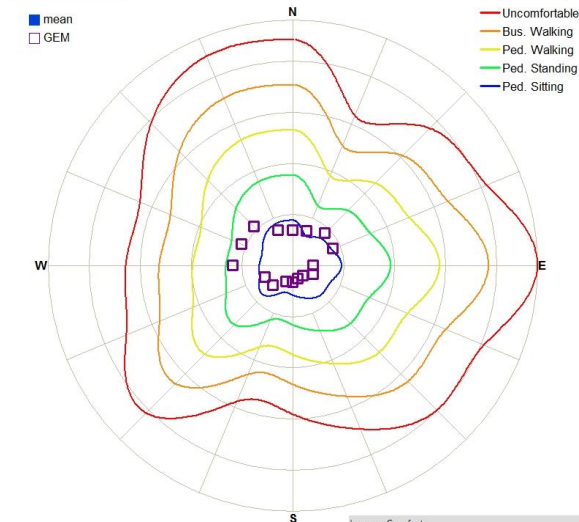

| % of time in excess of wind speed V |      |      |          |
|-------------------------------------|------|------|----------|
| V (m/s)                             | MEAN | GEM  | COMBINED |
| 2                                   | 2.75 | 7.64 | 7.64     |
| 4                                   | 0.02 | 0.41 | 0.41     |
| 6                                   | 0.00 | 0.01 | 0.01     |
| 8                                   | 0.00 | 0.00 | 0.00     |
| 10                                  | 0.00 | 0.00 | 0.00     |

| Lawson Comfort |                |             |             |
|----------------|----------------|-------------|-------------|
| (5%)           | MEAN           | GEM         | COMBINED    |
| V (m/s)        | 1.7            | 2.3         | 2.3         |
| Rating         | Outdoor Dining | Ped Sitting | Ped Sitting |
| Lawson Safety  |                |             |             |
| (0.022%)       | MEAN           | GEM         | COMBINED    |
| V (m/s)        | 3.8            | 5.4         | 5.4         |
| Rating         | Pass           | Pass        | Pass        |

## LOCATION 4

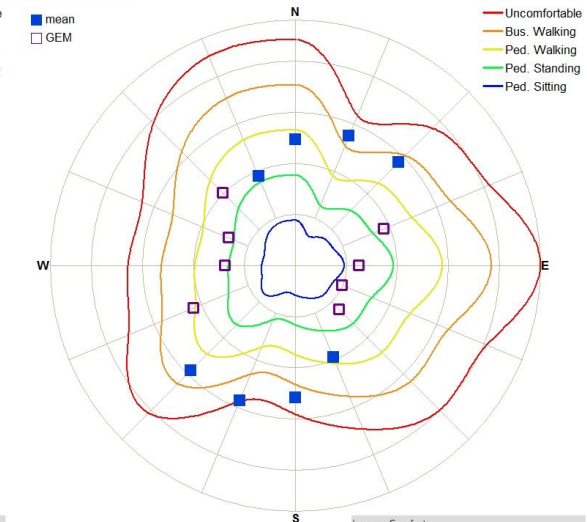


| % of time in excess of wind speed V |       |       |          |
|-------------------------------------|-------|-------|----------|
| V (m/s)                             | MEAN  | GEM   | COMBINED |
| 2                                   | 55.62 | 65.62 | 66.29    |
| 4                                   | 27.84 | 28.49 | 29.68    |
| 6                                   | 11.20 | 9.82  | 11.45    |
| 8                                   | 3.13  | 2.45  | 3.18     |
| 10                                  | 0.53  | 0.38  | 0.54     |

| Lawson Comfort |             |             |             |
|----------------|-------------|-------------|-------------|
| (5%)           | MEAN        | GEM         | COMBINED    |
| V (m/s)        | 7.3         | 7.0         | 7.3         |
| Rating         | Ped Walking | Ped Walking | Ped Walking |
| Lawson Safety  |             |             |             |
| (0.022%)       | MEAN        | GEM         | COMBINED    |
| V (m/s)        | 13.9        | 13.4        | 13.9        |
| Rating         | Pass        | Pass        | Pass        |



## LOCATION 5

■ mean  
□ GEM

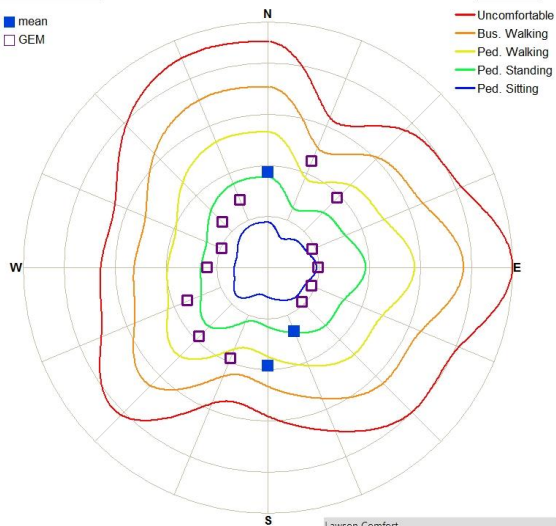


| % of time in excess of wind speed V |       |       |          |  |
|-------------------------------------|-------|-------|----------|--|
| V (m/s)                             | MEAN  | GEM   | COMBINED |  |
| 2                                   | 39.90 | 47.34 | 47.71    |  |
| 4                                   | 13.53 | 14.41 | 15.43    |  |
| 6                                   | 2.57  | 2.60  | 3.06     |  |
| 8                                   | 0.19  | 0.22  | 0.25     |  |
| 10                                  | 0.01  | 0.01  | 0.02     |  |

| Lawson Comfort |              |              |              |
|----------------|--------------|--------------|--------------|
| (5%)           | MEAN         | GEM          | COMBINED     |
| V (m/s)        | 5.2          | 5.2          | 5.4          |
| Rating         | Ped Standing | Ped Standing | Ped Standing |

| Lawson Safety |      |      |          |
|---------------|------|------|----------|
| (0.022%)      | MEAN | GEM  | COMBINED |
| V (m/s)       | 9.5  | 9.6  | 9.8      |
| Rating        | Pass | Pass | Pass     |

## LOCATION 6

■ mean  
□ GEM

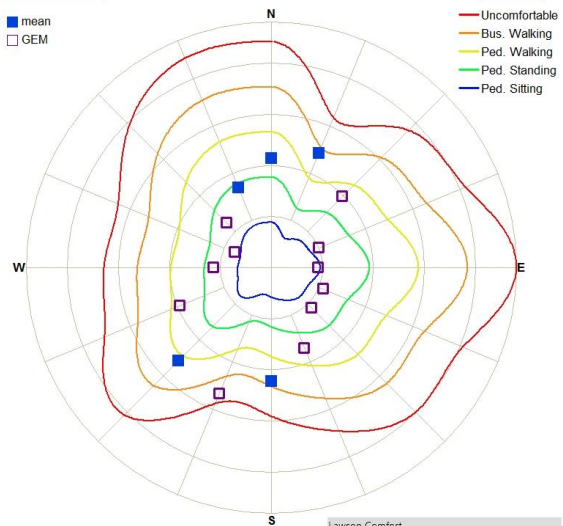


| % of time in excess of wind speed V |       |       |          |  |
|-------------------------------------|-------|-------|----------|--|
| V (m/s)                             | MEAN  | GEM   | COMBINED |  |
| 2                                   | 46.16 | 52.02 | 53.55    |  |
| 4                                   | 20.36 | 19.82 | 21.54    |  |
| 6                                   | 6.46  | 5.23  | 6.71     |  |
| 8                                   | 1.20  | 0.92  | 1.31     |  |
| 10                                  | 0.17  | 0.18  | 0.20     |  |

| Lawson Comfort |             |             |             |
|----------------|-------------|-------------|-------------|
| (5%)           | MEAN        | GEM         | COMBINED    |
| V (m/s)        | 6.3         | 6.0         | 6.4         |
| Rating         | Ped Walking | Ped Walking | Ped Walking |
| Lawson Safety  |             |             |             |
| (0.022%)       | MEAN        | GEM         | COMBINED    |
| V (m/s)        | 12.3        | 12.6        | 12.6        |
| Rating         | Pass        | Pass        | Pass        |

## LOCATION 7

■ mean  
□ GEM

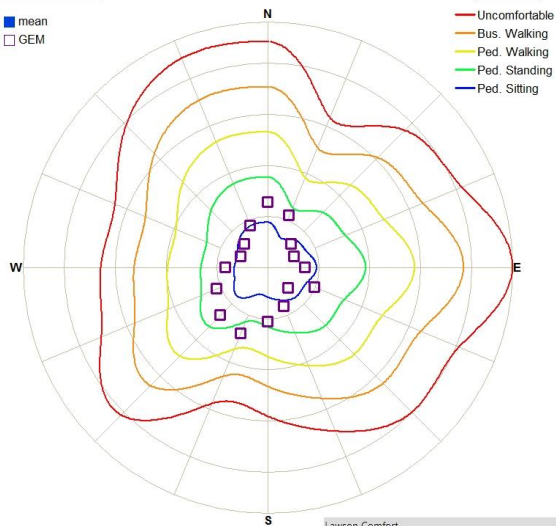


| % of time in excess of wind speed V |       |       |          |  |
|-------------------------------------|-------|-------|----------|--|
| V (m/s)                             | MEAN  | GEM   | COMBINED |  |
| 2                                   | 11.46 | 22.36 | 22.36    |  |
| 4                                   | 0.35  | 1.20  | 1.20     |  |
| 6                                   | 0.01  | 0.05  | 0.05     |  |
| 8                                   | 0.00  | 0.00  | 0.00     |  |
| 10                                  | 0.00  | 0.00  | 0.00     |  |

| Lawson Comfort |             |             |             |
|----------------|-------------|-------------|-------------|
| (5%)           | MEAN        | GEM         | COMBINED    |
| V (m/s)        | 2.5         | 3.1         | 3.1         |
| Rating         | Ped Sitting | Ped Sitting | Ped Sitting |

| Lawson Safety |      |      |          |
|---------------|------|------|----------|
| (0.022%)      | MEAN | GEM  | COMBINED |
| V (m/s)       | 5.5  | 6.6  | 6.6      |
| Rating        | Pass | Pass | Pass     |

## LOCATION 8

■ mean  
□ GEM

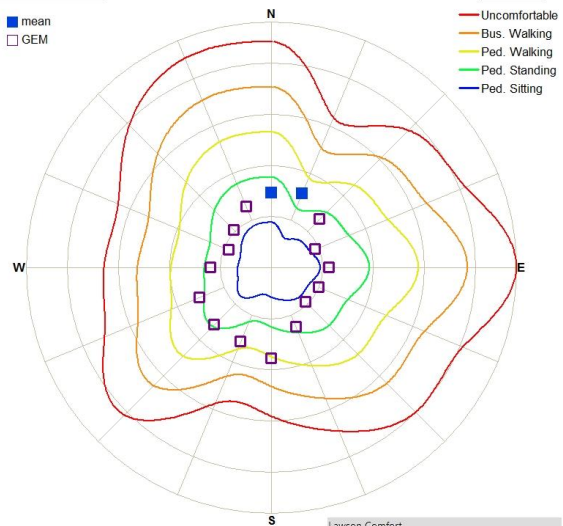


| % of time in excess of wind speed V |       |       |          |  |
|-------------------------------------|-------|-------|----------|--|
| V (m/s)                             | MEAN  | GEM   | COMBINED |  |
| 2                                   | 30.12 | 40.71 | 40.85    |  |
| 4                                   | 4.31  | 8.97  | 9.01     |  |
| 6                                   | 0.13  | 0.89  | 0.90     |  |
| 8                                   | 0.00  | 0.05  | 0.05     |  |
| 10                                  | 0.00  | 0.00  | 0.00     |  |

| Lawson Comfort |             |              |              |
|----------------|-------------|--------------|--------------|
| (5%)           | MEAN        | GEM          | COMBINED     |
| V (m/s)        | 3.8         | 4.5          | 4.5          |
| Rating         | Ped Sitting | Ped Standing | Ped Standing |
| Lawson Safety  |             |              |              |
| (0.022%)       | MEAN        | GEM          | COMBINED     |
| V (m/s)        | 6.9         | 8.6          | 8.6          |
| Rating         | Pass        | Pass         | Pass         |

## LOCATION 9

■ mean  
□ GEM

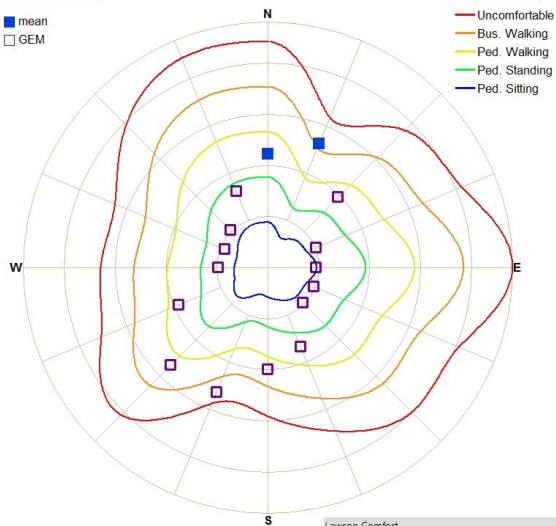


| % of time in excess of wind speed V |       |       |          |  |
|-------------------------------------|-------|-------|----------|--|
| V (m/s)                             | MEAN  | GEM   | COMBINED |  |
| 2                                   | 42.32 | 50.51 | 50.90    |  |
| 4                                   | 16.24 | 20.06 | 20.37    |  |
| 6                                   | 4.52  | 5.71  | 5.85     |  |
| 8                                   | 0.99  | 1.17  | 1.25     |  |
| 10                                  | 0.13  | 0.19  | 0.20     |  |

| Lawson Comfort |              |             |             |
|----------------|--------------|-------------|-------------|
| (5%)           | MEAN         | GEM         | COMBINED    |
| V (m/s)        | 5.8          | 6.2         | 6.2         |
| Rating         | Ped Standing | Ped Walking | Ped Walking |

| Lawson Safety |      |      |          |
|---------------|------|------|----------|
| (0.022%)      | MEAN | GEM  | COMBINED |
| V (m/s)       | 11.9 | 12.5 | 12.5     |
| Rating        | Pass | Pass | Pass     |

## LOCATION 10

■ mean  
□ GEM

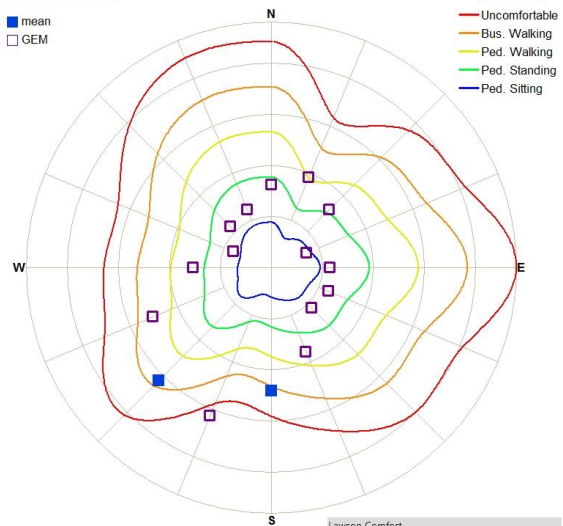


| % of time in excess of wind speed V |       |       |          |  |
|-------------------------------------|-------|-------|----------|--|
| V (m/s)                             | MEAN  | GEM   | COMBINED |  |
| 2                                   | 41.62 | 51.18 | 51.34    |  |
| 4                                   | 18.45 | 21.25 | 21.62    |  |
| 6                                   | 7.10  | 7.56  | 8.03     |  |
| 8                                   | 2.11  | 2.08  | 2.25     |  |
| 10                                  | 0.52  | 0.53  | 0.56     |  |

| Lawson Comfort |             |             |             |
|----------------|-------------|-------------|-------------|
| (5%)           | MEAN        | GEM         | COMBINED    |
| V (m/s)        | 6.5         | 6.6         | 6.7         |
| Rating         | Ped Walking | Ped Walking | Ped Walking |
| Lawson Safety  |             |             |             |
| (0.022%)       | MEAN        | GEM         | COMBINED    |
| V (m/s)        | 14.7        | 14.8        | 14.8        |
| Rating         | Pass        | Pass        | Pass        |

## LOCATION 11

■ mean  
□ GEM

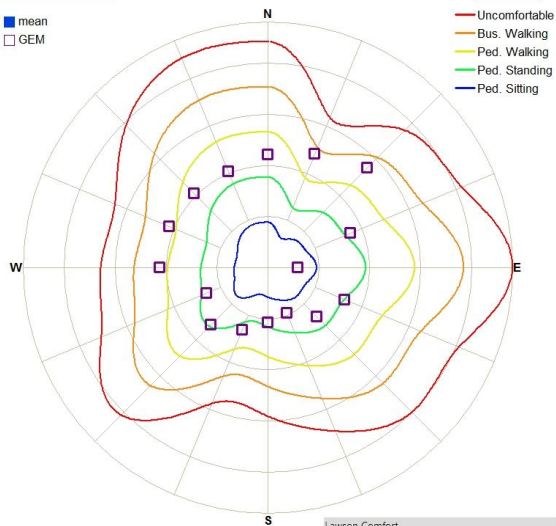


| % of time in excess of wind speed V |       |       |          |  |
|-------------------------------------|-------|-------|----------|--|
| V (m/s)                             | MEAN  | GEM   | COMBINED |  |
| 2                                   | 36.46 | 60.42 | 60.42    |  |
| 4                                   | 7.54  | 14.91 | 14.91    |  |
| 6                                   | 1.31  | 4.09  | 4.09     |  |
| 8                                   | 0.10  | 0.62  | 0.62     |  |
| 10                                  | 0.00  | 0.04  | 0.04     |  |

| Lawson Comfort |              |              |              |
|----------------|--------------|--------------|--------------|
| (5%)           | MEAN         | GEM          | COMBINED     |
| V (m/s)        | 4.5          | 5.5          | 5.5          |
| Rating         | Ped Standing | Ped Standing | Ped Standing |
| Lawson Safety  |              |              |              |
| (0.022%)       | MEAN         | GEM          | COMBINED     |
| V (m/s)        | 9.0          | 10.3         | 10.3         |
| Rating         | Pass         | Pass         | Pass         |

## LOCATION 12

■ mean  
□ GEM

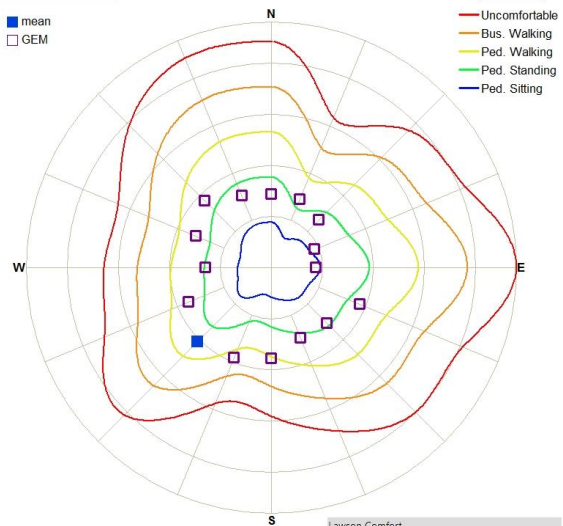


| % of time in excess of wind speed V |       |       |          |  |
|-------------------------------------|-------|-------|----------|--|
| V (m/s)                             | MEAN  | GEM   | COMBINED |  |
| 2                                   | 33.10 | 52.64 | 52.65    |  |
| 4                                   | 7.63  | 12.60 | 12.61    |  |
| 6                                   | 0.83  | 1.62  | 1.62     |  |
| 8                                   | 0.05  | 0.14  | 0.14     |  |
| 10                                  | 0.00  | 0.01  | 0.01     |  |

| Lawson Comfort |              |              |              |
|----------------|--------------|--------------|--------------|
| (5%)           | MEAN         | GEM          | COMBINED     |
| V (m/s)        | 4.4          | 4.9          | 4.9          |
| Rating         | Ped Standing | Ped Standing | Ped Standing |
| Lawson Safety  |              |              |              |
| (0.022%)       | MEAN         | GEM          | COMBINED     |
| V (m/s)        | 8.6          | 9.6          | 9.6          |
| Rating         | Pass         | Pass         | Pass         |

## LOCATION 13

■ mean  
□ GEM

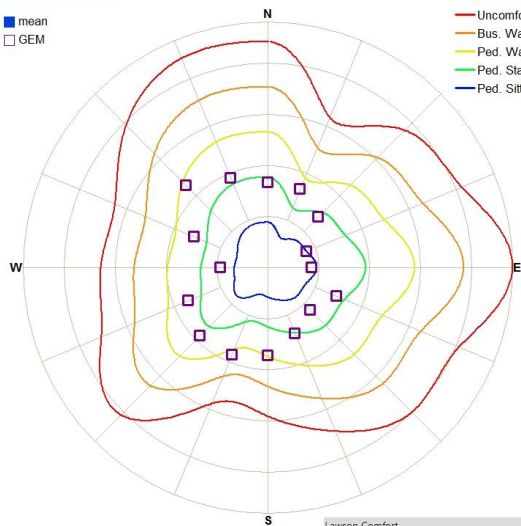


| % of time in excess of wind speed V |       |       |          |
|-------------------------------------|-------|-------|----------|
| V (m/s)                             | MEAN  | GEM   | COMBINED |
| 2                                   | 33.09 | 53.61 | 53.61    |
| 4                                   | 7.04  | 12.59 | 12.59    |
| 6                                   | 0.73  | 1.66  | 1.66     |
| 8                                   | 0.04  | 0.19  | 0.19     |
| 10                                  | 0.00  | 0.03  | 0.03     |

| Lawson Comfort |              |              |              |
|----------------|--------------|--------------|--------------|
| (5%)           | MEAN         | GEM          | COMBINED     |
| V (m/s)        | 4.3          | 4.9          | 4.9          |
| Rating         | Ped Standing | Ped Standing | Ped Standing |
| Lawson Safety  |              |              |              |
| (0.022%)       | MEAN         | GEM          | COMBINED     |
| V (m/s)        | 8.5          | 10.3         | 10.3         |
| Rating         | Pass         | Pass         | Pass         |

## LOCATION 14

■ mean  
□ GEM

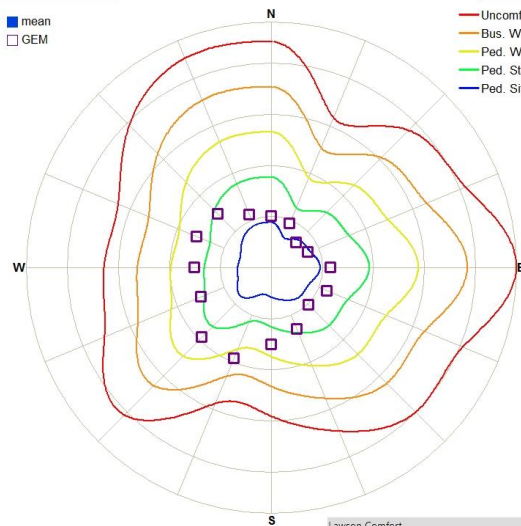


| % of time in excess of wind speed V |       |       |          |
|-------------------------------------|-------|-------|----------|
| V (m/s)                             | MEAN  | GEM   | COMBINED |
| 2                                   | 27.14 | 38.79 | 38.79    |
| 4                                   | 2.97  | 7.70  | 7.70     |
| 6                                   | 0.18  | 0.90  | 0.90     |
| 8                                   | 0.01  | 0.09  | 0.09     |
| 10                                  | 0.00  | 0.01  | 0.01     |

| Lawson Comfort |             |              |              |
|----------------|-------------|--------------|--------------|
| (5%)           | MEAN        | GEM          | COMBINED     |
| V (m/s)        | 3.6         | 4.4          | 4.4          |
| Rating         | Ped Sitting | Ped Standing | Ped Standing |
| Lawson Safety  |             |              |              |
| (0.022%)       | MEAN        | GEM          | COMBINED     |
| V (m/s)        | 7.5         | 9.2          | 9.2          |
| Rating         | Pass        | Pass         | Pass         |

## LOCATION 15

■ mean  
□ GEM

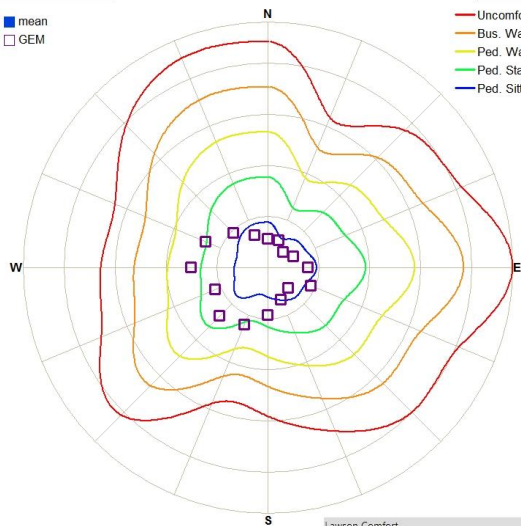


| % of time in excess of wind speed V |      |       |          |
|-------------------------------------|------|-------|----------|
| V (m/s)                             | MEAN | GEM   | COMBINED |
| 2                                   | 8.35 | 19.85 | 19.85    |
| 4                                   | 0.15 | 1.68  | 1.68     |
| 6                                   | 0.00 | 0.09  | 0.09     |
| 8                                   | 0.00 | 0.00  | 0.00     |
| 10                                  | 0.00 | 0.00  | 0.00     |

| Lawson Comfort |             |             |             |
|----------------|-------------|-------------|-------------|
| (5%)           | MEAN        | GEM         | COMBINED    |
| V (m/s)        | 2.3         | 3.1         | 3.1         |
| Rating         | Ped Sitting | Ped Sitting | Ped Sitting |
| Lawson Safety  |             |             |             |
| (0.022%)       | MEAN        | GEM         | COMBINED    |
| V (m/s)        | 4.7         | 6.7         | 6.7         |
| Rating         | Pass        | Pass        | Pass        |

## LOCATION 16

■ mean  
□ GEM

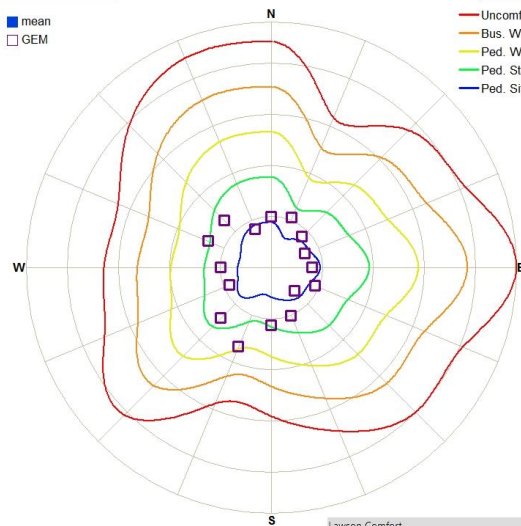


| % of time in excess of wind speed V |       |       |          |
|-------------------------------------|-------|-------|----------|
| V (m/s)                             | MEAN  | GEM   | COMBINED |
| 2                                   | 10.30 | 27.20 | 27.20    |
| 4                                   | 0.51  | 2.82  | 2.82     |
| 6                                   | 0.01  | 0.27  | 0.27     |
| 8                                   | 0.00  | 0.02  | 0.02     |
| 10                                  | 0.00  | 0.00  | 0.00     |

| Lawson Comfort |             |             |             |
|----------------|-------------|-------------|-------------|
| (5%)           | MEAN        | GEM         | COMBINED    |
| V (m/s)        | 2.5         | 3.5         | 3.5         |
| Rating         | Ped Sitting | Ped Sitting | Ped Sitting |
| Lawson Safety  |             |             |             |
| (0.022%)       | MEAN        | GEM         | COMBINED    |
| V (m/s)        | 5.7         | 8.0         | 8.0         |
| Rating         | Pass        | Pass        | Pass        |



## LOCATION 17

■ mean  
□ GEM

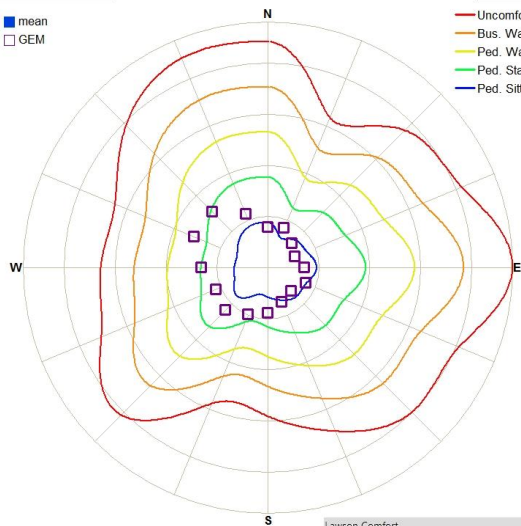


| % of time in excess of wind speed V |      |       |          |
|-------------------------------------|------|-------|----------|
| V (m/s)                             | MEAN | GEM   | COMBINED |
| 2                                   | 9.80 | 22.47 | 22.47    |
| 4                                   | 0.50 | 1.58  | 1.58     |
| 6                                   | 0.02 | 0.17  | 0.17     |
| 8                                   | 0.00 | 0.01  | 0.01     |
| 10                                  | 0.00 | 0.00  | 0.00     |

| Lawson Comfort |             |             |             |
|----------------|-------------|-------------|-------------|
| (5%)           | MEAN        | GEM         | COMBINED    |
| V (m/s)        | 2.4         | 3.0         | 3.0         |
| Rating         | Ped Sitting | Ped Sitting | Ped Sitting |
| Lawson Safety  |             |             |             |
| (0.022%)       | MEAN        | GEM         | COMBINED    |
| V (m/s)        | 6.0         | 7.4         | 7.4         |
| Rating         | Pass        | Pass        | Pass        |

## LOCATION 18

■ mean  
□ GEM

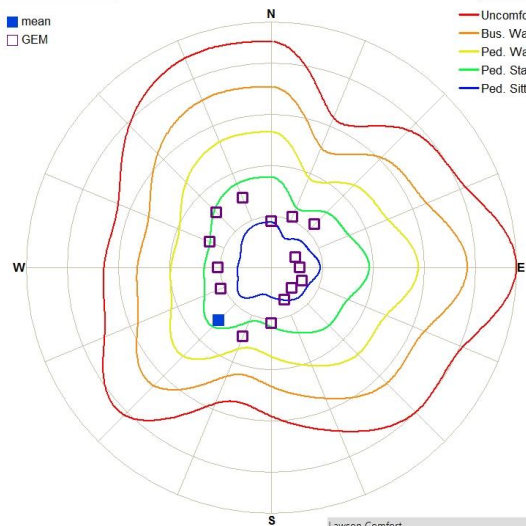


| % of time in excess of wind speed V |       |       |          |
|-------------------------------------|-------|-------|----------|
| V (m/s)                             | MEAN  | GEM   | COMBINED |
| 2                                   | 13.88 | 28.82 | 28.82    |
| 4                                   | 0.62  | 2.34  | 2.34     |
| 6                                   | 0.02  | 0.16  | 0.16     |
| 8                                   | 0.00  | 0.01  | 0.01     |
| 10                                  | 0.00  | 0.00  | 0.00     |

| Lawson Comfort |             |             |             |
|----------------|-------------|-------------|-------------|
| (5%)           | MEAN        | GEM         | COMBINED    |
| V (m/s)        | 2.6         | 3.4         | 3.4         |
| Rating         | Ped Sitting | Ped Sitting | Ped Sitting |
| Lawson Safety  |             |             |             |
| (0.022%)       | MEAN        | GEM         | COMBINED    |
| V (m/s)        | 6.0         | 7.3         | 7.3         |
| Rating         | Pass        | Pass        | Pass        |

## LOCATION 19

■ mean  
□ GEM

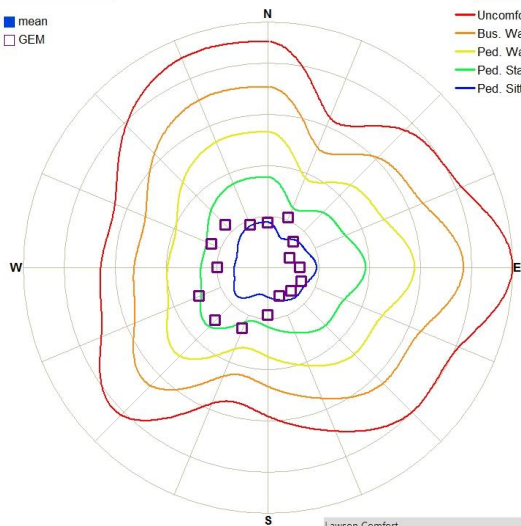


| % of time in excess of wind speed V |      |       |          |
|-------------------------------------|------|-------|----------|
| V (m/s)                             | MEAN | GEM   | COMBINED |
| 2                                   | 9.83 | 22.19 | 22.19    |
| 4                                   | 0.18 | 1.38  | 1.38     |
| 6                                   | 0.00 | 0.05  | 0.05     |
| 8                                   | 0.00 | 0.00  | 0.00     |
| 10                                  | 0.00 | 0.00  | 0.00     |

| Lawson Comfort |             |             |             |
|----------------|-------------|-------------|-------------|
| (5%)           | MEAN        | GEM         | COMBINED    |
| V (m/s)        | 2.4         | 3.2         | 3.2         |
| Rating         | Ped Sitting | Ped Sitting | Ped Sitting |
| Lawson Safety  |             |             |             |
| (0.022%)       | MEAN        | GEM         | COMBINED    |
| V (m/s)        | 4.9         | 6.4         | 6.4         |
| Rating         | Pass        | Pass        | Pass        |

## LOCATION 20

■ mean  
□ GEM

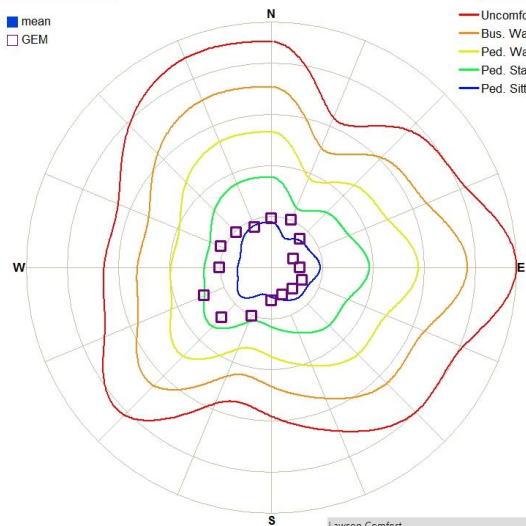


| % of time in excess of wind speed V |      |       |          |
|-------------------------------------|------|-------|----------|
| V (m/s)                             | MEAN | GEM   | COMBINED |
| 2                                   | 6.94 | 16.17 | 16.17    |
| 4                                   | 0.13 | 0.70  | 0.70     |
| 6                                   | 0.00 | 0.01  | 0.01     |
| 8                                   | 0.00 | 0.00  | 0.00     |
| 10                                  | 0.00 | 0.00  | 0.00     |

| Lawson Comfort |             |             |             |
|----------------|-------------|-------------|-------------|
| (5%)           | MEAN        | GEM         | COMBINED    |
| V (m/s)        | 2.2         | 2.8         | 2.8         |
| Rating         | Ped Sitting | Ped Sitting | Ped Sitting |
| Lawson Safety  |             |             |             |
| (0.022%)       | MEAN        | GEM         | COMBINED    |
| V (m/s)        | 4.8         | 5.7         | 5.7         |
| Rating         | Pass        | Pass        | Pass        |

## LOCATION 21

■ mean  
□ GEM

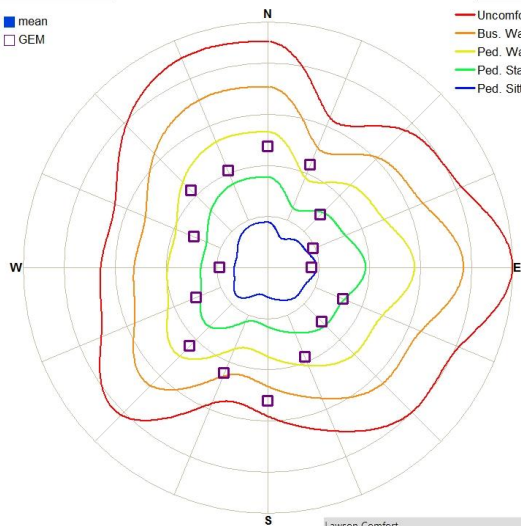


| % of time in excess of wind speed V |       |       |          |
|-------------------------------------|-------|-------|----------|
| V (m/s)                             | MEAN  | GEM   | COMBINED |
| 2                                   | 49.61 | 60.99 | 60.99    |
| 4                                   | 17.89 | 22.20 | 22.20    |
| 6                                   | 5.97  | 7.75  | 7.75     |
| 8                                   | 1.32  | 1.75  | 1.75     |
| 10                                  | 0.18  | 0.27  | 0.27     |

| Lawson Comfort |             |             |             |
|----------------|-------------|-------------|-------------|
| (5%)           | MEAN        | GEM         | COMBINED    |
| V (m/s)        | 6.2         | 6.6         | 6.6         |
| Rating         | Ped Walking | Ped Walking | Ped Walking |
| Lawson Safety  |             |             |             |
| (0.022%)       | MEAN        | GEM         | COMBINED    |
| V (m/s)        | 12.3        | 12.7        | 12.7        |
| Rating         | Pass        | Pass        | Pass        |

## LOCATION 22

■ mean  
□ GEM

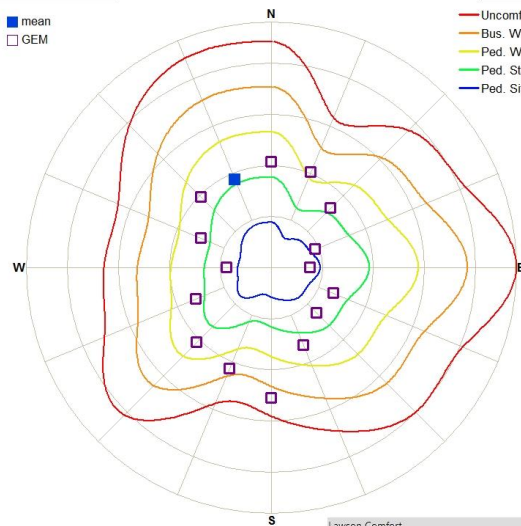


| % of time in excess of wind speed V |       |       |          |
|-------------------------------------|-------|-------|----------|
| V (m/s)                             | MEAN  | GEM   | COMBINED |
| 2                                   | 47.07 | 56.01 | 56.15    |
| 4                                   | 15.87 | 19.81 | 19.84    |
| 6                                   | 4.12  | 6.43  | 6.43     |
| 8                                   | 0.65  | 1.41  | 1.41     |
| 10                                  | 0.06  | 0.20  | 0.20     |

| Lawson Comfort |              |             |             |
|----------------|--------------|-------------|-------------|
| (5%)           | MEAN         | GEM         | COMBINED    |
| V (m/s)        | 5.7          | 6.3         | 6.3         |
| Rating         | Ped Standing | Ped Walking | Ped Walking |
| Lawson Safety  |              |             |             |
| (0.022%)       | MEAN         | GEM         | COMBINED    |
| V (m/s)        | 11.1         | 12.4        | 12.4        |
| Rating         | Pass         | Pass        | Pass        |

## LOCATION 23

■ mean  
□ GEM

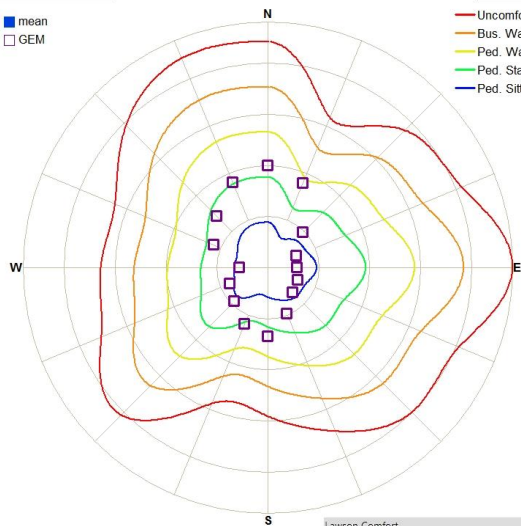


| % of time in excess of wind speed V |       |       |          |
|-------------------------------------|-------|-------|----------|
| V (m/s)                             | MEAN  | GEM   | COMBINED |
| 2                                   | 21.25 | 33.02 | 33.02    |
| 4                                   | 2.52  | 5.51  | 5.51     |
| 6                                   | 0.11  | 0.40  | 0.40     |
| 8                                   | 0.00  | 0.01  | 0.01     |
| 10                                  | 0.00  | 0.00  | 0.00     |

| Lawson Comfort |             |              |              |
|----------------|-------------|--------------|--------------|
| (5%)           | MEAN        | GEM          | COMBINED     |
| V (m/s)        | 3.3         | 4.0          | 4.0          |
| Rating         | Ped Sitting | Ped Standing | Ped Standing |
| Lawson Safety  |             |              |              |
| (0.022%)       | MEAN        | GEM          | COMBINED     |
| V (m/s)        | 6.8         | 7.5          | 7.5          |
| Rating         | Pass        | Pass         | Pass         |

## LOCATION 24

■ mean  
□ GEM

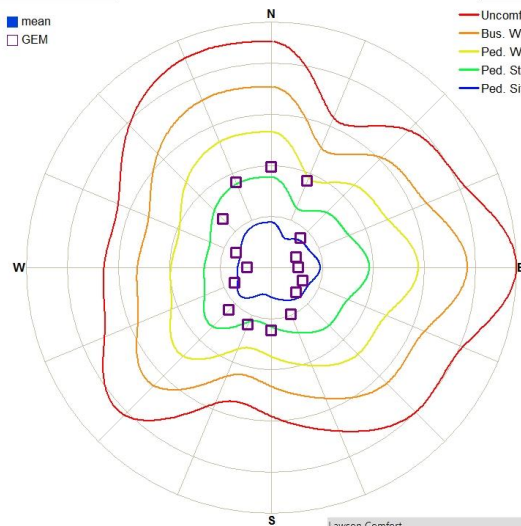


| % of time in excess of wind speed V |       |       |          |
|-------------------------------------|-------|-------|----------|
| V (m/s)                             | MEAN  | GEM   | COMBINED |
| 2                                   | 20.09 | 31.15 | 31.15    |
| 4                                   | 1.93  | 4.73  | 4.73     |
| 6                                   | 0.06  | 0.41  | 0.41     |
| 8                                   | 0.00  | 0.01  | 0.01     |
| 10                                  | 0.00  | 0.00  | 0.00     |

| Lawson Comfort |             |             |             |
|----------------|-------------|-------------|-------------|
| (5%)           | MEAN        | GEM         | COMBINED    |
| V (m/s)        | 3.2         | 3.9         | 3.9         |
| Rating         | Ped Sitting | Ped Sitting | Ped Sitting |
| Lawson Safety  |             |             |             |
| (0.022%)       | MEAN        | GEM         | COMBINED    |
| V (m/s)        | 6.4         | 7.5         | 7.5         |
| Rating         | Pass        | Pass        | Pass        |

## LOCATION 25

■ mean  
□ GEM

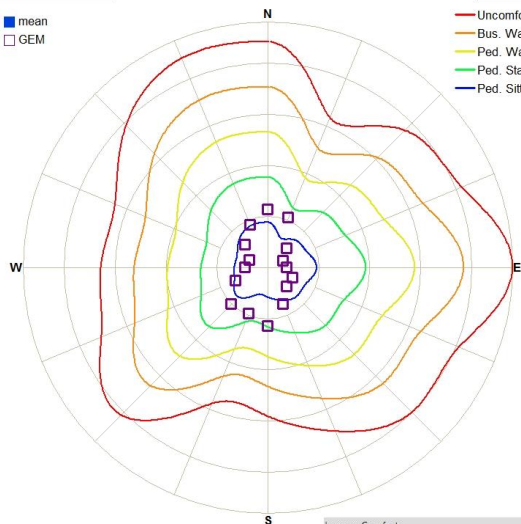


| % of time in excess of wind speed V |       |       |          |  |
|-------------------------------------|-------|-------|----------|--|
| V (m/s)                             | MEAN  | GEM   | COMBINED |  |
| 2                                   | 10.49 | 16.90 | 16.90    |  |
| 4                                   | 0.11  | 0.71  | 0.71     |  |
| 6                                   | 0.00  | 0.01  | 0.01     |  |
| 8                                   | 0.00  | 0.00  | 0.00     |  |
| 10                                  | 0.00  | 0.00  | 0.00     |  |

| Lawson Comfort |             |             |             |
|----------------|-------------|-------------|-------------|
| (5%)           | MEAN        | GEM         | COMBINED    |
| V (m/s)        | 2.4         | 2.9         | 2.9         |
| Rating         | Ped Sitting | Ped Sitting | Ped Sitting |

| Lawson Safety |      |      |          |
|---------------|------|------|----------|
| (0.022%)      | MEAN | GEM  | COMBINED |
| V (m/s)       | 4.7  | 5.6  | 5.6      |
| Rating        | Pass | Pass | Pass     |

## LOCATION 26

■ mean  
□ GEM

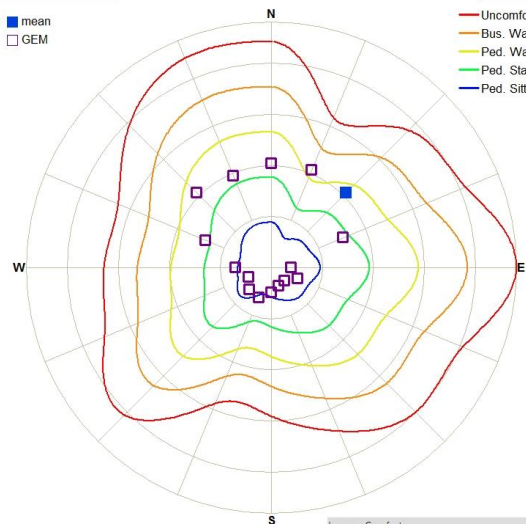


| % of time in excess of wind speed V |       |       |          |  |
|-------------------------------------|-------|-------|----------|--|
| V (m/s)                             | MEAN  | GEM   | COMBINED |  |
| 2                                   | 22.73 | 29.56 | 29.59    |  |
| 4                                   | 5.55  | 6.97  | 7.04     |  |
| 6                                   | 0.76  | 1.22  | 1.23     |  |
| 8                                   | 0.03  | 0.08  | 0.08     |  |
| 10                                  | 0.00  | 0.01  | 0.01     |  |

| Lawson Comfort |              |              |              |
|----------------|--------------|--------------|--------------|
| (5%)           | MEAN         | GEM          | COMBINED     |
| V (m/s)        | 4.1          | 4.3          | 4.4          |
| Rating         | Ped Standing | Ped Standing | Ped Standing |
| Lawson Safety  |              |              |              |
| (0.022%)       | MEAN         | GEM          | COMBINED     |
| V (m/s)        | 8.1          | 9.3          | 9.3          |
| Rating         | Pass         | Pass         | Pass         |

## LOCATION 27

■ mean  
□ GEM

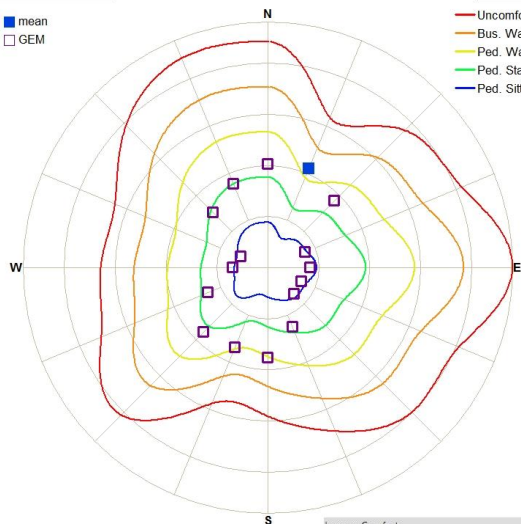


| % of time in excess of wind speed V |       |       |          |  |
|-------------------------------------|-------|-------|----------|--|
| V (m/s)                             | MEAN  | GEM   | COMBINED |  |
| 2                                   | 36.69 | 43.33 | 43.34    |  |
| 4                                   | 9.20  | 12.62 | 12.62    |  |
| 6                                   | 1.17  | 1.87  | 1.88     |  |
| 8                                   | 0.05  | 0.10  | 0.10     |  |
| 10                                  | 0.00  | 0.00  | 0.00     |  |

| Lawson Comfort |              |              |              |
|----------------|--------------|--------------|--------------|
| (5%)           | MEAN         | GEM          | COMBINED     |
| V (m/s)        | 4.6          | 5.0          | 5.0          |
| Rating         | Ped Standing | Ped Standing | Ped Standing |
| Lawson Safety  |              |              |              |
| (0.022%)       | MEAN         | GEM          | COMBINED     |
| V (m/s)        | 8.4          | 9.0          | 9.0          |
| Rating         | Pass         | Pass         | Pass         |

## LOCATION 28

■ mean  
□ GEM

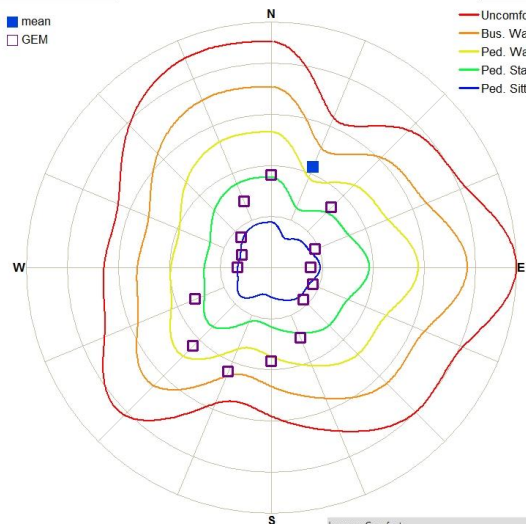

| % of time in excess of wind speed V |       |       |          |  |
|-------------------------------------|-------|-------|----------|--|
| V (m/s)                             | MEAN  | GEM   | COMBINED |  |
| 2                                   | 36.38 | 41.82 | 41.93    |  |
| 4                                   | 10.85 | 14.34 | 14.53    |  |
| 6                                   | 1.99  | 2.76  | 2.90     |  |
| 8                                   | 0.20  | 0.28  | 0.31     |  |
| 10                                  | 0.02  | 0.04  | 0.04     |  |

| Lawson Comfort |              |              |              |
|----------------|--------------|--------------|--------------|
| (5%)           | MEAN         | GEM          | COMBINED     |
| V (m/s)        | 4.9          | 5.3          | 5.4          |
| Rating         | Ped Standing | Ped Standing | Ped Standing |
| Lawson Safety  |              |              |              |
| (0.022%)       | MEAN         | GEM          | COMBINED     |
| V (m/s)        | 9.8          | 10.5         | 10.5         |
| Rating         | Pass         | Pass         | Pass         |

LOCATION 29

