


Fluence Gridstack™

Grid-scale, industrial-strength energy storage product designed for the most demanding market applications with industry-leading reliability, scalability, and safety.

FLUENCE
A Siemens and AES Company

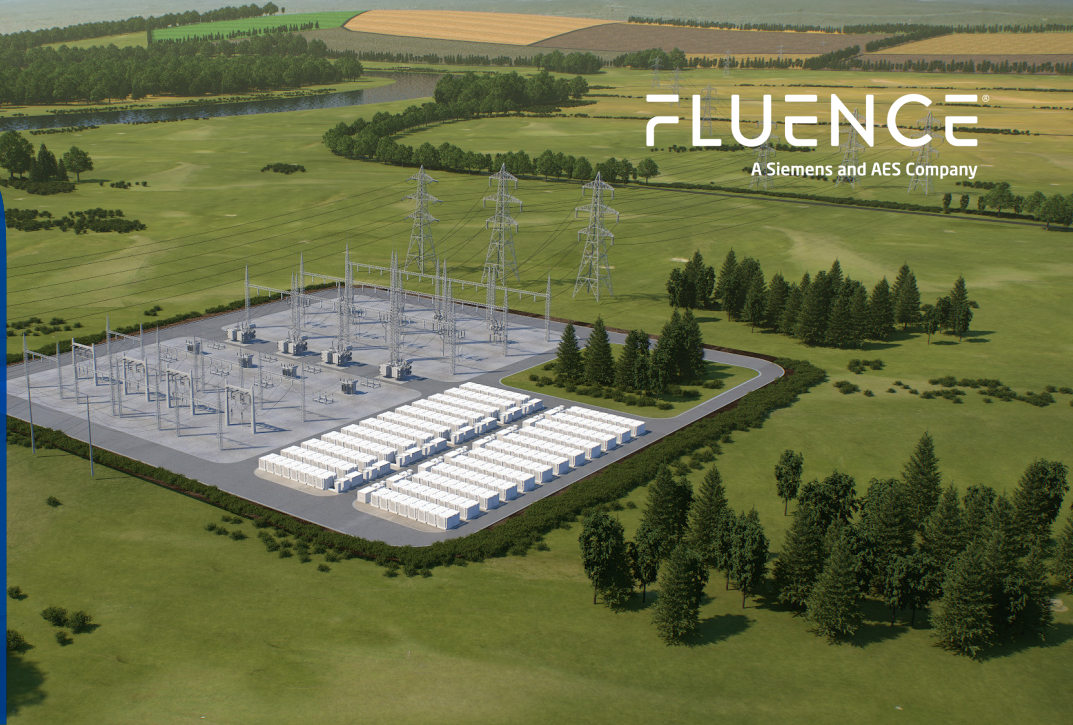

About Gridstack

Gridstack's industrial-strength design is built for the most demanding applications including Flexible Peaking Capacity, Frequency Regulation, Renewable Integration, T&D Enhancement, and more. The system is highly configurable to meet your specific operational requirements and can be cost-effectively augmented over time to maximize asset value.

Gridstack is built using our 6th generation technology stack, which incorporates more than 3 years of design and deployment experience.

Features



Easily Configurable: Gridstack's flexible architecture lets you configure key components from pre-qualified Tier 1 suppliers to best meet your deployment requirements. Enhance your system for specific market applications with a range of optimized dispatch algorithms.



Highly Scalable: Gridstack brings repeatability to large energy storage deployments. The scale-out design drives efficiencies in project permitting and delivery to reduce your implementation risk, while consistency across project locations simplifies training, operations, and maintenance.



Total System Safety: Gridstack comes equipped with comprehensive safety features throughout the integrated technology stack. The factory-built design brings consistent quality control to your storage system for the highest level of safety.

Fluence Cube
is your building
block for better
energy storage.

The Fluence Cube is a factory built, modular storage building block for safe, cost-effective systems configurable with the latest component technologies, delivering:

- Cost-effective systems with maximum quality control
- Fast procurement and contracting process
- Simple system design, engineering, and permitting
- Rapid delivery, construction, and commissioning
- Latest safety features and storage components



Gridstack™ Specifications

Gridstack System

Rated AC Power (50°C)	2 MW – 500+ MW	Availability	>97.0%
Discharge Duration	1 – 6+ hours	Altitude	De-rated over 1,000 meters
Grid Frequency	50Hz and 60Hz	Seismic Rating	Seismic options available
Reactive Power	Four-quadrant control, 0.9 leading to 0.9 lagging at rated power (reactive capability available over full real power range)*	System Response Time	Max capacity change in 1,000 ms
		Standard Temperature Range	-30°C to 45°C **

Fluence Cube

Cube Dimensions (H x W x D)

Long Duration: 2,549 x 2,578 x 2,160 mm

Short Duration: 2,549 x 2,578 x 2,257 mm

Cube Weight (total) lb/kg

Long Duration: 18,078 / 8,200

Short Duration: 18,850 / 8,550

Enclosure Rating

NEMA Type 3R

IP Rating

IP55

Cooling

Liquid Cooled

Battery Supplier / Module

CATL / LFP-280LC

Safety Features

Fast stop, fire detection and suppression system (solid aerosol), gas detection (carbon monoxide), deflagration panels, lockable disconnect switch, open door sensor, gas spring damper, sliding door lock

Installation

Forkliftable from all 4 sides. Crane compatible and includes vertical stabilization.

Fluence OS

Fully-integrated operating system for comprehensive control, asset management, and system visibility.

Operation Modes

Automatic Resource Control, Manual Dispatch, Idle, Disconnect, Reset

System KPIs

Real and reactive power dispatch, state of charge, cell voltage and temperature, auxiliary system details, core and node status, fire system and F-Stop status, and more

External Control Interface

SCADA and EMS integration available via common protocols including DNP3 and Native Modbus TCP/IP

Market Dispatch Applications

Primary and secondary frequency control, peak shaving, power factor regulation, AGC, SOC management, and more

Fluence IQ

The Fluence IQ Bidding Application automates wholesale market participation to maximize asset value in the NEM and CAISO markets.

Forecasting


Analyze thousands of variables to predict future market prices

Optimization

Automatically generate optimal bids for wind, solar, and storage assets

Bidding

Incorporate organizational risk tolerance levels into bidding strategy

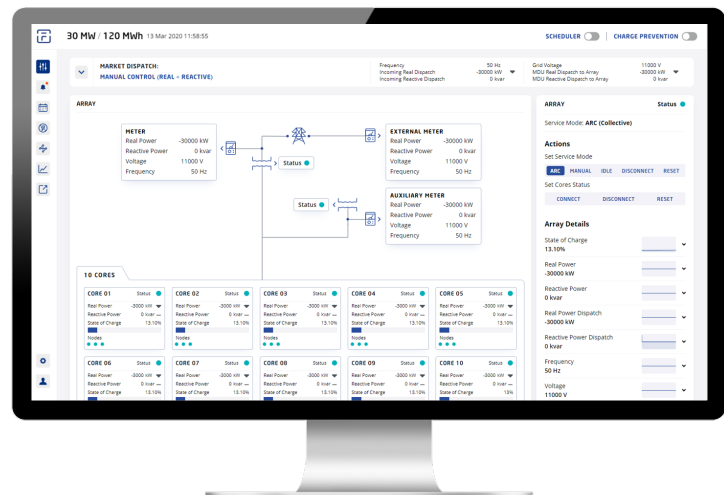

* Additional reactive capability upon request **Can vary depending on cooling system, low temperature kits required below -10 degrees



About Fluence™

Fluence (Nasdaq: FLNC) is a global market leader in energy storage products and services, and digital applications for renewables and storage. With a presence in 30 global markets, Fluence provides an ecosystem of offerings to drive the clean energy transition, including modular, scalable energy storage products, comprehensive service offerings, and the Fluence IQ Platform, which delivers AI-enabled digital applications for managing and optimizing renewables and storage from any provider. The company is transforming the way we power our world by helping customers create more resilient and sustainable electric grids.

© 2022 Fluence. All rights reserved.

TS-006-06-EN