

Industrial Warehouse Development: Storage and Distribution Warehouse

Traffic Impact Assessment

9 March 2026

HB&B Property


Industrial Warehouse Development: Storage and Distribution Warehouse

Traffic Impact Assessment

9 March 2026

Our Ref:

30088823-TP-06-STORAGE-RPT-01-TIA



Brandon Williams

Author

Prepared By:

Arcadis Australia Pacific Pty Ltd
Level 16, 580 George Street
Sydney NSW 2000
Australia
Tel: 02 8907 9000

Prepared For:

HBB Property
Level 2
143 Macquarie Street
Sydney NSW 2000



Bailey Byrnes

Approver

Version Control

Revision No.	Date Issued	Description	Author	Approver
0.1	10 March 2025	Draft report	B. Williams	N. Vukic
1.0	14 April 2025	Final report	B. Williams	N. Vukic
1.1	5 June 2025	Final report	B. Williams	N. Vukic
1.2	17 July 2025	Final report	B. Williams	B. Byrnes
1.3	18 November 2025	Final report	B. Williams	B. Byrnes
1.4	9 December 2025	Final report	B. Williams	B. Byrnes
1.5	9 March 2026	Final report	B. Williams	B. Byrnes

Contents

Acronyms and abbreviations	v
Executive Summary.....	vi
1 Introduction.....	1
1.1 SEARs	1
1.2 Background	2
1.3 Scope of the report.....	2
1.4 Reference documents	2
2 Existing conditions	3
2.1 Site location	3
2.2 Land use.....	4
2.3 Road network	4
2.4 Public transport network.....	6
2.5 Active transport	7
2.6 Road safety	7
3 Future development and road network changes	9
3.1 State transport policy.....	9
3.2 Key developments and land use changes	10
3.3 Transport network improvements and changes	10
4 Development proposal.....	12
5 Traffic impact assessment	14
5.1 Traffic generation	14
5.2 Background traffic volumes	16
5.3 Traffic distribution	19
5.4 Modelling approach and assessment criteria.....	20
5.5 Operational traffic impact assessment	21
5.6 Cumulative construction traffic impact	25
6 Car parking assessment.....	28
6.1 Proposed parking provisions.....	28
6.2 Accessible parking	29
6.3 Bicycle parking	30
6.4 Parking summary	30
7 Access and internal design assessment	32
7.1 Site access and internal configuration layout.....	32
7.2 Car parking.....	32
7.3 Pedestrian access	32
8 Summary	34
Appendix A Site plans	35
Appendix B Swept path diagram	36
Appendix C STFM outputs.....	37
Appendix D SIDRA outputs – operations.....	38
Appendix E SIDRA outputs – construction	39
Appendix F Green Travel Plan	40
Appendix G GTIA scope requirements.....	41

Tables

Table 1-1 SEARs requirements & Government Agency comments.....	1
Table 2-1 Crash history along Luddenham Road for the five-year period between 2019-2023	7
Table 4-1 Indicative land use mix for storage and distribution warehouse development.....	12
Table 5-1 Storage and Distribution warehouse - peak operational hardstand movements	14
Table 5-2 Expected staff numbers for the proposal	14
Table 5-3 Storage and Distribution warehouse operational traffic generation summary	15
Table 5-4 AIBP peak daily construction traffic volumes - 2025/26.....	16
Table 5-5 Peak construction movements in 2024/ 2025 for the Sydney Metro – Western Sydney Airport stabling and maintenance facility (EIS)	17
Table 5-6 Peak construction movements in 2024/ 2025 for the Sydney Metro – Western Sydney Airport stabling and maintenance facility (PLM).....	17
Table 5-7 Survey (2025) - Sydney Metro construction traffic volumes	18
Table 5-8 Forecasted background traffic volumes for Luddenham Road determined from STFM inputs	19
Table 5-9 LOS criteria for intersection capacity analysis	20
Table 5-10 Degree of Saturation (SIDRA 9.0).....	21
Table 5-11 Turning movement demands.....	22
Table 5-12 Development demand comparison	22
Table 5-13 Year 2027 intersection modelling results for storage and distribution warehouse.....	23
Table 5-14 Year 2036 intersection modelling results for storage and distribution warehouse.....	24
Table 5-15 SIDRA modelling outputs – construction.....	25
Table 6-1 Parking requirements for Luddenham Road Industrial Business Park (Source: Penrith DCP E18 Luddenham Road Industrial Business Park)	28
Table 6-2 Parking requirements	29

Figures

Figure 2-1 AIBP site location	3
Figure 2-2 Land Zoning Map (Source: ePlanning Spatial Viewer – NSW Planning Portal).....	4
Figure 2-3 Luddenham Road, facing north.....	5
Figure 2-4 Luddenham Road, facing south	5
Figure 2-5 Patons Lane, facing west.....	5
Figure 2-6 Patons Lane, facing east.....	5
Figure 2-7 Mamre Road, facing north (Source: Google Earth)	6
Figure 2-8 Mamre Road, facing south (Source: Google Earth).....	6
Figure 2-9 Elizabeth Drive, facing east (Source: Google Earth)	6
Figure 2-10 Elizabeth Drive, facing west (Source: Google Earth).....	6
Figure 2-11 Existing Public Transport Network - Orchard Hills area.....	7
Figure 3-1 Proposed transport network - Orchard Hills area.....	9
Figure 4-1 Proposed storage and distribution site layout.....	12
Figure 4-2 Indicative AIBP construction timeline	13
Figure 5-1 Peak operational daily traffic profile - Storage and Distribution warehouse	15
Figure 5-2 Matrix survey (2025) Luddenham Road / Patons Lane intersection counts	18
Figure 5-3 Network layout for the assessed intersection at Luddenham Road and Patons Lane	23

Acronyms and abbreviations

Acronym	Definition
AIBP	Alspec Industrial Business Park
EP&A Act	Environmental Planning and Assessment Act 1979
EIS	Environmental Impact Statement
PLM	Parklife Metro
SEAR	Secretary's Environmental Assessment Requirements
SSTOM	Stations, Systems, Trains, Operations and Maintenance (Sydney Metro)
TfNSW	Transport for NSW
TIA	Traffic Impact Assessment
GTP	Green Travel Plan
HV	Heavy Vehicle
LV	Light Vehicle
DA	Development Approval

Executive Summary

This Traffic Impact Assessment (TIA) has been prepared by Arcadis to accompany a State Significant Development Application (SSDA) SSD-81434988 for a Storage and Distribution Warehouse. The project seeks detailed approval for a new Storage and Distribution Warehouse within the Alspeg Industrial Business Park (AIBP) at 221-235 Luddenham Road, Orchard Hills (the site). The site is legally described as Lot 1 in DP 1293805. However, the proposed warehouse will be designated as lot 11 in the new community subdivision plan (DP271602) following completion of the estate subdivision.

This report has been prepared to address the Secretary's Environmental Assessment Requirements (SEARs) issued for the project (SSD-81434988).

- This report concludes that the proposed development is suitable and warrants approval subject to the implementation of the following mitigation measures.
- Access to the site will be provided via the internal road within the AIBP development with access to the broader road network via Patons Lane or Luddenham Road.
- The traffic demands associated with the potential development during construction and the operation of the site is expected to be accommodated safely.
- The provided car parking meets the anticipated demands generated by the site. Provisions for accessible parking and bicycle parking will be accommodated during further development of the proposal.
- The internal configuration of the site has been designed in accordance with Penrith City Council's DCP and the relevant Australian Standards.

Following the implementation of the above mitigation measures, the remaining impacts are appropriate.

1 Introduction

This report has been prepared in support of a development at 221-235 Luddenham Road, Orchard Hills (the site), including detailed approval for a Storage and Distribution Centre. The project seeks to deliver a new a new Storage and Distribution Warehouse within the Alspeg Industrial Business Park (AIBP).

Specifically, the project comprises the following:

- Construction of a new warehouse with a two-level ancillary office. The warehouse is predominantly 14.7 metres in height, with a high-bay warehouse component at the western portion of the building which achieves a maximum height of 39 metres.
- A total building area of 45,449 m²; broken down as follows:
 - Warehouse area: 43,606 m²
 - Office Area: 1,843 m²
- Loading areas at the north and south sides of the warehouse, with hardstand surrounding the perimeter of the warehouse. Hardstand and carpark areas are accessed via four new driveways from the AIBP internal estate road.
- Provision of vehicular parking onsite to accommodate cars, vans, semi-trailers and B-doubles. It is envisaged that approximately 329 spaces will be provided on site within the proposed hardstand and carparking areas.
- Perimeter landscaping and tree planting with a total area of 10,134 m² (10%).

A Traffic Impact Assessment (TIA) is required for the development, where subsequent traffic impacts on the construction and operation phases are explored.

1.1 SEARs

This TIA (and accompanying Construction Traffic Management Plan (CTMP)) has been prepared in response to the requirements contained within the Secretary's Environmental Assessment Requirements (SEARs) dated 4 April 2025 and issued for the SSDA (SSD-81434988). Specifically, this report has been prepared to respond to the SEARs requirement and government agency comments issued below (Table 1-1).

Table 1-1 SEARs requirements & Government Agency comments

Item	Description of Requirement	Report Reference
6.1	Details of all daily and peak traffic volumes likely to be generated during all key stages of construction and operation, including a description of key access / haul routes.	Storage and Distribution Warehouse TIA, Section 5
6.2	An assessment of the predicted impacts of this traffic on road safety and the capacity of the road network, including consideration of cumulative traffic impacts on existing performance levels of nearby intersections (using industry standard modelling).	Storage and Distribution Warehouse CTMP, Section 4 Storage and Distribution Warehouse TIA, Section 5
6.3	Plans demonstrating how all vehicles likely to be generated during construction and operation and awaiting loading, unloading or servicing can be accommodated on the site to avoid queuing in the street network	Storage and Distribution Warehouse TIA, Section 7
6.4	Details and plans of the proposed internal road network, loading docks, pedestrian and cycling facilities and on-site parking in accordance with the relevant Australian Standards	Storage and Distribution Warehouse TIA, Section 6 and 7
6.5	Swept path analysis for the largest vehicle requiring access to the development	Storage and Distribution Warehouse TIA, Appendix B

6.6	Details of road upgrades, infrastructure works, or new roads or access points required for the development if necessary.	Storage and Distribution Warehouse CTMP, Section 3
6.7	Provide a Construction Traffic Management Plan detailing predicted construction vehicle, routes, access and parking arrangements, coordination with other construction occurring in the area, and how impacts on existing traffic, pedestrian and bicycle networks would be managed and mitigated	Storage and Distribution Warehouse CTMP, Section 3, 4 and 5

1.2 Background

HB&B Property Ltd has engaged Arcadis to undertake a TIA for the proposed storage and distribution warehouse development at 221 Luddenham Road, Orchard Hills.

The proposal is to develop a 45,449 m² warehouse at the above address to accommodate a mix of warehouse, industrial and office land uses. The AIBP development is proposed to be completed by 2028, with various road and other infrastructure works required. In preparing this assessment, the subject site and its surroundings have been inspected, along with development plans. Relevant traffic and parking data have been reviewed and analysed.

1.3 Scope of the report

This report has been structured as follows:

- Section 2 describes the existing conditions in relation to the site, including surrounding land uses, the road network and available transport modes.
- Section 3 outlines the future development and road network changes expected to occur around the site over the next 20 years.
- Section 4 outlines the development proposal for the construction of the storage and distribution warehouse.
- Section 5 outlines the expected traffic generated by the development during the construction and operational phase and their associated impact on the surrounding road network.
- Section 6 outlines the expected parking requirements associated with the proposed development in accordance with local relevant planning policies.
- Section 7 assesses the access and internal design of the warehouse, describing transport movements and identifying any potential issues from the current development application (DA) plans.
- Section 8 provides a summary of the TIA.

1.4 Reference documents

In preparing this report, reference has been made to the following documents:

- Schedule of Classified Roads and Unclassified Regional Roads (Roads and Maritime, 2014)
- Development Control Plan (DCP) (Penrith Council, 2021)
- Guide to Transport Impact Assessments (TfNSW, 2024)
- Technical Direction (TDT 2013/04a) (Roads and Maritime, 2013)
- 221 Luddenham Road, Orchard Hills –Alspeg Industrial Business Park Traffic Impact Assessment (Arcadis, April 2023).

2 Existing conditions

2.1 Site location

The subject site is located on Luddenham Road, south of Patons Lane, in Orchard Hills. Located approximately 30 kilometres west of Parramatta CBD and is part of the larger AIBP development. The AIBP site is irregular in shape, with frontages across both Luddenham Road and Patons Lane.

The storage and distribution warehouse site is rectangular, encompassing a total area of 104,959 m². It features frontage to an internal road within the AIBP site, providing access to the broader road network via Patons Lane and Luddenham Road. The site location of the warehouse site within AIBP is shown in Figure 2-1.



Figure 2-1 AIBP site location

2.2 Land use

As shown in Figure 2-2, the subject site is in a General Industrial Zone (E4). The region surrounding the site is a mix of Environmental Conservation (C2) and Rural Landscape Zone (RU2). To the east of Mamre Road, the more common land uses are General Industrial (IN1) and Low Density Residential (R2).

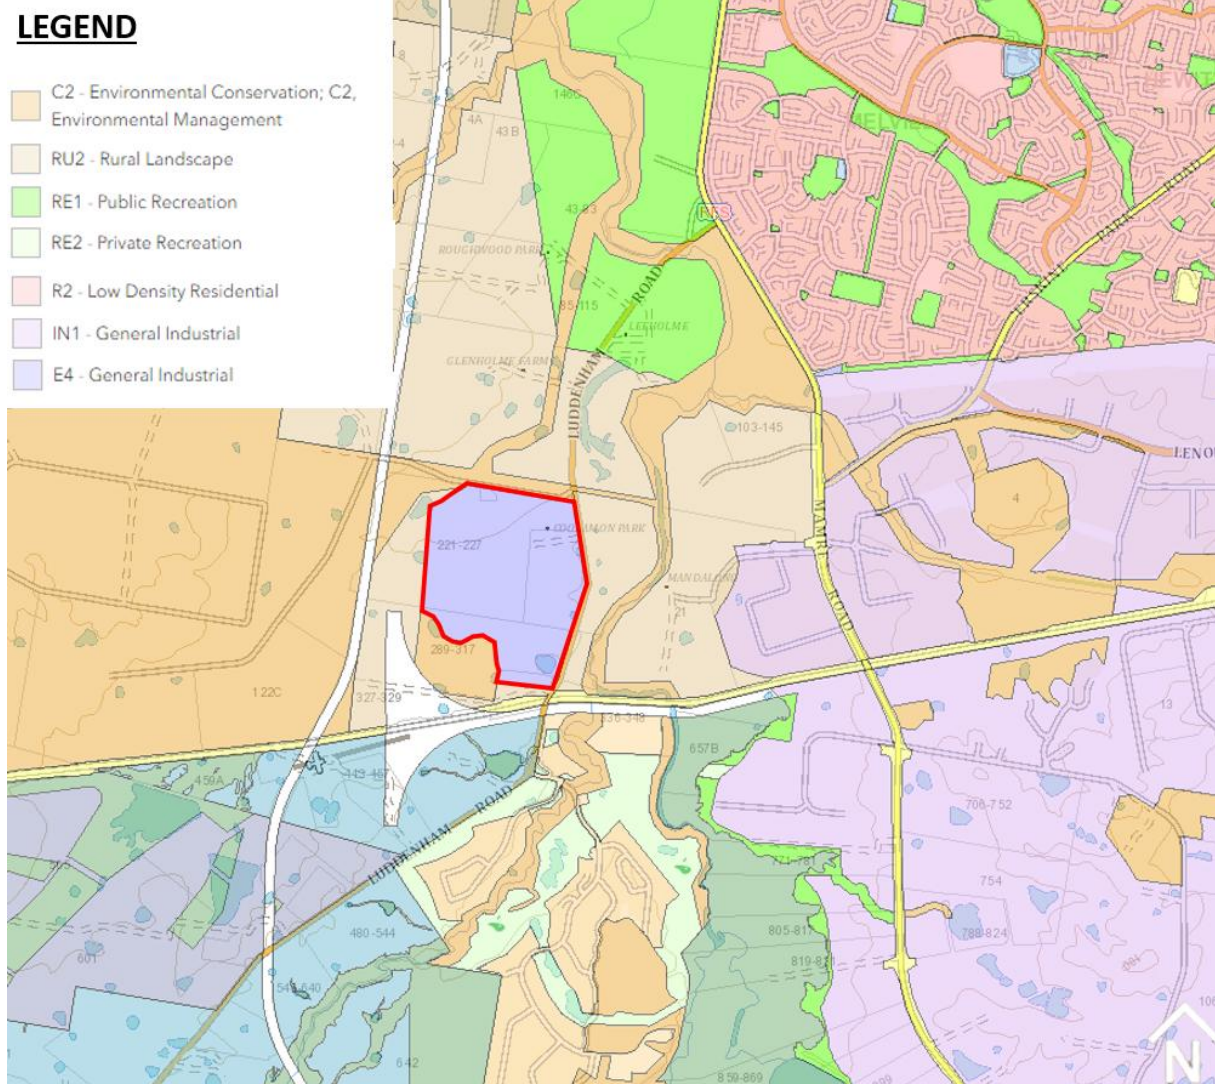


Figure 2-2 Land Zoning Map (Source: ePlanning Spatial Viewer – NSW Planning Portal)

2.3 Road network

The existing roads which will be impacted by the development application are described below:

Luddenham Road

Luddenham Road is a regional road under the control and management of Penrith City Council. Near the site, Luddenham Road is aligned in a general north-east/south-west direction. It is a two-way road configured with a two-lane, seven-metre-wide carriageway, set within an approximately 21-metre-wide road reserve. Luddenham Road carries approximately 3,000 vehicles per day and has a posted speed limit of 80 km/h. Photos of Luddenham Road in the vicinity of the site are provided in Figure 2-3 and Figure 2-4.



Figure 2-3 Luddenham Road, facing north



Figure 2-4 Luddenham Road, facing south

Patons Lane

Patons Lane is a local road under the control and management of Penrith City Council. Near the site, Patons Lane has a posted speed limit of 50 km/h and is generally aligned in an east/west orientation. It is a two-way road configured with a two-lane, 6.6-metre-wide carriageway with 1.2-metre-wide sealed shoulders on both sides of the road, set within a road reserve that is approximately 19 metres wide.

Stations, Systems, Trains, Operations and Maintenance (SSTOM) Contractors conducted traffic surveys in March 2024 which indicated Patons Lane carries approximately 1,260 vehicles per day, due to the construction of the Sydney Metro project. Lower daily traffic volumes are to be expected once construction of the Metro is completed.

Photos of Patons Lane in the vicinity of the site are provided in Figure 2-5 and Figure 2-6.



Figure 2-5 Patons Lane, facing west



Figure 2-6 Patons Lane, facing east

Mamre Road

Mamre Road is a state road under the control and management of Transport for NSW (TfNSW). Within the context of the study area, Mamre Road is aligned in a north/ south orientation and is currently configured as a two-lane undivided carriageway, set within a 45-metre-wide road reserve.

Mamre Road carries approximately 15,000 vehicles per day and has a posted speed limit of 80 km/h. Mamre Road passes through the Western Sydney Priority Growth Area and provides connections to the Western Sydney Employment Area (WSEA), making it a key route for regional trips.

Photos of Mamre Road close to the intersection with Luddenham Road are shown in Figure 2-7 and Figure 2-8.



Figure 2-7 Mamre Road, facing north (Source: Google Earth)



Figure 2-8 Mamre Road, facing south (Source: Google Earth)

Elizabeth Drive

Elizabeth Drive is a state road under the control and management of TfNSW. It is aligned in an east/west orientation and carries approximately 11,000 vehicles per day.

Elizabeth Drive is configured as a two-lane undivided carriageway with unsealed shoulders and is set within a 35-metre-wide road reserve. The speed limit is posted as 80 km/h in both directions of travel. To the east, Elizabeth Drive connects to the Westlink M7 Motorway and to the west it connects with The Northern Road.

Photos of Elizabeth Drive near the intersection with Luddenham Road is shown in Figure 2-9 and Figure 2-10.



Figure 2-9 Elizabeth Drive, facing east (Source: Google Earth)



Figure 2-10 Elizabeth Drive, facing west (Source: Google Earth)

2.4 Public transport network

A review of the public transport available in the vicinity of the site indicates that there are three bus services (Routes 775, 776 and 779) that operate in the St Clair/ Erskine Park area to the northeast of the site. No bus services connect past the site to the south. Overall, the area is currently underserved by public transport.

However, the level of service provision reflects the low travel demands of the locality. Figure 2-11 shows a map of the existing public transport network for the Orchard Hills area.

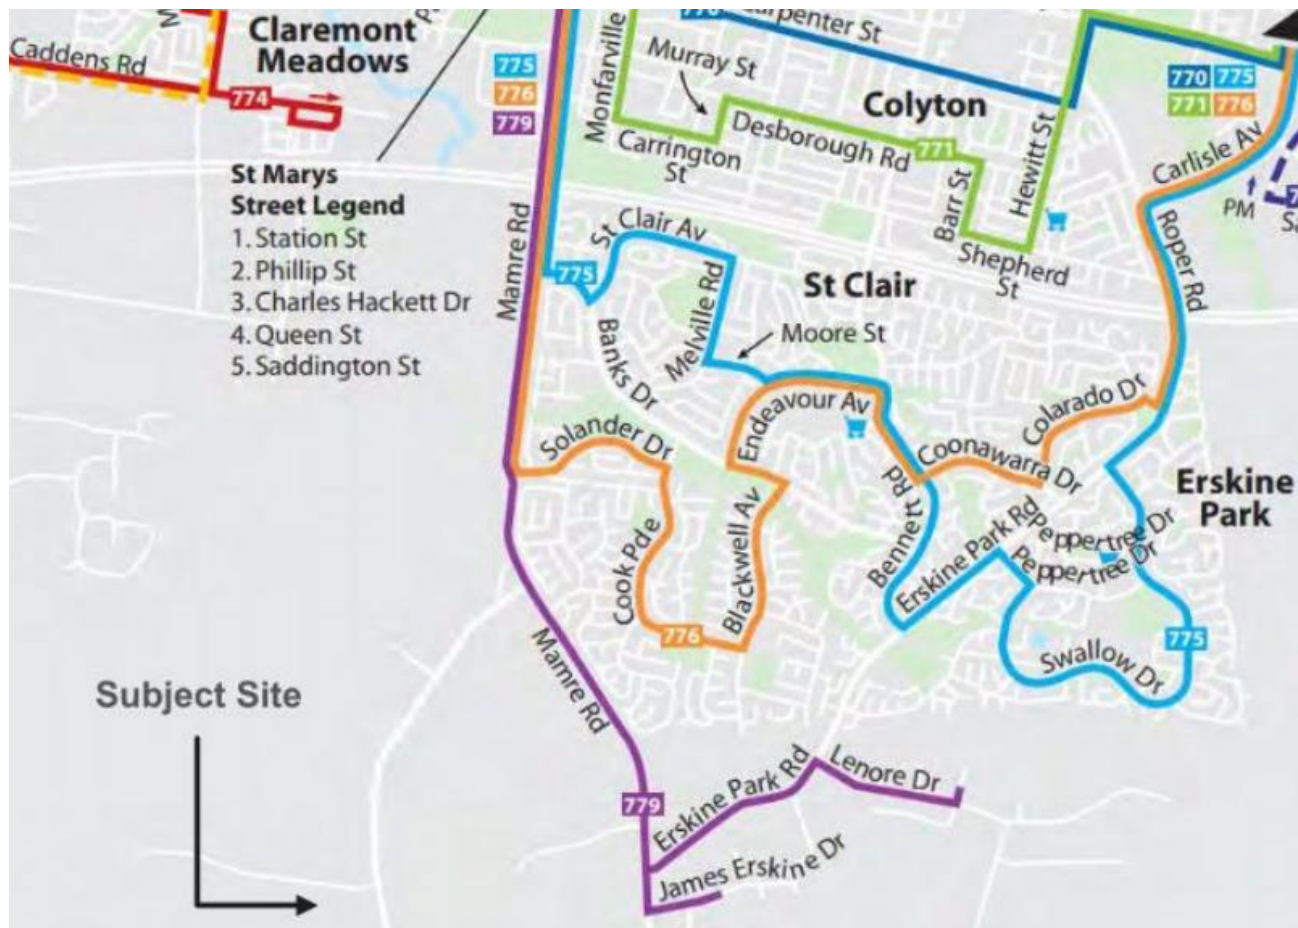


Figure 2-11 Existing Public Transport Network - Orchard Hills area

2.5 Active transport

There is currently limited pedestrian or cyclist infrastructure provided in the vicinity of the site, mainly due to the nature of land use in the vicinity and the limited demand for such facilities at present.

2.6 Road safety

Historical crash data has been evaluated between 2019 and 2023 as part of this assessment to obtain an understating of current road safety characteristics and trends for Luddenham Road between Mamre Road and Elizabeth Drive. A summary of the crash statistics for crashes occurring along Luddenham Road is provided in Table 2-1.

Table 2-1 Crash history along Luddenham Road for the five-year period between 2019-2023

Crash severity	Year				
	2019	2020	2021	2022	2023
Non-casualty	1	4	2	1	2
Minor/ other injury	-	2	1	-	-

Crash severity	Year				
	2019	2020	2021	2022	2023
Moderate injury	2	1	1	4	-
Serious injury	-	1	3	1	5
Fatal	-	-	-	-	-
Total	3	8	7	6	7

The crash data revealed:

- A total of 31 vehicles were involved in crashes occurring along the length of Luddenham Road between Mamre Road and Elizabeth Drive over a five-year period between 2019 and 2023, averaging 0.017 per day or 6.2 per year.
- 68 per cent of the crashes resulted in an injury, and there were no fatalities recorded.
- 26 per cent involved vehicles travelling off the road and hitting an object which resulted in an injury.
- 27 per cent of recorded crashes involved a head on collision.
- 47 per cent of recorded crashes involved multiple vehicles in this period.
- 47 per cent of crashes occurred in dusk or darkness conditions.
- Seven per cent of crashes involved vehicles striking animals while travelling along the roadway.

The crash statistics indicate that a relatively high number of crashes involved head on collisions and vehicles colliding objects after veering off the roadway. Any future upgrade to Luddenham Road should address this trend and related safety issues.

3 Future development and road network changes

The area and road network around the site are expected to undergo significant changes over the next 20 years to support the growth of the broader the Greater Penrith to Eastern Creek (GPEC) Growth Area, Western Sydney Employment Area (WSEA) and the Aerotropolis. This section outlines key transport policy influences, as well as land use and road network changes within proximity to the site.

Figure 3-1 highlights the location of these projects in relation to the subject site.

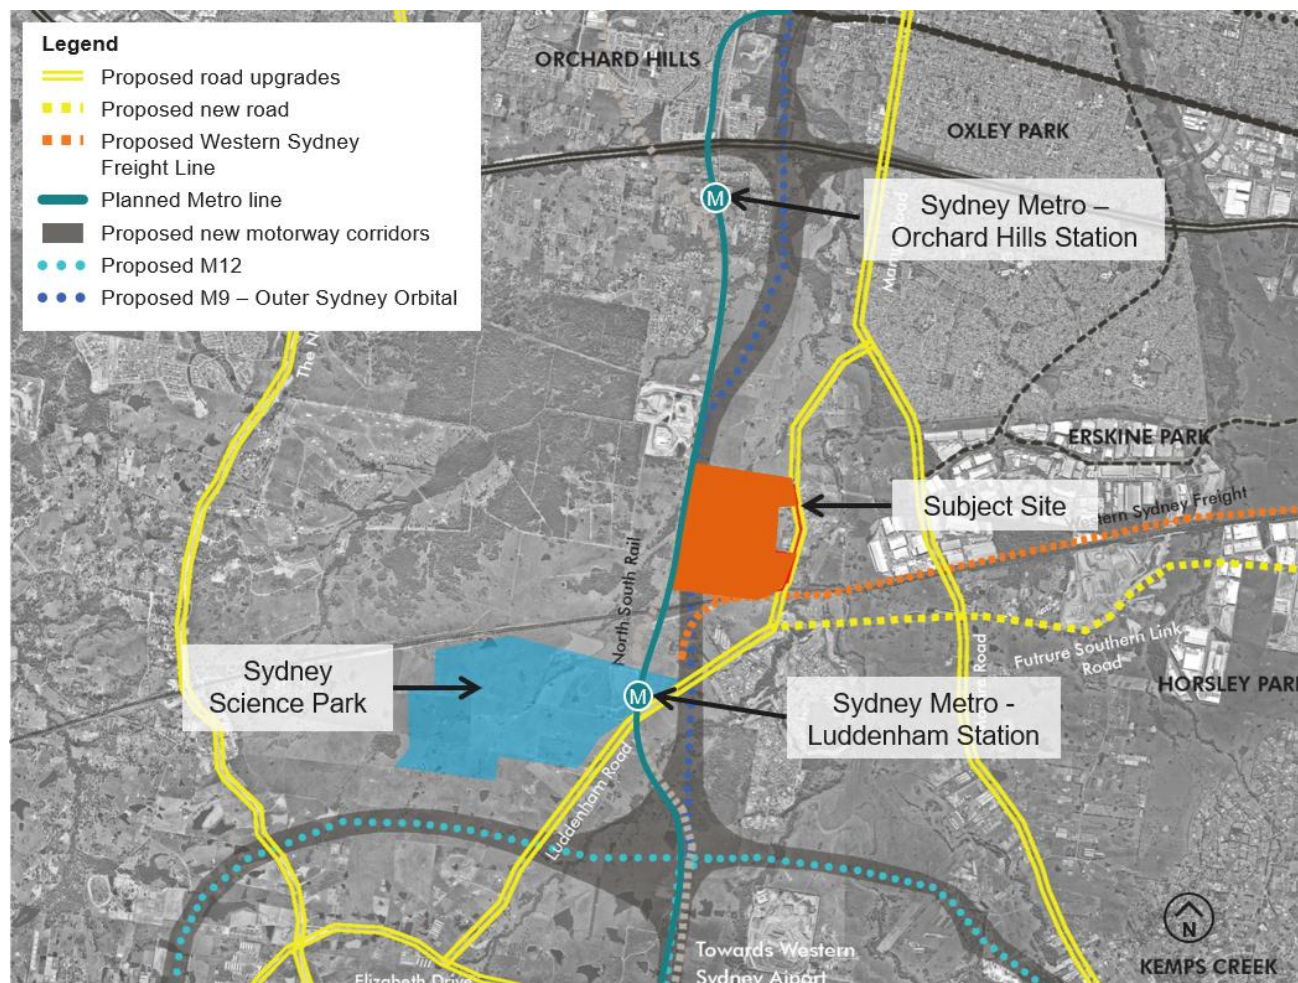


Figure 3-1 Proposed transport network - Orchard Hills area

3.1 State transport policy

The Future Transport Strategy

The *Future Transport Strategy* (The NSW Government) was published in September 2022 and is an update of NSW's *Future Transport 2056: Shaping the Future* (2018). The Strategy contains a wide range of planning vision, directions, and outcomes on how transport can support the population and economy.

The *Future Transport Strategy* aims to enable safe, healthy, sustainable, accessible, and integrated passenger and freight journeys in NSW. It outlines the direction for investment, services, and policy to improve connections for people and goods. This will revitalise the six cities and allow people and goods to move seamlessly between the cities.

Existing and potential transit connections, together with new technology and innovation, will make the broader transport network more responsive to demand and better able to manage congestion in the future. For the six cities identified, more specific outcomes listed as part of the strategy which will benefit the site's transport context, include:

- C1.1 – Enhance 30-minute metropolitan cities

The proposal will create jobs within Luddenham and provide jobs for residents in proximity to the development. According to the economic analysis conducted by Urbis¹, the development is forecasted to generate up to 3,730 direct jobs. This will enable residents living within future land release areas more job opportunities within 30 minutes of their residence.

- E2.1 – Promote travel behaviour change to manage networks

Attractive infrastructure, appropriate policies, and programs are required to encourage more sustainable travel behaviours and reduce congestion. The development will contain infrastructure such as shared paths, end of trip facilities, and secure bicycle parking to promote more people walking and people cycling. The shared paths within the site should connect to future cycling routes to be located on Luddenham Road.

A Green Travel Plan and Travel Access Guide influenced by Travel Demand Management will influence the policies and encourage a modal shift for more sustainable modes of travel.

- P1.3 – Ensure public transport is available on day one

The future Luddenham station as part of the Sydney Metro Western Sydney Airport line will crucial public transport infrastructure required for the site. Rapid bus networks are proposed along Luddenham Road. The provision of rapid bus stops within proximity of the proposal will provide efficient and attractive journeys via public transport.

3.2 Key developments and land use changes

The site is in close proximity to a number of region and city shaping development opportunities that will shape economic activity and movement into the future. These will attract significant freight, logistics, advanced manufacturing, health, education and science activities and jobs that will direct investment across the metropolitan area.

Key projects that will influence demands around the subject site include:

- **The Western Sydney Airport** is a committed new international airport in Badgerys Creek. Set to open in 2026, the airport will serve passenger and freight operations and is expected to generate over 30,000 jobs from airport operations by 2060.
- **The Sydney Science Park** is a proposed new specialised centre comprising of a range of research and development, employment, education, retail, and residential uses located at 565-609 Luddenham Road, Luddenham, approximately 2.5 kilometres south of the subject development.

3.3 Transport network improvements and changes

The Australian and NSW Governments are progressively planning for and funding the delivery of a broad range of transport infrastructure improvements across the Greater Western Sydney region. These projects are intended to support an integrated transport solution for the region and capitalise on the economic benefits from developing the new Western Sydney airport and the broader land use changes across the area.

¹ Economic Analysis to Underpin the Planning Proposal to Rezone 21-227 & 289-317 Luddenham Road, Orchard Hills (Dated 30th of June 2020)

Key infrastructure upgrades in relation to the subject site include:

- **The Sydney Metro – Western Sydney Airport**, a new metro railway connecting the new Western Sydney International Airport with the Greater Western Sydney, which provides connection to the existing Sydney Trains suburban T1 Western Line. The new rail line consists of six stations, including one at Luddenham which is around one kilometre south of the subject site and one at Orchard Hills, three kilometres north of the subject site. The station will serve a future employment, research, and knowledge-based employment precinct, along with a mixed-use residential development. The Luddenham Station will provide an interchange with future bus and active transport networks.
- **The Outer Sydney Orbital**, which will provide for a future north south motorway and freight rail line to support the growth of Western Sydney and the distribution of freight across Sydney and regional NSW. The recommended alignment runs directly adjacent to the subject site, and it is expected that some portion of land would be acquired for Outer Sydney Orbital project in the future.
- **The M12 motorway project** will provide direct access between the Western Sydney Airport at Badgerys Creek and Sydney's motorway network, connecting the M7 Motorway, Cecil Hills, and The Northern Road, Luddenham. The link forms a key part of the Western Sydney Infrastructure Plan, a joint initiative of the Australian and NSW governments to fund a \$4.1 billion road and transport program for Western Sydney.
- **The Mamre Road upgrade**, which will provide an additional lane in each direction for the 10-kilometre section between the M4 Motorway and Kerrs Road, as well as a wide central median for the provision of an additional traffic lane in the future. Preliminary designs indicate the intersection of Luddenham Road and Mamre Road, will be converted to traffic signals as part of this project. The NSW Government has committed \$220 million to upgrade Stage 1 of these work between the M4 Western Motorway and Erskine Park Road.
- **The Elizabeth Drive Upgrade**, which will provide an additional lane in each direction between the M7 Motorway at Cecil Hills and The Northern Road at Luddenham, with future provision for additional lanes. Preliminary designs indicate the intersection of Luddenham Road and Elizabeth Drive, will be converted to traffic signals as part of this project.
- **The proposed Western Sydney Freight Line**, which will be a dedicated freight rail line running from the future Outer Sydney Orbital near Luddenham to the M7 Motorway. This new freight line will allow the transport of goods by rail across Western Sydney, linking growing industrial areas and distribution centres. The current proposed rail alignment is to the south of the subject site.
- **The potential upgrade of Luddenham Road**, which will provide an additional lane in each direction along the length of Luddenham Road between Mamre Road and Elizabeth Drive, with future provision for additional lanes. This initiative has been identified in broader infrastructure planning assessments for the region.

4 Development proposal

The proposal is for the development of a 104,959 m² parcel of land as part of the wider AIBP development. The Storage and Distribution development will comprise of warehouse and office land uses, as well as supporting car parking for both heavy vehicles and cars.

Figure 4-1 shows the plan for the proposed development.

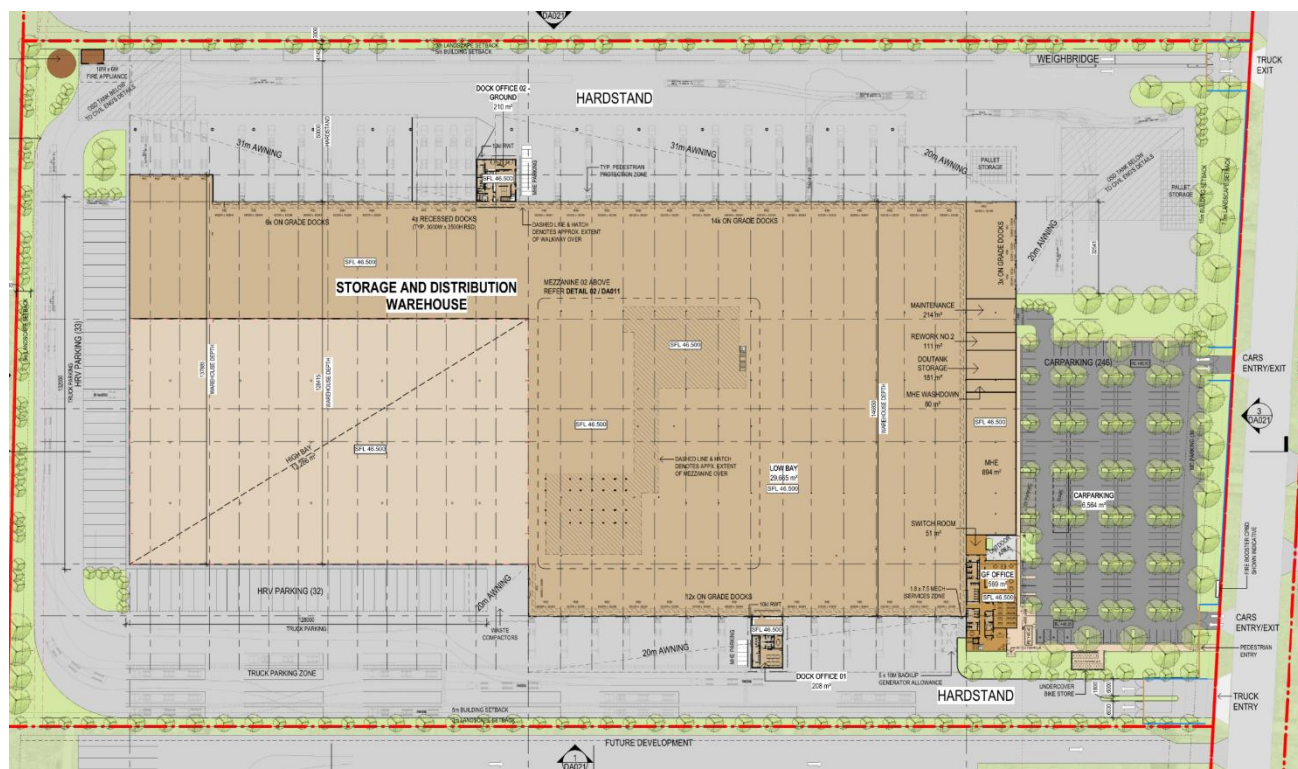


Figure 4-1 Proposed storage and distribution site layout

A summary of the land use mix for the storage and distribution warehouse development is provided in Table 4-1.

Table 4-1 Indicative land use mix for storage and distribution warehouse development

	Land use	Total building GFA (m ²)
Storage and distribution warehouse SSDA	Warehouse	43,606
	Office	1,843
	Total building	45,449
	Total car park	6,564
	Total landscape	10,134
	Total site area	104,959

4.1.1 AIBP construction timeline

Construction of the storage and distribution warehouse will be in conjunction with other infrastructure works as part of the AIBP development. Figure 4-2 shows an expected timeline for 2025-2027 construction period of AIBP, inclusive of the Storage and Distribution SSDA and other concurrent DA construction works.

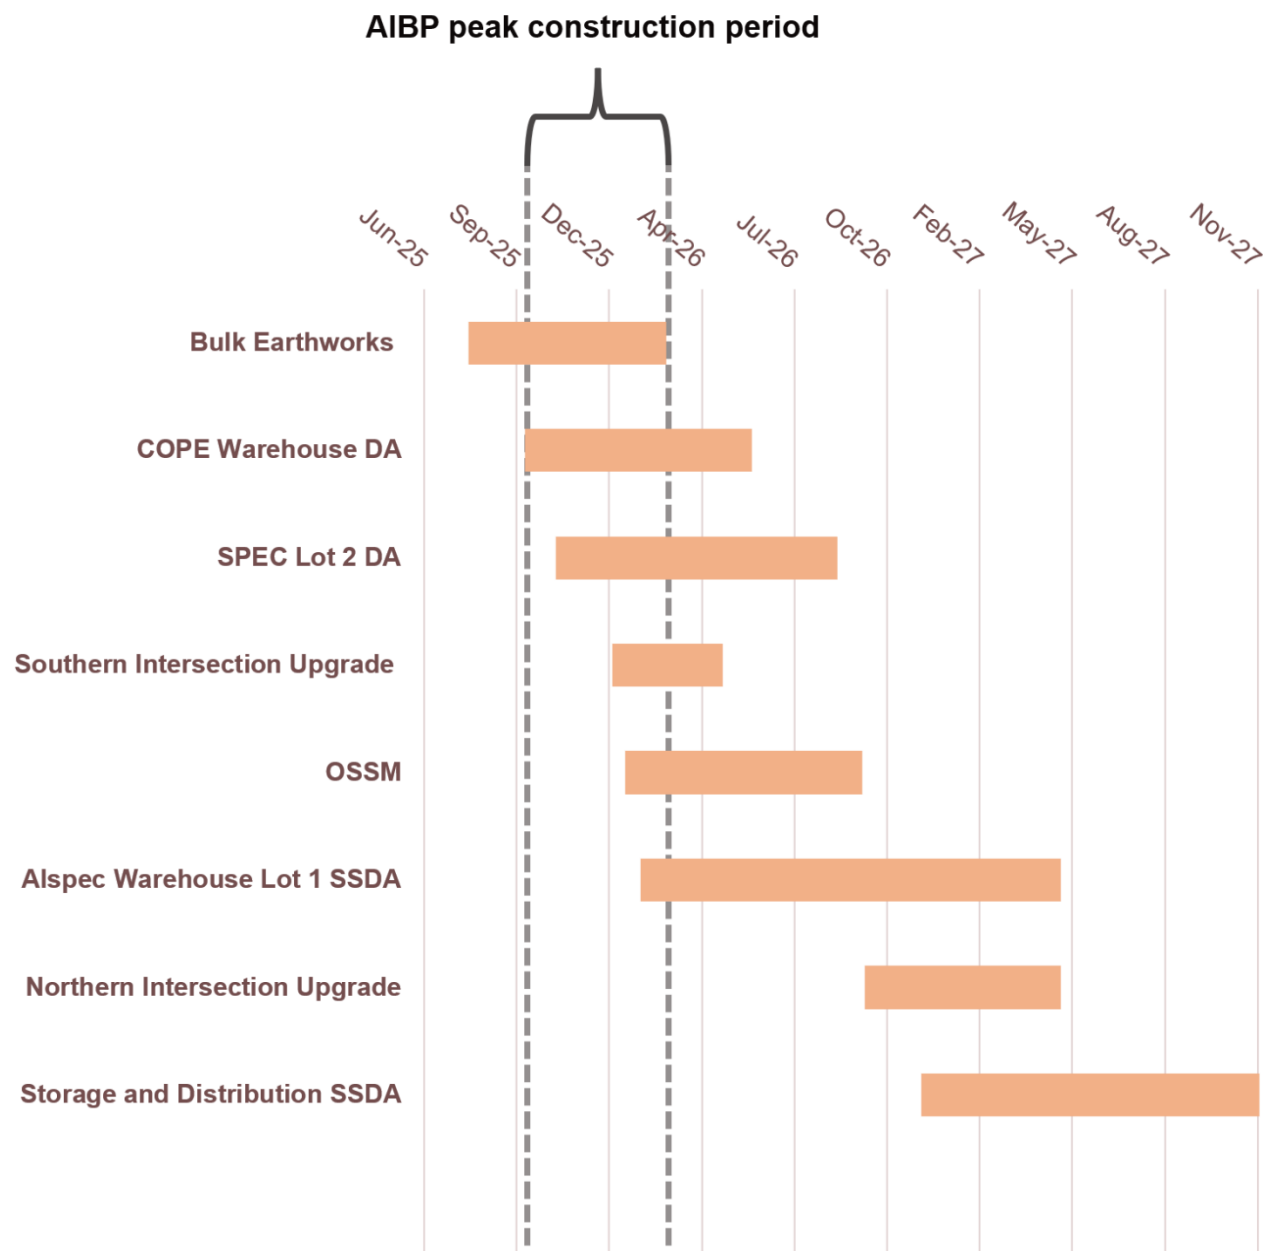


Figure 4-2 Indicative AIBP construction timeline

5 Traffic impact assessment

An assessment of the likely traffic impact has been completed to understand the implications of the proposed development and the associated staging on the performance of the surrounding network.

5.1 Traffic generation

5.1.1 Operational traffic

TMX has provided information on the peak average day hardstand two-way movements for heavy vehicles and rigid delivery vans during operations. Table 5-1 presents the anticipated hardstand movements during peak operations.

Table 5-1 Storage and Distribution warehouse - peak operational hardstand movements

Heavy vehicle type	Daily peak operational hardstand traffic – two-way movements	
	IN	OUT
B-doubles	110	110
Semi-trailers	123	123
Rigid delivery vans	112	112
Total	345	345

The anticipated operational window for each heavy vehicle type is as follows:

- B-doubles – evenly spread over a 20 hour operational window, between 1am to 9pm.
- Semi-trailers – evenly spread over a 20 hour operational window, between 1am to 9pm.
- Rigid delivery vans – leave over approximately three hours in the morning and return in the afternoon. Morning window is between 5am to 8am, afternoon window is between 3pm to 6pm.

In addition, TMX has provided a breakdown of the expected staff numbers for the warehouse during a day of peak operations. Table 5-2 summarises the peak staff numbers anticipated for the main office, warehouse and warehouse office.

Table 5-2 Expected staff numbers for the proposal

Shift Time	Staff Numbers			
	Main Office	Warehouse	Dock Offices	Total
6am to 2pm	26	45	14	85
2pm to 10pm	0	40	13	53
10pm to 6am	0	15	6	21
Total Staff	26	100	33	159

The following assumptions have been made for light vehicle movements in the operational traffic assessment:

- Given the current absence of active and public transport options surrounding the site, a 90% vehicle mode share was adopted
- Staff is expected to arrive / leave the site in the hours around the start / end of their shift times
- Between shift times, additional light vehicle trips have been considered to allow for staff taking breaks or performing work duties external to the site.

Table 5-3 summarises the application of TMX's provided data for heavy vehicle (Table 5-1) and light vehicle (Table 5-2) movements for the Storage and Distribution warehouse development.

Table 5-3 Storage and Distribution warehouse operational traffic generation summary

Vehicle type*	AM peak (7:00-8:00am)			PM peak (5:00-6:00pm)		
	IN	OUT	Total	IN	OUT	Total
Light vehicles (LVs)	14	2	16	1	2	3
Heavy vehicles (HVs)	13	51	64	51	13	64
Total	27	53	80	52	15	67

An expected peak operational daily profile for the proposed development is provided in Figure 5-1. Note that the operational modelling assessment considers cumulative operational traffic demand from the AIBP. Consequently, the morning and afternoon peak hours for the Storage and Distribution warehouse differs from concurrent AIBP warehouse operations.

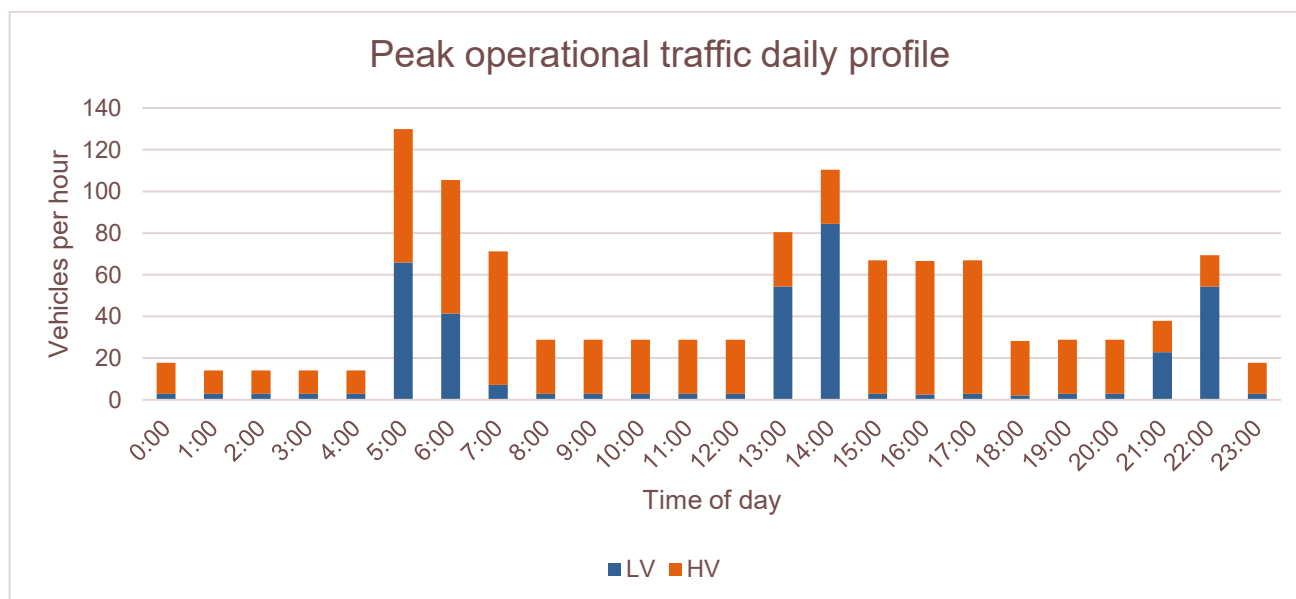


Figure 5-1 Peak operational daily traffic profile - Storage and Distribution warehouse

5.1.2 Cumulative construction traffic

A cumulative construction assessment has been conducted to reflect the concurrent construction activities for the broader development site in 2025 to 2026. After consideration of the AIBP construction program, the cumulative assessment considers peak construction traffic from each project, which is expected to be between November 2025 to March 2026. Since the storage and distribution warehouse and the northern intersection upgrade works construction will be yet to commence, traffic volumes from these construction activities have not been considered in the cumulative assessment. The estimated peak daily construction traffic for each project is summarised in Table 5-4.

Table 5-4 AIBP peak daily construction traffic volumes - 2025/26

Project	Daily peak construction traffic – two-way movements	
	LVs	HVs
Storage and distribution warehouse SSDA*	80	30
Bulk earthworks	160	100
COPE warehouse DA	60	20
Southern intersection upgrade	12	20
Alspec warehouse lot 1 SSDA	80	30
SPEC lot 2 DA	50	16
Northern intersection upgrade*	30	80
Total (cumulative assessment)	362	186

*Northern Intersection Upgrade and Storage and distribution warehouse have not been considered in the cumulative construction assessment. See Figure 4-2.

Construction Hours

Proposed construction hours for the site are as follows:

- Monday to Friday 6am to 6pm
- Saturday 8am to 1pm
- Sunday No work.

5.2 Background traffic volumes

5.2.1 Sydney Metro – Western Sydney Airport stabling and maintenance facility

To assess the overall impact of traffic on the performance of Patons Lane and Luddenham Road, traffic generated by the Patons Lane Resource Recovery Centre (RRC) and the Sydney Metro – Western Sydney Airport stabling, and maintenance facility has been included in this assessment.

The Sydney Metro – Western Sydney Airport stabling and maintenance facility will be located at Orchard Hills, south of Blaxland Creek and north of Patons Lane. Access to the facilities is provided by Patons Lane.

Construction of the facility has commenced and is expected to be operational by 2027. It is forecasted that traffic will be generated from the stabling and maintenance facility during its construction and operation.

Peak hour construction movements as reported in the *Construction Traffic Management Plan – SSTOM – Orchard Hills Stabling and Maintenance Facility (Environmental Impact Statement (EIS) and Park Life Metro (PLM))* have been considered for the modelled scenarios, with traffic data shown in Table 5-5 and Table 5-6, respectively.

Table 5-5 Peak construction movements in 2024/ 2025 for the Sydney Metro – Western Sydney Airport stabling and maintenance facility (EIS)

Source: Construction Traffic Management Plan – Orchard Hills Stabling and Maintenance Facility (Table 6)

Vehicle Type*	AM peak (7:30-8:30am)			PM peak (4:30-5:30pm)		
	IN	OUT	Total	IN	OUT	Total
LV Staff	56	0	56	0	56	56
LV Deliveries	1	1	2	1	1	2
HV	11	11	22	11	11	22
Total	68	12	80	12	68	80

Table 5-6 Peak construction movements in 2024/ 2025 for the Sydney Metro – Western Sydney Airport stabling and maintenance facility (PLM)

Source: Construction Traffic Management Plan – Orchard Hills Stabling and Maintenance Facility (Table 6)

Vehicle Type*	AM peak (7:30-8:30am)			PM peak (4:30-5:30pm)		
	IN	OUT	Total	IN	OUT	Total
LV Staff	30	0	30	0	50	50
LV Deliveries	1	1	2	1	1	2
HV	8	8	16	8	8	16
Total	39	9	48	9	59	68

The cumulative construction assessment has incorporated the higher background traffic volumes from Table 5-5 on Patons Lane.

Oversize-overmass (OSOM) vehicles are expected to access the SSTOM site from May 2026, for deliveries of large items such as rolling stock, transformers and other large components. OSOM vehicles required for SSTOM's construction site are expected to be completed outside of general peak periods, under full traffic control and using escort vehicles. Sydney Metro will provide notice of their scheduled deliveries to ensure access via Patons Lane is maintained and potential conflicts are managed. AIBP construction vehicles will not be permitted to access the site overnight, with construction vehicle movements anticipated to occur between 6am and 6pm only. Therefore, SSTOM's OSOM vehicles are not anticipated to experience any disruptions due to AIBP's construction vehicles.

5.2.2 Luddenham Road and Patons Lane traffic survey

Matrix was commissioned between Monday 24 March to Friday 28 March 2025, to provide five-day intersection traffic counts at the Luddenham Road and Patons Lane intersection. The survey captures current

construction traffic volumes for the Sydney Metro stabling and maintenance facility and traffic generated by the operational Patons Lane Resource Recovery Centre.

To align with this assessment, the five-day survey data for the AM period between 6am and 9am and PM period between 3pm and 6pm was analysed. AM and PM peak hours for assessment were determined by taking the highest combined hourly northbound and southbound through movements on Luddenham Road from the survey. As a result, the AM peak hour assessed was based on survey data on 27 March, between 7am and 8am, while the PM peak hour assessed was based on survey data on 26 March, between 4:30pm and 5:30pm. The survey counts for the AM and PM peak have been summarised in Figure 5-2.

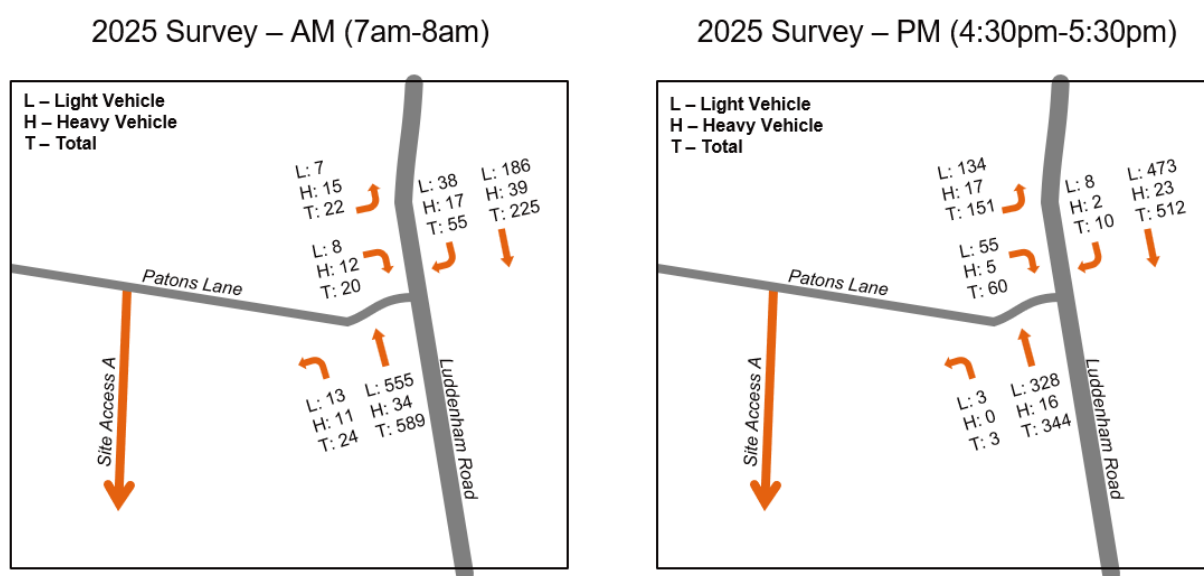


Figure 5-2 Matrix survey (2025) Luddenham Road / Patons Lane intersection counts

Furthermore, as part of the on-going consultation process, Sydney Metro / Park Life have provided traffic volumes during the identified survey peak periods illustrated above for the existing stabling and maintenance facility construction site. The traffic attributed to the existing Sydney Metro construction site is summarised in Table 5-7 below.

Table 5-7 Survey (2025) - Sydney Metro construction traffic volumes

Vehicle Type*	AM peak (7:00-8:00am)			PM peak (4:30-5:30pm)		
	IN	OUT	Total	IN	OUT	Total
LV	10	2	12	0	68	68
HV	2	6	8	1	5	6
Total	12	8	20	1	73	74

For the Year 2027 operational assessment, an annual traffic growth rate of 2.5% has been applied to the survey data. Sydney Metro construction traffic volumes above have been deducted from the peak construction traffic anticipated by the stabling and maintenance facility (refer Table 5-5).

5.2.3 STFM model

Background traffic volumes for Luddenham Road were derived from TfNSW traffic forecasting modelling for the morning peak period (7am to 9am) and the afternoon peak period (4pm to 6pm) to inform the future year 2036

traffic assessment. These forecasts were provided from a model that was based on land use forecasts from LU2019 and demand matrices from Strategic Transport Model V3.8. Traffic volumes were factored by 0.55 to estimate peak hour volumes. Table 5-8 summarises the peak hour traffic volumes on Luddenham Road.

The assessment (Year 2036) adopts the decreased traffic volumes in line with the traffic forecast.

Table 5-8 Forecasted background traffic volumes for Luddenham Road determined from STFM inputs

	AM peak (7-8am)		PM peak (5-6pm)	
	Northbound	Southbound	Northbound	Southbound
2036	760	470	480	650

A copy of the STFM outputs is provided in Appendix C.

5.2.4 Other construction surrounding the site

M12 Motorway Project

The M12 Motorway Project expects its peak construction volumes to occur in 2024. However, within the M12 Motorway EIS, Section 6.2.3 of Transport and Traffic describes the site access routes for the project, which is via Elizabeth Drive, Mame Road, The Northern Road and Wallgrove Road (Source: *M12 Motorway Amendment Report, Section 6.2*) The construction traffic assessment did not include Luddenham Road and Patons Lane as an access route during construction. Therefore, the cumulative traffic impact for this TIA did not consider the expected traffic induced by the M12 Motorway.

Western Sydney Airport

Construction for the Western Sydney Airport (WSA) is underway and expected to be completed by 2026. The WSA EIS report describes the construction traffic accesses the site via Elizabeth Drive, Anton Road, The Northern Road, and Badgerys Creek Road. The construction traffic assessment did not include Luddenham Road and Patons Lane as an access route during construction. Therefore, the cumulative traffic impact for this TIA did not consider the expected traffic induced by WSA.

Mamre Road Upgrade

As part of this project, the intersection of Luddenham Road and Mamre Road will be converted to a multiple lane, signalised intersection, to improve safety and traffic flow. Construction of the intersection is underway as of June 2025, resulting in a small section of Luddenham Road being closed between Old Luddenham Road and Mamre Road. The closure is expected to be in place until early 2026. TfNSW has diverted Luddenham Road traffic onto Old Luddenham Road, under the guidance of traffic control.

While there is no publicly available construction traffic assessment for the Luddenham Road and Mamre Road intersection upgrade, it is not anticipated that construction vehicles for the project will use Luddenham Road as an access route. The construction traffic assessment for the Mamre Road and Abbots Road intersection upgrade (also part of the Mamre Road upgrade project), conducted by Ason Group, makes no reference to Luddenham Road as an access route for heavy and light construction vehicles.

5.3 Traffic distribution

For the cumulative operational assessment, the following assumptions were made for traffic generated by the various components of the concurrent warehouse developments, based on STFM outputs:

- In the AM peak, 80 per cent of traffic generated by the proposal travelled inbound to the site, and 20 per cent outbound.
- In the PM peak, 60 per cent of traffic generated by the proposal travelled inbound to the site, and 40 per cent outbound.

The directional distribution and assignment of traffic generated by the proposed development will be influenced by several factors, including:

- The future transport and road configuration in the vicinity of the site: the dominant freeway in the area is the M4 Western Motorway in the north, but the importance of the southern areas will be increasing with the proposed M12 and the development of the broader Aerotropolis (Northern Gateway Precinct).
- The distribution of residential, commercial, and other land use development in the surrounding areas.
- The likely distribution of employees' places of residence in relation to the site.
- The configuration and staging of the access points to the site.

In consideration of the above, the following distribution and assignments were adopted in this assessment, based on STFM outputs:

- To/ from Luddenham Road north (towards Mamre Road): 70 per cent
- To/ from Luddenham Road south (towards Elizabeth Drive): 30 per cent.

5.4 Modelling approach and assessment criteria

The assessment of the performance of the intersections were tested using SIDRA Intersection 9.0. All traffic models were modelled as a 'Network' site in SIDRA 9.1.

The operational performance of the intersection was evaluated by assessing the average vehicle delay and the corresponding **Level of Service** (LoS). The average vehicle delay and level of service were assessed in accordance with the RMS Traffic Modelling Guidelines and is summarised in Table 5-9.

The RMS Traffic Modelling Guidelines recommends that LoS is determined by the critical movement with the highest delay for priority intersections such as roundabout and sign-controlled intersections. With these intersection controls (roundabout, stop and give way sign controls), some movements may experience high levels of delay while others may experience a minimal delay.

The level of service criteria for a signalised intersection is related to the average intersection delay measure in seconds per vehicle.

Table 5-9 LOS criteria for intersection capacity analysis

Level of service	Traffic signals	Description of intersection operation
A	$d \leq 14$	Good operation
B	$15 \leq d \leq 28$	Good with acceptable delays and spare capacity
C	$29 \leq d \leq 42$	Satisfactory
D	$43 \leq d \leq 56$	Operating near capacity
E	$57 < d \leq 70$	At capacity, at signals, incidents will cause excessive delays Roundabouts require other control mode
F	$d > 70$	Unsatisfactory and requires additional capacity.

Source: RMS Traffic Modelling Guidelines, 2013

Degree of Saturation (DoS) is equal to the *demand to capacity ratio* for each traffic movement, with the overall intersection DoS defined as the highest DoS of all individual movements calculated at the intersection. For various intersection controls, the following DoS ratings are defined in Table 5-10.

Table 5-10 Degree of Saturation (SIDRA 9.0)

Degree of Saturation (DoS)	Rating
DoS < 0.6	Excellent
0.6 < X < 0.7	Very good
0.7 < X < 0.8	Good
0.8 < X < 0.9	Acceptable
0.9 < X < 1.0	Poor
X > 1.0	Very poor

The intersection traffic performance targets established for this assessment include:

- An overall intersection level of service (LoS) D or better
- A degree of saturation (DoS) of:
 - Less than 0.85 for roundabouts
 - Less than 0.90 for signalised intersections.

5.5 Operational traffic impact assessment


5.5.1 Assessed network and traffic demand

This traffic impact assessment includes traffic modelling using SIDRA Network software to assess the impacts of the Storage and Distribution warehouse development (Table 5-1Table 5-3), and concurrent AIBP warehouse developments at the Luddenham Road/ Patons Lane intersection and Patons Lane/ Site Access A intersection. For each of these intersections the following scenarios (A and B) have been considered:

- **Year 2027** – AIBP cumulative operational development, including storage and distribution operational demand, 2025 Matrix survey data (applied annual growth rate 2.5%) and peak Sydney Metro construction data.
- **Year 2036** – complete AIBP operational development, including storage and distribution operational demand, STFM model 2036 data.

Table 5-11 summarises the turning movements that result from the generation and distribution of operational trips during the AM and PM peak periods for the storage and distribution warehouse, 2027 project state of the wider AIBP development (storage and distribution plus other concurrent warehouse developments), and the ultimate development state for AIBP.

Table 5-11 Turning movement demands

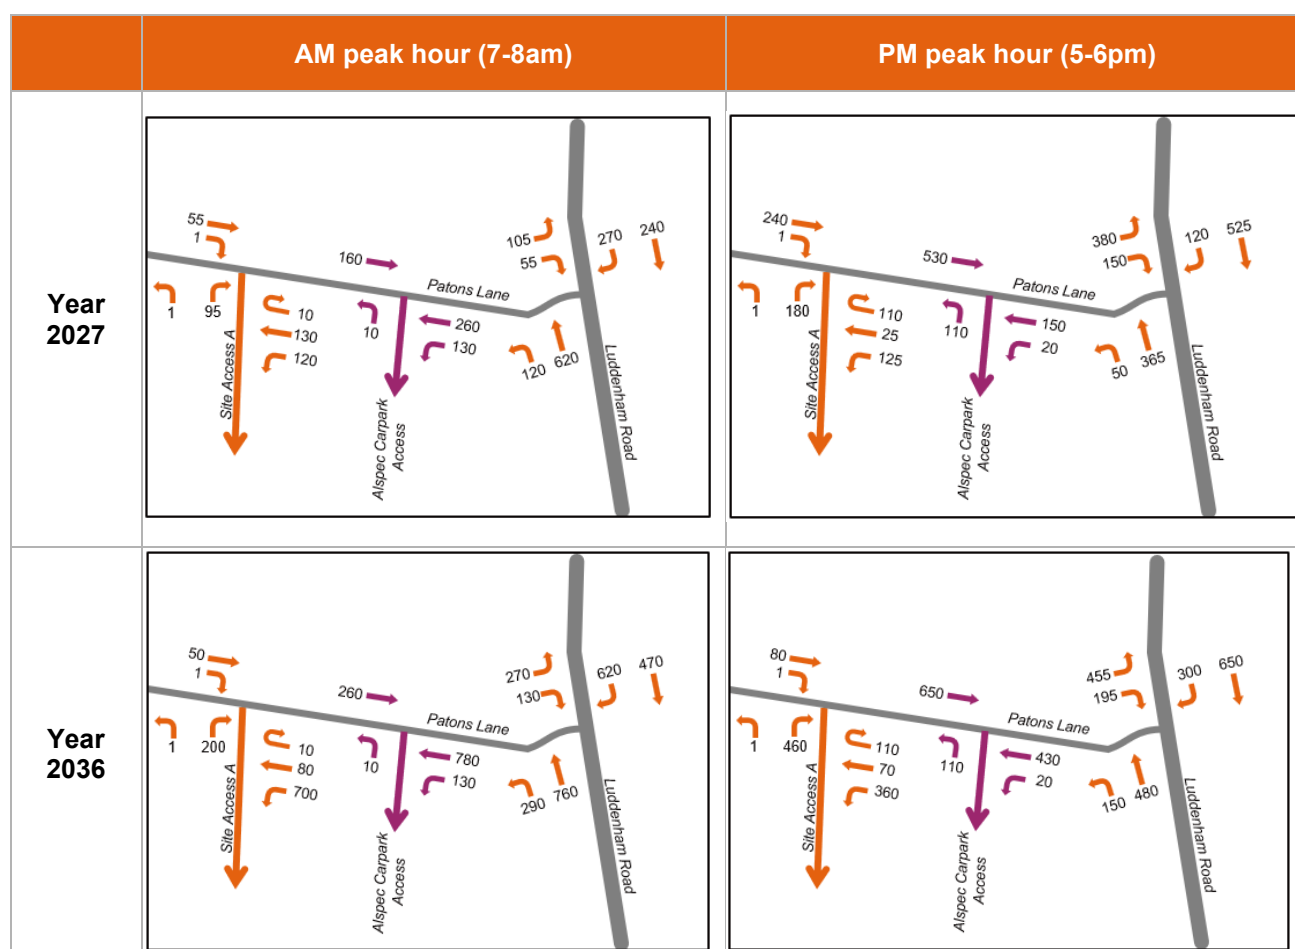

Detailed modelling for the AIBP masterplan, which includes expected operational traffic from the Storage and Distribution warehouse, was conducted as part of the TIA (Arcadis, 2023). The 221 Luddenham Road, Orchard Hills TIA indicated no adverse impact on the traffic distribution of the surrounding road networks. The modelling approach and assessment criteria, as well as the intersection capacity assessment, are included in the TIA (Arcadis, 2023).

In addition, Table 5-12 summarises the projected traffic for the entire AIBP and the Storage and Distribution warehouse, along with construction phase traffic.

Table 5-12 Development demand comparison

Assessment		AM peak hour	PM peak hour
AIPB Traffic Impact Assessment (Arcadis, 2023)	Ultimate development operational demand	844 vehicles	823 vehicles
	Operational demand (excluding staff)	80 vehicles	67 vehicles
Storage and Distribution warehouse assessment (this report)	Construction demand	80 vehicles	30 vehicles

The following intersections were assessed in the scenarios as part of this traffic impact assessment:

www.arcadis.com

- Luddenham Road and Patons Lane:**
 The intersection was modelled as a signalised intersection where Luddenham Road was configured with a northbound and southbound auxiliary lane, two right-hand turn short lanes on the northern approach and a high entry left turn lane on the southern approach. Patons lane was modelled as two lanes on both east and west approach.
- Patons Lane and Site Access Road:**
 The intersection was modelled as a two-lane roundabout with Patons Lane modelled as two lanes on both east and south approaches and one lane on the west approach.

The assessed network configuration is provided in

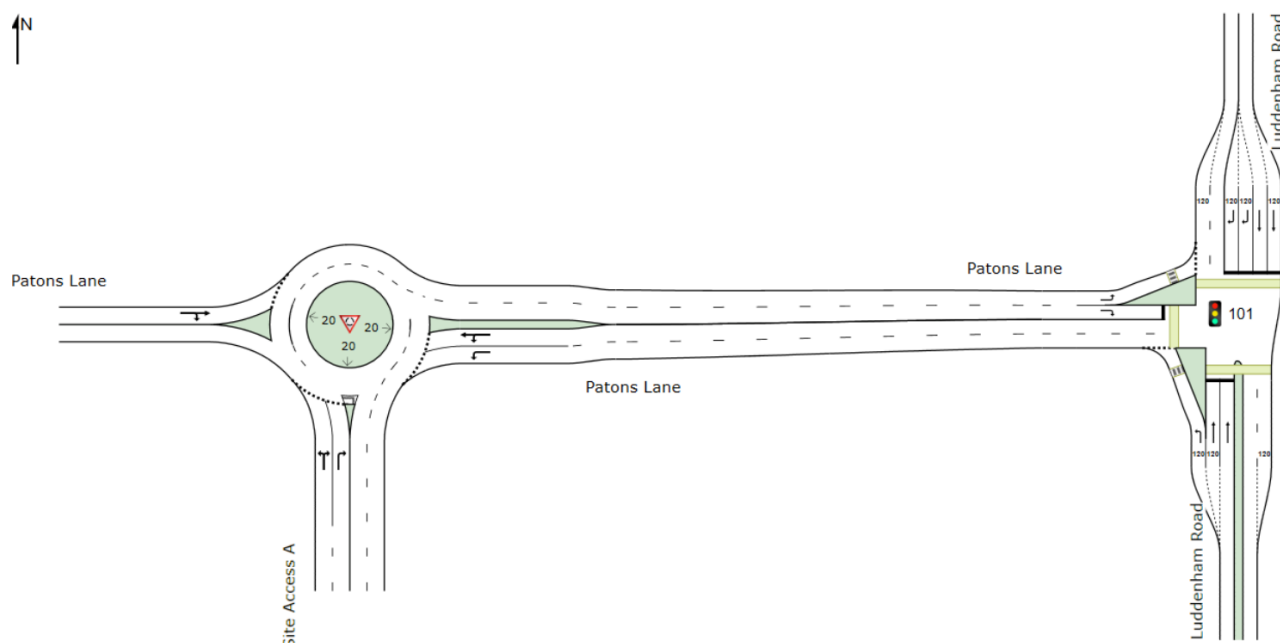


Figure 5-3 Network layout for the assessed intersection at Luddenham Road and Patons Lane

5.5.2 Findings and results

The AM and PM peak intersection performance results for Year 2027 and Year 2036 is summarised in Table 5-13 and Table 5-14, respectively.

Table 5-13 Year 2027 intersection modelling results for storage and distribution warehouse

Year	Intersection	Intersection treatment	Peak hour	Volume	Average delay (sec)	DoS	LoS
2027	Patons Lane / Site Access A Road	Roundabout	AM	419	10.8	0.106	A
			PM	705	10.8	0.286	A

	Luddenham Road/ Patons Lane	Signalised intersection	AM	1464	24.3	0.539	B
			PM	1525	18.6	0.336	B

Table 5-14 Year 2036 intersection modelling results for storage and distribution warehouse

Year	Intersection	Intersection treatment	Peak hour	Volume	Average delay (sec)	DoS	LoS
2036	Patons Lane / Site Access A Road	Roundabout	AM	1097	12.4	0.306	A
			PM	1140	15.4	0.221	B
	Luddenham Road/ Patons Lane	Signalised intersection	AM	2674	30.9	0.844	C
			PM	2347	22.8	0.555	B

The assessment identified that the Patons Lane and Site Access Road intersection meets both the traffic performance criteria for capacity and delay in the ultimate state scenario.

For the Luddenham Road and Patons Lane intersection, the signalised intersection treatments meet the traffic performance criteria for delay in the ultimate state scenario. The signalised intersection meets the criteria for capacity in the ultimate stage with a maximum DoS of 0.851. This is within the acceptable DoS of 0.9 set by the RMS modelling guidelines.

Further development of the ultimate scenario may be required including a review of the forecasted volumes given the likelihood of key road corridor upgrades that may be completed by 2036.

A copy of the SIDRA modelling outputs is provided in Appendix D.

5.5.3 Operational traffic impact

Based on a comparison of traffic demand against the broader AIBP traffic impact assessment, and the operational traffic generated by the proposed development, the future road network will accommodate the operational traffic in both the project state (Stage 1 of the AIBP development) and the ultimate state. The total traffic demand for this proposal is less than the modelled demand, with the SIDRA results demonstrating both the Site Access Road/ Patons Lane and Patons Lane/ Luddenham Road intersections performing at a LoS C or better in both scenarios.

A swept path analysis has been undertaken for the warehouse hardstand movements to accommodate B-double truck movements. The clearances for the trucks in this area was deemed sufficient and a copy of the swept path diagram is provided in Appendix B of this report.

5.5.4 Operational traffic management measures

To support non-private vehicle access to the site during normal operations, a Green Travel Plan has been prepared that outlines the management measures that can be adopted for the development.

A copy of the Green Travel Plan is provided in Appendix E of this report.

5.6 Cumulative construction traffic impact

5.6.1 Construction impact

For this assessment, the existing intersection of Luddenham Road and Patons Lane, with a through lane in each direction on Luddenham Road, a southbound right-turn lane from Luddenham Road into Patons Lane, and a left and right turn approach lane out of Patons Lane into Luddenham Road was modelled to assess:

- **Base Case** – 2025 traffic conditions, as per survey conducted by Matrix and calibrated to reflect the surveyed queue lengths.
- **Scenario A** – 2025 traffic conditions, as per survey conducted by Matrix and calibrated to reflect the surveyed queue lengths, Sydney Metro peak EIS construction traffic, without construction traffic from AIBP works.
- **Scenario B** – 2025 traffic conditions, as per survey conducted by Matrix and calibrated to reflect the surveyed queue lengths, Sydney Metro peak EIS construction traffic, cumulative peak hour AIBP construction traffic demand.

The results summary of the SIDRA assessment for the construction traffic scenarios identified above is provided in Table 5-15.

Table 5-15 SIDRA modelling outputs – construction

Year	Intersection	Intersection treatment	Peak hour	Volume	Average delay (sec)	DoS	LoS
2025	Base Case - Luddenham Rd/Patons Lane	Sign controlled intersection	AM	984	42.9	0.353	D
			PM	1137	84.9	0.888	F
	Scenario A - Luddenham Rd/Patons Lane	Sign controlled intersection	AM	1049	52.0	0.395	D
			PM	1163	115.3	0.987	F
	Scenario B - Luddenham Rd/Patons Lane	Sign controlled intersection	AM	1176	67.9	0.465	E
			PM	1245	329.3	1.282	F

For the detailed cumulative construction impact assessment, refer to *Construction Traffic and Pedestrian Management Plan for Bulk Earthworks DA* (Arcadis, July 2025).

5.6.2 Construction mitigation and management measures

A range of mitigation and management measures would be needed to manage the impacts to traffic and transport during construction. These include:

- A Construction Traffic Management Plan (CTMP) would be prepared and implemented in accordance with the Traffic control at work sites, version 6.1 (TfNSW, 2022). The construction traffic management

plan would enable the safe management of traffic, provide for the safety of construction personnel, and minimise impacts on the local community. The plan would include as a minimum:

- Hours of construction activity and haulage, which do not impose on peak periods and school drop-off and pick-up times
 - Haulage routes, including the source locations and their access points for the site
 - Design and construction of access points in accordance with TfNSW and Council requirements
 - The design of temporary works required to accommodate the heavy vehicle movements along the short sections of local roads required for access to ancillary sites
 - Designated areas within the proposal area for heavy vehicle turning movements, parking, loading and unloading
 - On-site parking arrangements for construction, supervisory and management personnel
 - Safety principles for construction activities, such as speed limits around the site and procedures for specific activities
 - Induction requirements for construction, supervisory and management personnel
 - Procedures for inspections and record keeping for maintaining traffic control measures
 - Contact details of key proposal personnel.
- For each stage of construction, detailed Traffic Guidance Schemes would be prepared and implemented in accordance with the Traffic control at work sites, version 6.1 (TfNSW, 2022) by suitably qualified personnel.
 - Dilapidation surveys of roads around the proposal area would be undertaken prior to their use for construction as well as after construction is complete. Any damage to roads will be repaired.
 - When AIBP construction vehicles are using Patons Lane for access and egress during off peak periods, full time traffic controllers will be located at the Luddenham Road and Patons Lane intersection, east of the Patons Lane site access. In addition, full time traffic controllers will be located at the existing site access driveway on Luddenham Road, south of the existing Luddenham Road and Patons Lane intersection. This will ensure that traffic movements to/ from the AIBP site are coordinated with Sydney Metro construction vehicle movements, minimising disruptions for Sydney Metro's construction activities and deliveries.
 - During the AM and PM peak hours, Sydney Metro construction traffic will be given priority access via Patons Lane. AIBP construction vehicles will not be permitted to access Patons Lane during Sydney Metro AM and PM peak construction times.
 - Traffic surveys are to be undertaken during construction around the site of works, to monitor how the site is being accessed by AIBP vehicles and to give confidence that AIBP construction traffic is not contributing to delays for Sydney Metro construction vehicles. These surveys will also enable AIBP to monitor their contribution to the traffic on the surrounding road network throughout the construction period.
 - Patons Lane access must always be maintained to not impede on Sydney Metro's construction activities. AIBP construction vehicles are not permitted to access the site during critical OSOM deliveries for Sydney Metro. OSOM deliveries such as rolling stock and transformers will have priority access to Patons Lane overnight, with the Sydney Metro team providing notice to the AIBP site team of their delivery schedule.
 - All vehicles accessing the site for the purpose of material delivery and construction works would be fitted with safety flashing lights located on the top of the vehicle and functioning reverse beepers. All operators will be licensed for the particular item of plant/ equipment and will demonstrate competence in the use of the plant/ equipment as part of the site management and safety plan.
 - Direct access at the frontages would be provided with adequate sight distances relating to the posted road speed. This will allow vehicles on the main road to see vehicles emerging from the construction compound and will allow ample room to slow down and stop if necessary. Similarly, it will allow vehicles

waiting to emerge from the site access, adequate sight distance to see approaching vehicles and determine acceptable gaps for them to enter the main road traffic.

Site access to Sydney Metro Western Sydney Airport stabling and maintenance facility

Patons Lane is the sole vehicular access road to the Sydney Metro Western Sydney Airport stabling and maintenance facility. Access to the Sydney Metro facility along Patons Lane must be always maintained as there are no alternative access options. Ongoing stakeholder consultation with Sydney Metro's D&C is required during construction to understand the vehicular movements associated with the stabling and maintenance facility and to mitigate any reduction in access and negative traffic impacts.

6 Car parking assessment

The site has specific provisions with parking outlined in the Penrith Development Control Plan (DCP) E18 Luddenham Road Industrial Business Park. A summary of the rates is outlined in Table 6-1.

Table 6-1 Parking requirements for Luddenham Road Industrial Business Park (Source: Penrith DCP E18 Luddenham Road Industrial Business Park)

Activity	Parking requirement
Freight transport facilities	1 per transport vehicle present at peak vehicle accumulation plus 1 per 2 employees, or to be determined by a car parking survey of a comparable facility
Industries	1 space per 200 m ² GFA or 1 space per 2 employees, whichever is the greater
Vehicle body repair workshops/ vehicle repair stations	3 spaces per 100 m ² GFA or 6 per work bay, whichever is the greater
Warehouses or distribution centres	1 space per 300 m² GFA or 1 space per 4 employees, whichever is the greater
Ancillary office space	1 space per 40 m² GFA
Neighbourhood shops	1 space per 40 m ² of gross leasable floor area (GLFA)
Accessible parking	Accessible car spaces should be in accordance with the Access to Premises Standards, Building Code of Australia and AS2890.
Bicycle parking	1 space per 600 m ² GFA of office and retail space (over 1200 m ² GFA) 1 space per 1000m ² GFA of industrial activities (over 2000 m ² GFA)
Electric vehicle	1 space per 40 car spaces
Car share	1 space per 40 car spaces
Electric bicycle	A charging station for electric bicycles is provided for the first 5 bicycle spaces within a development, and for every 10 bicycle spaces thereafter
Motorcycle parking	1 space per 10 car spaces

6.1 Proposed parking provisions

The parking provisions for the site are identified in the Penrith DCP E18 Luddenham Road Industrial Park. The minimum requirements stipulated in the Penrith DCP aims to ensure that the development functions efficiently and there is limited impact on street parking and congestion. The car parking requirements for warehouse developments are:

- 1 space per 300 m² of warehouse GFA.
- 1 space per 40 m² of GFA for ancillary office spaces.

An assessment of the parking requirements for the proposed development is provided in Table 6-2.

Table 6-2 Parking requirements

Land use	Area (m ²)	Parking rate	Parking requirement (spaces)
Storage and distribution warehouse	45,449		
Warehouse	43,606	1 space per 300 m ² GFA	146
Office	1,843	1 space per 40 m ² GFA	46
Total			192

The current construction plans for the storage and distribution warehouse facility indicate 246 private vehicle car spaces will be provided for the development. This exceeds the expected minimum parking demand generated by the proposal according to Penrith DCP E18.

Electric vehicle parking

As outlined in the Penrith DCP E18 Luddenham Road Industrial Business Park, electric vehicle parking and charging stations are to be integrated into car park design on the development site. This includes:

- Charging stations to be located within or immediately adjacent to the parking spaces.
- The charging stations to be located clear of pedestrian paths of travel and do not impede desire lines.
- A provision for electric vehicle parking of is identified as one space per 40 car spaces.

To meet the Penrith DCP E18 Luddenham Road Industrial Business Park controls, at least seven car spaces must be designated for electric vehicles with charging stations. The Penrith DCP E18 Luddenham Road Industrial Business Park controls outline all car parking spaces should be designed to be easily converted into electric charging stations.

Car share parking

The Penrith DCP E18 Luddenham Road Industrial Business Park outlines car share parking rates for the development. One space per 40 car spaces will be allocated for car share. To meet the requirements outlined in the Penrith DCP, at least seven car spaces are to be provided for car sharing spaces.

Motorcycle parking

The motorcycle parking requirements are outlined in the Penrith DCP E18 Luddenham Road Industrial Business Park. The site-specific controls outline one motorcycle space per 10 car spaces. To meet the minimum requirements, the site must provide at least 25 motorcycle spaces.

6.2 Accessible parking

As outlined in Part C10 of the Penrith Developmental Control Plan (DCP), accessible parking is to be provided in accordance with the Disability (Access to Premises – Buildings) Standards 2010 from the Building Code of Australia and Australian Standard AS 2890.

The accessible (disabled) parking requirements in the Disability (Access to Premises – Buildings) Standards states for offices (Class 5) and warehouses (Class 7) should be provided at the rate of one space for every 100 car spaces or part thereof.

Accessible (disabled) spaces within the industrial development are to be designed in accordance with the Australian Standard AS 2890.6 for accessible (disabled) parking. These parking spaces shall be designed with minimum dimensions of 2.4-metre width and 5.4-metre length with an aisle width of 5.8 metres.

For the proposal to meet the requirements stipulated in the Penrith DCP, the development will be required to provide at least three accessible parking spaces.

6.3 Bicycle parking

Regarding bicycle parking and end-of-trip facilities, the Penrith DCP E18 Luddenham Road Industrial Business Park permits bicycle parking to be in secure, visible, and accessible locations, and provided with weather protection, in accordance with AS2890.3:1993 Bicycle Parking Facilities.

The following associated facilities are to be provided:

- For ancillary office and retail space with a gross floor area over 2,500 m², at least one shower cubicle with ancillary change rooms.
- For industrial activities with a gross floor area over 4,000 m², at least one shower cubicle with ancillary change rooms.
- Change and shower facilities for cyclists and are to be conveniently located close to the bicycle storage areas.
- Where the building is to be strata-titled, the bicycle storage facilities and shower/ change facilities are to be made available to all occupants of the building.

In terms of overall bicycle parking provision, the Penrith DCP E18 Luddenham Road Industrial Business Park provides the following bicycle parking rates for the site:

- 1 space per 600 m² GFA of office and retail space (over 1,200 m² GFA)
- 1 space per 1,000 m² GFA of industrial activities (over 2,000 m²).

As the proposal is developed, appropriate bicycle parking and storage will be provided in accordance with the Penrith DCP. A total of 46 bicycle parking spaces must be provided on site.

6.3.1 Electric bicycle parking

Requirements for electric bicycle facilities are set out in the Penrith DCP E18 Luddenham Road Industrial Business Park. Charging stations will be provided on-site at a rate in accordance with the DCP as the proposal is developed.

Charging stations for electric bicycles should be provided for the first five bicycle spaces within a development, and for every 10 bicycle spaces afterwards. A total of five electric bicycle charging station will be provided at the completion of the proposal.

6.4 Parking summary

The storage and distribution warehouse development currently includes a provision of a total of 246 private vehicle car spaces, which meets the minimum parking requirement of 194 car spaces. From the 246 car spaces proposed:

- At least seven car spaces with charging stations for electric vehicles.
- At least seven spaces should be provided as car share spaces.
- At least 25 spaces should be provided for motorcycles.
- At least three accessible parking spaces should be provided.

The bicycle parking rates required to meet the requirements specified in the Penrith DCP have been outlined in this report and will be accommodated during the proposal development.

In summary, the parking demand generated by the land uses will be met on-site and will meet the requirements set out in the Penrith DCP E18 Luddenham Road Industrial Business Park. Current site plans for the car parking and manoeuvring were deemed to be satisfactory after being assessed against AS 2890 Parts 1, 2 and 6, and the Penrith DCP.

7 Access and internal design assessment

7.1 Site access and internal configuration layout

The development plans show four vehicle access points along the eastern side of the warehouse boundary, within AIBP's internal road network. Light and passenger vehicle access is separated from heavy vehicle access, with dedicated entry/exit driveways provided for each within the development.

Light vehicles will be permitted to enter/exit the private vehicle carpark from two separate access points, with one located roughly at the centre of the eastern boundary and the other further towards the south. There are 246 LV car spots located within the previous parking area, to be used for staff and customers during warehouse operations.

The truck entry access to the hardstand is provided on the southern boundary of the site, with the hardstand wrapping around the warehouse. To facilitate smooth traffic flow, all heavy vehicles will travel in a clockwise direction around the hardstand to reach the truck exit, located on the northern boundary of the site. All docks have been designed for right hand down movements.

A range of heavy vehicle facilities have been provided on the hardstand, including docking stations (on-grade and recessed docks), heavy vehicle parking bays, pallet van parking a waste collection point, service zones and a weighbridge.

A copy of the swept path analysis for the site is provided in Appendix B. The swept paths indicate there is adequate space for heavy (B-double, HRV) and light vehicle (B99) turning and parking movements on the hardstand and car park. A potential clash can be observed on the southern hardstand parallel parking bays; however, this type of parking turn would not occur when the two rear parks are full. Heavy vehicle parking movements will be operationally managed by the tenant.

7.2 Car parking

A total of 246 private vehicle parking spaces are accessible along the eastern site boundary of the warehouse. The design of the parking area complies with the guidance on driveway access into the development, warehouses and car parking spaces shown in AS 2890.1 Off-street car parking. Provisions for accessible parking spaces, as identified in Section 5.2, should be considered in accordance with AS 2890.6 Parking facilities Off-street parking for people with disabilities.

In addition, the hardstand accommodates 64 heavy rigid vehicle (HRV) and 19 B-double parking spaces. Vehicle movements on the hardstand have been designed for one-way traffic flow in a clockwise direction. This will reduce the risk of congestion for heavy vehicles manoeuvring through the site during operations. A swept path analysis indicated the design of the hardstand is acceptable for B-double movements (Appendix B).

7.3 Pedestrian access

Along the frontage of the site, the road reserve width is sufficient to accommodate footpaths along both sides of the road in accordance with the requirements of the Penrith DCP. It is anticipated that the frontage onto Luddenham Road and Patons Lane will have footpaths as part of the Luddenham Road widening construction works. Within the site, pedestrian access is provided to the office and warehouse, via the pedestrian gate located between the southern private vehicle and truck entry access points. The pedestrian gate and pathway to the

warehouse is separate from the light and heavy vehicle access points. This will allow pedestrians clear access from the building into the broader pedestrian network outside the site.

Within the site, pedestrian pathways have been clearly identified within the warehouse. Delineation of pathways for pedestrians across the hardstand have been provided from the heavy vehicle parking areas to access the two dock offices at the northern and southern sections of the hardstand.

8 Summary


The proposal is for the development of a 104,959 m² parcel of land as part of Alspec Industrial Business Park (AIBP) construction. The Storage and Distribution warehouse development comprises a 43,606 m² warehouse, 1,843 m² between two offices office, 30,939 m² hardstand, and supports car parking for both heavy and light vehicles.

The key findings of this assessment are:

- Access to the site will be provided via the internal road within the AIBP development with access to the broader road network via Patons Lane or Luddenham Road.
- The traffic demands associated with the potential development during construction and the operation of the site is expected to be accommodated safely.
- The provided car parking meets the anticipated demands generated by the site. Provisions for accessible parking and bicycle parking will be accommodated during further development of the proposal.
- The internal configuration of the site has been designed in accordance with Penrith City Council's DCP and the relevant Australian Standards.


It is therefore concluded that the proposed Storage and Distribution warehouse development at the subject site of 221 Luddenham Road, Orchard Hills, is supportable on traffic planning grounds.

Appendix A Site plans

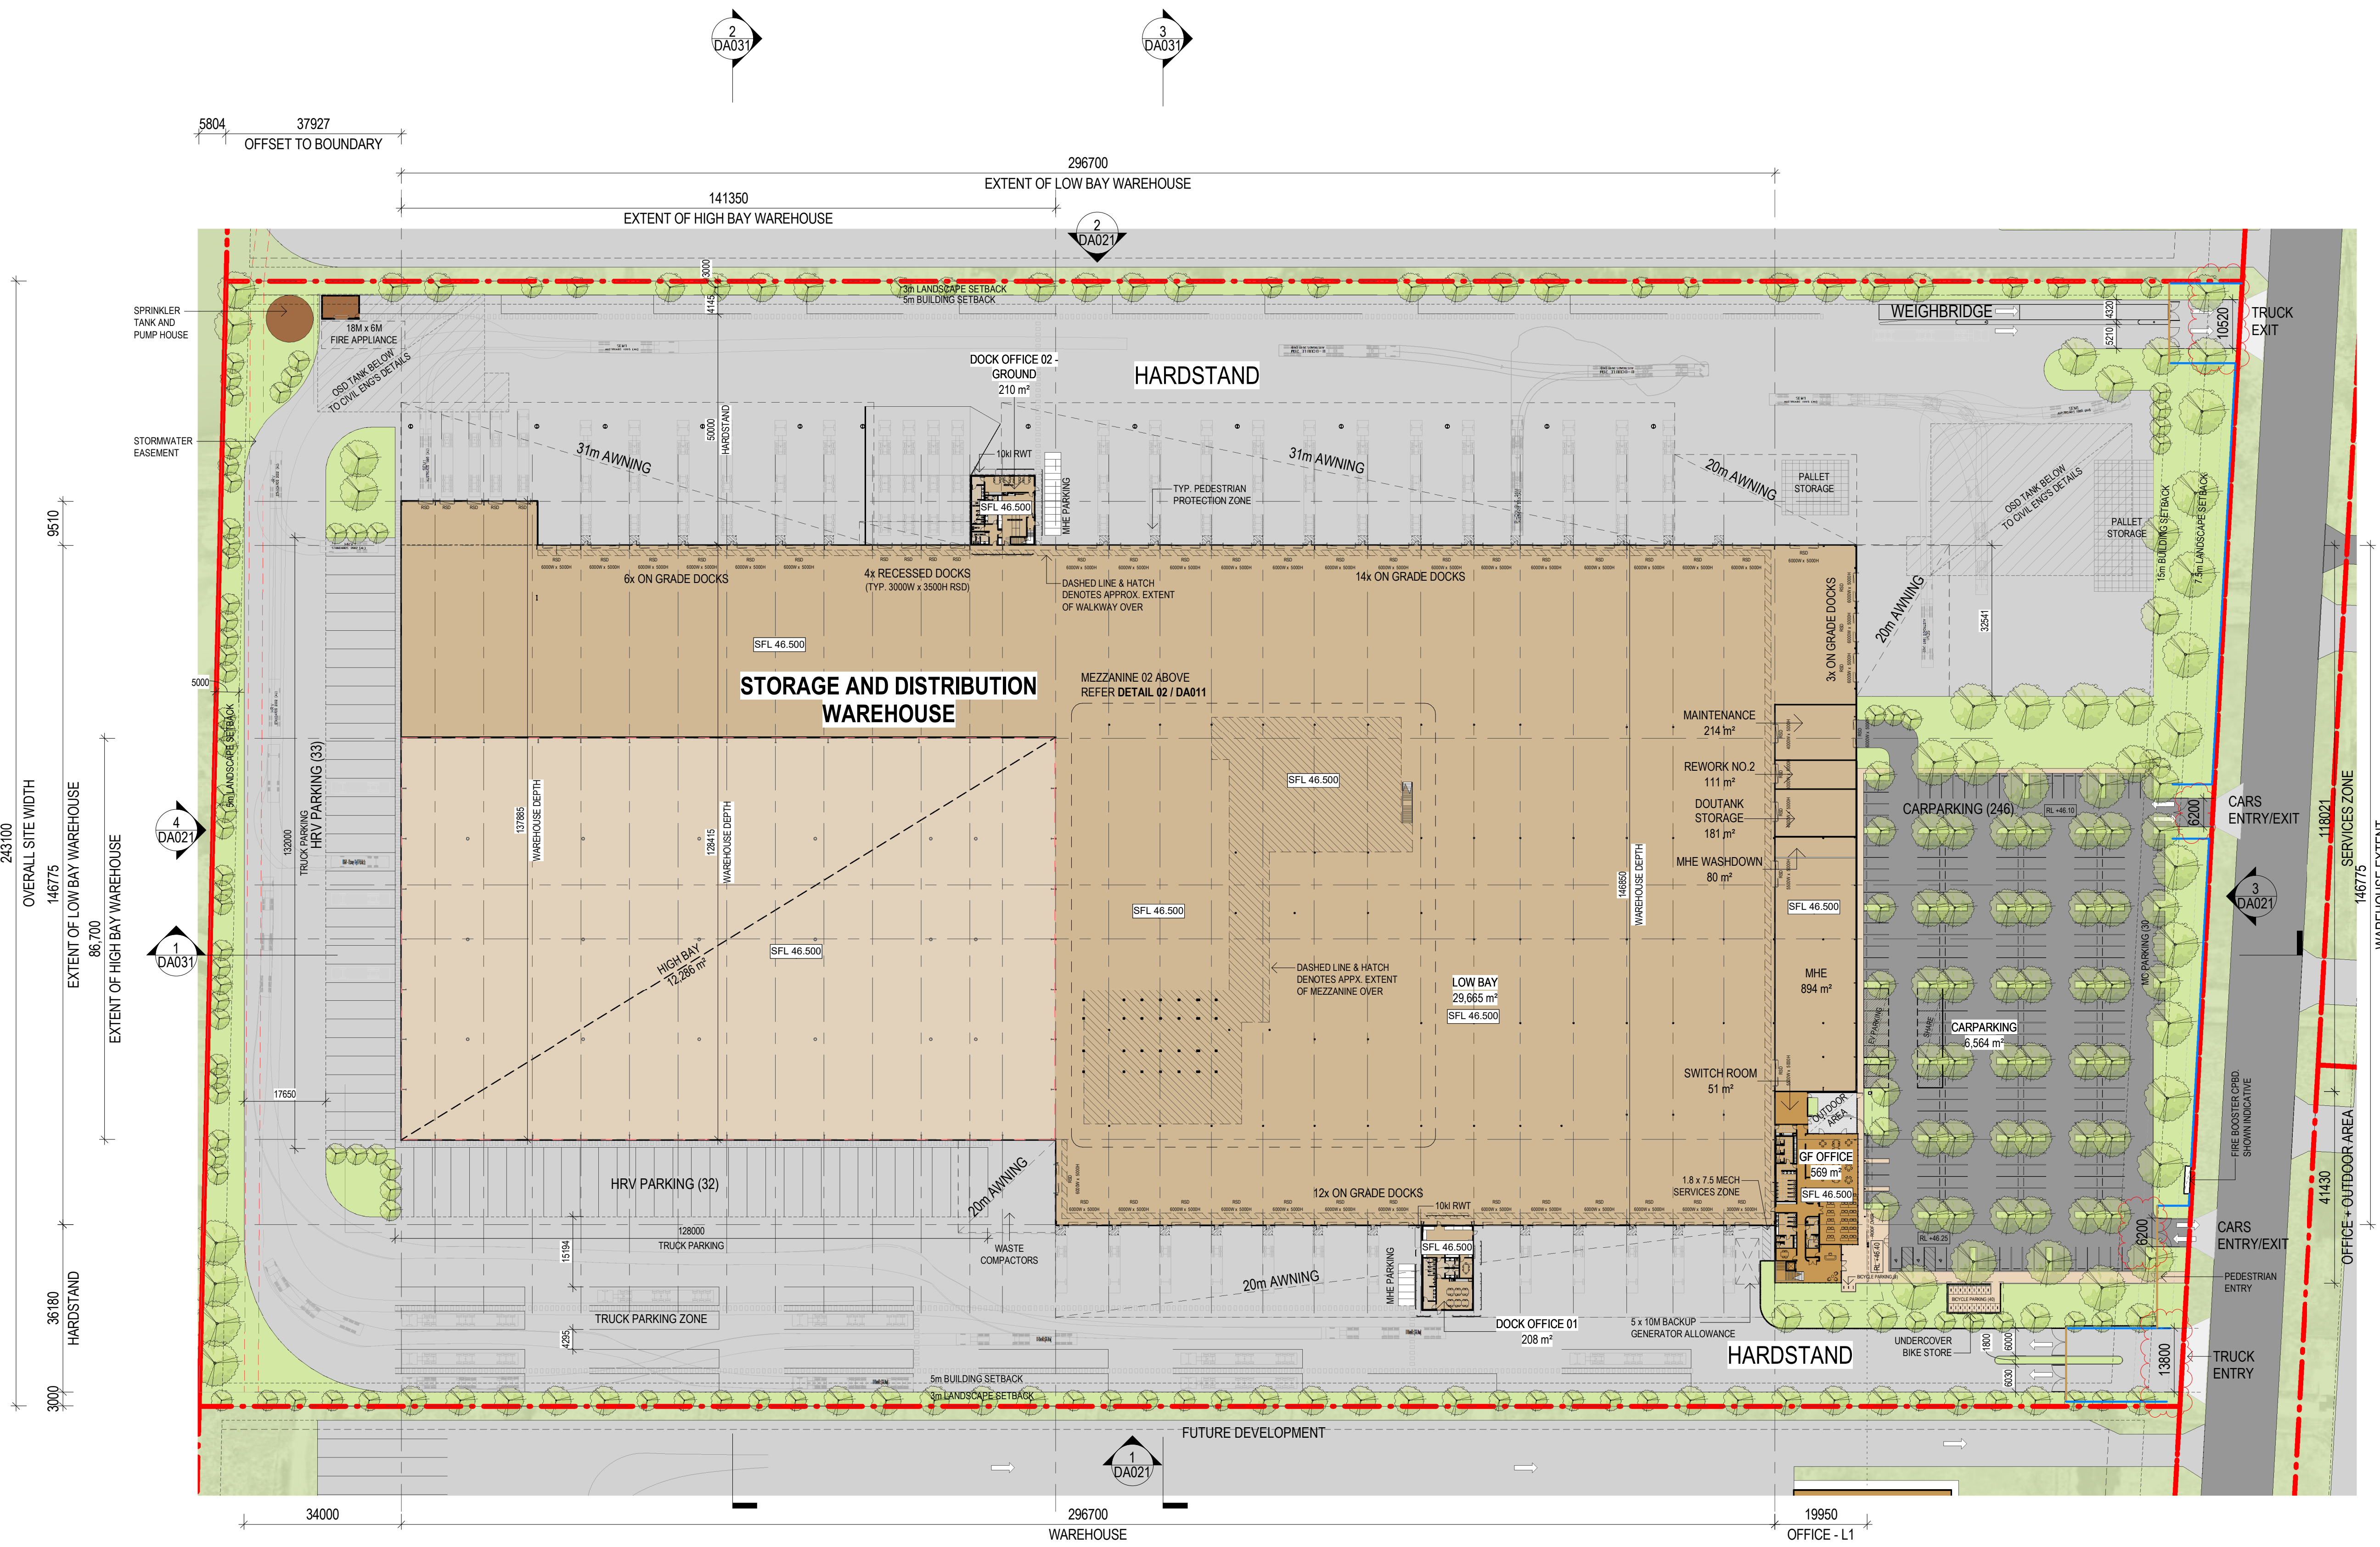


STORAGE AND DISTRIBUTION...	
LUDDENHAM ROAD, ORCHARD HILLS	
SITE AREA (m²)	104,959
Total Building Foot Print	44,593
WAREHOUSE AREA - GROUND FLOOR TOTAL (m²)	
LOW BAY AREA (m²)	29,665
HIGH BAY AREA (m²)	12,285
TOTAL WAREHOUSE AREA (m²)	41,950
MHE	
MHE WASH-DOWN	894
MAINTENANCE	80
REWORK NO.02	214
DOUTANK STORAGE	111
SWITCHROOM - MSB	181
PUMP ROOM AND TANKS	51
TOTAL SERVICES AREA (m²)	125
WAREHOUSE & SERVICES AREA	1,656
DOCK OFFICE 01(m²)	
DOCK OFFICE 02 (m²) - Ground	208
DOCK OFFICE 02 (m²) - Level 1	210
MAIN OFFICE (m²) - Ground	569
MAIN OFFICE (m²) - Level 1	646
TOTAL OFFICE AREA (m²)	1,843
TOTAL GLA AREA	45,449
FSR	
	0.43
MEZZANINE AREAS	
MEZZANINE 1 AREA (m²)	2,385
MEZZANINE 2 AREA (m²)	323
WAREHOUSE AREA - MEZZANINES TOTAL (m²)	2,708
TOTAL BUILDING AREA (m²)	48,157
PARKING	
BICYCLE PARKING	46
MOTORCYCLE PARKING	30
VEHICLE PARKING	
CAR PARKING	246
HRV PARKING	64
B-DOUBLE PARKING	19
TOTAL VEHICLE PARKING	329
EXTERNAL AREAS	
CANOPIES	12,062
CAR PARKING	6,564
HARDSTAND	30,939
LANDSCAPE AREA	10,134
LIGHTDUTY CONCRETE	n/a
PAVEMENT - BRUSHED CONCRETE	n/a
PAVEMENT - EXPOSED CONCRETE	570
OUTDOOR AREA	97
TOTAL	60,366
TOTAL LANDSCAPE AREA	10,134
LANDSCAPE PERCENTAGE	10%

Appendix B Swept path diagram

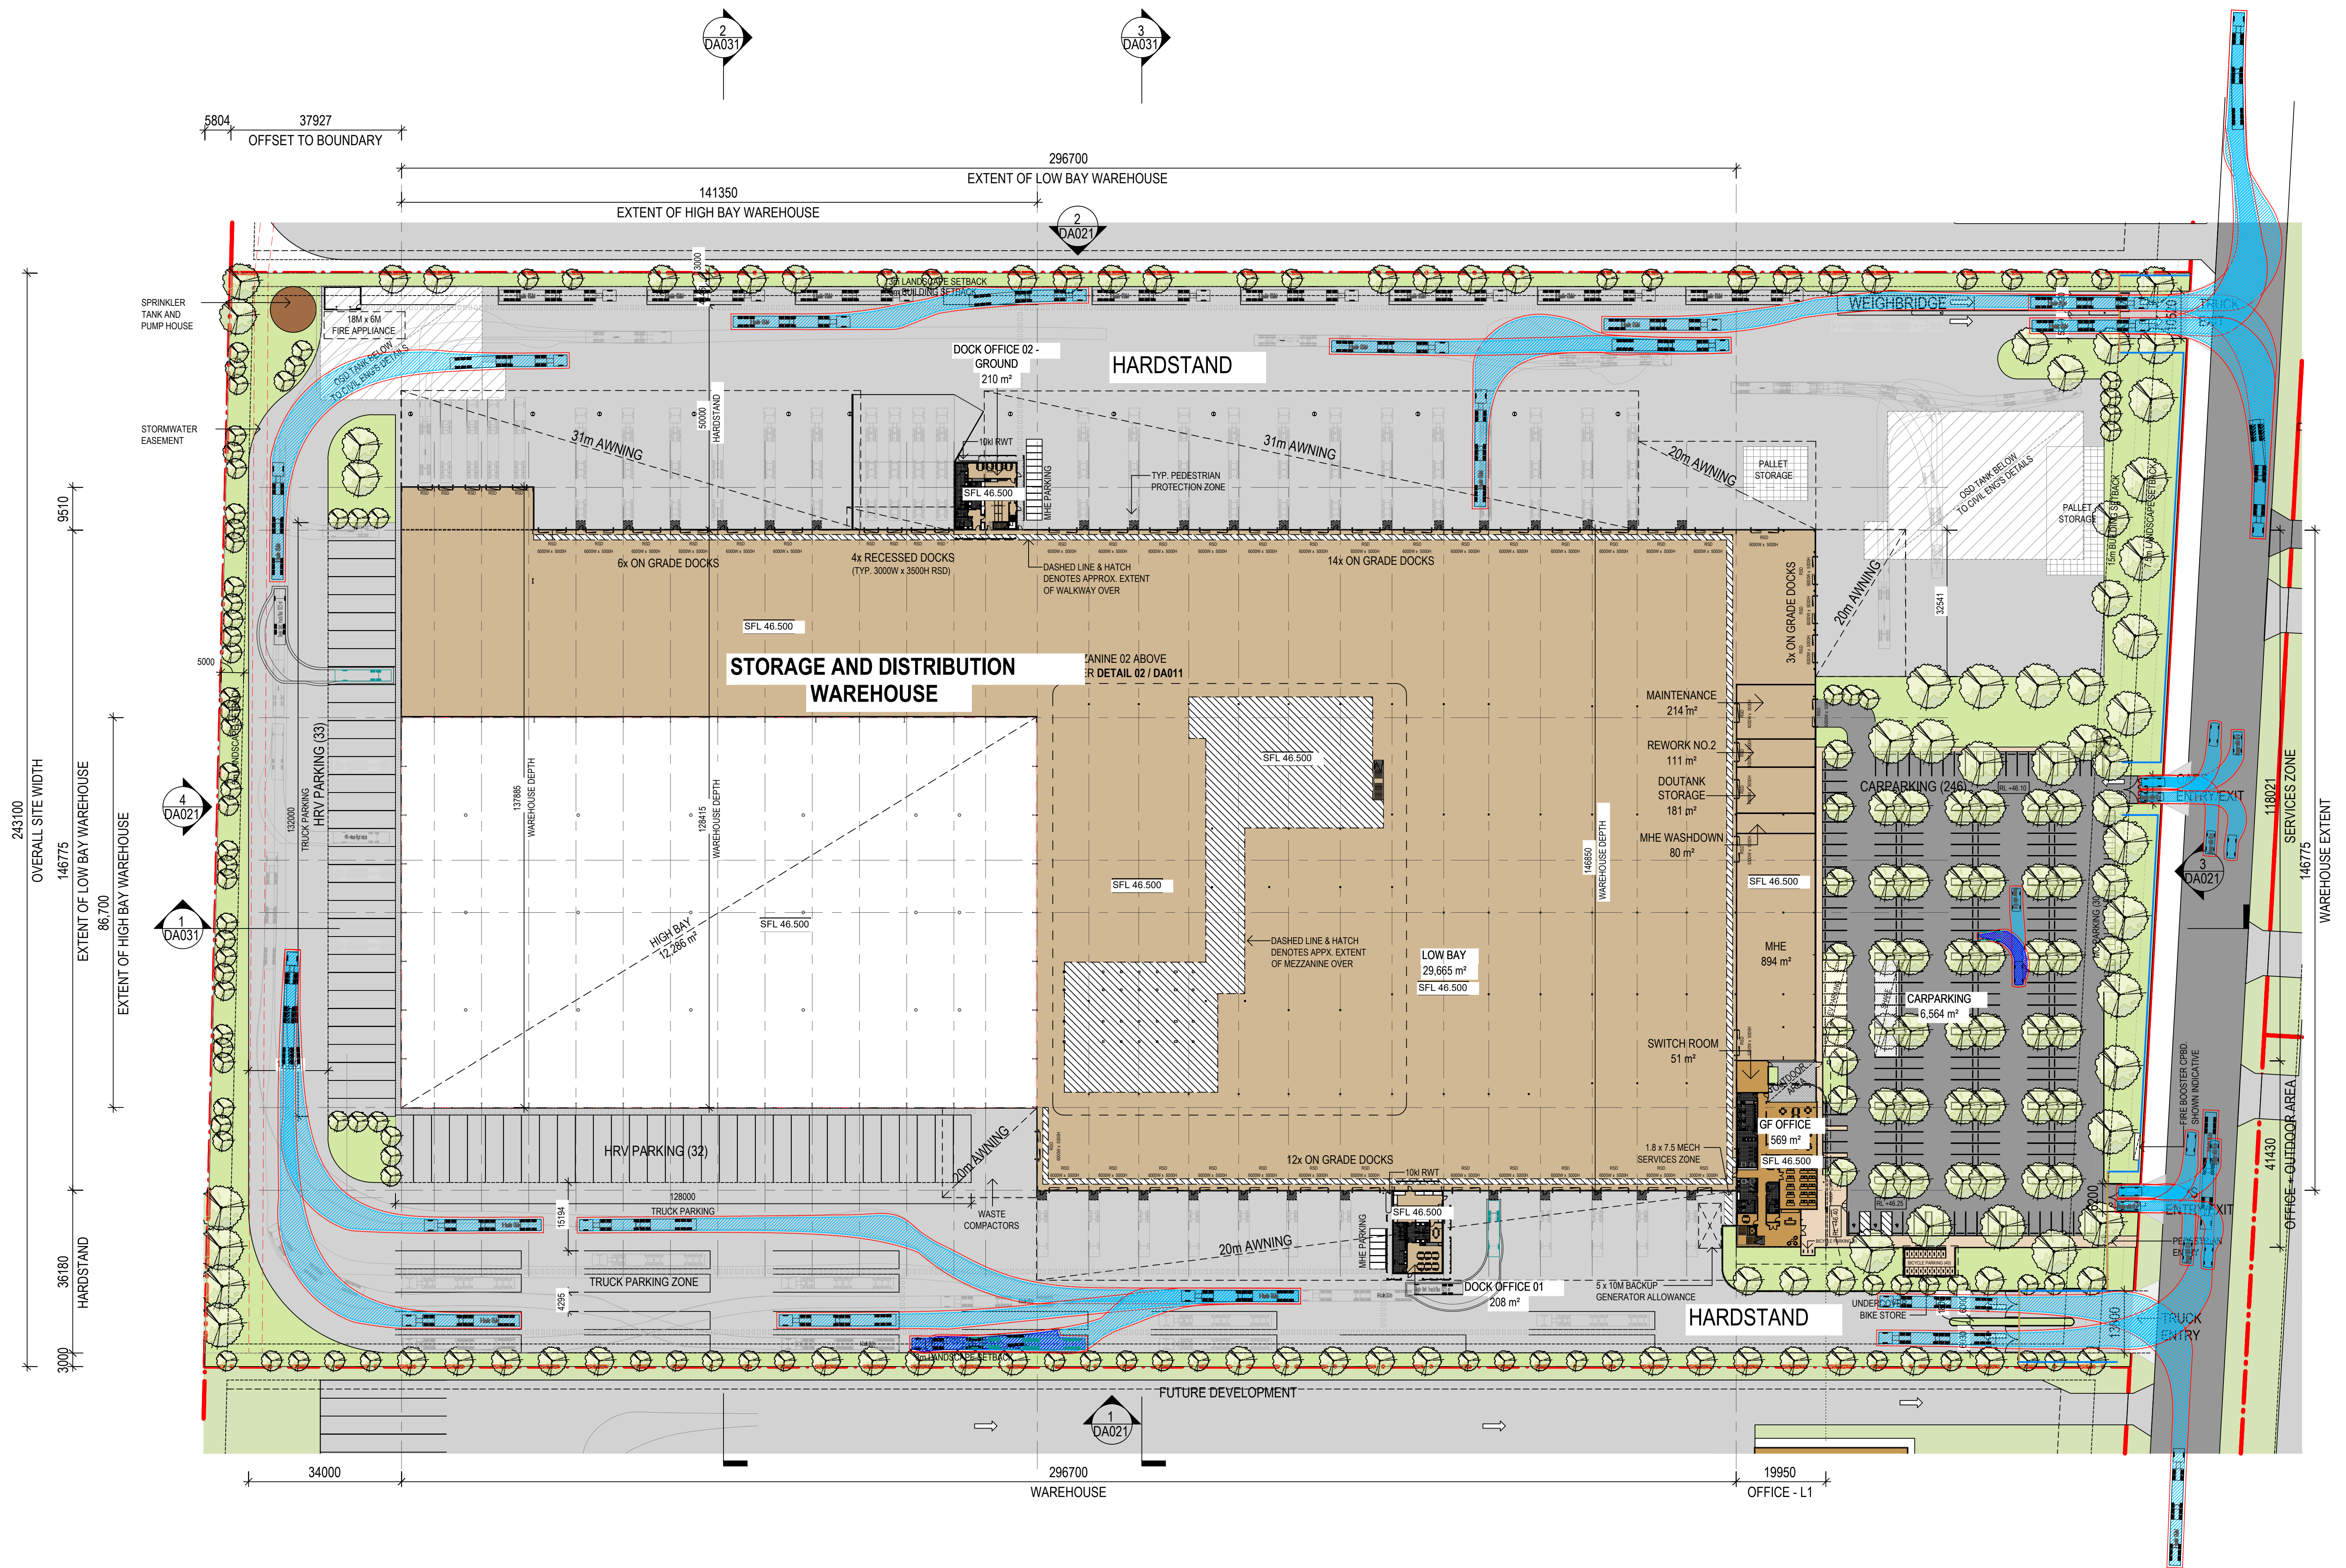


Appendix C **STFM outputs**


TRAFFIC VOLUMES__

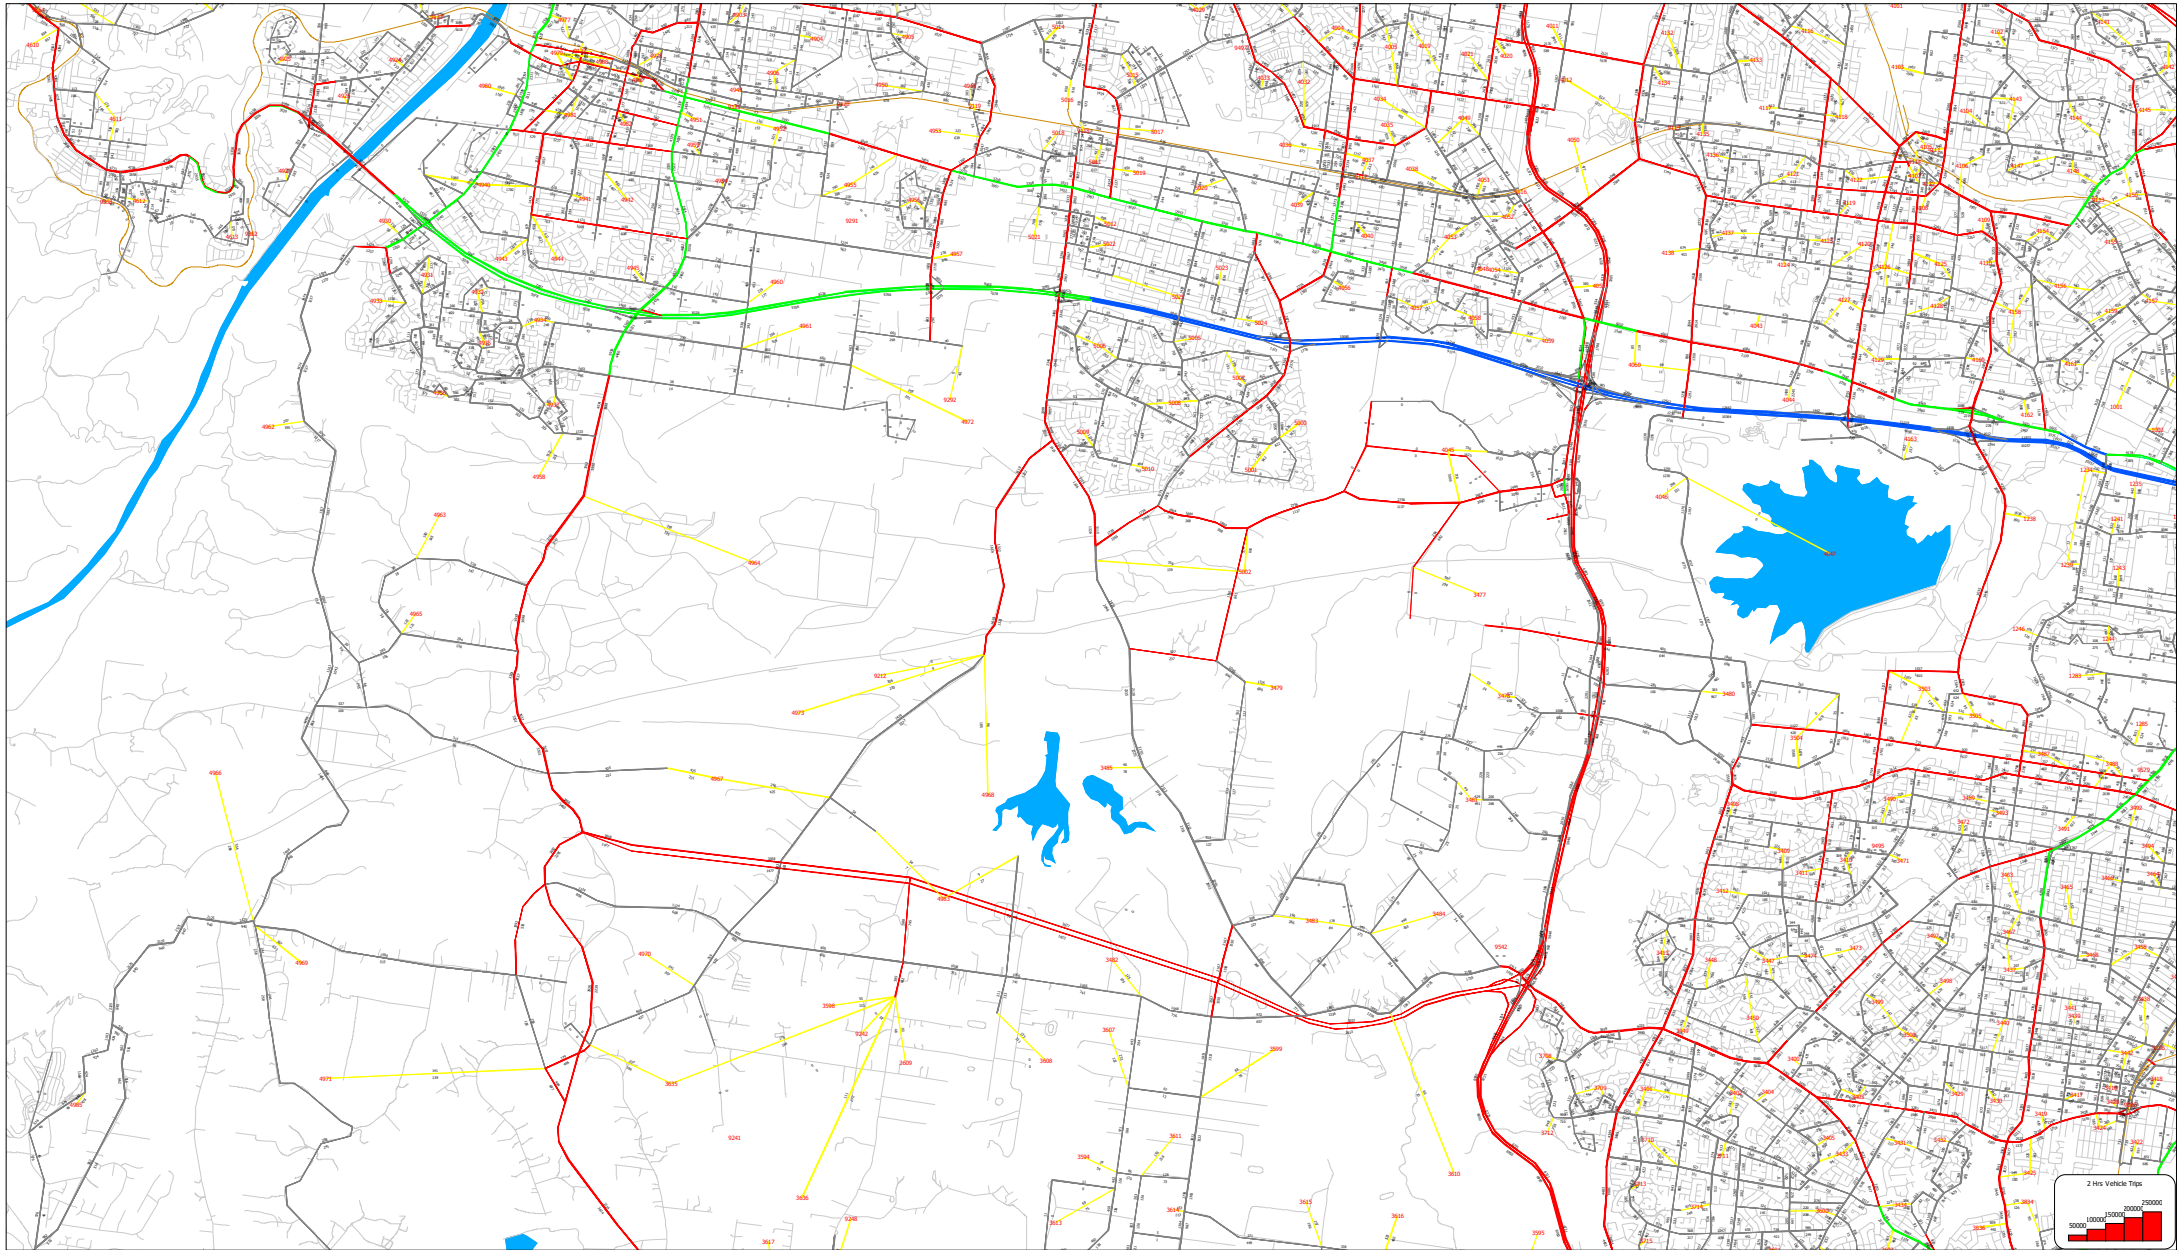


SYDNEY GMA STRATEGIC TRAFFIC FORECASTING MODEL(STFM)
 Scenario 2026: 2026 ROAD NETWORK MODEL(TZP19STMV3.8FMMV7.1):7-9AM(mf34)
 2021-12-10 07:09



TRAFFIC VOLUMES__

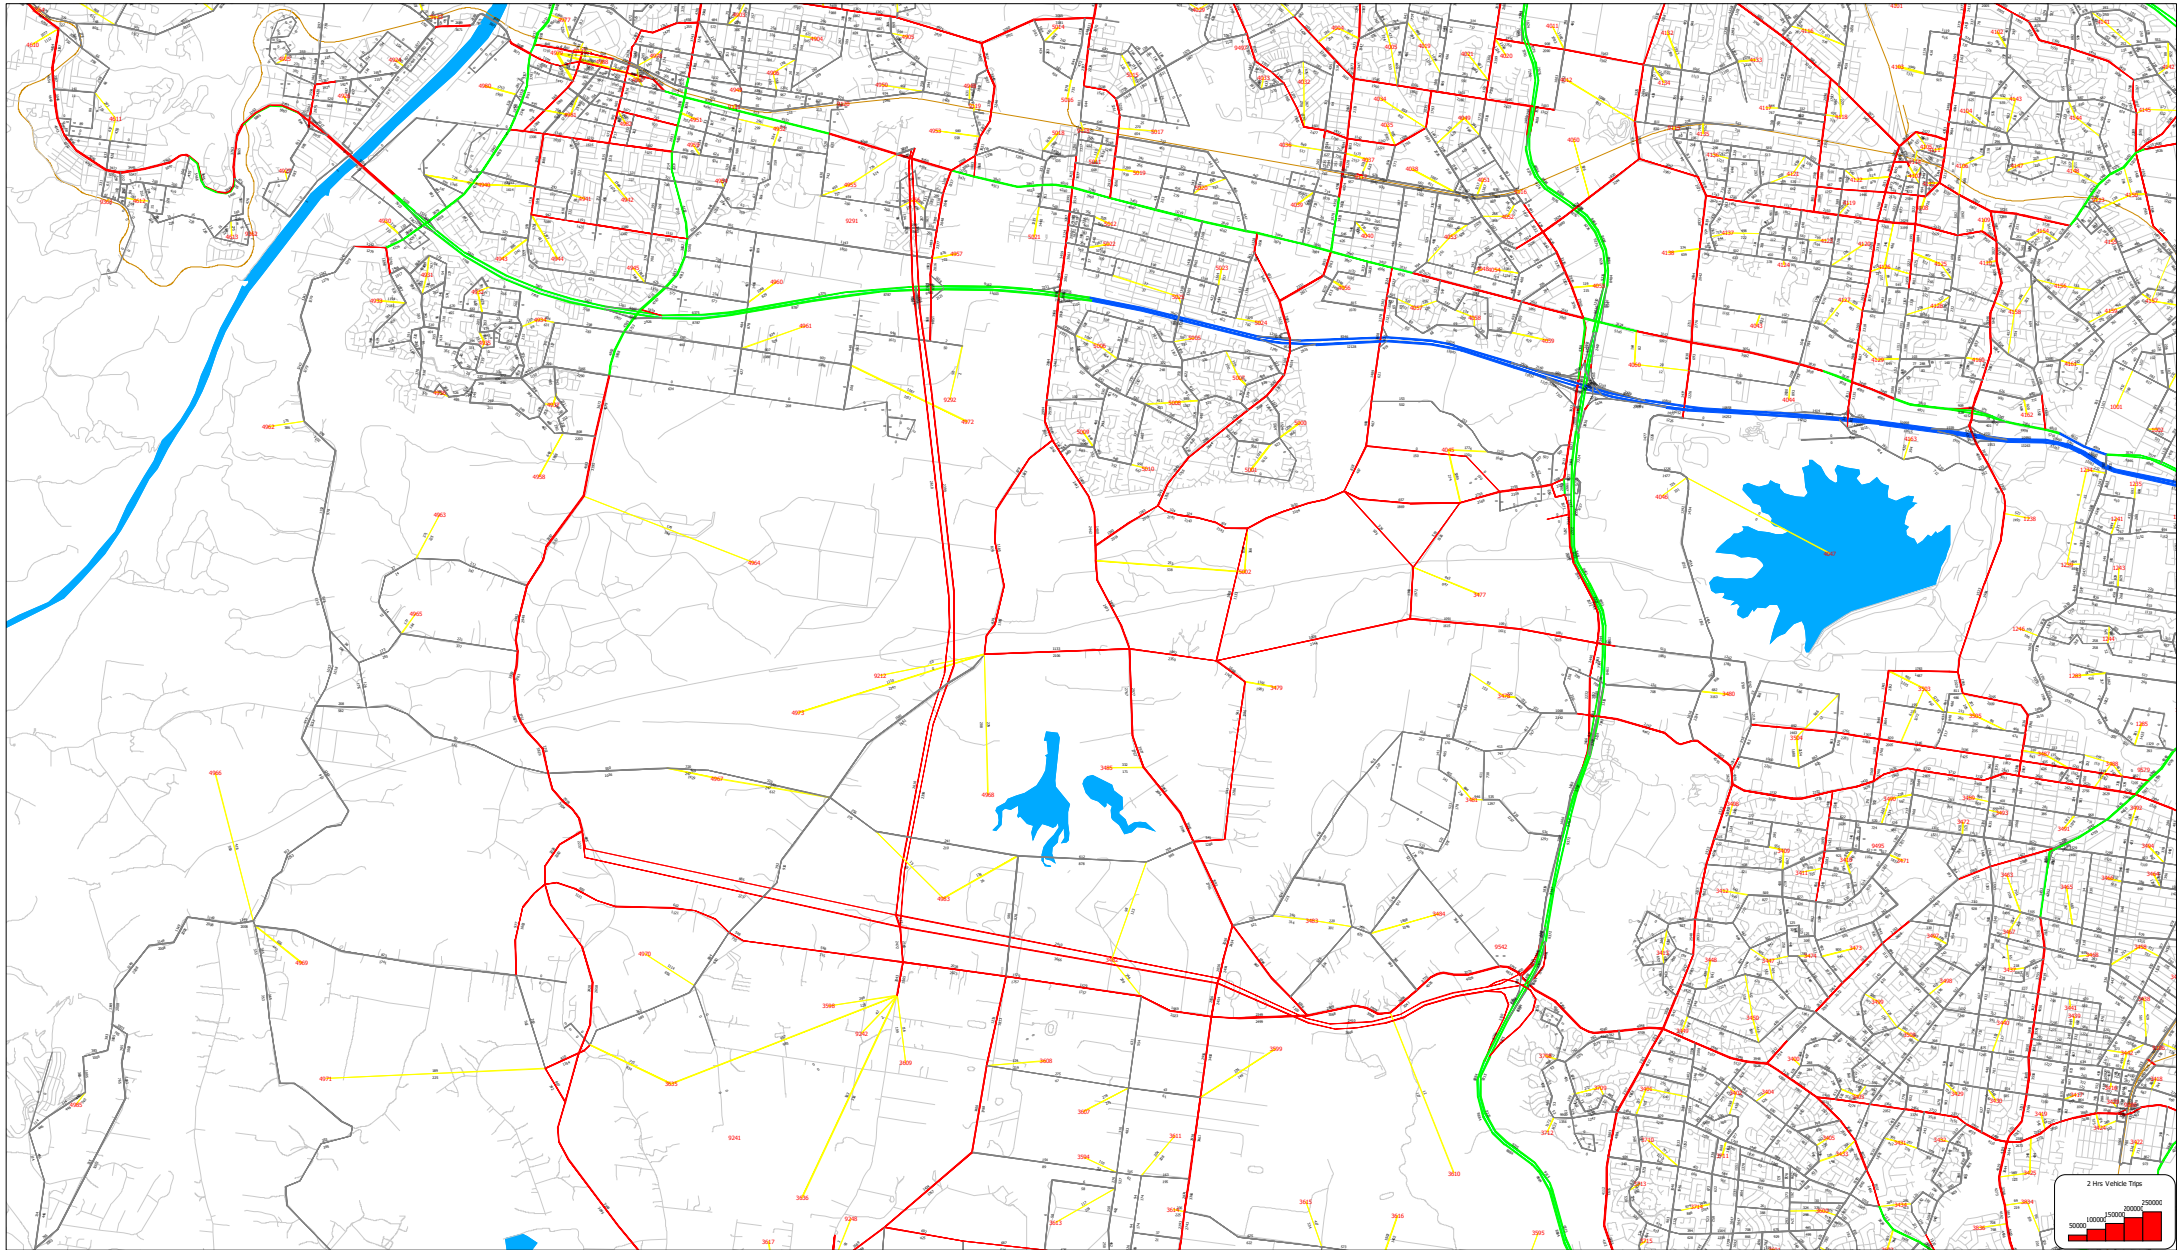

SYDNEY GMA STRATEGIC TRAFFIC FORECASTING MODEL(STFM)
 Scenario 2036: 2036 ROAD NETWORK MODEL(TP19STMV3.8FMMV7.1)-4-6PM(mf56)
 2021-12-10 07:10




Appendix D **SIDRA outputs – operations**

SITE LAYOUT

 Site: [Patons Ln/Site Access A - AM Peak - Alspec Year 2027
(Site Folder: Alspec - Year 2027 - AM)]

NA
Site Category: NA
Roundabout

Layout pictures are schematic functional drawings reflecting input data. They are not design drawings.

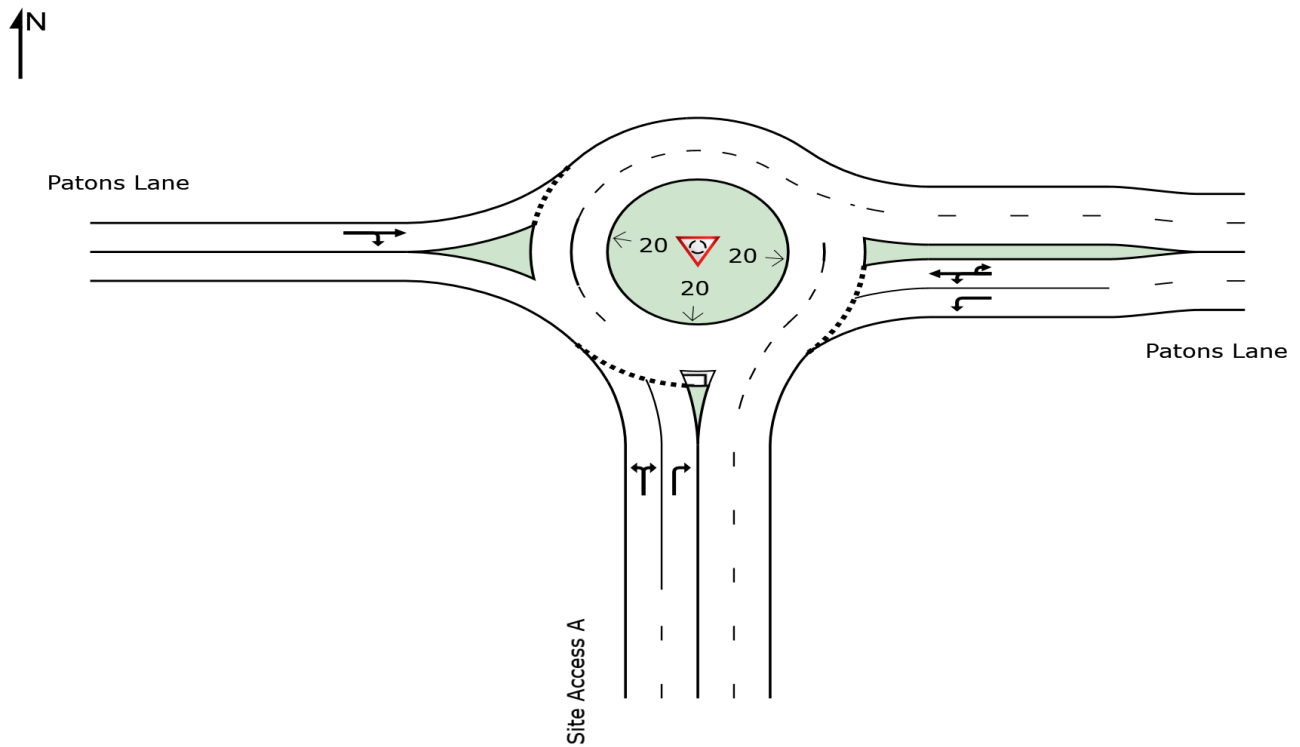

SIDRA INTERSECTION 9.1 | Copyright © 2000-2022 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: ARCADIS AUSTRALIA PACIFIC PTY LIMITED | Licence: NETWORK / Enterprise Level 3 | Created: Friday, 12 September 2025 3:31:57 PM

Project: C:\Users\bw83252\Downloads\2025-09-09 Luddenham Road TIA_ALSPEC ACCESS.sip9

MOVEMENT SUMMARY

 Site: [Patons Ln/Site Access A - AM Peak - Alspec Year 2027
(Site Folder: Alspec - Year 2027 - AM)]

Output produced by SIDRA INTERSECTION Version: 9.1.2.202

NA

Site Category: NA

Roundabout

Vehicle Movement Performance															
Mov ID	Turn	Mov Class	Demand Flows		Arrival Flows		Deg. Satn	Aver. Delay	Level of Service	95% Back Of Queue		Prop. Que	Eff. Stop Rate	Aver. No. of Cycles	Aver. Speed
			[Total HV]	%	[Total HV]	%	v/c	sec		[Veh. veh	Dist] m				km/h
South: Site Access A															
1	L2	All MCs	1	0.0	1	0.0	0.061	4.7	LOS A	0.3	4.3	0.37	0.57	0.37	47.0
		LV	1		1		0.061	4.7	LOS A	0.3	4.3	NA	NA	NA	47.0
		HV	0		0		-	-	-	-	-	NA	NA	NA	-
		TR	0		0		-	-	-	-	-	NA	NA	NA	-
3	R2	All MCs	96	76.9	96	76.9	0.061	9.7	LOS A	0.3	4.6	0.38	0.58	0.38	34.1
		LV	22		22		0.061	8.9	LOS A	0.3	4.6	NA	NA	NA	34.5
		HV	45		45		0.061	9.6	LOS A	0.3	4.6	NA	NA	NA	34.1
		TR	28		28		0.061	10.4	LOS A	0.3	4.6	NA	NA	NA	33.8
Approach			97	76.1	97	76.1	0.061	9.6	LOS A	0.3	4.6	0.38	0.58	0.38	34.2
East: Patons Lane															
4	L2	All MCs	124	51.7	124	51.7	0.106	4.7	LOS A	0.5	5.9	0.02	0.49	0.02	43.4
		LV	60		60		0.106	4.7	LOS A	0.5	5.9	NA	NA	NA	43.4
		HV	43		43		0.106	4.7	LOS A	0.5	5.9	NA	NA	NA	43.4
		TR	21		21		0.106	4.7	LOS A	0.5	5.9	NA	NA	NA	43.4
5	T1	All MCs	134	28.3	134	28.3	0.106	4.4	LOS A	0.5	4.7	0.02	0.44	0.02	53.0
		LV	96		96		0.106	4.4	LOS A	0.5	4.7	NA	NA	NA	53.0
		HV	25		25		0.106	4.4	LOS A	0.5	4.7	NA	NA	NA	53.0
		TR	13		13		0.106	4.4	LOS A	0.5	4.7	NA	NA	NA	53.0
6u	U	All MCs	11	0.0	11	0.0	0.106	10.8	LOS A	0.5	4.7	0.02	0.44	0.02	51.8
		LV	11		11		0.106	10.8	LOS A	0.5	4.7	NA	NA	NA	51.8
		HV	0		0		-	-	-	-	-	NA	NA	NA	-
		TR	0		0		-	-	-	-	-	NA	NA	NA	-
Approach			268	38.0	268	38.0	0.106	4.8	LOS A	0.5	5.9	0.02	0.46	0.02	48.7
West: Patons Lane															
11	T1	All MCs	53	66.0	53	66.0	0.073	6.0	LOS A	0.3	4.2	0.35	0.50	0.35	50.6
		LV	18		18		0.073	5.4	LOS A	0.3	4.2	NA	NA	NA	51.2
		HV	24		24		0.073	6.2	LOS A	0.3	4.2	NA	NA	NA	50.5
		TR	11		11		0.073	6.8	LOS A	0.3	4.2	NA	NA	NA	50.0
12	R2	All MCs	1	0.0	1	0.0	0.073	9.4	LOS A	0.3	4.2	0.35	0.50	0.35	51.0
		LV	1		1		0.073	9.4	LOS A	0.3	4.2	NA	NA	NA	51.0
		HV	0		0		-	-	-	-	-	NA	NA	NA	-
		TR	0		0		-	-	-	-	-	NA	NA	NA	-
Approach			54	64.7	54	64.7	0.073	6.1	LOS A	0.3	4.2	0.35	0.50	0.35	50.6
All Vehicles			419	50.3	419	50.3	0.106	6.1	LOS A	0.5	5.9	0.14	0.49	0.14	45.0

Site Level of Service (LOS) Method: Delay (RTA NSW). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Vehicle movement LOS values are based on average delay per movement.

Intersection and Approach LOS values are based on average delay for all vehicle movements.

Roundabout Capacity Model: SIDRA Standard.

Delay Model: SIDRA Standard (Control Delay: Geometric Delay is included).

Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.

Gap-Acceptance Capacity Formula: SIDRA Standard (Akçelik M3D).

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

SIDRA INTERSECTION 9.1 | Copyright © 2000-2022 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: ARCADIS AUSTRALIA PACIFIC PTY LIMITED | Licence: NETWORK / Enterprise Level 3 | Processed: Friday, 12 September 2025 3:18:12 PM

Project: C:\Users\bw83252\Downloads\2025-09-09 Luddenham Road TIA_ALSPEC ACCESS.sip9

MOVEMENT SUMMARY

 Site: [Patons Ln/Site Access A - PM Peak - Alspec Year 2027
(Site Folder: Alspec - Year 2027 - PM)]

Output produced by SIDRA INTERSECTION Version: 9.1.2.202

NA

Site Category: NA

Roundabout

Vehicle Movement Performance															
Mov ID	Turn	Mov Class	Demand Flows		Arrival Flows		Deg. Satn	Aver. Delay	Level of Service	95% Back Of Queue		Prop. Que	Eff. Stop Rate	Aver. No. of Cycles	Aver. Speed
			[Total HV]	%	[Total HV]	%	v/c	sec		[Veh. veh	Dist] m				km/h
South: Site Access A															
1	L2	All MCs	1	0.0	1	0.0	0.082	4.6	LOS A	0.4	3.7	0.29	0.60	0.29	48.7
		LV	1		1		0.082	4.6	LOS A	0.4	3.7	NA	NA	NA	48.7
		HV	0		0		-	-	-	-	-	NA	NA	NA	-
		TR	0		0		-	-	-	-	-	NA	NA	NA	-
3	R2	All MCs	188	25.7	188	25.7	0.082	9.8	LOS A	0.4	3.8	0.30	0.60	0.30	42.1
		LV	140		140		0.082	9.6	LOS A	0.4	3.8	NA	NA	NA	42.2
		HV	34		34		0.082	10.2	LOS A	0.4	3.8	NA	NA	NA	41.8
		TR	15		15		0.082	10.8	LOS A	0.4	3.8	NA	NA	NA	41.4
Approach			189	25.6	189	25.6	0.082	9.8	LOS A	0.4	3.8	0.30	0.60	0.30	42.1
East: Patons Lane															
4	L2	All MCs	128	77.9	128	77.9	0.107	5.0	LOS A	0.5	4.5	0.02	0.53	0.02	39.5
		LV	28		28		0.107	5.0	LOS A	0.5	7.3	NA	NA	NA	39.5
		HV	69		69		0.107	5.0	LOS A	0.5	7.3	NA	NA	NA	39.5
		TR	31		31		0.107	5.0	LOS A	0.5	7.3	NA	NA	NA	39.5
5	T1	All MCs	26	48.0	26	48.0	0.107	4.5	LOS A	0.5	4.5	0.02	0.65	0.02	48.8
		LV	14		14		0.107	4.5	LOS A	0.5	4.5	NA	NA	NA	48.8
		HV	9		9		0.107	4.5	LOS A	0.5	4.5	NA	NA	NA	48.8
		TR	3		3		0.107	4.5	LOS A	0.5	4.5	NA	NA	NA	48.8
6u	U	All MCs	108	0.0	108	0.0	0.107	10.8	LOS A	0.5	4.5	0.02	0.65	0.02	47.6
		LV	108		108		0.107	10.8	LOS A	0.5	4.5	NA	NA	NA	47.6
		HV	0		0		-	-	-	-	-	NA	NA	NA	-
		TR	0		0		-	-	-	-	-	NA	NA	NA	-
Approach			263	42.8	263	42.8	0.107	7.4	LOS A	0.5	7.3	0.02	0.59	0.02	43.8
West: Patons Lane															
11	T1	All MCs	252	12.1	252	12.1	0.286	6.1	LOS A	1.3	10.5	0.47	0.56	0.47	51.7
		LV	221		221		0.286	5.8	LOS A	1.3	10.5	NA	NA	NA	52.0
		HV	22		22		0.286	7.8	LOS A	1.3	10.5	NA	NA	NA	50.3
		TR	8		8		0.286	9.7	LOS A	1.3	10.5	NA	NA	NA	48.9
12	R2	All MCs	1	0.0	1	0.0	0.286	10.3	LOS A	1.3	10.5	0.47	0.56	0.47	50.6
		LV	1		1		0.286	10.3	LOS A	1.3	10.5	NA	NA	NA	50.6
		HV	0		0		-	-	-	-	-	NA	NA	NA	-
		TR	0		0		-	-	-	-	-	NA	NA	NA	-
Approach			253	12.1	253	12.1	0.286	6.1	LOS A	1.3	10.5	0.47	0.56	0.47	51.7
All Vehicles			705	27.2	705	27.2	0.286	7.6	LOS A	1.3	10.5	0.25	0.58	0.25	46.2

Site Level of Service (LOS) Method: Delay (RTA NSW). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Vehicle movement LOS values are based on average delay per movement.

Intersection and Approach LOS values are based on average delay for all vehicle movements.

Roundabout Capacity Model: SIDRA Standard.

Delay Model: SIDRA Standard (Control Delay: Geometric Delay is included).

Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.

Gap-Acceptance Capacity Formula: SIDRA Standard (Akçelik M3D).

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

SIDRA INTERSECTION 9.1 | Copyright © 2000-2022 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: ARCADIS AUSTRALIA PACIFIC PTY LIMITED | Licence: NETWORK / Enterprise Level 3 | Processed: Friday, 12 September 2025 3:18:15 PM

Project: C:\Users\bw83252\Downloads\2025-09-09 Luddenham Road TIA_ALSPEC ACCESS.sip9

SITE LAYOUT


 Site: 101 [Luddenham Rd/Patons Ln - AM Peak- Alspec Year 2027 (Site Folder: Alspec - Year 2027 - AM)]

New Site

Site Category: (None)

Signals - EQUISAT (Fixed-Time/SCATS) Isolated

Layout pictures are schematic functional drawings reflecting input data. They are not design drawings.

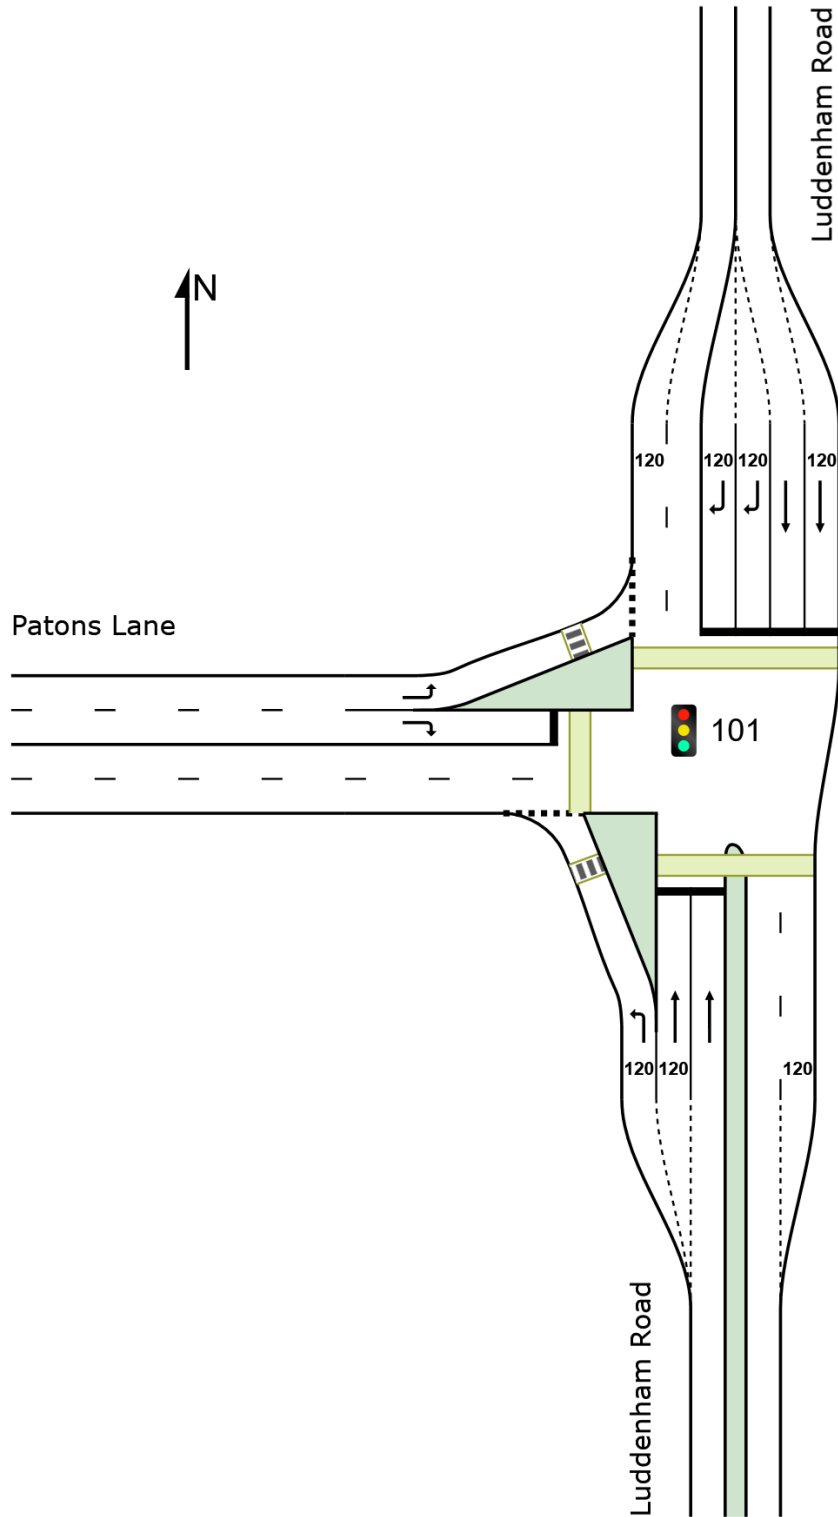

SIDRA INTERSECTION 9.1 | Copyright © 2000-2022 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: ARCADIS AUSTRALIA PACIFIC PTY LIMITED | Licence: NETWORK / Enterprise Level 3 | Created: Friday, 12 September 2025
3:32:26 PM

Project: C:\Users\bw83252\Downloads\2025-09-09 Luddenham Road TIA_ALSPEC ACCESS.sip9

MOVEMENT SUMMARY

 Site: 101 [Luddenham Rd/Patons Ln - AM Peak- Alspec Year 2027 (Site Folder: Alspec - Year 2027 - AM)]

Output produced by SIDRA INTERSECTION Version: 9.1.2.202

New Site

Site Category: (None)

Signals - EQUISAT (Fixed-Time/SCATS) Isolated Cycle Time = 100 seconds (Site User-Given Cycle Time)

Vehicle Movement Performance															
Mov ID	Turn	Mov Class	Demand Flows		Arrival Flows		Deg. Satn	Aver. Delay	Level of Service	95% Back Of Queue		Prop. Que	Eff. Stop Rate	Aver. No. of Cycles	Aver. Speed
			[Total HV]	%	[Total HV]	%				[Veh. veh	Dist] m				km/h
South: Luddenham Road															
1	L2	All MCs	125	30.3	125	30.3	0.123	8.0	LOS A	1.0	10.2	0.28	0.62	0.28	51.8
		LV	87		87		0.123	8.0	LOS A	1.0	10.2	NA	NA	NA	51.8
		HV	27		27		0.123	8.0	LOS A	1.0	10.2	NA	NA	NA	51.8
		TR	11		11		0.123	8.0	LOS A	1.0	10.2	NA	NA	NA	51.8
2	T1	All MCs	652	5.8	652	5.8	* 0.539	24.7	LOS B	14.7	111.3	0.79	0.68	0.79	46.3
		LV	614		614		* 0.539	24.7	LOS B	14.7	111.3	NA	NA	NA	46.3
		HV	25		25		0.539	24.7	LOS B	14.7	111.3	NA	NA	NA	46.3
		TR	13		13		0.539	24.7	LOS B	14.7	111.3	NA	NA	NA	46.3
Approach			777	9.8	777	9.8	0.539	22.0	LOS B	14.7	111.3	0.71	0.67	0.71	47.1
North: Luddenham Road															
8	T1	All MCs	248	17.4	248	17.4	0.137	6.8	LOS A	2.7	21.6	0.39	0.32	0.39	55.5
		LV	205		205		0.137	6.8	LOS A	2.7	21.6	NA	NA	NA	55.5
		HV	43		43		0.137	6.8	LOS A	2.7	21.6	NA	NA	NA	55.5
		TR	0		0		-	-	-	-	-	NA	NA	NA	-
9	R2	All MCs	291	27.2	291	27.2	* 0.522	45.7	LOS D	6.6	62.9	0.94	0.80	0.94	30.8
		LV	212		212		* 0.522	45.7	LOS D	6.6	62.9	NA	NA	NA	30.8
		HV	56		56		0.522	45.7	LOS D	6.6	62.9	NA	NA	NA	30.8
		TR	23		23		0.522	45.7	LOS D	6.6	62.9	NA	NA	NA	30.8
Approach			539	22.7	539	22.7	0.522	27.8	LOS B	6.6	62.9	0.69	0.58	0.69	41.2
West: Patons Lane															
10	L2	All MCs	100	75.8	100	75.8	0.184	12.7	LOS A	1.3	19.8	0.38	0.64	0.38	46.0
		LV	24		24		0.184	12.7	LOS A	1.3	19.8	NA	NA	NA	46.0
		HV	44		44		0.184	12.7	LOS A	1.3	19.8	NA	NA	NA	46.0
		TR	32		32		0.184	12.7	LOS A	1.3	19.8	NA	NA	NA	46.0
12	R2	All MCs	48	67.4	48	67.4	* 0.248	45.2	LOS D	2.1	27.0	0.89	0.75	0.89	35.3
		LV	16		16		* 0.248	45.2	LOS D	2.1	27.0	NA	NA	NA	35.3
		HV	25		25		0.248	45.2	LOS D	2.1	27.0	NA	NA	NA	35.3
		TR	7		7		0.248	45.2	LOS D	2.1	27.0	NA	NA	NA	35.3
Approach			148	73.0	148	73.0	0.248	23.3	LOS B	2.1	27.0	0.54	0.67	0.54	41.0
All Vehicles			1464	20.9	1464	20.9	0.539	24.3	LOS B	14.7	111.3	0.68	0.64	0.68	44.4

Site Level of Service (LOS) Method: Delay (RTA NSW). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Vehicle movement LOS values are based on average delay per movement.

Intersection and Approach LOS values are based on average delay for all vehicle movements.

Delay Model: SIDRA Standard (Control Delay: Geometric Delay is included).

Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Green.

Gap-Acceptance Capacity Formula: SIDRA Standard (Akçelik M3D).

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

* Critical Movement (Signal Timing)

Pedestrian Movement Performance												
Mov ID	Crossing	Input Vol.	Dem. Flow	Aver. Delay	Level of Service	AVERAGE BACK OF QUEUE		Prop. Que	Eff. Stop Rate	Travel Time	Travel Dist.	Aver. Speed
		ped/h	ped/h	sec		[Ped ped	Dist] m			sec	m	m/sec
South: Luddenham Road												
P1	Full	50	53	44.3	LOS E	0.1	0.1	0.94	0.94	210.9	200.0	0.95
North: Luddenham Road												
P3	Full	50	53	44.3	LOS E	0.1	0.1	0.94	0.94	210.9	200.0	0.95
West: Patons Lane												
P4	Full	50	53	44.3	LOS E	0.1	0.1	0.94	0.94	210.9	200.0	0.95
All Pedestrians		150	158	44.3	LOS E	0.1	0.1	0.94	0.94	210.9	200.0	0.95

Level of Service (LOS) Method: SIDRA Pedestrian LOS Method (Based on Average Delay)

Pedestrian movement LOS values are based on average delay per pedestrian movement.

Intersection LOS value for Pedestrians is based on average delay for all pedestrian movements.

SIDRA INTERSECTION 9.1 | Copyright © 2000-2022 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: ARCADIS AUSTRALIA PACIFIC PTY LIMITED | Licence: NETWORK / Enterprise Level 3 | Processed: Friday, 12 September 2025 3:18:14 PM

Project: C:\Users\bw83252\Downloads\2025-09-09 Luddenham Road TIA_ALSPEC ACCESS.sip9

MOVEMENT SUMMARY

 Site: 101 [Luddenham Rd/Patons Ln - PM Peak- Alspec Year 2027 (Site Folder: Alspec - Year 2027 - PM)]

Output produced by SIDRA INTERSECTION Version: 9.1.2.202

New Site

Site Category: (None)

Signals - EQUISAT (Fixed-Time/SCATS) Isolated Cycle Time = 100 seconds (Site User-Given Cycle Time)

Vehicle Movement Performance														
Mov ID	Turn	Mov Class	Demand Flows		Arrival Flows		Deg. Satn	Aver. Delay	Level of Service	95% Back Of Queue	Prop. Que	Eff. Stop Rate	Aver. No. of Cycles	Aver. Speed
			[Total HV]		[Total HV]									
			veh/h	%	veh/h	%	v/c	sec		[Veh. veh	Dist] m			km/h
South: Luddenham Road														
1	L2	All MCs	46	72.7	46	72.7	0.056	7.8	LOS A	0.2	3.3	0.21	0.58	50.8
		LV	13		13		0.056	7.8	LOS A	0.2	3.3	NA	NA	50.8
		HV	24		24		0.056	7.8	LOS A	0.2	3.3	NA	NA	50.8
		TR	9		9		0.056	7.8	LOS A	0.2	3.3	NA	NA	50.8
2	T1	All MCs	381	4.7	381	4.7	* 0.336	24.2	LOS B	8.1	60.3	0.75	0.62	46.3
		LV	363		363		* 0.336	24.2	LOS B	8.1	60.3	NA	NA	46.3
		HV	12		12		0.336	24.2	LOS B	8.1	60.3	NA	NA	46.3
		TR	6		6		0.336	24.2	LOS B	8.1	60.3	NA	NA	46.3
Approach			427	12.1	427	12.1	0.336	22.4	LOS B	8.1	60.3	0.69	0.62	46.7
North: Luddenham Road														
8	T1	All MCs	548	4.6	548	4.6	0.297	10.5	LOS A	7.7	57.1	0.51	0.44	53.4
		LV	523		523		0.297	10.5	LOS A	7.7	57.1	NA	NA	53.4
		HV	21		21		0.297	10.5	LOS A	7.7	57.1	NA	NA	53.4
		TR	4		4		0.297	10.5	LOS A	7.7	57.1	NA	NA	53.4
9	R2	All MCs	109	73.1	109	73.1	* 0.329	48.1	LOS D	2.5	34.6	0.92	0.76	29.4
		LV	29		29		* 0.329	48.1	LOS D	2.5	34.6	NA	NA	29.4
		HV	57		57		0.329	48.1	LOS D	2.5	34.6	NA	NA	29.4
		TR	23		23		0.329	48.1	LOS D	2.5	34.6	NA	NA	29.4
Approach			658	16.0	658	16.0	0.329	16.8	LOS B	7.7	57.1	0.57	0.49	48.8
West: Patons Lane														
10	L2	All MCs	312	18.2	312	18.2	0.325	8.8	LOS A	3.0	25.9	0.33	0.65	49.7
		LV	255		255		0.325	8.8	LOS A	3.0	25.9	NA	NA	49.7
		HV	39		39		0.325	8.8	LOS A	3.0	25.9	NA	NA	49.7
		TR	18		18		0.325	8.8	LOS A	3.0	25.9	NA	NA	49.7
12	R2	All MCs	128	17.2	128	17.2	* 0.334	39.4	LOS C	5.2	44.5	0.86	0.78	37.8
		LV	106		106		* 0.334	39.4	LOS C	5.2	44.5	NA	NA	37.8
		HV	17		17		0.334	39.4	LOS C	5.2	44.5	NA	NA	37.8
		TR	5		5		0.334	39.4	LOS C	5.2	44.5	NA	NA	37.8
Approach			440	17.9	440	17.9	0.334	17.8	LOS B	5.2	44.5	0.48	0.69	44.6
All Vehicles			1525	15.5	1525	15.5	0.336	18.6	LOS B	8.1	60.3	0.58	0.58	47.1

Site Level of Service (LOS) Method: Delay (RTA NSW). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Vehicle movement LOS values are based on average delay per movement.

Intersection and Approach LOS values are based on average delay for all vehicle movements.

Delay Model: SIDRA Standard (Control Delay: Geometric Delay is included).

Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Green.

Gap-Acceptance Capacity Formula: SIDRA Standard (Akçelik M3D).

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

* Critical Movement (Signal Timing)

Pedestrian Movement Performance												
Mov ID	Crossing	Input Vol.	Dem. Flow	Aver. Delay	Level of Service	AVERAGE BACK OF QUEUE		Prop. Que	Eff. Stop Rate	Travel Time	Travel Dist.	Aver. Speed
		ped/h	ped/h	sec		[Ped	Dist]			sec	m	m/sec
South: Luddenham Road												
P1	Full	50	53	44.3	LOS E	0.1	0.1	0.94	0.94	210.9	200.0	0.95
North: Luddenham Road												
P3	Full	50	53	44.3	LOS E	0.1	0.1	0.94	0.94	210.9	200.0	0.95
West: Patons Lane												
P4	Full	50	53	44.3	LOS E	0.1	0.1	0.94	0.94	210.9	200.0	0.95
All Pedestrians		150	158	44.3	LOS E	0.1	0.1	0.94	0.94	210.9	200.0	0.95


Level of Service (LOS) Method: SIDRA Pedestrian LOS Method (Based on Average Delay)
 Pedestrian movement LOS values are based on average delay per pedestrian movement.
 Intersection LOS value for Pedestrians is based on average delay for all pedestrian movements.

SITE LAYOUT

 Site: [Patons Ln/Site Access A - AM Peak - Alspec Year 2036
(Site Folder: Alspec - Year 2036 - AM)]

NA
Site Category: NA
Roundabout

Layout pictures are schematic functional drawings reflecting input data. They are not design drawings.

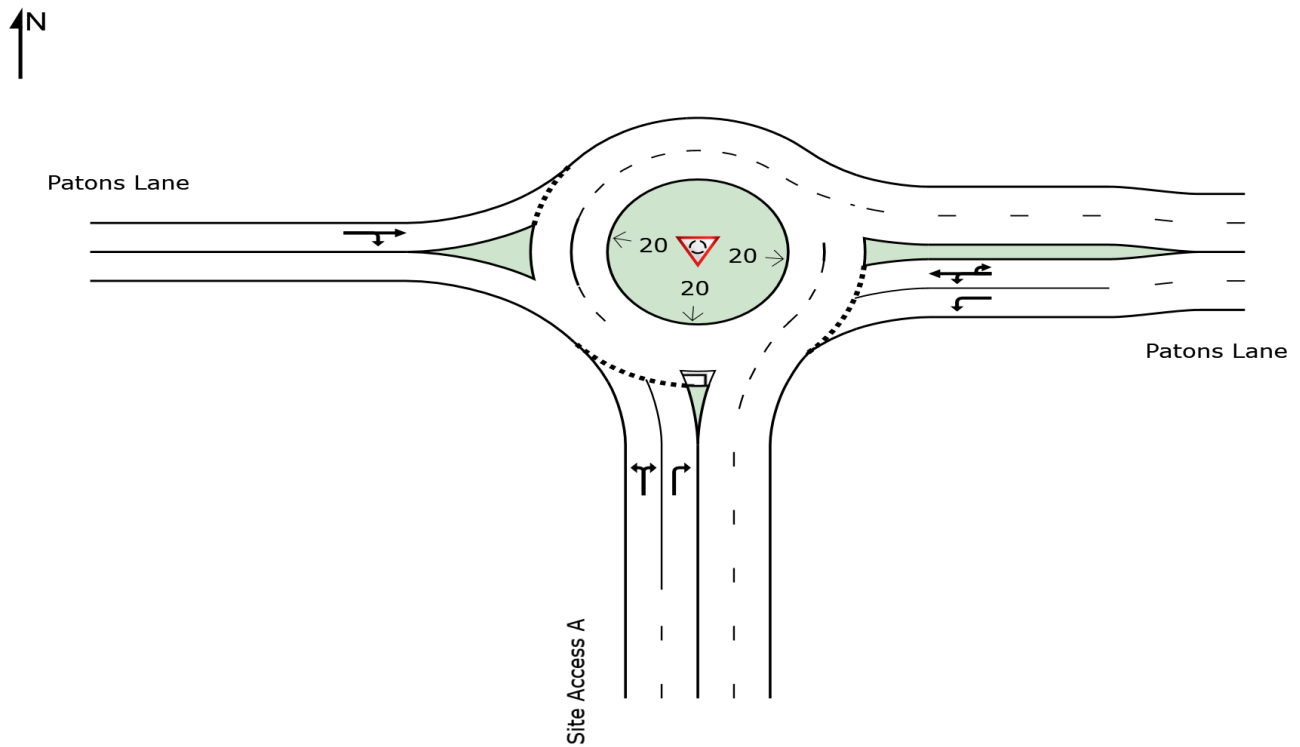

SIDRA INTERSECTION 9.1 | Copyright © 2000-2022 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: ARCADIS AUSTRALIA PACIFIC PTY LIMITED | Licence: NETWORK / Enterprise Level 3 | Created: Friday, 12 September 2025 3:32:37 PM

Project: C:\Users\bw83252\Downloads\2025-09-09 Luddenham Road TIA_ALSPEC ACCESS.sip9

MOVEMENT SUMMARY

 Site: [Patons Ln/Site Access A - AM Peak - Alspec Year 2036
(Site Folder: Alspec - Year 2036 - AM)]

Output produced by SIDRA INTERSECTION Version: 9.1.2.202

NA

Site Category: NA

Roundabout

Vehicle Movement Performance															
Mov ID	Turn	Mov Class	Demand Flows		Arrival Flows		Deg. Satn	Aver. Delay	Level of Service	95% Back Of Queue	Prop. Que	Eff. Stop Rate	Aver. No. of Cycles	Aver. Speed	
			[Total HV]	%	[Total HV]	%	v/c	sec		[Veh. veh	Dist] m			km/h	
South: Site Access A															
1	L2	All MCs	1	100.0	1	100.0	0.102	6.0	LOS A	0.5	5.9	0.26	0.58	45.2	
		LV	0		0		-	-	-	-	-	NA	NA	-	
		HV	1		1		0.102	6.0	LOS A	0.5	5.9	NA	NA	45.2	
		TR	0		0		-	-	-	-	-	NA	NA	-	
3	R2	All MCs	211	50.0	211	50.0	0.102	10.0	LOS A	0.5	6.0	0.27	0.58	38.7	
		LV	105		105		0.102	9.7	LOS A	0.5	6.0	NA	NA	38.9	
		HV	74		74		0.102	10.2	LOS A	0.5	6.0	NA	NA	38.6	
		TR	32		32		0.102	10.6	LOS A	0.5	6.0	NA	NA	38.4	
Approach			212	50.2	212	50.2	0.102	10.0	LOS A	0.5	6.0	0.27	0.58	0.27	38.7
East: Patons Lane															
4	L2	All MCs	737	30.0	737	30.0	0.306	4.5	LOS A	1.8	16.5	0.03	0.49	0.03	46.6
		LV	516		516		0.306	4.5	LOS A	1.8	17.4	NA	NA	NA	46.6
		HV	147		147		0.306	4.5	LOS A	1.8	17.4	NA	NA	NA	46.6
		TR	74		74		0.306	4.5	LOS A	1.8	17.4	NA	NA	NA	46.6
5	T1	All MCs	84	8.8	84	8.8	0.306	4.2	LOS A	1.8	16.5	0.03	0.48	0.03	53.8
		LV	77		77		0.306	4.2	LOS A	1.8	16.5	NA	NA	NA	53.8
		HV	7		7		0.306	4.2	LOS A	1.8	16.5	NA	NA	NA	53.8
		TR	0		0		-	-	-	-	-	NA	NA	NA	-
6u	U	All MCs	11	0.0	11	0.0	0.306	10.8	LOS A	1.8	16.5	0.03	0.48	0.03	52.0
		LV	11		11		0.306	10.8	LOS A	1.8	16.5	NA	NA	NA	52.0
		HV	0		0		-	-	-	-	-	NA	NA	NA	-
		TR	0		0		-	-	-	-	-	NA	NA	NA	-
Approach			832	27.5	832	27.5	0.306	4.5	LOS A	1.8	17.4	0.03	0.48	0.03	47.5
West: Patons Lane															
11	T1	All MCs	53	14.0	53	14.0	0.060	5.5	LOS A	0.2	1.8	0.38	0.52	0.38	52.1
		LV	45		45		0.060	5.3	LOS A	0.2	1.8	NA	NA	NA	52.3
		HV	7		7		0.060	6.8	LOS A	0.2	1.8	NA	NA	NA	51.0
		TR	0		0		-	-	-	-	-	NA	NA	NA	-
12	R2	All MCs	1	100.0	1	100.0	0.060	12.4	LOS A	0.2	1.8	0.38	0.52	0.38	46.9
		LV	0		0		-	-	-	-	-	NA	NA	NA	-
		HV	1		1		0.060	12.4	LOS A	0.2	1.8	NA	NA	NA	46.9
		TR	0		0		-	-	-	-	-	NA	NA	NA	-
Approach			54	15.7	54	15.7	0.060	5.7	LOS A	0.2	1.8	0.38	0.52	0.38	52.0
All Vehicles			1097	31.3	1097	31.3	0.306	5.6	LOS A	1.8	17.4	0.09	0.50	0.09	45.7

Site Level of Service (LOS) Method: Delay (RTA NSW). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Vehicle movement LOS values are based on average delay per movement.

Intersection and Approach LOS values are based on average delay for all vehicle movements.

Roundabout Capacity Model: SIDRA Standard.

Delay Model: SIDRA Standard (Control Delay: Geometric Delay is included).

Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.

Gap-Acceptance Capacity Formula: SIDRA Standard (Akçelik M3D).

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

SIDRA INTERSECTION 9.1 | Copyright © 2000-2022 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: ARCADIS AUSTRALIA PACIFIC PTY LIMITED | Licence: NETWORK / Enterprise Level 3 | Processed: Friday, 12 September 2025 3:18:17 PM

Project: C:\Users\bw83252\Downloads\2025-09-09 Luddenham Road TIA_ALSPEC ACCESS.sip9

MOVEMENT SUMMARY

 Site: [Patons Ln/Site Access A - PM Peak - Alspec Year 2036
(Site Folder: Alspec - Year 2036 - PM)]

Output produced by SIDRA INTERSECTION Version: 9.1.2.202

NA

Site Category: NA

Roundabout

Vehicle Movement Performance															
Mov ID	Turn	Mov Class	Demand Flows		Arrival Flows		Deg. Satn	Aver. Delay	Level of Service	95% Back Of Queue	Prop. Que	Eff. Stop Rate	Aver. No. of Cycles	Aver. Speed	
			[Total HV]	%	[Total HV]	%	v/c	sec		[Veh. veh	Dist] m			km/h	
South: Site Access A															
1	L2	All MCs	1	100.0	1	100.0	0.221	6.9	LOS A	1.2	11.4	0.38	0.61	0.38	44.9
		LV	0		0		-	-	-	-	-	NA	NA	NA	-
		HV	1		1		0.221	6.9	LOS A	1.2	11.4	NA	NA	NA	44.9
		TR	0		0		-	-	-	-	-	NA	NA	NA	-
3	R2	All MCs	484	26.7	484	26.7	0.221	10.3	LOS A	1.2	11.5	0.39	0.61	0.39	41.6
		LV	355		355		0.221	9.9	LOS A	1.2	11.5	NA	NA	NA	41.9
		HV	93		93		0.221	10.9	LOS A	1.2	11.5	NA	NA	NA	41.2
		TR	37		37		0.221	12.0	LOS A	1.2	11.5	NA	NA	NA	40.5
Approach			485	26.9	485	26.9	0.221	10.2	LOS A	1.2	11.5	0.39	0.61	0.39	41.7
East: Patons Lane															
4	L2	All MCs	379	50.0	379	50.0	0.215	4.7	LOS A	1.2	10.6	0.03	0.52	0.03	43.1
		LV	189		189		0.215	4.7	LOS A	1.2	13.2	NA	NA	NA	43.1
		HV	147		147		0.215	4.7	LOS A	1.2	13.2	NA	NA	NA	43.1
		TR	42		42		0.215	4.7	LOS A	1.2	13.2	NA	NA	NA	43.1
5	T1	All MCs	74	11.4	74	11.4	0.215	4.2	LOS A	1.2	10.6	0.02	0.57	0.02	51.5
		LV	65		65		0.215	4.2	LOS A	1.2	10.6	NA	NA	NA	51.5
		HV	8		8		0.215	4.2	LOS A	1.2	10.6	NA	NA	NA	51.5
		TR	0		0		-	-	-	-	-	NA	NA	NA	-
6u	U	All MCs	117	0.0	117	0.0	0.215	10.8	LOS A	1.2	10.6	0.02	0.57	0.02	49.5
		LV	117		117		0.215	10.8	LOS A	1.2	10.6	NA	NA	NA	49.5
		HV	0		0		-	-	-	-	-	NA	NA	NA	-
		TR	0		0		-	-	-	-	-	NA	NA	NA	-
Approach			569	34.8	569	34.8	0.215	5.9	LOS A	1.2	13.2	0.02	0.54	0.02	45.5
West: Patons Lane															
11	T1	All MCs	84	10.0	84	10.0	0.118	6.9	LOS A	0.5	3.5	0.54	0.65	0.54	51.4
		LV	76		76		0.118	6.6	LOS A	0.5	3.5	NA	NA	NA	51.7
		HV	8		8		0.118	9.7	LOS A	0.5	3.5	NA	NA	NA	49.2
		TR	0		0		-	-	-	-	-	NA	NA	NA	-
12	R2	All MCs	1	100.0	1	100.0	0.118	15.4	LOS B	0.5	3.5	0.54	0.65	0.54	46.2
		LV	0		0		-	-	-	-	-	NA	NA	NA	-
		HV	1		1		0.118	15.4	LOS B	0.5	3.5	NA	NA	NA	46.2
		TR	0		0		-	-	-	-	-	NA	NA	NA	-
Approach			85	11.1	85	11.1	0.118	7.0	LOS A	0.5	3.5	0.54	0.65	0.54	51.3
All Vehicles			1140	29.6	1140	29.6	0.221	7.8	LOS A	1.2	13.2	0.22	0.58	0.22	44.3

Site Level of Service (LOS) Method: Delay (RTA NSW). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Vehicle movement LOS values are based on average delay per movement.

Intersection and Approach LOS values are based on average delay for all vehicle movements.

Roundabout Capacity Model: SIDRA Standard.

Delay Model: SIDRA Standard (Control Delay: Geometric Delay is included).

Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.

Gap-Acceptance Capacity Formula: SIDRA Standard (Akçelik M3D).

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

SIDRA INTERSECTION 9.1 | Copyright © 2000-2022 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: ARCADIS AUSTRALIA PACIFIC PTY LIMITED | Licence: NETWORK / Enterprise Level 3 | Processed: Friday, 12 September 2025 3:18:20 PM

Project: C:\Users\bw83252\Downloads\2025-09-09 Luddenham Road TIA_ALSPEC ACCESS.sip9

SITE LAYOUT


 Site: 101 [Luddenham Rd/Patons Ln - AM Peak- Alspec Year 2036 (Site Folder: Alspec - Year 2036 - AM)]

New Site

Site Category: (None)

Signals - EQUISAT (Fixed-Time/SCATS) Isolated

Layout pictures are schematic functional drawings reflecting input data. They are not design drawings.

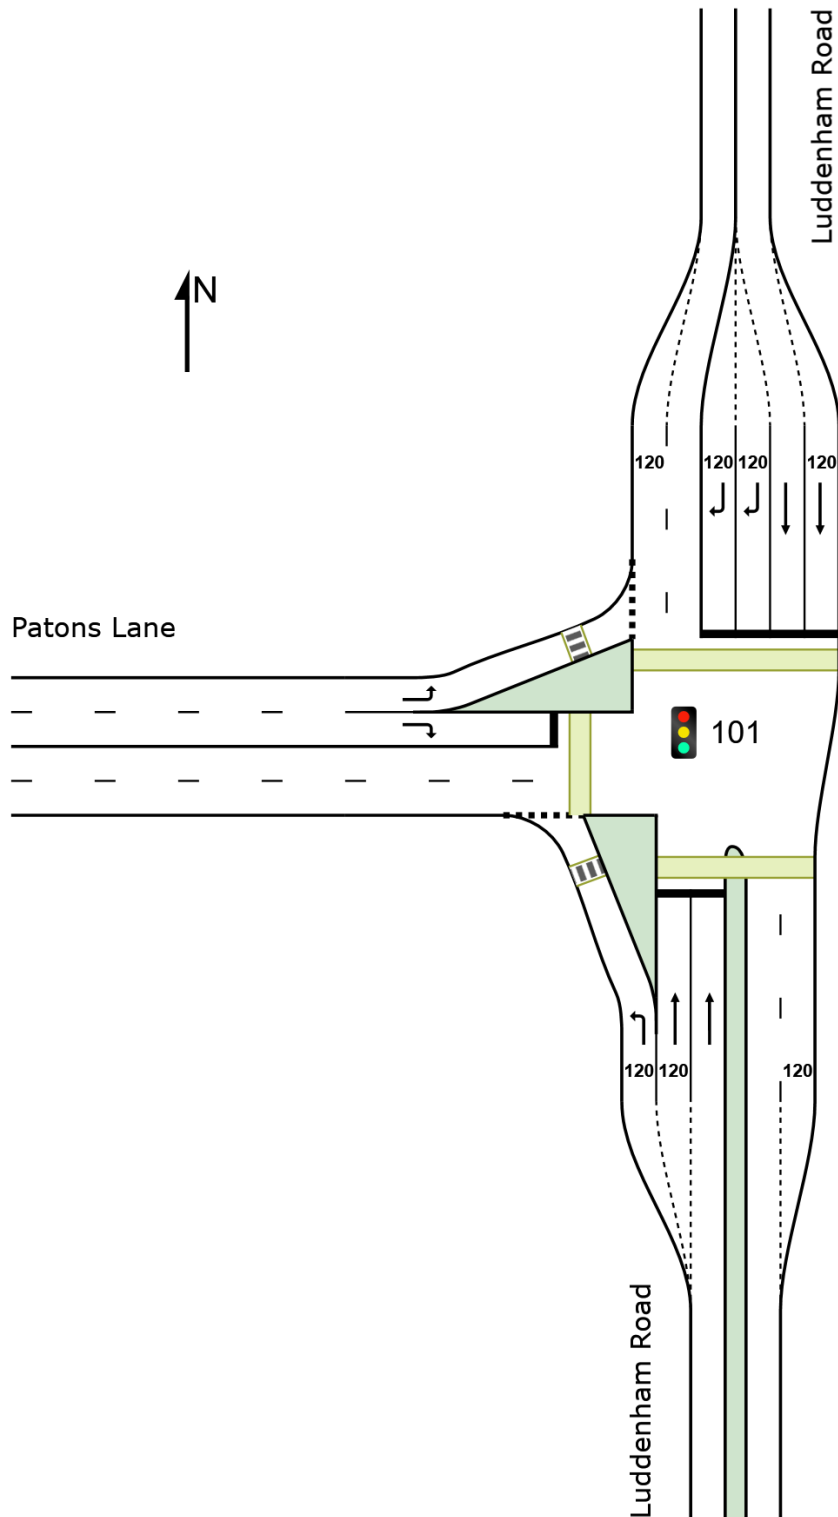

SIDRA INTERSECTION 9.1 | Copyright © 2000-2022 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: ARCADIS AUSTRALIA PACIFIC PTY LIMITED | Licence: NETWORK / Enterprise Level 3 | Created: Friday, 12 September 2025
3:33:01 PM

Project: C:\Users\bw83252\Downloads\2025-09-09 Luddenham Road TIA_ALSPEC ACCESS.sip9

MOVEMENT SUMMARY

 Site: 101 [Luddenham Rd/Patons Ln - AM Peak- Alspec Year 2036 (Site Folder: Alspec - Year 2036 - AM)]

Output produced by SIDRA INTERSECTION Version: 9.1.2.202

New Site

Site Category: (None)

Signals - EQUISAT (Fixed-Time/SCATS) Isolated Cycle Time = 100 seconds (Site User-Given Cycle Time)

Vehicle Movement Performance															
Mov ID	Turn	Mov Class	Demand Flows		Arrival Flows		Deg. Satn	Aver. Delay	Level of Service	95% Back Of Queue		Prop. Que	Eff. Stop Rate	Aver. No. of Cycles	Aver. Speed
			[Total HV]		[Total HV]					[Veh.	Dist]				
			veh/h	%	veh/h	%	v/c	sec		veh	m				km/h
South: Luddenham Road															
1	L2	All MCs	305	21.7	305	21.7	0.336	11.9	LOS A	5.4	49.8	0.50	0.70	0.50	49.8
		LV	239		239		0.336	11.9	LOS A	5.4	49.8	NA	NA	NA	49.8
		HV	44		44		0.336	11.9	LOS A	5.4	49.8	NA	NA	NA	49.8
		TR	22		22		0.336	11.9	LOS A	5.4	49.8	NA	NA	NA	49.8
2	T1	All MCs	800	10.0	800	10.0	* 0.838	37.5	LOS C	24.4	195.3	0.94	0.89	1.03	41.6
		LV	720		720		* 0.838	37.5	LOS C	24.4	195.3	NA	NA	NA	41.6
		HV	53		53		0.838	37.5	LOS C	24.4	195.3	NA	NA	NA	41.6
		TR	27		27		0.838	37.5	LOS C	24.4	195.3	NA	NA	NA	41.6
Approach			1105	13.2	1105	13.2	0.838	30.4	LOS C	24.4	195.3	0.82	0.84	0.88	43.4
North: Luddenham Road															
8	T1	All MCs	495	10.0	495	10.0	0.255	7.6	LOS A	5.9	44.5	0.43	0.37	0.43	55.1
		LV	445		445		0.255	7.6	LOS A	5.9	44.5	NA	NA	NA	55.1
		HV	49		49		0.255	7.6	LOS A	5.9	44.5	NA	NA	NA	55.1
		TR	0		0		-	-	-	-	-	NA	NA	NA	-
9	R2	All MCs	653	23.7	653	23.7	* 0.844	52.0	LOS D	17.4	162.9	1.00	0.96	1.21	29.1
		LV	498		498		* 0.844	52.0	LOS D	17.4	162.9	NA	NA	NA	29.1
		HV	103		103		0.844	52.0	LOS D	17.4	162.9	NA	NA	NA	29.1
		TR	52		52		0.844	52.0	LOS D	17.4	162.9	NA	NA	NA	29.1
Approach			1147	17.8	1147	17.8	0.844	32.9	LOS C	17.4	162.9	0.75	0.70	0.87	39.0
West: Patons Lane															
10	L2	All MCs	284	28.5	284	28.5	0.380	17.8	LOS B	5.8	55.7	0.56	0.72	0.56	45.4
		LV	203		203		0.380	17.8	LOS B	5.8	55.7	NA	NA	NA	45.4
		HV	59		59		0.380	17.8	LOS B	5.8	55.7	NA	NA	NA	45.4
		TR	22		22		0.380	17.8	LOS B	5.8	55.7	NA	NA	NA	45.4
12	R2	All MCs	137	23.1	137	23.1	* 0.498	46.3	LOS D	6.2	57.0	0.94	0.80	0.94	35.6
		LV	105		105		* 0.498	46.3	LOS D	6.2	57.0	NA	NA	NA	35.6
		HV	22		22		0.498	46.3	LOS D	6.2	57.0	NA	NA	NA	35.6
		TR	9		9		0.498	46.3	LOS D	6.2	57.0	NA	NA	NA	35.6
Approach			421	26.8	421	26.8	0.498	27.1	LOS B	6.2	57.0	0.68	0.75	0.68	40.9
All Vehicles			2674	17.3	2674	17.3	0.844	30.9	LOS C	24.4	195.3	0.77	0.76	0.85	41.2

Site Level of Service (LOS) Method: Delay (RTA NSW). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Vehicle movement LOS values are based on average delay per movement.

Intersection and Approach LOS values are based on average delay for all vehicle movements.

Delay Model: SIDRA Standard (Control Delay: Geometric Delay is included).

Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Green.

Gap-Acceptance Capacity Formula: SIDRA Standard (Akçelik M3D).

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

* Critical Movement (Signal Timing)

Pedestrian Movement Performance												
Mov ID	Crossing	Input Vol.	Dem. Flow	Aver. Delay	Level of Service	AVERAGE BACK OF QUEUE		Prop. Que	Eff. Stop Rate	Travel Time	Travel Dist.	Aver. Speed
		ped/h	ped/h	sec		[Ped	Dist]			sec	m	m/sec
South: Luddenham Road												
P1	Full	50	53	44.3	LOS E	0.1	0.1	0.94	0.94	210.9	200.0	0.95
North: Luddenham Road												
P3	Full	50	53	44.3	LOS E	0.1	0.1	0.94	0.94	210.9	200.0	0.95
West: Patons Lane												
P4	Full	50	53	44.3	LOS E	0.1	0.1	0.94	0.94	210.9	200.0	0.95
All Pedestrians		150	158	44.3	LOS E	0.1	0.1	0.94	0.94	210.9	200.0	0.95

Level of Service (LOS) Method: SIDRA Pedestrian LOS Method (Based on Average Delay)

Pedestrian movement LOS values are based on average delay per pedestrian movement.

Intersection LOS value for Pedestrians is based on average delay for all pedestrian movements.

SIDRA INTERSECTION 9.1 | Copyright © 2000-2022 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: ARCADIS AUSTRALIA PACIFIC PTY LIMITED | Licence: NETWORK / Enterprise Level 3 | Processed: Friday, 12 September 2025 3:18:19 PM

Project: C:\Users\bw83252\Downloads\2025-09-09 Luddenham Road TIA_ALSPEC ACCESS.sip9

MOVEMENT SUMMARY

 Site: 101 [Luddenham Rd/Patons Ln - PM Peak - Alspec Year 2036 (Site Folder: Alspec - Year 2036 - PM)]

Output produced by SIDRA INTERSECTION Version: 9.1.2.202

New Site

Site Category: (None)

Signals - EQUISAT (Fixed-Time/SCATS) Isolated Cycle Time = 100 seconds (Site User-Given Cycle Time)

Vehicle Movement Performance													
Mov ID	Turn	Mov Class	Demand Flows [Total HV] veh/h	Arrival Flows [Total HV] veh/h	Deg. Satn v/c	Aver. Delay sec	Level of Service	95% Back Of Queue [Veh. Dist] veh m	Prop. Que	Eff. Stop Rate	Aver. No. of Cycles	Aver. Speed km/h	
South: Luddenham Road													
1	L2	All MCs	158 36.0	158 36.0	0.168	8.5	LOS A	1.5 15.5	0.32	0.63	0.32	51.4	
		LV	101	101	0.168	8.5	LOS A	1.5 15.5	NA	NA	NA	51.4	
		HV	44	44	0.168	8.5	LOS A	1.5 15.5	NA	NA	NA	51.4	
		TR	13	13	0.168	8.5	LOS A	1.5 15.5	NA	NA	NA	51.4	
2	T1	All MCs	505 10.0	505 10.0	* 0.555	31.2	LOS C	12.5 95.1	0.86	0.73	0.86	43.6	
		LV	455	455	* 0.555	31.2	LOS C	12.5 95.1	NA	NA	NA	43.6	
		HV	51	51	0.555	31.2	LOS C	12.5 95.1	NA	NA	NA	43.6	
		TR	0	0	-	-	-	-	NA	NA	NA	-	
Approach			663 16.2	663 16.2	0.555	25.8	LOS B	12.5 95.1	0.73	0.71	0.73	45.1	
North: Luddenham Road													
8	T1	All MCs	684 10.0	684 10.0	0.388	11.5	LOS A	10.4 78.9	0.54	0.47	0.54	53.0	
		LV	616	616	0.388	11.5	LOS A	10.4 78.9	NA	NA	NA	53.0	
		HV	68	68	0.388	11.5	LOS A	10.4 78.9	NA	NA	NA	53.0	
		TR	0	0	-	-	-	-	NA	NA	NA	-	
9	R2	All MCs	316 42.0	316 42.0	* 0.555	44.0	LOS D	7.0 75.0	0.93	0.81	0.93	31.1	
		LV	183	183	* 0.555	44.0	LOS D	7.0 75.0	NA	NA	NA	31.1	
		HV	103	103	0.555	44.0	LOS D	7.0 75.0	NA	NA	NA	31.1	
		TR	29	29	0.555	44.0	LOS D	7.0 75.0	NA	NA	NA	31.1	
Approach			1000 20.1	1000 20.1	0.555	21.8	LOS B	10.4 78.9	0.66	0.58	0.66	45.6	
West: Patons Lane													
10	L2	All MCs	479 20.2	479 20.2	0.527	12.4	LOS A	7.9 70.3	0.50	0.72	0.50	47.9	
		LV	382	382	0.527	12.4	LOS A	7.9 70.3	NA	NA	NA	47.9	
		HV	72	72	0.527	12.4	LOS A	7.9 70.3	NA	NA	NA	47.9	
		TR	25	25	0.527	12.4	LOS A	7.9 70.3	NA	NA	NA	47.9	
12	R2	All MCs	205 20.0	205 20.0	* 0.549	41.7	LOS C	8.9 78.6	0.92	0.81	0.92	37.0	
		LV	164	164	* 0.549	41.7	LOS C	8.9 78.6	NA	NA	NA	37.0	
		HV	31	31	0.549	41.7	LOS C	8.9 78.6	NA	NA	NA	37.0	
		TR	11	11	0.549	41.7	LOS C	8.9 78.6	NA	NA	NA	37.0	
Approach			684 20.2	684 20.2	0.549	21.2	LOS B	8.9 78.6	0.63	0.75	0.63	43.2	
All Vehicles			2347 19.0	2347 19.0	0.555	22.8	LOS B	12.5 95.1	0.67	0.66	0.67	44.8	

Site Level of Service (LOS) Method: Delay (RTA NSW). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Vehicle movement LOS values are based on average delay per movement.

Intersection and Approach LOS values are based on average delay for all vehicle movements.

Delay Model: SIDRA Standard (Control Delay: Geometric Delay is included).

Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Green.

Gap-Acceptance Capacity Formula: SIDRA Standard (Akçelik M3D).

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

* Critical Movement (Signal Timing)

Pedestrian Movement Performance												
Mov ID	Crossing	Input Vol.	Dem. Flow	Aver. Delay	Level of Service	AVERAGE BACK OF QUEUE		Prop. Que	Eff. Stop Rate	Travel Time	Travel Dist.	Aver. Speed
		ped/h	ped/h	sec		[Ped	Dist]			sec	m	m/sec
South: Luddenham Road												
P1	Full	50	53	44.3	LOS E	0.1	0.1	0.94	0.94	210.9	200.0	0.95
North: Luddenham Road												
P3	Full	50	53	44.3	LOS E	0.1	0.1	0.94	0.94	210.9	200.0	0.95
West: Patons Lane												
P4	Full	50	53	44.3	LOS E	0.1	0.1	0.94	0.94	210.9	200.0	0.95
All Pedestrians		150	158	44.3	LOS E	0.1	0.1	0.94	0.94	210.9	200.0	0.95

Level of Service (LOS) Method: SIDRA Pedestrian LOS Method (Based on Average Delay)
 Pedestrian movement LOS values are based on average delay per pedestrian movement.
 Intersection LOS value for Pedestrians is based on average delay for all pedestrian movements.


Appendix E **SIDRA outputs – construction**

SITE LAYOUT

▼ Site: v [Luddenham Rd/Patons Ln (2025) - AM Peak - Base Case (Site Folder: AM Base Case - 2025 Survey)]

NA
Site Category: (None)
Give-Way (Two-Way)

Layout pictures are schematic functional drawings reflecting input data. They are not design drawings.

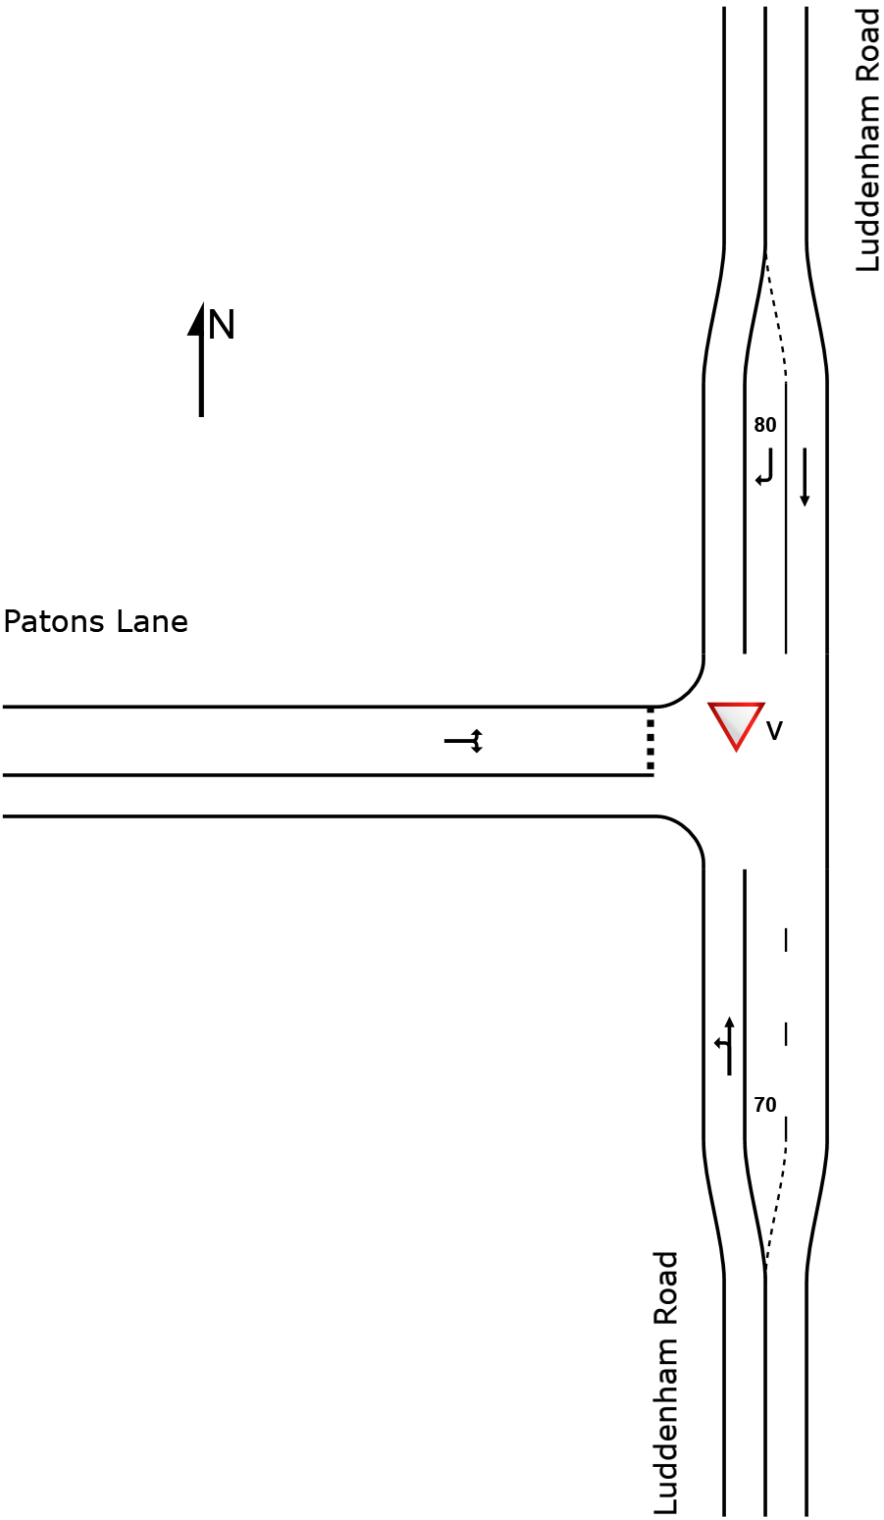

SIDRA INTERSECTION 9.1 | Copyright © 2000-2022 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: ARCADIS AUSTRALIA PACIFIC PTY LIMITED | Licence: NETWORK / Enterprise Level 3 | Created: Monday, 18 August 2025 9:59:45 AM

Project: C:\Users\whaz4229\OneDrive - ARCADIS\Local\Luddenham\Comments 25-08\2025-08-18 AIBP Construction_ScenarioC.sip9

MOVEMENT SUMMARY

Site: v [Luddenham Rd/Patons Ln (2025) - AM Peak - Base Case (Site Folder: AM Base Case - 2025 Survey)]

Output produced by SIDRA INTERSECTION Version: 9.1.2.202

NA

Site Category: (None)

Give-Way (Two-Way)

Vehicle Movement Performance															
Mov ID	Turn	Mov Class	Demand Flows		Arrival Flows		Deg. Satn	Aver. Delay	Level of Service	95% Back Of Queue	Prop. Que	Eff. Stop Rate	Aver. No. of Cycles	Aver. Speed	
			[Total HV]	[Total HV]	[Total HV]	[Total HV]									
			veh/h	%	veh/h	%	v/c	sec		[Veh. veh	Dist] m			km/h	
South: Luddenham Road															
1	L2	All MCs	25	45.8	25	45.8	0.353	7.9	LOS A	0.0	0.0	0.00	0.03	0.00	63.4
		LV	14		14		0.353	7.9	LOS A	0.0	0.0	NA	NA	NA	63.4
		HV	12		12		0.353	7.9	LOS A	0.0	0.0	NA	NA	NA	63.4
		TR	0		0		-	-	-	-	-	NA	NA	NA	-
2	T1	All MCs	620	5.8	620	5.8	0.353	0.1	LOS A	0.0	0.0	0.00	0.03	0.00	79.5
		LV	584		584		0.353	0.1	LOS A	0.0	0.0	NA	NA	NA	79.5
		HV	36		36		0.353	0.1	LOS A	0.0	0.0	NA	NA	NA	79.5
		TR	0		0		-	-	-	-	-	NA	NA	NA	-
Approach			645	7.3	645	7.3	0.353	0.4	NA	0.0	0.0	0.00	0.03	0.00	78.8
North: Luddenham Road															
8	T1	All MCs	237	17.3	237	17.3	0.141	0.0	LOS A	0.0	0.0	0.00	0.00	0.00	79.9
		LV	196		196		0.141	0.0	LOS A	0.0	0.0	NA	NA	NA	79.9
		HV	41		41		0.141	0.0	LOS A	0.0	0.0	NA	NA	NA	79.9
		TR	0		0		-	-	-	-	-	NA	NA	NA	-
9	R2	All MCs	58	30.9	58	30.9	0.102	11.8	LOS A	0.3	2.8	0.57	0.84	0.57	49.8
		LV	40		40		0.102	10.2	LOS A	0.3	2.8	NA	NA	NA	51.1
		HV	18		18		0.102	15.5	LOS B	0.3	2.8	NA	NA	NA	47.1
		TR	0		0		-	-	-	-	-	NA	NA	NA	-
Approach			295	20.0	295	20.0	0.141	2.3	NA	0.3	2.8	0.11	0.17	0.11	73.8
West: Patons Lane															
10	L2	All MCs	23	68.2	23	68.2	0.268	17.9	LOS B	0.9	9.5	0.84	0.97	0.96	30.7
		LV	7		7		0.268	11.7	LOS A	0.9	9.5	NA	NA	NA	32.7
		HV	16		16		0.268	20.8	LOS B	0.9	9.5	NA	NA	NA	29.9
		TR	0		0		-	-	-	-	-	NA	NA	NA	-
12	R2	All MCs	21	60.0	21	60.0	0.268	42.9	LOS D	0.9	9.5	0.84	0.97	0.96	40.9
		LV	8		8		0.268	21.5	LOS B	0.9	9.5	NA	NA	NA	51.2
		HV	13		13		0.268	57.1	LOS E	0.9	9.5	NA	NA	NA	36.0
Approach			44	64.3	44	64.3	0.268	29.8	LOS C	0.9	9.5	0.84	0.97	0.96	35.7
All Vehicles			984	13.7	984	13.7	0.353	2.3	NA	0.9	9.5	0.07	0.11	0.08	74.2

Site Level of Service (LOS) Method: Delay (RTA NSW). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Vehicle movement LOS values are based on average delay per movement.

Minor Road Approach LOS values are based on average delay for all vehicle movements.

NA (TWSC): Level of Service is not defined for major road approaches or the intersection as a whole for Two-Way Sign Control (HCM LOS rule).

Two-Way Sign Control Capacity Model: SIDRA Standard.

Delay Model: SIDRA Standard (Control Delay: Geometric Delay is included).

Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.

Gap-Acceptance Capacity Formula: SIDRA Standard (Akçelik M3D).

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

SIDRA INTERSECTION 9.1 | Copyright © 2000-2022 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: ARCADIS AUSTRALIA PACIFIC PTY LIMITED | Licence: NETWORK / Enterprise Level 3 | Processed: Wednesday, 18 June 2025 9:02:09 AM

Project: C:\Users\whaz4229\OneDrive - ARCADIS\Local\Luddenham\Comments 25-08\2025-08-18 AIBP Construction_ScenarioC.sip9

MOVEMENT SUMMARY

Site: v [Luddenham Rd/Patons Ln (2025) - PM Peak - Base Case (Site Folder: PM Base Case - 2025 Survey)]

Output produced by SIDRA INTERSECTION Version: 9.1.2.202

NA

Site Category: (None)

Give-Way (Two-Way)

Vehicle Movement Performance															
Mov ID	Turn	Mov Class	Demand Flows		Arrival Flows		Deg. Satn	Aver. Delay	Level of Service	95% Back Of Queue		Prop. Que	Eff. Stop Rate	Aver. No. of Cycles	Aver. Speed
			[Total HV]		[Total HV]					[Veh. veh	Dist]				km/h
			veh/h	%	veh/h	%	v/c	sec			m				
South: Luddenham Road															
1	L2	All MCs	3	0.0	3	0.0	0.194	7.0	LOS A	0.0	0.0	0.00	0.01	0.00	74.4
		LV	3		3		0.194	7.0	LOS A	0.0	0.0	NA	NA	NA	74.4
		HV	0		0		-	-	-	-	-	NA	NA	NA	-
		TR	0		0		-	-	-	-	-	NA	NA	NA	-
2	T1	All MCs	362	4.7	362	4.7	0.194	0.1	LOS A	0.0	0.0	0.00	0.01	0.00	79.8
		LV	345		345		0.194	0.1	LOS A	0.0	0.0	NA	NA	NA	79.8
		HV	17		17		0.194	0.1	LOS A	0.0	0.0	NA	NA	NA	79.8
		TR	0		0		-	-	-	-	-	NA	NA	NA	-
Approach			365	4.6	365	4.6	0.194	0.1	NA	0.0	0.0	0.00	0.01	0.00	79.8
North: Luddenham Road															
8	T1	All MCs	539	4.5	539	4.5	0.286	0.1	LOS A	0.0	0.0	0.00	0.00	0.00	79.8
		LV	515		515		0.286	0.1	LOS A	0.0	0.0	NA	NA	NA	79.8
		HV	24		24		0.286	0.1	LOS A	0.0	0.0	NA	NA	NA	79.8
		TR	0		0		-	-	-	-	-	NA	NA	NA	-
9	R2	All MCs	11	20.0	11	20.0	0.011	8.7	LOS A	0.0	0.3	0.38	0.64	0.38	52.5
		LV	8		8		0.011	8.3	LOS A	0.0	0.3	NA	NA	NA	52.8
		HV	2		2		0.011	10.1	LOS A	0.0	0.3	NA	NA	NA	51.3
		TR	0		0		-	-	-	-	-	NA	NA	NA	-
Approach			549	4.8	549	4.8	0.286	0.2	NA	0.0	0.3	0.01	0.01	0.01	79.3
West: Patons Lane															
10	L2	All MCs	159	11.3	159	11.3	0.888	30.4	LOS C	8.4	63.9	0.93	1.81	3.12	30.8
		LV	141		141		0.888	29.9	LOS C	8.4	63.9	NA	NA	NA	31.0
		HV	18		18		0.888	34.9	LOS C	8.4	63.9	NA	NA	NA	29.5
		TR	0		0		-	-	-	-	-	NA	NA	NA	-
12	R2	All MCs	63	8.3	63	8.3	0.888	84.9	LOS F	8.4	63.9	0.93	1.81	3.12	37.7
		LV	58		58		0.888	72.9	LOS F	8.4	63.9	NA	NA	NA	42.1
		HV	5		5		0.888	217.3	LOS F	8.4	63.9	NA	NA	NA	17.5
Approach			222	10.4	222	10.4	0.888	45.9	LOS D	8.4	63.9	0.93	1.81	3.12	32.9
All Vehicles			1137	5.8	1137	5.8	0.888	9.1	NA	8.4	63.9	0.19	0.36	0.61	65.6

Site Level of Service (LOS) Method: Delay (RTA NSW). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Vehicle movement LOS values are based on average delay per movement.

Minor Road Approach LOS values are based on average delay for all vehicle movements.

NA (TWSC): Level of Service is not defined for major road approaches or the intersection as a whole for Two-Way Sign Control (HCM LOS rule).

Two-Way Sign Control Capacity Model: SIDRA Standard.

Delay Model: SIDRA Standard (Control Delay: Geometric Delay is included).

Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.

Gap-Acceptance Capacity Formula: SIDRA Standard (Akçelik M3D).

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity Constraint effects.

SIDRA INTERSECTION 9.1 | Copyright © 2000-2022 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: ARCADIS AUSTRALIA PACIFIC PTY LIMITED | Licence: NETWORK / Enterprise Level 3 | Processed: Wednesday, 18 June 2025 9:02:12 AM


Project: C:\Users\whaz4229\OneDrive - ARCADIS\Local\Luddenham\Comments 25-08\2025-08-18 AIBP Construction_ScenarioC.sip9

SITE LAYOUT

▽ Site: v [Luddenham Rd/Patons Ln (2025) - AM Peak - Scenario A (Site Folder: AM EW - Scenario A (Base Case + Metro))]

NA
Site Category: (None)
Give-Way (Two-Way)

Layout pictures are schematic functional drawings reflecting input data. They are not design drawings.

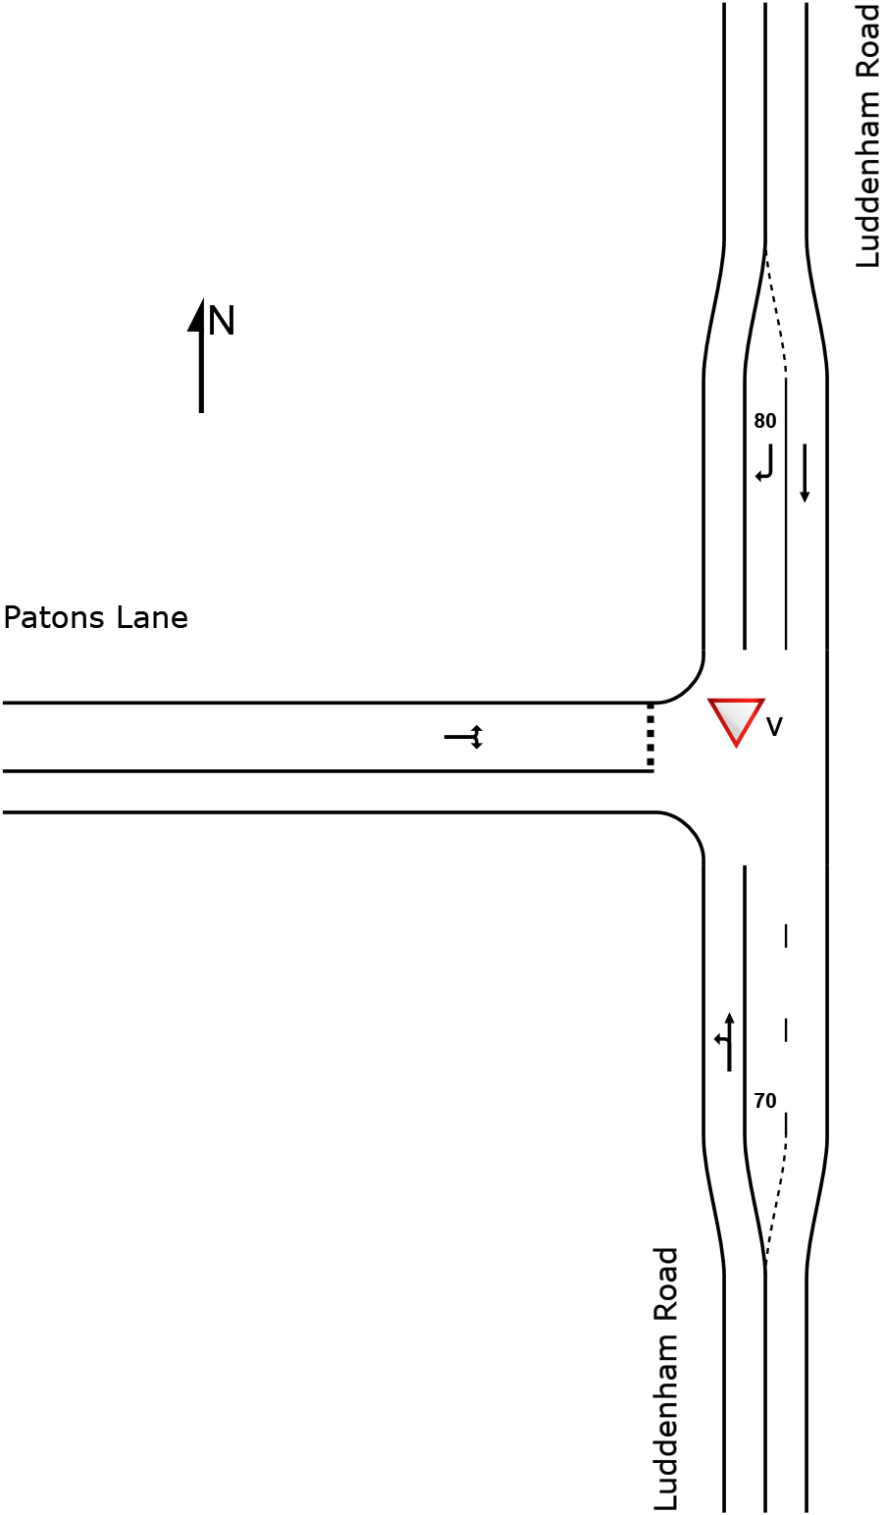

SIDRA INTERSECTION 9.1 | Copyright © 2000-2022 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: ARCADIS AUSTRALIA PACIFIC PTY LIMITED | Licence: NETWORK / Enterprise Level 3 | Created: Monday, 18 August 2025 9:59:53 AM

Project: C:\Users\whaz4229\OneDrive - ARCADIS\Local\Luddenham\Comments 25-08\2025-08-18 AIBP Construction_ScenarioC.sip9

MOVEMENT SUMMARY

Site: v [Luddenham Rd/Patons Ln (2025) - AM Peak - Scenario A (Site Folder: AM EW - Scenario A (Base Case + Metro))]

Output produced by SIDRA INTERSECTION Version: 9.1.2.202

NA

Site Category: (None)

Give-Way (Two-Way)

Vehicle Movement Performance															
Mov ID	Turn	Mov Class	Demand Flows		Arrival Flows		Deg. Satn	Aver. Delay	Level of Service	95% Back Of Queue		Prop. Que	Eff. Stop Rate	Aver. No. of Cycles	Aver. Speed
			[Total HV]	[Total HV]	[Total HV]	[Total HV]				[Veh.	Dist]				km/h
			veh/h	%	veh/h	%	v/c	sec		veh	m				
South: Luddenham Road															
1	L2	All MCs	43	34.1	43	34.1	0.365	7.7	LOS A	0.0	0.0	0.00	0.04	0.00	65.5
		LV	28		28		0.365	7.7	LOS A	0.0	0.0	NA	NA	NA	65.5
		HV	11		11		0.365	7.7	LOS A	0.0	0.0	NA	NA	NA	65.5
		TR	4		4		0.365	7.7	LOS A	0.0	0.0	NA	NA	NA	65.5
2	T1	All MCs	620	5.8	620	5.8	0.365	0.1	LOS A	0.0	0.0	0.00	0.04	0.00	79.3
		LV	584		584		0.365	0.1	LOS A	0.0	0.0	NA	NA	NA	79.3
		HV	36		36		0.365	0.1	LOS A	0.0	0.0	NA	NA	NA	79.3
		TR	0		0		-	-	-	-	-	NA	NA	NA	-
Approach			663	7.6	663	7.6	0.365	0.6	NA	0.0	0.0	0.00	0.04	0.00	78.3
North: Luddenham Road															
8	T1	All MCs	237	17.3	237	17.3	0.141	0.0	LOS A	0.0	0.0	0.00	0.00	0.00	79.9
		LV	196		196		0.141	0.0	LOS A	0.0	0.0	NA	NA	NA	79.9
		HV	41		41		0.141	0.0	LOS A	0.0	0.0	NA	NA	NA	79.9
		TR	0		0		-	-	-	-	-	NA	NA	NA	-
9	R2	All MCs	99	24.5	99	24.5	0.171	11.9	LOS A	0.5	4.5	0.59	0.85	0.59	49.8
		LV	75		75		0.171	10.4	LOS A	0.5	4.5	NA	NA	NA	51.0
		HV	24		24		0.171	16.4	LOS B	0.5	4.5	NA	NA	NA	46.5
		TR	0		0		-	-	-	-	-	NA	NA	NA	-
Approach			336	19.4	336	19.4	0.171	3.5	NA	0.5	4.5	0.17	0.25	0.17	70.8
West: Patons Lane															
10	L2	All MCs	28	74.1	28	74.1	0.394	34.1	LOS C	1.2	15.7	0.88	1.04	1.14	26.9
		LV	7		7		0.394	15.2	LOS B	1.2	15.7	NA	NA	NA	32.1
		HV	15		15		0.394	24.4	LOS B	1.2	15.7	NA	NA	NA	29.4
		TR	6		6		0.394	78.6	LOS F	1.2	15.7	NA	NA	NA	19.5
12	R2	All MCs	21	60.0	21	60.0	0.394	52.0	LOS D	1.2	15.7	0.88	1.04	1.14	36.5
		LV	8		8		0.394	26.6	LOS B	1.2	15.7	NA	NA	NA	46.4
		HV	13		13		0.394	68.9	LOS E	1.2	15.7	NA	NA	NA	31.9
Approach			49	68.1	49	68.1	0.394	41.7	LOS C	1.2	15.7	0.88	1.04	1.14	31.0
All Vehicles			1048	14.3	1048	14.3	0.394	3.5	NA	1.2	15.7	0.10	0.16	0.11	71.9

Site Level of Service (LOS) Method: Delay (RTA NSW). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Vehicle movement LOS values are based on average delay per movement.

Minor Road Approach LOS values are based on average delay for all vehicle movements.

NA (TWSC): Level of Service is not defined for major road approaches or the intersection as a whole for Two-Way Sign Control (HCM LOS rule).

Two-Way Sign Control Capacity Model: SIDRA Standard.

Delay Model: SIDRA Standard (Control Delay: Geometric Delay is included).

Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.

Gap-Acceptance Capacity Formula: SIDRA Standard (Akçelik M3D).

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity

Constraint effects.

SIDRA INTERSECTION 9.1 | Copyright © 2000-2022 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: ARCADIS AUSTRALIA PACIFIC PTY LIMITED | Licence: NETWORK / Enterprise Level 3 | Processed: Tuesday, 29 July 2025
11:14:35 AM

Project: C:\Users\whaz4229\OneDrive - ARCADIS\Local\Luddenham\Comments 25-08\2025-08-18 AIBP Construction_ScenarioC.sip9

MOVEMENT SUMMARY

Site: v [Luddenham Rd/Patons Ln (2025) - PM Peak - Scenario A (Site Folder: PM EW - Scenario A (Base Case + Metro))]

Output produced by SIDRA INTERSECTION Version: 9.1.2.202

NA

Site Category: (None)

Give-Way (Two-Way)

Vehicle Movement Performance															
Mov ID	Turn	Mov Class	Demand Flows		Arrival Flows		Deg. Satn	Aver. Delay	Level of Service	95% Back Of Queue		Prop. Que	Eff. Stop Rate	Aver. No. of Cycles	Aver. Speed
			[Total HV]	[Total HV]	[Total HV]	[Total HV]				[Veh. veh	Dist] m				km/h
			veh/h	%	veh/h	%	v/c	sec							
South: Luddenham Road															
1	L2	All MCs	6	50.0	6	50.0	0.198	7.9	LOS A	0.0	0.0	0.00	0.01	0.00	62.6
		LV	3		3		0.198	7.9	LOS A	0.0	0.0	NA	NA	NA	62.6
		HV	2		2		0.198	7.9	LOS A	0.0	0.0	NA	NA	NA	62.6
		TR	1		1		0.198	7.9	LOS A	0.0	0.0	NA	NA	NA	62.6
2	T1	All MCs	362	4.7	362	4.7	0.198	0.1	LOS A	0.0	0.0	0.00	0.01	0.00	79.8
		LV	345		345		0.198	0.1	LOS A	0.0	0.0	NA	NA	NA	79.8
		HV	17		17		0.198	0.1	LOS A	0.0	0.0	NA	NA	NA	79.8
		TR	0		0		-	-	-	-	-	NA	NA	NA	-
Approach			368	5.4	368	5.4	0.198	0.2	NA	0.0	0.0	0.00	0.01	0.00	79.5
North: Luddenham Road															
8	T1	All MCs	539	4.5	539	4.5	0.286	0.1	LOS A	0.0	0.0	0.00	0.00	0.00	79.8
		LV	515		515		0.286	0.1	LOS A	0.0	0.0	NA	NA	NA	79.8
		HV	24		24		0.286	0.1	LOS A	0.0	0.0	NA	NA	NA	79.8
		TR	0		0		-	-	-	-	-	NA	NA	NA	-
9	R2	All MCs	15	35.7	15	35.7	0.018	9.3	LOS A	0.1	0.5	0.40	0.66	0.40	51.9
		LV	9		9		0.018	8.7	LOS A	0.1	0.5	NA	NA	NA	52.4
		HV	5		5		0.018	10.5	LOS A	0.1	0.5	NA	NA	NA	50.9
		TR	0		0		-	-	-	-	-	NA	NA	NA	-
Approach			554	5.3	554	5.3	0.286	0.3	NA	0.1	0.5	0.01	0.02	0.01	79.1
West: Patons Lane															
10	L2	All MCs	165	14.6	165	14.6	0.947	44.3	LOS D	11.1	90.2	0.97	2.13	3.90	26.8
		LV	141		141		0.947	42.6	LOS D	11.1	90.2	NA	NA	NA	27.2
		HV	17		17		0.947	47.8	LOS D	11.1	90.2	NA	NA	NA	26.0
		TR	7		7		0.947	69.9	LOS E	11.1	90.2	NA	NA	NA	22.0
12	R2	All MCs	63	8.3	63	8.3	0.947	100.8	LOS F	11.1	90.2	0.97	2.13	3.90	32.9
		LV	58		58		0.947	88.0	LOS F	11.1	90.2	NA	NA	NA	36.4
		HV	5		5		0.947	241.9	LOS F	11.1	90.2	NA	NA	NA	15.9
Approach			228	12.9	228	12.9	0.947	60.0	LOS E	11.1	90.2	0.97	2.13	3.90	28.6
All Vehicles			1151	6.9	1151	6.9	0.947	12.1	NA	11.1	90.2	0.20	0.43	0.78	62.4

Site Level of Service (LOS) Method: Delay (RTA NSW). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Vehicle movement LOS values are based on average delay per movement.

Minor Road Approach LOS values are based on average delay for all vehicle movements.

NA (TWSC): Level of Service is not defined for major road approaches or the intersection as a whole for Two-Way Sign Control (HCM LOS rule).

Two-Way Sign Control Capacity Model: SIDRA Standard.

Delay Model: SIDRA Standard (Control Delay is included).

Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.

Gap-Acceptance Capacity Formula: SIDRA Standard (Akçelik M3D).

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity

Constraint effects.

SIDRA INTERSECTION 9.1 | Copyright © 2000-2022 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: ARCADIS AUSTRALIA PACIFIC PTY LIMITED | Licence: NETWORK / Enterprise Level 3 | Processed: Tuesday, 29 July 2025
11:14:35 AM


Project: C:\Users\whaz4229\OneDrive - ARCADIS\Local\Luddenham\Comments 25-08\2025-08-18 AIBP Construction_ScenarioC.sip9

SITE LAYOUT

▽ Site: v [Luddenham Rd/Patons Ln (2025) - AM Peak - Scenario B (Site Folder: AM EW - Scenario B (Base Case + Metro + AIBP))]

NA
Site Category: (None)
Give-Way (Two-Way)

Layout pictures are schematic functional drawings reflecting input data. They are not design drawings.

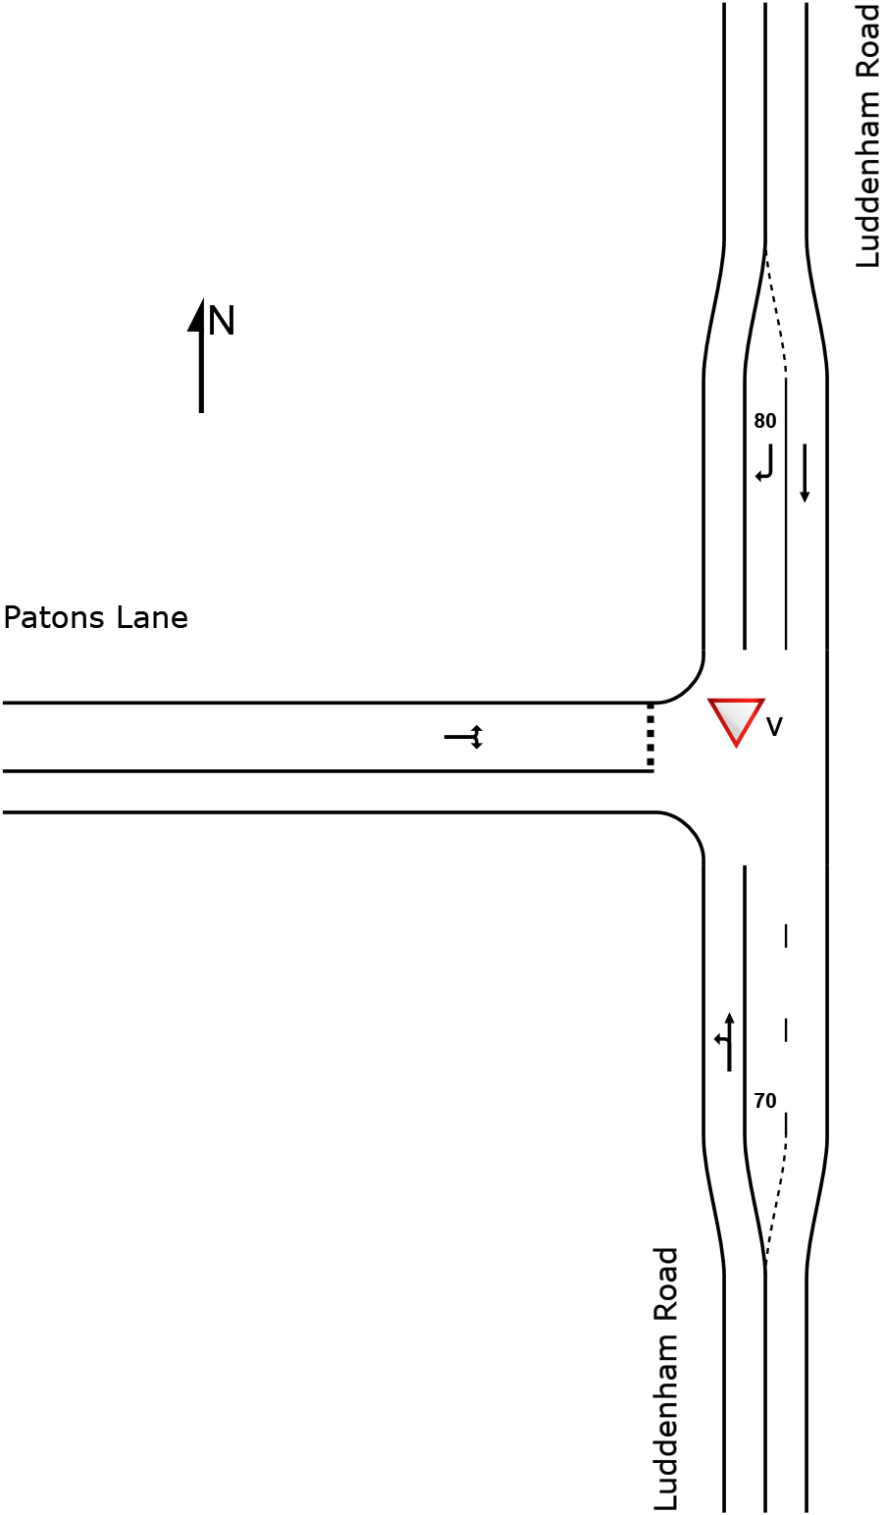

SIDRA INTERSECTION 9.1 | Copyright © 2000-2022 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: ARCADIS AUSTRALIA PACIFIC PTY LIMITED | Licence: NETWORK / Enterprise Level 3 | Created: Monday, 18 August 2025 10:00:03 AM

Project: C:\Users\whaz4229\OneDrive - ARCADIS\Local\Luddenham\Comments 25-08\2025-08-18 AIBP Construction_ScenarioC.sip9

MOVEMENT SUMMARY

Site: v [Luddenham Rd/Patons Ln (2025) - AM Peak - Scenario B (Site Folder: AM EW - Scenario B (Base Case + Metro + AIBP))]

Output produced by SIDRA INTERSECTION Version: 9.1.2.202

NA

Site Category: (None)

Give-Way (Two-Way)

Vehicle Movement Performance															
Mov ID	Turn	Mov Class	Demand Flows		Arrival Flows		Deg. Satn	Aver. Delay	Level of Service	95% Back Of Queue		Prop. Que	Eff. Stop Rate	Aver. No. of Cycles	Aver. Speed
			[Total HV]	[Total HV]	[Total HV]	[Total HV]				[Veh. veh	Dist] m				km/h
			veh/h	%	veh/h	%	v/c	sec							
South: Luddenham Road															
1	L2	All MCs	81	27.3	81	27.3	0.390	7.6	LOS A	0.0	0.0	0.00	0.07	0.00	66.6
		LV	59		59		0.390	7.6	LOS A	0.0	0.0	NA	NA	NA	66.6
		HV	16		16		0.390	7.6	LOS A	0.0	0.0	NA	NA	NA	66.6
		TR	6		6		0.390	7.6	LOS A	0.0	0.0	NA	NA	NA	66.6
2	T1	All MCs	620	5.8	620	5.8	0.390	0.2	LOS A	0.0	0.0	0.00	0.07	0.00	78.8
		LV	584		584		0.390	0.2	LOS A	0.0	0.0	NA	NA	NA	78.8
		HV	36		36		0.390	0.2	LOS A	0.0	0.0	NA	NA	NA	78.8
		TR	0		0		-	-	-	-	-	NA	NA	NA	-
Approach			701	8.3	701	8.3	0.390	1.0	NA	0.0	0.0	0.00	0.07	0.00	77.4
North: Luddenham Road															
8	T1	All MCs	237	17.3	237	17.3	0.141	0.0	LOS A	0.0	0.0	0.00	0.00	0.00	79.9
		LV	196		196		0.141	0.0	LOS A	0.0	0.0	NA	NA	NA	79.9
		HV	41		41		0.141	0.0	LOS A	0.0	0.0	NA	NA	NA	79.9
		TR	0		0		-	-	-	-	-	NA	NA	NA	-
9	R2	All MCs	187	23.0	187	23.0	0.342	13.5	LOS A	1.3	11.0	0.67	0.93	0.85	48.6
		LV	144		144		0.342	11.8	LOS A	1.3	11.0	NA	NA	NA	49.9
		HV	43		43		0.342	19.3	LOS B	1.3	11.0	NA	NA	NA	44.6
		TR	0		0		-	-	-	-	-	NA	NA	NA	-
Approach			424	19.9	424	19.9	0.342	6.0	NA	1.3	11.0	0.30	0.41	0.38	65.5
West: Patons Lane															
10	L2	All MCs	28	74.1	28	74.1	0.464	37.0	LOS C	1.5	18.3	0.91	1.08	1.23	25.1
		LV	7		7		0.464	18.0	LOS B	1.5	18.3	NA	NA	NA	29.6
		HV	15		15		0.464	27.3	LOS B	1.5	18.3	NA	NA	NA	27.2
		TR	6		6		0.464	81.7	LOS F	1.5	18.3	NA	NA	NA	18.5
12	R2	All MCs	21	60.0	21	60.0	0.464	67.9	LOS E	1.5	18.3	0.91	1.08	1.23	34.1
		LV	8		8		0.464	33.1	LOS C	1.5	18.3	NA	NA	NA	46.9
		HV	13		13		0.464	91.2	LOS F	1.5	18.3	NA	NA	NA	28.8
Approach			49	68.1	49	68.1	0.464	50.2	LOS D	1.5	18.3	0.91	1.08	1.23	29.0
All Vehicles			1175	15.0	1175	15.0	0.464	4.9	NA	1.5	18.3	0.14	0.24	0.19	69.3

Site Level of Service (LOS) Method: Delay (RTA NSW). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Vehicle movement LOS values are based on average delay per movement.

Minor Road Approach LOS values are based on average delay for all vehicle movements.

NA (TWSC): Level of Service is not defined for major road approaches or the intersection as a whole for Two-Way Sign Control (HCM LOS rule).

Two-Way Sign Control Capacity Model: SIDRA Standard.

Delay Model: SIDRA Standard (Control Delay: Geometric Delay is included).

Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.

Gap-Acceptance Capacity Formula: SIDRA Standard (Akçelik M3D).

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity

Constraint effects.

SIDRA INTERSECTION 9.1 | Copyright © 2000-2022 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: ARCADIS AUSTRALIA PACIFIC PTY LIMITED | Licence: NETWORK / Enterprise Level 3 | Processed: Tuesday, 29 July 2025
11:14:35 AM

Project: C:\Users\whaz4229\OneDrive - ARCADIS\Local\Luddenham\Comments 25-08\2025-08-18 AIBP Construction_ScenarioC.sip9

MOVEMENT SUMMARY

Site: v [Luddenham Rd/Patons Ln (2025) - PM Peak - Scenario B (Site Folder: PM EW - Scenario B (Base Case + Metro + AIBP))]

Output produced by SIDRA INTERSECTION Version: 9.1.2.202

NA

Site Category: (None)

Give-Way (Two-Way)

Vehicle Movement Performance															
Mov ID	Turn	Mov Class	Demand Flows		Arrival Flows		Deg. Satn	Aver. Delay	Level of Service	95% Back Of Queue		Prop. Que	Eff. Stop Rate	Aver. No. of Cycles	Aver. Speed
			[Total HV]	[Total HV]	[Total HV]	[Total HV]				[Veh. veh	Dist] m				km/h
			veh/h	%	veh/h	%	v/c	sec							
South: Luddenham Road															
1	L2	All MCs	6	50.0	6	50.0	0.198	7.9	LOS A	0.0	0.0	0.00	0.01	0.00	62.6
		LV	3		3		0.198	7.9	LOS A	0.0	0.0	NA	NA	NA	62.6
		HV	2		2		0.198	7.9	LOS A	0.0	0.0	NA	NA	NA	62.6
		TR	1		1		0.198	7.9	LOS A	0.0	0.0	NA	NA	NA	62.6
2	T1	All MCs	362	4.7	362	4.7	0.198	0.1	LOS A	0.0	0.0	0.00	0.01	0.00	79.8
		LV	345		345		0.198	0.1	LOS A	0.0	0.0	NA	NA	NA	79.8
		HV	17		17		0.198	0.1	LOS A	0.0	0.0	NA	NA	NA	79.8
		TR	0		0		-	-	-	-	-	NA	NA	NA	-
Approach			368	5.4	368	5.4	0.198	0.2	NA	0.0	0.0	0.00	0.01	0.00	79.5
North: Luddenham Road															
8	T1	All MCs	539	4.5	539	4.5	0.286	0.1	LOS A	0.0	0.0	0.00	0.00	0.00	79.8
		LV	515		515		0.286	0.1	LOS A	0.0	0.0	NA	NA	NA	79.8
		HV	24		24		0.286	0.1	LOS A	0.0	0.0	NA	NA	NA	79.8
		TR	0		0		-	-	-	-	-	NA	NA	NA	-
9	R2	All MCs	15	35.7	15	35.7	0.018	9.3	LOS A	0.1	0.5	0.40	0.66	0.40	51.9
		LV	9		9		0.018	8.7	LOS A	0.1	0.5	NA	NA	NA	52.4
		HV	5		5		0.018	10.5	LOS A	0.1	0.5	NA	NA	NA	50.9
		TR	0		0		-	-	-	-	-	NA	NA	NA	-
Approach			554	5.3	554	5.3	0.286	0.3	NA	0.1	0.5	0.01	0.02	0.01	79.1
West: Patons Lane															
10	L2	All MCs	225	14.0	225	14.0	1.244	241.7	LOS F	45.8	371.7	1.00	4.65	10.36	10.0
		LV	194		194		1.244	239.9	LOS F	45.8	371.7	NA	NA	NA	10.1
		HV	21		21		1.244	245.4	LOS F	45.8	371.7	NA	NA	NA	9.9
		TR	11		11		1.244	268.5	LOS F	45.8	371.7	NA	NA	NA	9.2
12	R2	All MCs	86	6.1	86	6.1	1.244	297.1	LOS F	45.8	371.7	1.00	4.65	10.36	13.2
		LV	81		81		1.244	287.3	LOS F	45.8	371.7	NA	NA	NA	13.6
		HV	5		5		1.244	448.6	LOS F	45.8	371.7	NA	NA	NA	9.0
Approach			312	11.8	312	11.8	1.244	257.1	LOS F	45.8	371.7	1.00	4.65	10.36	10.9
All Vehicles			1234	7.0	1234	7.0	1.244	65.1	NA	45.8	371.7	0.26	1.19	2.62	35.6

Site Level of Service (LOS) Method: Delay (RTA NSW). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Vehicle movement LOS values are based on average delay per movement.

Minor Road Approach LOS values are based on average delay for all vehicle movements.

NA (TWSC): Level of Service is not defined for major road approaches or the intersection as a whole for Two-Way Sign Control (HCM LOS rule).

Two-Way Sign Control Capacity Model: SIDRA Standard.

Delay Model: SIDRA Standard (Control Delay is included).

Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.

Gap-Acceptance Capacity Formula: SIDRA Standard (Akçelik M3D).

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity

Constraint effects.

SIDRA INTERSECTION 9.1 | Copyright © 2000-2022 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: ARCADIS AUSTRALIA PACIFIC PTY LIMITED | Licence: NETWORK / Enterprise Level 3 | Processed: Tuesday, 29 July 2025
11:14:34 AM


Project: C:\Users\whaz4229\OneDrive - ARCADIS\Local\Luddenham\Comments 25-08\2025-08-18 AIBP Construction_ScenarioC.sip9

SITE LAYOUT

▽ Site: v [Luddenham Rd/Patons Ln (2025) - AM Peak - Scenario C (Site Folder: AM EW - Scenario C (Base Case + Metro + AIBP through))]

NA
Site Category: (None)
Give-Way (Two-Way)

Layout pictures are schematic functional drawings reflecting input data. They are not design drawings.

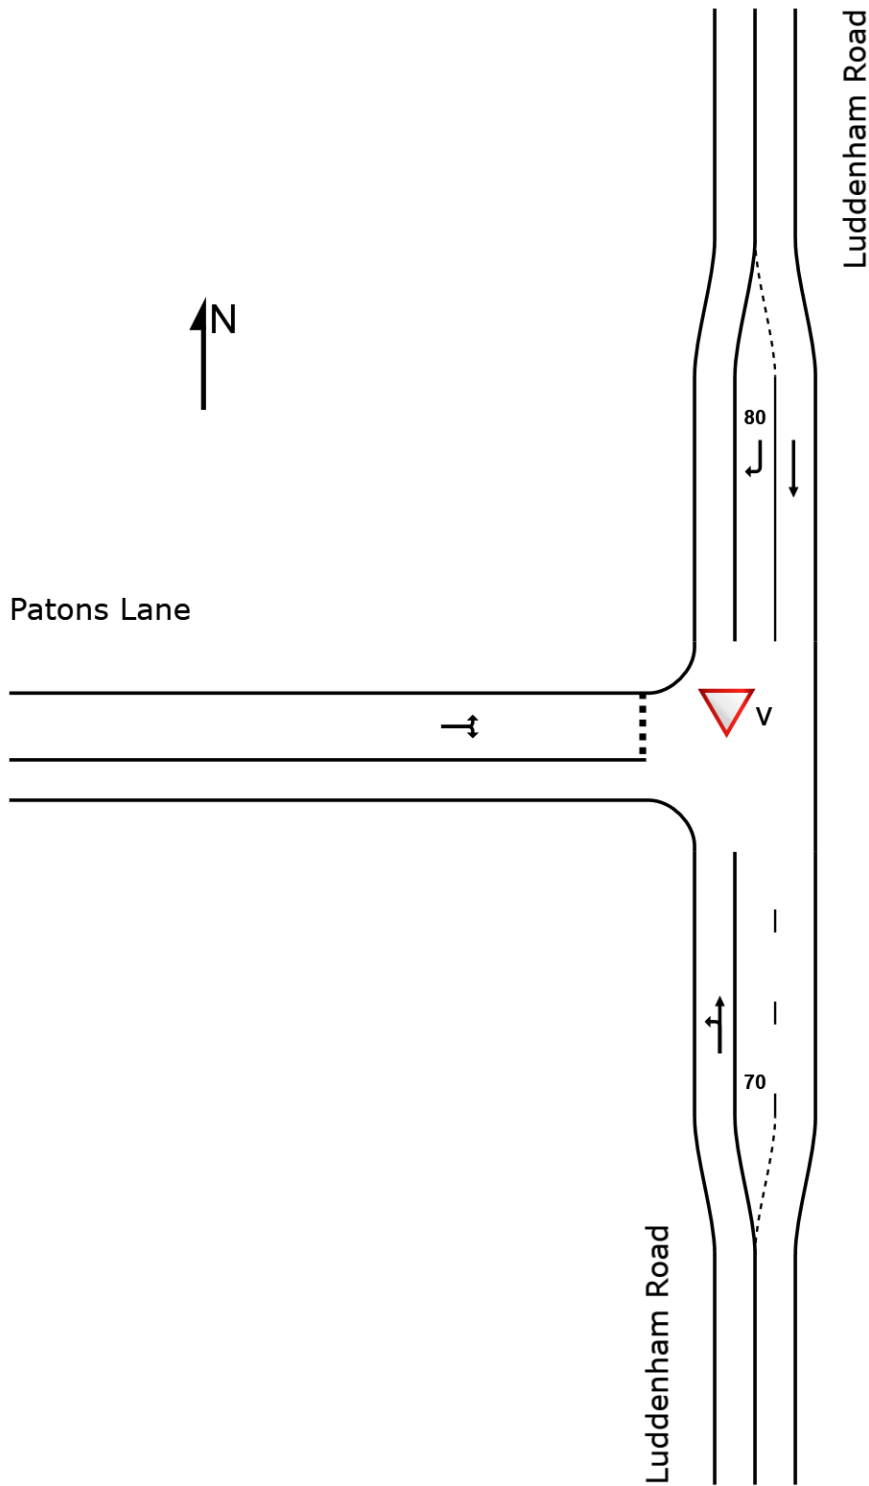

SIDRA INTERSECTION 9.1 | Copyright © 2000-2022 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: ARCADIS AUSTRALIA PACIFIC PTY LIMITED | Licence: NETWORK / Enterprise Level 3 | Created: Monday, 18 August 2025 10:00:33 AM

Project: C:\Users\whaz4229\OneDrive - ARCADIS\Local\Luddenham\Comments 25-08\2025-08-18 AIBP Construction_ScenarioC.sip9

MOVEMENT SUMMARY

▽ Site: v [Luddenham Rd/Patons Ln (2025) - AM Peak - Scenario C (Site Folder: AM EW - Scenario C (Base Case + Metro + AIBP through))]

Output produced by SIDRA INTERSECTION Version: 9.1.2.202

NA

Site Category: (None)

Give-Way (Two-Way)

Vehicle Movement Performance															
Mov ID	Turn	Mov Class	Demand Flows		Arrival Flows		Deg. Satn	Aver. Delay	Level of Service	95% Back Of Queue		Prop. Que	Eff. Stop Rate	Aver. No. of Cycles	Aver. Speed
			[Total HV]		[Total HV]					[Veh. veh	Dist]				km/h
			veh/h	%	veh/h	%	v/c	sec			m				
South: Luddenham Road															
1	L2	All MCs	43	34.1	43	34.1	0.366	7.7	LOS A	0.0	0.0	0.00	0.04	0.00	65.4
		LV	28		28		0.366	7.7	LOS A	0.0	0.0	NA	NA	NA	65.4
		HV	8		8		0.366	7.7	LOS A	0.0	0.0	NA	NA	NA	65.4
		TR	6		6		0.366	7.7	LOS A	0.0	0.0	NA	NA	NA	65.4
2	T1	All MCs	620	5.8	620	5.8	0.366	0.1	LOS A	0.0	0.0	0.00	0.04	0.00	79.3
		LV	584		584		0.366	0.1	LOS A	0.0	0.0	NA	NA	NA	79.3
		HV	36		36		0.366	0.1	LOS A	0.0	0.0	NA	NA	NA	79.3
		TR	0		0		-	-	-	-	-	NA	NA	NA	-
Approach			663	7.6	663	7.6	0.366	0.6	NA	0.0	0.0	0.00	0.04	0.00	78.3
North: Luddenham Road															
8	T1	All MCs	326	18.4	326	18.4	0.196	0.0	LOS A	0.0	0.0	0.00	0.00	0.00	79.9
		LV	266		266		0.196	0.0	LOS A	0.0	0.0	NA	NA	NA	79.9
		HV	60		60		0.196	0.0	LOS A	0.0	0.0	NA	NA	NA	79.9
		TR	0		0		-	-	-	-	-	NA	NA	NA	-
9	R2	All MCs	99	24.5	99	24.5	0.171	11.9	LOS A	0.5	4.6	0.59	0.85	0.59	49.8
		LV	75		75		0.171	10.4	LOS A	0.5	4.6	NA	NA	NA	51.0
		HV	24		24		0.171	16.4	LOS B	0.5	4.6	NA	NA	NA	46.5
		TR	0		0		-	-	-	-	-	NA	NA	NA	-
Approach			425	19.8	425	19.8	0.196	2.8	NA	0.5	4.6	0.14	0.20	0.14	72.6
West: Patons Lane															
10	L2	All MCs	28	74.1	28	74.1	0.453	36.5	LOS C	1.4	17.9	0.90	1.08	1.22	25.4
		LV	7		7		0.453	17.5	LOS B	1.4	17.9	NA	NA	NA	30.0
		HV	15		15		0.453	26.8	LOS B	1.4	17.9	NA	NA	NA	27.5
		TR	6		6		0.453	81.1	LOS F	1.4	17.9	NA	NA	NA	18.7
12	R2	All MCs	21	60.0	21	60.0	0.453	65.8	LOS E	1.4	17.9	0.90	1.08	1.22	34.4
		LV	8		8		0.453	32.4	LOS C	1.4	17.9	NA	NA	NA	46.8
		HV	13		13		0.453	88.0	LOS F	1.4	17.9	NA	NA	NA	29.3
Approach			49	68.1	49	68.1	0.453	48.9	LOS D	1.4	17.9	0.90	1.08	1.22	29.3
All Vehicles			1138	14.8	1138	14.8	0.453	3.5	NA	1.4	17.9	0.09	0.15	0.10	72.1

Site Level of Service (LOS) Method: Delay (RTA NSW). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Vehicle movement LOS values are based on average delay per movement.

Minor Road Approach LOS values are based on average delay for all vehicle movements.

NA (TWSC): Level of Service is not defined for major road approaches or the intersection as a whole for Two-Way Sign Control (HCM LOS rule).

Two-Way Sign Control Capacity Model: SIDRA Standard.

Delay Model: SIDRA Standard (Control Delay: Geometric Delay is included).

Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.

Gap-Acceptance Capacity Formula: SIDRA Standard (Akçelik M3D).

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity

Constraint effects.

SIDRA INTERSECTION 9.1 | Copyright © 2000-2022 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: ARCADIS AUSTRALIA PACIFIC PTY LIMITED | Licence: NETWORK / Enterprise Level 3 | Processed: Friday, 15 August 2025
11:08:54 AM

Project: C:\Users\whaz4229\OneDrive - ARCADIS\Local\Luddenham\Comments 25-08\2025-08-18 AIBP Construction_ScenarioC.sip9

MOVEMENT SUMMARY

Site: v [Luddenham Rd/Patons Ln (2025) - PM Peak - Scenario C (Site Folder: PM EW - Scenario C (Base Case + Metro + AIBP))]

Output produced by SIDRA INTERSECTION Version: 9.1.2.202

NA

Site Category: (None)

Give-Way (Two-Way)

Vehicle Movement Performance															
Mov ID	Turn	Mov Class	Demand Flows		Arrival Flows		Deg. Satn	Aver. Delay	Level of Service	95% Back Of Queue		Prop. Que	Eff. Stop Rate	Aver. No. of Cycles	Aver. Speed
			[Total HV]	[Total HV]	[Total HV]	[Total HV]				[Veh. veh	Dist] m				km/h
			veh/h	%	veh/h	%	v/c	sec							
South: Luddenham Road															
1	L2	All MCs	6	50.0	6	50.0	0.232	7.9	LOS A	0.0	0.0	0.00	0.01	0.00	62.6
		LV	3		3		0.232	7.9	LOS A	0.0	0.0	NA	NA	NA	62.6
		HV	2		2		0.232	7.9	LOS A	0.0	0.0	NA	NA	NA	62.6
		TR	1		1		0.232	7.9	LOS A	0.0	0.0	NA	NA	NA	62.6
2	T1	All MCs	422	5.7	422	5.7	0.232	0.1	LOS A	0.0	0.0	0.00	0.01	0.00	79.8
		LV	398		398		0.232	0.1	LOS A	0.0	0.0	NA	NA	NA	79.8
		HV	24		24		0.232	0.1	LOS A	0.0	0.0	NA	NA	NA	79.8
		TR	0		0		-	-	-	-	-	NA	NA	NA	-
Approach			428	6.4	428	6.4	0.232	0.2	NA	0.0	0.0	0.00	0.01	0.00	79.5
North: Luddenham Road															
8	T1	All MCs	539	4.5	539	4.5	0.286	0.1	LOS A	0.0	0.0	0.00	0.00	0.00	79.8
		LV	515		515		0.286	0.1	LOS A	0.0	0.0	NA	NA	NA	79.8
		HV	24		24		0.286	0.1	LOS A	0.0	0.0	NA	NA	NA	79.8
		TR	0		0		-	-	-	-	-	NA	NA	NA	-
9	R2	All MCs	15	35.7	15	35.7	0.019	9.7	LOS A	0.1	0.6	0.43	0.68	0.43	51.5
		LV	9		9		0.019	8.9	LOS A	0.1	0.6	NA	NA	NA	52.2
		HV	5		5		0.019	11.2	LOS A	0.1	0.6	NA	NA	NA	50.3
		TR	0		0		-	-	-	-	-	NA	NA	NA	-
Approach			554	5.3	554	5.3	0.286	0.3	NA	0.1	0.6	0.01	0.02	0.01	79.0
West: Patons Lane															
10	L2	All MCs	165	14.6	165	14.6	1.106	132.5	LOS F	22.0	183.2	1.00	3.20	6.90	15.2
		LV	141		141		1.106	129.8	LOS F	22.0	183.2	NA	NA	NA	15.4
		HV	14		14		1.106	136.2	LOS F	22.0	183.2	NA	NA	NA	14.9
		TR	11		11		1.106	165.0	LOS F	22.0	183.2	NA	NA	NA	13.1
12	R2	All MCs	63	8.3	63	8.3	1.106	193.5	LOS F	22.0	183.2	1.00	3.20	6.90	19.6
		LV	58		58		1.106	178.5	LOS F	22.0	183.2	NA	NA	NA	21.0
		HV	5		5		1.106	358.3	LOS F	22.0	183.2	NA	NA	NA	11.2
Approach			228	12.9	228	12.9	1.106	149.4	LOS F	22.0	183.2	1.00	3.20	6.90	16.5
All Vehicles			1211	7.1	1211	7.1	1.106	28.4	NA	22.0	183.2	0.19	0.62	1.31	51.2

Site Level of Service (LOS) Method: Delay (RTA NSW). Site LOS Method is specified in the Parameter Settings dialog (Options tab).

Vehicle movement LOS values are based on average delay per movement.

Minor Road Approach LOS values are based on average delay for all vehicle movements.

NA (TWSC): Level of Service is not defined for major road approaches or the intersection as a whole for Two-Way Sign Control (HCM LOS rule).

Two-Way Sign Control Capacity Model: SIDRA Standard.

Delay Model: SIDRA Standard (Control Delay: Geometric Delay is included).

Queue Model: SIDRA queue estimation methods are used for Back of Queue and Queue at Start of Gap.

Gap-Acceptance Capacity Formula: SIDRA Standard (Akçelik M3D).

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

Arrival Flows used in performance calculations are adjusted to include any Initial Queued Demand and Upstream Capacity

Constraint effects.

SIDRA INTERSECTION 9.1 | Copyright © 2000-2022 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: ARCADIS AUSTRALIA PACIFIC PTY LIMITED | Licence: NETWORK / Enterprise Level 3 | Processed: Friday, 15 August 2025 11:11:27 AM

Project: C:\Users\whaz4229\OneDrive - ARCADIS\Local\Luddenham\Comments 25-08\2025-08-18 AIBP Construction_ScenarioC.sip9

Appendix F **Green Travel Plan**

Industrial Warehouse Development: Storage and Distribution Warehouse

Green Travel Plan

5 June 2025

[Report Title]

HB&B Property


Industrial Warehouse Development: Storage and Distribution Warehouse

Waste Management Plan

5 June 2025

Our Ref:

30088823-TP-06-STORAGE-RPT-02-GTP



Brandon Williams


Author

Prepared By:

Arcadis Australia Pacific Pty Ltd
Level 16, 580 George Street
Sydney NSW 2000
Australia
Tel: 02 8907 9000

Prepared For:

HB+B Property
Ground Floor
55-59 Regent St
Chippendale NSW 2007



Nicole Vukic

Approver

Version Control

Revision No.	Date Issued	Description	Author	Approver
0.1	10 March 2025	Draft report	B. Williams	N. Vukic
1.0	14 April 2025	Final report	B. Williams	N. Vukic
1.1	5 June 2025	Final report	B. Williams	N. Vukic

Contents

Acronyms and abbreviations	iv
1 Introduction.....	1
1.1 Background	1
1.2 Report purpose.....	3
1.3 Report structure.....	3
2 Subject site	4
2.1 Existing transport infrastructure	4
3 Green Travel Plan	6
3.1 Targets	6
3.2 Actions.....	6
4 Monitoring and review	9
4.1 Updates to the Green Travel Plan.....	9
4.2 Responsibility	9
Appendix A Transport Access Guide	10
Appendix B Example employee commute survey	11

Tables

Table 2-1 Public transport services	5
---	---

Figures

Figure 1-1 AIBP site location	2
Figure 1-2 Proposed storage and distribution site layout.....	3
Figure 2-1 Existing public transport network - Orchard Hills area	4

Acronyms and abbreviations

Acronym	Definition
AIBP	Alsip Industrial Business Park
GTP	Green Travel Plan
TIA	Traffic Impact Assessment
TAG	Transport Access Guide

1 Introduction

This report has been prepared in support of a development at 221-235 Luddenham Road, Orchard Hills (the site), including detailed approval for a Storage and Distribution Centre. The project seeks to deliver a new a new Storage and Distribution Warehouse within the Alspeg Industrial Business Park (AIBP).

Specifically, the project comprises the following:

- Construction of a new warehouse with a two-level ancillary office. The warehouse is predominantly 14.7 metres in height, with a high-bay warehouse component at the western portion of the building which achieves a maximum height of 39 metres.
- A total building area of 45,449 m²; broken down as follows:
 - Warehouse and services area: 43,606 m²
 - Office area: 1,843 m².
- Loading areas at the north and south sides of the warehouse, with hardstand surrounding the perimeter of the warehouse. Hardstand and carpark areas are accessed via four new driveways from the AIBP internal estate road.
- Provision of vehicular parking onsite to accommodate cars, vans, semi-trailers and B-doubles. It is envisaged that approximately 329 spaces will be provided on site within the proposed hardstand and carparking areas.
- Perimeter landscaping and tree planting with a total area of 10,134 m² (10%).

1.1 Background

This Green Travel Plan (GTP) has been prepared to accompany a Traffic Impact Assessment (TIA) for the proposed storage and distribution warehouse development at 221 Luddenham Road, Orchard Hills.

The proposal is to develop a 45,449 m² warehouse at the above address to accommodate a mix of warehouse, industrial and office land uses. The development is proposed to be completed in three stages, with various road and other infrastructure works required at each stage.

The subject site is located on Luddenham Road, south of Patons Lane, in Orchard Hills. Situated approximately 30 kilometres west of Parramatta CBD, the proposed Storage and Distribution warehouse is part of the larger Alspeg Industrial Business Park (AIBP) development. The AIBP site is irregular in shape, with the Alspeg warehouse making up one of many split frontages across both Luddenham Road and Patons Lane.

The site location is shown in Figure 1-1 and current development plans are provided in Figure 1-2.



Figure 1-1 AIBP site location

2 Subject site

The subject site is located at 221 Luddenham Road, Orchard Hills and has a surface area of 104,959 m² (warehouse + hardstand + car park + landscape area). Currently, the site is largely a greenfield development with an underutilised surrounding network, which is expected to undergo significant changes over time.

2.1 Existing transport infrastructure

The following transport infrastructure is available at the subject site as of March 2025.

2.1.1 Active transport infrastructure

There is limited pedestrian or cyclist infrastructure provided close to the site, mainly due to the nature of land use in the vicinity and the limited demand for such facilities at present.

2.1.2 Public transport

A review of the public transport available in the vicinity of the site indicates that there are three bus services (routes 775, 776 and 779) that operate in the St Clair/ Erskine Park area to the northeast of the site. No bus services connect past the site to the south.

There is no existing rail stations close to the site.

Overall, the area is currently underserved by public transport. Figure 2-1 shows a map of the existing public transport network for the Orchard Hills area and Table 2-1 shows the convenient transport services closest to the development.

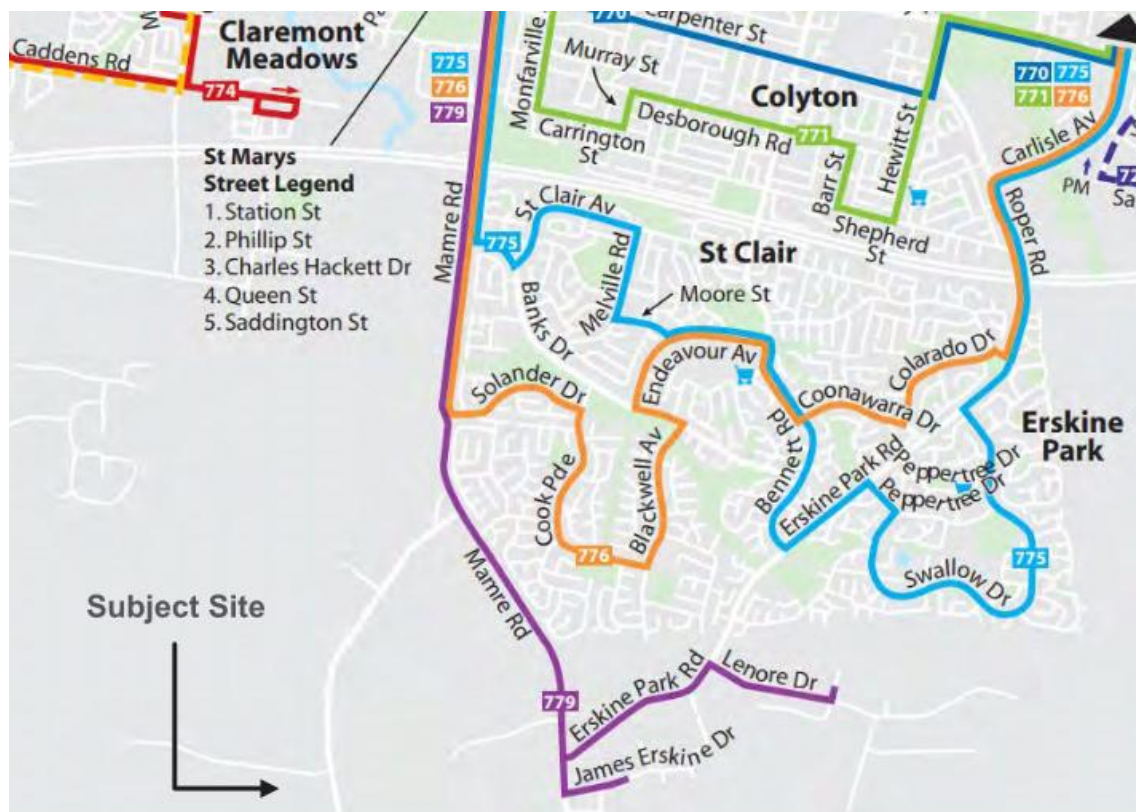


Figure 2-1 Existing public transport network - Orchard Hills area

Table 2-1 Public transport services

Transport system	Closest stop	Route	Route extents	Frequency
Train	St. Marys Station	Blue Mountains Line	Bathurst – Central	Peak: 30min Off Peak: 60min
Bus	St. Clair Avenue/Banks Drive	775	Mount Druitt Station – St Marys Station	Peak: 25min Off Peak: 35min
Bus	Solander Drive after Madison	776	St Marys Station – Mount Druitt Station	Peak: 15min Off Peak: 35min
Bus	Erskine Road/Mamre Road	779	St Marys Station – Emporium Avenue	Peak: 30min Off Peak: 45-60min

2.1.3 Car share and taxi service

Car share and taxi services are available close to the site. However, major centres where is such as Penrith and Blacktown, may be distant from the site to provide quick transport options.

3 Green Travel Plan

3.1 Targets

The area and road network around the site are expected to undergo significant changes over the next 20 years to support the broader Greater Penrith to Eastern Creek (GPEC) Growth Area, Western Sydney Employment Area (WSEA) and the Aerotropolis. The Aerotropolis precinct plan aims to ensure that all developments are within walking distance of the metro station and other public transport services available within proximity. While the site lies just to the north of the Aerotropolis, targets adopted by the area set a good benchmark.

Based on the site location, existing transport infrastructure and the aspirations of the adjacent Aerotropolis Precinct Plan, the following target is developed:

- ≤65% of employees commuting to work by single occupant vehicle by 2036
- ≥30% of the primary mode of travel to be by public transport by 2036.

3.2 Actions

The following section provides recommendations to encourage the use of sustainable transport modes for the workers and visitors of the storage and distribution development. The responsibility of implementing these actions is generally with either the developer or building management depending on the timeframe for the action.

A Transport Access Guide (TAG) will be provided to users of a building or facility, intended to inform of ways to access the site through walking, cycling or public transport. The objective of the TAG is to simplify the process of trip planning for visitors and can assist in increasing the proportion of trips made to the site through public and active transport modes. TAGs are typically updated annually to ensure the information is accurate and up to date.

A TAG has been specifically developed for the storage and distribution warehouse and provided as Appendix A. This will be updated as part of the review process outlined in Section 3.

General measures	Timeframe	Responsible party
Introduce a travel coordinator role to execute the recommendations of this plan. This could potentially be incorporated into the facilities management function.	Prior to occupation	Building Management
Utilise social media opportunities to inform tenants and visitors of available sustainable transport options and facilities. To increase the use of the social media site this could be combined with other useful information including local events and building maintenance activities.	During operation	Building Management
Monitor the mode share, use and demand of facilities to inform future updates of the GTP.	During operation	Building Management
Prepare a Transport Access Guide that is provided to building occupants that details transport options to the site, a public transport map surrounding the site area, and site specific transport provisions. The TAG is recommended to be updated annually with the latest transport details.	Prior to and during operation	Building Management

General measures	Timeframe	Responsible party
Hold Travel Smart Get to Workdays in the form of workshops encouraging employees to travel by walking, cycling and public modes of transport.	During operation	Building Management

Walking measures	Timeframe	Responsible party
Work with other stakeholders to improve wayfinding signage to public transport (bus stops, future rail networks) between the development and nearby infrastructure hubs such as St Clair and Erskine Park.	Prior to occupation	Building Management
Produce a walking map showing safe and pleasurable walking routes to and from the building with times, to local facilities, such as shops and bus stops	Prior to and during operation	Building Management
As part of building management activities, promote walking for short trips in lieu of using a private vehicle.	During operation	Building Management

Cycling measures	Timeframe	Responsible party
Provide at least 46 secure bicycle parking spaces to meet employee and visitor needs. Bicycle spaces to be easily accessible, well-lit and secure.	Prior to occupation	Architect / Contractor
Supply a communal bicycle repair toolkit for employees and visitors.	Prior to occupation	Building Management
Maintain a TAG (updated annually) that effectively informs employees and visitors of: - Safe and accessible cycling routes as well as end-of-trip facilities provided by the building. - Cycling clubs and bicycle user groups (BUGs) that may be lobbying for the improvement of cycle facilities in the surrounding area.	Prior to and during operation	Building Management
Ensure the bicycle parking and end of trip facilities within the building are maintained.	During operation	Building Management
Come to an arrangement with a local bicycle retailer for servicing of bikes and other incentives.	During operation	Building Management
Participate in annual events such as 'Ride to Work Day'.	During operation	Building Management

Public transport measures	Timeframe	Responsible party
Provide employees and visitors a map showing public transport stops in the surrounding area and expected walk times needed to access the locations.	Prior to and during operation	Building Management
Provide train and bus timetables for services in the local area as part of household welcome packs for all new employees.	During operation	Building Management

Carpooling and car share measures	Timeframe	Responsible party
Promote the cost savings of car share over commuting via private vehicle to employees through the TAG.	During operation	Building Management
Allocate spaces as required for car-sharing within the Storage and Distribution warehouse.	During operation	Building Management

Car parking measures	Timeframe	Responsible party
Provide electric car charging stations within the site.	Prior to occupation	Architect / Contractor
Provide clear signage for and advertisement (within the TAG) of electric car charging stations within the site.	Prior to occupation	Architect / Contractor

4 Monitoring and review

4.1 Updates to the Green Travel Plan

For this GTP to be effective, it should be reviewed and amended by building management regularly to ensure that the objectives are being met. Travel surveys should be conducted, and the GTP and TAGs should be updated annually to achieve sustainable travel targets more effectively.

The following approach will be adopted for reviewing and updating this GTP:

- Prior to occupation:
 - Existing transportation options, infrastructure and potential amenities that support sustainable commuting will be evaluated and reviewed
 - New employees/ relocated employees will be provided comprehensive information on sustainable travel options and incentives.
- Three to six months after occupation:
 - Travel surveys will be conducted to gather data on commuting habits, preferences and challenges faced by employees and visitors to identify areas for improvement. An example travel survey is provided in Appendix B
 - Based on the survey findings, challenges will be addressed through sit specific initiatives including carpooling, cycling or public transport system.
- Annual reviews:
 - The GTP and TAGs should be updated with the latest data, trends and best practices pertaining to sustainable transportation
 - Regular travel surveys can help assess employee commuting patterns to identify areas for improvement
 - Implemented measures should be reviewed to evaluate the effectiveness of initiatives introduced, identify successes and areas needing improvement for continual enhancement of the green travel plan.

4.2 Responsibility

To ensure that the goals of this GTP are achieved, it is necessary to identify an individual or committee responsible for monitoring and managing various aspects of the plan. This group will monitor travel patterns and the effectiveness of the GTP, conduct ongoing travel surveys, and carry out the initiatives outlined in this plan.

Appendix A **Transport Access Guide**

Getting to and from STORAGE AND DISTRIBUTION WAREHOUSE



The Alspeck Industrial Business

Park (AIBP) is approximately 6.8 kilometres from St Marys Train Station. The walking route from the Station (Station Street) to AIBP takes you along Mamre Road to Luddenham Road, and then along Luddenham Road to Patons Lane and the COPE site. Walking time from St Marys Station to AIBP is approximately 2 hours and is marked on the map in this TAG.



Bus services

The nearest bus services to the site are:

Route 775 which runs from Mount Druitt to Penrith via St Clair and Erskine Park. The nearest bus stop is approximately 5 km away from the site, on St Clair Avenue just after Banks Drive.

Route 776 runs from Mt Druitt to Penrith via St Clair and Erskine Park. The nearest bus stop is approximately 3.7 km away from the site. The nearest bus stop is at Solander Drive after Madison Circuit.

Route 779 services run from Mount Druitt to Kemps Creek along Erskine Park. The nearest stop is on Erskine Road after Mamre Road.

For more information on bus timetables, see

<https://transportnsw.info/>



Rail and Metro services

The nearest train station to AIBP is St Marys Station, located 6.8km north of AIBP.



A future Metro Station, Luddenham, is located 2km south of the site, and is anticipated to open in 2026.



Parking

All employee car parking is located on site. Entry to the parking area is on the AIBP access road, south of Patons Lane.

Electric vehicle charging infrastructure is available on site.

Accessible parking is provided on site, near the main building entrance.



Bicycle parking

Secure and visible parking spaces are available for bicycles and electric bicycles with charging stations and storage facilities available on site.

End of trip facilities are conveniently located close to bicycle storage areas.

For more information
speak to the Facilities
Manager at XXXX XXXX or
at (email)

PRELIMINARY INFORMATION

This draft Transport
Access Guide will be
updated prior to
occupation

[illegible][illegible]

Appendix B Example employee commute survey

The purpose of a travel survey is to understand the reasons for which commuters to and from the site select their preferred travel modes. In turn, this allows for more effective incentives and initiatives to be developed in increasing the mode share of sustainable travel options.

An example of a travel survey has been provided below.

You are invited to participate in the Employee Commute Survey being conducted by xxx. The purpose of this survey is to anticipate the transport related environmental impacts of the establishment and encourage the use of sustainable transport.

The survey will take about 5-10 minutes to complete.

Q1. Which of the following do you identify as?

- ☐ Resident
- ☐ Employee
- ☐ Visitor

Q2. What is your postcode? _____

Q3. How did you travel here today?

- ☐ Walk only
- ☐ Bicycle
- ☐ Bus
- ☐ Train
- ☐ Light rail
- ☐ Combination of public transport
- ☐ Car driver
- ☐ Car passenger
- ☐ Other (please state) _____

Q4. . If you travelled via car (as a single driver), what was the primary reason for you to travel this way?

- ☐ Only option
- ☐ More comfortable
- ☐ Safety concerns with other types of transport options
- ☐ Poor end to end connectivity
- ☐ Cost effective
- ☐ Poor infrastructure/information for other modes of transport
- ☐ Other (please state) _____

Q5. If your general mode of commuting is by car (single driver); what services could be provided to you to use other modes of travelling such as car share or car pool or biking.

About Arcadis

Arcadis is the leading global Design & Consultancy firm for natural and built assets. Applying our deep market sector insights and collective design, consultancy, engineering, project and management services we work in partnership with our clients to deliver exceptional and sustainable outcomes throughout the lifecycle of their natural and built assets. We are 27,000 people, active in over 70 countries that generate €3.3 billion in revenues. We support UN-Habitat with knowledge and expertise to improve the quality of life in rapidly growing cities around the world.

Arcadis Australia Pacific Pty Ltd

Level 16, 580 George Street
Sydney NSW 2000

T **+61 2 8907 9000**

Appendix G **GTIA scope requirements**

Appendix E

– Scoping checklist



Appendix E – Scoping checklist

The following table serves as a checklist of typical items that are considered or developed in TISs and TIAs. The final column also includes considerations for subdivision TIAs. This checklist is not prescriptive and aims to assist practitioners in optimising a TIA or TIS to focus on critical and impactful elements.

Y = Generally Required. M = May be Required depending on Development Circumstances.

Deliverables and Actions Checklist	GTIA Cross Reference	Conditions where this may be required	TIS	TIA	Subdivision
Scoping					
Determine suitable assessment: Transport Impact Statement (TIS)	Chapter 3, Section 3.2.5	Small impact developments, generally below the T&I SEPP Schedule 3 thresholds	Y	-	-
Determine suitable assessment: Transport Impact Assessment (TIA)	Chapter 3, Section 3.2.5	Medium to large impact developments, generally meet or above the T&I SEPP Schedule 3 thresholds	-	Y	Y
Proposed development					
Alignment with relevant transport strategies, plans and planning controls	Chapter 2, Section 2.3.1	Always	Y	Y	Y
Relevant site characteristics, including location and proposed land use mix	Chapter 2, Section 2.3.1	Always	Y	Y	Y
Plans showing layout of site and access arrangements for all modes	Chapter 7	Always	Y	Y	Y
Travel demand management measures	Chapter 4, Section 4.2	To reduce dependency on private vehicle travel when there is (or proposed to be) adequate accessibility to alternative transport modes	-	M	M
Travel Plan	Chapter 4, Section 4.3	At the consent authority's discretion, typically to mitigate significant impact	-	M	M
Parking provisions and facilities by mode and vehicle type, on-street and off-street	Chapter 8	Always	Y	Y	Y
Movement and place roles of internal roads	Chapter 7, Section 7.4	Subdivisions	-	-	Y
Freight and servicing plan	Chapter 6, Section 6.2.3	Significant and/or complex freight and servicing	M	Y	Y
Delivery and Servicing Plan (refer to TfNSW's Last Mile Toolkit)	Chapter 6, Section 6.4.4	At the consent authority's discretion, typically in urban centres	-	M	M

Appendix E – Scoping checklist (continued)

Y = Generally Required. M = May be Required depending on Development Circumstances.

Deliverables and Actions Checklist	GTIA Cross Reference	Conditions where this may be required	TIS	TIA	Subdivision
Existing Conditions					
Area of influence and peak periods identified by mode	Chapter 6, Section 6.2.2	Always	Y	Y	Y
Surrounding transport networks, and origins and destinations connected					
Walking network	Chapter 6, Section 6.2.3	Walking demand	M	Y	Y
Cycling network	Chapter 6, Section 6.2.3	Significant cycling demand and/or limited cycling capacity	M	Y	Y
Public transport network, including service frequencies	Chapter 6, Section 6.2.3	Significant public transport demand and/or limited public transport capacity	M	Y	Y
Road network, including movement and place roles	Chapter 6, Section 6.2.3	Significant road network demand and/or limited road capacity	M	Y	Y
Existing and future baseline transport network conditions					
Walking space analysis	Chapter 6, Section 6.2.3	Walking demand	M	Y	Y
Cycling connections analysis	Chapter 6, Section 6.2.3	Significant cycling demand and/or limited cycling capacity	M	Y	Y
Public transport capacity and accessibility analysis	Chapter 6, Section 6.2.3	Significant public transport demand and/or limited public transport capacity	M	Y	Y
Road performance analysis	Chapter 6, Section 6.2.3	Significant road network demand and/or limited road capacity	M	Y	Y
Road safety assessment	Chapter 6, Section 6.2.3	Road user demand	M	Y	Y

Appendix E – Scoping checklist (continued)

Y = Generally Required. M = May be Required depending on Development Circumstances.

Deliverables and Actions Checklist	GTIA Cross Reference	Conditions where this may be required	TIS	TIA	Subdivision
Development Impacts					
Trips generated to/from the development by mode	Chapter 5, Section 5.5	Always	Y	Y	Y
Trip distribution and network assignment at an appropriate scale	Chapter 5, Section 5.5.5	Always	Y	Y	Y
Development impacts on the surrounding transport network in peak periods					
Walking space analysis to key points of interest	Chapter 6, Section 6.2.3	Significant walking demand	M	M	Y
Cycling connections analysis	Chapter 6, Section 6.2.3	Significant cycling demand	M	Y	Y
Public transport capacity and accessibility analysis	Chapter 6, Section 6.2.3	Significant public transport demand	M	Y	Y
Public transport interchange capacity and safety analysis	Chapter 6, Section 6.2.3	Significant pedestrian demand at station precincts or interchanges	M	M	M
Road performance analysis	Chapter 6, Section 6.2.3	Significant road demand	M	Y	Y
Road signal warrant and turn lane warrant analysis	Chapter 6, Section 6.2.3	Significant road demand	M	Y	Y
Road safety assessment (see Transport's Road Safety Assessment Methods)	Chapter 6, Section 6.2.3	Always	M	Y	Y
Road safety audit (see Transport's Guidelines for Road Safety Audit Practices)	Chapter 6, Section 6.2.3	Significant road safety risk	M	M	M
On-site transport movements and parking analysis, including swept path diagrams	Chapter 7, Chapter 8	Vehicle movements on-site	M	Y	-
Construction impacts on the surrounding transport network					
Haul routes and the type of heavy vehicles used	Chapter 3, Section 3.4.4	Significant construction impacts on road network	-	M	M
Public transport access, service or route disruptions	Chapter 3, Section 3.4.4	Construction impacts on public transport network/services	-	M	M
Pedestrian and cyclist access	Chapter 3, Section 3.4.4	Construction impacts on active transport network	-	M	M

Appendix E – Scoping checklist (continued)

Y = Generally Required. M = May be Required depending on Development Circumstances.

Deliverables and Actions Checklist	GTIA Cross Reference	Conditions where this may be required	TIS	TIA	Subdivision
Mitigations					
Improvements, such as design changes and infrastructure upgrades	Chapter 6, Section 6.4	If mitigations are necessary for the final design	M	M	M
Construction impact mitigations	Chapter 6, Section 6.4	If mitigations are necessary during construction	M	M	M
Funding arrangements and developer contributions	Chapter 6, Section 6.5	If mitigations are necessary	M	M	M
Issue specific considerations					
Signage complies with the Transport Corridor Outdoor Advertising and Signage Guidelines	Chapter 6, Section 6.2.3	Roadside signage or advertising	M	M	M
Strategic design complying with Transport's Strategic Design requirements for DAs	Chapter 3, Section 3.3.4	Works on State roads and traffic signals on any road	M	M	M
Development near rail corridors and busy roads, as per Transport and Infrastructure SEPP	Chapter 6, Section 6.2.4	Development near rail or busy road corridors	M	M	M
Development involving access via level crossings, as per Transport and Infrastructure SEPP	Chapter 6, Section 6.2.3	Development involving access via level crossings	M	M	M
Site permeability and access to local networks	Chapter 6, Section 6.2.4	Design proposes an internal street network	M	M	Y
Traffic analysis using modelling software	Chapter 6, Section 6.3	Significant road network demand and/or limited road capacity	M	M	M
Pedestrian analysis using modelling software	Chapter 6, Section 6.3	Significant pedestrian demands	M	M	M
Impact of freight traffic on road safety and capacity, including at key intersections	Chapter 6, Section 6.2.3	Significant and/or complex freight	M	M	M
Heavy vehicle driver facilities, including truck and trailer parking and rest facilities	Chapter 6, Section 6.2.3	Significant freight	M	M	M

About Arcadis

Arcadis is the leading global Design & Consultancy firm for natural and built assets. Applying our deep market sector insights and collective design, consultancy, engineering, project and management services we work in partnership with our clients to deliver exceptional and sustainable outcomes throughout the lifecycle of their natural and built assets. We are 27,000 people, active in over 70 countries that generate €3.3 billion in revenues. We support UN-Habitat with knowledge and expertise to improve the quality of life in rapidly growing cities around the world.

Arcadis Australia Pacific Pty Ltd

Level 16, 580 George Street
Sydney NSW 2000

T **+61 2 8907 9000**