




CERMAK
PETERKA
PETERSEN

WIND ENGINEERING AND AIR QUALITY CONSULTANTS

FINAL REPORT

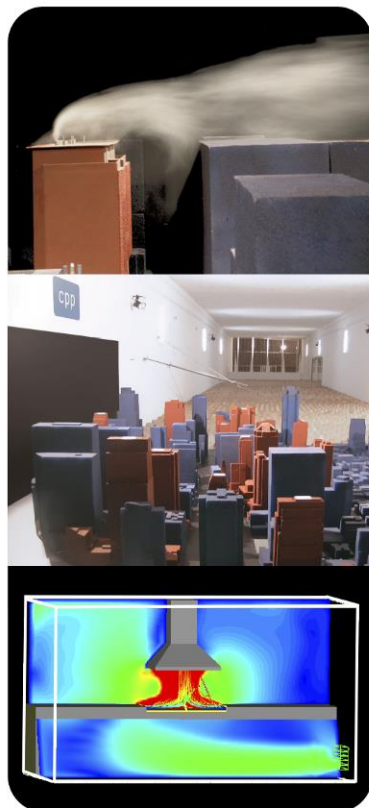

Wind Assessment for:

12 FREDERICK STREET TOWER B

St. Leonards, Australia

Prepared for:

Donald Cant Watts Corke

Level 10, Angel Place

123 Pitt Street

Sydney

NSW 2000

Prepared by:

Andrew Nguyen, Project Engineer

Matt Glanville, Director

June 2017

CPP Project: 11523

DOCUMENT VERIFICATION

Date	Revision	Prepared by	Checked by	Approved by
09/06/17	Draft report	AN	AN	AN
19/06/17	Final Report	AN	MG	MG

TABLE OF CONTENTS

Introduction.....	2
Sydney Wind Climate.....	4
Environmental Wind Speed Criteria.....	5
Wind Flow Mechanisms	6
Environmental Wind Assessment	7
Winds from the North-east	8
Winds from the South	8
Winds from the West.....	9
Summary	9
Conclusions.....	9
References.....	10

TABLE OF FIGURES

Figure 1: Location of proposed development site (Google Earth, 2016)	3
Figure 2: 3D perspective viewed from the south	3
Figure 3: Wind rose of direction and speed for Sydney Airport	4
Figure 4: Flow visualisation around a tall building	6
Figure 5: Wind channelling between buildings	6
Figure 6: Topography contours of cliff face (left), and view from north (right)	7
Figure 7: Site plan showing Tower B envelope	7
Figure 8: South elevation of proposed development	8

TABLE OF TABLES

Table 1: Pedestrian comfort criteria for various activities	5
---	---

INTRODUCTION

Cermak Peterka Petersen Pty. Ltd. has been engaged by Donald Cant Watts Corke to provide a qualitative assessment of the pedestrian level wind conditions in and around Tower B of the 12 Frederick Street development, St Leonards.

The project will involve a Concept Proposal for the building:

- Building envelope for a new tower, known as ‘Tower B’, situated on the northern and eastern sides of the 2 storey podium of the proposed private hospital (Tower A and Podium, SSD 7543) on the site. The heights of the envelope are:
 - Single storey (maximum RL 112.950) on eastern side of podium
 - 8 storeys on northern side of podium. Predominant height of RL 144.150 and maximum height (lift overrun) of RL 146.150
- Gross floor area (GFA) of 7,655 m²
- Uses associated with the proposed private hospital, including (but not necessarily limited to):
 - Medical consulting rooms
 - Operating and procedure rooms
 - Approximately 185 accommodation rooms consisting of post-natal suites, health care worker, and patient and visitor accommodation
 - Education and conference meeting rooms
 - Gymnasium
 - Additional car parking (proposed number to be confirmed) to be accommodated in the basement car park of the private hospital.

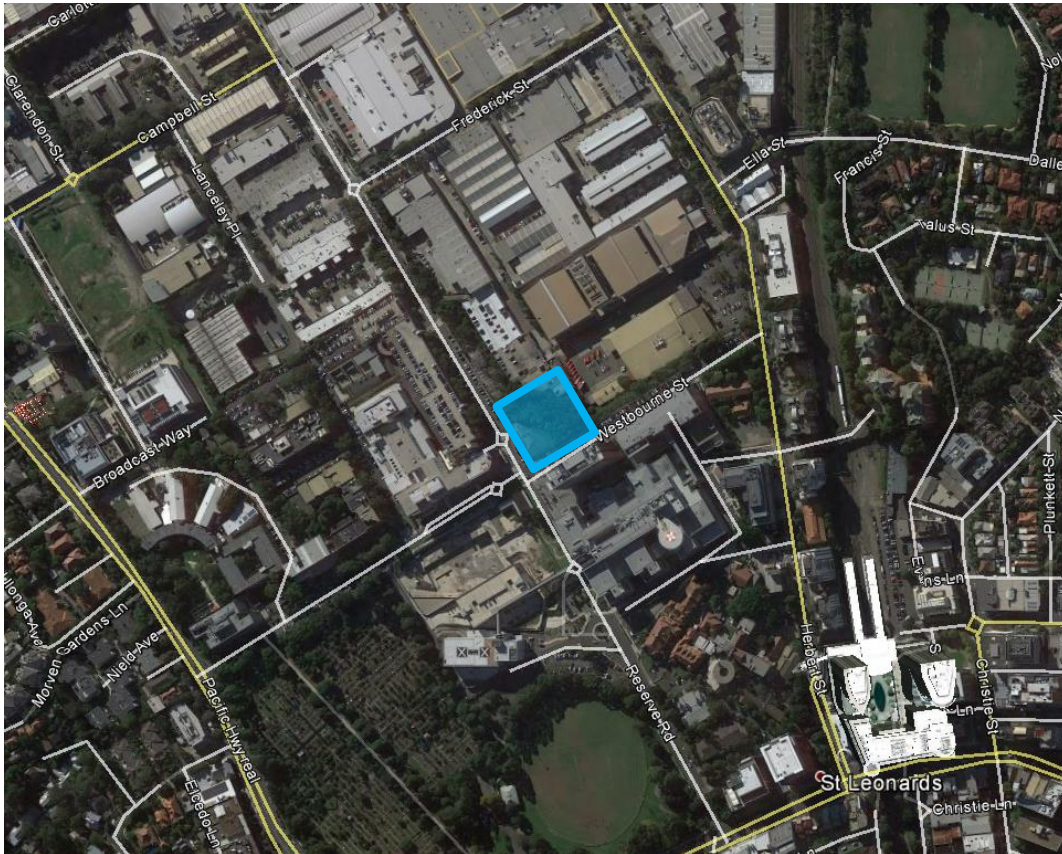


Figure 1: Location of proposed development site (Google Earth, 2016)

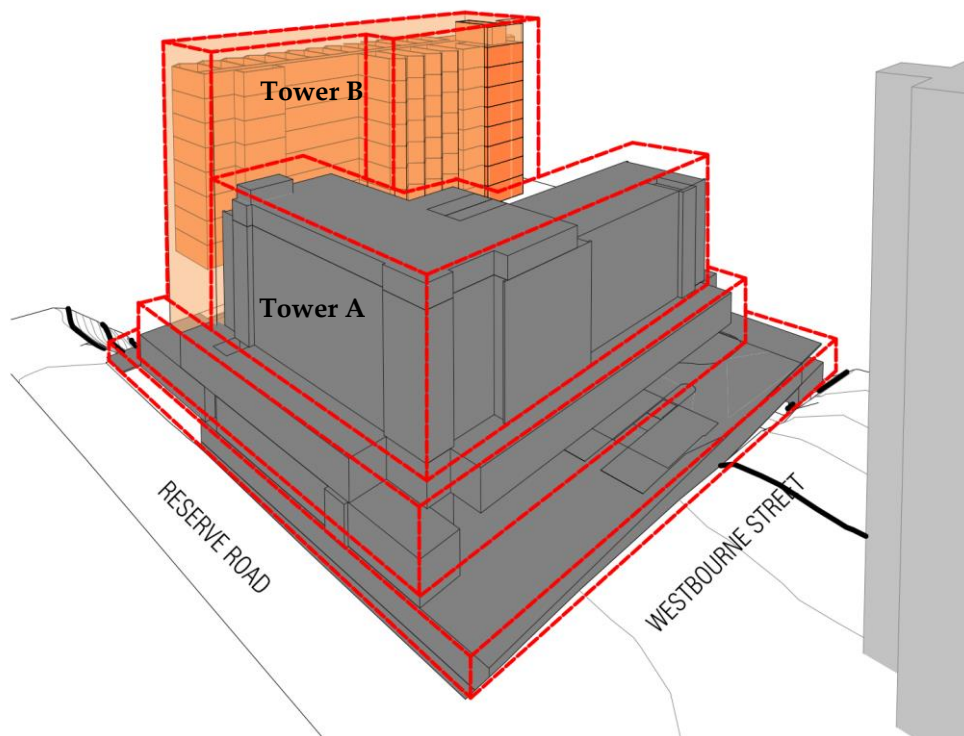


Figure 2: 3D perspective viewed from the south

SYDNEY WIND CLIMATE

The proposed development lies approximately 14 km to the north of Sydney Airport Bureau of Meteorology anemometer. The wind rose for the airport, shown in Figure 3, is considered to be representative of prevailing winds at the site.

It is evident that the prevailing winds from coastal Sydney come from the north-east, south, and west. Winds from the north-east tend to be summer sea breezes and bring welcome relief on summer days. Winds from the south tend to be cold and are generally associated with frontal systems that can last several days and occur throughout the year. Winds from the west are the strongest of the year and are associated with large weather patterns and thunderstorm activity. These winds occur throughout the year and can be cold or warm depending on the inland conditions.

This wind assessment is focused on these prevailing wind directions.

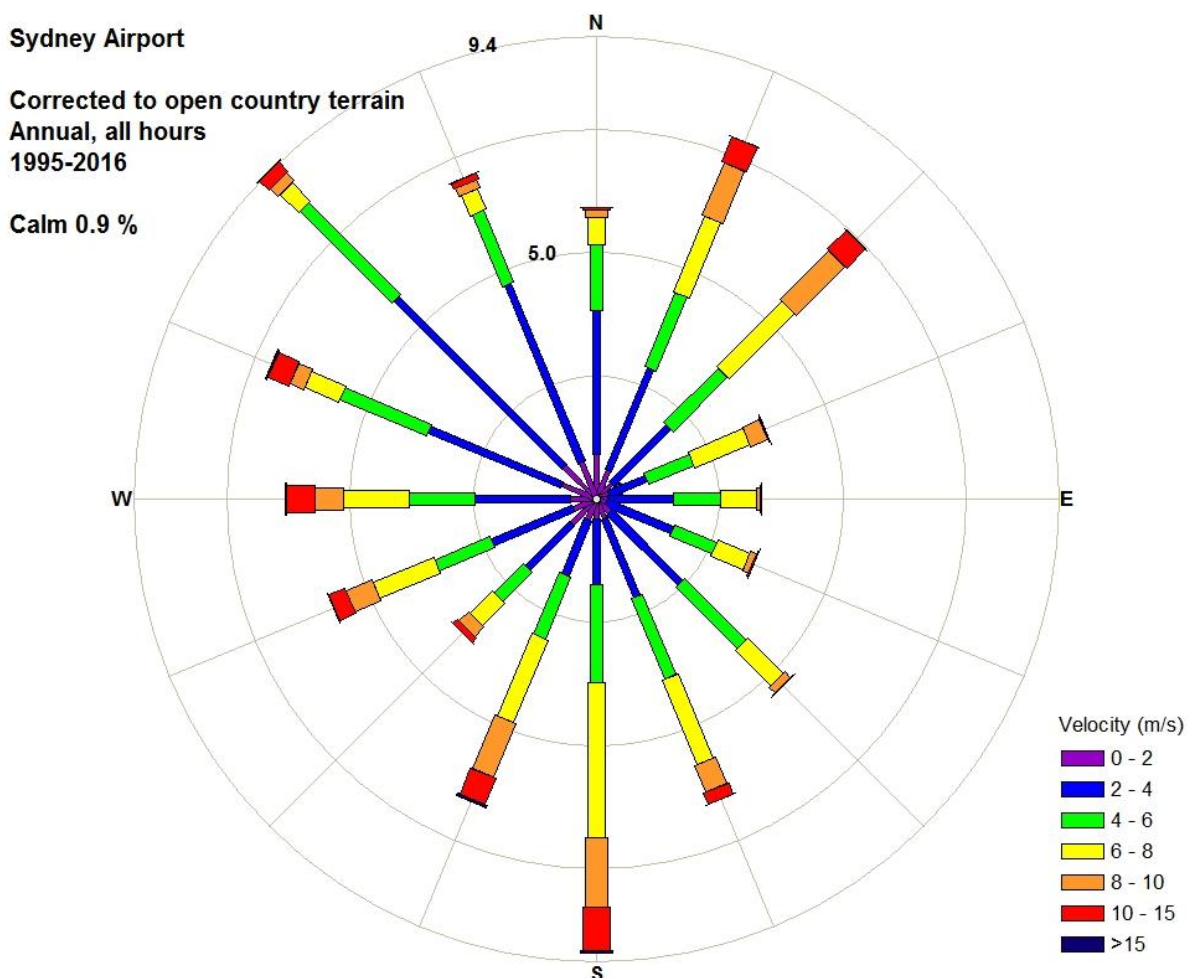


Figure 3: Wind rose of direction and speed for Sydney Airport

ENVIRONMENTAL WIND SPEED CRITERIA

It is generally accepted that wind speed and the rate of change of wind velocity are the primary parameters that should be used in the assessment of how wind affects pedestrians. Over the years, a number of researchers have added to the knowledge of wind effects on pedestrians by suggesting criteria for comfort and safety. Because pedestrians will tolerate higher wind speeds for a smaller period of time than for lower wind speeds, these criteria provide a means of evaluating the overall acceptability of a pedestrian location. A location can further be evaluated for its intended use, such as for an outdoor café or footpath.

City of Willoughby Council do not specify a wind assessment criterion for the region enveloping the proposed development site. The wind assessment criteria used in this study are based upon research of Lawson (1990), which are described in Table 1 for both pedestrian and distress. The benefits of these criteria over many in the field are that they use both a mean and gust equivalent mean (GEM) wind speeds to assess the suitability of specific locations. The criteria based on the mean wind speeds define when the steady component of the wind causes discomfort, whereas the GEM wind speeds define when the wind gusts cause discomfort. The level and severity of these comfort categories can vary based on individual preference, so calibration to the local wind environment for all wind directions is recommended when evaluating with Lawson ratings.

Once expected wind conditions are qualitatively determined throughout the site, it is necessary to assess the conditions against the criteria for comfort and safety (distress) in Table 1.

Comfort (maximum of mean or gust equivalent mean (GEM ⁺) wind speed exceeded 5% of the time)	
< 4 m/s	Pedestrian Sitting (considered to be of long duration)
4 - 6 m/s	Pedestrian Standing (or sitting for a short time or exposure)
6 - 8 m/s	Pedestrian Walking
8 - 10 m/s	Business Walking (objective walking from A to B or for cycling)
> 10 m/s	Uncomfortable
Distress (maximum of mean or GEM wind speed exceeded 0.022% of the time)	
<15 m/s	not to be exceeded more than two times per year (or one time per season) for general access
<20 m/s	not to be exceeded more than two times per year (or one time per season) where only able bodied people would be expected; frail or cyclists would not be expected

The wind speed is either a mean wind speed or a gust equivalent mean (GEM) wind speed. The GEM wind speed is equal to the 3 s gust wind speed divided by 1.85.

Table 1: Pedestrian comfort criteria for various activities

WIND FLOW MECHANISMS

When the wind hits a large isolated building, the wind is accelerated down and around the windward corners, Figure 4; this flow mechanism is called downwash and causes the windiest conditions at ground level on the windward and sides of the building. In Figure 4 smoke is being released into the wind flow to allow the wind speed, turbulence, and direction to be visualised. The image on the left shows smoke being released across the windward face, and the image on the right shows smoke being released into the flow at about third height in the centre of the face.

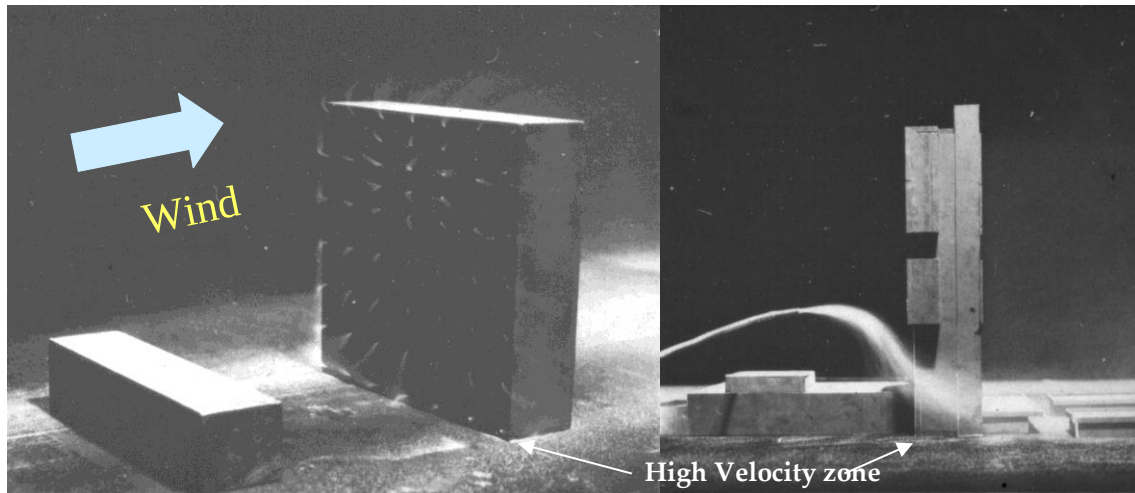


Figure 4: Flow visualisation around a tall building

Techniques to mitigate the effects of downwash winds on pedestrians include the provision of horizontal elements, the most effective being a podium to divert the flow away from pavements and building entrances. Awnings along street frontages perform a similar function and the deeper the horizontal element generally the more effective it will be in diverting the flow.

Channelling occurs when the wind is accelerated between two buildings or along straight streets with buildings on either side.

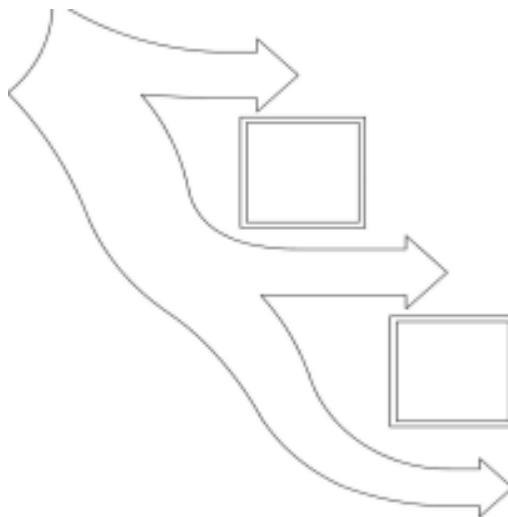


Figure 5: Wind channelling between buildings

ENVIRONMENTAL WIND ASSESSMENT

The proposed development will be positioned near the south end of the block bounded by Reserve Road, Frederick, Herbert, and Westbourne Streets. Winds in this type of urban-scape tend to be channelled along the streets with local effects being dictated by local topography and exposed large buildings nearby. The development site is located at the base of a 21 m high cliff to the south and west of the development site, with a maximum height on the corner of Reserve Road and Westbourne Street, Figure 6. The topography gradually descends from the maximum height down Reserve Road to the north-west, and Westbourne Street to the north-east.

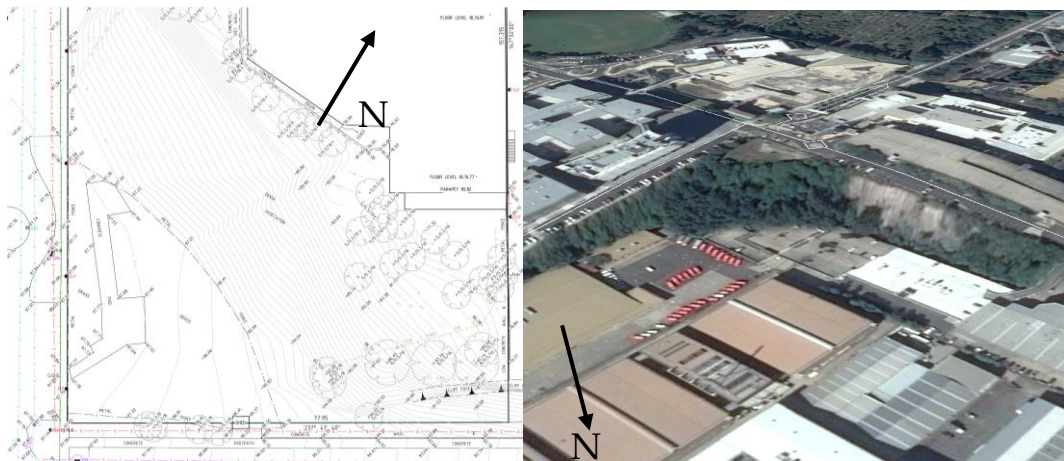


Figure 6: Topography contours of cliff face (left), and view from north (right)

The frontages of the proposed development will be mostly away from the adjacent streets, Figure 7. The maximum height of the proposed development is about RL 144 m, and the corner of Reserve Road and Westbourne Street is approximately RL 98 m, Figure 8.

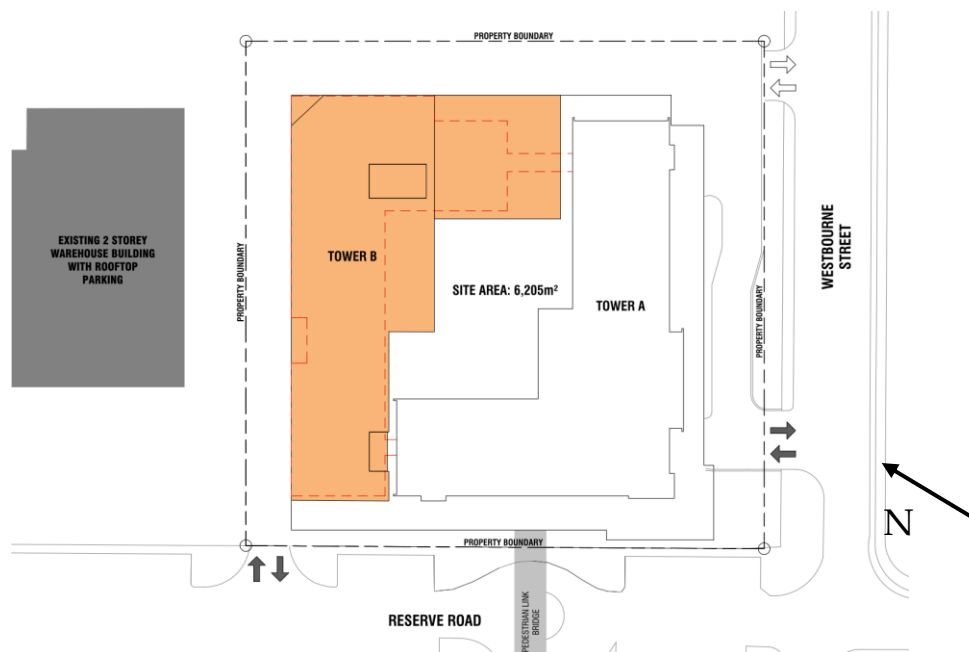


Figure 7: Site plan showing Tower B envelope

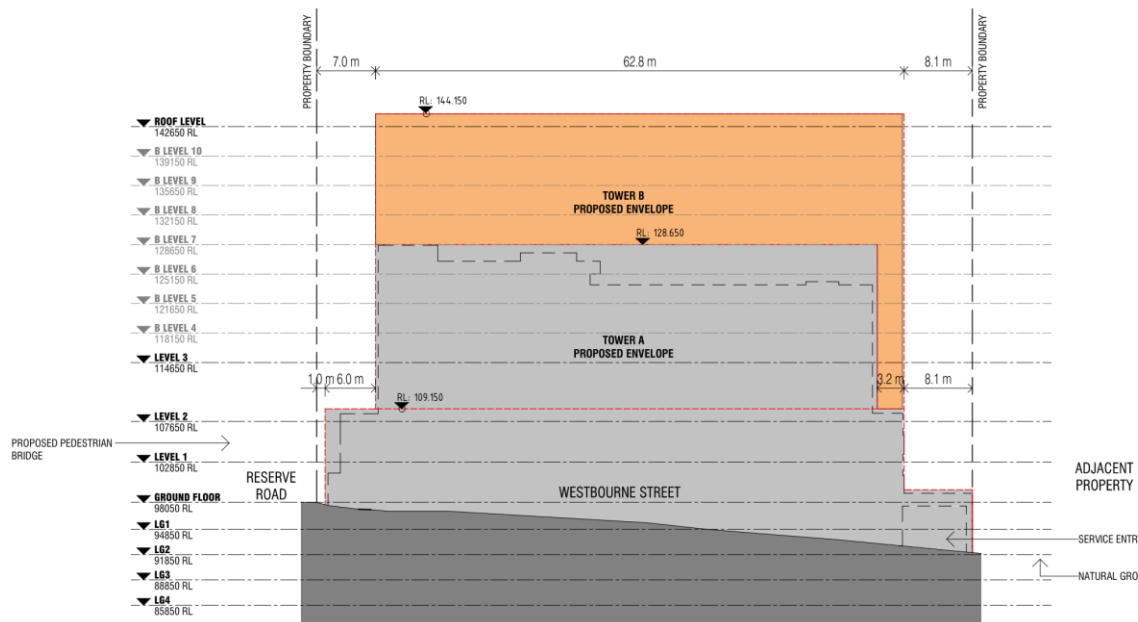


Figure 8: South elevation of proposed development

Winds from the North-east

At an elevation of about RL 144 m, the proposed Tower B will be exposed to winds from the north-east as it will stand taller than most buildings to the north-east quadrant. Approach winds will impact the narrow side of the building allowing majority of the wind to flow horizontally around the building. A small amount of downwash from the north-east façade will generate considerable wind flow around the northern corner of Tower B at ground level before channelling along the north-west boundary and dispersing into Reserve Road. It would be recommended building entrances are located away from the base of the tower, and it is evident from the provided architectural drawings the Tower B entry is in fact located a distance to the east of the north-east façade.

There will be some limited downwash flow spilling from the western end of the north-west façade although the setback of Tower B from Reserve road will allow this flow to disperse before reaching the Reserve Road footpath. Hence Tower B is not expected to significantly increase the existing wind conditions along Reserve and Westbourne Roads during wind events from the north-east, and is expected to remain suitable as a public accessway from a comfort and distress perspective as per the Lawson criteria.

Winds from the South

Currently, demolition of the old hospital building at 1 Westbourne Street behind the Chapel to the south of the development site has created a space to allow a larger volume of wind from the south south-west to reach the development site. The proposed Tower A and podium massing would largely shield Tower B from winds from the south, and encourage a large amount of wind to flow over and

around Tower B. It is expected the addition of the proposed Tower B will not have a significant impact on the existing wind conditions along Reserve Road and Westbourne Street at pedestrian level.

There will be construction of a large building dedicated to research and education at 1 Westbourne Street, and will help provide future shielding for the development site's street frontages from winds from the south. With the future 1 Westbourne Street building in place, winds channelling along Westbourne Street and Reserve Road may become more noticeable. The addition of the proposed Tower B will have minimal effects on the wind conditions at pedestrian level as it will be nested in the existing flow field during winds from the south.

Winds from the West

The development site is largely shielded by the North Shore Private Hospital and carpark from winds coming from the west quadrant, with some existing channelling winds along Westbourne Street in the east direction. Thus, the addition of the proposed building is expected to have minimal effect on the channelling winds.

Summary

For all wind directions, it is predicted pedestrian level wind conditions along Reserve Road and Westbourne Street after the addition of the proposed development will remain similar to existing conditions, rated in the pedestrian standing to walking range with reference to the Lawson criterion while passing the distress criterion.

CONCLUSIONS

Cermak Peterka Petersen Pty. Ltd. has provided an opinion based assessment of the pedestrian level wind environment in and around the 12 Frederick Street site, St Leonards.

Existing wind conditions at pedestrian level along the street frontages of the development site are relatively windy due to accelerated and channelled wind flow. The addition of the proposed Tower B is expected to have marginal effects on the existing conditions.

The wind conditions for the street front of the site are expected to range between pedestrian standing and walking Lawson criteria, while passing the distress criterion, being similar to existing conditions.

Verification of the predicted wind environment surrounding the site will require wind tunnel testing.

REFERENCES

City of Sydney, (2011), “Central of Sydney Development Control Plan 1996”.

City of Sydney, (2012), “Sydney Development Control Plan 2012”.

City of Willoughby, (2012), “Willoughby Development Control Plan”.

Lawson, T.V., (1990), The Determination of the wind environment of a building complex before construction, *Department of Aerospace Engineering, University of Bristol*, Report Number TVL 9025.

Melbourne, W.H., (1978), Criteria for environmental wind conditions, *J. Industrial Aerodynamics*, **3**, 241-249.