



23 - 31 Dover Road, Rose Bay

SSD Noise & Vibration Impact Assessment

Dover Street (Rose Bay) Developments Pty Limited
L5, 30-36 Bay Street, Double Bay, NSW 2060

Report Reference: 250187 – 23 - 31 Dover Road, Rose Bay – SSD Noise & Vibration Impact Assessment – R3

Date: 11 September 2025

Revision: R3

Project Number: 250187

DOCUMENT CONTROL

Project Name:	23 - 31 Dover Road, Rose Bay
Project Number:	250187
Report Reference:	250187 – 23 - 31 Dover Road, Rose Bay – SSD Noise & Vibration Impact Assessment – R3
Client:	Dover Street (Rose Bay) Developments Pty Limited

Revision	Description	Reference	Date	Prepared	Checked	Authorised
0	DRAFT – For Review	250187 – 23 – 31 Dover Road, Rose Bay – SSD Noise & Vibration Impact Assessment – R0	01/07/25	MF	NDC	MF
1	For Information.	250187 – 23 – 31 Dover Road, Rose Bay – SSD Noise & Vibration Impact Assessment – R1	07/07/25	MF	NDC	MF
2	Updated to include frozen architectural drawings.	250187 – 23 – 31 Dover Road, Rose Bay – SSD Noise & Vibration Impact Assessment – R2	04/09/25	MF	NDC	MF
3	Minor amendments to architectural set	250187 – 23 – 31 Dover Road, Rose Bay – SSD Noise & Vibration Impact Assessment – R3	11/09/25	MF	NDC	MF

PREPARED BY:

Pulse White Noise Acoustics Pty Ltd

ABN: 95 642 886 306

Address: Suite 601, Level 6, 32 Walker Street, North Sydney, 2060

Phone: 1800 4 PULSE

This report has been prepared by Pulse White Noise Acoustics Pty Ltd with all reasonable skill, care and diligence, and taking account of the timescale and resources allocated to it by agreement with Dover Street (Rose Bay) Developments Pty Limited.

Information reported herein is based on the interpretation of data collected, which has been accepted in good faith as being accurate and valid.

This report is for the exclusive use of Dover Street (Rose Bay) Developments Pty Limited
No warranties or guarantees are expressed or should be inferred by any third parties.
This report may not be relied upon by other parties without written consent from Pulse White Noise Acoustics.

This report remains the property of Pulse White Noise Acoustics Pty Ltd until paid for in full by the client, Dover Street (Rose Bay) Developments Pty Limited.

Pulse White Noise Acoustics disclaims any responsibility to the Client and others in respect of any matters outside the agreed scope of the work.



CONTENTS

1	CONSULTANT DECLARATION	5
2	EXECUTIVE SUMMARY	7
3	INTRODUCTION	8
3.1	Planning Secretary's Environmental Assessment Requirements (SEARs)	8
3.2	SEARs Satisfaction Table	8
3.3	Relevant Guidelines	8
3.4	Project Description	9
3.5	The Site	9
3.6	Surrounding Receivers.....	11
4	ACOUSTIC NOISE SURVEY	13
4.1	Unattended Noise Monitoring	13
4.1.1	Results in accordance with the NSW EPA Noise Policy for Industry (NPI) 2017 (RBL's).....	13
4.1.2	Results in accordance with the NSW Department of Planning, Housing and Infrastructure (DPHI) "Road Noise Policy"	14
4.2	Attended Noise Survey.....	14
4.3	Summary of Measured/Assumed RBLs.....	15
5	NOISE AND VIBRATION CRITERIA	16
5.1	External Noise Emission Criteria.....	16
5.1.1	NSW EPA Noise Policy for Industry (NPI) 2017	16
5.1.1.1	Intrusive Noise Impacts (Residential Receivers).....	16
5.1.1.2	Protecting Noise Amenity (All Receivers)	16
5.1.1.3	Residential Receivers – Area Classification	17
5.1.1.4	Maximum Noise Level Event (Sleeping Disturbance)	20
5.1.1.5	Project Specific External Noise Emission Criteria	20
5.1.2	NSW EPA (Formerly DECCW) NSW Road Noise Policy (RNP) 2011	22
5.2	Noise Intrusion Criteria	22
5.2.1	Australian/New Zealand Standard AS/NZS 2107:2016 – Acoustics – Recommended design sound levels and reverberation times for building interiors	22
5.2.2	Summary of Project Requirements.....	22
5.3	Construction Noise and Vibration Criteria	23
5.3.1	Construction Noise Criteria	23
5.3.1.1	NSW EPA (Former DECC) Interim Construction Noise Guideline (ICNG) 2009	23
5.3.2	Vibration Criteria	25
5.3.2.1	Vibration Criteria – Human Comfort	25
5.3.2.2	Vibration Criteria – Building Contents and Structure.....	26
5.3.2.2.1	British Standard BS 7385 Part 2 - 1993.....	26
5.3.2.2.2	German Standard DIN 4150 Part 3 - 1999	28
5.3.3	Construction Traffic Noise Criteria.....	28
6	EXTERNAL NOISE INTRUSION ASSESSMENT	29
6.1	Façade Acoustic Treatments	29
6.1.1	Glazing Recommendations	29
6.1.2	External Wall Construction	29
6.1.3	External Roof Construction	29
7	OPERATIONAL NOISE EMISSION ASSESSMENT	31



7.1	Noise from Engineering Services	31
7.2	Carpark Noise Emissions.....	31
7.3	Noise from Additional Traffic	31
7.4	Acoustic Separation	32
7.5	Noise Associated with Communal Open Space.....	32
8	CONSTRUCTION NOISE AND VIBRATION ASSESSMENT	34
8.1	Construction Activity Noise Assessment.....	34
8.2	Construction Traffic Noise Assessment	34
8.3	Vibration Assessment	34
8.4	Acoustic Management Procedures.....	35
8.4.1	Summary of Management Procedures	35
8.4.2	Allocation of Noise Management Procedures.....	36
8.4.3	Allocation of Vibration Management Procedures	36
8.5	Site Specific Noise Mitigation Measures	37
8.5.1	General Comments	37
8.5.2	Noise Monitoring	37
8.5.3	Alternate Equipment or Process	37
8.5.4	Acoustic Enclosures/Screening.....	38
8.6	Vibration Mitigation Measures	38
8.6.1	General Comments	38
8.6.2	Vibration Monitoring	38
8.7	Community Consultation	39
8.8	Complaints Management System	39
8.9	Contingency Plans.....	39
8.10	General Mitigation Measures (Australia Standard 2436-2010).....	40
8.10.1	Adoption of Universal Work Practices	40
8.10.2	Plant and Equipment.....	40
8.10.3	On Site Noise Mitigation	40
8.10.4	Work Scheduling	41
8.10.5	Source Noise Control Strategies.....	41
8.11	Discussion of Resulting Construction Noise Levels with Mitigation	41
9	SUMMARY OF ACOUSTIC MITIGATION MEASURES.....	43
10	CONCLUSION	44
APPENDIX A.	APPENDIX TERMINOLOGY	45
APPENDIX B.	UNATTENDED NOISE MONITOR – L1	47
APPENDIX C.	UNATTENDED NOISE MONITOR – L2	48

Figures

Figure 1	Aerial Image of Site.....	10
Figure 2	Project Site Location - Sourced Six Maps.....	12
Figure 3	NSW ePlanning Spatial Viewer	18
Figure 4	NPI Extract - Table 2.3 Determining which of the residential receiver categories applies	19
Figure 5	BS 7385 Part 2 – 1993, graph of transient vibration values for cosmetic damage.....	27
Figure 6	Extract – NSW Noise Policy for Industry (NPI) 2017	32



Tables

Table 1	SEARs Satisfaction Table.....	8
Table 2	Measured Ambient Noise Levels corresponding to the NPI's Assessment Time Periods.....	14
Table 3	Measured Ambient Noise Levels corresponding to the "Road Noise Policy" Assessment Time Periods...	14
Table 4	Measured Attended Noise Level Measurements	15
Table 5	Assumed Noise Levels vs. Receiver Locations (RBL's)	15
Table 6	NSW NPI – Recommended L_{Aeq} Noise Levels from Noise Sources.....	19
Table 7	External noise level criteria in accordance with the NSW NPI	21
Table 8	Recommended design sound levels as per standard AS/NZS 2107:2016	22
Table 9	Summary of Internal Noise Level Criteria	23
Table 10	NMLs for quantitative assessment at residences	24
Table 11	NMLs as basis for the acoustic assessment	25
Table 12	Continuous vibration acceleration criteria (m/s^2) 1 Hz-80 Hz.....	26
Table 13	Impulsive vibration acceleration criteria (m/s^2) 1 Hz-80 Hz.....	26
Table 14	Intermittent vibration impacts criteria ($m/s^{1.75}$) 1 Hz-80 Hz	26
Table 15	Transient vibration criteria as per standard BS 7385 Part 2 – 1993.....	27
Table 16	Structural damage criteria as per standard DIN 4150 Part 3 – 1999.....	28
Table 17	Recommended Glazing Construction	29
Table 18	"Offensive Noise" Test	33
Table 19	Recommended indicative safe working distances for vibration intensive plant	35
Table 20	Summary of mitigation procedures	35
Table 21	Allocation of noise management procedures – Residential Receivers.....	36
Table 22	Allocation of vibration management procedures	37
Table 23	Summary of Acoustic Mitigation Measures.....	43



1 CONSULTANT DECLARATION

PROJECT DETAILS

PROJECT NAME

Application number	SSD-86017721
Address of subject land	23-31 Dover Road, Rose Bay within Woollahra Municipality
Lot / DP	Lots 10/A in DP4244, Lot 11/A in DP4244, Lot 12/A in DP4244, Lot 13 in DP663078 and Lot 1 in DP105598

APPLICANT DETAILS

Applicant name	DOVER STREET (ROSE BAY) DEVELOPMENTS PTY. LIMITED
Applicant address	Level 5, 30 – 36 Bay Street Double Bay NSW 2028.

REPORT DETAILS

Name of report this declaration relates	<i>Noise and Vibration Impact Assessment</i>
Report reference no.	<i>250187 – 23 – 31 Dover Road, Rose Bay – SSD Noise & Vibration Impact Assessment – R3</i>
Report date	11/09/2025
Company name (inc. ABN / ACN)	Pulse White Noise Acoustics Pty Ltd (ABN: 95 642 886 306)
Author name	Matthew Furlong
Author qualifications	Bachelor of Creative Technology (Audio Engineering and Sound Production)
Author address	Suite 601, Level 6, 32 Walker Street, North Sydney NSW 2060

DECLARATION BY CONSULTANT

Name	Pulse White Noise Acoustics Pty Ltd
Registration no.	1933
Organisation registered with	Australian Acoustical Society (AAS)
Declaration	The undersigned declares that <i>Noise and Vibration Impact Assessment</i>: - has been prepared in accordance with the following policy, guidelines, or legislative requirements: - Australian & New Zealand AS/NZS 2107:2016 Acoustics – Recommended design sound levels and reverberation times for building interiors. - NSW EPA Noise Policy for Industry (NPI) 2017. - NSW EPA Road Noise Policy (RNP) 2011. - NSW EPA Interim Construction Noise Guideline (ICNG) 2009. - NSW EPA (formerly, Department of Environment and Climate Change) Assessing Vibration: a technical guideline 2006 (AV-TG). - Australian Standard AS 2670.2 1990 - Evaluation of Human Exposure to Whole Body Vibration - Part 2: Continuous and Shock Induced Vibration in Buildings (1 Hz to 80 Hz).

- British Standard BS 6472 - 2008 - Evaluation of Human Exposure Vibration in Buildings (1 Hz to 80 Hz).
- German DIN 4150: Part 3 – 1999 “Effects of Vibration on Structure” (DIN 1999).
- contains all available information relevant to the environmental assessment of the development, activity or infrastructure to which the *Noise and Vibration Impact Assessment* relates;
- does not contain information that is false or misleading;
- identifies and addresses the relevant Planning Secretary’s environmental assessment requirements (SEARs) for the project;
- identifies and addresses the relevant statutory requirements for the project, including any relevant matters for consideration in environmental planning instruments to which the *Noise and Vibration Impact Assessment* relates;
- contains a consolidated summary of the proposed or necessary mitigation measures.

Signature

A handwritten signature in blue ink, appearing to be 'M. Jones' or similar, written over a light blue circular stamp.

Date

11th September 2025

2 EXECUTIVE SUMMARY

This Noise and Vibration Impact Assessment (NVIA) has been prepared by Pulse White Noise Acoustics Pty Ltd (PWNA) on behalf of DOVER STREET (ROSE BAY) DEVELOPMENTS PTY. LIMITED for the construction of a residential development (the proposal) on land situated at 23 – 31 Dover Road, Rose Bay (the site).

The report has considered the building envelope requirements, establishment of noise emission requirements to site-specific surrounding receivers and likely construction impacts from the project and has presented reasonable and feasible management and mitigation measures to ensure the project can achieve the noise and vibration management levels as outlined in this report.

The site is located at 23 – 31 Dover Road, Rose Bay, within the Woollahra Local Government Area (LGA). The site extends across a rectangular-shaped configured site of approximately 2,657 m² and comprises five (5) separate allotments at Lots 10/A in DP4244, Lot 11/A in DP4244, Lot 12/A in DP4244, Lot 13 in DP663078 and Lot 1 in DP105598.

Background noise logging was undertaken at two (2) locations between Tuesday 22nd April 2025 until Wednesday 7th April 2025 (L1) and from Wednesday the 27th October to the 9th of November 2022 (L2). The measurements have been used to establish the projects construction noise management levels and operational project specific noise trigger levels.

An assessment of the impacts associated with the number of vehicles on surrounding public roads around the site predicted the impact to be less than 2 dB and is therefore compliant with the NSW EPA RNP.

Prior to the issue of the Construction Certificate it is recommended that a *Construction Noise and Vibration Management Sub Plan (CNVMP)* be undertaken to formulate relevant compliance with the objectives detailed above.



3 INTRODUCTION

This report has been prepared to support a State Significant Development (SSD) Application SSD-86017721 for the proposed redevelopment of 23-31 Dover Road, Rose Bay (the site).

The Minister for Planning, or their delegate, is the consent authority for the SSDA and this application is lodged with the NSW Department of Planning, Housing and Infrastructure (DPHI) for assessment.

This report has been prepared in response to the requirements contained within the Secretary’s Environmental Assessment Requirements (SEARs) dated 13th June 2025 (SSD-86017721).

3.1 Planning Secretary’s Environmental Assessment Requirements (SEARs)

This report addresses the relevant Secretary’s Environmental Assessment Requirements (SEARs), namely:

10. Noise and Vibration
- *Provide a noise and vibration assessment prepared in accordance with the relevant NSW Environment Protection Authority (EPA) guidelines. The assessment must detail construction and operational noise and vibration impacts on nearby sensitive receivers and structures and outline the proposed management and mitigation measures that would be implemented.*

3.2 SEARs Satisfaction Table

In addressing the requirements of SEARs item 10 above, each item is addressed in the following sections:

Table 1 SEARs Satisfaction Table

Acoustic Assessment SEARs Satisfaction Table		
SEAR	SEAR Requirements	Document Reference
10	<i>Provide a noise and vibration assessment prepared in accordance with the relevant NSW Environment Protection Authority (EPA) guidelines</i>	Refer to section 5.
	<i>The assessment must detail construction and operational noise and vibration impacts on nearby sensitive receivers and structures</i>	Refer to section 7 for operational noise. Refer to section 8 for construction noise and vibration.
	<i>.... and outline the proposed management and mitigation measures that would be implemented</i>	Refer to sections 7 and 8.

3.3 Relevant Guidelines

Acoustic criteria that have been adopted in this assessment include requirements from the following guidelines or legislative documents:

- NSW EPA Noise Policy for Industry (*NPI*) 2017.
- NSW EPA Road Noise Policy (*RNP*) 2011.
- NSW EPA Interim Construction Noise Guideline (*ICNG*) 2009.
- NSW EPA (formerly, Department of Environment and Climate Change) *Assessing Vibration: a technical guideline 2006 (AV-TG)*.



- Australian Standard AS 2670.2 1990 - *Evaluation of Human Exposure to Whole Body Vibration - Part 2: Continuous and Shock Induced Vibration in Buildings (1 Hz to 80 Hz)*.
- British Standard BS 6472 - 2008 - *Evaluation of Human Exposure Vibration in Buildings (1 Hz to 80 Hz)*.
- German DIN 4150: Part 3 – 1999 “*Effects of Vibration on Structure*” (DIN 1999).

3.4 Project Description

The application seeks development consent for an SSDA which will facilitate the redevelopment of the site for a residential flat building using the in-fill affordable housing and mid-rise housing controls in accordance with the recently introduced provisions under the State Environmental Planning Policy (Housing) 2021 (**Housing SEPP**).

The project seeks consent for:

- Demolition of existing buildings on site and tree removal.
- Construction of a residential flat building comprising two levels of basement car parking, eight storeys of residential dwellings, communal open space and associated landscaping. The building will include:
 - 15% affordable housing operated and used by a CHP for a period of 15 years.
 - 49 residential dwellings including 1-, 2-, 4- and 3-bedroom typology.
 - Vehicular access from Dover Road and provision for parking of 66 car parking spaces, including 6 visitor, 5 accessible, 7 motorbike spaces, and 54 bicycle spaces.
- Storage areas, utilities and service provision.

Refer to Architectural Plans prepared by MNDU as appended to the Environmental Impact Statement.

3.5 The Site

The site is located at 23-31 Dover Road, Rose Bay. The site occupies five lots legally described as Lots 10/A in DP4244, Lot 11/A in DP4244, Lot 12/A in DP4244, Lot 13 in DP663078 and Lot 1 in DP105598. The site area is 2657 m².


The site is located to the immediate east of the Rose Bay town centre in the Woollahra local government area (**LGA**). The Rose Bay town centre is identified as a Low-Mid Rise Centre under the Housing SEPP. Existing development on the site includes:

- A single storey building with a large gable roof, housing the Rose Bay Family Medical Centre at 23 Dover Road. The zoning of this property is still residential.
- Two-storey rendered houses with pitched tiled roofs at 25 & 27 Dover Road.
- A single storey rendered house with a pitched tiled roof at 29 Dover Road.
- A two-storey rendered dual occupancy with a pitched metal roof at 31 Dover Road.

All five lots have vehicular access from Dover Road, leading to garages. Pedestrian access is also available from Dover Road through gates in the front fences.

The site location is identified in Figure 1 below.

Figure 1 Aerial Image of Site

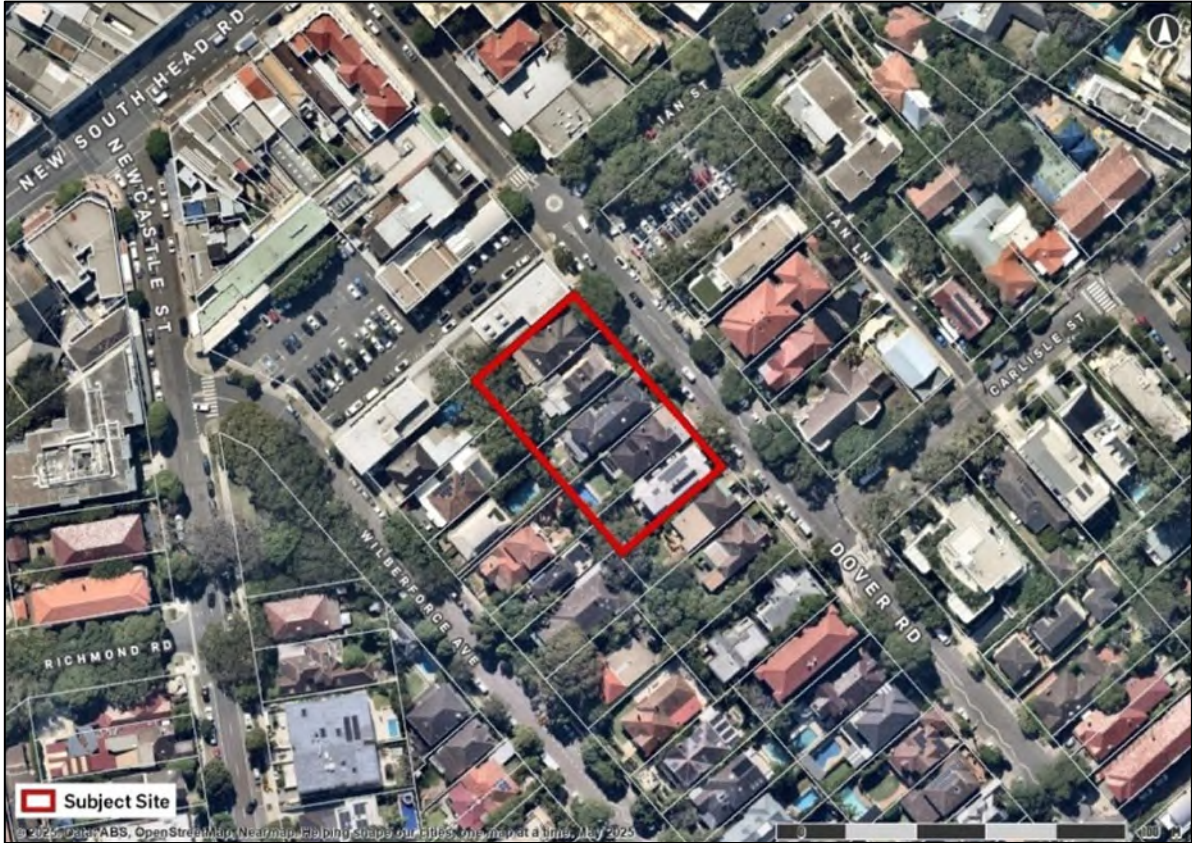

Land Uses surrounding the site can be described as follows:

- **North:** Located along the north-western boundary is a multi-story commercial development. Along the north-eastern boundary is Dover Road, which is classified as a local road and carries a moderate volume of road traffic.
- **East:** Located to the north-east, across Dover Road are multiple residential receiver buildings and two early learning centres.
- **South / west:** Located along the southern / south-western boundary are multiple residential receivers. The proposed development would feature a shared boundary with six existing residential developments.

3.6 Surrounding Receivers

The nearest sensitive noise receivers to the site are identified below.

- Receiver 01:** 19-21 Dover Road, Rose Bay, a two (2) storey commercial receiver located along the north-western boundary of the project site.
- Receiver 02:** 20 Dover Road, Rose Bay, a three (3) storey residential building to the north-east of the project site.
- Receiver 03:** 22 Dover Road, Rose Bay a three (3) storey residential building to the north-east of the project site
- Receiver 04:** 24 Dover Road, Rose Bay a two (2) storey childcare centre located to the east of the project site.
- Receiver 05:** 2 Carlisle Street, Rose Bay a single storey childcare centre located to the east of the project site.
- Receiver 06:** 33 Dover Road, Rose Bay a single storey residential receiver located along the south-eastern boundary of the project site.
- Receiver 07:** 35 Dover Road, Rose Bay a single storey residential receiver located to the south-east of the project site.
- Receiver 08:** 20 Wilberforce Avenue, Rose Bay a two (2) storey residential receiver located along the southern boundary of the project site.
- Receiver 09:** 18 Wilberforce Avenue, Rose Bay a two (2) storey residential receiver located along the western boundary of the project site.
- Receiver 10:** 16 Wilberforce Avenue, Rose Bay a single storey residential receiver located along the western boundary of the project site.
- Receiver 11:** 14 Wilberforce Avenue, Rose Bay a single storey residential receiver located along the western boundary of the project site.
- Receiver 12:** 12 Wilberforce Avenue, Rose Bay a two (2) storey residential receiver located along the western boundary of the project site.
- Receiver 13:** 10 Wilberforce Avenue, Rose Bay a two (2) storey residential receiver located along the western boundary of the project site.

A map showing the site location and all measurement locations as well as nearest receivers is provided in Figure 2 below.



Figure 2 - Project Site Location - Sourced Six Maps



4 ACOUSTIC NOISE SURVEY

Measured noise levels from the onsite noise survey are outlined below.

4.1 Unattended Noise Monitoring

Two (2) unattended noise monitors have been adopted as part of the survey to determine existing background noise levels as well as ambient L_{Aeq} noise levels.

The monitoring location included one (1) unattended noise monitor along the northeastern façade of the project site along Dover Road, referred to as 'L1' in the Figure 2 above. This location was used for determining existing acoustic environment for the receivers around Dover Road.

The second location was located to the west of the project site, at 24 Newcastle Street, Rose Bay, referred to as 'L2' in the Figure 2 above. This location was used for determining existing acoustic environment for the receivers along Wilberforce Avenue.

Onsite acoustic noise survey was conducted from Tuesday 22nd April 2025 until Wednesday 7th April 2025 for L1, and Wednesday 27th October to the 9th of November 2022 for L2.

All data in the graphs presented in Appendix B and Appendix C have not been corrected (i.e., raw data is presented).

Instrumentation for the surveys comprised of two (2) Rion NL-42 sound level meter (serial number 00998081 and 01000231 for noise logger 1 and 2 respectively). Calibration of the monitors were checked prior to and following the measurements. Drift in calibration did not exceed ± 0.5 dB. All equipment carried appropriate and current NATA (or manufacturer) calibration certificates.

Charts presenting summaries of the measured daily noise data are attached in Appendix B for Location 1 and Appendix C for location 2. The charts present each 24-hour period and show the L_{A10} , L_{Aeq} and L_{A90} noise levels for the corresponding 15-minute periods. This data has been filtered to remove periods affected by adverse weather conditions based on weather information.

Based on the unattended noise measurements, the results of the survey have been presented below.

4.1.1 Results in accordance with the NSW EPA Noise Policy for Industry (NPI) 2017 (RBL's)

In order to assess the acoustical implications of the development at nearby noise sensitive receivers, the measured background noise data of the logger was processed in accordance with the NSW EPA's Noise Policy for Industry (NPI, 2017).

The Rating Background Noise Level (RBL) is the background noise level used for assessment purposes at the nearest potentially affected receiver. It is the 90th percentile of the daily background noise levels during each assessment period, being day, evening and night. RBL L_{A90} (15minute) and L_{Aeq} noise levels are presented in Table 2

Data affected by adverse meteorological conditions and by spurious and uncharacteristic events have been excluded from the results, and also excluded from the data used to determine the noise emission criteria. Meteorological information has been obtained from the Observatory Hill (ID 066214) which is located within 30 km. Levels presented below are processed results with extraneous weather events removed.

**Table 2 Measured Ambient Noise Levels corresponding to the NPI's Assessment Time Periods**

Measurement Location ⁴	Daytime ¹ 7:00 am to 6:00 pm		Evening ¹ 6:00 pm to 10:00 pm		Night-time ¹ 10:00 pm to 7:00 am	
	L _{A90} ² (dB(A))	L _{Aeq} ³ (dB(A))	L _{A90} ² (dB(A))	L _{Aeq} ³ (dB(A))	L _{A90} ² (dB(A))	L _{Aeq} ³ (dB(A))
Location 1 – Along Dover Road (see Figure 2)	51	65	43	61	37	57
Location 2 – Along Wilberforce Avenue (see Figure 2)	48	58	41	54	35	51

Note 1 For Monday to Saturday, Daytime 7:00 am – 6:00 pm; Evening 6:00 pm – 10:00 pm; Night-time 10:00 pm – 7:00 am. On Sundays and Public Holidays, Daytime 8:00 am – 6:00 pm; Evening 6:00 pm – 10:00 pm; Night-time 10:00 pm – 8:00 am.

Note 2 The LA90 noise level is representative of the "average minimum background sound level" (in the absence of the source under consideration), or simply the background level.

Note 3 The LAeq is the energy average sound level. It is defined as the steady sound level that contains the same amount of acoustical energy as a given time-varying sound.

4.1.2 Results in accordance with the NSW Department of Planning, Housing and Infrastructure (DPHI) "Road Noise Policy"

In determining the noise impact from the generation of additional traffic on public roads, in accordance with the internal noise level requirements of Department of Planning, Housing and Infrastructure (DPHI) "Road Noise Policy", measured noise levels are shown based on the time periods defined by the policy below.

Table 3 Measured Ambient Noise Levels corresponding to the "Road Noise Policy" Assessment Time Periods

Measurement Location	Daytime ¹ 7:00 am to 10:00 pm L _{Aeq} (whole period) ² (dBA)	Night-time ¹ 10:00 pm to 7:00 am L _{Aeq} (whole period) ² (dBA)
Location 1 – Along Dover Road (see Figure 2)	64	57
Location 2 – Along Wilberforce Avenue (see Figure 2)	58	51

Note 1 For Monday to Sunday, Daytime 7:00 am – 10:00 pm; Night-time 10:00 pm – 7:00 am.

Note 2 The LAeq is the energy average sound level. It is defined as the steady sound level that contains the same amount of acoustical energy as a given time-varying sound.

4.2 Attended Noise Survey

In addition to the unattended noise surveys detailed above, an onsite attended noise surveys have been undertaken around the site to support the measurements above.

Locations of the attended noise measurements are detailed in the figure above. Noise measurements have been undertaken along all boundaries adjacent to existing receivers.



Attended noise level testing was undertaken using a Bruel and Kjaer 2270 Class 1 Type 1 Sound Level Meter (SLM). The meter was calibrated before and after testing and no significant drift was recorded. The attended and unattended noise locations were selected to obtain suitable noise levels for the assessment of background noise levels ($L_{90(t)}$) as well as the impact from traffic movements ($L_{Aeq(Period)}$).

The attended noise survey was undertaken on Tuesday 22nd April 2025 between 2:00 pm and 3:00 pm. Results from this survey are presented below.

Table 4 Measured Attended Noise Level Measurements

Measurement Location	Measured Noise Level (dBA)	
	L_{A90} (15-minutes) ¹ (dB(A))	L_{Aeq} (15-minutes) ² (dB(A))
2:00 pm to 3:00 pm		
Location A1 – (see Figure 2)	52	60
Location A2 – (see Figure 2)	51	58
Location A3 – (see Figure 2)	45	54
<i>Note 1</i> The L_{A90} noise level is representative of the "average minimum background sound level" (in the absence of the source under consideration), or simply the background level. <i>Note 2</i> The L_{Aeq} is the energy average sound level. It is defined as the steady sound level that contains the same amount of acoustical energy as a given time-varying sound.		

4.3 Summary of Measured/Assumed RBLs

Based on the measured noise levels obtained above, the following table outlines the relevant Rating Background Noise Level (RBL) at each receiver location. These are formulated based on the unattended noise monitoring conducted around the project site.

Table 5 Assumed Noise Levels vs. Receiver Locations (RBL's)

Measurement Location ⁴	Daytime ¹ 7:00 am to 6:00 pm		Evening ¹ 6:00 pm to 10:00 pm		Night-time ¹ 10:00 pm to 7:00 am	
	L_{A90} ² (dB(A))	L_{Aeq} ³ (dB(A))	L_{A90} ² (dB(A))	L_{Aeq} ³ (dB(A))	L_{A90} ² (dB(A))	L_{Aeq} ³ (dB(A))
Receivers 02, 03, 04, 05, 06 & 07	51	65	43	61	37	57
Receivers 08, 09, 10, 11, 12 & 13	48	58	41	54	35	51
<i>Note 1</i> For Monday to Saturday, Daytime 7:00 am – 6:00 pm; Evening 6:00 pm – 10:00 pm; Night-time 10:00 pm – 7:00 am. On Sundays and Public Holidays, Daytime 8:00 am – 6:00 pm; Evening 6:00 pm – 10:00 pm; Night-time 10:00 pm – 8:00 am. <i>Note 2</i> The L_{A90} noise level is representative of the "average minimum background sound level" (in the absence of the source under consideration), or simply the background level. <i>Note 3</i> The L_{Aeq} is the energy average sound level. It is defined as the steady sound level that contains the same amount of acoustical energy as a given time-varying sound. <i>Note 4</i> Determined based on the differences between the attended and unattended noise measurements at other locations during similar times.						



5 NOISE AND VIBRATION CRITERIA

All relevant noise and vibration criteria for the project is presented below. It has been separated into three (3) main components: external noise emission criteria, building envelope criteria (façade) and construction noise / vibration criteria. Each are discussed in detail below.

5.1 External Noise Emission Criteria

5.1.1 NSW EPA Noise Policy for Industry (NPI) 2017

In NSW, the control of noise emissions is the responsibility of Local Governments and the NSW Environment Protection Authority (NSW EPA).

The NSW EPA has recently released a document titled Noise Policy for Industry (NSW NPI) which provides a framework and process for determining external noise criteria for the assessment of noise emission from industrial developments. The NSW NPI criteria for industrial noise sources have two components:

- Controlling the intrusive noise impacts for residents and other sensitive receivers in the short term; and
- Maintaining noise level amenity of particular land uses for residents and sensitive receivers in other land uses.

5.1.1.1 Intrusive Noise Impacts (Residential Receivers)

The NSW NPI states that the noise from any single source should not intrude greatly above the prevailing background noise level. Industrial noises are generally considered acceptable if the equivalent continuous (energy-average) A-weighted level of noise from the source (L_{Aeq}), measured over a 15-minute period, does not exceed the background noise level measured in the absence of the source by more than 5 dB(A). This is often termed the Intrusiveness Criterion.

The 'Rating Background Level' (RBL) is the background noise level to be used for assessment purposes and is determined by the methods given in the NSW NPI. Using the rating background noise level approach results in the intrusiveness criterion being met for 90% of the time. Adjustments are to be applied to the level of noise produced by the source that is received at the assessment point where the noise source contains annoying characteristics such as tonality or impulsiveness.

5.1.1.2 Protecting Noise Amenity (All Receivers)

To limit continuing increase in noise levels, the maximum ambient noise level within an area from industrial noise sources should not normally exceed the acceptable noise levels specified in Table 2.2 of the NSW NPI. That is, the ambient L_{Aeq} noise level should not exceed the level appropriate for the locality and land use. This is often termed the 'Background Creep' or Amenity Criterion.

The amenity assessment is based on noise criteria specified for a particular land use and corresponding sensitivity to noise. The cumulative effect of noise from industrial sources needs to be considered in assessing the impact. These criteria relate only to other continuous industrial-type noise and do not include road, rail or community noise. If the existing (measured) industrial-type noise level approaches the criterion value, then the NSW NPI sets maximum noise emission levels from new sources with the objective of ensuring that the cumulative levels do not significantly exceed the criterion.

Project amenity noise level for industrial developments is specified as the recommended amenity noise level (Table 2.2 of the NPI) minus 5 dB(A). To standardise the time periods for the intrusiveness and amenity noise levels, this policy assumes that the $L_{Aeq,15min}$ will be taken to be equal to the $L_{Aeq,period} + 3$ decibels (dB).



Where the resultant project amenity noise level is 10 dB or more lower than the existing traffic noise level, the project amenity noise levels can be set at 15 dB below existing traffic noise levels (i.e. $L_{Aeq,period(traffic)} \text{ minus } 15 \text{ dB}$).

5.1.1.3 Residential Receivers – Area Classification

The NPFI characterises the “Suburban” noise environment as an area with an acoustical environment that:

- *An area that has local traffic with characteristically intermittent traffic flows.*
- *Limited commerce or industry.*
- *Evening ambient noise levels defined by natural environment and human activity.*

Figure 3 below is obtained from the NSW Planning ePlanning Spatial Viewer Zoning Maps and shows the land zoning map of the site and the surrounding sensitive receivers.

Review of the information provided in Figure 3 below shows that the site is surrounded by residential receivers which are zoned as R3 – Medium Density Residential. Additionally, the site is adjacent to commercial receivers which are located within an area zoned as E1 (Local Centre). Based on these zonings, we believe that the most appropriate classification for the development site is suburban residential.

Figure 3 – NSW ePlanning Spatial Viewer

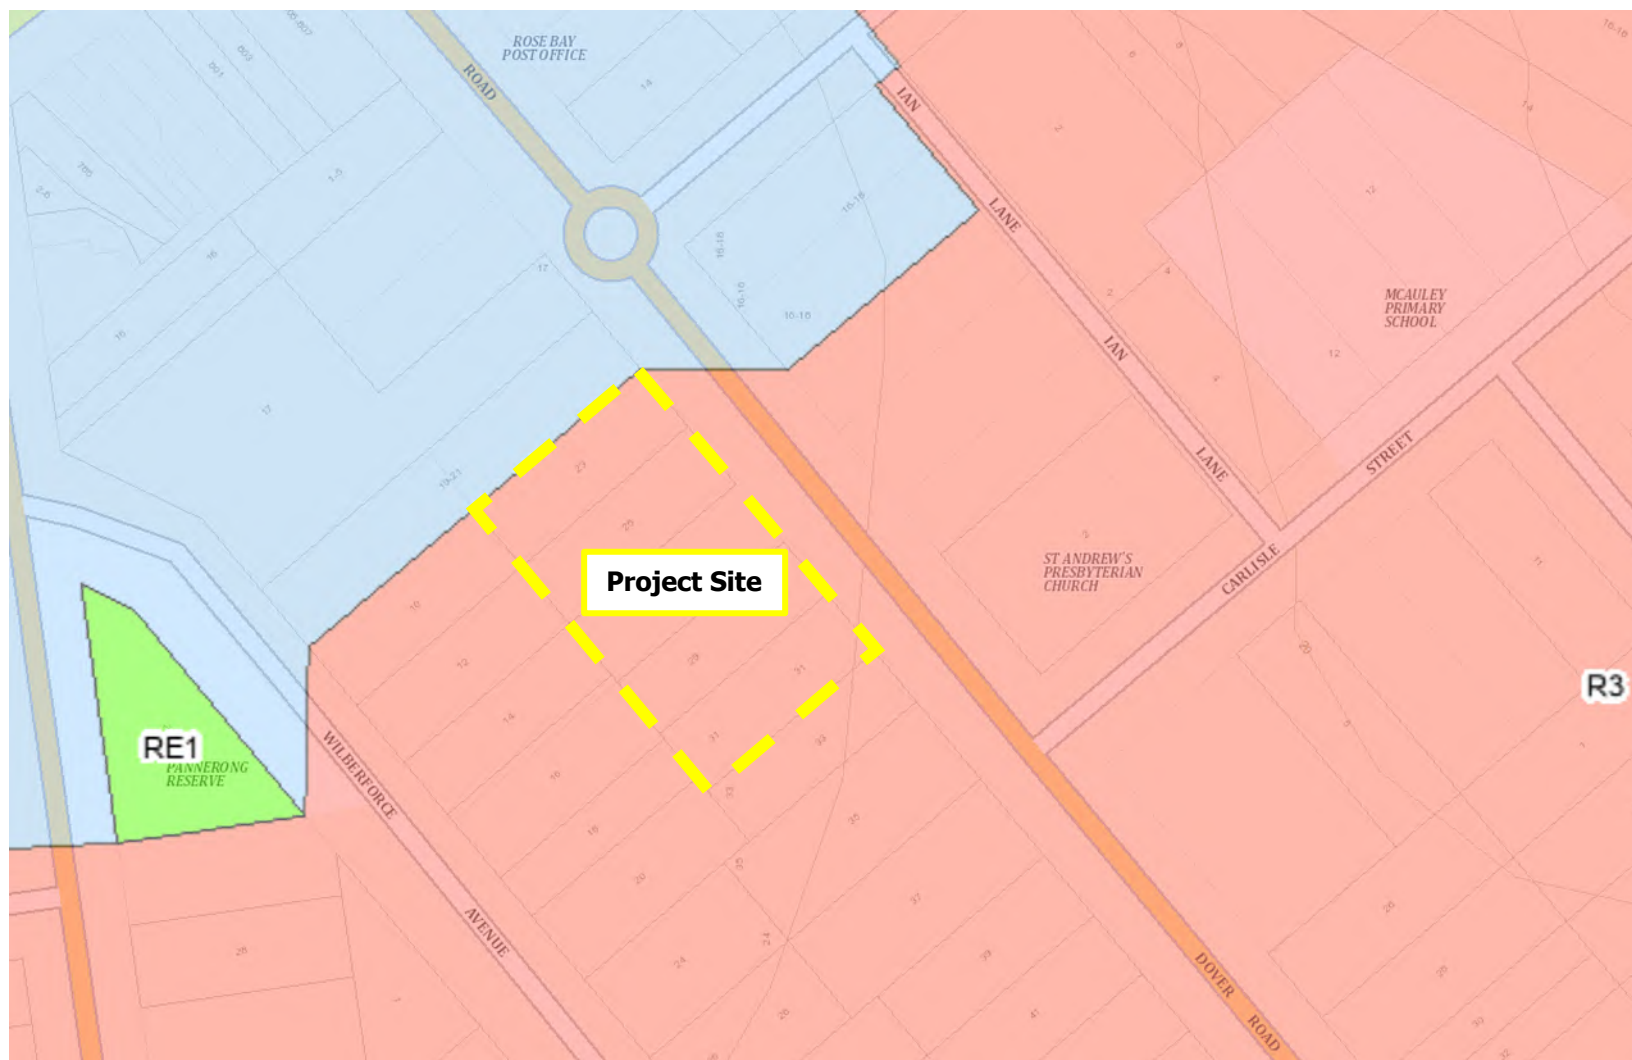


Figure 4 - NPI Extract - Table 2.3 Determining which of the residential receiver categories applies**Table 2.3: Determining which of the residential receiver categories applies.**

Receiver category	Typical planning zoning – standard instrument*	Typical existing background noise levels	Description
Rural residential	RU1 – primary production RU2 – rural landscape RU4 – primary production small lots R5 – large lot residential E4 – environmental living	Daytime RBL <40 dB(A) Evening RBL <35 dB(A) Night RBL <30 dB(A)	Rural – an area with an acoustical environment that is dominated by natural sounds, having little or no road traffic noise and generally characterised by low background noise levels. Settlement patterns would be typically sparse. Note: Where background noise levels are higher than those presented in column 3 due to existing industry or intensive agricultural activities, the selection of a higher noise amenity area should be considered.
Suburban residential	RU5 – village RU6 – transition R2 – low density residential R3 – medium density residential E2 – environmental conservation E3 – environmental management	Daytime RBL <45 dB(A) Evening RBL <40 dB(A) Night RBL <35 dB(A)	Suburban – an area that has local traffic with characteristically intermittent traffic flows or with some limited commerce or industry. This area often has the following characteristic: evening ambient noise levels defined by the natural environment and human activity.
Urban residential	R1 – general residential R4 – high density residential B1 – neighbourhood centre (boarding houses and shop-top housing) B2 – local centre (boarding houses) B4 – mixed use	Daytime RBL > 45 dB(A) Evening RBL > 40 dB(A) Night RBL >35 dB(A)	Urban – an area with an acoustical environment that: - is dominated by 'urban hum' or industrial source noise, where urban hum means the aggregate sound of many unidentifiable, mostly traffic and/or industrial related sound sources - has through-traffic with characteristically heavy and continuous traffic flows during peak periods - is near commercial districts or industrial districts - has any combination of the above.

Notes: *As cited in Standard Instrument – Principal Local Environmental Plan, New South Wales Government, Version 15 August 2014. RBL = rating background noise level.

Resultant amenity levels for suburban receivers are shown below.

Table 6 NSW NPI – Recommended L_{Aeq} Noise Levels from Noise Sources

Type of Receiver	Indicative Noise Amenity Area	Time of Day ¹	Recommended Amenity Noise Level ($L_{Aeq, period}$) ² (dB(A))
Residence	Suburban	Day	50
		Evening	40
		Night	35
Commercial	All	When in use	60

Note 1 For Monday to Saturday, Daytime 7:00 am – 6:00 pm; Evening 6:00 pm – 10:00 pm; Night-time 10:00 pm – 7:00 am. On Sundays and Public Holidays, Daytime 8:00 am – 6:00 pm; Evening 6:00 pm – 10:00 pm; Night-time 10:00 pm – 8:00 am

Note 2 The L_{Aeq} is the energy average sound level. It is defined as the steady sound level that contains the same amount of acoustical energy as a given time-varying sound



5.1.1.4 Maximum Noise Level Event (Sleeping Disturbance)

Section 2.5 of the NPI states the following:

The potential for sleep disturbance from maximum noise level events from premises during the night-time period needs to be considered. Sleep disturbance is considered to be both awakenings and disturbance to sleep stages.

Where the subject development/premises night-time noise levels at a residential location exceed:

- *$L_{Aeq,15min}$ 40 dB(A) or the prevailing RBL plus 5 dB, whichever is the greater, and/or*
- *L_{AFmax} 52 dB(A) or the prevailing RBL plus 15 dB, whichever is the greater,*
a detailed maximum noise level event assessment should be undertaken.

Based on the requirements above as well as the onsite measured noise levels discussed above, the following maximum noise level event criterion applies as per below:

- **Receivers 02, 03, 04, 05, 06, 07:**
 - 42 dB(A) L_{Aeq} (15-minute); and
 - 52 dB(A) L_{Max}
- **Receiver 08, 09, 10, 11, 12, 13:**
 - 40 dB(A) L_{Aeq} (15-minute); and
 - 52 dB(A) L_{Max}

5.1.1.5 Project Specific External Noise Emission Criteria

The intrusive, amenity and maximum noise event criteria for noise emissions, derived from the measured data, are presented in Table 7. These criteria are nominated for the purpose of determining the operational noise limits for building services associated with the development which can potentially affect noise sensitive receivers.

For each assessment period, the lower (i.e., the more stringent) of the amenity or intrusive criteria are adopted. These are shown in bold text in Table 7.

**Table 7 External noise level criteria in accordance with the NSW NPI**

Receiver Type	Time of Day ¹	Project Amenity Noise Level, $L_{Aeq, period}$ ^{2 4} (dB(A))	Measured $L_{A90, 15 min}$ (RBL) ³ (dB(A))	Measured $L_{Aeq, period}$ Noise Level ⁴ (dB(A))	Intrusive $L_{Aeq, 15 min}$ Criterion ⁴ for New Sources (dB(A))	Amenity $L_{Aeq, 15 min}$ Criterion ^{4 5} for New Sources (dB(A))
Receiver 02, 03, 04, 05, 06, 07 (Residential)	Day	50	51	65	56	53
	Evening	40	43	61	48	43
	Night	35	37	57	42	38
Receiver 08, 09, 10, 11, 12, 13 (Residential)	Day	50	48	58	53	53
	Evening	40	41	54	46	43
	Night	35	35	51	40	38
Receivers 01 (Commercial)	When in use	60	-	-	-	63

Note 1 For Monday to Saturday, Daytime 7:00 am – 6:00 pm; Evening 6:00 pm – 10:00 pm; Night-time 10:00 pm – 1:00 am. On Sundays and Public Holidays, Daytime 8:00 am – 6:00 pm; Evening 6:00 pm – 10:00 pm; Night-time 10:00 pm – 7:00 am.
Note 2 Project Amenity Noise Levels corresponding to "Suburban" areas, equivalent to the Recommended Amenity Noise Levels minus 5 dBA.
Note 3 LA90 Background Noise or Rating Background Level.
Note 4 The LAeq is the energy average sound level. It is defined as the steady sound level that contains the same amount of acoustical energy as a given time-varying sound
Note 5 According to Section 2.2 of the NSW NPI, the LAeq, 15 minutes is equal to the LAeq, period + 3 dB.
Note 6 Project Noise Trigger Levels are shown in bold.

In addition, a maximum noise level event criterion applies as per below:

- **Receivers 02, 03, 04, 05, 06, 07:**
 - 42 dB(A) L_{Aeq} (15-minute); and
 - 52 dB(A) L_{Max}
- **Receiver 08, 09, 10, 11, 12, 13:**
 - 40 dB(A) L_{Aeq} (15-minute); and
 - 52 dB(A) L_{Max}



5.1.2 NSW EPA (Formerly DECCW) NSW Road Noise Policy (RNP) 2011

For existing residences and other sensitive land uses affected by additional traffic on existing roads, the NSW Road Noise Policy states that for noise associated with increased road traffic generated by land use developments, any increase in the total traffic noise level should be limited to 2 dB during both day and night-time periods. An increase of 2 dB represents a minor impact that is considered barely perceptible to the average person.

5.2 Noise Intrusion Criteria

5.2.1 Australian/New Zealand Standard AS/NZS 2107:2016 – Acoustics – Recommended design sound levels and reverberation times for building interiors

In relation to design internal noise levels, standard AS/NZS 2107:2016 recommends a range with lower and upper levels (rather than “satisfactory” and “maximum” internal noise levels) for building interiors based on room designation and location of the development relative to external noise sources. This change has occurred due to the fact that sound levels below ‘satisfactory’ could be interpreted as desirable, but the opposite may in fact be the case. Levels below those which were listed as ‘satisfactory’ can lead to inadequate acoustic masking resulting in loss of acoustic isolation and speech privacy.

The levels for areas relevant to this development are given in the table below. In this report we will confine our recommendations to dBA levels, however, where the background noise appears to be unbalanced, standard AS/NZS 2107:2016 provides direction in terms of suitable diagnostic tools that can be used to assess the spectrum distribution of the background noise.

Section 6.18 of standard AS/NZ 2107:2016 notes that the presence of discrete frequencies or narrow band signals may cause the sound level to vary spatially within a particular area and be a source of distraction for occupants. Where this occurs, the sound level shall be determined as the highest level measured in the occupied location(s).

The Table below includes the recommended internal noise levels included within AS2107:2016 for various spaces.

Table 8 Recommended design sound levels as per standard AS/NZS 2107:2016

Type of Occupancy/Activity	Design sound level range (dBA $L_{Aeq,t}$)
Apartment common areas (e.g., foyer, lift lobby)	45 – 50
Residential – Living/working areas	30 – 40
Residential - Sleeping areas (night-time)	30 – 35
<i>Note 1 The L_{Aeq} is the energy average sound level. It is defined as the steady sound level that contains the same amount of acoustical energy as a given time-varying sound</i>	

Generally, where the final noise levels are within +/- 2 dB of the specified level given above, the design criteria will be considered met. Both the upper and lower limits will need to be satisfied especially where privacy is important or where noise intrusion to be avoided.

5.2.2 Summary of Project Requirements

Based on the requirements listed in the sections above, the project resulting internal noise levels requirements are summarised in the table below.

**Table 9 Summary of Internal Noise Level Criteria**

Room Type	Project Internal Environmental Noise Level Requirements dBA $L_{Aeq, (Period)}$	Governing Document
Bedrooms	35 dB(A) L_{Aeq} 9 hour (10pm - 7am)	AS/NZS 2107:2016
Habitable Spaces	40 dB(A) L_{Aeq} 15 hour (7am - 10pm)	AS/NZS 2107:2016
Apartment common areas (e.g. foyer, lift lobby)	50 dB(A) L_{Aeq} anytime	AS/NZS 2107:2016
<i>Note 1 The L_{Aeq} is the energy average sound level. It is defined as the steady sound level that contains the same amount of acoustical energy as a given time-varying sound</i>		

5.3 Construction Noise and Vibration Criteria

5.3.1 Construction Noise Criteria

Relevant construction noise criteria applicable to this project are outlined below.

5.3.1.1 NSW EPA (Former DECC) Interim Construction Noise Guideline (ICNG) 2009

Noise criteria for construction and demolition activities are discussed in the Interim Construction Noise Guideline (ICNG). The ICNG also recommends procedures to address potential impacts of construction noise on residences and other sensitive land uses. The main objectives of the ICNG are summarised as follows:

- Promote a clear understanding of ways to identify and minimise noise from construction works.
- Focus on applying all “feasible” and “reasonable” work practices to minimise construction noise impacts.
- Encourage construction to be undertaken only during the recommended standard hours unless approval is given for works that cannot be undertaken during these hours.
- Streamline the assessment and approval stages and reduce time spent dealing with complaints at the project implementation stage; and
- Provide flexibility in selecting site-specific feasible and reasonable work practices to minimise noise impacts.

The ICNG contains a quantitative assessment method which is applicable to this project. Guidance levels are given for airborne noise at residences and other sensitive land uses.

The quantitative assessment method involves predicting noise levels at sensitive receivers and comparing them with the Noise Management Levels (NMLs). The NML affectation categories for residential receivers have been reproduced from the guideline and are listed in the table below.

Table 10 NMLs for quantitative assessment at residences

Time of Day	Noise Management Level $L_{Aeq(15minute)}$ ^{1,2}	How to Apply
Recommended standard hours: Monday to Friday 7 am to 6 pm Saturday 8 am to 1 pm No work on Sundays or public holidays	Noise affected (NAL) RBL + 10 dB	The noise affected level represents the point above which there may be some community reaction to noise. Where the predicted or measured $L_{Aeq(15minute)}$ is greater than the noise affected level, the proponent should apply all feasible and reasonable work practices to meet the noise affected level. The proponent should also inform all potentially impacted residents of the nature of works to be carried out, the expected noise levels and duration, as well as contact details.
	Highly noise affected (HNAL) 75 dBA	The highly noise affected level represents the point above which there may be strong community reaction to noise. Where noise is above this level, the relevant authority (consent, determining or regulatory) may require respite periods by restricting the hours that the very noisy activities can occur, taking into account: 1. Times identified by the community when they are less sensitive to noise (such as before and after school for works near schools, or mid-morning or mid-afternoon for works near residences). 2. If the community is prepared to accept a longer period of construction in exchange for restrictions on construction times.
Outside the recommended standard hours above	Noise affected RBL + 5 dB	A strong justification would typically be required for works outside the recommended standard hours. The proponent should apply all feasible and reasonable work practices to meet the noise affected level. Where all feasible and reasonable practices have been applied and noise is more than 5 dB above the noise affected level, the proponent should notify the community.
<i>Note 1 Noise levels apply at the property boundary that is most exposed to construction noise, and at a height of 1.5 m above ground level. If the property boundary is more than 30 m from the residence, the location for measuring or predicting noise levels is at the most noise-affected point within 30 m of the residence. Noise levels may be higher at upper floors of the noise affected residence.</i> <i>Note 2 The RBL is the overall single-figure background noise level measured in each relevant assessment period (during or outside the recommended standard hours). The term RBL is described in detail in the NSW Industrial Noise Policy (EPA 2000) (Now NSW EPA NPI 2017).</i>		

Based on the measured background noise levels summarised in section 4, and the NMLs outlined above, the construction noise criteria to be used in this assessment are listed in section 4.

**Table 11 NMLs as basis for the acoustic assessment**

Receiver Types		NML, dB L _{Aeq} (15minute)	
		Standard Hours Monday to Friday: 7:00am to 6:00pm Saturday: 8:00am to 1:00pm	Outside Standard Hours All hours not listed in the adjacent column.
Residences (Measured externally)	Receivers 02, 03, 04, 05, 06, 07	NAL: 61 (RBL (51) + 10 dB) HNAL: 75	RBL + 5 dB
	Receiver 08, 09, 10, 11, 12, 13	NAL: 58 (RBL (48) + 10 dB) HNAL: 75	RBL + 5 dB
Commercial (Measured externally)	Receiver 1	70	
<i>Note 1 The LAeq is the energy average sound level. It is defined as the steady sound level that contains the same amount of acoustical energy as a given time-varying sound.</i>			

5.3.2 Vibration Criteria

Effects of ground borne vibration on buildings may be segregated into the following three categories:

- Human comfort – vibration in which the occupants or users of the building are inconvenienced or possibly disturbed.
- Effects on building contents – where vibration can cause damage to fixtures, fittings, and other non-building related objects.
- Effects on building structures – where vibration can compromise the integrity of the building or structure itself.

5.3.2.1 Vibration Criteria – Human Comfort

Vibration effects relating specifically to the human comfort aspects of the project are taken from AV-TG. This type of impact can be further categorised and assessed using the appropriate criterion as follows:

- Continuous vibration – from uninterrupted sources.
- Impulsive vibration – up to three instances of sudden impact e.g., dropping heavy items, per monitoring period.
- Intermittent vibration – such as from drilling, compacting or activities that would result in continuous vibration if operated continuously.

Table 12 Continuous vibration acceleration criteria (m/s²) 1 Hz-80 Hz

Location	Assessment period	Preferred Values		Maximum Values	
		z-axis	x- and y-axis	z-axis	x- and y-axis
Residences	Daytime	0.010	0.0071	0.020	0.014
	Night-time	0.007	0.005	0.014	0.010
Offices, schools, educational institutions and places of worship	Anytime	0.020	0.014	0.04	0.028

Table 13 Impulsive vibration acceleration criteria (m/s²) 1 Hz-80 Hz

Location	Assessment period	Preferred Values		Maximum Values	
		z-axis	x- and y-axis	z-axis	x- and y-axis
Residences	Daytime	0.30	0.21	0.60	0.42
	Night-time	0.10	0.071	0.20	0.14
Offices, schools, educational institutions and places of worship	Anytime	0.64	0.46	1.28	0.92

Table 14 Intermittent vibration impacts criteria (m/s^{1.75}) 1 Hz-80 Hz

Location	Daytime		Night-time	
	Preferred Values	Maximum Values	Preferred Values	Maximum Values
Residences	0.20	0.40	0.13	0.26
Offices, schools, educational institutions and places of worship	0.40	0.80	0.40	0.80

5.3.2.2 Vibration Criteria – Building Contents and Structure

The vibration effects on the building itself are assessed against international standards as follows:

- For transient vibration: British Standard BS 7385: Part 2-1993 "Evaluation and measurement for vibration in buildings Part 2: Guide to damage levels from ground borne vibration" (BSI 1993); and
- For continuous or repetitive vibration: German DIN 4150: Part 3 – 1999 "Effects of Vibration on Structure" (DIN 1999).

5.3.2.2.1 British Standard BS 7385 Part 2 - 1993

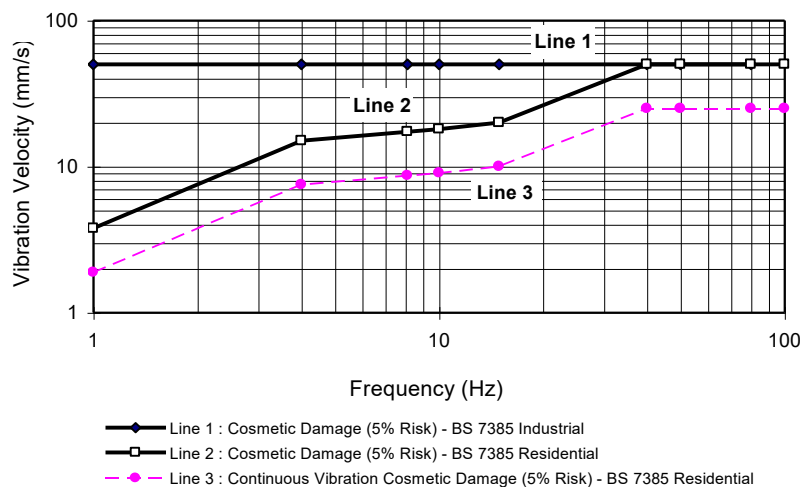
For transient vibration, as discussed in standard BS 7385 Part 2-1993, the criteria are based on peak particle velocity (mm/s) which is to be measured at the base of the building. These are summarised in Table 15 and illustrated in Figure 5.

Table 15 Transient vibration criteria as per standard BS 7385 Part 2 – 1993

Line in Figure 5	Type of Building	Peak Component Particle Velocity in Frequency Range of Predominant Pulse	
		4 Hz to 15 Hz	15 Hz and Above
1	Reinforced or framed structures Industrial and heavy commercial buildings	50 mm/s at 4 Hz and above	
2	Unreinforced or light framed structures Residential or light commercial type buildings	15 mm/s at 4 Hz increasing to 20 mm/s at 15 Hz	20 mm/s at 15 Hz increasing to 50 mm/s at 40 Hz and above

Standard BS 7385 Part 2 – 1993 states that the values in Table 15 relate to transient vibration which does not cause resonant responses in buildings.

Where the dynamic loading caused by continuous vibration events is such that it results in dynamic magnification due to resonance (especially at the lower frequencies where lower guide values apply), then the values in Table 15 may need to be reduced by up to 50% (refer to Line 3 in Figure 5).

Figure 5 - BS 7385 Part 2 – 1993, graph of transient vibration values for cosmetic damage

In the lower frequency region where strains associated with a given vibration velocity magnitude are higher, the recommended values corresponding to Line 2 are reduced. Below a frequency of 4 Hz, where a high displacement is associated with the relatively low peak component particle velocity value, a maximum displacement of 0.6 mm (zero to peak) is recommended. This displacement is equivalent to a vibration velocity of 3.7 mm/s at 1 Hz.

The standard also states that minor damage is possible at vibration magnitudes which are greater than twice those given in , and major damage to a building structure may occur at values greater than four times the tabulated values.

Fatigue considerations are also addressed in the standard, and it is concluded that unless the calculation indicates that the magnitude and number of load reversals is significant (in respect of the fatigue life of building materials) then the values in should not be reduced for fatigue considerations.



5.3.2.2 German Standard DIN 4150 Part 3 - 1999

For continuous or repetitive vibration, standard DIN 4150 Part 3-1999 provides criteria based on values for peak particle velocity (mm/s) measured at the foundation of the building; these are summarised in Table 16. The criteria are frequency dependent and specific to particular categories of structures.

Table 16 Structural damage criteria as per standard DIN 4150 Part 3 – 1999

Type of Structure	Peak Component Particle Velocity, mm/s			
	Vibration at the foundation at a frequency of			Vibration of horizontal plane of highest floor at all frequencies
	1 Hz to 10 Hz	10 Hz to 50 Hz	50 Hz to 100 Hz ₁	
Buildings used for commercial purposes, industrial buildings and buildings of similar design	20	20 to 40	40 to 50	40
Dwellings and buildings of similar design and/or use	5	5 to 15	15 to 20	15
Structures that, because of their sensitivity to vibration, do not correspond to those listed in lines 1 and 2 and are of great intrinsic value (e.g. buildings that are under a preservation order)	3	3 to 8	8 to 10	8

5.3.3 Construction Traffic Noise Criteria

For existing residences and other sensitive land uses affected by additional traffic on existing roads, the NSW Road Noise Policy (RNP) states that for noise associated with increased road traffic generated by land use developments, any increase in the total traffic noise level should be limited to 2 dB during both day and night-time periods. An increase of 2 dB represents a minor impact that is considered barely perceptible to the average person.

6 EXTERNAL NOISE INTRUSION ASSESSMENT

6.1 Façade Acoustic Treatments

Preliminary façade acoustic treatments based on the external levels measured above from surrounding roads and other environmental sources as discussed in section 4 above are provided below.

6.1.1 Glazing Recommendations

The recommended sound transmission loss requirement required to satisfy the specified internal noise level criteria outlined above are summarised in the table below.

Please note for windows, this performance is not only subject to the glazing selection but also to the construction of the window frame and the frame seal selection. Therefore, it is recommended that the window manufacturer should confirm that the required sound insulation can be achieved. It is anticipated that the window system should comprise Q-Lon (or equivalent) or fin seals with deep C channels as part of the window track (**i.e., Performance levels outlined above need to be achieved with glazed panels + frame + seals**).

Table 17 Recommended Glazing Construction

Façade	Space	Indicative Construction	Minimum System Rating Requirements
Northeastern Façade (Along Dover Road)	All areas	10.38 mm Laminate	$\geq R_w$ (C;Ctr): 35 (-1,-3)
Southeastern Façade	All areas	6.38 mm Laminate	$\geq R_w$ (C;Ctr): 31 (-1,-3)
Southwestern Façade (Towards Wilberforce Avenue)	All areas	6.38 mm Laminate	$\geq R_w$ (C;Ctr): 31 (-1,-3)
Northwestern Façade	All areas	10.38 mm Laminate	$\geq R_w$ (C;Ctr): 35 (-1,-3)

Note 1 These are preliminary selections will be confirmed in the detailed design stage once the layouts and façade orientations are finalised.

It is recommended prior to the issue of a Construction Certificate (CC) a further detailed review be undertaken once the final layouts and façade openings are confirmed, and façade detailing/systems has completed/being selected.

6.1.2 External Wall Construction

The proposed external building elements including masonry or concrete external walls and roof are acoustically acceptable without additional acoustic treatment.

Any lightweight external plasterboard walls should be constructed from a construction with a minimum acoustic performance of R_w 42.

If penetrations through any external skin are required, all gaps remaining in the penetration are to be filled with an acoustic grade sealant which provides an equal or better performance to the system being penetrated.

It is recommended prior to the issue of a Construction Certificate (CC) a further detailed review be undertaken once the final layouts and façade openings are confirmed, and façade detailing/systems has completed/being selected.

6.1.3 External Roof Construction

External roof constructions which are constructed from a concrete construction will be acoustically sufficient and no further acoustic upgrading is required.



If penetrations through any external skin are required, all gaps remaining in the penetration are to be filled with an acoustic grade sealant which provides an equal or better performance to the system being penetrated.

It is recommended prior to the issue of a Construction Certificate (CC) a further detailed review be undertaken once the final layouts and façade openings are confirmed, and façade detailing/systems has completed/being selected.

7 OPERATIONAL NOISE EMISSION ASSESSMENT

Assessment of the potential noise emissions from the operation of the development and its potential for impacts on the adjacent land users are outlined below. Noise emissions expected from the operation of the building are mainly from any base building services (mechanical, electrical, hydraulic), vehicle movements around the site and on public roads and activity noise.

Each element is discussed in detail below.

7.1 Noise from Engineering Services

At this stage of the project, the exact locations of key plant items, and the selection of items to be installed, have not been selected. As such, a detailed assessment of noise associated with engineering services cannot be undertaken.

All future plant and equipment are to be acoustically treated to ensure the noise levels at all surrounding receivers and internal receivers comply with noise emission and intrusion criteria detailed within this report. Experience with similar projects indicates that it is both possible and practical to treat all mechanical equipment such that the relevant noise levels are achieved. Examples of the possible acoustic treatments to mechanical equipment includes the following:

- Supply and Exhaust Fans – location of fans within the building and treated using internally lined ductwork or acoustic silencers.
- General supply and exhaust fans – general exhaust and supply fans such as toilet, kitchen, lobby and other small mechanical fans can be acoustically treated using acoustic flex ducting or internally lined ducting.
- Residential Condensers – The project may include external residential condenser units which will likely be located on the roof-top or individually balconies. Providing condenser equipment is selected using suitable noise level data, then acoustic treatments can be implemented such as screening and treatment to exhaust to ensure that the relevant noise emission criteria will be achieved.

Experience with similar projects indicates that the acoustic treatment of whatever mechanical equipment is to be installed on the project is both possible and practical, in order to meet the relevant criteria at surrounding receivers, as well as the relevant noise intrusion criteria for internal receivers within the development.

Note: Prior to the issue of the Construction Certificate the recommended acoustic treatments for the engineering services should be reviewed to ensure final selections and mechanical airflow requirements are achieved.

7.2 Carpark Noise Emissions

It is noted that the carpark will be fully enclosed and mechanically ventilated. As a result, it is expected that noise emissions from the car park will have a negligible impact onto the nearest affected receivers.

7.3 Noise from Additional Traffic

Noise impacts from the increase in vehicle movements along the surrounding roadways is to be assessed in accordance with the NSW EPA Road Noise Policy (RNP) 2011.

A peak hour increase proposed for the number vehicles associated with the development will not exceed a 2 dB increase at the nearest residential receivers. As summarised in the NSW EPA RNP, an increase of up to 2 dB represents a minor impact that is considered barely perceptible to the average person and is therefore considered acoustically acceptable.

7.4 Acoustic Separation

As this project is still within the development approval phase, information regarding the proposed constructions that will be separating areas within the development is not known at this stage. As such, a detailed review of the constructions for compliance with the airborne and impact ratings from the National Construction Code cannot be undertaken. It is usual for such work to be conducted at the Construction Certificate (CC) stage of the development. The required airborne and impact ratings have been presented in Part F7 of the National Construction Code.

7.5 Noise Associated with Communal Open Space

The NSW EPA Noise Policy for Industry (2017) and NSW Noise Guide for Local Council are recommended. See below.

In accordance with section 1.5 of the NSW EPA NPI (2017) domestic / neighbourhood noise is strictly excluded and is not to be assessed under the policy, see Figure 6 below.

Figure 6 Extract – NSW Noise Policy for Industry (NPI) 2017

1.5 What has been excluded from the policy?

The policy does not apply to:

- vehicles associated with an industrial premise that are on a public road
- transportation corridors (roadways, railways, waterways and air corridors)
- noise from sporting facilities, including motor sport facilities
- construction activities
- **noise sources covered by regulations (domestic/neighbourhood noise)**
 - blasting activities
 - shooting ranges
 - internal or occupational noise within any workplace regulated by SafeWork NSW
 - wind farms
 - amplified music/patron noise from premises including those licensed by Liquor and Gaming NSW.

Other government policies, guidelines and legislation typically cover these noise sources.

Therefore, use of the Communal Open Space (being neighbourhood type noise) is not required to comply with the Project Trigger Noise Levels (PTNL's) as outlined from the NSW EPA NPI 2017 above.

In the absence of any requirements for neighbourhood noise / the fact that it specifically excluded from the NSW NPI 2017, guidance is sought from the NSW Government Noise Guide for Local Council. See below.

A review of the Noise Guide for Local Council indicates that no numerical objectives apply to the use of Communal Open Space or Private Open Spaces in NSW. As such we believe in the absence of any formal noise framework around this issue consideration to an Offense Noise Test in accordance the POEO Act. An assessment of offensive noise is undertaken below for the use of the Communal Open Space.

**Table 18 "Offensive Noise" Test**

Definition Part	PWNA Discussion	Outcome
<i>Level, nature, character, or quality, or</i>	- A determined above, noise from neighbourhood noise does not have specific noise objectives. As such no breach of a noise level condition/consent will occur. - The use of amplified music is not recommended for all time periods. - The use of the communal open space is recommended to be limited to 7:00am to 10:00pm all days. This is to avoid the sensitive night period. - Noise from the use of the area will not include screeching, squealing, high-pitched, whining or low frequency noise.	Not Offensive
<i>Time at which is made, or</i>	The use of the communal open space is recommended to be limited to 7:00am to 10:00pm all days. This is to avoid the sensitive nighttime period.	Not Offensive
<i>Any other circumstances, or</i>	Being a residential development including residents nearby, noise from the communal open space will be typical.	Not Offensive
<i>it is harmful to (or is likely to be harmful to) a person who is outside the premises from which it is emitted or interferes unreasonably with (or is likely to interfere unreasonably with) the comfort or repose of a person who is outside the premises from which it is emitted.</i>	The noise associated with the communal open space will not be harmful to anyone outside the premise (including the residents within the proposed development).	Not Offensive

Based on the corresponding "Offensive Noise" test, PWNA can confirm the use of communal open space is not likely to result in a noise which is deemed "Offensive" in accordance with the POEO Act and therefore is acoustically acceptable. However, the following mitigations are to be implemented.

- Use of the communal open space is to be limited to 7:00am to 10:00pm every day to avoid the sensitive nighttime period.
- Signs shall be installed at the entryway and within the communal open space to remind users to be mindful of noise.
- Amplified music is permitted to be used within the COS (during the recommended operational hours of 7:00 am – 10:00 pm) if restricted to the use of one speaker with a sound power level of 75 dB(A) (or 68 dB(A) as a sound pressure level when measured at a distance of 1 m) at any time.

8 CONSTRUCTION NOISE AND VIBRATION ASSESSMENT

A preliminary acoustic assessment of the noise and vibrations impact during the construction of the development has been undertaken below.

8.1 Construction Activity Noise Assessment

A review of the noise levels likely to be emitted from the site because of the demolition and construction works has been undertaken. Based on the proximity of the surrounding receivers and the works area, we expect there is likely to be periods where noise emission are likely to exceed the *Noise Affected Level (NAL)* and in some cases the *Highly Noise Affected Level (HNAL)*. As such the works will require a site-specific *Construction Noise & Vibration Sub Plan (CNVMSP)* to be prepared for the site.

This plan should be undertaken in accordance with the relevant NSW EPA documents around noise and vibration (such as the ICNG and Assessing Vibration- a technical guideline.).

Outlined in sections 8.4 to 8.10 PWNA have provided detailed list of possible mitigation measures which could be implemented to reduce these expected noise levels at neighbouring properties. These are all to be considered as part of the preparation of this plan prior to the issue of a Construction Certificate (CC).

8.2 Construction Traffic Noise Assessment

From the criteria, it is noted that vehicle numbers on surrounding roads would need to increase by around 60% from existing traffic flows, for a 2 dB increase in road traffic noise to occur. As noted previously, a 2 dB increase in road traffic noise is not considered to be noticeable.

Based on the number of vehicles projected over each of the construction phases, it is concluded that noise impacts from construction traffic is unlikely to have an impact at the nearest affected properties. As a result, no further assessment is required.

8.3 Vibration Assessment

In order to maintain compliance with the human comfort vibration criteria discussed in Section 5.3, it is recommended that the indicative safe distances listed in Table 19 should be maintained. These indicative safe distances should be validated prior to the start of construction works by undertaking measurements of vibration levels generated by construction and demolition equipment to be used on site.

Since the criteria for scientific or medical equipment (should any of these exist close to the site) can be more stringent than those required for human comfort, vibration validating measurements should be conducted at each site to determine the vibration level and potential impact onto this sensitive equipment.

Additionally, any vibration levels should be assessed in accordance with the criteria discussed in Section 5.3.2. This information should also be included as part of a Construction Noise Vibration Management Sub Plan (CNVMSP).

Table 19 Recommended indicative safe working distances for vibration intensive plant

Plant	Rating / Description	Safe Working Distances (m)	
		Cosmetic Damage (BS 7385: Part 2 DIN 4150: Part 3)	Human Comfort (AVTG)
Vibratory roller	< 50 kN (Typically 1 – 2 tonnes)	5	15 – 20
	< 100 kN (Typically 2 – 4 tonnes)	6	20
	< 200 kN (Typically 4 – 6 tonnes)	12	40
	< 300 kN (Typically 7 – 13 tonnes)	15	100
	> 300 kN (Typically more than 13 tonnes)	20	100
Small hydraulic hammer	300 kg, typically 5 – 12 tonnes excavator	2	7
Medium hydraulic hammer	900 kg, typically 12 – 18 tonnes excavator	7	23
Large hydraulic hammer	1600 kg, typically 18 – 34 tonnes excavator	22	73
Vibratory pile driver	Sheet piles	2 – 20	20
Jackhammer	Hand held	1	Avoid contact with structure and steel reinforcements

8.4 Acoustic Management Procedures

8.4.1 Summary of Management Procedures

Table 20 below summarises the management procedures recommended for airborne noise and vibration impact. These procedures are also further discussed in the report.

Table 20 Summary of mitigation procedures

Procedure	Abbreviation	Description
General Management Measures	GMM	Introduce best-practice general mitigation measures in the workplace which are aimed at reducing the acoustic impact onto the nearest affected receivers.
Project Notification	PN	Issue project updates to stakeholders, discussing overviews of current and upcoming works. Advanced warning of potential disruptions can be included. Content and length to be determined on a project-by-project basis.
Verification Monitoring	V	Monitoring to comprise attended or unattended acoustic surveys. The purpose of the monitoring is to confirm measured levels are consistent with the predictions in the acoustic assessment, and to verify that the mitigation procedures are appropriate for the affected receivers. If the measured levels are higher than those predicted, then the measures will need to be reviewed and the management plan will need to be amended.
Complaints Management System	CMS	Implement a management system which includes procedures for receiving and addressing complaints from affected stakeholders
Specific Notification	SN	Individual letters or phone calls to notify stakeholders that noise levels are likely to exceed noise objectives.

Respite Offer Alternative Construction Methodology	RO	Alternatively, contractor could visit stakeholders individually in order to brief them in regard to the noise impact and the mitigation measures that will be implemented.
	AC	Offer provided to stakeholders subjected to an ongoing HNAL impact. Contractor to consider alternative construction options that achieve compliance with relevant criteria. Alternative option to be determined on a case-by-case basis. It is recommended that the selection of the alternative option should also be determined by considering the assessment of on-site measurements (refer to Verification Monitoring above).

The application of these procedures is in relation to the exceedances over the relevant criteria. For airborne noise, the criteria are based on NMLs. The allocation of these procedures is discussed in Section 8.4.2.

For vibration, the criteria either correspond to human comfort, building damage or scientific and medical equipment. The application of these procedures is discussed in Section 8.4.3.

8.4.2 Allocation of Noise Management Procedures

For residences, the management procedures have been allocated based on noise level exceedances at the affected properties, which occur over the designated NMLs. The allocation of these procedures is summarised in Table 20 below.

Table 21 Allocation of noise management procedures – Residential Receivers

Construction Hours	Exceedance over NML (dB)	Management Procedures (see definition above)
Standard Hours	0 - 3	GMM, CMS, AC
Mon – Fri: 7:00 am to 6:00 pm	4 - 10	GMM, CMS, AC, V ¹
Sat: 8:00 am – 1:00 pm	11 - 20	GMM, CMS, PN, AC, V ¹
	≥ 21	GMM, CMS, PN, AC, SN, V ¹
	≥ 75dBA	GMM, CMS, PN, AC, SN, RO, V ¹
Outside Standard Hours (If applicable)	Specific NMP will be undertaken should this be required.	

Note 1 Verification monitoring to be undertaken upon complaints received from affected receivers.

8.4.3 Allocation of Vibration Management Procedures

Table 22 below summarises the vibration management procedures to be adopted based on exceedance scenarios (i.e., whether the exceedance occurs over human comfort criteria, building damage criteria, or criteria for scientific and medical equipment). Please note these management procedures apply for any type of affected receiver (i.e., for residences as well as non-residential receivers).

Table 22 Allocation of vibration management procedures

Construction Hours	Exceedance Scenario	Management Procedures
Standard Hours Mon – Fri: 7:00 am to 6:00 pm Sat: 8:00 am – 1:00 pm	Over human comfort criteria (refer to Section 8.3)	GMM, CMS, AC, SN, V ¹
	Over building damage criteria (refer to Section 8.3)	GMM, CMS, AC, SN, VM, RO, V ¹
Outside Standard Hours (If applicable)	Specific VMP will be undertaken should this be required.	
Note 1 Verification monitoring to be undertaken upon complaints received from affected receivers.		

8.5 Site Specific Noise Mitigation Measures

8.5.1 General Comments

The contractor will, where reasonable and feasible, apply best practice noise mitigation measures. These measures shall include the following:

- Maximising the offset distance between plant items and nearby noise sensitive receivers.
- Preventing noisy plant working simultaneously and adjacent to sensitive receivers.
- Minimising consecutive works in the same site area.
- Orienting equipment away from noise sensitive areas.
- Carrying out loading and unloading away from noise sensitive areas.

In order to minimise noise impacts during the works, the contractor will take all reasonable and feasible measures to mitigate noise effects.

The contractor will also take reasonable steps to control noise from all plant and equipment. Examples of appropriate noise control include efficient silencers and low noise mufflers.

The contractor should apply all feasible and reasonable work practices to meet the NMLs and inform all potentially impacted residents of the nature of works to be carried out, the expected noise levels, duration of noise generating construction works, and the contact details for the proposal.

8.5.2 Noise Monitoring

Noise measurements are an effective way of providing feedback to the contractor which acoustic mitigation measures are providing community benefit. As such the site-specific *Construction Noise and Vibration Management Sub Plan (CNVMSP)* should detail the strategy being proposed.

The survey methodology and any equipment should comply with the requirements discussed in Standard AS 1055.1-1997.

8.5.3 Alternate Equipment or Process

Exceedance of the site's NMLs should result in an investigation as to whether alternate equipment could be used, or a difference process could be undertaken.



In some cases, the investigation may conclude that no possible other equipment can be used, however, a different process could be undertaken.

8.5.4 Acoustic Enclosures/Screening

Typically, on a construction site there are three different types of plant that will be used: mobile plant (i.e., excavators, skid steers, etc.), semi mobile plant (i.e., hand tools generally) or static plant (i.e., diesel generators).

For plant items which are static it is recommended that, in the event exceedances are being measured due to operation of the plant item, an acoustic enclosure/screen is constructed to reduce impacts. These systems can be constructed from Fibre Cement (FC) sheeting or, if airflow is required, acoustic attenuators or louvres.

For semi mobile plant, relocation of plant should be investigated to either be operated in an enclosed space or at locations away from a receiver.

With mobile plant it is generally not possible to treat these sources. However, investigations into the machine itself may result in a reduction of noise (i.e., mufflers/attenuators etc).

8.6 Vibration Mitigation Measures

8.6.1 General Comments

As part of the CNVMP, the following vibration mitigation measures should be implemented:

- Any vibration generating plant and equipment is to be in areas within the site in order to lower the vibration impacts.
- Investigate the feasibility of rescheduling the hours of operation of major vibration generating plant and equipment.
- Use lower vibration generating items of construction plant and equipment; that is, smaller capacity plant.
- Minimise conducting vibration generating works consecutively in the same area (if applicable).
- Schedule a minimum respite period of at least 30 minutes before activities commence which are to be undertaken for a continuous 4-hour period.
- Use only dampened rock breakers and/or "city" rock breakers to minimise the impacts associated with rock breaking works.
- Conduct attended measurements of vibration generating plant at commencement of works to validate the indicative safe working distances advised in Table 19 and, consequently, to establish safe working distances suitable to the project. Measurements should be conducted at the nearest affected property boundary. These safe working distances should be defined by considering the vibration criteria discussed in Section 5.3.2 (i.e., criteria for structural damage and human comfort).

8.6.2 Vibration Monitoring

Vibration measurements are an effective way of providing feedback to the contractor which acoustic mitigation measures are providing community benefit. As such the site-specific *Construction Noise and Vibration Management Sub Plan (CNVMSP)* should detail the strategy being proposed.



8.7 Community Consultation

Key engagement methods include:

- Formal and information briefings and meetings
- Workshops.
- Door Knocks.
- Letterbox Drops.
- Email Notifications.

8.8 Complaints Management System

The Contractor is to establish a communication register for recording incoming complaints. The registration of a particular item will remain open until the complaint has been appropriately dealt with.

All complaints should be investigated by the Contractor in accordance with the procedures outlined in Australia Standard 2436-2010. In addition, the following procedures are an example of the procedures that are to be specifically adopted for complaints relating to noise.

Upon receipt of a complaint the Contractor is to:

- Try to ascertain from the complaint which appliance is causing the problem i.e., inside or outside the site and in what position.
- Establish from the monitoring equipment if the allowable noise levels have been complied with.
- Establish if the appliance positioning has previously been highlighted as a problem area. If not and the noise levels are above the allowable limit, then the equipment and its position shall be noted.
- Move machinery if the allowable levels have been exceeded or take other acoustic remedial action.
- The Site Supervisor is to ensure that a report of any incident is provided to the Project Manager.
- The Project Manager is to provide a report on the incident to the relevant stakeholders.
- The Contractor is to provide a 24-hour telephone contact number and this number is to be prominently displayed on the site.

8.9 Contingency Plans

Contingency plans are required to address noise or vibration problems if excessive levels are measured at surrounding sensitive receivers and/or if justified complaints occur. Such plans could include:

- Stop the onsite works.
- Identify the source of the main equipment within specific areas of the site which is producing the most construction noise and vibration at the sensitive receivers; and



- Review the identified equipment and determine if an alternate piece of equipment can be used or the process can be altered.
- In the event an alternate piece of equipment or process can be used, works can re-commence.
- In the event an alternate piece of equipment or process cannot be determined implement a construction assessment to be performed by a suitably qualified acoustic consultant.

8.10 General Mitigation Measures (Australia Standard 2436-2010)

As well as the above project specific noise mitigation controls, AS 2436-2010 "*Guide to Noise and Vibration Control on Construction, Demolition and Maintenance Sites*" sets out numerous practical recommendations to assist in mitigating construction noise emissions. Examples of strategies that could be implemented on the subject project are listed below, including the typical noise reduction achieved, where applicable.

8.10.1 Adoption of Universal Work Practices

- Regular reinforcement (such as at toolbox talks) of the need to minimise noise and vibration.
- Regular identification of noisy activities and adoption of improvement techniques.
- Avoiding the use of portable radios, public address systems or other methods of site communication that may unnecessarily impact upon nearby sensitive receivers.
- Where possible, avoiding the use of equipment that generates impulsive noise.
- Minimising the need for vehicle reversing for example (particularly at night), by arranging for one-way site traffic routes.
- Use of broadband audible alarms on vehicles and elevated work platforms used on site.
- Minimising the movement of materials and plant and unnecessary metal-on-metal contact.
- Minimising truck movements.

8.10.2 Plant and Equipment

- Choosing quieter plant and equipment based on the optimal power and size to most efficiently perform the required tasks.
- Selecting plant and equipment with low vibration generation characteristics.
- Operating plant and equipment in the quietest and most efficient manner.

8.10.3 On Site Noise Mitigation

- Maximising the distance between noise activities and noise sensitive land uses.
- Installing purpose-built noise barriers, acoustic sheds and enclosures.

8.10.4 Work Scheduling

- Providing respite periods which could include restricting very noisy activities to time periods that least affect the nearby noise sensitive locations, restricting the number of nights that after-hours work is conducted near residences or by determining any specific requirements.
- Scheduling work to coincide with non-sensitive periods.
- Planning deliveries and access to the site to occur quietly and efficiently and organising parking only within designated areas located away from the sensitive receivers.
- Optimising the number of deliveries to the site by amalgamating loads where possible and scheduling arrivals within designated hours.
- Including contract conditions that include penalties for non-compliance with reasonable instructions by the principal to minimise noise or arrange suitable scheduling.

8.10.5 Source Noise Control Strategies

Some ways of controlling noise at the source are:

- Where reasonably practical, noisy plant or processes should be replaced by less noisy alternatives.
- Modify existing equipment: Engines and exhausts are typically the dominant noise sources on mobile plant such as cranes, graders, excavators, trucks, etc. In order to minimise noise emissions, residential grade mufflers should be fitted on all mobile plant utilised on site.
- Siting of equipment: locating noisy equipment behind structures that act as barriers, or at the greatest distance from the noise-sensitive area; or orienting the equipment so that noise emissions are directed away from any sensitive areas, to achieve the maximum attenuation of noise.
- Regular and effective maintenance.

8.11 Discussion of Resulting Construction Noise Levels with Mitigation

In sections 8.4 to 8.10 PWNA have provided detailed list of possible mitigation measures which could be implemented to reduce these expected noise levels at neighbouring properties. In some cases the noise levels expected with the some of the listed mitigation measures would be significant.

Regarding the acoustic benefit of some of the listed acoustic mitigation measures, the following would be expected:

- Implementation of acoustic enclosures/screening (section 8.5.4) for static/fix plant a reduction between 10 – 20 dBA would be expected based on the scenario.
- When work scheduling (section 8.10.4) is implemented (i.e. noisy works occurring between certain times) will significantly reduce noise levels at surrounding receiver locations by greater than 20dBA.
- Use of broadband reversing alarms, or quackers (section 8.10) will provide an approximate 5dBA reduction.
- Through the selection of quieter plant (section 8.10.2) this can reduce noise levels by up to 10dBA, plant specific.
- Implementation of mufflers and silencers on motor engines can reduce noise levels by up to 8dBA.



- Ensuring good community consultation (section 8.7) would not necessarily have an associated noise reduction, however, provide the community awareness and confidence in the works being undertaken. This reduces community annoyance when noisy activities begin/occur.
- Through the successful management of construction traffic (section 8.10) and ensuring vehicles follow the dedicated traffic routes developed during the preparation of the site-specific management plans will ensure one way traffic movements have minimised acoustic impacts on neighbouring properties.

Like any other State Significant Development (SSD) approval, should the project be awarded approval a site-specific *Construction Noise Management Sub-Plan (CNVMSP)* would be prepared in conjunction with the client, managing contractor and other relevant design team members to further assess the impacts however more importantly determine the exact noise and vibration mitigation measures that are to be implemented.

Therefore, we would recommend in the event of project approval the preparation of a site-specific *Construction Noise Management Sub-Plan (CNVMSP)* be conditioned to ensure all mitigation measures are developed and implemented prior to construction works commencing onsite. Ensuring the site achieves a high standard of acoustic mitigation.

9 SUMMARY OF ACOUSTIC MITIGATION MEASURES

Detailed below is a summary of the relevant acoustic mitigation measures required to be implemented.

Table 23 Summary of Acoustic Mitigation Measures

Project Stage	Mitigation Measures	Relevant Section of Report
Design (D)	Design of building envelope (i.e. Glazing Construction, External Wall Construction and Roof Construction) should meet the minimum acoustic design requirements.	Section 6.1.
	A detailed acoustic review of all proposed building services is required to be undertaken prior to installation once final selections are made to ensure compliance with the relevant PTNLs as part of the Construction Certificate (as applicable).	Section 7.1.
	A detailed acoustic review of the Construction Certificate drawings is required to be undertaken to ensure compliance with the acoustic separation requirements of Part F7 of the National Construction Code/Building Code of Australia (NCC/BCA) are achieved.	Section 7.4
Construction (C)	A dedicated site-specific <i>Construction Noise and Vibration Sub-Plan (CNVMSP)</i> must be prepared for the site outlining the relevant noise and vibration mitigation measures required.	Section 8.11
Operation (O)	Communal Open Space: • Use of the communal open space is to be limited to 7:00am to 10:00pm every day to avoid the sensitive night period. • Amplified music is permitted to be used within the COS (during the recommended operational hours of 7:00 am – 10:00 pm) if restricted to the use of one speaker with a sound power level of 75 dB(A) (or 68 dB(A) as a sound pressure level when measured at a distance of 1 m) at any time.	Section 7.5.

10 Conclusion

This Noise and Vibration Impact Assessment (NVIA) has been prepared by Pulse White Noise Acoustics Pty Ltd (PWNA) on behalf of DOVER STREET (ROSE BAY) DEVELOPMENTS PTY. LIMITED for the construction and operation of a residential development (the proposal) on land at 23 – 31 Dover Road, Rose Bay (the site).

This report has been prepared to review and assess the noise and vibration elements of the development including operational noise on surrounding existing developments, noise and vibration intrusion from external sources (road) and noise and vibration impacts associated with the construction of the development. This report also describes the relevant noise and vibration criteria and recommended acoustic mitigation measures required to ensure compliance.

A review of the existing onsite noise levels from the nearby roadways has resulted in recommended acoustic treatments to the future buildings facades to ensure internal noise levels are within permissible limits.

To control noise impacts at external receivers, recommended indicative treatments for major engineering services have been provided in Section 7. From our review we have formulated the following opinion:

- At this stage of the project the exact selections/locations of plant items are not known. A preliminary assessment, however, has been carried out using our experience with similar types of developments and the typical plant items installed in each type of plant room.
- From this review we recommend the selection of high-performance acoustic treatment to ensure that the operation of the plant items comply with the project criteria. Therefore, it is recommended that prior to the issue of a Construction Certificate (CC) a detailed acoustic assessment is undertaken to ensure all cumulative noise from engineering services comply with the requirements as listed in Section 5.

An assessment of the impacts associated with the number of vehicles on surrounding public roads around the site predicted the impact to be less than 2 dB and is therefore compliant with the NSW EPA RNP.

Prior to the issue of the Construction Certificate it is recommended that a *Construction Noise and Vibration Management Sub Plan (CNVMP)* be undertaken to formulate relevant compliance with the objectives detailed above.

If you have any additional questions, please contact us should you have any further queries.

Regards,

A handwritten signature in blue ink, appearing to read 'M Furlong', is written over a faint circular stamp.

Matthew Furlong
Principal Acoustic Engineer
PULSE WHITE NOISE ACOUSTICS PTY LTD
AAS Member and AAAC Member Firm



APPENDIX A. APPENDIX TERMINOLOGY

<i>Sound power level</i>	The total sound emitted by a source																						
<i>Sound pressure level</i>	The amount of sound at a specified point																						
<i>Decibel [dB]</i>	The measurement unit of sound																						
<i>A Weighted decibels [dB(A)]</i>	The A weighting is a frequency filter applied to measured noise levels to represent how humans hear sounds. The A-weighting filter emphasises frequencies in the speech range (between 1kHz and 4 kHz) which the human ear is most sensitive to, and places less emphasis on low frequencies at which the human ear is not so sensitive. When an overall sound level is A-weighted it is expressed in units of dB(A).																						
<i>Decibel scale</i>	The decibel scale is logarithmic in order to produce a better representation of the response of the human ear. A 3 dB increase in the sound pressure level corresponds to a doubling in the sound energy. A 10 dB increase in the sound pressure level corresponds to a perceived doubling in volume. Examples of decibel levels of common sounds are as follows: <table> <tr><td>0 dB(A)</td><td>Threshold of human hearing</td></tr> <tr><td>30 dB(A)</td><td>A quiet country park</td></tr> <tr><td>40 dB(A)</td><td>Whisper in a library</td></tr> <tr><td>50 dB(A)</td><td>Open office space</td></tr> <tr><td>70 dB(A)</td><td>Inside a car on a freeway</td></tr> <tr><td>80 dB(A)</td><td>Outboard motor</td></tr> <tr><td>90 dB(A)</td><td>Heavy truck pass-by</td></tr> <tr><td>100 dB(A)</td><td>Jackhammer/Subway train</td></tr> <tr><td>110 dB(A)</td><td>Rock Concert</td></tr> <tr><td>115 dB(A)</td><td>Limit of sound permitted in industry</td></tr> <tr><td>120 dB(A)</td><td>747 take off at 250 metres</td></tr> </table>	0 dB(A)	Threshold of human hearing	30 dB(A)	A quiet country park	40 dB(A)	Whisper in a library	50 dB(A)	Open office space	70 dB(A)	Inside a car on a freeway	80 dB(A)	Outboard motor	90 dB(A)	Heavy truck pass-by	100 dB(A)	Jackhammer/Subway train	110 dB(A)	Rock Concert	115 dB(A)	Limit of sound permitted in industry	120 dB(A)	747 take off at 250 metres
0 dB(A)	Threshold of human hearing																						
30 dB(A)	A quiet country park																						
40 dB(A)	Whisper in a library																						
50 dB(A)	Open office space																						
70 dB(A)	Inside a car on a freeway																						
80 dB(A)	Outboard motor																						
90 dB(A)	Heavy truck pass-by																						
100 dB(A)	Jackhammer/Subway train																						
110 dB(A)	Rock Concert																						
115 dB(A)	Limit of sound permitted in industry																						
120 dB(A)	747 take off at 250 metres																						
<i>Frequency [f]</i>	The repetition rate of the cycle measured in Hertz (Hz). The frequency corresponds to the pitch of the sound. A high frequency corresponds to a high pitched sound and a low frequency to a low pitched sound.																						
<i>Ambient sound</i>	The all-encompassing sound at a point composed of sound from all sources near and far.																						
<i>Equivalent continuous sound level [L_{eq}]</i>	The constant sound level which, when occurring over the same period of time, would result in the receiver experiencing the same amount of sound energy.																						
<i>Reverberation</i>	The persistence of sound in a space after the source of that sound has been stopped (the reverberation time is the time taken for a reverberant sound field to decrease by 60 dB)																						
<i>Air-borne sound</i>	The sound emitted directly from a source into the surrounding air, such as speech, television or music																						
<i>Air-borne sound isolation</i>	The reduction of airborne sound between two rooms.																						
<i>Sound Reduction Index [R] (Sound Transmission Loss)</i>	The ratio the sound incident on a partition to the sound transmitted by the partition.																						
<i>Weighted sound reduction index [R_w]</i>	A single figure representation of the air-borne sound insulation of a partition based upon the R values for each frequency measured in a laboratory environment.																						
<i>C_{tr}</i>	A value added to an R _w or D _{nT,w} value to account for variations in the spectrum.																						
<i>Energy Equivalent Sound Pressure Level [L_{A,eq,T}]</i>	'A' weighted, energy averaged sound pressure level over the measurement period T.																						
<i>Percentile Sound Pressure Level [L_{Ax,T}]</i>	'A' weighted, sound pressure that is exceeded for percentile x of the measurement period T.																						
<i>Speech Privacy</i>	A non-technical term but one of common usage. Speech privacy and speech intelligibility are opposites and a high level of speech privacy means a low level of speech intelligibility. It should be recognised that acceptable levels of speech privacy do not require that speech from an adjacent room is inaudible.																						
<i>Sound Pressure Level, LP dB</i>	A measurement obtained directly using a microphone and sound level meter. Sound pressure level varies with distance from a source and with changes to the measuring environment. Sound																						



	pressure level equals 20 times the logarithm to the base 10 of the ratio of the rms sound pressure to the reference sound pressure of 20 micro Pascals.
<i>Sound Power Level, L_w dB</i>	Sound power level is a measure of the sound energy emitted by a source, does not change with distance, and cannot be directly measured. Sound power level of a machine may vary depending on the actual operating load and is calculated from sound pressure level measurements with appropriate corrections for distance and/or environmental conditions. Sound power levels is equal to 10 times the logarithm to the base 10 of the ratio of the sound power of the source to the reference sound power of 1 picroWatt
<i>Noise Reduction</i>	The difference in sound pressure level between any two areas. The term "noise reduction" does not specify any grade or performance quality unless accompanied by a specification of the units and conditions under which the units shall apply
<i>Audible Range</i>	The limits of frequency which are audible or heard as sound. The normal ear in young adults detects sound having frequencies in the region 20 Hz to 20 kHz, although it is possible for some people to detect frequencies outside these limits.
<i>Background Sound Low</i>	The average of the lowest levels of the sound levels measured in an affected area in the absence of noise from occupants and from unwanted, external ambient noise sources. Usually taken to mean the LA90 value
<i>Character, acoustic</i>	The total of the qualities making up the individuality of the noise. The pitch or shape of a sound's frequency content (spectrum) dictate a sound's character.
<i>Loudness</i>	A rise of 10 dB in sound level corresponds approximately to a doubling of subjective loudness. That is, a sound of 85 dB is twice as loud as a sound of 75 dB which is twice as loud as a sound of 65 dB and so on
<i>L_{Max}</i>	The maximum sound pressure level measured over a given period.
<i>L_{Min}</i>	The minimum sound pressure level measured over a given period.
<i>L₁</i>	The sound pressure level that is exceeded for 1% of the time for which the given sound is measured.
<i>L₁₀</i>	The sound pressure level that is exceeded for 10% of the time for which the given sound is measured.
<i>L₉₀</i>	The level of noise exceeded for 90% of the time. The bottom 10% of the sample is the L90 noise level expressed in units of dB(A).
<i>Leq</i>	The "equivalent noise level" is the summation of noise events and integrated over a selected period of time.



APPENDIX B. UNATTENDED NOISE MONITOR – L1

23-31 Dover Road, Roase Bay

Ambient noise monitoring report



Item	Information
Logger Type	NL-42
Serial number	998081
Address	23-31 Dover Road, Roase Bay
Location	23-31 Dover Road, Roase Bay
Facade / free field	Free field
Environment	


Measured noise levels

Logging date	Rating Background Level			L _{Aeq,period}		
	Daytime 7am-6pm	Evening 6pm-10pm	Night-time 10pm-7am	Daytime 7am-6pm	Evening 6pm-10pm	Night-time 10pm-7am
Tue 22 Apr 2025	-	44	-	62	58	55
Wed 23 Apr 2025	51	42	39	61	59	56
Thu 24 Apr 2025	51	43	36	64	61	58
Fri 25 Apr 2025	49	43	36	60	60	55
Sat 26 Apr 2025	49	45	37	61	65	57
Sun 27 Apr 2025	49	48	38	62	59	56
Mon 28 Apr 2025	52	41	38	63	60	58
Tue 29 Apr 2025	52	44	36	63	60	56
Wed 30 Apr 2025	54	44	37	63	61	57
Thu 01 May 2025	53	46	39	72	62	59
Fri 02 May 2025	54	45	37	64	61	58
Sat 03 May 2025	51	43	37	62	59	56
Sun 04 May 2025	49	43	36	62	59	54
Mon 05 May 2025	52	43	37	61	59	57
Tue 06 May 2025	52	42	37	67	59	56
Wed 07 May 2025	-	-	-	63	-	56
Summary	51	43	37	65	61	57


Note: Results with a '-' identify that there were not enough measurements available to correctly calculate the level, in accordance with the Noise Policy for Industry. The data has been excluded either from weather or manual exclusions. See the charts for more information

Logger location	Logger deployment photo


Typical Day

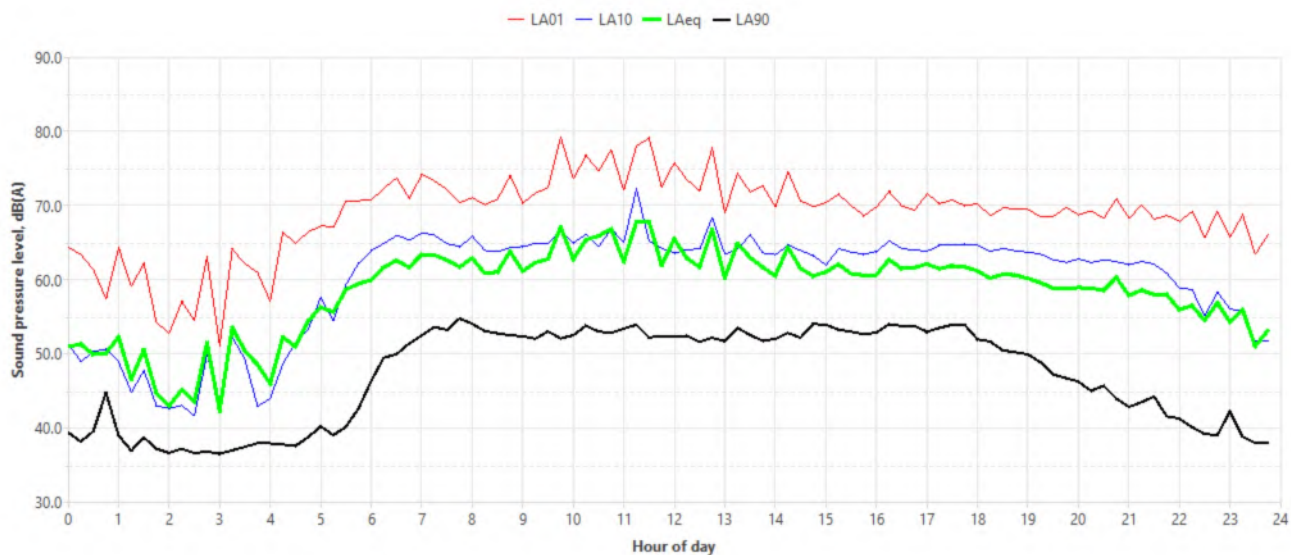


Tuesday, 22 April 2025

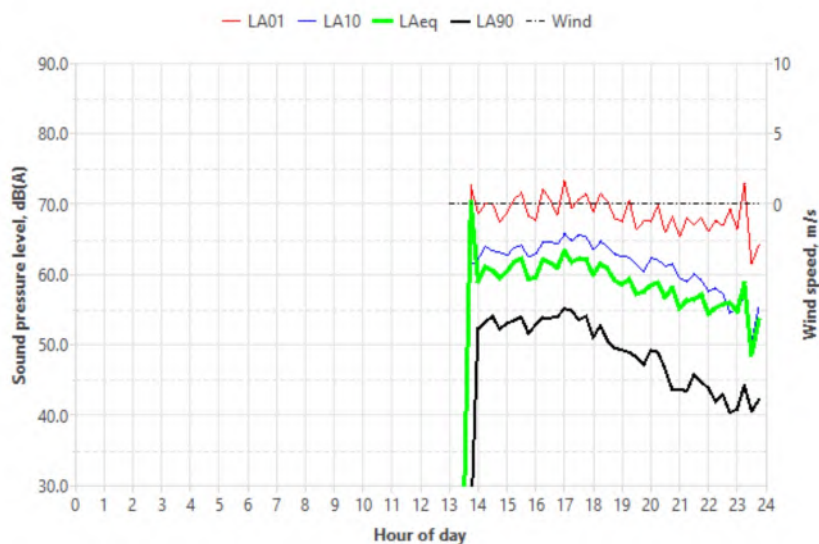


Wednesday, 23 April 2025

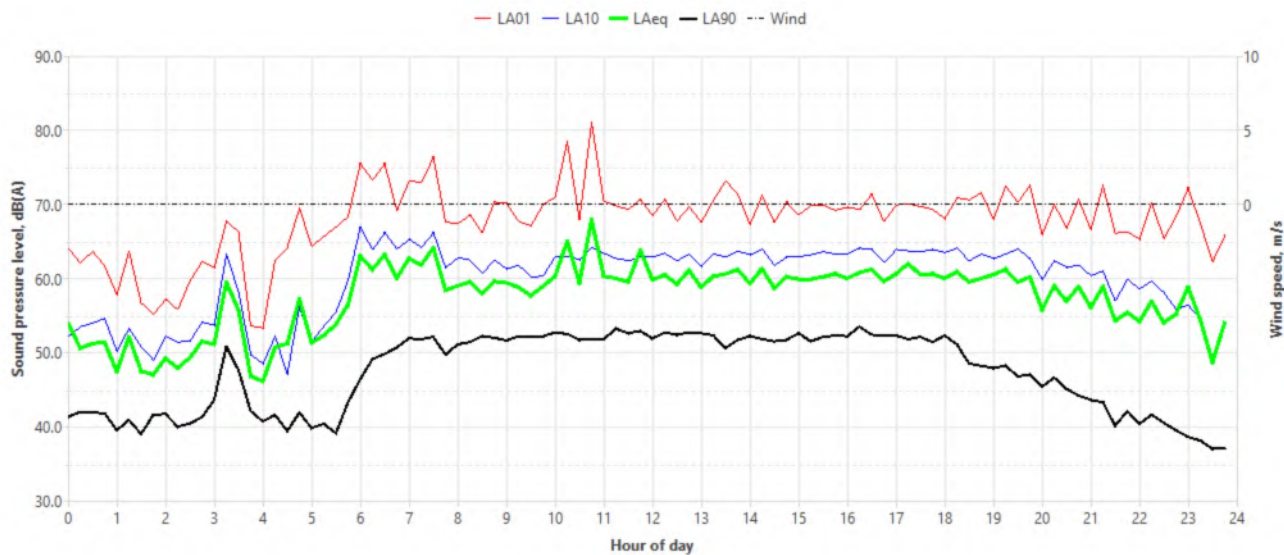


Thursday, 24 April 2025

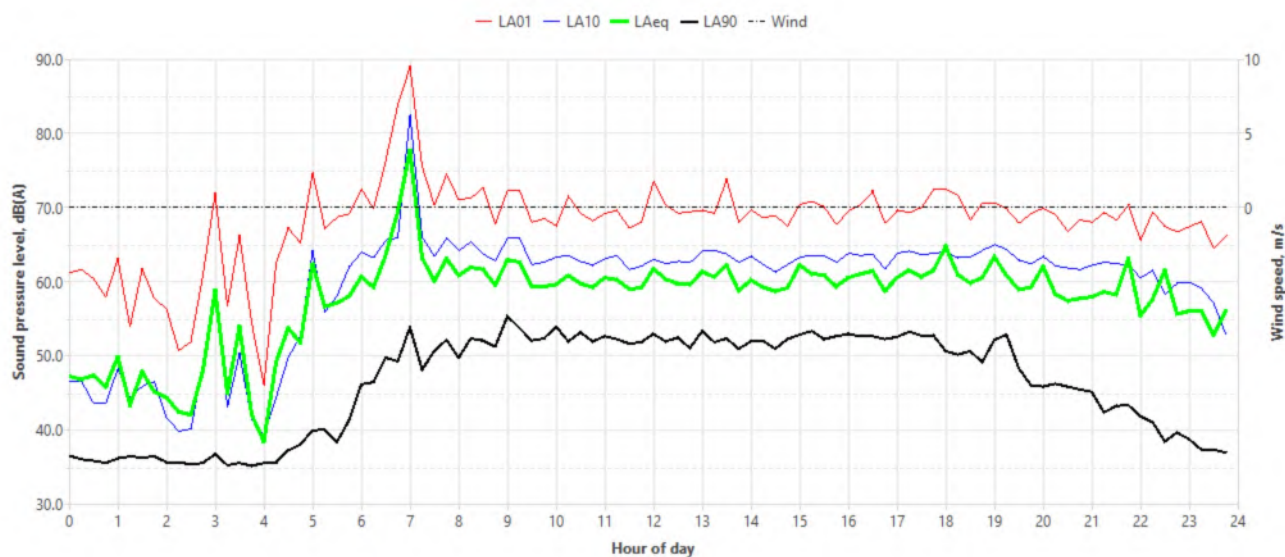


Friday, 25 April 2025

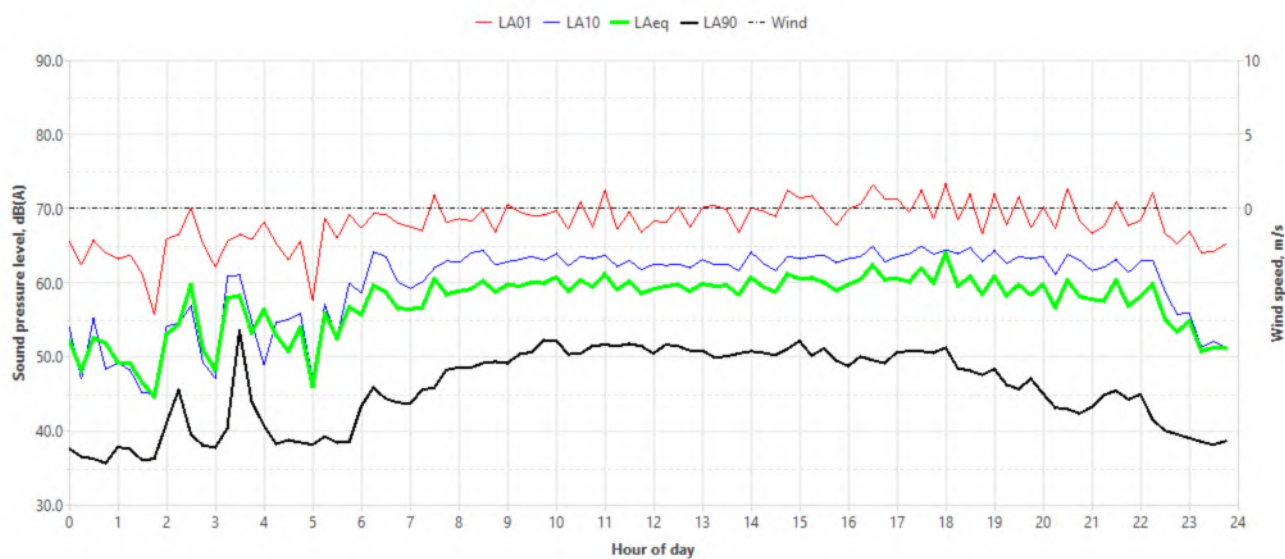


Saturday, 26 April 2025

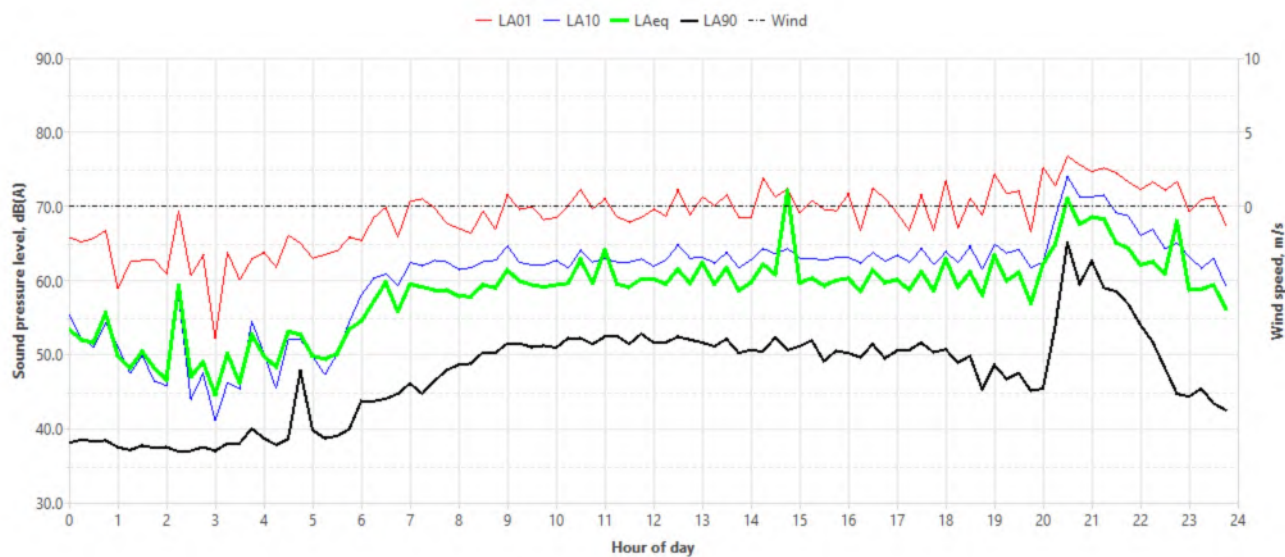


Sunday, 27 April 2025

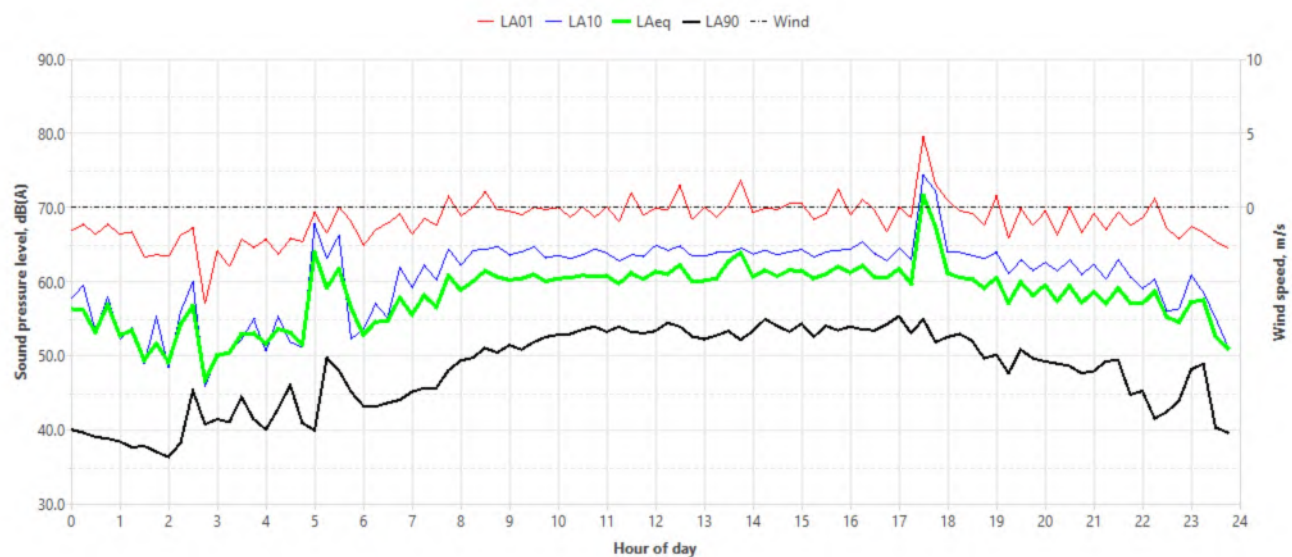


Monday, 28 April 2025

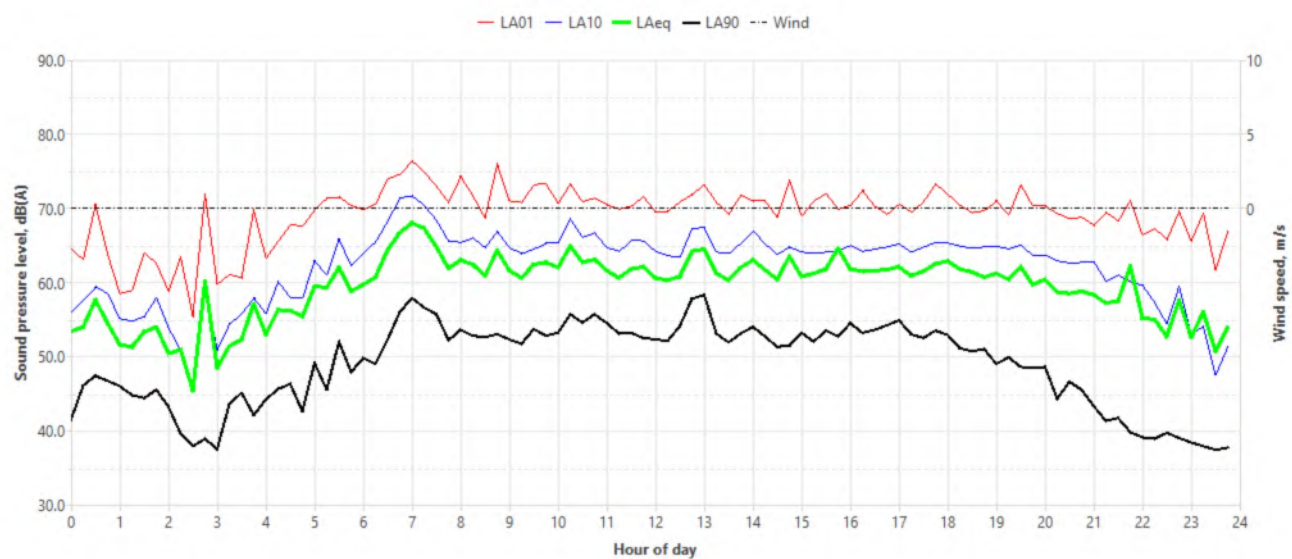


Tuesday, 29 April 2025

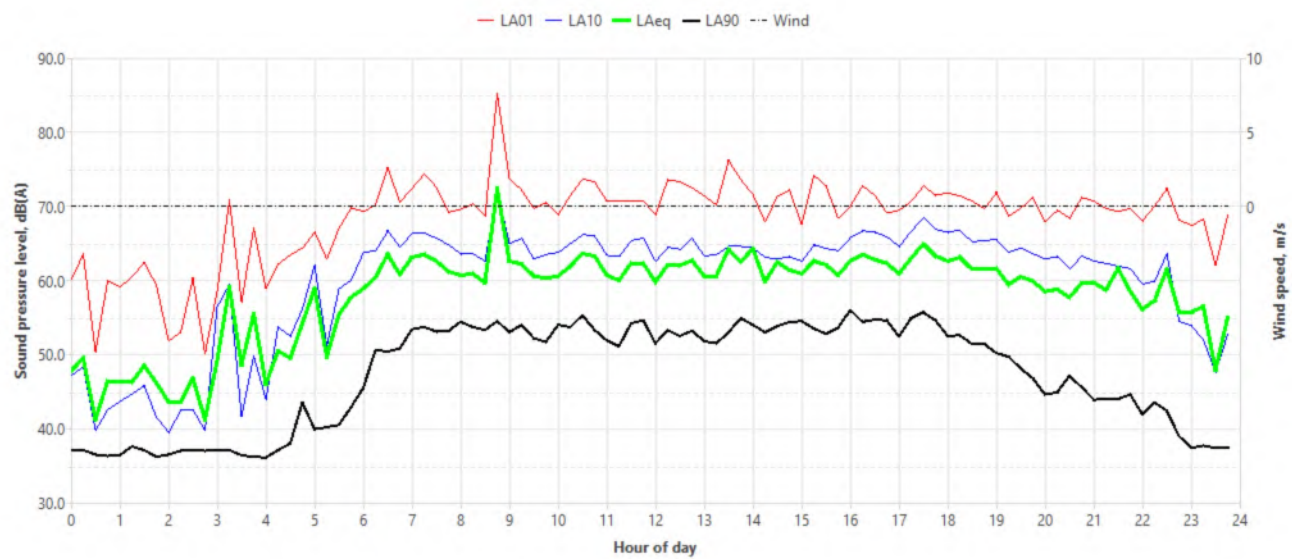


Wednesday, 30 April 2025

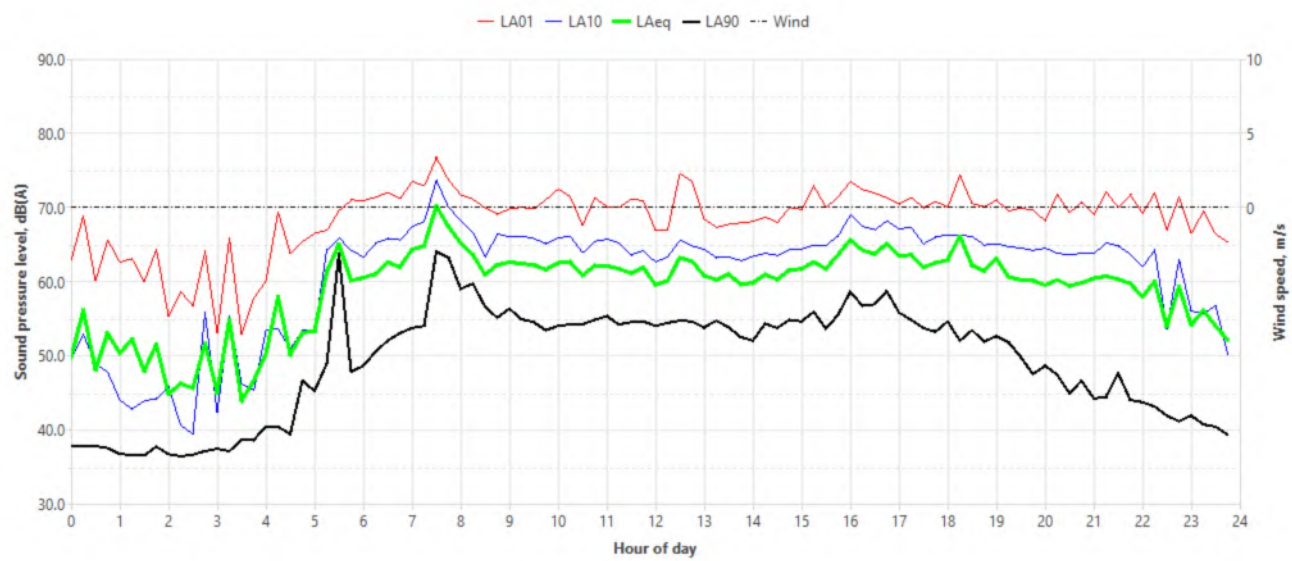


Thursday, 1 May 2025

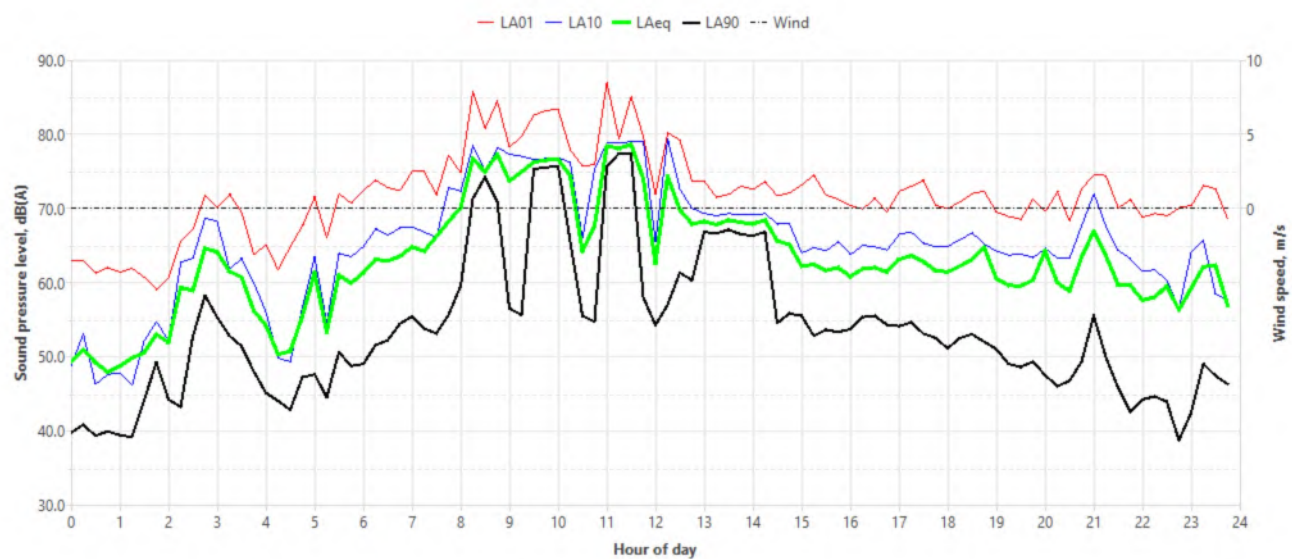


Friday, 2 May 2025

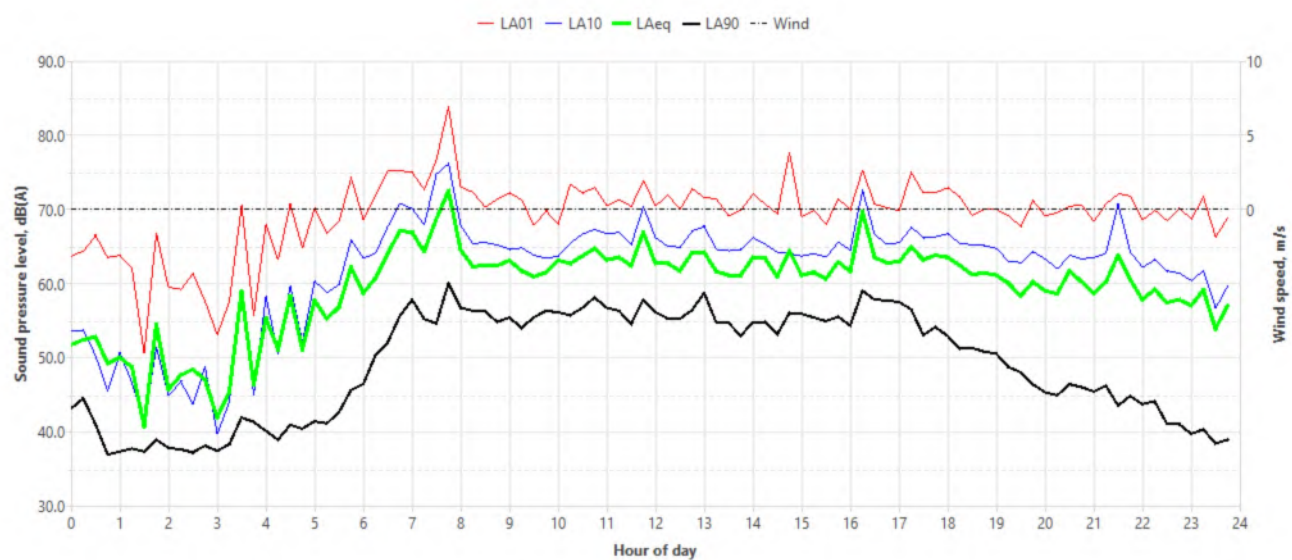


Saturday, 3 May 2025

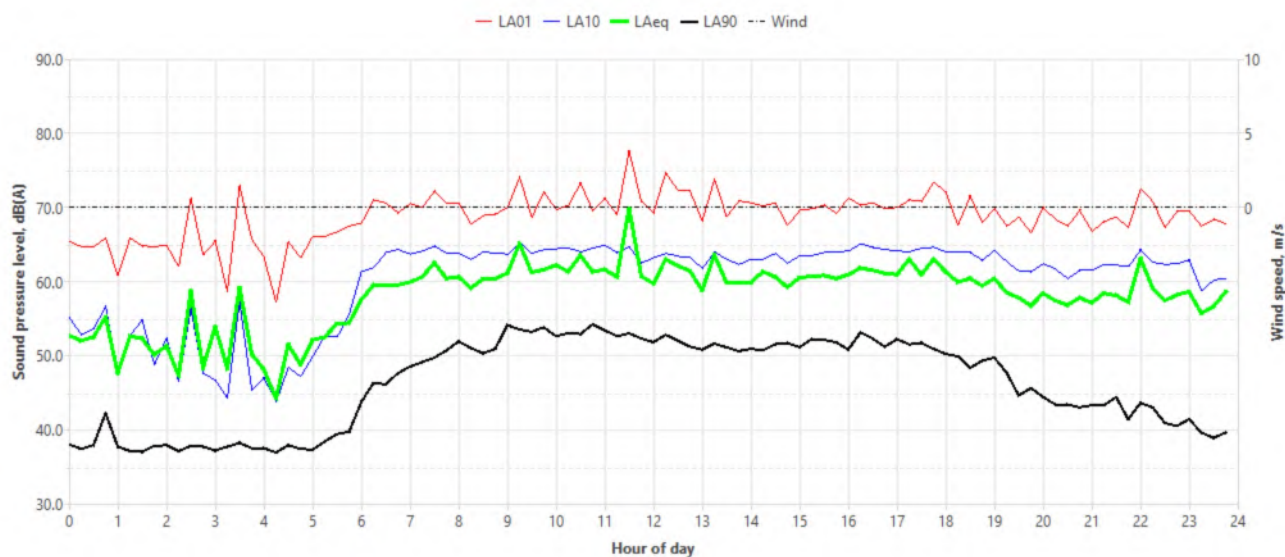


Sunday, 4 May 2025

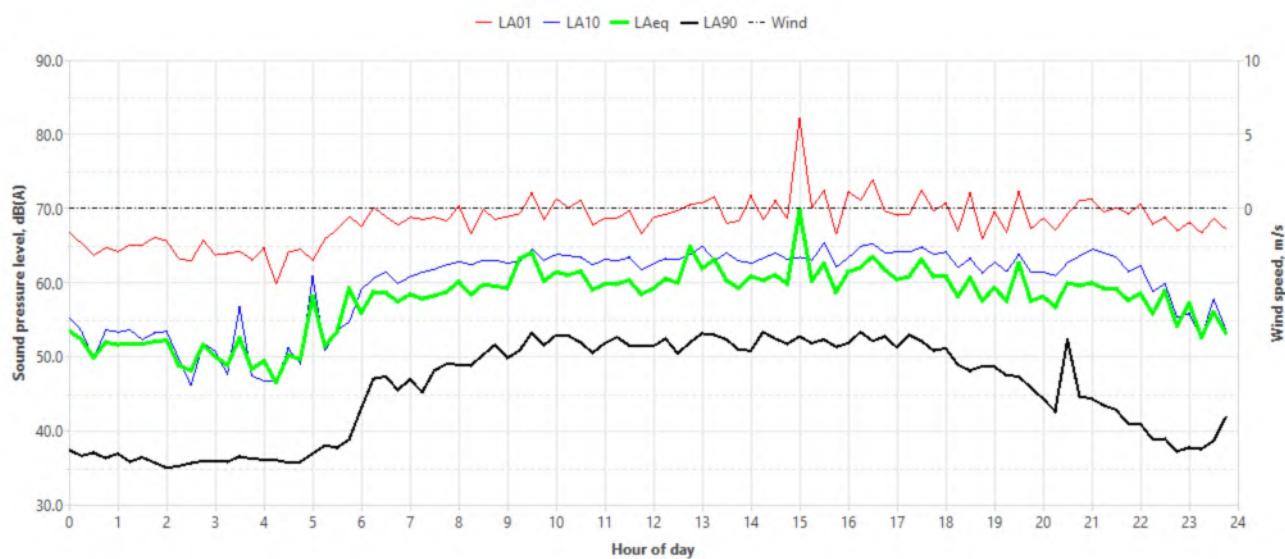


Monday, 5 May 2025

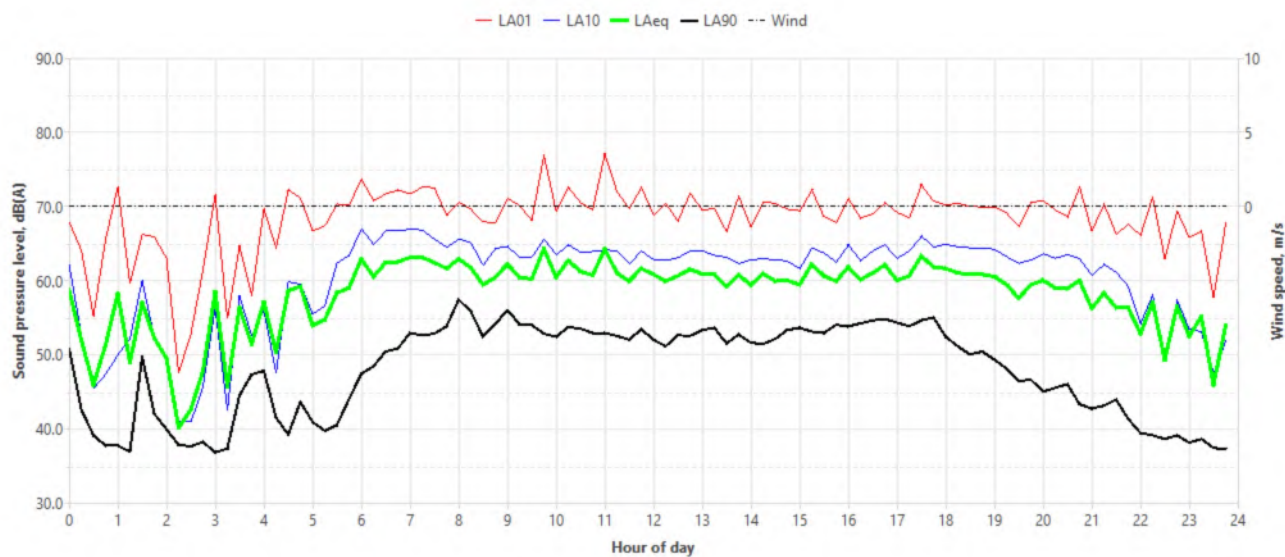

Tuesday, 6 May 2025

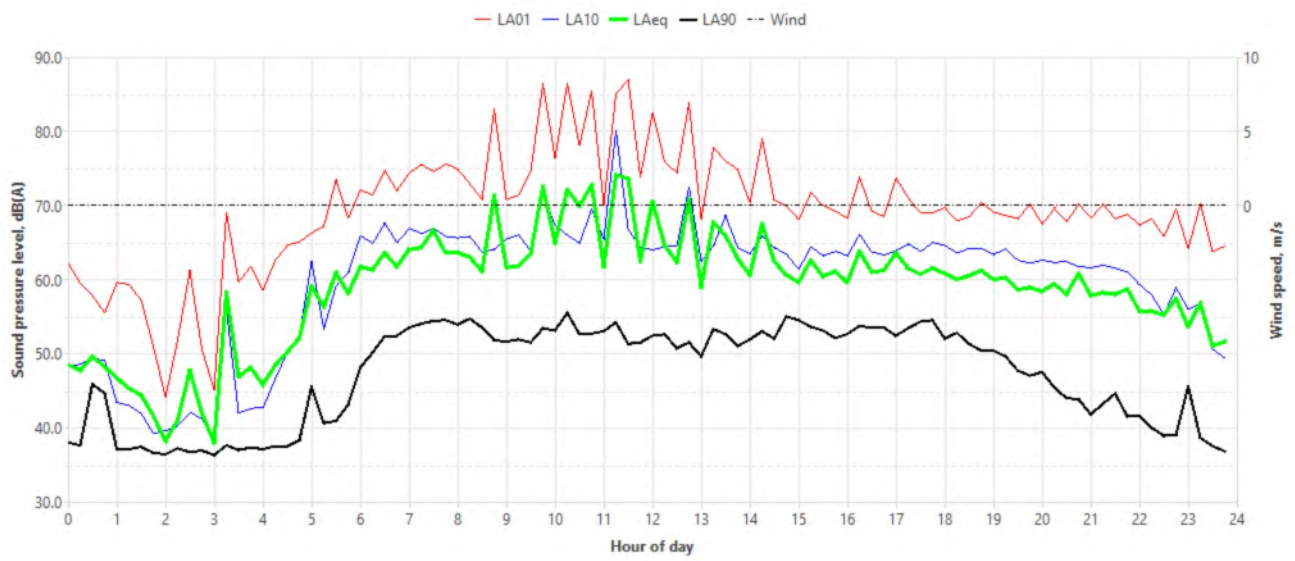

Wednesday, 7 May 2025

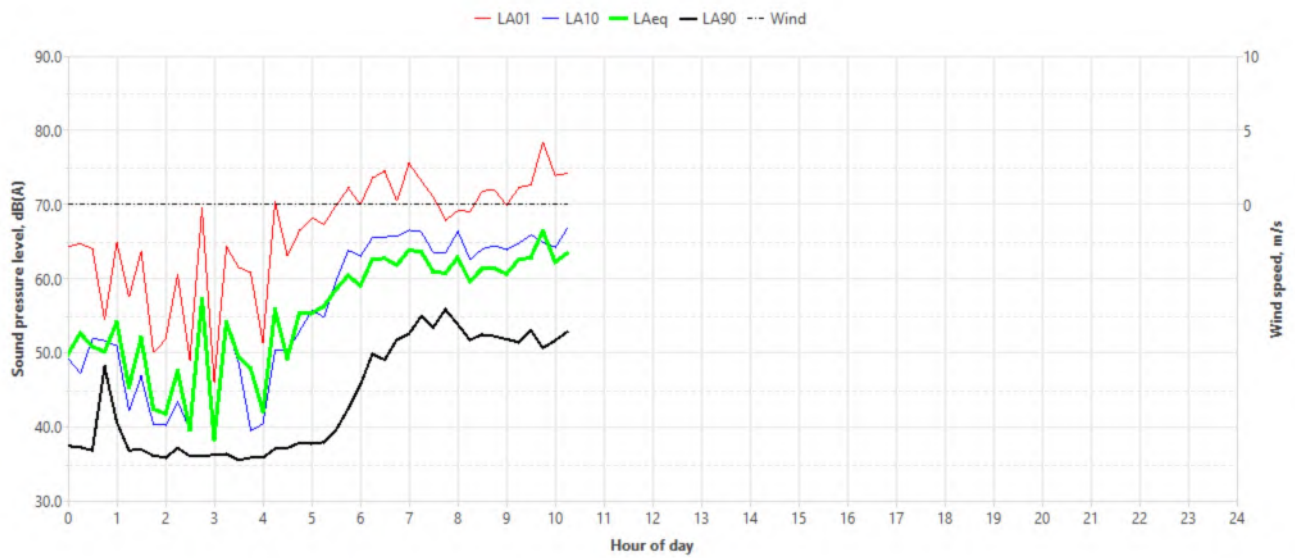




APPENDIX C. UNATTENDED NOISE MONITOR – L2



Pannerong Park


Thursday 27 October 2022

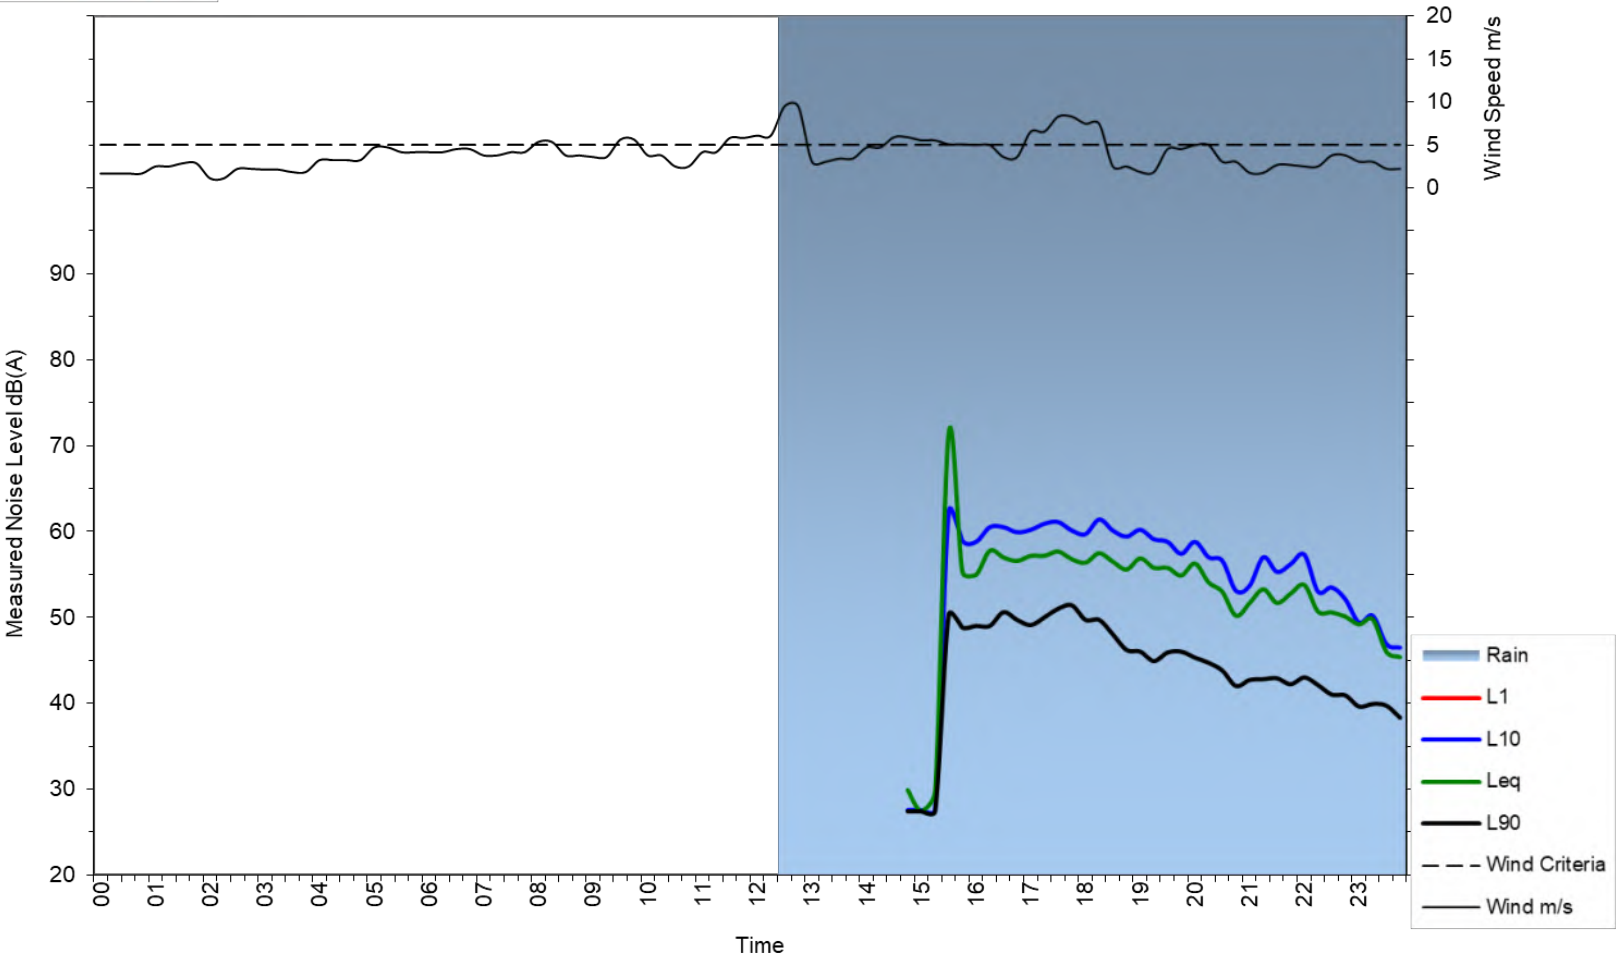



Pannerong Park


Friday 28 October 2022

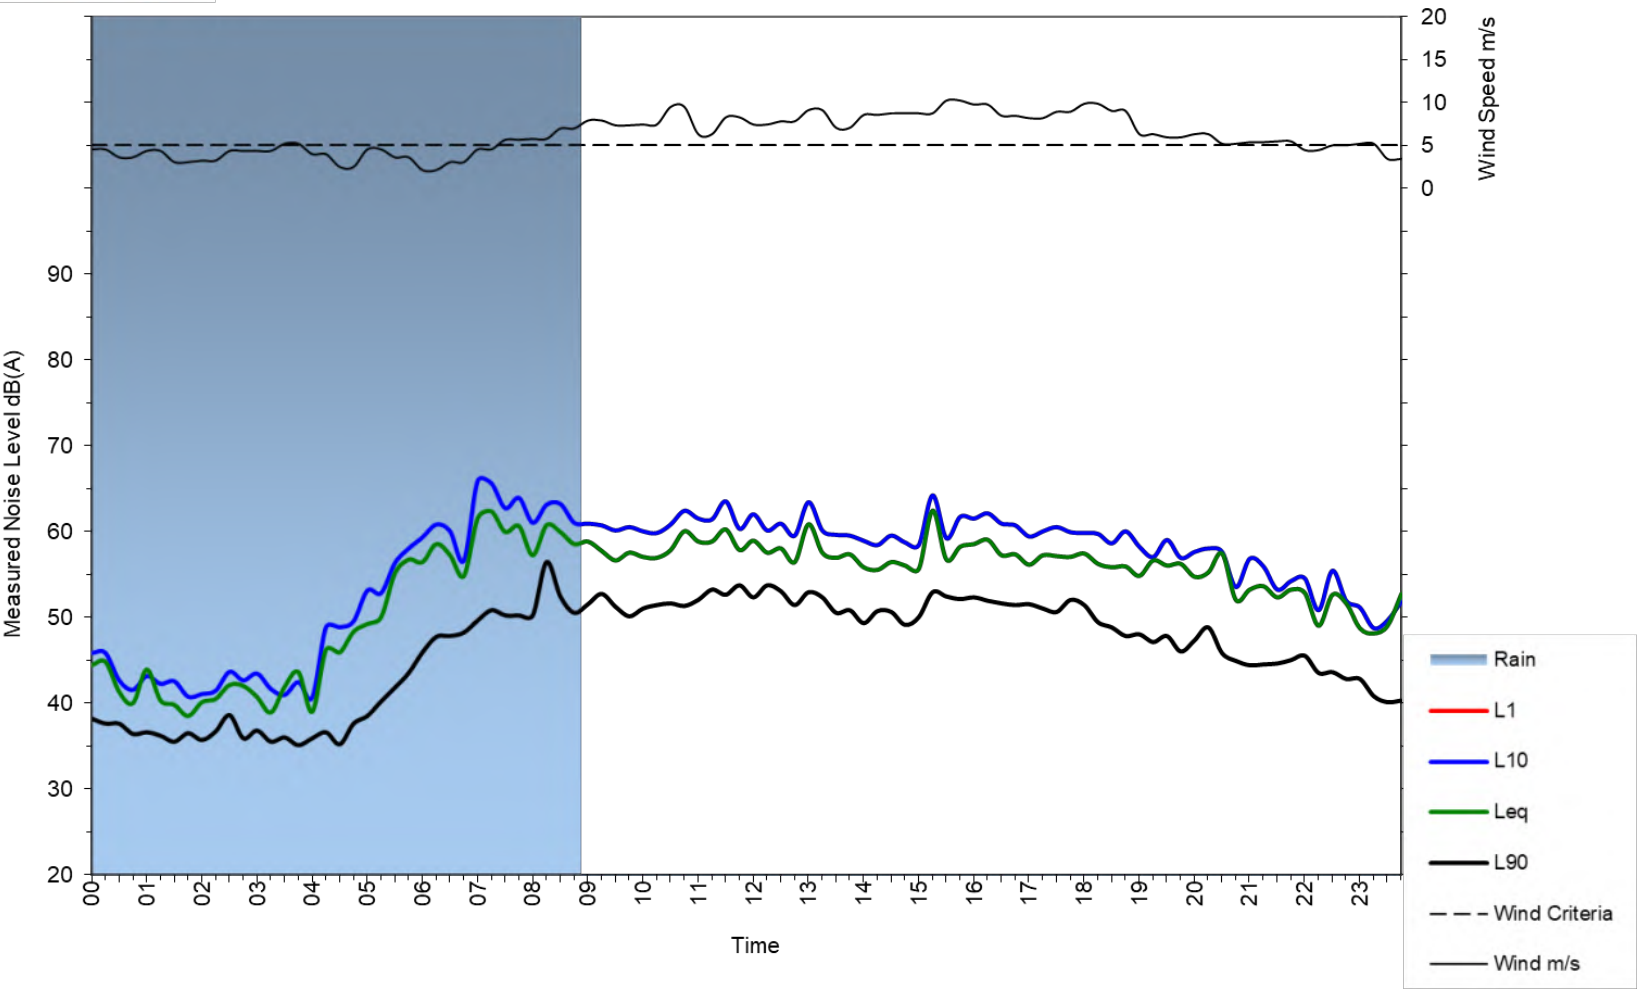



Pannerong Park


Saturday 29 October 2022

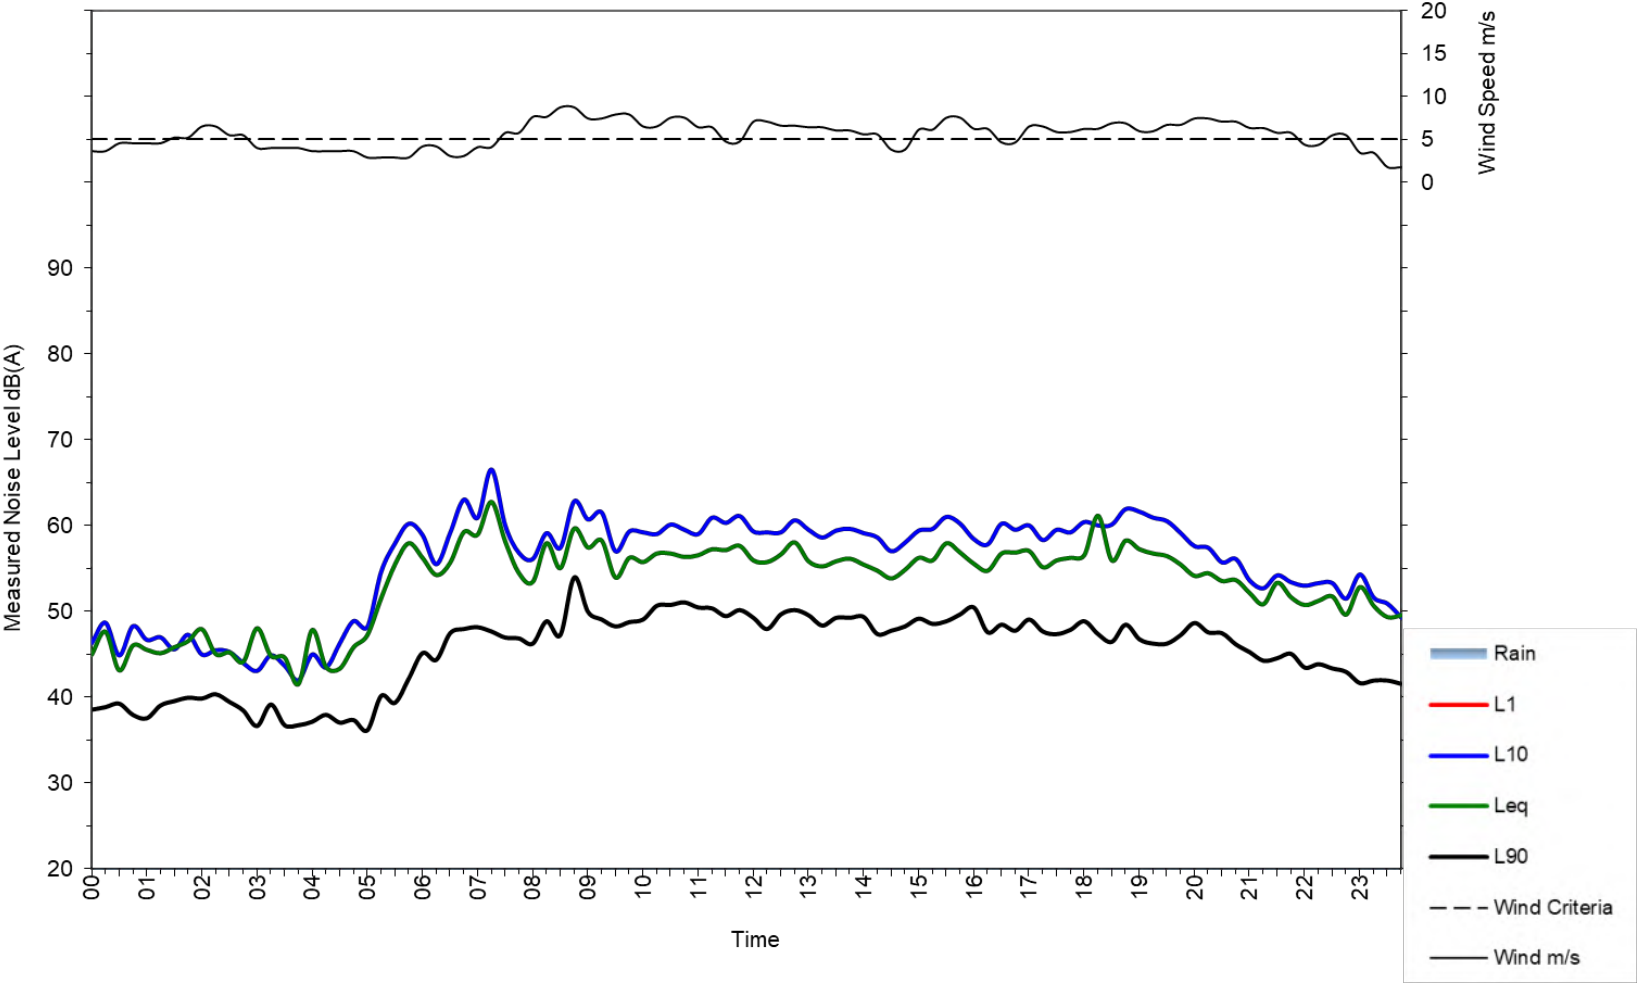



Pannerong Park


Sunday 30 October 2022

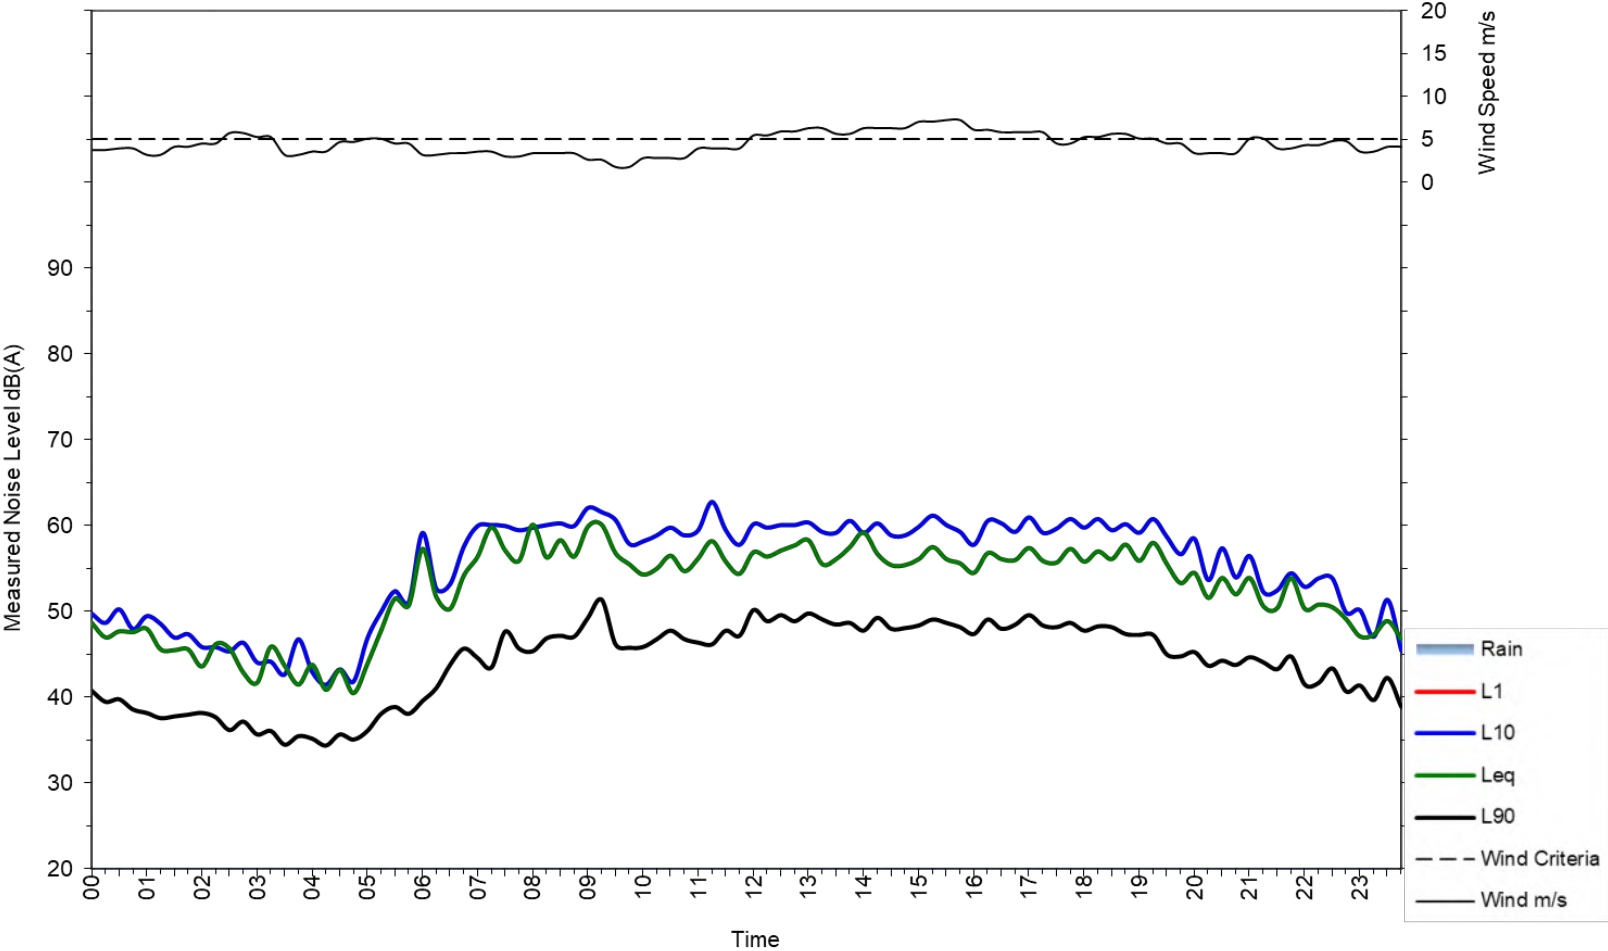



Pannerong Park


Monday 31 October 2022

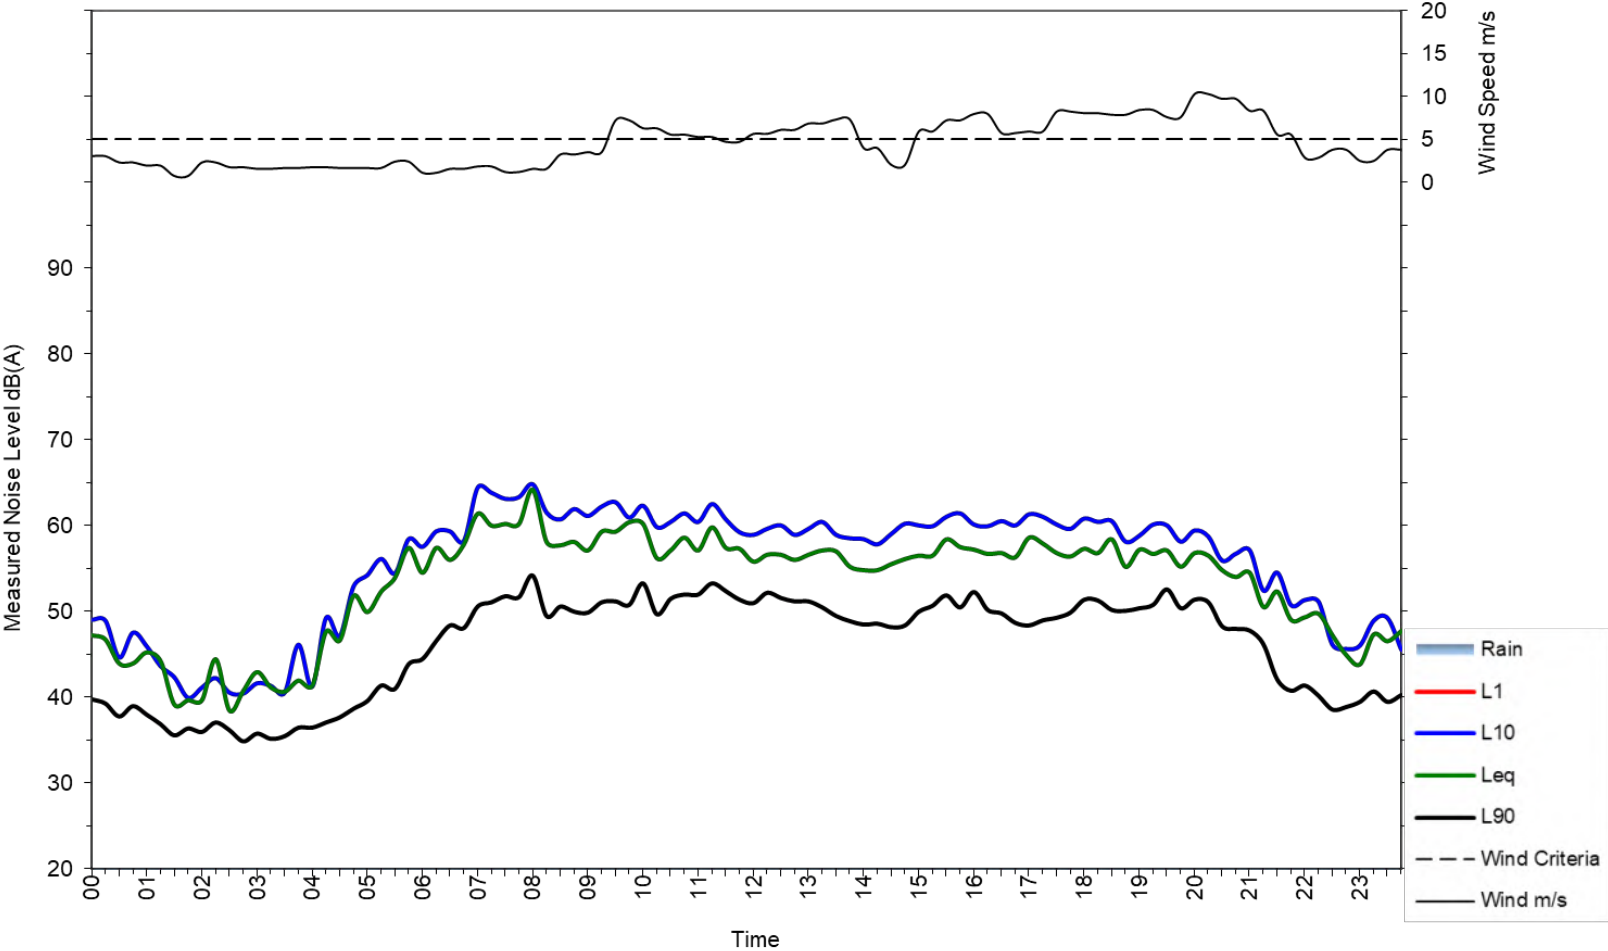



Pannerong Park


Tuesday 01 November 2022

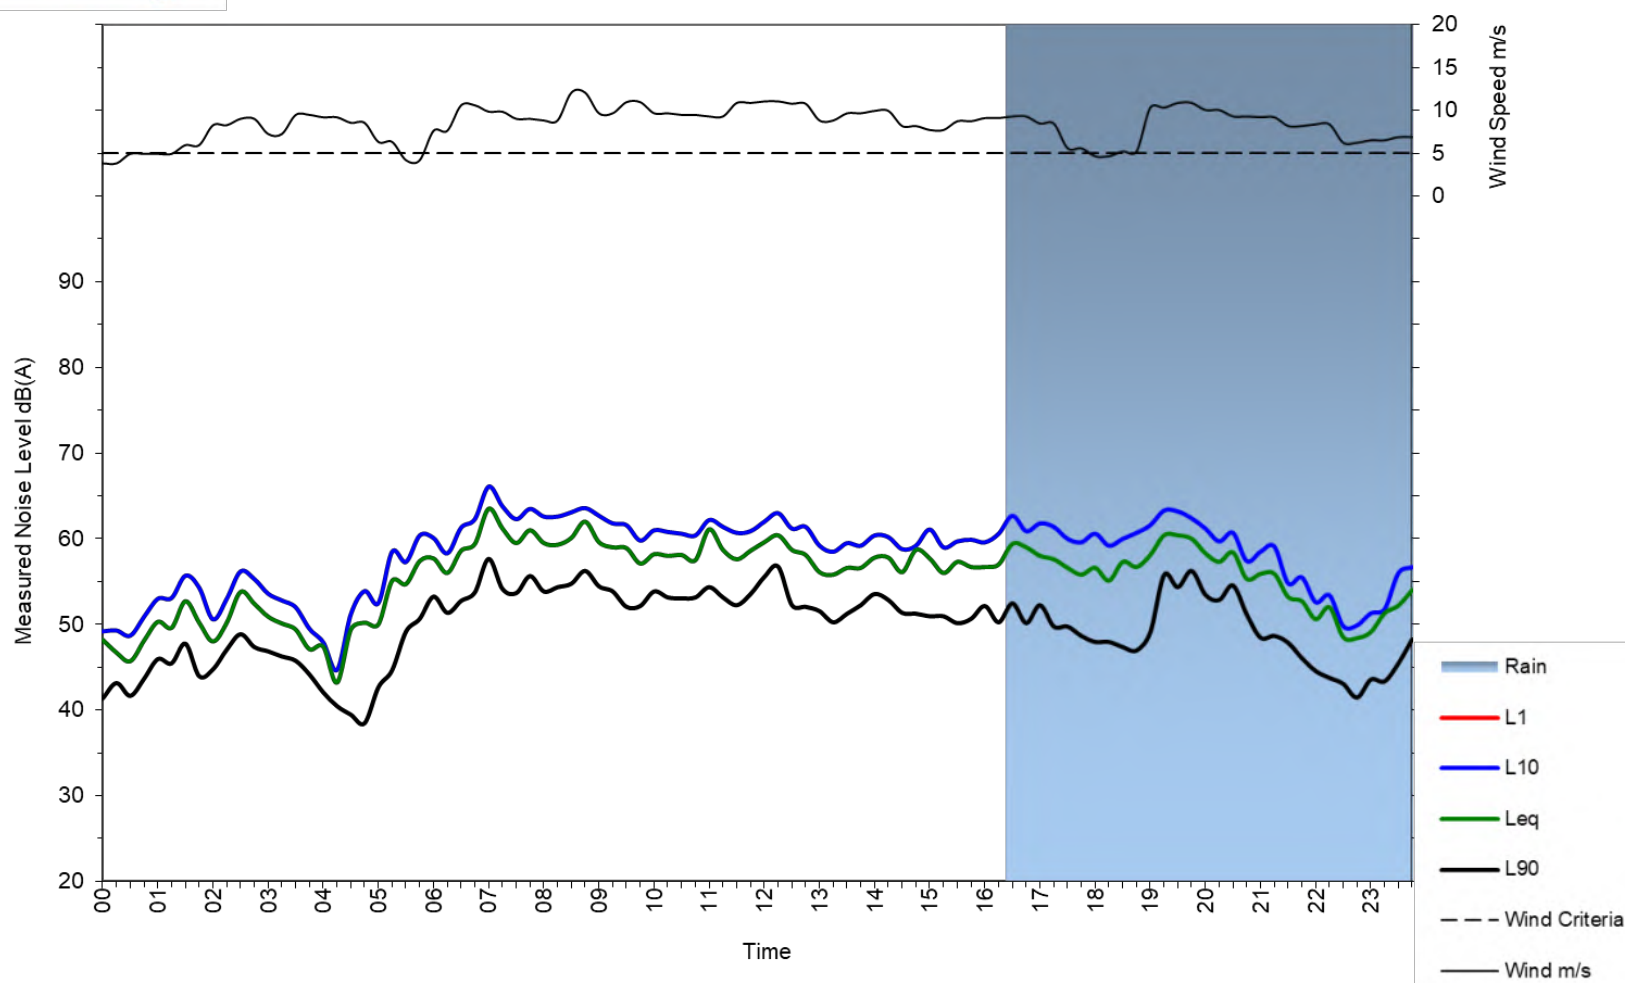



Pannerong Park


Wednesday 02 November 2022

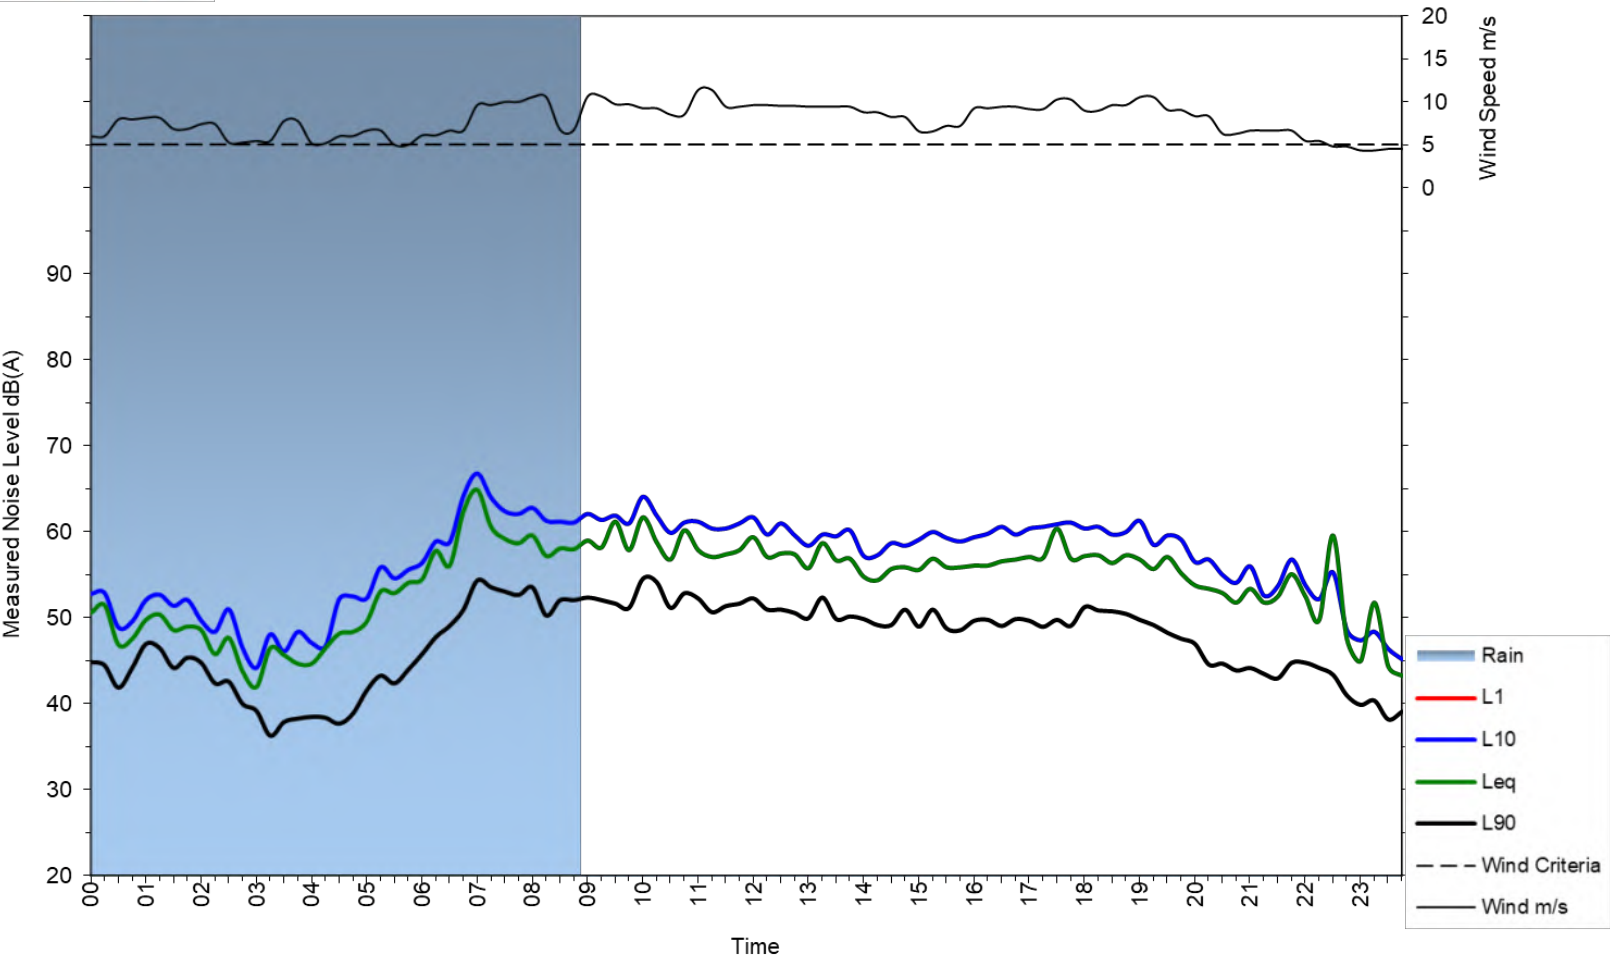



Pannerong Park


Thursday 03 November 2022

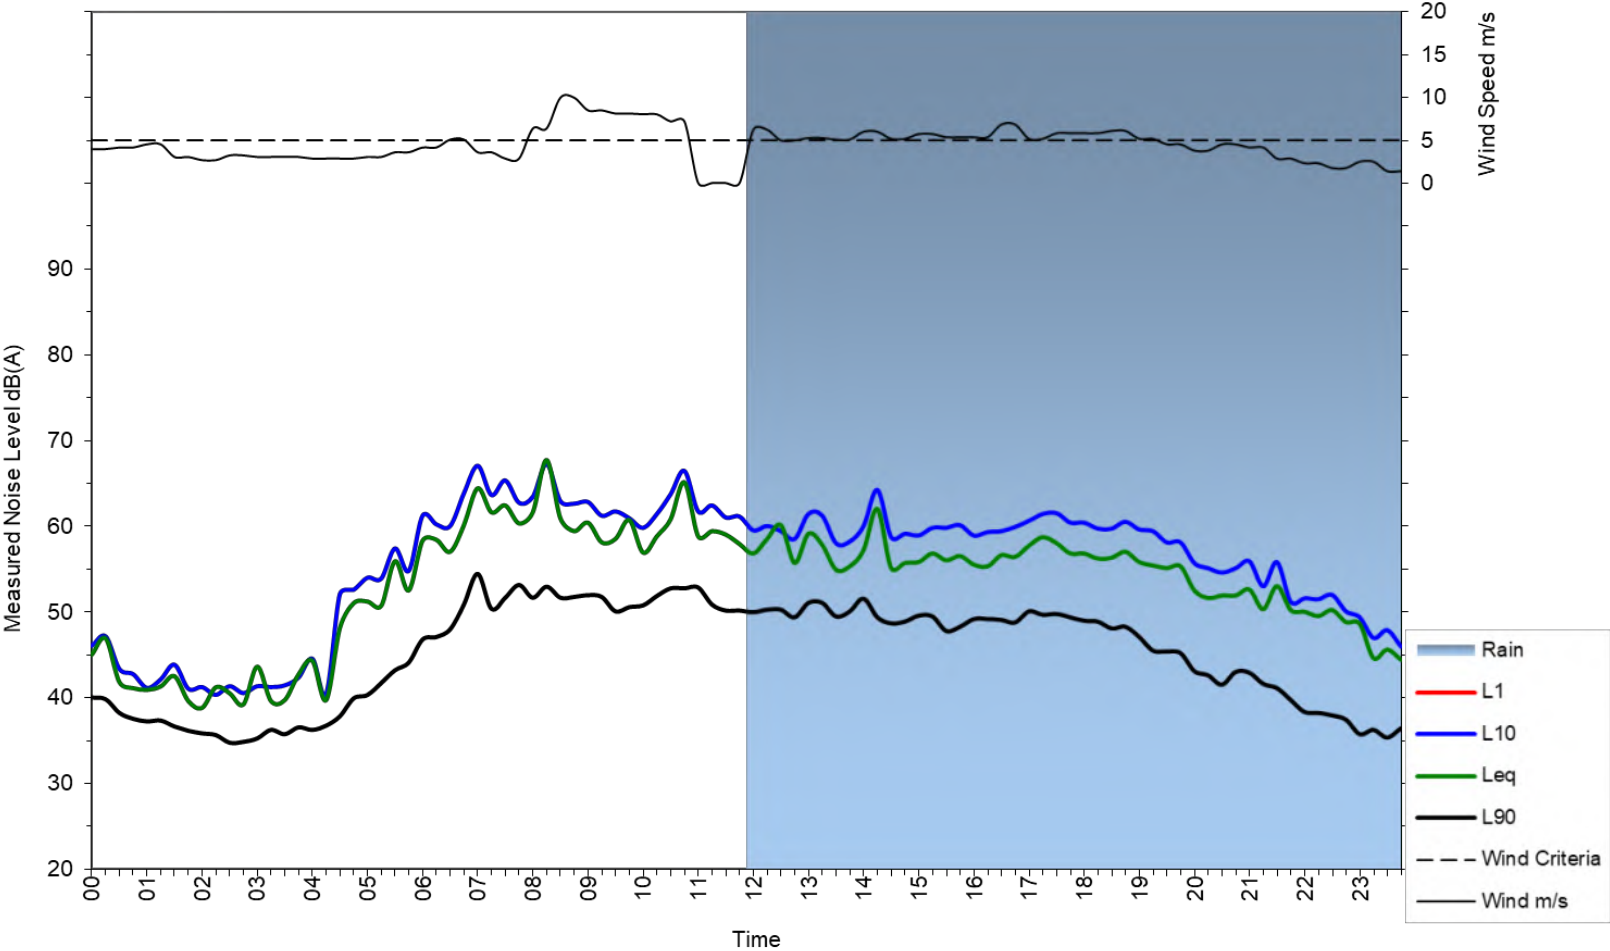



Pannerong Park


Friday 04 November 2022

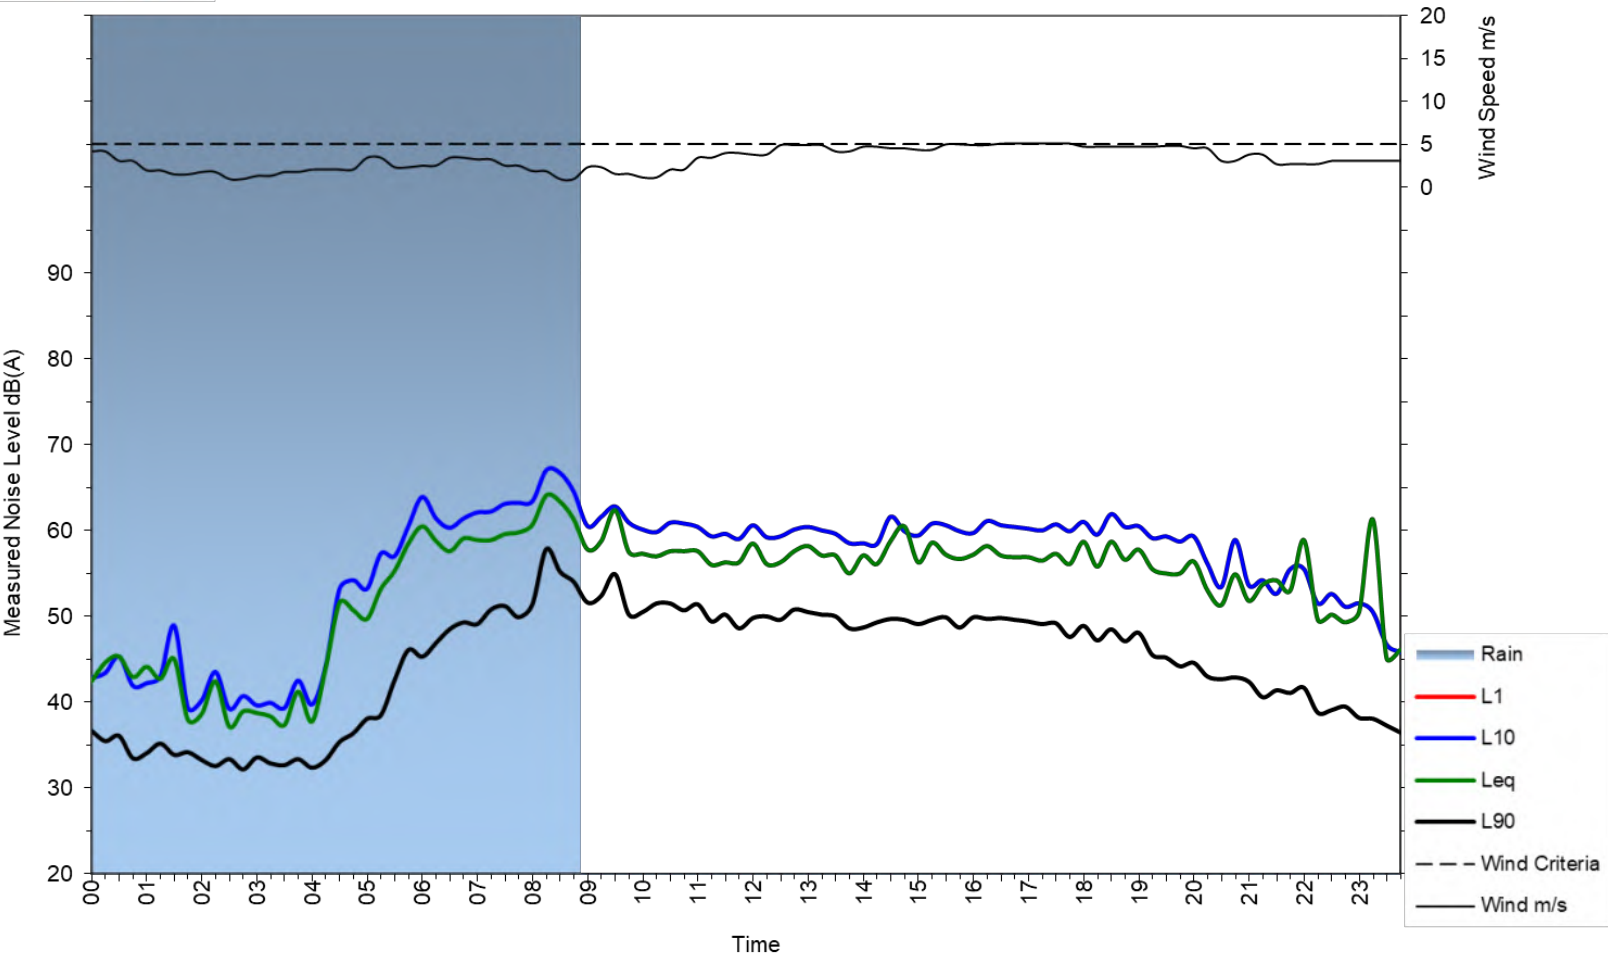



Pannerong Park


Saturday 05 November 2022

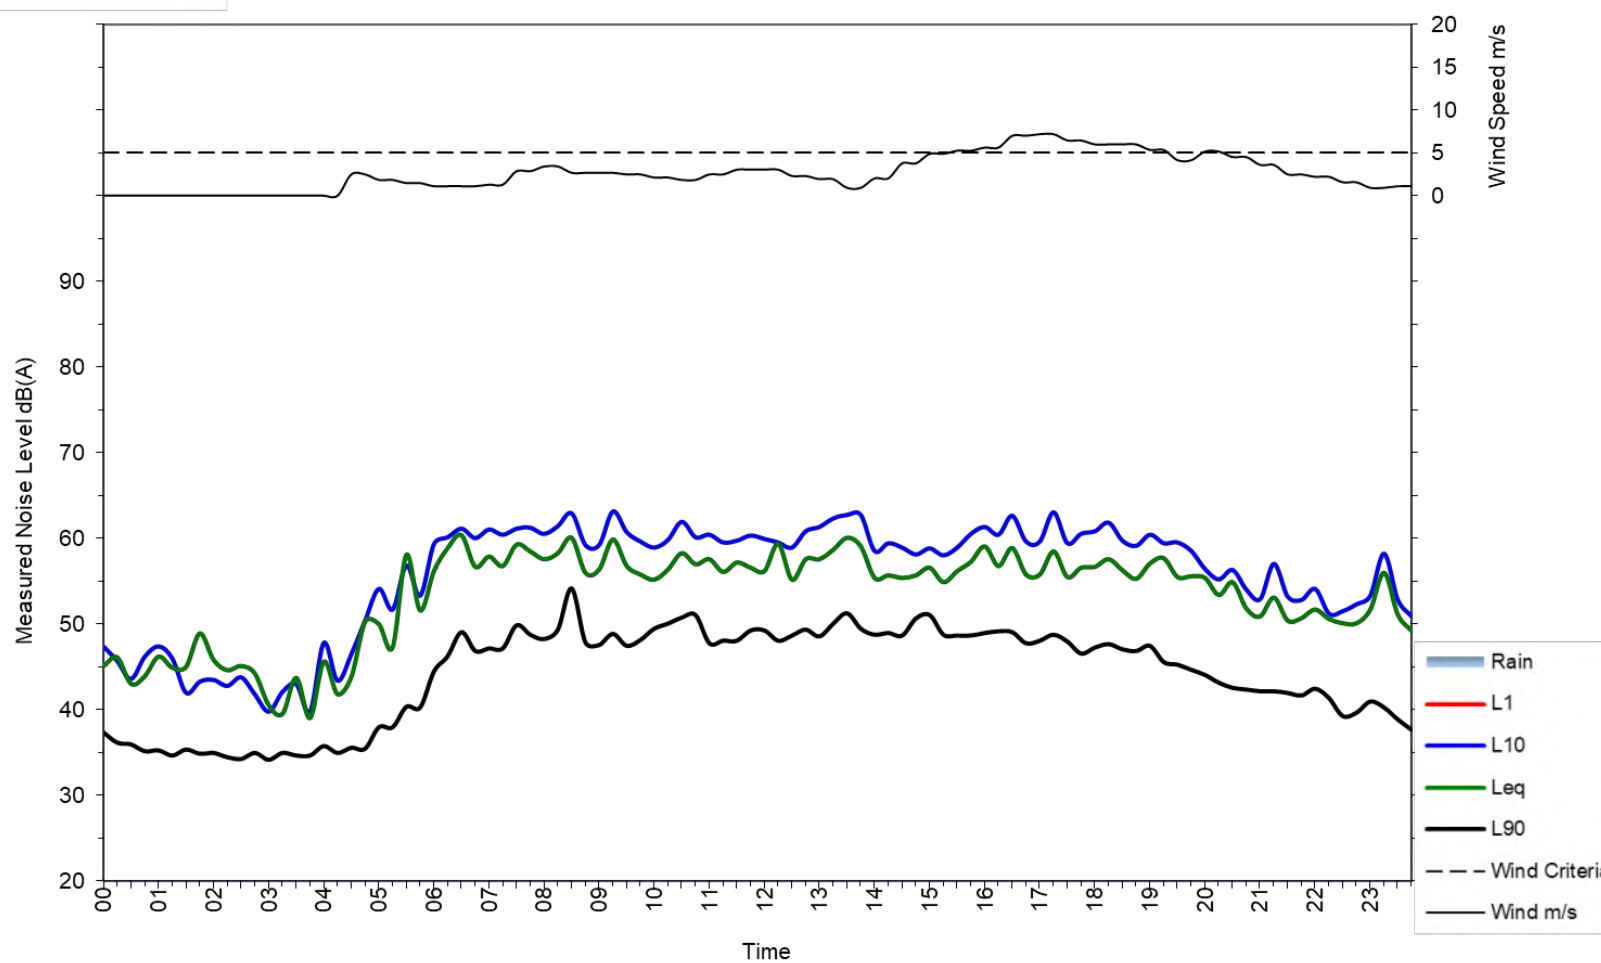



Pannerong Park


Sunday 06 November 2022

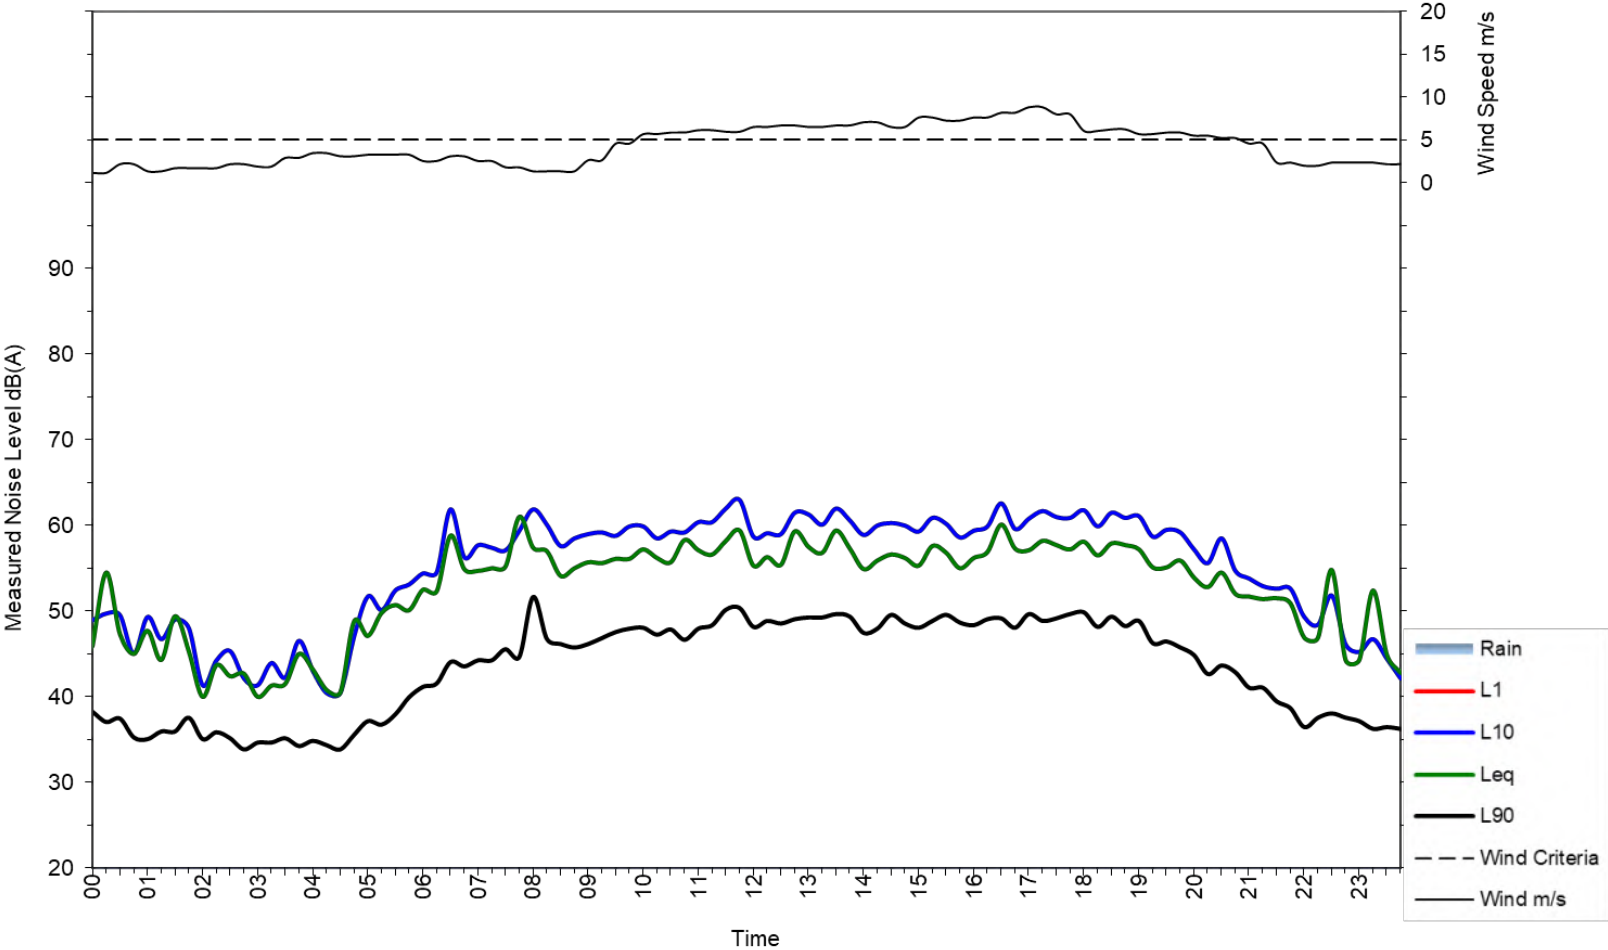



Pannerong Park


Monday 07 November 2022

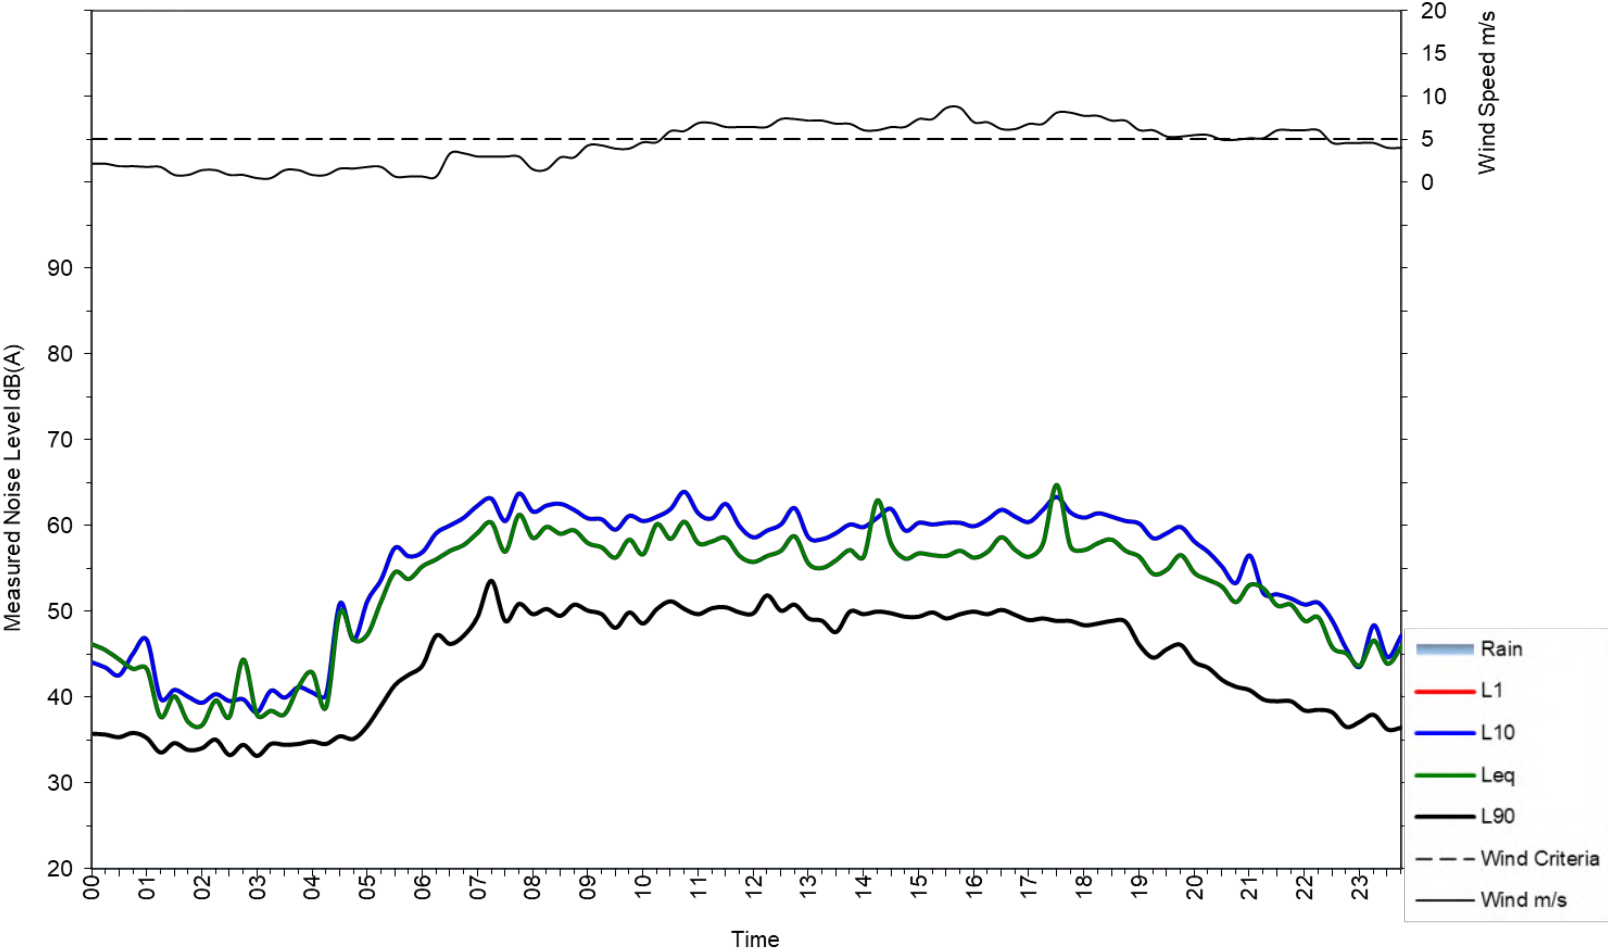



Pannerong Park

Tuesday 08 November 2022

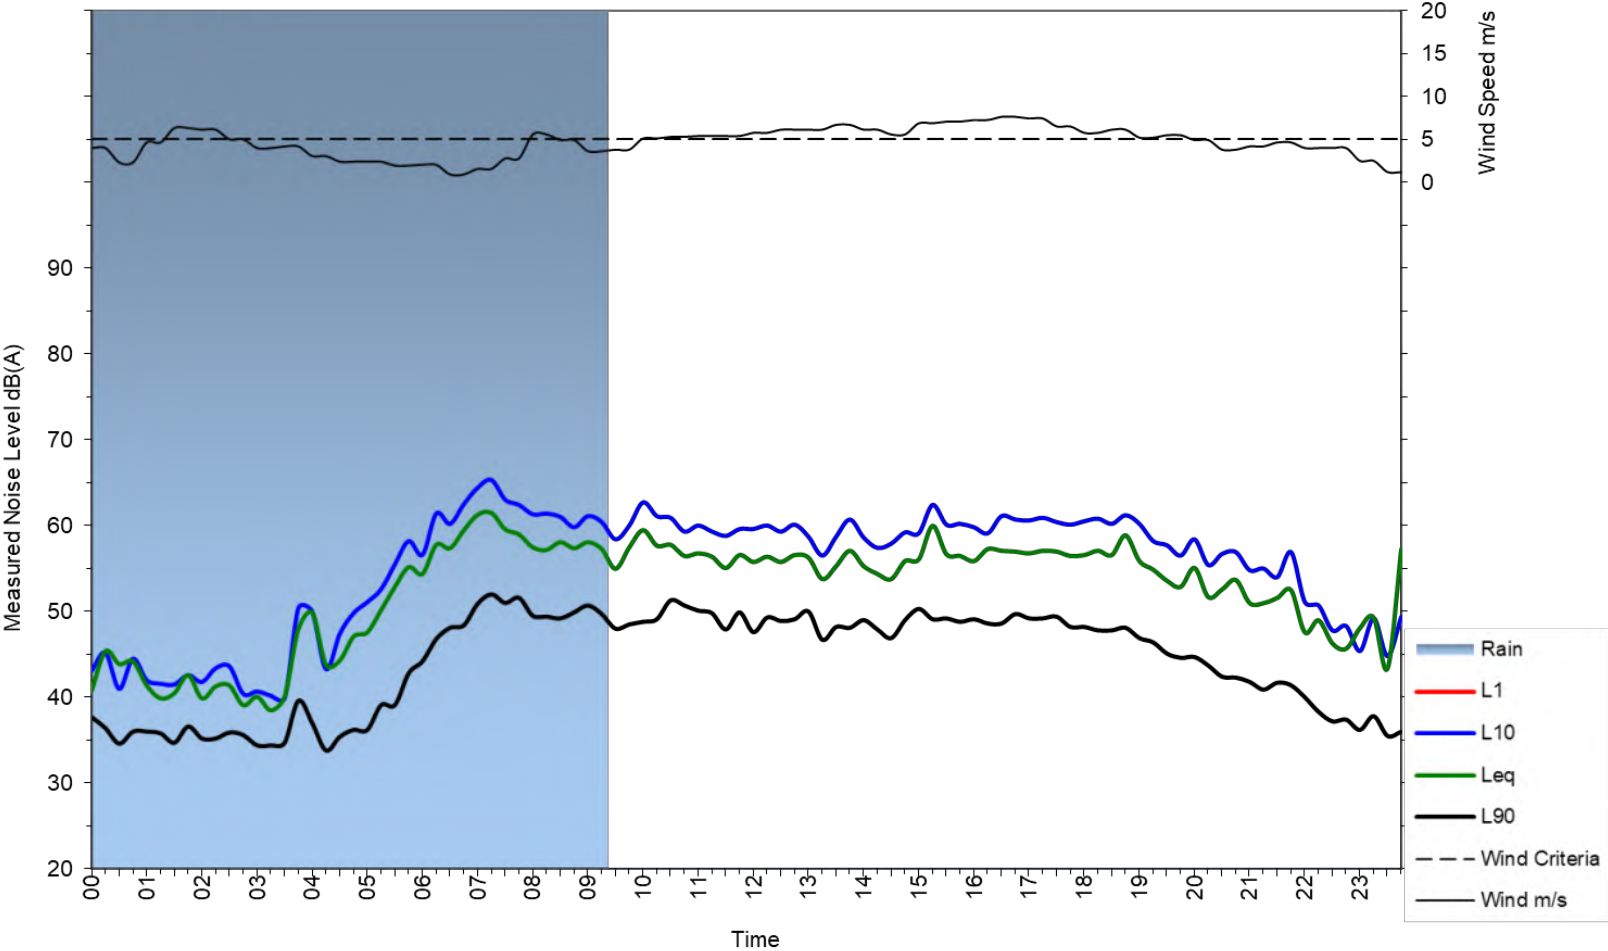



Pannerong Park

Wednesday 09 November 2022

