Nationwide House Energy Rating Scheme®
Class 2 Summary
NatHERS® Certificate No. 0012352830

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NatHERS Climate Zone	56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National

Thermal performance Star rating

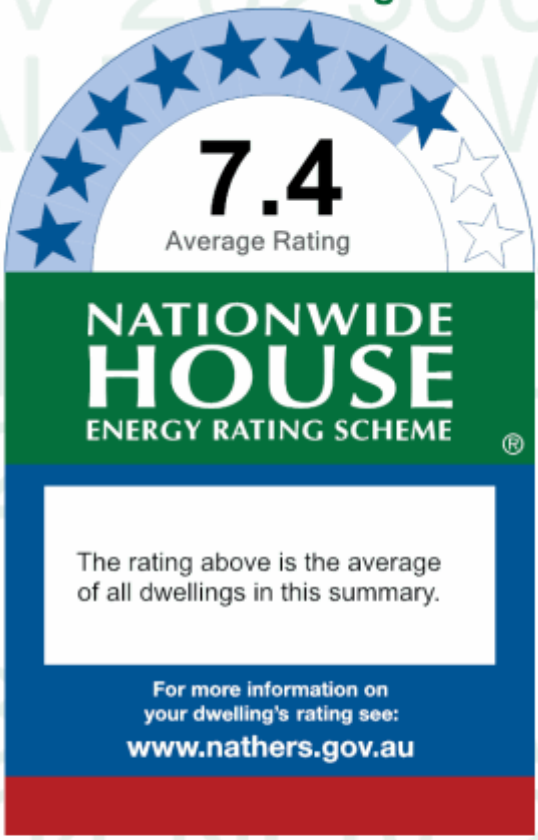

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=FLYCTvKeO . When using either link, ensure you are visiting hstar.com.au

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

NCC heating and cooling maximum loads (MJ/m²/p.a.)

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled block average	16.6	9.3
Maximum block limit	N/A	N/A

Whole of Home performance rating

No Whole of Home performance rating conducted for this summary certificate or not completed for all dwellings

Summary of all dwellings

Certificate number and link	Unit Number	Heating load (load limit) [MJ/m²/p.a.]	Cooling load (load limit) [MJ/m²/p.a.]	Total load [MJ/m²/p.a.]	Star Rating	Whole of Home Rating
0012351839	A 1.01	10.3 (N/A)	8.3 (N/A)	18.6	8.2	0
0012351862	A 1.02	6.9 (N/A)	10.6 (N/A)	17.5	8.4	0

Summary of all dwellings (continued)

Certificate number and link	Unit Number	Heating load (load limit) [MJ/m^2/p.a.]	Cooling load (load limit) [MJ/m^2/p.a.]	Total load [MJ/m^2/p.a.]	Star Rating	Whole of Home Rating
0012351961	A 1.03	27.3 (N/A)	9.4 (N/A)	36.7	6.2	0
0012351979	A 1.04	27.9 (N/A)	8.6 (N/A)	36.5	6.2	0
0012352084	A 1.05	11.9 (N/A)	15.7 (N/A)	27.5	7.3	0
0012352019	A 1.06	18.0 (N/A)	10.2 (N/A)	28.3	7.2	0
0012351888	A 2.01	10.9 (N/A)	8.2 (N/A)	19.0	8.2	0
0012352068	A 2.02	7.4 (N/A)	10.5 (N/A)	17.9	8.3	0
0012351953	A 2.03	26.1 (N/A)	10.4 (N/A)	36.5	6.2	0
0012351946	A 2.04	25.9 (N/A)	9.2 (N/A)	35.1	6.4	0
0012351912	A 2.05	10.4 (N/A)	14.9 (N/A)	25.3	7.4	0
0012352001	A 2.06	18.9 (N/A)	10.0 (N/A)	28.9	7.1	0
0012351870	A 3.01	12.5 (N/A)	6.7 (N/A)	19.2	8.2	0
0012351896	A 3.02	8.1 (N/A)	10.0 (N/A)	18.0	8.3	0
0012352225	A 3.03	19.1 (N/A)	11.7 (N/A)	30.8	6.9	0
0012352217	A 3.04	15.8 (N/A)	11.0 (N/A)	26.8	7.3	0
0012352191	A 3.05	12.4 (N/A)	11.5 (N/A)	23.9	7.6	0
0012351904	A 3.06	23.5 (N/A)	7.8 (N/A)	31.3	6.8	0
0012352183	A 4.01	5.3 (N/A)	11.9 (N/A)	17.1	8.4	0
0012352175	A 4.02	20.7 (N/A)	14.5 (N/A)	35.2	6.4	0
0012352159	A 4.03	12.7 (N/A)	10.9 (N/A)	23.6	7.7	0
0012352142	A 4.04	24.0 (N/A)	8.0 (N/A)	32.0	6.8	0
0012352134	A 5.01	9.9 (N/A)	11.3 (N/A)	21.2	7.9	0
0012352126	A 5.02	21.3 (N/A)	15.6 (N/A)	36.8	6.2	0
0012352118	A 5.03	16.3 (N/A)	9.1 (N/A)	25.3	7.4	0
0012352100	A 5.04	30.8 (N/A)	7.2 (N/A)	38.0	6	0
0012351821	A G.01	16.6 (N/A)	5.1 (N/A)	21.6	7.9	0
0012351813	A G.02	11.0 (N/A)	6.1 (N/A)	17.1	8.4	0
0012351995	A G.03	30.2 (N/A)	6.3 (N/A)	36.5	6.2	0
0012351987	A G.04	31.4 (N/A)	5.9 (N/A)	37.3	6.1	0
0012351938	A G.05	15.2 (N/A)	11.4 (N/A)	26.6	7.3	0
0012351920	A G.06	21.1 (N/A)	8.0 (N/A)	29.1	7.1	0
0012352779	B 1.01	9.8 (N/A)	8.6 (N/A)	18.4	8.3	0
0012352613	B 1.02	9.3 (N/A)	8.6 (N/A)	17.9	8.3	0
0012352761	B 1.03	18.9 (N/A)	10.1 (N/A)	29.0	7.1	0
0012352654	B 1.04	22.8 (N/A)	7.6 (N/A)	30.4	6.9	0

0012352746	B 2.01	9.8 (N/A)	8.5 (N/A)	18.3	8.3	0
0012352605	B 2.02	9.8 (N/A)	8.4 (N/A)	18.2	8.3	0
0012352753	B 2.03	17.4 (N/A)	9.9 (N/A)	27.3	7.3	0
0012352621	B 2.04	23.2 (N/A)	7.5 (N/A)	30.7	6.9	0
0012352738	B 3.01	11.7 (N/A)	7.1 (N/A)	18.8	8.2	0
0012352597	B 3.02	10.5 (N/A)	7.9 (N/A)	18.4	8.3	0
0012352720	B 3.03	13.7 (N/A)	10.2 (N/A)	23.9	7.6	0
0012352639	B 3.04	23.4 (N/A)	7.3 (N/A)	30.7	6.9	0
0012352688	B 4.01	5.6 (N/A)	11.5 (N/A)	17.1	8.4	0
0012352670	B 4.02	20.6 (N/A)	11.8 (N/A)	32.4	6.7	0
0012352662	B 5.01	10.0 (N/A)	11.4 (N/A)	21.4	7.9	0
0012352647	B 5.02	17.8 (N/A)	12.5 (N/A)	30.3	6.9	0
0012352811	B G.01	14.6 (N/A)	5.1 (N/A)	19.7	8.1	0
0012352803	B G.02	13.2 (N/A)	5.2 (N/A)	18.3	8.3	0
0012352787	B G.03	23.1 (N/A)	8.1 (N/A)	31.2	6.9	0
0012352795	B G.04	26.2 (N/A)	6.3 (N/A)	32.5	6.7	0
0012352555	C 1.01	8.3 (N/A)	8.8 (N/A)	17.1	8.4	0
0012352530	C 1.02	10.2 (N/A)	7.9 (N/A)	18.0	8.3	0
0012352464	C 1.03	16.8 (N/A)	12.1 (N/A)	28.9	7.1	0
0012352431	C 1.04	18.6 (N/A)	8.7 (N/A)	27.3	7.3	0
0012352522	C 1.05	14.8 (N/A)	9.5 (N/A)	24.3	7.6	0
0012352506	C 1.06	29.4 (N/A)	7.6 (N/A)	37.0	6.1	0
0012352514	C 2.01	8.7 (N/A)	8.8 (N/A)	17.5	8.4	0
0012352498	C 2.02	10.7 (N/A)	7.4 (N/A)	18.1	8.3	0
0012352472-01	C 2.03	17.6 (N/A)	12.0 (N/A)	29.5	7.1	0
0012352449	C 2.04	18.9 (N/A)	8.5 (N/A)	27.3	7.3	0
0012352415	C 2.05	8.7 (N/A)	10.2 (N/A)	18.9	8.2	0
0012352399	C 2.06	20.2 (N/A)	7.8 (N/A)	28.0	7.2	0
0012352381	C 3.01	12.3 (N/A)	7.7 (N/A)	20.1	8.1	0
0012352373	C 3.02	11.3 (N/A)	7.6 (N/A)	19.0	8.2	0
0012352365	C 3.03	21.6 (N/A)	11.0 (N/A)	32.6	6.7	0
0012352357	C 3.04	22.8 (N/A)	8.5 (N/A)	31.2	6.9	0
0012352340	C 3.05	9.3 (N/A)	10.0 (N/A)	19.4	8.2	0
0012352332	C 3.06	20.2 (N/A)	8.1 (N/A)	28.4	7.2	0
0012352274	C 4.01	5.3 (N/A)	12.0 (N/A)	17.3	8.4	0
0012352316	C 4.02	21.1 (N/A)	15.0 (N/A)	36.2	6.2	0
0012352308	C 4.03	12.0 (N/A)	8.3 (N/A)	20.3	8.1	0
0012352290	C 4.04	24.2 (N/A)	7.5 (N/A)	31.7	6.8	0

0012352282	C 5.01	10.2 (N/A)	11.6 (N/A)	21.8	7.9	0
0012352258	C 5.02	24.1 (N/A)	13.3 (N/A)	37.4	6.1	0
0012352241	C 5.03	17.4 (N/A)	7.3 (N/A)	24.7	7.5	0
0012352233	C 5.04	29.6 (N/A)	7.1 (N/A)	36.7	6.2	0
0012352563	C G.01	13.5 (N/A)	6.2 (N/A)	19.7	8.1	0
0012352571	C G.02	15.4 (N/A)	4.9 (N/A)	20.3	8.1	0
0012352456	C G.03	18.6 (N/A)	11.8 (N/A)	30.4	6.9	0
0012352423	C G.04	18.9 (N/A)	7.9 (N/A)	26.8	7.3	0

Explanatory notes

About this ratings

The thermal performance star rating in this Certificate is the average rating of all NCC Class 2 dwellings in an apartment block. Individual unit ratings are listed in the ‘Summary of all dwellings’ section of this Certificate.
NatHERS ratings use computer modelling to evaluate a home’s energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the energy loads and societal cost. The thermal performance star rating uses the home’s building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads.
For more details about an individual dwelling’s assessment, refer to the individual dwelling’s NatHERS Certificate (accessible via link).

Accredited Assessors

For high quality NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.
Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.
Licensed assessors in the Australian Capital Territory (ACT) can produce assessments for regulatory purposes only, using endorsed software, as listed on the ACT licensing register.
Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in certificates is entered by the assessor. It is the assessor’s responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.
The predicted annual energy use, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling’s design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.
Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.
Not all assumptions made by the assessor while using the NatHERS accredited software tool are presented in this report and further details or data files may be available from the assessor.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012351821

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit A G.01, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*

Conditioned*	136.6
Unconditioned*	0.0
Total	136.6
Garage	0.0

Exposure type

Suburban

NatHERS climate zone

56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	16.6	5.1
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=USwiMlfrK . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Ldry	Daytime	4.34
Entry	Daytime	19.39
Kitchen/Living	Kitchen/Living	49.29
Bedroom 1	Bedroom	14.62
Bedroom 2	Bedroom	12.64
ENS 1	Nighttime	7.06
Bath	Daytime	5.32
Bedroom 3	Bedroom	11.27
WC	Daytime	2.53
WIR 1	Nighttime	4.98
Pantry	Daytime	5.17

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-003-03 A	W18	2130	1000	Awning	70	NW	Yes
Kitchen/Living	ALM-003-03 A	W14	2130	800	Awning	70	NE	No
Kitchen/Living	ALM-004-03 A	W10	2700	3900	Sliding	60	NE	No
Kitchen/Living	ALM-004-03 A	W13	2700	2600	Sliding	45	NE	No

* Refer to glossary.

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Bedroom 1	ALM-003-03 A	W17	950	1200	Awning	10	NW	No
Bedroom 1	ALM-003-03 A	W4	2130	1150	Awning	70	NE	No
Bedroom 2	ALM-003-03 A	W5	2130	1150	Awning	70	SW	No
Bedroom 2	ALM-003-03 A	W16	950	1200	Awning	10	NW	No
Bedroom 3	ALM-003-03 A	W19	2130	1150	Awning	70	NW	Yes

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

* Refer to glossary.

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	1295	NW	0	No
Kitchen/Living	EW-1	2700	3384	W	0	No
Kitchen/Living	EW-1	2700	1100	NE	0	Yes
Kitchen/Living	EW-1	2700	1200	NW	0	No
Kitchen/Living	EW-1	2700	7200	NE	3600	Yes
Bedroom 1	EW-1	2700	3095	NW	0	No
Bedroom 1	EW-1	2700	1500	NE	6275	Yes
Bedroom 2	EW-1	2700	1500	SW	0	Yes
Bedroom 2	EW-1	2700	3195	NW	0	No
Bedroom 3	EW-1	2700	3400	SW	0	No
Bedroom 3	EW-1	2700	3095	NW	0	No
Pantry	EW-1	2700	2790	NW	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Concrete Panel/Blocks filled, plasterboard	55.62	No Insulation
IW-002	Steel Stud Frame, Direct Fix Plasterboard	149.31	No insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Ldry	Suspended Concrete Slab 200mm	4.34	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Ceramic Tiles 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Entry	Suspended Concrete Slab 200mm	19.39	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
Kitchen/Living	Suspended Concrete Slab 200mm	47.59	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
Kitchen/Living	Suspended Concrete Slab 150mm	1.70	Totally Open	Bulk Insulation in Contact with Floor	Cork Tiles or Parquetry 8mm
Bedroom 1	Suspended Concrete Slab 200mm	9.92	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
Bedroom 1	Suspended Concrete Slab 150mm	4.70	Totally Open	Bulk Insulation in Contact with Floor	Cork Tiles or Parquetry 8mm
Bedroom 2	Suspended Concrete Slab 200mm	7.94	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
Bedroom 2	Suspended Concrete Slab 150mm	4.70	Totally Open	Bulk Insulation in Contact with Floor	Cork Tiles or Parquetry 8mm
ENS 1	Suspended Concrete Slab 200mm	7.06	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Ceramic Tiles 8mm
Bath	Suspended Concrete Slab 200mm	5.32	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Ceramic Tiles 8mm
Bedroom 3	Suspended Concrete Slab 200mm	11.27	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
WC	Suspended Concrete Slab 200mm	2.53	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Ceramic Tiles 8mm
WIR 1	Suspended Concrete Slab 200mm	4.98	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
Pantry	Suspended Concrete Slab 200mm	5.17	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
Entry	Concrete, Plasterboard with Steel Frame	No insulation	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 3	Concrete, Plasterboard with Steel Frame	No insulation	
WC	Concrete, Plasterboard with Steel Frame	No insulation	
WIR 1	Concrete, Plasterboard with Steel Frame	No insulation	
Pantry	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Ldry	1	Downlights - LED	150	Sealed
Ldry	1	Exhaust Fans	300	Sealed
Entry	8	Downlights - LED	150	Sealed
Kitchen/Living	19	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed

* Refer to glossary.

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Bedroom 1	6	Downlights - LED	150	Sealed
Bedroom 2	5	Downlights - LED	150	Sealed
ENS 1	2	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
Bedroom 3	5	Downlights - LED	150	Sealed
WC	1	Downlights - LED	150	Sealed
WC	1	Exhaust Fans	300	Sealed
WIR 1	2	Downlights - LED	150	Sealed
Pantry	2	Downlights - LED	150	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
Ceiling		900	0.75	No
Internal Wall		600	0.75	No
External Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012351813

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit A G.02, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*	
Conditioned*	135.9
Unconditioned*	0.0
Total	135.9
Garage	0.0

Exposure type
Suburban

NatHERS climate zone
56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	11.0	6.1
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=PUfguUdcw . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

* Refer to glossary.

Room *schedule*

Room	Zone Type	Area [m^2]
Ldry	Daytime	4.5
Entry	Daytime	19.22
Kitchen/Living	Kitchen/Living	48.57
Bedroom 1	Bedroom	14.62
Bedroom 2	Bedroom	12.64
ENS 1	Nighttime	7.06
Bath	Daytime	5.32
Bedroom 3	Bedroom	11.27
WC	Daytime	2.53
WIR 1	Nighttime	4.98
Pantry	Daytime	5.17

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-004-03 A	W23	2700	3900	Sliding	60	NE	No
Kitchen/Living	ALM-004-03 A	W24	2700	2600	Sliding	45	NE	No
Kitchen/Living	ALM-003-03 A	W25	2130	800	Awning	70	NE	No
Kitchen/Living	ALM-003-03 A	W20	2130	1000	Awning	70	SE	No

* Refer to glossary.

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Bedroom 1	ALM-003-03 A	W27	2130	1150	Awning	70	NE	No
Bedroom 1	ALM-003-03 A	W21	950	1200	Awning	90	SE	No
Bedroom 2	ALM-003-03 A	W22	950	1200	Awning	90	SE	No
Bedroom 2	ALM-003-03 A	W26	2130	1150	Awning	70	SW	No
Bedroom 3	ALM-003-03 A	W19	2130	1200	Awning	70	SE	No

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

* Refer to glossary.

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	7200	NE	3600	Yes
Kitchen/Living	EW-1	2700	1100	SE	0	No
Kitchen/Living	EW-1	2700	1100	NE	0	Yes
Kitchen/Living	EW-1	2700	3384	SE	0	No
Kitchen/Living	EW-1	2700	1295	SE	0	No
Bedroom 1	EW-1	2700	1500	NE	6275	Yes
Bedroom 1	EW-1	2700	3095	SE	0	No
Bedroom 2	EW-1	2700	3195	SE	0	No
Bedroom 2	EW-1	2700	1500	SW	0	Yes
Bedroom 3	EW-1	2700	3095	SE	0	No
Pantry	EW-1	2700	2790	SE	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Steel Stud Frame, Direct Fix Plasterboard	154.44	No insulation
IW-002	Concrete Panel/Blocks filled, plasterboard	64.53	No Insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Ldry	Suspended Concrete Slab 200mm	4.50	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Ceramic Tiles 8mm

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Entry	Suspended Concrete Slab 200mm	19.22	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
Kitchen/Living	Suspended Concrete Slab 200mm	48.57	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
Bedroom 1	Suspended Concrete Slab 200mm	14.62	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
Bedroom 2	Suspended Concrete Slab 200mm	12.64	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
ENS 1	Suspended Concrete Slab 200mm	7.06	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Ceramic Tiles 8mm
Bath	Suspended Concrete Slab 200mm	5.32	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Ceramic Tiles 8mm
Bedroom 3	Suspended Concrete Slab 200mm	11.27	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
WC	Suspended Concrete Slab 200mm	2.53	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Ceramic Tiles 8mm
WIR 1	Suspended Concrete Slab 200mm	4.98	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
Pantry	Suspended Concrete Slab 200mm	5.17	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
Entry	Concrete, Plasterboard with Steel Frame	No insulation	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 3	Concrete, Plasterboard with Steel Frame	No insulation	
WC	Concrete, Plasterboard with Steel Frame	No insulation	
WIR 1	Concrete, Plasterboard with Steel Frame	No insulation	
Pantry	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Ldry	1	Downlights - LED	150	Sealed
Ldry	1	Exhaust Fans	300	Sealed
Entry	7	Downlights - LED	150	Sealed
Kitchen/Living	19	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Bedroom 1	6	Downlights - LED	150	Sealed
Bedroom 2	5	Downlights - LED	150	Sealed
ENS 1	2	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
Bedroom 3	5	Downlights - LED	150	Sealed
WC	1	Downlights - LED	150	Sealed
WC	1	Exhaust Fans	300	Sealed
WIR 1	2	Downlights - LED	150	Sealed
Pantry	2	Downlights - LED	150	Sealed

* Refer to glossary.

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
Ceiling		900	0.75	No
Internal Wall		600	0.75	No
External Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

* Refer to glossary.

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012351995

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit A G.03, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*	
Conditioned*	79.5
Unconditioned*	0.0
Total	79.5
Garage	0.0

Exposure type
Suburban

NatHERS climate zone
56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

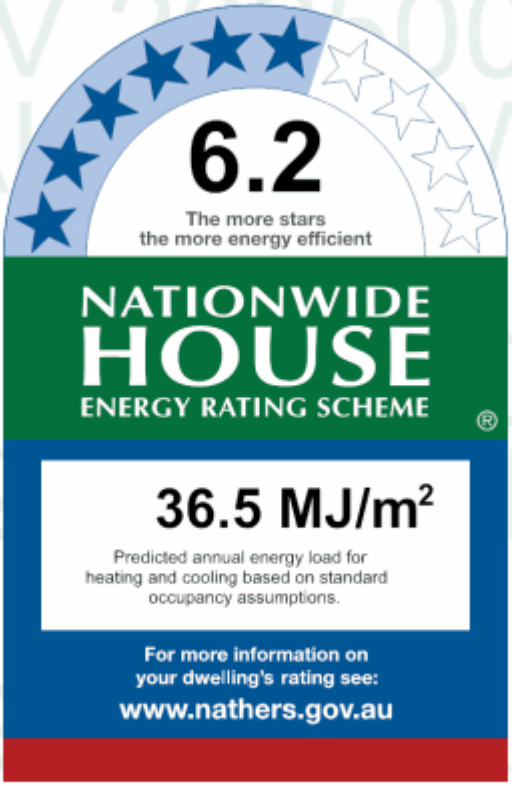

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	30.2	6.3
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=MqNwbPBpN . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Kitchen/Living	Kitchen/Living	34.53
Entry/Ldry	Daytime	6.99
Bedroom 2	Bedroom	10.86
Bedroom 1	Bedroom	16.61
Glazed Common	Glazed Common Area	19.05
ENS 1	Nighttime	5.99
Bath	Daytime	4.49

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-004-03 A	W24	2700	2850	Sliding	45	NW	No
Kitchen/Living	ALM-004-03 A	W23	2700	3600	Sliding	60	NW	No
Bedroom 2	ALM-003-03 A	W22	2130	1200	Awning	70	SE	Yes
Bedroom 1	ALM-003-03 A	W21	2130	1200	Awning	70	SE	Yes
Glazed Common	ALM-001-01 A	W19	2100	2000	Casement	90	SE	No

* Refer to glossary.

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

* Refer to glossary.

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	3100	NW	1500	Yes
Kitchen/Living	EW-1	2700	1000	NE	4000	No
Kitchen/Living	EW-1	2700	4000	NW	2500	Yes
Bedroom 2	EW-1	2700	3045	SE	0	No
Bedroom 1	EW-1	2700	3995	SE	0	No
Glazed Common	EW-1	2700	2250	SE	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Steel Stud Frame, Direct Fix Plasterboard	64.80	No insulation
IW-002	Concrete Panel/Blocks filled, plasterboard	77.22	No Insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Kitchen/Living	Suspended Concrete Slab 200mm	34.53	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
Entry/Ldry	Suspended Concrete Slab 200mm	6.99	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
Bedroom 2	Suspended Concrete Slab 200mm	10.86	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
Bedroom 1	Suspended Concrete Slab 200mm	16.61	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Glazed Common	Suspended Concrete Slab 200mm	19.05	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
ENS 1	Suspended Concrete Slab 200mm	5.99	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Ceramic Tiles 8mm
Bath	Suspended Concrete Slab 200mm	4.49	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Ceramic Tiles 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Entry/Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Glazed Common	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Kitchen/Living	15	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Entry/Ldry	3	Downlights - LED	150	Sealed
Entry/Ldry	1	Exhaust Fans	300	Sealed
Bedroom 2	4	Downlights - LED	150	Sealed
Bedroom 1	7	Downlights - LED	150	Sealed
ENS 1	2	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	1	Downlights - LED	150	Sealed

* Refer to glossary.

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Bath	1	Exhaust Fans	300	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
External Wall		600	0.75	No
Ceiling		900	0.75	No
Internal Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012351987

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit A G.04, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*	
Conditioned*	79.5
Unconditioned*	0.0
Total	79.5
Garage	0.0

Exposure type
Suburban

NatHERS climate zone
56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

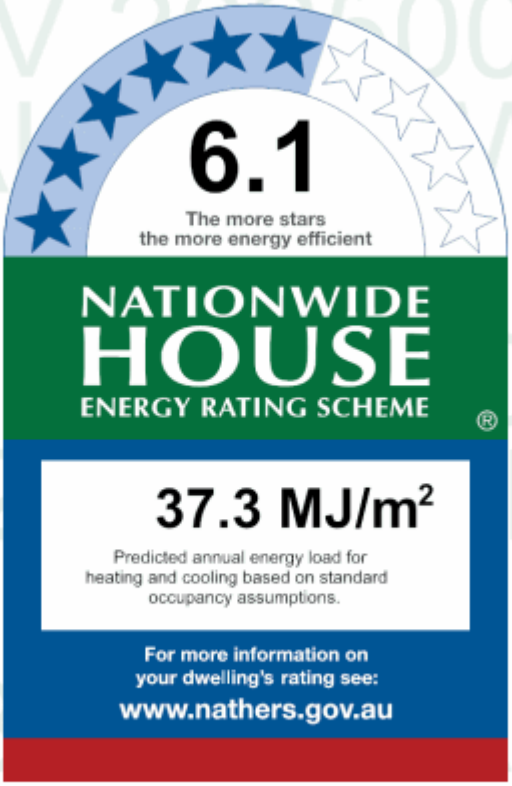

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	31.4	5.9
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=nGyHyJYPT . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Kitchen/Living	Kitchen/Living	34.53
Entry/Ldry	Daytime	6.99
Bedroom 2	Bedroom	10.86
Bedroom 1	Bedroom	16.61
Glazed Common	Glazed Common Area	19.05
ENS 1	Nighttime	5.99
Bath	Daytime	4.49

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-004-03 A	n/a	2700	3600	Sliding	60	NW	No
Kitchen/Living	ALM-004-03 A	n/a	2700	2850	Sliding	45	NW	No
Bedroom 2	ALM-003-03 A	W26	2130	1200	Awning	70	SE	Yes
Bedroom 1	ALM-003-03 A	W27	2130	1200	Awning	70	SE	Yes
Glazed Common	ALM-001-01 A	W25	2100	2000	Casement	90	SE	No

* Refer to glossary.

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

* Refer to glossary.

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	4000	NW	2500	Yes
Kitchen/Living	EW-1	2700	1000	SW	4000	No
Kitchen/Living	EW-1	2700	3100	NW	1500	Yes
Bedroom 2	EW-1	2700	3045	SE	0	No
Bedroom 1	EW-1	2700	3995	SE	0	No
Glazed Common	EW-1	2700	2250	SE	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Concrete Panel/Blocks filled, plasterboard	88.29	No Insulation
IW-002	Steel Stud Frame, Direct Fix Plasterboard	61.83	No insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Kitchen/Living	Suspended Concrete Slab 200mm	34.57	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
Entry/Ldry	Suspended Concrete Slab 200mm	6.99	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
Bedroom 2	Suspended Concrete Slab 200mm	10.86	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
Bedroom 1	Suspended Concrete Slab 200mm	16.61	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Glazed Common	Suspended Concrete Slab 200mm	19.05	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
ENS 1	Suspended Concrete Slab 200mm	5.99	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Ceramic Tiles 8mm
Bath	Suspended Concrete Slab 200mm	4.49	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Ceramic Tiles 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Entry/Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Glazed Common	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Kitchen/Living	15	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Entry/Ldry	3	Downlights - LED	150	Sealed
Entry/Ldry	1	Exhaust Fans	300	Sealed
Bedroom 2	4	Downlights - LED	150	Sealed
Bedroom 1	7	Downlights - LED	150	Sealed
ENS 1	2	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	1	Downlights - LED	150	Sealed

* Refer to glossary.

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Bath	1	Exhaust Fans	300	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
External Wall		600	0.75	No
Ceiling		900	0.75	No
Internal Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012351938

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit A G.05, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*	
Conditioned*	90.4
Unconditioned*	0.0
Total	90.4
Garage	0.0

Exposure type
Suburban

NatHERS climate zone
56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	15.2	11.4
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=eqSjdKeeX . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Kitchen/Living	Kitchen/Living	36.83
Bedroom 1	Bedroom	12.12
ENS 1	Nighttime	6.49
Bedroom 2	Bedroom	11.2
Entry/Ldry	Daytime	11.08
Bath	Daytime	5.46
WIR 1	Nighttime	7.25

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-004-03 A	W3	2700	3700	Sliding	60	SW	No
Kitchen/Living	ALM-003-03 A	W4	2130	1000	Awning	70	NW	No
Kitchen/Living	ALM-003-03 A	W5	2130	2000	Awning	70	NW	No
Bedroom 1	ALM-004-03 A	n/a	2700	3000	Sliding	45	SW	No
Bedroom 2	ALM-003-03 A	W2	2130	1200	Awning	70	NW	No

* Refer to glossary.

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

* Refer to glossary.

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	4195	SW	2100	Yes
Kitchen/Living	EW-1	2700	8595	NW	0	No
Bedroom 1	EW-1	2700	1000	NW	4200	No
Bedroom 1	EW-1	2700	3000	SW	1100	No
Bedroom 2	EW-1	2700	3795	NW	0	No
Bedroom 2	EW-1	2700	2995	NE	0	No
Entry/Ldry	EW-1	2700	395	NE	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Steel Stud Frame, Direct Fix Plasterboard	75.87	No insulation
IW-002	Concrete Panel/Blocks filled, plasterboard	35.37	No Insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Kitchen/Living	Suspended Concrete Slab 200mm	36.83	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
Bedroom 1	Suspended Concrete Slab 200mm	12.12	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
ENS 1	Suspended Concrete Slab 200mm	6.49	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Ceramic Tiles 8mm
Bedroom 2	Suspended Concrete Slab 200mm	11.20	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Entry/Ldry	Suspended Concrete Slab 200mm	11.08	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
Bath	Suspended Concrete Slab 200mm	5.46	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Ceramic Tiles 8mm
WIR 1	Suspended Concrete Slab 200mm	7.25	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
Entry/Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	
WIR 1	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Kitchen/Living	15	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Bedroom 1	5	Downlights - LED	150	Sealed
ENS 1	2	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bedroom 2	4	Downlights - LED	150	Sealed
Entry/Ldry	4	Downlights - LED	150	Sealed
Entry/Ldry	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed

* Refer to glossary.

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Bath	1	Exhaust Fans	300	Sealed
WIR 1	2	Downlights - LED	150	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
External Wall		600	0.75	No
Ceiling		900	0.75	No
Internal Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012351920

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit A G.06, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*	
Conditioned*	123.5
Unconditioned*	0.0
Total	123.5
Garage	0.0

Exposure type
Suburban

NatHERS climate zone
56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	21.1	8.0
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=AHSHuVkRB . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Ldry	Daytime	4.58
Entry	Daytime	21.37
Kitchen/Living	Kitchen/Living	44.54
Bedroom 1	Bedroom	17.17
Bedroom 2	Bedroom	12.59
ENS 1	Nighttime	7.06
Bath	Daytime	4.89
Bedroom 3	Bedroom	11.27

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-003-03 A	W9	2130	1000	Awning	70	SE	No
Kitchen/Living	ALM-003-03 A	W11	2130	1200	Awning	70	SE	No
Kitchen/Living	ALM-004-03 A	W1	2700	3050	Sliding	45	SW	No
Kitchen/Living	ALM-004-03 A	W10	2700	3900	Sliding	60	SW	No
Bedroom 1	ALM-003-03 A	W8	950	1200	Awning	90	SE	No
Bedroom 1	ALM-003-03 A	W4	2130	1150	Awning	70	SW	No
Bedroom 2	ALM-003-03 A	W5	2130	1150	Awning	70	NE	No

* Refer to glossary.

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Bedroom 2	ALM-003-03 A	W7	950	1200	Awning	90	SE	No
Bedroom 3	ALM-003-03 A	W12	2130	1200	Awning	70	SE	No

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

* Refer to glossary.

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	6895	SE	0	No
Kitchen/Living	EW-1	2700	3100	SW	1400	Yes
Kitchen/Living	EW-1	2700	1200	NW	4100	No
Kitchen/Living	EW-1	2700	4100	SW	2600	Yes
Kitchen/Living	EW-1	2700	2200	NW	700	No
Bedroom 1	EW-1	2700	3095	SE	0	No
Bedroom 1	EW-1	2700	1500	SW	0	Yes
Bedroom 1	EW-1	2700	595	SE	0	No
Bedroom 2	EW-1	2700	1500	NE	0	Yes
Bedroom 2	EW-1	2700	3195	SE	0	No
Bedroom 3	EW-1	2700	3095	SE	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Concrete Panel/Blocks filled, plasterboard	52.65	No Insulation
IW-002	Steel Stud Frame, Direct Fix Plasterboard	115.83	No insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Ldry	Suspended Concrete Slab 200mm	4.58	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Ceramic Tiles 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Entry	Suspended Concrete Slab 200mm	21.37	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
Kitchen/Living	Suspended Concrete Slab 200mm	44.54	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
Bedroom 1	Suspended Concrete Slab 200mm	17.17	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
Bedroom 2	Suspended Concrete Slab 200mm	12.59	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
ENS 1	Suspended Concrete Slab 200mm	7.06	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Ceramic Tiles 8mm
Bath	Suspended Concrete Slab 200mm	4.89	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Ceramic Tiles 8mm
Bedroom 3	Suspended Concrete Slab 200mm	11.27	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
Entry	Concrete, Plasterboard with Steel Frame	No insulation	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	

* Refer to glossary.

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Bath	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 3	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Ldry	1	Downlights - LED	150	Sealed
Ldry	1	Exhaust Fans	300	Sealed
Entry	8	Downlights - LED	150	Sealed
Kitchen/Living	20	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Bedroom 1	7	Downlights - LED	150	Sealed
Bedroom 2	5	Downlights - LED	150	Sealed
ENS 1	3	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
Bedroom 3	4	Downlights - LED	150	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
Ceiling		900	0.75	No
Internal Wall		600	0.75	No
External Wall		600	0.75	No

* Refer to glossary.

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012351839

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit A 1.01, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*	
Conditioned*	136.6
Unconditioned*	0.0
Total	136.6
Garage	0.0

Exposure type
Suburban

NatHERS climate zone
56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

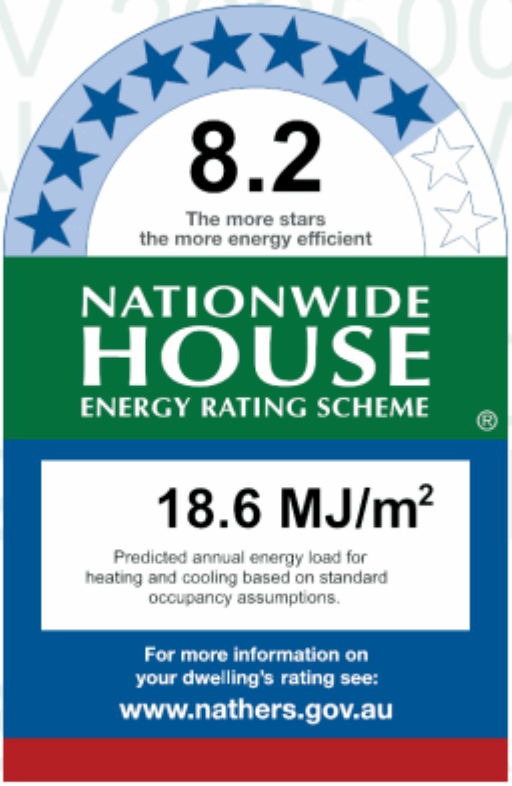

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	10.3	8.3
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=vihtjeCRR . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Ldry	Daytime	4.34
Entry	Daytime	19.39
Kitchen/Living	Kitchen/Living	49.29
Bedroom 1	Bedroom	14.62
Bedroom 2	Bedroom	12.64
ENS 1	Nighttime	7.06
Bath	Daytime	5.32
Bedroom 3	Bedroom	11.27
WC	Daytime	2.53
WIR 1	Nighttime	4.98
Pantry	Daytime	5.17

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-003-03 A	W18	2130	1000	Awning	10	NW	Yes
Kitchen/Living	ALM-003-03 A	W14	2130	800	Awning	10	NE	No
Kitchen/Living	ALM-004-03 A	W10	2700	3900	Sliding	60	NE	No
Kitchen/Living	ALM-004-03 A	W13	2700	2600	Sliding	45	NE	No

* Refer to glossary.

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Bedroom 1	ALM-003-03 A	W17	950	1150	Awning	10	NW	No
Bedroom 1	ALM-003-03 A	W4	2130	1150	Awning	10	NE	No
Bedroom 2	ALM-003-03 A	W5	2130	1150	Awning	10	SW	No
Bedroom 2	ALM-003-03 A	W16	950	1150	Awning	10	NW	No
Bedroom 3	ALM-003-03 A	W19	2130	1150	Awning	10	NW	Yes

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

* Refer to glossary.

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	1295	NW	0	No
Kitchen/Living	EW-1	2700	3384	W	0	No
Kitchen/Living	EW-1	2700	1100	NE	0	Yes
Kitchen/Living	EW-1	2700	1200	NW	0	No
Kitchen/Living	EW-1	2700	7200	NE	2700	Yes
Bedroom 1	EW-1	2700	3095	NW	0	No
Bedroom 1	EW-1	2700	1500	NE	6275	Yes
Bedroom 2	EW-1	2700	1500	SW	0	Yes
Bedroom 2	EW-1	2700	3195	NW	0	No
Bedroom 3	EW-1	2700	3400	SW	0	No
Bedroom 3	EW-1	2700	3095	NW	0	No
Pantry	EW-1	2700	2790	NW	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Concrete Panel/Blocks filled, plasterboard	55.62	No Insulation
IW-002	Steel Stud Frame, Direct Fix Plasterboard	149.31	No insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Ldry	Concrete Slab, Unit Below 200mm	4.34	None	No Insulation	Ceramic Tiles 8mm
Entry	Concrete Slab, Unit Below 200mm	19.39	None	No Insulation	Cork Tiles or Parquetry 8mm
Kitchen/Living	Concrete Slab, Unit Below 200mm	49.29	None	No Insulation	Cork Tiles or Parquetry 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Bedroom 1	Concrete Slab, Unit Below 200mm	14.62	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 2	Concrete Slab, Unit Below 200mm	12.64	None	No Insulation	Cork Tiles or Parquetry 8mm
ENS 1	Concrete Slab, Unit Below 200mm	7.06	None	No Insulation	Ceramic Tiles 8mm
Bath	Concrete Slab, Unit Below 200mm	5.32	None	No Insulation	Ceramic Tiles 8mm
Bedroom 3	Concrete Slab, Unit Below 200mm	11.27	None	No Insulation	Cork Tiles or Parquetry 8mm
WC	Concrete Slab, Unit Below 200mm	2.53	None	No Insulation	Ceramic Tiles 8mm
WIR 1	Concrete Slab, Unit Below 200mm	4.98	None	No Insulation	Cork Tiles or Parquetry 8mm
Pantry	Concrete Slab, Unit Below 200mm	5.17	None	No Insulation	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
Entry	Concrete, Plasterboard with Steel Frame	No insulation	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 3	Concrete, Plasterboard with Steel Frame	No insulation	
WC	Concrete, Plasterboard with Steel Frame	No insulation	
WIR 1	Concrete, Plasterboard with Steel Frame	No insulation	
Pantry	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Ldry	1	Downlights - LED	150	Sealed
Ldry	1	Exhaust Fans	300	Sealed
Entry	8	Downlights - LED	150	Sealed

* Refer to glossary.

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Kitchen/Living	19	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Bedroom 1	6	Downlights - LED	150	Sealed
Bedroom 2	5	Downlights - LED	150	Sealed
ENS 1	2	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
Bedroom 3	5	Downlights - LED	150	Sealed
WC	1	Downlights - LED	150	Sealed
WC	1	Exhaust Fans	300	Sealed
WIR 1	2	Downlights - LED	150	Sealed
Pantry	2	Downlights - LED	150	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
Ceiling		900	0.75	No
Internal Wall		600	0.75	No
External Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012351862

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit A 1.02, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*	
Conditioned*	135.9
Unconditioned*	0.0
Total	135.9
Garage	0.0

Exposure type
Suburban

NatHERS climate zone
56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	6.9	10.6
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=OeVuyGNaX . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Ldry	Daytime	4.5
Entry	Daytime	19.22
Kitchen/Living	Kitchen/Living	48.57
Bedroom 1	Bedroom	14.62
Bedroom 2	Bedroom	12.64
ENS 1	Nighttime	7.06
Bath	Daytime	5.32
Bedroom 3	Bedroom	11.27
WC	Daytime	2.53
WIR 1	Nighttime	4.98
Pantry	Daytime	5.17

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-004-03 A	W23	2700	3900	Sliding	60	NE	No
Kitchen/Living	ALM-004-03 A	W24	2700	2600	Sliding	45	NE	No
Kitchen/Living	ALM-003-03 A	W25	2130	800	Awning	10	NE	No
Kitchen/Living	ALM-003-03 A	W20	2130	1000	Awning	10	SE	No

* Refer to glossary.

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Bedroom 1	ALM-003-03 A	W27	2130	1150	Awning	10	NE	No
Bedroom 1	ALM-003-03 A	W21	950	1200	Awning	10	SE	No
Bedroom 2	ALM-003-03 A	W22	950	1200	Awning	10	SE	No
Bedroom 2	ALM-003-03 A	W26	2130	1150	Awning	10	SW	No
Bedroom 3	ALM-003-03 A	W19	2130	1200	Awning	10	SE	No

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

* Refer to glossary.

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	7200	NE	2800	Yes
Kitchen/Living	EW-1	2700	1100	SE	0	No
Kitchen/Living	EW-1	2700	1100	NE	0	Yes
Kitchen/Living	EW-1	2700	3384	SE	0	No
Kitchen/Living	EW-1	2700	1295	SE	0	No
Bedroom 1	EW-1	2700	1500	NE	6275	Yes
Bedroom 1	EW-1	2700	3095	SE	0	No
Bedroom 2	EW-1	2700	3195	SE	0	No
Bedroom 2	EW-1	2700	1500	SW	0	Yes
Bedroom 3	EW-1	2700	3095	SE	0	No
Pantry	EW-1	2700	2790	SE	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Steel Stud Frame, Direct Fix Plasterboard	154.44	No insulation
IW-002	Concrete Panel/Blocks filled, plasterboard	64.53	No Insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Ldry	Concrete Slab, Unit Below 200mm	4.50	None	No Insulation	Ceramic Tiles 8mm
Entry	Concrete Slab, Unit Below 200mm	19.22	None	No Insulation	Cork Tiles or Parquetry 8mm
Kitchen/Living	Concrete Slab, Unit Below 200mm	48.57	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 1	Concrete Slab, Unit Below 200mm	14.62	None	No Insulation	Cork Tiles or Parquetry 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Bedroom 2	Concrete Slab, Unit Below 200mm	12.64	None	No Insulation	Cork Tiles or Parquetry 8mm
ENS 1	Concrete Slab, Unit Below 200mm	7.06	None	No Insulation	Ceramic Tiles 8mm
Bath	Concrete Slab, Unit Below 200mm	5.32	None	No Insulation	Ceramic Tiles 8mm
Bedroom 3	Concrete Slab, Unit Below 200mm	11.27	None	No Insulation	Cork Tiles or Parquetry 8mm
WC	Concrete Slab, Unit Below 200mm	2.53	None	No Insulation	Ceramic Tiles 8mm
WIR 1	Concrete Slab, Unit Below 200mm	4.98	None	No Insulation	Cork Tiles or Parquetry 8mm
Pantry	Concrete Slab, Unit Below 200mm	5.17	None	No Insulation	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
Entry	Concrete, Plasterboard with Steel Frame	No insulation	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 3	Concrete, Plasterboard with Steel Frame	No insulation	
WC	Concrete, Plasterboard with Steel Frame	No insulation	
WIR 1	Concrete, Plasterboard with Steel Frame	No insulation	
Pantry	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Ldry	1	Downlights - LED	150	Sealed
Ldry	1	Exhaust Fans	300	Sealed
Entry	7	Downlights - LED	150	Sealed
Kitchen/Living	19	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed

* Refer to glossary.

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Bedroom 1	6	Downlights - LED	150	Sealed
Bedroom 2	5	Downlights - LED	150	Sealed
ENS 1	2	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
Bedroom 3	5	Downlights - LED	150	Sealed
WC	1	Downlights - LED	150	Sealed
WC	1	Exhaust Fans	300	Sealed
WIR 1	2	Downlights - LED	150	Sealed
Pantry	2	Downlights - LED	150	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
Ceiling		900	0.75	No
Internal Wall		600	0.75	No
External Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012351961

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit A 1.03, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*	
Conditioned*	79.5
Unconditioned*	0.0
Total	79.5
Garage	0.0

Exposure type
Suburban

NatHERS climate zone
56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

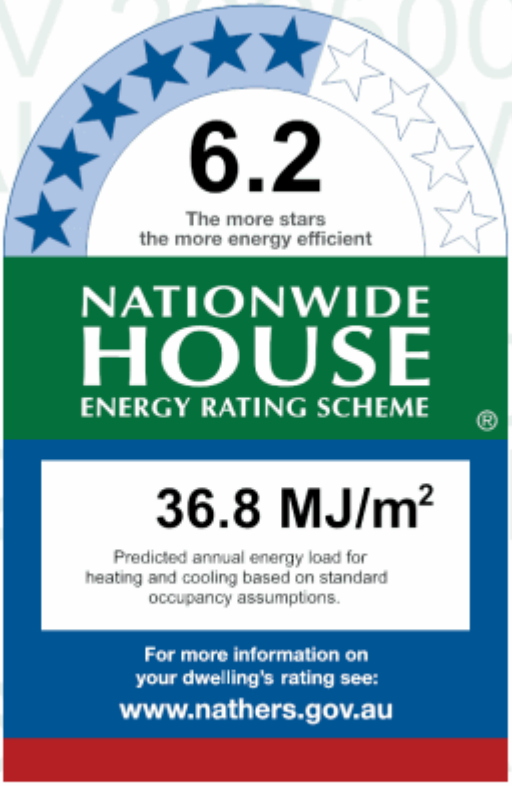

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	27.3	9.4
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=oleyZgYgn . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Kitchen/Living	Kitchen/Living	34.53
Entry/Ldry	Daytime	6.99
Bedroom 2	Bedroom	10.86
Bedroom 1	Bedroom	16.61
Glazed Common	Glazed Common Area	19.05
ENS 1	Nighttime	5.99
Bath	Daytime	4.49

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-004-03 A	W24	2700	3050	Sliding	45	NW	No
Kitchen/Living	ALM-004-03 A	W23	2700	3600	Sliding	60	NW	No
Bedroom 2	ALM-003-03 A	W22	2130	1200	Awning	10	SE	No
Bedroom 1	ALM-003-03 A	W21	2130	1200	Awning	10	SE	No
Glazed Common	ALM-001-01 A	W19	1980	2000	Awning	70	SE	No

* Refer to glossary.

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

* Refer to glossary.

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	3100	NW	1500	Yes
Kitchen/Living	EW-1	2700	1000	NE	4000	No
Kitchen/Living	EW-1	2700	4000	NW	2500	Yes
Bedroom 2	EW-1	2700	3045	SE	0	No
Bedroom 1	EW-1	2700	3995	SE	0	No
Glazed Common	EW-1	2700	2250	SE	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Steel Stud Frame, Direct Fix Plasterboard	64.80	No insulation
IW-002	Concrete Panel/Blocks filled, plasterboard	77.22	No Insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Kitchen/Living	Concrete Slab, Unit Below 200mm	34.53	None	No Insulation	Cork Tiles or Parquetry 8mm
Entry/Ldry	Concrete Slab, Unit Below 200mm	6.99	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 2	Concrete Slab, Unit Below 200mm	10.86	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 1	Concrete Slab, Unit Below 200mm	16.61	None	No Insulation	Cork Tiles or Parquetry 8mm
Glazed Common	Concrete Slab, Unit Below 200mm	19.05	None	No Insulation	Cork Tiles or Parquetry 8mm
ENS 1	Concrete Slab, Unit Below 200mm	5.99	None	No Insulation	Ceramic Tiles 8mm
Bath	Concrete Slab, Unit Below 200mm	4.49	None	No Insulation	Ceramic Tiles 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Entry/Ldry	Concrete, Plasterboard with Steel Frame	No insulation	

* Refer to glossary.

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Glazed Common	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Kitchen/Living	15	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Entry/Ldry	3	Downlights - LED	150	Sealed
Entry/Ldry	1	Exhaust Fans	300	Sealed
Bedroom 2	4	Downlights - LED	150	Sealed
Bedroom 1	7	Downlights - LED	150	Sealed
ENS 1	2	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	1	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
External Wall		600	0.75	No
Ceiling		900	0.75	No

* Refer to glossary.

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
Internal Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012351979

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit A 1.04, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*	
Conditioned*	79.5
Unconditioned*	0.0
Total	79.5
Garage	0.0

Exposure type
Suburban

NatHERS climate zone
56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

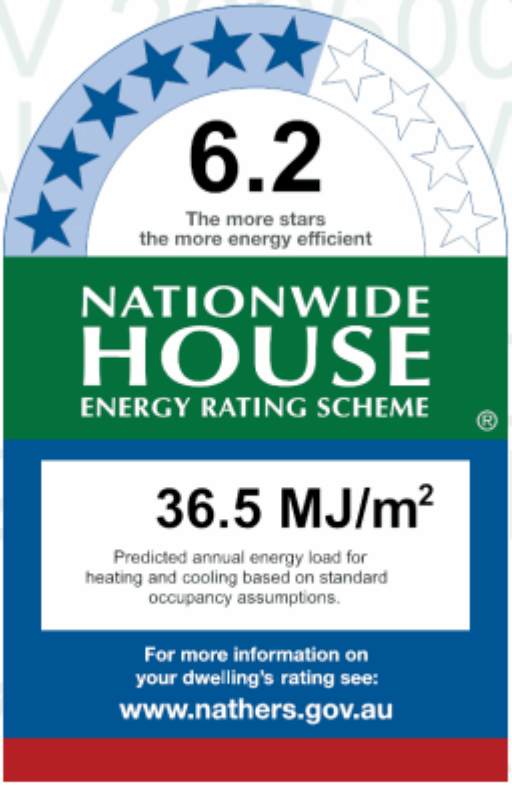

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	27.9	8.6
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=NttnBnBGh . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Kitchen/Living	Kitchen/Living	34.53
Entry/Ldry	Daytime	6.99
Bedroom 2	Bedroom	10.86
Bedroom 1	Bedroom	16.61
Glazed Common	Glazed Common Area	19.05
ENS 1	Nighttime	5.99
Bath	Daytime	4.49

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-004-03 A	W28	2700	3600	Sliding	60	NW	No
Kitchen/Living	ALM-004-03 A	W29	2700	3050	Sliding	45	NW	No
Bedroom 2	ALM-003-03 A	W27	2130	1200	Awning	10	SE	No
Bedroom 1	ALM-003-03 A	W26	2130	1200	Awning	10	SE	No
Glazed Common	ALM-001-01 A	W25	1980	2000	Awning	70	SE	No

* Refer to glossary.

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

* Refer to glossary.

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	4000	NW	2400	Yes
Kitchen/Living	EW-1	2700	1000	SW	4000	No
Kitchen/Living	EW-1	2700	3100	NW	1400	Yes
Bedroom 2	EW-1	2700	3045	SE	0	No
Bedroom 1	EW-1	2700	3995	SE	0	No
Glazed Common	EW-1	2700	2250	SE	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Concrete Panel/Blocks filled, plasterboard	88.29	No Insulation
IW-002	Steel Stud Frame, Direct Fix Plasterboard	61.83	No insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Kitchen/Living	Concrete Slab, Unit Below 200mm	34.57	None	No Insulation	Cork Tiles or Parquetry 8mm
Entry/Ldry	Concrete Slab, Unit Below 200mm	6.99	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 2	Concrete Slab, Unit Below 200mm	10.86	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 1	Concrete Slab, Unit Below 200mm	16.61	None	No Insulation	Cork Tiles or Parquetry 8mm
Glazed Common	Concrete Slab, Unit Below 200mm	19.05	None	No Insulation	Cork Tiles or Parquetry 8mm
ENS 1	Concrete Slab, Unit Below 200mm	5.99	None	No Insulation	Ceramic Tiles 8mm
Bath	Concrete Slab, Unit Below 200mm	4.49	None	No Insulation	Ceramic Tiles 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Entry/Ldry	Concrete, Plasterboard with Steel Frame	No insulation	

* Refer to glossary.

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Glazed Common	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Kitchen/Living	15	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Entry/Ldry	3	Downlights - LED	150	Sealed
Entry/Ldry	1	Exhaust Fans	300	Sealed
Bedroom 2	4	Downlights - LED	150	Sealed
Bedroom 1	7	Downlights - LED	150	Sealed
ENS 1	2	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	1	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
External Wall		600	0.75	No
Ceiling		900	0.75	No

* Refer to glossary.

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
Internal Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

* Refer to glossary.

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352084

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit A 1.05, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*	
Conditioned*	90.4
Unconditioned*	0.0
Total	90.4
Garage	0.0

Exposure type
Suburban

NatHERS climate zone
56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	11.9	15.7
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=GaEUzTIAz . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Kitchen/Living	Kitchen/Living	36.83
Bedroom 1	Bedroom	12.12
ENS 1	Nighttime	6.49
Bedroom 2	Bedroom	11.2
Entry/Ldry	Daytime	11.08
Bath	Daytime	5.46
WIR 1	Nighttime	7.25

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-004-03 A	W3	2700	3900	Sliding	60	SW	No
Kitchen/Living	ALM-003-03 A	W4	2130	1000	Awning	10	NW	No
Kitchen/Living	ALM-003-03 A	W5	2130	2000	Awning	10	NW	No
Bedroom 1	ALM-004-03 A	W6	2700	3000	Sliding	45	SW	No
Bedroom 2	ALM-003-03 A	W2	2130	1200	Awning	10	NW	No

* Refer to glossary.

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

* Refer to glossary.

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	4195	SW	2100	Yes
Kitchen/Living	EW-1	2700	8595	NW	0	No
Bedroom 1	EW-1	2700	1000	NW	4200	No
Bedroom 1	EW-1	2700	3000	SW	1100	No
Bedroom 2	EW-1	2700	3795	NW	0	No
Bedroom 2	EW-1	2700	2995	NE	0	No
Entry/Ldry	EW-1	2700	395	NE	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Steel Stud Frame, Direct Fix Plasterboard	75.87	No insulation
IW-002	Concrete Panel/Blocks filled, plasterboard	35.37	No Insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Kitchen/Living	Concrete Slab, Unit Below 200mm	36.83	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 1	Concrete Slab, Unit Below 200mm	12.12	None	No Insulation	Cork Tiles or Parquetry 8mm
ENS 1	Concrete Slab, Unit Below 200mm	6.49	None	No Insulation	Ceramic Tiles 8mm
Bedroom 2	Concrete Slab, Unit Below 200mm	11.20	None	No Insulation	Cork Tiles or Parquetry 8mm
Entry/Ldry	Concrete Slab, Unit Below 200mm	11.08	None	No Insulation	Cork Tiles or Parquetry 8mm
Bath	Concrete Slab, Unit Below 200mm	5.46	None	No Insulation	Ceramic Tiles 8mm
WIR 1	Concrete Slab, Unit Below 200mm	7.25	None	No Insulation	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	

* Refer to glossary.

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
Entry/Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	
WIR 1	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Kitchen/Living	15	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Bedroom 1	5	Downlights - LED	150	Sealed
ENS 1	2	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bedroom 2	4	Downlights - LED	150	Sealed
Entry/Ldry	4	Downlights - LED	150	Sealed
Entry/Ldry	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
WIR 1	2	Downlights - LED	150	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

* Refer to glossary.

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
External Wall		600	0.75	No
Ceiling		900	0.75	No
Internal Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352019

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit A 1.06, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*	
Conditioned*	123.5
Unconditioned*	0.0
Total	123.5
Garage	0.0

Exposure type
Suburban

NatHERS climate zone
56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	18.0	10.2
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=ijPMEaGsR . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Ldry	Daytime	4.58
Entry	Daytime	21.37
Kitchen/Living	Kitchen/Living	44.54
Bedroom 1	Bedroom	17.17
Bedroom 2	Bedroom	12.59
ENS 1	Nighttime	7.06
Bath	Daytime	4.89
Bedroom 3	Bedroom	11.27

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-003-03 A	W9	2130	1000	Awning	10	SE	No
Kitchen/Living	ALM-003-03 A	W11	2130	1200	Awning	10	SE	No
Kitchen/Living	ALM-004-03 A	W1	2700	3050	Sliding	45	SW	No
Kitchen/Living	ALM-004-03 A	W10	2700	3900	Sliding	60	SW	No
Bedroom 1	ALM-003-03 A	W8	950	1200	Awning	10	SE	No
Bedroom 1	ALM-003-03 A	W4	2130	1150	Awning	10	SW	No
Bedroom 2	ALM-003-03 A	W5	2130	1150	Awning	10	NE	No

* Refer to glossary.

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Bedroom 2	ALM-003-03 A	W7	950	1200	Awning	10	SE	No
Bedroom 3	ALM-003-03 A	W12	2130	1200	Awning	10	SE	No

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

* Refer to glossary.

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	6895	SE	0	No
Kitchen/Living	EW-1	2700	3100	SW	1400	Yes
Kitchen/Living	EW-1	2700	1200	NW	4100	No
Kitchen/Living	EW-1	2700	4100	SW	2600	Yes
Kitchen/Living	EW-1	2700	2200	NW	700	No
Bedroom 1	EW-1	2700	3095	SE	0	No
Bedroom 1	EW-1	2700	1500	SW	0	Yes
Bedroom 1	EW-1	2700	595	SE	0	No
Bedroom 2	EW-1	2700	1500	NE	0	Yes
Bedroom 2	EW-1	2700	3195	SE	0	No
Bedroom 3	EW-1	2700	3095	SE	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Concrete Panel/Blocks filled, plasterboard	52.65	No Insulation
IW-002	Steel Stud Frame, Direct Fix Plasterboard	115.83	No insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Ldry	Concrete Slab, Unit Below 200mm	4.58	None	No Insulation	Ceramic Tiles 8mm
Entry	Concrete Slab, Unit Below 200mm	21.37	None	No Insulation	Cork Tiles or Parquetry 8mm
Kitchen/Living	Concrete Slab, Unit Below 200mm	44.54	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 1	Concrete Slab, Unit Below 200mm	17.17	None	No Insulation	Cork Tiles or Parquetry 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Bedroom 2	Concrete Slab, Unit Below 200mm	12.59	None	No Insulation	Cork Tiles or Parquetry 8mm
ENS 1	Concrete Slab, Unit Below 200mm	7.06	None	No Insulation	Ceramic Tiles 8mm
Bath	Concrete Slab, Unit Below 200mm	4.89	None	No Insulation	Ceramic Tiles 8mm
Bedroom 3	Concrete Slab, Unit Below 200mm	11.27	None	No Insulation	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
Entry	Concrete, Plasterboard with Steel Frame	No insulation	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 3	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Ldry	1	Downlights - LED	150	Sealed
Ldry	1	Exhaust Fans	300	Sealed
Entry	8	Downlights - LED	150	Sealed
Kitchen/Living	20	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Bedroom 1	7	Downlights - LED	150	Sealed
Bedroom 2	5	Downlights - LED	150	Sealed
ENS 1	3	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
Bedroom 3	4	Downlights - LED	150	Sealed

* Refer to glossary.

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
Ceiling		900	0.75	No
Internal Wall		600	0.75	No
External Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

* Refer to glossary.

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012351888

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit A 2.01, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*	
Conditioned*	136.6
Unconditioned*	0.0
Total	136.6
Garage	0.0

Exposure type
Suburban

NatHERS climate zone
56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

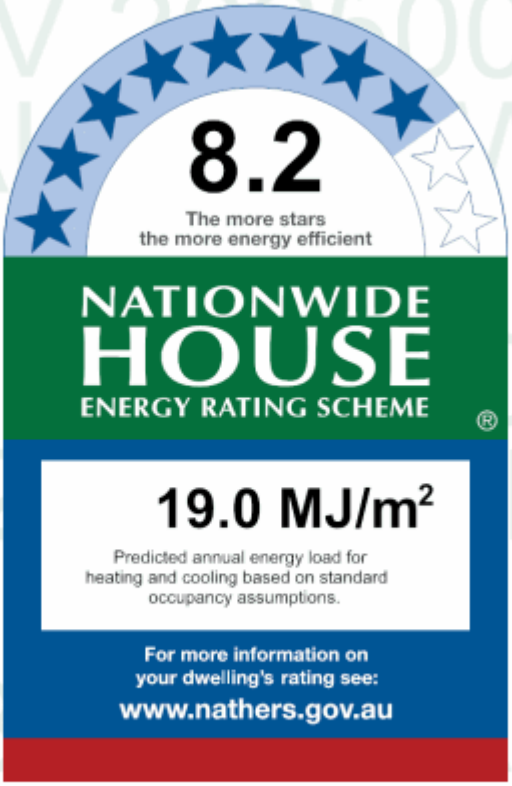

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	10.9	8.2
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=dpvOqsYfi . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Ldry	Daytime	4.34
Entry	Daytime	19.39
Kitchen/Living	Kitchen/Living	49.29
Bedroom 1	Bedroom	14.62
Bedroom 2	Bedroom	12.64
ENS 1	Nighttime	7.06
Bath	Daytime	5.32
Bedroom 3	Bedroom	11.27
WC	Daytime	2.53
WIR 1	Nighttime	4.98
Pantry	Daytime	5.17

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-003-03 A	W18	2130	1000	Awning	10	NW	Yes
Kitchen/Living	ALM-003-03 A	W14	2130	800	Awning	10	NE	No
Kitchen/Living	ALM-004-03 A	W10	2700	3900	Sliding	60	NE	No
Kitchen/Living	ALM-004-03 A	W13	2700	2600	Sliding	45	NE	No

* Refer to glossary.

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Bedroom 1	ALM-003-03 A	W17	950	1150	Awning	10	NW	No
Bedroom 1	ALM-003-03 A	W4	2130	1150	Awning	10	NE	No
Bedroom 2	ALM-003-03 A	W5	2130	1150	Awning	10	SW	No
Bedroom 2	ALM-003-03 A	W16	950	1150	Awning	10	NW	No
Bedroom 3	ALM-003-03 A	W19	2130	1200	Awning	10	NW	Yes

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

* Refer to glossary.

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	1295	NW	0	No
Kitchen/Living	EW-1	2700	3384	W	0	No
Kitchen/Living	EW-1	2700	1100	NE	0	Yes
Kitchen/Living	EW-1	2700	1200	NW	0	No
Kitchen/Living	EW-1	2700	7200	NE	2700	Yes
Bedroom 1	EW-1	2700	3095	NW	0	No
Bedroom 1	EW-1	2700	1500	NE	6275	Yes
Bedroom 2	EW-1	2700	1500	SW	0	Yes
Bedroom 2	EW-1	2700	3195	NW	0	No
Bedroom 3	EW-1	2700	3400	SW	0	No
Bedroom 3	EW-1	2700	3095	NW	0	No
Pantry	EW-1	2700	2790	NW	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Concrete Panel/Blocks filled, plasterboard	55.62	No Insulation
IW-002	Steel Stud Frame, Direct Fix Plasterboard	149.31	No insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Ldry	Concrete Slab, Unit Below 200mm	4.34	None	No Insulation	Ceramic Tiles 8mm
Entry	Concrete Slab, Unit Below 200mm	19.39	None	No Insulation	Cork Tiles or Parquetry 8mm
Kitchen/Living	Concrete Slab, Unit Below 200mm	49.29	None	No Insulation	Cork Tiles or Parquetry 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Bedroom 1	Concrete Slab, Unit Below 200mm	14.62	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 2	Concrete Slab, Unit Below 200mm	12.64	None	No Insulation	Cork Tiles or Parquetry 8mm
ENS 1	Concrete Slab, Unit Below 200mm	7.06	None	No Insulation	Ceramic Tiles 8mm
Bath	Concrete Slab, Unit Below 200mm	5.32	None	No Insulation	Ceramic Tiles 8mm
Bedroom 3	Concrete Slab, Unit Below 200mm	11.27	None	No Insulation	Cork Tiles or Parquetry 8mm
WC	Concrete Slab, Unit Below 200mm	2.53	None	No Insulation	Ceramic Tiles 8mm
WIR 1	Concrete Slab, Unit Below 200mm	4.98	None	No Insulation	Cork Tiles or Parquetry 8mm
Pantry	Concrete Slab, Unit Below 200mm	5.17	None	No Insulation	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
Entry	Concrete, Plasterboard with Steel Frame	No insulation	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 3	Concrete, Plasterboard with Steel Frame	No insulation	
WC	Concrete, Plasterboard with Steel Frame	No insulation	
WIR 1	Concrete, Plasterboard with Steel Frame	No insulation	
Pantry	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Ldry	1	Downlights - LED	150	Sealed
Ldry	1	Exhaust Fans	300	Sealed
Entry	8	Downlights - LED	150	Sealed

* Refer to glossary.

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Kitchen/Living	19	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Bedroom 1	6	Downlights - LED	150	Sealed
Bedroom 2	5	Downlights - LED	150	Sealed
ENS 1	2	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
Bedroom 3	5	Downlights - LED	150	Sealed
WC	1	Downlights - LED	150	Sealed
WC	1	Exhaust Fans	300	Sealed
WIR 1	2	Downlights - LED	150	Sealed
Pantry	2	Downlights - LED	150	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
Ceiling		900	0.75	No
Internal Wall		600	0.75	No
External Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352068

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit A 2.02, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*	
Conditioned*	135.9
Unconditioned*	0.0
Total	135.9
Garage	0.0

Exposure type
Suburban

NatHERS climate zone
56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	7.4	10.5
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=KTuVZoFvU . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Ldry	Daytime	4.5
Entry	Daytime	19.22
Kitchen/Living	Kitchen/Living	48.57
Bedroom 1	Bedroom	14.62
Bedroom 2	Bedroom	12.64
ENS 1	Nighttime	7.06
Bath	Daytime	5.32
Bedroom 3	Bedroom	11.27
WC	Daytime	2.53
WIR 1	Nighttime	4.98
Pantry	Daytime	5.17

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-004-03 A	W23	2700	3900	Sliding	60	NE	No
Kitchen/Living	ALM-004-03 A	W24	2700	2600	Sliding	45	NE	No
Kitchen/Living	ALM-003-03 A	W25	2130	800	Awning	10	NE	No
Kitchen/Living	ALM-003-03 A	W20	2130	1000	Awning	10	SE	No

* Refer to glossary.

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Bedroom 1	ALM-003-03 A	W27	2130	1150	Awning	10	NE	No
Bedroom 1	ALM-003-03 A	W21	950	1200	Awning	10	SE	No
Bedroom 2	ALM-003-03 A	W22	950	1200	Awning	10	SE	No
Bedroom 2	ALM-003-03 A	W26	2130	1150	Awning	10	SW	No
Bedroom 3	ALM-003-03 A	W19	2130	1200	Awning	10	SE	No

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

* Refer to glossary.

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	7200	NE	2800	Yes
Kitchen/Living	EW-1	2700	1100	SE	0	No
Kitchen/Living	EW-1	2700	1100	NE	0	Yes
Kitchen/Living	EW-1	2700	3384	SE	0	No
Kitchen/Living	EW-1	2700	1295	SE	0	No
Bedroom 1	EW-1	2700	1500	NE	6275	Yes
Bedroom 1	EW-1	2700	3095	SE	0	No
Bedroom 2	EW-1	2700	3195	SE	0	No
Bedroom 2	EW-1	2700	1500	SW	0	Yes
Bedroom 3	EW-1	2700	3095	SE	0	No
Pantry	EW-1	2700	2790	SE	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Steel Stud Frame, Direct Fix Plasterboard	154.44	No insulation
IW-002	Concrete Panel/Blocks filled, plasterboard	64.53	No Insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Ldry	Concrete Slab, Unit Below 200mm	4.50	None	No Insulation	Ceramic Tiles 8mm
Entry	Concrete Slab, Unit Below 200mm	19.22	None	No Insulation	Cork Tiles or Parquetry 8mm
Kitchen/Living	Concrete Slab, Unit Below 200mm	48.57	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 1	Concrete Slab, Unit Below 200mm	14.62	None	No Insulation	Cork Tiles or Parquetry 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Bedroom 2	Concrete Slab, Unit Below 200mm	12.64	None	No Insulation	Cork Tiles or Parquetry 8mm
ENS 1	Concrete Slab, Unit Below 200mm	7.06	None	No Insulation	Ceramic Tiles 8mm
Bath	Concrete Slab, Unit Below 200mm	5.32	None	No Insulation	Ceramic Tiles 8mm
Bedroom 3	Concrete Slab, Unit Below 200mm	11.27	None	No Insulation	Cork Tiles or Parquetry 8mm
WC	Concrete Slab, Unit Below 200mm	2.53	None	No Insulation	Ceramic Tiles 8mm
WIR 1	Concrete Slab, Unit Below 200mm	4.98	None	No Insulation	Cork Tiles or Parquetry 8mm
Pantry	Concrete Slab, Unit Below 200mm	5.17	None	No Insulation	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
Entry	Concrete, Plasterboard with Steel Frame	No insulation	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 3	Concrete, Plasterboard with Steel Frame	No insulation	
WC	Concrete, Plasterboard with Steel Frame	No insulation	
WIR 1	Concrete, Plasterboard with Steel Frame	No insulation	
Pantry	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Ldry	1	Downlights - LED	150	Sealed
Ldry	1	Exhaust Fans	300	Sealed
Entry	7	Downlights - LED	150	Sealed
Kitchen/Living	19	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed

* Refer to glossary.

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Bedroom 1	6	Downlights - LED	150	Sealed
Bedroom 2	5	Downlights - LED	150	Sealed
ENS 1	2	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
Bedroom 3	5	Downlights - LED	150	Sealed
WC	1	Downlights - LED	150	Sealed
WC	1	Exhaust Fans	300	Sealed
WIR 1	2	Downlights - LED	150	Sealed
Pantry	2	Downlights - LED	150	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
Ceiling		900	0.75	No
Internal Wall		600	0.75	No
External Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012351953

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit A 2.03, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*	
Conditioned*	79.5
Unconditioned*	0.0
Total	79.5
Garage	0.0

Exposure type
Suburban

NatHERS climate zone
56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

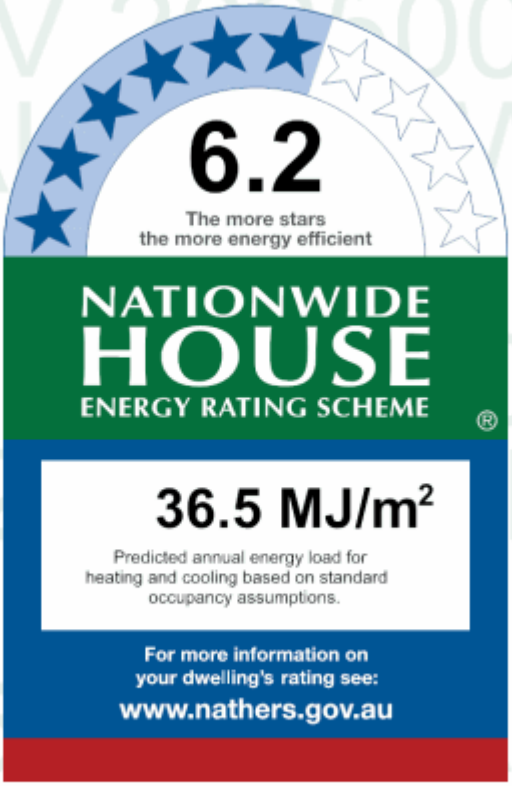

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	26.1	10.4
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=gUnFYxZek . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Kitchen/Living	Kitchen/Living	34.53
Entry/Ldry	Daytime	6.99
Bedroom 2	Bedroom	10.86
Bedroom 1	Bedroom	16.61
Glazed Common	Glazed Common Area	19.05
ENS 1	Nighttime	5.99
Bath	Daytime	4.49

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-004-03 A	W24	2700	3050	Sliding	45	NW	No
Kitchen/Living	ALM-004-03 A	W23	2700	3600	Sliding	60	NW	No
Bedroom 2	ALM-003-03 A	W22	2130	1200	Awning	10	SE	No
Bedroom 1	ALM-003-03 A	W21	2130	1200	Awning	10	SE	No
Glazed Common	ALM-001-01 A	W19	1980	2000	Awning	70	SE	No

* Refer to glossary.

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

* Refer to glossary.

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	3100	NW	1500	Yes
Kitchen/Living	EW-1	2700	1000	NE	4000	No
Kitchen/Living	EW-1	2700	4000	NW	2500	Yes
Bedroom 2	EW-1	2700	3045	SE	0	No
Bedroom 1	EW-1	2700	3995	SE	0	No
Glazed Common	EW-1	2700	2250	SE	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Steel Stud Frame, Direct Fix Plasterboard	64.80	No insulation
IW-002	Concrete Panel/Blocks filled, plasterboard	77.22	No Insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Kitchen/Living	Concrete Slab, Unit Below 200mm	34.53	None	No Insulation	Cork Tiles or Parquetry 8mm
Entry/Ldry	Concrete Slab, Unit Below 200mm	6.99	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 2	Concrete Slab, Unit Below 200mm	10.86	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 1	Concrete Slab, Unit Below 200mm	16.61	None	No Insulation	Cork Tiles or Parquetry 8mm
Glazed Common	Concrete Slab, Unit Below 200mm	19.05	None	No Insulation	Cork Tiles or Parquetry 8mm
ENS 1	Concrete Slab, Unit Below 200mm	5.99	None	No Insulation	Ceramic Tiles 8mm
Bath	Concrete Slab, Unit Below 200mm	4.49	None	No Insulation	Ceramic Tiles 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Entry/Ldry	Concrete, Plasterboard with Steel Frame	No insulation	

* Refer to glossary.

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Glazed Common	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Kitchen/Living	15	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Entry/Ldry	3	Downlights - LED	150	Sealed
Entry/Ldry	1	Exhaust Fans	300	Sealed
Bedroom 2	4	Downlights - LED	150	Sealed
Bedroom 1	7	Downlights - LED	150	Sealed
ENS 1	2	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	1	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
External Wall		600	0.75	No
Ceiling		900	0.75	No

* Refer to glossary.

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
Internal Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012351946

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit A 2.04, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*	
Conditioned*	79.5
Unconditioned*	0.0
Total	79.5
Garage	0.0

Exposure type
Suburban

NatHERS climate zone
56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

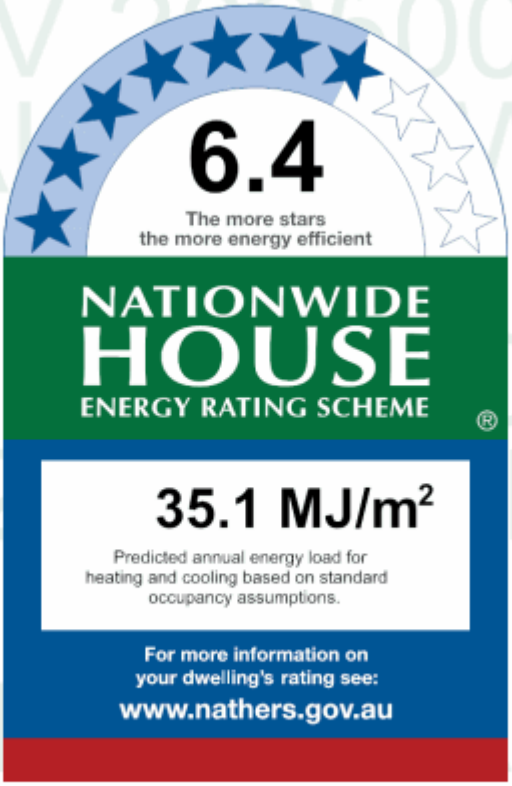

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	25.9	9.2
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=FFCuBDCEe . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Kitchen/Living	Kitchen/Living	34.53
Entry/Ldry	Daytime	6.99
Bedroom 2	Bedroom	10.86
Bedroom 1	Bedroom	16.61
Glazed Common	Glazed Common Area	19.05
ENS 1	Nighttime	5.99
Bath	Daytime	4.49

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-004-03 A	W28	2700	3600	Sliding	60	NW	No
Kitchen/Living	ALM-004-03 A	W29	2700	3050	Sliding	45	NW	No
Bedroom 2	ALM-003-03 A	W27	2130	1200	Awning	10	SE	No
Bedroom 1	ALM-003-03 A	W26	2130	1200	Awning	10	SE	No
Glazed Common	ALM-001-01 A	W25	1980	2000	Awning	70	SE	No

* Refer to glossary.

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

* Refer to glossary.

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	4000	NW	2400	Yes
Kitchen/Living	EW-1	2700	1000	SW	4000	No
Kitchen/Living	EW-1	2700	3100	NW	1400	Yes
Bedroom 2	EW-1	2700	3045	SE	0	No
Bedroom 1	EW-1	2700	3995	SE	0	No
Glazed Common	EW-1	2700	2250	SE	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Concrete Panel/Blocks filled, plasterboard	88.29	No Insulation
IW-002	Steel Stud Frame, Direct Fix Plasterboard	61.83	No insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Kitchen/Living	Concrete Slab, Unit Below 200mm	34.57	None	No Insulation	Cork Tiles or Parquetry 8mm
Entry/Ldry	Concrete Slab, Unit Below 200mm	6.99	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 2	Concrete Slab, Unit Below 200mm	10.86	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 1	Concrete Slab, Unit Below 200mm	16.61	None	No Insulation	Cork Tiles or Parquetry 8mm
Glazed Common	Concrete Slab, Unit Below 200mm	19.05	None	No Insulation	Cork Tiles or Parquetry 8mm
ENS 1	Concrete Slab, Unit Below 200mm	5.99	None	No Insulation	Ceramic Tiles 8mm
Bath	Concrete Slab, Unit Below 200mm	4.49	None	No Insulation	Ceramic Tiles 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Entry/Ldry	Concrete, Plasterboard with Steel Frame	No insulation	

* Refer to glossary.

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Glazed Common	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Kitchen/Living	15	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Entry/Ldry	3	Downlights - LED	150	Sealed
Entry/Ldry	1	Exhaust Fans	300	Sealed
Bedroom 2	4	Downlights - LED	150	Sealed
Bedroom 1	7	Downlights - LED	150	Sealed
ENS 1	2	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	1	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
External Wall		600	0.75	No
Ceiling		900	0.75	No

* Refer to glossary.

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
Internal Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

* Refer to glossary.

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012351912

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit A 2.05, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*	
Conditioned*	90.4
Unconditioned*	0.0
Total	90.4
Garage	0.0

Exposure type
Suburban

NatHERS climate zone
56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

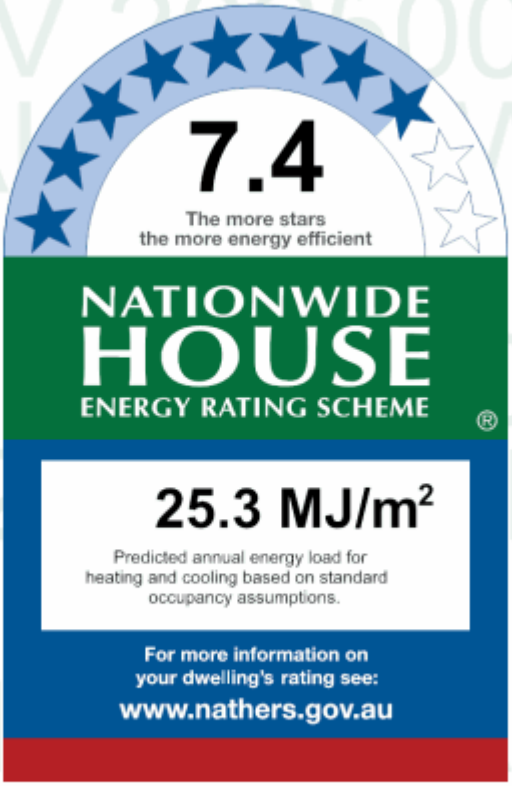

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	10.4	14.9
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=ZshwWbNrv . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Kitchen/Living	Kitchen/Living	36.83
Bedroom 1	Bedroom	12.12
ENS 1	Nighttime	6.49
Bedroom 2	Bedroom	11.2
Entry/Ldry	Daytime	11.08
Bath	Daytime	5.46
WIR 1	Nighttime	7.25

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-004-03 A	W3	2700	3900	Sliding	60	SW	No
Kitchen/Living	ALM-003-03 A	W4	2130	1000	Awning	10	NW	No
Kitchen/Living	ALM-003-03 A	W5	2130	2000	Awning	10	NW	No
Bedroom 1	ALM-004-03 A	W6	2700	3000	Sliding	45	SW	No
Bedroom 2	ALM-003-03 A	W2	2130	1200	Awning	10	NW	No

* Refer to glossary.

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

* Refer to glossary.

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	4195	SW	2100	Yes
Kitchen/Living	EW-1	2700	8595	NW	0	No
Bedroom 1	EW-1	2700	1000	NW	4200	No
Bedroom 1	EW-1	2700	3000	SW	1100	No
Bedroom 2	EW-1	2700	3795	NW	0	No
Bedroom 2	EW-1	2700	2995	NE	0	No
Entry/Ldry	EW-1	2700	395	NE	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Steel Stud Frame, Direct Fix Plasterboard	75.87	No insulation
IW-002	Concrete Panel/Blocks filled, plasterboard	35.37	No Insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Kitchen/Living	Concrete Slab, Unit Below 200mm	36.83	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 1	Concrete Slab, Unit Below 200mm	12.12	None	No Insulation	Cork Tiles or Parquetry 8mm
ENS 1	Concrete Slab, Unit Below 200mm	6.49	None	No Insulation	Ceramic Tiles 8mm
Bedroom 2	Concrete Slab, Unit Below 200mm	11.20	None	No Insulation	Cork Tiles or Parquetry 8mm
Entry/Ldry	Concrete Slab, Unit Below 200mm	11.08	None	No Insulation	Cork Tiles or Parquetry 8mm
Bath	Concrete Slab, Unit Below 200mm	5.46	None	No Insulation	Ceramic Tiles 8mm
WIR 1	Concrete Slab, Unit Below 200mm	7.25	None	No Insulation	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	

* Refer to glossary.

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
Entry/Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	
WIR 1	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Kitchen/Living	15	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Bedroom 1	5	Downlights - LED	150	Sealed
ENS 1	2	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bedroom 2	4	Downlights - LED	150	Sealed
Entry/Ldry	4	Downlights - LED	150	Sealed
Entry/Ldry	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
WIR 1	2	Downlights - LED	150	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
External Wall		600	0.75	No
Ceiling		900	0.75	No
Internal Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352001

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit A 2.06, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*	
Conditioned*	123.5
Unconditioned*	0.0
Total	123.5
Garage	0.0

Exposure type
Suburban

NatHERS climate zone
56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	18.9	10.0
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=JzzXbTdSY . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Ldry	Daytime	4.58
Entry	Daytime	21.37
Kitchen/Living	Kitchen/Living	44.54
Bedroom 1	Bedroom	17.17
Bedroom 2	Bedroom	12.59
ENS 1	Nighttime	7.06
Bath	Daytime	4.89
Bedroom 3	Bedroom	11.27

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-003-03 A	W9	2130	1000	Awning	10	SE	No
Kitchen/Living	ALM-003-03 A	W11	2130	1200	Awning	10	SE	No
Kitchen/Living	ALM-004-03 A	W1	2700	3050	Sliding	45	SW	No
Kitchen/Living	ALM-004-03 A	W10	2700	3900	Sliding	60	SW	No
Bedroom 1	ALM-003-03 A	W8	950	1200	Awning	10	SE	No
Bedroom 1	ALM-003-03 A	W4	2130	1150	Awning	10	SW	No
Bedroom 2	ALM-003-03 A	W5	2130	1150	Awning	10	NE	No

* Refer to glossary.

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Bedroom 2	ALM-003-03 A	W7	950	1200	Awning	10	SE	No
Bedroom 3	ALM-003-03 A	W12	2130	1200	Awning	10	SE	No

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	6895	SE	0	No
Kitchen/Living	EW-1	2700	3100	SW	1400	Yes
Kitchen/Living	EW-1	2700	1200	NW	4100	No
Kitchen/Living	EW-1	2700	4100	SW	2600	Yes
Kitchen/Living	EW-1	2700	2200	NW	700	No
Bedroom 1	EW-1	2700	3095	SE	0	No
Bedroom 1	EW-1	2700	1500	SW	0	Yes
Bedroom 1	EW-1	2700	595	SE	0	No
Bedroom 2	EW-1	2700	1500	NE	0	Yes
Bedroom 2	EW-1	2700	3195	SE	0	No
Bedroom 3	EW-1	2700	3095	SE	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Concrete Panel/Blocks filled, plasterboard	52.65	No Insulation
IW-002	Steel Stud Frame, Direct Fix Plasterboard	115.83	No insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Ldry	Concrete Slab, Unit Below 200mm	4.58	None	No Insulation	Ceramic Tiles 8mm
Entry	Concrete Slab, Unit Below 200mm	21.37	None	No Insulation	Cork Tiles or Parquetry 8mm
Kitchen/Living	Concrete Slab, Unit Below 200mm	44.54	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 1	Concrete Slab, Unit Below 200mm	17.17	None	No Insulation	Cork Tiles or Parquetry 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Bedroom 2	Concrete Slab, Unit Below 200mm	12.59	None	No Insulation	Cork Tiles or Parquetry 8mm
ENS 1	Concrete Slab, Unit Below 200mm	7.06	None	No Insulation	Ceramic Tiles 8mm
Bath	Concrete Slab, Unit Below 200mm	4.89	None	No Insulation	Ceramic Tiles 8mm
Bedroom 3	Concrete Slab, Unit Below 200mm	11.27	None	No Insulation	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
Entry	Concrete, Plasterboard with Steel Frame	No insulation	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 3	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Ldry	1	Downlights - LED	150	Sealed
Ldry	1	Exhaust Fans	300	Sealed
Entry	8	Downlights - LED	150	Sealed
Kitchen/Living	20	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Bedroom 1	7	Downlights - LED	150	Sealed
Bedroom 2	5	Downlights - LED	150	Sealed
ENS 1	3	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
Bedroom 3	4	Downlights - LED	150	Sealed

* Refer to glossary.

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
Ceiling		900	0.75	No
Internal Wall		600	0.75	No
External Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

* Refer to glossary.

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012351870

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit A 3.01, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*

Conditioned*	136.6
Unconditioned*	0.0
Total	136.6
Garage	0.0

Exposure type

Open

NatHERS climate zone

56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

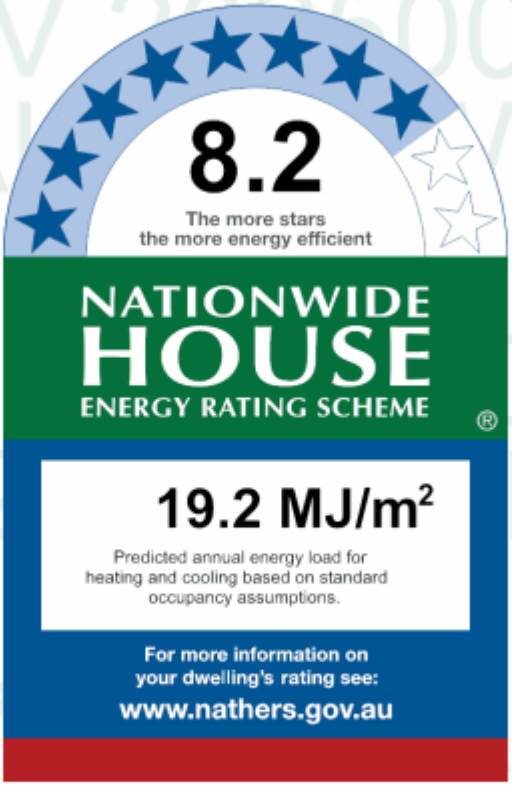

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	12.5	6.7
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=CaLDSzBFc . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Ldry	Daytime	4.34
Entry	Daytime	19.39
Kitchen/Living	Kitchen/Living	49.29
Bedroom 1	Bedroom	14.62
Bedroom 2	Bedroom	12.64
ENS 1	Nighttime	7.06
Bath	Daytime	5.32
Bedroom 3	Bedroom	11.27
WC	Daytime	2.53
WIR 1	Nighttime	4.98
Pantry	Daytime	5.17

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-003-03 A	W18	2130	1000	Awning	10	NW	Yes
Kitchen/Living	ALM-003-03 A	W14	2130	800	Awning	10	NE	No
Kitchen/Living	ALM-004-03 A	W10	2700	3900	Sliding	60	NE	No
Kitchen/Living	ALM-004-03 A	W13	2700	2600	Sliding	45	NE	No

* Refer to glossary.

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Bedroom 1	ALM-003-03 A	W17	950	1150	Awning	10	NW	No
Bedroom 1	ALM-003-03 A	W4	2130	1150	Awning	10	NE	No
Bedroom 2	ALM-003-03 A	W5	2130	1150	Awning	10	SW	No
Bedroom 2	ALM-003-03 A	W16	950	1150	Awning	10	NW	No
Bedroom 3	ALM-003-03 A	W19	2130	1150	Awning	10	NW	Yes

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

* Refer to glossary.

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	1295	NW	0	No
Kitchen/Living	EW-1	2700	3384	W	0	No
Kitchen/Living	EW-1	2700	1100	NE	0	Yes
Kitchen/Living	EW-1	2700	1200	NW	0	No
Kitchen/Living	EW-1	2700	7200	NE	2700	Yes
Bedroom 1	EW-1	2700	3095	NW	0	No
Bedroom 1	EW-1	2700	1500	NE	6275	Yes
Bedroom 2	EW-1	2700	1500	SW	0	Yes
Bedroom 2	EW-1	2700	3195	NW	0	No
Bedroom 3	EW-1	2700	3400	SW	0	No
Bedroom 3	EW-1	2700	3095	NW	0	No
Pantry	EW-1	2700	2790	NW	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Concrete Panel/Blocks filled, plasterboard	55.62	No Insulation
IW-002	Steel Stud Frame, Direct Fix Plasterboard	149.31	No insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Ldry	Concrete Slab, Unit Below 200mm	4.34	None	No Insulation	Ceramic Tiles 8mm
Entry	Concrete Slab, Unit Below 200mm	19.39	None	No Insulation	Cork Tiles or Parquetry 8mm
Kitchen/Living	Concrete Slab, Unit Below 200mm	49.29	None	No Insulation	Cork Tiles or Parquetry 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Bedroom 1	Concrete Slab, Unit Below 200mm	14.62	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 2	Concrete Slab, Unit Below 200mm	12.64	None	No Insulation	Cork Tiles or Parquetry 8mm
ENS 1	Concrete Slab, Unit Below 200mm	7.06	None	No Insulation	Ceramic Tiles 8mm
Bath	Concrete Slab, Unit Below 200mm	5.32	None	No Insulation	Ceramic Tiles 8mm
Bedroom 3	Concrete Slab, Unit Below 200mm	11.27	None	No Insulation	Cork Tiles or Parquetry 8mm
WC	Concrete Slab, Unit Below 200mm	2.53	None	No Insulation	Ceramic Tiles 8mm
WIR 1	Concrete Slab, Unit Below 200mm	4.98	None	No Insulation	Cork Tiles or Parquetry 8mm
Pantry	Concrete Slab, Unit Below 200mm	5.17	None	No Insulation	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
Entry	Concrete, Plasterboard with Steel Frame	No insulation	
Entry	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Bedroom 2	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 3	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 3	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
WC	Concrete, Plasterboard with Steel Frame	No insulation	
WIR 1	Concrete, Plasterboard with Steel Frame	No insulation	
WIR 1	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Pantry	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	

* Refer to glossary.

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Ldry	1	Downlights - LED	150	Sealed
Ldry	1	Exhaust Fans	300	Sealed
Entry	8	Downlights - LED	150	Sealed
Kitchen/Living	19	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Bedroom 1	6	Downlights - LED	150	Sealed
Bedroom 2	5	Downlights - LED	150	Sealed
ENS 1	2	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
Bedroom 3	5	Downlights - LED	150	Sealed
WC	1	Downlights - LED	150	Sealed
WC	1	Exhaust Fans	300	Sealed
WIR 1	2	Downlights - LED	150	Sealed
Pantry	2	Downlights - LED	150	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
Waterproofing Membrane	No Added Insulation, No air Gap	0.30	Light

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
Ceiling		900	0.75	No
Internal Wall		600	0.75	No

* Refer to glossary.

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
External Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012351896

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit A 3.02, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*	
Conditioned*	135.9
Unconditioned*	0.0
Total	135.9
Garage	0.0

Exposure type
Suburban

NatHERS climate zone
56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	8.1	10.0
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=oCSILdwlp . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Ldry	Daytime	4.5
Entry	Daytime	19.22
Kitchen/Living	Kitchen/Living	48.57
Bedroom 1	Bedroom	14.62
Bedroom 2	Bedroom	12.64
ENS 1	Nighttime	7.06
Bath	Daytime	5.32
Bedroom 3	Bedroom	11.27
WC	Daytime	2.53
WIR 1	Nighttime	4.98
Pantry	Daytime	5.17

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-004-03 A	W23	2700	3900	Sliding	60	NE	No
Kitchen/Living	ALM-004-03 A	W24	2700	2600	Sliding	45	NE	No
Kitchen/Living	ALM-003-03 A	W25	2130	800	Awning	10	NE	No
Kitchen/Living	ALM-003-03 A	W20	1930	1000	Awning	10	SE	No

* Refer to glossary.

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Bedroom 1	ALM-003-03 A	W27	2130	1150	Awning	10	NE	No
Bedroom 1	ALM-003-03 A	W21	950	1200	Awning	10	SE	No
Bedroom 2	ALM-003-03 A	W22	950	1200	Awning	10	SE	No
Bedroom 2	ALM-003-03 A	W26	2130	1150	Awning	10	SW	No
Bedroom 3	ALM-003-03 A	W19	2130	1200	Awning	10	SE	No

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

* Refer to glossary.

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	7200	NE	2800	Yes
Kitchen/Living	EW-1	2700	1100	SE	0	No
Kitchen/Living	EW-1	2700	1100	NE	0	Yes
Kitchen/Living	EW-1	2700	3384	SE	0	No
Kitchen/Living	EW-1	2700	1295	SE	0	No
Bedroom 1	EW-1	2700	1500	NE	6275	Yes
Bedroom 1	EW-1	2700	3095	SE	0	No
Bedroom 2	EW-1	2700	3195	SE	0	No
Bedroom 2	EW-1	2700	1500	SW	0	Yes
Bedroom 3	EW-1	2700	3095	SE	0	No
Pantry	EW-1	2700	2790	SE	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Steel Stud Frame, Direct Fix Plasterboard	154.44	No insulation
IW-002	Concrete Panel/Blocks filled, plasterboard	64.53	No Insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Ldry	Concrete Slab, Unit Below 200mm	4.50	None	No Insulation	Ceramic Tiles 8mm
Entry	Concrete Slab, Unit Below 200mm	19.22	None	No Insulation	Cork Tiles or Parquetry 8mm
Kitchen/Living	Concrete Slab, Unit Below 200mm	48.57	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 1	Concrete Slab, Unit Below 200mm	14.62	None	No Insulation	Cork Tiles or Parquetry 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Bedroom 2	Concrete Slab, Unit Below 200mm	12.64	None	No Insulation	Cork Tiles or Parquetry 8mm
ENS 1	Concrete Slab, Unit Below 200mm	7.06	None	No Insulation	Ceramic Tiles 8mm
Bath	Concrete Slab, Unit Below 200mm	5.32	None	No Insulation	Ceramic Tiles 8mm
Bedroom 3	Concrete Slab, Unit Below 200mm	11.27	None	No Insulation	Cork Tiles or Parquetry 8mm
WC	Concrete Slab, Unit Below 200mm	2.53	None	No Insulation	Ceramic Tiles 8mm
WIR 1	Concrete Slab, Unit Below 200mm	4.98	None	No Insulation	Cork Tiles or Parquetry 8mm
Pantry	Concrete Slab, Unit Below 200mm	5.17	None	No Insulation	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
Entry	Concrete, Plasterboard with Steel Frame	No insulation	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 3	Concrete, Plasterboard with Steel Frame	No insulation	
WC	Concrete, Plasterboard with Steel Frame	No insulation	
WIR 1	Concrete, Plasterboard with Steel Frame	No insulation	
Pantry	Concrete, Plasterboard with Steel Frame	No insulation	
Pantry	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Ldry	1	Downlights - LED	150	Sealed

* Refer to glossary.

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Ldry	1	Exhaust Fans	300	Sealed
Entry	7	Downlights - LED	150	Sealed
Kitchen/Living	19	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Bedroom 1	6	Downlights - LED	150	Sealed
Bedroom 2	5	Downlights - LED	150	Sealed
ENS 1	2	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
Bedroom 3	5	Downlights - LED	150	Sealed
WC	1	Downlights - LED	150	Sealed
WC	1	Exhaust Fans	300	Sealed
WIR 1	2	Downlights - LED	150	Sealed
Pantry	2	Downlights - LED	150	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
Ceiling		900	0.75	No
Internal Wall		600	0.75	No
External Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352225

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit A 3.03, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*	
Conditioned*	79.5
Unconditioned*	0.0
Total	79.5
Garage	0.0

Exposure type
Suburban

NatHERS climate zone
56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

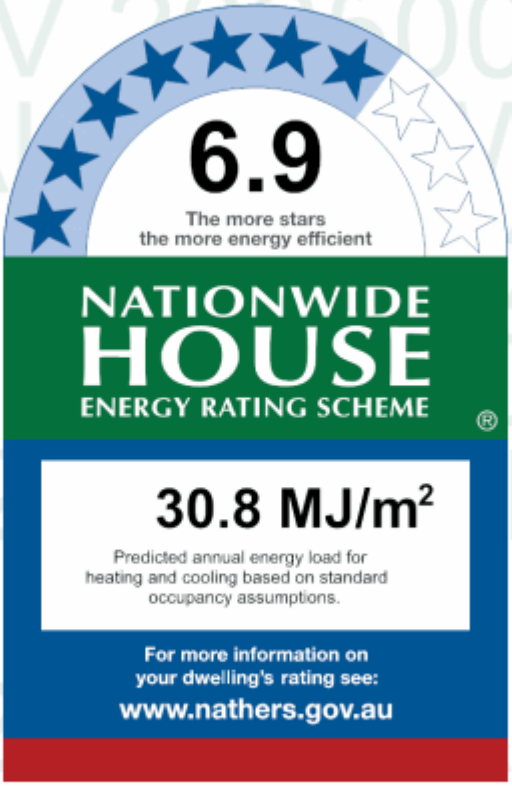

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	19.1	11.7
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=FyoUlkGiy . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Kitchen/Living	Kitchen/Living	34.53
Entry/Ldry	Daytime	6.99
Bedroom 2	Bedroom	10.86
Bedroom 1	Bedroom	16.61
Glazed Common	Glazed Common Area	19.05
ENS 1	Nighttime	5.99
Bath	Daytime	4.49

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-004-03 A	W24	2700	3050	Sliding	45	NW	No
Kitchen/Living	ALM-004-03 A	W23	2700	3600	Sliding	60	NW	No
Bedroom 2	ALM-003-03 A	W22	2130	1200	Awning	10	SE	No
Bedroom 1	ALM-003-03 A	W21	2130	1200	Awning	10	SE	No
Glazed Common	ALM-001-01 A	W19	1980	2000	Awning	70	SE	No

* Refer to glossary.

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

* Refer to glossary.

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	3100	NW	1500	Yes
Kitchen/Living	EW-1	2700	1000	NE	4000	No
Kitchen/Living	EW-1	2700	4000	NW	2500	Yes
Bedroom 2	EW-1	2700	3045	SE	0	No
Bedroom 1	EW-1	2700	3995	SE	0	No
Glazed Common	EW-1	2700	2250	SE	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Steel Stud Frame, Direct Fix Plasterboard	64.80	No insulation
IW-002	Concrete Panel/Blocks filled, plasterboard	77.22	No Insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Kitchen/Living	Concrete Slab, Unit Below 200mm	34.53	None	No Insulation	Cork Tiles or Parquetry 8mm
Entry/Ldry	Concrete Slab, Unit Below 200mm	6.99	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 2	Concrete Slab, Unit Below 200mm	10.86	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 1	Concrete Slab, Unit Below 200mm	16.61	None	No Insulation	Cork Tiles or Parquetry 8mm
Glazed Common	Concrete Slab, Unit Below 200mm	19.05	None	No Insulation	Cork Tiles or Parquetry 8mm
ENS 1	Concrete Slab, Unit Below 200mm	5.99	None	No Insulation	Ceramic Tiles 8mm
Bath	Concrete Slab, Unit Below 200mm	4.49	None	No Insulation	Ceramic Tiles 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	

* Refer to glossary.

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Entry/Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Glazed Common	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Kitchen/Living	15	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Entry/Ldry	3	Downlights - LED	150	Sealed
Entry/Ldry	1	Exhaust Fans	300	Sealed
Bedroom 2	4	Downlights - LED	150	Sealed
Bedroom 1	7	Downlights - LED	150	Sealed
ENS 1	2	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	1	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
External Wall		600	0.75	No

* Refer to glossary.

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
Ceiling		900	0.75	No
Internal Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

* Refer to glossary.

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352217

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit A 3.04, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*	
Conditioned*	79.5
Unconditioned*	0.0
Total	79.5
Garage	0.0

Exposure type
Suburban

NatHERS climate zone
56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

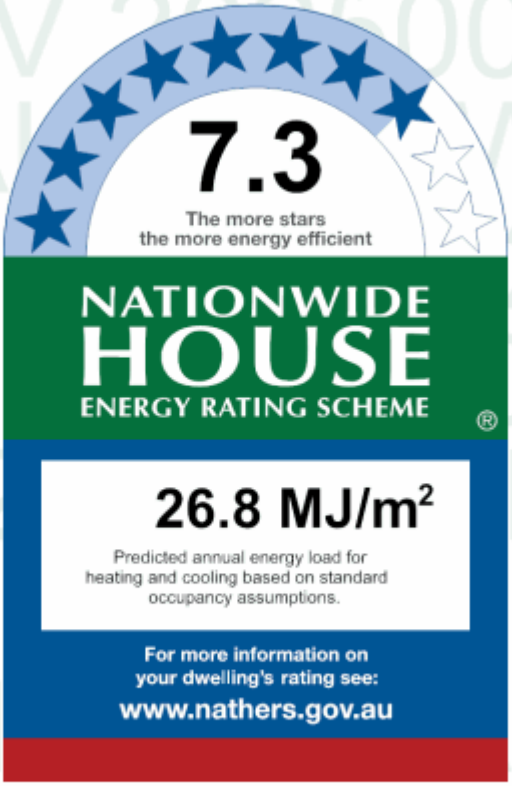

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	15.8	11.0
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=nplQUnCGX . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Kitchen/Living	Kitchen/Living	34.53
Entry/Ldry	Daytime	6.99
Bedroom 2	Bedroom	10.86
Bedroom 1	Bedroom	16.61
Glazed Common	Glazed Common Area	19.05
ENS 1	Nighttime	5.99
Bath	Daytime	4.49

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-004-03 A	W28	2700	3600	Sliding	60	NW	No
Kitchen/Living	ALM-004-03 A	W29	2700	3050	Sliding	45	NW	No
Bedroom 2	ALM-003-03 A	W27	2130	1200	Awning	10	SE	No
Bedroom 1	ALM-003-03 A	W26	2130	1200	Awning	10	SE	No
Glazed Common	ALM-001-01 A	W25	1980	2000	Awning	10	SE	No

* Refer to glossary.

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

* Refer to glossary.

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	4000	NW	2400	Yes
Kitchen/Living	EW-1	2700	1000	SW	4000	No
Kitchen/Living	EW-1	2700	3100	NW	1400	Yes
Bedroom 2	EW-1	2700	3045	SE	0	No
Bedroom 1	EW-1	2700	3995	SE	0	No
Glazed Common	EW-1	2700	2250	SE	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Concrete Panel/Blocks filled, plasterboard	88.29	No Insulation
IW-002	Steel Stud Frame, Direct Fix Plasterboard	61.83	No insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Kitchen/Living	Concrete Slab, Unit Below 200mm	34.57	None	No Insulation	Cork Tiles or Parquetry 8mm
Entry/Ldry	Concrete Slab, Unit Below 200mm	6.99	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 2	Concrete Slab, Unit Below 200mm	10.86	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 1	Concrete Slab, Unit Below 200mm	16.61	None	No Insulation	Cork Tiles or Parquetry 8mm
Glazed Common	Concrete Slab, Unit Below 200mm	19.05	None	No Insulation	Cork Tiles or Parquetry 8mm
ENS 1	Concrete Slab, Unit Below 200mm	5.99	None	No Insulation	Ceramic Tiles 8mm
Bath	Concrete Slab, Unit Below 200mm	4.49	None	No Insulation	Ceramic Tiles 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	

* Refer to glossary.

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Entry/Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Glazed Common	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Kitchen/Living	15	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Entry/Ldry	3	Downlights - LED	150	Sealed
Entry/Ldry	1	Exhaust Fans	300	Sealed
Bedroom 2	4	Downlights - LED	150	Sealed
Bedroom 1	7	Downlights - LED	150	Sealed
ENS 1	2	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	1	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
External Wall		600	0.75	No

* Refer to glossary.

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
Ceiling		900	0.75	No
Internal Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

* Refer to glossary.

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352191

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit A 3.05, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*	
Conditioned*	90.4
Unconditioned*	0.0
Total	90.4
Garage	0.0

Exposure type
Open

NatHERS climate zone
56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

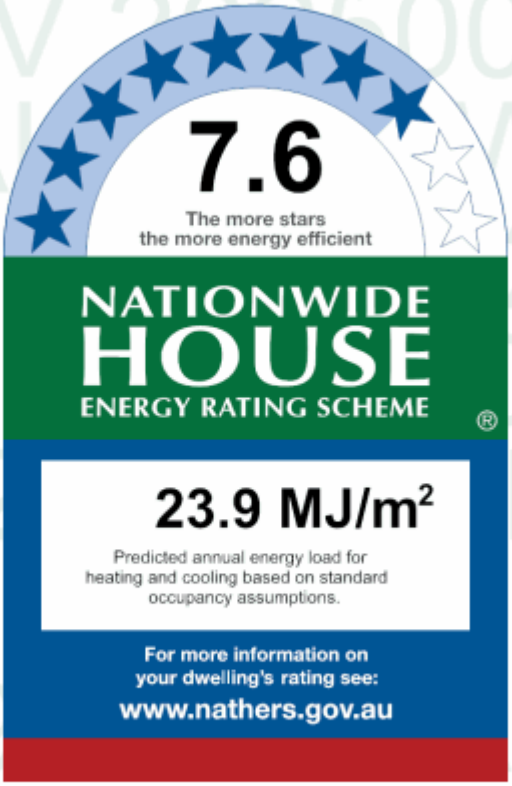

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	12.4	11.5
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=DziDmUlwM . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Kitchen/Living	Kitchen/Living	36.83
Bedroom 1	Bedroom	12.12
ENS 1	Nighttime	6.49
Bedroom 2	Bedroom	11.2
Entry/Ldry	Daytime	11.08
Bath	Daytime	5.46
WIR 1	Nighttime	7.25

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-004-03 A	W3	2700	3900	Sliding	60	SW	No
Kitchen/Living	ALM-003-03 A	W4	2130	1000	Awning	10	NW	No
Kitchen/Living	ALM-003-03 A	W5	2130	2000	Awning	10	NW	No
Bedroom 1	ALM-004-03 A	W6	2700	3000	Sliding	45	SW	No
Bedroom 2	ALM-003-03 A	W2	2130	1200	Awning	10	NW	No

* Refer to glossary.

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

* Refer to glossary.

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	4195	SW	2100	Yes
Kitchen/Living	EW-1	2700	8595	NW	0	No
Bedroom 1	EW-1	2700	1000	NW	4200	No
Bedroom 1	EW-1	2700	3000	SW	1100	No
Bedroom 2	EW-1	2700	3795	NW	0	No
Bedroom 2	EW-1	2700	2995	NE	0	No
Entry/Ldry	EW-1	2700	395	NE	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Steel Stud Frame, Direct Fix Plasterboard	75.87	No insulation
IW-002	Concrete Panel/Blocks filled, plasterboard	35.37	No Insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Kitchen/Living	Concrete Slab, Unit Below 200mm	36.83	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 1	Concrete Slab, Unit Below 200mm	12.12	None	No Insulation	Cork Tiles or Parquetry 8mm
ENS 1	Concrete Slab, Unit Below 200mm	6.49	None	No Insulation	Ceramic Tiles 8mm
Bedroom 2	Concrete Slab, Unit Below 200mm	11.20	None	No Insulation	Cork Tiles or Parquetry 8mm
Entry/Ldry	Concrete Slab, Unit Below 200mm	11.08	None	No Insulation	Cork Tiles or Parquetry 8mm
Bath	Concrete Slab, Unit Below 200mm	5.46	None	No Insulation	Ceramic Tiles 8mm
WIR 1	Concrete Slab, Unit Below 200mm	7.25	None	No Insulation	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	

* Refer to glossary.

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
Entry/Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	
WIR 1	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Kitchen/Living	15	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Bedroom 1	5	Downlights - LED	150	Sealed
ENS 1	2	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bedroom 2	4	Downlights - LED	150	Sealed
Entry/Ldry	4	Downlights - LED	150	Sealed
Entry/Ldry	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
WIR 1	2	Downlights - LED	150	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
External Wall		600	0.75	No
Ceiling		900	0.75	No
Internal Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012351904

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit A 3.06, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*

Conditioned*	123.5
Unconditioned*	0.0
Total	123.5
Garage	0.0

Exposure type

Open

NatHERS climate zone

56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

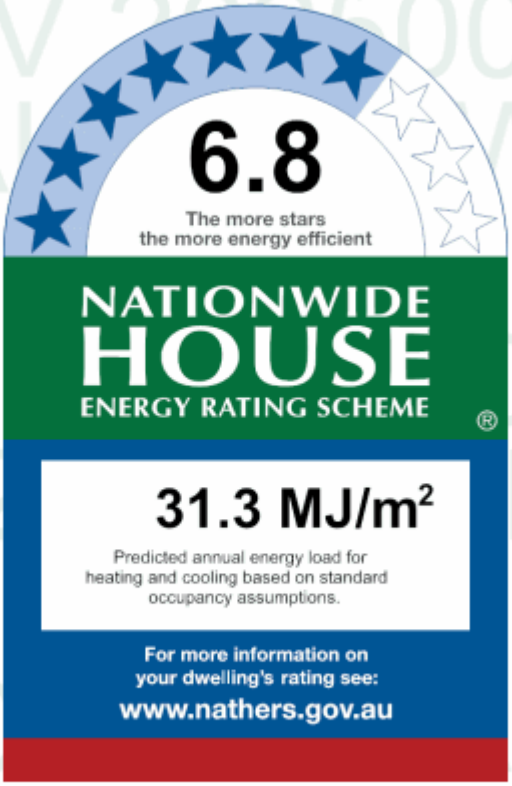

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	23.5	7.8
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=NmhaokZLi . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Ldry	Daytime	4.58
Entry	Daytime	21.37
Kitchen/Living	Kitchen/Living	44.54
Bedroom 1	Bedroom	17.17
Bedroom 2	Bedroom	12.59
ENS 1	Nighttime	7.06
Bath	Daytime	4.89
Bedroom 3	Bedroom	11.27

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-003-03 A	W9	1980	1000	Awning	10	SE	No
Kitchen/Living	ALM-003-03 A	W11	1980	1200	Awning	10	SE	No
Kitchen/Living	ALM-004-03 A	W1	2700	3050	Sliding	45	SW	No
Kitchen/Living	ALM-004-03 A	W10	2700	3900	Sliding	60	SW	No
Bedroom 1	ALM-003-03 A	W8	950	1200	Awning	10	SE	No
Bedroom 1	ALM-003-03 A	W4	1980	1150	Awning	10	SW	No
Bedroom 2	ALM-003-03 A	W5	1980	1150	Awning	10	NE	No

* Refer to glossary.

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Bedroom 2	ALM-003-03 A	W7	950	1200	Awning	10	SE	No
Bedroom 3	ALM-003-03 A	W12	1980	1200	Awning	10	SE	No

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

* Refer to glossary.

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	6895	SE	0	No
Kitchen/Living	EW-1	2700	3100	SW	1400	Yes
Kitchen/Living	EW-1	2700	1200	NW	4100	No
Kitchen/Living	EW-1	2700	4100	SW	2600	Yes
Kitchen/Living	EW-1	2700	2200	NW	700	No
Bedroom 1	EW-1	2700	3095	SE	0	No
Bedroom 1	EW-1	2700	1500	SW	0	Yes
Bedroom 1	EW-1	2700	595	SE	0	No
Bedroom 2	EW-1	2700	1500	NE	0	Yes
Bedroom 2	EW-1	2700	3195	SE	0	No
Bedroom 3	EW-1	2700	3095	SE	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Concrete Panel/Blocks filled, plasterboard	52.65	No Insulation
IW-002	Steel Stud Frame, Direct Fix Plasterboard	115.83	No insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Ldry	Concrete Slab, Unit Below 200mm	4.58	None	No Insulation	Ceramic Tiles 8mm
Entry	Concrete Slab, Unit Below 200mm	21.37	None	No Insulation	Cork Tiles or Parquetry 8mm
Kitchen/Living	Concrete Slab, Unit Below 200mm	44.54	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 1	Concrete Slab, Unit Below 200mm	17.17	None	No Insulation	Cork Tiles or Parquetry 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Bedroom 2	Concrete Slab, Unit Below 200mm	12.59	None	No Insulation	Cork Tiles or Parquetry 8mm
ENS 1	Concrete Slab, Unit Below 200mm	7.06	None	No Insulation	Ceramic Tiles 8mm
Bath	Concrete Slab, Unit Below 200mm	4.89	None	No Insulation	Ceramic Tiles 8mm
Bedroom 3	Concrete Slab, Unit Below 200mm	11.27	None	No Insulation	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
Entry	Concrete, Plasterboard with Steel Frame	No insulation	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 3	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Ldry	1	Downlights - LED	150	Sealed
Ldry	1	Exhaust Fans	300	Sealed
Entry	8	Downlights - LED	150	Sealed
Kitchen/Living	20	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Bedroom 1	7	Downlights - LED	150	Sealed
Bedroom 2	5	Downlights - LED	150	Sealed
ENS 1	3	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
Bedroom 3	4	Downlights - LED	150	Sealed

* Refer to glossary.

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
Ceiling		900	0.75	No
Internal Wall		600	0.75	No
External Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

* Refer to glossary.

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352183

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit A 4.01, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*

Conditioned*	171.0
Unconditioned*	0.0
Total	171.0
Garage	0.0

Exposure type

Open

NatHERS climate zone

56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	5.3	11.9
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=vfOZtpaHG . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
ENS 1	Nighttime	10.6
WIR 1	Nighttime	11.16
Bedroom 1	Bedroom	15.19
Kitchen/Living	Kitchen/Living	64.97
Bedroom 2	Bedroom	13.53
ENS 2	Nighttime	4.73
Bath	Daytime	5.12
Ldry	Daytime	3.08
WC	Daytime	2.55
Pantry	Daytime	3.81
Bedroom 3	Bedroom	12.93
Entry	Daytime	19.8
WIR	Nighttime	3.51

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Bedroom 1	ALM-003-03 A	W7	1980	1700	Awning	10	NE	No
Kitchen/Living	ALM-003-03 A	W11	1980	1700	Awning	10	NW	No

* Refer to glossary.

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-003-03 A	W12	1980	1200	Awning	10	NW	No
Kitchen/Living	ALM-004-03 A	W9	2700	4700	Sliding	60	NE	No
Kitchen/Living	ALM-004-03 A	W10	2700	4100	Sliding	60	NE	No
Bedroom 2	ALM-003-03 A	W14	1980	1700	Awning	10	NW	No
Bedroom 3	ALM-003-03 A	W13	1980	1700	Awning	10	NW	No

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

* Refer to glossary.

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
ENS 1	EW-1	2700	3595	SE	0	No
WIR 1	EW-1	2700	3090	SE	0	No
Bedroom 1	EW-1	2700	2000	NE	0	No
Bedroom 1	EW-1	2700	4195	SE	0	No
Kitchen/Living	EW-1	2700	7195	NW	0	No
Kitchen/Living	EW-1	2700	9700	NE	2300	Yes
Kitchen/Living	EW-1	2700	4895	SE	0	No
Bedroom 2	EW-1	2700	3390	NW	0	No
ENS 2	EW-1	2700	700	SW	0	No
ENS 2	EW-1	2700	1795	NW	0	No
Bedroom 3	EW-1	2700	3390	NW	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Steel Stud Frame, Direct Fix Plasterboard	176.09	No insulation
IW-002	Concrete Panel/Blocks filled, plasterboard	21.60	No Insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
ENS 1	Concrete Slab, Unit Below 200mm	10.60	None	No Insulation	Ceramic Tiles 8mm
WIR 1	Concrete Slab, Unit Below 200mm	11.16	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 1	Concrete Slab, Unit Below 200mm	15.19	None	No Insulation	Cork Tiles or Parquetry 8mm
Kitchen/Living	Concrete Slab, Unit Below 200mm	64.97	None	No Insulation	Cork Tiles or Parquetry 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Bedroom 2	Concrete Slab, Unit Below 200mm	13.53	None	No Insulation	Cork Tiles or Parquetry 8mm
ENS 2	Concrete Slab, Unit Below 200mm	4.73	None	No Insulation	Ceramic Tiles 8mm
Bath	Concrete Slab, Unit Below 200mm	5.12	None	No Insulation	Ceramic Tiles 8mm
Ldry	Concrete Slab, Unit Below 200mm	3.08	None	No Insulation	Ceramic Tiles 8mm
WC	Concrete Slab, Unit Below 200mm	2.55	None	No Insulation	Ceramic Tiles 8mm
Pantry	Concrete Slab, Unit Below 200mm	3.81	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 3	Concrete Slab, Unit Below 200mm	12.93	None	No Insulation	Cork Tiles or Parquetry 8mm
Entry	Concrete Slab, Unit Below 200mm	19.80	None	No Insulation	Cork Tiles or Parquetry 8mm
WIR	Concrete Slab, Unit Below 200mm	3.51	None	No Insulation	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
WIR 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 2	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	
Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
WC	Concrete, Plasterboard with Steel Frame	No insulation	
Pantry	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 3	Concrete, Plasterboard with Steel Frame	No insulation	
Entry	Concrete, Plasterboard with Steel Frame	No insulation	
WIR	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
ENS 1	4	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
WIR 1	4	Downlights - LED	150	Sealed
Bedroom 1	6	Downlights - LED	150	Sealed
Kitchen/Living	26	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Bedroom 2	5	Downlights - LED	150	Sealed
ENS 2	1	Downlights - LED	150	Sealed
ENS 2	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
Ldry	1	Downlights - LED	150	Sealed
Ldry	1	Exhaust Fans	300	Sealed
WC	1	Downlights - LED	150	Sealed
WC	1	Exhaust Fans	300	Sealed
Pantry	1	Downlights - LED	150	Sealed
Bedroom 3	5	Downlights - LED	150	Sealed
Entry	8	Downlights - LED	150	Sealed
WIR	1	Downlights - LED	150	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

* Refer to glossary.

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
External Wall		600	0.75	No
Ceiling		900	0.75	No
Internal Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352175

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit A 4.02, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*

Conditioned*	125.3
Unconditioned*	0.0
Total	125.3
Garage	0.0

Exposure type

Open

NatHERS climate zone

56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

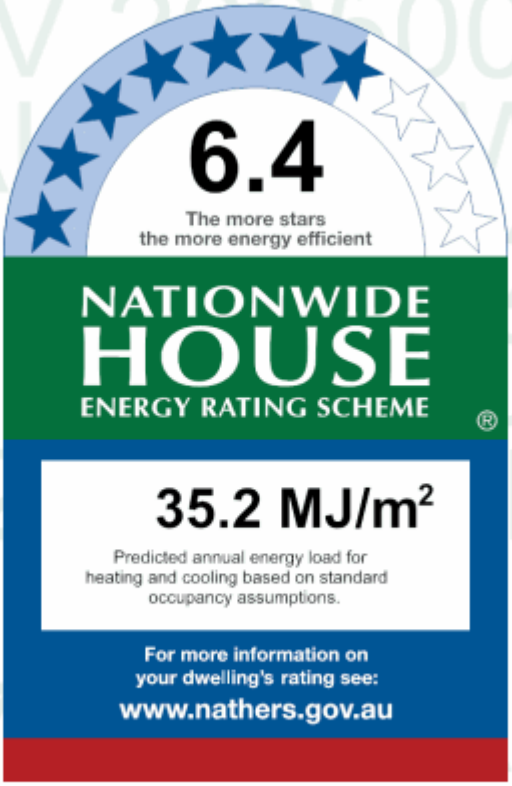

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	20.7	14.5
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=WuzkRjyhN . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Entry	Daytime	9.27
Bedroom 1	Bedroom	11.32
ENS 1	Nighttime	9.72
WIR 1	Nighttime	4.84
Kitchen/Living	Kitchen/Living	49.88
Bedroom 2	Bedroom	13.56
Bedroom 3	Bedroom	11.18
Bath	Daytime	4.91
Pantry	Daytime	6.91
Glazed Common 2	Glazed Common Area	15.05
Ldry	Daytime	3.76

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Bedroom 1	ALM-004-03 A	W32	2700	3000	Sliding	45	NW	No
Kitchen/Living	ALM-004-03 A	W27	2700	3800	Sliding	60	NW	No
Kitchen/Living	ALM-004-03 A	W28	2700	3800	Sliding	60	NW	No
Bedroom 2	ALM-004-03 A	W29	2700	3200	Sliding	45	NW	No

* Refer to glossary.

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Bedroom 3	ALM-003-03 A	W31	1980	1200	Awning	10	SE	Yes
Glazed Common 2	ALM-001-01 A	W30	1980	2000	Awning	10	SE	No

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

* Refer to glossary.

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Bedroom 1	EW-1	2700	3195	NW	2900	No
ENS 1	EW-1	2700	3195	SE	0	No
Kitchen/Living	EW-1	2700	7890	NW	2900	No
Bedroom 2	EW-1	2700	3395	NW	2900	No
Bedroom 3	EW-1	2700	4045	SE	0	No
Bath	EW-1	2700	2990	SE	0	No
Pantry	EW-1	2700	4190	SE	0	No
Glazed Common 2	EW-1	2700	2150	SE	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Steel Stud Frame, Direct Fix Plasterboard	123.66	No insulation
IW-002	Concrete Panel/Blocks filled, plasterboard	68.31	No Insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Entry	Concrete Slab, Unit Below 200mm	9.27	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 1	Concrete Slab, Unit Below 200mm	11.32	None	No Insulation	Cork Tiles or Parquetry 8mm
ENS 1	Concrete Slab, Unit Below 200mm	9.72	None	No Insulation	Ceramic Tiles 8mm
WIR 1	Concrete Slab, Unit Below 200mm	4.84	None	No Insulation	Cork Tiles or Parquetry 8mm
Kitchen/Living	Concrete Slab, Unit Below 200mm	49.88	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 2	Concrete Slab, Unit Below 200mm	13.56	None	No Insulation	Cork Tiles or Parquetry 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Bedroom 3	Concrete Slab, Unit Below 200mm	11.18	None	No Insulation	Cork Tiles or Parquetry 8mm
Bath	Concrete Slab, Unit Below 200mm	4.91	None	No Insulation	Ceramic Tiles 8mm
Pantry	Concrete Slab, Unit Below 200mm	6.91	None	No Insulation	Cork Tiles or Parquetry 8mm
Glazed Common 2	Concrete Slab, Unit Below 200mm	15.05	None	No Insulation	Cork Tiles or Parquetry 8mm
Ldry	Concrete Slab, Unit Below 200mm	3.76	None	No Insulation	Ceramic Tiles 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Entry	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
WIR 1	Concrete, Plasterboard with Steel Frame	No insulation	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 3	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	
Pantry	Concrete, Plasterboard with Steel Frame	No insulation	
Glazed Common 2	Concrete, Plasterboard with Steel Frame	No insulation	
Ldry	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Entry	4	Downlights - LED	150	Sealed
Bedroom 1	4	Downlights - LED	150	Sealed
ENS 1	3	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
WIR 1	2	Downlights - LED	150	Sealed
Kitchen/Living	20	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed

* Refer to glossary.

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Bedroom 2	5	Downlights - LED	150	Sealed
Bedroom 3	4	Downlights - LED	150	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
Pantry	2	Downlights - LED	150	Sealed
Ldry	1	Downlights - LED	150	Sealed
Ldry	1	Exhaust Fans	300	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
Ceiling		900	0.75	No
Internal Wall		600	0.75	No
External Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352159

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit A 4.03, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*	
Conditioned*	90.4
Unconditioned*	0.0
Total	90.4
Garage	0.0

Exposure type
Open

NatHERS climate zone
56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	12.7	10.9
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=ugqXJtbJI .
When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Kitchen/Living	Kitchen/Living	36.83
Bedroom 1	Bedroom	12.12
ENS 1	Nighttime	6.49
Bedroom 2	Bedroom	11.2
Entry/Ldry	Daytime	11.08
Bath	Daytime	5.46
WIR 1	Nighttime	7.25

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-004-03 A	W3	2700	3900	Sliding	60	SW	No
Kitchen/Living	ALM-003-03 A	W4	1980	1000	Awning	10	NW	No
Kitchen/Living	ALM-003-03 A	W5	1980	2000	Awning	10	NW	No
Bedroom 1	ALM-004-03 A	W6	2700	3000	Sliding	45	SW	No
Bedroom 2	ALM-003-03 A	W2	1980	1200	Awning	10	NW	No

* Refer to glossary.

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

* Refer to glossary.

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	4195	SW	2100	Yes
Kitchen/Living	EW-1	2700	8595	NW	0	No
Bedroom 1	EW-1	2700	1000	NW	4200	No
Bedroom 1	EW-1	2700	3000	SW	1100	No
Bedroom 2	EW-1	2700	3795	NW	0	No
Bedroom 2	EW-1	2700	2995	NE	0	No
Entry/Ldry	EW-1	2700	395	NE	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Steel Stud Frame, Direct Fix Plasterboard	75.87	No insulation
IW-002	Concrete Panel/Blocks filled, plasterboard	35.37	No Insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Kitchen/Living	Concrete Slab, Unit Below 200mm	36.83	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 1	Concrete Slab, Unit Below 200mm	12.12	None	No Insulation	Cork Tiles or Parquetry 8mm
ENS 1	Concrete Slab, Unit Below 200mm	6.49	None	No Insulation	Ceramic Tiles 8mm
Bedroom 2	Concrete Slab, Unit Below 200mm	11.20	None	No Insulation	Cork Tiles or Parquetry 8mm
Entry/Ldry	Concrete Slab, Unit Below 200mm	11.08	None	No Insulation	Cork Tiles or Parquetry 8mm
Bath	Concrete Slab, Unit Below 200mm	5.46	None	No Insulation	Ceramic Tiles 8mm
WIR 1	Concrete Slab, Unit Below 200mm	7.25	None	No Insulation	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	

* Refer to glossary.

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
Entry/Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	
WIR 1	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Kitchen/Living	15	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Bedroom 1	5	Downlights - LED	150	Sealed
ENS 1	2	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bedroom 2	4	Downlights - LED	150	Sealed
Entry/Ldry	4	Downlights - LED	150	Sealed
Entry/Ldry	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
WIR 1	2	Downlights - LED	150	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
External Wall		600	0.75	No
Ceiling		900	0.75	No
Internal Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352142

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit A 4.04, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*

Conditioned*	123.5
Unconditioned*	0.0
Total	123.5
Garage	0.0

Exposure type

Open

NatHERS climate zone

56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

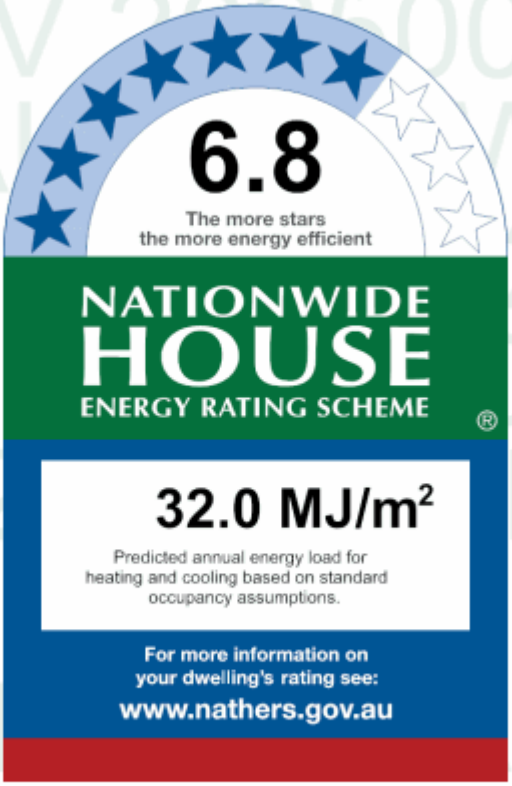

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	24.0	8.0
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=FZNFAEVvb . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Ldry	Daytime	4.58
Entry	Daytime	21.37
Kitchen/Living	Kitchen/Living	44.54
Bedroom 1	Bedroom	17.17
Bedroom 2	Bedroom	12.59
ENS 1	Nighttime	7.06
Bath	Daytime	4.89
Bedroom 3	Bedroom	11.27

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-003-03 A	W9	1980	1000	Awning	10	SE	No
Kitchen/Living	ALM-003-03 A	W11	1980	1200	Awning	10	SE	No
Kitchen/Living	ALM-004-03 A	W1	2700	3050	Sliding	45	SW	No
Kitchen/Living	ALM-004-03 A	W10	2700	3900	Sliding	60	SW	No
Bedroom 1	ALM-003-03 A	W8	950	1200	Awning	10	SE	No
Bedroom 1	ALM-003-03 A	W4	1980	1150	Awning	10	SW	No
Bedroom 2	ALM-003-03 A	W5	1980	1150	Awning	10	NE	No

* Refer to glossary.

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Bedroom 2	ALM-003-03 A	W7	950	1200	Awning	10	SE	No
Bedroom 3	ALM-003-03 A	W12	1980	1200	Awning	10	SE	No

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

* Refer to glossary.

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	6895	SE	0	No
Kitchen/Living	EW-1	2700	3100	SW	1400	Yes
Kitchen/Living	EW-1	2700	1200	NW	4100	No
Kitchen/Living	EW-1	2700	4100	SW	2600	Yes
Kitchen/Living	EW-1	2700	2200	NW	700	No
Bedroom 1	EW-1	2700	3095	SE	0	No
Bedroom 1	EW-1	2700	1500	SW	0	No
Bedroom 1	EW-1	2700	595	SE	0	No
Bedroom 2	EW-1	2700	1500	NE	0	No
Bedroom 2	EW-1	2700	3195	SE	0	No
Bedroom 3	EW-1	2700	3095	SE	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Concrete Panel/Blocks filled, plasterboard	52.65	No Insulation
IW-002	Steel Stud Frame, Direct Fix Plasterboard	115.83	No insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Ldry	Concrete Slab, Unit Below 200mm	4.58	None	No Insulation	Ceramic Tiles 8mm
Entry	Concrete Slab, Unit Below 200mm	21.37	None	No Insulation	Cork Tiles or Parquetry 8mm
Kitchen/Living	Concrete Slab, Unit Below 200mm	44.54	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 1	Concrete Slab, Unit Below 200mm	17.17	None	No Insulation	Cork Tiles or Parquetry 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Bedroom 2	Concrete Slab, Unit Below 200mm	12.59	None	No Insulation	Cork Tiles or Parquetry 8mm
ENS 1	Concrete Slab, Unit Below 200mm	7.06	None	No Insulation	Ceramic Tiles 8mm
Bath	Concrete Slab, Unit Below 200mm	4.89	None	No Insulation	Ceramic Tiles 8mm
Bedroom 3	Concrete Slab, Unit Below 200mm	11.27	None	No Insulation	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
Entry	Concrete, Plasterboard with Steel Frame	No insulation	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 3	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Ldry	1	Downlights - LED	150	Sealed
Ldry	1	Exhaust Fans	300	Sealed
Entry	8	Downlights - LED	150	Sealed
Kitchen/Living	20	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Bedroom 1	7	Downlights - LED	150	Sealed
Bedroom 2	5	Downlights - LED	150	Sealed
ENS 1	3	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
Bedroom 3	4	Downlights - LED	150	Sealed

* Refer to glossary.

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
Ceiling		900	0.75	No
Internal Wall		600	0.75	No
External Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

* Refer to glossary.

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352134

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit A 5.01, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*

Conditioned*	171.0
Unconditioned*	0.0
Total	171.0
Garage	0.0

Exposure type

Open

NatHERS climate zone

56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	9.9	11.3
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=DvsjFRavO . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
ENS 1	Nighttime	10.6
WIR 1	Nighttime	11.16
Bedroom 1	Bedroom	15.19
Kitchen/Living	Kitchen/Living	64.97
Bedroom 2	Bedroom	13.53
ENS 2	Nighttime	5.43
Bath	Daytime	5.12
Ldry	Daytime	5.03
WC	Daytime	2.55
Pantry	Daytime	3.81
Bedroom 3	Bedroom	12.93
Entry	Daytime	17.15
WIR	Nighttime	3.51

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Bedroom 1	ALM-003-03 A	W7	1980	1700	Awning	10	NE	No
Kitchen/Living	ALM-003-03 A	W11	1980	1700	Awning	10	NW	No

* Refer to glossary.

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-003-03 A	W12	1980	1000	Awning	10	NW	No
Kitchen/Living	ALM-004-03 A	W9	2700	4700	Sliding	60	NE	No
Kitchen/Living	ALM-004-03 A	W10	2700	4100	Sliding	60	NE	No
Bedroom 2	ALM-003-03 A	W14	1980	1700	Awning	10	NW	No
Bedroom 3	ALM-003-03 A	W13	1980	1700	Awning	10	NW	No

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

* Refer to glossary.

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
ENS 1	EW-1	2700	3595	SE	0	No
WIR 1	EW-1	2700	3090	SE	0	No
Bedroom 1	EW-1	2700	2000	NE	0	No
Bedroom 1	EW-1	2700	4195	SE	0	No
Kitchen/Living	EW-1	2700	7195	NW	0	No
Kitchen/Living	EW-1	2700	9700	NE	1500	Yes
Kitchen/Living	EW-1	2700	4895	SE	0	No
Bedroom 2	EW-1	2700	3390	NW	0	No
ENS 2	EW-1	2700	500	SW	0	No
ENS 2	EW-1	2700	1795	NW	0	No
Bedroom 3	EW-1	2700	3390	NW	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Steel Stud Frame, Direct Fix Plasterboard	176.09	No insulation
IW-002	Concrete Panel/Blocks filled, plasterboard	22.14	No Insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
ENS 1	Concrete Slab, Unit Below 200mm	10.60	None	No Insulation	Ceramic Tiles 8mm
WIR 1	Concrete Slab, Unit Below 200mm	11.16	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 1	Concrete Slab, Unit Below 200mm	15.19	None	No Insulation	Cork Tiles or Parquetry 8mm
Kitchen/Living	Concrete Slab, Unit Below 200mm	64.97	None	No Insulation	Cork Tiles or Parquetry 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Bedroom 2	Concrete Slab, Unit Below 200mm	13.53	None	No Insulation	Cork Tiles or Parquetry 8mm
ENS 2	Concrete Slab, Unit Below 200mm	5.43	None	No Insulation	Ceramic Tiles 8mm
Bath	Concrete Slab, Unit Below 200mm	5.12	None	No Insulation	Ceramic Tiles 8mm
Ldry	Concrete Slab, Unit Below 200mm	5.03	None	No Insulation	Ceramic Tiles 8mm
WC	Concrete Slab, Unit Below 200mm	2.55	None	No Insulation	Ceramic Tiles 8mm
Pantry	Concrete Slab, Unit Below 200mm	3.81	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 3	Concrete Slab, Unit Below 200mm	12.93	None	No Insulation	Cork Tiles or Parquetry 8mm
Entry	Concrete Slab, Unit Below 200mm	17.15	None	No Insulation	Cork Tiles or Parquetry 8mm
WIR	Concrete Slab, Unit Below 200mm	3.51	None	No Insulation	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
ENS 1	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
WIR 1	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Bedroom 1	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Bedroom 2	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
ENS 2	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Bath	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Ldry	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
WC	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Pantry	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Bedroom 3	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Entry	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
WIR	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
ENS 1	4	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
WIR 1	4	Downlights - LED	150	Sealed
Bedroom 1	6	Downlights - LED	150	Sealed
Kitchen/Living	26	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Bedroom 2	5	Downlights - LED	150	Sealed
ENS 2	2	Downlights - LED	150	Sealed
ENS 2	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
Ldry	2	Downlights - LED	150	Sealed
Ldry	1	Exhaust Fans	300	Sealed
WC	1	Downlights - LED	150	Sealed
WC	1	Exhaust Fans	300	Sealed
Pantry	1	Downlights - LED	150	Sealed
Bedroom 3	5	Downlights - LED	150	Sealed
Entry	7	Downlights - LED	150	Sealed
WIR	1	Downlights - LED	150	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
Waterproofing Membrane	No Added Insulation, No air Gap	0.30	Light

* Refer to glossary.

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
External Wall		600	0.75	No
Ceiling		900	0.75	No
Internal Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352126

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit A 5.02, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*

Conditioned*	125.3
Unconditioned*	0.0
Total	125.3
Garage	0.0

Exposure type

Open

NatHERS climate zone

56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

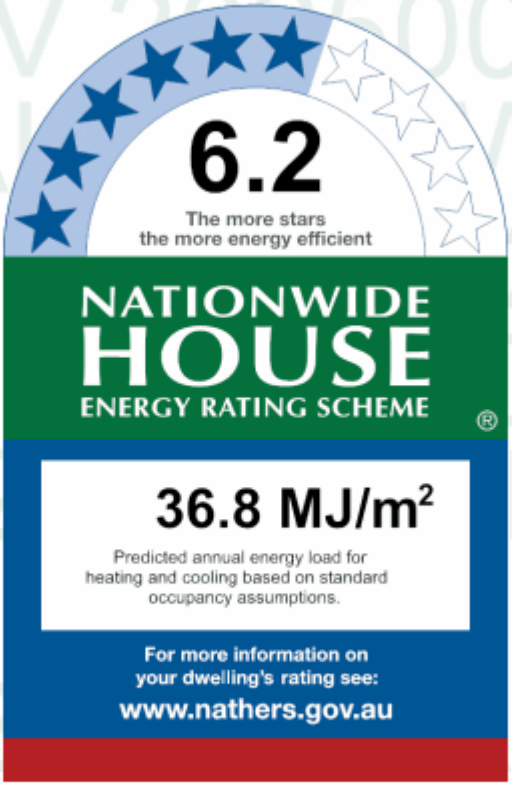

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	21.3	15.6
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=eKcudLyVU . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Entry	Daytime	9.27
Bedroom 1	Bedroom	11.32
ENS 1	Nighttime	9.72
WIR 1	Nighttime	4.84
Kitchen/Living	Kitchen/Living	49.88
Bedroom 2	Bedroom	13.56
Bedroom 3	Bedroom	11.18
Bath	Daytime	4.91
Pantry	Daytime	6.91
Glazed Common 2	Glazed Common Area	15.05
Ldry	Daytime	3.76

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Bedroom 1	ALM-004-03 A	W32	2700	3000	Sliding	45	NW	No
Kitchen/Living	ALM-004-03 A	W27	2700	3800	Sliding	60	NW	No
Kitchen/Living	ALM-004-03 A	W28	2700	3800	Sliding	60	NW	No
Bedroom 2	ALM-004-03 A	W29	2700	3200	Sliding	45	NW	No

* Refer to glossary.

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Bedroom 3	ALM-003-03 A	W31	1980	1200	Awning	10	SE	Yes
Glazed Common 2	ALM-001-01 A	W30	1930	2000	Awning	70	SE	No

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

* Refer to glossary.

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Bedroom 1	EW-1	2700	3195	NW	2200	No
ENS 1	EW-1	2700	3195	SE	0	No
Kitchen/Living	EW-1	2700	7890	NW	2200	No
Bedroom 2	EW-1	2700	3395	NW	2200	No
Bedroom 3	EW-1	2700	4045	SE	0	No
Bath	EW-1	2700	2990	SE	0	No
Pantry	EW-1	2700	4190	SE	0	No
Glazed Common 2	EW-1	2700	2150	SE	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Steel Stud Frame, Direct Fix Plasterboard	123.66	No insulation
IW-002	Concrete Panel/Blocks filled, plasterboard	68.31	No Insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Entry	Concrete Slab, Unit Below 200mm	9.27	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 1	Concrete Slab, Unit Below 200mm	11.32	None	No Insulation	Cork Tiles or Parquetry 8mm
ENS 1	Concrete Slab, Unit Below 200mm	9.72	None	No Insulation	Ceramic Tiles 8mm
WIR 1	Concrete Slab, Unit Below 200mm	4.84	None	No Insulation	Cork Tiles or Parquetry 8mm
Kitchen/Living	Concrete Slab, Unit Below 200mm	49.88	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 2	Concrete Slab, Unit Below 200mm	13.56	None	No Insulation	Cork Tiles or Parquetry 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Bedroom 3	Concrete Slab, Unit Below 200mm	11.18	None	No Insulation	Cork Tiles or Parquetry 8mm
Bath	Concrete Slab, Unit Below 200mm	4.91	None	No Insulation	Ceramic Tiles 8mm
Pantry	Concrete Slab, Unit Below 200mm	6.91	None	No Insulation	Cork Tiles or Parquetry 8mm
Glazed Common 2	Concrete Slab, Unit Below 200mm	15.05	None	No Insulation	Cork Tiles or Parquetry 8mm
Ldry	Concrete Slab, Unit Below 200mm	3.76	None	No Insulation	Ceramic Tiles 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Entry	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Bedroom 1	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
ENS 1	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
WIR 1	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Bedroom 2	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Bedroom 3	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Bath	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Pantry	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Glazed Common 2	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Ldry	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Entry	4	Downlights - LED	150	Sealed
Bedroom 1	4	Downlights - LED	150	Sealed
ENS 1	3	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
WIR 1	2	Downlights - LED	150	Sealed
Kitchen/Living	20	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed

* Refer to glossary.

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Bedroom 2	5	Downlights - LED	150	Sealed
Bedroom 3	4	Downlights - LED	150	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
Pantry	2	Downlights - LED	150	Sealed
Ldry	1	Downlights - LED	150	Sealed
Ldry	1	Exhaust Fans	300	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
Waterproofing Membrane	No Added Insulation, No air Gap	0.30	Light

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
Ceiling		900	0.75	No
Internal Wall		600	0.75	No
External Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

* Refer to glossary.

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352118

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit A 5.03, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*	
Conditioned*	90.4
Unconditioned*	0.0
Total	90.4
Garage	0.0

Exposure type
Open

NatHERS climate zone
56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	16.3	9.1
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=vflYQIhuY . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Kitchen/Living	Kitchen/Living	36.83
Bedroom 1	Bedroom	12.12
ENS 1	Nighttime	6.49
Bedroom 2	Bedroom	11.2
Entry/Ldry	Daytime	11.08
Bath	Daytime	5.46
WIR 1	Nighttime	7.25

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-004-03 A	W3	2700	3900	Sliding	60	SW	No
Kitchen/Living	ALM-003-03 A	W4	1980	1000	Awning	10	NW	No
Kitchen/Living	ALM-003-03 A	W5	1980	2000	Awning	10	NW	No
Bedroom 1	ALM-004-03 A	W6	2700	3000	Sliding	45	SW	No
Bedroom 2	ALM-003-03 A	W2	1980	1200	Awning	10	NW	No

* Refer to glossary.

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

* Refer to glossary.

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	4195	SW	1900	Yes
Kitchen/Living	EW-1	2700	8595	NW	0	No
Bedroom 1	EW-1	2700	1000	NW	4200	No
Bedroom 1	EW-1	2700	3000	SW	900	No
Bedroom 2	EW-1	2700	3795	NW	0	No
Bedroom 2	EW-1	2700	2995	NE	0	No
Entry/Ldry	EW-1	2700	395	NE	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Steel Stud Frame, Direct Fix Plasterboard	75.87	No insulation
IW-002	Concrete Panel/Blocks filled, plasterboard	35.37	No Insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Kitchen/Living	Concrete Slab, Unit Below 200mm	36.83	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 1	Concrete Slab, Unit Below 200mm	12.12	None	No Insulation	Cork Tiles or Parquetry 8mm
ENS 1	Concrete Slab, Unit Below 200mm	6.49	None	No Insulation	Ceramic Tiles 8mm
Bedroom 2	Concrete Slab, Unit Below 200mm	11.20	None	No Insulation	Cork Tiles or Parquetry 8mm
Entry/Ldry	Concrete Slab, Unit Below 200mm	11.08	None	No Insulation	Cork Tiles or Parquetry 8mm
Bath	Concrete Slab, Unit Below 200mm	5.46	None	No Insulation	Ceramic Tiles 8mm
WIR 1	Concrete Slab, Unit Below 200mm	7.25	None	No Insulation	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Kitchen/Living	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	

* Refer to glossary.

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Bedroom 1	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
ENS 1	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Bedroom 2	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Entry/Ldry	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Bath	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
WIR 1	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Kitchen/Living	15	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Bedroom 1	5	Downlights - LED	150	Sealed
ENS 1	2	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bedroom 2	4	Downlights - LED	150	Sealed
Entry/Ldry	4	Downlights - LED	150	Sealed
Entry/Ldry	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
WIR 1	2	Downlights - LED	150	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
Waterproofing Membrane	No Added Insulation, No air Gap	0.30	Light

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
External Wall		600	0.75	No
Ceiling		900	0.75	No
Internal Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352100

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit A 5.04, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*	
Conditioned*	123.5
Unconditioned*	0.0
Total	123.5
Garage	0.0

Exposure type
Open

NatHERS climate zone
56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

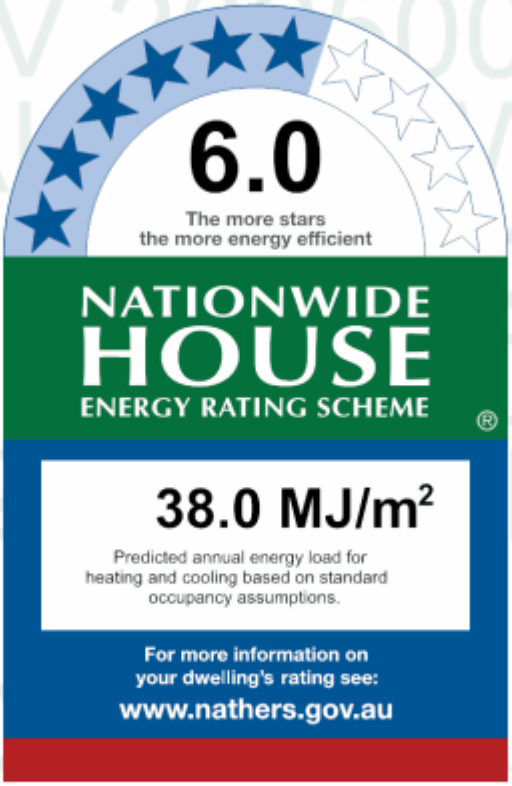

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	30.8	7.2
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=UQANsOJUS . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Ldry	Daytime	4.58
Entry	Daytime	21.37
Kitchen/Living	Kitchen/Living	44.54
Bedroom 1	Bedroom	17.17
Bedroom 2	Bedroom	12.59
ENS 1	Nighttime	7.06
Bath	Daytime	4.89
Bedroom 3	Bedroom	11.27

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-003-03 A	W9	1980	1000	Awning	10	SE	No
Kitchen/Living	ALM-003-03 A	W11	1980	1200	Awning	10	SE	No
Kitchen/Living	ALM-004-03 A	W1	2700	3050	Sliding	45	SW	No
Kitchen/Living	ALM-004-03 A	W10	2700	3900	Sliding	60	SW	No
Bedroom 1	ALM-003-03 A	W8	950	1200	Awning	10	SE	No
Bedroom 1	ALM-003-03 A	W4	1980	1150	Awning	10	SW	No
Bedroom 2	ALM-003-03 A	W5	1980	1150	Awning	10	NE	No

* Refer to glossary.

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Bedroom 2	ALM-003-03 A	W7	950	1200	Awning	10	SE	No
Bedroom 3	ALM-003-03 A	W12	1980	1200	Awning	10	SE	No

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
GEN-04-006a	Single-glazed clear, Timber and Aluminium Frame	0.5

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
Kitchen/Living	GEN-04-006a	S1	50	2.40	NE	None	No

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

* Refer to glossary.

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	6895	SE	0	No
Kitchen/Living	EW-1	2700	3100	SW	1100	Yes
Kitchen/Living	EW-1	2700	1200	NW	4100	No
Kitchen/Living	EW-1	2700	4100	SW	2300	Yes
Kitchen/Living	EW-1	2700	2200	NW	7600	No
Bedroom 1	EW-1	2700	3095	SE	0	No
Bedroom 1	EW-1	2700	1500	SW	0	No
Bedroom 1	EW-1	2700	595	SE	0	No
Bedroom 2	EW-1	2700	1500	NE	0	No
Bedroom 2	EW-1	2700	3195	SE	0	No
Bedroom 3	EW-1	2700	3095	SE	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Concrete Panel/Blocks filled, plasterboard	52.65	No Insulation
IW-002	Steel Stud Frame, Direct Fix Plasterboard	115.83	No insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Ldry	Concrete Slab, Unit Below 200mm	4.58	None	No Insulation	Ceramic Tiles 8mm
Entry	Concrete Slab, Unit Below 200mm	21.37	None	No Insulation	Cork Tiles or Parquetry 8mm
Kitchen/Living	Concrete Slab, Unit Below 200mm	44.54	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 1	Concrete Slab, Unit Below 200mm	17.17	None	No Insulation	Cork Tiles or Parquetry 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Bedroom 2	Concrete Slab, Unit Below 200mm	12.59	None	No Insulation	Cork Tiles or Parquetry 8mm
ENS 1	Concrete Slab, Unit Below 200mm	7.06	None	No Insulation	Ceramic Tiles 8mm
Bath	Concrete Slab, Unit Below 200mm	4.89	None	No Insulation	Ceramic Tiles 8mm
Bedroom 3	Concrete Slab, Unit Below 200mm	11.27	None	No Insulation	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Ldry	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Entry	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Bedroom 1	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Bedroom 2	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
ENS 1	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Bath	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Bedroom 3	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Ldry	1	Downlights - LED	150	Sealed
Ldry	1	Exhaust Fans	300	Sealed
Entry	8	Downlights - LED	150	Sealed
Kitchen/Living	20	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Bedroom 1	7	Downlights - LED	150	Sealed
Bedroom 2	5	Downlights - LED	150	Sealed
ENS 1	3	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
Bedroom 3	4	Downlights - LED	150	Sealed

* Refer to glossary.

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
Waterproofing Membrane	No Added Insulation, No air Gap	0.30	Light

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
Ceiling		900	0.75	No
Internal Wall		600	0.75	No
External Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

* Refer to glossary.

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352811

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit B G.01, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*

Conditioned*	135.9
Unconditioned*	0.0
Total	135.9
Garage	0.0

Exposure type

Suburban

NatHERS climate zone

56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

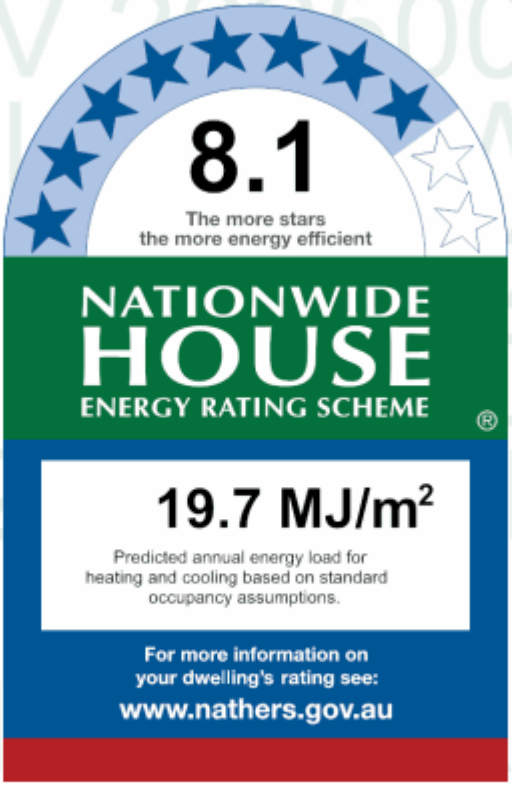

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	14.6	5.1
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=SjvIOltCf . When using either link, ensure you are visiting hstar.com.au

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Ldry	Daytime	4.34
Entry	Daytime	19.39
Kitchen/Living	Kitchen/Living	48.57
Bedroom 1	Bedroom	14.62
Bedroom 2	Bedroom	12.64
ENS 1	Nighttime	7.06
Bath	Daytime	5.32
Bedroom 3	Bedroom	11.27
WC	Daytime	2.53
WIR 1	Nighttime	4.98
Pantry	Daytime	5.17

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-003-03 A	W23	2110	980	Awning	70	NW	Yes
Kitchen/Living	ALM-003-03 A	W14	2110	800	Awning	70	NE	No
Kitchen/Living	ALM-004-03 A	W10	2700	3900	Sliding	60	NE	No
Kitchen/Living	ALM-004-03 A	W13	2700	2600	Sliding	45	NE	No

* Refer to glossary.

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Bedroom 1	ALM-003-03 A	W22	950	1200	Awning	90	NW	No
Bedroom 1	ALM-003-03 A	W4	2110	1150	Awning	70	NE	No
Bedroom 2	ALM-003-03 A	W5	2110	1150	Awning	70	SW	No
Bedroom 2	ALM-003-03 A	W21	950	1200	Awning	90	NW	No
Bedroom 3	ALM-003-03 A	W24	2110	1150	Awning	70	NW	Yes

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

* Refer to glossary.

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	1295	NW	0	No
Kitchen/Living	EW-1	2700	3384	W	0	No
Kitchen/Living	EW-1	2700	1100	NE	0	Yes
Kitchen/Living	EW-1	2700	1100	NW	0	No
Kitchen/Living	EW-1	2700	7200	NE	3600	Yes
Bedroom 1	EW-1	2700	3095	NW	0	No
Bedroom 1	EW-1	2700	1500	NE	6275	Yes
Bedroom 2	EW-1	2700	1500	SW	0	Yes
Bedroom 2	EW-1	2700	3195	NW	0	No
Bedroom 3	EW-1	2700	3300	SW	0	No
Bedroom 3	EW-1	2700	3095	NW	0	No
Pantry	EW-1	2700	2790	NW	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Concrete Panel/Blocks filled, plasterboard	55.62	No Insulation
IW-002	Steel Stud Frame, Direct Fix Plasterboard	149.31	No insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Ldry	Suspended Concrete Slab 200mm	4.34	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Ceramic Tiles 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Entry	Suspended Concrete Slab 200mm	19.39	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
Kitchen/Living	Suspended Concrete Slab 200mm	48.57	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
Bedroom 1	Suspended Concrete Slab 200mm	14.62	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
Bedroom 2	Suspended Concrete Slab 200mm	12.64	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
ENS 1	Suspended Concrete Slab 200mm	7.06	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Ceramic Tiles 8mm
Bath	Suspended Concrete Slab 200mm	5.32	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Ceramic Tiles 8mm
Bedroom 3	Suspended Concrete Slab 200mm	11.27	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
WC	Suspended Concrete Slab 200mm	2.53	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Ceramic Tiles 8mm
WIR 1	Suspended Concrete Slab 200mm	4.98	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
Pantry	Suspended Concrete Slab 200mm	5.17	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
Entry	Concrete, Plasterboard with Steel Frame	No insulation	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 3	Concrete, Plasterboard with Steel Frame	No insulation	
WC	Concrete, Plasterboard with Steel Frame	No insulation	
WIR 1	Concrete, Plasterboard with Steel Frame	No insulation	
Pantry	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Ldry	1	Downlights - LED	150	Sealed
Ldry	1	Exhaust Fans	300	Sealed
Entry	8	Downlights - LED	150	Sealed
Kitchen/Living	19	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Bedroom 1	6	Downlights - LED	150	Sealed
Bedroom 2	5	Downlights - LED	150	Sealed
ENS 1	2	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
Bedroom 3	5	Downlights - LED	150	Sealed
WC	1	Downlights - LED	150	Sealed
WC	1	Exhaust Fans	300	Sealed
WIR 1	2	Downlights - LED	150	Sealed

* Refer to glossary.

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Pantry	2	Downlights - LED	150	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
Ceiling		900	0.75	No
Internal Wall		600	0.75	No
External Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352803

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit B G.02, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*

Conditioned*	130.6
Unconditioned*	0.0
Total	130.6
Garage	0.0

Exposure type

Suburban

NatHERS climate zone

56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

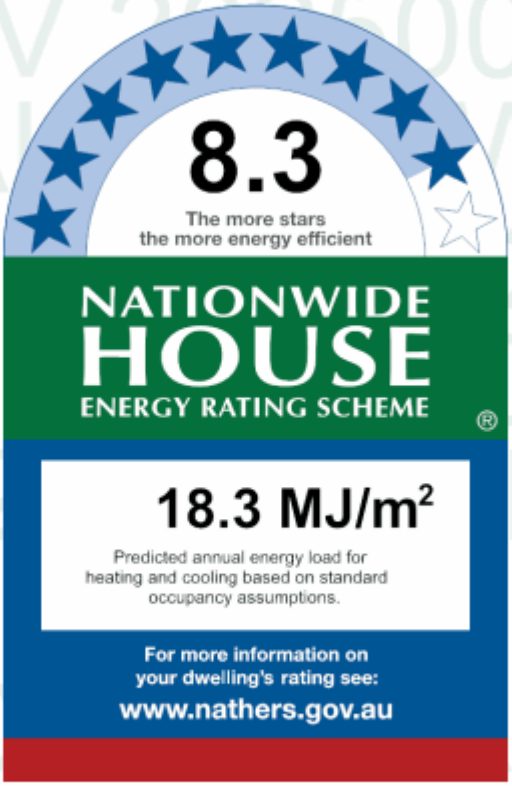

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	13.2	5.2
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=tyfTICQcm . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Entry	Daytime	18.2
Kitchen/Living	Kitchen/Living	48.57
Bedroom 1	Bedroom	14.62
Bedroom 2	Bedroom	12.64
ENS 1	Nighttime	7.06
Bath	Daytime	5.32
Bedroom 3	Bedroom	11.46
WC	Daytime	2.53
WIR 1	Nighttime	4.98
Pantry	Daytime	5.17

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-004-03 A	W23	2700	3900	Sliding	60	NE	No
Kitchen/Living	ALM-004-03 A	W24	2700	2600	Sliding	45	NE	No
Kitchen/Living	ALM-003-03 A	W27	2110	800	Awning	70	NE	No
Kitchen/Living	ALM-003-03 A	W20	2110	1000	Awning	70	SE	Yes
Bedroom 1	ALM-003-03 A	W25	2110	1200	Awning	70	NE	No

* Refer to glossary.

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Bedroom 2	ALM-003-03 A	W28	2110	1200	Awning	70	SW	No
Bedroom 3	ALM-003-03 A	W26	2110	1200	Awning	70	SE	Yes

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

* Refer to glossary.

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	7200	NE	3600	Yes
Kitchen/Living	EW-1	2700	1100	SE	0	No
Kitchen/Living	EW-1	2700	1100	NE	0	Yes
Kitchen/Living	EW-1	2700	3384	SE	0	No
Kitchen/Living	EW-1	2700	1295	SE	0	No
Bedroom 1	EW-1	2700	1500	NE	6275	Yes
Bedroom 1	EW-1	2700	3095	SE	0	No
Bedroom 2	EW-1	2700	3195	SE	0	No
Bedroom 2	EW-1	2700	1500	SW	0	Yes
Bedroom 3	EW-1	2700	3095	SE	0	No
Pantry	EW-1	2700	2790	SE	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Concrete Panel/Blocks filled, plasterboard	46.98	No Insulation
IW-002	Steel Stud Frame, Direct Fix Plasterboard	135.54	No insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Entry	Suspended Concrete Slab 200mm	18.20	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Kitchen/Living	Suspended Concrete Slab 200mm	48.57	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
Bedroom 1	Suspended Concrete Slab 200mm	14.62	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
Bedroom 2	Suspended Concrete Slab 200mm	12.64	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
ENS 1	Suspended Concrete Slab 200mm	7.06	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Ceramic Tiles 8mm
Bath	Suspended Concrete Slab 200mm	5.32	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Ceramic Tiles 8mm
Bedroom 3	Suspended Concrete Slab 200mm	11.46	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
WC	Suspended Concrete Slab 200mm	2.53	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Ceramic Tiles 8mm
WIR 1	Suspended Concrete Slab 200mm	4.98	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
Pantry	Suspended Concrete Slab 200mm	5.17	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Entry	Concrete, Plasterboard with Steel Frame	No insulation	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 3	Concrete, Plasterboard with Steel Frame	No insulation	
WC	Concrete, Plasterboard with Steel Frame	No insulation	
WIR 1	Concrete, Plasterboard with Steel Frame	No insulation	
Pantry	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Entry	7	Downlights - LED	150	Sealed
Entry	1	Exhaust Fans	300	Sealed
Kitchen/Living	19	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Bedroom 1	6	Downlights - LED	150	Sealed
Bedroom 2	5	Downlights - LED	150	Sealed
ENS 1	2	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
Bedroom 3	4	Downlights - LED	150	Sealed
WC	1	Downlights - LED	150	Sealed
WC	1	Exhaust Fans	300	Sealed
WIR 1	2	Downlights - LED	150	Sealed
Pantry	2	Downlights - LED	150	Sealed

* Refer to glossary.

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
Ceiling		900	0.75	No
Internal Wall		600	0.75	No
External Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

* Refer to glossary.

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352787

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit B G.03, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*	
Conditioned*	91.8
Unconditioned*	0.0
Total	91.8
Garage	0.0

Exposure type
Suburban

NatHERS climate zone
56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

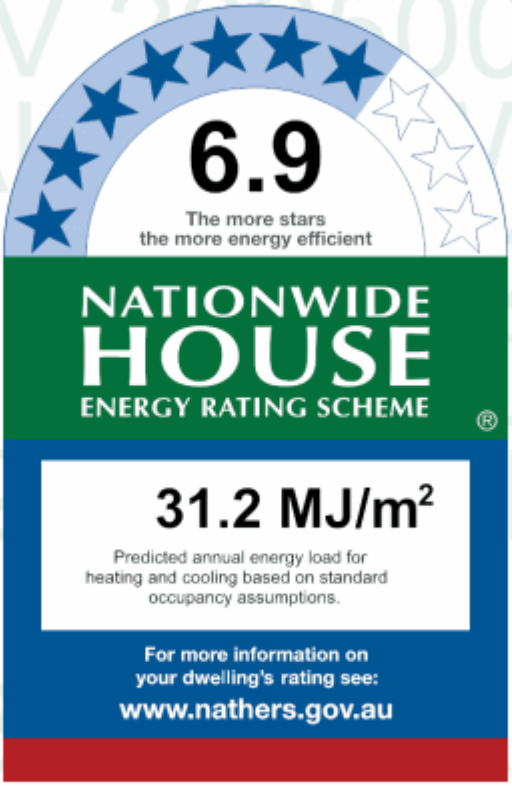

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	23.1	8.1
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=GgwKwftCu . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Kitchen/Living	Kitchen/Living	38.64
Bedroom 1	Bedroom	12.12
ENS 1	Nighttime	6.49
Bedroom 2	Bedroom	11.2
Entry/Ldry	Daytime	10.68
Bath	Daytime	5.46
WIR 1	Nighttime	7.25
Glazed Common 1	Glazed Common Area	7.88

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-004-03 A	W3	2700	3900	Sliding	60	SW	No
Kitchen/Living	ALM-003-03 A	W6	2130	800	Awning	70	NE	No
Bedroom 1	ALM-004-03 A	n/a	2700	3000	Sliding	45	SW	No
Bedroom 2	ALM-003-03 A	W2	2130	1200	Awning	70	NW	Yes
Glazed Common 1	ALM-001-01 A	W7	2700	2000	Casement	90	NW	No

* Refer to glossary.

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

* Refer to glossary.

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	4195	SW	2100	Yes
Kitchen/Living	EW-1	2700	1700	NW	0	No
Kitchen/Living	EW-1	2700	3479	W	0	No
Kitchen/Living	EW-1	2700	1100	NE	0	Yes
Kitchen/Living	EW-1	2700	3595	NW	0	No
Bedroom 1	EW-1	2700	1000	NW	4200	No
Bedroom 1	EW-1	2700	3000	SW	1100	No
Bedroom 2	EW-1	2700	3795	NW	0	No
Bedroom 2	EW-1	2700	2995	NE	0	No
Entry/Ldry	EW-1	2700	595	NE	0	No
Glazed Common 1	EW-1	2700	2250	NW	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Steel Stud Frame, Direct Fix Plasterboard	75.87	No insulation
IW-002	Concrete Panel/Blocks filled, plasterboard	50.76	No Insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Kitchen/Living	Suspended Concrete Slab 200mm	38.64	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
Bedroom 1	Suspended Concrete Slab 200mm	12.12	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
ENS 1	Suspended Concrete Slab 200mm	6.49	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Ceramic Tiles 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Bedroom 2	Suspended Concrete Slab 200mm	11.20	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
Entry/Ldry	Suspended Concrete Slab 200mm	10.68	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
Bath	Suspended Concrete Slab 200mm	5.46	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Ceramic Tiles 8mm
WIR 1	Suspended Concrete Slab 200mm	7.25	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
Glazed Common 1	Suspended Concrete Slab 200mm	7.88	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
Entry/Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	
WIR 1	Concrete, Plasterboard with Steel Frame	No insulation	
Glazed Common 1	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Kitchen/Living	15	Downlights - LED	150	Sealed

* Refer to glossary.

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Bedroom 1	5	Downlights - LED	150	Sealed
ENS 1	2	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bedroom 2	4	Downlights - LED	150	Sealed
Entry/Ldry	4	Downlights - LED	150	Sealed
Entry/Ldry	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
WIR 1	2	Downlights - LED	150	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
External Wall		600	0.75	No
Ceiling		900	0.75	No
Internal Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352795

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit B G.04, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*	
Conditioned*	122.9
Unconditioned*	0.0
Total	122.9
Garage	0.0

Exposure type
Suburban

NatHERS climate zone
56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

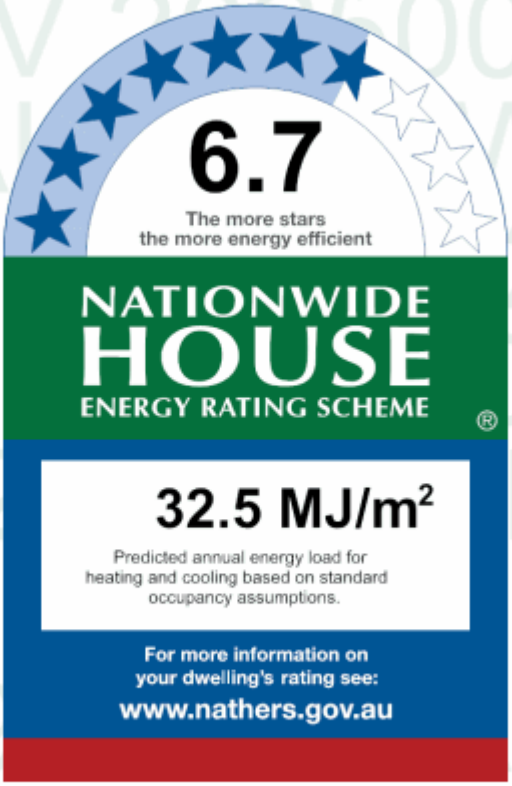

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	26.2	6.3
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=hvhWTZQcA . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Ldry	Daytime	4.46
Entry	Daytime	21.14
Kitchen/Living	Kitchen/Living	44.72
Bedroom 1	Bedroom	17.17
Bedroom 2	Bedroom	12.59
ENS 1	Nighttime	7.06
Bath	Daytime	4.89
Bedroom 3	Bedroom	10.9

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-003-03 A	W9	2130	1000	Awning	70	SE	Yes
Kitchen/Living	ALM-003-03 A	W11	2130	1200	Awning	70	SE	Yes
Kitchen/Living	ALM-004-03 A	W1	2700	2850	Sliding	45	SW	No
Kitchen/Living	ALM-004-03 A	W10	2700	3900	Sliding	60	SW	No
Bedroom 1	ALM-003-03 A	W8	950	1200	Awning	90	SE	No
Bedroom 1	ALM-003-03 A	W4	2130	1200	Awning	70	SW	No
Bedroom 2	ALM-003-03 A	W5	2130	1200	Awning	70	NE	No

* Refer to glossary.

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Bedroom 2	ALM-003-03 A	W7	950	1200	Awning	90	SE	No
Bedroom 3	ALM-003-03 A	W12	2130	1200	Awning	70	SE	Yes

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

* Refer to glossary.

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	6995	SE	0	No
Kitchen/Living	EW-1	2700	3000	SW	1300	Yes
Kitchen/Living	EW-1	2700	1300	NW	4200	No
Kitchen/Living	EW-1	2700	4200	SW	2600	Yes
Kitchen/Living	EW-1	2700	2300	NW	0	No
Bedroom 1	EW-1	2700	3095	SE	0	No
Bedroom 1	EW-1	2700	1500	SW	0	Yes
Bedroom 1	EW-1	2700	595	SE	0	No
Bedroom 2	EW-1	2700	1500	NE	0	Yes
Bedroom 2	EW-1	2700	3195	SE	0	No
Bedroom 3	EW-1	2700	2995	SE	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Concrete Panel/Blocks filled, plasterboard	52.11	No Insulation
IW-002	Steel Stud Frame, Direct Fix Plasterboard	115.56	No insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Ldry	Suspended Concrete Slab 200mm	4.46	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Entry	Suspended Concrete Slab 200mm	21.14	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
Kitchen/Living	Suspended Concrete Slab 200mm	44.72	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
Bedroom 1	Suspended Concrete Slab 200mm	17.17	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
Bedroom 2	Suspended Concrete Slab 200mm	12.59	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
ENS 1	Suspended Concrete Slab 200mm	7.06	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Ceramic Tiles 8mm
Bath	Suspended Concrete Slab 200mm	4.89	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Ceramic Tiles 8mm
Bedroom 3	Suspended Concrete Slab 200mm	10.90	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
Entry	Concrete, Plasterboard with Steel Frame	No insulation	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Bath	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 3	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Ldry	1	Downlights - LED	150	Sealed
Ldry	1	Exhaust Fans	300	Sealed
Entry	8	Downlights - LED	150	Sealed
Kitchen/Living	17	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Bedroom 1	7	Downlights - LED	150	Sealed
Bedroom 2	5	Downlights - LED	150	Sealed
ENS 1	3	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
Bedroom 3	4	Downlights - LED	150	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
Ceiling		900	0.75	No
Internal Wall		600	0.75	No
External Wall		600	0.75	No

* Refer to glossary.

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

* Refer to glossary.

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352779

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit B 1.01, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*

Conditioned*	135.9
Unconditioned*	0.0
Total	135.9
Garage	0.0

Exposure type

Suburban

NatHERS climate zone

56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	9.8	8.6
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=fQMzYmWbn . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Ldry	Daytime	4.34
Entry	Daytime	19.39
Kitchen/Living	Kitchen/Living	48.57
Bedroom 1	Bedroom	14.62
Bedroom 2	Bedroom	12.64
ENS 1	Nighttime	7.06
Bath	Daytime	5.32
Bedroom 3	Bedroom	11.27
WC	Daytime	2.53
WIR 1	Nighttime	4.98
Pantry	Daytime	5.17

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-003-03 A	W23	2110	980	Awning	10	NW	Yes
Kitchen/Living	ALM-003-03 A	W14	2110	800	Awning	10	NE	No
Kitchen/Living	ALM-004-03 A	W10	2700	3900	Sliding	60	NE	No
Kitchen/Living	ALM-004-03 A	W13	2700	2600	Sliding	45	NE	No

* Refer to glossary.

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Bedroom 1	ALM-003-03 A	W22	950	1200	Awning	10	NW	No
Bedroom 1	ALM-003-03 A	W4	2110	1150	Awning	10	NE	No
Bedroom 2	ALM-003-03 A	W5	2110	1150	Awning	10	SW	No
Bedroom 2	ALM-003-03 A	W21	950	1200	Awning	10	NW	No
Bedroom 3	ALM-003-03 A	W24	2110	1150	Awning	10	NW	Yes

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

* Refer to glossary.

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	1295	NW	0	No
Kitchen/Living	EW-1	2700	3384	W	0	No
Kitchen/Living	EW-1	2700	1100	NE	0	Yes
Kitchen/Living	EW-1	2700	1100	NW	0	No
Kitchen/Living	EW-1	2700	7200	NE	2600	Yes
Bedroom 1	EW-1	2700	3095	NW	0	No
Bedroom 1	EW-1	2700	1500	NE	6275	Yes
Bedroom 2	EW-1	2700	1500	SW	0	Yes
Bedroom 2	EW-1	2700	3195	NW	0	No
Bedroom 3	EW-1	2700	3300	SW	0	No
Bedroom 3	EW-1	2700	3095	NW	0	No
Pantry	EW-1	2700	2790	NW	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Concrete Panel/Blocks filled, plasterboard	55.62	No Insulation
IW-002	Steel Stud Frame, Direct Fix Plasterboard	149.31	No insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Ldry	Concrete Slab, Unit Below 200mm	4.34	None	No Insulation	Ceramic Tiles 8mm
Entry	Concrete Slab, Unit Below 200mm	19.39	None	No Insulation	Cork Tiles or Parquetry 8mm
Kitchen/Living	Concrete Slab, Unit Below 200mm	48.57	None	No Insulation	Cork Tiles or Parquetry 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Bedroom 1	Concrete Slab, Unit Below 200mm	14.62	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 2	Concrete Slab, Unit Below 200mm	12.64	None	No Insulation	Cork Tiles or Parquetry 8mm
ENS 1	Concrete Slab, Unit Below 200mm	7.06	None	No Insulation	Ceramic Tiles 8mm
Bath	Concrete Slab, Unit Below 200mm	5.32	None	No Insulation	Ceramic Tiles 8mm
Bedroom 3	Concrete Slab, Unit Below 200mm	11.27	None	No Insulation	Cork Tiles or Parquetry 8mm
WC	Concrete Slab, Unit Below 200mm	2.53	None	No Insulation	Ceramic Tiles 8mm
WIR 1	Concrete Slab, Unit Below 200mm	4.98	None	No Insulation	Cork Tiles or Parquetry 8mm
Pantry	Concrete Slab, Unit Below 200mm	5.17	None	No Insulation	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
Entry	Concrete, Plasterboard with Steel Frame	No insulation	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 3	Concrete, Plasterboard with Steel Frame	No insulation	
WC	Concrete, Plasterboard with Steel Frame	No insulation	
WIR 1	Concrete, Plasterboard with Steel Frame	No insulation	
Pantry	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Ldry	1	Downlights - LED	150	Sealed
Ldry	1	Exhaust Fans	300	Sealed
Entry	8	Downlights - LED	150	Sealed

* Refer to glossary.

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Kitchen/Living	19	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Bedroom 1	6	Downlights - LED	150	Sealed
Bedroom 2	5	Downlights - LED	150	Sealed
ENS 1	2	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
Bedroom 3	5	Downlights - LED	150	Sealed
WC	1	Downlights - LED	150	Sealed
WC	1	Exhaust Fans	300	Sealed
WIR 1	2	Downlights - LED	150	Sealed
Pantry	2	Downlights - LED	150	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
Ceiling		900	0.75	No
Internal Wall		600	0.75	No
External Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352613

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit B 1.02, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*

Conditioned*	130.6
Unconditioned*	0.0
Total	130.6
Garage	0.0

Exposure type

Suburban

NatHERS climate zone

56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	9.3	8.6
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=wwFJgVWMr . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Entry	Daytime	18.2
Kitchen/Living	Kitchen/Living	48.57
Bedroom 1	Bedroom	14.62
Bedroom 2	Bedroom	12.64
ENS 1	Nighttime	7.06
Bath	Daytime	5.32
Bedroom 3	Bedroom	11.46
WC	Daytime	2.53
WIR 1	Nighttime	4.98
Pantry	Daytime	5.17

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-004-03 A	W23	2700	3900	Sliding	60	NE	No
Kitchen/Living	ALM-004-03 A	W24	2700	2600	Sliding	45	NE	No
Kitchen/Living	ALM-003-03 A	W27	2110	800	Awning	10	NE	No
Kitchen/Living	ALM-003-03 A	W20	2110	1000	Awning	10	SE	Yes
Bedroom 1	ALM-003-03 A	W25	2110	1150	Awning	10	NE	No

* Refer to glossary.

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Bedroom 1	ALM-003-03 A	W30	950	1200	Awning	10	SE	No
Bedroom 2	ALM-003-03 A	W29	950	1200	Awning	10	SE	No
Bedroom 2	ALM-003-03 A	W28	2110	1150	Awning	10	SW	No
Bedroom 3	ALM-003-03 A	W26	2110	1200	Awning	10	SE	Yes

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

* Refer to glossary.

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	7200	NE	2600	Yes
Kitchen/Living	EW-1	2700	1100	SE	0	No
Kitchen/Living	EW-1	2700	1100	NE	0	Yes
Kitchen/Living	EW-1	2700	3384	SE	0	No
Kitchen/Living	EW-1	2700	1295	SE	0	No
Bedroom 1	EW-1	2700	1500	NE	6275	Yes
Bedroom 1	EW-1	2700	3095	SE	0	No
Bedroom 2	EW-1	2700	3195	SE	0	No
Bedroom 2	EW-1	2700	1500	SW	0	Yes
Bedroom 3	EW-1	2700	3095	SE	0	No
Pantry	EW-1	2700	2790	SE	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Concrete Panel/Blocks filled, plasterboard	46.98	No Insulation
IW-002	Steel Stud Frame, Direct Fix Plasterboard	135.54	No insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Entry	Concrete Slab, Unit Below 200mm	18.20	None	No Insulation	Cork Tiles or Parquetry 8mm
Kitchen/Living	Concrete Slab, Unit Below 200mm	48.57	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 1	Concrete Slab, Unit Below 200mm	14.62	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 2	Concrete Slab, Unit Below 200mm	12.64	None	No Insulation	Cork Tiles or Parquetry 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
ENS 1	Concrete Slab, Unit Below 200mm	7.06	None	No Insulation	Ceramic Tiles 8mm
Bath	Concrete Slab, Unit Below 200mm	5.32	None	No Insulation	Ceramic Tiles 8mm
Bedroom 3	Concrete Slab, Unit Below 200mm	11.46	None	No Insulation	Cork Tiles or Parquetry 8mm
WC	Concrete Slab, Unit Below 200mm	2.53	None	No Insulation	Ceramic Tiles 8mm
WIR 1	Concrete Slab, Unit Below 200mm	4.98	None	No Insulation	Cork Tiles or Parquetry 8mm
Pantry	Concrete Slab, Unit Below 200mm	5.17	None	No Insulation	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Entry	Concrete, Plasterboard with Steel Frame	No insulation	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 3	Concrete, Plasterboard with Steel Frame	No insulation	
WC	Concrete, Plasterboard with Steel Frame	No insulation	
WIR 1	Concrete, Plasterboard with Steel Frame	No insulation	
Pantry	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Entry	7	Downlights - LED	150	Sealed
Entry	1	Exhaust Fans	300	Sealed
Kitchen/Living	19	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Bedroom 1	6	Downlights - LED	150	Sealed
Bedroom 2	5	Downlights - LED	150	Sealed
ENS 1	2	Downlights - LED	150	Sealed

* Refer to glossary.

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
Bedroom 3	4	Downlights - LED	150	Sealed
WC	1	Downlights - LED	150	Sealed
WC	1	Exhaust Fans	300	Sealed
WIR 1	2	Downlights - LED	150	Sealed
Pantry	2	Downlights - LED	150	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
Ceiling		900	0.75	No
Internal Wall		600	0.75	No
External Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

* Refer to glossary.

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352761

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit B 1.03, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*	
Conditioned*	91.8
Unconditioned*	0.0
Total	91.8
Garage	0.0

Exposure type
Suburban

NatHERS climate zone
56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	18.9	10.1
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=cHiaTetOv . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Kitchen/Living	Kitchen/Living	38.64
Bedroom 1	Bedroom	12.12
ENS 1	Nighttime	6.49
Bedroom 2	Bedroom	11.2
Entry/Ldry	Daytime	10.68
Bath	Daytime	5.46
WIR 1	Nighttime	7.25
Glazed Common 1	Glazed Common Area	7.88

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-004-03 A	W3	2700	3900	Sliding	60	SW	No
Kitchen/Living	ALM-003-03 A	W6	2130	800	Awning	10	NE	No
Bedroom 1	ALM-004-03 A	W8	2700	3000	Sliding	45	SW	No
Bedroom 2	ALM-003-03 A	W2	2130	1200	Awning	10	NW	Yes
Glazed Common 1	ALM-001-01 A	W7	1980	2000	Awning	10	NW	No

* Refer to glossary.

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

* Refer to glossary.

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	4195	SW	2100	Yes
Kitchen/Living	EW-1	2700	1700	NW	0	No
Kitchen/Living	EW-1	2700	3479	W	0	No
Kitchen/Living	EW-1	2700	1100	NE	0	Yes
Kitchen/Living	EW-1	2700	3595	NW	0	No
Bedroom 1	EW-1	2700	1000	NW	4200	No
Bedroom 1	EW-1	2700	3000	SW	1100	No
Bedroom 2	EW-1	2700	3795	NW	0	No
Bedroom 2	EW-1	2700	2995	NE	0	No
Entry/Ldry	EW-1	2700	595	NE	0	No
Glazed Common 1	EW-1	2700	2250	NW	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Steel Stud Frame, Direct Fix Plasterboard	75.87	No insulation
IW-002	Concrete Panel/Blocks filled, plasterboard	50.76	No Insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Kitchen/Living	Concrete Slab, Unit Below 200mm	38.64	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 1	Concrete Slab, Unit Below 200mm	12.12	None	No Insulation	Cork Tiles or Parquetry 8mm
ENS 1	Concrete Slab, Unit Below 200mm	6.49	None	No Insulation	Ceramic Tiles 8mm
Bedroom 2	Concrete Slab, Unit Below 200mm	11.20	None	No Insulation	Cork Tiles or Parquetry 8mm
Entry/Ldry	Concrete Slab, Unit Below 200mm	10.68	None	No Insulation	Cork Tiles or Parquetry 8mm
Bath	Concrete Slab, Unit Below 200mm	5.46	None	No Insulation	Ceramic Tiles 8mm
WIR 1	Concrete Slab, Unit Below 200mm	7.25	None	No Insulation	Cork Tiles or Parquetry 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Glazed Common 1	Concrete Slab, Unit Below 200mm	7.88	None	No Insulation	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
Entry/Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	
WIR 1	Concrete, Plasterboard with Steel Frame	No insulation	
Glazed Common 1	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Kitchen/Living	15	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Bedroom 1	5	Downlights - LED	150	Sealed
ENS 1	2	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bedroom 2	4	Downlights - LED	150	Sealed
Entry/Ldry	4	Downlights - LED	150	Sealed
Entry/Ldry	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
WIR 1	2	Downlights - LED	150	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

* Refer to glossary.

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
External Wall		600	0.75	No
Ceiling		900	0.75	No
Internal Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

* Refer to glossary.

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352654

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit B 1.04, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*

Conditioned*	122.9
Unconditioned*	0.0
Total	122.9
Garage	0.0

Exposure type

Suburban

NatHERS climate zone

56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

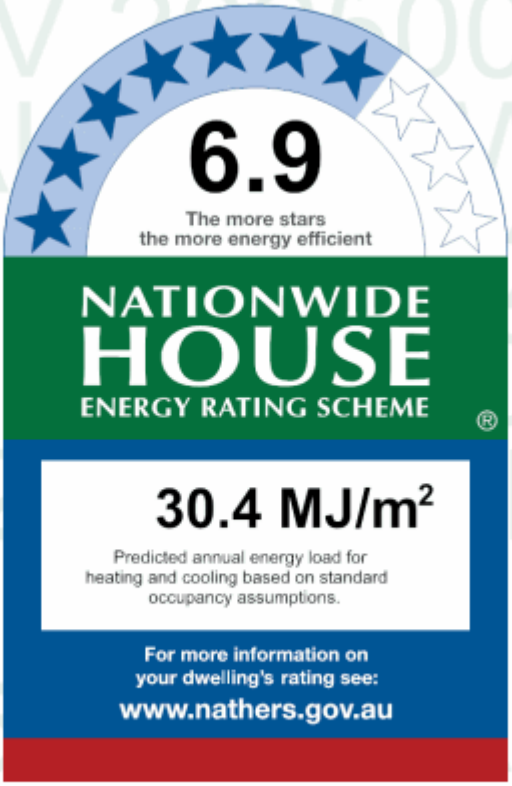

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	22.8	7.6
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=EajfHTkei . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Ldry	Daytime	4.46
Entry	Daytime	21.14
Kitchen/Living	Kitchen/Living	44.72
Bedroom 1	Bedroom	17.17
Bedroom 2	Bedroom	12.59
ENS 1	Nighttime	7.06
Bath	Daytime	4.89
Bedroom 3	Bedroom	10.9

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-003-03 A	W9	2130	1000	Awning	10	SE	Yes
Kitchen/Living	ALM-003-03 A	W11	2130	1200	Awning	10	SE	Yes
Kitchen/Living	ALM-004-03 A	W1	2700	2850	Sliding	45	SW	No
Kitchen/Living	ALM-004-03 A	W10	2700	3900	Sliding	60	SW	No
Bedroom 1	ALM-003-03 A	W8	950	1200	Awning	10	SE	No
Bedroom 1	ALM-003-03 A	W4	2130	1150	Awning	10	SW	No
Bedroom 2	ALM-003-03 A	W5	2130	1150	Awning	10	NE	No

* Refer to glossary.

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Bedroom 2	ALM-003-03 A	W7	950	1200	Awning	10	SE	No
Bedroom 3	ALM-003-03 A	W12	2130	1200	Awning	10	SE	Yes

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

* Refer to glossary.

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	6995	SE	0	No
Kitchen/Living	EW-1	2700	3000	SW	1300	Yes
Kitchen/Living	EW-1	2700	1300	NW	4200	No
Kitchen/Living	EW-1	2700	4200	SW	2600	Yes
Kitchen/Living	EW-1	2700	2200	NW	0	No
Bedroom 1	EW-1	2700	3095	SE	0	No
Bedroom 1	EW-1	2700	1500	SW	0	Yes
Bedroom 1	EW-1	2700	595	SE	0	No
Bedroom 2	EW-1	2700	1500	NE	0	Yes
Bedroom 2	EW-1	2700	3195	SE	0	No
Bedroom 3	EW-1	2700	2995	SE	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Concrete Panel/Blocks filled, plasterboard	52.38	No Insulation
IW-002	Steel Stud Frame, Direct Fix Plasterboard	115.56	No insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Ldry	Concrete Slab, Unit Below 200mm	4.46	None	No Insulation	Cork Tiles or Parquetry 8mm
Entry	Concrete Slab, Unit Below 200mm	21.14	None	No Insulation	Cork Tiles or Parquetry 8mm
Kitchen/Living	Concrete Slab, Unit Below 200mm	44.72	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 1	Concrete Slab, Unit Below 200mm	17.17	None	No Insulation	Cork Tiles or Parquetry 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Bedroom 2	Concrete Slab, Unit Below 200mm	12.59	None	No Insulation	Cork Tiles or Parquetry 8mm
ENS 1	Concrete Slab, Unit Below 200mm	7.06	None	No Insulation	Ceramic Tiles 8mm
Bath	Concrete Slab, Unit Below 200mm	4.89	None	No Insulation	Ceramic Tiles 8mm
Bedroom 3	Concrete Slab, Unit Below 200mm	10.90	None	No Insulation	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
Entry	Concrete, Plasterboard with Steel Frame	No insulation	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 3	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Ldry	1	Downlights - LED	150	Sealed
Ldry	1	Exhaust Fans	300	Sealed
Entry	8	Downlights - LED	150	Sealed
Kitchen/Living	17	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Bedroom 1	7	Downlights - LED	150	Sealed
Bedroom 2	5	Downlights - LED	150	Sealed
ENS 1	3	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
Bedroom 3	4	Downlights - LED	150	Sealed

* Refer to glossary.

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
Ceiling		900	0.75	No
Internal Wall		600	0.75	No
External Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

* Refer to glossary.

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352746

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit B 2.01, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*

Conditioned*	135.9
Unconditioned*	0.0
Total	135.9
Garage	0.0

Exposure type

Suburban

NatHERS climate zone

56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

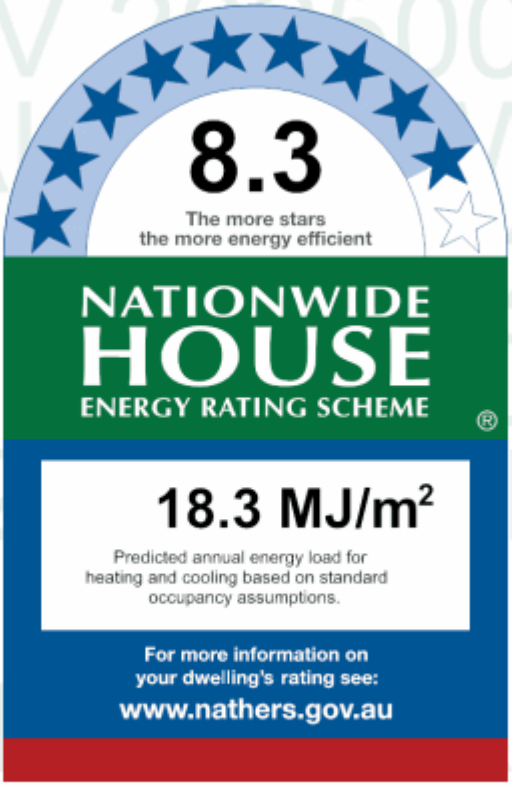

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	9.8	8.5
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=IBdwoimnv . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Ldry	Daytime	4.34
Entry	Daytime	19.39
Kitchen/Living	Kitchen/Living	48.57
Bedroom 1	Bedroom	14.62
Bedroom 2	Bedroom	12.64
ENS 1	Nighttime	7.06
Bath	Daytime	5.32
Bedroom 3	Bedroom	11.27
WC	Daytime	2.53
WIR 1	Nighttime	4.98
Pantry	Daytime	5.17

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-003-03 A	W23	2110	980	Awning	10	NW	Yes
Kitchen/Living	ALM-003-03 A	W14	2110	800	Awning	10	NE	No
Kitchen/Living	ALM-004-03 A	W10	2700	3900	Sliding	60	NE	No
Kitchen/Living	ALM-004-03 A	W13	2700	2600	Sliding	45	NE	No

* Refer to glossary.

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Bedroom 1	ALM-003-03 A	W22	950	1200	Awning	10	NW	No
Bedroom 1	ALM-003-03 A	W4	2110	1150	Awning	10	NE	No
Bedroom 2	ALM-003-03 A	W5	2110	1150	Awning	10	SW	No
Bedroom 2	ALM-003-03 A	W21	950	1200	Awning	10	NW	No
Bedroom 3	ALM-003-03 A	W24	2110	1150	Awning	10	NW	Yes

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

* Refer to glossary.

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	1295	NW	0	No
Kitchen/Living	EW-1	2700	3384	W	0	No
Kitchen/Living	EW-1	2700	1100	NE	0	Yes
Kitchen/Living	EW-1	2700	1100	NW	0	No
Kitchen/Living	EW-1	2700	7200	NE	2600	Yes
Bedroom 1	EW-1	2700	3095	NW	0	Yes
Bedroom 1	EW-1	2700	1500	NE	6275	Yes
Bedroom 2	EW-1	2700	1500	SW	0	Yes
Bedroom 2	EW-1	2700	3195	NW	0	Yes
Bedroom 3	EW-1	2700	3300	SW	0	No
Bedroom 3	EW-1	2700	3095	NW	0	No
Pantry	EW-1	2700	2790	NW	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Concrete Panel/Blocks filled, plasterboard	55.62	No Insulation
IW-002	Steel Stud Frame, Direct Fix Plasterboard	149.31	No insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Ldry	Concrete Slab, Unit Below 200mm	4.34	None	No Insulation	Ceramic Tiles 8mm
Entry	Concrete Slab, Unit Below 200mm	19.39	None	No Insulation	Cork Tiles or Parquetry 8mm
Kitchen/Living	Concrete Slab, Unit Below 200mm	48.57	None	No Insulation	Cork Tiles or Parquetry 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Bedroom 1	Concrete Slab, Unit Below 200mm	14.62	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 2	Concrete Slab, Unit Below 200mm	12.64	None	No Insulation	Cork Tiles or Parquetry 8mm
ENS 1	Concrete Slab, Unit Below 200mm	7.06	None	No Insulation	Ceramic Tiles 8mm
Bath	Concrete Slab, Unit Below 200mm	5.32	None	No Insulation	Ceramic Tiles 8mm
Bedroom 3	Concrete Slab, Unit Below 200mm	11.27	None	No Insulation	Cork Tiles or Parquetry 8mm
WC	Concrete Slab, Unit Below 200mm	2.53	None	No Insulation	Ceramic Tiles 8mm
WIR 1	Concrete Slab, Unit Below 200mm	4.98	None	No Insulation	Cork Tiles or Parquetry 8mm
Pantry	Concrete Slab, Unit Below 200mm	5.17	None	No Insulation	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
Entry	Concrete, Plasterboard with Steel Frame	No insulation	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 3	Concrete, Plasterboard with Steel Frame	No insulation	
WC	Concrete, Plasterboard with Steel Frame	No insulation	
WIR 1	Concrete, Plasterboard with Steel Frame	No insulation	
Pantry	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Ldry	1	Downlights - LED	150	Sealed
Ldry	1	Exhaust Fans	300	Sealed
Entry	8	Downlights - LED	150	Sealed

* Refer to glossary.

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Kitchen/Living	19	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Bedroom 1	6	Downlights - LED	150	Sealed
Bedroom 2	5	Downlights - LED	150	Sealed
ENS 1	2	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
Bedroom 3	5	Downlights - LED	150	Sealed
WC	1	Downlights - LED	150	Sealed
WC	1	Exhaust Fans	300	Sealed
WIR 1	2	Downlights - LED	150	Sealed
Pantry	2	Downlights - LED	150	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
Ceiling		900	0.75	No
Internal Wall		600	0.75	No
External Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352605

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit B 2.02, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*

Conditioned*	130.6
Unconditioned*	0.0
Total	130.6
Garage	0.0

Exposure type

Suburban

NatHERS climate zone

56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	9.8	8.4
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=glLGHygss . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Entry	Daytime	18.2
Kitchen/Living	Kitchen/Living	48.57
Bedroom 1	Bedroom	14.62
Bedroom 2	Bedroom	12.64
ENS 1	Nighttime	7.06
Bath	Daytime	5.32
Bedroom 3	Bedroom	11.46
WC	Daytime	2.53
WIR 1	Nighttime	4.98
Pantry	Daytime	5.17

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-004-03 A	W23	2700	3900	Sliding	60	NE	No
Kitchen/Living	ALM-004-03 A	W24	2700	2600	Sliding	45	NE	No
Kitchen/Living	ALM-003-03 A	W27	2110	800	Awning	10	NE	No
Kitchen/Living	ALM-003-03 A	W20	2110	1000	Awning	10	SE	Yes
Bedroom 1	ALM-003-03 A	W25	2110	1150	Awning	10	NE	No

* Refer to glossary.

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Bedroom 1	ALM-003-03 A	W30	950	1200	Awning	10	SE	No
Bedroom 2	ALM-003-03 A	W29	950	1200	Awning	10	SE	No
Bedroom 2	ALM-003-03 A	W28	2110	1150	Awning	10	SW	No
Bedroom 3	ALM-003-03 A	W26	2110	1200	Awning	10	SE	Yes

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

* Refer to glossary.

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	7200	NE	2600	Yes
Kitchen/Living	EW-1	2700	1100	SE	0	No
Kitchen/Living	EW-1	2700	1100	NE	0	Yes
Kitchen/Living	EW-1	2700	3384	SE	0	No
Kitchen/Living	EW-1	2700	1295	SE	0	No
Bedroom 1	EW-1	2700	1500	NE	6275	Yes
Bedroom 1	EW-1	2700	3095	SE	0	No
Bedroom 2	EW-1	2700	3195	SE	0	No
Bedroom 2	EW-1	2700	1500	SW	0	Yes
Bedroom 3	EW-1	2700	3095	SE	0	No
Pantry	EW-1	2700	2790	SE	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Concrete Panel/Blocks filled, plasterboard	46.98	No Insulation
IW-002	Steel Stud Frame, Direct Fix Plasterboard	135.54	No insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Entry	Concrete Slab, Unit Below 200mm	18.20	None	No Insulation	Cork Tiles or Parquetry 8mm
Kitchen/Living	Concrete Slab, Unit Below 200mm	48.57	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 1	Concrete Slab, Unit Below 200mm	14.62	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 2	Concrete Slab, Unit Below 200mm	12.64	None	No Insulation	Cork Tiles or Parquetry 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
ENS 1	Concrete Slab, Unit Below 200mm	7.06	None	No Insulation	Ceramic Tiles 8mm
Bath	Concrete Slab, Unit Below 200mm	5.32	None	No Insulation	Ceramic Tiles 8mm
Bedroom 3	Concrete Slab, Unit Below 200mm	11.46	None	No Insulation	Cork Tiles or Parquetry 8mm
WC	Concrete Slab, Unit Below 200mm	2.53	None	No Insulation	Ceramic Tiles 8mm
WIR 1	Concrete Slab, Unit Below 200mm	4.98	None	No Insulation	Cork Tiles or Parquetry 8mm
Pantry	Concrete Slab, Unit Below 200mm	5.17	None	No Insulation	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Entry	Concrete, Plasterboard with Steel Frame	No insulation	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 3	Concrete, Plasterboard with Steel Frame	No insulation	
WC	Concrete, Plasterboard with Steel Frame	No insulation	
WIR 1	Concrete, Plasterboard with Steel Frame	No insulation	
Pantry	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Entry	7	Downlights - LED	150	Sealed
Entry	1	Exhaust Fans	300	Sealed
Kitchen/Living	19	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Bedroom 1	6	Downlights - LED	150	Sealed
Bedroom 2	5	Downlights - LED	150	Sealed

* Refer to glossary.

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
ENS 1	2	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
Bedroom 3	4	Downlights - LED	150	Sealed
WC	1	Downlights - LED	150	Sealed
WC	1	Exhaust Fans	300	Sealed
WIR 1	2	Downlights - LED	150	Sealed
Pantry	2	Downlights - LED	150	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
Ceiling		900	0.75	No
Internal Wall		600	0.75	No
External Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352753

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit B 2.03, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*	
Conditioned*	91.8
Unconditioned*	0.0
Total	91.8
Garage	0.0

Exposure type
Suburban

NatHERS climate zone
56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

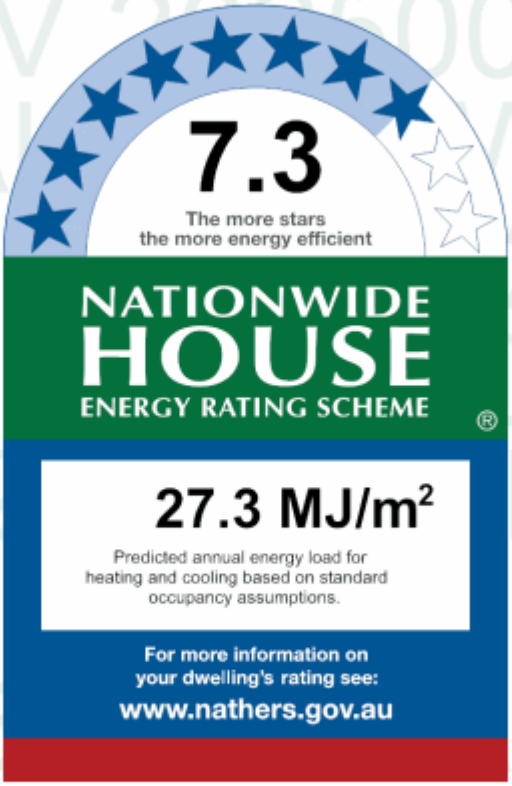

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	17.4	9.9
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=DWTlrYRoB . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Kitchen/Living	Kitchen/Living	38.64
Bedroom 1	Bedroom	12.12
ENS 1	Nighttime	6.49
Bedroom 2	Bedroom	11.2
Entry/Ldry	Daytime	10.68
Bath	Daytime	5.46
WIR 1	Nighttime	7.25
Glazed Common 1	Glazed Common Area	7.88

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-004-03 A	W3	2700	3900	Sliding	60	SW	No
Kitchen/Living	ALM-003-03 A	W6	2130	800	Awning	10	NE	No
Bedroom 1	ALM-004-03 A	n/a	2700	3000	Sliding	45	SW	No
Bedroom 2	ALM-003-03 A	W2	2130	1200	Awning	10	NW	Yes
Glazed Common 1	ALM-001-01 A	W7	1980	2000	Awning	10	NW	No

* Refer to glossary.

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

* Refer to glossary.

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	4195	SW	2100	Yes
Kitchen/Living	EW-1	2700	1700	NW	0	No
Kitchen/Living	EW-1	2700	3479	W	0	No
Kitchen/Living	EW-1	2700	1100	NE	0	Yes
Kitchen/Living	EW-1	2700	3595	NW	0	No
Bedroom 1	EW-1	2700	1000	NW	4200	No
Bedroom 1	EW-1	2700	3000	SW	1100	No
Bedroom 2	EW-1	2700	3795	NW	0	No
Bedroom 2	EW-1	2700	2995	NE	0	No
Entry/Ldry	EW-1	2700	595	NE	0	No
Glazed Common 1	EW-1	2700	2250	NW	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Steel Stud Frame, Direct Fix Plasterboard	75.87	No insulation
IW-002	Concrete Panel/Blocks filled, plasterboard	50.76	No Insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Kitchen/Living	Concrete Slab, Unit Below 200mm	38.64	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 1	Concrete Slab, Unit Below 200mm	12.12	None	No Insulation	Cork Tiles or Parquetry 8mm
ENS 1	Concrete Slab, Unit Below 200mm	6.49	None	No Insulation	Ceramic Tiles 8mm
Bedroom 2	Concrete Slab, Unit Below 200mm	11.20	None	No Insulation	Cork Tiles or Parquetry 8mm
Entry/Ldry	Concrete Slab, Unit Below 200mm	10.68	None	No Insulation	Cork Tiles or Parquetry 8mm
Bath	Concrete Slab, Unit Below 200mm	5.46	None	No Insulation	Ceramic Tiles 8mm
WIR 1	Concrete Slab, Unit Below 200mm	7.25	None	No Insulation	Cork Tiles or Parquetry 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Glazed Common 1	Concrete Slab, Unit Below 200mm	7.88	None	No Insulation	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
Entry/Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	
WIR 1	Concrete, Plasterboard with Steel Frame	No insulation	
Glazed Common 1	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Kitchen/Living	15	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Bedroom 1	5	Downlights - LED	150	Sealed
ENS 1	2	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bedroom 2	4	Downlights - LED	150	Sealed
Entry/Ldry	4	Downlights - LED	150	Sealed
Entry/Ldry	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
WIR 1	2	Downlights - LED	150	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

* Refer to glossary.

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
External Wall		600	0.75	No
Ceiling		900	0.75	No
Internal Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

* Refer to glossary.

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352621

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit B 2.04, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*

Conditioned*	122.9
Unconditioned*	0.0
Total	122.9
Garage	0.0

Exposure type

Suburban

NatHERS climate zone

56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

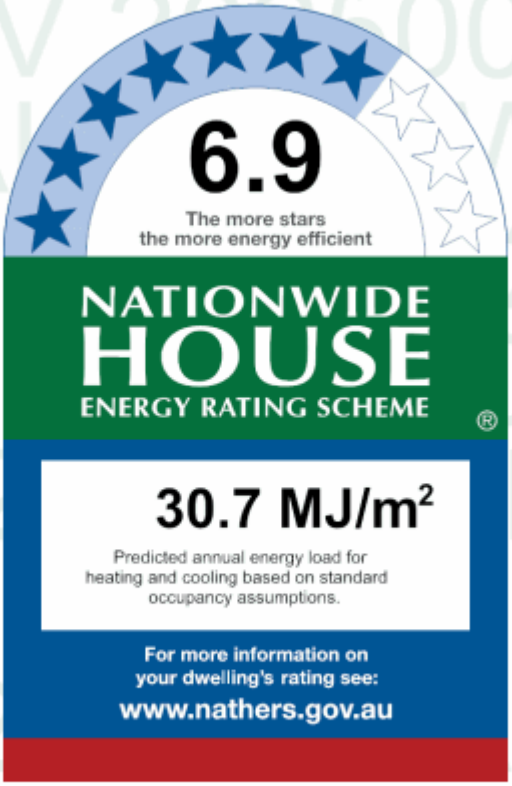

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	23.2	7.5
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=jxfrtRuJS . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Ldry	Daytime	4.46
Entry	Daytime	21.14
Kitchen/Living	Kitchen/Living	44.72
Bedroom 1	Bedroom	17.17
Bedroom 2	Bedroom	12.59
ENS 1	Nighttime	7.06
Bath	Daytime	4.89
Bedroom 3	Bedroom	10.9

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-003-03 A	W9	2130	1000	Awning	10	SE	Yes
Kitchen/Living	ALM-003-03 A	W11	2130	1200	Awning	10	SE	Yes
Kitchen/Living	ALM-004-03 A	W1	2700	2850	Sliding	45	SW	No
Kitchen/Living	ALM-004-03 A	W10	2700	3900	Sliding	60	SW	No
Bedroom 1	ALM-003-03 A	W8	950	1200	Awning	10	SE	No
Bedroom 1	ALM-003-03 A	W4	2130	1150	Awning	10	SW	No
Bedroom 2	ALM-003-03 A	W5	2130	1150	Awning	10	NE	No

* Refer to glossary.

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Bedroom 2	ALM-003-03 A	W7	950	1200	Awning	10	SE	No
Bedroom 3	ALM-003-03 A	W12	2130	1200	Awning	10	SE	Yes

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

* Refer to glossary.

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	6995	SE	0	No
Kitchen/Living	EW-1	2700	3000	SW	1300	Yes
Kitchen/Living	EW-1	2700	1300	NW	4200	No
Kitchen/Living	EW-1	2700	4200	SW	2600	Yes
Kitchen/Living	EW-1	2700	2200	NW	0	No
Bedroom 1	EW-1	2700	3095	SE	0	No
Bedroom 1	EW-1	2700	1500	SW	0	Yes
Bedroom 1	EW-1	2700	595	SE	0	No
Bedroom 2	EW-1	2700	1500	NE	0	Yes
Bedroom 2	EW-1	2700	3195	SE	0	No
Bedroom 3	EW-1	2700	2995	SE	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Concrete Panel/Blocks filled, plasterboard	52.38	No Insulation
IW-002	Steel Stud Frame, Direct Fix Plasterboard	115.56	No insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Ldry	Concrete Slab, Unit Below 200mm	4.46	None	No Insulation	Cork Tiles or Parquetry 8mm
Entry	Concrete Slab, Unit Below 200mm	21.14	None	No Insulation	Cork Tiles or Parquetry 8mm
Kitchen/Living	Concrete Slab, Unit Below 200mm	44.72	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 1	Concrete Slab, Unit Below 200mm	17.17	None	No Insulation	Cork Tiles or Parquetry 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Bedroom 2	Concrete Slab, Unit Below 200mm	12.59	None	No Insulation	Cork Tiles or Parquetry 8mm
ENS 1	Concrete Slab, Unit Below 200mm	7.06	None	No Insulation	Ceramic Tiles 8mm
Bath	Concrete Slab, Unit Below 200mm	4.89	None	No Insulation	Ceramic Tiles 8mm
Bedroom 3	Concrete Slab, Unit Below 200mm	10.90	None	No Insulation	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
Entry	Concrete, Plasterboard with Steel Frame	No insulation	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 3	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Ldry	1	Downlights - LED	150	Sealed
Ldry	1	Exhaust Fans	300	Sealed
Entry	8	Downlights - LED	150	Sealed
Kitchen/Living	17	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Bedroom 1	7	Downlights - LED	150	Sealed
Bedroom 2	5	Downlights - LED	150	Sealed
ENS 1	3	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
Bedroom 3	4	Downlights - LED	150	Sealed

* Refer to glossary.

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
Ceiling		900	0.75	No
Internal Wall		600	0.75	No
External Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

* Refer to glossary.

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352738

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit B 3.01, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*

Conditioned*	135.9
Unconditioned*	0.0
Total	135.9
Garage	0.0

Exposure type

Open

NatHERS climate zone

56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

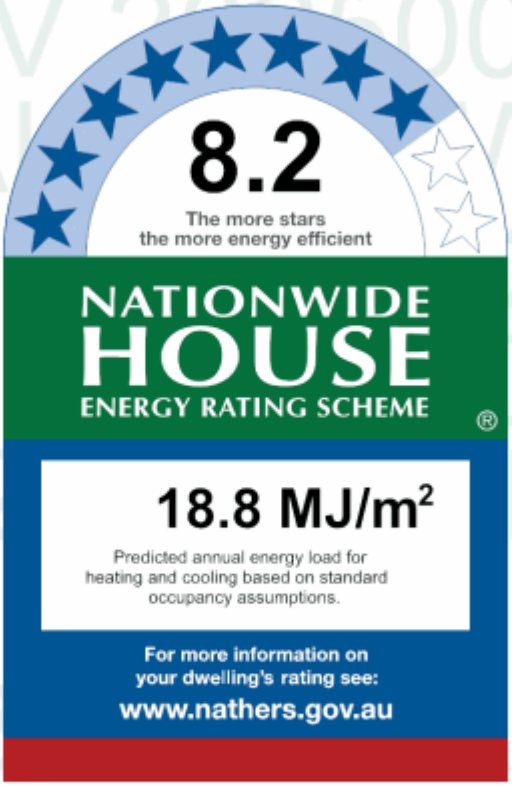

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	11.7	7.1
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=MVZOhpsaw . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Ldry	Daytime	4.34
Entry	Daytime	19.39
Kitchen/Living	Kitchen/Living	48.57
Bedroom 1	Bedroom	14.62
Bedroom 2	Bedroom	12.64
ENS 1	Nighttime	7.06
Bath	Daytime	5.32
Bedroom 3	Bedroom	11.27
WC	Daytime	2.53
WIR 1	Nighttime	4.98
Pantry	Daytime	5.17

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-003-03 A	W23	2110	1000	Awning	10	NW	Yes
Kitchen/Living	ALM-003-03 A	W14	2110	800	Awning	10	NE	No
Kitchen/Living	ALM-004-03 A	W10	2700	3900	Sliding	60	NE	No
Kitchen/Living	ALM-004-03 A	W13	2700	2600	Sliding	45	NE	No

* Refer to glossary.

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Bedroom 1	ALM-003-03 A	W22	950	1200	Awning	10	NW	No
Bedroom 1	ALM-003-03 A	W4	2110	1150	Awning	10	NE	No
Bedroom 2	ALM-003-03 A	W5	2110	1150	Awning	10	SW	No
Bedroom 2	ALM-003-03 A	W21	950	1200	Awning	10	NW	No
Bedroom 3	ALM-003-03 A	W24	2110	1200	Awning	10	NW	Yes

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

* Refer to glossary.

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	1295	NW	0	No
Kitchen/Living	EW-1	2700	3384	W	0	No
Kitchen/Living	EW-1	2700	1100	NE	0	Yes
Kitchen/Living	EW-1	2700	1100	NW	0	No
Kitchen/Living	EW-1	2700	7200	NE	2600	Yes
Bedroom 1	EW-1	2700	3095	NW	0	No
Bedroom 1	EW-1	2700	1500	NE	6275	Yes
Bedroom 2	EW-1	2700	1500	SW	0	Yes
Bedroom 2	EW-1	2700	3195	NW	0	No
Bedroom 3	EW-1	2700	3300	SW	0	No
Bedroom 3	EW-1	2700	3095	NW	0	No
Pantry	EW-1	2700	2790	NW	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Concrete Panel/Blocks filled, plasterboard	55.62	No Insulation
IW-002	Steel Stud Frame, Direct Fix Plasterboard	149.31	No insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Ldry	Concrete Slab, Unit Below 200mm	4.34	None	No Insulation	Ceramic Tiles 8mm
Entry	Concrete Slab, Unit Below 200mm	19.39	None	No Insulation	Cork Tiles or Parquetry 8mm
Kitchen/Living	Concrete Slab, Unit Below 200mm	48.57	None	No Insulation	Cork Tiles or Parquetry 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Bedroom 1	Concrete Slab, Unit Below 200mm	14.62	None	No Insulation	Carpet+Rubber Underlay 18mm
Bedroom 2	Concrete Slab, Unit Below 200mm	12.64	None	No Insulation	Carpet+Rubber Underlay 18mm
ENS 1	Concrete Slab, Unit Below 200mm	7.06	None	No Insulation	Ceramic Tiles 8mm
Bath	Concrete Slab, Unit Below 200mm	5.32	None	No Insulation	Ceramic Tiles 8mm
Bedroom 3	Concrete Slab, Unit Below 200mm	11.27	None	No Insulation	Carpet+Rubber Underlay 18mm
WC	Concrete Slab, Unit Below 200mm	2.53	None	No Insulation	Ceramic Tiles 8mm
WIR 1	Concrete Slab, Unit Below 200mm	4.98	None	No Insulation	Carpet+Rubber Underlay 18mm
Pantry	Concrete Slab, Unit Below 200mm	5.17	None	No Insulation	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
Entry	Concrete, Plasterboard with Steel Frame	No insulation	
Entry	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Bedroom 2	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 3	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 3	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
WC	Concrete, Plasterboard with Steel Frame	No insulation	
WIR 1	Concrete, Plasterboard with Steel Frame	No insulation	
WIR 1	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Pantry	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	

* Refer to glossary.

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Ldry	1	Downlights - LED	150	Sealed
Ldry	1	Exhaust Fans	300	Sealed
Entry	8	Downlights - LED	150	Sealed
Kitchen/Living	19	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Bedroom 1	6	Downlights - LED	150	Sealed
Bedroom 2	5	Downlights - LED	150	Sealed
ENS 1	2	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
Bedroom 3	5	Downlights - LED	150	Sealed
WC	1	Downlights - LED	150	Sealed
WC	1	Exhaust Fans	300	Sealed
WIR 1	2	Downlights - LED	150	Sealed
Pantry	2	Downlights - LED	150	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
Waterproofing Membrane	No Added Insulation, No air Gap	0.30	Light

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
Ceiling		900	0.75	No
Internal Wall		600	0.75	No

* Refer to glossary.

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
External Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

* Refer to glossary.

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352597

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit B 3.02, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*

Conditioned*	130.6
Unconditioned*	0.0
Total	130.6
Garage	0.0

Exposure type

Suburban

NatHERS climate zone

56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	10.5	7.9
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=qIIhFHwDr . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Entry	Daytime	18.2
Kitchen/Living	Kitchen/Living	48.57
Bedroom 1	Bedroom	14.62
Bedroom 2	Bedroom	12.64
ENS 1	Nighttime	7.06
Bath	Daytime	5.32
Bedroom 3	Bedroom	11.46
WC	Daytime	2.53
WIR 1	Nighttime	4.98
Pantry	Daytime	5.17

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-004-03 A	W23	2700	3900	Sliding	60	NE	No
Kitchen/Living	ALM-004-03 A	W24	2700	2600	Sliding	45	NE	No
Kitchen/Living	ALM-003-03 A	W27	2110	800	Awning	10	NE	No
Kitchen/Living	ALM-003-03 A	W20	2110	1000	Awning	10	SE	Yes
Bedroom 1	ALM-003-03 A	W25	2110	1150	Awning	10	NE	No

* Refer to glossary.

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Bedroom 1	ALM-003-03 A	W30	950	1200	Awning	10	SE	No
Bedroom 2	ALM-003-03 A	W29	950	1200	Awning	10	SE	No
Bedroom 2	ALM-003-03 A	W28	2110	1150	Awning	10	SW	No
Bedroom 3	ALM-003-03 A	W26	2110	1200	Awning	10	SE	Yes

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

* Refer to glossary.

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	7200	NE	2600	Yes
Kitchen/Living	EW-1	2700	1100	SE	0	No
Kitchen/Living	EW-1	2700	1100	NE	0	Yes
Kitchen/Living	EW-1	2700	3384	SE	0	No
Kitchen/Living	EW-1	2700	1295	SE	0	No
Bedroom 1	EW-1	2700	1500	NE	6275	Yes
Bedroom 1	EW-1	2700	3095	SE	0	No
Bedroom 2	EW-1	2700	3195	SE	0	No
Bedroom 2	EW-1	2700	1500	SW	0	Yes
Bedroom 3	EW-1	2700	3095	SE	0	No
Pantry	EW-1	2700	2790	SE	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Concrete Panel/Blocks filled, plasterboard	46.98	No Insulation
IW-002	Steel Stud Frame, Direct Fix Plasterboard	135.54	No insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Entry	Concrete Slab, Unit Below 200mm	18.20	None	No Insulation	Cork Tiles or Parquetry 8mm
Kitchen/Living	Concrete Slab, Unit Below 200mm	48.57	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 1	Concrete Slab, Unit Below 200mm	14.62	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 2	Concrete Slab, Unit Below 200mm	12.64	None	No Insulation	Cork Tiles or Parquetry 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
ENS 1	Concrete Slab, Unit Below 200mm	7.06	None	No Insulation	Ceramic Tiles 8mm
Bath	Concrete Slab, Unit Below 200mm	5.32	None	No Insulation	Ceramic Tiles 8mm
Bedroom 3	Concrete Slab, Unit Below 200mm	11.46	None	No Insulation	Cork Tiles or Parquetry 8mm
WC	Concrete Slab, Unit Below 200mm	2.53	None	No Insulation	Ceramic Tiles 8mm
WIR 1	Concrete Slab, Unit Below 200mm	4.98	None	No Insulation	Cork Tiles or Parquetry 8mm
Pantry	Concrete Slab, Unit Below 200mm	5.17	None	No Insulation	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Entry	Concrete, Plasterboard with Steel Frame	No insulation	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 3	Concrete, Plasterboard with Steel Frame	No insulation	
WC	Concrete, Plasterboard with Steel Frame	No insulation	
WIR 1	Concrete, Plasterboard with Steel Frame	No insulation	
Pantry	Concrete, Plasterboard with Steel Frame	No insulation	
Pantry	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Entry	7	Downlights - LED	150	Sealed
Entry	1	Exhaust Fans	300	Sealed

* Refer to glossary.

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Kitchen/Living	19	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Bedroom 1	6	Downlights - LED	150	Sealed
Bedroom 2	5	Downlights - LED	150	Sealed
ENS 1	2	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
Bedroom 3	4	Downlights - LED	150	Sealed
WC	1	Downlights - LED	150	Sealed
WC	1	Exhaust Fans	300	Sealed
WIR 1	2	Downlights - LED	150	Sealed
Pantry	2	Downlights - LED	150	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
Ceiling		900	0.75	No
Internal Wall		600	0.75	No
External Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352720

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit B 3.03, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*

Conditioned*	91.8
Unconditioned*	0.0
Total	91.8
Garage	0.0

Exposure type

Suburban

NatHERS climate zone

56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

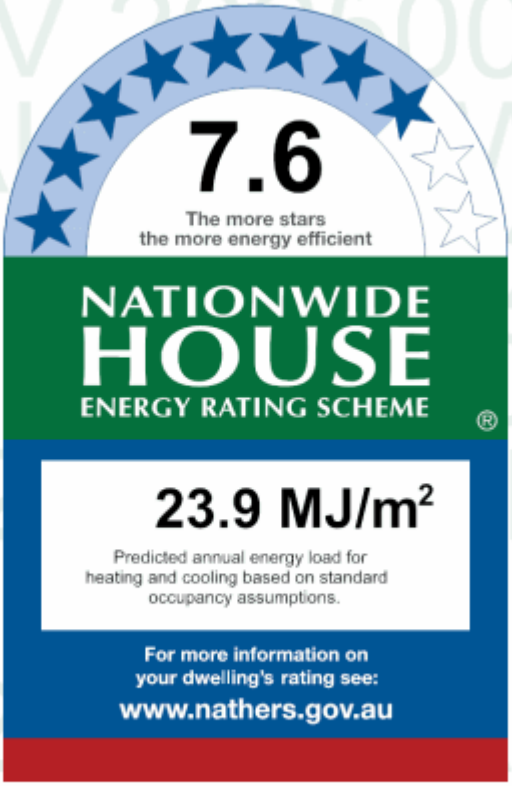

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	13.7	10.2
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=OhYjTuMrB . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

* Refer to glossary.

Room *schedule*

Room	Zone Type	Area [m^2]
Kitchen/Living	Kitchen/Living	38.64
Bedroom 1	Bedroom	12.12
ENS 1	Nighttime	6.49
Bedroom 2	Bedroom	11.2
Entry/Ldry	Daytime	10.68
Bath	Daytime	5.46
WIR 1	Nighttime	7.25
Glazed Common 1	Glazed Common Area	7.88

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-004-03 A	W3	2700	3900	Sliding	60	SW	No
Kitchen/Living	ALM-003-03 A	W6	2130	800	Awning	10	NE	No
Bedroom 1	ALM-004-03 A	n/a	2700	3000	Sliding	45	SW	No
Bedroom 2	ALM-003-03 A	W2	2130	1200	Awning	10	NW	Yes
Glazed Common 1	ALM-001-01 A	W7	1980	2000	Awning	10	NW	No

* Refer to glossary.

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

* Refer to glossary.

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	4195	SW	2100	Yes
Kitchen/Living	EW-1	2700	1700	NW	0	No
Kitchen/Living	EW-1	2700	3479	W	0	No
Kitchen/Living	EW-1	2700	1100	NE	0	Yes
Kitchen/Living	EW-1	2700	3595	NW	0	No
Bedroom 1	EW-1	2700	1000	NW	4200	No
Bedroom 1	EW-1	2700	3000	SW	1100	No
Bedroom 2	EW-1	2700	3795	NW	0	No
Bedroom 2	EW-1	2700	2995	NE	0	No
Entry/Ldry	EW-1	2700	595	NE	0	No
Glazed Common 1	EW-1	2700	2250	NW	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Steel Stud Frame, Direct Fix Plasterboard	75.87	No insulation
IW-002	Concrete Panel/Blocks filled, plasterboard	50.76	No Insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Kitchen/Living	Concrete Slab, Unit Below 200mm	38.64	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 1	Concrete Slab, Unit Below 200mm	12.12	None	No Insulation	Cork Tiles or Parquetry 8mm
ENS 1	Concrete Slab, Unit Below 200mm	6.49	None	No Insulation	Ceramic Tiles 8mm
Bedroom 2	Concrete Slab, Unit Below 200mm	11.20	None	No Insulation	Cork Tiles or Parquetry 8mm
Entry/Ldry	Concrete Slab, Unit Below 200mm	10.68	None	No Insulation	Cork Tiles or Parquetry 8mm
Bath	Concrete Slab, Unit Below 200mm	5.46	None	No Insulation	Ceramic Tiles 8mm
WIR 1	Concrete Slab, Unit Below 200mm	7.25	None	No Insulation	Cork Tiles or Parquetry 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Glazed Common 1	Concrete Slab, Unit Below 200mm	7.88	None	No Insulation	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Entry/Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	
WIR 1	Concrete, Plasterboard with Steel Frame	No insulation	
Glazed Common 1	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Kitchen/Living	15	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Bedroom 1	5	Downlights - LED	150	Sealed
ENS 1	2	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bedroom 2	4	Downlights - LED	150	Sealed
Entry/Ldry	4	Downlights - LED	150	Sealed
Entry/Ldry	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
WIR 1	2	Downlights - LED	150	Sealed

* Refer to glossary.

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
External Wall		600	0.75	No
Ceiling		900	0.75	No
Internal Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

* Refer to glossary.

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352639

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit B 3.04, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*

Conditioned*	122.9
Unconditioned*	0.0
Total	122.9
Garage	0.0

Exposure type

Suburban

NatHERS climate zone

56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

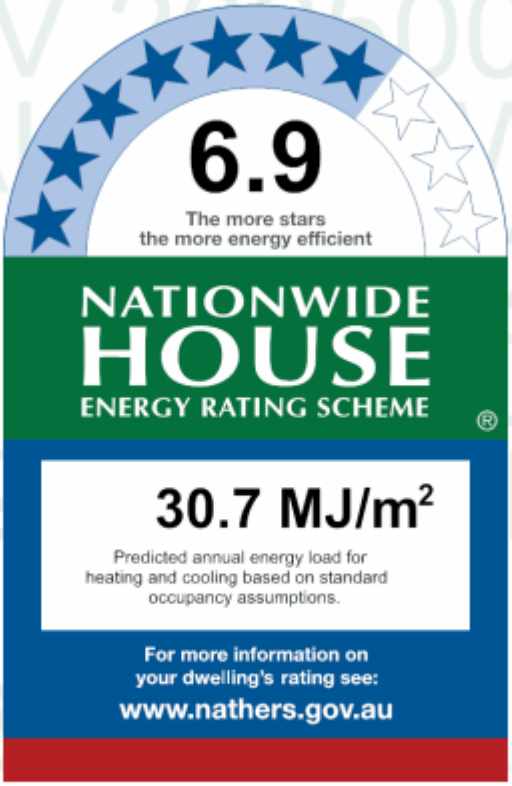

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	23.4	7.3
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=KNQCQLRjY . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Ldry	Daytime	4.46
Entry	Daytime	21.14
Kitchen/Living	Kitchen/Living	44.72
Bedroom 1	Bedroom	17.17
Bedroom 2	Bedroom	12.59
ENS 1	Nighttime	7.06
Bath	Daytime	4.89
Bedroom 3	Bedroom	10.9

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-003-03 A	W9	2130	1000	Awning	10	SE	Yes
Kitchen/Living	ALM-003-03 A	W11	2130	1200	Awning	10	SE	Yes
Kitchen/Living	ALM-004-03 A	W1	2700	2850	Sliding	45	SW	No
Kitchen/Living	ALM-004-03 A	W10	2700	3900	Sliding	60	SW	No
Bedroom 1	ALM-003-03 A	W8	950	1200	Awning	10	SE	No
Bedroom 1	ALM-003-03 A	W4	2130	1150	Awning	10	SW	No
Bedroom 2	ALM-003-03 A	W5	2130	1150	Awning	10	NE	No

* Refer to glossary.

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Bedroom 2	ALM-003-03 A	W7	950	1200	Awning	10	SE	No
Bedroom 3	ALM-003-03 A	W12	2130	1200	Awning	10	SE	Yes

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

* Refer to glossary.

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	6995	SE	0	No
Kitchen/Living	EW-1	2700	3000	SW	1300	Yes
Kitchen/Living	EW-1	2700	1300	NW	4200	No
Kitchen/Living	EW-1	2700	4200	SW	2600	Yes
Kitchen/Living	EW-1	2700	2200	NW	0	No
Bedroom 1	EW-1	2700	3095	SE	0	No
Bedroom 1	EW-1	2700	1500	SW	0	Yes
Bedroom 1	EW-1	2700	595	SE	0	No
Bedroom 2	EW-1	2700	1500	NE	0	Yes
Bedroom 2	EW-1	2700	3195	SE	0	No
Bedroom 3	EW-1	2700	2995	SE	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Concrete Panel/Blocks filled, plasterboard	52.38	No Insulation
IW-002	Steel Stud Frame, Direct Fix Plasterboard	115.56	No insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Ldry	Concrete Slab, Unit Below 200mm	4.46	None	No Insulation	Cork Tiles or Parquetry 8mm
Entry	Concrete Slab, Unit Below 200mm	21.14	None	No Insulation	Cork Tiles or Parquetry 8mm
Kitchen/Living	Concrete Slab, Unit Below 200mm	44.72	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 1	Concrete Slab, Unit Below 200mm	17.17	None	No Insulation	Cork Tiles or Parquetry 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Bedroom 2	Concrete Slab, Unit Below 200mm	12.59	None	No Insulation	Cork Tiles or Parquetry 8mm
ENS 1	Concrete Slab, Unit Below 200mm	7.06	None	No Insulation	Ceramic Tiles 8mm
Bath	Concrete Slab, Unit Below 200mm	4.89	None	No Insulation	Ceramic Tiles 8mm
Bedroom 3	Concrete Slab, Unit Below 200mm	10.90	None	No Insulation	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
Entry	Concrete, Plasterboard with Steel Frame	No insulation	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 3	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Ldry	1	Downlights - LED	150	Sealed
Ldry	1	Exhaust Fans	300	Sealed
Entry	8	Downlights - LED	150	Sealed
Kitchen/Living	17	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Bedroom 1	7	Downlights - LED	150	Sealed
Bedroom 2	5	Downlights - LED	150	Sealed
ENS 1	3	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed

* Refer to glossary.

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
Bedroom 3	4	Downlights - LED	150	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
Ceiling		900	0.75	No
Internal Wall		600	0.75	No
External Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352688

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit B 4.01, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*

Conditioned*	171.0
Unconditioned*	0.0
Total	171.0
Garage	0.0

Exposure type

Open

NatHERS climate zone

56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	5.6	11.5
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=JCanHRkRJ . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
ENS 1	Nighttime	10.6
WIR 1	Nighttime	11.16
Bedroom 1	Bedroom	15.19
Kitchen/Living	Kitchen/Living	64.97
Bedroom 2	Bedroom	13.53
ENS 2	Nighttime	5.43
Bath	Daytime	5.12
Ldry	Daytime	5.03
WC	Daytime	2.55
Pantry	Daytime	3.81
Bedroom 3	Bedroom	12.93
Entry	Daytime	17.15
WIR	Nighttime	3.51

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Bedroom 1	ALM-003-03 A	W7	1980	1700	Awning	10	NE	No
Kitchen/Living	ALM-003-03 A	W11	1980	1700	Awning	10	NW	No

* Refer to glossary.

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-003-03 A	W12	1980	1000	Awning	10	NW	No
Kitchen/Living	ALM-004-03 A	W9	2700	4700	Sliding	60	NE	No
Kitchen/Living	ALM-004-03 A	W10	2700	4100	Sliding	60	NE	No
Bedroom 2	ALM-003-03 A	W14	1980	1700	Awning	10	NW	No
Bedroom 3	ALM-003-03 A	W13	1980	1700	Awning	10	NW	No

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
ENS 1	EW-1	2700	3595	SE	0	No
WIR 1	EW-1	2700	3090	SE	0	No
Bedroom 1	EW-1	2700	2000	NE	0	No
Bedroom 1	EW-1	2700	4195	SE	0	No
Kitchen/Living	EW-1	2700	7195	NW	0	No
Kitchen/Living	EW-1	2700	9700	NE	2400	Yes
Kitchen/Living	EW-1	2700	4895	SE	0	No
Bedroom 2	EW-1	2700	3390	NW	0	No
ENS 2	EW-1	2700	500	SW	0	No
ENS 2	EW-1	2700	1795	NW	0	No
Bedroom 3	EW-1	2700	3390	NW	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Steel Stud Frame, Direct Fix Plasterboard	176.09	No insulation
IW-002	Concrete Panel/Blocks filled, plasterboard	22.14	No Insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
ENS 1	Concrete Slab, Unit Below 200mm	10.60	None	No Insulation	Ceramic Tiles 8mm
WIR 1	Concrete Slab, Unit Below 200mm	11.16	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 1	Concrete Slab, Unit Below 200mm	15.19	None	No Insulation	Cork Tiles or Parquetry 8mm
Kitchen/Living	Concrete Slab, Unit Below 200mm	64.97	None	No Insulation	Cork Tiles or Parquetry 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Bedroom 2	Concrete Slab, Unit Below 200mm	13.53	None	No Insulation	Cork Tiles or Parquetry 8mm
ENS 2	Concrete Slab, Unit Below 200mm	5.43	None	No Insulation	Ceramic Tiles 8mm
Bath	Concrete Slab, Unit Below 200mm	5.12	None	No Insulation	Ceramic Tiles 8mm
Ldry	Concrete Slab, Unit Below 200mm	5.03	None	No Insulation	Ceramic Tiles 8mm
WC	Concrete Slab, Unit Below 200mm	2.55	None	No Insulation	Ceramic Tiles 8mm
Pantry	Concrete Slab, Unit Below 200mm	3.81	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 3	Concrete Slab, Unit Below 200mm	12.93	None	No Insulation	Cork Tiles or Parquetry 8mm
Entry	Concrete Slab, Unit Below 200mm	17.15	None	No Insulation	Cork Tiles or Parquetry 8mm
WIR	Concrete Slab, Unit Below 200mm	3.51	None	No Insulation	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
WIR 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 2	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	
Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
WC	Concrete, Plasterboard with Steel Frame	No insulation	
Pantry	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 3	Concrete, Plasterboard with Steel Frame	No insulation	
Entry	Concrete, Plasterboard with Steel Frame	No insulation	
WIR	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
ENS 1	4	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
WIR 1	4	Downlights - LED	150	Sealed
Bedroom 1	6	Downlights - LED	150	Sealed
Kitchen/Living	26	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Bedroom 2	5	Downlights - LED	150	Sealed
ENS 2	2	Downlights - LED	150	Sealed
ENS 2	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
Ldry	2	Downlights - LED	150	Sealed
Ldry	1	Exhaust Fans	300	Sealed
WC	1	Downlights - LED	150	Sealed
WC	1	Exhaust Fans	300	Sealed
Pantry	1	Downlights - LED	150	Sealed
Bedroom 3	5	Downlights - LED	150	Sealed
Entry	7	Downlights - LED	150	Sealed
WIR	1	Downlights - LED	150	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

* Refer to glossary.

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
External Wall		600	0.75	No
Ceiling		900	0.75	No
Internal Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352670

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit B 4.02, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*

Conditioned*	124.1
Unconditioned*	0.0
Total	124.1
Garage	0.0

Exposure type

Open

NatHERS climate zone

56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

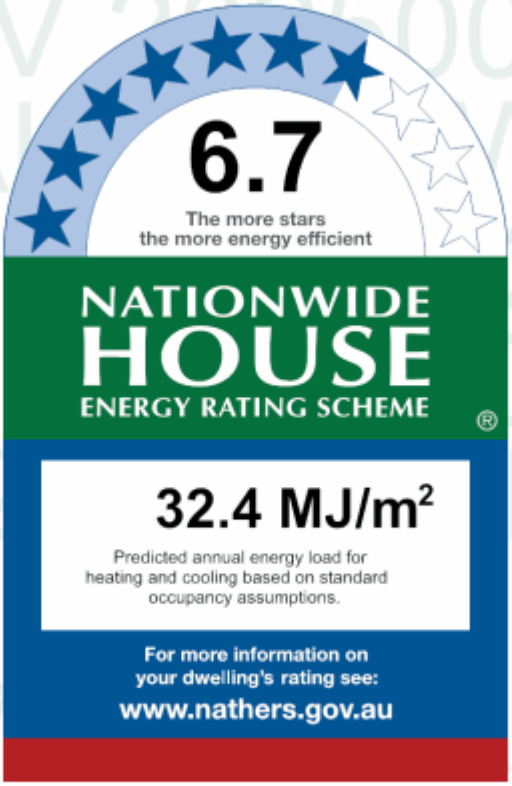

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	20.6	11.8
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=vqHUpuwyj . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Kitchen/Living	Kitchen/Living	45.56
Bedroom 1	Bedroom	18.78
ENS	Nighttime	8.5
WIR	Nighttime	3.5
Bedroom 2	Bedroom	15.31
Butlers Pantry	Daytime	4.73
Bath	Daytime	4.2
Entry	Daytime	11.69
Bedroom 3	Bedroom	11.79
Glazed Common	Glazed Common Area	14.67

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-003-03 A	W11	1980	1000	Awning	10	NW	No
Kitchen/Living	ALM-003-03 A	W16	1980	1200	Awning	10	NW	No
Kitchen/Living	ALM-004-03 A	W17	2700	4170	Sliding	60	SW	No
Kitchen/Living	ALM-004-03 A	W18	2700	3150	Sliding	45	SW	No
Bedroom 1	ALM-003-03 A	W10	1980	1200	Awning	10	SE	Yes

* Refer to glossary.

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Bedroom 1	ALM-004-03 A	W9	2700	3300	Sliding	45	SW	No
Bedroom 2	ALM-003-03 A	W12	1980	1200	Awning	10	NW	No
Bedroom 3	ALM-003-03 A	W15	1980	1200	Awning	10	SE	Yes
Glazed Common	ALM-001-01 A	W14	1980	2000	Awning	10	NW	No

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

* Refer to glossary.

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	6995	NW	0	No
Kitchen/Living	EW-1	2700	7695	SW	2600	Yes
Bedroom 1	EW-1	2700	4095	SE	0	No
Bedroom 1	EW-1	2700	3995	SW	2600	Yes
ENS	EW-1	2700	2190	SE	0	No
WIR	EW-1	2700	1590	SE	0	No
Bedroom 2	EW-1	2700	700	NE	0	No
Bedroom 2	EW-1	2700	3895	NW	0	No
Bedroom 3	EW-1	2700	2995	SE	0	No
Glazed Common	EW-1	2700	2250	NW	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Steel Stud Frame, Direct Fix Plasterboard	111.55	No insulation
IW-002	Concrete Panel/Blocks filled, plasterboard	45.36	No Insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Kitchen/Living	Concrete Slab, Unit Below 200mm	45.56	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 1	Concrete Slab, Unit Below 200mm	18.78	None	No Insulation	Cork Tiles or Parquetry 8mm
ENS	Concrete Slab, Unit Below 200mm	8.50	None	No Insulation	Ceramic Tiles 8mm
WIR	Concrete Slab, Unit Below 200mm	3.50	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 2	Concrete Slab, Unit Below 200mm	15.31	None	No Insulation	Cork Tiles or Parquetry 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Butlers Pantry	Concrete Slab, Unit Below 200mm	4.73	None	No Insulation	Cork Tiles or Parquetry 8mm
Bath	Concrete Slab, Unit Below 200mm	4.20	None	No Insulation	Ceramic Tiles 8mm
Entry	Concrete Slab, Unit Below 200mm	11.69	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 3	Concrete Slab, Unit Below 200mm	11.79	None	No Insulation	Cork Tiles or Parquetry 8mm
Glazed Common	Concrete Slab, Unit Below 200mm	14.67	None	No Insulation	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
ENS	Concrete, Plasterboard with Steel Frame	No insulation	
WIR	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
Butlers Pantry	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	
Entry	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 3	Concrete, Plasterboard with Steel Frame	No insulation	
Glazed Common	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Kitchen/Living	18	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Bedroom 1	7	Downlights - LED	150	Sealed
ENS	3	Downlights - LED	150	Sealed
ENS	1	Exhaust Fans	300	Sealed
WIR	1	Downlights - LED	150	Sealed
Bedroom 2	6	Downlights - LED	150	Sealed
Butlers Pantry	2	Downlights - LED	150	Sealed

* Refer to glossary.

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Butlers Pantry	1	Exhaust Fans	300	Sealed
Bath	1	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
Entry	5	Downlights - LED	150	Sealed
Bedroom 3	4	Downlights - LED	150	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
External Wall		600	0.75	No
Ceiling		900	0.75	No
Internal Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352662

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit B 5.01, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*

Conditioned*	171.0
Unconditioned*	0.0
Total	171.0
Garage	0.0

Exposure type

Open

NatHERS climate zone

56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	10.0	11.4
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=cLmUaBVWU . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
ENS 1	Nighttime	10.6
WIR 1	Nighttime	11.16
Bedroom 1	Bedroom	15.19
Kitchen/Living	Kitchen/Living	64.97
Bedroom 2	Bedroom	13.53
ENS 2	Nighttime	5.43
Bath	Daytime	5.12
Ldry	Daytime	5.03
WC	Daytime	2.55
Pantry	Daytime	3.81
Bedroom 3	Bedroom	12.93
Entry	Daytime	17.15
WIR	Nighttime	3.51

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Bedroom 1	ALM-003-03 A	W7	1980	1700	Awning	10	NE	No
Kitchen/Living	ALM-003-03 A	W11	1980	1700	Awning	10	NW	No

* Refer to glossary.

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-003-03 A	W12	1980	1000	Awning	10	NW	No
Kitchen/Living	ALM-004-03 A	W9	2700	4700	Sliding	60	NE	No
Kitchen/Living	ALM-004-03 A	W10	2700	4100	Sliding	60	NE	No
Bedroom 2	ALM-003-03 A	W14	1980	1700	Awning	10	NW	No
Bedroom 3	ALM-003-03 A	W13	1980	1700	Awning	10	NW	No

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

* Refer to glossary.

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
ENS 1	EW-1	2700	3595	SE	0	No
WIR 1	EW-1	2700	3090	SE	0	No
Bedroom 1	EW-1	2700	2000	NE	0	No
Bedroom 1	EW-1	2700	4195	SE	0	No
Kitchen/Living	EW-1	2700	7195	NW	0	No
Kitchen/Living	EW-1	2700	9700	NE	1500	Yes
Kitchen/Living	EW-1	2700	4895	SE	0	No
Bedroom 2	EW-1	2700	3390	NW	0	No
ENS 2	EW-1	2700	500	SW	0	No
ENS 2	EW-1	2700	1795	NW	0	No
Bedroom 3	EW-1	2700	3390	NW	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Steel Stud Frame, Direct Fix Plasterboard	176.09	No insulation
IW-002	Concrete Panel/Blocks filled, plasterboard	22.14	No Insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
ENS 1	Concrete Slab, Unit Below 200mm	10.60	None	No Insulation	Ceramic Tiles 8mm
WIR 1	Concrete Slab, Unit Below 200mm	11.16	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 1	Concrete Slab, Unit Below 200mm	15.19	None	No Insulation	Cork Tiles or Parquetry 8mm
Kitchen/Living	Concrete Slab, Unit Below 200mm	64.97	None	No Insulation	Cork Tiles or Parquetry 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Bedroom 2	Concrete Slab, Unit Below 200mm	13.53	None	No Insulation	Cork Tiles or Parquetry 8mm
ENS 2	Concrete Slab, Unit Below 200mm	5.43	None	No Insulation	Ceramic Tiles 8mm
Bath	Concrete Slab, Unit Below 200mm	5.12	None	No Insulation	Ceramic Tiles 8mm
Ldry	Concrete Slab, Unit Below 200mm	5.03	None	No Insulation	Ceramic Tiles 8mm
WC	Concrete Slab, Unit Below 200mm	2.55	None	No Insulation	Ceramic Tiles 8mm
Pantry	Concrete Slab, Unit Below 200mm	3.81	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 3	Concrete Slab, Unit Below 200mm	12.93	None	No Insulation	Cork Tiles or Parquetry 8mm
Entry	Concrete Slab, Unit Below 200mm	17.15	None	No Insulation	Cork Tiles or Parquetry 8mm
WIR	Concrete Slab, Unit Below 200mm	3.51	None	No Insulation	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
ENS 1	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
WIR 1	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Bedroom 1	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Bedroom 2	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
ENS 2	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Bath	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Ldry	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
WC	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Pantry	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Bedroom 3	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Entry	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
WIR	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	

* Refer to glossary.

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
ENS 1	4	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
WIR 1	4	Downlights - LED	150	Sealed
Bedroom 1	6	Downlights - LED	150	Sealed
Kitchen/Living	26	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Bedroom 2	5	Downlights - LED	150	Sealed
ENS 2	2	Downlights - LED	150	Sealed
ENS 2	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
Ldry	2	Downlights - LED	150	Sealed
Ldry	1	Exhaust Fans	300	Sealed
WC	1	Downlights - LED	150	Sealed
WC	1	Exhaust Fans	300	Sealed
Pantry	1	Downlights - LED	150	Sealed
Bedroom 3	5	Downlights - LED	150	Sealed
Entry	7	Downlights - LED	150	Sealed
WIR	1	Downlights - LED	150	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
Waterproofing Membrane	No Added Insulation, No air Gap	0.30	Light

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
External Wall		600	0.75	No
Ceiling		900	0.75	No
Internal Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352647

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit B 5.02, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*

Conditioned*	124.1
Unconditioned*	0.0
Total	124.1
Garage	0.0

Exposure type

Open

NatHERS climate zone

56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

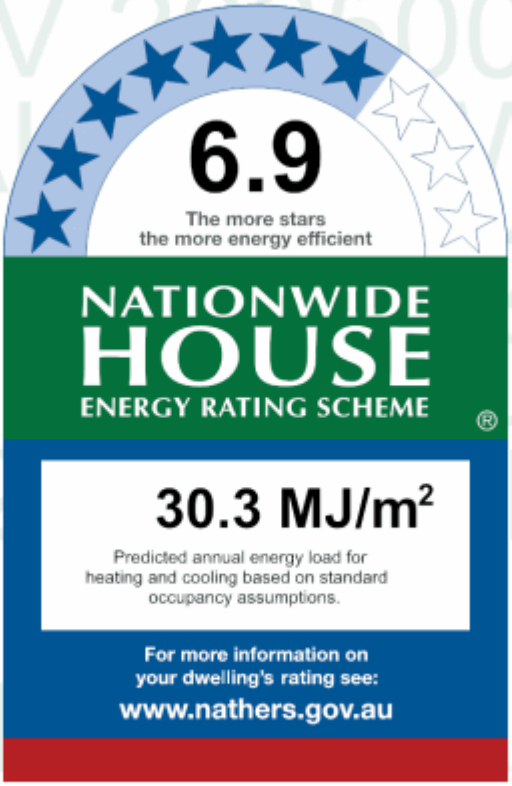

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	17.8	12.5
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=fpTqfNHEp . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Kitchen/Living	Kitchen/Living	45.56
Bedroom 1	Bedroom	18.78
ENS	Nighttime	8.5
WIR	Nighttime	3.5
Bedroom 2	Bedroom	15.31
Butlers Pantry	Daytime	4.73
Bath	Daytime	4.2
Entry	Daytime	11.69
Bedroom 3	Bedroom	11.79
Glazed Common	Glazed Common Area	14.67

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-003-03 A	W11	1980	1000	Awning	10	NW	No
Kitchen/Living	ALM-003-03 A	W16	1980	1200	Awning	10	NW	No
Kitchen/Living	ALM-004-03 A	W17	2700	4170	Sliding	60	SW	No
Kitchen/Living	ALM-004-03 A	W18	2700	3150	Sliding	45	SW	No
Bedroom 1	ALM-003-03 A	W10	1980	1200	Awning	10	SE	Yes

* Refer to glossary.

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Bedroom 1	ALM-004-03 A	W9	2700	3300	Sliding	45	SW	No
Bedroom 2	ALM-003-03 A	W12	1980	1200	Awning	10	NW	Yes
Bedroom 3	ALM-003-03 A	W15	1980	1200	Awning	10	SE	Yes
Glazed Common	ALM-001-01 A	W14	1960	2000	Awning	10	NW	No

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

* Refer to glossary.

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	6995	NW	0	No
Kitchen/Living	EW-1	2700	7695	SW	1600	Yes
Bedroom 1	EW-1	2700	4095	SE	0	No
Bedroom 1	EW-1	2700	3995	SW	1600	Yes
ENS	EW-1	2700	2190	SE	0	No
WIR	EW-1	2700	1590	SE	0	No
Bedroom 2	EW-1	2700	700	NE	0	No
Bedroom 2	EW-1	2700	3895	NW	0	No
Bedroom 3	EW-1	2700	2995	SE	0	No
Glazed Common	EW-1	2700	2250	NW	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Steel Stud Frame, Direct Fix Plasterboard	111.55	No insulation
IW-002	Concrete Panel/Blocks filled, plasterboard	45.36	No Insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Kitchen/Living	Concrete Slab, Unit Below 200mm	45.56	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 1	Concrete Slab, Unit Below 200mm	18.78	None	No Insulation	Cork Tiles or Parquetry 8mm
ENS	Concrete Slab, Unit Below 200mm	8.50	None	No Insulation	Ceramic Tiles 8mm
WIR	Concrete Slab, Unit Below 200mm	3.50	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 2	Concrete Slab, Unit Below 200mm	15.31	None	No Insulation	Cork Tiles or Parquetry 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Butlers Pantry	Concrete Slab, Unit Below 200mm	4.73	None	No Insulation	Cork Tiles or Parquetry 8mm
Bath	Concrete Slab, Unit Below 200mm	4.20	None	No Insulation	Ceramic Tiles 8mm
Entry	Concrete Slab, Unit Below 200mm	11.69	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 3	Concrete Slab, Unit Below 200mm	11.79	None	No Insulation	Cork Tiles or Parquetry 8mm
Glazed Common	Concrete Slab, Unit Below 200mm	14.67	None	No Insulation	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
ENS	Concrete, Plasterboard with Steel Frame	No insulation	
WIR	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
Butlers Pantry	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	
Entry	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 3	Concrete, Plasterboard with Steel Frame	No insulation	
Glazed Common	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Kitchen/Living	18	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Bedroom 1	7	Downlights - LED	150	Sealed
ENS	3	Downlights - LED	150	Sealed
ENS	1	Exhaust Fans	300	Sealed
WIR	1	Downlights - LED	150	Sealed
Bedroom 2	6	Downlights - LED	150	Sealed
Butlers Pantry	2	Downlights - LED	150	Sealed

* Refer to glossary.

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Butlers Pantry	1	Exhaust Fans	300	Sealed
Bath	1	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
Entry	5	Downlights - LED	150	Sealed
Bedroom 3	4	Downlights - LED	150	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
External Wall		600	0.75	No
Ceiling		900	0.75	No
Internal Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352563

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit C G.01, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*	
Conditioned*	135.9
Unconditioned*	0.0
Total	135.9
Garage	0.0

Exposure type
Suburban

NatHERS climate zone
56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

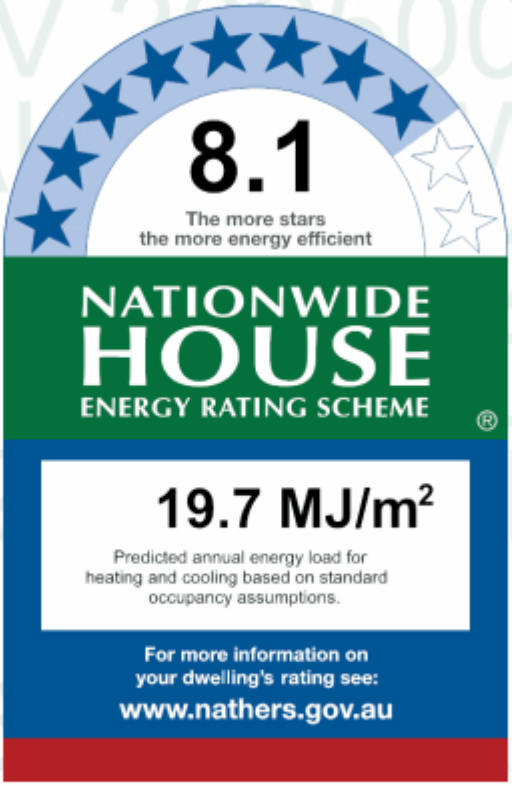

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	13.5	6.2
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=AptOpRipC . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Ldry	Daytime	4.34
Entry	Daytime	19.39
Kitchen/Living	Kitchen/Living	48.57
Bedroom 1	Bedroom	14.62
Bedroom 2	Bedroom	12.64
ENS 1	Nighttime	7.06
Bath	Daytime	5.32
Bedroom 3	Bedroom	11.27
WC	Daytime	2.53
WIR 1	Nighttime	4.98
Pantry	Daytime	5.17

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-003-03 A	W14	1980	800	Awning	70	NE	No
Kitchen/Living	ALM-004-03 A	W10	2700	3900	Sliding	60	NE	No
Kitchen/Living	ALM-004-03 A	W13	2700	2600	Sliding	45	NE	No
Bedroom 1	ALM-003-03 A	W4	1980	1150	Awning	70	NE	No

* Refer to glossary.

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Bedroom 2	ALM-003-03 A	W5	1980	1150	Awning	70	SW	No
Bedroom 3	ALM-003-03 A	W19	1980	1150	Awning	70	SW	No

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

* Refer to glossary.

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Ldry	EW-1	2700	895	SW	0	No
Kitchen/Living	EW-1	2700	1295	NW	0	No
Kitchen/Living	EW-1	2700	3384	W	0	No
Kitchen/Living	EW-1	2700	1100	NE	0	Yes
Kitchen/Living	EW-1	2700	1100	NW	0	No
Kitchen/Living	EW-1	2700	7200	NE	3600	Yes
Bedroom 1	EW-1	2700	3095	NW	0	No
Bedroom 1	EW-1	2700	1500	NE	6275	Yes
Bedroom 2	EW-1	2700	1500	SW	0	Yes
Bedroom 2	EW-1	2700	3195	NW	0	No
Bedroom 3	EW-1	2700	3695	SW	0	Yes
Bedroom 3	EW-1	2700	3095	NW	0	No
Pantry	EW-1	2700	2790	NW	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Concrete Panel/Blocks filled, plasterboard	54.54	No Insulation
IW-002	Steel Stud Frame, Direct Fix Plasterboard	149.31	No insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Ldry	Suspended Concrete Slab 200mm	4.34	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Ceramic Tiles 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Entry	Suspended Concrete Slab 200mm	19.39	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
Kitchen/Living	Suspended Concrete Slab 200mm	48.57	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
Bedroom 1	Suspended Concrete Slab 200mm	14.62	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
Bedroom 2	Suspended Concrete Slab 200mm	12.64	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
ENS 1	Suspended Concrete Slab 200mm	7.06	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Ceramic Tiles 8mm
Bath	Suspended Concrete Slab 200mm	5.32	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Ceramic Tiles 8mm
Bedroom 3	Suspended Concrete Slab 200mm	11.27	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
WC	Suspended Concrete Slab 200mm	2.53	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Ceramic Tiles 8mm
WIR 1	Suspended Concrete Slab 200mm	4.98	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
Pantry	Suspended Concrete Slab 200mm	5.17	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
Entry	Concrete, Plasterboard with Steel Frame	No insulation	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 3	Concrete, Plasterboard with Steel Frame	No insulation	
WC	Concrete, Plasterboard with Steel Frame	No insulation	
WIR 1	Concrete, Plasterboard with Steel Frame	No insulation	
Pantry	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Ldry	1	Downlights - LED	150	Sealed
Ldry	1	Exhaust Fans	300	Sealed
Entry	8	Downlights - LED	150	Sealed
Kitchen/Living	19	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Bedroom 1	6	Downlights - LED	150	Sealed
Bedroom 2	5	Downlights - LED	150	Sealed
ENS 1	2	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
Bedroom 3	5	Downlights - LED	150	Sealed
WC	1	Downlights - LED	150	Sealed
WC	1	Exhaust Fans	300	Sealed
WIR 1	2	Downlights - LED	150	Sealed

* Refer to glossary.

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Pantry	2	Downlights - LED	150	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
External Wall		600	0.75	No
Ceiling		900	0.75	No
Internal Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352571

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit C G.02, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*

Conditioned*	135.9
Unconditioned*	0.0
Total	135.9
Garage	0.0

Exposure type

Suburban

NatHERS climate zone

56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

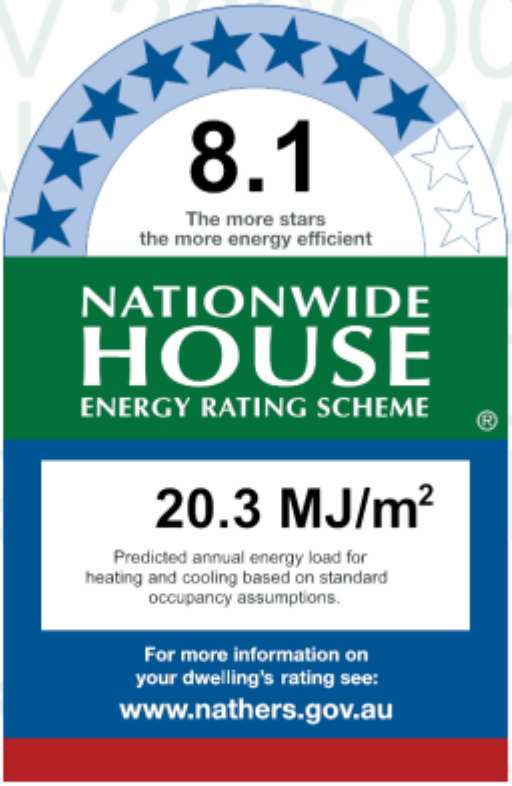

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	15.4	4.9
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=bEeZMKFQJ . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Ldry	Daytime	4.5
Entry	Daytime	19.22
Kitchen/Living	Kitchen/Living	48.57
Bedroom 1	Bedroom	14.62
Bedroom 2	Bedroom	12.64
ENS 1	Nighttime	7.06
Bath	Daytime	5.32
Bedroom 3	Bedroom	11.27
WC	Daytime	2.53
WIR 1	Nighttime	4.98
Pantry	Daytime	5.17

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-004-03 A	W23	2700	3900	Sliding	60	NE	No
Kitchen/Living	ALM-004-03 A	W24	2700	2600	Sliding	45	NE	No
Kitchen/Living	ALM-003-03 A	W27	1980	800	Awning	70	NE	No
Kitchen/Living	ALM-003-03 A	W20	1980	1000	Awning	70	SE	Yes

* Refer to glossary.

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Bedroom 1	ALM-003-03 A	W26	1980	1200	Awning	70	NE	No
Bedroom 1	ALM-003-03 A	W21	950	1200	Awning	90	SE	No
Bedroom 2	ALM-003-03 A	W22	950	1200	Awning	90	SE	No
Bedroom 2	ALM-003-03 A	W25	1980	1150	Awning	70	SW	No
Bedroom 3	ALM-003-03 A	W19	1980	1200	Awning	70	SE	Yes

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

* Refer to glossary.

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	7200	NE	3600	Yes
Kitchen/Living	EW-1	2700	1100	SE	0	No
Kitchen/Living	EW-1	2700	1100	NE	0	Yes
Kitchen/Living	EW-1	2700	3384	SE	0	No
Kitchen/Living	EW-1	2700	1295	SE	0	No
Bedroom 1	EW-1	2700	1500	NE	6275	Yes
Bedroom 1	EW-1	2700	3095	SE	0	No
Bedroom 2	EW-1	2700	3195	SE	0	No
Bedroom 2	EW-1	2700	1500	SW	0	Yes
Bedroom 3	EW-1	2700	3095	SE	0	No
Pantry	EW-1	2700	2790	SE	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Steel Stud Frame, Direct Fix Plasterboard	154.44	No insulation
IW-002	Concrete Panel/Blocks filled, plasterboard	64.53	No Insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Ldry	Suspended Concrete Slab 200mm	4.50	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Ceramic Tiles 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Entry	Suspended Concrete Slab 200mm	19.22	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
Kitchen/Living	Suspended Concrete Slab 200mm	48.57	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
Bedroom 1	Suspended Concrete Slab 200mm	14.62	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
Bedroom 2	Suspended Concrete Slab 200mm	12.64	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
ENS 1	Suspended Concrete Slab 200mm	7.06	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Ceramic Tiles 8mm
Bath	Suspended Concrete Slab 200mm	5.32	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Ceramic Tiles 8mm
Bedroom 3	Suspended Concrete Slab 200mm	11.27	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
WC	Suspended Concrete Slab 200mm	2.53	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Ceramic Tiles 8mm
WIR 1	Suspended Concrete Slab 200mm	4.98	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
Pantry	Suspended Concrete Slab 200mm	5.17	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
Entry	Concrete, Plasterboard with Steel Frame	No insulation	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 3	Concrete, Plasterboard with Steel Frame	No insulation	
WC	Concrete, Plasterboard with Steel Frame	No insulation	
WIR 1	Concrete, Plasterboard with Steel Frame	No insulation	
Pantry	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Ldry	1	Downlights - LED	150	Sealed
Ldry	1	Exhaust Fans	300	Sealed
Entry	7	Downlights - LED	150	Sealed
Kitchen/Living	19	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Bedroom 1	6	Downlights - LED	150	Sealed
Bedroom 2	5	Downlights - LED	150	Sealed
ENS 1	2	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
Bedroom 3	5	Downlights - LED	150	Sealed
WC	1	Downlights - LED	150	Sealed
WC	1	Exhaust Fans	300	Sealed
WIR 1	2	Downlights - LED	150	Sealed

* Refer to glossary.

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Pantry	2	Downlights - LED	150	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
Ceiling		900	0.75	No
Internal Wall		600	0.75	No
External Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352456

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit C G.03, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*

Conditioned*	79.6
Unconditioned*	0.0
Total	79.6
Garage	0.0

Exposure type

Suburban

NatHERS climate zone

56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

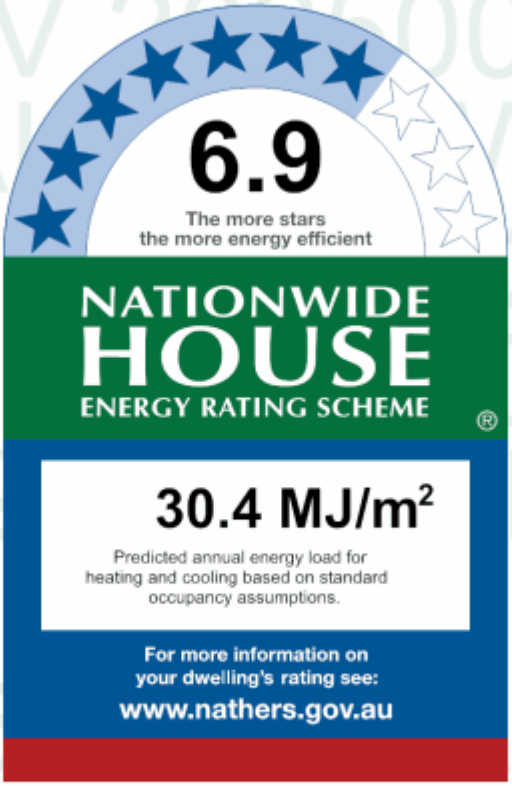

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	18.6	11.8
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=lubXSWSUT . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Kitchen/Living	Kitchen/Living	34.53
Entry/Ldry	Daytime	6.99
Bedroom 2	Bedroom	11.03
Bedroom 1	Bedroom	16.61
Glazed Common	Glazed Common Area	15.77
ENS 1	Nighttime	5.99
Bath	Daytime	4.49

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-004-03 A	W22	2700	2800	Sliding	45	NW	No
Kitchen/Living	ALM-004-03 A	W23	2700	3600	Sliding	60	NW	No
Bedroom 2	ALM-003-03 A	W20	1980	1200	Awning	70	SE	Yes
Bedroom 1	ALM-003-03 A	W21	1980	1200	Awning	70	SE	Yes
Glazed Common	ALM-001-01 A	W19	2100	2000	Casement	90	SE	No

* Refer to glossary.

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

* Refer to glossary.

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	3100	NW	1100	Yes
Kitchen/Living	EW-1	2700	1000	NE	4000	No
Kitchen/Living	EW-1	2700	4000	NW	2100	Yes
Kitchen/Living	EW-1	2700	2400	NE	0	No
Bedroom 2	EW-1	2700	1500	NE	0	No
Bedroom 2	EW-1	2700	3095	SE	0	No
Bedroom 1	EW-1	2700	3995	SE	0	No
Glazed Common	EW-1	2700	2250	SE	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Steel Stud Frame, Direct Fix Plasterboard	64.80	No insulation
IW-002	Concrete Panel/Blocks filled, plasterboard	62.64	No Insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Kitchen/Living	Suspended Concrete Slab 200mm	34.53	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
Entry/Ldry	Suspended Concrete Slab 200mm	6.99	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
Bedroom 2	Suspended Concrete Slab 200mm	11.03	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
Bedroom 1	Suspended Concrete Slab 200mm	16.61	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Glazed Common	Suspended Concrete Slab 200mm	15.77	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
ENS 1	Suspended Concrete Slab 200mm	5.99	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Ceramic Tiles 8mm
Bath	Suspended Concrete Slab 200mm	4.49	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Ceramic Tiles 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Entry/Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Glazed Common	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Kitchen/Living	15	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Entry/Ldry	3	Downlights - LED	150	Sealed
Entry/Ldry	1	Exhaust Fans	300	Sealed
Bedroom 2	4	Downlights - LED	150	Sealed
Bedroom 1	7	Downlights - LED	150	Sealed
ENS 1	2	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	1	Downlights - LED	150	Sealed

* Refer to glossary.

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Bath	1	Exhaust Fans	300	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
External Wall		600	0.75	No
Ceiling		900	0.75	No
Internal Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352423

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit C G.04, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*	
Conditioned*	78.9
Unconditioned*	0.0
Total	78.9
Garage	0.0

Exposure type
Suburban

NatHERS climate zone
56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

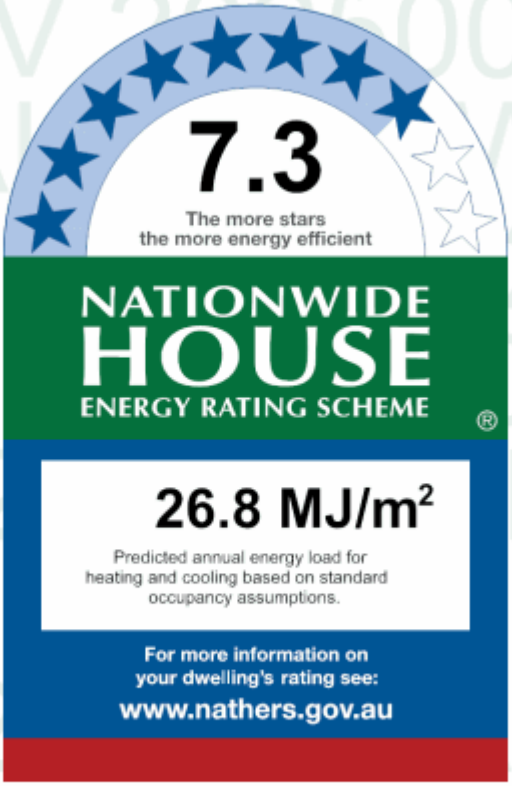

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	18.9	7.9
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=vNTyHwbYG . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Kitchen/Living	Kitchen/Living	33.82
Entry/Ldry	Daytime	7.16
Bedroom 2	Bedroom	11.03
Bedroom 1	Bedroom	16.61
Glazed Common	Glazed Common Area	15.77
ENS 1	Nighttime	5.99
Bath	Daytime	4.33

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-004-03 A	n/a	2700	3600	Sliding	60	NW	No
Kitchen/Living	ALM-004-03 A	n/a	2700	2850	Sliding	45	NW	No
Bedroom 2	ALM-003-03 A	W20	1980	1200	Awning	70	SE	Yes
Bedroom 1	ALM-003-03 A	n/a	1980	1200	Awning	70	SE	Yes
Glazed Common	ALM-001-01 A	n/a	2100	2000	Casement	90	SE	No

* Refer to glossary.

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

* Refer to glossary.

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	4000	NW	2500	Yes
Kitchen/Living	EW-1	2700	1000	SW	4000	No
Kitchen/Living	EW-1	2700	3100	NW	1500	Yes
Bedroom 2	EW-1	2700	3095	SE	0	No
Bedroom 2	EW-1	2700	1500	SW	0	No
Bedroom 1	EW-1	2700	3995	SE	0	No
Glazed Common	EW-1	2700	2250	SE	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Concrete Panel/Blocks filled, plasterboard	79.65	No Insulation
IW-002	Steel Stud Frame, Direct Fix Plasterboard	61.56	No insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Kitchen/Living	Suspended Concrete Slab 200mm	33.86	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
Entry/Ldry	Suspended Concrete Slab 200mm	7.16	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
Bedroom 2	Suspended Concrete Slab 200mm	11.03	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
Bedroom 1	Suspended Concrete Slab 200mm	16.61	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Glazed Common	Suspended Concrete Slab 200mm	15.77	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
ENS 1	Suspended Concrete Slab 200mm	5.99	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Ceramic Tiles 8mm
Bath	Suspended Concrete Slab 200mm	4.33	Basement Carpark	Bulk Insulation in Contact with Floor R2.5	Ceramic Tiles 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Entry/Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Glazed Common	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Kitchen/Living	16	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Entry/Ldry	3	Downlights - LED	150	Sealed
Entry/Ldry	1	Exhaust Fans	300	Sealed
Bedroom 2	4	Downlights - LED	150	Sealed
Bedroom 1	6	Downlights - LED	150	Sealed
ENS 1	2	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed

* Refer to glossary.

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Bath	1	Exhaust Fans	300	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
External Wall		600	0.75	No
Ceiling		900	0.75	No
Internal Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352555

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit C 1.01, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*

Conditioned*	135.9
Unconditioned*	0.0
Total	135.9
Garage	0.0

Exposure type

Suburban

NatHERS climate zone

56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	8.3	8.8
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=fXKuoeFYO . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Ldry	Daytime	4.34
Entry	Daytime	19.39
Kitchen/Living	Kitchen/Living	48.57
Bedroom 1	Bedroom	14.62
Bedroom 2	Bedroom	12.64
ENS 1	Nighttime	7.06
Bath	Daytime	5.32
Bedroom 3	Bedroom	11.27
WC	Daytime	2.53
WIR 1	Nighttime	4.98
Pantry	Daytime	5.17

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-003-03 A	W14	1980	800	Awning	10	NE	No
Kitchen/Living	ALM-004-03 A	W10	2700	3900	Sliding	60	NE	No
Kitchen/Living	ALM-004-03 A	W13	2700	2600	Sliding	45	NE	No
Bedroom 1	ALM-003-03 A	W4	1980	1150	Awning	10	NE	No

* Refer to glossary.

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Bedroom 2	ALM-003-03 A	W5	1980	1150	Awning	10	SW	No
Bedroom 3	ALM-003-03 A	W20	1980	1150	Awning	10	SW	No

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

* Refer to glossary.

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Ldry	EW-1	2700	895	SW	0	No
Kitchen/Living	EW-1	2700	1295	NW	0	No
Kitchen/Living	EW-1	2700	3384	W	0	No
Kitchen/Living	EW-1	2700	1100	NE	0	Yes
Kitchen/Living	EW-1	2700	1100	NW	0	No
Kitchen/Living	EW-1	2700	7200	NE	2700	Yes
Bedroom 1	EW-1	2700	3095	NW	0	No
Bedroom 1	EW-1	2700	1500	NE	6275	Yes
Bedroom 2	EW-1	2700	1500	SW	0	Yes
Bedroom 2	EW-1	2700	3195	NW	0	No
Bedroom 3	EW-1	2700	3695	SW	0	Yes
Bedroom 3	EW-1	2700	3095	NW	0	No
Pantry	EW-1	2700	2790	NW	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Concrete Panel/Blocks filled, plasterboard	54.54	No Insulation
IW-002	Steel Stud Frame, Direct Fix Plasterboard	149.31	No insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Ldry	Concrete Slab, Unit Below 200mm	4.34	None	No Insulation	Ceramic Tiles 8mm
Entry	Concrete Slab, Unit Below 200mm	19.39	None	No Insulation	Cork Tiles or Parquetry 8mm
Kitchen/Living	Concrete Slab, Unit Below 200mm	48.57	None	No Insulation	Cork Tiles or Parquetry 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Bedroom 1	Concrete Slab, Unit Below 200mm	14.62	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 2	Concrete Slab, Unit Below 200mm	12.64	None	No Insulation	Cork Tiles or Parquetry 8mm
ENS 1	Concrete Slab, Unit Below 200mm	7.06	None	No Insulation	Ceramic Tiles 8mm
Bath	Concrete Slab, Unit Below 200mm	5.32	None	No Insulation	Ceramic Tiles 8mm
Bedroom 3	Concrete Slab, Unit Below 200mm	11.27	None	No Insulation	Cork Tiles or Parquetry 8mm
WC	Concrete Slab, Unit Below 200mm	2.53	None	No Insulation	Ceramic Tiles 8mm
WIR 1	Concrete Slab, Unit Below 200mm	4.98	None	No Insulation	Cork Tiles or Parquetry 8mm
Pantry	Concrete Slab, Unit Below 200mm	5.17	None	No Insulation	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
Entry	Concrete, Plasterboard with Steel Frame	No insulation	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 3	Concrete, Plasterboard with Steel Frame	No insulation	
WC	Concrete, Plasterboard with Steel Frame	No insulation	
WIR 1	Concrete, Plasterboard with Steel Frame	No insulation	
Pantry	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Ldry	1	Downlights - LED	150	Sealed
Ldry	1	Exhaust Fans	300	Sealed
Entry	8	Downlights - LED	150	Sealed

* Refer to glossary.

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Kitchen/Living	19	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Bedroom 1	6	Downlights - LED	150	Sealed
Bedroom 2	5	Downlights - LED	150	Sealed
ENS 1	2	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
Bedroom 3	5	Downlights - LED	150	Sealed
WC	1	Downlights - LED	150	Sealed
WC	1	Exhaust Fans	300	Sealed
WIR 1	2	Downlights - LED	150	Sealed
Pantry	2	Downlights - LED	150	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
External Wall		600	0.75	No
Ceiling		900	0.75	No
Internal Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352530

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit C 1.02, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*

Conditioned*	135.9
Unconditioned*	0.0
Total	135.9
Garage	0.0

Exposure type
Suburban

NatHERS climate zone
56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	10.2	7.9
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=cfGHLxgNt . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Ldry	Daytime	4.5
Entry	Daytime	19.22
Kitchen/Living	Kitchen/Living	48.57
Bedroom 1	Bedroom	14.62
Bedroom 2	Bedroom	12.64
ENS 1	Nighttime	7.06
Bath	Daytime	5.32
Bedroom 3	Bedroom	11.27
WC	Daytime	2.53
WIR 1	Nighttime	4.98
Pantry	Daytime	5.17

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-004-03 A	W23	2700	3900	Sliding	60	NE	No
Kitchen/Living	ALM-004-03 A	W24	2700	2600	Sliding	45	NE	No
Kitchen/Living	ALM-003-03 A	W27	1980	800	Awning	10	NE	No
Kitchen/Living	ALM-003-03 A	W20	1980	1000	Awning	10	SE	Yes

* Refer to glossary.

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Bedroom 1	ALM-003-03 A	W26	1980	1150	Awning	10	NE	No
Bedroom 1	ALM-003-03 A	W21	950	1200	Awning	10	SE	No
Bedroom 2	ALM-003-03 A	W22	950	1200	Awning	10	SE	No
Bedroom 2	ALM-003-03 A	W25	1980	1150	Awning	10	SW	No
Bedroom 3	ALM-003-03 A	W19	1980	1200	Awning	10	SE	Yes

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

* Refer to glossary.

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	7200	NE	2700	Yes
Kitchen/Living	EW-1	2700	1100	SE	0	No
Kitchen/Living	EW-1	2700	1100	NE	0	Yes
Kitchen/Living	EW-1	2700	3384	SE	0	No
Kitchen/Living	EW-1	2700	1295	SE	0	No
Bedroom 1	EW-1	2700	1500	NE	6275	Yes
Bedroom 1	EW-1	2700	3095	SE	0	No
Bedroom 2	EW-1	2700	3195	SE	0	No
Bedroom 2	EW-1	2700	1500	SW	0	Yes
Bedroom 3	EW-1	2700	3095	SE	0	No
Pantry	EW-1	2700	2790	SE	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Steel Stud Frame, Direct Fix Plasterboard	154.44	No insulation
IW-002	Concrete Panel/Blocks filled, plasterboard	64.53	No Insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Ldry	Concrete Slab, Unit Below 200mm	4.50	None	No Insulation	Ceramic Tiles 8mm
Entry	Concrete Slab, Unit Below 200mm	19.22	None	No Insulation	Cork Tiles or Parquetry 8mm
Kitchen/Living	Concrete Slab, Unit Below 200mm	48.57	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 1	Concrete Slab, Unit Below 200mm	14.62	None	No Insulation	Cork Tiles or Parquetry 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Bedroom 2	Concrete Slab, Unit Below 200mm	12.64	None	No Insulation	Cork Tiles or Parquetry 8mm
ENS 1	Concrete Slab, Unit Below 200mm	7.06	None	No Insulation	Ceramic Tiles 8mm
Bath	Concrete Slab, Unit Below 200mm	5.32	None	No Insulation	Ceramic Tiles 8mm
Bedroom 3	Concrete Slab, Unit Below 200mm	11.27	None	No Insulation	Cork Tiles or Parquetry 8mm
WC	Concrete Slab, Unit Below 200mm	2.53	None	No Insulation	Ceramic Tiles 8mm
WIR 1	Concrete Slab, Unit Below 200mm	4.98	None	No Insulation	Cork Tiles or Parquetry 8mm
Pantry	Concrete Slab, Unit Below 200mm	5.17	None	No Insulation	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
Entry	Concrete, Plasterboard with Steel Frame	No insulation	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 3	Concrete, Plasterboard with Steel Frame	No insulation	
WC	Concrete, Plasterboard with Steel Frame	No insulation	
WIR 1	Concrete, Plasterboard with Steel Frame	No insulation	
Pantry	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Ldry	1	Downlights - LED	150	Sealed
Ldry	1	Exhaust Fans	300	Sealed
Entry	7	Downlights - LED	150	Sealed
Kitchen/Living	19	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed

* Refer to glossary.

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Bedroom 1	6	Downlights - LED	150	Sealed
Bedroom 2	5	Downlights - LED	150	Sealed
ENS 1	2	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
Bedroom 3	5	Downlights - LED	150	Sealed
WC	1	Downlights - LED	150	Sealed
WC	1	Exhaust Fans	300	Sealed
WIR 1	2	Downlights - LED	150	Sealed
Pantry	2	Downlights - LED	150	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
Ceiling		900	0.75	No
Internal Wall		600	0.75	No
External Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352464

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit C 1.03, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*	
Conditioned*	79.6
Unconditioned*	0.0
Total	79.6
Garage	0.0

Exposure type
Suburban

NatHERS climate zone
56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	16.8	12.1
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=qVGbWdlHn . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Kitchen/Living	Kitchen/Living	34.53
Entry/Ldry	Daytime	6.99
Bedroom 2	Bedroom	11.03
Bedroom 1	Bedroom	16.61
Glazed Common	Glazed Common Area	15.77
ENS 1	Nighttime	5.99
Bath	Daytime	4.49

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-004-03 A	W22	2700	3050	Sliding	45	NW	No
Kitchen/Living	ALM-004-03 A	W23	2700	3600	Sliding	60	NW	No
Bedroom 2	ALM-003-03 A	W20	1980	1200	Awning	10	SE	Yes
Bedroom 1	ALM-003-03 A	W21	1980	1200	Awning	10	SE	Yes
Glazed Common	ALM-001-01 A	W19	1980	2000	Awning	70	SE	No

* Refer to glossary.

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

* Refer to glossary.

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	3100	NW	1100	Yes
Kitchen/Living	EW-1	2700	1000	NE	4000	No
Kitchen/Living	EW-1	2700	4000	NW	2100	Yes
Bedroom 2	EW-1	2700	1500	NE	0	No
Bedroom 2	EW-1	2700	3095	SE	0	No
Bedroom 1	EW-1	2700	3995	SE	0	No
Glazed Common	EW-1	2700	2250	SE	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Steel Stud Frame, Direct Fix Plasterboard	64.80	No insulation
IW-002	Concrete Panel/Blocks filled, plasterboard	69.12	No Insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Kitchen/Living	Concrete Slab, Unit Below 200mm	34.53	None	No Insulation	Cork Tiles or Parquetry 8mm
Entry/Ldry	Concrete Slab, Unit Below 200mm	6.99	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 2	Concrete Slab, Unit Below 200mm	11.03	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 1	Concrete Slab, Unit Below 200mm	16.61	None	No Insulation	Cork Tiles or Parquetry 8mm
Glazed Common	Concrete Slab, Unit Below 200mm	15.77	None	No Insulation	Cork Tiles or Parquetry 8mm
ENS 1	Concrete Slab, Unit Below 200mm	5.99	None	No Insulation	Ceramic Tiles 8mm
Bath	Concrete Slab, Unit Below 200mm	4.49	None	No Insulation	Ceramic Tiles 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	

* Refer to glossary.

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Entry/Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Glazed Common	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Kitchen/Living	15	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Entry/Ldry	3	Downlights - LED	150	Sealed
Entry/Ldry	1	Exhaust Fans	300	Sealed
Bedroom 2	4	Downlights - LED	150	Sealed
Bedroom 1	7	Downlights - LED	150	Sealed
ENS 1	2	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	1	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
External Wall		600	0.75	No

* Refer to glossary.

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
Ceiling		900	0.75	No
Internal Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352431

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit C 1.04, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*	
Conditioned*	78.9
Unconditioned*	0.0
Total	78.9
Garage	0.0

Exposure type
Suburban

NatHERS climate zone
56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

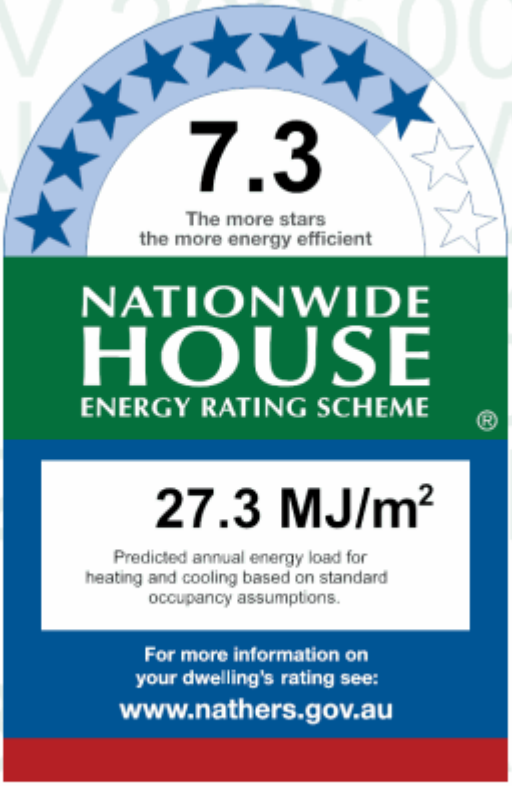

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	18.6	8.7
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=HlcWLwpkS . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

* Refer to glossary.

Room *schedule*

Room	Zone Type	Area [m^2]
Kitchen/Living	Kitchen/Living	33.82
Entry/Ldry	Daytime	7.16
Bedroom 2	Bedroom	11.03
Bedroom 1	Bedroom	16.61
Glazed Common	Glazed Common Area	15.77
ENS 1	Nighttime	5.99
Bath	Daytime	4.33

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-004-03 A	W23	2700	3600	Sliding	60	NW	No
Kitchen/Living	ALM-004-03 A	W22	2700	3050	Sliding	45	NW	No
Bedroom 2	ALM-003-03 A	W20	1980	1200	Awning	10	SE	Yes
Bedroom 1	ALM-003-03 A	W24	1980	1200	Awning	10	SE	Yes
Glazed Common	ALM-001-01 A	W21	1980	2000	Awning	70	SE	No

* Refer to glossary.

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

* Refer to glossary.

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	4000	NW	2500	Yes
Kitchen/Living	EW-1	2700	1000	SW	4000	No
Kitchen/Living	EW-1	2700	3100	NW	1500	Yes
Bedroom 2	EW-1	2700	3095	SE	0	No
Bedroom 2	EW-1	2700	1500	SW	0	No
Bedroom 1	EW-1	2700	3995	SE	0	No
Glazed Common	EW-1	2700	2250	SE	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Concrete Panel/Blocks filled, plasterboard	79.65	No Insulation
IW-002	Steel Stud Frame, Direct Fix Plasterboard	61.56	No insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Kitchen/Living	Concrete Slab, Unit Below 200mm	33.86	None	No Insulation	Cork Tiles or Parquetry 8mm
Entry/Ldry	Concrete Slab, Unit Below 200mm	7.16	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 2	Concrete Slab, Unit Below 200mm	11.03	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 1	Concrete Slab, Unit Below 200mm	16.61	None	No Insulation	Cork Tiles or Parquetry 8mm
Glazed Common	Concrete Slab, Unit Below 200mm	15.77	None	No Insulation	Cork Tiles or Parquetry 8mm
ENS 1	Concrete Slab, Unit Below 200mm	5.99	None	No Insulation	Ceramic Tiles 8mm
Bath	Concrete Slab, Unit Below 200mm	4.33	None	No Insulation	Ceramic Tiles 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	

* Refer to glossary.

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Entry/Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Glazed Common	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Kitchen/Living	16	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Entry/Ldry	3	Downlights - LED	150	Sealed
Entry/Ldry	1	Exhaust Fans	300	Sealed
Bedroom 2	4	Downlights - LED	150	Sealed
Bedroom 1	6	Downlights - LED	150	Sealed
ENS 1	2	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
External Wall		600	0.75	No

* Refer to glossary.

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
Ceiling		900	0.75	No
Internal Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352522

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit C 1.05, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*	
Conditioned*	129.8
Unconditioned*	0.0
Total	129.8
Garage	0.0

Exposure type
Suburban

NatHERS climate zone
56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

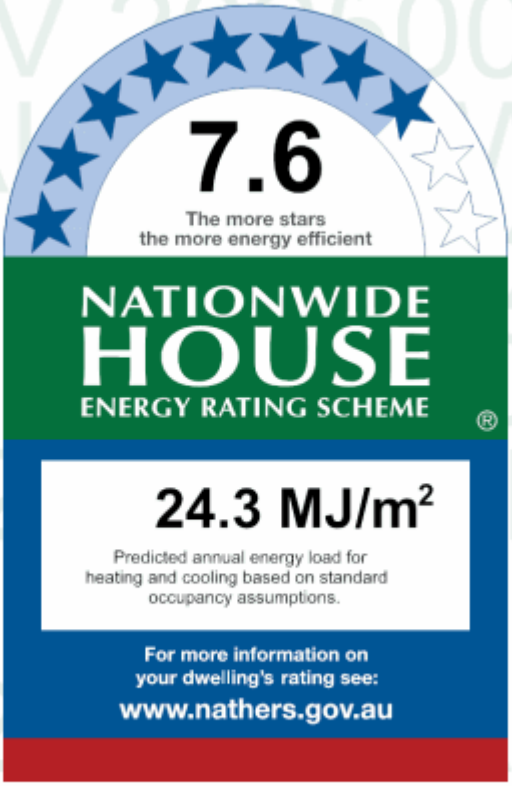

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	14.8	9.5
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=gWllofEAa . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Ldry	Daytime	4.27
Entry	Daytime	21.68
Kitchen/Living	Kitchen/Living	50.9
Bedroom 1	Bedroom	17.17
Bedroom 2	Bedroom	12.59
ENS 1	Nighttime	7.06
Bath	Daytime	4.89
Bedroom 3	Bedroom	11.27

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-004-03 A	n/a	2700	3900	Sliding	60	SW	No
Kitchen/Living	ALM-004-03 A	n/a	2700	2850	Sliding	45	SW	No
Kitchen/Living	ALM-003-03 A	W3	1980	1000	Awning	10	NW	No
Kitchen/Living	ALM-003-03 A	W4	1980	2000	Awning	10	NW	No
Bedroom 1	ALM-003-03 A	W6	1980	1150	Awning	10	SW	No
Bedroom 2	ALM-003-03 A	W5	1980	1150	Awning	10	NE	No
Bedroom 3	ALM-003-03 A	W2	1980	1200	Awning	10	NE	No

* Refer to glossary.

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

* Refer to glossary.

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Ldry	EW-1	2700	695	NE	0	No
Kitchen/Living	EW-1	2700	4200	SW	2600	Yes
Kitchen/Living	EW-1	2700	1200	SE	4200	No
Kitchen/Living	EW-1	2700	3000	SW	1400	Yes
Kitchen/Living	EW-1	2700	7795	NW	0	No
Bedroom 1	EW-1	2700	595	NW	0	No
Bedroom 1	EW-1	2700	1500	SW	0	Yes
Bedroom 1	EW-1	2700	3095	NW	0	No
Bedroom 2	EW-1	2700	3195	NW	0	No
Bedroom 2	EW-1	2700	1500	NE	0	Yes
Bedroom 3	EW-1	2700	3095	NW	0	No
Bedroom 3	EW-1	2700	3695	NE	0	Yes

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Steel Stud Frame, Direct Fix Plasterboard	119.88	No insulation
IW-002	Concrete Panel/Blocks filled, plasterboard	51.30	No Insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Ldry	Suspended Concrete Slab 200mm	4.27	Totally Open	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
Entry	Suspended Concrete Slab 200mm	21.68	Totally Open	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Kitchen/Living	Suspended Concrete Slab 200mm	50.90	Totally Open	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
Bedroom 1	Suspended Concrete Slab 200mm	17.17	Totally Open	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
Bedroom 2	Suspended Concrete Slab 200mm	12.59	Totally Open	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
ENS 1	Suspended Concrete Slab 200mm	7.06	Totally Open	Bulk Insulation in Contact with Floor R2.5	Ceramic Tiles 8mm
Bath	Suspended Concrete Slab 200mm	4.89	Totally Open	Bulk Insulation in Contact with Floor R2.5	Ceramic Tiles 8mm
Bedroom 3	Suspended Concrete Slab 200mm	11.27	Totally Open	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
Entry	Concrete, Plasterboard with Steel Frame	No insulation	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 3	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Ldry	1	Downlights - LED	150	Sealed
Ldry	1	Exhaust Fans	300	Sealed
Entry	8	Downlights - LED	150	Sealed
Kitchen/Living	20	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Bedroom 1	7	Downlights - LED	150	Sealed
Bedroom 2	5	Downlights - LED	150	Sealed
ENS 1	3	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
Bedroom 3	4	Downlights - LED	150	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
External Wall		600	0.75	No
Ceiling		900	0.75	No
Internal Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

* Refer to glossary.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352506

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit C 1.06, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*	
Conditioned*	129.8
Unconditioned*	0.0
Total	129.8
Garage	0.0

Exposure type
Suburban

NatHERS climate zone
56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

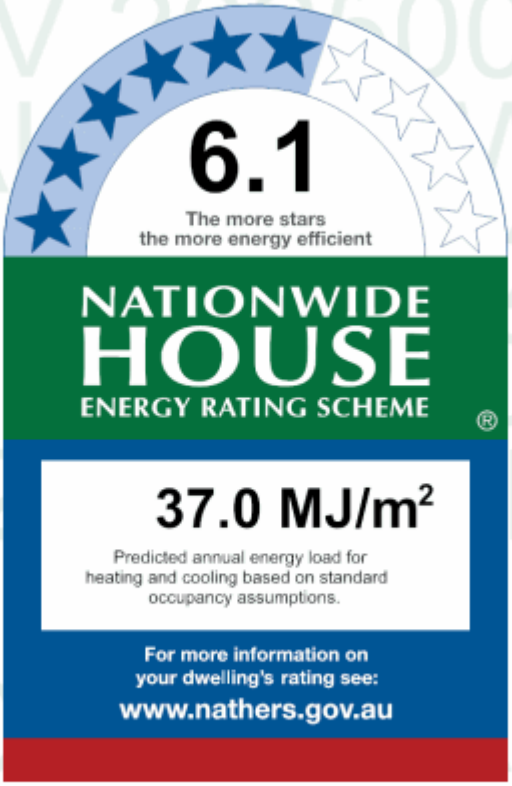

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	29.4	7.6
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=QBHQrJgcv . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Ldry	Daytime	4.58
Entry	Daytime	21.37
Kitchen/Living	Kitchen/Living	50.9
Bedroom 1	Bedroom	17.17
Bedroom 2	Bedroom	12.59
ENS 1	Nighttime	7.06
Bath	Daytime	4.89
Bedroom 3	Bedroom	11.27

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-003-03 A	W9	1980	1000	Awning	10	SE	No
Kitchen/Living	ALM-003-03 A	W11	1980	2000	Awning	10	SE	No
Kitchen/Living	ALM-004-03 A	W1	2700	2850	Sliding	45	SW	No
Kitchen/Living	ALM-004-03 A	W10	2700	3900	Sliding	60	SW	No
Bedroom 1	ALM-003-03 A	W8	950	1200	Awning	10	SE	No
Bedroom 1	ALM-003-03 A	W4	1980	1150	Awning	70	SW	No
Bedroom 2	ALM-003-03 A	W5	1980	1150	Awning	10	NE	No

* Refer to glossary.

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Bedroom 2	ALM-003-03 A	W7	950	1200	Awning	10	SE	No
Bedroom 3	ALM-003-03 A	W12	1980	1200	Awning	10	SE	No

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

* Refer to glossary.

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	7795	SE	0	No
Kitchen/Living	EW-1	2700	3000	SW	1400	Yes
Kitchen/Living	EW-1	2700	1200	NW	4200	No
Kitchen/Living	EW-1	2700	4200	SW	2600	Yes
Bedroom 1	EW-1	2700	3095	SE	0	No
Bedroom 1	EW-1	2700	1500	SW	0	Yes
Bedroom 1	EW-1	2700	595	SE	0	No
Bedroom 2	EW-1	2700	1500	NE	0	Yes
Bedroom 2	EW-1	2700	3195	SE	0	No
Bedroom 3	EW-1	2700	3095	SE	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Concrete Panel/Blocks filled, plasterboard	61.02	No Insulation
IW-002	Steel Stud Frame, Direct Fix Plasterboard	115.83	No insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Ldry	Suspended Concrete Slab 200mm	4.58	Totally Open	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
Entry	Suspended Concrete Slab 200mm	21.37	Totally Open	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Kitchen/Living	Suspended Concrete Slab 200mm	50.90	Totally Open	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
Bedroom 1	Suspended Concrete Slab 200mm	17.17	Totally Open	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
Bedroom 2	Suspended Concrete Slab 200mm	12.59	Totally Open	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm
ENS 1	Suspended Concrete Slab 200mm	7.06	Totally Open	Bulk Insulation in Contact with Floor R2.5	Ceramic Tiles 8mm
Bath	Suspended Concrete Slab 200mm	4.89	Totally Open	Bulk Insulation in Contact with Floor R2.5	Ceramic Tiles 8mm
Bedroom 3	Suspended Concrete Slab 200mm	11.27	Totally Open	Bulk Insulation in Contact with Floor R2.5	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
Entry	Concrete, Plasterboard with Steel Frame	No insulation	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 3	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Ldry	1	Downlights - LED	150	Sealed
Ldry	1	Exhaust Fans	300	Sealed
Entry	8	Downlights - LED	150	Sealed
Kitchen/Living	20	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Bedroom 1	7	Downlights - LED	150	Sealed
Bedroom 2	5	Downlights - LED	150	Sealed
ENS 1	3	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
Bedroom 3	4	Downlights - LED	150	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
Ceiling		900	0.75	No
Internal Wall		600	0.75	No
External Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

* Refer to glossary.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352514

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit C 2.01, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*

Conditioned*	135.9
Unconditioned*	0.0
Total	135.9
Garage	0.0

Exposure type

Suburban

NatHERS climate zone

56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	8.7	8.8
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=rQrbPCECB . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Ldry	Daytime	4.34
Entry	Daytime	19.39
Kitchen/Living	Kitchen/Living	48.57
Bedroom 1	Bedroom	14.62
Bedroom 2	Bedroom	12.64
ENS 1	Nighttime	7.06
Bath	Daytime	5.32
Bedroom 3	Bedroom	11.27
WC	Daytime	2.53
WIR 1	Nighttime	4.98
Pantry	Daytime	5.17

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-003-03 A	W14	1980	800	Awning	10	NE	No
Kitchen/Living	ALM-004-03 A	W10	2700	3900	Sliding	60	NE	No
Kitchen/Living	ALM-004-03 A	W13	2700	2600	Sliding	45	NE	No
Bedroom 1	ALM-003-03 A	W4	1980	1150	Awning	10	NE	No

* Refer to glossary.

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Bedroom 2	ALM-003-03 A	W5	1980	1150	Awning	10	SW	No
Bedroom 3	ALM-003-03 A	W20	1980	1200	Awning	10	SW	No

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

* Refer to glossary.

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Ldry	EW-1	2700	895	SW	0	No
Kitchen/Living	EW-1	2700	1295	NW	0	No
Kitchen/Living	EW-1	2700	3384	W	0	No
Kitchen/Living	EW-1	2700	1100	NE	0	Yes
Kitchen/Living	EW-1	2700	1100	NW	0	No
Kitchen/Living	EW-1	2700	7200	NE	2700	Yes
Bedroom 1	EW-1	2700	3095	NW	0	No
Bedroom 1	EW-1	2700	1500	NE	6275	Yes
Bedroom 2	EW-1	2700	1500	SW	0	Yes
Bedroom 2	EW-1	2700	3195	NW	0	No
Bedroom 3	EW-1	2700	3695	SW	0	Yes
Bedroom 3	EW-1	2700	3095	NW	0	No
Pantry	EW-1	2700	2790	NW	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Concrete Panel/Blocks filled, plasterboard	54.54	No Insulation
IW-002	Steel Stud Frame, Direct Fix Plasterboard	149.31	No insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Ldry	Concrete Slab, Unit Below 200mm	4.34	None	No Insulation	Ceramic Tiles 8mm
Entry	Concrete Slab, Unit Below 200mm	19.39	None	No Insulation	Cork Tiles or Parquetry 8mm
Kitchen/Living	Concrete Slab, Unit Below 200mm	48.57	None	No Insulation	Cork Tiles or Parquetry 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Bedroom 1	Concrete Slab, Unit Below 200mm	14.62	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 2	Concrete Slab, Unit Below 200mm	12.64	None	No Insulation	Cork Tiles or Parquetry 8mm
ENS 1	Concrete Slab, Unit Below 200mm	7.06	None	No Insulation	Ceramic Tiles 8mm
Bath	Concrete Slab, Unit Below 200mm	5.32	None	No Insulation	Ceramic Tiles 8mm
Bedroom 3	Concrete Slab, Unit Below 200mm	11.27	None	No Insulation	Cork Tiles or Parquetry 8mm
WC	Concrete Slab, Unit Below 200mm	2.53	None	No Insulation	Ceramic Tiles 8mm
WIR 1	Concrete Slab, Unit Below 200mm	4.98	None	No Insulation	Cork Tiles or Parquetry 8mm
Pantry	Concrete Slab, Unit Below 200mm	5.17	None	No Insulation	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
Entry	Concrete, Plasterboard with Steel Frame	No insulation	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 3	Concrete, Plasterboard with Steel Frame	No insulation	
WC	Concrete, Plasterboard with Steel Frame	No insulation	
WIR 1	Concrete, Plasterboard with Steel Frame	No insulation	
Pantry	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Ldry	1	Downlights - LED	150	Sealed
Ldry	1	Exhaust Fans	300	Sealed
Entry	8	Downlights - LED	150	Sealed

* Refer to glossary.

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Kitchen/Living	19	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Bedroom 1	6	Downlights - LED	150	Sealed
Bedroom 2	5	Downlights - LED	150	Sealed
ENS 1	2	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
Bedroom 3	5	Downlights - LED	150	Sealed
WC	1	Downlights - LED	150	Sealed
WC	1	Exhaust Fans	300	Sealed
WIR 1	2	Downlights - LED	150	Sealed
Pantry	2	Downlights - LED	150	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
External Wall		600	0.75	No
Ceiling		900	0.75	No
Internal Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352498

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit C 2.02, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*

Conditioned*	135.9
Unconditioned*	0.0
Total	135.9
Garage	0.0

Exposure type
Suburban

NatHERS climate zone
56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	10.7	7.4
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=GkEPOxefK . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Ldry	Daytime	4.5
Entry	Daytime	19.22
Kitchen/Living	Kitchen/Living	48.57
Bedroom 1	Bedroom	14.62
Bedroom 2	Bedroom	12.64
ENS 1	Nighttime	7.06
Bath	Daytime	5.32
Bedroom 3	Bedroom	11.27
WC	Daytime	2.53
WIR 1	Nighttime	4.98
Pantry	Daytime	5.17

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-004-03 A	W23	2700	3900	Sliding	60	NE	No
Kitchen/Living	ALM-004-03 A	W24	2700	2600	Sliding	45	NE	No
Kitchen/Living	ALM-003-03 A	W27	1980	800	Awning	10	NE	No
Kitchen/Living	ALM-003-03 A	W20	1980	1000	Awning	10	SE	Yes

* Refer to glossary.

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Bedroom 1	ALM-003-03 A	W26	1980	1200	Awning	10	NE	No
Bedroom 1	ALM-003-03 A	W21	950	1200	Awning	10	SE	No
Bedroom 2	ALM-003-03 A	W22	950	1200	Awning	10	SE	No
Bedroom 2	ALM-003-03 A	W25	1980	1200	Awning	10	SW	No
Bedroom 3	ALM-003-03 A	W19	1980	1200	Awning	10	SE	Yes

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

* Refer to glossary.

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	7200	NE	2700	Yes
Kitchen/Living	EW-1	2700	1100	SE	0	No
Kitchen/Living	EW-1	2700	1100	NE	0	Yes
Kitchen/Living	EW-1	2700	3384	SE	0	No
Kitchen/Living	EW-1	2700	1295	SE	0	No
Bedroom 1	EW-1	2700	1500	NE	6275	Yes
Bedroom 1	EW-1	2700	3095	SE	0	No
Bedroom 2	EW-1	2700	3195	SE	0	No
Bedroom 2	EW-1	2700	1500	SW	0	Yes
Bedroom 3	EW-1	2700	3095	SE	0	No
Pantry	EW-1	2700	2790	SE	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Steel Stud Frame, Direct Fix Plasterboard	154.44	No insulation
IW-002	Concrete Panel/Blocks filled, plasterboard	64.53	No Insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Ldry	Concrete Slab, Unit Below 200mm	4.50	None	No Insulation	Ceramic Tiles 8mm
Entry	Concrete Slab, Unit Below 200mm	19.22	None	No Insulation	Cork Tiles or Parquetry 8mm
Kitchen/Living	Concrete Slab, Unit Below 200mm	48.57	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 1	Concrete Slab, Unit Below 200mm	14.62	None	No Insulation	Cork Tiles or Parquetry 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Bedroom 2	Concrete Slab, Unit Below 200mm	12.64	None	No Insulation	Cork Tiles or Parquetry 8mm
ENS 1	Concrete Slab, Unit Below 200mm	7.06	None	No Insulation	Ceramic Tiles 8mm
Bath	Concrete Slab, Unit Below 200mm	5.32	None	No Insulation	Ceramic Tiles 8mm
Bedroom 3	Concrete Slab, Unit Below 200mm	11.27	None	No Insulation	Cork Tiles or Parquetry 8mm
WC	Concrete Slab, Unit Below 200mm	2.53	None	No Insulation	Ceramic Tiles 8mm
WIR 1	Concrete Slab, Unit Below 200mm	4.98	None	No Insulation	Cork Tiles or Parquetry 8mm
Pantry	Concrete Slab, Unit Below 200mm	5.17	None	No Insulation	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
Entry	Concrete, Plasterboard with Steel Frame	No insulation	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 3	Concrete, Plasterboard with Steel Frame	No insulation	
WC	Concrete, Plasterboard with Steel Frame	No insulation	
WIR 1	Concrete, Plasterboard with Steel Frame	No insulation	
Pantry	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Ldry	1	Downlights - LED	150	Sealed
Ldry	1	Exhaust Fans	300	Sealed
Entry	7	Downlights - LED	150	Sealed
Kitchen/Living	19	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed

* Refer to glossary.

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Bedroom 1	6	Downlights - LED	150	Sealed
Bedroom 2	5	Downlights - LED	150	Sealed
ENS 1	2	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
Bedroom 3	5	Downlights - LED	150	Sealed
WC	1	Downlights - LED	150	Sealed
WC	1	Exhaust Fans	300	Sealed
WIR 1	2	Downlights - LED	150	Sealed
Pantry	2	Downlights - LED	150	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
Ceiling		900	0.75	No
Internal Wall		600	0.75	No
External Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352472-01

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit C 2.03, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*	
Conditioned*	79.6
Unconditioned*	0.0
Total	79.6
Garage	0.0

Exposure type
Suburban

NatHERS climate zone
56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	17.6	12.0
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=herMvduuN . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Kitchen/Living	Kitchen/Living	34.53
Entry/Ldry	Daytime	6.99
Bedroom 2	Bedroom	11.03
Bedroom 1	Bedroom	16.61
Glazed Common	Glazed Common Area	15.77
ENS 1	Nighttime	5.99
Bath	Daytime	4.49

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-004-03 A	W22	2700	3050	Sliding	45	NW	No
Kitchen/Living	ALM-004-03 A	W23	2700	3600	Sliding	60	NW	No
Bedroom 2	ALM-003-03 A	W20	1980	1200	Awning	10	SE	Yes
Bedroom 1	ALM-003-03 A	W21	1980	1200	Awning	10	SE	Yes
Glazed Common	ALM-001-01 A	W19	1980	2000	Awning	70	SE	No

* Refer to glossary.

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

* Refer to glossary.

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	3100	NW	1100	Yes
Kitchen/Living	EW-1	2700	1000	NE	4000	No
Kitchen/Living	EW-1	2700	4000	NW	2100	Yes
Bedroom 2	EW-1	2700	1500	NE	0	No
Bedroom 2	EW-1	2700	3095	SE	0	No
Bedroom 1	EW-1	2700	3995	SE	0	No
Glazed Common	EW-1	2700	2250	SE	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Steel Stud Frame, Direct Fix Plasterboard	64.80	No insulation
IW-002	Concrete Panel/Blocks filled, plasterboard	69.12	No Insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Kitchen/Living	Concrete Slab, Unit Below 200mm	34.53	None	No Insulation	Cork Tiles or Parquetry 8mm
Entry/Ldry	Concrete Slab, Unit Below 200mm	6.99	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 2	Concrete Slab, Unit Below 200mm	11.03	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 1	Concrete Slab, Unit Below 200mm	16.61	None	No Insulation	Cork Tiles or Parquetry 8mm
Glazed Common	Concrete Slab, Unit Below 200mm	15.77	None	No Insulation	Cork Tiles or Parquetry 8mm
ENS 1	Concrete Slab, Unit Below 200mm	5.99	None	No Insulation	Ceramic Tiles 8mm
Bath	Concrete Slab, Unit Below 200mm	4.49	None	No Insulation	Ceramic Tiles 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	

* Refer to glossary.

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Entry/Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Glazed Common	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Kitchen/Living	15	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Entry/Ldry	3	Downlights - LED	150	Sealed
Entry/Ldry	1	Exhaust Fans	300	Sealed
Bedroom 2	4	Downlights - LED	150	Sealed
Bedroom 1	7	Downlights - LED	150	Sealed
ENS 1	2	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	1	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
External Wall		600	0.75	No

* Refer to glossary.

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
Ceiling		900	0.75	No
Internal Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352449

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit C 2.04, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*	
Conditioned*	78.9
Unconditioned*	0.0
Total	78.9
Garage	0.0

Exposure type
Suburban

NatHERS climate zone
56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	18.9	8.5
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=gVsLoCSKL . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Kitchen/Living	Kitchen/Living	33.82
Entry/Ldry	Daytime	7.16
Bedroom 2	Bedroom	11.03
Bedroom 1	Bedroom	16.61
Glazed Common	Glazed Common Area	15.77
ENS 1	Nighttime	5.99
Bath	Daytime	4.33

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-004-03 A	W23	2700	3600	Sliding	60	NW	No
Kitchen/Living	ALM-004-03 A	W22	2700	3050	Sliding	45	NW	No
Bedroom 2	ALM-003-03 A	W20	1980	1200	Awning	10	SE	Yes
Bedroom 1	ALM-003-03 A	W24	1980	1200	Awning	10	SE	Yes
Glazed Common	ALM-001-01 A	W21	1980	2000	Awning	70	SE	No

* Refer to glossary.

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

* Refer to glossary.

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	4000	NW	2500	Yes
Kitchen/Living	EW-1	2700	1000	SW	4000	No
Kitchen/Living	EW-1	2700	3100	NW	1500	Yes
Bedroom 2	EW-1	2700	3095	SE	0	No
Bedroom 2	EW-1	2700	1500	SW	0	No
Bedroom 1	EW-1	2700	3995	SE	0	No
Glazed Common	EW-1	2700	2250	SE	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Concrete Panel/Blocks filled, plasterboard	79.65	No Insulation
IW-002	Steel Stud Frame, Direct Fix Plasterboard	61.56	No insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Kitchen/Living	Concrete Slab, Unit Below 200mm	33.86	None	No Insulation	Cork Tiles or Parquetry 8mm
Entry/Ldry	Concrete Slab, Unit Below 200mm	7.16	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 2	Concrete Slab, Unit Below 200mm	11.03	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 1	Concrete Slab, Unit Below 200mm	16.61	None	No Insulation	Cork Tiles or Parquetry 8mm
Glazed Common	Concrete Slab, Unit Below 200mm	15.77	None	No Insulation	Cork Tiles or Parquetry 8mm
ENS 1	Concrete Slab, Unit Below 200mm	5.99	None	No Insulation	Ceramic Tiles 8mm
Bath	Concrete Slab, Unit Below 200mm	4.33	None	No Insulation	Ceramic Tiles 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	

* Refer to glossary.

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Entry/Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Glazed Common	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Kitchen/Living	16	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Entry/Ldry	3	Downlights - LED	150	Sealed
Entry/Ldry	1	Exhaust Fans	300	Sealed
Bedroom 2	4	Downlights - LED	150	Sealed
Bedroom 1	6	Downlights - LED	150	Sealed
ENS 1	2	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
External Wall		600	0.75	No

* Refer to glossary.

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
Ceiling		900	0.75	No
Internal Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352415

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit C 2.05, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*	
Conditioned*	129.8
Unconditioned*	0.0
Total	129.8
Garage	0.0

Exposure type
Suburban

NatHERS climate zone
56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

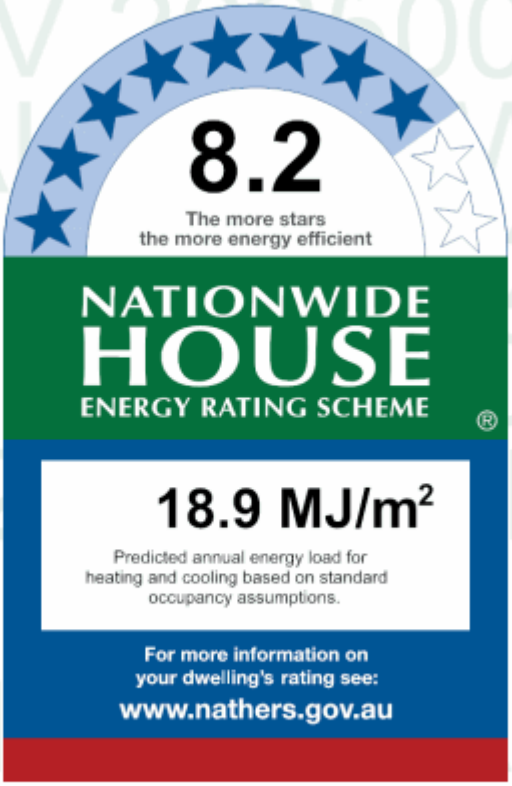

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	8.7	10.2
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=HVrzMiNDN . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

* Refer to glossary.

Room *schedule*

Room	Zone Type	Area [m^2]
Ldry	Daytime	4.27
Entry	Daytime	21.68
Kitchen/Living	Kitchen/Living	50.9
Bedroom 1	Bedroom	17.17
Bedroom 2	Bedroom	12.59
ENS 1	Nighttime	7.06
Bath	Daytime	4.89
Bedroom 3	Bedroom	11.27

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-004-03 A	W5	2700	3900	Sliding	60	SW	No
Kitchen/Living	ALM-004-03 A	W8	2700	2850	Sliding	45	SW	No
Kitchen/Living	ALM-003-03 A	W3	1980	1000	Awning	10	NW	No
Kitchen/Living	ALM-003-03 A	W4	1980	2000	Awning	10	NW	No
Bedroom 1	ALM-003-03 A	W7	1980	1150	Awning	10	SW	No
Bedroom 2	ALM-003-03 A	W6	1980	1150	Awning	10	NE	No
Bedroom 3	ALM-003-03 A	W2	1980	1200	Awning	10	NE	No

* Refer to glossary.

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

* Refer to glossary.

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Ldry	EW-1	2700	695	NE	0	No
Kitchen/Living	EW-1	2700	4200	SW	2600	Yes
Kitchen/Living	EW-1	2700	1200	SE	4200	No
Kitchen/Living	EW-1	2700	3000	SW	1400	Yes
Kitchen/Living	EW-1	2700	7795	NW	0	No
Bedroom 1	EW-1	2700	595	NW	0	No
Bedroom 1	EW-1	2700	1500	SW	0	Yes
Bedroom 1	EW-1	2700	3095	NW	0	No
Bedroom 2	EW-1	2700	3195	NW	0	No
Bedroom 2	EW-1	2700	1500	NE	0	Yes
Bedroom 3	EW-1	2700	3095	NW	0	No
Bedroom 3	EW-1	2700	3695	NE	0	Yes

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Steel Stud Frame, Direct Fix Plasterboard	119.88	No insulation
IW-002	Concrete Panel/Blocks filled, plasterboard	51.30	No Insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Ldry	Concrete Slab, Unit Below 200mm	4.27	None	No Insulation	Ceramic Tiles 8mm
Entry	Concrete Slab, Unit Below 200mm	21.68	None	No Insulation	Cork Tiles or Parquetry 8mm
Kitchen/Living	Concrete Slab, Unit Below 200mm	50.90	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 1	Concrete Slab, Unit Below 200mm	17.17	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 2	Concrete Slab, Unit Below 200mm	12.59	None	No Insulation	Cork Tiles or Parquetry 8mm
ENS 1	Concrete Slab, Unit Below 200mm	7.06	None	No Insulation	Ceramic Tiles 8mm
Bath	Concrete Slab, Unit Below 200mm	4.89	None	No Insulation	Ceramic Tiles 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Bedroom 3	Concrete Slab, Unit Below 200mm	11.27	None	No Insulation	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
Entry	Concrete, Plasterboard with Steel Frame	No insulation	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 3	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Ldry	1	Downlights - LED	150	Sealed
Ldry	1	Exhaust Fans	300	Sealed
Entry	8	Downlights - LED	150	Sealed
Kitchen/Living	20	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Bedroom 1	7	Downlights - LED	150	Sealed
Bedroom 2	5	Downlights - LED	150	Sealed
ENS 1	3	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
Bedroom 3	4	Downlights - LED	150	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

* Refer to glossary.

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
External Wall		600	0.75	No
Ceiling		900	0.75	No
Internal Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

* Refer to glossary.

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352399

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit C 2.06, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*

Conditioned*	129.8
Unconditioned*	0.0
Total	129.8
Garage	0.0

Exposure type
Suburban

NatHERS climate zone
56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	20.2	7.8
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=ikcKkbldT . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Ldry	Daytime	4.58
Entry	Daytime	21.37
Kitchen/Living	Kitchen/Living	50.9
Bedroom 1	Bedroom	17.17
Bedroom 2	Bedroom	12.59
ENS 1	Nighttime	7.06
Bath	Daytime	4.89
Bedroom 3	Bedroom	11.27

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-003-03 A	W9	1980	1000	Awning	10	SE	No
Kitchen/Living	ALM-003-03 A	W11	1980	2000	Awning	10	SE	No
Kitchen/Living	ALM-004-03 A	W1	2700	2850	Sliding	45	SW	No
Kitchen/Living	ALM-004-03 A	W10	2700	3900	Sliding	60	SW	No
Bedroom 1	ALM-003-03 A	W8	950	1200	Awning	10	SE	No
Bedroom 1	ALM-003-03 A	W4	1980	1150	Awning	10	SW	No
Bedroom 2	ALM-003-03 A	W5	1980	1150	Awning	10	NE	No

* Refer to glossary.

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Bedroom 2	ALM-003-03 A	W7	950	1200	Awning	10	SE	No
Bedroom 3	ALM-003-03 A	W12	1980	1200	Awning	10	SE	No

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

* Refer to glossary.

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	7795	SE	0	No
Kitchen/Living	EW-1	2700	3000	SW	1400	Yes
Kitchen/Living	EW-1	2700	1200	NW	4200	No
Kitchen/Living	EW-1	2700	4200	SW	2600	Yes
Bedroom 1	EW-1	2700	3095	SE	0	No
Bedroom 1	EW-1	2700	1500	SW	0	Yes
Bedroom 1	EW-1	2700	595	SE	0	No
Bedroom 2	EW-1	2700	1500	NE	0	Yes
Bedroom 2	EW-1	2700	3195	SE	0	No
Bedroom 3	EW-1	2700	3095	SE	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Concrete Panel/Blocks filled, plasterboard	61.02	No Insulation
IW-002	Steel Stud Frame, Direct Fix Plasterboard	115.83	No insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Ldry	Concrete Slab, Unit Below 200mm	4.58	None	No Insulation	Ceramic Tiles 8mm
Entry	Concrete Slab, Unit Below 200mm	21.37	None	No Insulation	Cork Tiles or Parquetry 8mm
Kitchen/Living	Concrete Slab, Unit Below 200mm	50.90	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 1	Concrete Slab, Unit Below 200mm	17.17	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 2	Concrete Slab, Unit Below 200mm	12.59	None	No Insulation	Cork Tiles or Parquetry 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
ENS 1	Concrete Slab, Unit Below 200mm	7.06	None	No Insulation	Ceramic Tiles 8mm
Bath	Concrete Slab, Unit Below 200mm	4.89	None	No Insulation	Ceramic Tiles 8mm
Bedroom 3	Concrete Slab, Unit Below 200mm	11.27	None	No Insulation	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
Entry	Concrete, Plasterboard with Steel Frame	No insulation	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 3	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Ldry	1	Downlights - LED	150	Sealed
Ldry	1	Exhaust Fans	300	Sealed
Entry	8	Downlights - LED	150	Sealed
Kitchen/Living	20	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Bedroom 1	7	Downlights - LED	150	Sealed
Bedroom 2	5	Downlights - LED	150	Sealed
ENS 1	3	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
Bedroom 3	4	Downlights - LED	150	Sealed

* Refer to glossary.

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
Ceiling		900	0.75	No
Internal Wall		600	0.75	No
External Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352381

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit C 3.01, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*	
Conditioned*	135.9
Unconditioned*	0.0
Total	135.9
Garage	0.0

Exposure type
Open

NatHERS climate zone
56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	12.3	7.7
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=JOhmZZrWt . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

* Refer to glossary.

Room *schedule*

Room	Zone Type	Area [m^2]
Ldry	Daytime	4.34
Entry	Daytime	19.39
Kitchen/Living	Kitchen/Living	48.57
Bedroom 1	Bedroom	14.62
Bedroom 2	Bedroom	12.64
ENS 1	Nighttime	7.06
Bath	Daytime	5.32
Bedroom 3	Bedroom	11.27
WC	Daytime	2.53
WIR 1	Nighttime	4.98
Pantry	Daytime	5.17

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-003-03 A	W14	1980	800	Awning	10	NE	No
Kitchen/Living	ALM-004-03 A	W10	2700	3900	Sliding	60	NE	No
Kitchen/Living	ALM-004-03 A	W13	2700	2600	Sliding	45	NE	No
Bedroom 1	ALM-003-03 A	W4	1980	1150	Awning	10	NE	No

* Refer to glossary.

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Bedroom 2	ALM-003-03 A	W5	1980	1150	Awning	10	SW	No
Bedroom 3	ALM-003-03 A	W20	1980	1150	Awning	10	SW	No

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

* Refer to glossary.

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Ldry	EW-1	2700	895	SW	0	No
Kitchen/Living	EW-1	2700	1295	NW	0	No
Kitchen/Living	EW-1	2700	3384	W	0	No
Kitchen/Living	EW-1	2700	1100	NE	0	Yes
Kitchen/Living	EW-1	2700	1100	NW	0	No
Kitchen/Living	EW-1	2700	7200	NE	2700	Yes
Bedroom 1	EW-1	2700	3095	NW	0	No
Bedroom 1	EW-1	2700	1500	NE	6275	Yes
Bedroom 2	EW-1	2700	1500	SW	0	Yes
Bedroom 2	EW-1	2700	3195	NW	0	No
Bedroom 3	EW-1	2700	3695	SW	0	Yes
Bedroom 3	EW-1	2700	3095	NW	0	No
Pantry	EW-1	2700	2790	NW	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Concrete Panel/Blocks filled, plasterboard	54.54	No Insulation
IW-002	Steel Stud Frame, Direct Fix Plasterboard	149.31	No insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Ldry	Concrete Slab, Unit Below 200mm	4.34	None	No Insulation	Ceramic Tiles 8mm
Entry	Concrete Slab, Unit Below 200mm	19.39	None	No Insulation	Cork Tiles or Parquetry 8mm
Kitchen/Living	Concrete Slab, Unit Below 200mm	48.57	None	No Insulation	Cork Tiles or Parquetry 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Bedroom 1	Concrete Slab, Unit Below 200mm	14.62	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 2	Concrete Slab, Unit Below 200mm	12.64	None	No Insulation	Cork Tiles or Parquetry 8mm
ENS 1	Concrete Slab, Unit Below 200mm	7.06	None	No Insulation	Ceramic Tiles 8mm
Bath	Concrete Slab, Unit Below 200mm	5.32	None	No Insulation	Ceramic Tiles 8mm
Bedroom 3	Concrete Slab, Unit Below 200mm	11.27	None	No Insulation	Cork Tiles or Parquetry 8mm
WC	Concrete Slab, Unit Below 200mm	2.53	None	No Insulation	Ceramic Tiles 8mm
WIR 1	Concrete Slab, Unit Below 200mm	4.98	None	No Insulation	Cork Tiles or Parquetry 8mm
Pantry	Concrete Slab, Unit Below 200mm	5.17	None	No Insulation	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
Entry	Concrete, Plasterboard with Steel Frame	No insulation	
Entry	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Bedroom 2	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 3	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 3	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
WC	Concrete, Plasterboard with Steel Frame	No insulation	
WIR 1	Concrete, Plasterboard with Steel Frame	No insulation	
WIR 1	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Pantry	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	

* Refer to glossary.

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Ldry	1	Downlights - LED	150	Sealed
Ldry	1	Exhaust Fans	300	Sealed
Entry	8	Downlights - LED	150	Sealed
Kitchen/Living	19	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Bedroom 1	6	Downlights - LED	150	Sealed
Bedroom 2	5	Downlights - LED	150	Sealed
ENS 1	2	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
Bedroom 3	5	Downlights - LED	150	Sealed
WC	1	Downlights - LED	150	Sealed
WC	1	Exhaust Fans	300	Sealed
WIR 1	2	Downlights - LED	150	Sealed
Pantry	2	Downlights - LED	150	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
Waterproofing Membrane	No Added Insulation, No air Gap	0.30	Light

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
External Wall		600	0.75	No
Ceiling		900	0.75	No

* Refer to glossary.

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
Internal Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352373

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit C 3.02, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*	
Conditioned*	135.9
Unconditioned*	0.0
Total	135.9
Garage	0.0

Exposure type
Suburban

NatHERS climate zone
56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

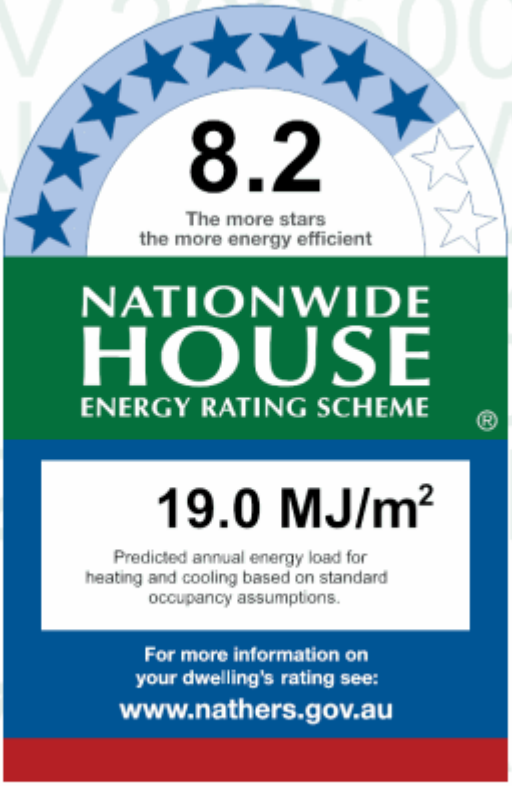

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	11.3	7.6
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=cDHAILkfX . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Ldry	Daytime	4.5
Entry	Daytime	19.22
Kitchen/Living	Kitchen/Living	48.57
Bedroom 1	Bedroom	14.62
Bedroom 2	Bedroom	12.64
ENS 1	Nighttime	7.06
Bath	Daytime	5.32
Bedroom 3	Bedroom	11.27
WC	Daytime	2.53
WIR 1	Nighttime	4.98
Pantry	Daytime	5.17

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-004-03 A	W23	2700	3900	Sliding	60	NE	No
Kitchen/Living	ALM-004-03 A	W24	2700	2600	Sliding	45	NE	No
Kitchen/Living	ALM-003-03 A	W27	1980	800	Awning	10	NE	No
Kitchen/Living	ALM-003-03 A	W20	1980	950	Awning	10	SE	Yes

* Refer to glossary.

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Bedroom 1	ALM-003-03 A	W26	1980	1150	Awning	10	NE	No
Bedroom 1	ALM-003-03 A	W21	950	1200	Awning	10	SE	No
Bedroom 2	ALM-003-03 A	W22	950	1200	Awning	10	SE	No
Bedroom 2	ALM-003-03 A	W25	1980	1150	Awning	10	SW	No
Bedroom 3	ALM-003-03 A	W19	1980	1200	Awning	10	SE	Yes

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

* Refer to glossary.

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	7200	NE	2700	Yes
Kitchen/Living	EW-1	2700	1100	SE	0	No
Kitchen/Living	EW-1	2700	1100	NE	0	Yes
Kitchen/Living	EW-1	2700	3384	SE	0	No
Kitchen/Living	EW-1	2700	1295	SE	0	No
Bedroom 1	EW-1	2700	1500	NE	6275	Yes
Bedroom 1	EW-1	2700	3095	SE	0	No
Bedroom 2	EW-1	2700	3195	SE	0	No
Bedroom 2	EW-1	2700	1500	SW	0	Yes
Bedroom 3	EW-1	2700	3095	SE	0	No
Pantry	EW-1	2700	2790	SE	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Steel Stud Frame, Direct Fix Plasterboard	154.44	No insulation
IW-002	Concrete Panel/Blocks filled, plasterboard	64.53	No Insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Ldry	Concrete Slab, Unit Below 200mm	4.50	None	No Insulation	Ceramic Tiles 8mm
Entry	Concrete Slab, Unit Below 200mm	19.22	None	No Insulation	Cork Tiles or Parquetry 8mm
Kitchen/Living	Concrete Slab, Unit Below 200mm	48.57	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 1	Concrete Slab, Unit Below 200mm	14.62	None	No Insulation	Cork Tiles or Parquetry 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Bedroom 2	Concrete Slab, Unit Below 200mm	12.64	None	No Insulation	Cork Tiles or Parquetry 8mm
ENS 1	Concrete Slab, Unit Below 200mm	7.06	None	No Insulation	Ceramic Tiles 8mm
Bath	Concrete Slab, Unit Below 200mm	5.32	None	No Insulation	Ceramic Tiles 8mm
Bedroom 3	Concrete Slab, Unit Below 200mm	11.27	None	No Insulation	Cork Tiles or Parquetry 8mm
WC	Concrete Slab, Unit Below 200mm	2.53	None	No Insulation	Ceramic Tiles 8mm
WIR 1	Concrete Slab, Unit Below 200mm	4.98	None	No Insulation	Cork Tiles or Parquetry 8mm
Pantry	Concrete Slab, Unit Below 200mm	5.17	None	No Insulation	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
Entry	Concrete, Plasterboard with Steel Frame	No insulation	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 3	Concrete, Plasterboard with Steel Frame	No insulation	
WC	Concrete, Plasterboard with Steel Frame	No insulation	
WIR 1	Concrete, Plasterboard with Steel Frame	No insulation	
Pantry	Concrete, Plasterboard with Steel Frame	No insulation	
Pantry	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Ldry	1	Downlights - LED	150	Sealed

* Refer to glossary.

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Ldry	1	Exhaust Fans	300	Sealed
Entry	7	Downlights - LED	150	Sealed
Kitchen/Living	19	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Bedroom 1	6	Downlights - LED	150	Sealed
Bedroom 2	5	Downlights - LED	150	Sealed
ENS 1	2	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
Bedroom 3	5	Downlights - LED	150	Sealed
WC	1	Downlights - LED	150	Sealed
WC	1	Exhaust Fans	300	Sealed
WIR 1	2	Downlights - LED	150	Sealed
Pantry	2	Downlights - LED	150	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
Ceiling		900	0.75	No
Internal Wall		600	0.75	No
External Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352365

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit C 3.03, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*	
Conditioned*	79.6
Unconditioned*	0.0
Total	79.6
Garage	0.0

Exposure type
Open

NatHERS climate zone
56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

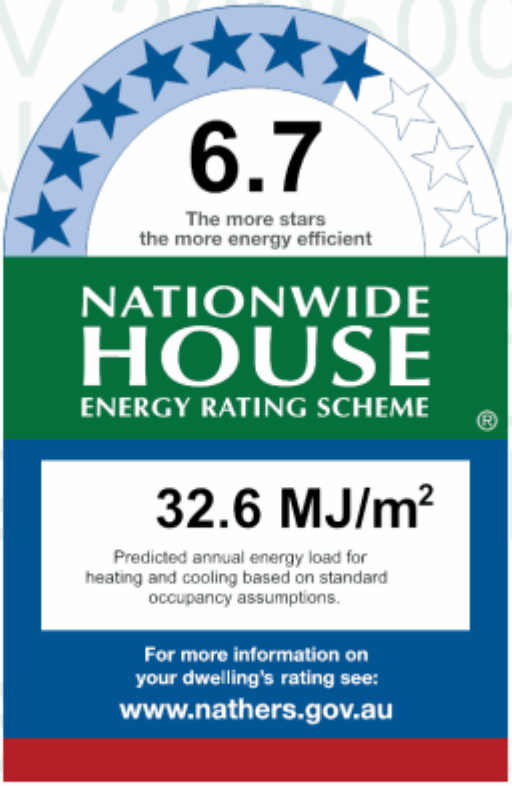

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	21.6	11.0
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=BoWokRNFR . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Kitchen/Living	Kitchen/Living	34.53
Entry/Ldry	Daytime	6.99
Bedroom 2	Bedroom	11.03
Bedroom 1	Bedroom	16.61
Glazed Common	Glazed Common Area	15.77
ENS 1	Nighttime	5.99
Bath	Daytime	4.49

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-004-03 A	W22	2700	3050	Sliding	45	NW	No
Kitchen/Living	ALM-004-03 A	W23	2700	3600	Sliding	60	NW	No
Bedroom 2	ALM-003-03 A	W20	1980	1200	Awning	10	SE	Yes
Bedroom 1	ALM-003-03 A	W21	1980	1200	Awning	10	SE	Yes
Glazed Common	ALM-001-01 A	W19	1980	2000	Awning	70	SE	No

* Refer to glossary.

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

* Refer to glossary.

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	3100	NW	1100	Yes
Kitchen/Living	EW-1	2700	1000	NE	4000	No
Kitchen/Living	EW-1	2700	4000	NW	2100	Yes
Bedroom 2	EW-1	2700	1500	NE	0	No
Bedroom 2	EW-1	2700	3095	SE	0	No
Bedroom 1	EW-1	2700	3995	SE	0	No
Glazed Common	EW-1	2700	2250	SE	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Steel Stud Frame, Direct Fix Plasterboard	64.80	No insulation
IW-002	Concrete Panel/Blocks filled, plasterboard	69.12	No Insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Kitchen/Living	Concrete Slab, Unit Below 200mm	34.53	None	No Insulation	Cork Tiles or Parquetry 8mm
Entry/Ldry	Concrete Slab, Unit Below 200mm	6.99	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 2	Concrete Slab, Unit Below 200mm	11.03	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 1	Concrete Slab, Unit Below 200mm	16.61	None	No Insulation	Cork Tiles or Parquetry 8mm
Glazed Common	Concrete Slab, Unit Below 200mm	15.77	None	No Insulation	Cork Tiles or Parquetry 8mm
ENS 1	Concrete Slab, Unit Below 200mm	5.99	None	No Insulation	Ceramic Tiles 8mm
Bath	Concrete Slab, Unit Below 200mm	4.49	None	No Insulation	Ceramic Tiles 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	

* Refer to glossary.

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Kitchen/Living	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Entry/Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Glazed Common	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Kitchen/Living	15	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Entry/Ldry	3	Downlights - LED	150	Sealed
Entry/Ldry	1	Exhaust Fans	300	Sealed
Bedroom 2	4	Downlights - LED	150	Sealed
Bedroom 1	7	Downlights - LED	150	Sealed
ENS 1	2	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	1	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
External Wall		600	0.75	No
Ceiling		900	0.75	No
Internal Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352357

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit C 3.04, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*

Conditioned*	78.9
Unconditioned*	0.0
Total	78.9
Garage	0.0

Exposure type

Open

NatHERS climate zone

56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

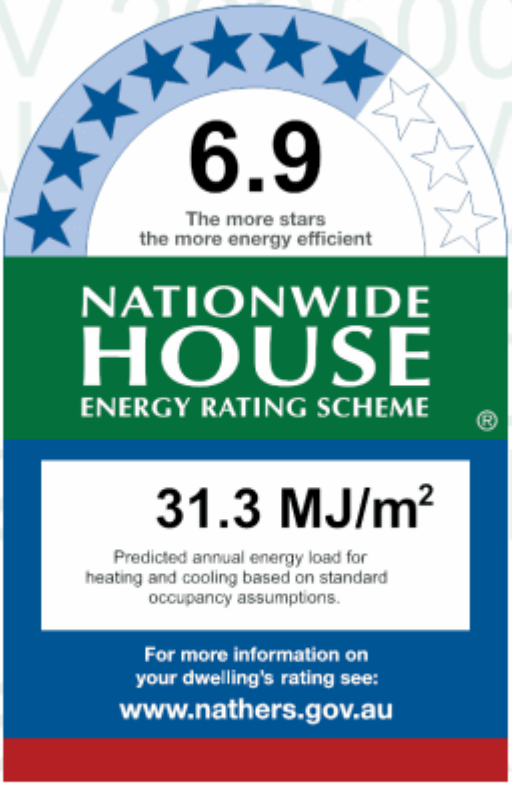

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	22.8	8.5
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=xrqqenCLY . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Kitchen/Living	Kitchen/Living	33.82
Entry/Ldry	Daytime	7.16
Bedroom 2	Bedroom	11.03
Bedroom 1	Bedroom	16.61
Glazed Common	Glazed Common Area	15.77
ENS 1	Nighttime	5.99
Bath	Daytime	4.33

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-004-03 A	W23	2700	3600	Sliding	60	NW	No
Kitchen/Living	ALM-004-03 A	W22	2700	3050	Sliding	45	NW	No
Bedroom 2	ALM-003-03 A	W20	1980	1200	Awning	10	SE	Yes
Bedroom 1	ALM-003-03 A	W24	1980	1200	Awning	10	SE	Yes
Glazed Common	ALM-001-01 A	W21	1980	2000	Awning	10	SE	No

* Refer to glossary.

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

* Refer to glossary.

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	4000	NW	2500	Yes
Kitchen/Living	EW-1	2700	1000	SW	4000	No
Kitchen/Living	EW-1	2700	3100	NW	1500	Yes
Bedroom 2	EW-1	2700	3095	SE	0	No
Bedroom 2	EW-1	2700	1500	SW	0	No
Bedroom 1	EW-1	2700	3995	SE	0	No
Glazed Common	EW-1	2700	2250	SE	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Concrete Panel/Blocks filled, plasterboard	79.65	No Insulation
IW-002	Steel Stud Frame, Direct Fix Plasterboard	61.56	No insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Kitchen/Living	Concrete Slab, Unit Below 200mm	33.86	None	No Insulation	Cork Tiles or Parquetry 8mm
Entry/Ldry	Concrete Slab, Unit Below 200mm	7.16	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 2	Concrete Slab, Unit Below 200mm	11.03	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 1	Concrete Slab, Unit Below 200mm	16.61	None	No Insulation	Cork Tiles or Parquetry 8mm
Glazed Common	Concrete Slab, Unit Below 200mm	15.77	None	No Insulation	Cork Tiles or Parquetry 8mm
ENS 1	Concrete Slab, Unit Below 200mm	5.99	None	No Insulation	Ceramic Tiles 8mm
Bath	Concrete Slab, Unit Below 200mm	4.33	None	No Insulation	Ceramic Tiles 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	

* Refer to glossary.

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Kitchen/Living	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Entry/Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Glazed Common	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Kitchen/Living	16	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Entry/Ldry	3	Downlights - LED	150	Sealed
Entry/Ldry	1	Exhaust Fans	300	Sealed
Bedroom 2	4	Downlights - LED	150	Sealed
Bedroom 1	6	Downlights - LED	150	Sealed
ENS 1	2	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

* Refer to glossary.

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
External Wall		600	0.75	No
Ceiling		900	0.75	No
Internal Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352340

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit C 3.05, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*

Conditioned*	129.8
Unconditioned*	0.0
Total	129.8
Garage	0.0

Exposure type
Suburban

NatHERS climate zone
56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

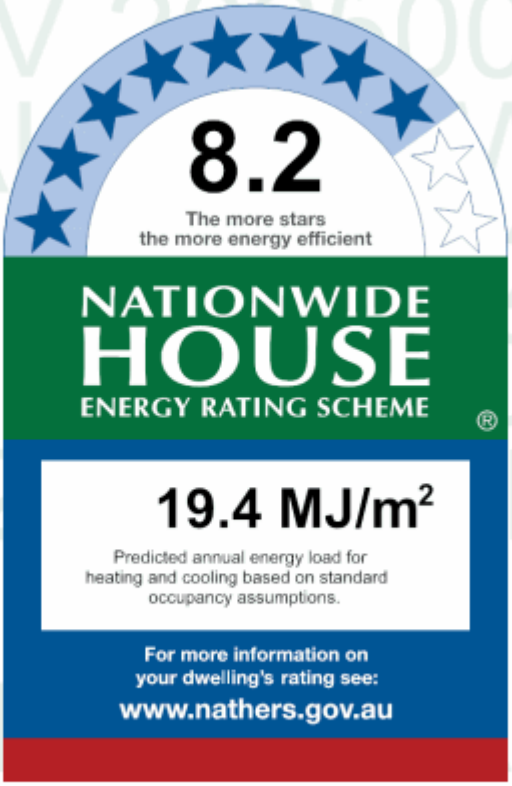

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	9.3	10.0
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=meMZUQHIT . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Ldry	Daytime	4.27
Entry	Daytime	21.68
Kitchen/Living	Kitchen/Living	50.9
Bedroom 1	Bedroom	17.17
Bedroom 2	Bedroom	12.59
ENS 1	Nighttime	7.06
Bath	Daytime	4.89
Bedroom 3	Bedroom	11.27

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-004-03 A	W5	2700	3900	Sliding	60	SW	No
Kitchen/Living	ALM-004-03 A	W8	2700	2850	Sliding	45	SW	No
Kitchen/Living	ALM-003-03 A	W3	1980	1000	Awning	10	NW	No
Kitchen/Living	ALM-003-03 A	W4	1980	2000	Awning	10	NW	No
Bedroom 1	ALM-003-03 A	W7	1980	1150	Awning	10	SW	No
Bedroom 2	ALM-003-03 A	W6	1980	1150	Awning	10	NE	No
Bedroom 3	ALM-003-03 A	W2	1980	1200	Awning	10	NE	No

* Refer to glossary.

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

* Refer to glossary.

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Ldry	EW-1	2700	695	NE	0	No
Kitchen/Living	EW-1	2700	4200	SW	2600	Yes
Kitchen/Living	EW-1	2700	1200	SE	4200	No
Kitchen/Living	EW-1	2700	3000	SW	1400	Yes
Kitchen/Living	EW-1	2700	7795	NW	0	No
Bedroom 1	EW-1	2700	595	NW	0	No
Bedroom 1	EW-1	2700	1500	SW	0	Yes
Bedroom 1	EW-1	2700	3095	NW	0	No
Bedroom 2	EW-1	2700	3195	NW	0	No
Bedroom 2	EW-1	2700	1500	NE	0	Yes
Bedroom 3	EW-1	2700	3095	NW	0	No
Bedroom 3	EW-1	2700	3695	NE	0	Yes

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Steel Stud Frame, Direct Fix Plasterboard	119.88	No insulation
IW-002	Concrete Panel/Blocks filled, plasterboard	51.30	No Insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Ldry	Concrete Slab, Unit Below 200mm	4.27	None	No Insulation	Ceramic Tiles 8mm
Entry	Concrete Slab, Unit Below 200mm	21.68	None	No Insulation	Cork Tiles or Parquetry 8mm
Kitchen/Living	Concrete Slab, Unit Below 200mm	50.90	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 1	Concrete Slab, Unit Below 200mm	17.17	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 2	Concrete Slab, Unit Below 200mm	12.59	None	No Insulation	Cork Tiles or Parquetry 8mm
ENS 1	Concrete Slab, Unit Below 200mm	7.06	None	No Insulation	Ceramic Tiles 8mm
Bath	Concrete Slab, Unit Below 200mm	4.89	None	No Insulation	Ceramic Tiles 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Bedroom 3	Concrete Slab, Unit Below 200mm	11.27	None	No Insulation	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
Entry	Concrete, Plasterboard with Steel Frame	No insulation	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 3	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Ldry	1	Downlights - LED	150	Sealed
Ldry	1	Exhaust Fans	300	Sealed
Entry	8	Downlights - LED	150	Sealed
Kitchen/Living	20	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Bedroom 1	7	Downlights - LED	150	Sealed
Bedroom 2	5	Downlights - LED	150	Sealed
ENS 1	3	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
Bedroom 3	4	Downlights - LED	150	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

* Refer to glossary.

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
External Wall		600	0.75	No
Ceiling		900	0.75	No
Internal Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

* Refer to glossary.

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352332

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit C 3.06, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*	
Conditioned*	129.8
Unconditioned*	0.0
Total	129.8
Garage	0.0

Exposure type
Suburban

NatHERS climate zone
56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	20.2	8.1
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=LPbOxWkLN . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Ldry	Daytime	4.58
Entry	Daytime	21.37
Kitchen/Living	Kitchen/Living	50.9
Bedroom 1	Bedroom	17.17
Bedroom 2	Bedroom	12.59
ENS 1	Nighttime	7.06
Bath	Daytime	4.89
Bedroom 3	Bedroom	11.27

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-003-03 A	W9	1980	1000	Awning	10	SE	No
Kitchen/Living	ALM-003-03 A	W11	1980	2000	Awning	10	SE	No
Kitchen/Living	ALM-004-03 A	W1	2700	2850	Sliding	45	SW	No
Kitchen/Living	ALM-004-03 A	W10	2700	3900	Sliding	60	SW	No
Bedroom 1	ALM-003-03 A	W8	950	1200	Awning	10	SE	No
Bedroom 1	ALM-003-03 A	W4	1980	1150	Awning	10	SW	No
Bedroom 2	ALM-003-03 A	W5	1980	1150	Awning	10	NE	No

* Refer to glossary.

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Bedroom 2	ALM-003-03 A	W7	950	1200	Awning	10	SE	No
Bedroom 3	ALM-003-03 A	W12	1980	1200	Awning	10	SE	No

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

* Refer to glossary.

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	7795	SE	0	No
Kitchen/Living	EW-1	2700	3000	SW	1400	Yes
Kitchen/Living	EW-1	2700	1200	NW	4200	No
Kitchen/Living	EW-1	2700	4200	SW	2600	Yes
Bedroom 1	EW-1	2700	3095	SE	0	No
Bedroom 1	EW-1	2700	1500	SW	0	Yes
Bedroom 1	EW-1	2700	595	SE	0	No
Bedroom 2	EW-1	2700	1500	NE	0	Yes
Bedroom 2	EW-1	2700	3195	SE	0	No
Bedroom 3	EW-1	2700	3095	SE	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Concrete Panel/Blocks filled, plasterboard	61.02	No Insulation
IW-002	Steel Stud Frame, Direct Fix Plasterboard	115.83	No insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Ldry	Concrete Slab, Unit Below 200mm	4.58	None	No Insulation	Ceramic Tiles 8mm
Entry	Concrete Slab, Unit Below 200mm	21.37	None	No Insulation	Cork Tiles or Parquetry 8mm
Kitchen/Living	Concrete Slab, Unit Below 200mm	50.90	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 1	Concrete Slab, Unit Below 200mm	17.17	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 2	Concrete Slab, Unit Below 200mm	12.59	None	No Insulation	Cork Tiles or Parquetry 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
ENS 1	Concrete Slab, Unit Below 200mm	7.06	None	No Insulation	Ceramic Tiles 8mm
Bath	Concrete Slab, Unit Below 200mm	4.89	None	No Insulation	Ceramic Tiles 8mm
Bedroom 3	Concrete Slab, Unit Below 200mm	11.27	None	No Insulation	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
Entry	Concrete, Plasterboard with Steel Frame	No insulation	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 3	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Ldry	1	Downlights - LED	150	Sealed
Ldry	1	Exhaust Fans	300	Sealed
Entry	8	Downlights - LED	150	Sealed
Kitchen/Living	20	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Bedroom 1	7	Downlights - LED	150	Sealed
Bedroom 2	5	Downlights - LED	150	Sealed
ENS 1	3	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
Bedroom 3	4	Downlights - LED	150	Sealed

* Refer to glossary.

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
Ceiling		900	0.75	No
Internal Wall		600	0.75	No
External Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352274

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit C 4.01, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*

Conditioned*	171.0
Unconditioned*	0.0
Total	171.0
Garage	0.0

Exposure type

Open

NatHERS climate zone

56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

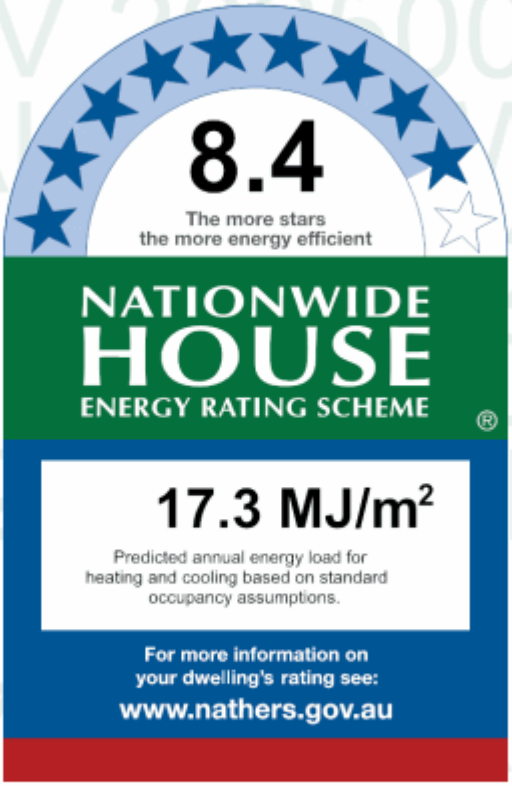

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	5.3	12.0
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=EyUYwSUjm . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
ENS 1	Nighttime	10.6
WIR 1	Nighttime	11.16
Bedroom 1	Bedroom	15.19
Kitchen/Living	Kitchen/Living	64.97
Bedroom 2	Bedroom	13.53
ENS 2	Nighttime	4.73
Bath	Daytime	5.12
Ldry	Daytime	3.08
WC	Daytime	2.55
Pantry	Daytime	3.81
Bedroom 3	Bedroom	12.93
Entry	Daytime	19.8
WIR	Nighttime	3.51

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Bedroom 1	ALM-003-03 A	W7	1980	1700	Awning	10	NE	No
Kitchen/Living	ALM-003-03 A	W11	1980	1700	Awning	10	NW	No

* Refer to glossary.

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-003-03 A	W12	1980	1000	Awning	10	NW	No
Kitchen/Living	ALM-004-03 A	W9	2700	4700	Sliding	60	NE	No
Kitchen/Living	ALM-004-03 A	W10	2700	4100	Sliding	60	NE	No
Bedroom 2	ALM-003-03 A	W14	1980	1700	Awning	10	NW	No
Bedroom 3	ALM-003-03 A	W13	1980	1700	Awning	10	NW	No

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

* Refer to glossary.

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
ENS 1	EW-1	2700	3595	SE	0	No
WIR 1	EW-1	2700	3090	SE	0	No
Bedroom 1	EW-1	2700	2000	NE	0	No
Bedroom 1	EW-1	2700	4195	SE	0	No
Kitchen/Living	EW-1	2700	7195	NW	0	No
Kitchen/Living	EW-1	2700	9700	NE	2300	Yes
Kitchen/Living	EW-1	2700	4895	SE	0	No
Bedroom 2	EW-1	2700	3390	NW	0	No
ENS 2	EW-1	2700	1700	SW	0	No
ENS 2	EW-1	2700	1795	NW	0	No
Bedroom 3	EW-1	2700	3390	NW	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Steel Stud Frame, Direct Fix Plasterboard	176.09	No insulation
IW-002	Concrete Panel/Blocks filled, plasterboard	18.90	No Insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
ENS 1	Concrete Slab, Unit Below 200mm	10.60	None	No Insulation	Ceramic Tiles 8mm
WIR 1	Concrete Slab, Unit Below 200mm	11.16	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 1	Concrete Slab, Unit Below 200mm	15.19	None	No Insulation	Cork Tiles or Parquetry 8mm
Kitchen/Living	Concrete Slab, Unit Below 200mm	64.97	None	No Insulation	Cork Tiles or Parquetry 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Bedroom 2	Concrete Slab, Unit Below 200mm	13.53	None	No Insulation	Cork Tiles or Parquetry 8mm
ENS 2	Concrete Slab, Unit Below 200mm	4.73	None	No Insulation	Ceramic Tiles 8mm
Bath	Concrete Slab, Unit Below 200mm	5.12	None	No Insulation	Ceramic Tiles 8mm
Ldry	Concrete Slab, Unit Below 200mm	3.08	None	No Insulation	Ceramic Tiles 8mm
WC	Concrete Slab, Unit Below 200mm	2.55	None	No Insulation	Ceramic Tiles 8mm
Pantry	Concrete Slab, Unit Below 200mm	3.81	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 3	Concrete Slab, Unit Below 200mm	12.93	None	No Insulation	Cork Tiles or Parquetry 8mm
Entry	Concrete Slab, Unit Below 200mm	19.80	None	No Insulation	Cork Tiles or Parquetry 8mm
WIR	Concrete Slab, Unit Below 200mm	3.51	None	No Insulation	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
WIR 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 2	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	
Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
WC	Concrete, Plasterboard with Steel Frame	No insulation	
Pantry	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 3	Concrete, Plasterboard with Steel Frame	No insulation	
Entry	Concrete, Plasterboard with Steel Frame	No insulation	
WIR	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
ENS 1	4	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
WIR 1	4	Downlights - LED	150	Sealed
Bedroom 1	6	Downlights - LED	150	Sealed
Kitchen/Living	26	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Bedroom 2	5	Downlights - LED	150	Sealed
ENS 2	1	Downlights - LED	150	Sealed
ENS 2	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
Ldry	1	Downlights - LED	150	Sealed
Ldry	1	Exhaust Fans	300	Sealed
WC	1	Downlights - LED	150	Sealed
WC	1	Exhaust Fans	300	Sealed
Pantry	1	Downlights - LED	150	Sealed
Bedroom 3	5	Downlights - LED	150	Sealed
Entry	8	Downlights - LED	150	Sealed
WIR	1	Downlights - LED	150	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

* Refer to glossary.

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
External Wall		600	0.75	No
Ceiling		900	0.75	No
Internal Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352316

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit C 4.02, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*

Conditioned*	125.3
Unconditioned*	0.0
Total	125.3
Garage	0.0

Exposure type

Open

NatHERS climate zone

56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

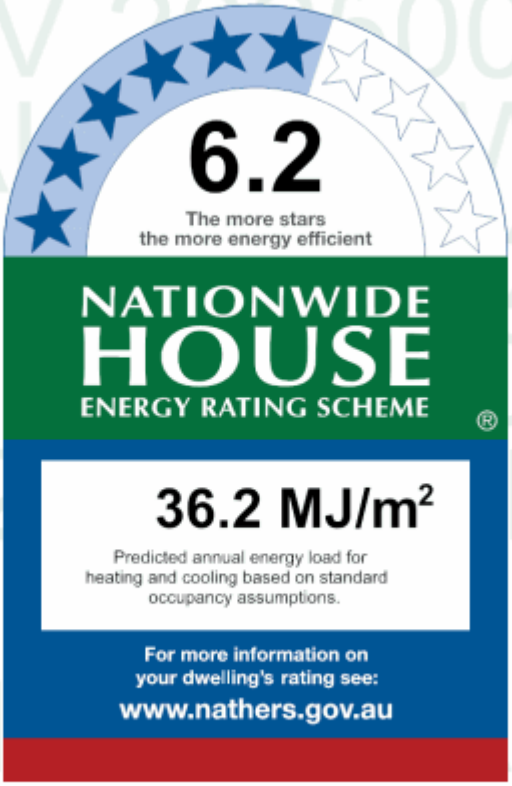

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	21.1	15.0
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=YInUOjZMA . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Entry	Daytime	9.27
Bedroom 1	Bedroom	11.32
ENS 1	Nighttime	9.72
WIR 1	Nighttime	4.84
Kitchen/Living	Kitchen/Living	49.88
Bedroom 2	Bedroom	13.56
Bedroom 3	Bedroom	11.18
Bath	Daytime	4.91
Pantry	Daytime	6.91
Glazed Common 2	Glazed Common Area	15.05
Ldry	Daytime	3.76

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Bedroom 1	ALM-004-03 A	W26	2700	3000	Sliding	45	NW	No
Kitchen/Living	ALM-004-03 A	W27	2700	3800	Sliding	60	NW	No
Kitchen/Living	ALM-004-03 A	W28	2700	3800	Sliding	60	NW	No
Bedroom 2	ALM-004-03 A	W29	2700	3200	Sliding	45	NW	No

* Refer to glossary.

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Bedroom 3	ALM-003-03 A	W31	1980	1200	Awning	10	SE	Yes
Glazed Common 2	ALM-001-01 A	W30	1930	2000	Awning	70	SE	No

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

* Refer to glossary.

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Bedroom 1	EW-1	2700	3195	NW	2700	No
ENS 1	EW-1	2700	3195	SE	0	No
Kitchen/Living	EW-1	2700	7890	NW	2700	No
Bedroom 2	EW-1	2700	3395	NW	2700	No
Bedroom 3	EW-1	2700	4045	SE	0	No
Bath	EW-1	2700	2990	SE	0	No
Pantry	EW-1	2700	4190	SE	0	No
Glazed Common 2	EW-1	2700	2150	SE	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Steel Stud Frame, Direct Fix Plasterboard	123.66	No insulation
IW-002	Concrete Panel/Blocks filled, plasterboard	68.31	No Insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Entry	Concrete Slab, Unit Below 200mm	9.27	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 1	Concrete Slab, Unit Below 200mm	11.32	None	No Insulation	Cork Tiles or Parquetry 8mm
ENS 1	Concrete Slab, Unit Below 200mm	9.72	None	No Insulation	Ceramic Tiles 8mm
WIR 1	Concrete Slab, Unit Below 200mm	4.84	None	No Insulation	Cork Tiles or Parquetry 8mm
Kitchen/Living	Concrete Slab, Unit Below 200mm	49.88	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 2	Concrete Slab, Unit Below 200mm	13.56	None	No Insulation	Cork Tiles or Parquetry 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Bedroom 3	Concrete Slab, Unit Below 200mm	11.18	None	No Insulation	Cork Tiles or Parquetry 8mm
Bath	Concrete Slab, Unit Below 200mm	4.91	None	No Insulation	Ceramic Tiles 8mm
Pantry	Concrete Slab, Unit Below 200mm	6.91	None	No Insulation	Cork Tiles or Parquetry 8mm
Glazed Common 2	Concrete Slab, Unit Below 200mm	15.05	None	No Insulation	Cork Tiles or Parquetry 8mm
Ldry	Concrete Slab, Unit Below 200mm	3.76	None	No Insulation	Ceramic Tiles 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Entry	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
WIR 1	Concrete, Plasterboard with Steel Frame	No insulation	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 3	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	
Pantry	Concrete, Plasterboard with Steel Frame	No insulation	
Glazed Common 2	Concrete, Plasterboard with Steel Frame	No insulation	
Ldry	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Entry	4	Downlights - LED	150	Sealed
Bedroom 1	4	Downlights - LED	150	Sealed
ENS 1	3	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
WIR 1	2	Downlights - LED	150	Sealed
Kitchen/Living	20	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed

* Refer to glossary.

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Bedroom 2	5	Downlights - LED	150	Sealed
Bedroom 3	4	Downlights - LED	150	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
Pantry	2	Downlights - LED	150	Sealed
Ldry	1	Downlights - LED	150	Sealed
Ldry	1	Exhaust Fans	300	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
Ceiling		900	0.75	No
Internal Wall		600	0.75	No
External Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

* Refer to glossary.

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352308

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit C 4.03, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*

Conditioned*	129.8
Unconditioned*	0.0
Total	129.8
Garage	0.0

Exposure type

Open

NatHERS climate zone

56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

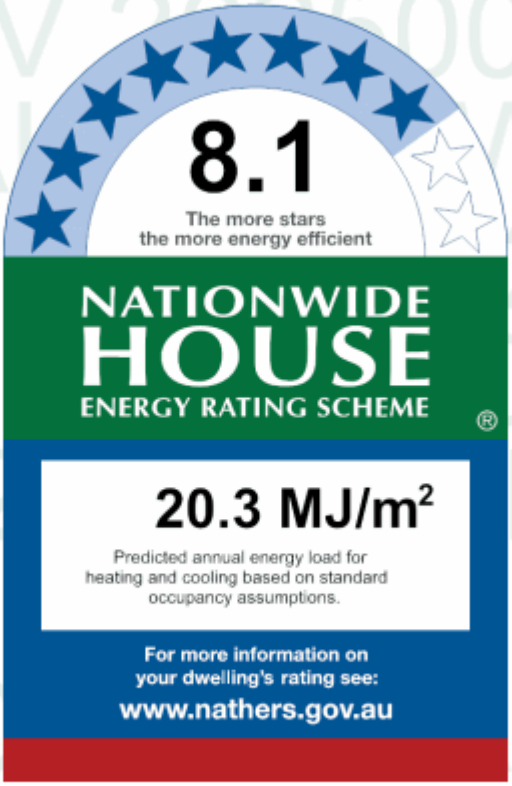

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	12.0	8.3
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=YPgFetiOO . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Ldry	Daytime	4.27
Entry	Daytime	21.68
Kitchen/Living	Kitchen/Living	50.9
Bedroom 1	Bedroom	17.17
Bedroom 2	Bedroom	12.59
ENS 1	Nighttime	7.06
Bath	Daytime	4.89
Bedroom 3	Bedroom	11.27

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-004-03 A	W5	2700	3900	Sliding	60	SW	No
Kitchen/Living	ALM-004-03 A	W8	2700	2850	Sliding	45	SW	No
Kitchen/Living	ALM-003-03 A	W3	1980	1000	Awning	10	NW	No
Kitchen/Living	ALM-003-03 A	W4	1980	2000	Awning	10	NW	No
Bedroom 1	ALM-003-03 A	W7	1980	1150	Awning	10	SW	No
Bedroom 2	ALM-003-03 A	W6	1980	1150	Awning	10	NE	No
Bedroom 3	ALM-003-03 A	W2	1980	1200	Awning	10	NE	No

* Refer to glossary.

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

* Refer to glossary.

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Ldry	EW-1	2700	695	NE	0	No
Kitchen/Living	EW-1	2700	4200	SW	2600	Yes
Kitchen/Living	EW-1	2700	1200	SE	4200	No
Kitchen/Living	EW-1	2700	3000	SW	1400	Yes
Kitchen/Living	EW-1	2700	7795	NW	0	No
Bedroom 1	EW-1	2700	595	NW	0	No
Bedroom 1	EW-1	2700	1500	SW	0	No
Bedroom 1	EW-1	2700	3095	NW	0	No
Bedroom 2	EW-1	2700	3195	NW	0	No
Bedroom 2	EW-1	2700	1500	NE	0	No
Bedroom 3	EW-1	2700	3095	NW	0	No
Bedroom 3	EW-1	2700	3695	NE	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Steel Stud Frame, Direct Fix Plasterboard	119.88	No insulation
IW-002	Concrete Panel/Blocks filled, plasterboard	51.30	No Insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Ldry	Concrete Slab, Unit Below 200mm	4.27	None	No Insulation	Cork Tiles or Parquetry 8mm
Entry	Concrete Slab, Unit Below 200mm	21.68	None	No Insulation	Cork Tiles or Parquetry 8mm
Kitchen/Living	Concrete Slab, Unit Below 200mm	50.90	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 1	Concrete Slab, Unit Below 200mm	17.17	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 2	Concrete Slab, Unit Below 200mm	12.59	None	No Insulation	Cork Tiles or Parquetry 8mm
ENS 1	Concrete Slab, Unit Below 200mm	7.06	None	No Insulation	Ceramic Tiles 8mm
Bath	Concrete Slab, Unit Below 200mm	4.89	None	No Insulation	Ceramic Tiles 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Bedroom 3	Concrete Slab, Unit Below 200mm	11.27	None	No Insulation	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
Entry	Concrete, Plasterboard with Steel Frame	No insulation	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 3	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Ldry	1	Downlights - LED	150	Sealed
Ldry	1	Exhaust Fans	300	Sealed
Entry	8	Downlights - LED	150	Sealed
Kitchen/Living	20	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Bedroom 1	7	Downlights - LED	150	Sealed
Bedroom 2	5	Downlights - LED	150	Sealed
ENS 1	3	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
Bedroom 3	4	Downlights - LED	150	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

* Refer to glossary.

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
External Wall		600	0.75	No
Ceiling		900	0.75	No
Internal Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

* Refer to glossary.

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352290

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit C 4.04, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*	
Conditioned*	129.8
Unconditioned*	0.0
Total	129.8
Garage	0.0

Exposure type
Open

NatHERS climate zone
56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

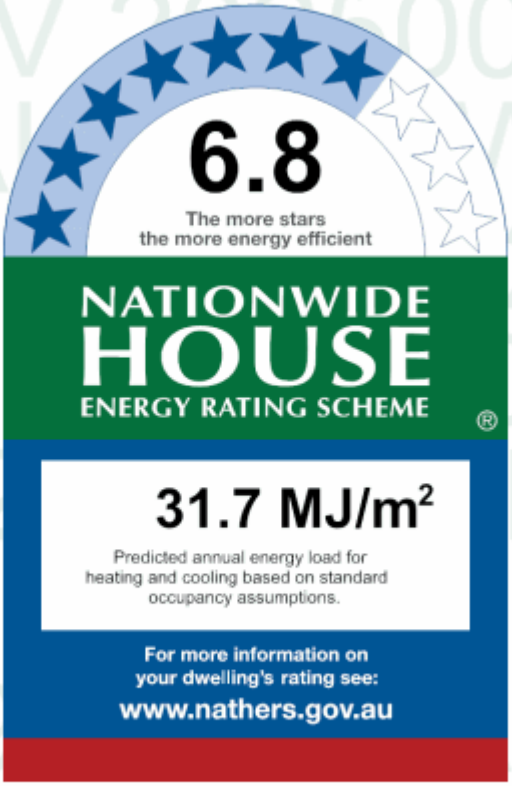

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	24.2	7.5
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=xzvuGzLol . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

* Refer to glossary.

Room *schedule*

Room	Zone Type	Area [m^2]
Ldry	Daytime	4.58
Entry	Daytime	21.37
Kitchen/Living	Kitchen/Living	50.9
Bedroom 1	Bedroom	17.17
Bedroom 2	Bedroom	12.59
ENS 1	Nighttime	7.06
Bath	Daytime	4.89
Bedroom 3	Bedroom	11.27

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-003-03 A	W9	1980	1000	Awning	10	SE	No
Kitchen/Living	ALM-003-03 A	W11	1980	2000	Awning	10	SE	No
Kitchen/Living	ALM-004-03 A	W1	2700	2850	Sliding	45	SW	No
Kitchen/Living	ALM-004-03 A	W10	2700	3900	Sliding	60	SW	No
Bedroom 1	ALM-003-03 A	W8	950	1200	Awning	10	SE	No
Bedroom 1	ALM-003-03 A	W4	1980	1150	Awning	10	SW	No
Bedroom 2	ALM-003-03 A	W5	1980	1150	Awning	10	NE	No

* Refer to glossary.

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Bedroom 2	ALM-003-03 A	W7	950	1200	Awning	10	SE	No
Bedroom 3	ALM-003-03 A	W12	1980	1200	Awning	10	SE	No

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

* Refer to glossary.

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	7795	SE	0	No
Kitchen/Living	EW-1	2700	3000	SW	1400	Yes
Kitchen/Living	EW-1	2700	1200	NW	4200	No
Kitchen/Living	EW-1	2700	4200	SW	2600	Yes
Bedroom 1	EW-1	2700	3095	SE	0	No
Bedroom 1	EW-1	2700	1500	SW	0	No
Bedroom 1	EW-1	2700	595	SE	0	No
Bedroom 2	EW-1	2700	1500	NE	0	No
Bedroom 2	EW-1	2700	3195	SE	0	No
Bedroom 3	EW-1	2700	3095	SE	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Concrete Panel/Blocks filled, plasterboard	61.02	No Insulation
IW-002	Steel Stud Frame, Direct Fix Plasterboard	115.83	No insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Ldry	Concrete Slab, Unit Below 200mm	4.58	None	No Insulation	Cork Tiles or Parquetry 8mm
Entry	Concrete Slab, Unit Below 200mm	21.37	None	No Insulation	Cork Tiles or Parquetry 8mm
Kitchen/Living	Concrete Slab, Unit Below 200mm	50.90	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 1	Concrete Slab, Unit Below 200mm	17.17	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 2	Concrete Slab, Unit Below 200mm	12.59	None	No Insulation	Cork Tiles or Parquetry 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
ENS 1	Concrete Slab, Unit Below 200mm	7.06	None	No Insulation	Ceramic Tiles 8mm
Bath	Concrete Slab, Unit Below 200mm	4.89	None	No Insulation	Ceramic Tiles 8mm
Bedroom 3	Concrete Slab, Unit Below 200mm	11.27	None	No Insulation	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Ldry	Concrete, Plasterboard with Steel Frame	No insulation	
Entry	Concrete, Plasterboard with Steel Frame	No insulation	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 2	Concrete, Plasterboard with Steel Frame	No insulation	
ENS 1	Concrete, Plasterboard with Steel Frame	No insulation	
Bath	Concrete, Plasterboard with Steel Frame	No insulation	
Bedroom 3	Concrete, Plasterboard with Steel Frame	No insulation	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Ldry	1	Downlights - LED	150	Sealed
Ldry	1	Exhaust Fans	300	Sealed
Entry	8	Downlights - LED	150	Sealed
Kitchen/Living	20	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Bedroom 1	7	Downlights - LED	150	Sealed
Bedroom 2	5	Downlights - LED	150	Sealed
ENS 1	3	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
Bedroom 3	4	Downlights - LED	150	Sealed

* Refer to glossary.

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
None Present		0.00	

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
Ceiling		900	0.75	No
Internal Wall		600	0.75	No
External Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

* Refer to glossary.

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352282

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit C 5.01, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*

Conditioned*	171.0
Unconditioned*	0.0
Total	171.0
Garage	0.0

Exposure type

Open

NatHERS climate zone

56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	10.2	11.6
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=dikMYZxJf . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

* Refer to glossary.

Room *schedule*

Room	Zone Type	Area [m^2]
ENS 1	Nighttime	10.6
WIR 1	Nighttime	11.16
Bedroom 1	Bedroom	15.19
Kitchen/Living	Kitchen/Living	64.97
Bedroom 2	Bedroom	13.53
ENS 2	Nighttime	4.73
Bath	Daytime	5.12
Ldry	Daytime	3.26
WC	Daytime	2.55
Pantry	Daytime	3.81
Bedroom 3	Bedroom	12.93
Entry	Daytime	19.63
WIR	Nighttime	3.51

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Bedroom 1	ALM-003-03 A	W7	1980	1700	Awning	10	NE	No
Kitchen/Living	ALM-003-03 A	W11	1980	1700	Awning	10	NW	No

* Refer to glossary.

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-003-03 A	W12	1980	1000	Awning	10	NW	No
Kitchen/Living	ALM-004-03 A	W9	2700	4700	Sliding	60	NE	No
Kitchen/Living	ALM-004-03 A	W10	2700	4100	Sliding	60	NE	No
Bedroom 2	ALM-003-03 A	W14	1980	1700	Awning	10	NW	No
Bedroom 3	ALM-003-03 A	W13	1980	1700	Awning	10	NW	No

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

* Refer to glossary.

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
ENS 1	EW-1	2700	3595	SE	0	No
WIR 1	EW-1	2700	3090	SE	0	No
Bedroom 1	EW-1	2700	2000	NE	0	No
Bedroom 1	EW-1	2700	4195	SE	0	No
Kitchen/Living	EW-1	2700	7195	NW	0	No
Kitchen/Living	EW-1	2700	9700	NE	1500	Yes
Kitchen/Living	EW-1	2700	4895	SE	0	No
Bedroom 2	EW-1	2700	3390	NW	0	No
ENS 2	EW-1	2700	1600	SW	0	No
ENS 2	EW-1	2700	1795	NW	0	No
Bedroom 3	EW-1	2700	3390	NW	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Steel Stud Frame, Direct Fix Plasterboard	176.09	No insulation
IW-002	Concrete Panel/Blocks filled, plasterboard	19.17	No Insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
ENS 1	Concrete Slab, Unit Below 200mm	10.60	None	No Insulation	Ceramic Tiles 8mm
WIR 1	Concrete Slab, Unit Below 200mm	11.16	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 1	Concrete Slab, Unit Below 200mm	15.19	None	No Insulation	Cork Tiles or Parquetry 8mm
Kitchen/Living	Concrete Slab, Unit Below 200mm	64.97	None	No Insulation	Cork Tiles or Parquetry 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Bedroom 2	Concrete Slab, Unit Below 200mm	13.53	None	No Insulation	Cork Tiles or Parquetry 8mm
ENS 2	Concrete Slab, Unit Below 200mm	4.73	None	No Insulation	Ceramic Tiles 8mm
Bath	Concrete Slab, Unit Below 200mm	5.12	None	No Insulation	Ceramic Tiles 8mm
Ldry	Concrete Slab, Unit Below 200mm	3.26	None	No Insulation	Ceramic Tiles 8mm
WC	Concrete Slab, Unit Below 200mm	2.55	None	No Insulation	Ceramic Tiles 8mm
Pantry	Concrete Slab, Unit Below 200mm	3.81	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 3	Concrete Slab, Unit Below 200mm	12.93	None	No Insulation	Cork Tiles or Parquetry 8mm
Entry	Concrete Slab, Unit Below 200mm	19.63	None	No Insulation	Cork Tiles or Parquetry 8mm
WIR	Concrete Slab, Unit Below 200mm	3.51	None	No Insulation	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
ENS 1	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
WIR 1	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Bedroom 1	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Bedroom 2	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
ENS 2	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Bath	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Ldry	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
WC	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Pantry	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Bedroom 3	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Entry	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
WIR	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	

* Refer to glossary.

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
ENS 1	4	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
WIR 1	4	Downlights - LED	150	Sealed
Bedroom 1	6	Downlights - LED	150	Sealed
Kitchen/Living	26	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Bedroom 2	5	Downlights - LED	150	Sealed
ENS 2	1	Downlights - LED	150	Sealed
ENS 2	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
Ldry	1	Downlights - LED	150	Sealed
Ldry	1	Exhaust Fans	300	Sealed
WC	1	Downlights - LED	150	Sealed
WC	1	Exhaust Fans	300	Sealed
Pantry	1	Downlights - LED	150	Sealed
Bedroom 3	5	Downlights - LED	150	Sealed
Entry	8	Downlights - LED	150	Sealed
WIR	1	Downlights - LED	150	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
Waterproofing Membrane	No Added Insulation, No air Gap	0.30	Light

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
External Wall		600	0.75	No
Ceiling		900	0.75	No
Internal Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

* Refer to glossary.

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352258

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit C 5.02, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*

Conditioned*	125.3
Unconditioned*	0.0
Total	125.3
Garage	0.0

Exposure type

Open

NatHERS climate zone

56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

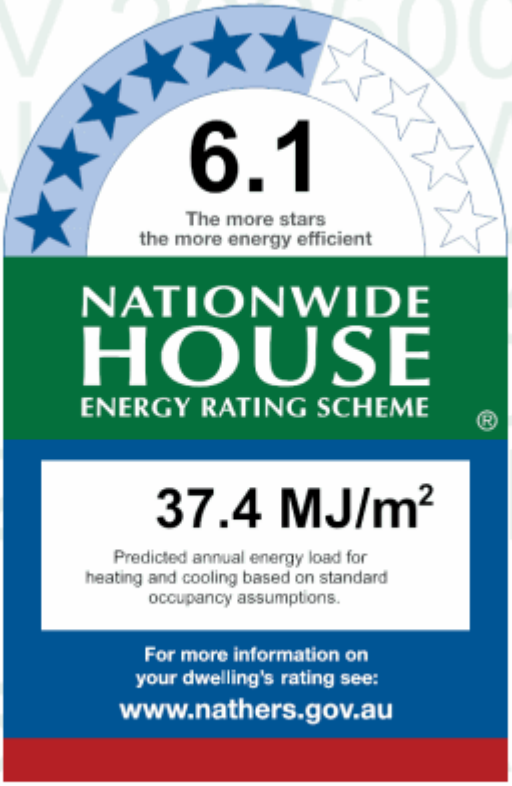

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	24.1	13.3
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=LKeSZrbVE . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Entry	Daytime	9.27
Bedroom 1	Bedroom	11.32
ENS 1	Nighttime	9.72
WIR 1	Nighttime	4.84
Kitchen/Living	Kitchen/Living	49.88
Bedroom 2	Bedroom	13.56
Bedroom 3	Bedroom	11.18
Bath	Daytime	4.91
Pantry	Daytime	6.91
Glazed Common 2	Glazed Common Area	15.05
Ldry	Daytime	3.76

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Bedroom 1	ALM-004-03 A	W26	2700	3000	Sliding	45	NW	No
Kitchen/Living	ALM-004-03 A	W27	2700	3800	Sliding	60	NW	No
Kitchen/Living	ALM-004-03 A	W28	2700	3800	Sliding	60	NW	No
Bedroom 2	ALM-004-03 A	W29	2700	3200	Sliding	45	NW	No

* Refer to glossary.

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Bedroom 3	ALM-003-03 A	W31	1980	1200	Awning	10	SE	Yes
Glazed Common 2	ALM-001-01 A	W30	1980	2000	Awning	10	SE	No

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

* Refer to glossary.

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Bedroom 1	EW-1	2700	3195	NW	2700	No
ENS 1	EW-1	2700	3195	SE	0	No
Kitchen/Living	EW-1	2700	7890	NW	2700	No
Bedroom 2	EW-1	2700	3395	NW	2700	No
Bedroom 3	EW-1	2700	4045	SE	0	No
Bath	EW-1	2700	2990	SE	0	No
Pantry	EW-1	2700	4190	SE	0	No
Glazed Common 2	EW-1	2700	2150	SE	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Steel Stud Frame, Direct Fix Plasterboard	123.66	No insulation
IW-002	Concrete Panel/Blocks filled, plasterboard	68.31	No Insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Entry	Concrete Slab, Unit Below 200mm	9.27	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 1	Concrete Slab, Unit Below 200mm	11.32	None	No Insulation	Cork Tiles or Parquetry 8mm
ENS 1	Concrete Slab, Unit Below 200mm	9.72	None	No Insulation	Ceramic Tiles 8mm
WIR 1	Concrete Slab, Unit Below 200mm	4.84	None	No Insulation	Cork Tiles or Parquetry 8mm
Kitchen/Living	Concrete Slab, Unit Below 200mm	49.88	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 2	Concrete Slab, Unit Below 200mm	13.56	None	No Insulation	Cork Tiles or Parquetry 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Bedroom 3	Concrete Slab, Unit Below 200mm	11.18	None	No Insulation	Cork Tiles or Parquetry 8mm
Bath	Concrete Slab, Unit Below 200mm	4.91	None	No Insulation	Ceramic Tiles 8mm
Pantry	Concrete Slab, Unit Below 200mm	6.91	None	No Insulation	Cork Tiles or Parquetry 8mm
Glazed Common 2	Concrete Slab, Unit Below 200mm	15.05	None	No Insulation	Cork Tiles or Parquetry 8mm
Ldry	Concrete Slab, Unit Below 200mm	3.76	None	No Insulation	Ceramic Tiles 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Entry	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Bedroom 1	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
ENS 1	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
WIR 1	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Bedroom 2	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Bedroom 3	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Bath	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Pantry	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Glazed Common 2	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Ldry	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Entry	4	Downlights - LED	150	Sealed
Bedroom 1	4	Downlights - LED	150	Sealed
ENS 1	3	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
WIR 1	2	Downlights - LED	150	Sealed
Kitchen/Living	20	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed

* Refer to glossary.

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Bedroom 2	5	Downlights - LED	150	Sealed
Bedroom 3	4	Downlights - LED	150	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
Pantry	2	Downlights - LED	150	Sealed
Ldry	1	Downlights - LED	150	Sealed
Ldry	1	Exhaust Fans	300	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
Waterproofing Membrane	No Added Insulation, No air Gap	0.30	Light

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
Ceiling		900	0.75	No
Internal Wall		600	0.75	No
External Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352241

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit C 5.03, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*	
Conditioned*	130.0
Unconditioned*	0.0
Total	130.0
Garage	0.0

Exposure type
Open

NatHERS climate zone
56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

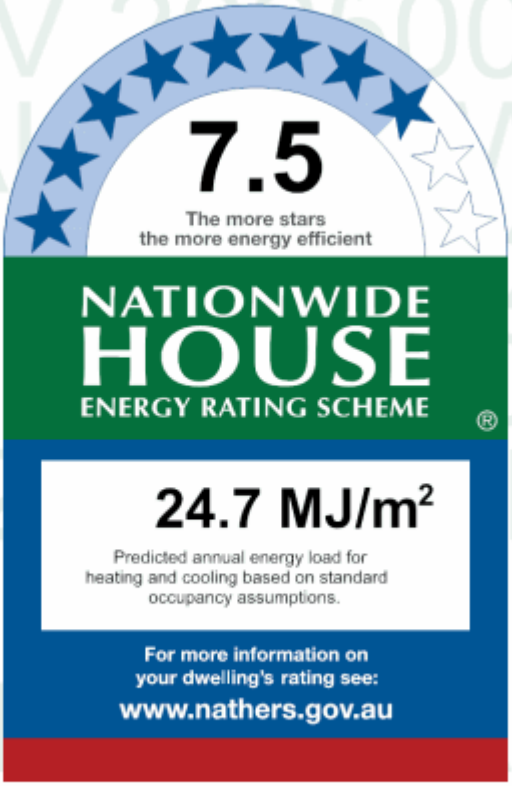

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	17.4	7.3
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=mZOdxlzvK . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Ldry	Daytime	4.27
Entry	Daytime	21.68
Kitchen/Living	Kitchen/Living	51.02
Bedroom 1	Bedroom	17.17
Bedroom 2	Bedroom	12.59
ENS 1	Nighttime	7.06
Bath	Daytime	4.89
Bedroom 3	Bedroom	11.27

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-004-03 A	W5	2700	3900	Sliding	60	SW	No
Kitchen/Living	ALM-004-03 A	W8	2700	3050	Sliding	45	SW	No
Kitchen/Living	ALM-003-03 A	W3	1980	1000	Awning	10	NW	No
Kitchen/Living	ALM-003-03 A	W4	1980	2000	Awning	10	NW	No
Bedroom 1	ALM-003-03 A	W7	1980	1150	Awning	10	SW	No
Bedroom 2	ALM-003-03 A	W6	1980	1150	Awning	10	NE	No
Bedroom 3	ALM-003-03 A	W2	1980	1200	Awning	10	NE	No

* Refer to glossary.

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
No Data Available		

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
No Data Available							

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

* Refer to glossary.

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Ldry	EW-1	2700	695	NE	0	No
Kitchen/Living	EW-1	2700	4100	SW	1900	Yes
Kitchen/Living	EW-1	2700	1200	SE	4100	No
Kitchen/Living	EW-1	2700	3100	SW	700	Yes
Kitchen/Living	EW-1	2700	7795	NW	0	No
Bedroom 1	EW-1	2700	595	NW	0	No
Bedroom 1	EW-1	2700	1500	SW	0	No
Bedroom 1	EW-1	2700	3095	NW	0	No
Bedroom 2	EW-1	2700	3195	NW	0	No
Bedroom 2	EW-1	2700	1500	NE	0	No
Bedroom 3	EW-1	2700	3095	NW	0	No
Bedroom 3	EW-1	2700	3695	NE	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Steel Stud Frame, Direct Fix Plasterboard	119.88	No insulation
IW-002	Concrete Panel/Blocks filled, plasterboard	51.30	No Insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Ldry	Concrete Slab, Unit Below 200mm	4.27	None	No Insulation	Ceramic Tiles 8mm
Entry	Concrete Slab, Unit Below 200mm	21.68	None	No Insulation	Cork Tiles or Parquetry 8mm
Kitchen/Living	Concrete Slab, Unit Below 200mm	51.02	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 1	Concrete Slab, Unit Below 200mm	17.17	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 2	Concrete Slab, Unit Below 200mm	12.59	None	No Insulation	Cork Tiles or Parquetry 8mm
ENS 1	Concrete Slab, Unit Below 200mm	7.06	None	No Insulation	Ceramic Tiles 8mm
Bath	Concrete Slab, Unit Below 200mm	4.89	None	No Insulation	Ceramic Tiles 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Bedroom 3	Concrete Slab, Unit Below 200mm	11.27	None	No Insulation	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Ldry	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Entry	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Bedroom 1	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Bedroom 2	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
ENS 1	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Bath	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Bedroom 3	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Ldry	1	Downlights - LED	150	Sealed
Ldry	1	Exhaust Fans	300	Sealed
Entry	8	Downlights - LED	150	Sealed
Kitchen/Living	20	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Bedroom 1	7	Downlights - LED	150	Sealed
Bedroom 2	5	Downlights - LED	150	Sealed
ENS 1	3	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
Bedroom 3	4	Downlights - LED	150	Sealed

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

* Refer to glossary.

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
Waterproofing Membrane	No Added Insulation, No air Gap	0.30	Light

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
External Wall		600	0.75	No
Ceiling		900	0.75	No
Internal Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

* Refer to glossary.

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.

Nationwide House Energy Rating Scheme®
NatHERS® Certificate No. 0012352233

Generated on 04 Nov 2025 using BERS Pro v5.2.6 (3.23)

Property

Address	Unit C 5.04, 159-167 Darley Street West, MONA VALE , NSW , 2103
Lot/DP	Lot 1-5 DP 11108
NCC class*	2
Floor/all Floors	G of 1 floors
Type	New Home

Plans

Main plan	2435
Prepared by	PBD Architects

Construction and environment

Assessed floor area [m2]*

Conditioned*	129.8
Unconditioned*	0.0
Total	129.8
Garage	0.0

Exposure type

Open

NatHERS climate zone

56 Mascot (Sydney Airport)

Accredited assessor

Name	Dean Gorman
Business name	Greenview Consulting Pty Ltd
Email	dean@greenview.net.au
Phone	8544 1683
Accreditation No.	DMN/13/1645
Assessor Accrediting Organisation	Design Matters National
Declaration of interest	Declaration completed: no conflicts

NCC Requirements

NCC provisions	Volume One
Strate/Territory variation	Yes

National Construction Code (NCC) requirements

The NCC allows the use of NatHERS accredited software to comply with the energy efficiency requirements for houses (Class 1 buildings) and apartments (Class 2 sole-occupancy units and Class 4 parts of buildings). The applicable requirements for houses are detailed in Specification 42 of NCC Volume Two. For apartments the requirements are detailed in clauses J3D3 and J3D15 of NCC Volume One.

NCC 2022 includes enhanced thermal performance requirements for houses and apartments. It also includes a new whole-of-home annual energy use budget which applies to the major equipment in the home.

The NCC, and associated ABCB Standards and support material, can be accessed at www.abcb.gov.au.

Note, variations and additions to the NCC energy efficiency requirements may apply in some states and territories.

Thermal performance Star rating

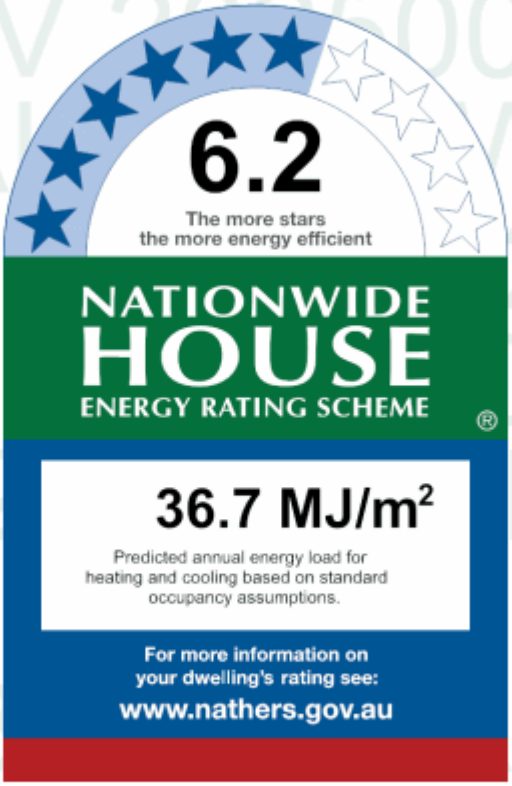

Thermal performance [MJ/m²]

Limits taken from ABCB Standard 2022

	Heating	Cooling
Modelled	29.6	7.1
Load limits	N/A	N/A

Features determining load limits

Floor Type (lowest conditioned area)	N/A
NCC climate zone 1 or 2	No
Outdoor living area	No
Outdoor living area ceiling fan	No

Whole of Home performance rating

No Whole of Home performance rating generated for this certificate.

Verification

To verify this certificate, scan the QR code or visit hstar.com.au/QR/Generate?p=zQNcNnGoT . When using either link, ensure you are visiting hstar.com.au

* Refer to glossary

About the ratings

Thermal performance rating

NatHERS thermal software models the expected heating and cooling energy loads using information about the design, construction, climate and common patterns of household use. The thermal performance rating (shown as a star rating on this Certificate) does not take into account appliances, apart from the airflow impacts from ceiling fans.

Whole of Home performance rating

NatHERS Whole of Home software uses the heating and cooling energy loads combined with the energy performance of the home's appliances (heating, cooling, hot water, lighting, pool/spa pump and onsite renewable energy generation and storage) and models the expected energy value* of the whole home. The Whole of Home performance rating is shown as a score out of 100 on this Certificate.

Heating & Cooling Load Limits

Additional information

In some locations under the NCC NatHERS pathway, separate heating and cooling load limits may apply. Minimum required star ratings in northern parts of Australia may also be affected by the presence or absence of an outdoor living area and/or an outdoor living area ceiling fan. Refer to the *ABCB Standard 2022: NatHERS heating and cooling load limits* for details or contact the relevant local building regulating authority, noting that State and Territory variations may also apply.

Setting Options:

Floor Type:

CSOG – Concrete Slab on Ground
SF – Suspended Floor (or a mixture of CSOG and SF)
NA – Not Applicable

NCC Climate Zone 1 or 2:

Yes
No
NA – Not Applicable

Outdoor Living Area:

Yes
No
NA – Not Applicable

Outdoor Living Area Ceiling Fan:

Yes
No
NA – Not Applicable

Predicted onsite renewable energy impact

No Whole of Home performance assessment conducted for this certificate.

Predicted Whole of Home annual impact by appliance

Energy use

No Whole of Home performance assessment conducted for this certificate

Greenhouse gas emissions

No Whole of Home performance assessment conducted for this certificate

Cost

No Whole of Home performance assessment conducted for this certificate

* Refer to glossary.

Certificate check

The checklist covers important items impacting the dwelling's ratings. It is recommended that the accuracy of the whole certificate is checked.

Note: The boxes indicate when and by whom each item should be checked. It is not mandatory to complete this checklist.

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Genuine certificate check					
Does this Certificate match the one available at the web address or QR code verification link on the front page?		☐	☐	☐	☐
Does the NatHERS certificate number on the NatHERS-stamped plans match the number on this Certificate?		☐	☐	☐	☐
Thermal performance check					
Windows and glazed doors					
Does the window size, opening type and location shown on the NatHERS-stamped plans or as installed match what is shown in 'Window and glazed door schedule' and 'Roof window schedule' tables on this Certificate?	☐	☐	☐	☐	☐
Does the installed windows meet the substitution tolerances (AFRC* based SHGC* and U-values*) as shown in the 'Window and glazed door type and performance' and 'Roof window type and performance' tables on this Certificate?			☐	☐	☐
External walls					
Does the external wall bulk insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the External wall type table on this Certificate?	☐	☐	☐	☐	☐
Does the external wall shade (colour) match what is shown in the 'External wall type' table on this Certificate?	☐	☐	☐	☐	☐
Floor					
Does the floor insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Floor type' table on this certificate?	☐	☐	☐	☐	☐
Ceiling penetrations*					
Does the 'quantity' and 'type' of ceiling penetrations* (e.g. downlights, exhaust fans, etc) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling penetrations' table on this Certificate?	☐	☐	☐	☐	☐
Ceiling					
Does the ceiling insulation (R-value) shown on the NatHERS-stamped plans or as installed match what is shown in the 'Ceiling type' table on this Certificate?	☐	☐	☐	☐	☐
Roof					
Does the external roof shade (colour) on the NatHERS stamped plans or as installed match what is shown in the 'Roof type' table on this Certificate?	☐	☐	☐	☐	☐
Apartment entrance doors (NCC Class 2 assessments only)					
Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.	☐	☐		☐	☐
Exposure*					
Has the appropriate exposure type (terrain) (shown on page 1) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".	☐	☐		☐	☐
Heating and cooling load limits*					
Do the load limits settings (shown on page 1) match what is shown	☐	☐	☐	☐	☐

* Refer to glossary.

Certificate check

Continued

	Approval Stage		Construction Stage		
	Assessor checked	Consent Authority/ Surveyor checked	Builder checked	Consent Authority Surveyor checked	Occupancy/Other
Additional NCC requirements for thermal performance (not included in the NatHERS assessment)					
Thermal bridging					
Does the dwelling meet the NCC requirement for thermal bridging?		☐	☐	☐	☐
Insulation installation method					
Has the insulation been installed according to the NCC requirements?			☐	☐	☐
Building sealing					
Does the dwelling meet the NCC requirements for Building Sealing?		☐	☐	☐	☐
Whole of Home performance check (not applicable if a Whole of Home performance assessment is not conducted)					
Appliances					
Does the cooling appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the Appliance schedule on this Certificate?	☐	☐	☐	☐	☐
Does the heating appliance/s type, location and efficiency/performance shown on the NatHERS-stamped plans or installed, match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the hot water system type and efficiency/performance shown on the NatHERS-stamped plans or as installed match the location and minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the pool pump efficiency/performance shown on the NatHERS-stamped plans or as installed match the minimum efficiency/performance requirements shown in the 'Appliance schedule' on this Certificate?	☐	☐	☐	☐	☐
Does the onsite renewable energy system type, orientation and system size or generation capacity shown on the NatHERS stamped plans or installed match the 'Onsite Renewable Energy schedule' on this Certificate?	☐	☐	☐	☐	☐
Additional NCC Requirements for Services (not included in the NatHERS assessment)					
Does the lighting meet the artificial lighting requirements specified in the NCC?		☐	☐	☐	☐
Does the hot water system meet the additional requirements specified in the NCC?		☐	☐	☐	☐
Provisional values* check					
Have provisional values* been used in the assessment and, if so, are they noted in 'Additional notes' table below?	☐	☐			

Other NCC requirements

Note: This Certificate only covers the energy efficiency requirements in the NCC. Additional requirements that must also be satisfied include, but are not limited to: condensation, structural and fire safety requirements and any state or territory variations to the NCC energy efficiency requirements.

Additional notes

Room *schedule*

Room	Zone Type	Area [m^2]
Ldry	Daytime	4.58
Entry	Daytime	21.37
Kitchen/Living	Kitchen/Living	50.9
Bedroom 1	Bedroom	17.17
Bedroom 2	Bedroom	12.59
ENS 1	Nighttime	7.06
Bath	Daytime	4.89
Bedroom 3	Bedroom	11.27

Window and glazed door *type and performance*

Default windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
ALM-003-03 A	Aluminium A DG Air Fill High Solar Gain low-E -	4.3	0.47	0.45	0.49
ALM-004-03 A	Aluminium B DG Air Fill High Solar Gain low-E -	4.3	0.53	0.50	0.56

Custom windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Window and glazed door *schedule*

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Kitchen/Living	ALM-003-03 A	W9	1980	1000	Awning	10	SE	No
Kitchen/Living	ALM-003-03 A	W11	1980	2000	Awning	10	SE	No
Kitchen/Living	ALM-004-03 A	W1	2700	2850	Sliding	45	SW	No
Kitchen/Living	ALM-004-03 A	W10	2700	3900	Sliding	60	SW	No
Bedroom 1	ALM-003-03 A	W8	950	1200	Awning	10	SE	No
Bedroom 1	ALM-003-03 A	W4	1980	1150	Awning	10	SW	No
Bedroom 2	ALM-003-03 A	W5	1980	1150	Awning	10	NE	No

* Refer to glossary.

Location	Window ID	Window no.	Height [mm]	Width [mm]	Window type	Opening %	Orientation	Window shading device*
Bedroom 2	ALM-003-03 A	W7	950	1200	Awning	10	SE	No
Bedroom 3	ALM-003-03 A	W12	1980	1200	Awning	10	SE	No

Roof window* *type and performance value*

Default roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom roof windows*

Window ID	Window Description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Roof window* *schedule*

Location	Window ID	Window no.	Opening %	Height [mm]	Width [mm]	Orientation	Outdoor shade	Indoor shade
No Data Available								

Skylight* *type and performance*

Skylight ID	Skylight description	Skylight shaft reflectance
GEN-04-006a	Single-glazed clear, Timber and Aluminium Frame	0.5

Skylight* *schedule*

Location	Skylight ID	Skylight No.	Skylight shaft length [mm]	Area [m^2]	Orientation	Outdoor shade	Diffuser
Kitchen/Living	GEN-04-006a	S1	50	2.40	NE	None	No

External door *schedule*

Location	Height [mm]	Width [mm]	Opening %	Orientation
No Data Available				

* Refer to glossary.

External wall *type*

Wall ID	Wall type	Solar absorptance	Wall shade [colour]	Bulk insulation [R-value]	Reflective wall wrap*
EW-1	Concrete Block, Lined Steel Stud Frame	0.30		Bulk Insulation, Air Gap R2.5	No

External wall *schedule*

Location	Wall ID	Height [mm]	Width [mm]	Orientation	Horizontal shading feature* maximum projection [mm]	Vertical shading feature [yes/no]
Kitchen/Living	EW-1	2700	7795	SE	0	No
Kitchen/Living	EW-1	2700	3000	SW	700	Yes
Kitchen/Living	EW-1	2700	1200	NW	4200	No
Kitchen/Living	EW-1	2700	4200	SW	1900	Yes
Bedroom 1	EW-1	2700	3095	SE	0	No
Bedroom 1	EW-1	2700	1500	SW	0	No
Bedroom 1	EW-1	2700	595	SE	0	No
Bedroom 2	EW-1	2700	1500	NE	0	No
Bedroom 2	EW-1	2700	3195	SE	0	No
Bedroom 3	EW-1	2700	3095	SE	0	No

Internal wall *type*

Wall ID	Wall type	Area [m^2]	Bulk insulation
IW-001	Concrete Panel/Blocks filled, plasterboard	61.02	No Insulation
IW-002	Steel Stud Frame, Direct Fix Plasterboard	115.83	No insulation

Floor *type*

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
Ldry	Concrete Slab, Unit Below 200mm	4.58	None	No Insulation	Ceramic Tiles 8mm
Entry	Concrete Slab, Unit Below 200mm	21.37	None	No Insulation	Cork Tiles or Parquetry 8mm
Kitchen/Living	Concrete Slab, Unit Below 200mm	50.90	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 1	Concrete Slab, Unit Below 200mm	17.17	None	No Insulation	Cork Tiles or Parquetry 8mm
Bedroom 2	Concrete Slab, Unit Below 200mm	12.59	None	No Insulation	Cork Tiles or Parquetry 8mm

* Refer to glossary.

Location	Construction	Area [m^2]	Sub-floor ventilation	Added insulation [R-value]	Covering
ENS 1	Concrete Slab, Unit Below 200mm	7.06	None	No Insulation	Ceramic Tiles 8mm
Bath	Concrete Slab, Unit Below 200mm	4.89	None	No Insulation	Ceramic Tiles 8mm
Bedroom 3	Concrete Slab, Unit Below 200mm	11.27	None	No Insulation	Cork Tiles or Parquetry 8mm

Ceiling *type*

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap* [yes/no]
Ldry	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Entry	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Kitchen/Living	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Bedroom 1	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Bedroom 2	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
ENS 1	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Bath	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	
Bedroom 3	Concrete, Plasterboard with Steel Frame	Foil reflective both sides of the Bulk Insulation R4	

Ceiling *penetrations**

Location	Quantity	Type	Diameter [mm]	Sealed/unsealed
Ldry	1	Downlights - LED	150	Sealed
Ldry	1	Exhaust Fans	300	Sealed
Entry	8	Downlights - LED	150	Sealed
Kitchen/Living	20	Downlights - LED	150	Sealed
Kitchen/Living	1	Exhaust Fans	300	Sealed
Bedroom 1	7	Downlights - LED	150	Sealed
Bedroom 2	5	Downlights - LED	150	Sealed
ENS 1	3	Downlights - LED	150	Sealed
ENS 1	1	Exhaust Fans	300	Sealed
Bath	2	Downlights - LED	150	Sealed
Bath	1	Exhaust Fans	300	Sealed
Bedroom 3	4	Downlights - LED	150	Sealed

* Refer to glossary.

Ceiling *fans*

Location	Quantity	Diameter [mm]
No Data Available		

Roof *type*

Construction	Added insulation [R-value]	Solar absorptance	Roof shade [colour]
Waterproofing Membrane	No Added Insulation, No air Gap	0.30	Light

Thermal bridging *schedule for steel frame elements*

Building element	Steel section dimensions [height x width, mm]	Frame spacing [mm]	Steel thickness [BMT,mm]	Thermal break [R-value]
Ceiling		900	0.75	No
Internal Wall		600	0.75	No
External Wall		600	0.75	No

Appliance *schedule*

(not applicable if a Whole of Home performance assessment is not conducted for this certificate)

Note: A flat assumption of 5W/m^2 is used for lighting, therefore lighting is not included in the appliance schedule.

Cooling system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Heating system

Appliance/ system type	Location	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available				

Hot water system

Appliance/ system type	Fuel type	Hot Water CER Zone	Minimum efficiency /STC	Zone 3 STC	Zone 3 Substitution tolerance ranges		Assessed daily load [litres]
					lower limit	upper limit	
No Data Available							

* Refer to glossary.

Pool/spa equipment

Appliance/ system type	Fuel type	Minimum efficiency/ performance	Recommended capacity
No Data Available			

Onsite Renewable Energy *Schedule*

System Type	Orientation	System Size Or Generation Capacity
No Data Available		

Battery *Schedule*

System Type	Size [Battery Storage Capacity]
No Data Available	

Explanatory notes

About this report

NatHERS ratings are a reliable guide for comparing different dwelling designs and to demonstrate that designs meet the energy efficiency requirements in the National Construction Code.

NatHERS ratings use computer modelling to evaluate a home's energy efficiency and performance. They use localised climate data and standard assumptions on how people use their home to predict the heating and cooling energy loads and energy value* of the whole home. The thermal performance star rating uses the home's building specifications, layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings) to predict the heating and cooling energy loads. The Whole of Home performance rating uses information about the home's appliances and onsite energy generation and storage to estimate the homes energy value*.

The actual energy loads, cost and greenhouse gas emissions of a home may vary from that predicted. This is because the assumptions will not always match the actual occupant usage patterns. For example, the number of occupants and how people use their appliances will vary.

Energy efficient homes use less energy, are warmer on cool days, cooler on hot days and cost less to run.

Accredited assessors

For quality assured NatHERS Certificates, always use an accredited or licenced assessor registered with an Assessor Accrediting Organisation (AAO). AAOs have strict quality assurance processes, and professional development requirements ensuring consistently high standards for assessments.

Non-accredited assessors (Raters) have no ongoing training requirements and are not quality assured.

Any queries about this report should be directed to the assessor. If the assessor is unable to address questions or concerns, contact the AAO specified on the front of this certificate.

Disclaimer

The NatHERS Certificate format is developed by the NatHERS Administrator. However, the content in the certificate is entered by the assessor. It is the assessor's responsibility to use NatHERS accredited software correctly and follow the NatHERS Technical Note to produce a NatHERS Certificate.

The predicted annual energy load, cost and greenhouse gas emissions in this NatHERS Certificate are an estimate based on an assessment of the dwelling's design by the assessor. It is not a prediction of actual energy use, cost or emissions. The information and ratings may be used to compare how other dwellings are likely to perform when used in a similar way.

Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, behaviour, appliance performance, indoor air temperature and local climate.

Not all assumptions made by the assessor using the NatHERS accredited software tool are presented in this report and further details or data files may be obtained from the assessor.

Glossary

AFRC	Australian Fenestration Rating Council
Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, range hoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
COP	Coefficient of performance
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
EER	Energy Efficiency Ratio, measure of how much cooling can be achieved by an air conditioner for a single kWh of electricity input
Energy use	This is your homes rating without solar or batteries.
Energy value	The net cost to society including, but not limited to, costs to the building user, the environment and energy networks (as defined in the ABCB Housing Provisions Standard).
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure	see exposure categories below.
Exposure category – exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category – open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category – protected	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category – suburban	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.
National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au.
Net zero home	a home that achieves a net zero energy value*.
Opening percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Recommended capacity	this is the capacity or size of equipment that is recommended by NatHERS to achieve the desired comfort conditions in the zone or zones serviced. This is a recommendation and the final selection sizing should be confirmed by a suitably qualified person.
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
STCs	Small-scale Technology Certificates, certificates created by the REC registry for renewable energy technologies that may be bought and sold as part of the Small-scale Renewable Energy Scheme operated by the Clean Energy Regulator (CER)
Thermal breaks	are materials with an R-value greater than or equal to 0.2 that must separate the metal frame from the cladding. This includes, but is not limited to, materials such as timber battens greater than or equal to 20mm thick or continuous thermal breaks such as polystyrene insulation sheeting or plastic strips
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).
Window shading device	device fixed to windows that provides shading e.g. window awnings or screens but excludes horizontal* or vertical shading features* (eg eaves and balconies)

* Refer to glossary.