


- (2) Provide a minimum clear width of 1.2m (desirable 2.0m) for pedestrian traffic and a minimum traffic lane width of 3.0m (desirable 3.5m).
- 3) Arrange vehicular access across the work area using portable barriers or plastic mesh fencing. (4) Provide a full width temporary ramp for prams and an all—weather surface on all pedestrian areas.
- (5) Ensure that the requirements of Traffic Control at Work Sites, Section 3.6, Safe clearances between workers and through traffic, are met for pedestrians.
- (6) The length of merge tapers is to be determined from Traffic Control at Work Sites, Table 5.2, Recommended taper lengths.

LONG TERM WORK ALL ROADS
WORK OCCUPY THE FULL WIDTH OF A FOOTWAY

T000109

TCP 109



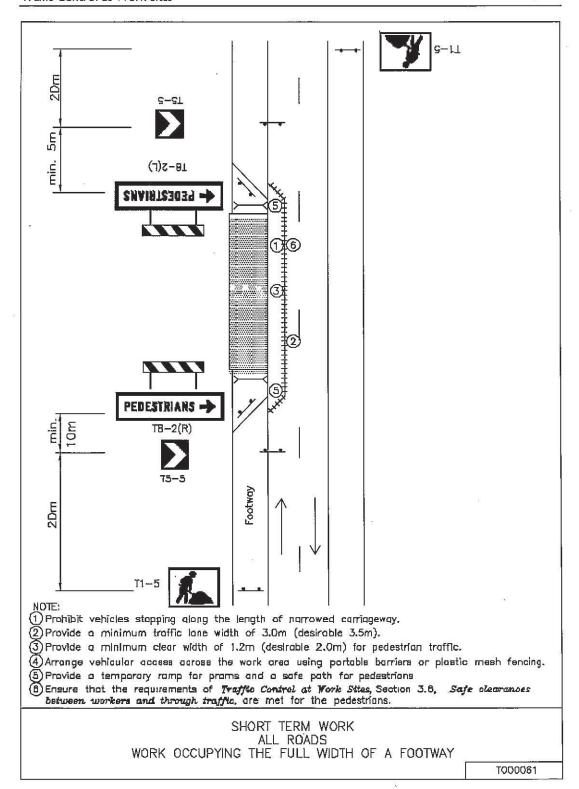

TCP 61