Certificate number: 0000162511 Certificate Date: 02 Sep 2015 ★ Star rating: 4.9



#### **Assessor details**

Accreditation

number: VIC/BDAV/12/1457

Name: **B Carr** Organisation: **STS** 

Email: ENQUIRIES@SUSTAINABLETHERMAL

Phone: **0420312721** 

Declaration No potential conflicts of interest to

of interest: declare

Software: AccuRate Sustainability V2.3.3.13 SP2

AAO: BDAV

#### **Overview**

#### **Dwelling details**

Street: Unit 4.3, 175-177 Cleveland STREET

Suburb: **REDFERN** 

State: NSW Postcode: 2016

Type: New NCC Class: 2

NatHERS

climate zone: **56** 

number: Lot 15,1,10,3,4,5/DI Exposure: Suburban

#### Key construction and insulation materials

(see following pages for details)

Construction: Brick Veneer

Concrete roof

**Plywood** 

Insulation: R1.5 wall insulation

Ceiling (uninsulated) Floor (uninsulated)

Glazing: Aluminium Sliding Door SG 5Clr

#### Net floor area (m²)

Conditioned: 35
Unconditioned: 4

Garage:

TOTAL: **39** 


# Annual thermal performance loads (MJ/m²)

Heating: **30**Cooling: **36**TOTAL: **66** 

#### Plan documents

Plan reference: 2014067

Prepared by: JPRA Architects

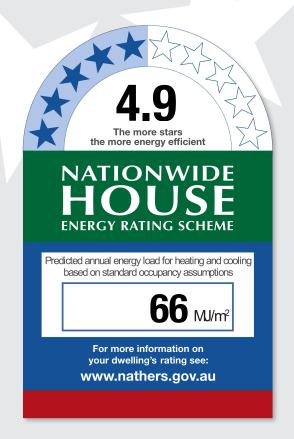

#### Ceiling penetrations

(see following pages for details)

Sealed: 0

Unsealed: 0
TOTAL:\*\*

\*\*NOTE: This total is the maximum number of ceiling penetrations allowed to a ceiling (under a roof) for this certificate. If this number is exceded in construction then this certificate IS NOT VALID and a new certificate is required. Loss of ceiling insulation for the penetrations listed has been taken into account with the rating.

Principle downlight type: No downlights modelled

# Window selection - default windows only

Note on allowable window values: With a 10% tolerance to the nominated SHGC window values shown on page 2, the following ratings are achieved:

-10% SHGC 4.9

+10% SHGC 4.9

NB: This tolerance ONLY applies to SHGC, the U-value can always be lower but not higher than the values stated on page 2.

If the rating listed above falls below 6.0 stars or the required rating, then the window with this tolerance can NOT be selected.

Scan to access this certificate online and confirm this is valid.



Certificate number: 0000162511 Certificate Date:

02 Sep 2015

★ Star rating:



# **Building features**

| Window type and | l performance value |
|-----------------|---------------------|
|-----------------|---------------------|

| Window ID    | Window type                                 | U-value | SHGC |
|--------------|---|---------|------|
| AIR-006-03 A | ALL-WINDOWS: Aluminium Sliding Door SG 5Clr | 6.20    | 0.73 |

#### Window schedule

| Location       | Window ID    | Window no. | Height (mm) | Width (mm) | Orientation | Outdoor shade |
|----------------|--------------|------------|-------------|------------|-------------|---------------|
| Kitchen/Living | AIR-006-03 A | living     | 1200        | 2200       | Е           | None          |
| Kitchen/Living | AIR-006-03 A | living     | 1200        | 1500       | E           | None          |

| ID           | Window type       | •      |  | U-value | SHGC |
|--------------|-------------------|--------|--|---------|------|
| None Present | t                 |        |  |         |      |
|              |                   |        |  |         |      |
| Roof windo   | w and skylight sc | hedule |  |         |      |

| External wall type      |                        |                   |
|-------------------------|------------------------|-------------------|
| Туре                    | Insulation             | Wall wrap or foil |
| EW-001: Brick<br>Veneer | Glass fibre batt: R1.5 | Yes               |
| EW-004:<br>Plasterboard | Glass fibre batt: R1.5 | No                |
| EW-005:<br>Plasterboard | Glass fibre batt: R1.5 | No                |

#### **External wall schedule**

| Location       | Wall type | Width (mm) | Height (mm) | Orientation | Fixed Shade | Eaves (mm) |
|----------------|-----------|------------|-------------|-------------|-------------|------------|
| Kitchen/Living | EW-001    | 4600       | 2700        | Е           | No          |            |
| Kitchen/Living | EW-001    | 1400       | 2700        | S           | Yes         | 2700       |
| Kitchen/Living | EW-001    | 1400       | 2700        | N           | Yes         | 2700       |
| Kitchen/Living | EW-005    | 1900       | 2700        | W           | Yes         | 1600       |
| Kitchen/Living | EW-004    | 4110       | 2700        | N           | No          |            |
| Bath           | EW-004    | 2330       | 2700        | W           | Yes         | 1600       |

| Internal wall type   |           |                        |                   |
|----------------------|-----------|------------------------|-------------------|
| Wall type            | Area (m²) | Insulation             | Wall wrap or foil |
| IW-001: Plasterboard | 24.4      |                        | No                |
| IW-002: Plasterboard | 39.6      | Glass fibre batt: R1.5 | No                |

| Floors   |              |              |                |          |
|----------|--------------|--------------|----------------|----------|
| Location | Construction | Area (m²) Sı | ub floor Added | Covering |

Certificate number: 0000162511 Certificate Date:

02 Sep 2015





# **Building features continued**

|   |   | ventilation   | insulation  |   |
|---|---|---|---|---|
| Concrete Suspended Slab 150 mm: ceramic tile/air gap/plasterboard | 5.5   |   |   | Ceramic tile  |
| Concrete Suspended Slab 150 mm: timber/air gap/plasterboard       | 5.4   |   |   |   |
| Concrete Suspended Slab 150 mm: timber/air gap/plasterboard       | 17.2  |   |   |   |
| Concrete Suspended Slab 150 mm: carpet/air gap/plasterboard       | 6.8   |   |   | Carpet 10 + rubber underlay 8   |
| Concrete Suspended Slab 150 mm: ceramic tile/air gap/plasterboard | 4.0   |   |   | Ceramic tile  |
|   | mm: ceramic tile/air<br>gap/plasterboard  Concrete Suspended Slab 150<br>mm: timber/air gap/plasterboard  Concrete Suspended Slab 150<br>mm: timber/air gap/plasterboard  Concrete Suspended Slab 150<br>mm: carpet/air gap/plasterboard  Concrete Suspended Slab 150<br>mm: ceramic tile/air | mm: ceramic tile/air gap/plasterboard  Concrete Suspended Slab 150 5.4 mm: timber/air gap/plasterboard  Concrete Suspended Slab 150 17.2 mm: timber/air gap/plasterboard  Concrete Suspended Slab 150 6.8 mm: carpet/air gap/plasterboard  Concrete Suspended Slab 150 4.0 mm: ceramic tile/air | Concrete Suspended Slab 150 5.5 mm: ceramic tile/air gap/plasterboard  Concrete Suspended Slab 150 5.4 mm: timber/air gap/plasterboard  Concrete Suspended Slab 150 17.2 mm: timber/air gap/plasterboard  Concrete Suspended Slab 150 6.8 mm: carpet/air gap/plasterboard  Concrete Suspended Slab 150 4.0 mm: ceramic tile/air | Concrete Suspended Slab 150 5.5 mm: ceramic tile/air gap/plasterboard  Concrete Suspended Slab 150 5.4 mm: timber/air gap/plasterboard  Concrete Suspended Slab 150 17.2 mm: timber/air gap/plasterboard  Concrete Suspended Slab 150 6.8 mm: carpet/air gap/plasterboard  Concrete Suspended Slab 150 4.0 mm: ceramic tile/air |

| Location                     | Construction  | Added insulation | Roof space above |
|------------------------------|---|------------------|------------------|
| Neighbour/Kitchen/<br>Living | Concrete Suspended Slab 150 mm: ceramic tile/air gap/plasterboard |                  | No               |
| Neighbour/Kitchen/<br>Living | Concrete Suspended Slab 150 mm: timber/air gap/plasterboard       |                  | No               |
| Neighbour/Bed                | Concrete Suspended Slab 150 mm: timber/air gap/plasterboard       |                  | No               |
| Neighbour/Bath               | Concrete Suspended Slab 150 mm: ceramic tile/air gap/plasterboard |                  | No               |

| lumber | Туре      | Diameter (mm)       | Sealed/unsealed     |
|--------|-----------|---------------------|---------------------|
| 3      | Downlight |                     | Unsealed            |
| +      | Downlight |                     | Unsealed            |
|        | Downlight |                     | Unsealed            |
|        | umber     | Downlight Downlight | Downlight Downlight |

| Ceiling fans  |                   |  |
|---------------|-------------------|--|
| Location Numb | ber Diameter (mm) |  |
| None Present  |                   |  |

| Roof type   |                  |             |
|---|------------------|-------------|
| Construction  | Added insulation | Roof colour |
| as_ROOF-B011.rof #1001 © Concrete slab 150mm - Drained Tile walking surfa - no insulation - Susp. Ceiling under | ce               | Medium      |



| Additional information |  |
|------------------------|--|
|                        |  |
|                        |  |
|                        |  |
|                        |  |
|                        |  |

# **Explanatory notes**

#### **About this report**

Residential energy ratings address the quality of the building fabric i.e. walls, windows, floors and roof/ceilings. Ratings do not cover the energy or water efficiency of appliances including heating and cooling, hot water, dishwashers, ovens, fridges, TVs etc. or solar panel or water tank requirements. The efficiency or specification of these items is generally covered by other regulations, standards or guidelines.

#### **General Information**

A NatHERS House Energy Rating is a comprehensive, dynamic computer modelling evaluation of the floorplans, elevations and specifications to predict an energy load of a home. Not all of us use our homes in the same way, so ratings are generated using standard assumptions. This means homes can be compared across the country.

The actual energy consumption of your home may vary significantly from the predicted energy load figures in this report depending on issues such as the size of your household and your personal preferences, e.g. in terms of heating or cooling.

While the figures are an indicative guide to energy use, they can be used as a reliable guide for comparative purposes between different house designs and for demonstrating that the design meets the required regulatory compliance.

Homes that are energy efficient use less energy, are warmer in winter, cooler in summer and cost less to run. The higher the star rating the more energy efficient.

This NatHERS House Energy Rating report was carefully prepared by your assessor on the basis of comprehensive modelling using standard procedures to rate your home using an underlying engine developed by the Australian Commonwealth Scientific and Industrial Research Organisation (CSIRO).

All information relating to energy loads presented in this report is based on a range of standard assumptions in order to allow for comparisons with reports prepared for other homes and to demonstrate minimum regulatory compliance. The standard assumptions include figures for occupancy, indoor air temperature and are based on a unique climate file for your region.

#### **Accredited Assessors**

To ensure you get a high-quality, professional NatHERS House Energy Rating report, you should always use an accredited assessor, accredited assessors are members of a professional body called an Assessor Accrediting Organisation (AAO).

AAOs have specific quality assurance processes in place and continuing professional development requirements to maintain a high and consistent standard of assessments across the country. Non-accredited assessors do not have this level of quality assurance or any on-going training requirements.

If you have any questions or concerns about this report, please direct them to your assessor in the first instance.

If your assessor is unable to address your questions or concerns, please contact their AAO listed under 'assessor details'. You can also find a range of information about accredited assessors on the AAO websites.

#### **Disclaimer**

The energy values quoted are for comparison purposes only; they are not a prediction of actual energy use. This rating only applies to the floor plan, construction details, orientation and climate as submitted and included in the attached drawing set that bears a stamp with the same number as this certificate. Changes to any of these details could affect the rating.

#### Contact

For more information on the Nationwide House Energy Rating Scheme (NatHERS), visit www.nathers.gov.au For more information on energy efficient design and insulation visit www.yourhome.gov.au