

## Solar Light Reflectivity Analysis

for the proposed development known as

### Prince of Wales Medical Research Institute, Neuroscience Research Precinct, Randwick

December 17, 2008

Report Reference No. WA590-01F03(rev0)- SR Report

## Document Control

Revision Number	Date	Revision History	Prepared By (initials)	Initial Review By (initials)	Reviewed & Authorised By (initials)
0	17/12/2008	Initial	AL		TR

*The work presented in this document was carried out in accordance with the Windtech Consultants Pty Ltd Quality Assurance System, which is based on Australian Standard / NZS ISO 9001.*

*This document is issued subject to review and authorisation by the Team Leader noted by the initials printed in the last column above. If no initials appear, this document shall be considered as preliminary or draft only and no reliance shall be placed upon it other than for information to be verified later.*

*This document is prepared for our Client's particular requirements which are based on a specific brief with limitations as agreed to with the Client. It is not intended for and should not be relied upon by a third party and no responsibility is undertaken to any third party without prior consent provided by Windtech Consultants Pty Ltd. This report should not be reproduced, presented or reviewed except in full. Prior to passing on to a third party, the Client is to fully inform the third party of the specific brief and limitations associated with the commission.*

*The information contained herein is for the purpose of wind, thermal and or solar effects only. No claims are made and no liability is accepted in respect of design and construction issues falling outside of the scope of this report.*

## **Table of Contents**

---

	Page
1.0 Introduction	4
2.0 Analysis	7
2.1 Impact on Drivers & Pedestrians - Non-Inclined Planes	7
2.2 Impact on Drivers & Pedestrians –Inclined Plane Awning	10
2.3 Impact on Drivers & Pedestrians –Inclined Plane Roof Feature	12
2.4 Impact onto Occupants of Neighbouring Buildings	13
3.0 Conclusion	14
Appendix A: Glare Overlays from the Various Study Locations	
Appendix B: Solar Charts for the Various Aspects of the Proposal	

## **1.0 Introduction**

---

This study is to investigate the potential impact of solar glare from the proposed development known as Prince of Wales Medical Research Institute, Randwick. The site is bounded by Easy Street to the east, Barker Street to the south, Hospital Road to the West and adjacent buildings to the north. An analysis has been undertaken, based on architectural drawings prepared by Cox Richardson, received on November 24, 2008.

With regards to solar reflectivity, this study addresses the requirement of the City of Sydney DCP October 2003, which states under Section 4.5: *Reflectivity*;

- 4.5.1 New buildings and facades should not result in glare that causes discomfort or threatens safety of pedestrians or drivers.*
- 4.5.2 Visible light reflectivity from building materials used on the facades of new buildings should not exceed 20%.*
- 4.5.3 A Reflectivity Report that analyses the potential solar glare from the proposed new development on pedestrians or motorists may be required.*


A reflectivity analysis of the subject development has been carried out using the technique published by Mr David N. H. Hassall (1991)<sup>1</sup>.

The limiting veiling luminance of 500 candelas per square metre for the comfort of vehicle drivers, suggested in Hassall (1991) has been adopted as a basis of assessing the glare impact from the subject development. In meeting this criterion for vehicle drivers, conditions will also be satisfactory for pedestrians. The glare impact onto occupants of neighbouring buildings is also discussed.


A figure showing the site location is presented in Figure 1. The various aspects of the proposal are presented on Figure 2.

---

<sup>1</sup> D.N. Hassall, 1991, Reflectivity, Dealing with Rogue Solar Reflections (published by author)

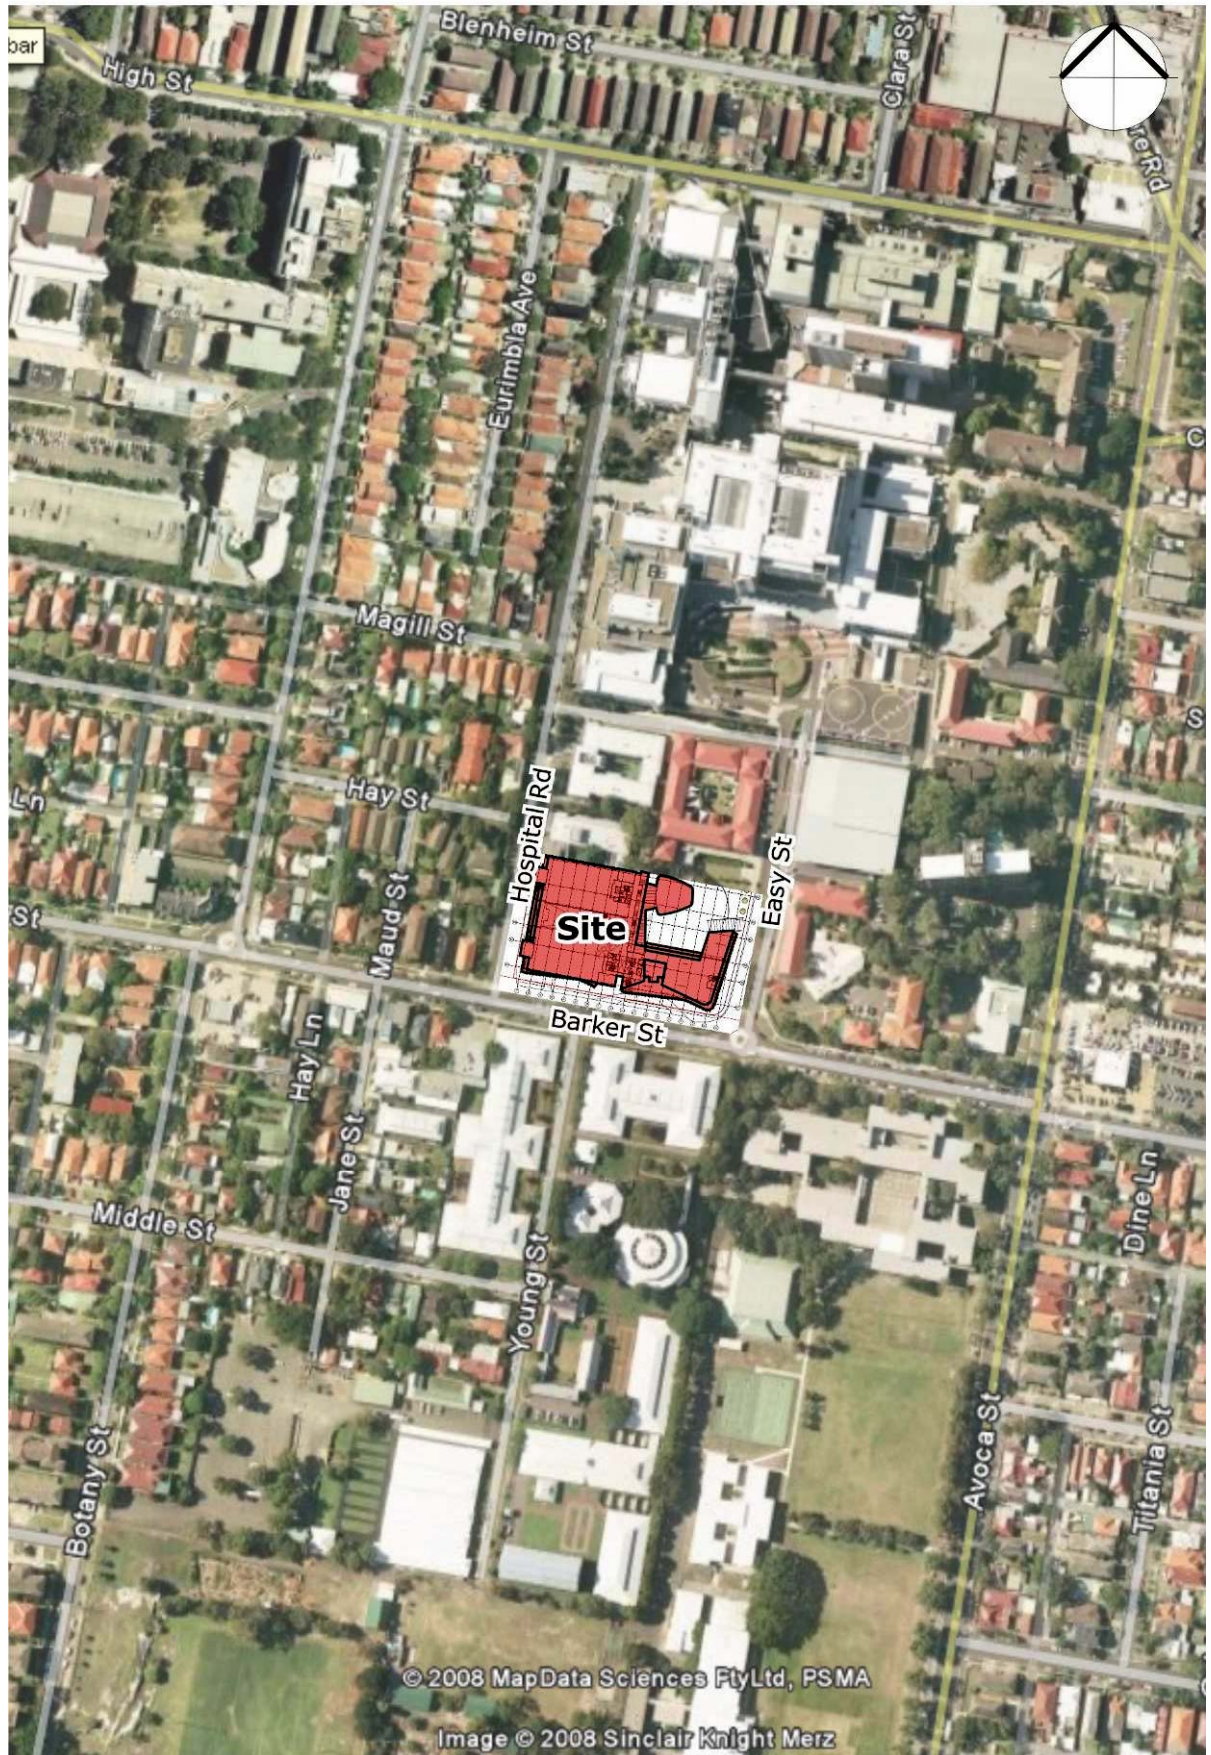

**Figure 1: Aerial Image of the Proposed Development**

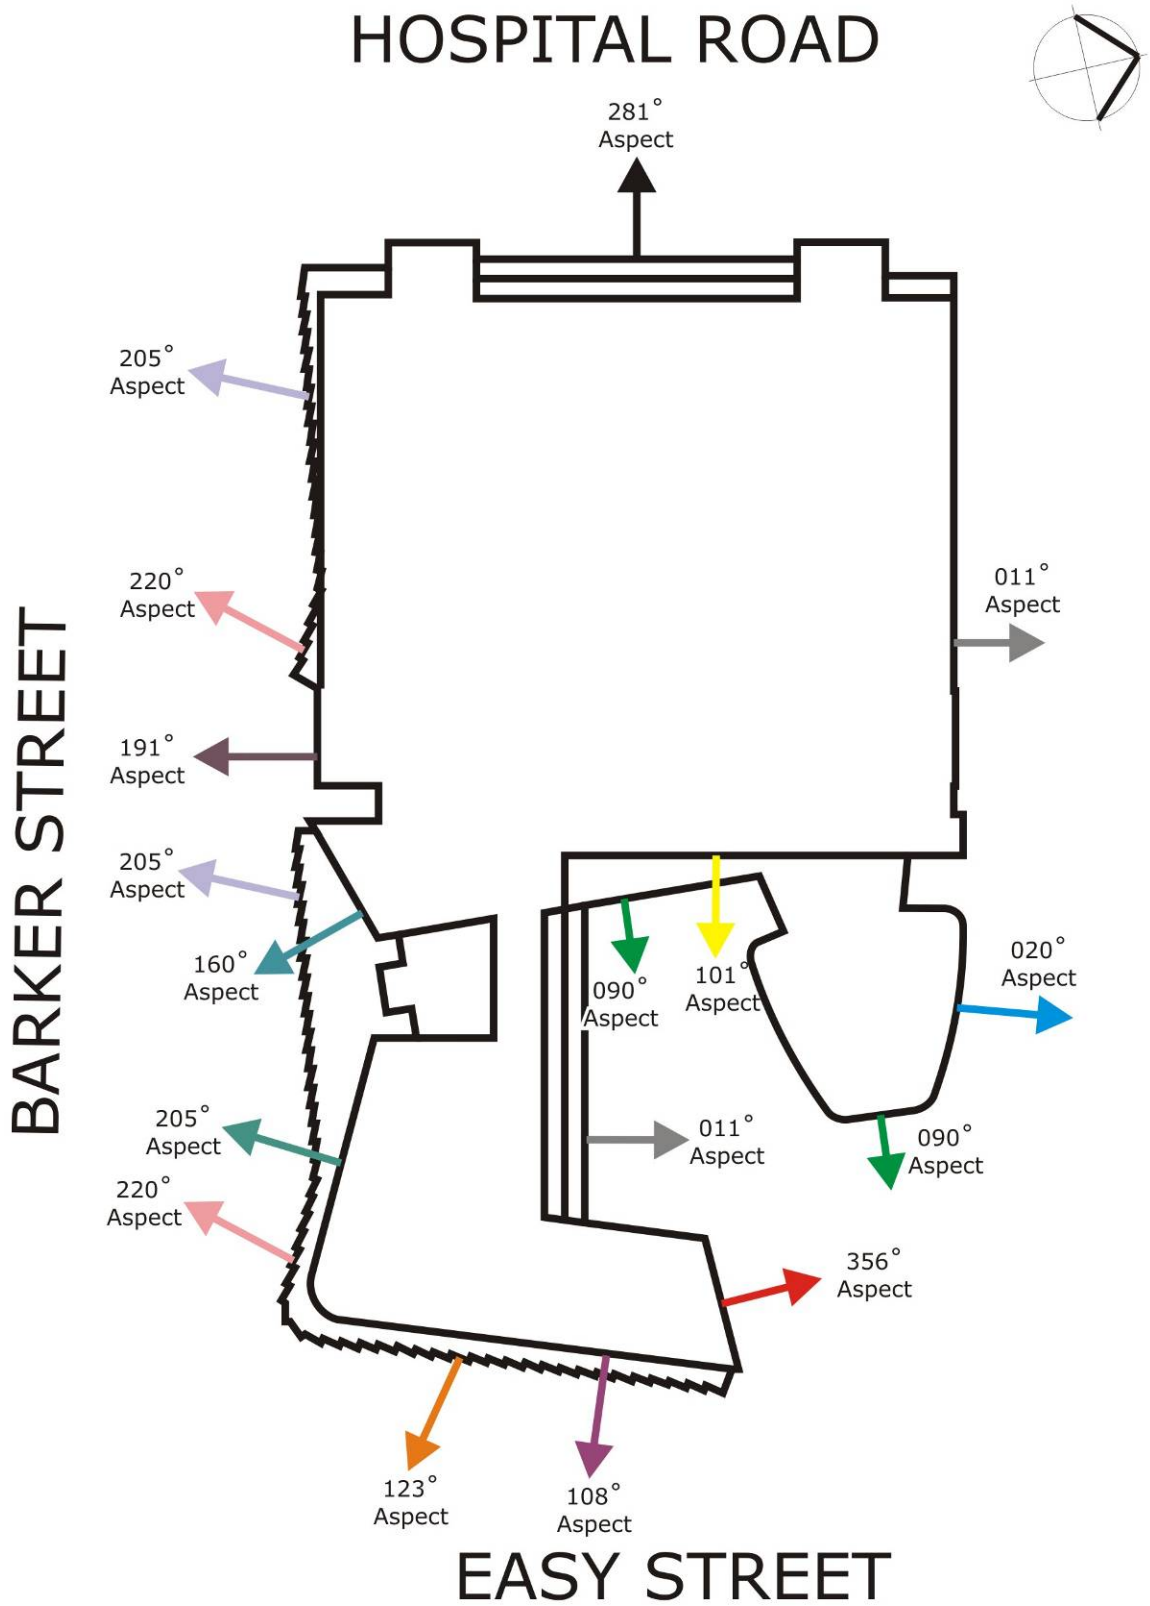

**Figure 2: The Critical Non-Inclined Plane Aspects**

## 2.0 Analysis

---

Solar charts for the various aspects of the development are presented in Appendix B. Check zones for the selected aspects have also been identified based on the data obtained from the solar charts. The check zones highlight the zones that are potentially affected by solar reflections from each aspect. The various check zones for the subject development are described in Figure 3.

It should be noted that the check zones described in Figure 3 do not take into account the effect of overshadowing by neighbouring buildings or the shielding effect of any existing trees or other obstructions. These effects are examined in the detailed analysis in the following section of this report.

### 2.1 Impact on Drivers & Pedestrians - Non-Inclined Planes


From the study of the check zones and with consideration of the potential overshadowing effects of neighbouring buildings, 6 street level locations have been identified for analysis. These locations are indicated in Figure 3. Table 1 summarises the effect of the various aspects on the selected study locations. Table 1 summarises the aspects of the site that affect each study point location.

**Table 1: Non-Inclined Aspects and the Relevant Study Points**

Study Point	Aspects
Point 1	002° aspect
Point 2	011° and 281° aspects
Point 3	191° and 281° aspects
Point 4	011° aspect
Point 5	090°, 101°, 108° and 191°
Point 6	160°, 205° and 220° aspects

For study point locations 1 to 6, photographs has been taken from the viewpoint of drivers and pedestrians using a calibrated camera. Views from the study point locations are presented in Appendix A of this report. A scaled glare protractor has been superimposed over each photograph.

The glare protractor is used to assess the amount of glare likely to be caused and to provide a direct comparison with the criterion of 500 candelas per square metre. Alternatively, the glare protractor can be used to determine the maximum acceptable reflectivity index for the glare to be within the criterion of 500 candelas/m<sup>2</sup>.

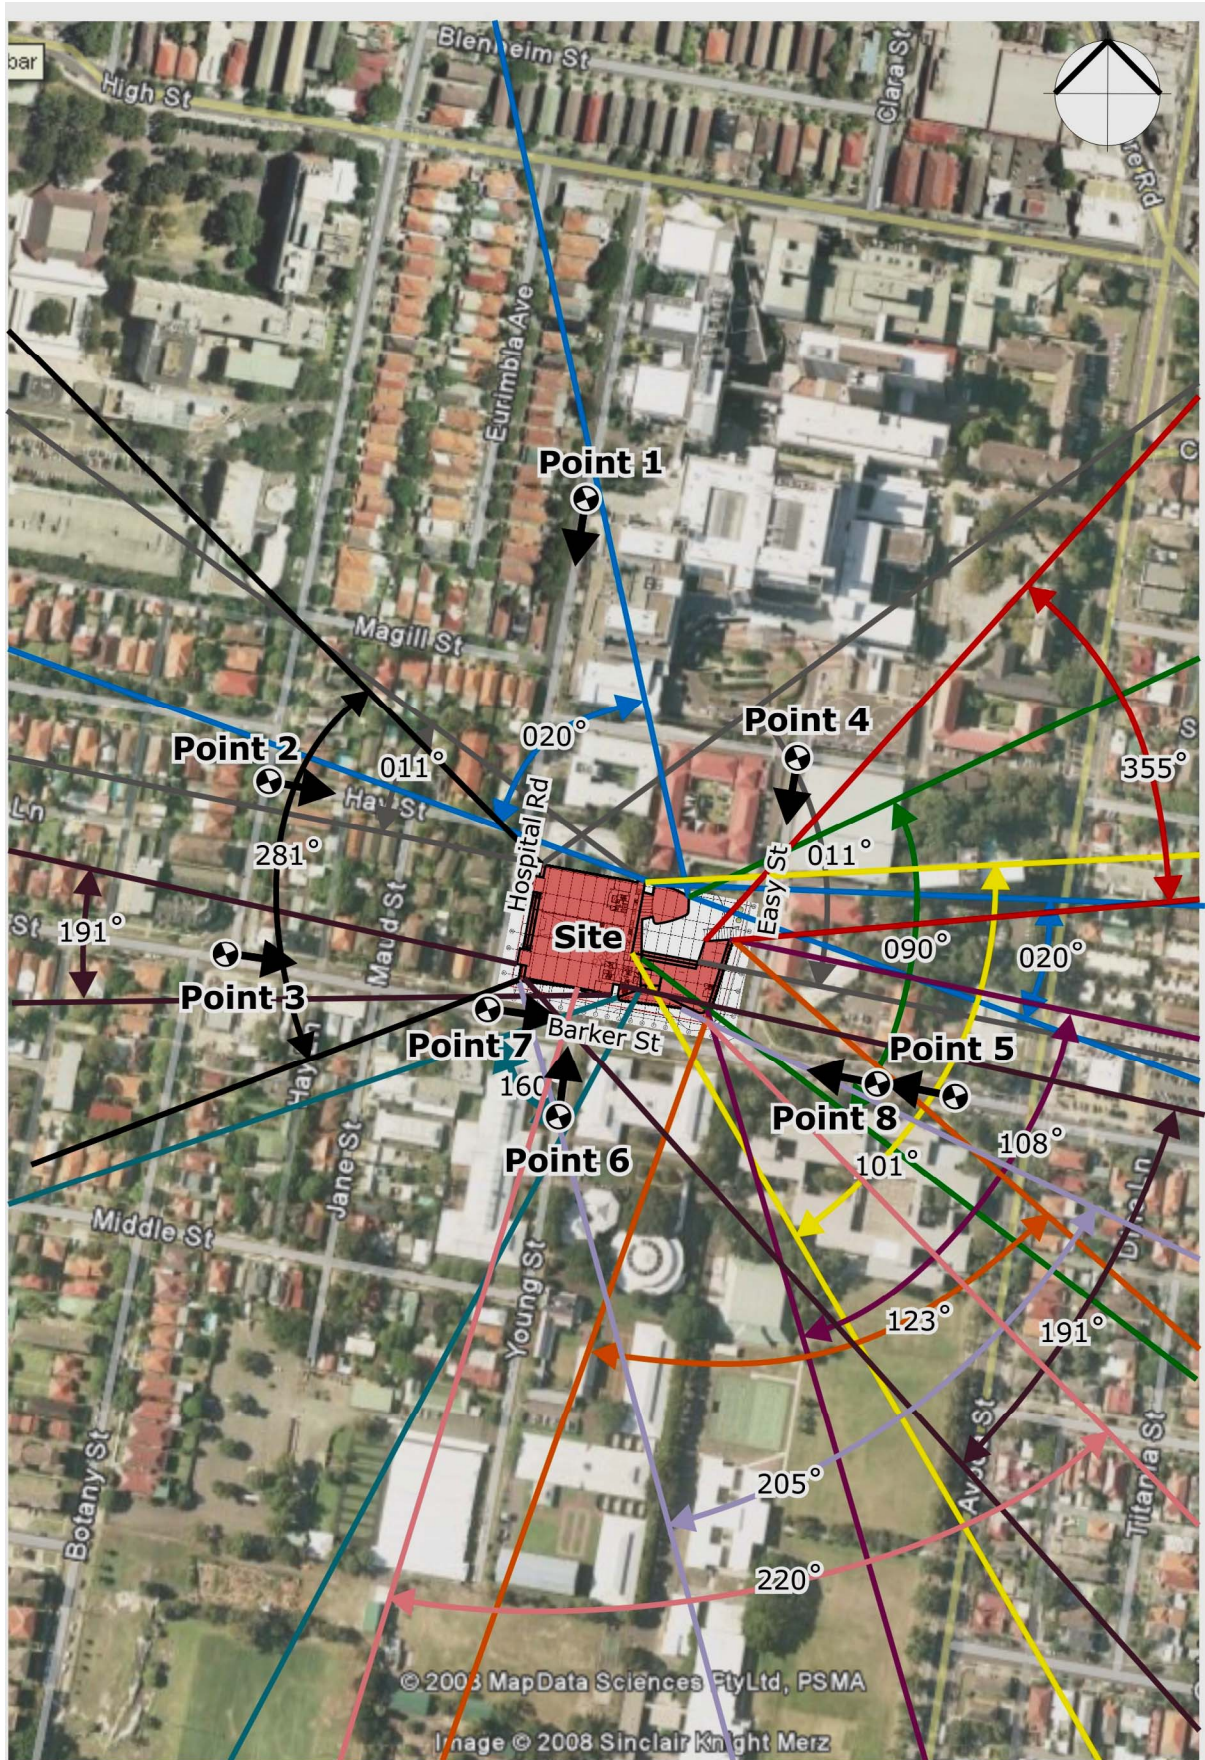

**Figure 3: Check Zones and Layout of Study Points for the Non-Inclined Aspects**



### ***Point 1***

Point 1 is located to the north of the proposed development on Hospital Road. This point represents a critical sightline of drivers heading south along Hospital Road. This point is located within the check zones for the 002° aspect of the proposed development.

The site survey of this point, shown in Figure A1 of Appendix A, indicates that the proposed development is obscured by the existing densely foliating trees lining the east side of Hospital Road.

Hence there will be no adverse glare from the 002° aspect of the proposed development to drivers and pedestrians facing south along Hospital Road at Point 1.

### ***Point 2***

Point 2 is located to the north-west of the proposed development on Hay Street. This point represents a critical sightline of drivers heading east along Hay Street. This point is located within the check zones for the 011° and 281° aspects of the proposed development.

The site survey of this point, shown in Figure A2 of Appendix A, indicates that the proposed development is obscured by the existing densely foliating trees lining the west side of Hospital Road.

Hence there will be no adverse glare from the 011° and 281° aspects of the proposed development to drivers and pedestrians facing east along Hay Street at Point 2.

### ***Point 3***

Point 3 is located to the west of the proposed development on Barker Street. This point represents a critical sightline of drivers heading east along Barker Street. This point is located within the check zones for the 191° and 281° aspects of the proposed development.

The site survey of this point, shown in Figure A3 of Appendix A, indicates that the top 3 levels of the 191° aspect are within the zone of sensitive vision. It is therefore recommended that the glazing on the top 3 levels of the 191° aspect have a normal specular reflectivity of visible light not exceeding 9%.

With the above recommendation satisfied, there will be no adverse glare from the 191° and 281° aspects of the proposed development to drivers and pedestrians facing east along Barker Street at Point 3.

### ***Point 4***

Point 4 is located to the north-east of the proposed development on Easy Street. This point represents a critical sightline of drivers heading south along Easy Street. This point is located within the check zones for the 011° aspect of the proposed development.

The site survey of this point, shown in Figure A4 of Appendix A, indicates that the third level of the 011° aspect is within the zone of sensitive vision.

It is therefore recommended that the third level of the 011° aspect at the eastern edge have a normal specular reflectivity of visible light not exceeding 9%.

With the above recommendation satisfied, there will be no adverse glare from the 011° aspect of the proposed development to drivers and pedestrians facing south along Easy Street at Point 4.

### ***Point 5***

Point 5 is located to the south-east of the proposed development on Barker Street. This point represents a critical sightline of drivers heading west along Barker Street. This point is located within the check zones for the 090°, 101°, 108° and 191° aspects of the proposed development.

The site survey of this point, shown in Figure A5 of Appendix A, indicates that none of the abovementioned aspects are within the zone of sensitive vision

Hence there will be no adverse glare from the 090°, 101°, 108°, 191° aspects and the east facing inclined awning of the proposed development to drivers and pedestrians facing west along Barker Street at Point 5.

### ***Point 6***

Point 6 is located to the south of the proposed development on Young Street. This point represents a critical sightline of drivers heading north along Young Street. This point is located within the check zones for the 160°, 205° and 220° aspects of the proposed development.

The site survey of this point, shown in Figure A6 of Appendix A, indicates that levels 2 and 3 of the 205° and 220° aspects between grid lines Q and L, as indicated in the architectural drawings, are within the zone of sensitive vision. It is therefore recommended that the glazing at the aforementioned location have a normal specular reflectivity of visible light not exceeding 8%.

With the above recommendation satisfied, there will be no adverse glare from the 160°, 205° and 220° aspects of the proposed development to drivers and pedestrians facing north along Young Street at Point 6.

## **2.2 Impact on Drivers & Pedestrians –Inclined Plane Awning**

With consideration of the potential overshadowing effects of neighbouring buildings, 4 street level locations have been identified for analysis of the inclined plane awning. A line was drawn from each study point location to the centre of each inclined plane panel. Using the angles of reflection, a line was then drawn indicating the calculated sun path. The calculated sun path was then resolved into azimuth and elevation angles and compared with the Solar Position Diagram for Sydney area in Figure B12 in Appendix B. Below is a description of the study points.

### ***Point 4***

Point 4 is located to the north-east of the proposed development on Easy Street. This point represents a critical sightline of drivers heading south along Easy Street. This point is located within the check zones for the 011° aspect of the proposed development.

The site survey of this point, shown in Figure A4 of Appendix A, indicates the eastern edge and the east facing inclined awing is within the zone of sensitive vision for drivers and pedestrians facing south along Easy Street at Point 4.

The glass panes of the east facing inclined awing are angled away from the line-of-sight of Point 4, hence there will be no adverse glare from the east facing inclined awing to drivers and pedestrians facing east along Easy Street at Point 4.

### ***Point 5***

Point 5 is located to the south-east of the proposed development on Barker Street. This point represents a critical sightline of drivers heading west along Barker Street. This point is located within the check zones for the 090°, 101°, 108° and 191° aspects of the proposed development.

The site survey of this point, shown in Figure A5 of Appendix A, indicates that a single glass pane of the east facing inclined awing and the south facing inclined awing are within the zone of sensitive vision. The glare overlay in Figure A5 indicates that the glass pane of the east facing awing is approximately 0.5 degrees or 30 minutes of arc in width. As a rule of thumb, any glazing that has a width or height of 30 minutes arc or less will reflect a negligible amount of solar glare back to an observer.

The glass panes of the south facing inclined awing are angled away from the line-of-sight of Point 5, hence there will be no adverse glare from the south facing inclined awing to drivers and pedestrians facing west along Barker Street at Point 5.


### ***Point 7***

From Figure 4, it can be seen that the range of angular co-ordinates (azimuth, altitude) from the sky that would result in reflections to this study point range from (48°, 193°) to (42°, 148°). These combinations of altitude and azimuth angles mean that it is not possible for the sun to reflect to Point 7 from the inclined surfaces.

### ***Point 8***

From Figure 4, it can be seen that the range of angular co-ordinates (azimuth, altitude) from the sky that would result in reflections to this study point range from (38.5°, 218°) to (42°, 280°). This means that reflections can occur from the included surfaces to Point 8 during the months of November and December. The exact time will depend on the exact day of the year but is expected to range between the 3:15pm and 3:45pm Mean Eastern Standard Time or 4:15pm to 4:45pm including daylight saving.

To mitigate the potential impact to westbound drivers on Barker St, we recommend that at least the inclined panels around the corner of the site be made from a clear or body-tinted glass so as to have a maximum normal specular reflectivity of 7percent.

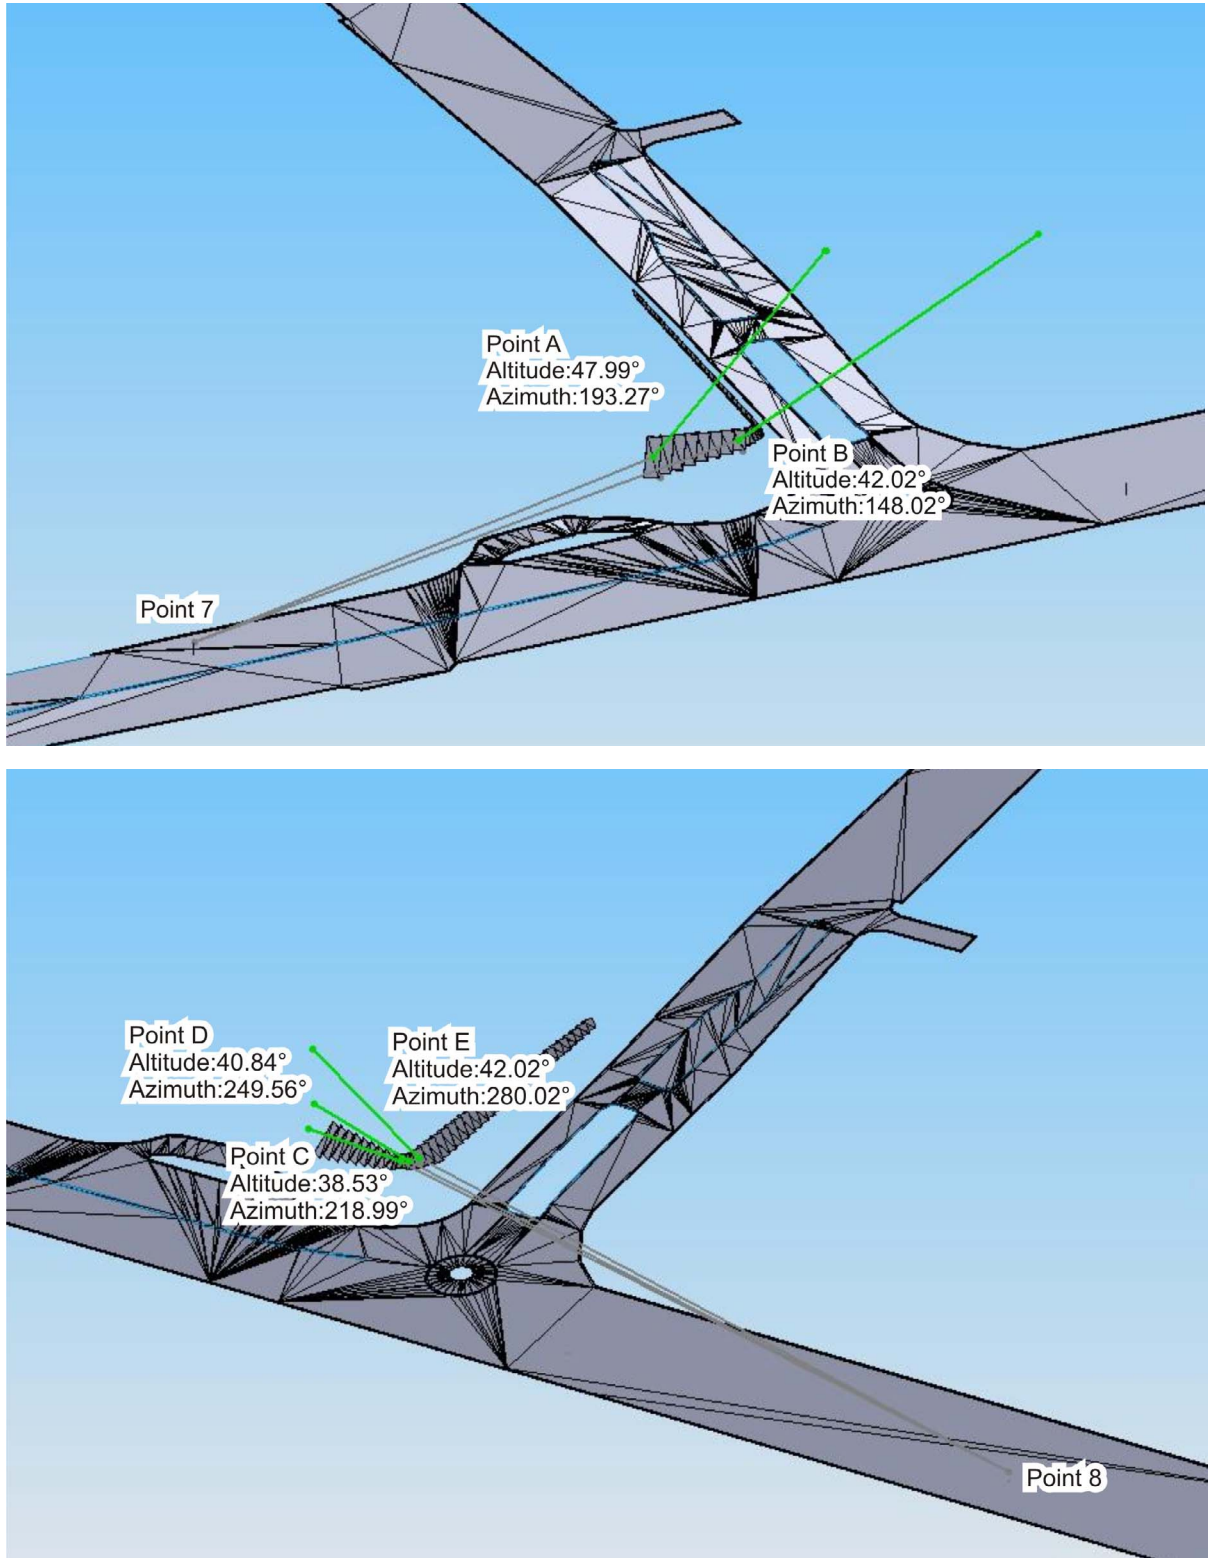

**Figure 4: Solar Reflections to Study Points 7 and 8 from the Inclined Aspects**

## **2.3 Impact on Drivers & Pedestrians –Inclined Plane Roof Feature**

With respect to the Sight-Lines from the Various Study Locations as seen in Appendix A, the inclined roof feature was outside the zone of sensitive vision for points 1 to 6. Since points 7 and 8 are located closer to the subject development, it is assumed that the inclined roof feature is also outside the zone of sensitive for points 7 and 8. Hence there will be no adverse glare reflected to any of the 8 critical study point locations from the inclined roof feature.

## **2.4 Impact onto Occupants of Neighbouring Buildings**

More research is required to properly assess what is considered an acceptable level of veiling luminance to occupants of surrounding buildings. Rofail and Dowdle (2004)<sup>2</sup> have highlighted the subjectivity of glare impact to occupants of surrounding buildings as it is highly affected by a number of factors, some of these are listed below:

- the intensity of glare
- duration of glare impact
- the type of use of the building
- the type of glazing used on the neighbouring building (eg. Clear or Tinted)
- shading elements on the façade of the neighbouring building
- level of tolerance by the occupant of the neighbouring building

Our past experience, involving approximately 200 projects, tends to indicate that buildings that tend to cause nuisance to occupants of neighbouring buildings are those that have a normal specular reflectivity of visible light greater than 20%. This seems to justify the suggested limit of 20% reflectivity by many local government authorities and state planning bodies. This reflectivity is defined as the level of luminance or normal specular reflectivity of visible light.

Hence, a general recommendation is made that all glazing used on the facades of the development have a normal specular reflectivity of visible light of 20 percent or less to avoid adverse solar glare to occupants of neighbouring buildings.

---

<sup>2</sup> A.W. Rofail and B. Dowdle, 2004, "Reflectivity Impact on Occupants of Neighbouring Properties" International Conf. on Building Envelope Systems & Technologies, Sydney.

### **3.0 Conclusion**

---

A reflectivity analysis of the proposed development known as Prince of Wales Medical Research Institute, Randwick has been carried out using the technique published by Mr David N. H. Hassall.

To avoid any adverse glare to drivers and pedestrians on the surrounding streets of the proposed development site, and to comply with the City of Sydney DCP October 2003 Section 4.5, the following recommendations have been made on the reflectance properties of the glazing to be used on the facade;

- All areas of the façade of the redevelopment should have a maximum normal specular reflectivity of visible light of 20 percent.
- It is recommended that the glazing on the top 3 levels of the 191° aspect and the third level of the 011° aspect at the eastern edge have a normal specular reflectivity of visible light not exceeding 9%.
- It is recommended that levels 2 and 3 of the 205° and 220° aspects between longitudinal lines Q and L as indicated in the architectural drawings have a normal specular reflectivity of visible light not exceeding 8%.
- To mitigate the potential impact to westbound drivers on Barker St, we recommend that at least the inclined panels around the corner of the site be made from a clear or body-tinted glass so as to have a maximum normal specular reflectivity of 7%.

With these recommendations satisfied, the results of this analysis indicate that the proposed development will not cause adverse solar glare to drivers or pedestrians in any of the surrounding streets and other outdoor areas. It is also expected that no adverse glare impacts will result with regards to the occupants of neighbouring buildings.


An alternative to the treatments listed above could be to provide shading across the relevant sections of the building façade. This could be achieved by vertical and/or horizontal fins, blade walls, slab overhangs, etc, or by external louvres or other façade elements. Another alternative for some of the lower areas could be to add densely foliating evergreen trees, capable of obscuring the view of the development from the zone of sensitive vision for drivers at affected location.

Hence, with a combination of the treatments detailed above incorporated into the design of the proposed development, there will be no adverse glare from the proposed development to drivers and pedestrians in the local surrounding streets and other outdoor areas.

It is also expected that no adverse glare impacts will result with regards to the occupants of neighbouring buildings if the glazing type(s) selected for the external facades of the development have a normal specular reflectivity of visible light of 20 percent or less. Other highly reflective materials should also be avoided on the façades to avoid adverse glare to the occupants of neighbouring buildings.


# **Appendix A**

Analysis of Sight-Lines from the  
Various Study Locations

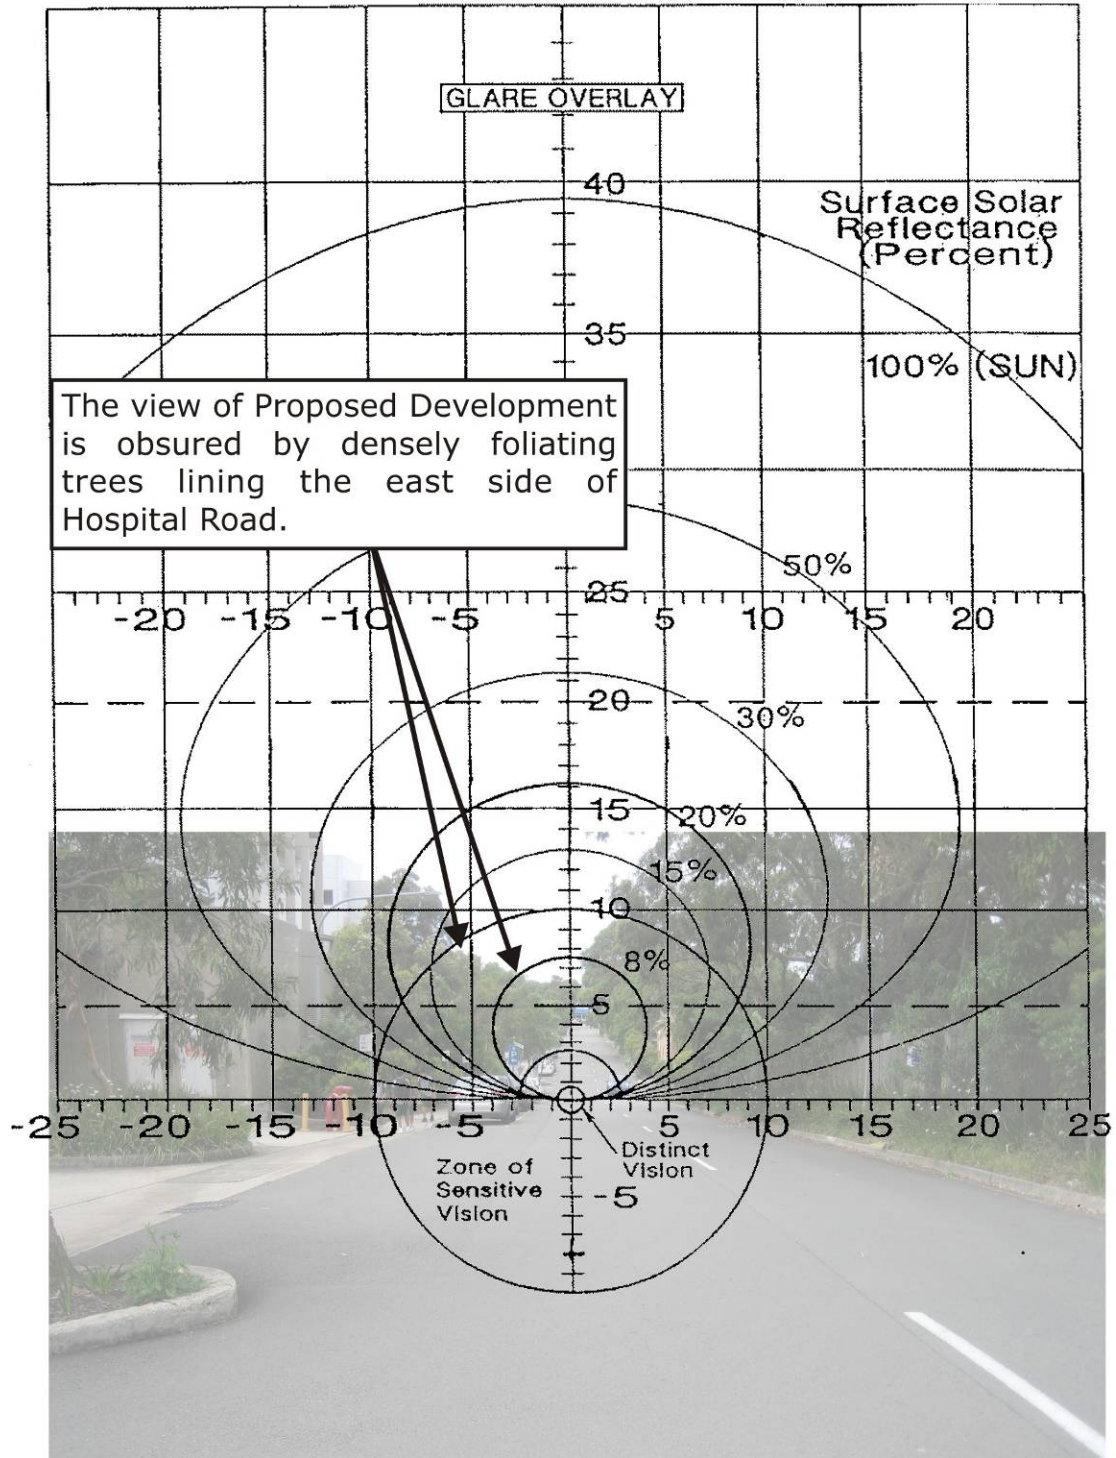


**Figure A1: Glare Overlay for Point 1**




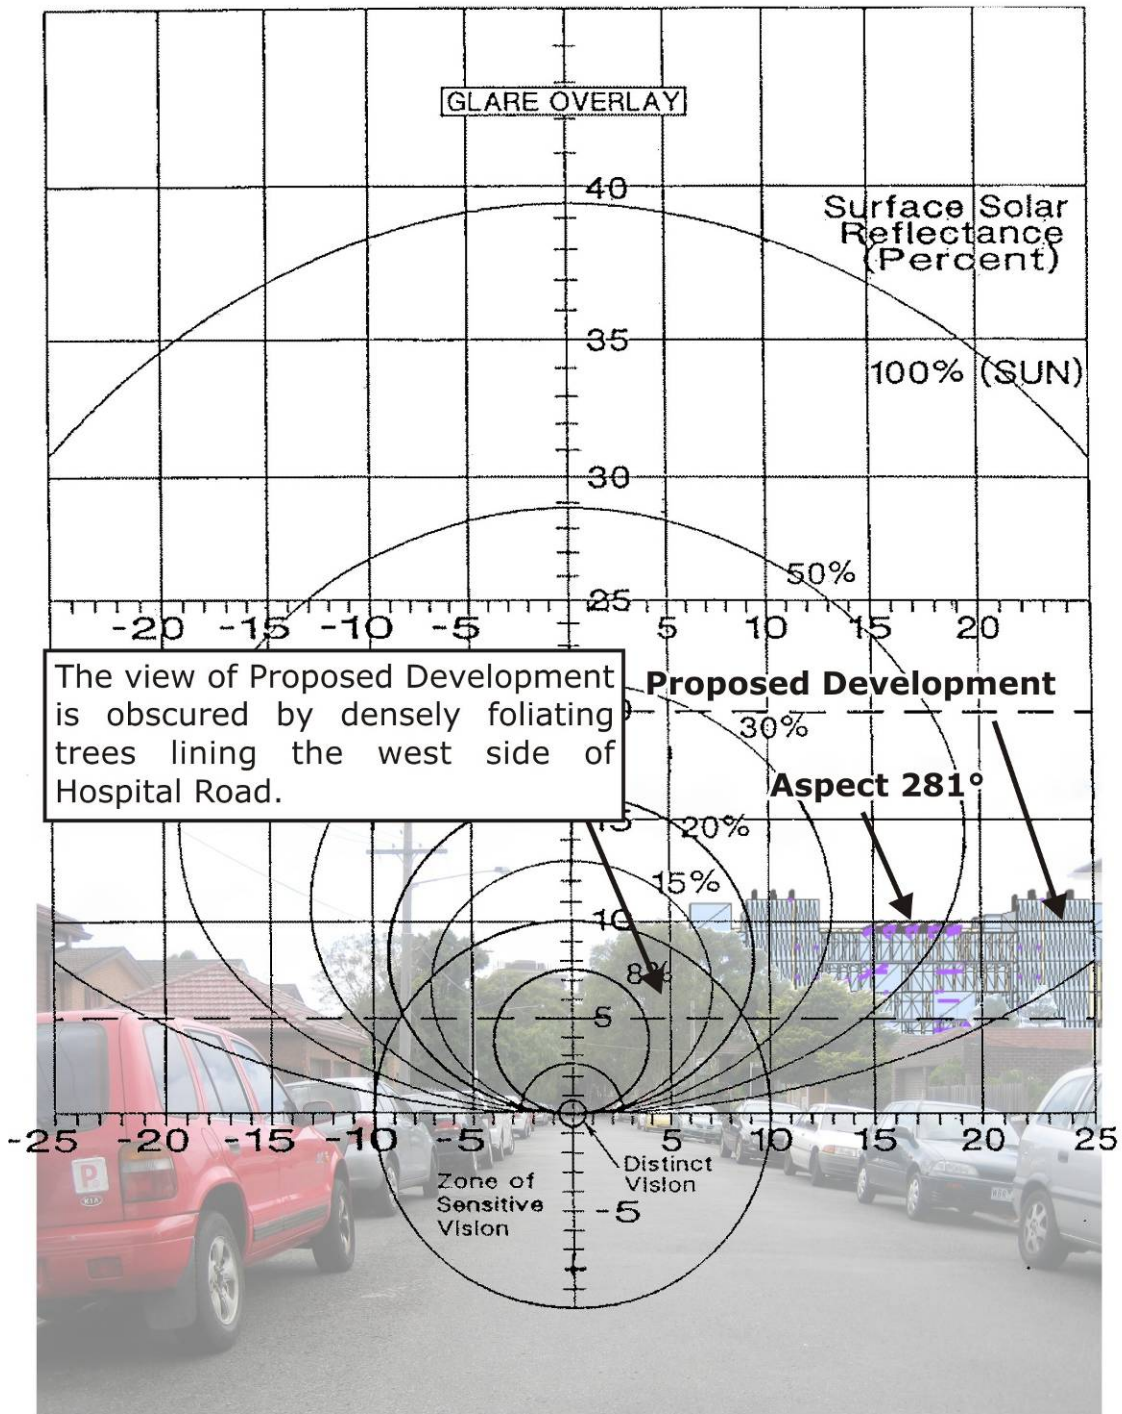


**Figure A2: Glare Overlay for Point 2**

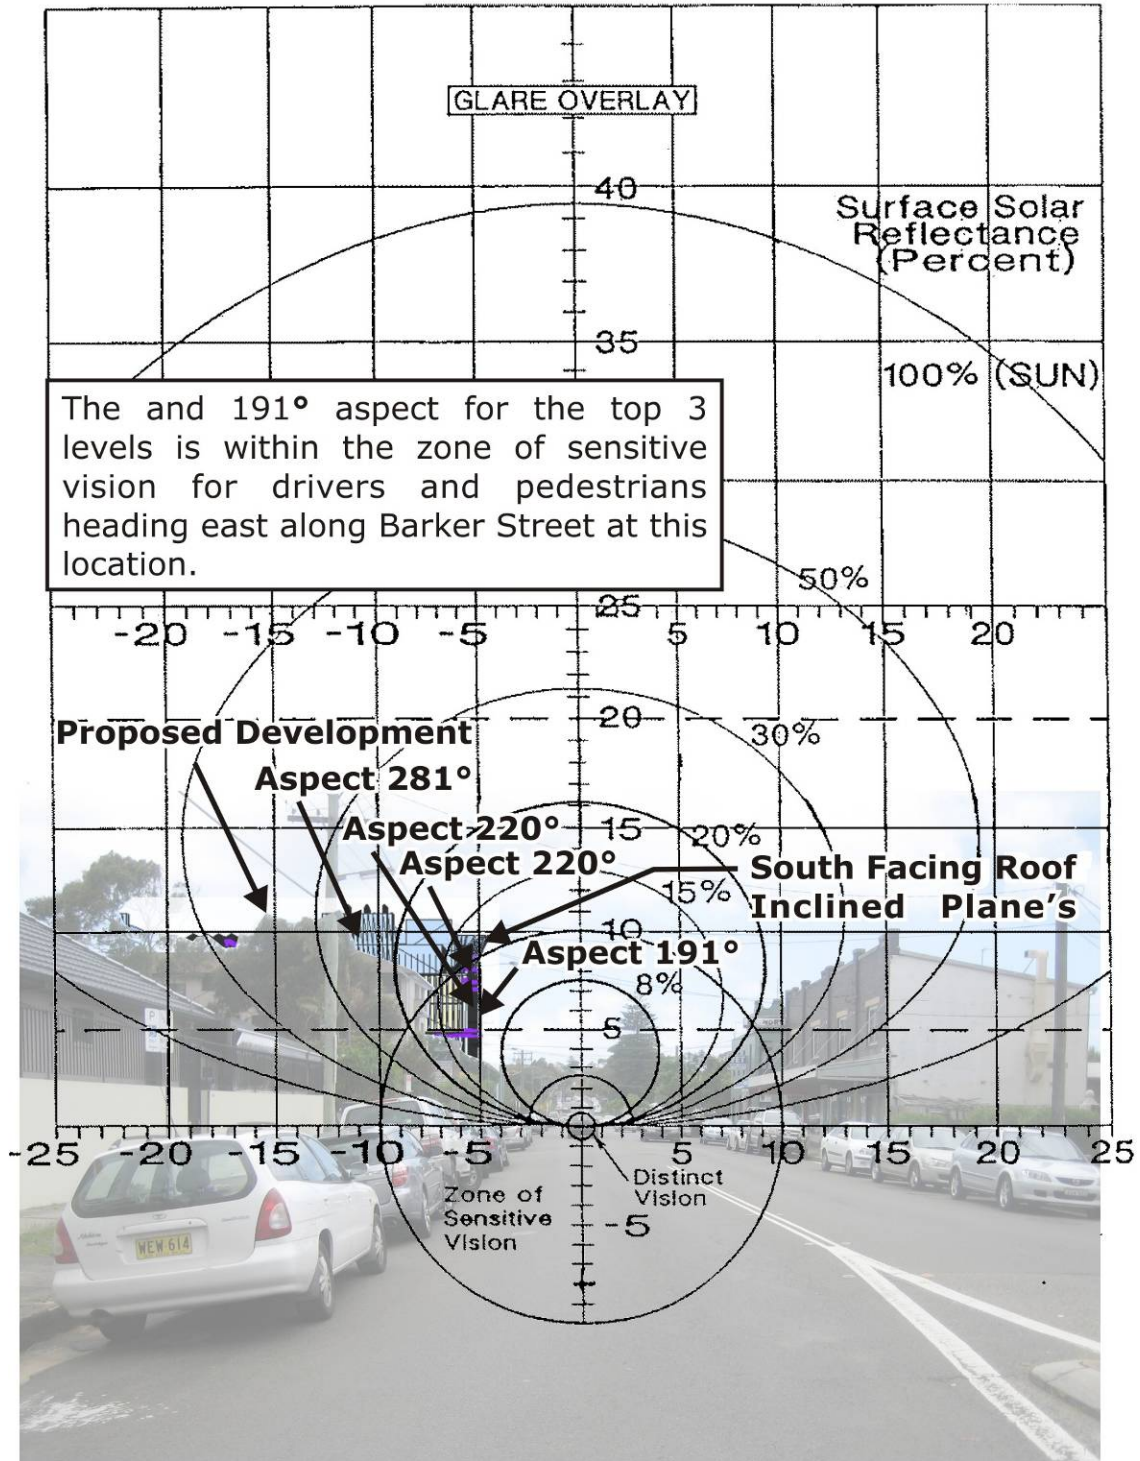

**Figure A3: Glare Overlay for Point 3**

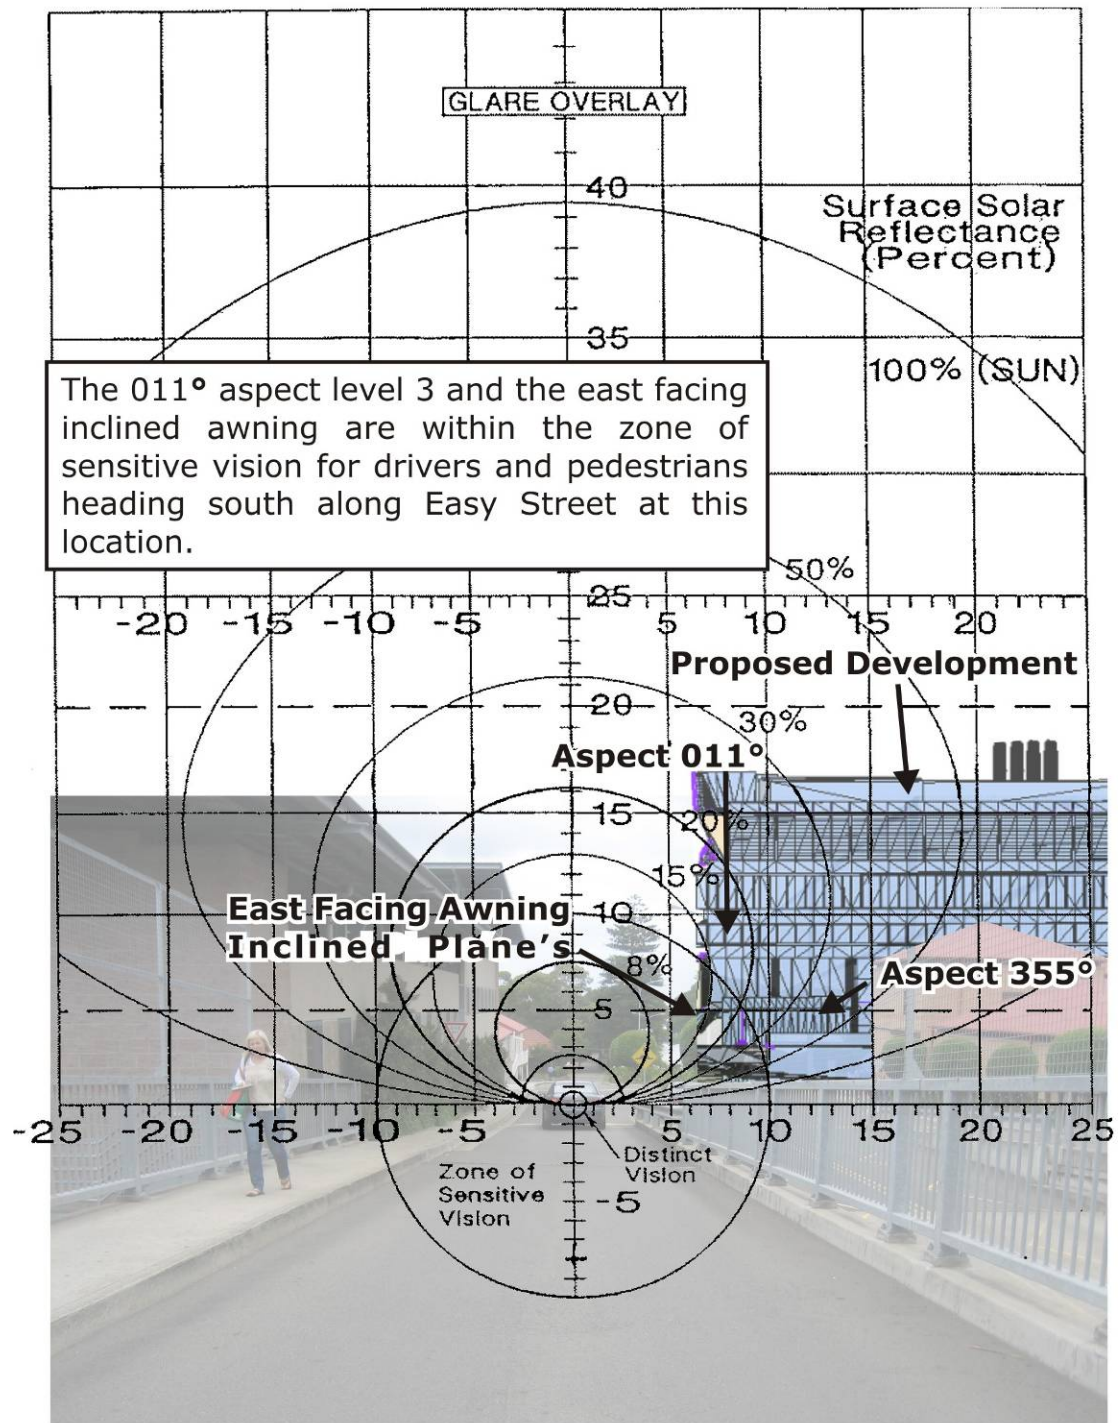


**Figure A4: Glare Overlay for Point 4**

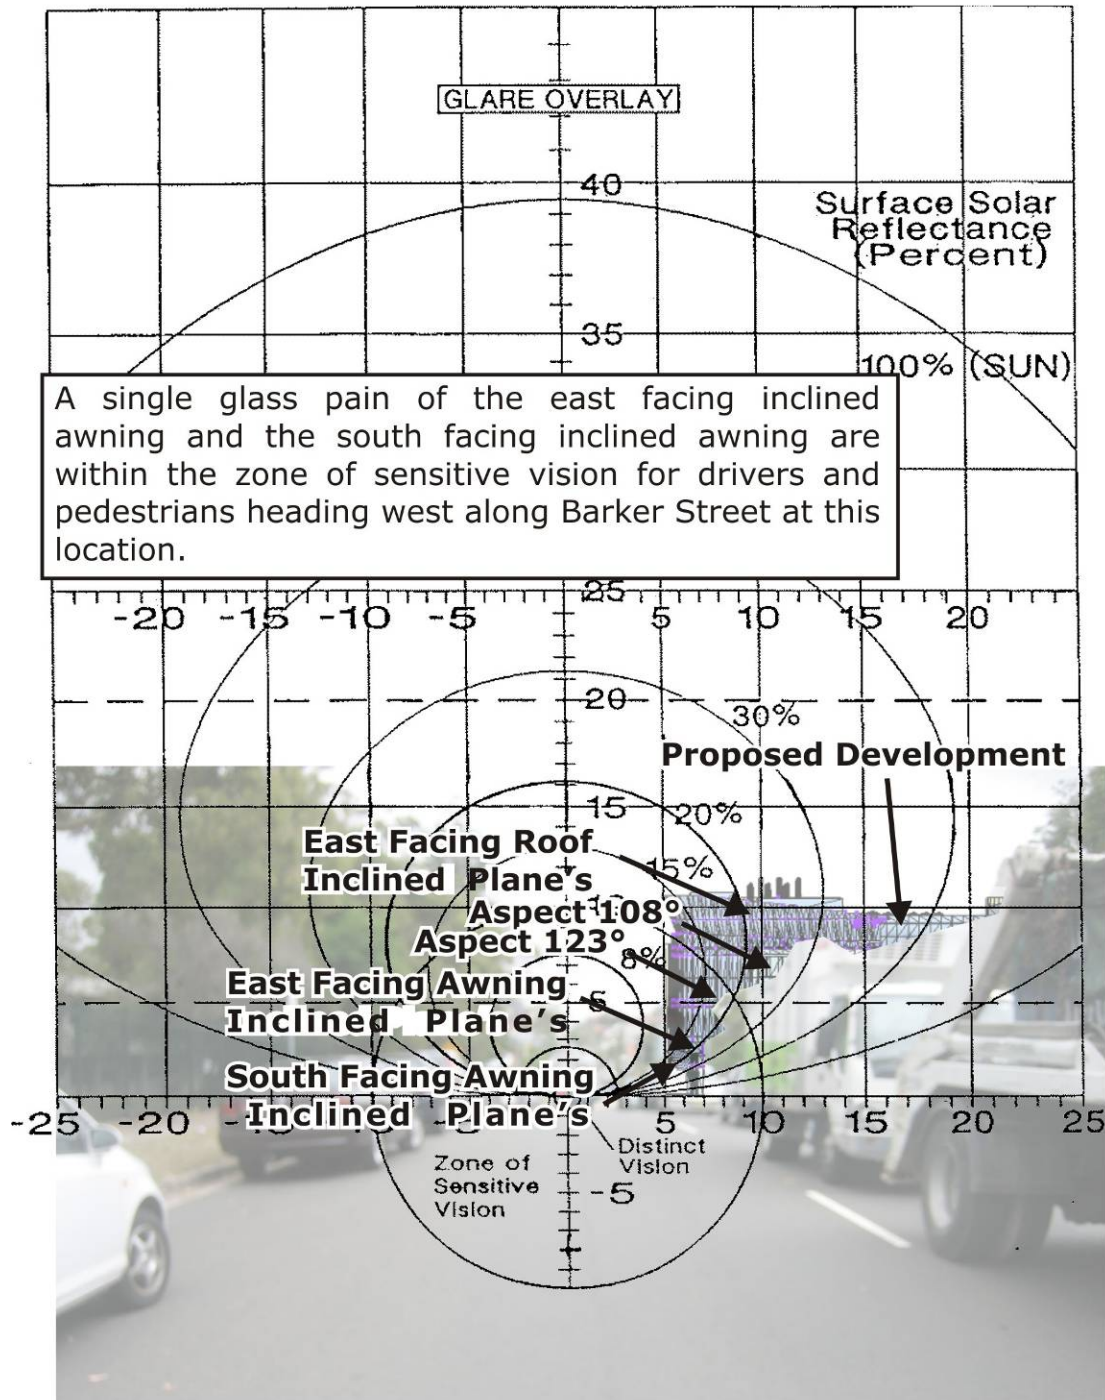

A single glass pain of the east facing inclined awning and the south facing inclined awning are within the zone of sensitive vision for drivers and pedestrians heading west along Barker Street at this location.


**Figure A5: Glare Overlay for Point 5**

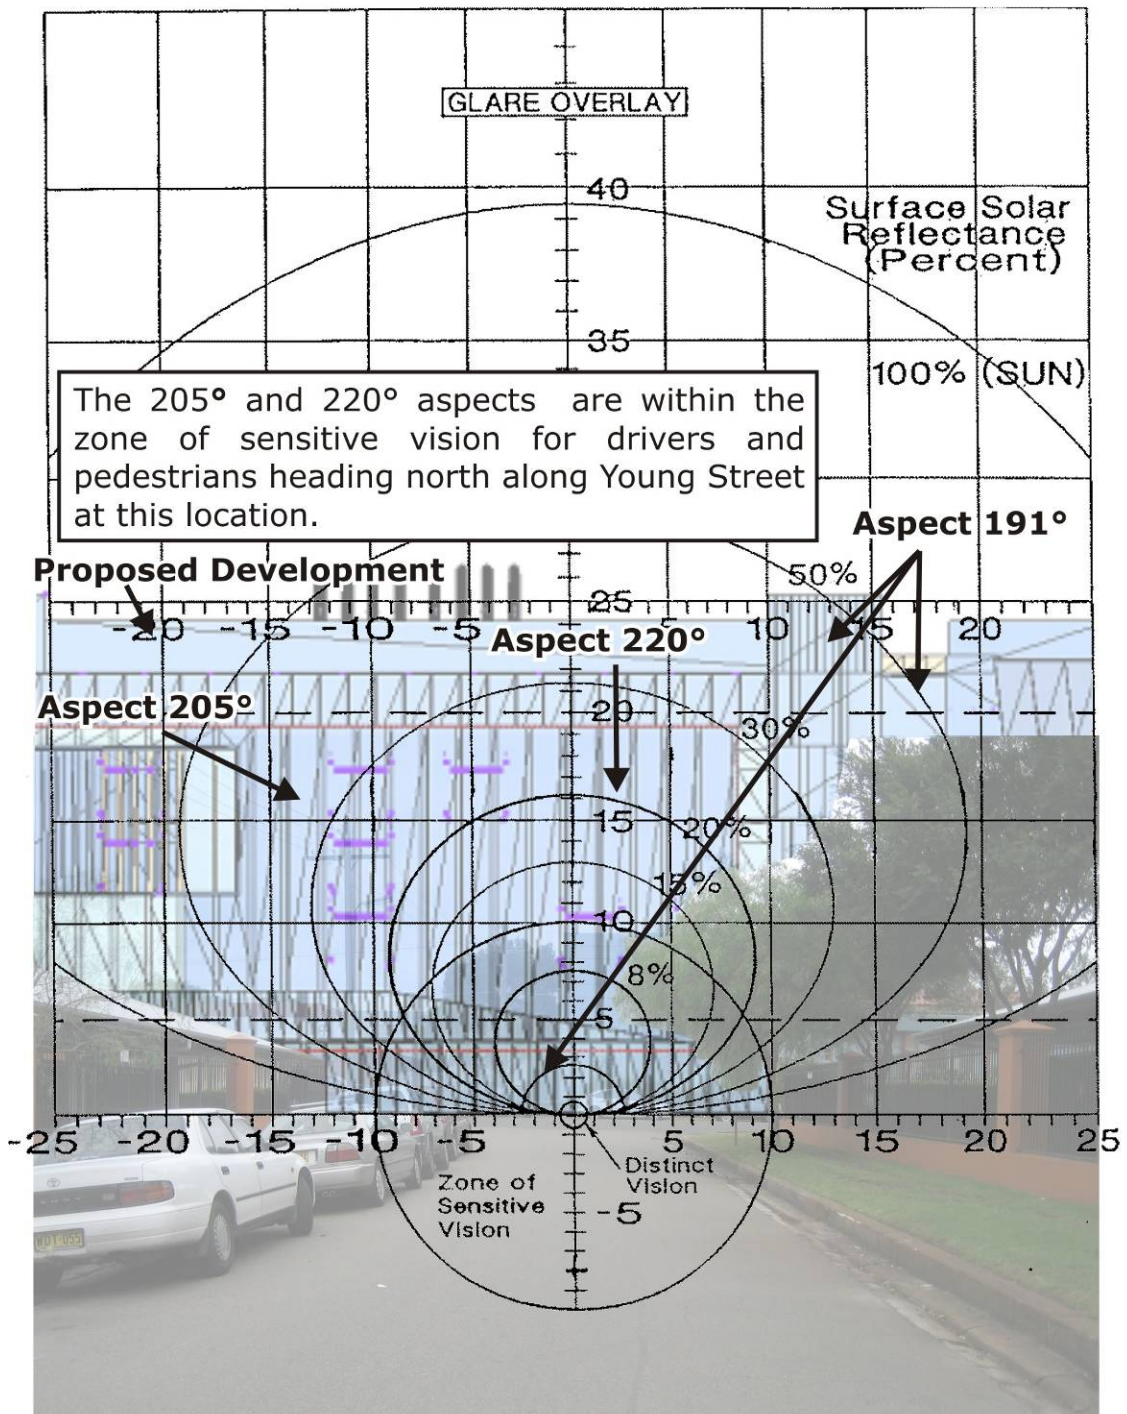


**Figure A6: Glare Overlay for Point 6**

# **Appendix B**

Solar Charts for the Various Aspects  
of the Proposal

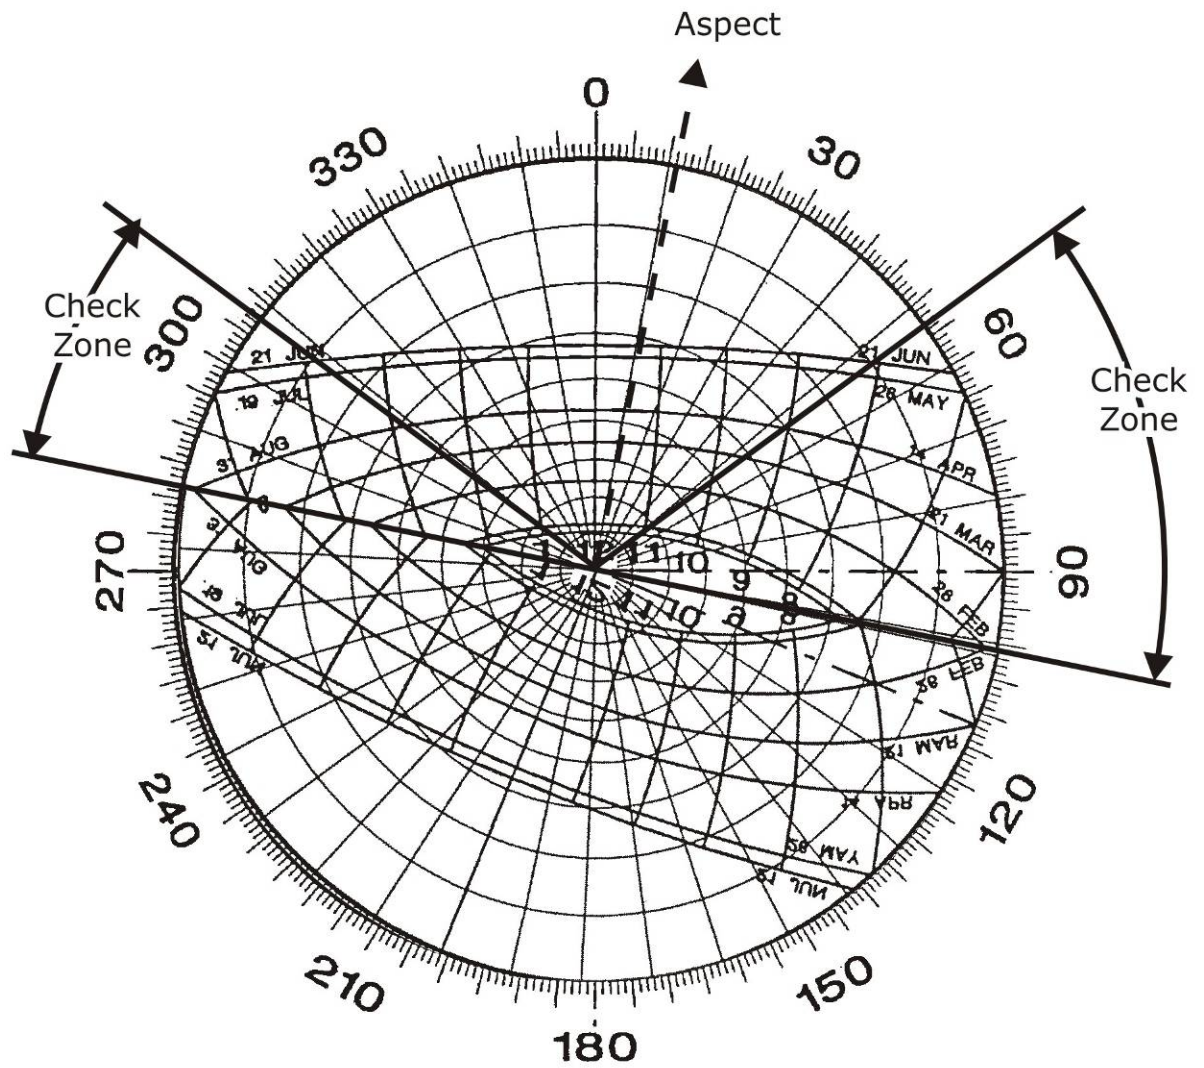


**Figure B1: Sun Chart for Aspect 017°**

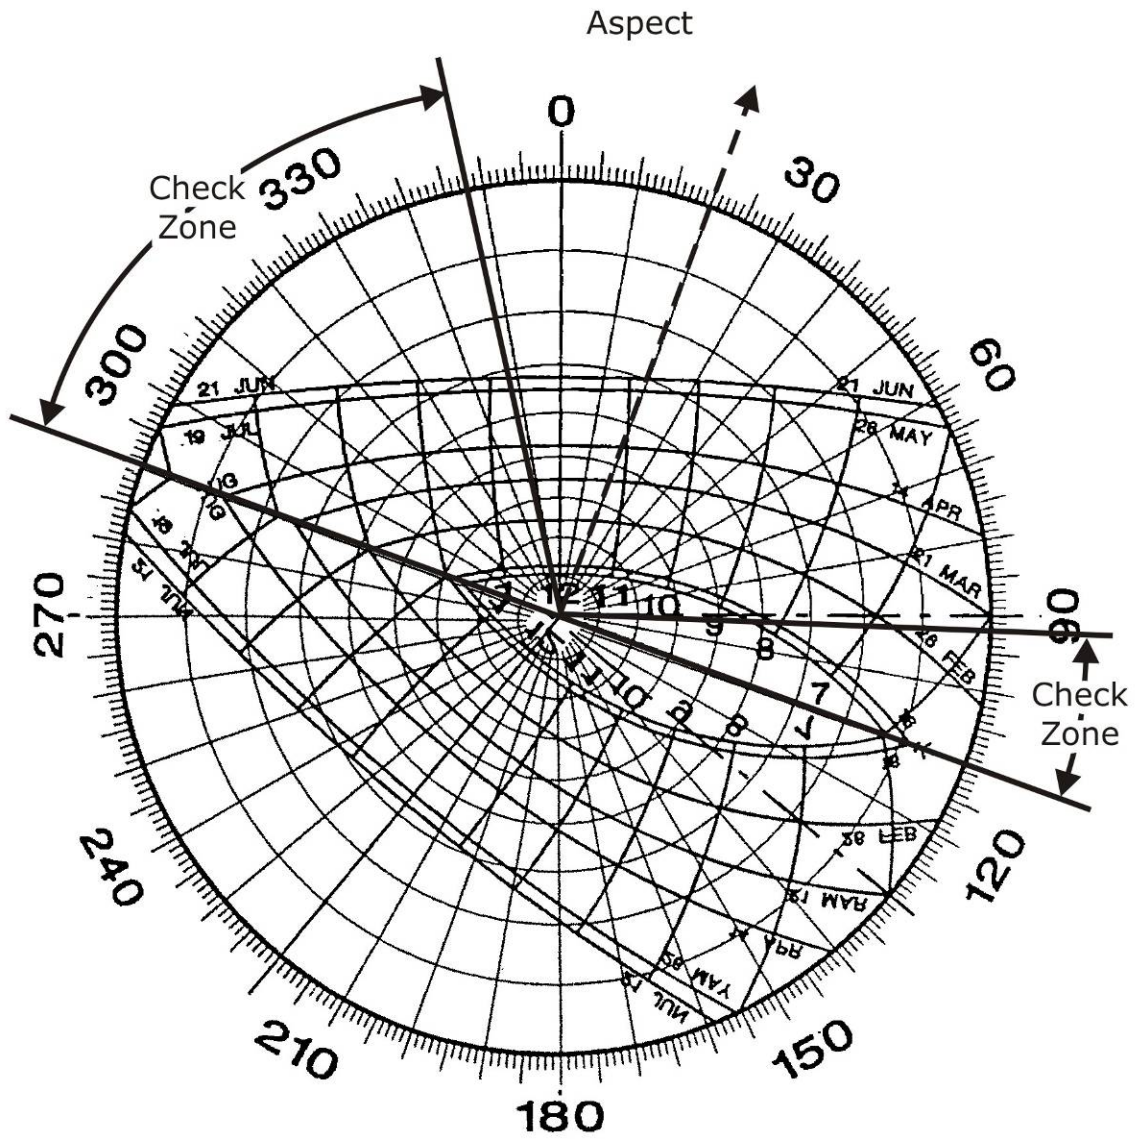


**Figure B2: Sun Chart for Aspect 020°**




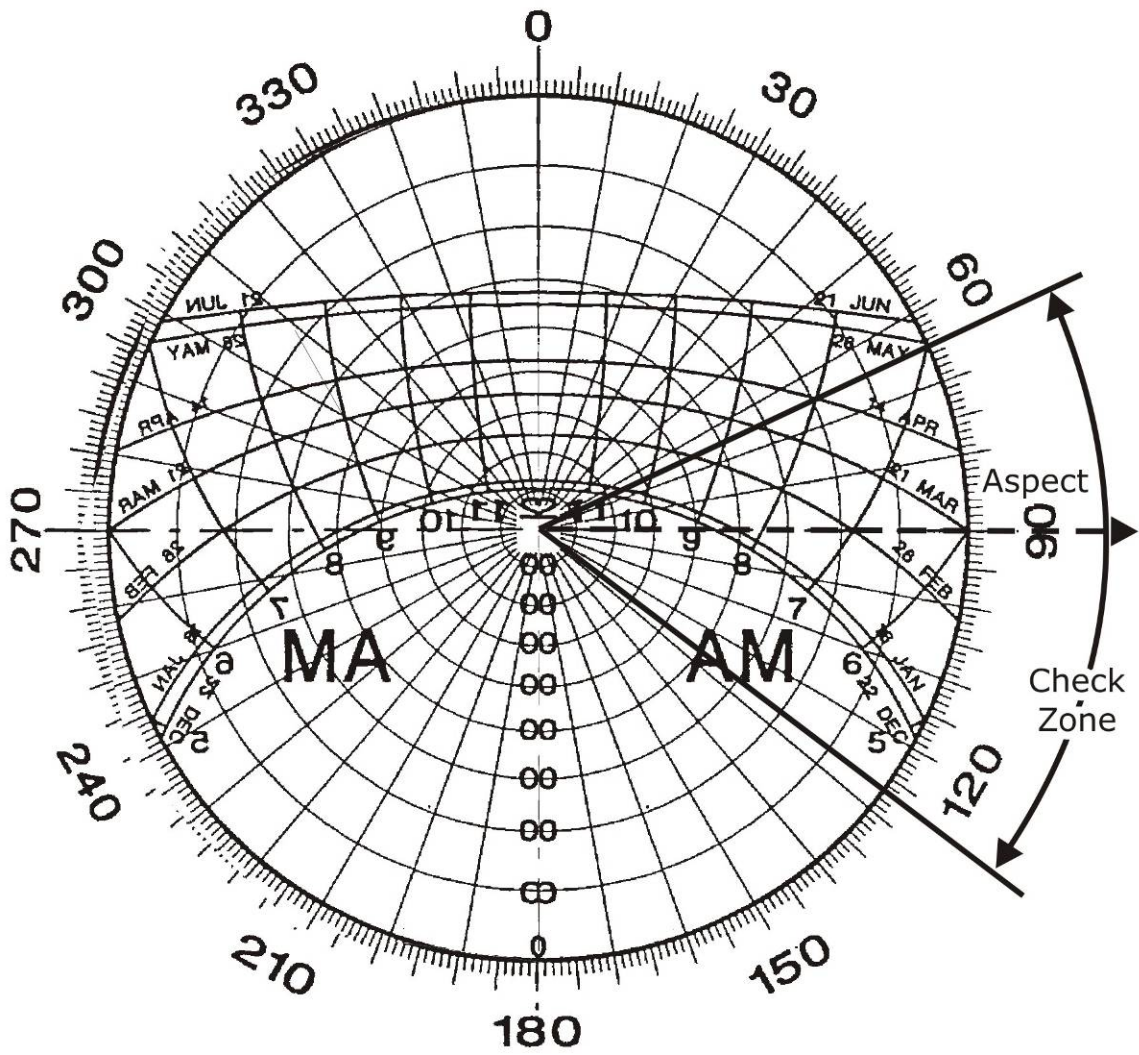


**Figure B3: Sun Chart for Aspect 090°**

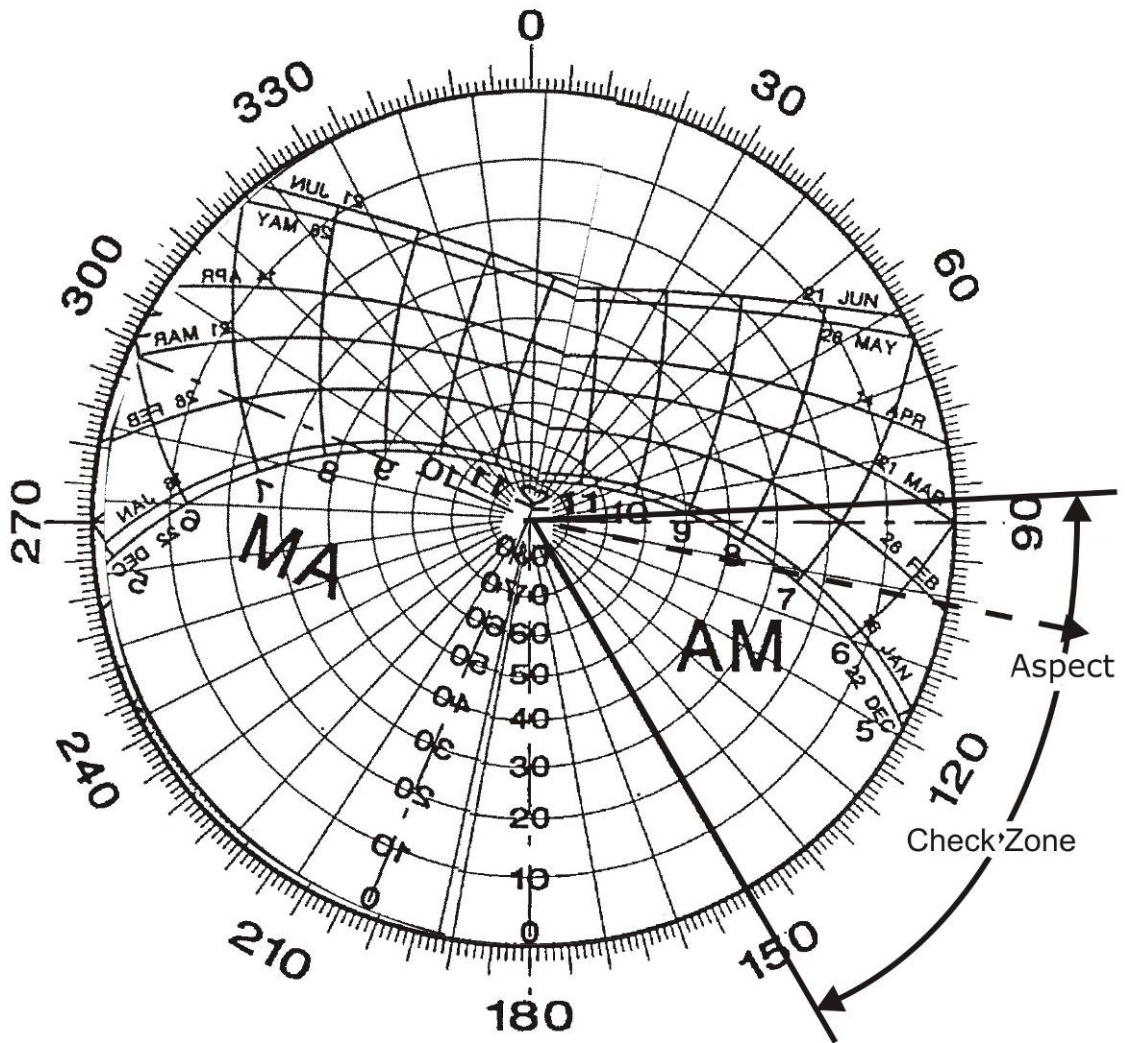


**Figure B4: Sun Chart for Aspect 101°**

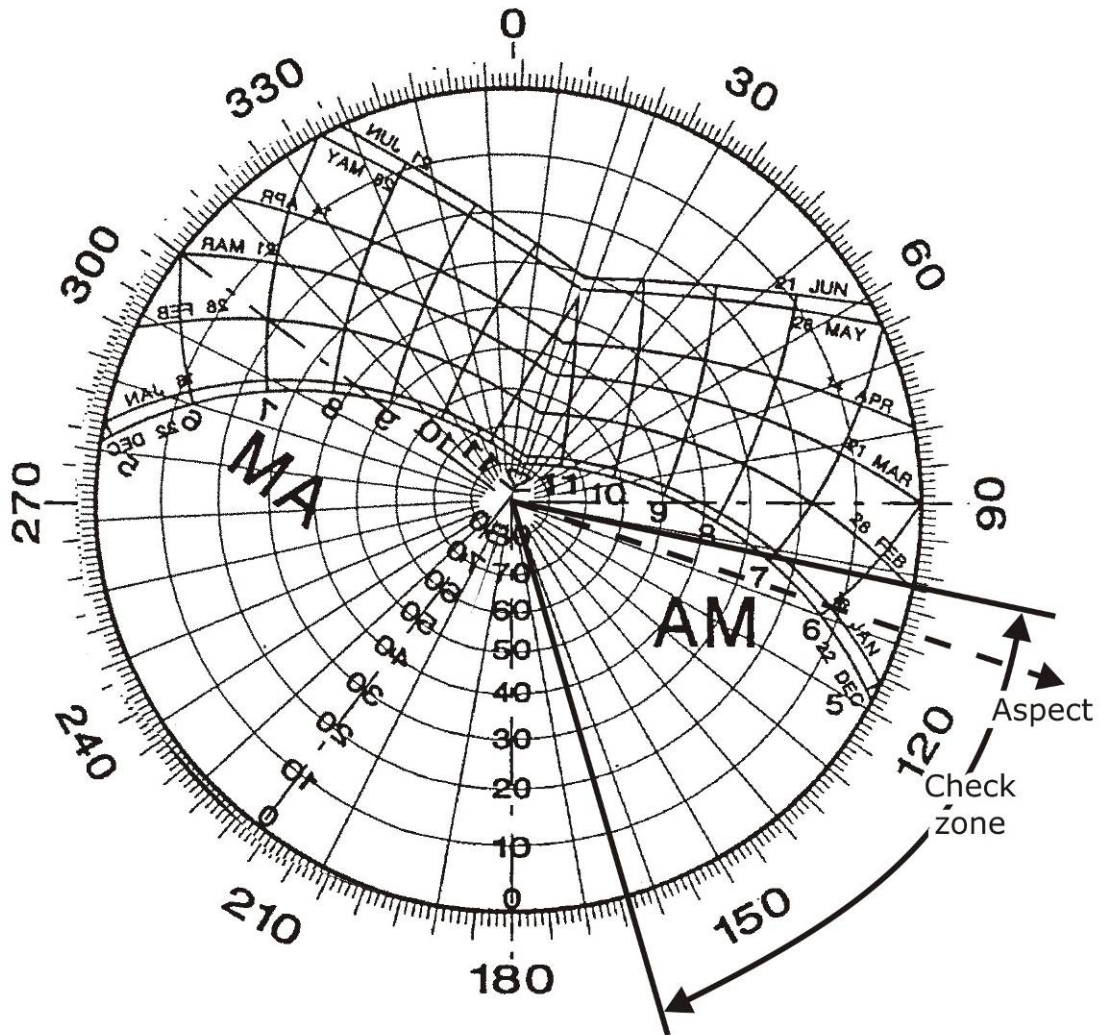


**Figure B5: Sun Chart for Aspect 108°**

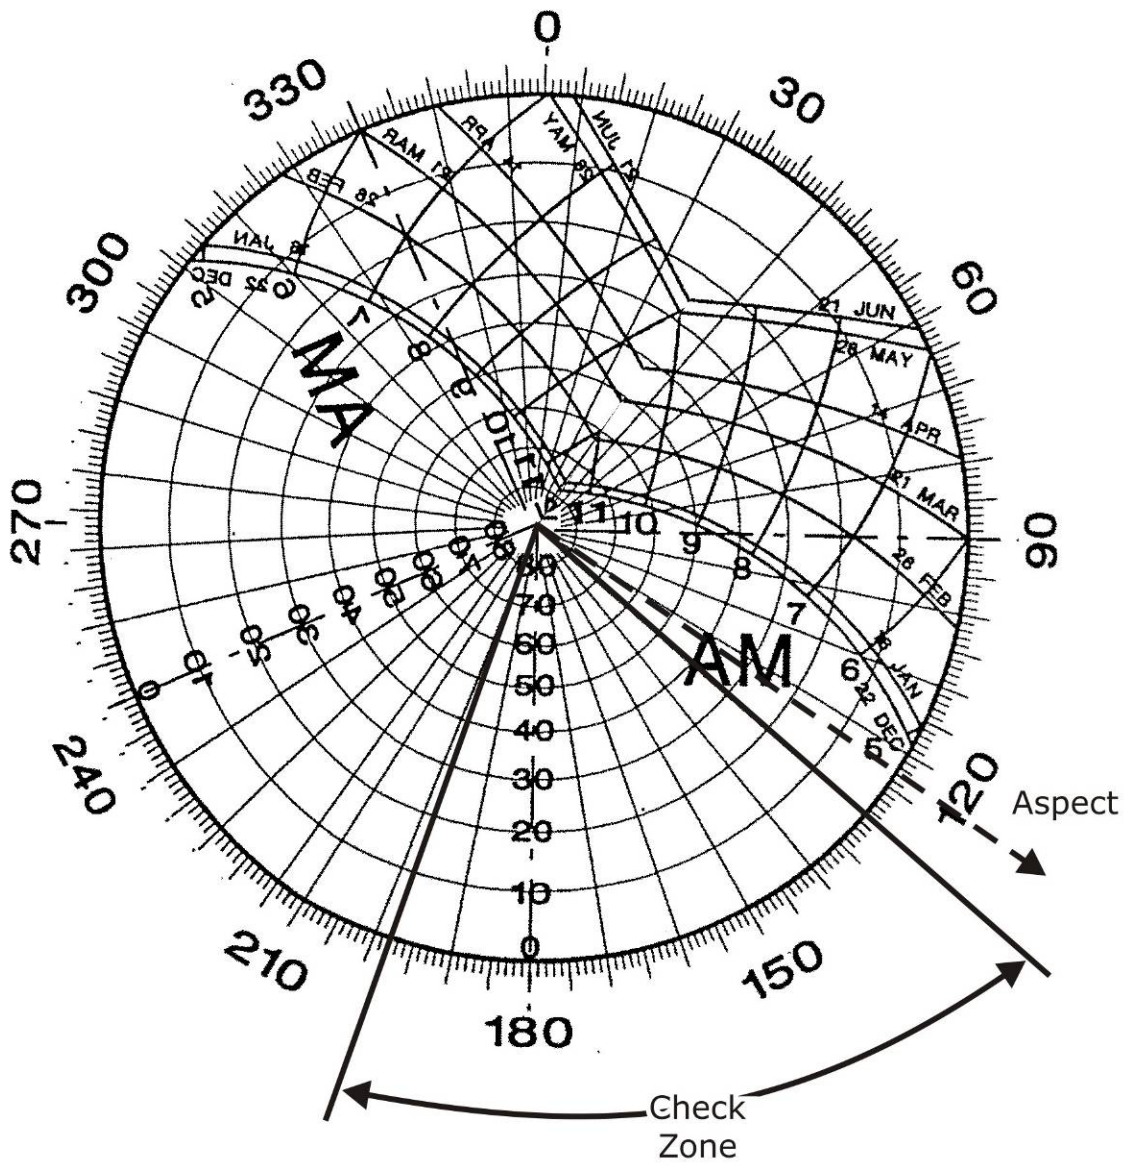


**Figure B6: Sun Chart for Aspect 123°**

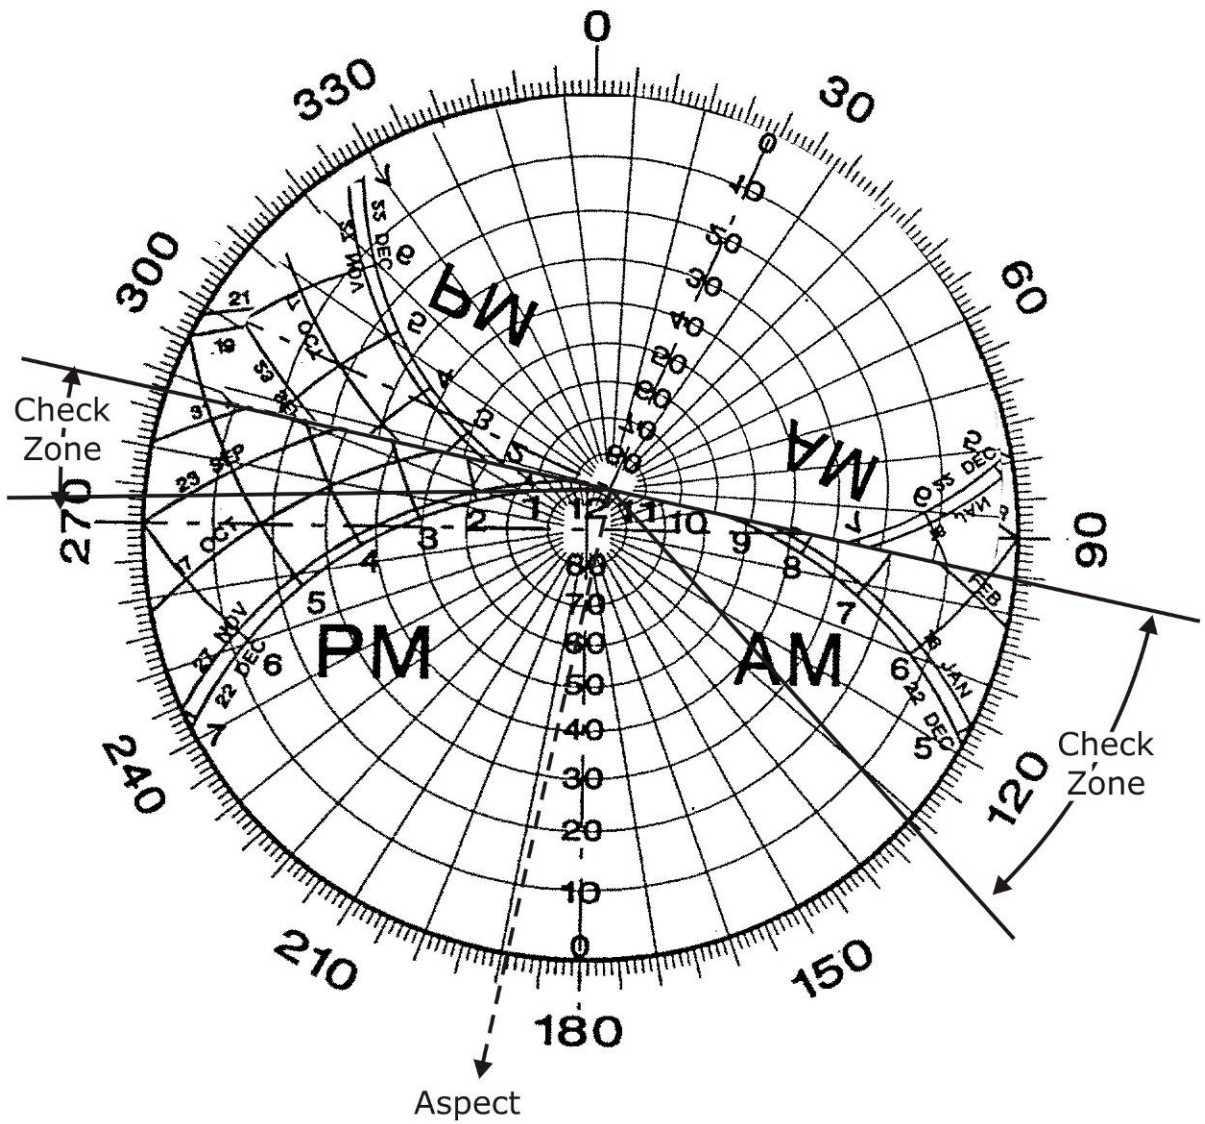


**Figure B7: Sun Chart for Aspect 191°**

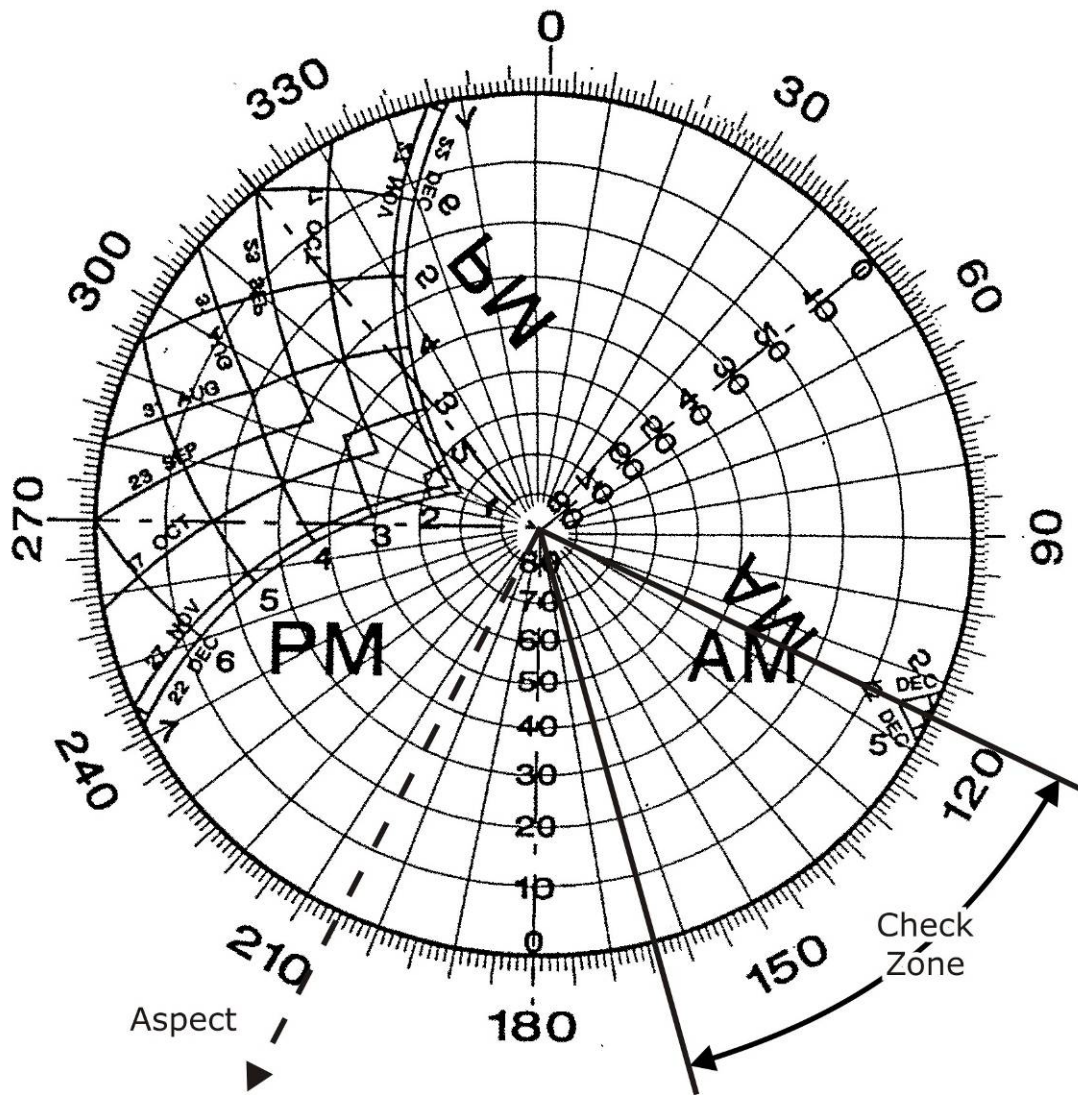

**Figure B8: Sun Chart for Aspect 205°**

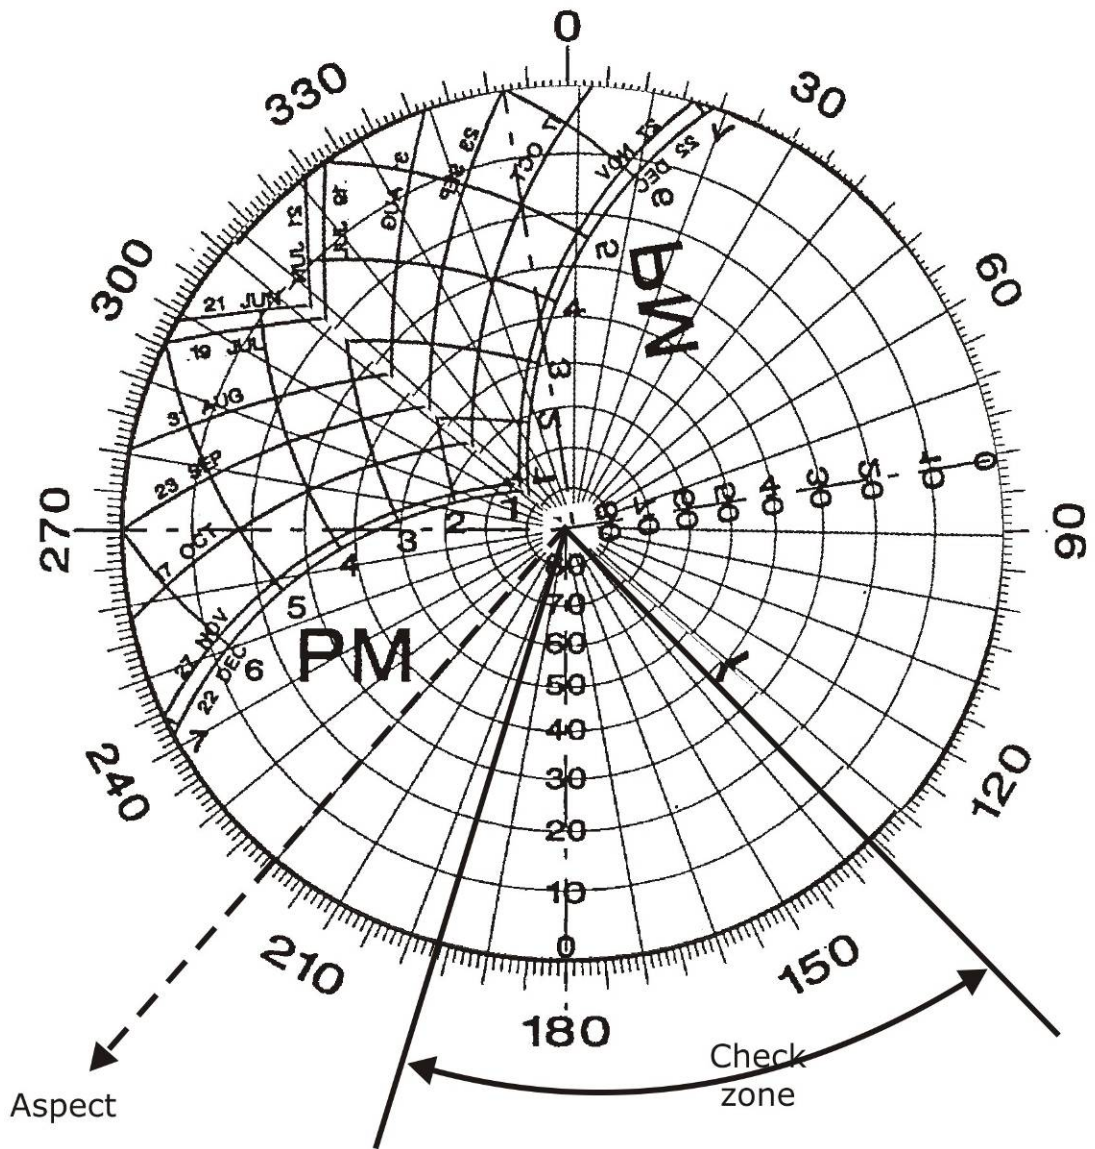


**Figure B9: Sun Chart for Aspect 220°**

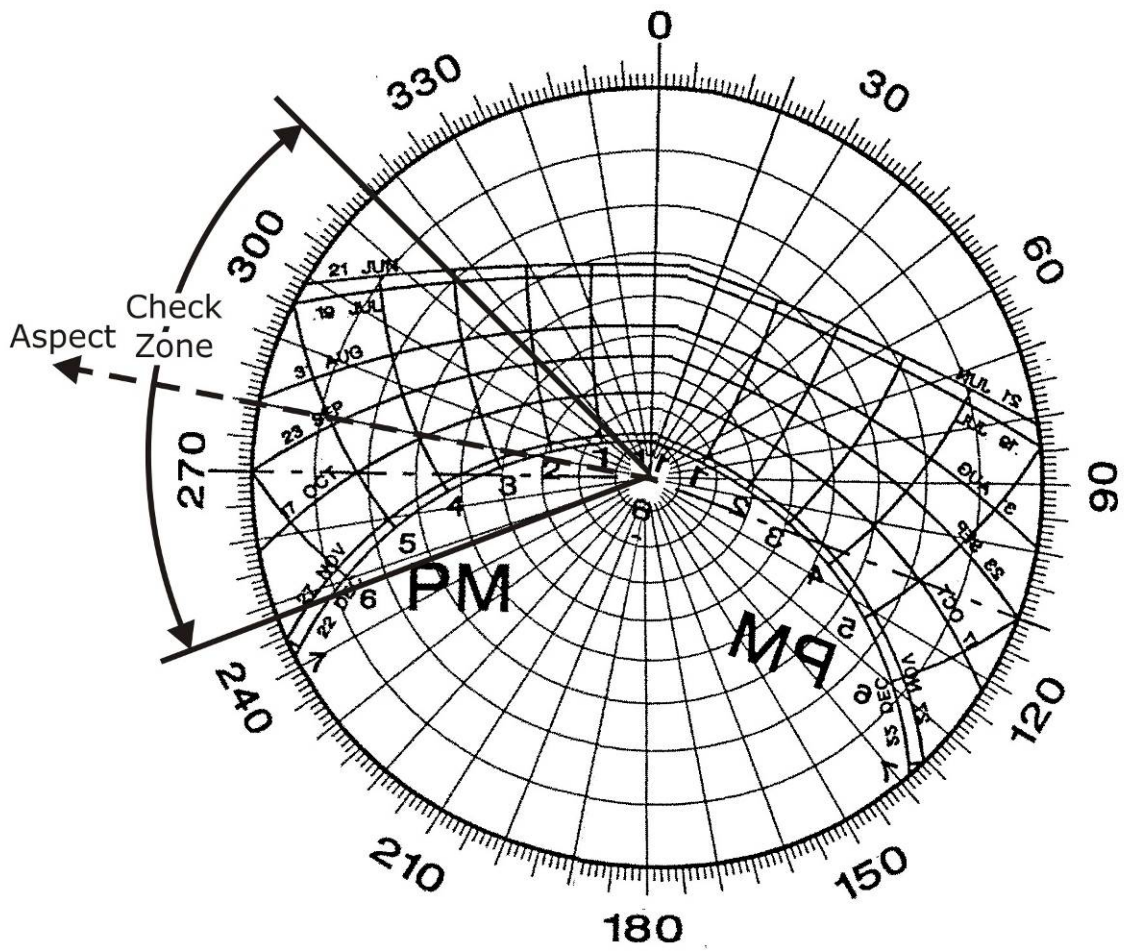


**Figure B10: Sun Chart for Aspect 281°**



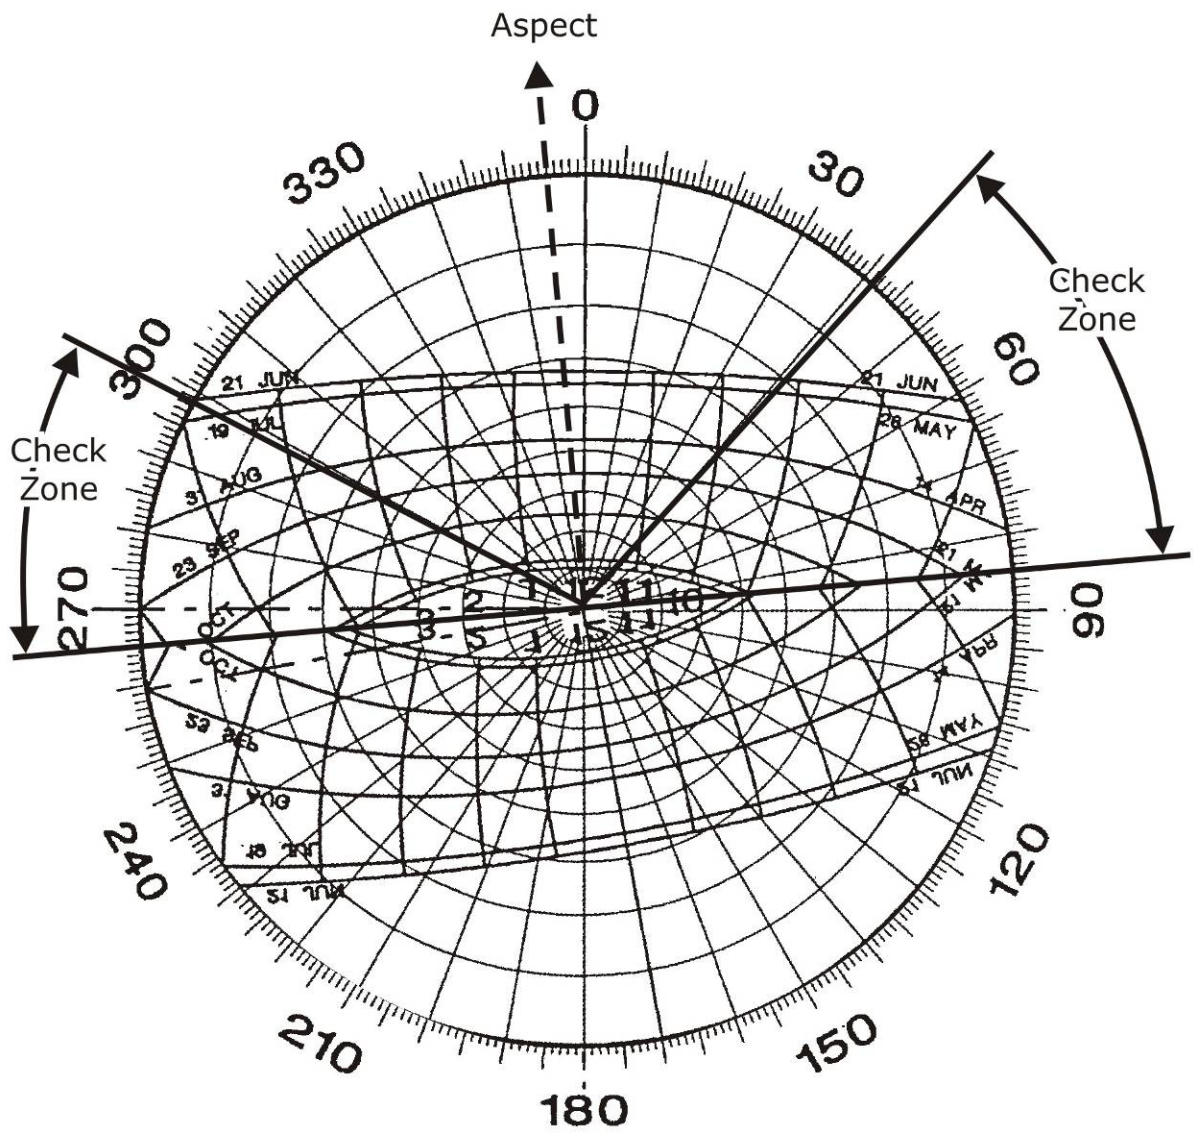

**Figure B11: Sun Chart for Aspect 355°**

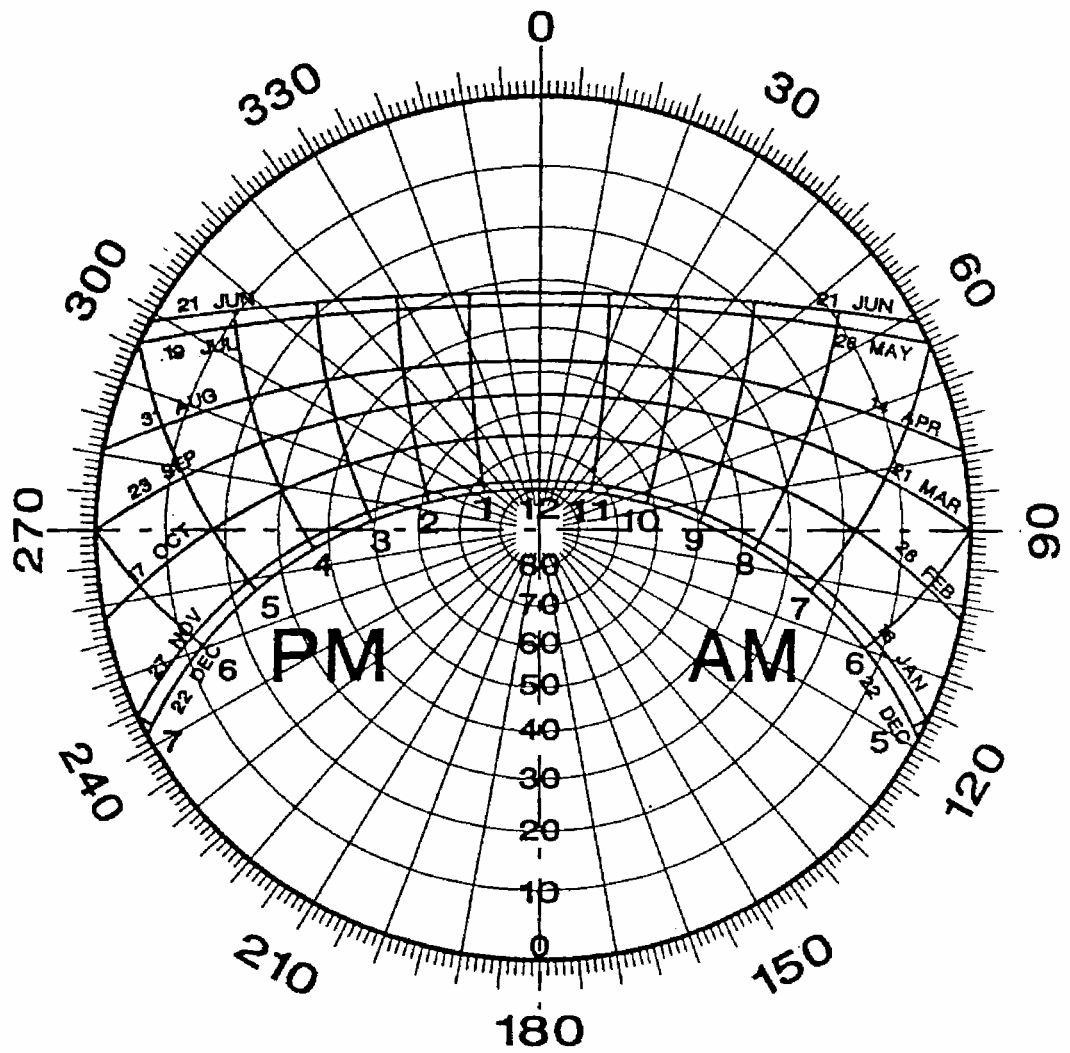

**Figure B11: Sun Chart for Sydney**