



dem

9.16 BCA Report

Suite 148/243 Pyrmont Street Pyrmont NSW 2009

Phone: 02 9571 8433

Fax: 02 9571 8466

admin@aedconsulting.com.au

www.aedconsulting.com.au

BCA SIGNIFICANT ISSUES & CONSTRAINTS REPORT

PROPOSED GLOBAL SYDNEY SWITCH 2

PYRMONT STREET, ULTIMO NSW

REPORT NO ► 1321-15 REV02

DATE ► FEBRUARY 2010

PREPARED FOR ► GLOBAL SWITCH

PREPARED BY ► AE&D

C O N T E N T S

Executive Summary..... 3

1.0 Introduction 4

2.0 BCA Assessment Data 7

3.0 BCA Assessment..... 9

4.0 Conclusion 18

REVISION STATUS

REPORT NO & REVISION	DATE	STATUS	WRITTEN	CHECKED
1321-15 REV 01	14.01.10	DRAFT ISSUE TO CLIENT	MS	NH
1321-15 REV 02	17.02.10	COMPLIANCE REVIEW	MS	NH

COMMERCIAL IN CONFIDENCE
 This document contains confidential material that is intended solely for AE&D. The project team and all regulatory authorities shall exercise precautionary measures to ensure that the information contained herein is not to be accessed by any third party. AE&D will take no responsibility for the use of any information contained within this report by any third party.

EXECUTIVE SUMMARY

This report has assessed the preliminary design documentation for the proposed Global Sydney Switch 2 Extension Project, Ultimo NSW. This assessment has been carried out in accordance with the provisions of the Building Code of Australia 2009 (BCA) to determine if the submitted design can comply with the requirements of the BCA. The primary purpose of this report is to identify any significant non-compliance matters (or constraints) in comparison to the current Deemed-to-Satisfy (DTS) provisions of the BCA and identify if Alternative Solution may be applicable in relation to those identified BCA DTS non-compliance matters.

The outcome of the report has noted that the proposed design contains several non-compliances with the deemed-to-satisfy provisions of the BCA that must be addressed via either re-design (by the design team) or supported by Alternative Solution. There are also certain matters for which full BCA compliance can not be fully determined due to the current level of design containing an insufficient level of detail, such matters will be addressed as the design continues to progress.

Subject to the recommendations contained in Section 3.0 of this report, the current design can readily comply with the performance requirements of the BCA.

1.0 INTRODUCTION

This report provides a Building Code of Australia 2009 (BCA) compliance assessment of the design documentation for the proposed Global Sydney Switch 2 Extension, against the significant requirements of the BCA 2009. Only major non-compliances have been identified at this stage, being those with the ability to affect the overall design &/or those requiring support by way of Alternative Solution. This report does not provide a comprehensive clause by clause assessment of the BCA, as the design is not at a level that allows that form of assessment.

The development comprises the construction of a major extension to the existing Global Sydney Switch Facility, located at 400 Harris Street, Ultimo NSW, which is located adjacent to an existing substation site as detailed below in Figure 1.0.



Figure 1.0 – Proposed Site, showing two separate buildings

1.1 Basis of Report

The key basis of this report is to address compliance with the significant requirements of the Building Code of Australia (BCA) 2009. The scope of services is limited to Sections C - **Fire Resistance**, Section D - **Access & Egress** and Section E - **Services & Equipment**, Section F - **Health and Amenity** and Section J - **Energy Efficiency** of the BCA.

This report is based on a desktop assessment of the Preliminary Design Prepared by DEM, with specific reference to the following:

- Architectural Plans prepared DEM – Drawing Numbers:

Basement level 3 -	ar 1200 B01
Basement level 2 -	ar 1201 B01
Basement level 1 -	ar 1202 B01
Ground Floor Plan -	ar 1203 B01
First Floor Plan -	ar 1204 B01
Second Floor Plan -	ar 1205 B01
Third Floor Plan -	ar 1206 B01
Fourth Floor Plan -	ar 1207 B01
Fourth Floor Mezzanine -	ar 1208 B01
Fifth Floor Plan -	ar 1209 B01
Fifth Floor Mezzanine -	ar 1210 B01
Roof Plan -	ar 1211 B01
Section one -	ar 2100 B01
Section two -	ar 2101 B01
Section three -	ar 2102 B01
Section four -	ar 2103 B01
North & South Elevations -	ar 2500 B01
East Elevation -	ar 2501 B01

- The Building Code of Australia 2009 (BCA), prepared by the Australian Building Codes Board.
- The Guide to the BCA 2009, prepared by the Australian Building Codes Board.
- The report has been based on both of the sites identified in figure 1.0 above, being a single consolidated allotment of land.

1.2 Purpose of the Report

The purpose of this report is to assess the following:

- Assessment under the current Building Code of Australia 2009 and detail any significant departures from the BCA2009.
- Provide recommendations to best address any significant departures from the requirements of BCA2009.

1.3 Limitations of the Report

- The report is limited to a desktop assessment of the nominated development only and does not constitute assessment of the existing site limitations in any way. Assessment is strictly limited to those works that have specifically been nominated within assessed documentation detailed in Section 1.1 of this report.
- This report does not provide any design advice and is limited to the provision of assessment of compliance with the BCA. The issues and matters identified by this report are to be considered by the design team for compliance with the BCA and any revision to the design must be carried out by the design team without advice from AE&D, other than for items of BCA compliance.
- Consideration of Energy Australia Design Requirements, which often exceed the minimum BCA requirements.
- Some requirements of the BCA are recognised as being interpretive in nature. Where these matters are encountered, interpretations are made in accordance with AE&D policy. Specific interpretations relevant to this assessment are included in Section 2.0 “BCA Assessment Data”.

- Access and facilities for people with disabilities is addressed however compliance with Disability Discrimination Act 1992 (DDA) is outside the scope of this report. It should be noted that BCA compliance does not necessarily meet the requirements of the Disability Discrimination Act (DDA).
- Reporting on hazardous materials, OH&S matters or site contamination
- Assessment of mechanical plant operations, electrical systems or security systems
- Heritage significance
- Consideration of energy or water authority requirements
- Consideration of Council's local planning policies
- Environmental or planning issues
- Requirements of statutory authorities
- Pest inspection or assessment building damage caused by pests (general/visual pest invasion or damage will be reported, however invasive or intrusive inspections have not be carried out)
- Sections B "Structure" (subject to Structural Design) and "I" Maintenance" (superseded in NSW) of the BCA are not specifically assessed.
- Provision of any construction approvals or certification under Part 4A or Part 5 of the Environmental Planning & Assessment Act 1979.

2.0 BCA ASSESSMENT DATA

Assessment data regarding the current Building Code of Australia:

BCA Building Classification/s:	Class 5 – Technical Data Areas Class 7b – Technical and other storage areas NB: Plant areas and the like have the same classification as the part of the building in which they are located.
Building rise in storeys:	8
Number of storeys contained:	11
Type of Construction:	A
General Floor area limitations:	Class 5 Parts - The building must have a floor area of not more than 8,000m ² and a volume of not more than 48,000m ³ Class 7b Parts - The building must have a floor area of not more than 5,000m ² and a volume of not more than 30,000m ³
Effective Height:	33.35m being greater than 25m but less than 50m.

BCA Assessment/Interpretation Notes:

- **Rise in Stories** – the “mezzanines” that are nominated on plan at Level 4 and Level 5 are each considered a “storey” for the purposes of assessment under C1.2 of the BCA, as they are over 200m².
- **The building has not been considered a ‘United Building’**, as this will require the existing building at 400 Harris Street to be considered as having an Effective Height of more than 25m. Therefore the buildings will be considered as two separate buildings on the same allotment of land.

2.1 Location of Fire Source features

West: Adjoining building at 400 Harris Street
East: Pyrmont Street, which is more than 6m wide.
North: Substation at ground level and highway overpass at level 3, which is more than 6 metres wide
South: Quarry Street, which is more than 6 metres wide

2.2 Building Layout

The building comprises the following:

Level/Part	Approximate Occupant Numbers	Usage
Basement 3	Maximum 10-20	Technical data space. Storage Diesel pumps and other plant and equipment
Basement 2	Maximum 10-20	Technical data space
Basement 1	Maximum 10-20	Technical data space Plant and equipment
Ground Floor	Maximum 15-25	Technical data & storage space. Lobby and Reception areas
First Floor	Maximum 10-20	Technical data space. Technical Storage
Second Floor	Maximum 10-20	Technical data space.
Third Floor	Maximum 10-20	Technical data storage space.

Level/Part	Approximate Occupant Numbers	Usage
		Technical Storage
Fourth Floor	0	Plant and equipment.
Fourth Floor Mezzanine	0	Plant and equipment
Fifth Floor	0	Cooling towers and associated plant and equipment
Roof Level	10-20	Amenities and roof areas

NB: Occupant numbers above are based on existing use conditions at Sydney Global Switch - 1 Facility.

3.0 BCA ASSESSMENT

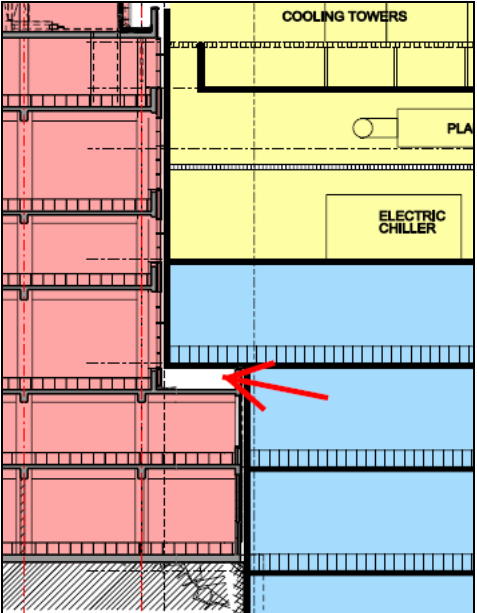
The following Table 3.0 identifies the significant non-compliances and constraints applicable to the current design when assessed against the requirements of the Building Code of Australia 2009. This report does not provide a comprehensive clause-by-clause assessment of the BCA, as the design is not at a level that allows that form of assessment.


TABLE 3.0 - SIGNIFICANT BCA ISSUES

#	SIGNIFICANT BCA ISSUES AND COMPLIANCE MATTERS																																																																																													
SECTION B "STRUCTURE"																																																																																														
1.	Informational	<p>STRUCTURAL DESIGN</p> <p>All buildings and structures should be designed by appropriately qualified structural engineers in accordance with Part B1 of the BCA and AS 1170 (SAA Loading Code), AS 1684, AS 1720, AS 2870, AS3600, AS4100 and other relevant structural codes. The structural certificate should state the classification of the site or the Geotechnical Report relied upon to carry out the structural design.</p>																																																																																												
SECTION C "FIRE RESISTANCE"																																																																																														
2.	Informational POTENTIAL ALTERNATIVE SOLUTION REQUIRED	<p>FIRE RATING OF BUILDING ELEMENTS (BCA SPEC C1.1)</p> <p>The building is required to be constructed in Type A construction which is required to comply with the minimum fire resistance levels of Table 3 of Specification C1.1 of the BCA. In summary, the following minimum FRL's must be maintained:</p> <table border="1"> <thead> <tr> <th>Building Element</th> <th>Class 5</th> <th>Class 7b</th> </tr> </thead> <tbody> <tr> <td colspan="3">External Wall (Loadbearing)</td> </tr> <tr> <td>Less than 1.5m from fire source feature</td> <td>120/120/120</td> <td>240/240/240</td> </tr> <tr> <td>1.5m to less than 3m from fire source feature</td> <td>240/240/180</td> <td>240/240/180</td> </tr> <tr> <td>3m or more from fire source feature</td> <td>240/180/90</td> <td>240/180/90</td> </tr> <tr> <td colspan="3">External Wall (Non-Loadbearing)</td> </tr> <tr> <td>Less than 3m from fire source feature</td> <td>-/120/120</td> <td>-/240/240</td> </tr> <tr> <td>3m or more from fire source feature</td> <td>-/-/-</td> <td>-/-/-</td> </tr> <tr> <td colspan="3">External Column</td> </tr> <tr> <td>Less than 3m</td> <td>120/-/-</td> <td>240/-/-</td> </tr> <tr> <td>3m or more</td> <td>-/-/-</td> <td>-/-/-</td> </tr> <tr> <td colspan="3">Common Walls & Fire Walls</td> </tr> <tr> <td></td> <td>120/120/120</td> <td>240/240/240</td> </tr> <tr> <td colspan="3">Internal Walls</td> </tr> <tr> <td colspan="3">Loadbearing Fire Stairs & Lift Shafts</td> </tr> <tr> <td></td> <td>120/120/120</td> <td>240/120/120</td> </tr> <tr> <td colspan="3">Non-Loadbearing Fire Stairs & Lift Shafts</td> </tr> <tr> <td></td> <td>-/120/120</td> <td>-/120/120</td> </tr> <tr> <td rowspan="2">Ventilating pipe, garbage, and like shafts not used for the discharge of hot products of combustion</td> <td>Loadbearing</td> <td>120/90/90</td> <td>240/120/120</td> </tr> <tr> <td>Non-loadbearing</td> <td>-/120/120</td> <td>-/-/-</td> </tr> <tr> <td rowspan="2">Bounding public corridors, public lobbies and the like, also Bounding sole occupancy units</td> <td>Loadbearing</td> <td>120/-/-</td> <td>120/90/90</td> </tr> <tr> <td>Non-loadbearing</td> <td>-/-/-</td> <td>-</td> </tr> <tr> <td colspan="3">Other loadbearing internal walls, internal beams, trusses</td> </tr> <tr> <td></td> <td>120/-/-</td> <td>240/-/-</td> </tr> <tr> <td colspan="3">Floors</td> </tr> <tr> <td></td> <td>120/120/120</td> <td>240/240/240</td> </tr> <tr> <td colspan="3">Roofs</td> </tr> <tr> <td></td> <td>120/60/30*</td> <td>240/90/60*</td> </tr> <tr> <td colspan="3">Equipment such as emergency generators, boilers, batteries and lift motor rooms</td> </tr> <tr> <td></td> <td>120/120/120 or -/120/120</td> <td>120/120/120 or -/120/120</td> </tr> </tbody> </table>	Building Element	Class 5	Class 7b	External Wall (Loadbearing)			Less than 1.5m from fire source feature	120/120/120	240/240/240	1.5m to less than 3m from fire source feature	240/240/180	240/240/180	3m or more from fire source feature	240/180/90	240/180/90	External Wall (Non-Loadbearing)			Less than 3m from fire source feature	-/120/120	-/240/240	3m or more from fire source feature	-/-/-	-/-/-	External Column			Less than 3m	120/-/-	240/-/-	3m or more	-/-/-	-/-/-	Common Walls & Fire Walls				120/120/120	240/240/240	Internal Walls			Loadbearing Fire Stairs & Lift Shafts				120/120/120	240/120/120	Non-Loadbearing Fire Stairs & Lift Shafts				-/120/120	-/120/120	Ventilating pipe, garbage, and like shafts not used for the discharge of hot products of combustion	Loadbearing	120/90/90	240/120/120	Non-loadbearing	-/120/120	-/-/-	Bounding public corridors, public lobbies and the like, also Bounding sole occupancy units	Loadbearing	120/-/-	120/90/90	Non-loadbearing	-/-/-	-	Other loadbearing internal walls, internal beams, trusses				120/-/-	240/-/-	Floors				120/120/120	240/240/240	Roofs				120/60/30*	240/90/60*	Equipment such as emergency generators, boilers, batteries and lift motor rooms				120/120/120 or -/120/120	120/120/120 or -/120/120
Building Element	Class 5	Class 7b																																																																																												
External Wall (Loadbearing)																																																																																														
Less than 1.5m from fire source feature	120/120/120	240/240/240																																																																																												
1.5m to less than 3m from fire source feature	240/240/180	240/240/180																																																																																												
3m or more from fire source feature	240/180/90	240/180/90																																																																																												
External Wall (Non-Loadbearing)																																																																																														
Less than 3m from fire source feature	-/120/120	-/240/240																																																																																												
3m or more from fire source feature	-/-/-	-/-/-																																																																																												
External Column																																																																																														
Less than 3m	120/-/-	240/-/-																																																																																												
3m or more	-/-/-	-/-/-																																																																																												
Common Walls & Fire Walls																																																																																														
	120/120/120	240/240/240																																																																																												
Internal Walls																																																																																														
Loadbearing Fire Stairs & Lift Shafts																																																																																														
	120/120/120	240/120/120																																																																																												
Non-Loadbearing Fire Stairs & Lift Shafts																																																																																														
	-/120/120	-/120/120																																																																																												
Ventilating pipe, garbage, and like shafts not used for the discharge of hot products of combustion	Loadbearing	120/90/90	240/120/120																																																																																											
	Non-loadbearing	-/120/120	-/-/-																																																																																											
Bounding public corridors, public lobbies and the like, also Bounding sole occupancy units	Loadbearing	120/-/-	120/90/90																																																																																											
	Non-loadbearing	-/-/-	-																																																																																											
Other loadbearing internal walls, internal beams, trusses																																																																																														
	120/-/-	240/-/-																																																																																												
Floors																																																																																														
	120/120/120	240/240/240																																																																																												
Roofs																																																																																														
	120/60/30*	240/90/60*																																																																																												
Equipment such as emergency generators, boilers, batteries and lift motor rooms																																																																																														
	120/120/120 or -/120/120	120/120/120 or -/120/120																																																																																												


#	SIGNIFICANT BCA ISSUES AND COMPLIANCE MATTERS	
		<p>NB1: Clause 3.1 of BCA Specification C1.1 requires:</p> <ul style="list-style-type: none"> • All loadbearing internal walls and fire rated walls must be of concrete or masonry. • All external walls must be non-combustible. • All internal non-loadbearing walls required to be fire rated are to be non-combustible. <p>NB2 – Concession 2.5(c) is applicable “structures on roofs” which allows for structures covering certain mechanical equipment located upon the roof to be except from the fire rating requirements of C1.1.</p> <p>NB3: Numerous concessions apply to building of Type A Construction. Reference is made to Clause 3 of BCA Specification C1.1. The application of the relevant exemptions would be assessed at the detailed design phase. These exemptions include:</p> <p>Clause 3.5 – Roof concession if building is sprinklered throughout.</p> <p>NB4: The building must be designed to accommodate the requirements of Clause 2.2 of BCA Specification C1.1, relating to the support of another part. This will be important where the Class 7b is above or below the Class 5 parts. The higher FRL being 240 minutes may be required to areas above and below the Class 5 parts to ensure adequate structural stability.</p> <p>POTENTIAL ALTERNATIVE SOLUTION REQUIRED - it may be applicable to consider consistent FRL’s throughout the entire building (ie reduced FRLs for the Class 7b data storage areas).</p>
3.	Informational	<p>FIRE HAZARD PROPERTIES (BCA Clause C1.10) The building is required to have internal linings compliant with BCA Clause C1.10. The internal wall, floor and ceiling linings must comply with the requirements and exemptions provided within Clause C1.10 and as relevant to Specification C1.10 and Specification C1.10a.</p>
4.	Informational and Potential Non- Compliance POTENTIAL ALTERNATIVE SOLUTION REQUIRED	<p>FIRE COMPARTMENTS (BCA CLAUSE C2.2) The fire compartments must be maintained in accordance with the following maximums to comply with Clause C2.2 of the BCA:</p> <ul style="list-style-type: none"> • Class 5 Parts - The building must have a floor area of not more than 8,000m² and a volume of not more than 48,000m³ • Class 7b Parts - The building must have a floor area of not more than 5,000m² and a volume of not more than 30,000m³ <p>It is assumed that the Class 5 & 7b parts will be separated by construction having an FRL of not less than 240/240/240. POTENTIAL ALTERNATIVE SOLUTION REQUIRED – it may be applicable to consider consistent FRL’s throughout the entire building (ie a reduction in the Class 7b FRLs).</p> <p>Based on the approximate floor plate of each storey being approximately 4,500m², the maximum fire compartment size would be unlikely to be exceeded in the Class 5 parts, however this should be fully detailed on plan to confirm full compliance. It is understood that typically substations are fire separated floor-to-floor.</p> <p>The Plant and equipment contained on levels 4 – 5 is connected by the plant lifting area and places the overall compartment sizes of these 3 floors in excess of that required by the DTS provisions of Clause C2.2, as listed above.</p>

SIGNIFICANT BCA ISSUES AND COMPLIANCE MATTERS

<p>5.</p> <p>Informational and Potential Non-Compliance</p> <p>POTENTIAL ALTERNATIVE SOLUTION REQUIRED</p>	<p>SEPARATION BY FIRE WALLS CLAUSE C2.7 – The fire wall separating the two buildings comprises both vertical and horizontal construction, which does not comply with BCA Clause C2.7(b) which requires that fire walls be provided to separate buildings, ie vertical construction. Refer to diagram below for location of horizontal element that is proposed within the fire wall separating buildings.</p> 
<p>6.</p> <p>Informational</p>	<p>SEPARATION of EQUIPMENT (BCA CLAUSE C2.12 & C2.13) Separation of equipment as listed below must be separated from the remainder of the building by FRL 120/120/120:</p> <ul style="list-style-type: none"> - Boilers; - Lift motors and control panels - Emergency generators used to sustain emergency equipment in the emergency mode; - Central smoke control plant; - Battery stores - Electricity substation and main switch boards (only switchboards used to sustain emergency equipment in the emergency mode)
<p>7.</p> <p>Informational and Potential Non-Compliance</p>	<p>PROTECTION OF OPENINGS (BCA CLAUSE C3.2) To comply with BCA Clause C3.2, openings in external walls within 6m of side of the existing building on the same allotment, or 6m of the far side of the road must be protected in accordance with C3.4 of the BCA. Protection of openings to be detailed as the design progresses, however the following openings are specifically noted:</p> <ul style="list-style-type: none"> i. To all openings within 6m of the existing Sydney Global Switch 1 building should be protected. This includes all openings under covered roofs, where the opening is taken to be the line of roof over. Refer to diagram below.

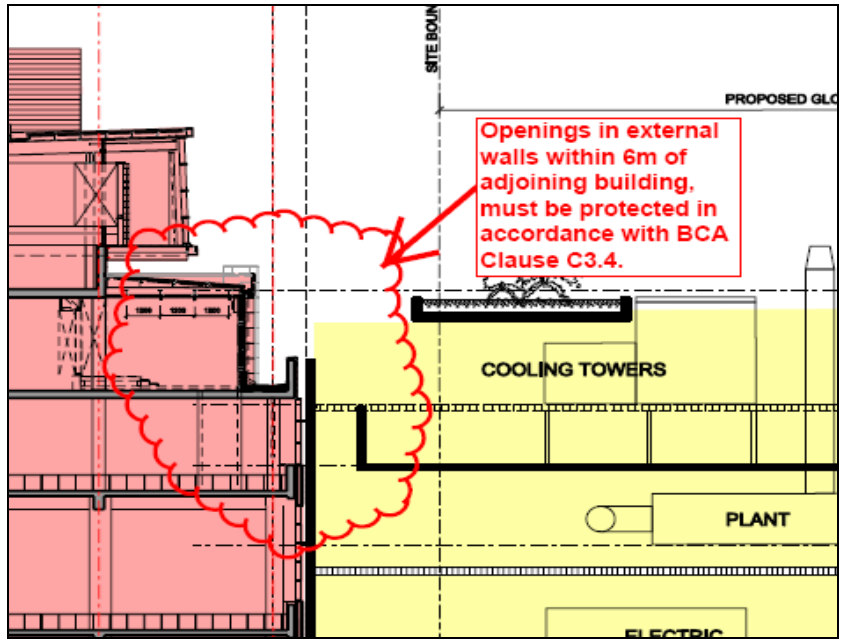

- ii. The link on Level 1 and 2. This link should be protected against the spread of fire from both buildings. ie. Have a fire door or fire shutter to protect the external wall opening in Sydney 1 and Sydney 2. Doorways in fire walls must comply with the provisions of BCA Part D3. Refer to diagram below.

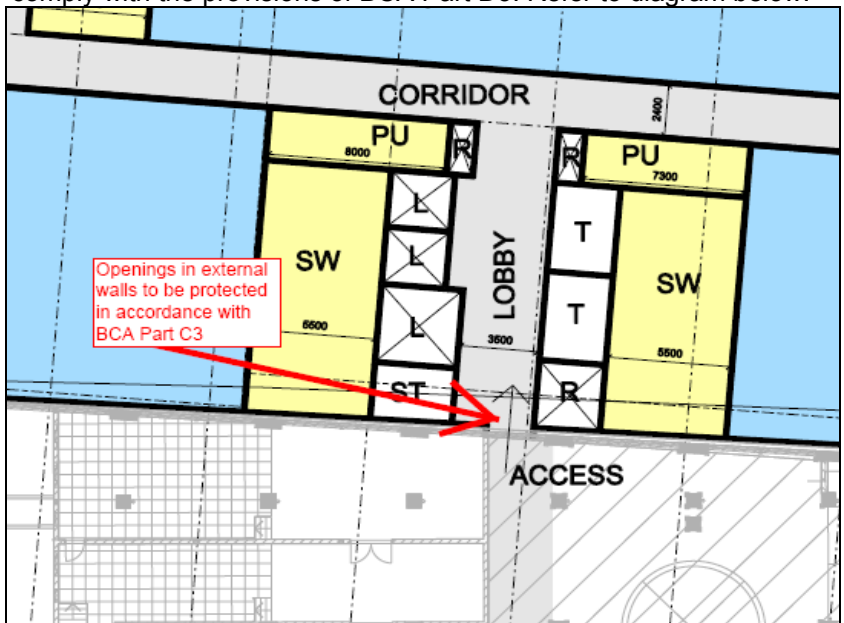

# SIGNIFICANT BCA ISSUES AND COMPLIANCE MATTERS		
PARTS D1 & D2 "EGRESS"		
8.	<p>Informational and Potential Non-Compliance</p> <p>POTENTIAL ALTERNATIVE SOLUTION REQUIRED</p>	<p>NUMBER OF EXITS (BCA CLAUSE D1.2) In accordance with BCA Clause D1.2, each storey is required to have at least two (2) exits. The building may not comply in the following areas:</p> <ul style="list-style-type: none"> i. Roof plant areas. ii. Amenities at roof level. iii. Fifth floor mezzanine and fifth floor cooling towers. <p>Access to exits, including door types and locations must be detailed as the design progresses to allow compliance with BCA D1.2 to be fully assessed. An alternative solution may be required should compliance with the deemed-to-satisfy provisions not be proposed.</p>
9.	<p>Informational</p> <p>POTENTIAL ALTERNATIVE SOLUTION REQUIRED</p>	<p>TRAVEL DISTANCES & EXIT LOCATIONS (BCA CLAUSE D1.4 & D1.5) Each storey must be provided with at least 2 exits providing a point of choice within 20m of all points on the floor, an exit within 40m of all points on the floor. Alternative exits must also be located between 9m to 60m apart. The proposed design appears generally compliant, however should the proposed fitout/s cause a non-compliance with the above parameters, it is suggested the non-compliance be addressed via alternative solution.</p> <p><i>NB: The individual fit-out of the technical areas may require an alternative solution, similar to the alternative solution currently applying to the Sydney 1 site. The technical area fit-outs will most likely cause the distance of travel to exceed 20m to a point of choice and the distance to one of the exits exceeding 40m. In addition it is likely that the fit-outs will create a non-compliance with the distance between alternative exits and exceed 60m.</i></p>
10.	<p>Informational</p>	<p>FIRE ISOLATED EXITS & EXIT STAIRS (BCA SECTION D) All stairs must be maintained as fire isolated exits to comply with D1.3 and D1.7 of the BCA, the proposed design appears to generally comply, with the following issues also noted:</p> <ul style="list-style-type: none"> i. The discharge from all fire stairs must be compliant with Clause D1.7 and D1.10 and in this regard the discharge points must provide a complaint path of travel to the road and only discharge into covered areas as permitted by Clause D1.7. Details will be assessed as the design progresses.
11.	<p>Informational</p>	<p>DIMENSIONS OF EXITS AND PATHS OF TRAVEL TO EXITS (BCA CLAUSE D1.6) The BCA requires paths of travel to exits and dimensions of exits to comply with BCA Clause D1.6, which states:</p> <ul style="list-style-type: none"> i. Paths of travel and exit widths not less than 1,000mm, except at doorways where they can be reduced to 750mm ii. Paths of travel and exit heights not less than 2,000mm except at doorways where they can be reduced to 1,980mm. <p>This aspect will be further assessed as the design continues to progress.</p>
12.	<p>Potential Non-Compliance</p>	<p>RISING & DESCENDING STAIRWAYS (BCA CLAUSE D2.4) The fire isolated stairways that serve the basement (or below ground levels) must not be directly connected to the fire isolated stairways serving the above ground storeys. The stairways must be separated by construction that is non-combustible and smoke proof.</p> <p>This aspect will be further assessed as the design continues to progress.</p>

# SIGNIFICANT BCA ISSUES AND COMPLIANCE MATTERS		
13.	Potential Non-Compliance	<p>RE-ENTRY FROM FIRE ISOLATED STAIRS (BCA CLAUSE D2.22) BCA Clause D2.22 requires fire isolated exits in this building not to be locked, unless unlocked at every fourth floor and activated by the fire alarm system to unlock the doors. Further detail required.</p>
PARTS D2 – CONSTRUCTION OF EXITS		
14.	Informational	<p>GENERAL – BCA PART D2 The design has not developed to a stage where the assessment of the construction of exits and the like can be determined. The further detailed design of the requirements of BCA Part D2 will be undertaken once the design has been developed by the design team to a suitable level. This includes such matters as:</p> <ul style="list-style-type: none"> - Stair construction, risers and goings - Handrails - Balustrades - Thresholds - Smoke sealing of electrical/comms enclosures - Fire isolation of fire isolated passageways - Stair landings - Doors and doorways, including door swing - Door hardware - Fire safety door signage
PARTS D3 – ACCESS & EGRESS		
15.	Informational	<p>ACCESS FOR PEOPLE WITH DISABILITIES (BCA PART D3) Access for people with disabilities is required to and throughout the building, excluding the plant and equipment and maintenance areas. All technical space and technical storage space, as well as the amenities and reception areas would require compliant access.</p> <p>General Access</p> <hr/> <p>External access to the building must be in accordance with BCA Part D3 and AS 1428.1-2001, and must be provided:</p> <ul style="list-style-type: none"> (i) from the allotment boundary at the main points of entry; and (ii) from any accessible carparking space on the allotment in accordance with D3.5; and (iii) from any adjacent and associated accessible building on the allotment; and (iv) through the principal public entrance. <p>Accessible Carparking</p> <hr/> <p>1 space for every 100 carparking spaces or part thereof. Carparking spaces must comply with AS 2890.1. Accessible carparking spaces should be not less than 3.2m wide, 5.5m long and have an unobstructed height of 2.5m. Note: Required only where carparking is provided.</p> <p>Sanitary Facilities</p> <hr/> <p>At least one (1) accessible sanitary facility constructed in accordance with AS 1428.1-2001, which must be accessible to all persons within the building.</p>

# SIGNIFICANT BCA ISSUES AND COMPLIANCE MATTERS		
		<p>Signage</p> <hr/> <p>Clear and legible Braille and tactile signage complying with BCA Specification D3.6 and incorporating the international symbol of access or deafness or other symbol as appropriate, in accordance with AS 1428.1-2001, should be provided to identify accessible features and facilities and should identify:</p> <p>(a) each:</p> <ul style="list-style-type: none"> (i) sanitary facility; and (ii) accessible space with a hearing augmentation system; and <p>(b) where an entrance or lift is not accessible, identify each accessible:</p> <ul style="list-style-type: none"> (i) entrance; and (ii) lift or bank of lifts, and <p>the path of travel from the principal public entrance to these features and facilities where their location is not apparent to the building occupant.</p>
Section E “Services and Equipment”		
16.	Informational	<p>SERVICES AND EQUIPMENT (SECTION E)</p> <p>The following services and equipment are required (or proposed) to be installed to the building to comply with Section E of the BCA:</p> <ul style="list-style-type: none"> • Fire Hydrant Coverage – in accordance with E1.3 of the BCA and AS2419.1-2005. Such hydrants must be located within the fire isolated stairs. Coverage to be fully confirmed in accordance with AS2419.1-2005. The hydrant booster shall comply with AS 2419.1-2005 and be located near the main entry and be accessible directly from the road. Hydrant pump rooms must be provided with direct access from the roadway, which can be via a fire isolated stairway. The pump room cannot open directly to the fire stair without a smoke lobby. The fire hydrant system should be design by a hydraulic engineer. • Fire Hose Reels – in accordance with BCA Clause E1.4, fire hose reels must be provided throughout the building to provide complete coverage. The system shall comply with AS 2441-2005 and should be designed by a hydraulic engineer. • Portable Fire Extinguishers – suitable for the hazards must be provided to comply with E1.6 of the BCA and AS 2444-2001 throughout the building. • Sprinkler system – In accordance with BCA Clause and Table E1.5, the building is required to have a sprinkler system throughout the entire building, installed in accordance with AS 2118.1-1999. The sprinkler valve room must be accessible direct from road or open space (via fire stair is acceptable) and be in a secure enclosure. Sprinkler booster arrangements must be accessible direct from the roadway. • Fire Control Centre – A Fire Control <i>Centre</i> is required to be provided in accordance with BCA Clause and Specification E1.8. The specific details of the fire control centre should be obtained from BCA Specification E1.8. The fire control centre must incorporate the fire indicator panel, master control panel, including fan controls and smoke controls and be a designated area for use by the fire brigade as part of their fire fighting operations. • Provision for Special Hazards – The building fire services must consider the special hazards that may be present within the building, in order to comply with BCA Clause E1.10. The fire services designers will need to demonstrate that the proposed fire services are adequate to address the special fire hazards contained within the building.

#	SIGNIFICANT BCA ISSUES AND COMPLIANCE MATTERS	
		<ul style="list-style-type: none"> • Smoke Hazard Management – the following must be provided to the building to comply with E2.2 and E2.2a of the BCA for a Class 5 & 7 building with an effective height of more than 25m: <ul style="list-style-type: none"> i. Stair pressurization to all stairs (both below and above ground) in accordance with AS 1668.1-1998; ii. Zone Smoke Control System throughout, in accordance with AS 1668.1-1998; • Exit and Emergency Lighting – shall be provided throughout the building in accordance with Part E4 of the BCA and AS 2293.1-2005. • Sound system and intercom system for emergency purposes – In accordance with BCA Clause E4.9, the emergency system must be installed throughout in accordance with AS 1670.4-2005. • At least 2 Emergency Lifts – refer to Item 17 below
17.	Informational	<p>LIFT REQUIREMENTS (BCA PART E3) –The proposed lifts should be installed in accordance with Part E3 of the BCA and AS1735.1 or .2 & AS 1735.12. So as to comply, and to provide an appropriate level of occupant safety, the following is required/recommended to be installed:</p> <ul style="list-style-type: none"> • At least 2 of the lifts are required to be emergency lifts and be contained in separate fire isolated lifts shafts, each having an FRL of not less than 120/120/120. • Have a standby power system • All lift landing doors must achieve an FRL of -/60/-. • In accordance with BCA Clause E3.4, the emergency lifts must maintain an internal floor area of no less than: <ul style="list-style-type: none"> Car depth – 2,280mm Car Width – 1,600mm Car floor/ceiling height – 2,300mm Min door height – 2,100mm Min door width – 1,300mm • Fire service controls be fitted to the lifts. • Comply with AS 1735.12 and the requirements of Clause E3.6 for people with disabilities • Warning Signs not to use lifts in the event of fire are to be placed next to all call buttons constructed of embossed/incised letters on a plate or similar, stating <ul style="list-style-type: none"> “DO NOT USE LIFTS IF THERE IS A FIRE” (in 10mm CAPITAL letters, or 8mm Sentence case text)

#		SIGNIFICANT BCA ISSUES AND COMPLIANCE MATTERS
Section F “Health & Amenity”		
18.	Informational	<p>DAMP & WEATHERPROOFING (BCA PART F1) Must be provided in accordance with BCA Part F1. Detail to be indicated as the design progresses.</p>
19.	Informational	<p>SANITARY & OTHER FACILITIES (BCA PART F2) Must be provided in accordance with BCA Part F2. Detail to be indicated as the design progresses.</p> <p><i>NB: The sanitary facilities must include both male and female toilets. As discussed above in item 15, the building will require at least 1 accessible unisex disabled facility. The number of sanitary facilities will be based on occupants numbers, which are yet to be confirmed.</i></p>
20.	Informational	<p>LIGHT & VENTILATION (PART F4 & F5) Must be provided in accordance with BCA Part F4. Detail to be indicated as the design progresses.</p> <p>Due to the limited availability of natural light and ventilation, it is anticipated that the building will have artificial light and mechanical ventilation, which must comply with BCA Part F4. Artificial light is to be provided to comply with BCA Clause F4.4 and AS 1680.0-1998. Mechanical ventilation must comply with AS 1668.2-1992.</p>
Section J “Energy Efficiency		
21.	Informational POTENTIAL ALTERNATIVE SOLUTION REQUIRED	<p>ENERGY EFFICIENCY (BCA SECTION J) (a) The building is considered a conditioned space. As such the following parts of Section J “Energy Efficiency” are applicable. Compliance should be confirmed by the designing engineers with the relevant provisions as follows:</p> <ul style="list-style-type: none"> • Part J1 – Building Fabric • Part J2 – Glazing • Part J6 – Building Sealing • Part J4 – Air Movement • Part J5 – Air-conditioning and Ventilation Systems • Part J6 – Artificial Lighting and Power • Part J7 - Hot Water Supply • Part J8 – Access for Maintenance <p>The subject design should be confirmed as complying with the above parts of Section J by the relevant disciplines architect &/or design engineers. Should any of the relevant disciplines not be confident with the application of Section J and it’s implications on the design, it is recommended that an appropriately qualified Energy Efficiency Consultant be engaged to assist with ensuring compliance.</p> <p>AE&D recommend a qualified and experienced Energy Efficient Consultant be engaged to verify compliance with Section J of the BCA. A performance based assessment (Alternative Solution) may be necessary to confirm compliance with the Energy Efficiency Requirements of Section j.</p>

4.0 CONCLUSION

This report has assessed the proposed development under the significant provisions of the BCA. The primary purpose of this report is to identify the non-compliance matters in comparison to the current Deemed-to-Satisfy provisions of the BCA, which are addressed in Section 3.0 above.

The proposed design contains several non-compliances with the deemed-to-satisfy provisions of the BCA that must be addressed via either re-design or supported by an Alternative Solution to demonstrate compliance with the Performance Requirements of the BCA. There are also certain matters for which full BCA compliance can not be fully determined due to the current level of design containing an insufficient level of detail, such matters will be addressed as the design detail continues to progress.

Subject to the comments contained in Section 3.0 of this report, the current design can comply with the performance requirements of the BCA.

Report By:



Nathan Halstead
for AE&D

MAIBS,
Grad Dip Fire Eng (VU), M Build Surv (UWS)
Accredited Certifier/PCA (Building) - Grade A1
AIBS National - Accredited Building Surveyor

Approved By:



Matt Shuter
for AE&D

MAIBS, GradDip (BuildSurv)
BASc (EnvHlth&BuildSurv)
CertAttain (BuildSurv)
Accredited Certifier/PCA (Building) - Grade A1
AIBS National - Accredited Building Surveyor