

(3512) Southern Schools Cluster (SSC)

79-81 Hoxton Park Road Liverpool

Forbes St Liverpool

Liverpool

NSW 2170 Australia



MAIL TYPE
General Correspondence

MAIL NUMBER
BM+G-GCOR-000066

REFERENCE NUMBER
ADCO Con-GCOR-000839

Re: GANSW Comment on Booster for NLPS SSD

From: Mr Antonio Canuto - Blakett Maguire + Goldsmith Pty Ltd
To: Elizabeth Creswell - ADCO CONSTRUCTIONS PTY LIMITED
Cc (5): Ms Philippa Walker - Blakett Maguire + Goldsmith Pty Ltd
James Kim - NBR SARCHITECTURE
Andrew Healy - NBR SARCHITECTURE
Mr Paulo Ruiz - NBR SARCHITECTURE
Mr Jon Kane - NBR SARCHITECTURE
Sent: Friday, 17 December 2021

MESSAGE

Hi Elizabeth,

My understand is that the only method of concealing a fire brigade booster assembly permitted by AS 2419.1 - 2005 is via a cabinet designed in accordance with this standard (50mm high signage, clear space in front of the assembly maintained, cabinet generally painted red, etc.).

There would be no opportunity to provide any further shielding or screening as this would obstruct the clear space between the booster and the hardstand (the road). Further noting that providing any form of landscaping in front of the booster would not meet FRNSW's operational requirements (based on past experience of having to concrete areas in front of booster assemblies where FRNSW has picked this up as an issue on site).

Note that this is more of a fire services designer question so they should also review and provide any further comment if necessary.

Regards,

Antonio Canuto

Senior Building Surveyor



M: 0472 722 160 T: 02 9211 7777 E: antonio@bplusg.com.au W: bplusg.com.au L: Connect on LinkedIn



This e-mail and attachments (if any) is intended only for the addressee(s) and is subject to copyright. This e-mail contains information which may be confidential or privileged. If you are not the intended recipient please advise the sender by return e-mail, do not use, or disclose the contents and delete message and any attachments from your system. Unless specifically stated, this e-mail does not constitute formal advice or commitment by the sender or Blakett Maguire + Goldsmith Pty Ltd or any of its subsidiaries.


210557

From: E Creswell
Sent: 17/12/2021 10:49:37 AM AEDT (GMT +11:00)
To: Antonio Canuto, Bree Jachin, Philippa Walker
Cc: Andrew Healy, Jon Kane, James Kim, Paulo Ruiz
Mail Number: ADCO Con-GCOR-000839
Subject: GANSW Comment on Booster for NLPS SSD

Hi Antonio,

We have received the below comment on the NLPS SSD from the Government Architect's Office.

the booster near the main entrance, should be concealed to improve the amenity of this public zone.	S
---	---

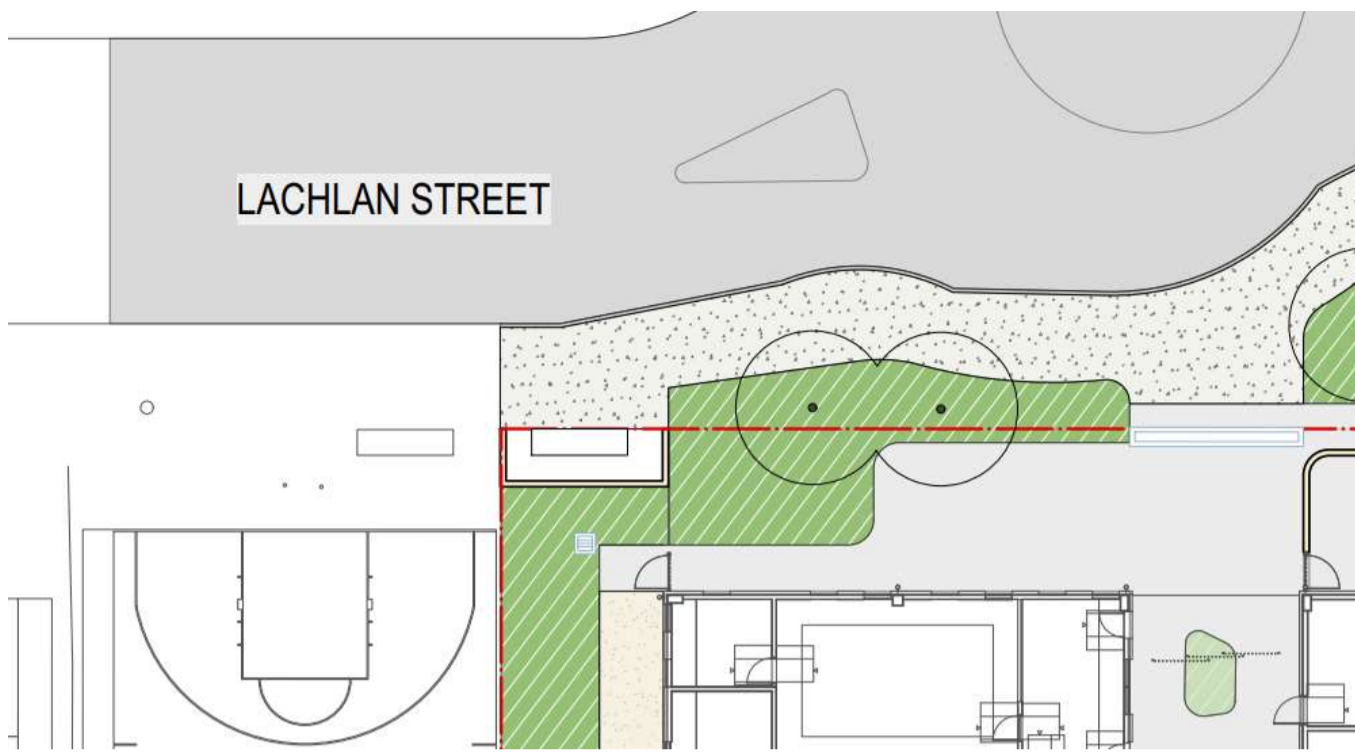

Are you able to provide a very brief statement today explaining to GANSW that, from a compliance perspective, we cannot screen the front of the booster?

Thanks

Elizabeth Creswell

Senior Design Manager

ADCO Constructions Pty Ltd

Level 2, 7-9 West Street, North Sydney NSW 2060

T 02 8437 5000 **M** 0418 592 825

W www.adcoconstruct.com.au



**SYDNEY
MELBOURNE
BRISBANE
GOLD COAST
PERTH
PEOPLE WHO BUILD**