

Civil SSDA - Flood Assessment & Stormwater Management Report

**Lang Walker AO Medical Research
Building - Macarthur**

Prepared for BVN / 11 May 2022

201940CAAA

Response to EES Comments.....	3
Response to Campbelltown Council Comments	5
1.0 Introduction	6
1.1 Project Objectives and Methodology	6
1.2 Site.....	7
2.0 Proposed Development	8
2.1 Reference Documents	10
3.0 Available Data	11
3.1 Previous Flood Studies.....	11
3.2 Survey Data.....	12
4.0 Hydraulic Model.....	12
4.1 2D Model Domain	12
4.2 1D Model Domain	13
4.3 Topography	13
4.4 Boundary Conditions	13
4.4.1 Model Inflows	13
4.4.2 Downstream boundary	13
4.5 Building Footprints.....	13
4.6 Hydraulic Roughness and Losses	13
5.0 Flood model results	15
5.1 Existing Conditions	15
5.2 Model Validation	22
5.3 Proposed Conditions	24
6.0 Compliance with Flood Planning Requirements	31
6.1 Flood Impacts.....	35
7.0 Site Stormwater Management Plan.....	37
7.1 Stormwater Quantity Management.....	37
7.1.1 DRAINS Model Results	38
7.2 Stormwater Quality Management	39
7.2.1 MUSIC Model Results	40
8.0 Construction Phase Stormwater Management	41
9.0 Conclusions and Recommendations	42
Attachment A	43

Response to EES Comments

The following has been prepared in response to the comments raised by Environment, Energy and Science Group (EES) with regards to the Flood Modelling and Assessment completed by TTW for the proposed development (refer Appendix A).

The EES comments are outlined below, and references have been provided to sections within this report where the comments have been sufficiently addressed.

EES Comments	TTW Response
EES has concerns regarding the flood model accuracy. The proposed conditions flood mapping shows flooding inside the building footprint, most notably in Figure 19 of the Civil SSDA – Flood Assessment and Stormwater Management Report Lang Walker AO Medical Research Building – Macarthur (the flood report). The building should be blocked out in the model and no flooding should be present within the building footprint. If the building is not blocked out, impacts will not be properly assessed.	- The proposed building now shown as blocked out in the images as they were in the model. - No flooding is present across the proposed building footprint. (Refer Section 4.5 and Figure 16 & Figure 19). - Figures 17,18 and 19 show flooding below Ground Level, toward the western side of the building, where there this level overhangs Lower Ground Levels 01 and 02. The flooding in this area remains outside the building footprint. The flooding at Lower Ground Floor 01 and 02 are shown in figure 20 and 21 respectively. - Images have been updated to include the building outlines above and below respective floor levels.
Clarification is also required regarding proposed floor levels and relevant flood levels. Section 5.3.1 of the flood report states that there is insufficient freeboard. It is also unclear where the different building levels are because the only description is "Lower Ground 02" for two separate levels. Levels for all relevant ground floors and associated flood levels need to be provided, for example Level 00 (Village Green). Ideally this should be provided in a table with a description of location and the point location should be marked on a flood map.	- Report has been updated to provide more clarification with regards to floor levels and associated flood levels. (Refer Section 6.0 and Figure 22, Figure 23 & Figure 24) - A table with Flood Planning Levels has been included in Section 6.0 - All proposed floor levels are above the design flood planning levels for the 1%AEP storm event plus 300mm freeboard as per Council's flood planning requirements in Council's DCP.
Further detail is required on flood impacts. The Flood Impact Assessment Map for the 1% AEP flood event does not allow assessment of significant impacts because a band of -20 mm to +20 mm has been used. No significant impact is typically considered to be within -10 to +10 mm. The mapping should be revised accordingly. Further, due to the potentially sensitive nature of adjacent land uses (hospital buildings), impact assessment is also required for the PMF event and a corresponding map should be provided.	- Flood impact assessment map with a band of 10mm to +10mm is now shown in Figure 25. The impact map shows no adverse offsite flood impacts beyond ±10mm anywhere beyond the development boundary in the 1% AEP flood event (Refer 6.1). - Flood impact assessment map for the PMF event is now provided in Figure 26. The development does not have any detrimental effect on adjacent buildings during the PMF event.

EES Comments	TTW Response
Section 5.3.1 Flood Levels Adjacent to the Proposed Building's Openings Received architectural plans indicate that the proposed entry level to Lower Ground 02 is 76.10m AHD which is 0.23m above the 1%AEP flood level of 75.88m AHD and 4mm above the adjacent PMF flood level of 76.06m AHD.	Additional Figure 22, Figure 23 & Figure 24 have been provided to confirm that Council's flood planning requirements have been met for all building openings. Refer Section 6.0 of the report for more details.
The Flood report establishes that the proposed Finished Floor Level for the Lower Ground 02 is 76.55m AHD which is above the minimum required FFL of 76.38m AHD (1% AEP flood level of 75.88m AHD plus 500mm freeboard).	Additional Figure 22, Figure 23 & Figure 24 have been provided to confirm that Council's flood planning requirements have been met for all building openings. Refer Section 6.0 of the report for more details.

Response to Campbelltown Council Comments

Campbelltown Council Comments	TTW Response
The site is impacted by overland flow from the car park at the hospital. Council discussed this matter with the proponent's engineers previously, and it was indicated that an overland flow path to the north of the proposed building would be included in the design. This flow path is not evident on the plans, However it is needed and should collect the overland flow and manage its discharge to the pipe drainage system in Parkside Crescent. Overland flows over the footpath, or discharge to the road surface are not permissible.	- The existing overland flow path for the upstream catchment (including the existing car park east of the site) is along the southern site boundary which drains onto the Parkside Crescent as shown in Figure 8 and presented clearly in Figure A1 of Attachment A. - The existing overland flow path has been maintained in the proposed development along the southern site boundary (see Figure 16 and Figure A2 of Attachment A). - The proposed pipe drainage system for the site is designed to cater for storm events of up to 5% AEP (minor event) as per the ARR minor and major drainage system requirements. - Minor storm event for the site is identified based on Table 4.5 of the Campbelltown Council DCP (2015). - The existing pipe network has been assumed to be fully blocked in the 1% AEP and PMF events. This approach provides more conservative results as opposed to the condition where the additional drainage capacity of the pipes is considered. - The existing stormwater pipe network in Parkside Crescent does not have capacity to convey the existing overland flows in major flood events e.g., a 1% AEP flood or greater. - The proposed development does not have any adverse impact on the existing flood levels or overland flow paths outside the development area, including the Parkside Crescent and the footpath. - The Proposed condition slightly reduces the 1% AEP existing overland flow that runs along the southern boundary, refer to Figure 25.

1.0 Introduction

Taylor Thomson Whitting (NSW) Pty. Limited has been engaged by BVN to prepare a Civil SSDA - Flood Assessment & Stormwater Management Report in accordance with the requirements of the Secretary's Environmental Assessment Requirements (SEARs), and in support of the State Significant Development (SSD – 17491477) for the proposed development at Parkside Crescent, Campbelltown NSW 2560 (the site).

1.1 Project Objectives and Methodology

The objective of this report is to address the flooding and stormwater management requirements of the SEARs (key issues 15 & 16) as follows:

- Identify any flood risk on-site in consultation with Council and having regard to the most recent flood studies for the development area and the potential effects of climate change and an increase in rainfall intensity.
- Assess the impacts of the development, including any changes to flood risk onsite or off-site, and detail design solutions to mitigate flood risk where required.
- Provide a preliminary stormwater management plan for the development that:
 - is prepared by a suitably qualified person in consultation with Council and any other relevant drainage authority.
 - details the proposed drainage design for the site including on-site detention facilities, water quality measures and the nominated discharge point.
 - demonstrates compliance with Council or other drainage authority requirements.
- Provide stormwater plans detailing the proposed methods of drainage without impacting on the downstream properties.
- Where drainage infrastructure works are required that would be handed over to Council, provide full hydraulic details and detailed plans and specifications of 10 proposed works that have been prepared in consultation with Council and comply with Council's relevant standards

TTW methodology in response to above matters is described as follows:

- Prepare a hydraulic model (TUFLOW) for the site under existing and proposed conditions.
- Determine site flood characteristics for the 1% annual exceedance probability (AEP) flood and probable maximum flood (PMF) events.
- Prepare relevant flood maps including flood extents, depths, levels, velocities, hazards and impacts.
- Comment on flood characteristics and model outcomes in existing and proposed conditions.
- Provide a stormwater quantity management plan and a water sensitive urban design (WSUD) consistent with the requirements of Campbelltown Council.

1.2 Site

The site is located at Parkside Crescent, Campbelltown NSW 2560 (an area within Lot 6 DP1058047) and is bounded by Parkside Crescent to the west and Macarthur Clinical School to the south. The site's general location is shown in Figure 1.

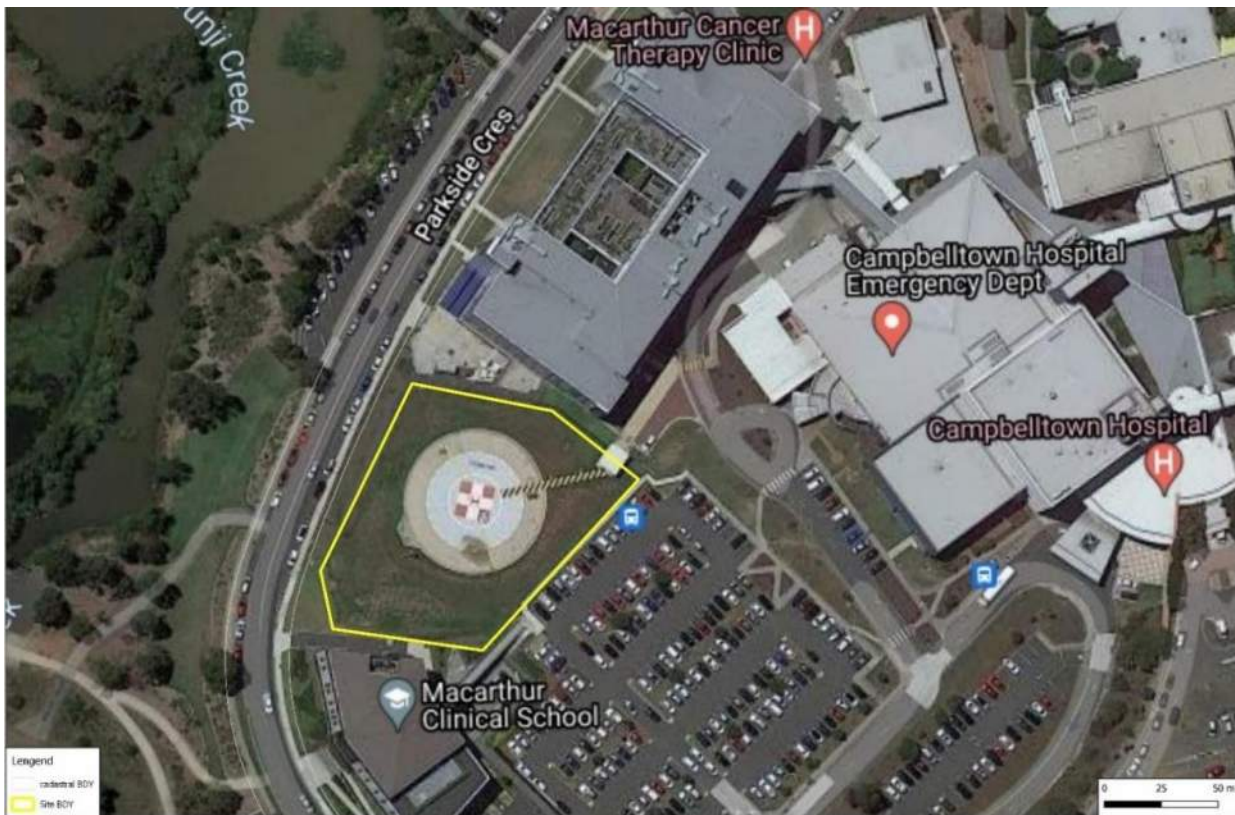


Figure 1 - Site Location and Surrounding area (Google Map)

The site area is 3384 m² (Approx.) and typically grades towards Parkside Crescent with highest levels of 83m AHD at north-eastern boundary, falling to 77m AHD towards the south-western boundary.

The site falls within the Campbelltown Council LGA and zoned as SP2 (infrastructure) based on Campbelltown City Council LEP (2015).

The site levels have been raised to 82m AHD along the western boundary and is currently used as helicopter pad. The land is generally covered with grass including an existing concrete helipad.

2.0 Proposed Development

The proposed development is a medical research centre and comprised of a 3-storey building including a ground floor and a basement.

Figure 2, Figure 3 and Figure 4 show the proposed architectural plan provided by BVN.



Figure 2 – Proposed Architectural Plan (Ground Floor) – BVN

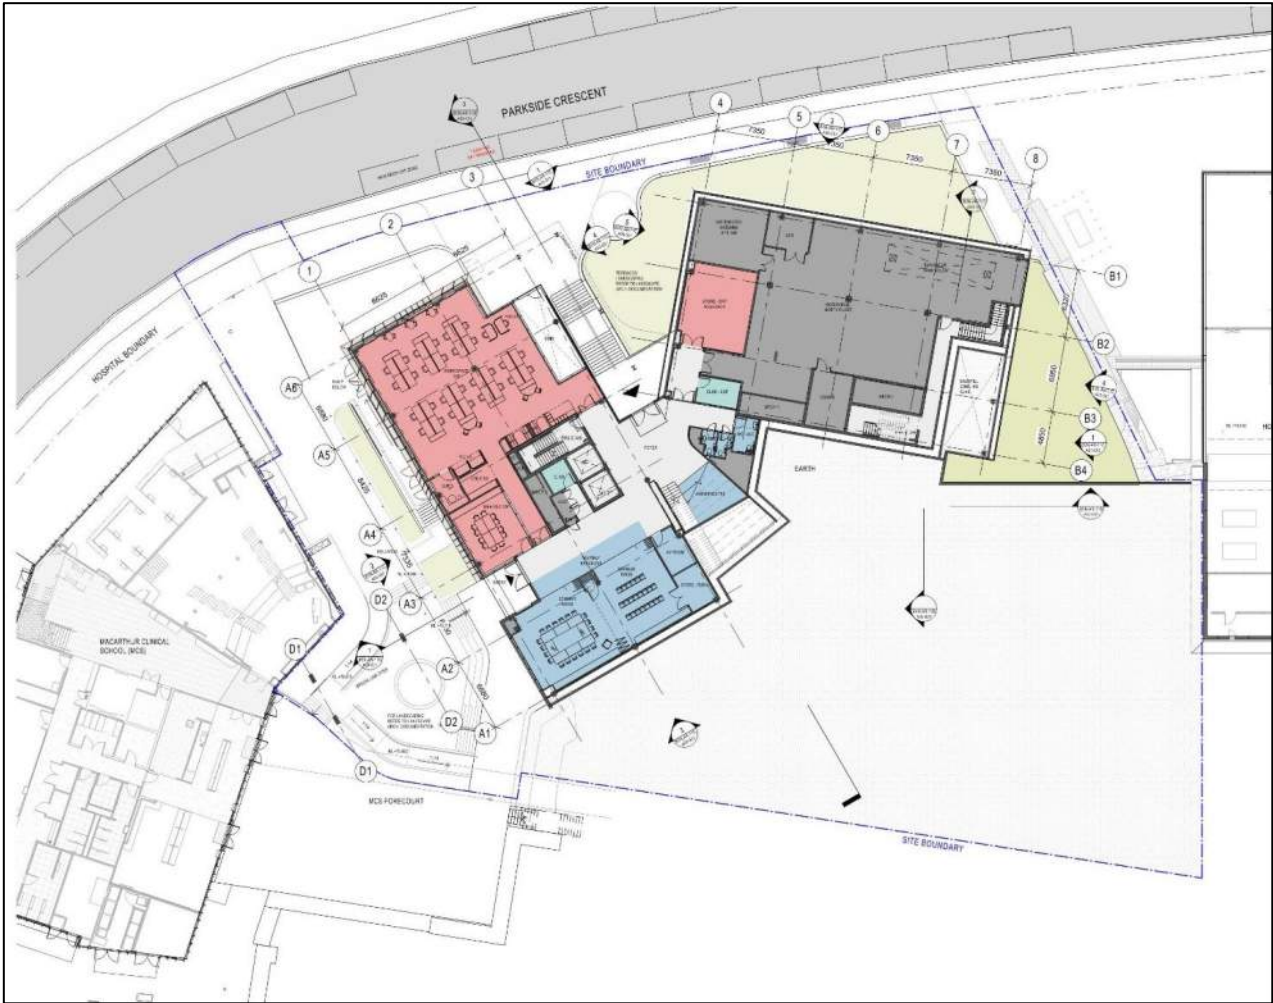


Figure 3 – Proposed Architectural Plan (Lower Ground Floor 01) – BVN

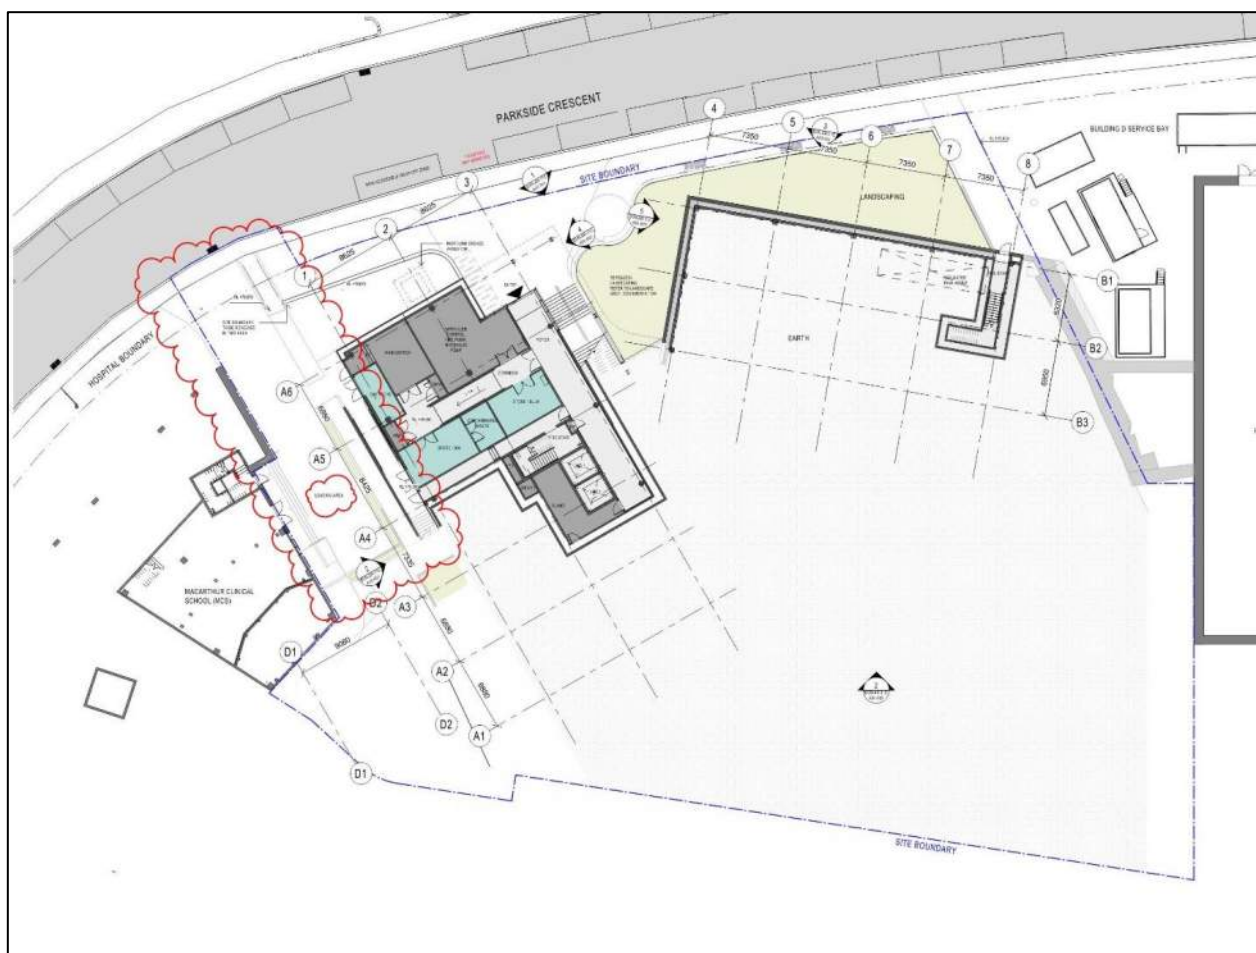


Figure 4 – Proposed Architectural Plan (Lower Ground Floor 02) – BVN

2.1 Reference Documents

This report has been prepared in accordance with the following guidelines and policies:

- Australian Rainfall and Runoff Data (2019) with AR&R (2016) rainfall datasets sourced from BoM
- Australian Rainfall and Runoff (2016) – A Guide to Flood Estimation.
- Campbelltown Development Control Plan (DCP, 2015)
- Campbelltown Local Environment Plan (LEP, 2015)
- Engineering Design for Development, Volume 2, Campbelltown DCP (2009)
- NSW Department of Infrastructure, Planning and Natural Resources (2005), Floodplain Development Manual.

3.0 Available Data

This flood study uses topographic data and flood related data obtained from a number of sources. The origin and types of information underpinning the assumptions used in this study are presented below.

3.1 Previous Flood Studies

The site falls within Bow Bowing Creek catchment. Molino Stewart Pty Ltd conducted a flood risk management study for this catchment on behalf of the Campbelltown City Council and summarised the outcomes in Bow Bowing Bunbury Curran Creek Strategic Floodplain Risk Management Study and Plan Report (August 2018).

Catchment Simulation Solutions (CSS) have also prepared a flood modelling and assessment for Campbelltown Hospital that covers the site and has been approved by the Campbelltown Council.

Despite enquiries made to receive the latest prepared flood model for the site, TTW was not able to acquire the Council's TUFLOW model. TTW However, have received the CSS flood modelling results for the site proximity subject to a request made through the Campbelltown Council. The provided data includes the CSS flood modelling results for the 1% AEP and PMF events are shown in Figure 5 and Figure 6 respectively.

Based on the CSS flood results, the site is primarily flood free during the 1% AEP flood event as well as the PMF.



Figure 5 - Received flood Results (CSS) - 1% AEP Flood Event

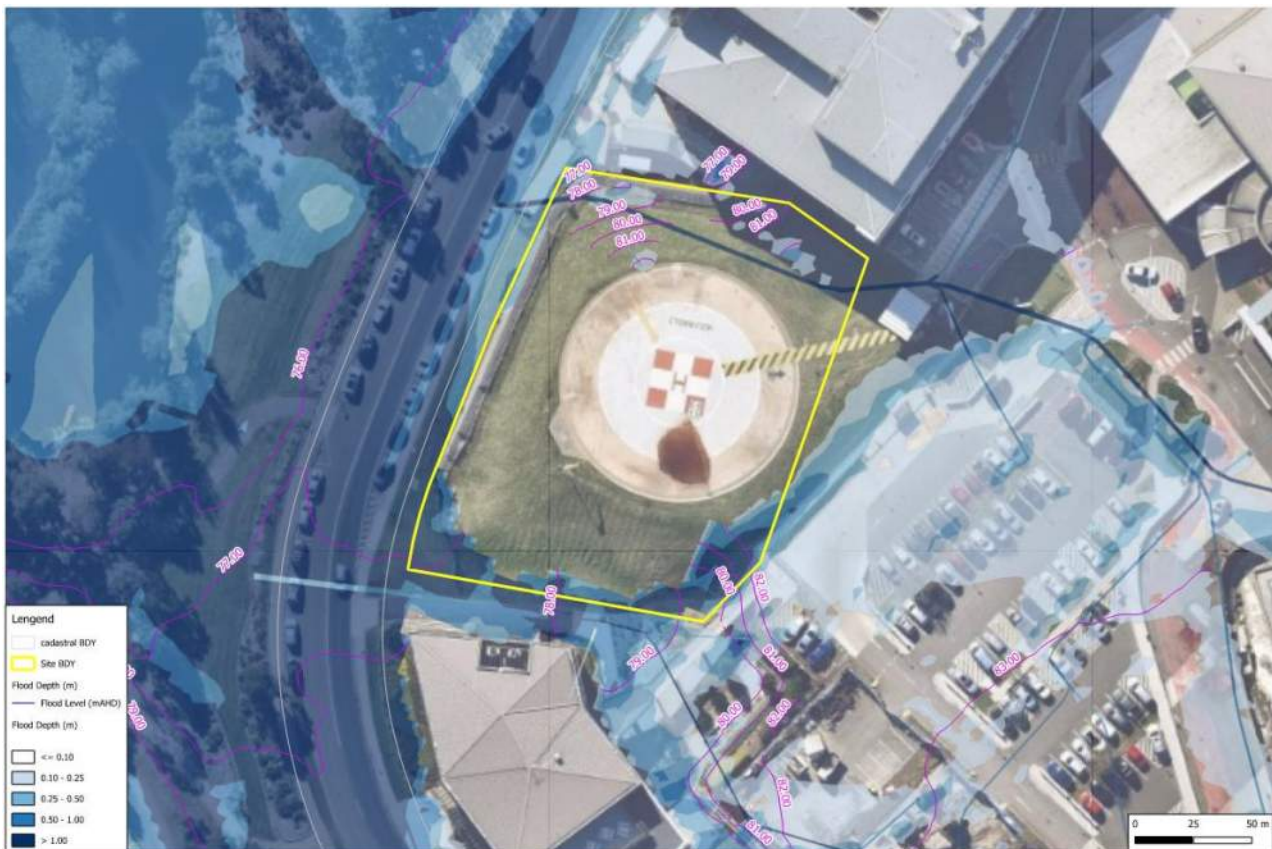


Figure 6 - Received flood Results (CSS) - PMF Flood Event

3.2 Survey Data

Survey information adopted for this study has been collated from the following sources:

- One metre resolution Digital Elevation Model (DEM), ALS.
- Site survey data provided by the LTS Lockley (dated 23/08/2017).
- GIS layers of cadastre and satellite imagery provided by the NSW LPI.

4.0 Hydraulic Model

The TUFLOW hydraulic model with direct rainfall method was used to determine flood extents, levels, depths, velocities, and hydraulic hazard during the critical 1% AEP and PMF events for the site in existing and proposed conditions.

4.1 2D Model Domain

The site upstream catchment delineated using Lidar data. Model boundary extents were generally placed along catchment ridgelines and / or connecting catchment high points surrounding the study area. Total model domain area is 299 ha (approx.) as shown in Figure 7. A square grid was utilised for this study, with the grid size of 1m x 1m.

The grid cell size of 2m² is sufficiently fine to appropriately represent the variations in topography and land use within the study area. It should be noted that TUFLOW samples elevation points at the cell centres, mid sides and corners, therefore a 1m² cell size results in surface elevations being sampled every 0.5m.

4.2 1D Model Domain

There are a series of interconnected detention basins along the Birunji Creek within the catchment area which are part of the Campbelltown LGA flood management plan to provide flood storage and attenuate flood levels. Floodwaters conveyed through those basins via existing culverts and drainage pipes.

The existing main culverts and drainage pipes along the Birunji Creek were modelled as 1D network to allow water conveyance through the basins to downstream. The size of 1D network throughout the basins were estimated and later calibrated based on the flood results received from CSS.

4.3 Topography

A 1m grid Digital Elevation Model (DEM) generated for the catchment using Lidar data and merged with the site survey DTM triangles data to increase the accuracy of existing model surface for the site as well as for a section of Parkside Crescent adjacent to the site.

4.4 Boundary Conditions

4.4.1 Model Inflows

A direct rainfall boundary condition was applied to the model domain. The 1% AEP Design rainfall intensity-frequency-duration (IFD) data, derived from BoM website ARR (2019) for the upstream catchment.

4.4.2 Downstream boundary

Downstream boundary was defined approximately 500m north of the site along Kellicar Road. Stage-discharge (water level versus flowrate) curves were adopted as the downstream boundary conditions. The stage-discharge relationship was generated by TUFLOW by specifying downstream boundary slopes.

4.5 Building Footprints

The footprints of buildings surrounding critical flow paths are modelled as blocked elements within the 2D domain. Model Cells within the building footprints were deactivated to prevent floodwaters entering the buildings. The existing building footprints were determined using available survey and aerial photographs.

The proposed building footprint was based on the latest architectural plans provided by BVN.

4.6 Hydraulic Roughness and Losses

The hydraulic roughness of a material is an estimate of the resistance to flow and energy loss due to friction between a surface and the flowing water. A higher hydraulic roughness indicates more resistance to the flow. Roughness in TUFLOW is modelled using the Manning's (n) roughness co-efficient.

Manning's zones based on Nearthmaps aerial photography of the study area with roughness coefficients adopted as per Table 1.

Table 1 Adopted roughness parameters

Land use category	Manning's 'n'
Residential land	0.20
Road and car park areas	0.02
Grass lands and parks	0.045
Bushlands	0.08

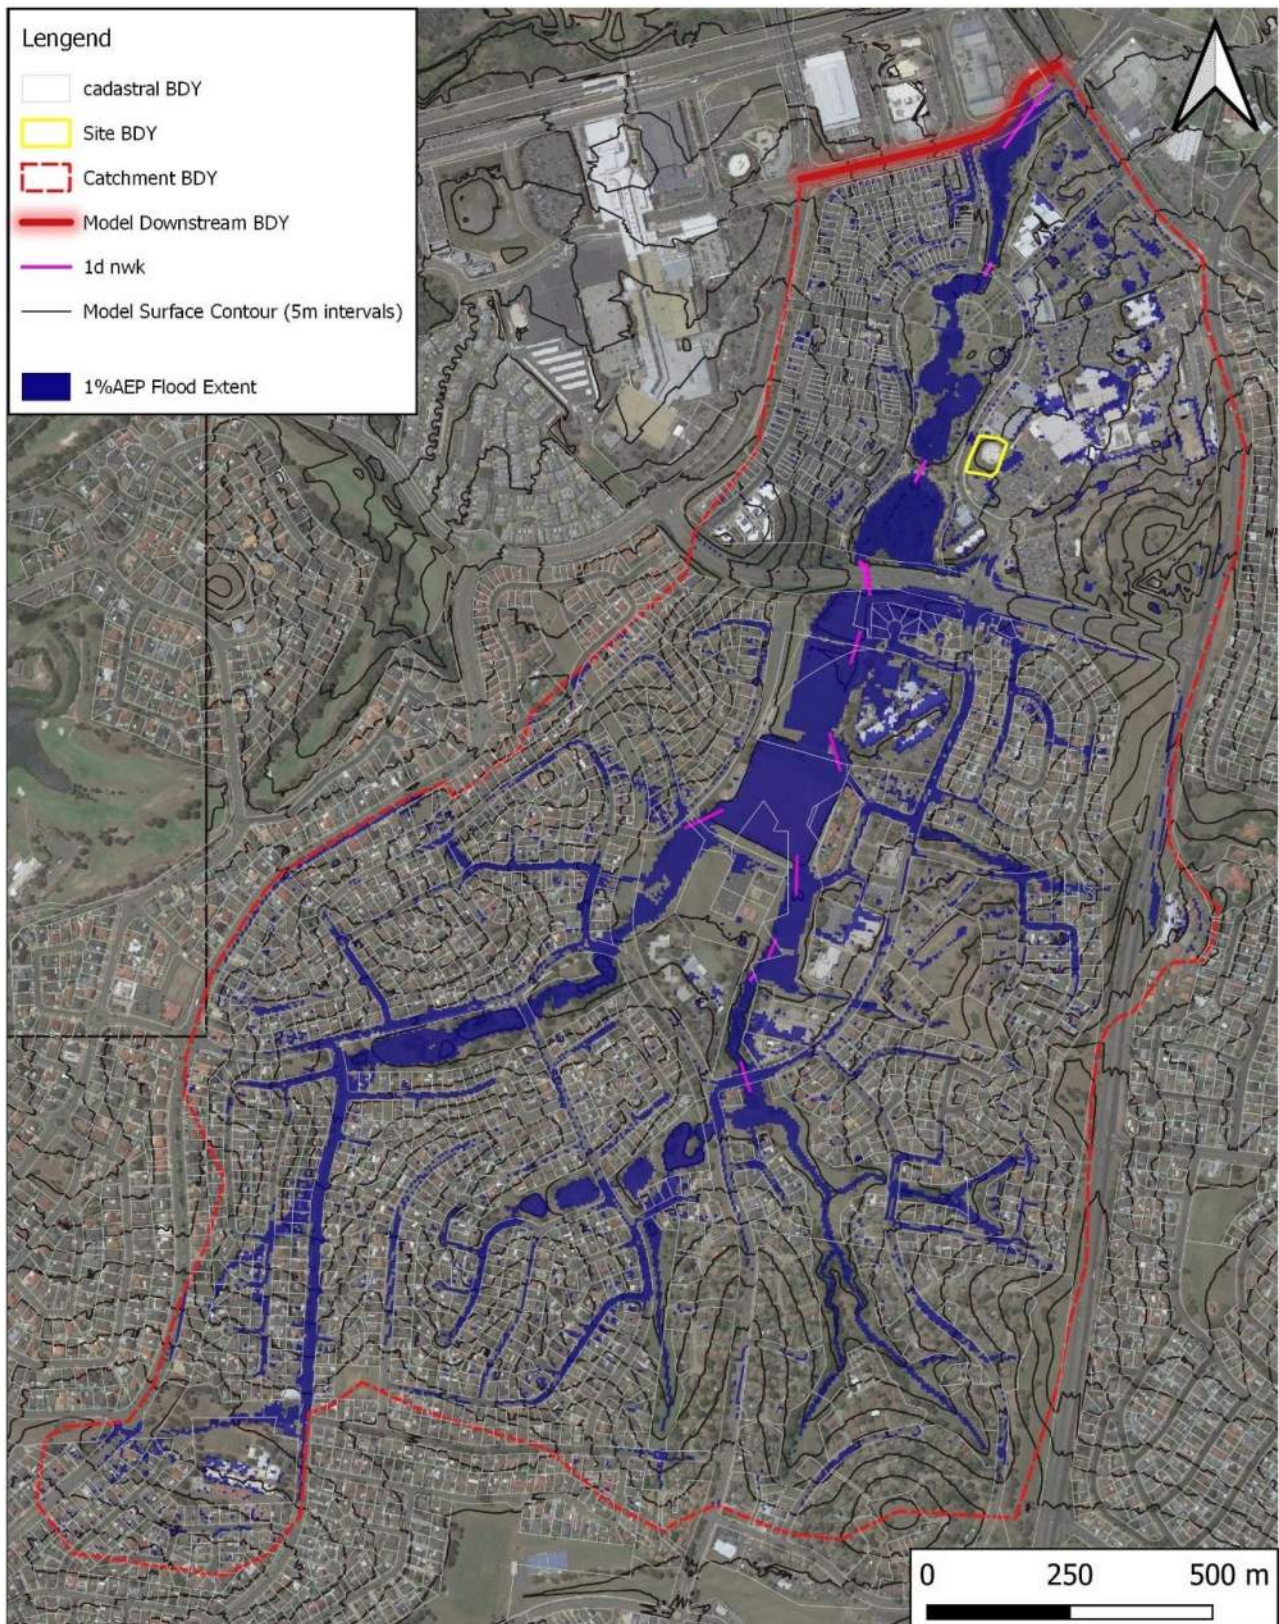


Figure 7 – TUFLOW Model 1D & 2D Domains - 1% AEP Flood Extent

5.0 Flood model results

The model was run for a range of 1% AEP flood durations as well as for a range of PMF durations from 30 minutes to 360 minutes to determine the site critical storm durations. The critical 1% AEP and PMF storm durations for the site were determined to be 180 minutes and 60 minutes, respectively.

The site flood conditions during the critical 1% AEP and PMF events in both existing and proposed site conditions are explained through the following sections and offsite flood impacts due to the proposed development are further investigated.

5.1 Existing Conditions

The peak flood levels depths, velocities, and hazards in the critical duration 1% AEP event for existing site conditions are shown in Figure 8, Figure 9 and Figure 10 respectively.

Flood results confirm that the site is generally flood free during both 1% AEP and PMF events and upstream overland flows are majorly contained within the Park Central Basin.

There are only localised overland flows through Parkside Crescent as well as on the existing car park towards the western site boundary. Minor overland flows around the site are very shallow (typical depths of less than 100mm) in the 1% AEP and are of low hazard based on NSW provisional hazard categories.

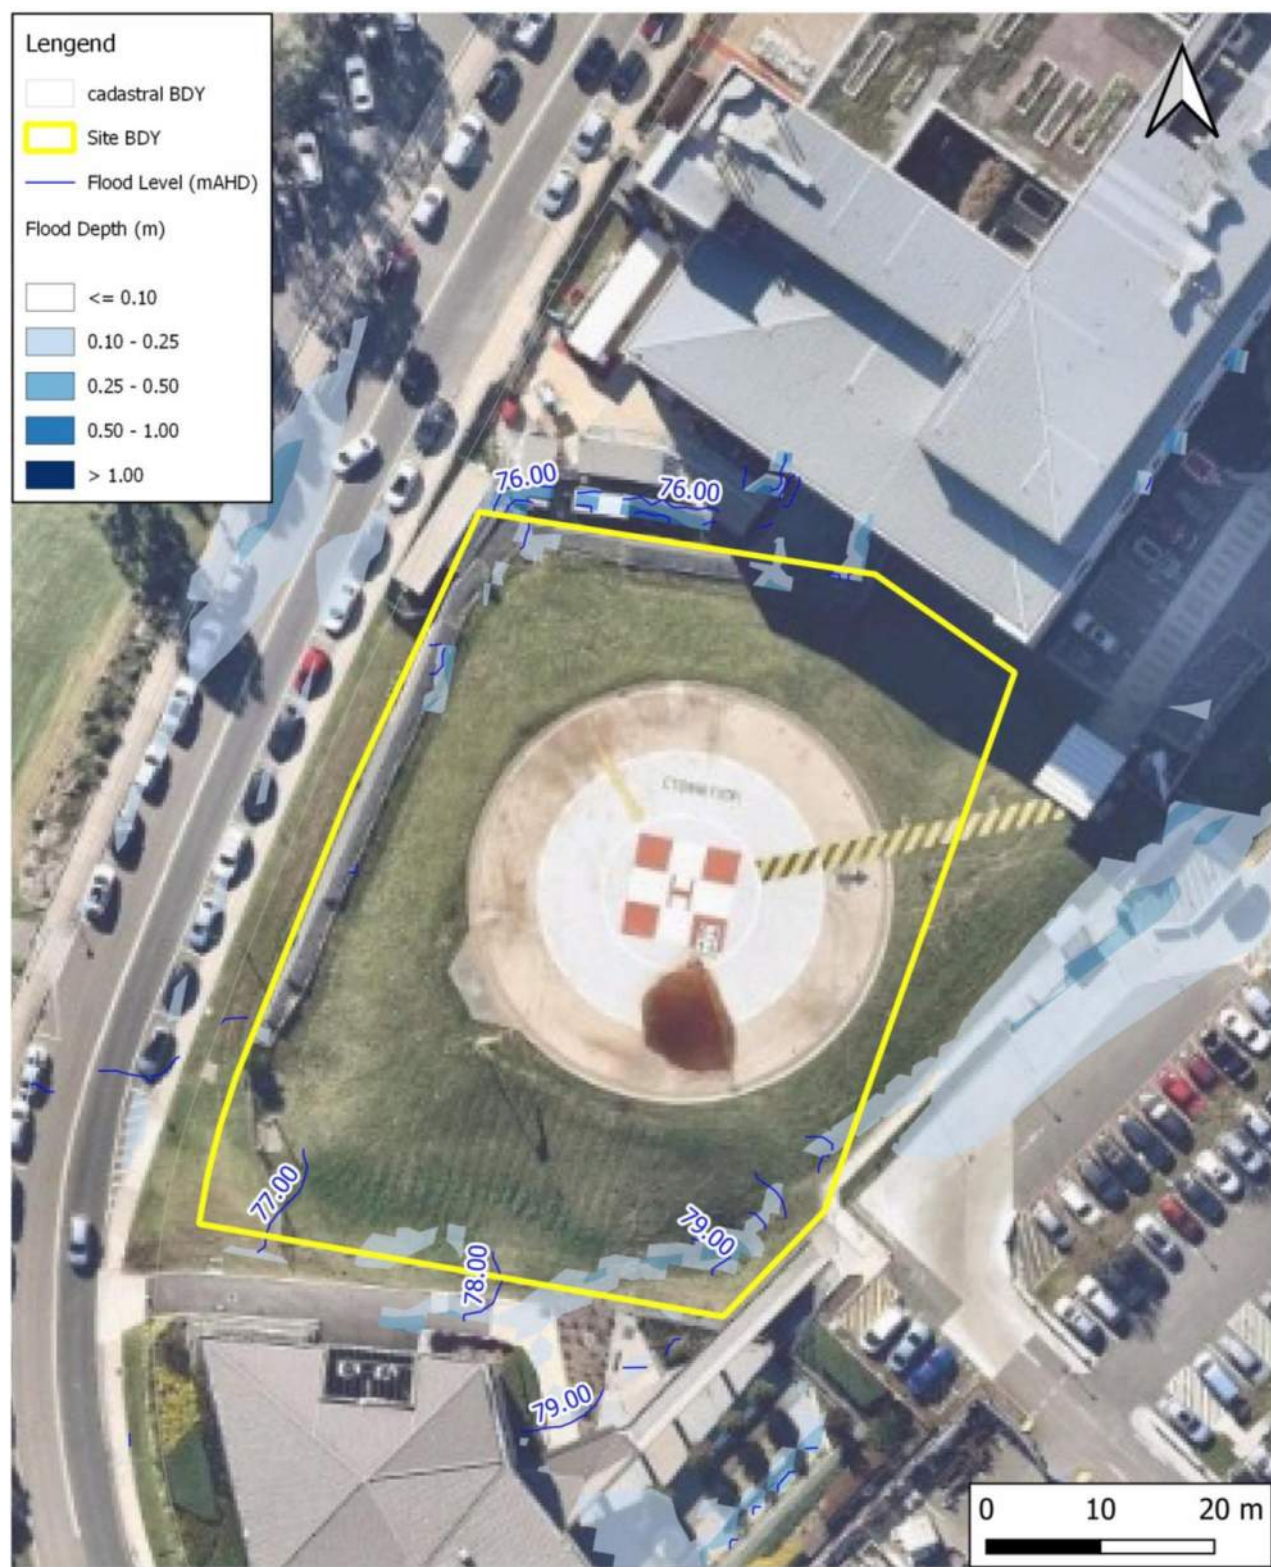


Figure 8 - Flood Levels & Depths (1% AEP) – Existing Conditions

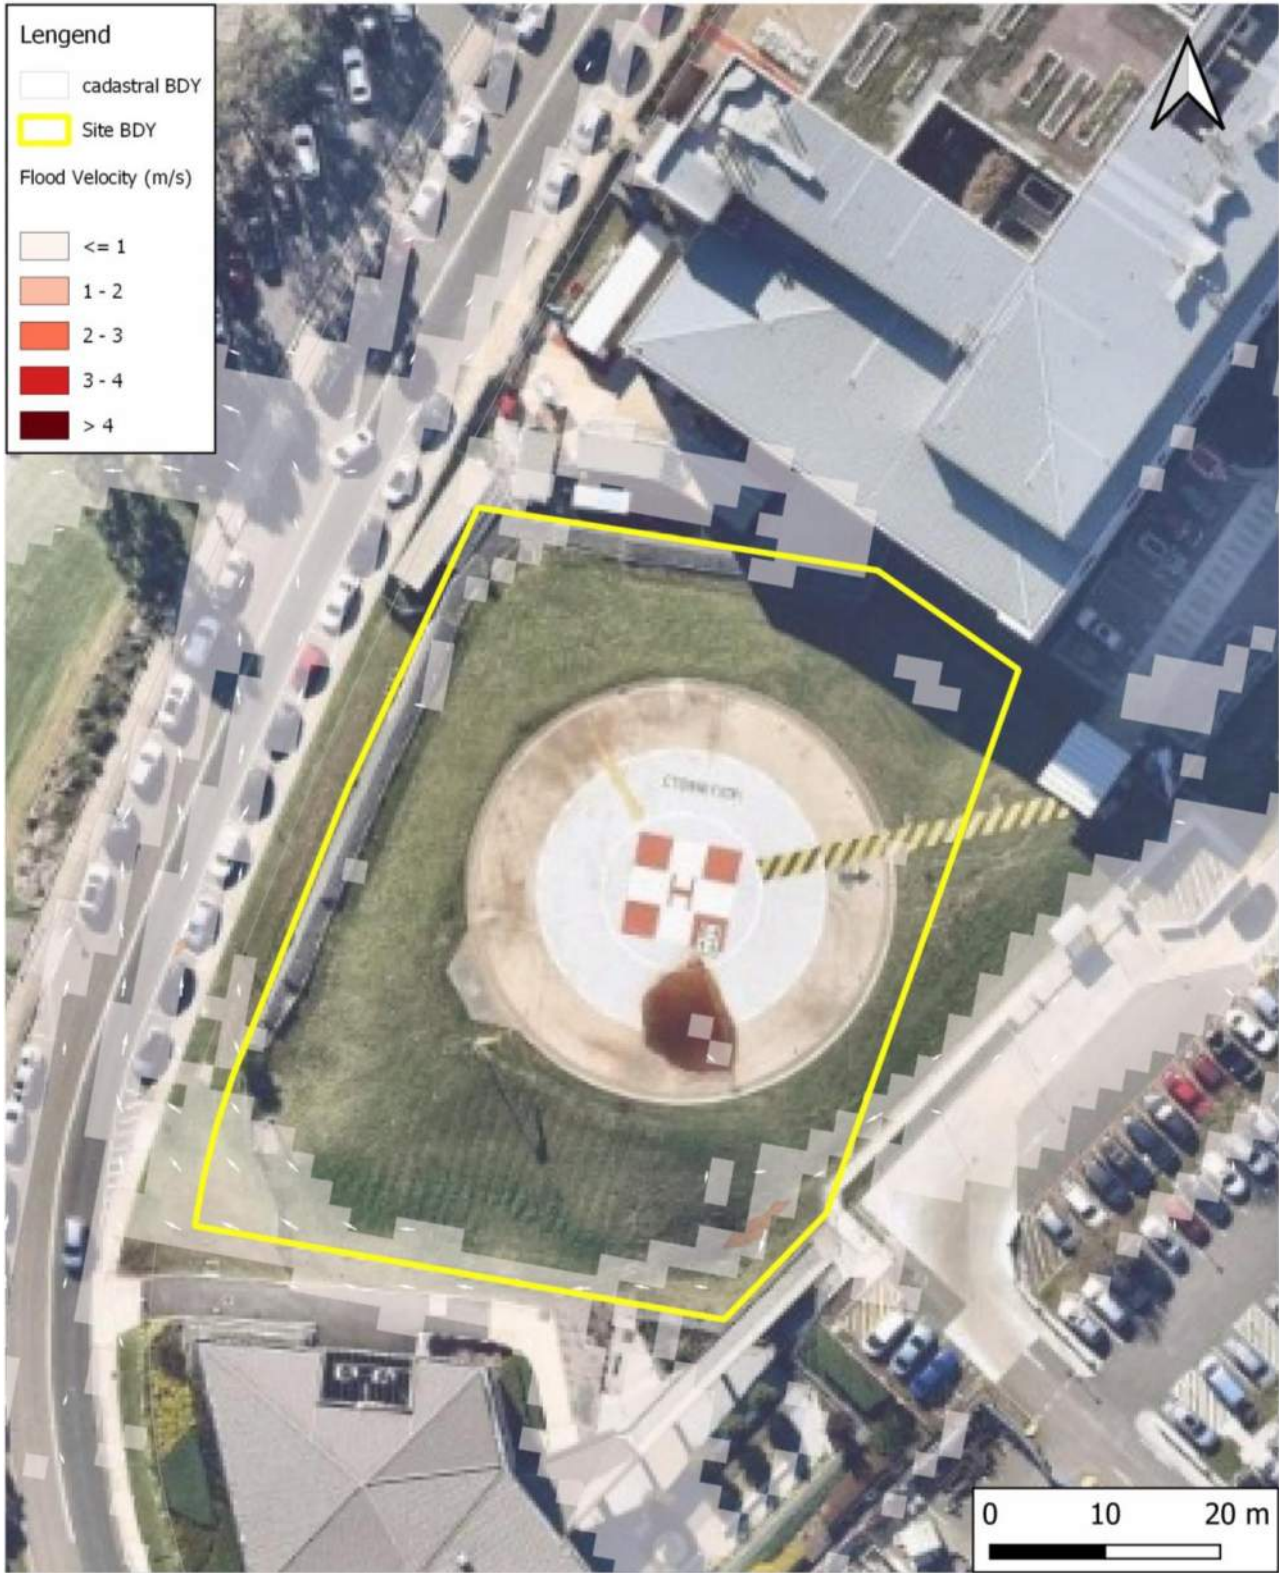


Figure 9 - Flood Velocities (1% AEP) – Existing Conditions

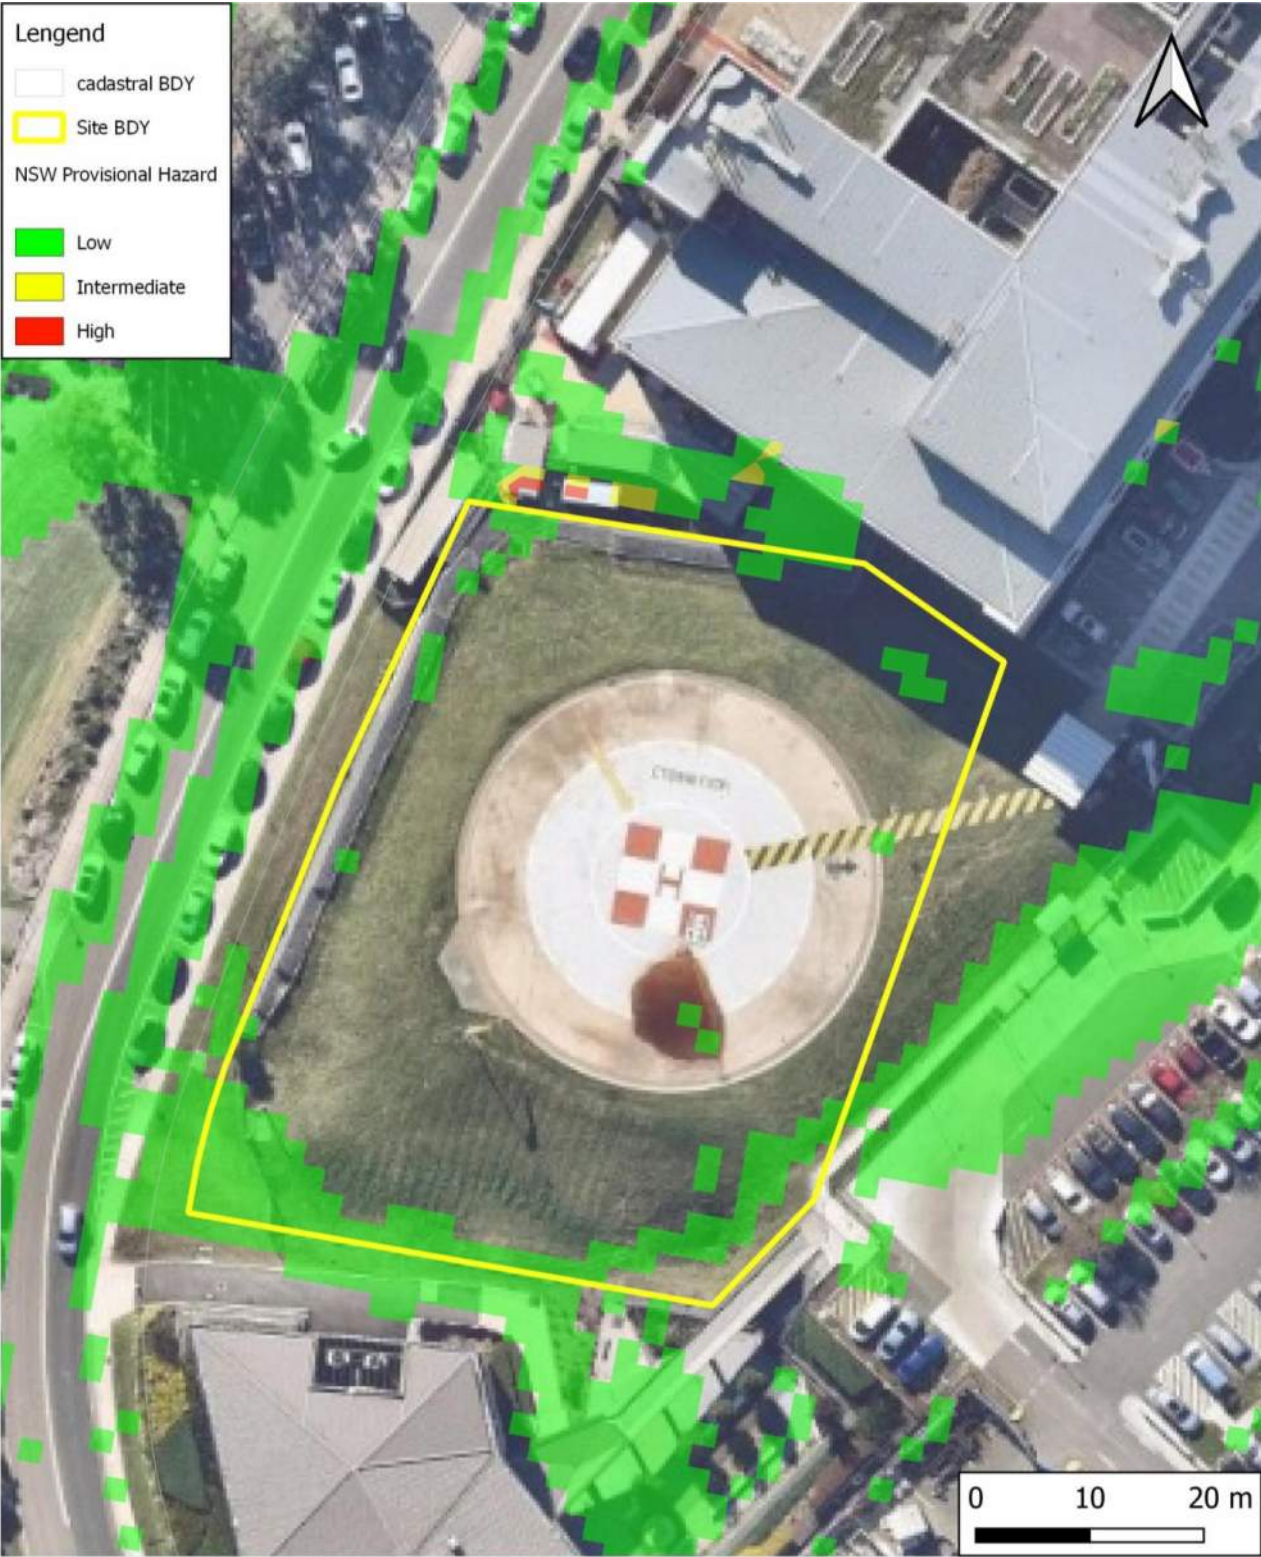


Figure 10 - Provisional Flood Hazards (1% AEP) – Existing Conditions

Flood depths during the PMF event though, raise up to the level of 77m AHD (750mm deep) on Parkside Crescent adjacent to the site and are of high hazard with flood velocities varying from 0.5m/s to 4.5m/s.

The site levels in existing conditions are approximately 6 metres higher than Parkside Crescent therefore, floodwaters along the western site boundary are contained within the Parkside Crescent during the PMF event.

The peak flood levels depths, velocities and hazards in the critical duration PMF event for existing site conditions are shown in Figure 11, Figure 12 and Figure 13 respectively.



Figure 11 - Flood Levels & Depths (PMF) – Existing Conditions

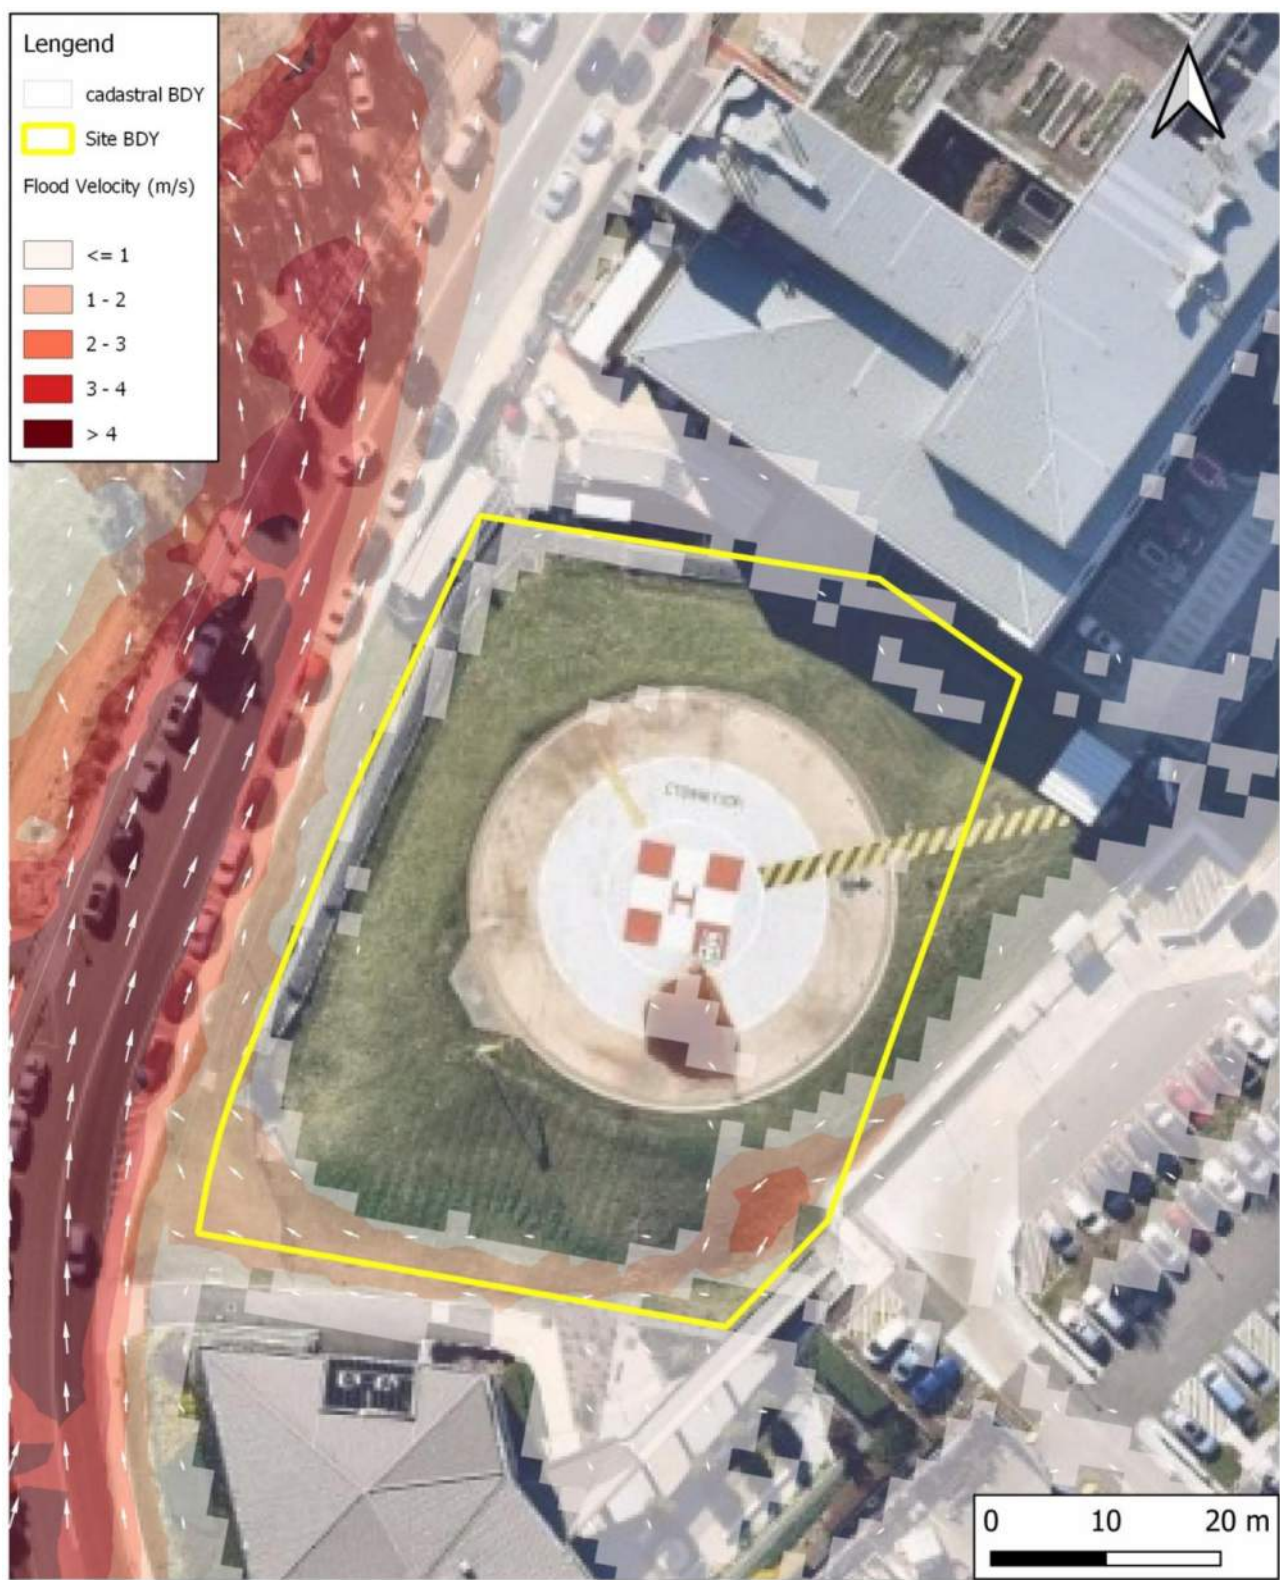


Figure 12 - Flood Velocities (PMF) – Existing Conditions

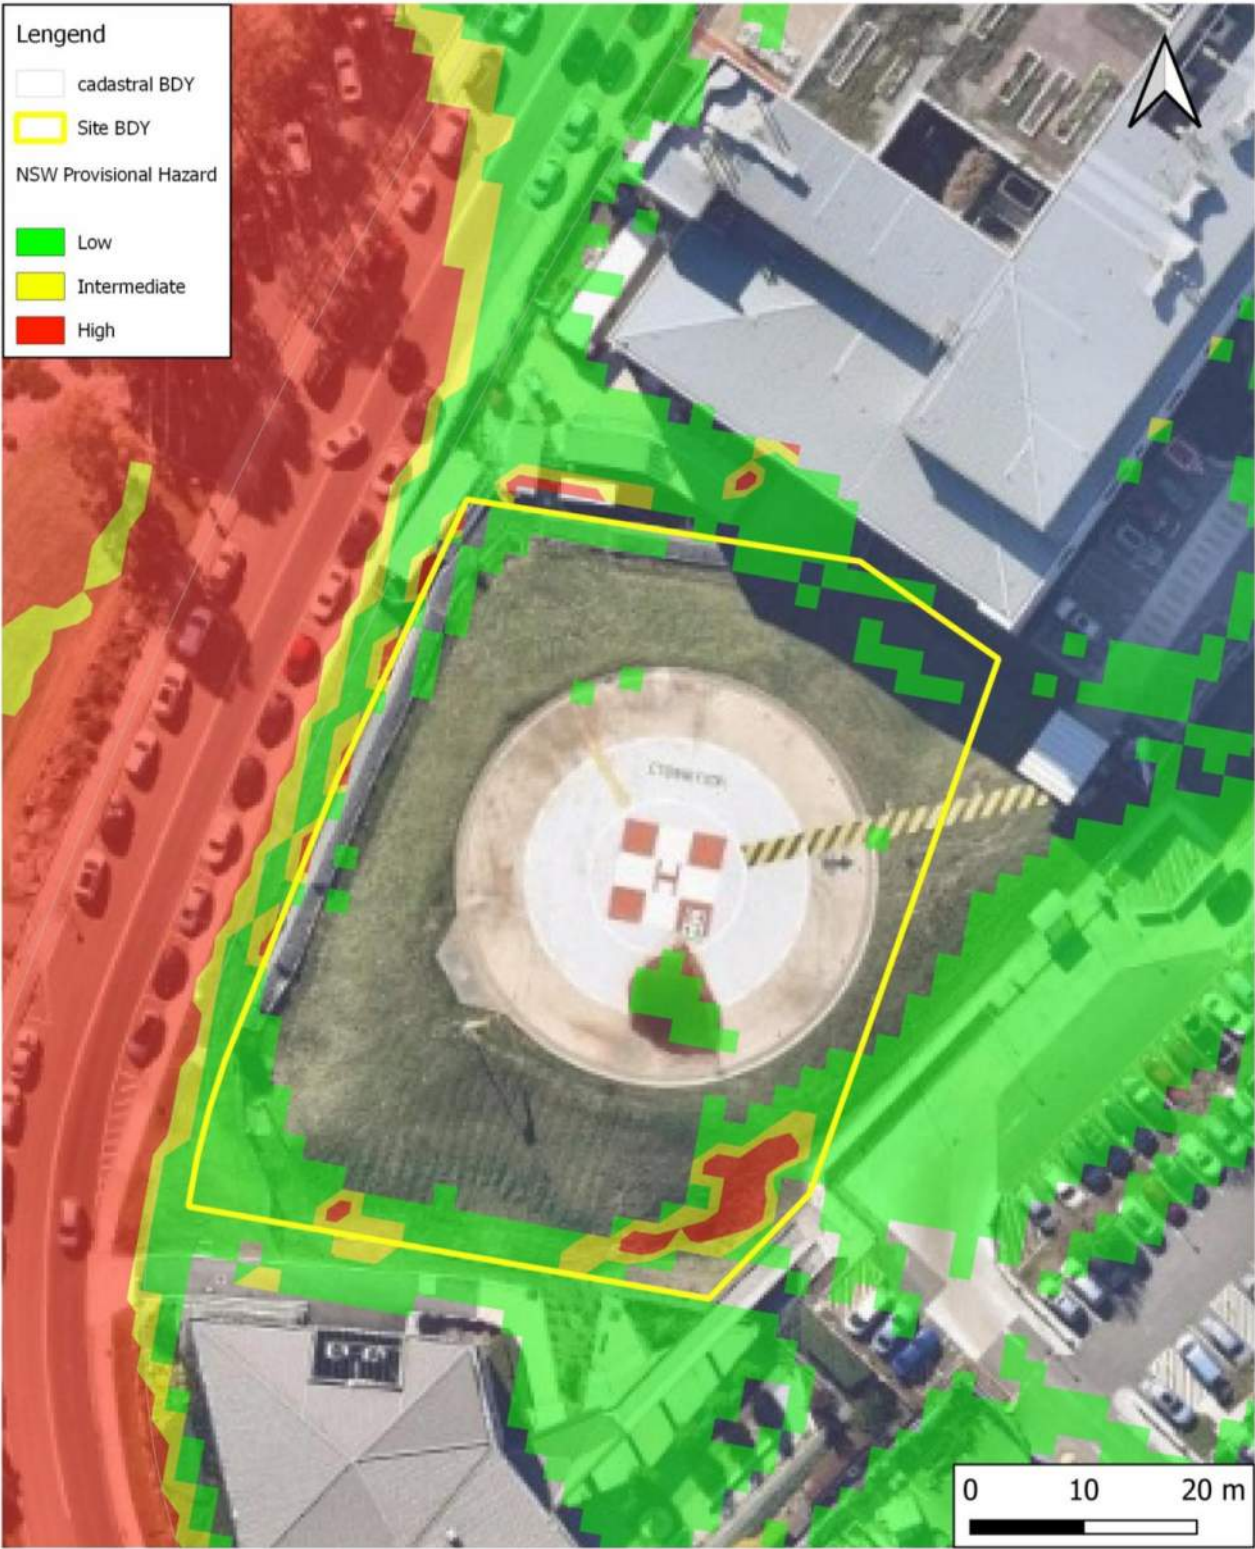


Figure 13 - Provisional Flood Hazards (PMF) – Existing Conditions

5.2 Model Validation

Flood model data and information provided by Council was used in the TTW flood model for to establish the 1% AEP existing flood condition.

Results of the TTW model were compared with the flood results provided by CSS. The comparison shows that although the TTW flood results agree well with those of provided by CSS.

Although the results show some discrepancies through the Birunji Creek basins (as TTW didn't have access to the basin and associated connection details), flood levels and depths agree well across the site and its proximities.

A few minor discrepancies on and around the site are likely due to the incorporation of the site survey (as opposed to pure lidar data) as well as the potential model cut-off depth differences (TTW's model cut-off depth is 20mm).

Figure 14 and Figure 15 show the comparison of flood levels (CSS and TTW model results) for the site during the 1% AEP and PMF events respectively.

TTW consider the model acceptable for the purposes of detailed site modelling and used this model as the base case scenario for the existing flood conditions.

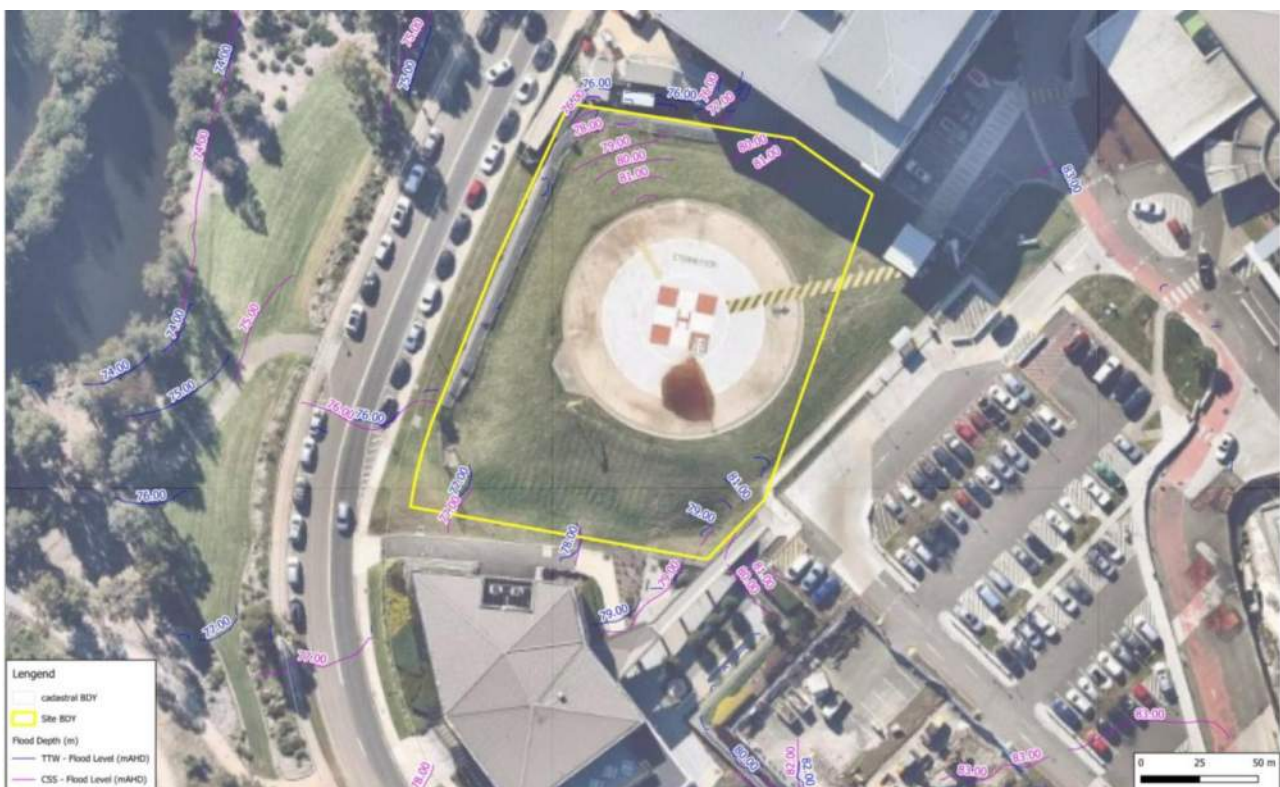


Figure 14 - Flood Level Comparison (CSS vs TTW Model Results) - 1% AEP

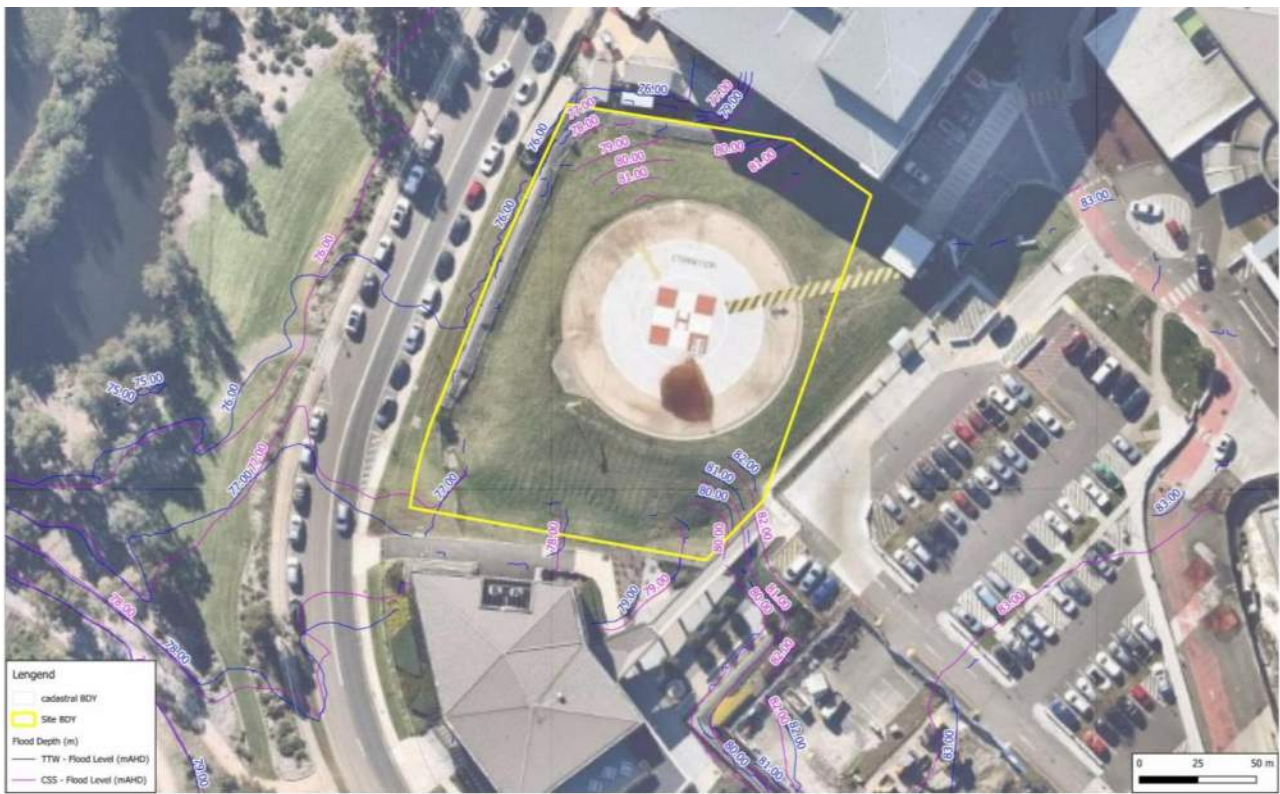


Figure 15 - Flood Level Comparison (CSS vs TTW Model Results) – PMF

5.3 Proposed Conditions


Peak flood levels, depths, velocities and hazards for proposed site conditions in the critical duration 1% AEP event are presented in Figure 16, Figure 17 and Figure 18 respectively. Figure 19, Figure 20 and Figure 21 also show peak flood levels, depths, velocities and hazards for proposed site conditions in the critical duration PMF event.

The flood modelling results confirm that the overland flow behaviour in the proposed conditions is relatively consistent with the existing conditions. The site is generally flood free in the proposed conditions during the 1% AEP event as well as the PMF.

The overland flow path along the southern site boundary is maintained through the proposed loading dock. Flow over the proposed loading dock is generally shallow and safe during the 1% AEP event. Overland flow is safe across Parkside Crescent as well as the car park area to the east of the site.

A few small and shallow ponding areas scattered nearby the proposed building during the 1% AEP event are as a result of the application of direct rainfall method in TUFLOW model (not considered flood affection) and will be drained offsite by way of the proposed site drainage network.

Floodwaters over the site are generally shallow (up to 0.3m) and of low hazard during the PMF. The flow path over the proposed loading dock (at the southern site boundary) stays generally safe during the PMF. Flood modelling results indicate that the flows through the southern site boundary are effectively contained within the proposed loading dock and waters shown nearby the building are shallow and safe.

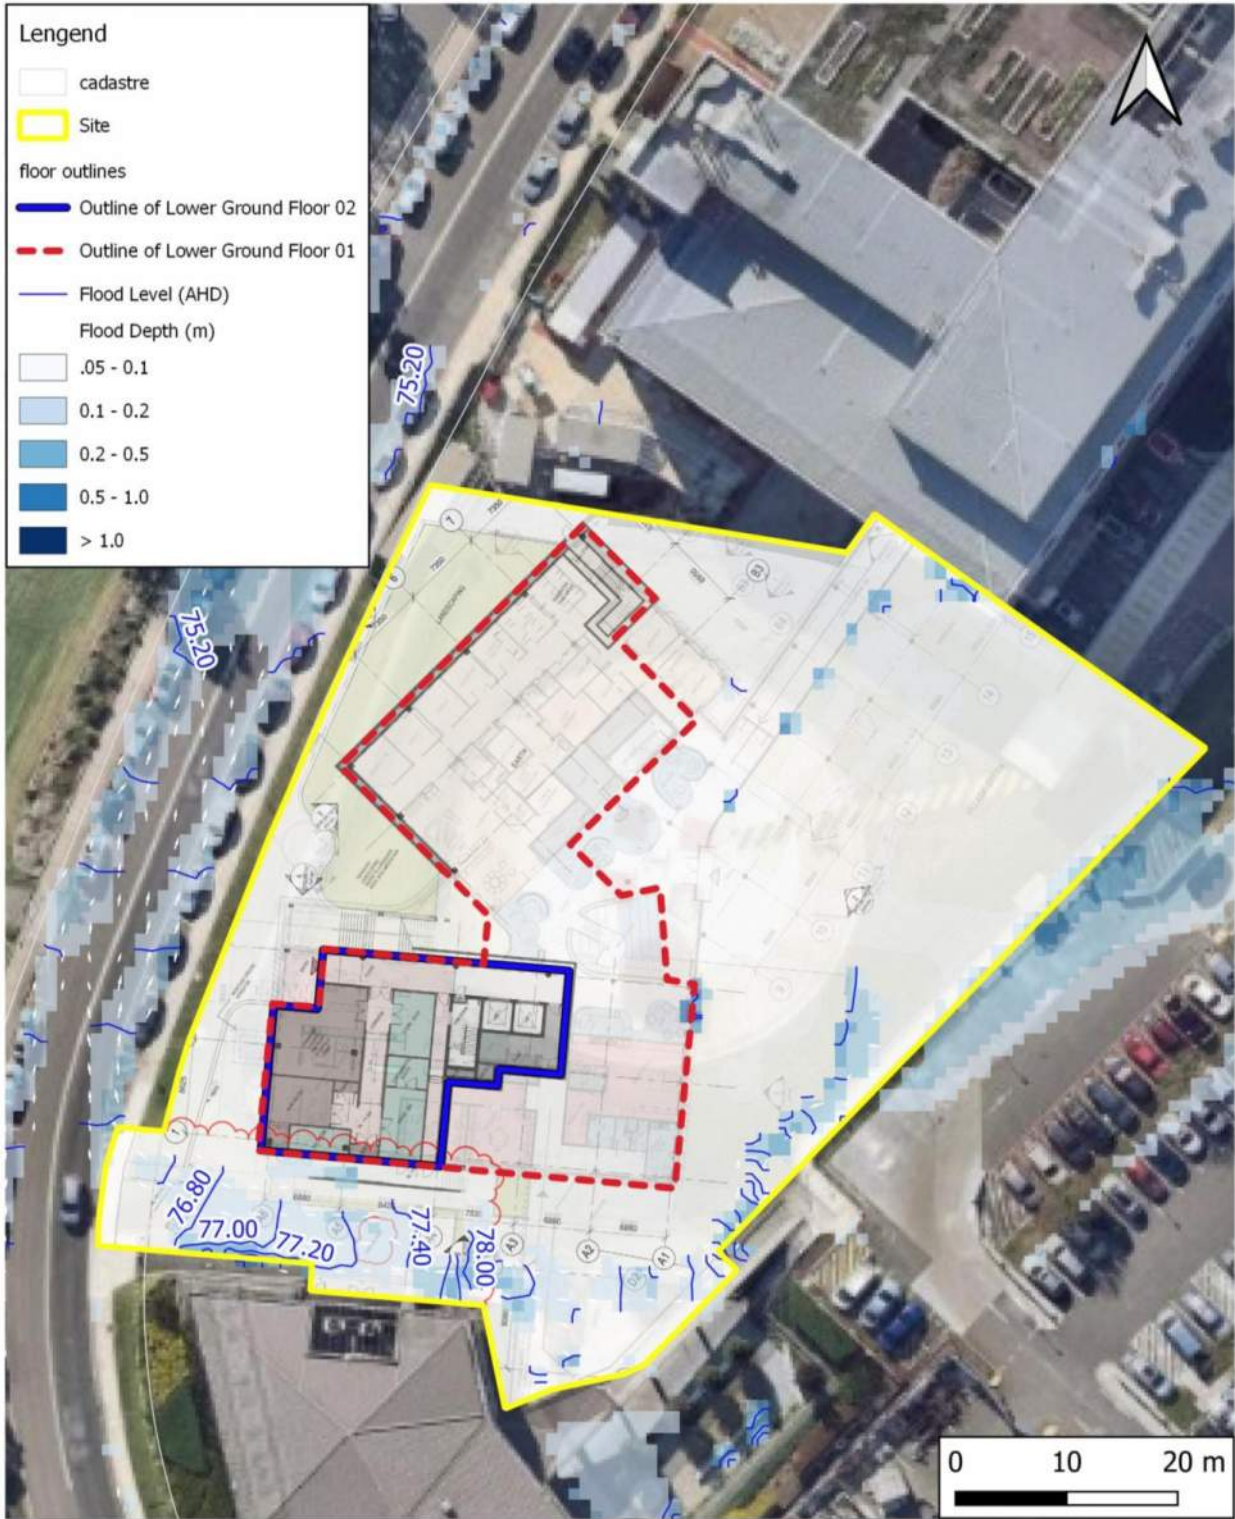

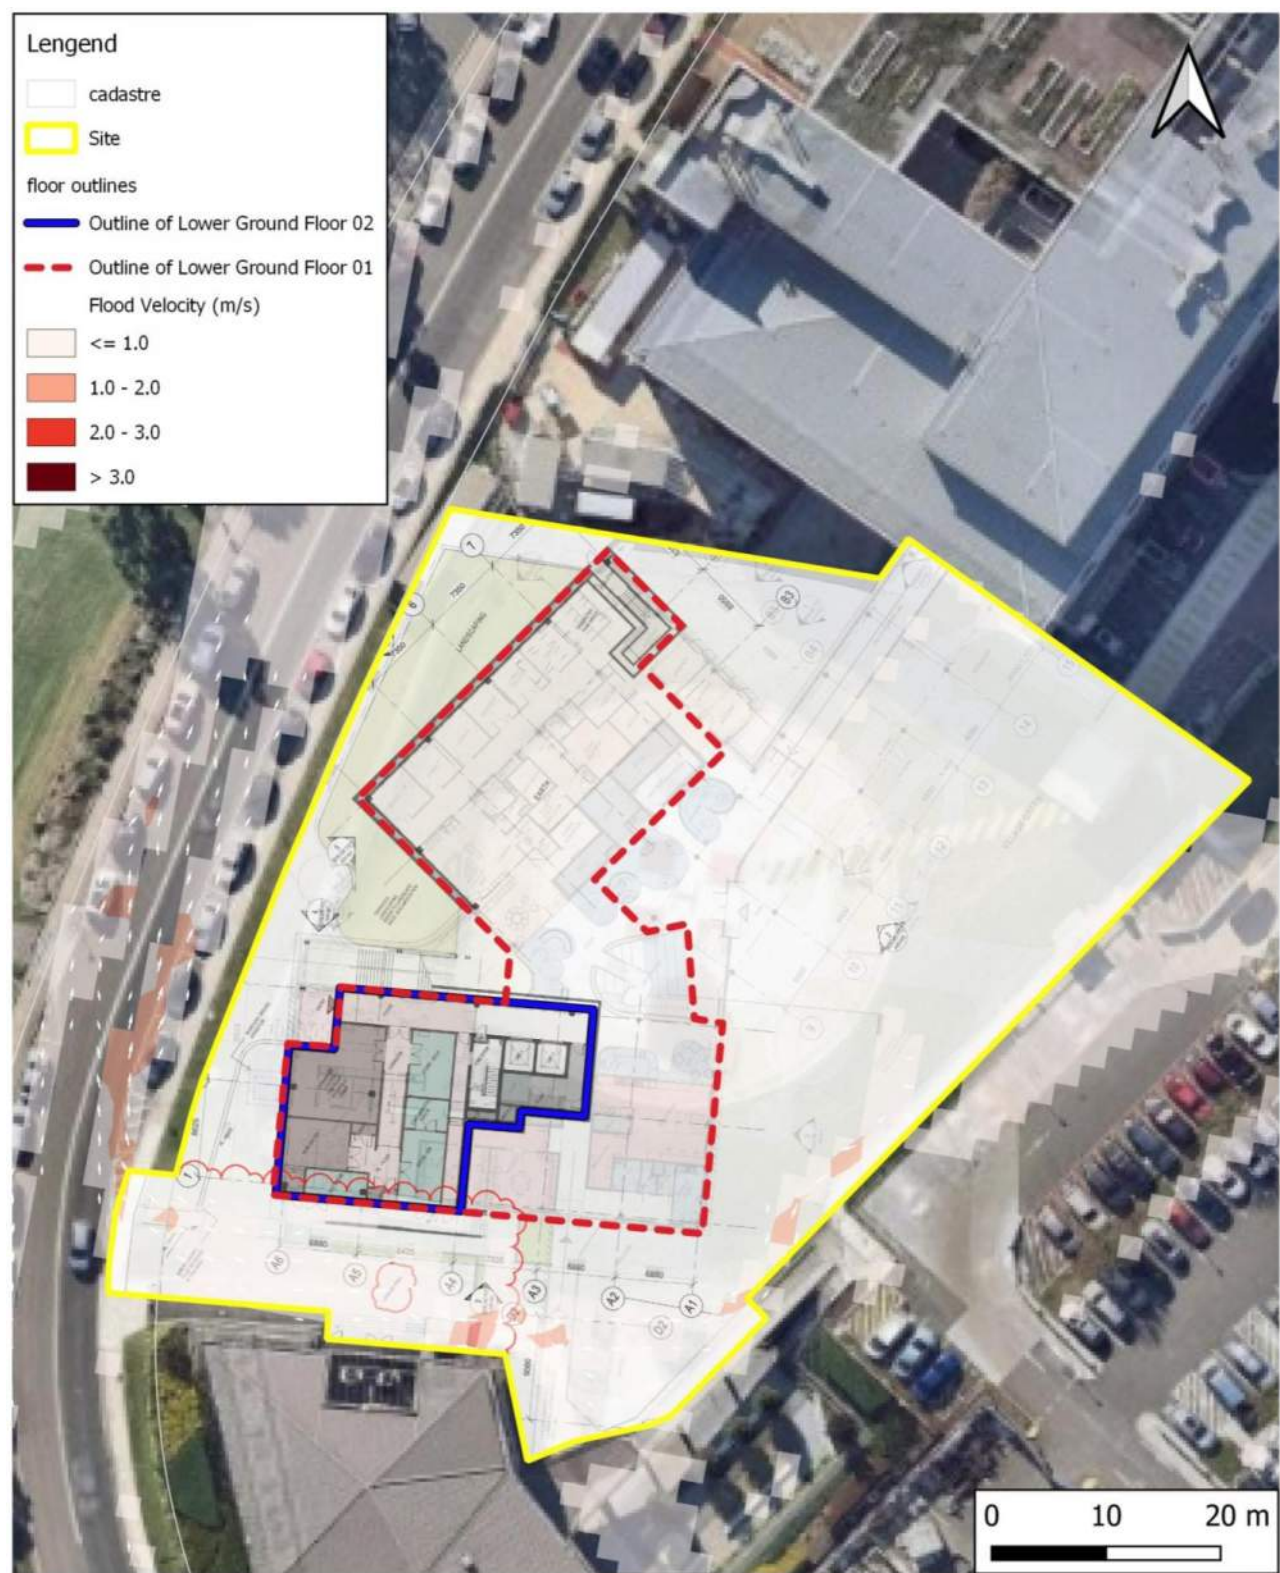


Figure 17 - Flood Velocities (1% AEP) – Proposed Conditions (Ground Floor)

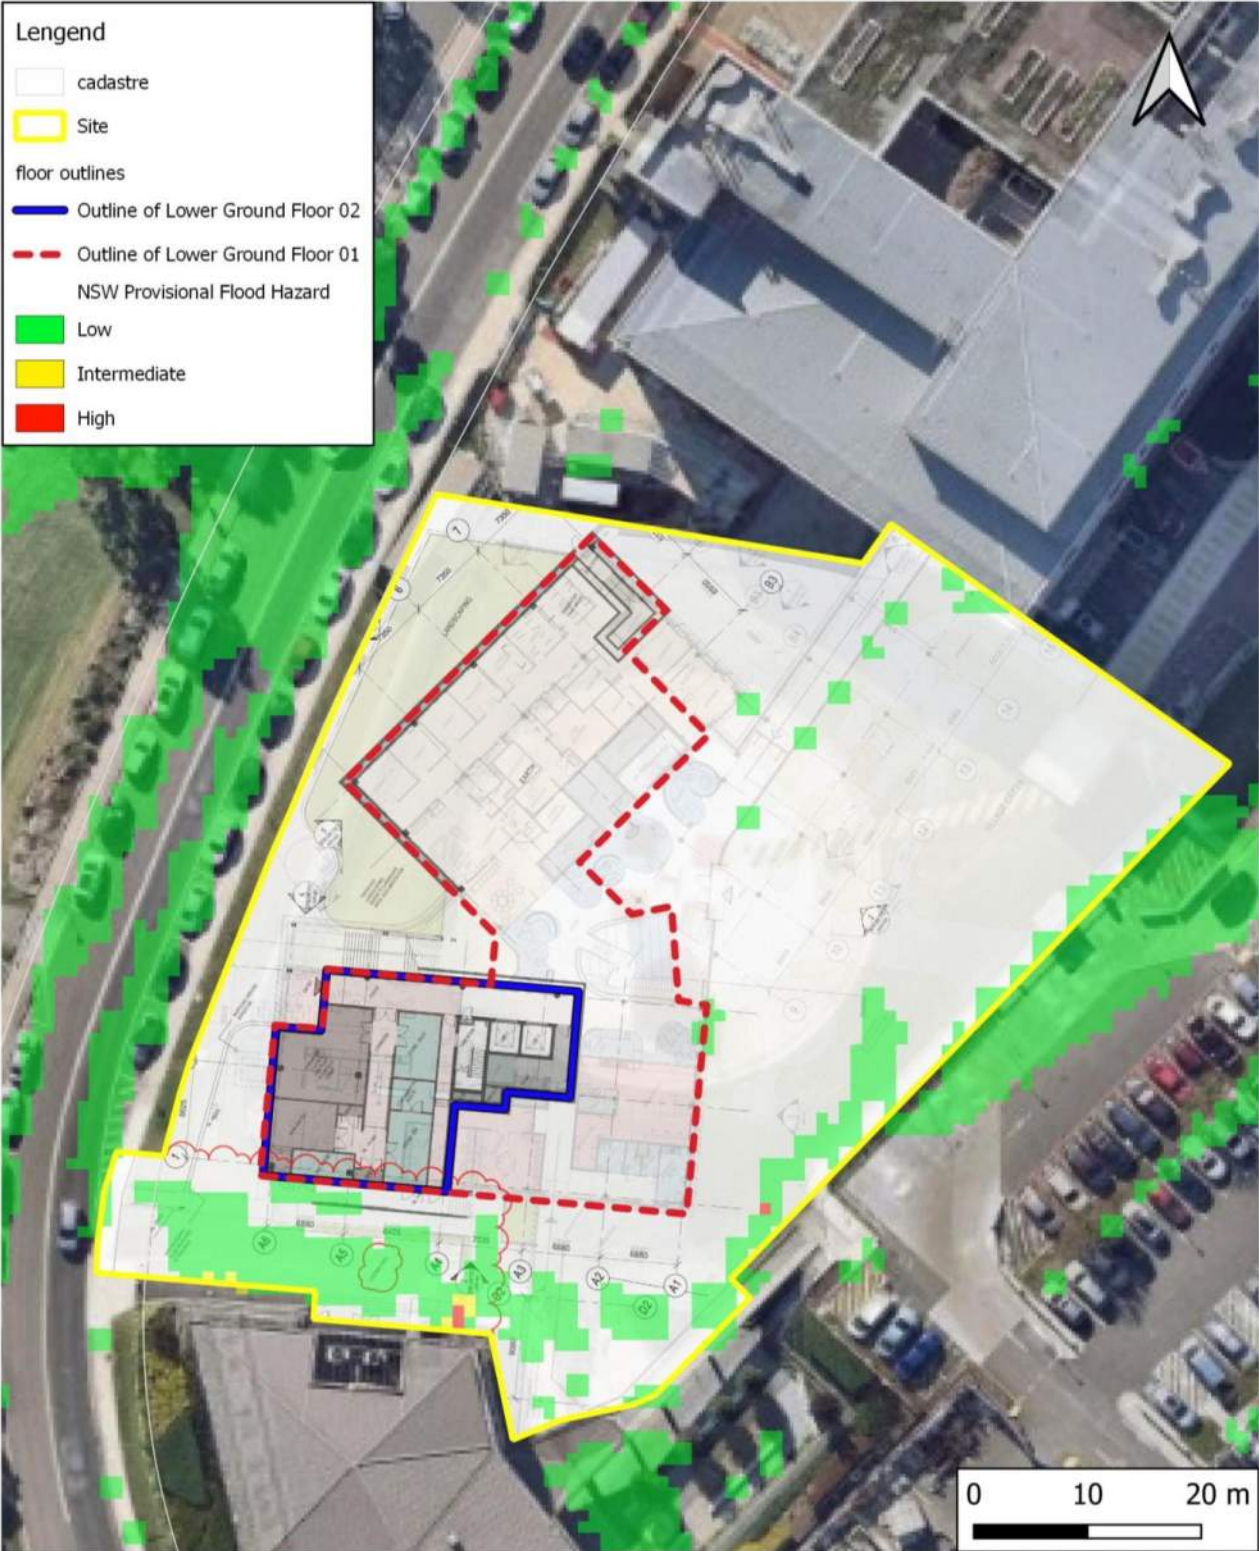
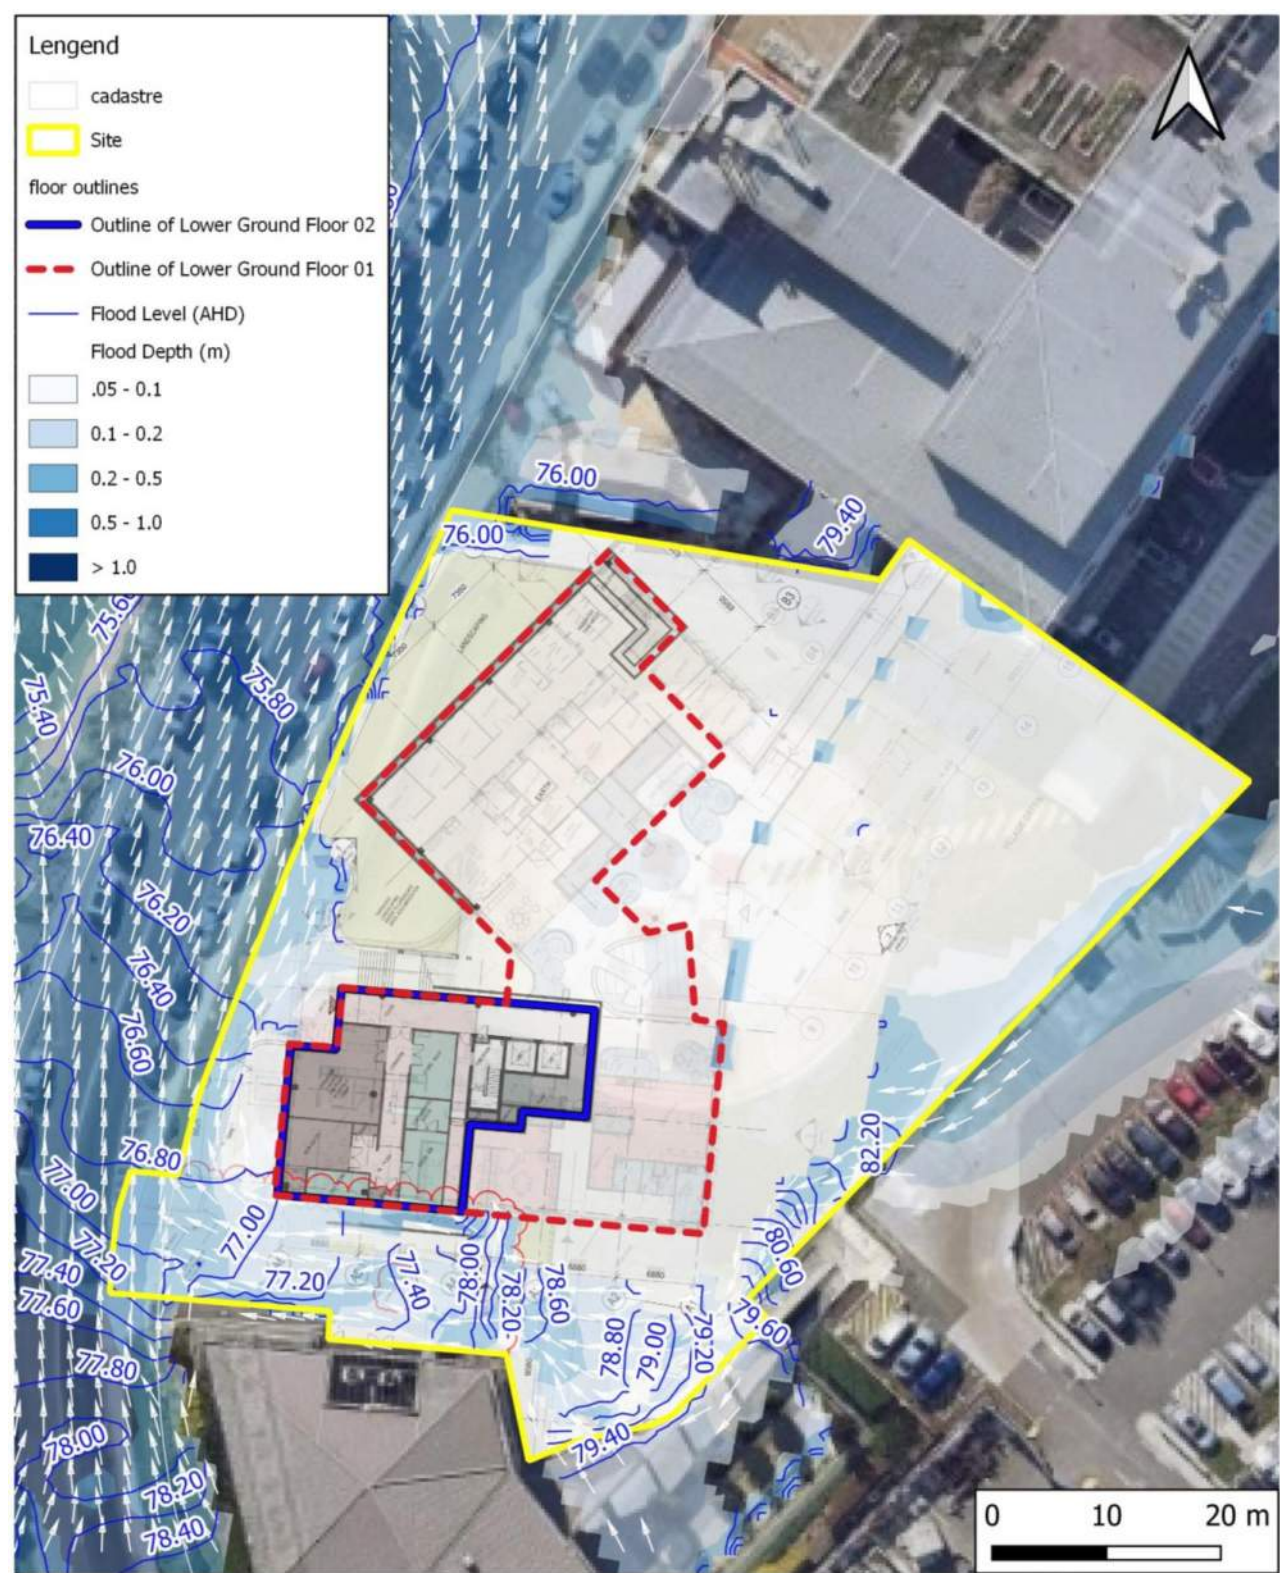


Figure 18 - Provisional Flood Hazards (1% AEP) – Proposed Conditions (Ground Floor)



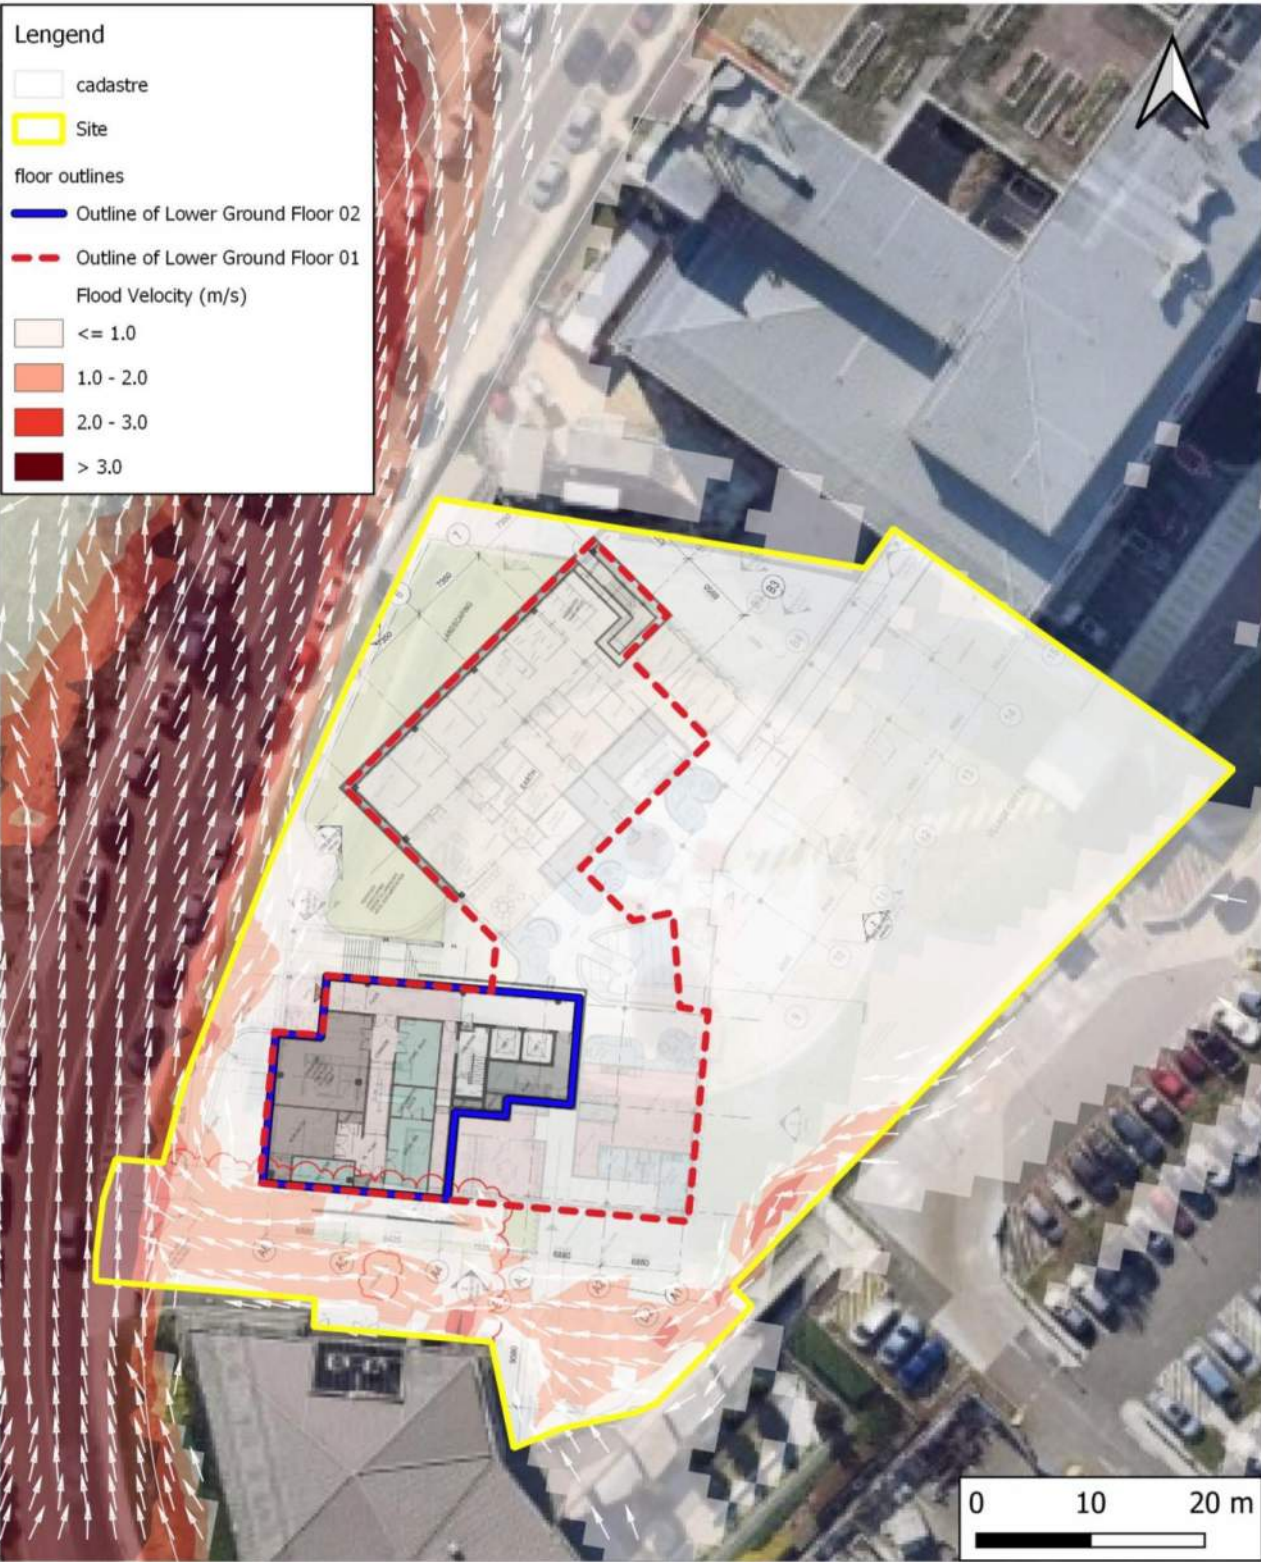


Figure 20 - Flood Velocities (PMF) – Proposed Conditions (Ground Floor)

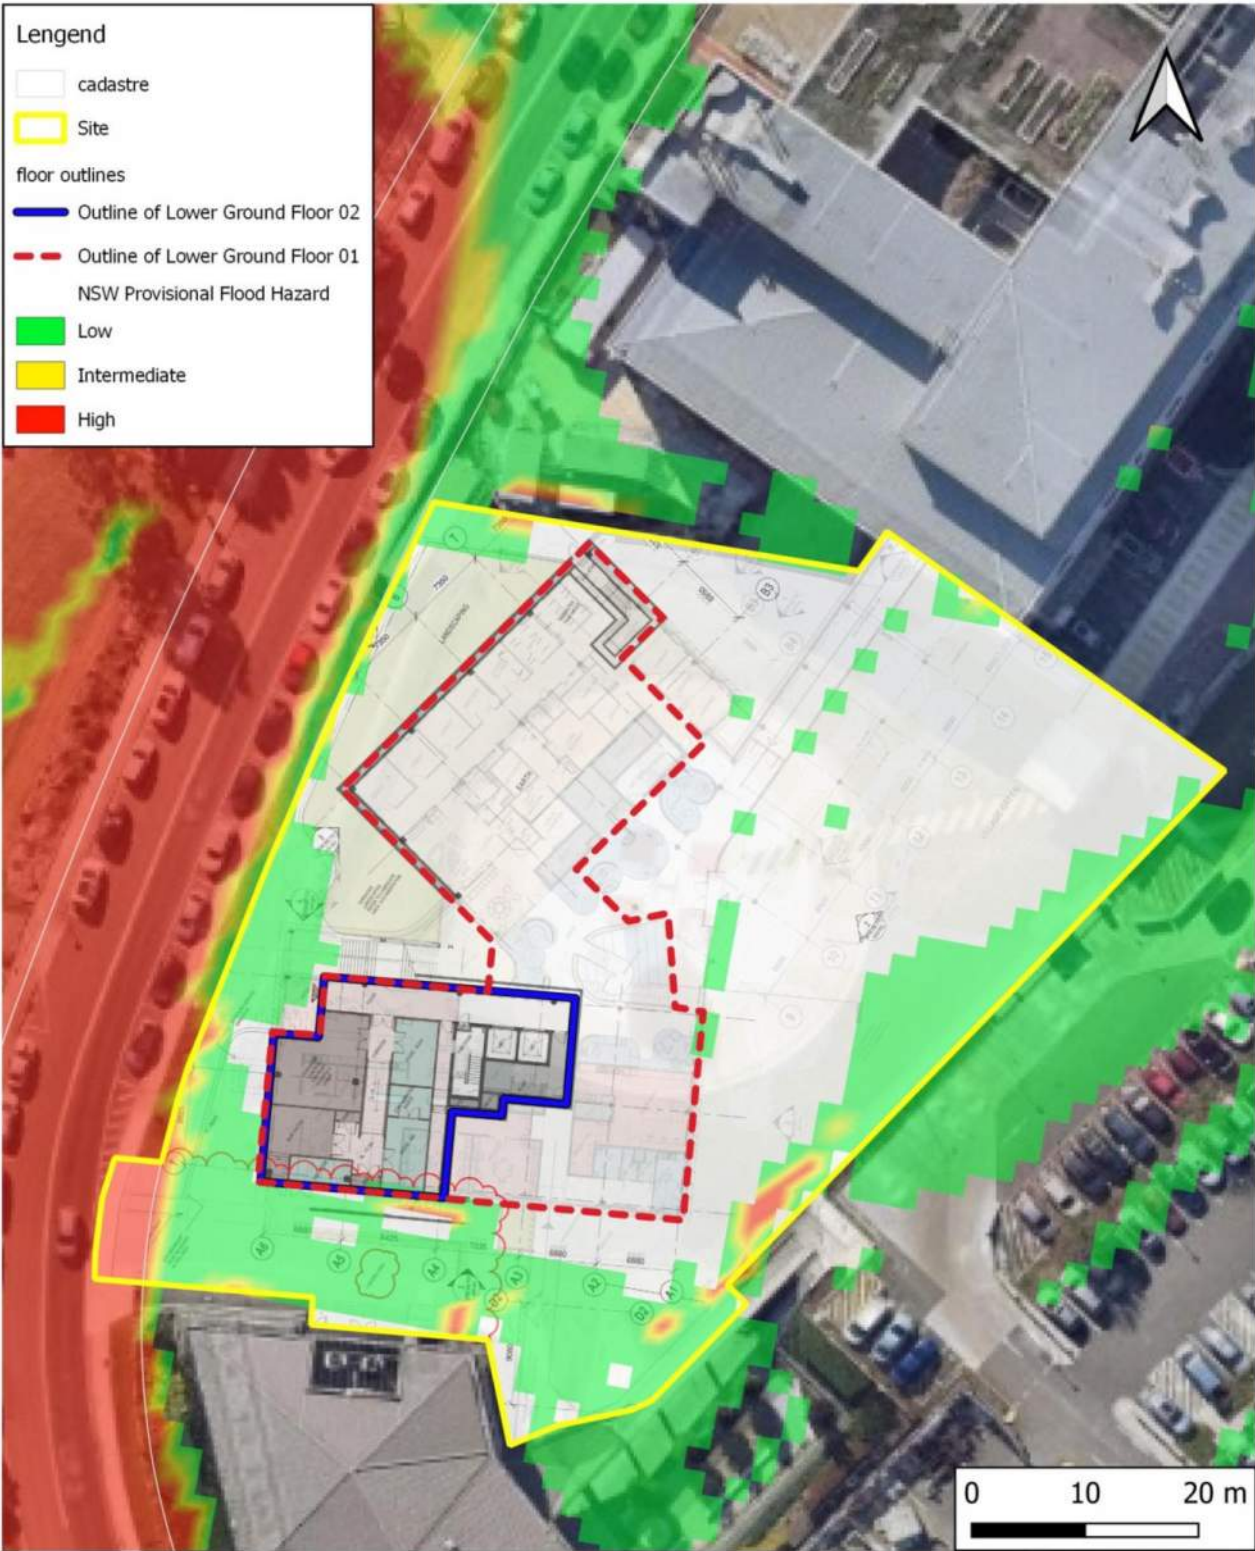


Figure 21 - Provisional Flood Hazards (PMF) – Proposed Conditions (Ground Floor)

6.0 Compliance with Flood Planning Requirements

According to the Campbelltown Council DCP (2015) flood planning level is the 1%AEP flood level plus freeboard. The Campbelltown Council DCP (2015) requires the freeboard to be based on Table 4.1 of Council's Engineering Design for Development as shown below.

Table 4.1 Floor Level and Freeboard Requirements

Development Criteria	Where the depth of flow is...	Minimum Freeboard above the predicted 100 yr ARI level
Floor level in relation to overland flow paths for any dwelling room [#] and commercial or industrial areas	< 300 mm	300 mm
	> 300 mm	500 mm
Floor level in relation to any creek or major stormwater line including detention basins for any dwelling room [#] and commercial or industrial areas	Any depth	500 mm
Garage or shed floor level **	< 300 mm	100 mm
	> 300 mm	300 mm
Underside of solid fencing in relation to finished ground levels where overland flow is to be accommodated		100 mm (min)

Based on the flood modelling results the 1%AEP flood depths are generally less than 300 mm adjacent the proposed building. Hence, the minimum required freeboard of 300mm for the building floors is adequate according to the Campbelltown Council DCP (2015), Table 4.1.

Overland flows through southern flow path are contained within the proposed loading dock and therefore, the proposed openings to Lower Ground 02 along the southern side of the building remain unaffected by the overland flows during all storm events up to 1% AEP.

Floor levels and floor planning levels for the proposed development have been summarised in Table 2.

Table 2 - Flood Planning levels (FPLs) Vs. Proposed Finished Floor Levels (FFLs)

Floor	FFL (mAHD)	1% AEP (mAHD)	FPL (1% AEP Flood Level + 300mm Freeboard)
Ground	83.73	78.50	78.80
Lower Ground 01	79.43	78.50	78.80
Lower Ground 02	76.55	75.75	76.05

Lower Ground 02:

Received architectural plans indicate that the proposed Lower Ground 02 will be used for services and storage area and is not habitable. The proposed Finished Floor Level (FFL) of Lower Ground 02 is 76.55m AHD which is above the minimum required flood planning level of 76.05m AHD (1% AEP flood level of 75.75m AHD adjacent to the main western entry plus 300mm freeboard).

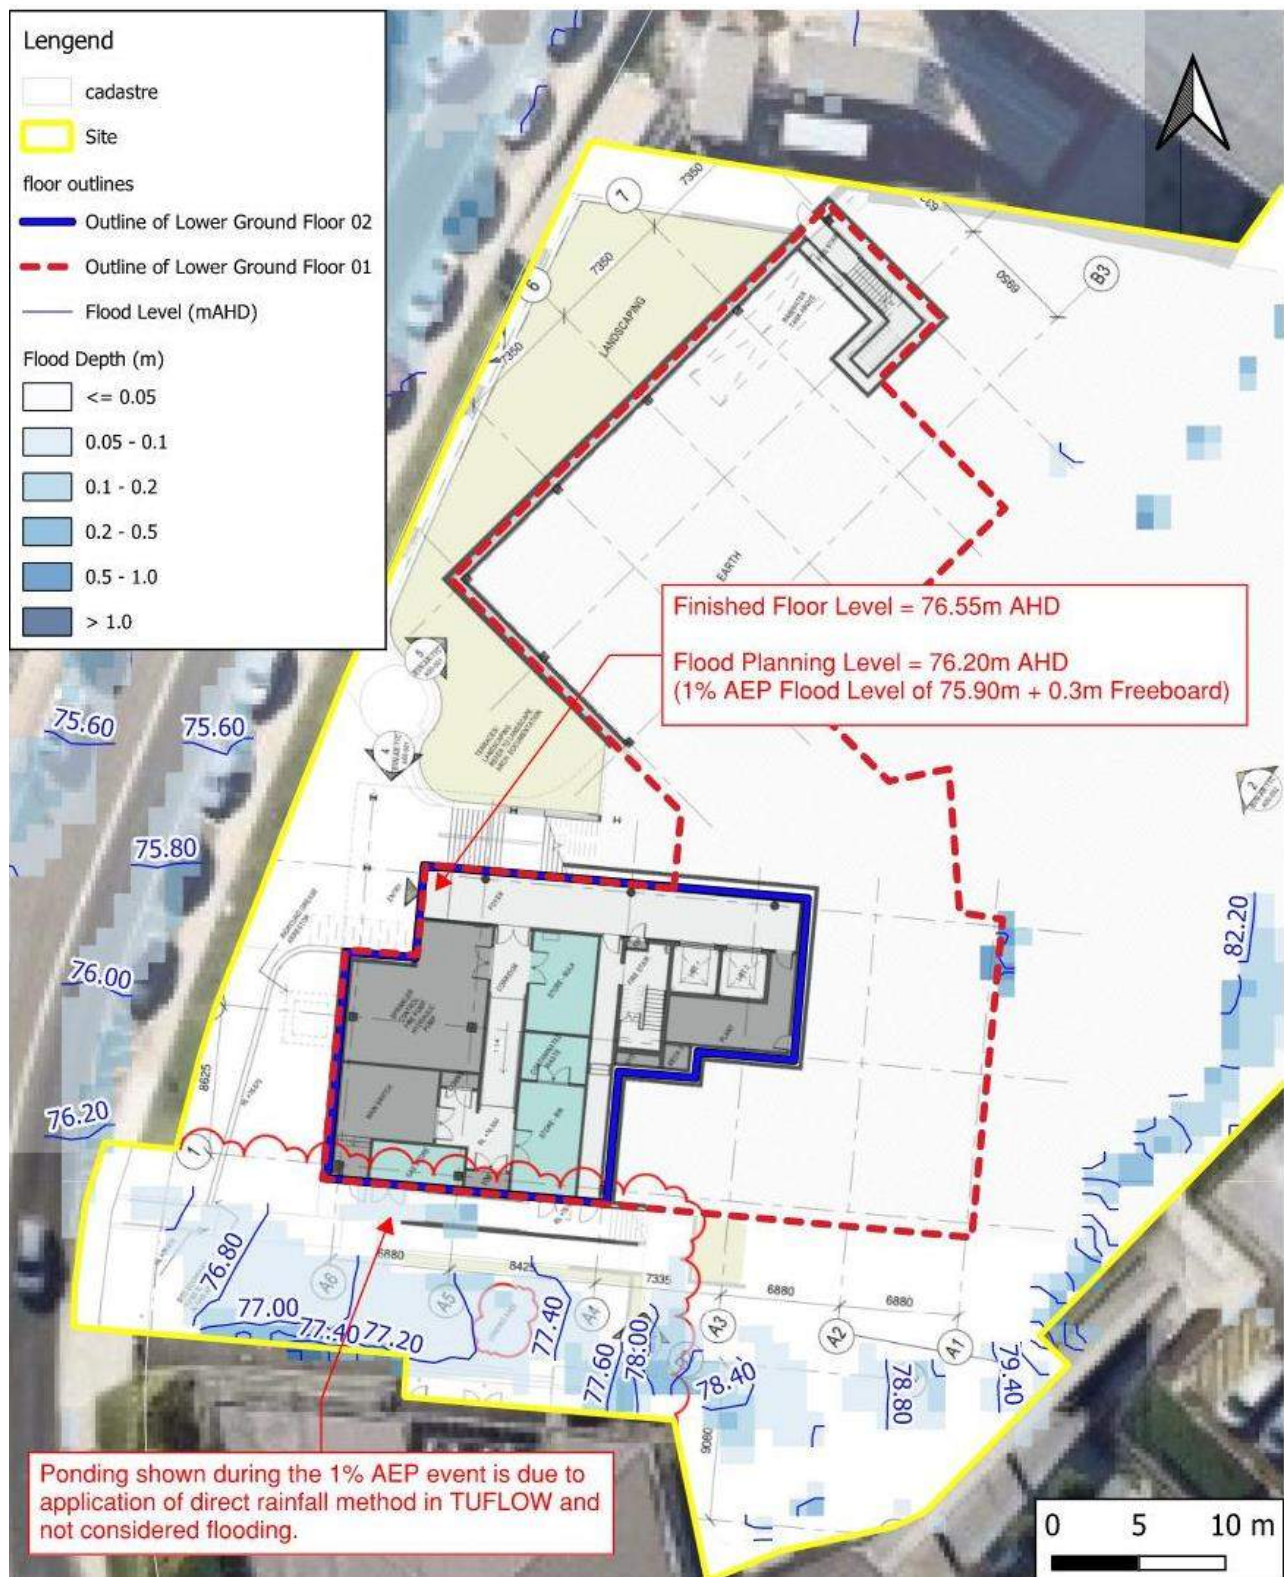


Figure 22 – Flood Panning levels (FPLs) Vs. Proposed Finished Floor Levels (FFLs) – Lower Ground 02

Lower Ground 01:

According to the architectural plans, the proposed Finished Floor Level (FFL) for the Lower Ground 01 is 79.43m AHD which is above the flood planning level (FPL) of 78.70m AHD (1%AEP flood level of 78.40m AHD plus 300mm freeboard) as shown in Figure 23.

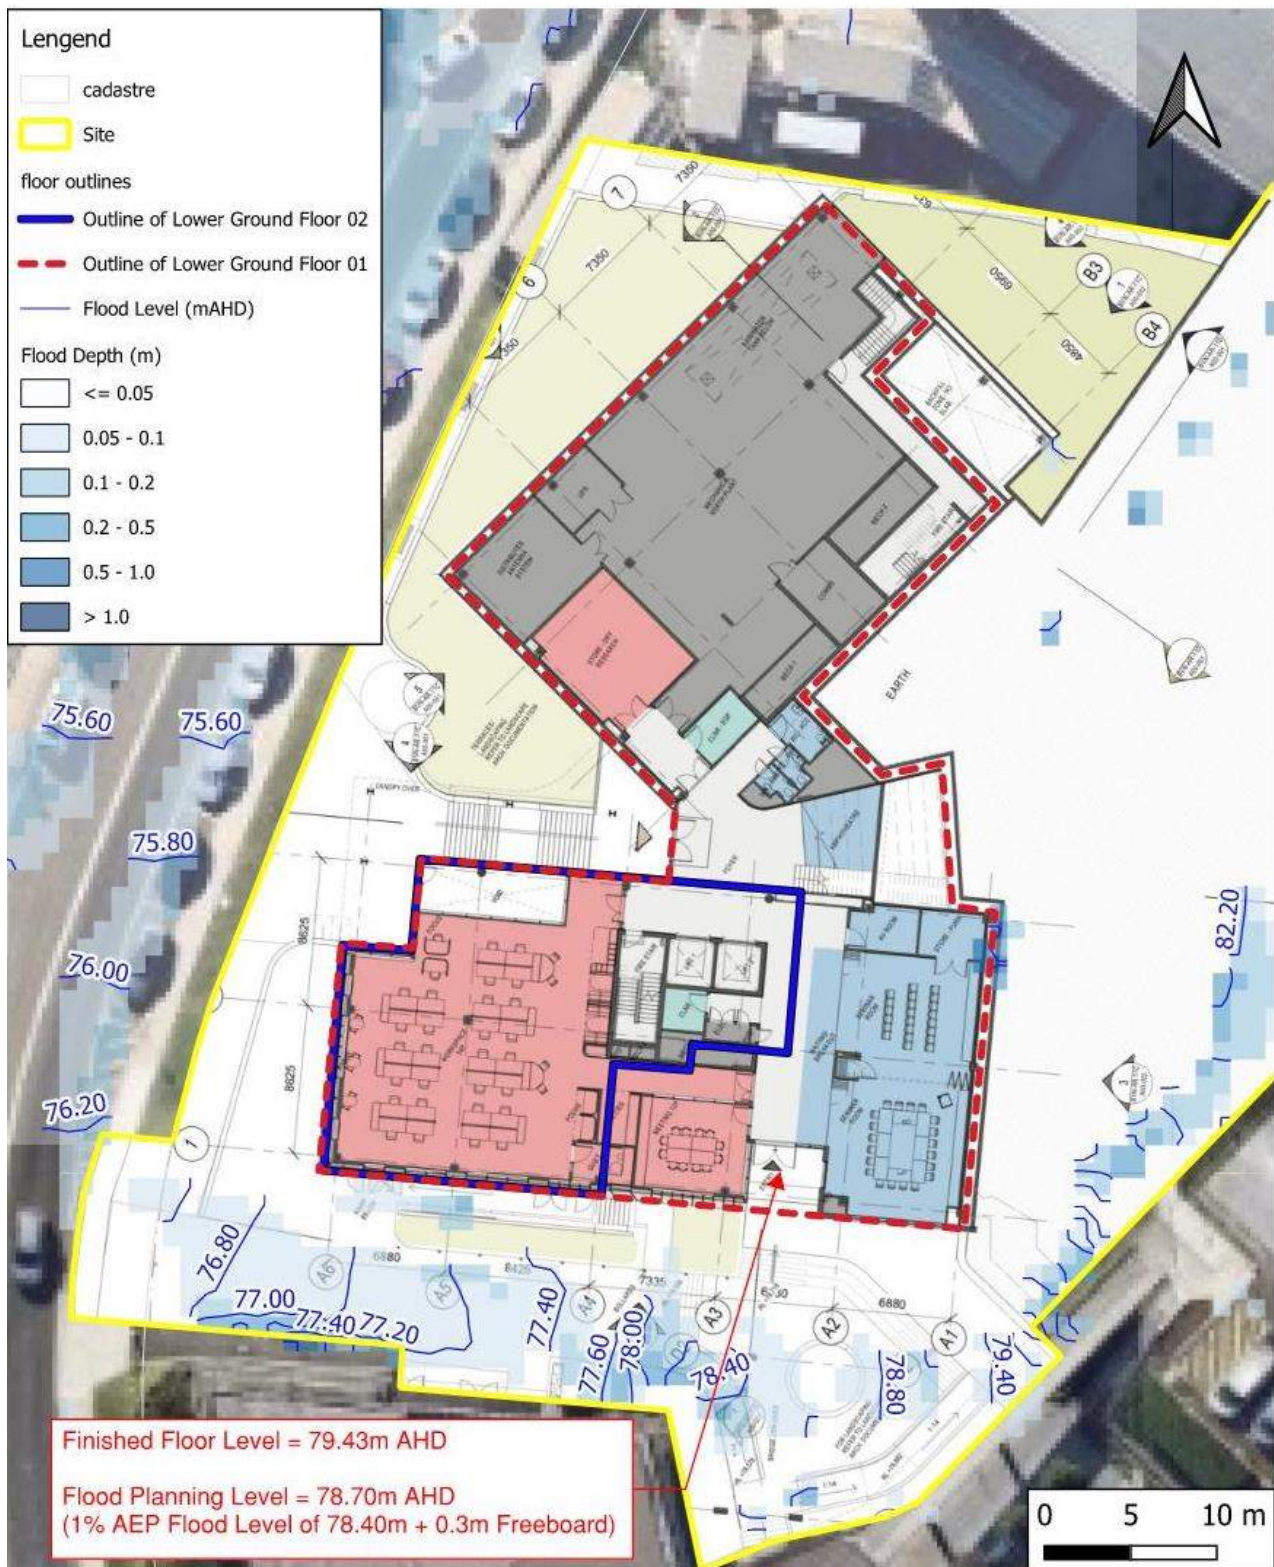


Figure 23 – Flood Panning levels (FPLs) Vs. Proposed Finished Floor Levels (FFLs) – Lower Ground 01

Ground Floor:

the proposed Finished Floor Level (FFL) for the ground floor (level 00) is 83.73m AHD which is above the flood planning level (FPL) of 78.80m AHD (1%AEP flood level of 78.50m AHD plus 300mm freeboard) as shown in Figure 24.

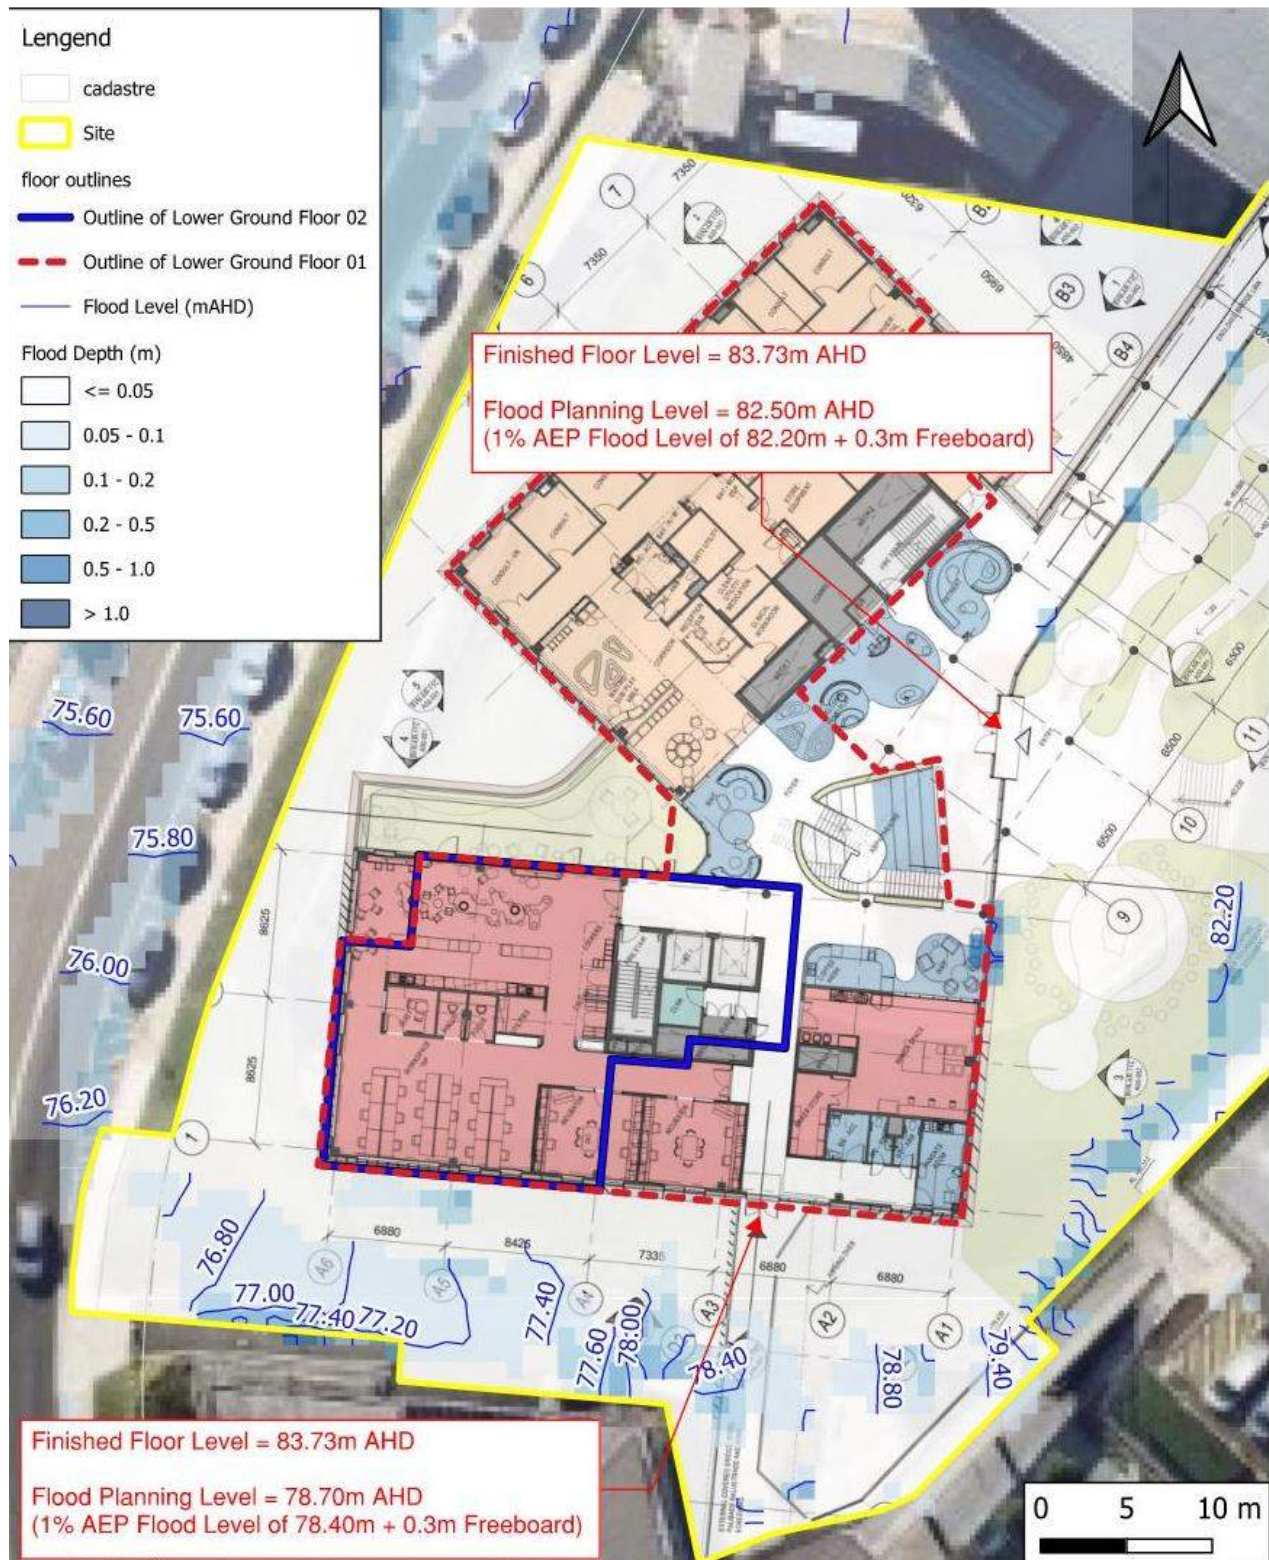


Figure 24 – Flood Panning levels (FPLs) Vs. Proposed Finished Floor Levels (FFLs) – Ground Floor

6.1 Flood Impacts

The site ground levels in existing conditions are in average 6 metres higher than Parkside Crescent surface levels. So that, the site acts as a blockage during large flood events and redirects upstream floodwaters onto Parkside Crescent. The proposed development would not impose additional fill to the existing flood storage area and therefore, unlikely to inflict negative offsite impacts.

Nevertheless, a flood impact assessment was undertaken to ensure no negative flood impacts caused by the proposed development. As depicted in Figure 25, the flood impact map shows no offsite impacts beyond the $\pm 10\text{mm}$ tolerance occurs outside of the development site during the 1%AEP flood event.

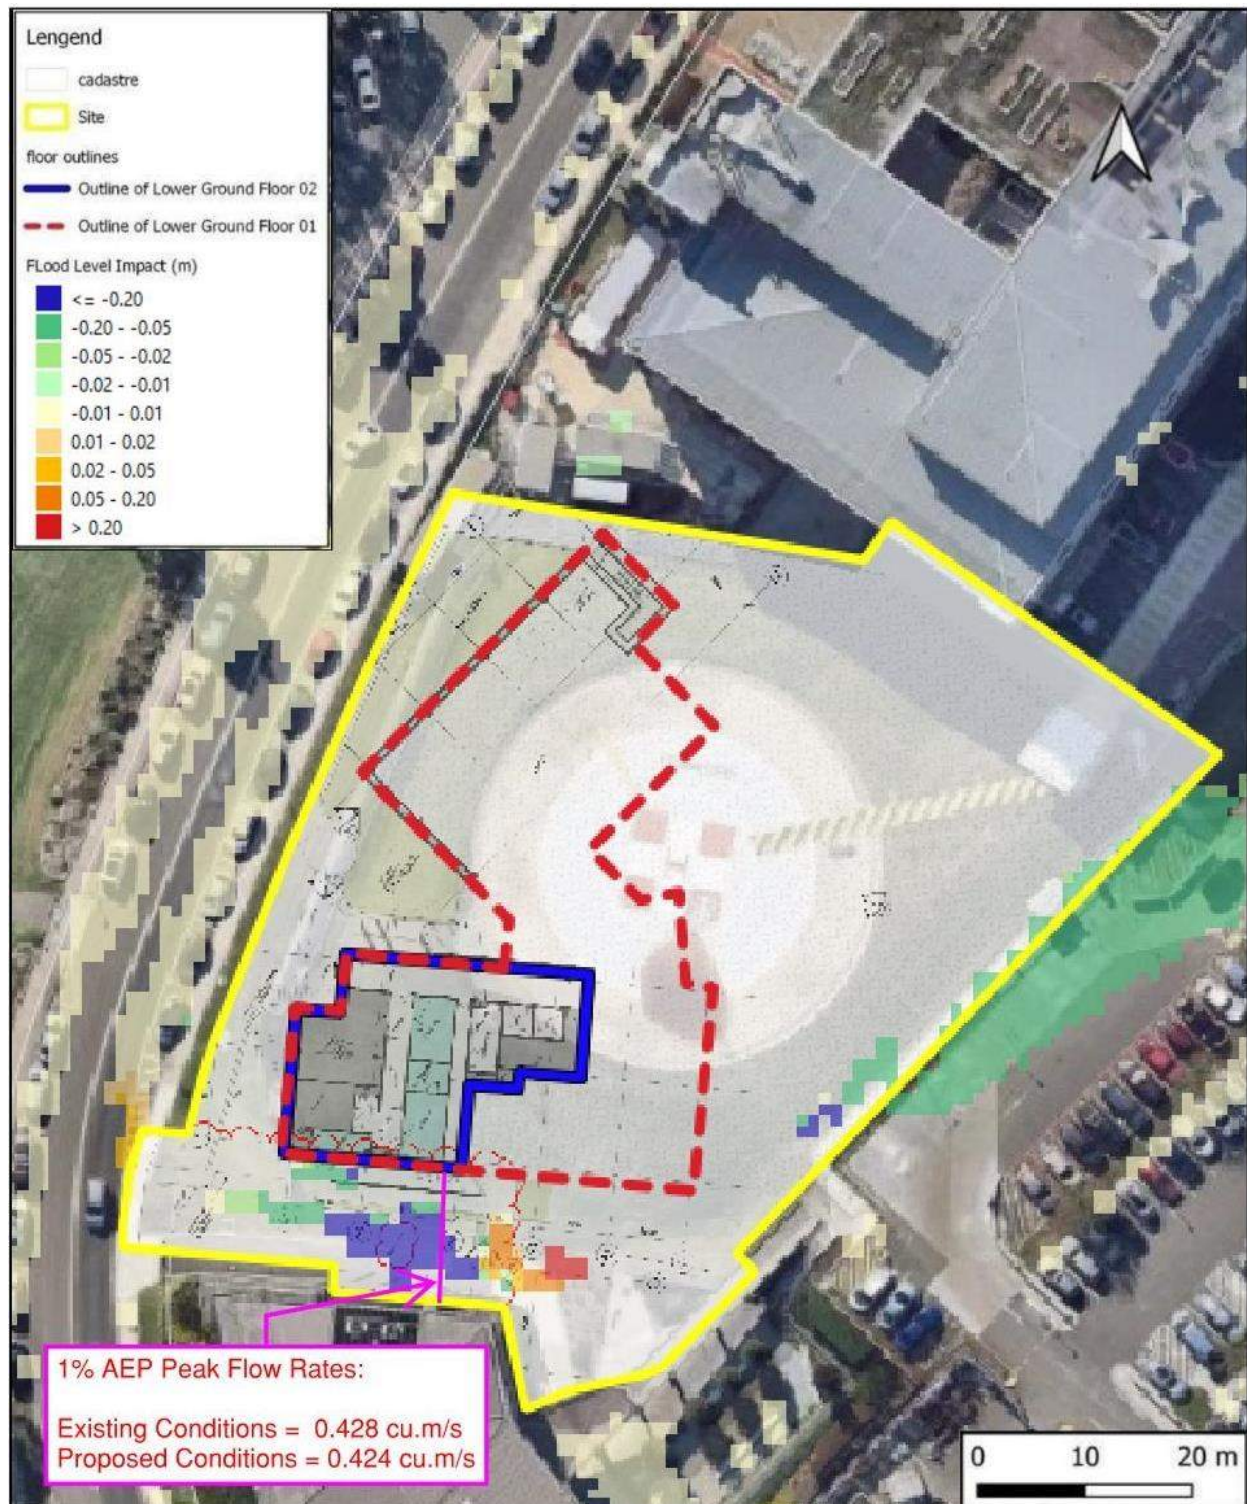


Figure 25 – Flood Impact Assessment Map (1% AEP Flood event)

An impact assessment was also carried out for the PMF event to ensure no significant flood level increase occurs anywhere outside of the development area. Figure 26 shows that the negative offsite flood level impacts are limited to 20mm for the PMF event.

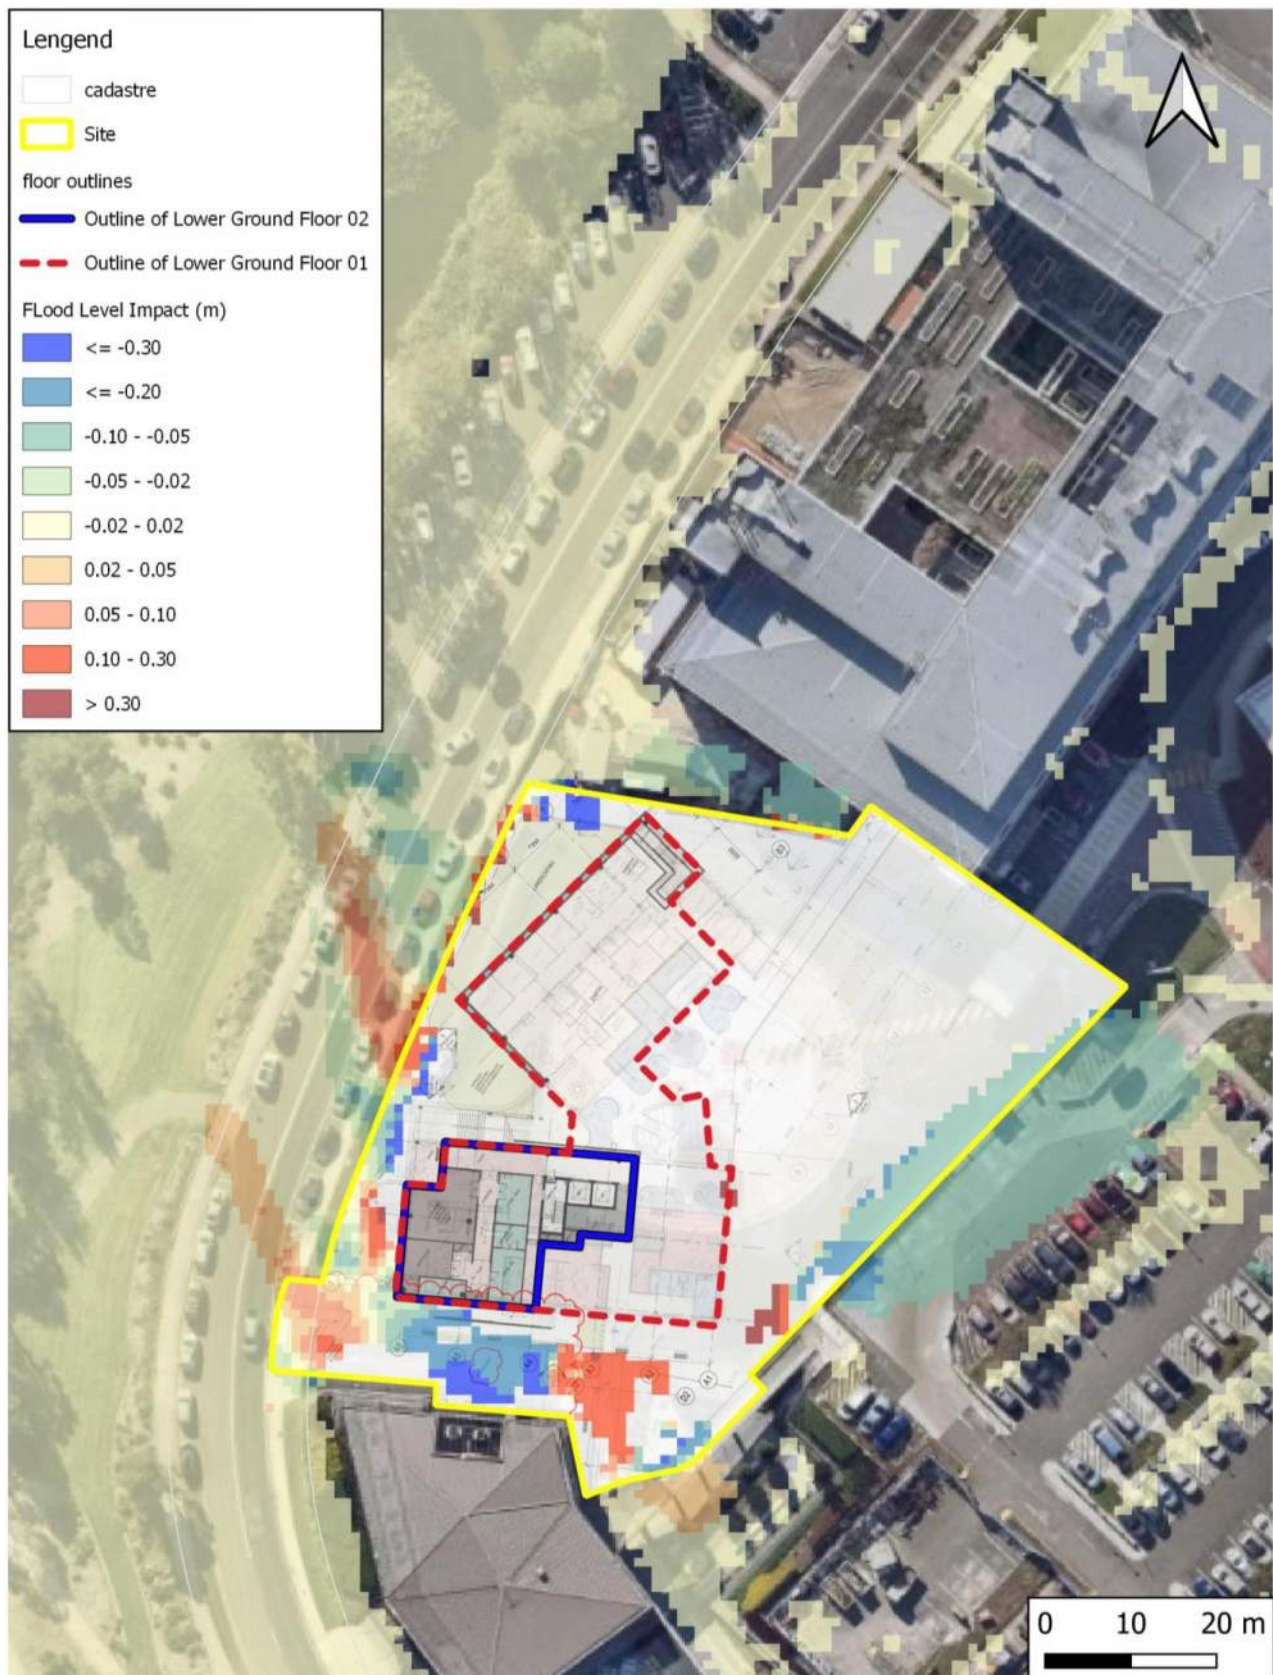


Figure 26 – Flood Impact Assessment Map (PMF event)

7.0 Site Stormwater Management Plan

7.1 Stormwater Quantity Management

Site stormwater quantity performance objectives are based on Campbelltown City Council Engineering Design Guide for Development (2015), Part 2.10. Water Cycle Management and Campbelltown City Development Control Plan (2009), Part 4. Stormwater Design as follows:

- All stormwater systems shall be sized to accommodate the 100-year ARI event
- On-site detention (OSD) is to be provided to ensure the maximum discharge from the post-development site is not to exceed the pre-developed flows for all storms up to the 100-year ARI event.
- Major design storm event being 1% AEP.
- Minor design storm event being 5% AEP equivalent to 1 in 20 Year ARI (refer to Table 4-5 of Engineering Design for Development, 2015).
- DRAINS hydrological and hydraulic modelling package was used with the IL-CL engine to determine preliminary site storage requirements and ensure post development discharge is less than or equal to pre-development discharge of the site. DRAINS input data are as follows:
- Intensity Frequency Duration (IFD) data and rainfall temporal patterns were based on the Bureau of Meteorology (BoM 2016) Rainfall IFD Data System and the Australian Rainfall & Runoff (ARR 2019) Data Hub.
- Model parameters are consistent with those of recommended in Campbelltown City Council Engineering Design for Development, 2015.
- Impervious and pervious fractions were based on aerial maps for the predevelopment condition model and based on architectural plan (provided by BVN) for the post development condition model.

The site pervious / impervious fractions for predevelopment and post development conditions are detailed in Table 3.

Table 3 - Site Catchment - Pervious / Impervious Areas

Catchment	Impervious Area (m ²)	Pervious Area (m ²)	Impervious (%)	Pervious (%)
Existing (site)	2284	1100	33	67
Proposed (site)	1949	1435	58	42

DRAINS models were developed for predevelopment and post development site conditions to assess the site peak discharges under a range of storm durations between 5 minutes to 30 minutes. An onsite detention (OSD) was proposed to ensure the site discharge flow rates in proposed conditions would not exceed of those in the existing conditions.

7.1.1 DRAINS Model Results

DRAINS modelling results indicate that approximately 60m³ of on-site detention is required to ensure post development peak flowrates do not exceed predevelopment values. Table 4 summaries the site peak discharge flowrates in existing and proposed conditions for a range of storm events from 50%AEP up to 1% AEP. It is notable that the proposed stormwater management plan will be further optimised during the detail design stage.

Table 4 - Site Pick Discharge Flow Rates in Existing and Proposed Conditions

Storm Event (AEP)	Peak Discharge (m ³ /s)		Change (m ³ /s)
	Existing	Post Development	
50%	0.023	0.022	-0.001
20%	0.068	0.029	-0.039
10%	0.094	0.056	-0.038
5%	0.114	0.103	-0.011
2%	0.132	0.122	-0.01
1%	0.165	0.163	-0.002

The proposed stormwater drainage network for the site is shown in Figure 27. Refer site stormwater plan drawing No. TTW-CI-20A NLS-005 for details.

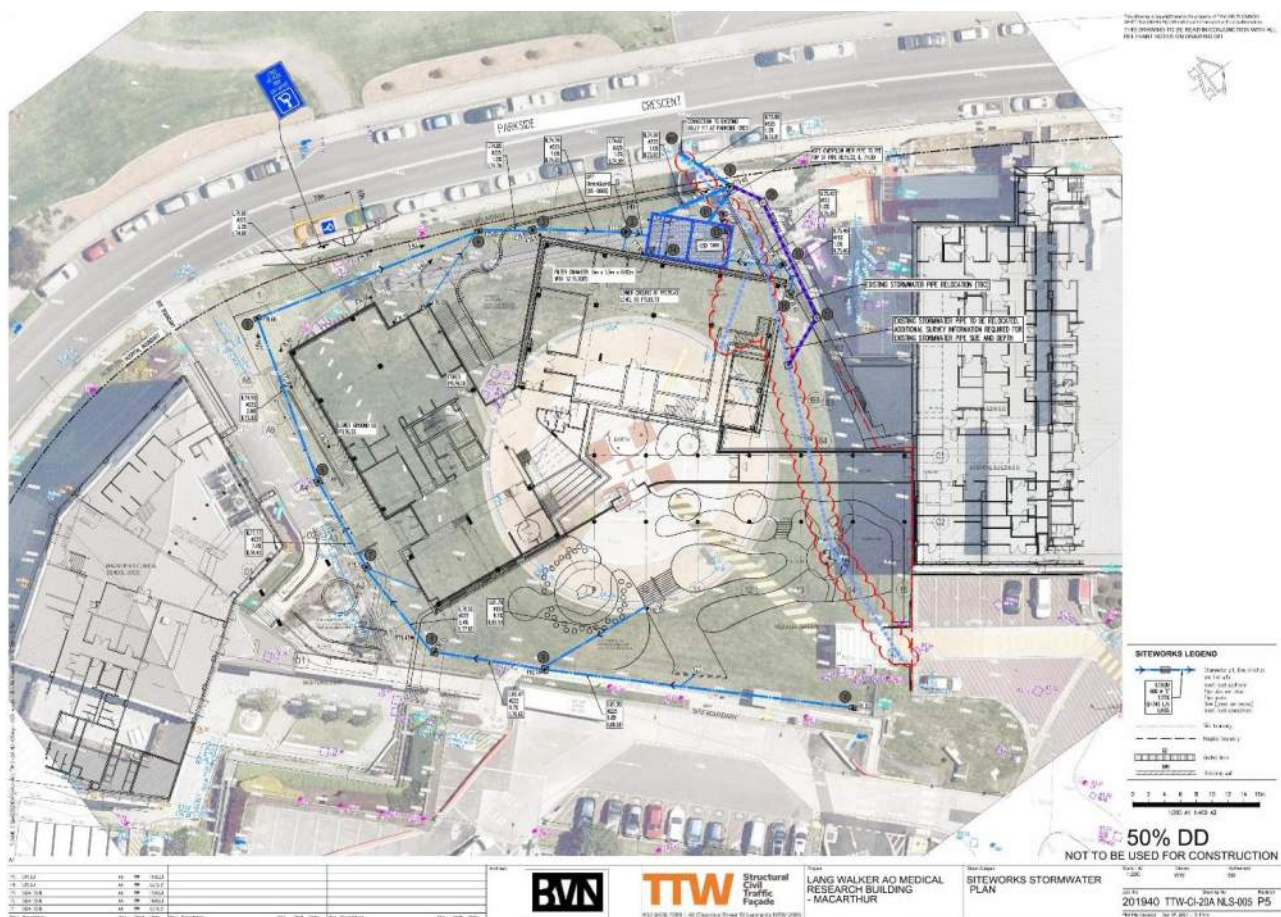


Figure 27 - Proposed Site Stormwater drainage network

7.2 Stormwater Quality Management

The Campbelltown City Council Engineering Design for Development (2015) has provided pollutant reduction targets as water quality criteria which are applicable to all urban developments. The targets (detailed in Table 5) are total values to be achieved from a development site.

Table 5 Pollutant reduction targets based the Campbelltown City Council Engineering Design for Development (2015)

Pollutant	Desired Target
Reduction in annual total suspended solids (TSS) export load	80%
Reduction in average annual total phosphorus (TP) export load	45%
Reduction in average annual total nitrogen (TN) export load	45%

The Model for Urban Stormwater Improvement Conceptualisation (MUSIC) was developed to assess the pollutant generation from the proposed development and to evaluate the effectiveness of proposed treatment train. Model parameters are as follows:

- 6-minute pluviograph rainfall data from the Lucas Heights was used.
- Catchment areas and pervious / impervious fractions for the proposed development are as per Table 6.

Table 6 Catchment Parameters - MUSIC Modelling

Surface	Area (m ²)	Pervious (%)	Impervious (%)
Roof	1710	0	100
Landscape	1534	70	30
Bypass	140	80	20

To achieve the pollutant reduction targets, an iterative approach was used for post-development modelling to determine appropriate types and sizes of stormwater treatment devices.

To satisfy the required treatment objectives in accordance with principles of WSUD, the proposed preliminary treatment train was designed as detailed in Table 7.

It is notable that the proposed treatment train arrangement is preliminary and be further optimised during detail design stage.

Table 7 Proposed Treatment Train

Treatment Device	Number of Device	Device Model	Max Flow Rate (l/s)
GPT	1	Ocean Save (OS-0606)	28
Cartridge Filter	12	Ocean Protect (Psorb 690mm)	10.8

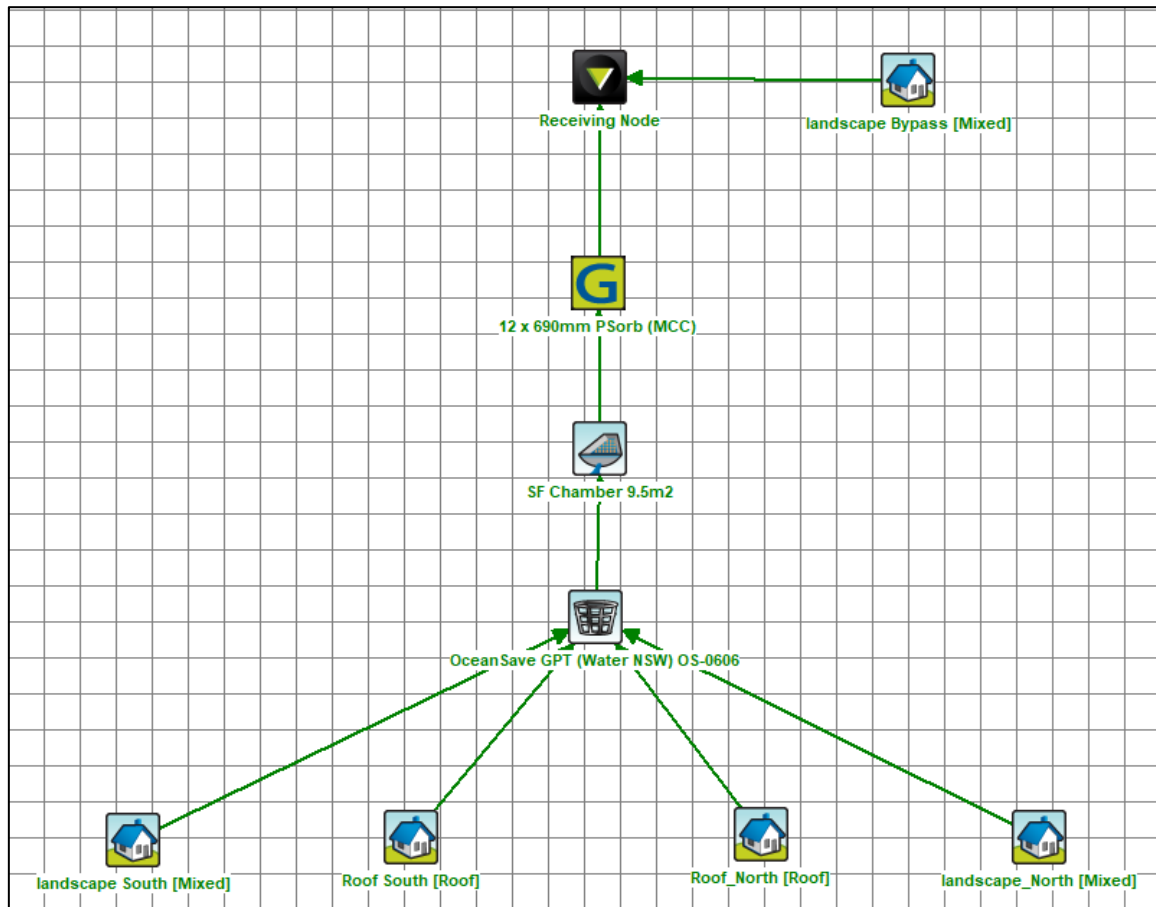


Figure 28 Proposed Treatment Train Layout

7.2.1 MUSIC Model Results

MUSIC modelling results demonstrate that the required reduction criteria can be achieved for the site with the implementation of the proposed treatment train. Proposed treatment effectiveness is represented in Table 8.

Table 8 Proposed Treatment Train Effectiveness

Pollutant	Sources	Residual Load	Reduction (%)	Reduction Target (%)
Flow (ML/yr)	2.45	2.45	0	-
Total Suspended Solids (kg/yr)	128	25.6	80	80%
Total Phosphorus (kg/yr)	0.451	0.111	75	45%
Total Nitrogen (kg/yr)	5.27	2.36	55	45%
Gross Pollutants (kg/yr)	62.5	1.23	98	-

MUSIC results demonstrate that the required reduction criteria can be achieved for the site with the implementation of the proposed treatment train.

8.0 Construction Phase Stormwater Management

During the construction phase of the project, an erosion and sediment control plan will be implemented to prevent sediment laden stormwater from entering the council drainage network. A conceptual Erosion and Sediment control plan will be included in the civil drawing set and is in accordance with the “Blue Book” - Managing Urban Stormwater: Soils and Construction (Landcom NSW). The controls include:

- Sediment fences;
- Vehicle shaker grid and wash down; and
- Sandbags or geotextile filter surrounding pits.

9.0 Conclusions and Recommendations

A detailed hydraulic model has been developed to assess local flood characteristics for the site in the 1% AEP and PMF events under both existing and proposed conditions. Modelling concluded that:

1. The proposed development is outside the flood planning area based on the Campbelltown LEP (2015) flood planning map.
2. The site is generally flood free during both 1% AEP and PMF events.
3. Minor overland flows on Parkside Crescent, to the west, and on the existing car park, to the east, have typical depths of less than 100mm in the 1% AEP and are of low hazard.
4. The existing site levels are higher than Parkside Crescent. Floodwaters along the western site boundary are generally contained within the Parkside Crescent road reserve with overflow from the carpark east of the site draining along the southern site boundary during the 1% AEP and PMF flood events.
5. Flood depths during the PMF reach a level of 77m AHD (750mm deep) on Parkside Crescent adjacent to the site and are of high hazard.
6. All openings and penetrations to the lower ground levels are to be protected up to 1% AEP flood levels plus 300mm freeboard.
7. Flood refuge for storm events up to the PMF event will be available as shelter in place on all floor levels of the proposed development.
8. Hydraulic modelling indicates that water quantity objectives are achieved through provision of an onsite detention tank with 60m³ volume capacity.
9. Water quality assessment results indicate that post development water quality objectives will be met through the proposed stormwater treatment train.
10. A final flood assessment is to be carried out to include final earthworks design, building structure and landscape design in CC stage to confirm flood compliance of the final design.

Prepared by
**TAYLOR THOMSON WHITTING
(NSW) PTY LTD**



ALI ATTAR

Authorised By
**TAYLOR THOMSON WHITTING
(NSW) PTY LTD**



Stephen Brain

P:\2020\2019\201940\Reports\TTW\Civil\Flood Assessment and Stormwater Management Report for SSDA.docx

Attachment A

Overland flow path at northern site boundary in predevelopment and post development conditions:

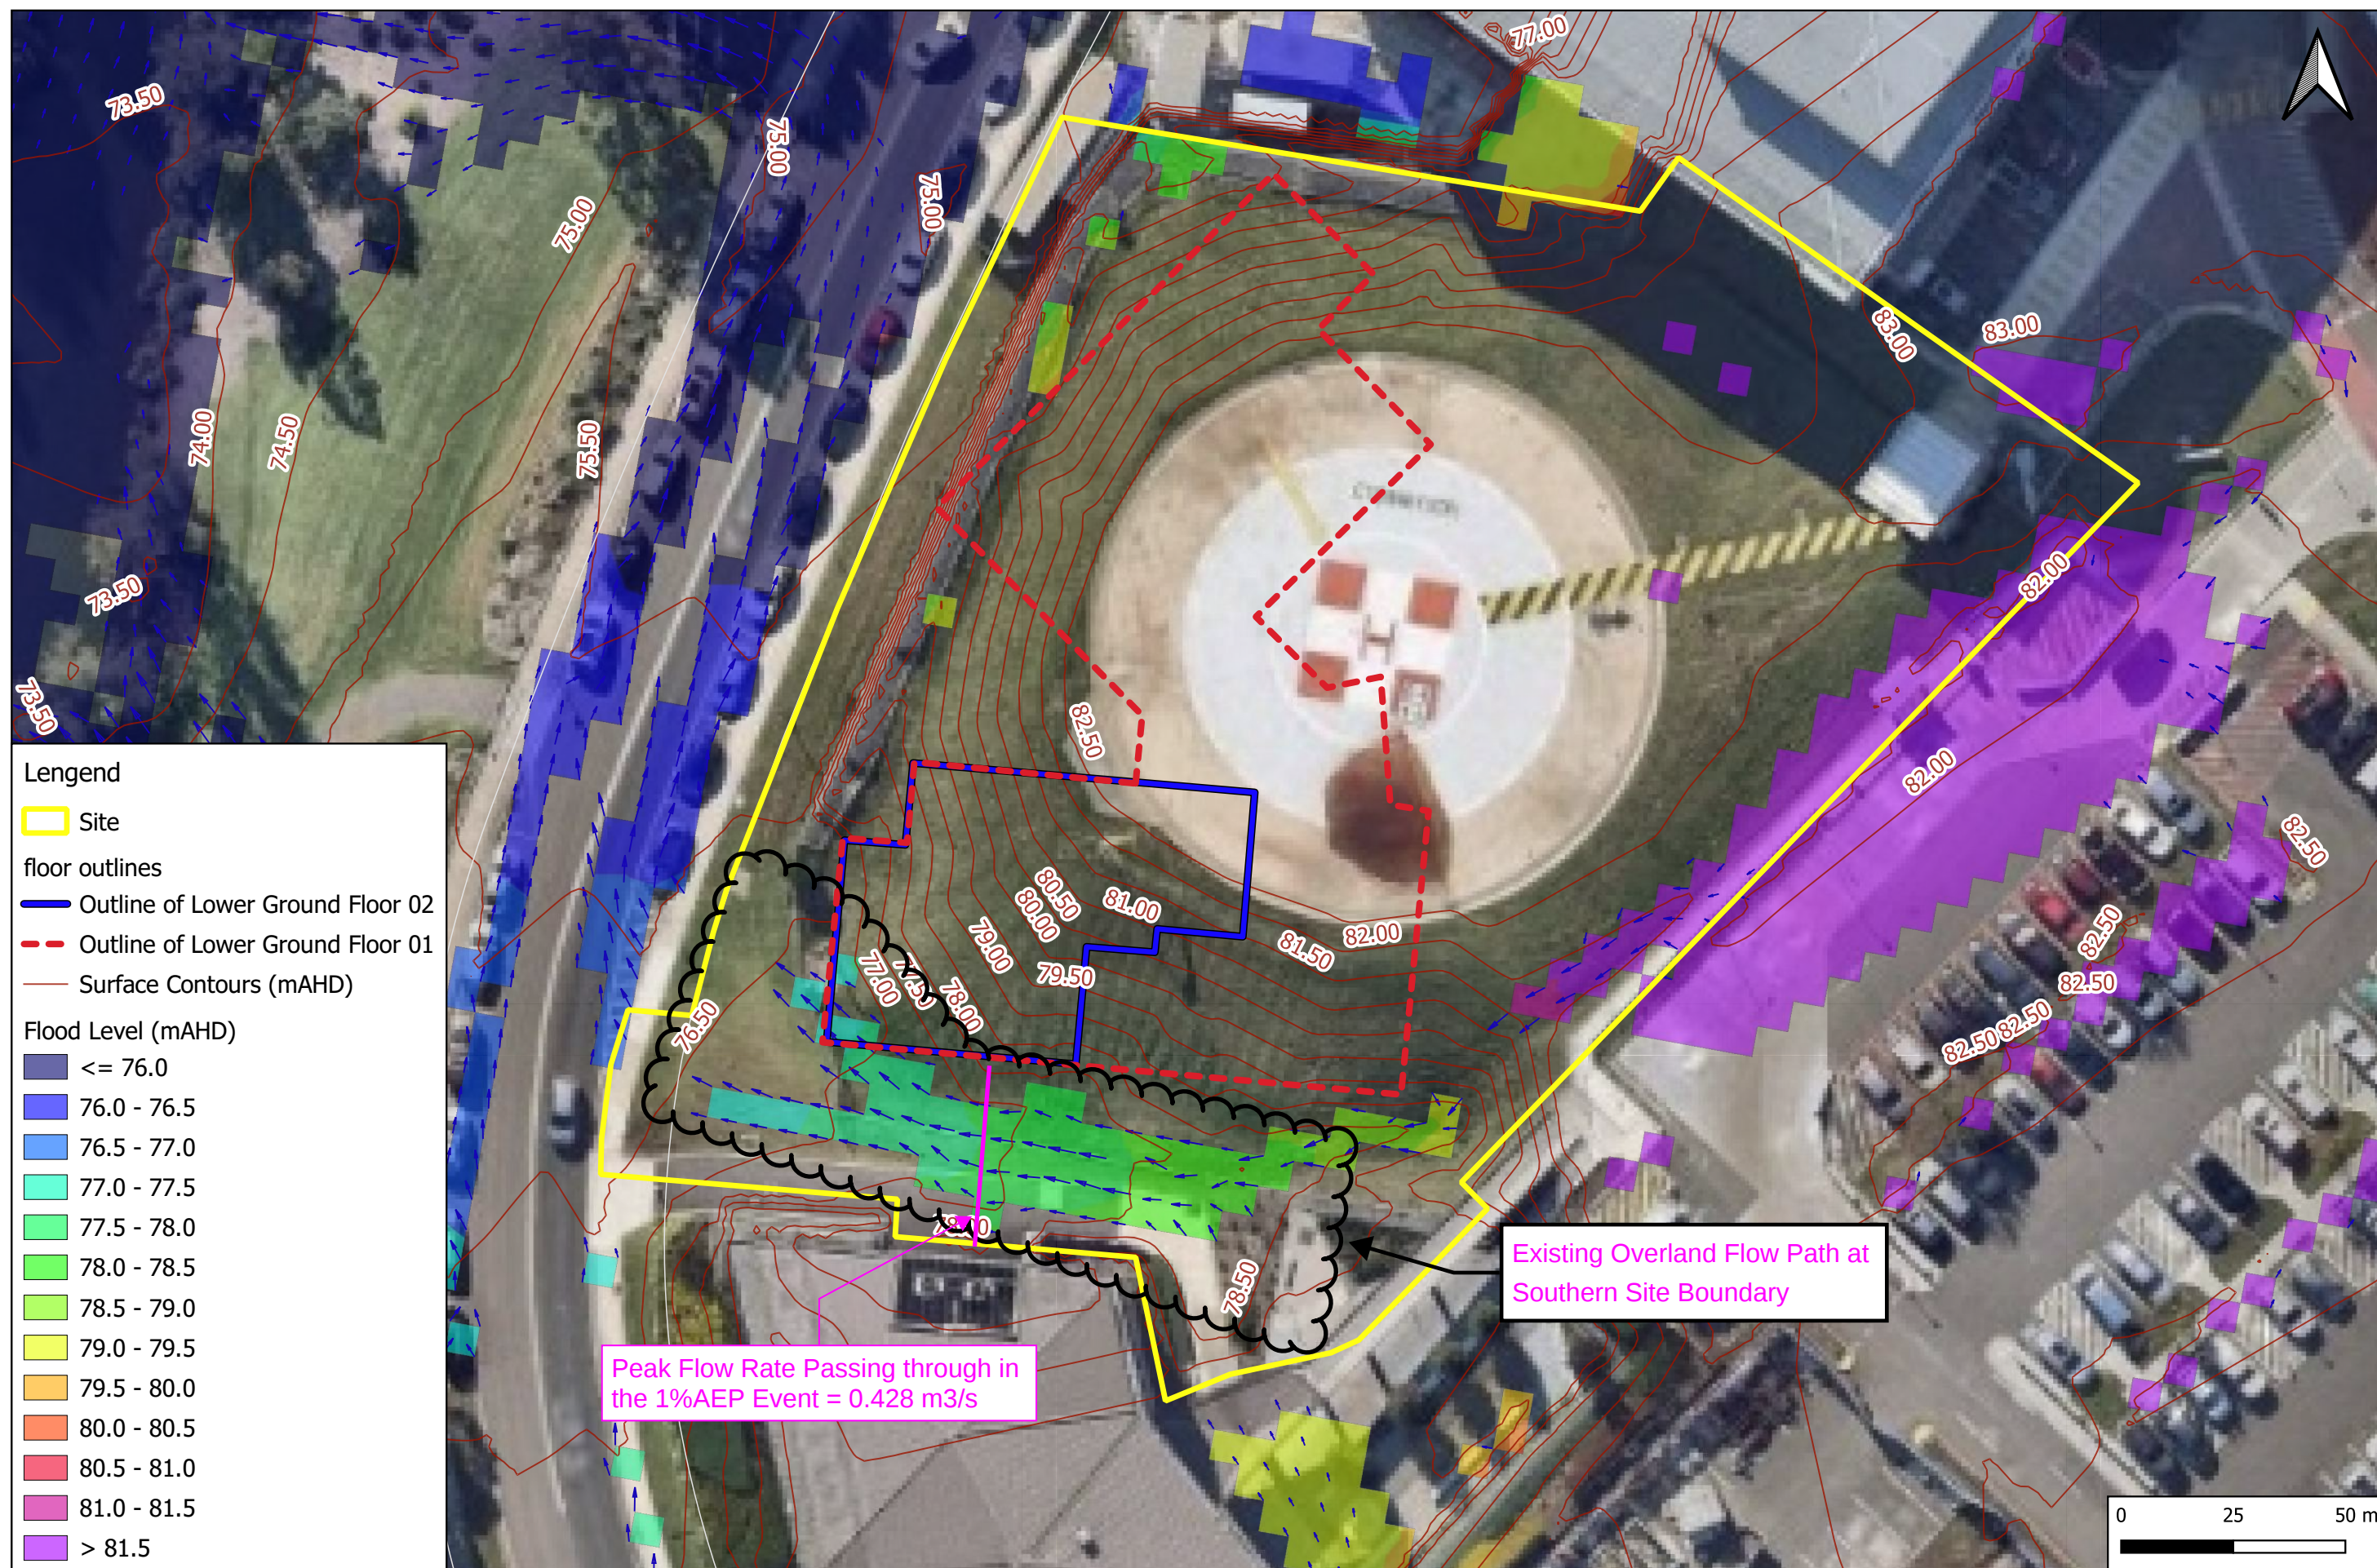


Figure A1 - Existing Overland Flow Path at Southern Site Boundary

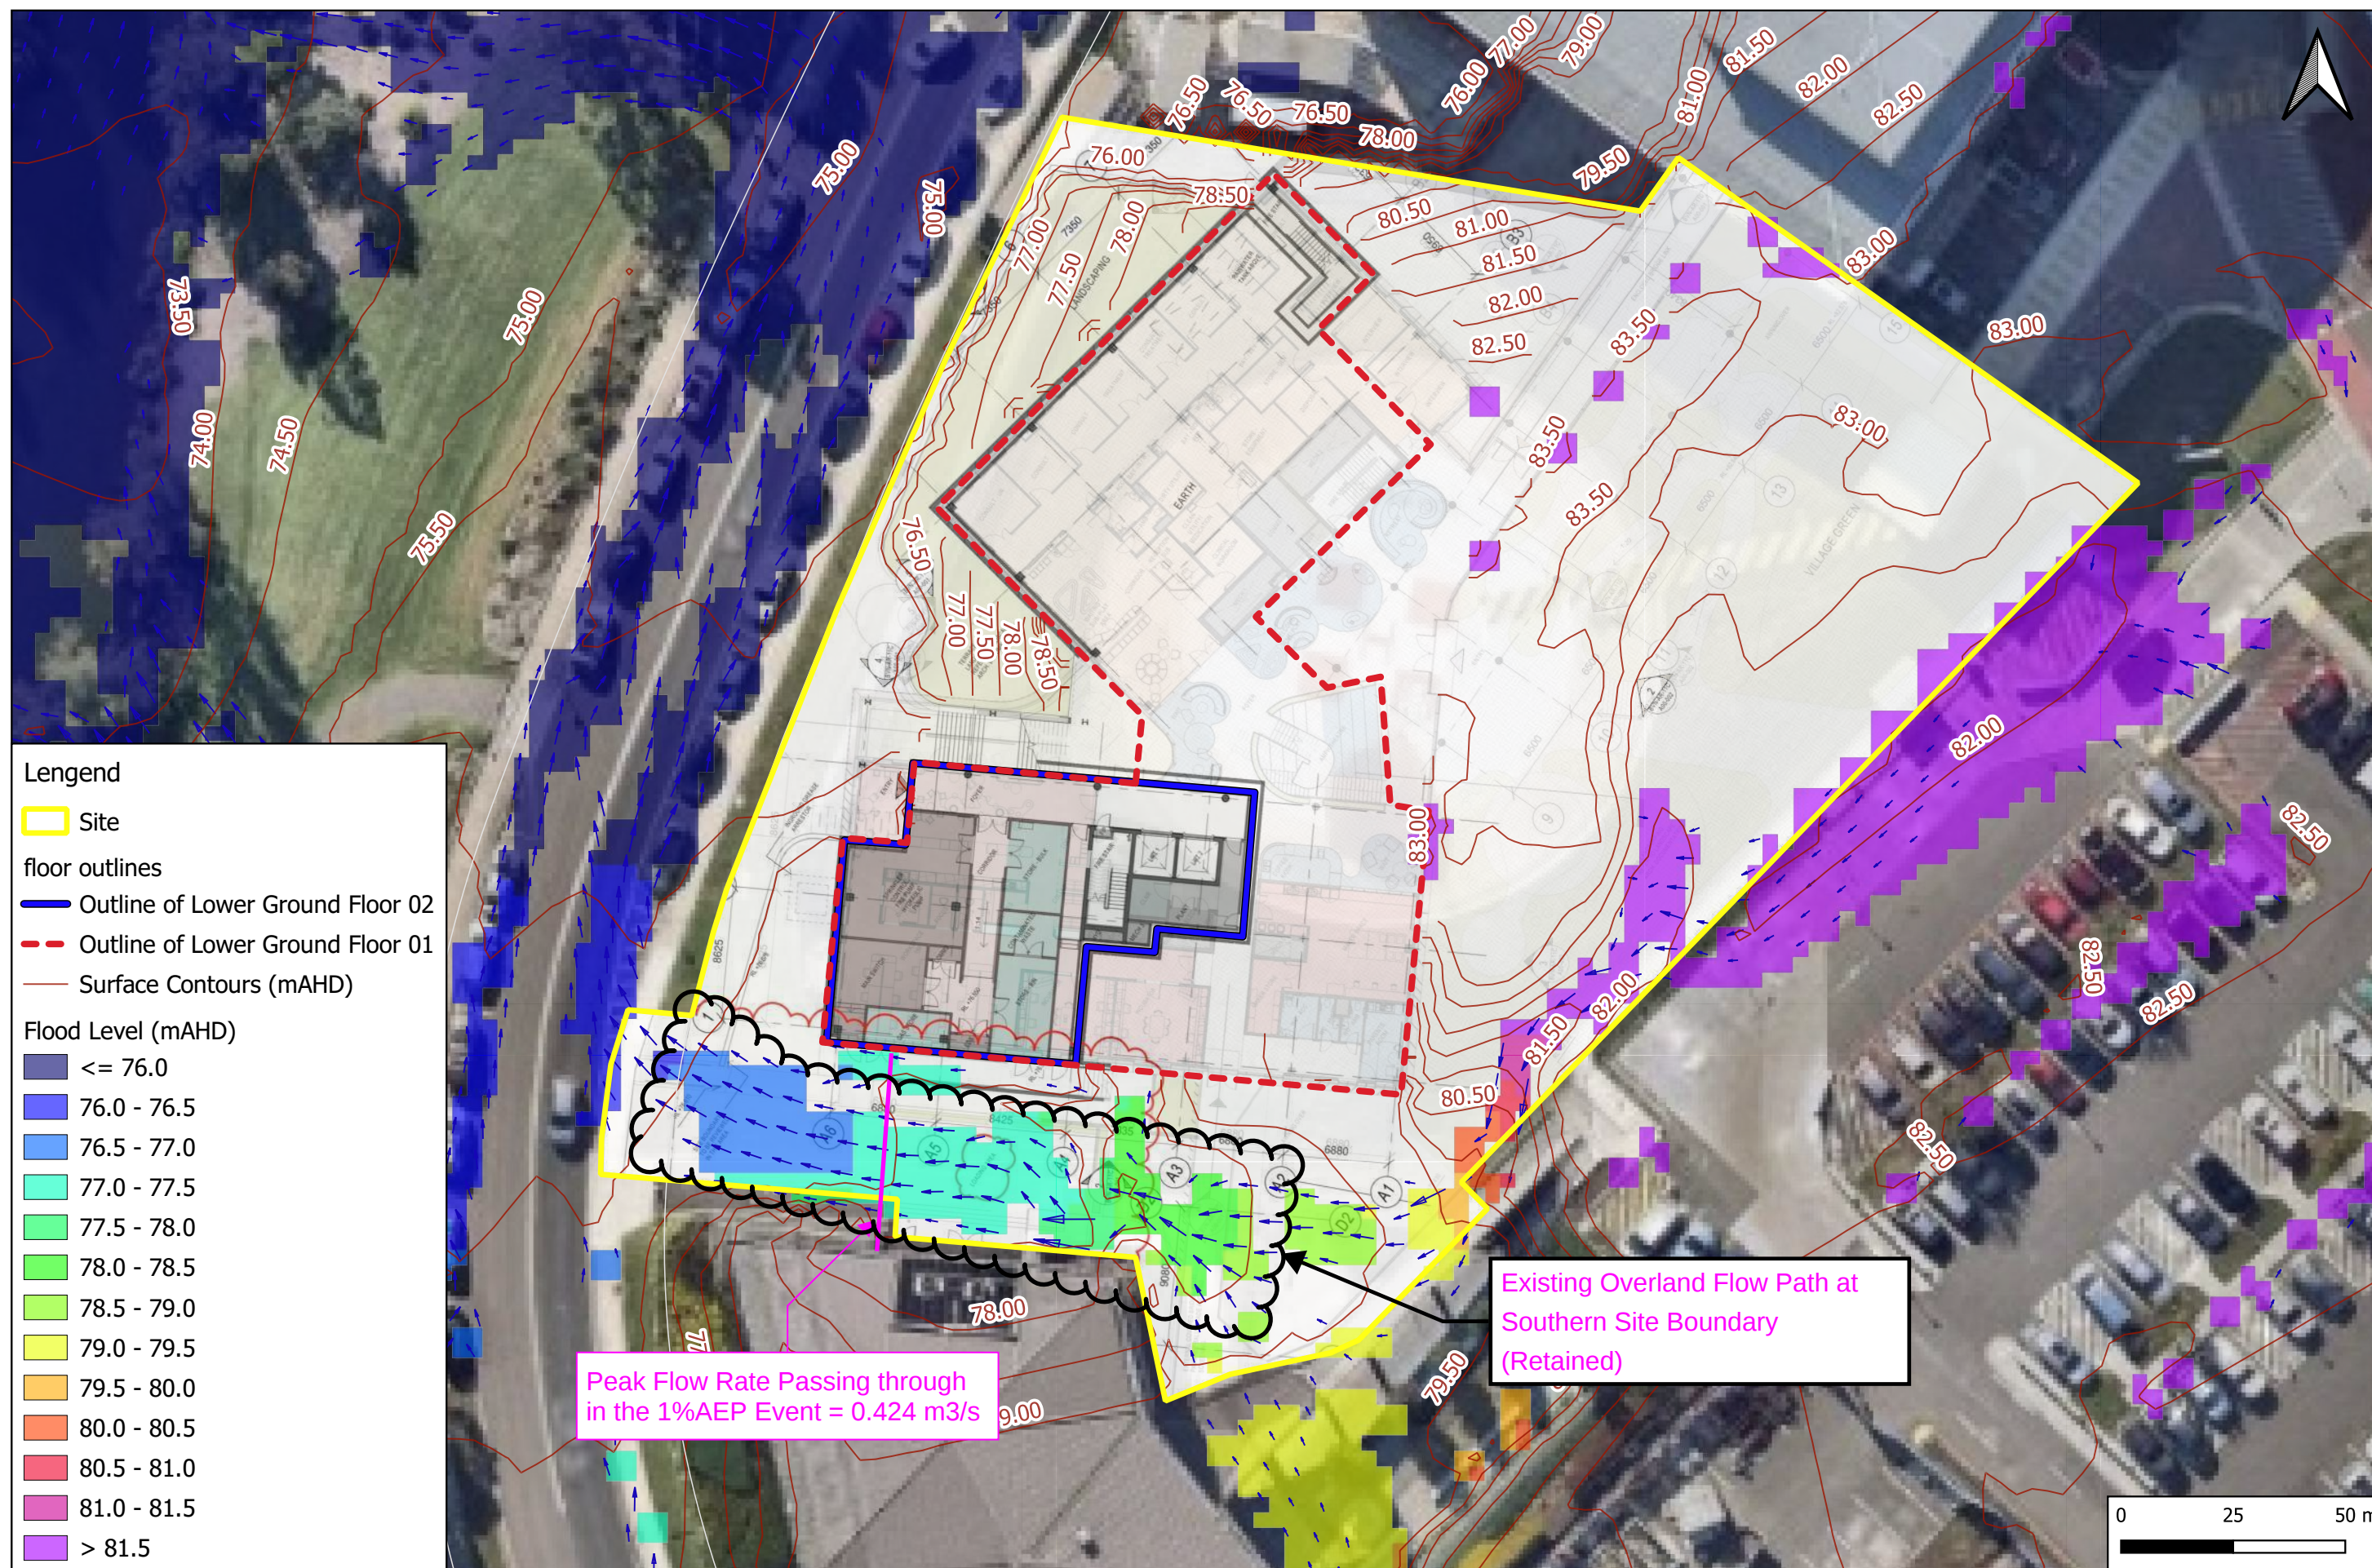


Figure A2 - Existing Overland Flow Path Retained in Post Development Conditions