



AREA 3C

**SWAMP IMPACT,
MONITORING,
MANAGEMENT AND
CONTINGENCY PLAN**

Table of Contents

1	INTRODUCTION	1
1.1	PROJECT BACKGROUND	1
1.2	SCOPE	1
1.3	STUDY AREA.....	2
1.4	OBJECTIVES	3
1.5	CONSULTATION	3
1.5.1	Longwall 21 SMP Approval.....	3
1.5.2	Longwalls 22 and 23 SMP Approval	3
2	PLAN REQUIREMENTS	5
2.1	DENDROBIUM DEVELOPMENT CONSENT.....	5
2.2	SUBSIDENCE MANAGEMENT PLAN APPROVAL	6
2.2.1	Condition 11(c), Schedule 3 – Independent Expert Panel's Recommendations	7
2.2.2	Condition 11(d), Schedule 3 – Independent Expert Panel's Advice	8
2.2.3	Condition 11(e), Schedule 3 – PSM (2017) Recommendations.....	10
2.2.4	Condition 11(f), Schedule 3 – IEP Advice dated March 2022	13
2.3	LEASES AND LICENCES	13
3	MONITORING	15
3.1	SUBSIDENCE MONITORING	15
3.2	AREA 3C SWAMPS	16
3.2.1	Reference Swamps	17
3.3	OBSERVATIONAL AND PHOTO POINT MONITORING	18
3.4	SWAMP HYDROLOGICAL BALANCE	19
3.5	WATER QUALITY CHEMISTRY	20
3.6	GROUNDWATER.....	20
3.7	SURFACE WATER FLOWS AND POOL WATER LEVELS	20
3.8	NEAR-SURFACE GROUNDWATER AND SOIL MOISTURE	21
3.9	POOLS AND CONTROLLING ROCKBARS	22
3.10	SLOPES AND GRADIENTS	23
3.11	ERODIBILITY	24
3.12	FLORA, FAUNA AND ECOSYSTEM FUNCTION	25
3.12.1	Ecosystem Function	25
3.12.2	Swamp Size.....	25
3.12.3	Fauna	26
3.13	REPORTING	27
4	PERFORMANCE MEASURES AND INDICATORS	33
4.1	IMPACT MECHANISMS.....	33
4.2	POTENTIAL FOR CONNECTIVITY TO THE MINE WORKINGS.....	34
4.3	POTENTIAL FOR FRACTURING BENEATH THE SWAMPS.....	36

4.4	POTENTIAL FOR EROSION WITHIN THE SWAMPS	38
4.5	POTENTIAL FOR VEGETATION CHANGES WITHIN THE SWAMPS.....	39
4.6	ACHIEVEMENT OF PERFORMANCE MEASURES	40
5	PREDICTED IMPACTS TO UPLAND SWAMPS.....	42
5.1	DESCRIPTION OF UPLAND SWAMPS WITHIN THE LONGWALLS 22 AND 23 STUDY AREA	42
5.2	IMPACT ASSESSMENT.....	44
5.2.1	Potential for changes in surface water flows due to the mining-induced tilts	44
5.2.2	Potential for cracking in Upland Swamps and fracturing of bedrock	44
5.2.3	Potential changes to Upland Swamp Hydrology	45
5.2.4	Potential impacts on Upland Swamp Ecology.....	47
6	MANAGEMENT AND CONTINGENCY PLAN.....	49
6.1	OBJECTIVES	49
6.2	TRIGGER ACTION RESPONSE PLAN.....	49
6.3	AVOIDING AND MINIMISING	50
6.4	MITIGATION AND REHABILITATION.....	51
6.4.1	Sealing of Rock Fractures.....	51
6.4.2	Injection Grouting.....	52
6.4.3	Erosion Control	53
6.4.4	Water Spreading.....	55
6.4.5	Alternative Remediation Approaches.....	56
6.4.6	Monitoring Remediation Success	56
6.5	BIODIVERSITY OFFSET STRATEGY	56
6.6	RESEARCH.....	57
6.7	CONTINGENCY AND RESPONSE PLAN	57
7	INCIDENTS, COMPLAINTS, EXCEEDANCES AND NON-CONFORMANCES.....	59
7.1	INCIDENTS	59
7.2	COMPLAINTS HANDLING	59
7.3	NON-CONFORMANCE PROTOCOL	59
8	PLAN ADMINISTRATION.....	60
8.1	ROLES AND RESPONSIBILITIES	60
8.2	RESOURCES REQUIRED	61
8.3	TRAINING	61
8.4	RECORD KEEPING AND CONTROL	61
8.5	MANAGEMENT PLAN REVIEW	61
9	REFERENCES AND SUPPORTING DOCUMENTATION	63

Tables

Table 2-1 Dendrobium Development Consent Conditions.....	5
Table 2-2 Subsidence impact performance measures	6

Table 2-3 Dendrobium Dendrobium Area 3C SMP Approval Conditions.....	7
Table 2-4 IEP (2019b) recommendations.....	7
Table 2-5 IEP (2019c) advice.....	9
Table 2-6 PSM (2018) recommendations.....	10
Table 2-7 IEP Advice (March 2022) – Method of Analysis of impacts on Swamp Hydrology	13
Table 3-1 Summary of swamps within the Longwalls 20 to 23 Study Area	17
Table 3-2 Summary of reference swamps for Dendrobium Area 3C	18
Table 3-3 Upland swamps and associated sub-communities within the Study Area (Niche 2021a).....	25
Table 4-1 Summary of subsidence effects, impacts and consequences for surface flows, storages and swamp hydrology (IEP 2019b)	34
Table 5-1: Maximum predicted total vertical subsidence, tilt and curvatures for the swamps.....	43
Table 5-2 Maximum predicted total upsidence and closure for the swamps	43
Table 5-3 Summary of predicted impacts to upland swamps	46
Table 6-1 Performance measures, potential impacts, monitoring, mitigation and management strategies and offsetting for swamps	59
Table 9-1 Agency feedback and responses – Longwalls 20 and 21	69
Table 9-2 Agency feedback and responses – Longwalls 22 and 23.....	71

Figures

Figure 1-1 Location of swamps above Dendrobium Mine Longwalls 20 to 23.....	4
Figure 3-1 Swamp observational, ecological, near-surface groundwater and soil moisture monitoring.....	28
Figure 3-2 Reference swamps.....	29
Figure 3-3 Groundwater monitoring boreholes in Longwalls 22 and 23 Study Area	30
Figure 3-4 Geomorphic features within the Area 3C Study Area	31
Figure 3-5 Frog Monitoring Sites	32
Figure 6-1 Rockbar grouting In The Georges River.....	53
Figure 6-2 Square coir logs for knick point control.....	53
Figure 6-3 Installation of square coir logs.....	54
Figure 6-4 Trenching & positioning of the first layer of coir logs and construction of a small dam in an eroding swamp channel	54
Figure 6-5 Small coir log dams with fibre matting	55
Figure 6-6 Round coir logs installed to spread water.....	55

Appendices

Appendix A – Swamp Monitoring and Trigger Action Response Plan

Appendix B –Agency Feedback and Responses

Review History

Revision	Description of Changes	Date	Approved
A	New Document	September 2019	GB
B	Minor updates	September 2019	GB
C	Figure updates	November 2019	GB

Revision	Description of Changes	Date	Approved
D	Updates to address Conditions 11 of the 3C SMP Approval (granted 19 December 2019)	June 2020	GB
E	Updated to address BCD and WaterNSW Feedback	August 2020	GB
F	Updated to include Longwalls 22 and 23	June 2020	GB
G	Updated with Agency feedback	September 2021	GB
H	Updates to address Condition 11 of the 3C SMP Approval (granted 20 December 2022)	March 2023	GB
H.1	Updated to include IEAPM advice dated 1 August 2023 in relation to the LW19A SIMMCP including definition of ecosystem functionality, the role of hydrology in swamp ecosystem functionality and the TARP	March 2024	GB

Persons involved in the development of this document

Name	Title	Company
Billy Agland	Specialist Environment	Illawarra Metallurgical Coal
Josh Carlon	Coordinator Environment	Illawarra Metallurgical Coal
Cody Brady	Principal Approvals	Illawarra Metallurgical Coal
Gary Brassington	Manager Approvals	Illawarra Metallurgical Coal
Linda Zanotto	Principal Approvals	Illawarra Metallurgical Coal

1 INTRODUCTION

1.1 Project Background

Illawarra Metallurgical Coal (IMC) operates underground coal mining operations at Dendrobium Mine, located in the Southern Coalfield of New South Wales. Longwalls from the Wongawilli Seam have been mined in Areas 1, 2, 3A and 3B. Longwall 21 in Area 3C has been extracted and was completed on 6 August 2023. Longwall 19A in Area 3A is currently being extracted.

IMC was granted Development Consent by the NSW Minister for Planning for the Dendrobium Project on 20 November 2001. In 2007, IMC proposed to modify its underground coal mining operations and the NSW Department of Planning advised that the application for the modified Area 3 required a modification to the original consent. The application followed the process of section 75W of the *Environmental Planning and Assessment Act 1979* (EP&A Act) and required the submission of a comprehensive Environmental Assessment (Cardno 2007). The Environmental Assessment (EA) described the environmental consequences likely from cracking and diversion of surface water as a result of the proposed mining. These impacts included diversion of flow, lowering of aquifers, changes to habitat for threatened species as well as other impacts and environmental consequences.

On 8 December 2008, the Minister for Planning approved a modification to DA_60-03-2001 for the Dendrobium Underground Coal Mine and associated surface facilities and infrastructure under section 75W of the EP&A Act.

Schedule 3, Condition 7 of the Development Consent, requires the development of a Subsidence Management Plan (SMP) for approval prior to carrying out mining operations in Area 3C.

This document satisfies Schedule 3 Condition 6 of the Development Consent, which requires the development of a Swamp Impact Monitoring, Management and Contingency Plan (SIMMCP) for approval prior to carrying out mining operations in Area 3C and has been updated in accordance with the request for more information by the Department in a letter dated 12 January 2024 which requires:

The Department requires amendments to the SIMMCP to address relevant comments made by the independent expert advisory panel for mining in its advice dated 1 August 2023 and by the Department in relation to the LW19A SIMMCP. This includes comments in relation to the definition of ecosystem functionality, the role of hydrology in swamp ecosystem functionality and in relation to the structure and detail of the trigger action response plan.

Performance indicators should also be included for significant pools within swamps, with TARPs that include provision for assessing if remediation is warranted and feasible to prevent changes to swamp ecosystem functionality.

The Department notes that changes to the swamp monitoring network may be necessary to support these changes and should be considered when updating the plan and, where relevant, as part of the independent review of monitoring required as a condition of the LW19A SIMMCP approval.

There is no current plan to extract Longwall 20 as previously proposed and therefore this longwall has been removed from the document.

1.2 Scope

The SIMMCP has been prepared to comply with the Dendrobium Development Consent which requires a SIMMCP subject to Schedule 3, Condition 6 as provided below.

6. Prior to carrying out any underground mining operations that could cause subsidence in either Area 3A, Area 3B or Area 3C, the Applicant must prepare a Swamp Impact Monitoring, Management and Contingency Plan to the satisfaction of the Secretary. Each such Plan must:

- (a) demonstrate how the subsidence impact limits in condition 5 are to be met;
- (b) include a monitoring program and reporting mechanisms to enable close and ongoing review by the Department and Resources Regulator of the subsidence effects and impacts (individual and cumulative) of each Area 3A Longwall on Swamp 15a;
- (c) include a general monitoring and reporting program addressing surface water levels, near surface groundwater levels, water quality, surface slope and gradient, erodibility, flora and ecosystem function;

- (d) include a management plan for avoiding, minimising, mitigating and remediating impacts on swamps, which includes a tabular contingency plan (based on the Trigger Action Response Plan structure) focusing on measures for remediating both predicted and unpredicted impacts;
- (e) address headwater and valley infill swamps separately and address each swamp individually;
- (f) be prepared in consultation with BCS, WaterNSW and Resources Regulator;
- (g) incorporate means of updating the plan based on experience gained as mining progresses;
- (h) be approved prior to the carrying out of any underground mining operations that could cause subsidence impacts on swamps in the relevant Area; and
- (i) be implemented to the satisfaction of the Secretary.

1.3 Study Area

The Study Area is defined as the surface area that could be affected by the mining of Longwalls 21, 22 and 23 (Longwalls 21 to 23) (**Figure 1-1**). The extent of the Study Area has been calculated by combining the areas bounded by the following limits:

- The 35° angle of draw line from the extents of Longwalls 21 to 23;
- The predicted limit of vertical subsidence, taken as the 20 mm subsidence contour, resulting from the extraction of the Longwalls 21 to 23; and
- The natural features located within 600 m of the extent of the longwall mining area, in accordance with Condition 8(d) of the Development Consent.

The depth of cover varies between 290 m and 420 m directly above the proposed Longwalls 21 to 23. The 35° angle of draw line, therefore, has been determined by drawing a line that is a horizontal distance varying between 200 m and 290 m around the extents of the longwall voids.

The predicted limit of vertical subsidence, taken as the predicted total 20 mm subsidence contour, has been determined using the calibrated Incremental Profile Method (IPM), which is described in MSEC (2021).

The features that are located within the 600 m boundary that are predicted to experience valley related movements and could be sensitive to these movements have been included in the assessments provided in this report. These features include streams and upland swamps.

There are additional features that are located outside the 600 m boundary that could experience either far field horizontal movements or valley related movements. The surface features that could be sensitive to such movements have been identified and have also been included in the assessments provided in this report.

The swamps located outside the extent of longwall mining which could experience far-field or valley related movements, and could be sensitive to these movements, have been identified and included in the assessments provided in this report.

This SIMMCP applies to Swamps 6, 7, 9, 16, 89, 140, 141, 144, 145, 152, 153, 154, 155, 156 and 157 within the Dendrobium Area 3C mining domain (Swamps 6, 16, 89, 140, 141, 145, 152 and 157 are located outside the Longwalls 21 to 23 Study Area based on the angle of draw boundary) (**Figure 1-1**). Swamp 15a, as defined in the Dendrobium Development Consent (Schedule 3, Conditions 5, 6a and 6b), is not within the defined area of study relative to the proposed extents of Longwalls 21 to 23.

A number of smaller swamp areas or swamp-like vegetation are scattered throughout the study area. These small patches of swamp like vegetation are often too small to map as discrete swamps and occur in small areas of impeded drainage that contain a mix of plant species common to the upland swamps and fringing eucalypt woodlands of the region. These patches of vegetation have not been identified in the existing swamp mapping of the study area and field observations indicate that these patches of vegetation occur randomly in the landscape, are not typically restrained by sandstone rockbars and are unlikely to be sustained by groundwater seeps (Niche 2021a). These small and less significant swamp areas (less than 1500 m² in area) have not been named and mapped as part of the terrestrial ecology assessment, with monitoring efforts focused on larger representative swamps. Two exceptions for the current study area include Swamp 141 and Swamp 157, both have been included despite their small size due to being incorporated in previous mapping for adjoining longwalls and/or regional mapping (NPWS 2003). Further, these vegetation patches do not occur in valley floors and therefore are not likely to be subject to valley closure movements resulting from longwall extraction (Niche 2012).

1.4 Objectives

The objectives of this SIMMCP are to identify swamp features and characteristics within the Dendrobium Longwalls 21 to 23 Study Area (**Figure 1-1**) and to monitor and manage potential impacts and/or environmental consequences of the proposed workings on swamps.

1.5 Consultation

The Dendrobium SIMMCP has been developed by IMC in consultation with:

- Department of Planning, Housing and Infrastructure (DPHI or “the Department”, previously known as DPE);
- Resources Regulator;
- Biodiversity Conservation Division (BCD) now known as Biodiversity Conservation and Science (BCS) within the Department of Climate Change, Energy, the Environment and Water (DCCEEW); and
- WaterNSW.


The SIMMCP and other relevant documentation are available on the IMC website (Schedule 8, Condition 11 of the Development Consent).

1.5.1 Longwall 21 SMP Approval

In accordance with the Area 3C SMP Approval (19 December 2019) Condition 11a, Schedule 3, the SIMMCP was provided to BCD and WaterNSW in June 2020 for consultation. Agency feedback was received, with **Table 9-1** providing details of feedback and associated responses. The Longwalls 20 and 21 SIMMCP (Revision E) was provided to the Department for consideration. The Department provided comments and recommendations in writing to IMC in July 2021.


1.5.2 Longwalls 22 and 23 SMP Approval

Revision G of the SIMMCP was submitted with the SMP application for Area 3C Longwalls 22 and 23 and approval was received on 20 December 2022. Table 9-2 provides details of agency feedback and associated responses. The SIMMCP has been updated to address these comments (Revision H of this document). This Revision H.1 has been amended in response to the Department’s request dated 12 January, 2024 to include advice from the Panel dated 1 August 2023 and the Department in relation to LW19A SIMMCP in regard to the definition of ecosystem functionality, the role of hydrology in swamp ecosystem functionality and the structure and detail of the TARP. Performance indicators for significant permanent pools within swamps include a provision within the TARP for assessing if remediation is warranted and feasible to prevent changes to swamp ecosystem functionality. Changes to the swamp monitoring network (Appendix A) are included accordingly. It should be noted that a SIMMCP was submitted (Revision I) with the Longwall 21A SMP application. At the time of writing, this version was with the Department for assessment.

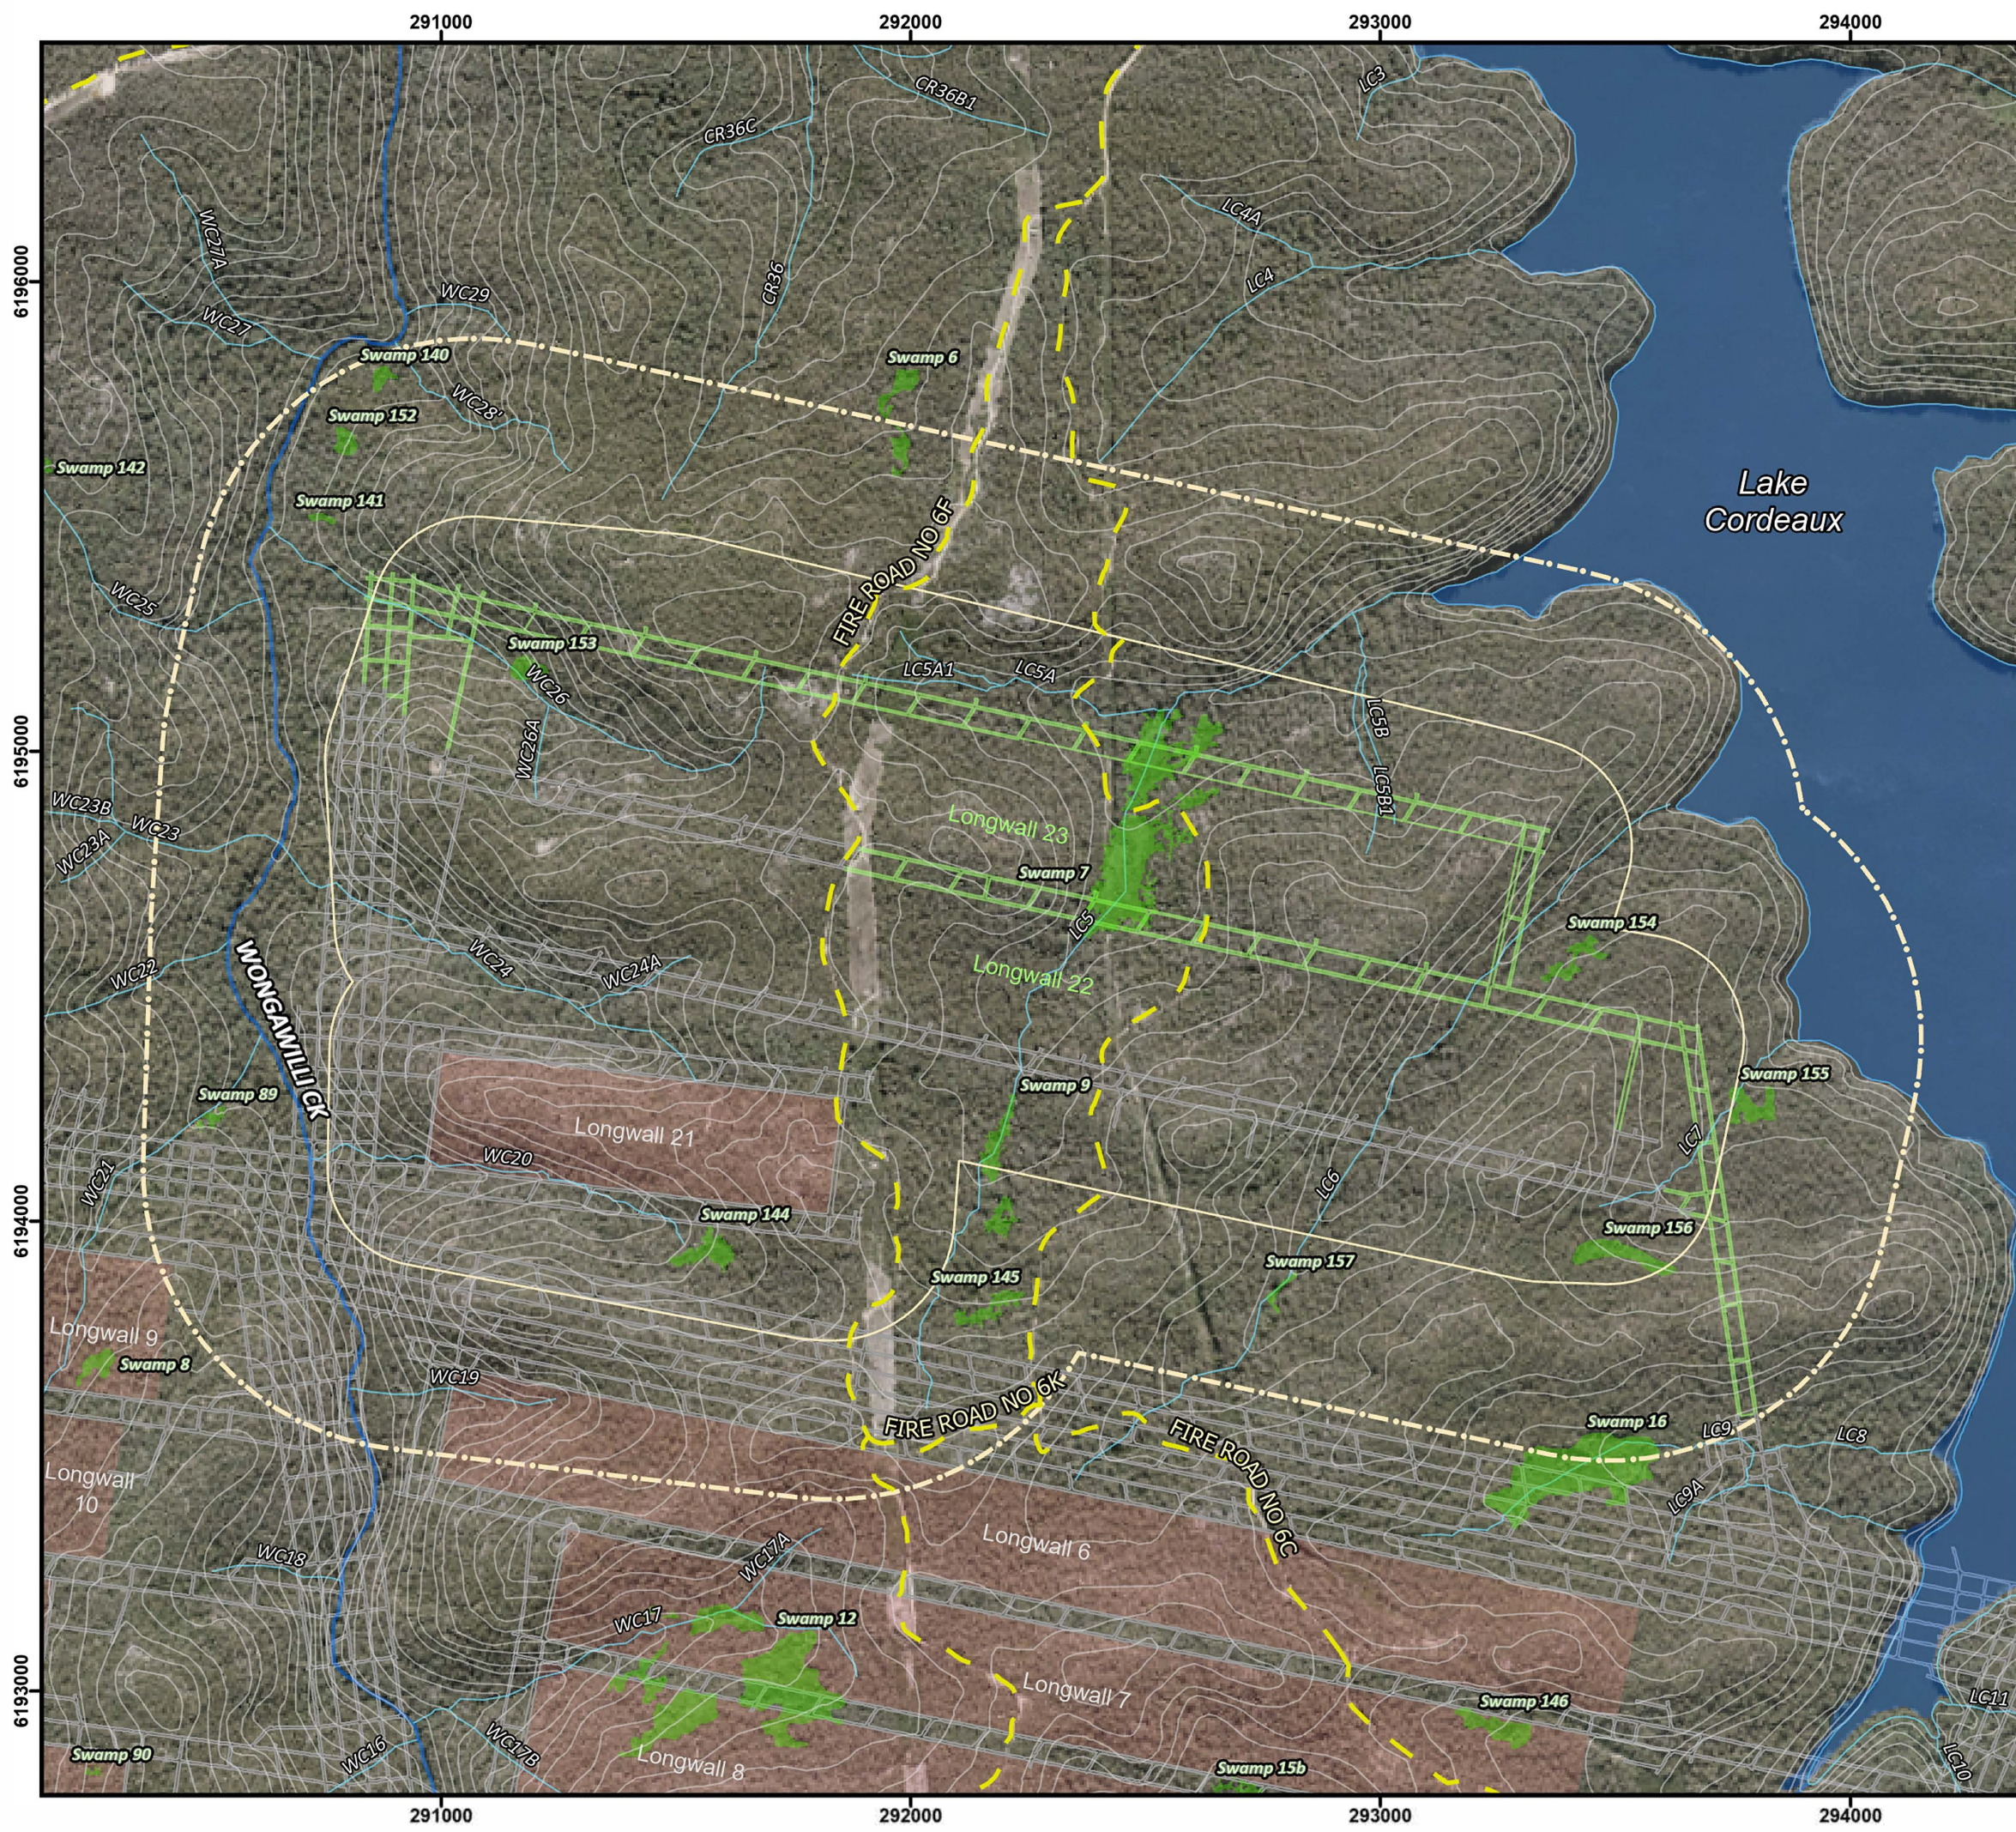



**DENDROBIUM
LONGWALLS 21
to 23 SMP
Overview**
Figure 1-1

- Fire Roads
- 10m Contours
- Study Area (35 deg Angle of Draw)
- Study Area (600m Boundary)
- Existing Mine Workings
- Approved Mine Layout
- Dendrobium Goaf
- Rivers
- Creeks
- Tributaries
- Swamp
- Dendrobium Mining Areas

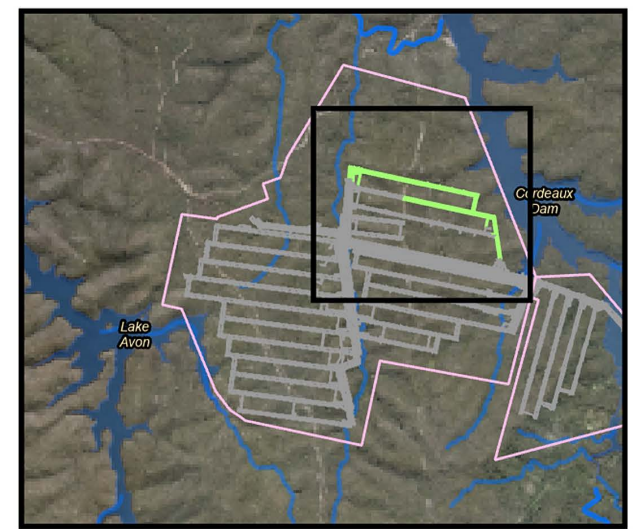

Date: February, 2024

Version 1
Horizontal Datum
MGA - Zone 56



2 PLAN REQUIREMENTS

Extraction of coal from longwalls in Area 3C will be in accordance with the conditions set out in the Dendrobium Development Consent as well as conditions attached to relevant mining leases.

Baseline studies have been completed within the Study Area and surrounds to record biophysical characteristics. Monitoring is conducted in the area potentially affected by subsidence from the extraction of Longwalls 20 to 23. The baseline studies have identified monitoring sites in these areas based on the Before After Control Impact (BACI) design criteria.

A comprehensive monitoring program for swamps is outlined in this SIMMCP (**Appendix A: Table 1.1**).

A summary of swamp monitoring within Dendrobium Area 3C is provided in the following sections. In the event that monitoring reveals impacts greater than what is authorised by the Development Consent, modifications to the project and mitigation measures including remediation, offsets, or other appropriate actions determined in consultation with the consent authority will be implemented. The monitoring locations for swamps within Dendrobium Area 3C will be reviewed as required and can be modified (with agreement) accordingly.

2.1 Dendrobium Development Consent

The Dendrobium Underground Coal Mine (DA 60-03-2001) modification was approved under section 75W of the EP&A Act on 8 December 2008. **Table 2-1** lists the Conditions of Consent relevant to the SIMMCP and where the conditions are addressed.

Table 2-1 Dendrobium Development Consent Conditions

Dendrobium Development Consent Condition	Relevant SIMMCP Section
Condition 5 – Schedule 3 The Applicant must ensure that subsidence does not cause erosion of the surface or changes in ecosystem functionality of Swamp 15a and that the structural integrity of its controlling rock-bar is maintained or restored, to the satisfaction of the Secretary.	Not Applicable to Area 3C
Condition 6 – Schedule 3 Prior to carrying out any underground mining operations that could cause subsidence in either Area 3A, Area 3B or Area 3C, the Applicant must prepare a Swamp Impact Monitoring, Management and Contingency Plan to the satisfaction of the Secretary. Each such Plan must: (a) demonstrate how the subsidence impact limits in condition 5 are to be met; (b) include a monitoring program and reporting mechanisms to enable close and ongoing review by the Department and Resources Regulator of the subsidence effects and impacts (individual and cumulative) of each Area 3A Longwall on Swamp 15a; (c) include a general monitoring and reporting program addressing surface water levels, near surface groundwater levels, water quality, surface slope and gradient, erodibility, flora and ecosystem function; (d) include a management plan for avoiding, minimising, mitigating and remediating impacts on swamps, which includes a tabular contingency plan (based on the Trigger Action Response Plan structure) focusing on measures for remediating both predicted and unpredicted impacts; (e) address headwater and valley infill swamps separately and address each swamp individually;	Not Applicable to Area 3C Not Applicable to Area 3C Section 3 and Appendix A Section 6 and Appendix A Section 3

Dendrobium Development Consent Condition	Relevant SIMMCP Section
(f) be prepared in consultation with BCD, WaterNSW and Resources Regulator;	Section 1.5
(g) incorporate means of updating the plan based on experience gained as mining progresses;	Section 8.5
(h) be approved prior to the carrying out of any underground mining operations that could cause subsidence impacts on swamps in the relevant Area; and	Section 1.4
(i) be implemented to the satisfaction of the Secretary.	Section 2

2.2 Subsidence Management Plan Approval

The Dendrobium Area 3C SMP Approval was granted by the Director, Energy & Resource Assessments (Underground) of the Department on 20 December 2022 for Longwalls 21, 22 and 23. The approval does not include Longwall 20 as per Condition 1 of Schedule 4 which states “*The Applicant must not extract Longwall 20 as presented in Subsidence Management Plan 2019.*”

The Dendrobium Mine Area 3C SMP approval stipulates in Condition 6 of Schedule 3 that the applicant must ensure that the development does not cause any exceedance of the performance measures. Performance measures for swamps under the Area 3C SMP approval are provided in Table 2-2 below.

Table 2-2 Subsidence impact performance measures – Swamps

Swamps	
Swamp Den 9, Den 144 and Den145, Den 154	Minor environmental consequences including: - negligible erosion of the surface of the swamp; - minor changes to the hydrology of the swamp; - minor changes in the size of the swamp; - minor changes in the ecosystem functionality of the swamp; and - maintenance or restoration of the structural integrity of the bedrock base of any significant permanent pool or controlling rockbar within the swamp.

Note: The Applicant may meet the requirements of this condition either by avoidance, mitigation, remediation or offsetting, or any combination of these measures.

Table 2-3 lists the Conditions of the Approval relevant to revising the SIMMCP and where the conditions are addressed.

Table 2-3 Dendrobium Area 3C SMP Approval Conditions

Dendrobium Area 3C SMP Approval Condition	Relevant SIMMCP Section
Condition 11 – Schedule 3 The Applicant must submit a revised Area 3C SIMMCP (including its associated TARP) to the Secretary by 30 March 2023 for approval. The revised Area 3C SIMMCP must:	
(a) be prepared in consultation with WaterNSW and BCD;	Section 1.5
(b) include a TARP which contains quantitative triggers which are directly linked to maintaining achievement of the performance measures for swamps set out in the SIMMCP;	Section 6.2 and Appendix A
(c) fully reflect the recommendations of the Independent Expert Panel which directly relate to impact monitoring, management, remediation and contingency planning in respect of swamps;	Section 2.2.1
	Section 2.2.2

Dendrobium Area 3C SMP Approval Condition	Relevant SIMMCP Section
(d) fully reflect the advice of the Independent Expert Panel dated 13 December 2019 on Subsidence Management Plan 2019 relating to monitoring of swamp impacts;	Section 2.2.3
(e) reflect the nine monitoring program recommendations included in <i>Height of Cracking - Dendrobium Area 3B</i> (PSM, 2017); and	Section 2.2.4
(f) fully reflect the advice of the Independent Expert Panel dated March 2022 on the Subsidence Management Plan 2021 relating to the method of analysis of impacts on swamp hydrology.	

2.2.1 Condition 11(c), Schedule 3 – Independent Expert Panel’s Recommendations

In accordance with Condition 11(c), Schedule 3 of the Area 3C SMP Approval, the SIMMCP was updated to fully reflect the recommendations of the Independent Expert Panel (IEP) on the Longwalls 20 and 21 SMP application dated 13 December 2019; relating to monitoring of swamp impacts which directly relate to impact monitoring, management, remediation and contingency planning in respect of swamps. **Table 2-4** details how the recommendations were addressed or where the recommendations are addressed in the SIMMCP. The Longwalls 20 and 21 SIMMCP (Revision E) was provided to the Department for consideration. The Department provided comments and recommendations in writing to IMC in July 2021. The SIMMCP was updated to address these comments in Revision G of this document which was approved with the Longwalls 22 and 23 SMP.

Table 2-4 IEP (2019b) recommendations

IEP Recommendation	Relevant SIMMCP Section
18. Future swamp monitoring and modelling programs should be designed to:	Monitoring the hydrogeological balance of representative swamps with flow gauges at the downstream exit stream is proposed for three swamps in Area 3C(Figure 1-1, Section3.4):
a) Provide a hydrological balance for representative swamps, sufficient to identify any mining-induced changes in soil moisture and in baseflow down the exit stream; and to provide vertical leakage rates as inputs to groundwater models, in order to quantify how much of the leakage is diverted back into the catchment or elsewhere.	- Swamp 7 is a large and “complex” valley infill swamp. Note it is the only swamp considered “complex” in the Longwalls 20 to 23 Study Area. A gauging station has been established on the exit stream for Swamp 7. - Swamp 153 is a small and “simple” headwater swamp. A gauging station (WC26S2) was installed in late 2022 immediately downstream of Swamp 153 to monitor swamp outflow. - Swamp 144 is a small and “simple” headwater swamp. A gauging station (WC20S2) was installed in late 2022 immediately downstream of Swamp 144 to monitor swamp outflow. As suitable datasets become available for these swamps, this data is incorporated into groundwater modelling to account for water loss scenarios.
b) Link any changes in swamp vegetation to changes in water table position, soil moisture content and soil organic carbon content.	Impacts to swamp ecology are not immediately obvious after groundwater changes as a result of mining (Section 4.5). There appears to be a lagging effect for swamps that have been undermined, slowly transition to drier upland swamp community subtypes. For large representative swamps in Area 3C, swamp monitoring reporting such as End of Panel (EoP) Reports (Section 3.13) and the Dendrobium Annual Terrestrial Ecology Monitoring Program will assess changes in swamp vegetation to changes in groundwater, soil moisture and soil organic

IEP Recommendation	Relevant SIMMCP Section
	carbon content. The Dendrobium Annual Terrestrial Ecology Monitoring Program currently assesses this for swamps in Areas 3A and 3B. Piezometric data indicates changes in shallow groundwater levels following extraction of longwalls beneath or near swamps. Ecological trends of monitored swamps is assessed in consideration of shallow groundwater and soil moisture, this is discussed in Section 4.1 of Biosis Research 2020.
c) Identify the presence of and any changes in obligate swamp fauna such as the giant dragonfly (<i>Petalura gigantea</i>).	As part of the Dendrobium Swamp Rehabilitation and Research Program (Section 6.6), Giant Dragonfly surveys have been conducted over a three year period. It should be noted that part of the purpose of this research is to better understand the distribution of the Giant Dragonfly as it is often not observed in similar abundance over successive years, indicating that variables that are not currently understood may be influencing the sightings. Giant dragonfly monitoring has been included as a component of the Dendrobium Ecological Monitoring program to be undertaken in Areas 3A, 3B and 3C.
20. Annual performance reports, end-of-panel reports and reports on studies required by development consent conditions, should: a) integrate hydrological and ecological impact and consequence assessments	Impacts to swamp ecology are not immediately obvious after they have been impacted by mining. There appears to be a lagging effect for swamps that have been undermined, slowly transition to drier upland swamp community subtypes. EoP Reports consider these lagging and cumulative effects where no immediate impact is apparent (Section 4.5). The Dendrobium Annual Terrestrial Ecology Monitoring Program will incorporate findings from the surface water impact assessments that are carried out for EoP Reporting to integrate hydrogeological impacts to swamps (Section 4.6).
b) include discussion of the inter-related changes in hydrological and ecological consequences for swamps, rather than having only discrete chapters on each	As detailed above, discussion of the inter-related changes in hydrological and ecological consequences for swamps will be included in the Dendrobium Annual Terrestrial Ecology Monitoring Report (Section 4.6).
c) include results for the entire period of monitoring, rather than just the previous year, that should be assessed, not only for the current mining area but for previous mining domains	The Dendrobium Annual Terrestrial Ecology Monitoring Report (Section 4.6) assesses several monitoring parameters including photo point monitoring, total swamp area, species composition and species composition over several years e.g. total swamp area for a number of swamps is compared from 2014 to present.

2.2.2 Condition 11(d), Schedule 3 – Independent Expert Panel's Advice

In accordance with Condition 11(d), Schedule 3 of the Area 3C SMP Approval, the SIMMCP was updated to fully reflect the advice of the IEP on the Longwalls 20 and 21 SMP application dated 13 December 2019 relating to monitoring of swamp impacts. **Table 2-5** details how the recommendations were addressed or where the recommendations are addressed in the SIMMCP. The Longwalls 20 and 21 SIMMCP (Revision E) was provided to the Department for consideration. The Department provided comments and recommendations in writing to IMC in July 2021. The SIMMCP was updated to address these comments in Revision G of this document which was approved with the Longwalls 22 and 23 SMP.

Table 2-5 IEP (2019c) advice

IEP Advice	Relevant SIMMCP Section
In respect of monitoring as specified in the Swamp Impact, Monitoring, Management and Contingency Plan (SIMMCP), several points may be noted: Variations in monitoring frequency before, during and after mining may preclude assessment of mining-related impacts, especially in swamps where the piezometers are not logged.	Swamp monitoring within Area 3C will be installed ahead of mining to achieve at least 2-years baseline data (subject to timing and approval timeframes of any request to install additional monitoring). Monitoring is generally conducted through the mining period and for 2-years following active subsidence (Appendix A). Where impacts are observed the monitoring period will be reviewed and this review will be reported in Impact Assessment Reports and EoP Reports (Section 6.2). Shallow swamp piezometers (Figure 3-1) and deep monitoring bores (Figure 3-3) at Dendrobium mine are routinely logged. The monitoring approach for Area 3C is discussed in detail in Section 1.3. In summary, monitoring resources are targeted at swamps which have been determined and identified through robust assessment to have a higher likelihood of impact. These swamps would have suitable baselines which can be used to assess mining related impacts.
To assess possible mining-related impacts, the proposed monitoring points in Swamps 144, 145 and 09 should be installed as soon as possible.	Swamp monitoring points in Area 3C will be installed ahead of mining to achieve at least 2-years baseline data (subject to timing and approval timeframes of any request to install additional monitoring) (Appendix A). Paired piezometers and soil moisture probes were established in swamps: - Swamp 9 – piezometer 09_01 was established 07/08/2020. - Swamp 9 – piezometer 09_02 was established 09/06/2022. - Swamp 144 piezometer 144_01 was established 28/08/2020. - Swamp 145 piezometer 145_01 was established 04/12/2020.
Use of vegetation change to monitor ecosystem functionality is of continuing concern, despite recognition of the less resilient sub-communities identified in the Panel's Part 2 Report (teatree thicket, cyperoid heath), because of the inability so far to distinguish possible mining-related changes from past monitoring data. While the implication may be that no mining-related change has occurred, it is equally possible that the techniques and data have been inadequate to discern the differing extents or causes of change.	At the Agency Consultation Workshop between IMC, WaterNSW, DPE and BCD on 27 May 2013, there was discussion about the definition of 'ecosystem functionality' in relation to subsidence impact performance measures for swamps. The term 'ecosystem functionality' is included in Table 1 of Condition 13 of the 3B SMP Approval. The term is not included in the definitions of the Development Consent or SMP Approval (Section 3.12.1). At the workshop it was stated that BCD disagrees with the definition of ecosystem function included in the Plans as they consider it is too simplistic and does not cover shallow groundwater levels. DPE advised the intent of the performance measure relating to ecosystem functionality for swamps was more general in intent; basically, the swamp will remain a swamp. The outcome of the workshop was that IMC proposed that the ecosystem function of swamps is measured via changes in the proportion of Banksia Thicket, Tea-tree Thicket and Sedgeland-heath Complex within the monitored swamps. This measure has been approved by the DPE in SIMMCPs since 2013. To address further advice from the Panel in August 2023, the swamp TARP has been updated to include performance indicators for ecosystem functionality to include hydrological changes within the swamp.
The shallow groundwater impacts are assessed by 'fall below baseline' or change in the	Watershed HydroGeo (2018) assessed impacts against the two agreed modes, as in the SIMMCP. Where identification of an impact from those two quantifiable measures was unclear, qualitative comparison against

IEP Advice	Relevant SIMMCP Section
recession rate. However, it is unclear in the analysis by Watershed HydroGeo whether a change to more frequent falls to baseline (analogous to a stream no-flow condition) and brief spiking only after rainfall is counted as an impact. Swamps 01b_01 and 05_08 are examples.	reference site behaviour was also undertaken. Watershed HydroGeo (2018) did not include a change to more frequent falls to baseline as an impact. For the Dendrobium Longwall 16 EoP, HGEO developed a graphical representation of swamp saturation levels by monthly intervals, as presented in Figure 43. That provides a means of visualising increased periods of dry or less saturated conditions compared to Reference Sites. This method could be extended to allow a quantitative assessment of potential impacts, but we consider that the visual comparison is effective, even for the intermittently wet swamps in the headwaters or on valley sides. In the case of the two example piezometers identified by the IEP, a brief summary of the assessment is presented below (note that a piezometer “05_08” does not exist. It is assumed to be a typographical error, and that 05_05 was meant to be referred to). 01b_01 (280 m from Longwall 9): has a very short baseline, which hampers definitive assessment. However, assessments by two hydrogeologists (carried out independently for the purpose of the Watershed, 2018 report) both indicated that an impact was unlikely. Furthermore, the pre- and post-mining behaviour of 01b_01 remained very similar in character to the reference sites 33_01, 33_03, and 88_02. 05_05 (above chain pillar between Longwalls 11 and 12): as above, assessment is hampered by a short baseline. Effects on recession rate and falling below baseline were unclear. Considering duration of below baseline or the saturation (compared to 33_03 and possibly against 23_01), an impact is likely to have occurred in August-November 2015 (it is very difficult to define exactly when). This occurred in the second half of Longwall 11, which passed within 40 m of 05_05 in early July 2015.

2.2.3 Condition 11(e), Schedule 3 – PSM (2017) Recommendations

In accordance with Condition 11(e), Schedule 3 of the Area 3C SMP Approval, the current revision of the SIMMCP reflects the nine monitoring program recommendations included in *Height of Cracking - Dendrobium Area 3B* (PSM, 2017) on the Longwalls 20 and 21 SMP application dated 13 December 2019 relating to monitoring of swamp impacts. **Table 2-6** details how the recommendations were addressed or where the recommendations are addressed in the SIMMCP. The Longwalls 20 and 21 SIMMCP (Revision E) was provided to the Department for consideration. The Department provided comments and recommendations in writing to IMC in July 2021. The SIMMCP was updated to address these comments in Revision G of this document which was approved with the Longwalls 22 and 23 SMP.

Table 2-6 PSM (2018) recommendations

PSM (2018) Recommendation	Relevant SIMMCP Section
1. The monitoring must be holistic and conceptualised from sound models including: a) Geological; b) Geotechnical; c) Groundwater; and d) Surface water.	South32 and consultant experts maintain and manage sophisticated models for geology, geotechnical, groundwater and surface water. Mine layouts for Dendrobium Area 3C have been developed using South32s Integrated Mine Planning Process (IMPP). This process considers mining and surface impacts when designing mine layouts. During this process, monitoring programs required to safely, efficiently and responsibly operate are developed. South32 and consultant experts participate in the IMPP (Section 6.3). Additionally, the SMP Applications for Longwalls 20 and 21 and Longwalls 22 and 23 include an independent consultant facilitated risk

PSM (2018) Recommendation	Relevant SIMMCP Section
	assessment (Axys 2019 and Axys 2021) in accordance with the IEP's recommendation (2019a). This risk assessment was attended by experts in the fields of; aquatic ecology, terrestrial ecology, subsidence, groundwater and surface water. This risk assessment was reviewed by an independent expert, Professor Bruce Hebblewhite. The Longwalls 20 and 21 Surface Water Assessment (HGEO 2019) also considered shallow groundwater monitoring sites. The recommendation of establishing monitoring sites in Swamps 9, 142, 144 and 145 has been adopted by IMC. As part of the Longwalls 22 and 23 SMP application, IMC has installed shallow groundwater monitoring sites in Swamps 9, 153 and 154. Shallow groundwater monitoring sites located in the proposed Longwall 21A study area (35 degree angle of draw) will include sites in Swamps 7, 9, 16, 145, 156 and 157 (subject to WaterNSW approval).
2. All the natural and man-made infrastructure must be identified, characterised and the sensitivities identified.	Natural features such as swamps and watercourse are described and characterised in Section 3 of the SIMMCP and WIMMCP. The sensitivities of mining to each of these are assessed in the specialist assessments attached to the SMP applications. Man-made features are characterised and detailed in the SMP documents and the subsidence assessments. Sensitive features are identified and considered as part of a formal risk assessment (Attachment E of the SMPs [Axys 2019 and 2021]) process in accordance with the IEP's recommendation (2019a). Potential impacts to these sensitive features are assessed in this risk assessment.
3. Hence the monitoring program is objective driven by the characteristics of the site conditions and the demands of the infrastructure that need to be protected and/or managed.	The Area 3C monitoring program (Section 3) has been designed for the natural features located within the Study Area and addresses the sensitivities of the natural features e.g. swamps have a number of parameters monitored including observational monitoring, shallow groundwater, soil moisture, ecosystem function, swamp size and flora composition.
4. The monitoring must be installed early enough to give an effective baseline.	Swamp monitoring within Area 3C has been installed to provide a minimum of 2 years of baseline data (where timing and approval timeframes of any request to install additional monitoring can be reasonably met) (Appendix A).
5. The monitoring must continue throughout and after the mining has been completed.	Swamp monitoring within Area 3C will be conducted throughout the mining period and for at least 2 years following active subsidence. A review of the continuation of post mining monitoring will be carried out in consultation with DPE, WaterNSW and other relevant agencies where required (Appendix A). Where impacts exceeding prediction are observed, the monitoring period may be extended and this will be reported in Impact Assessment Reports and EoP Reports.
6. The monitoring must be cognisant of potential interactions between the mining areas.	The potential impacts to swamps and the monitoring sites in Areas 3A, 3B and 3C will be reviewed to ensure monitoring sites, particularly reference sites are not influenced by interactions between the mining areas. This will occur on a periodic basis as detailed in Section 8.5. Cumulative effects from mining areas is addressed in the specialist assessments that support the SMP application e.g. subsidence assessment. The monitoring programs are informed by the recommendations from the specialist assessments.

PSM (2018) Recommendation	Relevant SIMMCP Section
	EoP assessments will identify any monitoring site which may have experienced influence from other mining areas. This will be taken into consideration and an alternate site may be established where appropriate (Section 8.5).
7. There must be sufficient monitoring remote from the mining to define the extent of the effects and impacts.	As detailed in Section 3, reference monitoring sites have been established and will continue to be monitored. Data from these reference swamps is used to compare differences in shallow groundwater levels within swamps, streams and hill-slope aquifers before and after mining. Reference sites are monitored to provide a comparison of sites mined under and not mined under during different climatic conditions. As mining operations progress to Area 3C, impacts to swamps will be reviewed to ensure monitoring sites, particularly reference sites are not influenced by interactions between the mining areas. This will occur on a periodic basis as detailed in Section 8.5. Far field impacts (remote from mining) are monitored during longwall extraction at Dendrobium via a network of survey monitoring marks which form the regional 3D GNSS network. This is supplemented by airborne based digital terrain modelling to determine absolute and incremental ground subsidence over entire mining areas. Monitoring of impacts is generally undertaken within 400m of active mining, and further from mining for features sensitive to far field movements e.g. valley closure. Results from monitoring are assessed in the EoP Reports to determine if far-field movements were within predictions.
8. Each new mine or area will require a specific monitoring program.	There is a SIMMCP for each of the three Dendrobium mining areas: Dendrobium Area 3A SIMMCP (2021), Dendrobium Area 3B SIMMCP (2020) and Dendrobium Area 3C SIMMCP (this document). Each of these plans have been specifically developed in consideration of the natural features within each of the mining areas. These monitoring plans are integrated in assessments such as the Dendrobium annual terrestrial ecology monitoring and aquatic ecology monitoring programs (Section 3.12) which assess impacts across Areas 3A and 3B, and 3C.
9. The monitoring program must be flexible and may require a number of cycles of design in order to ensure all the aspects of the “complex system” are captured.	A review of the objectives and targets associated with the Dendrobium Area3C operations will be undertaken on an annual basis via the IMC planning process. These reviews, which include involvement from senior management, assess the performance of the mine over the previous year and develop goals and targets for the following period (Section 8.5). The IMC Subsidence Review Meeting is held monthly and attended by various specialists within IMC. As part of this meeting, environmental impacts and the current monitoring program is presented and reviewed by the attendees, allowing for adjustments to monitoring practices and regimes where necessary. Where a Level 2 or 3 TARP is reached a specialist consultant reviews the monitoring data and assesses whether the monitoring program needs to be modified (Section 6.2).

PSM (2018) Recommendation	Relevant SIMMCP Section
	The EoP Reporting process includes an assessment of the adequacy of the monitoring program and recommends any changes required (Section 6.2). Any changes required to monitoring programs are to be approved by DPE.

2.2.4 Condition 11(f), Schedule 3 – IEP Advice dated March 2022

In accordance with Condition 11(f), Schedule 3 of the Area 3C SMP Approval, the SIMMCP has been updated to fully reflect the advice of the Independent Expert Panel dated March 2022 relating to the method of analysis of impacts on swamp hydrology. **Table 2-7** details how the recommendations have been addressed or where the recommendations are addressed in the SIMMCP.

Table 2-7 IEP Advice (March 2022) – Method of Analysis of impacts on Swamp Hydrology

IEP Recommendation	Relevant SIMMCP Section
4. The method of analysis of impacts on swamp hydrology developed in response to IEPMC recommendations should be included in the Swamp Impact Monitoring Management and Contingency Plan	As set-out in previous documentation, two hydrological impacts on swamp water tables are defined as: 1) Water level falls to below the pre-mining baseline (minimum) level following mining. 2) The post-mining water table recession rate exceeds that measured in the pre-mining period. These are assessed via graphical output developed for the End of Panel Reports, which plots both water table elevation and recession rate through time. For some swamps, judging whether there is an impact due to mining is obvious, with a sudden change in behaviour occurring when longwalls pass under or close to the swamp/piezometer. For other sites, confidently identifying an impact can be more difficult, especially if the water table fell to below the base of the piezometer in the pre-mining period. In these cases, comparison against suitable Reference Sites is carried out, where pre-mining behaviour is used to identify the most appropriate sites. To do this, the hydrograph for the Assessment Site and Reference Site are aligned to provide a consistent temporal scale, and similarities and differences reviewed and considered in the context of rainfall and evaporation trends, and the proximity of mining. When completing this comparison, changes to the duration over which the water table is at or below the base of the piezometer is also used (in addition to impacts #1 and #2, above) to determine the occurrence of an impact.

2.3 Leases and Licences

The following licences and permits may be applicable to IMC's operations in Dendrobium Area 3C:

- Dendrobium Mining Lease CCL 768, issued 7 May 1998 and expires 7 September 2026;
- Environmental Protection Licence 3241 which applies to the Dendrobium Mine. A copy of the licence can be accessed at the EPA website via the following link: <http://www.environment.nsw.gov.au/poeo>;
- Relevant Occupational Health and Safety approvals; and

- Any additional leases, licences or approvals resulting from the Dendrobium Development Consent.

3 MONITORING

Dendrobium Mine has undertaken longwall operations in the catchment since 2005, beginning with Dendrobium Area 1. Mining operations have expanded into Areas 2, 3A and 3B since then with the monitoring program evolving over this period to incorporate results, findings and lessons learnt. In parallel with this, IMC has undertaken extensive biophysical surveys, assessment and research of the Dendrobium mining area which have contributed to the understanding of how upland swamps are impacted by mining. Recommendations on upland swamp monitoring from various agencies, independent panels, consultants and research institutions have been adopted and incorporated into the monitoring program.

Condition 11c of the Area 3C SMP requires IMC to update the SIMMCP to fully reflect the recommendations of the IEP on the Longwalls 20 and 21 SMP application dated 13 December 2019; relating to monitoring of swamp impacts, management, remediation and contingency planning in respect of swamps. Condition 11d requires IMC to update the SIMMCP to fully reflect the advice of the IEP on the Longwalls 20 and 21 SMP application dated 13 December 2019 relating to monitoring of swamp impacts. The SIMMCP has been updated to address these conditions which form part of the foundation of the monitoring approach proposed for Area 3C. A key monitoring recommendation from IEP (2019b) is:

“18. Future swamp monitoring and modelling programs should be designed to:

- a. Provide a hydrological balance for representative swamps, sufficient to identify any mining-induced changes in soil moisture and in baseflow down the exit stream; and to provide vertical leakage rates as inputs to groundwater models, in order to quantify how much of the leakage is diverted back into the catchment or elsewhere.”*

The majority of impacts to upland swamps are likely to occur above the proposed longwall and within the groundwater impact zone. Hydrological impacts have not been observed at distances greater than 120m from the edge of a longwall at Dendrobium.

A HydroGeo assessment of swamps in 2023 concluded:

As of this 2023 review, the maximum distance at which an impact has been observed at a piezometer within a mapped Upland Swamp area is 113 m.

Hydrographs from almost all Upland Swamp piezometers within 70 m are likely to exhibit a response to mining (i.e. hydrogeological response), be that through a reduction in the water table to below pre-mining levels and/or increased recession (drainage) rate.

Outside the goaf, the overwhelming evidence is that the probability of an impact declines with distance from the goaf.

The swamp monitoring approach for Area 3C is comprised of four key principals which are stated below along with how each is proposed to be implemented in Area 3C.

1. Monitoring swamps which are considered “likely” impacted by HGEO (2023). Swamps considered likely impacted by Longwalls 22 and 23 include Swamps 7 and 153. The swamp considered likely impacted by Longwall 21 is Swamp 144.
2. Monitoring the hydrogeological balance of representative swamps with flow gauges at the downstream exit stream.
3. Monitoring swamps which are within the 35 degree angle of draw study area.
4. Monitoring swamps which are subject to specific performance measures.

Monitoring for Longwalls 21 to 23 will focus on Swamps 7, 9, 16, 144, 145, 153, 154, 155, 156 and 157. IMC has undertaken monitoring of swamps throughout Dendrobium Area 2 and 3 over a substantial period and impacts to shallow groundwater in swamps that are mined beneath are well documented. The ongoing monitoring of swamps in Areas 3A and 3B will provide information on potential ecological impacts over time.

3.1 Subsidence Monitoring

Survey monitoring techniques will be employed at upland swamps and watercourses throughout the Study Area to measure subsidence movements. Additionally, regional 3D Global Navigation Satellite System (GNSS) marks will be placed at strategic positions throughout the Study Area to monitor absolute surface movements.

Pending site access and approval, survey monitoring lines will be established across watercourses and representative large upland swamps within the 20 mm predicted subsidence contour. The monitoring lines will target controlling rockbars and steps. Additionally, survey monitoring lines will be installed across the Wongawilli Creek valley to measure closure (or opening) of the valley. Wongawilli Creek monitoring lines will be subject to site constraints

Watercourse and upland swamps monitoring lines will employ a series of marks along a transect at nominally 20 m intervals. If practical, upland swamps transects will be related to a GNSS control network to provide absolute 3D movements in addition to level, tilt and strain changes.

Nominal accuracy will be +/- 5 mm relative between marks and +/- 20 mm for horizontal and vertical accuracy if the swamp is related to a GNSS control network. Survey closure lines across the Wongawilli Creek valley will be measured for closure only; nominal accuracy will be +/- 5 mm.

Survey monitoring sites will be chosen for suitability and detailed in the Dendrobium Survey Monitoring Program, separate to the SMP. Baseline monitoring will be conducted prior to active subsidence.

3.2 Area 3C Swamps

Upland swamps are commonly known as vegetated freshwater wetlands occurring in shallow basins located in low hills or mountains. They occur in either low sloped headwater tributary valleys (headwater swamps) that are characteristically derived from colluvial sand eroded from the ridgelines or along the riparian zone of the creeks (valley infill swamps) within the headwater valleys.

There are seven swamps that have been identified wholly or partially within the Study Area based on the 35° angle of draw line. There are eight additional swamps that are located wholly or partially within the Study Area based on the 600 m boundary. The swamps within the Study Area are detailed in **Table 3-1**.

The swamps have bedrock bases and are associated with shallow groundwater aquifers. A number of the swamps in Area 3C terminate in rocky outcrops, exposed rock platforms or small waterfalls. Swamp material builds up behind these obstructions (e.g. prominent rock outcrop) and in-fills the depression upslope of the obstruction to form a beach like feature which also traps organic material. The Hawkesbury Sandstone is the predominant source of sediment for the swamps.

The Endangered Ecological Communities (EECs) which make up the upland swamps in the Study Area, specifically, the Banksia Thicket, Tea-tree Thicket and Sedgeland-heath Complex, as defined by the NSW Scientific Committee's 2012 determination, have been mapped and are presented in Niche (2021a).

Table 3-1 Summary of swamps within the Longwalls 21 to 23 Study Area

Reference	Total Area (Ha)	Location of Swamp	Distance from Nearest Longwall (m) and Impact Category
Swamp 6	0.57	On valley side of CR36	~ 490 m north of Longwall 23 (partially within the 600 m Study Area)
Swamp 7 ¹	5.44	Near the valley base of LC5B	Partially above Longwall 22 and directly above Longwall 23 (within shallow groundwater 60 m impact zone)
Swamp 9	0.79	Near the valley base of LC5B	~90 m south of Longwall 22 (partially within angle of draw)
Swamp 16	3.75	Near the valley base of LC1	~540 m south of Longwall 22 (partially located within 600 m Study Area)
Swamp 89	0.12	Near the valley base of WC21	~445 m from Longwall 21 (located within the 600 m Study Area)
Swamp 140	0.16	On the valley side of Wongawilli Creek	~525 m north west of Longwall 23 (within 600 m Study Area)
Swamp 141	0.08	On the valley side of Wongawilli Creek	~360 m west of Longwall 23 (partially within Longwall 20 angle of draw)
Swamp 144	0.54	Near the valley base of WC20	~500 m south of Longwall 22 (within Longwall 21 angle of draw)
Swamp 145	0.41	At the headwaters of LC5	~500 m south of Longwall 22 (within 600 m Study Area)
Swamp 152	0.22	On the valley side of Wongawilli Creek	~435 m north west of Longwall 23 (within 600 m Study Area)
Swamp 153	0.29	Near the valley base of WC26	Directly above Longwall 23 (within shallow groundwater 60 m impact zone)
Swamp 154	0.40	On the valley side of LC6	~70 m north of Longwall 22 and 95 m east of Longwall 23 (within angle of draw)
Swamp 155	0.50	On the valley side of LC7	~210 m east of Longwall 22 (partially within the angle of draw)
Swamp 156	0.71	On side of ridgeline south of mining area	~130 m south east of Longwall 22 (majority is within angle of draw)
Swamp 157	0.12	Near the valley base of LC6	~335 m south of Longwall 22 (within 600 m Study Area)

3.2.1 Reference Swamps

The monitoring design is structured around the BACI concept: Before, After, Control and Impact. Predicted impact areas are compared with control areas and measurements taken both before and after an impact event (longwall mining) occurs. Where measurable impacts occur, comparisons of before and after data should reveal changes at an impact site after mining. Reference or controls sites remain unimpacted before and after mining, where the mining plan evolves and has the potential to impact on a previous reference swamp, this will be updated to reflect the on-ground works (e.g. the data that was previously listed as control is now listed as pre-mining Impact data (Before) and is no longer included in the analysis as a control). Where both reference and impact sites change in a similar manner, observed changes may be due to other wider-ranging factors such as rainfall.

¹ Swamp 7 is an impact swamp for Area 3C and has been historically monitored as reference swamp for Areas 3B.

Impacted areas are those within the 400 m risk management zone (RMZ) which are sensitive to valley closure, uplifts, strains, and fracturing. This is in accordance with recommendations made by the Department of Planning (2008).

The Impact sites are referred to as pre-impact (Before) prior to mining activity, until the closest point of secondary extraction is located within the RMZ of the site. This allows for baseline (Before) data to be collected at each potential impact site. Once the point of secondary extraction is located within a RMZ the site is then referred to as post-impact but not yet mined beneath, this allows for the potential of observing any indirect impacts that have been predicted. Given that any observed impacts to natural features become most evident after the natural feature is mined beneath, the date the site has been mined beneath has also been considered in the assessment and analysis of trends over time. At this point the sites are referred to as post-impact and mined beneath.

Reference swamps for Area 3C have been selected in consideration of the following criteria:

- Distance from longwalls – outside 400 m risk management zone;
- Size of swamp;
- Suitable subcommunities comparable to impacted swamps;
- Not to be impacted by mining within foreseeable future;
- Swamp also used as a control for groundwater monitoring;
- Proximity to drainage features;
- Valley infill/headwater swamps;
- Natural disturbances (e.g. fire); and
- Rainfall patterns.

Reference swamps (**Figure 3-2**) within each of the mining domains are generally monitored for a minimum of two years prior to mining to gather baseline data. There are some Upland Swamps and creeks that will remain in the RMZ, as they are not planned to be mined beneath.

A table that includes details of swamp monitoring sites (impact and reference) associated with Area 3C Swamps is provided in **Appendix C**.

3.3 Observational and Photo Point Monitoring

IMC has conducted ongoing monitoring of upland swamps in the Dendrobium area since 2001. This monitoring builds upon the understanding of processes within the swamps, along with identifying and assessing any episodic or temporal changes.

This monitoring (along with other monitoring programs described in the SIMMCP) is consistent with (in part) Schedule 3, Condition 6 of the Dendrobium Development Consent *“include a general monitoring and reporting program addressing surface water levels, near surface groundwater levels, water quality, surface slope and gradient, erodibility, flora and ecosystem function”*.

The IMC Environmental Field Team undertakes structured monitoring assessments including:

- Water: location, volume and flow characteristics;
- Significant features: rockbars, pools and flow channels;
- Vegetation: location, species, height and observed health; and
- Sediment: composition, depth and moisture.

Monitoring sites and frequencies are provided in **Appendix A; Table 1.1**. Additional monitoring within Dendrobium Area 3C will be installed ahead of longwall mining to achieve 2 years baseline data (subject to timing and approval timeframes of any request to install additional monitoring). Proposed monitoring sites are subject to minor locality changes due to field inspections which determine the suitability of the site.

Observations of any surface water and vegetation health for prominent species are undertaken. Where surface water is present within a swamp or a watercourse the data collected includes water quality parameters (using a monitoring probe) and water levels from installed benchmarks established at the pool. Observations of any surface flow are also made during monitoring.

This data is used to compare differences in site conditions of swamps and watercourses before and after mining. Sites that will not be mined under are also monitored to provide a comparison of sites mined under and sites not mined under during different climatic conditions.

The following Area 3C impact and reference swamp sites are included in the observational monitoring program (as described in this section):

- Monitoring sites;
 - Swamps 7 (previously reference site for Area 3B); and
 - Swamps 9, 16, 144, 145, 153, 154, 155, 156 and 157.
- Reference sites:
 - Swamps 22, 24, 25, 84, 85, 86, 87, 88 and 131.

The monitoring sites above include existing and proposed monitoring sites. Due to the steep terrain, dense vegetation and shallow sediment depth, proposed monitoring sites may be relocated to a more suitable site.

3.4 Swamp Hydrological Balance

Under natural conditions, uplands swamps store water from rainfall, runoff, groundwater and interflow. After rainfall, this water may drain into the underlying sandstone if there is a downward hydraulic gradient, or flow horizontally through the swamp sediments or over the surface to provide downstream flow in the exit stream, or be lost by evapotranspiration.

The water table represents the depth below which the swamp sediment is saturated. In an undisturbed swamp where there is significant groundwater input to the sediments, the water table remains close to the swamp surface throughout long dry periods. Above this depth, in the unsaturated zone near the ground surface, the soil moisture can vary between very dry and very wet. In swamps where rainfall is the dominant water source, slow recession of the water table indicates loss by evapotranspiration and outflow to streams (IEP 2019b).

The IEP (2019b) recommended future swamp monitoring programs should be designed to:

Provide a hydrological balance for representative swamps, sufficient to identify any mining-induced changes in soil moisture and in baseflow down the exit stream; and to provide vertical leakage rates as inputs to groundwater models, in order to quantify how much of the leakage is diverted back into the catchment or elsewhere.

IMC proposes to establish flow monitoring gauges on the exit streams of select representative swamps in Area 3C, including Swamps 7, 144 and 153. The following details the suitability of the selected swamps and the progress of installing the gauges:

- Swamp 7 is a large and “complex” valley infill swamp. Note it is the only swamp considered “complex” in the Longwalls 20 to 23 Study Area. A gauging station (LC5S2) has been established on the exit stream for Swamp 7. Water chemistry will be monitored at LC5_S2.
- Swamp 144 is a small and “simple” headwater swamp. A gauging station (WC20S2) was installed in late 2022 immediately downstream of Swamp 144 to monitor swamp outflow.
- Swamp 153 is a small and “simple” headwater swamp. A gauging station (WC26S2) was installed in late 2022 immediately downstream of Swamp 153 to monitor swamp outflow.
- Swamp 16 – monitoring of outflow will be undertaken as per WaterNSW request. Details of monitoring are to be confirmed.

IMC sponsored a four-year upland swamp water balance study, conducted by University of New South Wales Water Research Lab (UNSW WRL), within the Metropolitan Special Area. Temperate highland peat swamps on sandstone (THPSS) sites were inspected via onsite investigations to determine if they would be suitable sites for future investigations. Sites were analysed based on proximity to historical, current and future longwall extractions, climatic variability (rainfall, evaporation), access, and physical characteristics (e.g., slope, shape, size, catchment location, etc.). Field reconnaissance was undertaken to inspect each nominated site. Three swamps within the Metropolitan Special Area (Avon and Cordeaux catchments) were chosen to be included in the study:

- Swamp 14
- Swamp 7

- Swamp 87.

The purpose of the study was to:

- Monitor groundwater levels and surface water discharges from an upland swamp prior to, during and after undermining, as well as other reference sites not impacted by mining; and
- Develop a calibrated water balance model to better understand and quantify impacts of longwall mining on the hydrology of these sensitive ecosystems.

The study was completed in March 2023 with findings reported in accordance with the Dendrobium Swamp Rehabilitation Research Program.

3.5 Water Quality Chemistry

Monitoring undertaken by IMC since 2003 (**Figure 3-2** of the WIMMCP) includes water quality monitoring of parameters such as pH, Electrical Conductivity (EC), Dissolved Oxygen (DO), Oxygen Reduction Potential (ORP) and temperature. Monitoring sites where these parameters are sampled are indicated as water observation sites.

Water quality is also monitored for analytes including DOC, Na, K, Ca, Mg, Filt. SO₄, Cl, T. Alk., Total Fe, Mn, Al, Filt. Cu, Ni, Zn, Si. Water samples are retrieved from the monitoring sites and analytes are tested in a laboratory. Monitoring sites where water samples are taken for laboratory testing are indicated as water chemistry sites in Figure 3-2 of the WIMMCP.

The key field parameters of DO, pH, EC and ORP for monitoring sites within Dendrobium Area 3C will be analysed to identify any changes in water quality resulting from the mining. Pools and streams away from mining are monitored to allow for a comparison against sites not influenced by mining. Pools will be measured at weekly intervals during active subsidence and monthly before and following mining. The monitoring of water chemistry provides a sensitive means of detecting and providing quantitative assessment of effects in the early stages of streambed fracturing or induction of ferruginous springs. Assessment of water quality data will be supported by geochemical modelling using PHREEQC, where applicable (Parkhurst and Appelo 1999).

Water quality monitoring is covered in detail in the WIMMCP.

3.6 Groundwater

A specialist Groundwater Assessment is provided in Attachment B of the SMP (Watershed HydroGeo 2021). An existing groundwater monitoring program is in place for Dendrobium, which includes Area 3C (**Figure 3-3**). The Dendrobium Long Term Groundwater Monitoring Program is available in **Appendix B** of the Area 3C WIMMCP.

Groundwater monitoring is undertaken in:

- Surficial and shallow systems associated with upland swamps and the weathered near-surface bedrock; and
- Consolidated rock strata comprising the deeper Hawkesbury Sandstone, the underlying Narrabeen Group and Illawarra Coal Measures.

Pre-mining and post-mining monitoring holes have been installed within Area 3C to investigate and monitor the highly connected fracture network above the goaf and the upwards migration of the phreatic surface.

Monitoring pore pressures at Dendrobium Mine uses vibrating wire piezometers installed at different depths within the same borehole, thereby creating a vertical array which can be used for 3D mapping and analysis of the pore pressure regime (IEP 2019a).

Before and after mining piezometers are routinely installed along the centreline of longwall panels to identify the maximum groundwater effects and the height of depressurisation within the subsidence zone.

3.7 Surface Water Flows and Pool Water Levels

Pool water levels in targeted pools within swamps and associated streams are measured using installed benchmarks in both impact sites and reference sites where conditions allow. Not all swamps have pool features within their boundary. Pool water levels are generally measured relative to installed benchmarks on rocks or other stable features on the edge of pools. Where an installed benchmark is not able to be installed in a monitored pool,

semi-quantitative water observations are typically recorded including Water in Pool, and Inflow and Outflow observations.

From a review of existing stream mapping in Area 3C, no significant permanent pools within swamps (see Section 3.7.1, below) were identified. For pools within swamps in Area 3C, the following sites will be used as references:

- Swamp 22: S22_Pool 10 (reference swamp);
- Swamp 24: S24_Pool 10 (reference swamp);
- Swamp 33: WC11_Pool 20 (reference swamp);
- Swamp 84: S84_Pool 10 (reference swamp); and
- Swamp 88: S88_Pool 10 (reference swamp).

Water level/flow gauges and data loggers are installed at key stream flow monitoring sites (see Area 3C WIMMCP for details).

Pool water levels will be generally monitored monthly before and after mining and on a weekly basis during active subsidence. This data is used to compare differences in pool water levels within swamps and associated streams before and after mining.

3.7.1 Significant Pools within Swamps

Pools within the Area 3C Study Area are mapped on Figure 3-4 – Geomorphology. Significant permanent pools are considered to be any basal rockbar-controlled permanent pool greater than 6 m long and 4 m wide, as defined within the Area 3B SIMMCP (South32, 2020). Analysis undertaken for stream features over Area 3C has identified no pools matching this criteria within or directly adjacent to swamps.

There are four small pools identified within the Swamp 7 mapped boundary. These have been classified as not significant due to their small size and/or because they do not hold consistent water levels during dry periods.

Monitoring using installed benchmarks of LC9_Pool 38 in Swamp 16 and the larger two Swamp 7 pools- LC5_Pool 13 and LC5_Pool 12 will be undertaken as part of the Area 3C monitoring program.

Pool water level monitoring provides the key data to assess the Performance Measure: Maintenance or restoration of the structural integrity of the bedrock base of any significant permanent pool or controlling rockbar. Performance against this measure will be based on fracturing of the rockbar base of any significant permanent pool or controlling rockbar within the swamp resulting in a dry pool. TARP actions include provision for assessing if remediation is warranted and feasible to prevent changes to ecosystem functionality. Pool water level data would also be used to determine the success of any pool/rockbar remediation.

3.8 Near-Surface Groundwater and Soil Moisture

The surface area above Dendrobium Area 3C is characterised by a series of drainage basins separated by steep ridges. The drainage basins drain to Wongawilli Creek, Donalds Castle Creek and directly into Lake Cordeaux.

Monitoring of shallow groundwater levels allows for the indirect measurement of water storage and transmission parameters within the saturated part of hill-slope/upland swamp complexes. Shallow groundwater piezometers have been installed in several swamps in Area 3C (**Figure 3-1**). Within Area 3C long-term piezometer records are available for Swamp 2 and 7. This data is used to compare differences in shallow groundwater levels within swamps, streams and hill-slope aquifers before and after mining. Reference sites are monitored to provide a comparison of sites mined under and not mined under during different climatic conditions.

The piezometric monitoring directed at shallow groundwater levels is supplemented with monitoring of soil moisture profiles up to a maximum depth of 1.2 m. Key monitoring sites will be installed with loggers to provide a continuous soil moisture record (**Figure 3-1**).

The shallow groundwater piezometers and soil moisture probe data is compared with the Cumulative Monthly Rainfall Residuals (a key parameter for interpreting temporal soil and shallow groundwater data). Comparisons of the Cumulative Monthly Rainfall Residuals against mean monthly water heads in shallow groundwater piezometers and soil moisture profiles will take into account the known distribution of rainfall isohyets (contours of equal annual precipitation) in the local region (these being denser and less smooth closer to the Illawarra Escarpment and much wider proceeding northwest).

Several rainfall gauges are available for analysis and modelling in Dendrobium Area 3 with the most appropriate data used, taking into account proximity, length of record and data quality.

3.9 Pools and Controlling Rockbars

Dendrobium Mine lies in the southern part of the Permo-Triassic Sydney Basin. The geology mainly comprises sedimentary sandstones, shales and claystones, which have been intruded by igneous sills.

The sandstone units vary in thickness from a few metres to as much as 120 m. The major sandstone units are interbedded with other rocks and, though shales and claystones are quite extensive in places, the sandstone predominates.

The major sedimentary units at Dendrobium are, from the top down:

- The Hawkesbury Sandstone.
- The Narrabeen Group (including the Bulgo Sandstone).
- The Eckersley Formation.

Extensive geomorphological mapping has been completed for Dendrobium Area 3, including the location of pools and rockbars (**Figure 3-4**).

Area 3C is broadly sited on a plateau dissected by a number of relatively deep sub-catchments draining either into Cordeaux River via Wongawilli Creek or Donalds Castle Creek or five un-named 1st and 2nd order streams draining directly to Lake Cordeaux.

The largest watercourse within the Study Area is Wongawilli Creek, which is located between Areas 3A and 3B; and to the west of Longwalls 21 to 23. The headwaters of Wongawilli Creek are located along a drainage divide separating surface runoff and shallow groundwater outflow runoff from Native Dog Creek and Lake Avon to the west.

Donalds Castle Creek and its tributaries also drain the north-western part of Area 3B through a weakly incised plateau. Donalds Castle Creek catchment on this plateau is characterised by low topography, upland swamps and numerous unconfined shallow hillslope aquifers. Much of the soil is derived from weathering of shale-rich Mittagong Formation and is more clayey and of lower permeability than residual soils developed purely on Hawkesbury Sandstone outcrop.

Wongawilli, Sandy and Donalds Castle Creeks are permanent to perennial flowing streams with small base flows and increased flows for short periods of time after each significant rain event.

Beds of the creeks are typically formed within Bulgo Sandstone, which overlies the Stanwell Park Claystone; however, there are sections of the headwaters of these creeks which are formed within the Hawkesbury Sandstone.

Three distinct channel types may be recognised in the main channel uplands, and in the tributaries of Wongawilli Creek:

- Narrow indistinct channels associated with low sedge/heath type vegetation cover and a relatively thick sandy riparian soil profile. The streambed consists of weathered bedrock and/or sandy materials. This is the situation in which valley infill swamps may be found.
- Rockbars of variable width which are usually smooth except for minor depressions on joint planes and occasional potholes. These platforms normally grade to a thinly vegetated sandy soil on both sides and usually exhibit the effects of chemical deposition of hydrated iron oxides. This deposition ranges from a slight colouration of the surface strata to intense replacement of the rock fabric.
- Channels that are erosive into cross-bedded sandstone and exhibit a rough riffle like surface usually with accumulations of boulders and other sediments. These channels are usually bounded by solid rock outcrop.

A number of semi-permanent pools may be found within the channels of these drainage lines and creeks. The mechanisms of pool stability are variable and uniquely depend on local stratigraphy, structure and gradient. Pools range from:

- Water accumulations in depression of an impermeable bedrock shelf (analogous to a bathtub) that is fed by direct precipitation, seepage or flood events; to

- Pools within eroded sections of sandy sediment and a free water surface that is dependent on surface flows and the local groundwater regime for stability.

Pools within unconsolidated (sandy) sediments are in a state of equilibrium between water in (from a higher part of the phreatic groundwater surface either upstream or laterally) and water out (flowing down the phreatic surface).

Most bedrock pools and riffle complexes rely on equilibrium between excess water in compared to water out. If the water inflow is less than the outflow, then the pool water level declines. The nature of this equilibrium is ultimately dependent on the position of the pool on the overall stream gradient. Many pools in the streams naturally develop at rockbars and at sediment and debris accumulations.

Rockbars and pools in Wongawilli Creeks have been mapped (**Figure 3-4**). All mapped rockbar controlled pools in Wongawilli Creek are significant permanent pools.

3.10 Slopes and Gradients

Slopes within Area 3C have been mapped according to their gradients and are identified on Drawing 8 in MSEC (2021). Monitoring of landscape features such as slopes and swamps will be undertaken in Area 3C, see Area 3C WIMMCP.

Monitoring of steep slopes allows for the measurement of any changes to the surface including soil cracking, erosion and/or sedimentation impacts resulting from subsidence.

The inspections and monitoring includes the following monitoring sites:

- Monitoring sites based on an assessment of risk of impact where pre-mining measurements have been undertaken and reported;
- Areas of steep slopes that are en route or near monitoring sites;
- Rock outcrops that are en route or near monitoring sites;
- Any other sites where impacts have been previously observed that warrant follow-up inspection (i.e. rockfalls and soil cracking); and
- The general areas above the current mining location at the time of inspection.

The monitoring sites include comprehensive investigation as described below, and the wider area around the monitoring site is subject to inspection during monitoring events.

Observations on landform and land surface at the monitoring sites are recorded to account for the Australian Soil and Land Survey, Field Handbook, 2nd Edition (McDonald, Isbell, Speight, Walker and Hopkins 1990) as modified for subsidence monitoring.

Observations have been made of the landform elements in accordance with the Landform section of the Field Handbook. The landform element has generally been described in terms of the following attributes:

- Slope;
- Morphological type;
- Dimensions;
- Mode of geomorphological activity; and
- Geomorphological agent.

In addition, observation has been made of the land surface in accordance with the Land Surface section of the Field Handbook. The land surface has generally been described in terms of the following attributes:

- Aspect, elevation and drainage height;
- Disturbance at the site, including erosion and aggradations;
- Micro relief;
- Inundation;
- Coarse fragments and rock outcrop;
- Depth to free water; and

- Runoff.

Not all attributes for Landform Element and Land Surface referred to in the Field Handbook are recorded for each monitoring site. The previous monitoring experience for Areas 1, 2, 3A and 3B indicate that many of the attributes are of little importance to subsidence, and the monitoring for Area 2 and Area 3 has focused on recording those attributes and characteristics that are most relevant to subsidence impacts.

A watercourse reach of between ten and twenty times the channel width is monitored to cover local geomorphological units (e.g. pool/riffle).

For each watercourse monitoring site (including those associated with swamps), a range of measurements and observations of the watercourse characteristics are recorded along with established photo points. Measurements and observations incorporate the relevant parts of the Field Handbook, and relevant parts of the Riparian-Channel-Environmental Assessment (RCE) methodology (Petersen 1992).

While in most cases, impacts on steep slopes are likely to be restricted to surface cracks, there remains a low probability of large-scale downslope movements. Steep slopes, including those occurring within the proximity of swamps, are therefore monitored throughout the mining period and until any necessary rehabilitation is complete. Slopes and gradients are monitored prior to mining as well as monthly during active subsidence during mining. The monitoring is undertaken at six-monthly intervals for two years following completion of mining.

3.11 Erodibility

Most of the surface of Area 3C has been identified as highly weathered Hawkesbury Sandstone outcrops and Sandstone derived-soils. This soil landscape has been identified to have high to extreme erosion susceptibilities to concentrated flows. This results in potential flow on effects to slope stability and erosion from any cracking resulting from subsidence (Ecoengineers 2012).

Studies undertaken by Earth Tech (2005) identified that if shear stress thresholds are not exceeded then swamps are most likely to remain intact. Swamps at risk of erosion include those that have vegetation of poor condition or those that lie on higher order streams. Tomkins and Humphrey (2006) concluded that the occurrence of wildfires can also lead to erosion of swamps. Landscape monitoring of slopes and swamps will be undertaken in Area 3C to identify any erosion of the surface.

The types of erosion which could manifest within swamps are sheet, rill, gully, tunnel and stream channel. These types of erosion will be monitored in swamps in the mining area as well as in reference swamps not in the mining area. The types and magnitude of any erosion identified in swamps in the mining area will be compared to any erosion away from the mining area. In the event of a bushfire any comparison between mining area and reference swamps will take into account the increased potential for erosion following a fire.

Due to terrain, vegetation and access restrictions, the primary method of identifying any gully erosion over Area 3C will be Airborne Laser Scanning (ALS). This technique has proven to be successful in generating topographic models of subsidence over entire longwalls and mining domains and will also provide identification of any gully erosion developing within the swamps. The maximum length, area and depth of gully erosion will be measured by standard survey methods and compared to the areas and lengths of the swamps.

Base surveys over Area 3C using ALS were completed in December 2005. A verification base survey will be conducted prior to the commencement of mining of the proposed longwalls. Subsidence landscape models using the same methodology after the completion of subsidence at each longwall will provide a new (subsided) baseline surface dataset. For a period of up to ten years after mining repeat ALS datasets and surface modelling will be completed to identify new or increases in existing erosion. Erosion will be quantified by comparison of the immediate post subsidence landscape model with the long-term monitoring model. Targeted ALS scans will be completed where erosion is observed via the observational and landscape monitoring programs or after significant events such as bushfire and flooding.

The nominal accuracy of ALS derived subsidence contours is in the order of +/- 0.10 m and effective algorithms have been developed to allow the use of ground strike data only within the assessment. This effectively allows the analysis to see through vegetation to the ground surface.

General observational inspections of swamps will be undertaken at regular intervals, during active subsidence of the swamp. In addition to erosion, these observations aim to identify any surface cracking, surface water loss, soil moisture changes, vegetation condition changes, and slope and gradient changes. The observational monitoring program will also include specific attention to the condition of controlling rockbars and will incorporate both impact and reference sites.

3.12 Flora and Fauna

Terrestrial flora and vegetation communities in the Study Area are described in the *Dendrobium Area 3C Longwalls 22 and 23 Terrestrial Ecological Assessment* (Niche 2021a) and *Dendrobium Area 3C Longwalls 20 and 21 Terrestrial Ecological Assessment* (Niche 2019).

An aquatic ecology monitoring program has been established by Cardno for Area 3C. The monitoring program includes sites within Wongawilli and Donalds Castle Creeks.

Annual Reporting (Biosis 2016, 2017, 2018, 2019 and 2020) documents the ecological monitoring program undertaken within Dendrobium Areas 2, 3A and 3B. Subsidence related impacts following mining in these areas include lowering of shallow groundwater in uplands swamps and loss or alteration in the quality of pool water for first and second order streams.

A monitoring program designed to detect potential impacts to ecology from subsidence will be implemented in the Area 3C Study Area. As recommended by the IEP (2019a), the monitoring program will be based on a BACI design, as implemented in Area 3B, with sampling undertaken at impact and control locations prior to the commencement of extraction, during extraction and after extraction (**Figure 3-1**). The existing monitoring program uses a BACI approach in the data analysis to identify whether there has been any change in life stage detection pre-post impact, or between the control (reference sites) and impact sites. Identification of habitat loss due to mining induced change (e.g. pool water loss due to bedrock fracturing, or flocculant) is also completed to identify impacts.

Over two years of baseline data will be available for Area 3C and this data indicates that the habitat in this area is relatively undisturbed. There is sufficient baseline data to enable the detection of changes to ecology associated with mining related impacts.

The study focuses on flora, fauna and ecosystem function of swamps and watercourses and is measured via the following attributes:

- The size of the swamps based on the area of groundwater dependent communities contributing to the swamps;
- Water quality, including pH, DO, ORP, temperature and EC;
- Aquatic macrophytes, including presence, species composition and total area of coverage;
- Aquatic macroinvertebrates using the Australian River Assessment System (AUSRIVAS) sampling protocol and artificial aquatic macroinvertebrate collectors;
- Fish presence and numbers using backpack electro fisher and/or baited traps; and
- Presence of threatened species (including Macquarie perch, Littlejohn's Tree Frog, Giant Burrowing Frog, Adams Emerald Dragonfly, Giant Dragonfly and Sydney Hawk Dragonfly).
- Frog monitoring – frog surveys using standardised transects focussing on Littlejohn's Tree Frog and Giant Burrowing Frog.

Observations of the sites, photo points and pool water level data will also be collected as part of the frog and observational monitoring programs. Locations where significant changes have been observed (e.g. drainage of pools) will be mapped, documented and reported.

3.12.1 Swamp Size

Detailed mapping of the boundaries of the swamps and vegetation sub-communities has been undertaken for Swamp 6, 7, 9, 16, 140, 141, 144, 145, 152, 153, 154, 155, 156, 157 (Terrestrial Ecological Assessment, Niche 2021a).

Reference swamps have been paired with the impact swamps. These swamps were selected based on size, similar vegetation sub-communities, geographic proximity and a lack of previous mining near them.

The detailed mapping included the use of LiDAR data to indicate the location and extent of upland swamp boundaries followed by ground-truthing of these boundaries and the vegetation sub-communities. LiDAR surveys are captured following completion of each longwall.

This mapping will allow for detailed comparison of the size of upland swamps following mining, as well as detailed comparison of the extent of sub-communities within upland swamps over time. Mapping will be replicated for Swamps 7, 9, 16, 144, 145 and 153 following mining and on an ongoing basis for the life of the mine or as agreed

by the Secretary. This will allow direct comparison of changes in the size of upland swamps as well as the distribution of vegetation sub-communities within upland swamps.

Any change in the total area of a swamp will be compared to its pre-mining area and any change in area of reference swamps (**Figure 3-2**).

3.12.2 Fauna

Seven-part tests concluded that the Area 3C mining operations would likely cause a significant impact to local populations of Littlejohn's Tree Frog, Giant Burrowing Frog, Red-crowned Toadlet, Stuttering Frog (*Mixophyes balbus*) and Giant Dragonfly (*Petalura gigantean*) (Biosis 2007). The possible mechanisms of subsidence and physical effects of subsidence were determined to have a direct impact on known and potential habitat for the threatened fauna, which included waterways, upland swamps, riparian vegetation, ridge lines and rock overhangs.

In consideration of the possible presence of threatened macroinvertebrate species within the SMP Area, all dragonfly larvae collected in invertebrate sampling will be identified to the taxonomic level of family. Any individuals of the genus *Petalura*, Austrocorduliidae and Gomphomacromiidae will be further identified to species level if possible, and if there is uncertainty, specimens will be referred to a specialist taxonomist. The confirmed presence of a threatened species will trigger further investigation into the species and its habitats in relation to potential subsidence impacts.

Standardised transects in potential breeding habitat for the threatened frog species Littlejohn's Tree frog and Giant Burrowing Frog have been established in Dendrobium Area 3A and 3B. These repeatable surveys enable direct comparison of the numbers of individuals recorded at each site from one year to the next. The sites have been established within creeks associated with and/or downstream of swamps. Sites will be established on LC5, LC6, WC20, WC24 and WC26 in Area 3C (**Figure 3-5**).

Along each transect the monitoring includes: counts of frogs, an assessment of pools being used for breeding as well as counts of tadpoles and egg masses. This will enable a quantitative as well as qualitative assessment of breeding habitat for these species prior to, during and after mining. Monitoring is also undertaken away from mining at control (reference) sites for the mining versus non-mining comparative assessment.

Niche (2022) found populations of Littlejohn's Tree frog and Giant Burrowing Frog during recent surveys in Area 3C. Results from these surveys are presented in the Dendrobium Annual Terrestrial Ecology Monitoring Program.

Observations of the sites, photo points and pool water level data will also be collected as part of the frog and observational monitoring programs. Locations where significant changes have been observed (e.g. drainage of pools) will be mapped, documented and reported.

IMC continues to fund and support monitoring of and research into a regional understanding of the context and cumulative impact of the Dendrobium Mine on populations of Littlejohns Treefrog and Giant Dragonfly.

3.13 Ecosystem Functionality

The upland swamps in the Study Area fit the description of Coastal Upland Swamps in the Sydney Basin Bioregion, which has been listed as an EEC under the BC Act (Niche 2020; Niche 2022). Specifically, the Banksia Thicket, Tea-tree Thicket and Sedgeland-heath Complex are considered part of the Coastal Upland Swamp EEC as defined by the NSW Scientific Committee's 2012 determination.

At the Agency Consultation Workshop 27 May 2013 there was discussion about the definition of 'ecosystem functionality' in relation to subsidence impact performance measures for swamps. The term 'ecosystem functionality' is included in Table 1 of Condition 13 of the SMP Approval. The term is not included in the definitions of the Approval.

At the workshop it was stated that BCD disagrees with the definition of ecosystem function included in the Plans as they consider it is too simplistic and does not cover shallow groundwater levels. The Department advised the intent of the performance measure relating to ecosystem functionality for swamps was more general in intent; basically, the swamp will remain a swamp.

The outcome of the workshop was for IMC to propose a definition in the next version of the SIMMCP which was approved in subsequent SIMMCPs. Up to this point, ecosystem function of swamps was measured by the size of the groundwater dependent communities contributing to the swamps. Specifically, any changes in the proportion of Banksia Thicket, Tea-tree Thicket and Sedgeland-heath Complex within the monitored swamps resulting from mining. However, advice from the Panel (2023) in relation to Longwall 19A in Area 3A concluded that the definition

of “ecosystem functionality” warrants updating. The Panel considers the definition used in previous SIMMCPs to be *“outdated and inadequate and should be revised to accommodate all processes (such as swamp hydrology) that are essential for swamps and their dependent ecosystems.”*

This SIMMCP has been updated to address a broader definition of ecosystem functionality as recommended by the Panel. In addition to the size of groundwater dependent communities within a swamp, ecosystem functionality for specified swamps in Area 3C is measured by Area 3C mining induced hydrological changes (shallow groundwater) that results in piezometer remaining dry and not recovering following completion of mining and a year of average (or above) rainfall.

3.14 Reporting

Trigger and impact reporting will be undertaken in accordance with the TARP in Appendix A.

Summary reports are required to be submitted to the Secretary every four months during the extraction of longwalls in Area 3C. This regular reporting is required to include details of monitoring results, an assessment of compliance with performance measures, an assessment of any exceedances of predictions and any level 2 or 3 TARP triggers, actions taken or measures implemented and the seam mining height during the period.

EoP Reports are prepared in accordance with Condition 9, Schedule 3 of the Dendrobium Development Consent. Results from the monitoring program are included in the EoP Report and in the Annual Review. These reports detail the outcomes of monitoring undertaken; provide results of visual inspections and determine whether performance indicators have been exceeded.


Monitoring results will be reviewed monthly by the IMC Subsidence Management Committee. However, if the findings of monitoring are deemed to warrant an immediate response, the Principal Approvals will initiate the requirements of the TARPs shown as Appendix A.

Monitoring results are included in the Annual Reporting requirement under Condition 5, Schedule 8 in accordance with the Dendrobium Development Consent and are made publicly available in accordance with Condition 11 Schedule 8.





**DENDROBIUM
LONGWALLS 21
to 23 SMP
Swamp Monitoring
Figure 3-1**


- ▲ Shallow Groundwater and Soil Moisture Site
- Swamp Flow Site
- Study Area (35 deg Angle of Draw)
- - - Study Area (600m Boundary)
- Existing Mine Workings
- Approved Mine Layout
- Dendrobium Goaf
- Rivers
- Creeks
- Tributaries
- Swamp
- Dendrobium Mining Areas

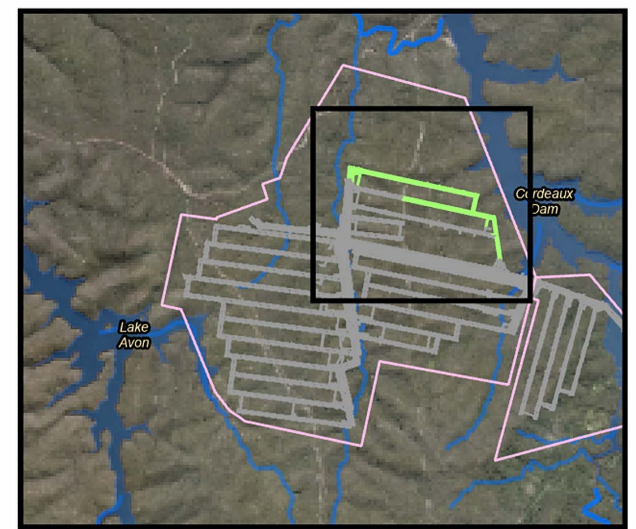

Date: February, 2024

Version 1
Horizontal Datum
MGA - Zone 56



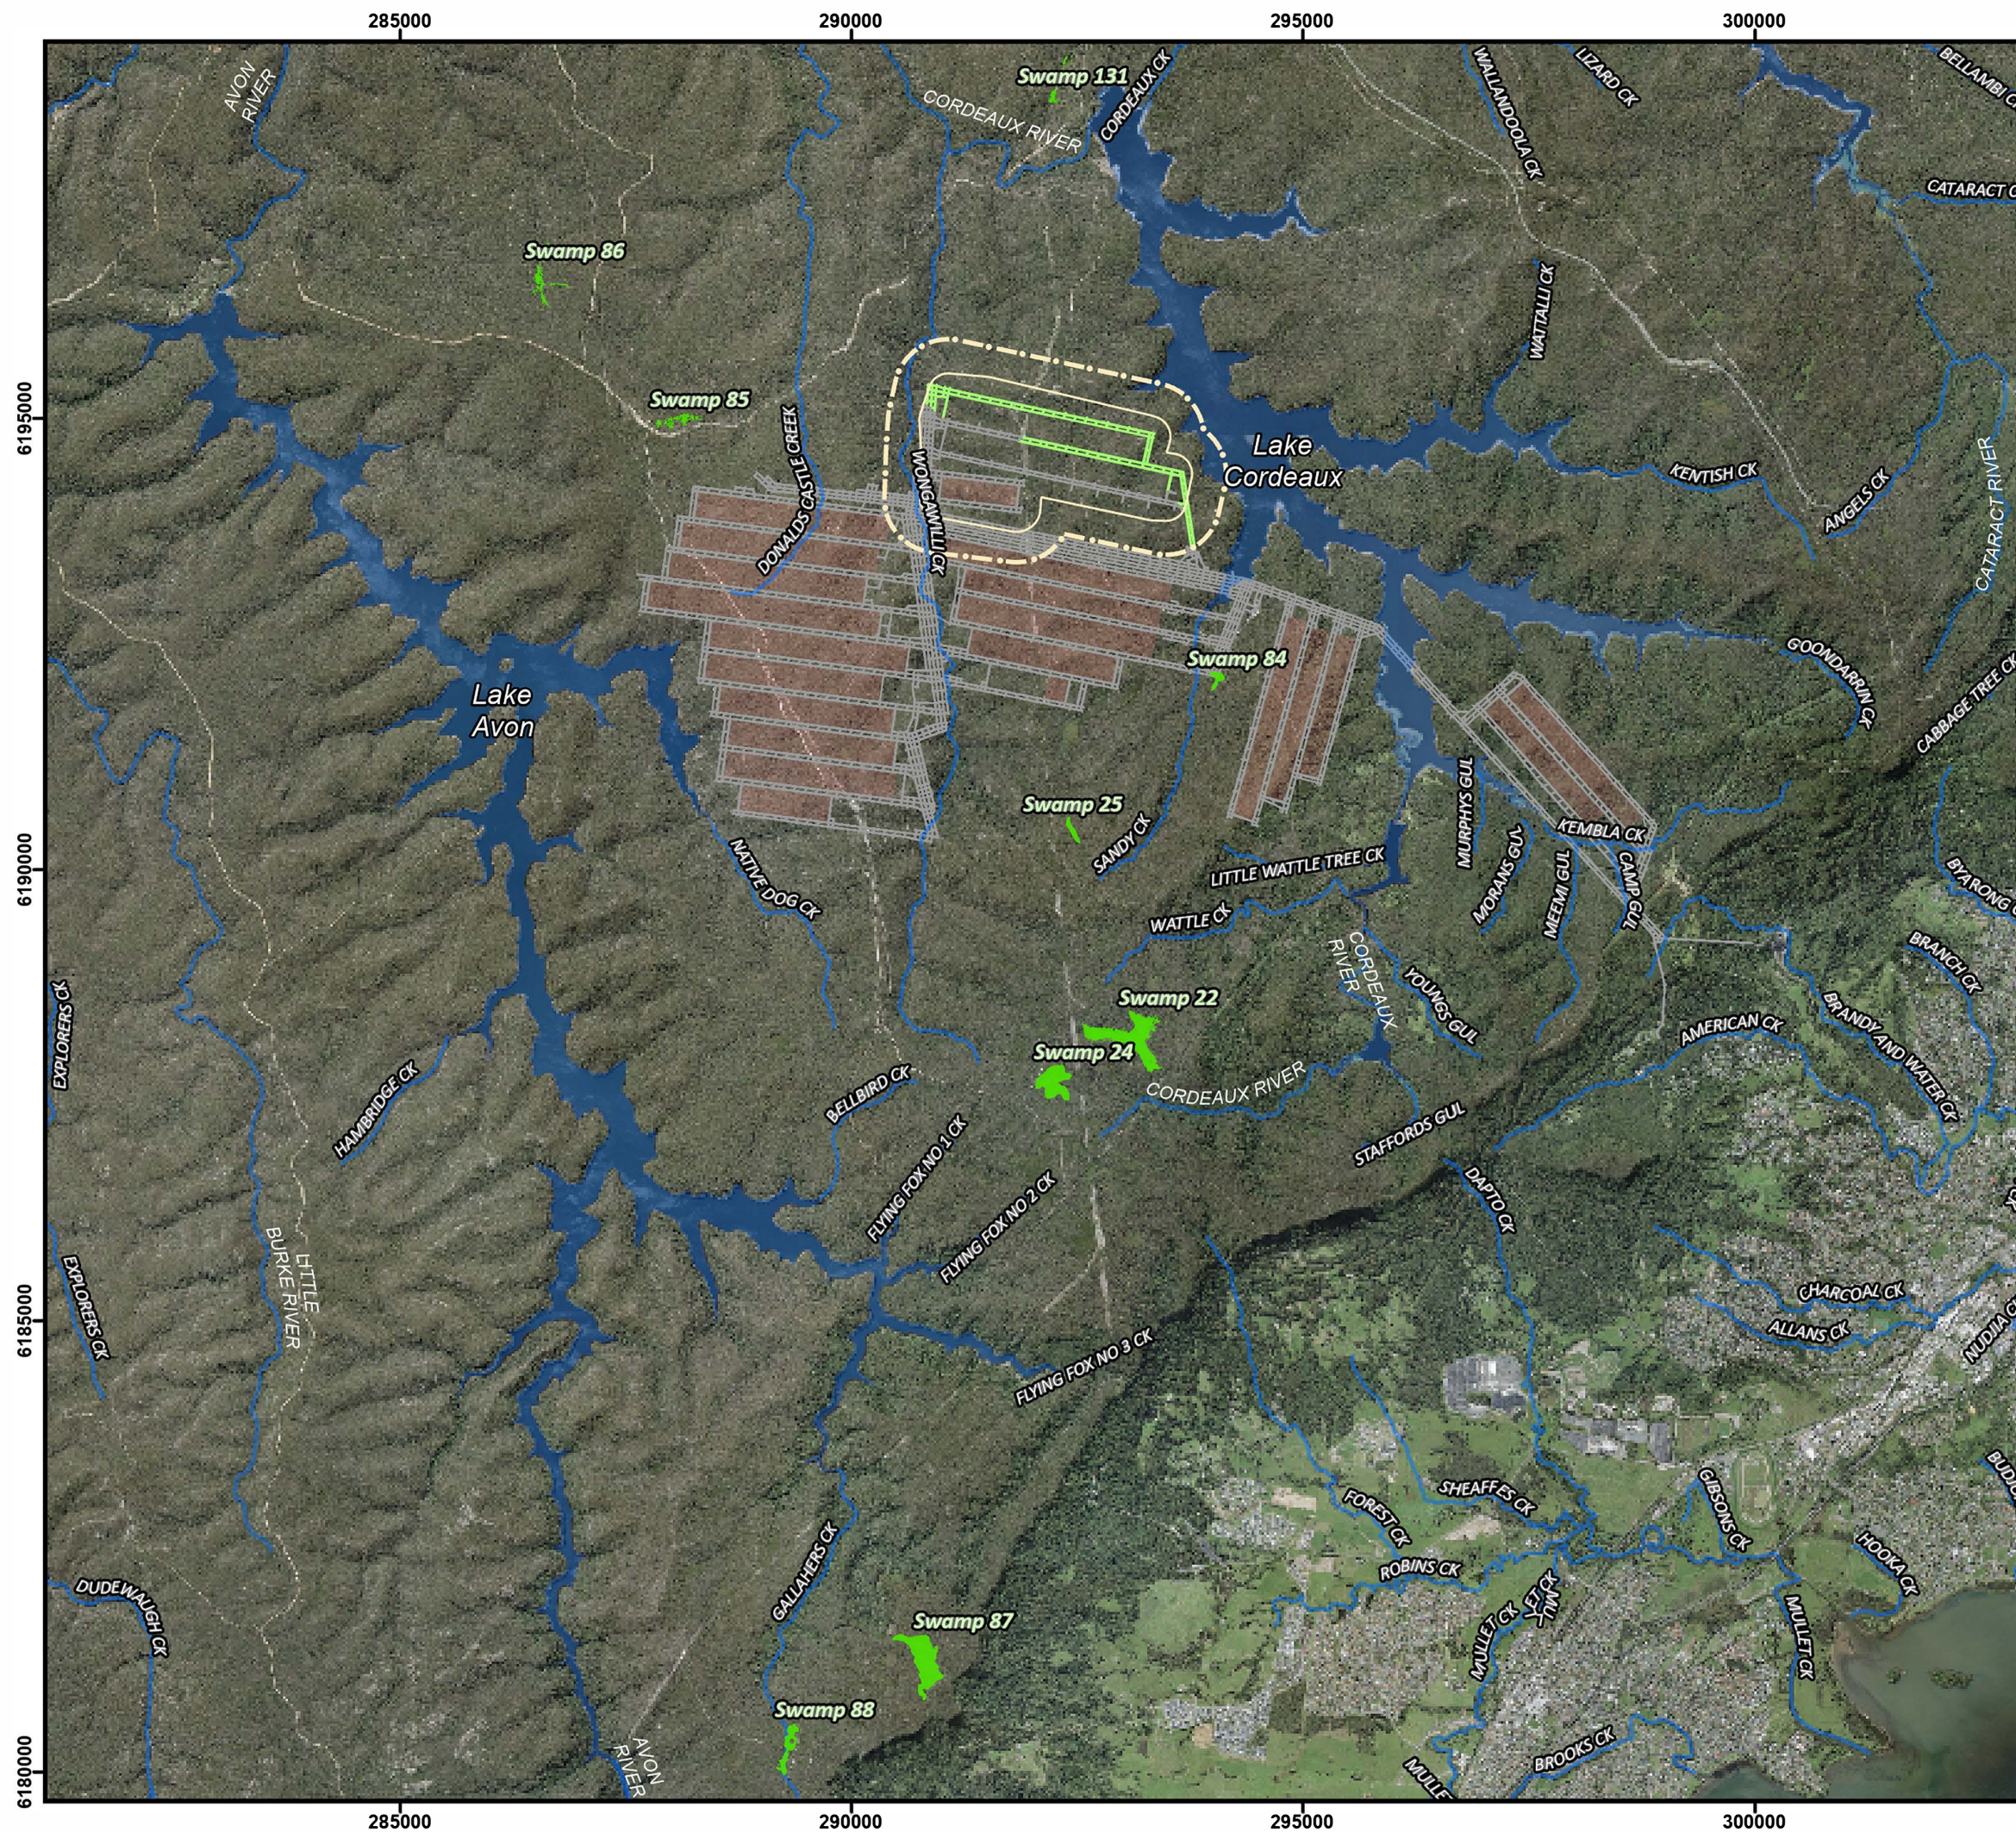



**DENDROBIUM
LONGWALL 21
TO 23 SMP
Reference Swamps
Figure 3-2**


- Reference Swamp
- Study Area (35 deg Angle of Draw)
- Study Area (600m Boundary)
- Existing Mine Workings
- Approved Mine Layout
- Dendrobium Goaf
- Creeks and Rivers



Date: February, 2024

Version 1
Horizontal Datum
MGA - Zone 56




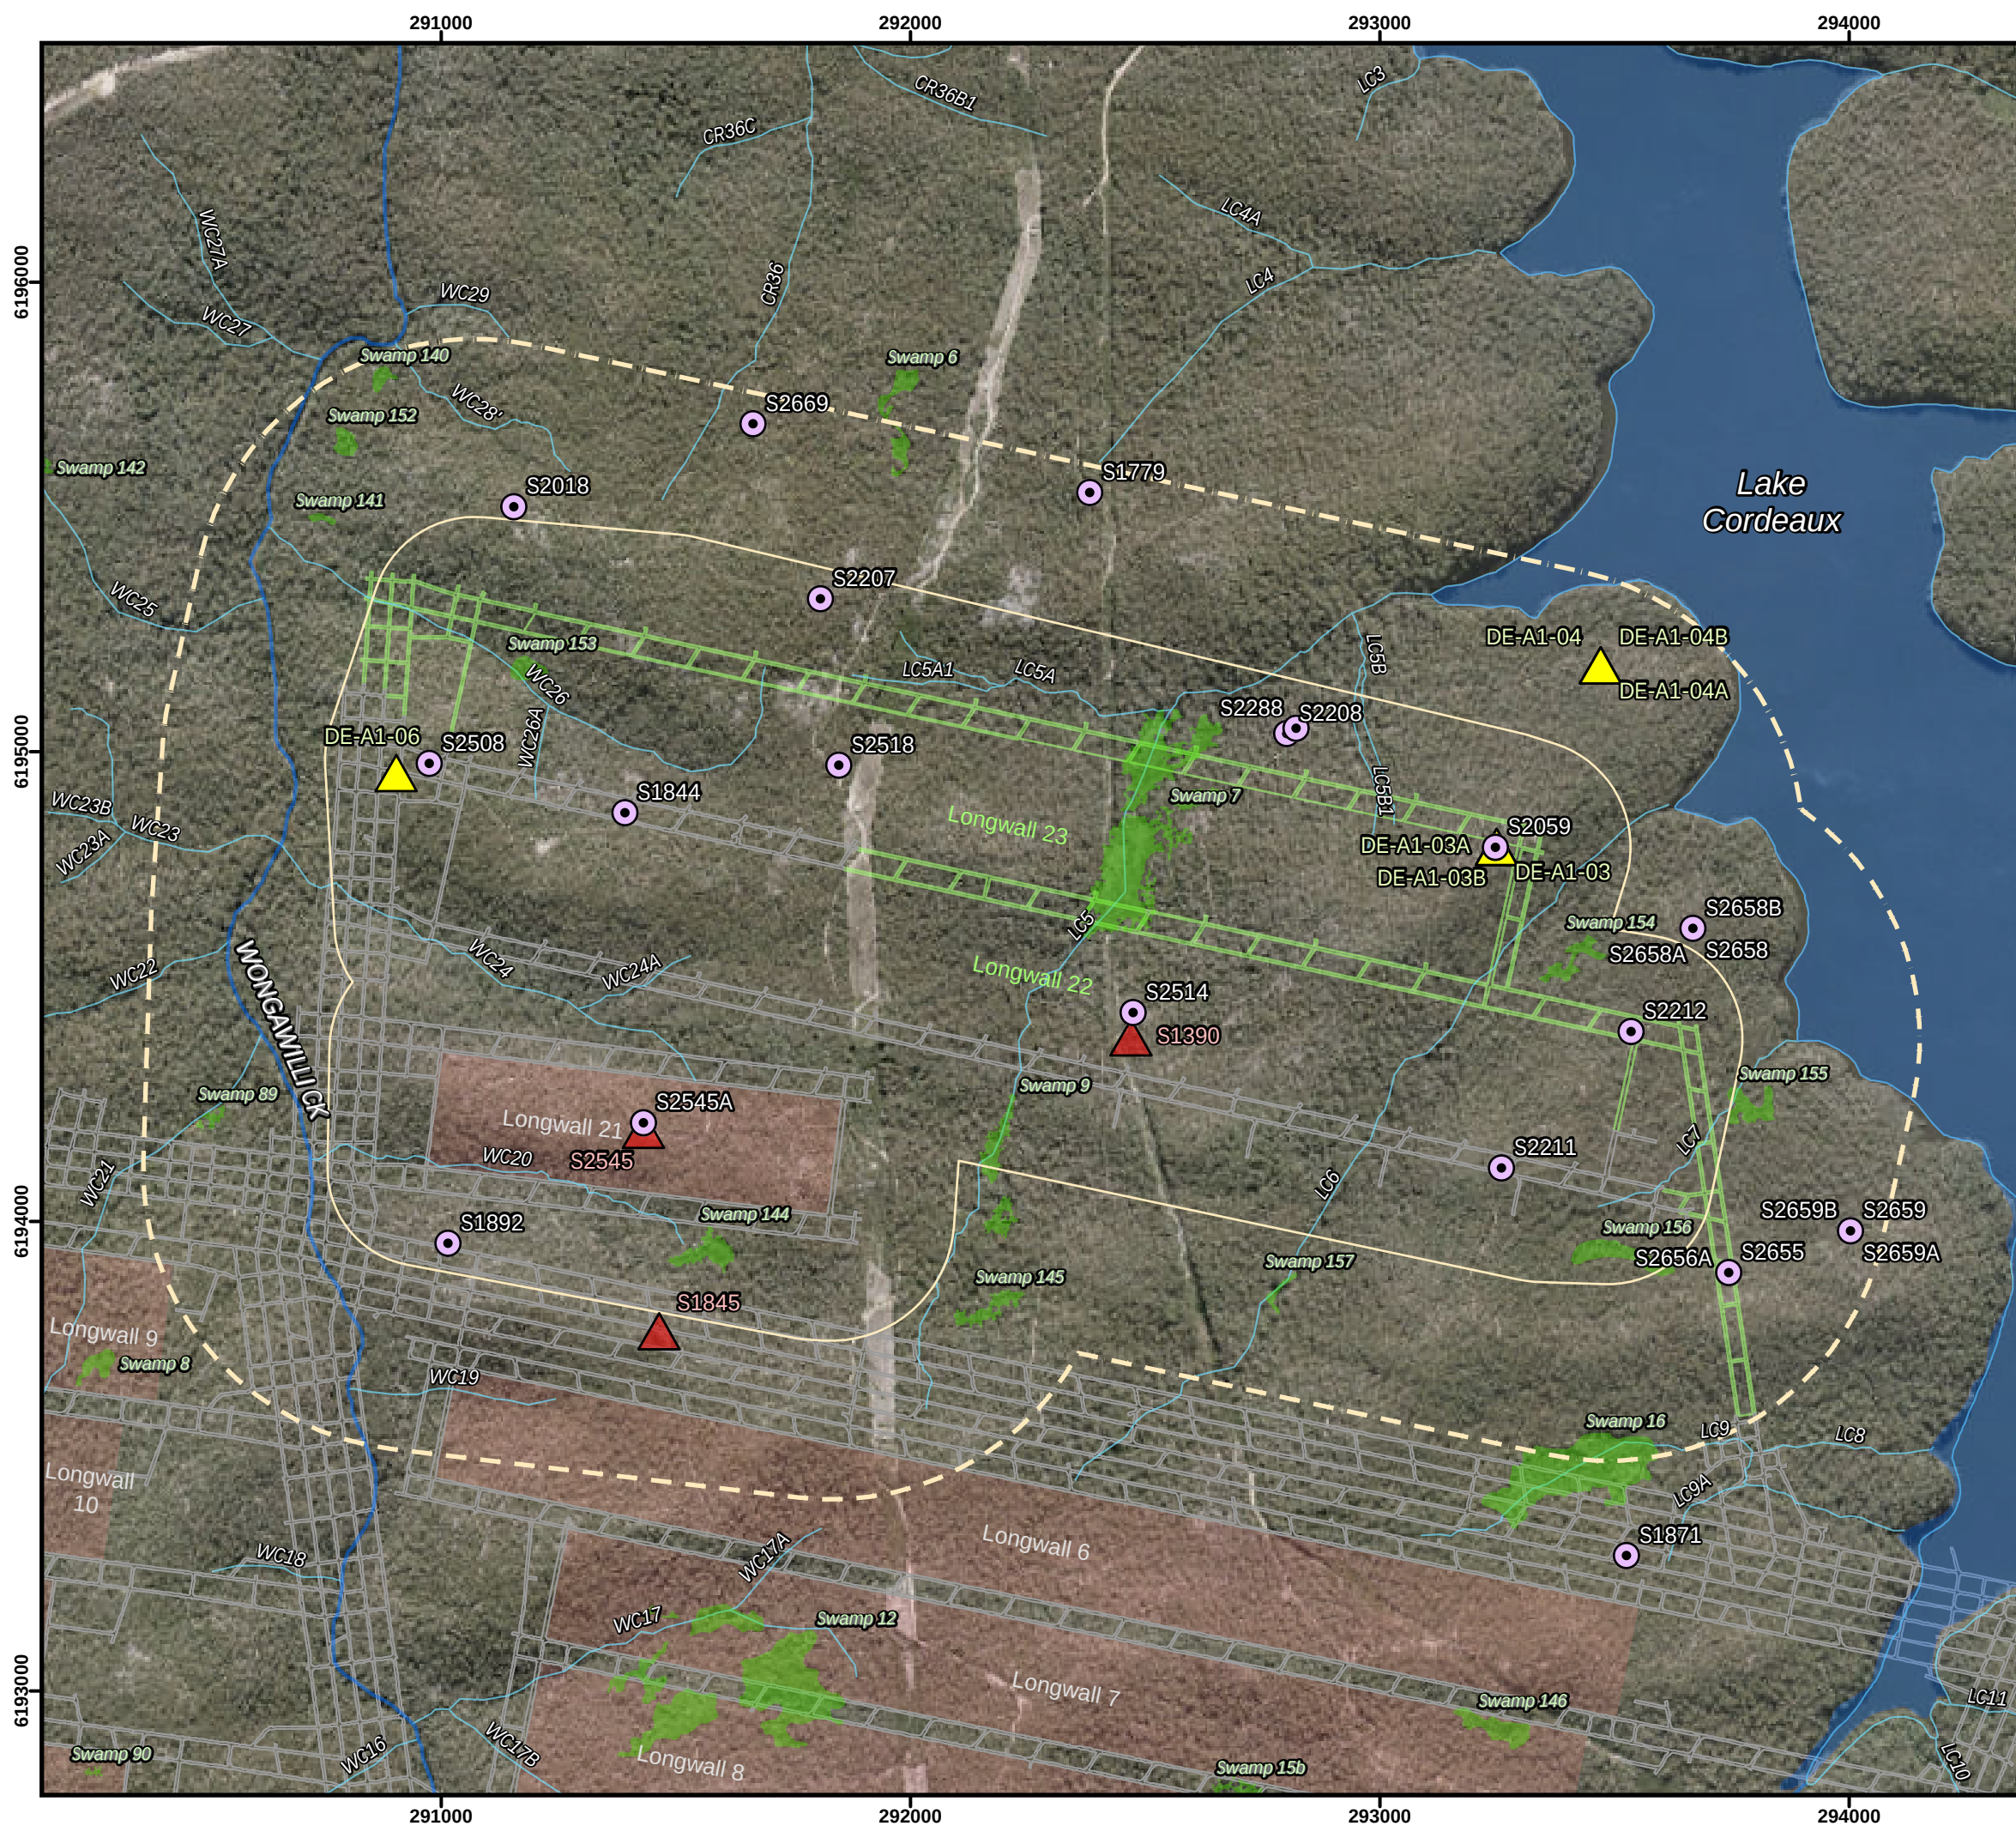

DENDROBIUM
LONGWALLS 21
to 23 SMP
Groundwater
Monitoring


Figure 3-3

- Groundwater Monitoring
- Proposed Groundwater Monitoring
- Terminated Groundwater Monitoring
- Study Area (35 deg Angle of Draw)
- Study Area (600m Boundary)
- Existing Mine Workings
- Approved Mine Layout
- Dendrobium Goaf
- Rivers
- Creeks
- Tributaries
- Swamp
- Dendrobium Mining Areas

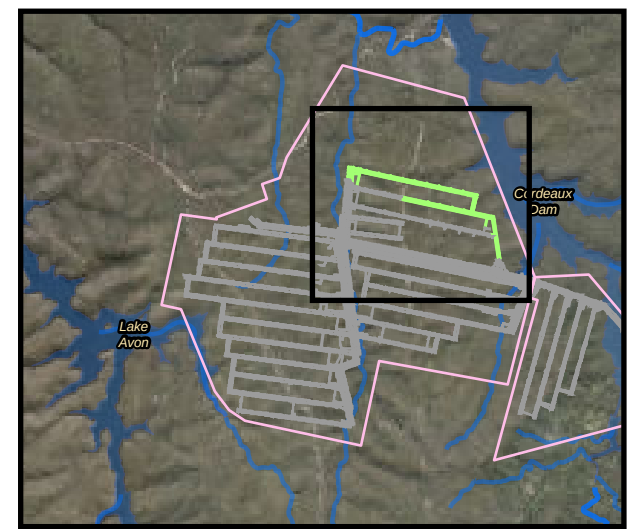

Date: March, 2024

Version 1
Horizontal Datum
MGA - Zone 56



4 PERFORMANCE MEASURES AND INDICATORS

Subsidence impact performance measures for Swamps 9, 144 and 145 and 154 are included within Condition 6, Schedule 3 of the Area 3C SMP Approval. Under the requirements of this approval and the Dendrobium Development Consent, these performance measures must be applied to the extraction of Longwalls 21, 22 and 23.

A detailed list of reporting triggers and performance measures and indicators is included in the TARP in **Appendix A**.

4.1 Impact Mechanisms

Subsidence is an unavoidable consequence of longwall mining and includes vertical and horizontal movement of the land surface. Subsidence effects include surface and sub-surface cracking, buckling, dilation and tilting. These effects can result in changes to the hydrology of watercourses.

Changes to watercourse hydrology and water quality can result in environmental consequences. The likelihood and timing of these consequences relate to the size and duration of the effect. The potential consequences of mining on groundwater and surface water in the Special Areas are (IEP 2019a):

- Groundwater depressurisation
 - The creation of an excavation below the water table can affect groundwater in a number of basic ways. In all cases, because the fluid pressure in an excavation is much lower than that of the fluid that originally occupied the space, a flow system is established with the excavation acting as a sink into which surrounding groundwater flows. The rate of flow and observed extent of depressurisation depend on the hydrogeological properties of the rock mass. If the excavated area is sufficiently large, the spatial extent and rate of flow into the sink can be enhanced by the formation of fractures.
- Surface water diversions
 - Diversions into a shallow, localised fracture network, where loss of flow from a surface water is likely to return to the system at some point downstream, which based on observations of the SCI (2008) may vary from 20 m for specific rockbars to more than 200 m.
- Surface water permanent losses
 - Diversions into deeper, dilated shear surfaces on bedding planes, where these form a conduit for lateral water flow, which may or may not report to the same catchment (i.e. it may become a permanent loss).
- Groundwater depressurisation
 - Groundwater within the Hawkesbury Sandstone and Narrabeen Group as well as the Permian coal measures is recharged from rainfall and water bodies where the lithologies occur at outcrop, as well as potential downward leakage from overlying strata (Hydrosimulations 2018).
- Water quality
 - Water quality within watercourses is affected by numerous factors including runoff from swamps and interactions between bedrock and water, with fracturing of bedrock due to mining causing local water quality impacts.

The environmental consequences which could relate to changes in hydrology and water quality include:

- Species composition change and/or changes in vegetation communities.
- Loss of aquatic ecology and/or changes in aquatic habitat resulting from a reduction of surface water quality and/or flows and standing pools.
- Water-borne inputs to Lake Avon, Lake Cordeaux and Cordeaux River such as erosive export of fine sands and clays and/or ferruginous precipitates.
- Reduced inflows into Lake Avon, Lake Cordeaux and Cordeaux River.

An overview of the potential impacts and consequences of mining on swamps, surface flows and storages is presented in **Table 4-1**.

Table 4-1 Summary of subsidence effects, impacts and consequences for surface flows, storages and swamp hydrology (IEP 2019b)

Subsidence effects	Impacts	Consequences
• Tensile cracking, tensile, compressive or shear movement of joint and bedding plane • Fracturing of sandstone blocks • Buckling and localised upsidence in the stream bed below the swamp • Tilting of bedrock	• Cracking of rock bars • Lowered water tables and soil moisture • Potential erosion and scouring • Altered water chemistry e.g. enhanced release of iron • Change to the size of swamps	• Loss of surface flow and storage through leakage • Loss of baseflow generation including from swamps • Vulnerability of swamps to fire and further erosion and reduction in baseflow generation capacity • Increased loads of contaminants to water storages

4.2 Potential for Connectivity to the Mine Workings

The fracture zone above a longwall panel comprises in-situ material lying immediately above the caved zone, which have sagged downwards and consequently suffered significant bending, fracturing, joint opening and bed separation (Singh and Kendorski, 1981; Forster, 1995). Where the panel width-to-depth ratio is high, and the depth of cover is shallow, the fracture zone would extend from the seam to the surface. Where the panel width-to-depth ratio is low, and where the depth of cover is high, the fracture zone would not extend from the seam to the surface.

The possible height of the fracture zone above the longwall panel is dependent upon the angle of break, the width of the panel, the thickness of seam extracted and the spanning capacity of a competent stratum at the top of the fracture zone (MSEC 2012). Based on mining geometry, the height of the fracture zone equals the panel width, minus the span, divided by twice the tangent of the angle of break.

It should be noted that the height of the fracture zone should be viewed in the context of fracturing only and should not be directly associated with an increase in vertical permeability. There are numerous models for the height of fracturing and height of desaturation. A review of these matters was conducted for the Bulli Seam Operations Project Response to PAC deliberations (Hebblewhite 2010).

The Regional Groundwater Models at Dendrobium uses site specific data to determine the height of desaturation. Dendrobium monitors in excess of 1,000 piezometers in ~100 boreholes (including a comprehensive array of piezometers above the centreline of longwall goafs) and has analysed many thousands of samples for field parameters, laboratory analysis, algae and isotopes.

The results of water analysis and the interpretation of the height of connective fracturing was peer reviewed by Parson Brinckerhoff (2012). The peer review states that "the use of standard hydrogeochemical tools clearly demonstrated the geochemical difference between water from the Wongawilli Coal Seam and goaf, and the overlying sandstone formations and surface water from Lake Cordeaux".

Although the report acknowledged limitations of the available data, this review is based on one of the most comprehensive datasets available in the Southern Coalfield. On the basis of the available data and the Parson Brinckerhoff (2012) review it is considered that the height of desaturation used by Heritage Computing (2009 & 2011) is conservative.

In January 2015 SRK Consulting conducted a detailed independent review of the Dendrobium water chemistry data, to:

- Assess the level of detail, quality of science, depth and technical appropriateness of the water chemistry data.
- Evaluate associated interpretations in relation to underground operations of Dendrobium Mine, with specific focus on how these address the question of hydraulic connectivity between the mined areas and the reservoirs.

Based on the review SRK concluded that the observed geochemical trends are not consistent with a high degree of hydraulic connectivity between the underground workings and the surface water bodies.

As reported in Coffey (2012) most of the change in aquifer properties occurs within the collapsed zone.

Changes in aquifer properties above the collapsed zone are less severe and largely restricted to increases in storativity. Groundwater drawdown due to sudden storativity increases will ultimately impact the surface, either directly (as seepage from watercourses or lakes to satisfy the drawdown), or by intercepting baseflow.

Predictions of fracture zone dimensions above longwall panels for Dendrobium (MSEC 2012 and Coffey 2012) refer to geotechnical fracturing behaviour and are not necessarily directly related to a groundwater response resulting from increased vertical permeability.

Parson Brinckerhoff and IMC have completed testing to characterise the pre- and post-mining permeability above Longwall 9, the first longwall in a new domain, not affected by previous mining. After Longwall 9 mined under the site it was tested to quantify the change to vertical and horizontal permeability of the strata, including the Bulgo and Hawkesbury Sandstones and the Bald Hill Claystone. The testing involved core, packer and borehole interference testing, groundwater flow and tracer testing.

Mining of Longwall 9 resulted in a significant increase in subsurface fracturing compared with pre-mining. Down-hole camera surveys identified a number of open horizontal and inclined fractures with apertures of several centimetres. Groundwater ingress was noted at several open fractures.

Most post-mining test bores showed decreases in groundwater level and strong downward hydraulic gradients, particularly in the lower Bulgo Sandstone. Significantly however, groundwater levels in the shallow Hawkesbury Sandstone remained perched at the study site.

Horizontal hydraulic conductivity increased between one to three orders of magnitude due to mine subsidence and strata fracturing. Increases in hydraulic conductivity are observed in every geological unit but are greatest below the base of the Hawkesbury Sandstone.

In contrast to pre-mining testing in which no breakthrough was observed, horizontal tracer testing after the passage of Longwall 9 resulted in breakthrough in about 40 minutes. This indicates a bulk hydraulic conductivity in the order of 10 m/day; at least two orders of magnitude higher than pre-mining conditions.

No breakthrough in tracer was observed in either the pre-mining or the post-mining tests of the Bald Hill Claystone and this indicates that the vertical conductance at the research site was below the detection limit of the test, estimated to be approximately 0.7 m/day.

Activated carbon samplers deployed in streams adjacent to the research site detected no breakthrough of tracer and therefore there is no evidence of preferential flow paths either existing or induced between the research site and adjacent streams.

Sampling of water from the underground mine detected no breakthrough of tracer and therefore there is no evidence of preferential flow paths induced between the research site and the workings.

Although current observations do not allow a precise definition of the height of intense fracturing using any criteria (and the boundaries are gradational in any case), most evidence suggests that the zone of most intense and vertically connected fracturing within Area 3B extends into the Bulgo Sandstone.

Estimates for the height of fracturing above a longwall panel at Dendrobium based on published methods range from 122 m to 357 m. This range in estimates is large and presents a challenge to those wishing to model hydrogeological impacts of mining on a regional scale based on mine site data.

The pre- and post-mining investigations carried out in this research study provide important constraints on the extent of mining related disturbance and its effect on groundwater systems.

In August 2015 HydroSimulations' completed an assessment of the estimated height of connected fracturing at Dendrobium. The assessment included:

- The effects of longwall mining and subsidence on overburden strata;
- A summary of previous research in relation to estimating the extent of the deformed strata above longwall mining, both in general and at Dendrobium;
- Revised estimates of the height of connected fracturing for Dendrobium longwalls using the Ditton 'Geology Model' (Ditton and Merrick, 2014) and the Tammetta (2013) method.

The assessment concluded that the Ditton 'Geology model', as outlined in Ditton and Merrick (2014), is the most appropriate method for estimating the vertical extent of connected fracturing above longwalls at Dendrobium. This is supported by the research above Longwall 9 by Parsons Brinckerhoff (2015) and earlier studies by GHD (2007) and Heritage Computing (2011).

A review of methods for estimating the height of fracturing above longwall panels at Dendrobium Mine was commissioned by DPE and carried out by geotechnical consultants Pells Sullivan Meynink (PSM). The PSM report was finalised in June 2017 and made available to South32 on 7 September 2017.

Recommendations by PSM regarding additional monitoring and research to add to our understanding of the catchment are generally sensible and many of these have already been acted on.

The IEP (2019b) Part 2 Report further considered mining operations within the special areas and reiterated its earlier position stated in IEP (2019a):

The Panel has given detailed consideration to the equations in the Part 1 Report and concluded that it cannot endorse either at this point in time. For a range of reasons, neither or either may ultimately prove to be sufficiently reliable. It recommended erring on the side of caution and deferring to the Tammetta equation until:

- i. field investigations quantify the height of complete drainage at Metropolitan and Dendrobium mines; and/or*
- ii. geomechanical modelling of rock fracturing and fluid flow are shown to be sufficiently reliable for informing the calibration of groundwater models at mine sites in the catchment.*

The Regional Groundwater Model for Dendrobium Mine has been revised to consider the findings of the PSM report and IEP Reports (2019a), including the use of the Tammetta model and modelling connectivity to the surface. HydroSimulations state that regardless of the method used to assess fracturing, they believe the current groundwater modelling approach is sound.

In accordance with Schedule 3, Condition 19(c) of the Area 3B SMP Approval, height of connective fracturing investigations across longwalls in Area 3B are undertaken and reported to the Department prior to each longwall extraction. The most recent report, Hebblewhite (2020) states:

... comments and conclusions are drawn in relation to the overall concept of height of depressurisation, and the status of predictive models:

- ... mining-induced impacts are occurring above all panels throughout the overburden sequence, through to, or very close to the surface in all cases. This includes increased defect/fracture impacts; significant increases in permeability; and reduction to near-zero pressure head throughout the strata.*
- There is some evidence of very localised retained groundwater in perched aquifers at some locations, and at different vertical horizons, but these are not extensive.*
- On the basis of this evidence, it is reasonable to conclude that the height of depressurisation is close to, or equal to the total depth of overburden above the working coal seam, i.e. extending to the surface in each instance.*
- In spite of the reduced longwall panel width in Area 3A (LW6 and LW7), the height of depressurisation has still effectively extended to the surface, albeit with a reduced strata fracture density above the mined panels. It is likely that a more significant panel width reduction and or mining height reduction would be necessary to cause a significant reduction in height of depressurisation in this particular mining region.*
- The lack of significant differential in height of depressurisation with the reduced panel widths means that the range of the dataset available to assist with developing an improved prediction model remains inconsistent, and insufficient to enable any further model development based on empirical methods.*
- There is strong evidence at all locations of significant depressurisation occurring ahead of under-mining, due to the effect of adjacent mining panels, and earlier mining development. These effects are evident at most of the strata horizons, extending towards the surface.*
- ... the Tammetta model is clearly the most appropriate one to continue using in the future. It provides a reasonably accurate prediction – given the variability of factors such as depth across any particular panel.*

4.3 Potential for Fracturing Beneath the Swamps

Based on the predicted systematic and non-systematic subsidence movements (2021) the bedrock below the swamps and any significant permanent pools within the swamps are likely to fracture as a consequence of subsidence induced strains. The predicted strains decrease where the surface is not directly mined beneath, and generally reduce with distance from the longwall panel.

Surface flows captured by the surface subsidence fracture network resulting from valley related movements which do not connect to a deeper aquifer or the mine workings will re-emerge further downstream. This prediction is based

on an assessment of the depth of valley closure induced vertical fracturing from the surface and measurements of water balance during the modelled periods of recession, baseflow and small storm unit hydrograph periods downstream of mining areas.

The depth of fracturing in the “surface zone” above a longwall panel is addressed in the Bulli Seam Operations Environmental Assessment: Section 5.2.1, Appendix A, Appendix B and Appendix C as well as in the Response to Submissions and Response to the NSW Planning Assessment Commission. The BSO Independent Peer Review of strata deformation provided by Professor Bruce Hebblewhite concurs with the concept of the “surface zone” fracture network related to down-slope or valley movements. Several studies have determined the depth of these vertical fracture networks are restricted to approximately 15 m to 20 m below the surface.

The depth and other attributes of the surface fracture zone have been comprehensively determined using the following instruments and techniques:

- Calliper logging;
- Straddle packer permeability testing;
- Overcore stress measurements;
- Core logging and geotechnical testing;
- Geophysical testing;
- Water level monitoring;
- Borehole cameras;
- Subsidence, extensometer monitoring and shear deformation monitoring;
- Stress change and fracture logging;
- Permeability testing and falling head tests; and
- Mapping of pressured air drilling fines.

The following sites have been comprehensively investigated to demonstrate the dimensions of the “surface fracture zone”:

- Two rockbars on the Waratah Rivulet; and
- Four rockbars on Georges River.

Monitoring from Dendrobium Mine indicates the surface fracture network over the goaf connects to or is concurrent with the fracture network which propagates from the seam to the surface. In this instance the diversion of surface flow to deep strata or the mine relates to vertical permeability increases associated with this fracturing.

Prior to any remediation works within Area 3B that target surface/shallow fracture networks, the depth of the fracturing will be characterised by standard techniques such as drilling, down hole cameras and calliper measurements. The hydraulic conductance of these fracture networks will also be determined prior to implementing any rehabilitation.

At reference swamp sites, shallow groundwater levels recovered in 2020, with saturation levels similar to those prior to the 2017-2019 drought (HGEO 2021b).

Swamps that have been mined under commonly display hydrological changes shortly following the passage of the longwall beneath the monitoring site. An assessment of hydrological change at Upland Swamps was carried out at Dendrobium by Watershed HydroGeo (2019), updated (Watershed HydroGeo, 2021) and again recently (Watershed HydroGeo, 2023) to include data to June 2023 and sites in Areas 2, 3A, 3B and 3C. The most recent study updated the empirical model of impact to swamp piezometers based on the assessments of water levels and recession rates around existing mining. The study identified that approximately 85-95% of Upland Swamp piezometers within 70 metres [of mining] are likely to exhibit a response to mining, and that there is overwhelming evidence that the probability of an impact declines with distance from the goaf. Four main zones were identified from the data:

- A. Above the goaf – Almost certain (97% chance) of being impacted;

- B. Within 75 m of the goaf – Highly likely (85-95% chance) of being impacted;
- C. 75-120 m from the goaf – 40% chance of being impacted; and
- D. >120 m from the goaf – Unaffected (0% chance of being impacted)

Furthermore, there is likely a difference between the distance to which groundwater effects propagate from the long edge compared to from the short edge, however there is insufficient quantitative data to be definitive in regard to shallow groundwater response. The assessment of hydrological change at Upland Swamps is currently being updated to consider all monitoring data available to the end of December 2023.

4.4 Potential for Erosion Within the Swamps

Tilting, cracking, desiccation and/or changes in vegetation health could result in concentration of runoff and erosion which intern could alter water distribution in the swamp. Changes to swamp hydrology can result in environmental consequences. The likelihood and timing of these consequences relate to the size and duration of the effect. The possible impacts of the drying of swamps due to mining-induced changes in hydrology include (IEP 2019b):

- reduction of soil moisture levels and loss of cohesiveness of the swamp sediments
- enhanced risk of channelization and consequent susceptibility to erosion of swamp sediments, with potential water quality implications
- decline of groundwater-dependent plant species and consequent changes in vegetation structure
- decline of groundwater-dependent fauna including macroinvertebrates and stygofauna
- oxidation of peaty sediments resulting in increased hydrophobicity, lower water-holding capacity and potential changes in nutrient status and cycling
- increased risk of erosion, which may lead to gully formation.
- swamps have less resilience to bushfires which, in turn, can lead to an increased susceptibility to erosion and loss of baseflow (NSW Threatened Species Scientific Committee, 2012).

Subsidence predictions were carried out to assess the potential impacts of longwall mining in Area 3C. The assessment indicated that the levels of impact on the natural features were likely to be similar to the impacts observed within Area 3A and Area 3B to date, including the reduction in the potential for impacts where mining is setback from surface features (see Section 4.3 where hydrological impacts have not been observed at distances greater than 120m). A summary of the maximum predicted values of subsidence, tilt and strain at the swamps is provided in **Section 5**.

Where a swamp is directly mined under, tilting of sufficient magnitude could change the catchment area of a swamp or re-concentrate runoff leading to scour and erosion, potentially reducing the water flowing onto a swamp or allowing water to escape from the swamp margins. These effects could be observed within the whole swamp or alter water distribution in parts of the swamp, thus favouring some flora species associations over others.

Changes in gradients predicted to occur following mining are discussed in **Section 5.2.1**. These changes have been considered in relation to the likelihood of change in drainage line alignment by MSEC (2021). The assessment takes into account the nature of the drainage channel and whether the predicted tilt is significant when compared to the existing slopes.

Landscape monitoring commenced in 2004 for Dendrobium Area 1. This monitoring program has been continued and updated throughout the mining period for Areas 2, 3A and 3B. The monitoring includes inspections of swamps at regular intervals prior to mining, during active subsidence and following the completion of subsidence movements. In addition to erosion (increased incision and/or widening), these observations target any surface cracking, surface water loss, soil moisture changes, vegetation condition changes, slope and gradient changes, the condition of rock-bars and peat condition.

The observed impacts on natural features above Longwalls 1 – 16 have been generally consistent with those predicted in the assessments undertaken prior to mining.

In Area 3B, to date there has been no instance of erosion resulting from this cracking. No erosion of the surface of the swamps as a result of mining observed to date. For Area 3B to completion of Longwall 13, 126 surface impacts have been identified. Many of these are very minor impacts and of very limited environmental consequence. For example, 91% of the cracking identified at the surface has a width of less than 100 mm. To date there has been no instance of erosion resulting from this cracking (Illawarra Coal 2018).

Swamp 18 is a swamp that some have reported to be impacted by mining. An important observation of Tomkins and Humphreys (2006) is that in 1951, Swamp 18 was more extensive and included a continuous, intact swampy unit infilling the valley of Native Dog Creek for several hundred meters downstream of the main body of the swamp to link with Swamp 19. Furthermore, the gully erosion of the lower extension of the swamp had commenced before 1951 and had reached the main body of Swamp 18 by 1990, well before underground coal mining in this area.

In 2003 approximately 450 m of gully erosion was identified in Swamps 1A and 1B and the associated stream before any mining influence in the area. These case studies demonstrate that erosion within swamps can be active without any influence of mining.

4.5 Potential for Vegetation Changes Within the Swamps

Where there are changes to swamp hydrology that are large and persistent there is likely to be a vegetation response. Swamp vegetation is likely to be relatively resilient to short term changes in groundwater level and soil moisture, demonstrated by the persistence of the swamp vegetation communities during extended periods of drought. For this reason, any response to changes in swamp hydrology are likely to be over the medium to longer time period as the vegetation equilibrates to the new hydrological regime. Vegetation change may be observed in the rates of species composition change and/or changes in vegetation communities over and above what is measured in nearby swamps due to natural variation.

The IEP Report (2019b) recognised that improvements in monitoring data supported by a substantial body of research has improved understanding of the impacts and consequences of longwall mining for swamps. The report also established that longwall mining directly under swamps in the Southern Coalfield can result in significant changes to swamp hydrology and redirection of surface runoff which currently appear to be irreversible. Additionally, the IEP Report (2019b) concluded:

- Impacts on swamps and on the streams exiting from them are evident, however currently there is no strong evidence to date of consequences of swamp impacts on catchment-scale water supplies.
- When shallow groundwater levels in a swamp decline, soil moisture levels also decline, with a lag time of weeks or months.
- Quantifying the consequences of changes for flows in exit streams requires the development of water balance models of the swamps.
- Mining-induced changes to upland swamp vegetation communities are still not able to be differentiated from natural changes.
- Vegetation change assessment does not provide a clear and timely measure of possible changes in ecosystem functionality of the upland swamps. While changes in methodology, such as using targeted obligate swamp-dependent species (either plants or animals) may improve assessment, the decadal nature of many changes remains.

4.6 Potential for changes to Ecosystem Functionality

Recent impact reports for swamps in Dendrobium Area 3 suggested that mining induced hydrological changes within swamps may occur further than 60 m from a longwall panel. The SMP application for Longwall 19A was referred to the Panel in June 2023 to provide advice specifically in relation to maintaining the ecosystem functionality of Swamp 15a. Primary conclusions of this advice in relation to ecosystem functionality that are relevant to Area 3C include:

- The definition of ecosystem functionality devised in 2013 and adopted in the Swamp Impact, Monitoring, Management and Contingency Plan (SIMMCP) for Longwalls 19 and 19A (and some other previous longwalls) neither reflects the universal definition of the term that has prevailed for at least the last three decades (and, hence, at the time when it was written into the Consent Conditions for Dendrobium Mine) nor general informed usage of the term.
- In particular, the established definitions of ecosystem functionality allude to physical processes, a key aspect of which is the swamp soil hydrology; a parameter that is not reflected in the definition of ecosystem functionality in the SIMMCP.
- Since a change in swamp hydrology at any monitoring site reflects a wider hydrological change, the area of which may be large but unmeasured, a change to the hydrology at any site should be regarded as indicating a change in swamp ecosystem functionality.

- If the Dendrobium-centric definition of ecosystem functionality continues to prevail, it is incomplete and warrants updating.
- In respect to advice presented in the SMP for LW19 that rapid drawdown to levels lower than pre-mining levels and increased rate of recession (drainage) in the water tables in colluvial sediments of swamps had not been observed at Dendrobium Mine to that point in time in swamps further than 60 m from a longwall panel, the Panel concludes on the basis of its assessment of recent Impact Reports relating to Swamp 35b, Swamp 144 and Swamp 15a as well as hydrological and other data, that this is no longer the case. Observations of this behaviour have since been recorded at distances close to 120 m from the edges of longwall panels.

The Area 3C Swamp Monitoring Program and TARP have been revised with consideration to the Panel's advice and includes the addition of mining-induced hydrological changes as a measure of changes to ecosystem functionality including:

- Falls in surface or near-surface groundwater levels;
- Falls in soil moisture levels; and
- Reduced pool water levels.

Reporting trigger levels are included in the TARP to provide a rapid assessment that indicate an immediate change that can be reported to key stakeholders within a few days of the identified change. Reporting triggers do not necessarily indicate an exceedance of a performance measure. Reporting triggers increase in severity from Level 1 to 3 and are used for trigger reporting, response and/or management action.

Performance indicators are quantifiable measures used to assess whether the performance measure has been exceeded.

The Area 3C monitoring program and TARP are presented in **Appendix A**.

4.7 Achievement of Performance Measures

Mining has been occurring for many decades beneath swamps and this allows an opportunity to do some relatively simple back analysis of impacts to these features over the long-term. This approach has the disadvantage of a relatively simple experimental design whereby only obvious changes as a result of the mining are likely to be identified.

Subsidence predictions for swamps in historic mining areas were reviewed as part of the Bulli Seam Project Environmental Assessment (Resource Strategies 2009).

Field investigations were carried out in these swamps to assess impacts and consequences from various levels of back-predicted levels of subsidence movement. This data was used to inform the assessment of risk of impacts and environmental consequences for the Bulli Seam Operation Project. A summary of the review findings is provided below.

Back predictions have been undertaken for 34 swamps previously subject to subsidence in the Southern Coalfield. The back predictions indicate that six of these swamps would have been subject to closure values of greater than 200 mm, namely:

- Swamp STC-S4 (221mm predicted closure) at West Cliff;
- Swamp STC-S1c (276mm predicted closure) at West Cliff;
- Swamp STC-S1a (278mm predicted closure) at West Cliff;
- Swamp 12 (335mm predicted closure) at Dendrobium;
- Swamp STC-S1b (461mm predicted closure) at West Cliff; and
- Swamp STC-S2 (542mm predicted closure) at West Cliff.

Site inspections have been conducted of the swamps listed above. An additional ten swamps predicted to have been previously subject to less than 200 mm valley closure were also inspected. The inspection methods included walking the length of the swamp and recording observations of any significant environmental impacts or consequences, for example:

- Significant subsidence-induced buckling or cracking.

- Any significant erosion or scour.
- Significant vegetation dieback on a broad scale.
- Significant desiccation of vegetation or peat materials on a broad scale.

It is recognised that there are limitations associated with the assessment. As stated above, the assessment is based on back predictions of subsidence effects, as opposed to observed (i.e. monitored) subsidence effects. However, these back predictions are being compared with predictions using the same methodology for analysis at Dendrobium, thus ensuring consistency within the comparative assessment.

Evidence of cracking and minor erosion was observed during the site inspections; however, no evidence of significant environmental consequences was observed.

Observational monitoring of upland swamps on the Woronora Plateau has been conducted by IMC since 2003. The results of this observational monitoring are in the report Understanding Swamp Conditions (BHPBIC 2010).

The report identifies any morphological, geological, hydrological and/or botanical changes observed in the swamps since inspections were initiated in winter 2003. Data is collected and analysed in such a way to identify and record any episodic or temporal changes to these swamp features.

Data is collected with the use of field instruments and through visual inspections of the dominant features within each swamp. The monitoring includes location and extent of any surface water or moisture, the health and location of vegetation, sediment and peat distributions and depths, as well as any cracking, erosion or sedimentation. Observation sites are recorded and plotted on plans with relevant comments.

A total of 28 swamps were visited and inspected between October 2010 and November 2010. A field sheet and plan with defined "Swamp Characteristics" were used to collect the data. Field officers visit each swamp and photograph and record data at various accessible sites. Data collection methodologies are consistent with previous swamp inspections. Swamp characteristics photographed and recorded include:

- Water: Location, volume and flow characteristics.
- Vegetation: Location, species, height and observed health.
- Sediment: Composition, depth and moisture.

The data is used to compare the conditions of sites in swamps before and after mining and under different climatic conditions. Data is also used to outline differences in swamp conditions due to geological and morphological conditions.

5 PREDICTED IMPACTS TO UPLAND SWAMPS

Subsidence has the potential to impact swamps overlying the proposed longwalls due to either transient or relatively permanent changes in porosity and permeability of a swamp or hillslope aquifer. Underlying sandstone substrate is likely to fracture as a result of the predicted differential subsidence movements. The likelihood of these impacts occurring reduces where mining is setback from surface features (see Section 4.3 where hydrological impacts have not been observed at distances greater than 120m).

If a swamp overlies a longwall panel it may undergo temporary extensional “face line” cracking (perpendicular to the long axis of the panel) as the panel retreats, followed by re-compression as the maximum subsidence occurs.

In addition, a swamp may also undergo both longer term extensional “rib line” cracking (parallel to the long axis of the panel) along the outer edge and compression within the central portion of the subsidence trough.

Non-conventional movements can also occur, and have occurred, in the NSW Coalfields as a result of, amongst other things, anomalous movements, valley closure and downslope movements. Many of the swamps are located in the bases of drainage lines and, therefore, could experience valley and slope related movements. The predicted valley related movements are provided in MSEC (2021). The maximum valley related movements are predicted to occur in the bases of the streams within the extents of the valley infill swamps. The headwater swamps are located partly up the valley sides and, therefore, in these cases the predicted valley related movements (upsidence and closure) for these swamps are less than the maxima provided in MSEC (2021).

Conventional closures result from sagging curvature; these predictions are provided separately to the valley related closures, as the associated conventional strains are distributed across the longwalls, as opposed to the valley related compressive strains, which are concentrated in the valley bases. Generally, the valley related closures and conventional closures are orientated obliquely to each other.

Where mining induced movements are sufficient to result in fracturing, these would be visible at the surface where the bedrock is exposed, or where the thickness of the overlying sediment is relatively shallow.

In accordance with the findings of the Southern Coalfield Inquiry and the IEP (2019a):

- **Subsidence effects** are defined as the deformation of ground mass such as horizontal and vertical movement, curvature and strains.
- **Subsidence impacts** are the physical changes to the ground that are caused by subsidence effects, such as tensile and shear cracking and buckling of strata.
- **Environmental consequences** are then identified, for example, as a loss of surface water flows and standing pools.

5.1 Description of Upland Swamps Within the Area 3C Study Area

There are seven swamps that have been identified wholly or partially within the Area 3C Study Area based on the 35° angle of draw line. There are eight additional swamps that are located wholly or partially within the Study Area based on the 600 m boundary. Swamp 153 and part of Swamp 7 are located directly above Longwall 23 and part of Swamp 7 is located directly above Longwall 22. There are no swamps directly above Longwall 21. The remaining swamps are located outside the extents of the proposed longwalls. Further swamp details are provided in **Table 3-1**.

The upland swamps can be categorised into two types, the valley infill swamps that form within the drainage lines, and headwater swamps that form within relatively low sloped areas of weathered Hawkesbury Sandstone where hillslope aquifers exist. Further details are provided in Section 3.2

5.2 Subsidence Predictions

Incremental impacts predicted to upland swamps from Longwalls 20 and 21 are stated in the Longwalls 20 and 21 SMP. Subsidence predictions discussed in this Plan are focused on the proposed Longwalls 22 and 23. Where swamps may be influenced by multiple longwalls, maximum predictions include cumulative predictions.

A summary of the maximum predicted total vertical subsidence, tilt and curvatures for the swamps located within the Longwalls 22 and 23 Study Area is provided in **Table 5-1**. The values are the maxima within 20 m of the mapped extents of each of the swamps within the Study Area due to the extraction of the existing longwalls of the existing and proposed longwalls in Areas 3A, 3B and 3C.

Table 5-1: Maximum predicted total vertical subsidence, tilt and curvatures for the swamps

Reference	Maximum predicted total vertical subsidence (mm)	Maximum predicted total tilt (mm/m)	Maximum predicted total hogging curvature (km ⁻¹)	Maximum predicted total sagging curvature (km ⁻¹)
Swamp 6	< 20	< 0.5	< 0.01	< 0.01
Swamp 7	2650	35	0.90	0.70
Swamp 9	< 20	< 0.5	< 0.01	< 0.01
Swamp 16	30	< 0.5	< 0.01	< 0.01
Swamp 140	< 20	< 0.5	< 0.01	< 0.01
Swamp 141	< 20	< 0.5	< 0.01	< 0.01
Swamp 144	< 20	< 0.5	< 0.01	< 0.01
Swamp 145	< 20	< 0.5	< 0.01	< 0.01
Swamp 152	< 20	< 0.5	< 0.01	< 0.01
Swamp 153	2100	30	0.50	0.60
Swamp 154	< 20	< 0.5	< 0.01	< 0.01
Swamp 155	< 20	< 0.5	< 0.01	< 0.01
Swamp 156	< 20	< 0.5	< 0.01	< 0.01
Swamp 157	< 20	< 0.5	< 0.01	< 0.01

Swamps 7 and 153 are located directly above the proposed longwalls. These two swamps are predicted to experience subsidence effects up to 2650 mm vertical subsidence, 35 mm/m tilt (i.e. 3.5 %, or 1 in 29), 0.90 km⁻¹ hogging curvature (1.1 km minimum radius) and 0.70 km⁻¹ sagging curvature (1.4 km minimum radius).

The maximum predicted conventional strains for Swamps 7 and 153, based on applying a factor of 15 to the maximum predicted conventional curvatures, are 14 mm/m tensile and 11 mm/m compressive. The maximum predicted strains directly above the mining area are 8 mm/m tensile and compressive based

The remaining swamps are located outside the mining area, at minimum distances ranging between 70 m and 540 m from the proposed longwalls. These swamps are predicted to experience up to 30 mm vertical subsidence due to the mining of Longwalls 22 and 23. While the swamps located outside the mining area could experience low levels of vertical subsidence, they are not expected to experience measurable conventional tilts, curvatures or strains.

Swamps 7, 9, 16, 144, 153 and 157 are located near the bases of the valleys associated with the streams. These swamps could experience valley-related effects due to the extraction of the proposed longwalls. The remaining swamps within the Study Area are located further up the valley sides and, therefore, are unlikely to experience upsidence or compressive strain due to valley closure effects.

A summary of the maximum predicted total upsidence and closure for the swamps within the Study Area is provided in **Table 5-2**. The values are the maxima within 20 m of the mapped extents of each of the swamps within the Study Area due to the extraction of the existing longwalls in Areas 3A and 3B and the proposed longwalls in Area 3C.

Table 5-2 Maximum predicted total upsidence and closure for the swamps

Location	Maximum predicted total upsidence (mm)	Maximum predicted total closure (mm)
Swamp 7	325	475
Swamp 9	125	200
Swamp 16	40	60
Swamp 144	125	225
Swamp 153	275	400

Swamp 157	80	150
-----------	----	-----

Swamps 7 and 153 are located directly above the proposed longwalls and they are within valleys with equivalent heights ranging between 25 m and 50 m. The maximum predicted compressive strain for the parts of these two swamps located directly above the proposed mining area is 17 mm/m based on the 95 % confidence level.

The remaining swamps are located outside the mining area, at minimum distances ranging between 70 m and 540 m from the proposed longwalls, and they are within valleys with equivalent heights ranging between 5 m and 25 m. The maximum predicted compressive strain for these swamps is 3 mm/m based on the 95 % confidence level.

5.3 Impact Assessment

5.3.1 Potential for changes in surface water flows due to the mining-induced tilts

Mining can impact surface water flows through swamps, if the mining-induced tilts are much greater than the natural gradients, potentially resulting in increased levels of ponding or scouring, or impacting the distribution of water within the swamps.

Swamps 7 and 153 are located directly above the proposed longwalls. The maximum predicted tilt for these two swamps is 35 mm/m (i.e. 3.5 %, or 1 in 29). The natural grades within the swamps are lowest along the streams in the bases of the valleys.

There are predicted reductions in grade along LC5 and within the extent of Swamp 7. There is potential for minor and localised increased ponding upstream of these locations and within this swamp. The topographical depressions are predicted to be less than 0.4 m deep and 60 m long and are localised in the base of the valley.

The areas of the swamp further up the valley sides have higher natural grades and there are no predicted reductions in grade away from the valley base. There are no predicted reductions in grade along WC26 nor within the extent of Swamp 153. Similarly, there are no predicted reductions in grade along the remaining streams nor within the remaining swamps in the Study Area, as they are located outside the mining area and they are predicted to experience tilts of less than 0.5 mm/m (i.e. less than 0.5 %, or 1 in 2000). It is unlikely, therefore, that these swamps would experience adverse changes in the levels of ponding or scouring based on the predicted vertical subsidence and tilt.

5.3.2 Potential for cracking in Upland Swamps and fracturing of bedrock

Fracturing of the bedrock has been observed in the past, as a result of longwall mining, where the tensile strains have been greater than approximately 0.5 mm/m or where the compressive strains have been greater than approximately 2 mm/m.

As Swamps 7 and 153 are located directly above the proposed longwalls, The maximum predicted compressive strain due to the valley-related effects for the parts of these swamps located directly above the proposed mining area is 17 mm/m based on the 95 % confidence level. Away from the valley base, the maximum predicted strains for the parts of these two swamps located directly above the proposed mining area are 8 mm/m tensile and compressive based on the 95 % confidence levels.

The typical fracture widths in the bedrock beneath Swamps 07 and 153 could be similar to the surface deformations previously observed at the Mine. Fracturing would only be visible at the surface where the bedrock is exposed, or where the thickness of the overlying soil is relatively shallow.

Swamps 7 and 153 are also predicted to experience up to 325 mm upsidence and 475 mm closure. These valley-related effects could result in the dilation of the strata beneath these two swamps. It has been previously observed that the depth of fracturing and dilation of the uppermost bedrock, resulting from valley-related effects, is generally in the order of 10 m to 15 m (Mills 2003, Mills 2007, and Mills and Huuskes 2004).

The dilated strata beneath the drainage lines and within Swamps 7 and 153 could result in the diversion of some surface water flows beneath parts of these swamps. The drainage lines upstream of these swamps flow during and shortly after rainfall events. Where there is no connective fracturing to any deeper storage, it is likely that surface water flows will re-emerge at the limits of fracturing and dilation.

The remaining swamps are located outside the mining area, at minimum distances ranging between 70 m and 540 m from the proposed longwalls. Fracturing has been observed in streams located outside the extents of previously extracted longwalls in the NSW coalfields. Fracturing has been observed in the drainage lines at distances of up to

290 m from the previously extracted longwalls in Area 3B. Minor and isolated fracturing has also been observed up to 400 m outside of longwalls extracted elsewhere in the Southern Coalfield.

Swamp 9 is located near the base of LC5 and it is at a minimum distance of 90 m from the proposed longwalls. Fracturing could occur in the base of the valley and within this swamp. Fracture widths in the order of 20 mm to 50 mm have been observed due to valley-related effects at similar distances from previous longwall mining.

Swamp 157 is located near the base of LC6 and it is at a minimum distance of 335 m from the proposed longwalls. It is possible, but unlikely, that fracturing could occur in the base of the valley and within this swamp. Fracture widths less than 20 mm have been observed due to valley-related effects at similar distances from previous longwall mining.

The remaining swamps within the Study Area are either located on the valley sides or are more than 400 m outside the proposed mining area. It is unlikely therefore that fracturing would develop in the bedrock beneath these remaining swamps.

5.3.3 Potential changes to Upland Swamp Hydrology

Swamps that have been mined beneath commonly display hydrological changes shortly following the passage of the longwall beneath the shallow groundwater monitoring site; specifically:

- A decrease in the average shallow groundwater elevation;
- A decrease in the duration of saturation of the swamp sediments following a significant rainfall event; or
- A change in the shape of saturation peak and recession curves (and recession rate) in response to significant rainfall events.

Potential changes to swamp hydrology within the Longwalls 22 and 23 Study Area is detailed in **Table 5-3**.

An assessment of shallow groundwater impacts due to mining at Dendrobium was carried out by Watershed Hydrogeo in 2019 and updated in 2021 and more recently in 2023 to include data to June 2023 and sites in Areas 2, 3A, 3B and 3C. The most recent study updated the empirical model of impact to swamp piezometers based on the assessments of water levels and recession rates around existing mining. The study identified that approximately 85-95% of Upland Swamp piezometers within 70 metres [of mining] are likely to exhibit a response to mining, and that there is overwhelming evidence that the probability of an impact declines with distance from the goaf. Four main zones were identified from the data:

- A. Above the goaf – Almost certain (97% chance) of being impacted;
- B. Within 75 m of the goaf – Highly likely (85-95% chance) of being impacted;
- C. 75-120 m from the goaf – 40% chance of being impacted; and
- D. >120 m from the goaf – Unaffected (0% chance of being impacted)

Furthermore, there is likely a difference between the distance to which groundwater effects propagate from the long edge compared to from the short edge, however there is insufficient quantitative data to be definitive in regard to shallow groundwater response.

Observations at the Springvale Mine in the Western Coalfield show that hydrological impacts can occur in swamps overlying connected geological structures (faults or other lineaments) at distances greater than 1200 m from the longwall (Galvin *et al.*, 2016). The same effect is not apparent at Dendrobium. Recent studies have identified no anomalous subsidence specifically related to mapped lineaments (MSEC, 2020), and no hydrological impacts at swamp piezometers located near mapped lineaments that are greater than 120 m from the goaf (Watershed Hydrogeo, 2023).

The hydrological changes are most likely due to the development of surface fracturing and bedding plane openings in the sandstone substrate of the swamp and/or a rock-bar at the swamp outlet. The formation of fractures in the substrate may change the swamp from a perched system to a connected system. The impact on the swamp will be dependent on the head difference between the swamp sediments and the sandstone substrate. Where the hydraulic gradient is downwards (into the sandstone, which is common) then the fracturing will lead to greater flows of water from the swamp and a decline in average swamp groundwater levels. It is not yet known whether the hydrological characteristics recover to some degree as fractures are filled with fine sediments and on-going monitoring is required to assess longer-term impacts (HGEO 2020).

Table 5-3 Summary of predicted impacts to upland swamps

Swamp	Distance from longwall (m)	Likelihood of shallow groundwater effects (HGEO 2021a)	Potential ecological impacts (Niche 2021a)
Swamp 6	488	Unlikely	Unlikely to be measurable impacts, given the distance from the longwall and that subsidence effects are generally only experienced up to 400 m from a longwall.
Swamp 7	0	Likely	Possible ecological impacts including changes in vegetation. Wetter Swamp types (such as Tea-tree Thicket) may trend towards Banksia Thicket or Fringing Eucalypt Woodland if changes are long-term. Vegetative dieback may be experienced due to reduction in water holding capacity of the swamp.
Swamp 9	90	Possible	Possible ecological impacts including changes in vegetation, with areas trending towards Banksia Thicket or Fringing Eucalypt Woodland if changes are long-term.
Swamp 16	542	Unlikely	Unlikely to be measurable impacts, given the distance from the longwall and that subsidence effects are generally only experienced up to 400 m from a longwall.
Swamp 140	527	Unlikely	Unlikely to be measurable impacts, given the distance from the longwall and that subsidence effects are generally only experienced up to 400 m from a longwall.
Swamp 141	360	Possible	Unlikely to be measurable impacts, given the distance from the longwall and that subsidence effects are generally only experienced up to 400 m from a longwall, the MSEC (2021) predictions, the small size of the swamp and the fact that it supports one of the drier swamp types (Banksia Thicket).
Swamp 144	503	Unlikely	Unlikely to be measurable impacts, given the distance from the longwall and that subsidence effects are generally only experienced up to 400 m from a longwall.
Swamp 145	498	Unlikely	Unlikely to be measurable impacts, given the distance from the longwall and that subsidence effects are generally only experienced up to 400 m from a longwall.
Swamp 152	436	Unlikely	Unlikely to be measurable impacts, given the distance from the longwall and that subsidence effects are generally only experienced up to 400 m from a longwall.
Swamp 153	0	Likely	Possible ecological impacts including changes in vegetation, trending towards Fringing Eucalypt Woodland. Vegetative dieback may be experienced due to reduction in water holding capacity of the swamp.
Swamp 154	73	Possible	Unlikely to be measurable impacts, given the MSEC (2021) predictions, the small size of the swamp and the fact that it supports one of the drier swamp types (Banksia Thicket).
Swamp 155	209	Possible	Unlikely to be measurable impacts, given the distance from the longwall, the MSEC (2021) predictions, the small size of the swamp and the fact that it supports one of the drier swamp types (Banksia Thicket).
Swamp 156	130	Possible	Unlikely to be measurable impacts, given the distance from the longwall, the MSEC (2021) predictions, the small

Swamp	Distance from longwall (m)	Likelihood of shallow groundwater effects (HGEO 2021a)	Potential ecological impacts (Niche 2021a)
			size of the swamp and the fact that it supports one of the drier swamp types (Banksia Thicket).
Swamp 157	336	Possible	Possible ecological impacts including changes in vegetation, trending towards Banksia Thicket and Fringing Eucalypt Woodland. Vegetative dieback may be experienced if fracturing occurs due to reduction in water holding capacity of the swamp.

There has been no recorded hydrological change within a swamp more than 120 metres from the edge of a longwall at Dendrobium as assessed and compared to reference sites to date. Swamp TARP triggers reported in impact reports during the extraction of a longwall are assessed and reported in End of Panel reports.

It is noted that Condition 6, Schedule 3 of the Area 3C SMP Approval allows performance measures for Swamps 9, 144, 145 and 154 to be met “either by avoidance, mitigation, remediation or offset.” Should the performance measure of ‘minor’ change be exceeded, remediation or other appropriate actions will be determined and implemented in consultation with key agencies, and where remediation is not feasible, a suitable biodiversity offset would be provided.

5.3.4 Potential impacts on Upland Swamp Ecology

Vegetation communities which are not dependent on groundwater are unlikely to be impacted by subsidence due to underground mining (Niche 2021a).

Groundwater dependent and riparian vegetation may experience some floristic changes in response to changed groundwater conditions, as a result of subsidence (Niche 2021a).

Riparian vegetation may be impacted by subsidence through water diversion or cracking of bedrock. Impacts to riparian vegetation associated with Longwalls 22 and 23 are predicted to be minor in occurrence, being localised if they occurred. There is overwhelming evidence that the probability of a hydrological impact within a swamp decline with distance from the goaf. Data to date indicates that where piezometers are setback >120 m from the goaf at Dendrobium Mine there is a 0% chance of being impacted (HGEO, 2023).

An assessment of the potential ecological impacts of subsidence on upland swamps was completed by Niche (2021a).

5.3.4.1 Potential Impacts to Threatened Flora

Ten threatened flora species have been determined to have a moderate to high likelihood of occurring within the study area (Niche 2021a). However, a limited number have potential habitat likely to be impacted by subsidence (Niche 2021a).

Four species (*Epacris purpurascens* var. *purpurascens*, *Pultenaea aristata*, *Cryptostylis hunteriana* and *Leucopogon exolasius*) are considered to have habitat within the study area that may be impacted by subsidence. Each of these species has potential habitat within upland swamps or creek vegetation communities, however none of these species are reliant on such habitat and occur throughout a range of other habitats within the study area.

5.3.4.2 Potential Impacts to Fauna

Subsidence may have a direct impact on known and potential habitat for threatened fauna such as watercourses, upland swamps, riparian vegetation, rock overhangs, rocky outcrops, cliffs and crevices.

Woodland and forest habitat types make up the majority of the study area. These habitat types which are not dependent on groundwater are unlikely to be impacted by subsidence. Microhabitat features such as tree hollows and exfoliating bark are also unlikely to be impacted (Niche 2021a).

5.3.4.3 *Potential Impacts to Threatened Fauna*

Sixty-eight threatened fauna were considered during the likelihood of occurrence assessment. Thirty-nine of these species were determined to have a moderate or high likelihood of occurrence within the Study Area. Subsidence impacts from the proposed longwalls are likely to be negligible for the majority of these species (Niche 2021a). Nine threatened species are considered to be potentially impacted by subsidence impacts resulting from Longwalls 22 and 23 (Niche 2021a).

An assessment of potential impacts for each of the identified threatened species likely to be impacted is provided in the Area 3C Terrestrial Ecology Assessment (Niche 2021a).

6 MANAGEMENT AND CONTINGENCY PLAN

The potential impacts of mine subsidence to upland swamps in Area 3C are provided below, together with a summary of the avoidance, minimising, mitigation and remediation measures proposed.

6.1 Objectives

The aims and objectives of this Plan include:

- Avoiding and minimising impacts to significant environmental values where possible;
- Implementing TARPs to identify, assess and respond to impacts to swamps;
- Carrying out mitigation and remediation works in a manner that protects to the greatest practicable extent the environmental values of the area;
- Achieving the Performance Measures outlined in the SMP Approval, to the satisfaction of the Secretary; and
- Monitoring and reporting effectiveness of the Plan.

To achieve these aims, monitoring, management, mitigation and remediation has been incorporated into the mining activity proposed by IMC.

6.2 Trigger Action Response Plan

The TARPs relate to identifying, assessing and responding to potential impacts to swamps (including impacts greater than predicted) from subsidence in Dendrobium Area 3C including Swamps 9, 144, 145 and 154. These TARPs have been prepared using knowledge gained from previous mining in other areas of Dendrobium, advice from the Panel (2023) and in consultation with the Department, WaterNSW and BCD. The TARPs for Area 3C swamps are included in **Appendix A: Table 1.2**.

The TARPs represent reporting and/or other actions to be taken upon reaching each defined trigger level. A Corrective Management Action (CMA) is developed in consultation with stakeholders in order to manage an observed impact in accordance with relevant approvals. The SIMMCP provides a basis for the design and implementation of any mitigation and remediation. Generic CMAs will be developed as required, in consultation with WaterNSW, to provide for a prompt response to a specific impact that requires a specific CMA. If appropriate these discussions will consider whether pre-approvals for the CMA can be obtained where immediate implementation is required.

Monitoring of environmental aspects provides key data when determining any requirement for mitigation or rehabilitation. The triggers are based on comparison of baseline and impact monitoring results. Specific triggers will continue to be reviewed and developed in consultation with key stakeholders as the impact monitoring phase matures. Where required the triggers will be reviewed and changes proposed in impact assessment reports provided to government agencies or in EoP Reports.

Level 2 and 3 TARPs result in further investigations and reporting by appropriately qualified people. Impact assessment reports will include:

- Study scope and objectives;
- Consideration of relevant aspect from this Plan;
- Analysis of trends and assessment of any impacts compared to prediction;
- Root cause analysis of any change or impact;
- Assessment of the need for contingent measures and management options;
- Any recommended changes to this Plan; and
- Appropriate consultation.

The Level 2 and 3 TARPs may require the development of site specific CMAs which generally include:

- A description of the impact to be managed;
- Results of specific investigations;
- Aims and objections for any corrective actions;
- Specific actions required to mitigate/manage and timeframes for implementation;
- Roles and responsibilities;
- Gaining appropriate approvals from landholders and government agencies; and
- Reporting, consultation and communication.

Performance indicators provide a measure for the exceedance of the performance measures. Where a performance indicator is exceeded, actions detailed in Section 6.4 will be undertaken.

6.3 Avoiding and Minimising

Mine layouts for Dendrobium Area 3C have been developed using IMC's Integrated Mine Planning Process (IMPP). This process considers mining and surface impacts when designing mine layouts.

IMC has assessed mining layout options for Dendrobium Area 3C against the following criteria:

- Extent, duration and nature of any community, social and environmental impacts;
- Coal customer requirements;
- Roadway development and longwall continuity;
- Mine services such as ventilation;
- Recovery of the resource for the business and the State; and
- Gas drainage, geological and geotechnical issues.

Several layout alternatives for Area 3C were assessed by IMC using a multi-disciplinary team including environment, community, mining, geological and exploration expertise. These included variations in the number of longwalls and orientations, lengths, and setbacks of the longwalls from key surface features. These options were reviewed, analysed and modified until an optimised longwall layout in Area 3C was achieved.

Area 3C is part of the overall mining schedule for Dendrobium Mine and has been designed to flow on from Areas 1, 2, 3A and 3B to provide a continuous mining operation. There are a number of surface and subsurface constraints within the vicinity of Area 3C including major surface water features such as Lake Cordeaux and Wongawilli Creek; and a number of geological constraints such as dykes and faults. The process of developing the layout for Area 3C has considered predicted impacts on major natural features and aimed to minimise these impacts within geological and other mining constraints.

The layouts at Dendrobium Mine have been modified to reduce the potential for impacts to surface features. Changes to a mine layout have significant flow-on impacts to mine planning and scheduling as well as economic viability. These issues need to be taken into account when optimising mine layouts. The process adopted in designing the Dendrobium Area 3C mine layout incorporated the hierarchy of avoid/minimise/mitigate as requested by the DPE and BCD during the consultation process. Mine plan changes result in significant business and economic impact, including:

- Reduction in coal extracted;
- Reduction in royalties to the State;
- Additional costs to the business;
- Risks to longwall production due to additional roadway development requirements; and
- Constraints on blending which can disrupt the supply of coal to meet customer requirements.

Restricting mine layout flexibility can also have the following consequences:

- Additional energy used to ventilate the mine;
- Increased safety risks such as risk of frictional ignition on the longwall due to less than optimal ventilation;
- Increased power usage, reduced fan lifespan and a requirement to install booster fans;
- Requirement for heavy secondary support density;
- Potential for horizontal stress and vertical abutment concentrations;
- The risk of strata control associated with increased roadway development and longwall install and take-off faces;
- Exposes the workforce to higher risk environments more frequently;
- Results in a large number of equipment movements and interaction with workers and infrastructure; and
- Requires specialised equipment and skilled personnel with limited availability.

Longwalls 22 and 23 have been setback 345 and 320 m respectively from Wongawilli Creek and minimum of 300 m from Lake Cordeaux. This reduction in extraction also reduces subsidence movements at surface features in proximity to Wongawilli Creek and Lake Cordeaux, including the tributaries WC26, WC24, LC6, LC7 and CR36, and Swamps 141, 152, 154, 155 and 156.

The mining layout of Longwalls 22 and 23 is designed to avoid Lake Cordeaux, Wongawilli Creek and geological constraints.

Wongawilli Creek is situated on the western side of the longwalls in Area 3C. The thalweg (i.e. base or centreline) of the creek is 320 m from the finishing (i.e. western) end of Longwall 23, at its closest point. The minimum distances between the thalweg of the creek and the completed longwalls are 110 m for Longwall 6 in Area 3A and 290 m for Longwall 9 in Area 3B.

6.4 Mitigation and Rehabilitation

If the performance measures in the Development Consent are not met, then following consultation with BCD, WaterNSW and Resources Regulator, the Secretary of the Department may issue a direction in writing to undertake actions or measures to mitigate or remediate subsidence impacts and/or associated environmental consequences. The direction must be implemented in accordance with its terms and requirements, in consultation with the Secretary and affected agencies.

Coastal Upland Swamps were determined to be an endangered ecological community under the then *Threatened Species Conservation Act 1995* (TSC Act) by the NSW Scientific Committee in 2012. As indicated in Schedule 2, Conditions 1 and 14 of the Development Consent (Minister for Planning 2008) and Condition 10 of the Area 3B SMP Approval (Secretary DoPI 2013), the mitigation and rehabilitation described in this Plan is required for the development and an integral component of the proposed mining activity. To the extent these activities are required for the development approved under the Dendrobium Mine Development Consent no other license under the TSC Act is required in respect of those activities.

At the time of grant of the Dendrobium Development Consent there was no requirement for concurrence in respect of threatened species or ecological communities. The requirement for concurrence was, at that time, governed by section 79B of the EPA Act. At the time of grant of the Dendrobium Consent there was a requirement for consultation with the Minister administering the then TSC Act and this consultation was undertaken.

6.4.1 Sealing of Rock Fractures

Where the bedrock base of any significant permanent pool or controlling rockbar within Wongawilli Creek is impacted from subsidence and where there is limited ability for these fractures to seal naturally they will be sealed with an appropriate and approved grout. Grouting will be focused where fractures result in diversion of flow from pools or through the controlling rockbar. Significant success has been achieved in the remediation of the Georges River where four West Cliff longwalls directly mined under the river and pool water level loss was observed (BHP Billiton Illawarra Coal, 2006).

Such operations do have the potential to result in additional environmental impacts and are carefully planned to avoid contamination. Mixing areas will be restricted to cleared seismic lines or other open areas wherever possible. Bunds are used to contain any local spillage at mixing points. Temporary cofferdams can be built downstream of the grouting operations to collect any spillage or excess grouting materials for disposal off-site. The selection of

grouting materials is based on demonstrated effectiveness and ensuring that there is no significant impact to water quality or ecology.

6.4.2 Injection Grouting

Injection grouting involves the delivery of grout through holes drilled into the bedrock targeted for rehabilitation. A variety of grouts and filler materials can be injected to fill the voids in the fractured strata intercepted by the drill holes. The intention of this grouting is to achieve a low permeability 'layer' below any affected pool as well as the full depth of any controlling rockbar.

Where alluvial materials overlie sandstone, grouts may be injected through grout rods to seal voids in or under the soil or peat material. This technique was successfully used at Pool 16 in the Georges River to rehabilitate surface flow by-pass to Pool 17. In this case 1-2 m of loose sediment was grouted through using purpose built grouting pipes.

Grouting holes are drilled in a pattern, usually commencing at a grid spacing of 1 m x 1 m to 2 m x 2 m. The most efficient way to drill the holes taking into account potential environmental impact is by using handheld drills. The drills are powered by compressed air which is distributed to the work area from a compressor. The necessary equipment will be sited on cleared seismic lines or other clear areas wherever possible with hoses run out to target areas.

Grout is delivered from a small tank into the ground via mechanical packers installed at the surface. All equipment can be transported with vehicles capable of travelling on tracks similar to seismic lines. If necessary, equipment or materials can be flown to nearby tracks or open spaces by a helicopter. Helicopter staging has previously occurred from Cordeaux Mine where there is appropriate logistical support. The grout is mixed and pumped according to a grout design. A grout of high viscosity will be used if vertical fracturing is believed to be present since it has a shorter setting time. A low viscosity grout will be used if cross-linking is noted during grouting. Once the grout has been installed the packers are removed and the area cleaned.

After sufficient time for the product to set the area may be in-filled with additional grouting holes that target areas of significant grout take from the previous pass. The grouting program can normally be completed with hand held equipment. Wherever possible the setup and mixing areas will be restricted to cleared seismic lines and other open areas. Bunds are used to contain any local spillage at mixing points.

Grouting volumes and locations are recorded, and high-volume areas identified. Once the grout take in the area is reduced and the material has set, the grouted section of the pool is isolated and tested with local or imported clean water. The rate at which the water drains is measured and compared to pre-grouting results. The grouting process is iterative; relying on monitoring of grout injection quantities, grout backpressures and measurements of water holding capacity. In the Georges River, the majority of pools were sealed with two to three grout passes.

If flow diversion through a swamp rockbar occurs it may be more appropriate to implement alternative grouting techniques such as a deeper grout curtain which can be delivered via directional drilling technologies. Grouting should preferentially be undertaken at the completion of subsidence movements in the area to reduce the risk of the area being re-impacted. **Figure 6-1** shows grouting operations in progress within the Georges River.



(a) Drilling into the bedrock



(b) Grout pump station setup



(c) Injecting grout into bedrock via a specially designed packer system

Figure 6-1 Rockbar grouting In The Georges River

6.4.3 Erosion Control

The types of erosion which could manifest within swamps are sheet, rill, gully, tunnel and stream channel. These types of erosion will be monitored in swamps in the mining area as well as in reference swamps not in the mining area. The types and magnitude of any erosion identified in swamps in the mining area will be compared to any erosion away from the mining area.

Erosion can create preferred flow paths and where this erosion creates a topographic low point within a swamp it could act to dewater the swamp sediments. To arrest this type of erosion, 'coir log dams' are installed at knick points, channelised flow paths and/or at the inception of tunnel/void spaces (**Figure 6-2**). The square coir logs used for the construction of these small dams were developed specifically for swamp rehabilitation and have been successfully used during a number of swamp rehabilitation programs of recent years in the Blue Mountains and Snowy Mountains.



Figure 6-2 Square coir logs for knick point control

As the coir log dams silt up they are regularly added to by the placement of additional layers of logs until the pooled water behind the 'dams' is at or above the level of the bank of the eroded channel, or the peat bed of the swamp. The coir logs are held in place by 50 x 50mm wooden tree stakes and bound together with wire (**Figure 6-3**).

The coir log dam slows the flows in the eroding drainage line such that the drainage line will silt up and water in the swamp will once again flow through the swamp rather than being concentrated in the eroding channel.



Figure 6-3 Installation of square coir logs

The most important aspect of these coir dams is the positioning of the first layer of coir logs. A trench is cut into the swamp soil so the first layer sits on the underlying substrate or so the top of the first coir log is at ground level (**Figure 6-4**).



Figure 6-4 Trenching & positioning of the first layer of coir logs and construction of a small dam in an eroding swamp channel

The coir log dams are constructed at intervals down the eroding channel, the intervals being calculated on the depth of erosion and predicted peak flows and added to until the pooled water behind the 'dams' is at or above the level of the bank of the erosion. At this point the stream becomes, once again, a net water contributor to the swamp and not a net drainer of water from the swamp. Where increased filtering of flows is required the coir logs are wrapped in fibre matting (**Figure 6-5**).



Figure 6-5 Small coir log dams with fibre matting

6.4.4 Water Spreading

Where sheet and rill erosion forms, these processes can reduce vegetation on the surface and/or be a precursor to the formation of gully and stream channel erosion. Treatment of these areas can prevent the formation of channels and maintain swamp moisture. The treatment proposed includes water spreading techniques, involving long lengths of coir logs and hessian 'sausages' linked together across the contour such that water flow builds up behind them and slowly seeps through the water spreaders (**Figure 6-6**). Where required the water spreaders would be installed in shallow trenches within the swamp and along the higher margins.



Figure 6-6 Round coir logs installed to spread water

Erosion control and water spreading involves soft-engineering materials that will contribute to and function as part of the swamp system but will eventually degrade (biodegradable) and become integrated into the soil of the swamps. This approach is ecologically sustainable in that all the materials used can breakdown and become part of the organic component of the swamp. This also removes the requirement for any post-rehabilitation removal of structures or materials.

6.4.5 Alternative Remediation Approaches

IMC has successfully implemented a subsidence rehabilitation program in the Georges River where there were impacts associated with mining directly under streams. This rehabilitation focused on grouting of mining induced fractures and strata dilation to reinstate the structural integrity and water holding capacity of the bedrock. Metropolitan Colliery is currently undertaking work aimed at rehabilitating areas impacted by subsidence using Polyurethane Resin (PUR) and other grouting materials. IMC is consulting with Metropolitan Colliery in relation to these new and emerging technologies. Should rehabilitation be necessary in Dendrobium Area 3B, the best option available at the time of the rehabilitation work will be identified and with appropriate approval, implemented by IMC.

Cracking due to subsidence will tend to seal as the natural processes of erosion and deposition act on them. The characteristics of the surface materials and the prevailing erosion and depositional processes of a specific area will determine the rate of infill of cracks and sealing of any fracture network.

6.4.6 Monitoring Remediation Success

Baseline studies have been completed within the Study Area in order to record biophysical characteristics of the mining area. Monitoring is conducted in the area potentially affected by subsidence from the Area 3B extraction as well as areas away from mining to act as control (reference) sites. The studies in these areas are based on the Before After Control Impact (BACI) design criteria.

A comprehensive swamp monitoring program is in place for swamps identified in this Plan. A summary of swamp monitoring within Dendrobium Area 3C is provided in **Section 3**. In the event that monitoring reveals impacts greater than what is authorised by the approval, modifications to the project, mitigation measures including remediation, offsets or other appropriate actions determined in consultation with the consent authority will be implemented.

The monitoring program would remain in place prior to, during and following the implementation of any mitigation measures in Area 3C. The monitoring program is based on a BACI design with sampling undertaken at impact and control locations prior to the commencement of mitigation, during mitigation and after the completion of the mitigation actions. The monitoring locations/points for swamps within Dendrobium Area 3C will be reviewed as required and can be modified (with agreement) accordingly.

Data will be analysed according to the BACI design. Statistical analyses between control, impact and mitigation sites will be used to determine whether there are statistically significant differences between these sites. This analysis will assist in determining the success of any mitigation or natural reduction of mining impacts over time.

Observation data will also be collected as part of the monitoring program and be used to provide contextual information to the above assessment approach. Monitoring data and observations will be mapped, documented and reported.

The water levels of all significant permanent pools within swamps will be monitored prior to and during mining. These pool water levels will provide a direct comparison of pre-mining and post mining conditions within the pool. Where rehabilitation activities are required to restore the structural integrity of the bedrock base of any significant permanent pool or controlling rockbar, the pool water level will also be monitored after the CMAs are implemented. The rehabilitation will be successful if the measured pool water levels after a rainfall recharge event are re-established to pre-mining conditions. The rainfall recharge event is required to fill the pool so that the success of the CMA can be tested. A rainfall recharge event is where the watercourse flows into the significant permanent pool to such an extent that it is filled.

6.5 Biodiversity Offset Strategy

Where impacts are greater than predicted or not within approved levels, offset measures will be considered. Any offset will consider the level of impact requiring offsetting, the measures available and the practicality and cost of implementing the measure.

Subject to Condition 14 of Schedule 3 of the Development Consent:

- The Applicant must provide suitable offsets for loss of water quality or loss of water flows to WaterNSW storages, clearing and other ground disturbance (including cliff falls) caused by its mining operations and/or surface activities within the mining area, unless otherwise addressed by the conditions of this consent, to the satisfaction of the Secretary. These offsets must:
 - (a) be submitted to the Secretary for approval by 30 April 2009;
 - (b) be prepared in consultation with WaterNSW;

- (c) provide measures that result in a beneficial effect on water quality, water quantity, aquatic ecosystems and/or ecological integrity of WaterNSW's Special Areas or water catchments.

IMC transferred 33 ha of land adjacent to the Cataract River to WaterNSW to meet the above condition. A Strategic Biodiversity Offset (SBO) has been developed in consultation with BCS and WaterNSW for the approval of the Secretary of the Department. The Secretary approved the SBO in accordance with Condition 15 of Schedule 2 of the Development Consent for the Dendrobium Coal Mine 16 December 2016. Following ongoing consultation with the Department, a revised SBO (October 2023) has been approved. The revised SBO confirms the Maddens Plains land satisfies offset requirements for upland swamps located in:

- Dendrobium Areas 3B and 3C identified in Table 3-1; and
- Dendrobium Areas 3A, 3B and 3C mapped on Figure 1 which cover swamps mapped at the time the SBO was prepared in 2016 and impacts on Swamp 15a which do not exceed performance measures under Condition 3 of Schedule 3 of the Consent.

6.6 Research

To assist in further understanding the impacts of subsidence and rehabilitation of swamps IMC will undertake research to the satisfaction of the Secretary. The research is directed to improving the prediction, assessment, remediation and/or avoidance of subsidence impacts and environmental consequences to swamps.

The program of research will continue through the mining of Area 3C and be adaptive to results as the program is implemented. The research will be conducted as provided by a Swamp Rehabilitation Research Program (SRRP). The SRRP:

- investigates methods to rehabilitate swamps subject to subsidence impacts and environmental consequences within Area 3A and 3B, with the aim of restoring groundwater levels and groundwater recharge response behaviour to pre-mining levels;
- establish a field trial (for a 5 year duration or longer) for rehabilitation techniques at a swamp or swamps that have been impacted by subsidence;
- provide for the expenditure of at least \$3.5 million over this period; and
- include a schedule of subsequent trials, development of work plans and ongoing reporting.

IMC is required to report to the Secretary on the SRRP every 6 months.

6.7 Contingency and Response Plan

In the event the TARP performance indicators are considered to have been exceeded, or are likely to be exceeded, IMC will implement a Contingency Plan to manage any unpredicted impacts and their consequences. This contingency and response plan is applicable for all swamps within Area 3C, including Swamps 9, 144, 145 and 154.

This would involve the following actions:

- Identify and record the event.
- Notify Government agencies and specialists as soon as practicable.
- Conduct site visits with stakeholders as required.
- Contract specialists to investigate and report on changes identified.
- Provide incident report to relevant agencies.
- Establish weekly monitoring frequency for the site until stabilised.
- Inform relevant Government agencies of investigation results.
- Develop site CMA in consultation with key stakeholders and seek approvals.
- Implement CMA as agreed with stakeholders following approvals.
- Conduct initial follow up monitoring and reporting following CMA completion.

- Review the SIMMCP in consultation with key Government agencies.
- Report in EoP Report and Annual Review.

A site-specific rehabilitation action plan detailing the location and specific works to be implemented will be prepared following the identification of mining induced swamp degradation that exceeds the performance indicators specified in the TARPS.

The site-specific swamp rehabilitation action plan will be developed in consultation with relevant stakeholders. Authority to access the land to conduct works and implement environmental controls requires approval of WaterNSW.

Appendix A provides a summary of the mitigation and contingency measures proposed to manage mining impacts where TARP reporting triggers are exceeded.

7 INCIDENTS, COMPLAINTS, EXCEEDANCES AND NON-CONFORMANCES

7.1 Incidents

IMC will notify the Department and other relevant agencies of any incident associated with Area 3C operations as soon as practicable after IMC becomes aware of the incident. IMC will provide the Department and any relevant agencies with a report on the incident within seven days of confirmation of any event.

7.2 Complaints Handling

IMC will:

- Provide a readily accessible contact point through a 24-hour toll-free Community Call Line (1800 102 210) and email address (illawarracommunity@south32.net). The number will be displayed prominently on IMC sites in a position visible by the public as well as on publications, letters and other correspondence provided to the local community.
- Respond to complaints in accordance with the IMC Handling Community Complaints, Enquiries and Disputes Procedure.
- Maintain good communication lines between the community and IMC.
- Keep a register of any complaints, including the details of the complaint with information such as:
 - Time and date.
 - Person receiving the complaint.
 - Complainant's name and phone number.
 - Description of the complaint and where complaint relates to.
 - Details of any response where appropriate.
 - Details of any corrective actions.

7.3 Non-Conformance Protocol

The requirement to comply with all approvals, plans and procedures is the responsibility of all personnel (staff and contractors) employed on or in association with Dendrobium Mine operations. Regular inspections, internal audits and initiation of any remediation/rectification work in relation to this Plan will be undertaken by the Principal Approvals.

Non-conformances, corrective actions and preventative actions are managed in accordance with the following process:

- Identification and recording of non-conformance and/or non-compliance.
- Evaluation of the non-conformance and/or non-compliance to determine specific corrective and preventative actions.
- Corrective and preventative actions to be assigned to the responsible person.
- Management review of corrective actions to ensure the status and effectiveness of the actions.

An Annual Review will be undertaken to assess IMC's compliance with all conditions of the Dendrobium Development Consent, Mining Leases and other approvals and licenses.

An independent environmental audit will be undertaken (Schedule 8, Condition 6) to review the adequacy of strategies, plans or programs under these approvals and if appropriate, recommend actions to improve environmental performance. The independent environmental audit will be undertaken by a suitably qualified, experienced and independent team of experts whose appointment has been endorsed by the Secretary of the Department.

8 PLAN ADMINISTRATION

This SIMMCP will be administered in accordance with the requirements of the Dendrobium Environmental Management System (EMS) and the Dendrobium Development Consent Conditions. A summary of the administrative requirements is provided below.

8.1 Roles and Responsibilities

Statutory obligations applicable to Dendrobium Mine operations are identified and managed via an online compliance management system (TICKIT). The online system can be accessed by the responsible IMC managers from the link below.

<https://illawarracoal.tod.net.au/login>.

The overall responsibility for the implementation of this SIMMCP resides with the Manager Approvals who shall be the SIMMCP's authorising officer.

Responsibilities for environmental management in Dendrobium Area 3C and the implementation of the SIMMCP include:

Manager Approvals

- Ensure that the requisite personnel and equipment are provided to enable this SIMMCP to be implemented effectively.
- Authorise the SIMMCP.

Principal Approvals

- Develop the SIMMCP and any amendments thereto.
- Document any approved changes to the SIMMCP.
- Provide regular updates to IMC on the results of the SIMMCP.
- Arrange information forums for key stakeholders as required.
- Prepare any report and maintain records required by the SIMMCP.
- Organise and participate in assessment meetings called to review mining impacts.
- Respond to any queries or complaints made by members of the public in relation to aspects of the SIMMCP.
- Organise audits and reviews of the SIMMCP.
- Address any identified non-conformances, assess improvement ideas and implement if appropriate.
- Arrange implementation of any agreed actions, responses or remedial measures.
- Ensure surveys required by this SIMMCP are conducted and record details of instances where circumstances prevent these from taking place.

Coordinator Environment

- Instruct suitable person(s) in the required standards for inspections, recording and reporting and be satisfied that these standards are maintained.
- Investigate significant subsidence impacts.
- Identify and report any non-conformances with the SIMMCP.
- Participate in assessment meetings to review subsidence impacts.
- Bring to the attention of the Principal Approvals any findings indicating an immediate response may be warranted.
- Bring to the attention of the Principal Approvals any non-conformances identified with the SIMMCP provisions or ideas aimed at improving the SIMMCP.

Survey Team Coordinator

- Collate survey data and present in an acceptable form for review at assessment meetings.
- Bring to the attention of the Principal Approvals any findings indicating an immediate response may be warranted.
- Bring to the attention of the Principal Approvals any non-conformances identified with the Plan provisions or ideas aimed at improving the SIMMCP.

Technical Experts

- Conduct the roles assigned to them in a competent and timely manner to the satisfaction of the Principal Approvals and provide expert opinion.

Person(s) Performing Inspections

- Inform the Coordinator Environment of any non-conformances identified with the Plan, or ideas aimed at improving the SIMMCP.
- Conduct inspections in a safe manner.

8.2 Resources Required

The Approvals Manager provides resources sufficient to implement this SIMMCP.

Equipment will be needed for the TARP provisions of this SIMMCP. Where this equipment is of a specialised nature, it will be provided by the supplier of the relevant service. All equipment is to be appropriately maintained, calibrated and serviced as required in operations manuals.

The Approvals Manager shall ensure personnel and equipment are provided as required to allow the provisions of this Plan to be implemented.

8.3 Training

All staff and contractors working on IMC sites are required to complete the IMC training program which includes:

- An initial site induction (including all relevant aspects of environment, health, safety and community).
- Safe Work Method Statements and Job Safety Analyses, Toolbox Talks and pre-shift communications.
- On-going job specific training and re-training (where required).

It is the responsibility of the Principal Approvals to ensure that all persons and organisations having responsibilities under this SIMMCP are trained and understand their responsibilities.

The person(s) performing regular inspections shall be under the supervision of the Coordinator Environment and be trained in observation, measurement and reporting. The Coordinator Environment shall be satisfied that the person(s) performing the inspections are capable of meeting and maintaining this standard.

8.4 Record Keeping and Control

Environmental Records are maintained in accordance with the IMC document control requirements.

IMC document control requirements include:

- Documents are approved for adequacy by authorised personnel prior to use.
- Obsolete documents are promptly removed from circulation.
- Documents are reissued, or made available, to relevant persons in a timely fashion after changes have been made and the authorisation process is complete.

The SIMMCP and other relevant documentation will be made available on the South32 website in accordance with Condition 11, Schedule 2 of the Development Consent.

8.5 Management Plan Review

A comprehensive review of the objectives and targets associated with the Dendrobium Area 3C operations is undertaken on an annual basis via the planning process. These reviews, which include involvement from senior

management and other key site personnel, assess the performance of the mine over the previous year and develop goals and targets for the following period.

An annual review of the environmental performance of Dendrobium Area 3C operations will also be undertaken in accordance with Schedule 8, Condition 5. More specifically this SIMMCP will be subject to review (and revision if necessary, to the satisfaction of the Secretary) following:

- The submission of an annual review under Schedule 8, Condition 5.
- The submission of an incident report under Schedule 8, Condition 3.
- The submission of an audit report under Schedule 8, Condition 6.
- Any modification to the conditions of this Dendrobium Development Consent or SMP approval.

If deficiencies in the EMS and/or SIMMCP are identified in the interim period, the plans will be modified as required. This process has been designed to ensure that all environmental documentation continues to meet current environmental requirements, including changes in technology and operational practice, and the expectations of stakeholders.

9 REFERENCES AND SUPPORTING DOCUMENTATION

- ACARP, 2009. *Damage Criteria and Practical Solutions for Protecting River Channels*. Project Number C12016. Ken Mills SCT May 2009.
- Axys, 2019. Risk Assessment: *Review of Dendrobium Longwalls 20 and 21 Subsidence Management Plan, Risk Assessment Report*. AR2625 (Revision 4).
- Axys, 2021. Risk Assessment: *Review of Dendrobium Longwalls 22 and 23 Subsidence Management Plan, Risk Assessment Report*. AR3122 (Revision B).
- BHP Billiton Illawarra Coal, 2006. *Georges River Report: Assessment of Georges River Remediation Longwalls 5A1-4*. November 2006.
- BHP Billiton Illawarra Coal, 2011. *Understanding Swamp Conditions - Field Inspection Report - September 2010 to November 2010*. BHP Billiton Illawarra Coal, April 2011.
- Biosis Research 2007. *Dendrobium Area 3 Species Impact Statement*, Prepared for BHP Billiton Illawarra Coal, Biosis Research Pty Ltd.
- Biosis Research 2007. *Dendrobium Coal Mine and Elouera Colliery Flora and Fauna Environmental Management Program, Annual Monitoring Report – Spring 2003 to Winter 2006*, Biosis Research Pty Ltd.
- Biosis Research, 2009. *Revision of the Dendrobium Coal Mine Flora and Fauna Monitoring Program*. February 2009.
- Biosis Research, 2012. *Elouera and Dendrobium Ecological Monitoring Program*. Annual Monitoring Report Financial Year 2010/2011. August 2012.
- Biosis Research, 2012. *Swamp 15b TARP Assessment – Ecology*. Ref:15462, 10 October 2012.
- Biosis, 2014. *Dendrobium Ecological Monitoring Program, Annual Report for 2012/2013 Financial Year*. February 2014. Prepared for Illawarra Coal.
- Biosis, 2015. *Dendrobium Terrestrial Ecology Monitoring Program, Annual Report for 2014*. September 2015. Prepared for Illawarra Coal.
- Biosis, 2017. *Dendrobium Terrestrial Ecology Monitoring Program, Annual Report for 2016*.
- Biosis, 2018. *Dendrobium Terrestrial Ecology Monitoring Program, Annual Report for 2017*.
- Biosis, 2019. *Dendrobium Terrestrial Ecology Monitoring Program, Annual Report for 2018*.
- Biosis, 2020. *Dendrobium Terrestrial Ecology Monitoring Program, Annual Report for 2019*.
- Boughton W, 2004. *The Australian water balance model*. Environ Model Softw 19:943–956. doi: doi:10.1016/j.envsoft.2003.10.007.
- Cardno, 2021. *Aquatic Flora and Fauna Review*. Illawarra Coal Holdings Pty Ltd, 26 August 2021.
- Cardno 2019. *Aquatic Flora and Fauna Assessment*. Illawarra Coal Holdings Pty Ltd, 29 May 2019.
- Cardno Ecology Lab, 2012. *Aquatic Flora and Fauna Assessment*. Prepared for BHPBIC, February 2012.
- Cardno Ecology Lab, 2012. *Swamp 15b and SC10C Aquatic Flora and Fauna Review*. Ref: NA49913032, 5 October 2012.
- Cardno Ecology Lab, 2013. *Dendrobium Area 3A Aquatic Ecology Monitoring 2008-2012*. Job Number: EL1112073 Prepared for BHP Billiton – Illawarra Coal, February 2013.
- Cardno Ecology Lab, 2013. *Review of Sandy Creek Pools Aquatic Flora and Fauna*. 25 February 2013.
- Cardno Ecology Lab, 2013. *SC10C Level 3 Aquatic Ecology Trigger Assessment*. 11 June 2013.
- Cardno Ecology Lab, 2015. *Dendrobium Area 3A Aquatic Ecology Monitoring 2008 to 2014*. 30 March 2015.
- Cardno Forbes Rigby, 2007. *Landscape Impact Assessment and Monitoring Site Optimisation*. Prepared for BHPBIC.
- Cardno Forbes Rigby, 2007. *Area 3A Subsidence Management Plan Longwalls 6 to 10*. Prepared for BHPBIC.
- Cardno Forbes Rigby, 2007. *Dendrobium Area 3 Environmental Assessment*. Prepared for BHPBIC.

- Chafer, C., Noonan, M and Macnaught, E. 2004. *The Post-Fire Measurement of Fire Severity and Intensity in the Christmas 2001 Sydney Wildfires*. International Journal of Wildland Fire Vol. 13; pp. 227-240.
- Chiew, F, Wang, Q. J., McConachy, F., James, R., Wright, W, and deHoedt, G. 2002. *Evapotranspiration Maps for Australia. Hydrology and Water Resources Symposium*, Melbourne, 20-23 May 2002, Institution of Engineers, Australia.
- Coffey, 2012. *Groundwater Study Area 3B Dendrobium Coal Mine: Numerical Modelling*. GEOTLCOV24507AA-AB2 2 October 2012.
- Ditton, S., and Merrick, N.P. 2014. *A new sub-surface fracture height prediction model for longwall mines in the NSW coalfields*. Paper presented at the Australian Earth Science Convention, Newcastle, NSW.
- Doherty, J. 2010. *PEST: Model-Independent Parameter Estimation User Manual (5th ed.): Watermark Numerical Computing*, Brisbane, Queensland, Australia.
- EarthTech Engineering Pty Ltd, 2005. *Thresholds for Swamp Stability*. Prepared for BHPBIC, January 2005.
- The Ecology Lab, 2007. *Dendrobium Area 3 Assessment of Mine Subsidence Impacts on Aquatic Habitat and Biota*. October 2007.
- Ecoengineers, 2006. *Assessment of Surface Water Chemical Effects of Mining by Elouera Colliery. January - December 2005*. February 2006.
- Ecoengineers, 2006. *Assessment of Catchment Hydrological Effects by Mining by Elouera Colliery Stage 1: Establishment of a Practical and Theoretical Framework*. August 2006.
- Ecoengineers, 2007. *Surface Water Quality and Hydrology Assessment to Support SMP Application for Dendrobium Area 3*.
- Ecoengineers, 2010. *End of Panel Surface and Shallow Groundwater Impacts Assessment Dendrobium Area 2 Longwall 5*. Document Reference No. 2010/01A. April 2010.
- Ecoengineers, 2012. *Surface Water Quality and Hydrological Assessment: Dendrobium Area 3B Subsidence Management Plan Surface and Shallow Groundwater Assessment*.
- Ecoengineers, 2012. *Level 2 TARP Independent Review and Recommendations Swamp 15b Dendrobium Area 3A*. 25 September 2012.
- Ecoengineers, 2013. *Level 3 TARP Independent Review and Recommendations Sandy Creek Catchment Pool 7 (Dendrobium Area 3A)*. 12 February 2013.
- Ecoengineers, 2013. *Level 2 TARP Specialist Review and Recommendations Donalds Castle Creek*. 22 May 2013.
- Ecoengineers, 2014. *End of Panel Surface and Shallow Groundwater Impacts Assessment, Dendrobium Area 3B Longwall 9*. June 2014.
- Ecoengineers, 2015. *End of Panel Surface and Shallow Groundwater Impacts Assessment, Dendrobium Area 3B Longwall 10*. February 2015.
- Eco Logical Australia, 2004. *The Impacts of Longwall Mining on the Upper Georges River Catchment*. Report to Total Environment Centre, 2004.
- Forster, 1995. *Impact of Underground Mining on the Hydrogeological Regime*, Central Coast NSW. Engineering Geology of the Newcastle-Gosford Region. Australian Geomechanics Society. Newcastle, February 1995.
- GHD, 2007. *Dendrobium Area 3A Predicted Hydrogeologic Performance*. Report for BHP Billiton, Illawarra Coal. November 2007.
- GSS Environmental, 2013. *Baseline and Pre-Mining Land Capability Survey. Dendrobium Mine, Area 3B*. February 2013.
- Hazelton P.A. and Tille P.J., 1990. *Soil Landscapes of the Wollongong-Port Hacking 1:100,000 Sheet map and report*, Soil Conservation Service of NSW, Sydney.
- Hebblewhite, 2010. *BHP Billiton Illawarra Coal: Bulli Seam Operations Project – Independent Review*. 31 March 2010.
- Helensburgh Coal Pty Ltd, 2007. *Submission to: Independent Expert Panel - Inquiry into NSW Southern Coalfield July 2007*, Helensburgh Coal Pty Ltd.

- Heritage Computing, 2009. *Dendrobium Colliery Groundwater Assessment: Mine Inflow Review, Conceptualisation and Preliminary Groundwater Modelling*. Merrick, N.P., Heritage Computing Report HC2009/2, February 2009.
- Heritage Computing, October 2011. *Recalibration of the Dendrobium Local Area Groundwater Model after Completion of Longwall 6 (Area 3A)*. Report prepared for Illawarra Coal. Report HC2011/13.
- HGEO, 2019. *Dendrobium Mine Assessment of surface water flow and quality effects of proposed Dendrobium Longwalls 20 and 21*. Report: D18301 May 2019.
- HGEO, 2020. *Dendrobium Mine End of Panel Surface Water and Shallow Groundwater Assessment: Longwall 15 (Area 3B)*, May 2020, Report: D20358.
- HGEO, 2021a. *Assessment of surface water flow and quality effects of proposed Dendrobium Longwalls 22 and 23*. Report: D20368. June 2021.
- HGEO, 2021b. *Dendrobium Mine End of Panel Surface Water and Shallow Groundwater Assessment: Longwall 16 (Area 3B)*, March 2021, Report: D21132.
- HydroSimulations, 2014. *Dendrobium Area 3B Groundwater Model Revision: Swamps, Stream Flows and Shallow Groundwater Sata*. Report: HC2014/4 March 2014.
- HydroSimulations, 2019. *Dendrobium Mine Longwalls 20 and 21 Groundwater Assessment*. Prepared for Illawarra Coal Pty Ltd. May 2019.
- Illawarra Coal, 2014. *Longwall 9 End of Panel Report*.
- Illawarra Coal, 2015. *Longwall 10 End of Panel Report*.
- Independent Expert Panel for Mining in the Catchment, 2019a, *Independent Expert Panel for Mining in the Catchment Report: Part 1*. Coal Mining Impacts in the Special Areas of the Greater Sydney Water Catchment, Prepared for the NSW Department of Planning, Industry and Environment.
- Independent Expert Panel for Mining in the Catchment, 2019b, *Independent Expert Panel for Mining in the Catchment Report: Part 2*. Coal Mining Impacts in the Special Areas of the Greater Sydney Water Catchment, Prepared for the NSW Department of Planning, Industry and Environment.
- Independent Expert Panel for Underground Mining, 2022, *Independent Expert Panel for Underground Mining*. Advice Re: Dendrobium Coal Mine Longwalls 22 & 23 Subsidence Management Plan, Prepared for the NSW Department of Planning, Industry and Environment.
- Kirchner, J. W. 2009. *Catchments as simple dynamical systems: Catchment characterization, rainfall-runoff modelling, and doing hydrology backwards*. Res., W02429.
- Manly Hydraulics Laboratory, 2006. *BHP Billiton Dendrobium Mine Area 2 Subsidence Environmental Management Plan Water Monitoring and Management Program*. Prepared for BHPBIC. Version 1.4 January 2006.
- McMahon, 2014. *Dendrobium Community Consultative Committee Report: Review of Surface Water Study. An independent review of surface water hydrological modelling associated with Illawarra Coal's Dendrobium Area 3, conducted by Emeritus Professor Thomas McMahon, University of Melbourne*. 4 June 2014.
- MSEC, 2007. *Dendrobium Mine Area 3A Longwalls 6 to 10. Report on The Prediction of Subsidence Parameters and the Assessment of Mine Subsidence Impacts on Natural Features and Surface Infrastructure Resulting from the Extraction of proposed Longwalls 6 to 10 in Area 3A at Dendrobium Mine in Support of the SMP and SEMP Applications*. September 2007.
- MSEC, 2012. *Dendrobium Area 3B Subsidence Predictions and Assessments for Natural Features and Surface Infrastructure in Support of the SMP Application*.
- MSEC, 2015. *Dendrobium Area 3B – Longwalls 12 to 18 Review of the Subsidence Predictions and Impact Assessments for Natural and Built Features in Dendrobium Area 3B based on Observed Movements and Impacts during Longwalls 9 and 10*.
- MSEC, 2017. *Dendrobium mine – Area 3B. The Effects of the Proposed Modified Commencing Ends of Longwalls 15 to 18 in Area 3B at Dendrobium Mine on the Subsidence Predictions and Impact Assessments*. MSEC914 August 2017.
- MSEC, 2019. *Dendrobium mine – Area 3C. Subsidence Predictions and Impact Assessments for the Natural and Built Features due to the Extraction of the Proposed Longwalls 20 and 21 in Area 3C at Dendrobium Mine*. MSEC978 August 2019.

MSEC, 2021. *Dendrobium mine – Area 3C. Subsidence Predictions and Impact Assessments for the Natural and Built Features due to the Extraction of the Proposed Longwalls 22 and 23 in Area 3C at Dendrobium Mine*. MSEC1104, Rev B, June 2021.

Niche Environment and Heritage, 2012. *Terrestrial Ecological Assessment*. Prepared for BHP Billiton Illawarra Coal. February 2012.

Niche Environment and Heritage, 2019a. *Aboriginal Cultural Heritage Assessment Report*. Prepared for South 32 Illawarra Coal Operations. September 2019.

Niche Environment and Heritage, 2019b. *Dendrobium Longwalls 20-21 Terrestrial Ecological Assessment*. South 32 Illawarra Coal. 20 August 2019.

Niche Environment and Heritage, 2021a. *Dendrobium Longwalls 22 and 23 Terrestrial Ecological Assessment*. South 32 Illawarra Metallurgical Coal.R3, 27 August 2021.

Niche Environment and Heritage, 2021b. *Dendrobium Areas 3A and 3B: Terrestrial Ecology Monitoring Program Annual Report 2020*. Prepared for South32 Illawarra Metallurgical Coal, 29 April 2021.

Niche, 2022. *Dendrobium Longwall 19A Terrestrial Ecological Assessment - Accompanying Document to Dendrobium Longwall 19A Subsidence Management Plan*. Prepared for South32 Illawarra Metallurgical Coal, September 2022.

OEC, 2001. *Environmental Impact Statement Dendrobium Coal Project*. Olsen Environmental Consulting, Figtree, N.S.W.

Parkhurst, D.L., and Appelo, C.A.J. 2012. *Description of Input and Examples for PHREEQC Version 3 – A Computer Program for Speciation, Batch-Reaction, One- Dimensional Transport and Inverse Geochemical Calculations*. US Department of Interior/US Geological Survey.

Parson Brinckerhoff, 2012. *Independent Review of Dendrobium Area 2 and 3A Hydrochemical Data*. August 20012.

Parsons Brinckerhoff, 2015. *Connected fracturing above longwall mining operations, Part 2: Post-longwall investigation*. For BHP Billiton Illawarra Coal. Document number 2172268F-WAT-REP-002 RevB. 6 March 2015.

Petersen, 1992. *The RCE: a Riparian, Channel, and Environmental Inventory for small streams in the agricultural landscape*. *Freshwater Biology* Vol 27, Issue 2, April 1992.

Resource Strategies, 2009. *Bulli Seam Operations Environmental Assessment*. Report in support of an application for the continued operations of the Appin and West Cliff Mines.

Singh & Kendorski, 1981. *Strata Disturbance Prediction for Mining Beneath Surface Water and Waste Impoundments, Proc. First Conference on Ground Control in Mining*, West Virginia University, PP 76-89.

Tammetta, P. (2013). *Estimation of the height of complete groundwater drainage above mined longwall panels*. *Groundwater*, 51(5), 723-734.

Tomkins, K.M. and Humphries, G.S. 2006. *Technical report 2: Upland Swamp development and erosion on the Woronora Plateau during the Holocene*. January 2006. Sydney Catchment Authority – Macquarie Collaborative Research Project.

Watershed HydroGeo, 2019. *Discussion of surface water flow TARPs (No. R011i5)*, Report for South32 Illawarra Metallurgical Coal.

Waddington, A.A. and Kay, D.R. 2001. *Research into the Impacts of Mine Subsidence on the Strata and Hydrology of River Valleys and Development of Management Guidelines for Undermining Cliffs*. Gorges and River Systems. Final Report on ACARP Research Project C8005, March 2001.

Waddington, A.A. and Kay, D.R. 2002. *Management Information handbook on the Undermining of Cliffs, Gorges and River Systems*. ACARP Research Projects Nos. C8005 and C9067, September 2002.

Watershed HydroGeo, 2019. *Geographic review of mining effects on Upland Swamps at Dendrobium (No. R008i5)*, Report for South32 Illawarra Metallurgical Coal.

Watershed HydroGeo, 2021. *Dendrobium Mine Longwalls 22 and 23 Groundwater Assessment*. Prepared for Illawarra Coal Pty Ltd. June 2021.

Zhang, L. Dawes, W.R. and Walker, G.R. 1999. *Predicting the effect of Vegetation Changes on Catchment Average Water Balance*. Technical Report No. 99/12, Cooperative Research Centre for Catchment Hydrology.

Appendix A – Swamp Monitoring and Trigger Action Response Plan

Appendix A: Table 1.1

Swamp monitoring within Dendrobium Area 3 will be installed ahead of mining to achieve at least 2-years baseline data (subject to timing and approval timeframes of any request to install additional monitoring). Monitoring is generally conducted through the mining period and for 2-years following active subsidence. Where performance measures require more than 2 years of post-mining monitoring, this will be undertaken, subject to approvals from WaterNSW for installation of the monitoring devices. Where impacts are observed the monitoring period will be reviewed and this review will be reported in Impact Assessment Reports and End of Panel Reports. For Level 2 and 3 Triggers and for impacts exceeding prediction this review is conducted in consultation with key stakeholders. The location of monitoring sites is indicated on the figures of the relevant SIMMCP.

Table 1.1 – Dendrobium Area 3 Swamp Monitoring Program

Monitoring Site		Site Type	Monitoring Frequency	Parameters
OBSERVATIONAL, PHOTO POINT AND WATER MONITORING				
AREA 3A	Swamps 12, 15A, 15B, 34, 95, 146, 147 and 148 <i>Reference Sites</i> Swamps, 22, 24, 25, 33, 84, 85, 86, 87 and 88	Observation and photo point monitoring: Sites based on risk Swamps Pools and rockbars Steep slopes and rock outcrops Previously observed impacts that warrant follow-up inspection Mining areas	Pre and post mining for 2 years, monthly when longwall is within 400 m of monitoring site Weekly inspection and pool water levels when longwall is within 400 m of monitoring site	Visual signs of impacts to swamps and drainage lines (i.e. cracking, vegetation changes, increased erosion, changes in water colour, soil moisture etc.) determined by comparing baseline photos with photos during the mining period Key water quality parameters in pools within and downstream of swamps analysed to identify any changes resulting from mining
	AREA 3B		Swamps 01A, 01B, 03, 04, 05, 08, 10, 11, 13, 14, 23, 35A, 35B, 149, 150 and 151 <i>Reference Sites</i> Swamps 7 ¹ , 22, 24, 25, 33, 84, 85, 86, 87 and 88	
AREA 3C	Swamps 7, 9, 16, 144, 145, 153, 154, 155, 156, 157 General observation of swamps in active mining areas when longwall is within 400 m of swamp <i>Reference Sites</i> Swamps 22, 25, 33, 84, 85, 86, 87, 88 and 131			
EROSION MONITORING				
AREA 3A	Swamps 12, 15A, 15B, 15C, 34, 95, 96, 146, 147 and 148	Airborne Laser Scanning Surveyed cross-sections, areas and lengths	ALS base surveys were completed in December 2005, with a verification base survey performed in 2013, immediately prior to the commencement of Longwall 9 extraction Ground based surveys to be completed for each longwall after each longwall or to define any new erosions identified by ALS survey	Raw ground strike ALS data will be contoured with a 0.2 m interval after the completion of subsidence at each longwall to provide a new (subsided) baseline surface dataset. For a period of up to ten years after mining repeat ALS datasets and surface modelling will be completed to assess for new or increases in existing erosion. The maximum area/length and depth of any erosion identified by ALS will be measured by standard survey methods
AREA 3B	Swamps 01A, 01B, 03, 04, 05, 08, 10, 11, 13, 14, 23, 35A, 35B, 149, 150, 151 <i>Reference Sites</i> Swamps 7 ² , 22, 24, 25, 33, 84, 85, 86, 87 and 88			

¹ Reference site for Area 3B; impact site when Longwall 22 commences.

² Reference site for Area 3B; impact site when Longwall 22 commences.

AREA 3C	Swamps 7, 9, 16, 144, 145, 153, 154, 155, 156, 157 <i>Reference Sites</i> Swamps 22 and 33, plus additional reference swamps where ALS data is available.			
SHALLOW GROUNDWATER LEVEL				
AREA 3A	Swamp 15A: 15a_03, 15a_04, 15a_06 15a_07, 15a_08, 15a_09, 15a_11, 15a_12, 15a_15, 15a_18 and 15a_19, Swamp 15B: 15b_H1, 15b_H2, 15b_H3, and 15b_39 Swamp 12: 12_01, 12_03, 12_04 Swamp 34: 34_01 Swamp 95: 95_01 Swamp 146: 146_01 Swamp 148: 148_01	Monitoring bore drilled into the soil profile	For open hole sites: Monthly monitoring pre, during and post mining for two years to be reviewed annually Reference sites 6 monthly For instrumented sites: Automatic groundwater level monitoring pre, during and post mining (1-hour interval or similar) Monitoring post mining for five years to be reviewed annually	Piezometric and dip meter monitoring of shallow groundwater level
AREA 3B	Swamp 01A: 01a_04ii, 01a_04iii Swamp 01B: 01b_02iii, 01b_02iv Swamp 03: 03_01 Swamp 05: 05_01, 05_04 Swamp 08: 08_01, 08_04 Swamp 10: 10_01 Swamp 11: 11-H1, 11-H2, 11-H3 Swamp 13: 13_01 Swamp 14: 14_01, 14_02 Swamp 23: 23_01, 23_02 Swamp 35A: 35A_01 Swamp 35B: 35B_01 Swamp 150: 150_01 Swamp 151: 151_01 <i>Reference Sites</i> Swamp 7 ³⁾ : 07_05, 07_06 Swamp 22: 22_01, 22_02 Swamp 24: 24_01 Swamp 25: 25_01 Swamp 33: 33_01, 33_03 Swamp 84: 84_02 Swamp 85: 85_01, 85_02, 85_03 Swamp 86: 86_01, 86_02, 86_03 Swamp 87: 87_01, 87_02 Swamp 88: 88_01, 88_02			

³ Reference site for Area 3B; impact site when Longwall 22 commences.

AREA 3C	Swamp 7: 07_05, 07_06, 07_07 Swamp 9: 09_01, 09_02 Swamp 16: 16_01, 16_03 Swamp 144: 144_01 Swamp 145: 145_01 Swamp 153: 153_01 Swamp 154: 154_01 Swamp 155: 155_01 Swamp 156: 156_01 Swamp 157: 157_01 Where sediment depth allows installation of instrument.			
SOIL MOISTURE				
AREA 3A	Swamp 15A: 15a_03, 15a_04, 15a_07, 15a_12, 15a_15, 15a_18 and 15a_19 Swamp 15B: 15b_H1, 15b_H2, 15b_H3, and 15b_39 Swamp 12: 12_01, 12_03, 12_04 Swamp 34: 34_01 Swamp 95: S95_01 Swamp 146: 146_01 Swamp 147: 147_01 Swamp 148: 148_01	Monitoring bore drilled into the soil profile	For manually measured sites: Monthly monitoring for 2 years baseline and post mining and 6-monthly reference sites Weekly monitoring when longwall is within 400 m of monitoring site For instrumented sites: Automatic soil moisture monitoring pre, during and post Monitoring post mining for five years to be reviewed annually	Installed dielectric soil moisture sites down to 1.5 m to measure deep soil moisture
AREA 3B	Swamp 05: S05_S01, S05_S02, S05_S05, S05_S08 Swamp 08: S08_S05 Swamp 11: S11_S01, S11_S02, S11_S05 Swamp 13: S13_S01, S13_S02, S13_S03 Swamp 14: 14_01, 14_02 Swamp 23: 23_01, 23_02 Swamp 35A: 35a_01 Swamp 35B: 35b_01 Swamp 149: 149_01 Swamp 150: 150_01 Swamp 151: 151_01 <i>Reference Sites</i> Swamp 7 ⁴ : S07_S05, S07_S06 Swamp 22: 22_01, 22_02 Swamp 24: S24_S01 Swamp 25: S25_S01 Swamp 33: S033_S01, S033_S03 Swamp 84: S84_S02 Swamp 85: S85_S01, S85_S02, S85_03 Swamp 86: S86_S01, S86_S02, S86_03 Swamp 87: S87_S01, S87_S02 Swamp 88: S88_S01, S88_S02			

⁴ Reference site for Area 3B; impact site when Longwall 22 commences.

AREA 3C	Swamp 7: 07_05, 07_06, 07_07 Swamp 9: 09_01, 09_02 Swamp 16: 16_01, 16_03 Swamp 144: 144_01 Swamp 145: 145_01 Swamp 153: 153_01 Swamp 154: 154_01 Swamp 155: 155_01 Swamp 156: 156_01 Swamp 157: 157_01 Where sediment depth allows installation of instrument.			
TERRESTRIAL FLORA – COMPOSITION AND DISTRIBUTION OF SPECIES				
AREA 3A	Swamps 15B and 15A	Swamp vegetation transects	Baseline monitoring campaigns at least two years prior to mining during spring. Note: Swamps 23 and 14 baseline monitoring included both autumn and spring seasons for one year prior to mining Annual monitoring post mining in spring for two years or as otherwise required General observation of active mining areas during all other monitoring	15 m transects consisting of thirty 0.5 m x 0.5 m quadrats. The monitoring records: • Presence of all species within each quadrat; • Observations of dieback or changes in community structure; and • Photo point monitoring at each transect
AREA 3B	Swamps 01A, 01B, 05, 11, 13, 14 and 23 <i>Reference Sites</i> Swamp, 22, 33, 86, 87, 88 and 131			
TERRESTRIAL FLORA – SWAMP SIZE AND ECOSYSTEM FUNCTION				
AREA 3A	Swamp 15A, 15B, 148	Size of the groundwater dependent communities (Banksia Thicket, Tea-tree Thicket and Sedgeland-heath Complex) and the total size of the swamps	Baseline mapping prior to mining with repeat mapping after each longwall or as determined by observational monitoring i.e. if dieback or invasion of non-swamp species is observed	Detailed mapping including the use of LiDAR data to indicate the location and extent of upland swamp boundaries. Ground-truthing of these boundaries and the vegetation sub-communities will be undertaken if subsequent Lidar data shows swamp boundary movements
AREA 3B	Swamps 01A, 01B, 05, 8, 11, 13, 14 and 23 <i>Reference Sites</i> Swamp 33, 85, 22, 86 and 131			
AREA 3C	Swamps 7, 9, 16, 144, 145 and 153 <i>Reference Sites</i> Swamp 6, 22, 33 and 131			
TERRESTRIAL FAUNA – THREATENED FROG SPECIES				
AREA 3A	SC10C, SC10(1), SC10(2), 6CDL, WC13 and WC17 <i>Reference Sites</i> WC10, WC11, SC7(1), SC7(2), SC7A, SC8, DC8, CR92, CR92D	Frog monitoring	Surveys are undertaken in winter each year to target active breeding periods (these can be variable depending on prevailing conditions) To address recommendation from Niche (2019),	For swamps frog surveys are conducted along associated creeks with a focus on features susceptible to impacts e.g. breeding pools. Potential breeding habitat for Littlejohn’s Tree Frog and Giant Burrowing Frog will be targeted.

AREA 3B	DC13, DC1, WC21, LA4A, ND1, NDC, ND2 and WC15 Reference Sites WC10, WC11, SC7(1), SC7(2), SC7A, SC8, DC8, CR92, CR92D		rainfall or hydrometric trigger values for surveys will be developed for surveys to allow for greater consistency between years which would aid in comparison of results (pre- versus post- mining and impact versus control).	Standardised transects have been established to record numbers of individuals recorded at each site from one year to the next. Tadpole counts will also be undertaken as part of the breeding habitat monitoring transects. These transects are surveyed by walking down the creekline and counting all amphibians seen or heard on either side of the line
AREA 3C	LC5, LC6, WC20, WC24 and WC26 – sites to be established Reference Sites WC10, WC11, SC7(1), SC7(2), SC7A, SC8, DC8, CR92, CR92D			
TERRESTRIAL FAUNA – GIANT DRAGONFLY MONITORING				
AREA 3A	Swamp 15A Reference Sites Swamps 33, 131, 132 and 22	Giant Dragonfly monitoring	Surveys are undertaken in summer during the emergence period.	Surveys will involve conducting visual searches through each of the identified swamps for adults, burrows and exuviae. Observations will include counts of all individuals seen and where possible the sex of the individual observed, as well as any other behaviours observed (e.g. mating, courtship, or mate guarding).
AREA 3B	Swamps 1B, 11 and 14 Reference Sites Swamps 33, 131, 132 and 22			
AREA 3C	Swamp 7 Reference Sites Swamps 33, 131, 132 and 22			
AQUATIC ECOLOGY				
AREAS 3A, 3B AND 3C	Sandy Creek Catchment Site 11 and 13 (SC10) Sites 9 and 12 (Sandy Creek) Wongawilli Creek Catchment Sites 6, X2 and X3 (WC21) Sites 1, 2, 3, 4, 5, 21, 22, X4, X5 and X6 (Wongawilli Creek) Donalds Castle Creek Catchment Site 14, X1 (Donalds Castle Creek) Reference Sites Sites X7 and X8 Sites 15 and 16 (Kentish Creek)	Quantitative and observational monitoring	Two annual baseline monitoring campaigns prior to mining during autumn and spring (providing 2 years of baseline data) Monitoring during mining in autumn and spring Monitoring post mining for two years or as otherwise required Monitoring targets sites as mining progresses through the domain	Macroinvertebrate sampling and assessment using the AUSRIVAS protocol and quantitative sampling using artificial collectors. In consideration of Adams Emerald Dragonfly and Sydney Hawk Dragonfly, individuals of the genus <i>Austrocorduliidae</i> and <i>Gomphomacromiidae</i> are identified to species level to confirm any potential identifications, as required. General fish surveys undertaken during each survey using dip nets, baited traps and visual observations. Targeted surveys for Macquarie perch undertaken using backpack electrofishing, as required.

In accordance with Condition 6, Schedule 3 of the Area 3C SMP Approval granted 20 December 2022, the performance measures stated in Table 1.2 below are applicable to Swamps 9, 144, 145 and 154 in Dendrobium Area 3C.

Table 1.2 - Dendrobium Area 3C Swamp TARP

Performance Measure ⁵	Potential Impacts	Reporting Trigger	Trigger Response	Performance Indicator
EROSION				
Negligible erosion of the surface of the swamp	Gully erosion or similar	Level 1 The increase in length of erosion within the swamp (compared to its pre-mining length) is 2% of the swamp length or area; and/or Erosion in a localised area (not associated with cracking or fracturing) which would be expected to naturally stabilise without CMA and within the period of monitoring.	- Continue monitoring program - Submit impact report to key stakeholders - Report in the End of Panel Report - Summarise actions and monitoring in Annual Review	Mining results in the total length of erosion within the swamp (compared to its pre-mining length) to increase >5% of the length or area of the swamp compared to any increase in total erosion length in a reference swamp (ie increase in length or area of erosion in an impact swamp less any increase in length or area in erosion in a reference swamp is >5%).
		Level 2 The increase in length of erosion within the swamp (compared to its pre-mining length) is 3% of the swamp length or area; and/or Soil surface crack that causes erosion that is likely to stabilise within the monitoring period without intervention; and/or Gully knickpoint forms or an existing gully knickpoint becomes active.	- Actions as stated for Level 1 - Review monitoring frequency - Seek expert and agency advice on any CMA required - Implement agreed CMAs as approved (subject to agency feedback) e.g. implement temporary erosion control (e.g., knickpoint control, coir logs)	
		Level 3 The increase in length of erosion within the swamp (compared to its pre-mining length) is 4% of the swamp length or area; and/or Soil surface crack that causes erosion that is unlikely to stabilise within the monitoring period without intervention.	- Actions as stated for Level 2 - Offer site visit with key stakeholders - Implement additional monitoring or increase frequency if required - Develop any additional CMA required in consultation with key stakeholders - Completion of works following approvals and at a time agreed between S32 and key stakeholders including monitoring and reporting on success	
ECOSYSTEM FUNCTION				
Minor changes in the size of the swamp	Area 3C mining induced hydrological changes in swamps result in decline in size of groundwater	Level 1 A trending decline in the extent of an upland swamp (combined area of groundwater dependent communities) for two consecutive monitoring periods, greater than observed in the Control Group, and exceeding the standard error (SE) of the Control Group.	- Continue monitoring program - Submit impact report to key stakeholders - Report in the End of Panel Report - Summarise actions and monitoring in Annual Review	Mining induced hydrological changes in swamps result in a trending decline in the extent of an upland swamp (combined area of groundwater dependent communities) for five consecutive monitoring periods, greater than observed in the Control Group, and exceeding the SE of the Control Group.

⁵ The performance measures can be met by either avoidance, mitigation, remediation or offsetting or any combination of these measures.

Performance Measure ⁵	Potential Impacts	Reporting Trigger	Trigger Response	Performance Indicator
	dependent communities	Level 2 A trending decline in the extent of an upland swamp (combined area of groundwater dependent communities) for three consecutive monitoring periods, greater than observed in the Control Group, and exceeding the SE of the Control Group.	• <i>Actions as stated for Level 1</i> • Review monitoring frequency • Obtain specialist advice on the need to undertake ground-truthing of swamp boundaries and the vegetation sub-communities	
		Level 3 A trending decline in the extent of an upland swamp (combined area of groundwater dependent communities) for four consecutive monitoring periods, greater than observed in the Control Group, and exceeding the SE of the Control Group.	• <i>Actions as stated for Level 2</i> • Offer site visit with key stakeholders	
ECOSYSTEM FUNCTION				
Minor changes in the ecosystem functionality of the swamp Minor changes to the hydrology of the swamp	Area 3C mining induced hydrological changes in swamps result in falls in surface or near-surface groundwater levels in the swamp Area 3C mining induced hydrological changes in swamps result in falls in soil moisture levels in the swamp	Level 1 Rate of groundwater level recession exceeds rate of groundwater level recession by 20% during baseline period at any monitoring site within the swamp (measured as average mm/day during the recession curve and where the 95%ile of pre- and post-mining recession rates are used for comparison); or 5-10% increase in period of time a borehole/pool is dry compared to baseline at any monitored groundwater level site within the swamp.	• Continue monitoring program • Submit impact report to key stakeholders • Report in the End of Panel Report • Summarise actions and monitoring in Annual Review	Mining induced hydrological changes within swamps (shallow groundwater) results in piezometer remaining dry and does not recover following the completion of mining and following a year of average (or above) rainfall ⁶ .
		Level 2 Groundwater or soil moisture level lower than baseline level at any monitoring site within the swamp; or Rate of groundwater level recession exceeds rate of groundwater level recession by >20 to 50% during baseline period any monitoring site within the swamp (measured as average mm/day during the recession curve and where the 95%ile of pre- and post-mining recession rates are used for comparison); or 10-20% increase in period of time a borehole/pool is dry compared to baseline at any monitored groundwater level site within the swamp.	• <i>Actions as stated for Level 1</i> • Review monitoring frequency • Obtain specialist advice on the need to undertake an ecological survey	

⁶ Average rainfall = (based on IMC Centroid rainfall data)

Performance Measure ⁵	Potential Impacts	Reporting Trigger	Trigger Response	Performance Indicator
		Level 3 Rate of groundwater level recession exceeds rate of groundwater level recession by >50 to 100% during baseline period at any monitoring site within the swamp (measured as average mm/day during the recession curve and where the 95%ile of pre- and post-mining recession rates are used for comparison); or >20% increase in period of time a borehole/pool is dry compared to baseline at any monitored groundwater level site within the swamp.	• <i>Actions as stated for Level 2</i> • Offer site visit with key stakeholders	
STRUCTURAL INTEGRITY OF CONTROLLING ROCKBAR				
Maintenance or restoration of the structural integrity of bedrock base of any significant permanent pool or controlling rockbar within the swamp	Subsidence impacts (i.e. cracking) on bedrock base or controlling rockbar	Level 1 Fracturing to rockbar base of any significant permanent pool or controlling rockbar within the swamp	• Continue monitoring program • Submit impact report to key stakeholders • Report in the End of Panel Report • Summarise actions and monitoring in Annual Review	Fracturing resulting in increased cease-to-flow or dry pool days at controlling rockbar within the swamp which cannot be restored via CMAs.
	Loss of surface water in significant permanent pools	Level 2 Fracturing to rockbar base of any significant permanent pool or controlling rockbar within the swamp results in cease-to-flow	• <i>Actions as stated for Level 1</i> • Review monitoring frequency	
		Level 3 Fracturing to rockbar base of any significant permanent pool or controlling rockbar within the swamp results in dry pool	• <i>Actions as stated for Level 2</i> • Offer site visit with key stakeholders • Undertake assessment to determine whether remediation is warranted and feasible to prevent changes to swamp ecosystem functionality	

Appendix B – Agency Feedback and Responses

Note: Agency feedback and responses provided in Table 9-1 and Table 9-2 are in relation to swamps only and pre-date advice from the Panel (11 August 2023).

Table 9-1 Agency feedback and responses – Longwalls 20 and 21

BCD Submission	Response
Performance measures not measurable and specific We note no changes in performance measures. As per previous advice: “The performance measures suggested for use in Area 3C by Illawarra Coal in the SMP are poorly defined and are not specific or measurable. Given the predictions for significant, permanent impacts to natural features, measurable performance measures are required to enable clear identification of impacts that are allowable under the SMP and development consent. Performance measures and associated TARP’s for use in Area 3C should be comprehensively reviewed with involvement of appropriate agencies and independent peer review.”	Refer to Section 3.6 of the WIMMCP for details of the Dendrobium Area 3B TARP review that was undertaken between WaterNSW, DPE and South32 between 2018 and 2020. These TARP’s have been adopted for Area 3C.
Upland swamps The IEPMC recognises that TARP’s, which are linked to performance measures, do not reflect the groundwater-dependence of the upland swamp ecosystem. Monitoring of groundwater using piezometers in swamps is already carried out broadly in Dendrobium Mine domains and should be utilised in informing environmental consequences of mining by inclusion of a specific performance measure relating to changes in groundwater within swamps. We suggest that this should be consistent with the definition of ‘Negligible environmental consequences’ from the Biodiversity Offsets Policy for Major Projects (Upland Swamps) Addendum, specifically: - Negligible change to the shallow groundwater regime of a swamp compared with control swamps; and/or - Negligible change to the composition or distribution of swamp dependent vegetation communities. The IEPMC recognised that the nature of existing performance measures and TARP’s in relation to swamps were slow to respond to mine impacts and would not be detected until much later. Groundwater monitoring with piezometers has the	The IEP (2019b) states: “The Panel’s conclusion in the Initial Report that TARP’s “do not reflect the groundwater dependence of the upland swamp ecosystems” was challenged in Peabody’s response that “swamp impact TARP’s do include triggers associated with piezometer monitoring” (Peabody, 2019b).⁴⁸ The Panel recognises that TARP’s for changes to piezometric levels in shallow groundwater are defined for both Dendrobium and Metropolitan mines.” The TARP’s for groundwater changes in swamps for Dendrobium Area 3C are detailed further in Appendix A: Level 1: Groundwater level lower than baseline level at any monitoring site within a swamp (in comparison to reference swamps); and/or Rate of groundwater level reduction exceeds rate of groundwater level reduction during baseline period at any monitoring site (measured as average mm/day during the recession curve). Level 2: Groundwater level lower than baseline level at 50% of monitoring sites (within 400 m of mining) within a swamp (in comparison to reference swamps); and/or Rate of groundwater level reduction exceeds rate of groundwater level reduction during baseline period at a 50% of monitoring sites (within 400 m of mining) within the swamp. Level 3: Groundwater level lower than baseline level at >80% of monitoring sites (within 400 m of mining) within a swamp (in comparison to reference swamps); and/or Rate of groundwater level reduction exceeds rate of groundwater level reduction during baseline period at >80% of monitoring sites (within 400 m of mining) within the swamp.

benefit of allowing detection of mine impacts immediately and being measurable and quantifiable.	
Adequate baseline monitoring of swamps not undertaken Some additional piezometers have been noted (including swamps 142 and 144), however we are unsure about pre-mining duration. This should be clarified.	Shallow groundwater piezometers paired with a soil moisture probe will be installed in Swamp 142 a minimum of two years prior to mining if Longwall 20 is to be extracted. Swamp 144 (piezometer 144_01) was established 28/08/2020.
No offsets for swamps 142 and 144 South32 have received confirmation from DPE that the 2016 Strategic Biodiversity Offset can be relied upon for the Longwall 20 and 21 SMP and also all future Area 3C SMP applications. However some swamps (142 & 144) have not been specifically identified in the SBO.	DPE has advised “... the Department is of the view that the Maddens Plains offset can be relied upon to offset the impacts of mining operations at Area 3C.”
WaterNSW Submission	Response
The plans only apply to the approved LW 21 whose finishing end is 240 m from Wongawilli Creek.	This is correct, Longwall 20 requires SMP Approval.
The reports are sound and adequate information has been provided with regards to monitoring and managing impacts due to LW21. In particular, the recently revised water flow assessment and TARP methodology has been incorporated for assessing water quantity impacts on Wongawilli Creek.	Noted.
Impacts and Monitoring of Wongawilli Creek - A detailed email from Howard Reed to South32 (D2020/15623 - DPE Planning email - Dendrobium Coal Mine - Request for Further Information re Area 3C Longwall 20) is referred to in this regard. The focus of the email is a request for more information with regards to predicted LW20 impacts on Wongawilli Creek. The key issue raised by DPE is the non-acceptance and query on the 10% rockbar fracturing model being used for assessment. This should be followed up with DPE.	SMP approval for Longwall 20 is not being sought by South32 at this time. Further assessment is required to be undertaken to support the Longwall 20 SMP Application.
There is adequate flow and pool water level measurement locations on Wongawilli Creek as well as groundwater bores to determine groundwater depressurization near LW21 and Wongawilli Creek. However the sensitivity of the proposed monitoring and TARP system is not adaptive i.e. to stop LW21 should impacts and consequences be seen to approach	IMC will update the subsidence impact and valley closure model prior to completion of extraction of Longwall 21. Future SMP applications in Area 3C will use the revised model as an adaptive management measure directed to avoiding exceedances of the performance measures for Wongawilli Creek.

Trigger Level 3 for pool level changes. South32's position is that they have setback LW21 to ensure a 200mm valley closure is not reached at Wongawilli Creek.	
There is only one swamp near LW 21 in Area 3C - Den144 near the valley base of Stream WC20 and it is not directly undermined by LW21. Some impacts in terms of change in groundwater and moisture levels in this swamp is predicted and proposed to be monitored.	See Section 5.2.3 .

Table 9-2 Agency feedback and responses – Longwalls 22 and 23

BCD Submission	Response
Changes to Longwall Layout Needed BCS does not support the direct undermining of upland swamp EECs (in particular the 4.8 ha Swamp 7) by longwalls 22 & 23. It is recommended that South 32 redesign longwalls 22 & 23 to avoid catastrophic damage to the Swamp 7 EEC and associated drainage lines. The design of longwalls 20 & 21 clearly demonstrates the feasibility of designing short longwalls which do not interact with swamps or major streams.	The predicted impacts to swamps in the Longwalls 22 and 23 SMP study area are defined in several documents supporting the SMP application (Attachments B, C, E and F). These impacts are in line with those predicted in the Dendrobium Area 3 Environmental Assessment. In April 2015, the Dendrobium Mine Consent was modified by adding Condition 15 to enable the provision of Strategic Biodiversity Offsets, whereby South32 could provide land that has conservation values which exceed the conservation values required to meet relevant offsetting requirements prescribed in a condition of an approval, and that the excess conservation values could be relied upon to meet future offsetting requirements under the Dendrobium Mine Consent and the Bulli Seam Operations Consent (08_0150). The Maddens Plains Offset Area was transferred to the NSW National Parks and Wildlife Service to provide physical offsets for impacts to vegetation communities and species, in addition to swamp research funding. The Department confirmed in writing that the Maddens Plains Offset Area can be used to offset residual biodiversity impacts for Area 3C in a letter to South32 dated 17 September 2019. The design and layout of Longwalls 20 and 21, the first in the Area 3C series were constrained by underground geological features and surface features such as Wongawilli Creek. These features limited the dimensions of Longwalls 20 and 21.
Surface to Seam Fracturing It is also recommended that the width of the longwalls (305m) is reduced to prevent surface to seam fracturing over the majority of the mine layout. SCT (2019) suggest the height of fracture zone, as observed from monitoring and modelling of goafs, is typically between 1-1.75 times the panel width and can be approximated to 1.5 times the panel width. Under such rough rules of thumb, 360m wide longwalls would lead to heights of the fracture zone extending 305m to 534m above the coal seam; or 458m above the	Experience at Dendrobium Mine and other mining operations in the Southern Coalfield shows that surface impacts related to subsidence can occur at panel widths significantly narrower than 305 m. MSEC (2019) conducted an analysis of variable longwall widths and concluded the following: • although maximum predicted vertical subsidence decreases as longwall void width reduces, the predicted conventional strains are still sufficient to result in the fracturing of bedrock for reduced longwall widths down to approximately 150 m; • valley related effects are seen at narrow longwall widths and, therefore, so are related potential impacts; and • strains due to the valley related effects would still be sufficient to result in fracturing of rockbars, pools and bedrock above and

coal seam if approximated using 1.5 times the panel width. Since the depth of cover is given as 290-390m, then this would mean that surface to seam fracturing is likely to occur over the entire longwall layout area using the 1.5 times panel width approximation. Use of Tammetta's equation suggests surface to seam connective fracturing will occur to heights between 355-374m for a longwall width of 305m and seam extraction of 3.9m. This means that surface to seam fracturing is likely to occur wherever surface AHD is less than ~370m. This is the majority (not 'some') of the project area above the proposed longwalls. Throughout many of the reports submitted for the proposal, statements are made such as: <i>On the basis that there is no connective fracturing to any deeper storage, it is likely that the diverted surface water flows will re-emerge at the limits of fracturing and dilation</i> Given previous experiences at Dendrobium, the work of SCT (2019) and Tammetta, and the IEPMC, this is clearly an inappropriate 'basis' to consider. The assumption should be that there will be connective fracturing, as has been demonstrated from previous longwall mining in Dendrobium Areas 3B, 3A and 2 (Expert Panel Report).	adjacent to the longwalls and, therefore, resultant surface water losses for reduced longwall widths down to approximately 150 m. While narrower longwall panels would reduce total vertical subsidence, and correspondingly reduce predicted tilts and strains in narrower panels, the strains due to the valley-related effects would still be sufficient to result in fracturing of rockbars, pools and bedrock above and adjacent to the longwalls. Accordingly, adverse environmental impacts are still anticipated for reduced longwall widths down to approximately 150 m. In addition, the continuation of 305 m wide panels avoids further value loss and coal sterilisation when compared to mining with narrower longwall panels (e.g. due to increased coal recovery). Surface to seam fracturing has been the subject of ongoing investigation throughout Dendrobium operations in Area 3. Condition 19, Schedule 3 of the Area 3B SMP Approval requires undertaking an assessment of the height of connective fracturing and the extent of surface cracking before and after the extraction of Longwalls 14, 15, 16 and 17. Investigation holes were drilled above both existing and planned Longwalls 12, 13, 14, 15 and 16 in Area 3B and Longwalls 6 and 7 in Area 3A, allowing assessment of effects above longwalls of different width. Longwalls in Area 3B are 305 m wide and Longwalls 6 and 7 in Area 3A are 249 m wide, including first workings. Assessment is detailed in HGEO (2020a;b) and is peer reviewed by Hebblewhite (2020a;b). The investigation focused on fracturing, strata permeability and groundwater pressures to allow comparison with predictions from the three prevailing methods for estimating the height of fracturing. The findings of those investigations were described in Sections 3.6 and 4.1 of the Groundwater Assessment (Watershed HydroGeo, 2021), with key points summarised below: • horizontal (low angle) fracturing to the surface (consistent with Tammetta H); • high angle fracturing is most significant to approximately 200-250 m above the goaf, declining above that with the exception of intense fracturing in the Bald Hill Claystone; • packer testing shows clear increase in horizontal hydraulic conductivity (kh) through the profile; • groundwater levels show depressurisation/draw down through the profile following longwall extraction. Within approximately 200 m above the goaf (i.e. mid-Bulgo Sandstone or below), no recovery has been observed. Above this, up to the mid-HBSS, groundwater levels have started to recover after a period of about 3 years. These observations have been used to refine the conceptual model of fracturing above longwalls at Dendrobium (as was recommended by the IEP). The subsequent methods to simulate deformation and fracturing in the Dendrobium Regional Groundwater Model (Watershed HydroGeo, 2021) are consistent with that IEP recommendation in that the Tammetta method is used, and recent investigations are used to define where
--	---

	connected and disconnected fracturing and strata dilation occur. This has resulted in an improvement in calibration to groundwater drawdown and inflow compared to previous modelling that assumed seam-to-surface connection.
Deficiencies in Monitoring Monitoring and assessment is deficient in a number of areas. The aquatic flora and fauna assessment (Cardno 2021) identifies that there has been very limited aquatic flora and fauna survey in the area and streams that are most likely to be impacted by longwalls 22 & 23; and much of this is based on decade old survey information. The report largely concentrates on impacts to Wongawilli Ck and Cordeaux Reservoir, ignoring impacts to LC5 and LC6. Both streams are likely to be permanent streams due to the swamps located in their headwaters (including the 4.8 ha Swamp 7 EEC). If the current configuration of LW 22 & 23 is adopted, all surface water will be lost and likely move directly into the mine due to connective fracturing. This will likely leave LC5 & LC6 without any aquatic habitat. This has not been appropriately considered in the aquatic flora and fauna assessment. There is also no identified offsetting of stream and aquatic fauna/flora impacts.	Supplementary aquatic surveys of LC5 and LC6 were undertaken by Cardno in August 2021. The Aquatic Flora and Fauna Assessment has been updated to incorporate these results. The assessment for LC5 and LC6 are detailed in Section 4.2.3.1 of Cardno (2021) and are based on recent survey, mapping and photographs of these watercourses. Previous survey was of physical characteristics of the watercourses and the presence of barriers to fish passage from Lake Cordeaux in to LC5 and LC6. The presence of significant barriers to fish passage at the confluence of these drainage lines and Lake Cordeaux was confirmed following surveys undertaken in August 2021. LC5 and LC6 flow directly over Longwalls 22 and 23 and are located almost entirely within 400 m of each longwall. Subsidence predictions (MSEC 2021) indicate that subsidence and fracturing is expected to occur in sections of watercourse directly above the longwalls, and that fracturing is possible to occur in watercourses up to approximately 400 m from the longwalls. It was predicted that a localised significant impact to aquatic habitat and biota would occur in these watercourses and that a localised reduction in the population size of aquatic biota would occur. At a catchment scale, such impacts would be minor. This assessment is consistent with that provided in Section 4.2.3.1 of Cardno (2021). Given available hydrological data, field observations during drought conditions, and the relatively small catchment sizes of LC5 and LC6, these drainage lines appear likely to stop flowing and several pools would become dry during drought. However, larger pools would provide refuge for aquatic biota for several months following low rainfall. See response above regarding biodiversity offsets provided for Area 3C mining impacts.
Watershed Hydrogeo suggests there are: recently installed gauging stations near to Longwalls 20-23: - LC5S1 on LC5: commenced monitoring 4/04/2019. This watercourse could be affected slightly by Longwall 21, and likely to be affected by Longwalls 22 and 23. - CR36S1 on CR36: commenced monitoring 5/09/2019. This watercourse could be affected slightly by Longwall 23. And that: IMC has received approval for additional surface water monitoring gauges around Area 3C on WC20, WC24, WC26, and are investigating a site on LC6 near Longwalls 22 and 23.	Surface water flow gauges have been installed at a number of locations across Area 3C: - LC5 (LC5S1); - CR36 (CR36S1); and - WC24 (WC24S1). South32 has secured approval to install additional gauges on: - WC20 (WC20S1); and - WC26 (WC26S1). South32 is currently pursuing the necessary approvals from WaterNSW to install flow gauges on: - LC6 (LC6S1); - WC20 (WC20S2) which is located at the outflow of Swamp 144. - WC26 (WC26S2) which is located at the outflow of Swamp 153 (pending a suitable site can be located).

None of this data appears to be in the assessment.	COVID related restrictions and associated safety concerns have resulted in delays in establishing a number of these flow gauges. They will be installed as soon as practical and it is safe to do so. The Area 3C WIMMCP has been updated to include additional details of flow monitoring gauging stations (see Section 3). Data from LC5 and CR36 are included in the Surface Water Assessment (HGEO, 2021), with the presentation of hydrographs, flow duration curves, and water quality analyses. WC24 is not included as this site was only recently established.
HGEO identify 34 pools in WC26, 29 (56%) of which lie directly above Longwall 23. Swamp Den153 EEC also lies directly above LW23. None of these have any baseline water level measurements (or piezometer monitoring) taken or an identified monitoring plan that can assess impact (eg BACI design).	Four water level monitoring sites have been established on WC26 and WC26A; including three water level bench marks and a water level logger near the confluence with Wongawilli Creek. These sites were established: • WC26_Channel 4 - 9/10/2020; • WC26_Pool 14 - 9/10/2020; • WC26_Pool 19 - 13/08/2021; • WC26_Pool 32 - 9/08/2021; and • WC26A_Pool 4 - 6/8/2021. This will provide more than 2 years of pre-mining baseline data. The data from these sites allows for comparison of premining to post mining conditions within the watercourse. This information is provided in the Area 3C SIMMCP. South32 will establish a piezometer and paired soil moisture monitoring site within Swamp 153, pending an inspection and a suitable site is located. Previous experience across Dendrobium Area 3 suggests that the smaller marginal upland swamps similar to Swamp 153, are often unsuitable for establishing monitoring equipment due to lack of soil depth.
HGEO identify 20 pools in LC5 downstream of Swamp Den09 EEC. Seventeen (85%) of which are in the 600m boundary and seven (35%) of these lie directly above Longwalls 22 & 23. HGEO identify 57 pools in LC6, 52 (91%) of which are within the 600m boundary and 23 (40%) directly above Longwalls 22 & 23. None of these pools have any baseline water level measurements taken or an identified monitoring plan that can assess impact (eg BACI design).	Five water level monitoring sites have been established on LC5 and LC5A; including five water level bench marks and a water level logger near the confluence with Lake Cordeaux. These sites were established: • LC5_Rockbar 11 – 13/08/2021; • LC5_Pool 13 – 13/0/2021; • LC5_Rockbar 7 – 13/08/2021; • LC5_S1 – 28/03/2019; and • LC5A_Pool 6 – 13082021. This will provide approximately 2 years of premining baseline data for tributary LC5. The data from these sites allows for comparison of premining to post mining conditions within the watercourse... Four water level monitoring sites have been established on LC6; including three water level bench marks and a water level logger near the confluence with Lake Cordeaux. These sites were established: • LC6_Pool 51 – 03/08/2021; • LC6_Pool 36 – 03/08/2021;

	• LC6_Pool 16 – 03/08/2021; and • LC6_Rockbar1 – 03/08/2021. This will provide approximately 2 of pre-mining baseline data for tributary LC6. The data from these sites allows for comparison of premining to post mining conditions within the watercourse...
Swamp Den07 EEC lies directly over Longwall 23. Swamps Den154, Den155, Den 156, Den09 are wholly or partially within the 400m boundary. Another unnamed swamp near swamp Den09 is within the 600m boundary. Many of these swamps have no stated monitoring. This identifies the paucity of baseline data for the area and streams that are most likely to be impacted by longwalls 22 & 23.	Dendrobium operations have been longwall mining in the catchment since 2005, beginning with Dendrobium Area 1 when monitoring of upland swamps was established. Mining operations have expanded into Areas 2, 3A and 3B since then with the monitoring program evolving over this period to incorporate results, findings and lessons learnt. In parallel with this, South32 has undertaken extensive biophysical surveys, assessment and research of the Dendrobium mining area which have contributed to the understanding of how upland swamps are impacted by mining. Recommendations on upland swamp monitoring from various agencies, independent panels, consultants and research institutions have been adopted and incorporated into the monitoring program. Condition 11c of the Area 3C SMP requires South32 to update the SIMMCP to fully reflect the recommendations of the IEP on the Longwalls 20 and 21 SMP application dated 13 December 2019; relating to monitoring of swamp impacts which directly relate to impact monitoring, management, remediation and contingency planning in respect of swamps. Condition 11d requires South32 to update the SIMMCP to fully reflect the advice of the IEP on the Longwalls 20 and 21 SMP application dated 13 December 2019 relating to monitoring of swamp impacts. The SIMMCP has been updated to address these conditions which form part of the foundation of the monitoring approach proposed for Area 3C. A key monitoring recommendation from IEP (2019b) is: <i>“18. Future swamp monitoring and modelling programs should be designed to:</i> <i>a. Provide a hydrological balance for representative swamps, sufficient to identify any mining-induced changes in soil moisture and in baseflow down the exit stream; and to provide vertical leakage rates as inputs to groundwater models, in order to quantify how much of the leakage is diverted back into the catchment or elsewhere.”</i> The majority of impacts to upland swamps are likely to occur above the proposed longwall and within the groundwater impact zone (60 m buffer). The severity and risk of impacts will reduce with distance from longwalls up to the 35 degree angle of draw study area, which includes the 20 mm subsidence contour. Beyond the 35 degree angle of draw study area, impacts to features such as swamps and watercourses are expected to be minor or negligible. An assessment at Dendrobium Mine concluded that hydrological change in upland swamps is not evident in shallow groundwater piezometers located more than 60 m from the extracted longwall (Watershed HydroGeo, 2019). The Independent Advisory Panel for Underground Mining’s (IAPUM) advice on the Longwall 19 SMP application regarding Swamp 15A is relevant to swamp monitoring in Area 3C.

	<i>The Panel considers that the (Watershed HydroGeo, 2019) report (which concluded that no changes to swamp hydrology have been observed greater than 60 m horizontal distance from a longwall panel in the Dendrobium mining area) is the most relevant available evidence regarding potential hydrological impacts to Swamp 15a...</i> <i>... Nevertheless, the evidence regarding the 60 m threshold allows the existence of swamp groundwater level impacts within 60 m to be predicted with high confidence.</i> The swamp monitoring approach for Area 3C is comprised of four key principals which are stated below along with how each is proposed to be implemented in Area 3C. 1. Monitoring swamps which are considered “likely” impacted by HGEO (2021) and HGEO (2019). Swamps considered likely impacted by Longwalls 22 and 23 include Swamps 7 and 153. The only swamp considered likely impacted by Longwalls 20 and 21 is Swamp 144. 2. Monitoring the hydrogeological balance of representative swamps with flow gauges at the downstream exit stream. - Swamp 7 is a large and “complex” valley infill swamp. Note it is the only swamp considered “complex” in the Longwalls 22 and 23 Study Area. A gauging station has been established on the exit stream for Swamp 7. - Swamp 153 is a small and “simple” headwater swamp. A gauging station is proposed to be installed on the exit stream for Swamp 153. - Swamp 144 is a small and “simple” headwater swamp. South32 have sought approval from WaterNSW to establish a gauge on the exit stream for Swamp 144. 3. Monitoring swamps which are within 60 m of the longwall goaf. Research shows that shallow groundwater impacts are highly likely in swamps within this 60 m zone (Watershed HydroGeo 2019). - Swamps 7, 144 and 153 are located in this zone. Piezometers and paired soil moisture probes are proposed to be installed or already have been installed in these swamps. - Swamp 154 is located approximately 70 m at its closest point to Longwalls 22 and 23 and is beyond the 60 m buffer impact zone. South32 propose to install a paired piezometer and soil moisture probe within this swamp. - Swamp 9 is located at a distance of 90 m at its closest point to Longwalls 22 and 23. South32 propose to install a paired piezometer and soil moisture probe within this swamp. Field investigations will be conducted to confirm that the soil depth is sufficient to establish a second site within this swamp. 4. Monitoring swamps which are subject to performance measures. - Swamps 9, 144 and 145 are swamps subject to performance measures in the Area 3C SMP Approval.
--	---

	Piezometers and paired soil moisture probes have been installed within these swamps.
WaterNSW Submission	Response
Mine design The proposed mining dimensions for Longwalls 22 and 23 are consistent with longwalls in Area 3A and 3B, and those proposed in the Dendrobium Area 5 & 6 Expansion Project. It is generally accepted that panel dimensions such as those proposed cause surface-to- seam connectivity in parts, if not all, of the extraction area. A comparison of the panel width/depth of cover (W/D) relationship indicates that the W/D ratio over much of the proposed longwalls is between 1.1 and 1.2. This is greater or at least comparable to most longwalls above Area 3A and 3B where surface-to- seam connectivity has occurred. It is now widely understood and accepted that narrower longwalls (and/or a lower mining height) can have significant benefits in reducing impacts on water resources, including: • A reduction in catchment losses due to regional depressurisation, • A reduction in the intensity of surface fracturing in less incised areas of the landscape, near or adjacent to watercourses, and • Improved chances of stream remediation. It is also widely accepted that non-conventional subsidence effects and impacts on surface water resources and upland swamps is best managed by not undermining them and ensuring adequate setbacks typically at least 400 m. The Independent Expert Panel for Mining in the Catchment (IEPMC) has recommended “adopting a precautionary approach and basing mine design on preventing the height of free drainage in the Special Areas from extending to the surface or interacting with surface fracture networks”.	See response to BCD submission above. Additionally, we acknowledge the comments regarding W/D ratios at Longwalls 22 and 23, as presented on Figure 4-3 of the Groundwater Assessment (Watershed HydroGeo, 2021), and that this contributes to potential impacts to near-surface and surface features. However, the comments regarding “generally accepted that panel dimensions such as those proposed cause surface-to- seam connectivity in parts, if not all, of the extraction area” and “This is greater or at least comparable to most longwalls above Area 3A and 3B where surface-to- seam connectivity has occurred” appear to be counter to comments by WaterNSW (07/07/2021): <i>“it appears that fracturing is not ‘connective’ such that it leads to rapid migration of water from the surface in Area 3B”</i>. The investigations into the height of fracturing in Area 3A and 3B support a conceptual model where the height of connected fracturing, and free drainage, is not to the surface in Areas 3A and 3B (but is considered to occur in Area 2), and that there is a zone of disconnected fracturing and/or strata dilation above the connected fracture zone. This is not to reject the idea that ‘disconnected’ fracturing (above the zone of connected fracturing) does not cause environmental impacts, just that the type and duration of effects, especially losses from the surface water catchment, are different.
Surface water losses Inflow or groundwater take is predicted through groundwater modelling to be up to 12 ML/day, with the extraction of Longwall	Subsidence is an unavoidable consequence of longwall mining and includes vertical and horizontal movement of the land surface. The predicted impacts detailed in the specialist assessments

22 causing an increase in inflow of up to 2-3 ML/day and Longwall 23 causing an increase in inflow of up to 2-3.5 ML/day. It is acknowledged that Dendrobium Mine is causing surface water losses within the Special Area of up to 5 ML/day (IEPMC, 2019). The IEPMC also estimated that 40 to 50% of previous inflows to mine workings is from surface water. This is water that would have otherwise reported to Sydney's drinking water catchment. The proposed extraction of Longwalls 22 and 23 would result in further depressurisation and surface water loss.	meet the performance requirements in the Dendrobium Mine Development Consent (DA 60-03-2001). Several layout alternatives for Area 3C were assessed by South32 using a multi-disciplinary team including environment, community, mining and exploration expertise. These included variations in the number of longwalls and orientations, lengths, and setbacks of the longwalls from key surface features. These options were reviewed, analysed and modified until an optimised longwall layout in Area 3C was achieved. In addition, a reduced maximum extraction height of 3.9 m will continue to be in place for Longwalls 22 and 23, as it has been since Longwall 14. IEP (2019a) also found impacts to catchment after 100 years of historical mining to be insignificant compared to other losses to the system "The losses referred to in Section 3.2.3 are low compared to other components of Sydney's supply and demand, for example recent losses from the Dendrobium, Russell Vale and Wongawilli mines of less than 8 ML/day on average compare to estimated leaks from the Sydney Water supply infrastructure of approximately 130 ML/day (Sydney Water, 2018)." Localised flow losses are clearly evident as a result of longwalls passing under or near watercourses (e.g. WC21, DC13, DCS2, LA4, and others). However, as discussed previously, if net losses in the magnitude stated here (5 ML/d) were occurring from Sydney's drinking water catchment, then flow losses of approximately 1 ML/d magnitude should be apparent at Wongawilli Creek gauge WWL and Donalds Castle Creek gauge DCU. However this is not the case, and the presence of groundwater recovery above and adjacent to longwalls supports this (which leads to different environmental effects).
Impacts on watercourses Several significant watercourses are likely to be impacted by Longwalls 22 and 23, including Wongawilli Creek, and Lake Cordeaux tributaries LC5 (770 m length of which is above the panels and pillars (44% of the total length of LC5)), and LC6. Impacts could include surface cracking, loss of flow, pool level decline and rock bar fracturing. Several tributaries of Lake Cordeaux have already been impacted by mining in Dendrobium Areas 1, 2 and 3A. The proposed longwalls would further contribute to impacts in the Lake Cordeaux catchment within the Metropolitan Special Area.	Mine layouts for Longwalls 22 and 23 have been developed using an Integrated Mine Planning Process. This process considers impacts to the mining operation as well as environmental impacts when designing mine layouts. Where impacts cannot be avoided or successfully remediated as is the situation for connectivity between near surface groundwater and deep groundwater, offsets have been provided to compensate for these potential impacts. Subject to Condition 14 of Schedule 3 of the Development Consent: <i>The Applicant shall provide suitable offsets for loss of water quality or loss of water flows to WaterNSW storages, clearing and other ground disturbance (including cliff falls) caused by its mining operations and/or surface activities within the mining area, unless otherwise addressed by the conditions of this consent, to the satisfaction of the Secretary. These offsets must:</i> <i>a) be submitted to the Secretary for approval by 30 April 2009;</i> <i>b) be prepared in consultation with WaterNSW;</i> <i>c) provide measures that result in a beneficial effect on water quality, water quantity, aquatic ecosystems and/or ecological integrity of WaterNSW's Special Areas or water catchments.</i> South32 transferred 33 ha of land adjacent to the Cataract River to WaterNSW to meet the above condition.

Impacts on upland swamps Upland Valley infill Swamp 7 located along Lake Cordeaux tributary LC5 extends over an area of 5.4 ha and is one of the largest and most significant swamps within the Dendrobium Mine footprint. This swamp is one of the designated Control Swamps under an active research program. This swamp would be undermined by Longwalls 22 and 23. WaterNSW is concerned that the hydrology of the swamp may be irreversibly affected. Swamp 7 should be considered in a similar manner to Swamp 15a overlying Dendrobium Area 3A and consideration should be given to application of similar performance measures.	See response ... regarding swamp offsetting for Area 3C. Swamp 15A in Area 3A received particular consideration in the Department's assessment of Dendrobium Development Consent Modification 6. As a result, the Consent contains a detailed performance measure that specifically relates to Swamp 15A. There is no similar condition imposed on Swamp 7. The Department state in their reasons for approvals of Longwall 19 SMP: <i>"It must be noted that this performance measure was not imposed in order to prevent any impact on Swamp 15a. Pages 22-24 of the Department's Assessment Report for Mod 6 make this quite clear."</i> The Area 3C SIMMCP details the monitoring that is in place for Swamp 7.
Consideration should also be given to increasing the setback from Wongawilli Creek and Cordeaux Reservoir to 400 m to avoid impacts and ensure compliance with the relevant performance measures and modifying the mine layout to avoid directly undermining LC5 and Swamp 7, and LC6.	Wongawilli Creek is located at minimum distances of 345 m and 320 m from the finishing ends of Longwall 22 and 23, respectively. The proposed setbacks were determined using the rockbar impact model, consistent with other longwalls in Areas 3A and 3B to limit predicted valley closure to 200 mm across the rockbars of Wongawilli Creek. The maximum predicted total closure for the rockbars along Wongawilli Creek within the Study Area occurs on Rockbars 21 to 23 which is 190 mm. The predicted rate of impact for the rockbars along this creek after the extraction of the proposed longwalls, therefore, is in the order of 6 % based on the maximum predicted closure (MSEC 2021). Based on the cumulative multidisciplinary assessment provided in the Longwalls 22 and 23 SMP application, South32 considers the setback appropriate to achieve compliance with the Wongawilli Creek performance measure of "minor impacts". The Department state in their reasons for approvals of Longwall 19 SMP which has a setback of 175 m from Wongawilli Creek: <i>"the Department has given careful consideration to the potential reduction in risk of Type 3 impacts within Wongawilli Creek by imposing an increase on South32's planned 175 m setback. It considers that the risk of such impacts is already low (c.8%, based on MSEC's existing database of similar impacts). It considers that the available reductions in risk (i.e. 1% or 2%) are not significant in themselves. Most significantly, it considers that the existing rate of Type 3 impacts in Wongawilli Creek (which has been affected by the extraction of ten longwalls, two of which were closer to Wongawilli Creek than is proposed for Longwall 19) is very low. On this basis, the Department accepts South32's proposed setback of Longwall 19 from Wongawilli Creek of 175 m."</i> The setbacks of Longwalls 22 and 23 carry a reduced risk of 6% probability of rockbar fracturing to that of the most recently approved Dendrobium Longwall 19. South32 has undertaken extensive exploration and research campaigns to understand potential seepage from Area 3B longwalls adjacent to Avon Reservoir. South32 installed monitoring bores at 8 locations to assess geotechnical and groundwater conditions in the barrier zone between Lake Avon and Longwalls 12 to 18. Each monitoring site is re-drilled and

	tested following the extraction of the adjacent longwall to assess changes to strata permeability. Groundwater monitoring in the Lake Avon barrier zone shows widespread depressurisation of all strata in response to mining in Area 3B and a general hydraulic gradient towards Area 3B, consistent with numerical model predictions. Groundwater levels at the base of the Hawkesbury Sandstone were likely near or just above the lake level prior to mining and have since declined below the lake level. There is evidence for recovery in groundwater pressures in the Colo Vale Sandstone at site AD2. The water loss predictions from Avon Reservoir from the numerical groundwater model (Watershed HydroGeo 2020) and the local-scale numerical model (HGEO 2020c) both indicate that the mining of the Area 3B longwall series, including the unextracted Longwall 18, would not exceed the 1 ML/day Dams Safety NSW limit. The experience derived from Area 3B operations, the Avon Dam borehole series and the predictions from the regional groundwater model in Watershed HydroGeo (2021), Section 7.4.3 indicate a maximum leakage from Cordeaux Reservoir due to Dendrobium operations is 0.11-0.36 ML/d. The upper estimate from the modelling presented in Watershed HydroGeo (2021) (0.36 ML/d) is lower than Dams Safety NSW's prescribed tolerable limit of 1 ML/d. Therefore, the need for further setbacks is not considered necessary for Longwalls 22 and 23. Tributaries LC5 and LC6 are not subject to specific performance measures in accordance with the Area 3C SMP Approval. Swamp 7 is addressed in response above.
WaterNSW also recommends consideration of an adaptive management approach with relevant monitoring and Trigger Action Response Plans aimed at protecting Wongawilli Creek, Lake Cordeaux, Lake Cordeaux tributaries LC5 and LC6 and upland swamp 7.	South32 does not support the increased risk to mining operations which would result from implementing an adaptive management approach to Wongawilli Creek, Lake Cordeaux or the surface features LC5, LC6 and Swamp 7. The risks to each of these features is discussed in the response above and is considered comparable to previous Areas 3A and 3B. South32 has demonstrated compliance with performance measures in End of Panel reports and Dam Safety NSW reporting for the relevant SMP approvals which are in place to limit impacts to sensitive features. Adaptive management options are limited for longwall mining operations. South32 has considered mine layouts for Longwalls 22 and 23 that have been developed using an integrated mine planning process. This process looks to avoid impacts which are greater than those defined in the Development Consent or SMP approvals.

Appendix C - Area 3C Monitoring and Reference Sites (Data as at 13 March 2024)

Monitoring Site ID	Data Type	Area	Monitoring Start Date	Monitoring Completion Date	Longwall	Easting	Northing
07_05	Groundwater level	Dendrobium Area 3c	15/07/2015	ongoing	Not mined beneath	292444.0	6194750.0
07_06	Groundwater level	Dendrobium Area 3c	3/07/2015	ongoing	Not mined beneath	292498.0	6195012.0
07_07	Groundwater level	Dendrobium Area 3c	1/07/2022	ongoing	Not mined beneath	292417.0	6194699.0
09_01	Groundwater level	Dendrobium Area 3c	7/08/2020	ongoing	Not mined beneath	292205.0	6194034.0
09_02	Groundwater level	Dendrobium Area 3c	9/06/2022	ongoing	Not mined beneath	292200.0	6194203.0
16_01	Groundwater level	Dendrobium Area 3c	13/02/2024	ongoing	Not mined beneath	293510	6193509
16_03	Groundwater level	Dendrobium Area 3c	13/02/2024	ongoing	Not mined beneath	293386	6193451
144_01	Groundwater level	Dendrobium Area 3c	28/08/2020	ongoing	Not mined beneath	291562.0	6193926.0
145_01	Groundwater level	Dendrobium Area 3c	4/12/2020	ongoing	Not mined beneath	292099.0	6193785.0
153_01	Groundwater level	Dendrobium Area 3c	9/06/2022	ongoing	Not mined beneath	291171.0	6195185.0
154_01	Groundwater level	Dendrobium Area 3c	11/11/2022	ongoing	Not mined beneath	293373.0	6194529.0
155_01	Groundwater level	Dendrobium Area 3c	2/02/2024	ongoing	Not mined beneath	293763	6194240
156_01	Groundwater level	Dendrobium Area 3c	2/02/2024	ongoing	Not mined beneath	293497	6193928
157_01	Groundwater level	Dendrobium Area 3c	16/02/2024	ongoing	Not mined beneath	292767	6193834
S07_05	Soil Moisture	Dendrobium Area 3c	12/06/2021	ongoing	Not mined beneath	292444.0	6194750.0
S07_06	Soil Moisture	Dendrobium Area 3c	12/06/2021	ongoing	Not mined beneath	292498.0	6195012.0

Note: Approved monitoring sites included in Table. Any proposed monitoring sites awaiting approval are not included.

S07_07	Soil Moisture	Dendrobium Area 3c	13/09/2022	ongoing	Not mined beneath	292417.0	6194699.0
S09_01	Soil Moisture	Dendrobium Area 3c	10/08/2021	ongoing	Not mined beneath	292205.0	6194034.0
S09_02	Soil Moisture	Dendrobium Area 3c	28/03/2022	ongoing	Not mined beneath	292200.0	6194203.0
S16_01	Soil Moisture	Dendrobium Area 3c	31/01/2024	ongoing	Not mined beneath	293510.0	6193509.0
S16_03	Soil Moisture	Dendrobium Area 3c	15/02/2024	ongoing	Not mined beneath	293386.0	6193451.0
S144_01	Soil Moisture	Dendrobium Area 3c	27/08/2020	ongoing	Not mined beneath	291562.0	6193926.0
S145_01	Soil Moisture	Dendrobium Area 3c	10/08/2021	ongoing	Not mined beneath	292099.0	6193785.0
S153_01	Soil Moisture	Dendrobium Area 3c	27/09/2022	ongoing	Not mined beneath	291171.0	6195185.0
S154_01	Soil Moisture	Dendrobium Area 3c	13/09/2022	ongoing	Not mined beneath	293373.0	6194529.0
155_01	Soil Moisture	Dendrobium Area 3c	24/01/2024	ongoing	Not mined beneath	293763	6194240
156_01	Soil Moisture	Dendrobium Area 3c	24/01/2024	ongoing	Not mined beneath	293497	6193928
157_01	Soil Moisture	Dendrobium Area 3c	15/02/2024	ongoing	Not mined beneath	292767	6193834
22_01	Groundwater level	Reference Swamps	11/08/2015	ongoing	Not mined beneath	292800.0	6188138.0
22_02	Groundwater level	Reference Swamps	11/08/2015	ongoing	Not mined beneath	293186.0	6188170.0
24_01	Groundwater level	Reference Swamps	10/11/2022	ongoing	Not mined beneath	292208.0	6187666.0
25_01	Groundwater level	Reference Swamps	30/07/2009	ongoing	Not mined beneath	292451.0	6190414.0
33_01	Groundwater level	Reference Swamps	13/08/2015	ongoing	Not mined beneath	291948.0	6190939.0
33_03	Groundwater level	Reference Swamps	13/08/2015	ongoing	Not mined beneath	291669.0	6191270.0

Note: Approved monitoring sites included in Table. Any proposed monitoring sites awaiting approval are not included.

84_01	Groundwater level	Reference Swamps	3/07/2015	ongoing	Not mined beneath	294101.0	6192112.0
85_01	Groundwater level	Reference Swamps	26/06/2015	ongoing	Not mined beneath	288040.0	6195000.0
85_02	Groundwater level	Reference Swamps	26/06/2015	ongoing	Not mined beneath	288141.0	6195011.0
85_03	Groundwater level	Reference Swamps	26/05/2017	ongoing	Not mined beneath	288222.0	6195022.0
86_01	Groundwater level	Reference Swamps	26/06/2015	ongoing	Not mined beneath	286625.0	6196839.0
86_02	Groundwater level	Reference Swamps	26/06/2015	ongoing	Not mined beneath	286536.0	6196553.0
86_03	Groundwater level	Reference Swamps	15/06/2017	ongoing	Not mined beneath	286535.0	6196653.0
87_01	Groundwater level	Reference Swamps	8/07/2015	ongoing	Not mined beneath	290859.0	6180953.0
87_02	Groundwater level	Reference Swamps	8/07/2015	ongoing	Not mined beneath	290881.0	6181182.0
88_01	Groundwater level	Reference Swamps	8/07/2015	ongoing	Not mined beneath	289221.0	6180109.0
88_02	Groundwater level	Reference Swamps	24/08/2015	ongoing	Not mined beneath	289368.0	6180463.0
S02_01	Soil Moisture	Reference Swamps	20/10/2020	ongoing	Not mined beneath	289477.0	6194981.0
S22_01	Soil Moisture	Reference Swamps	15/07/2018	ongoing	Not mined beneath	292800.0	6188138.0
S24_01	Soil Moisture	Reference Swamps	13/12/2022	ongoing	Not mined beneath	292208.0	6187666.0
S25_01	Soil Moisture	Reference Swamps	3/04/2023	ongoing	Not mined beneath	292451.0	6190414.0
S33_01	Soil Moisture	Reference Swamps	30/06/2023	ongoing	Not mined beneath	291948.0	6190939.0
S33_03	Soil Moisture	Reference Swamps	30/06/2023	ongoing	Not mined beneath	291669.0	6191270.0
S84_01	Soil Moisture	Reference Swamps	5/07/2023	ongoing	Not mined beneath	294101.0	6192112.0

Note: Approved monitoring sites included in Table. Any proposed monitoring sites awaiting approval are not included.

S85_01	Soil Moisture	Reference Swamps	7/07/2023	ongoing	Not mined beneath	288040.0	6195000.0
S85_02	Soil Moisture	Reference Swamps	7/07/2023	ongoing	Not mined beneath	288141.0	6195011.0
S85_03	Soil Moisture	Reference Swamps	14/07/2017	ongoing	Not mined beneath	288222.0	6195022.0
S86_01	Soil Moisture	Reference Swamps	22/09/2023	ongoing	Not mined beneath	286625.0	6196839.0
S86_02	Soil Moisture	Reference Swamps	22/09/2023	ongoing	Not mined beneath	286536.0	6196553.0
S86_03	Soil Moisture	Reference Swamps	24/07/2017	ongoing	Not mined beneath	286535.0	6196653.0
S87_01	Soil Moisture	Reference Swamps	7/03/2023	ongoing	Not mined beneath	290859.0	6180953.0
S87_02	Soil Moisture	Reference Swamps	8/05/2016	ongoing	Not mined beneath	290881.0	6181182.0
S88_01	Soil Moisture	Reference Swamps	7/03/2023	ongoing	Not mined beneath	289221.0	6180109.0
S88_02	Soil Moisture	Reference Swamps	25/11/2022	ongoing	Not mined beneath	289368.0	6180463.0

Note: Approved monitoring sites included in Table. Any proposed monitoring sites awaiting approval are not included.