

Sirius Site, 2-60 Cumberland Street, The Rocks

## Construction Noise and Vibration Management Plan

Project ID	20191508.5
Document Title	Construction Noise and Vibration Management
Attention To	Sirius Developments Pty Ltd

<b>Revision</b>	<b>Date</b>	<b>Document Reference</b>	<b>Prepared By</b>	<b>Checked By</b>	<b>Approved By</b>
0	1/09/2020	20191508.5/0109A/R0/WY	WY		VF

## TABLE OF CONTENTS

<b>1</b>	<b>INTRODUCTION</b>	<b>4</b>
<b>2</b>	<b>SITE DESCRIPTION</b>	<b>5</b>
<b>3</b>	<b>NOISE DESCRIPTORS</b>	<b>7</b>
<b>4</b>	<b>AMBIENT NOISE SURVEY</b>	<b>8</b>
4.1.1	Measurement Position	8
4.1.2	Measurement Period	8
4.1.3	Measurement Equipment	8
4.1.4	Summarised Rating Background Noise Levels	9
<b>5</b>	<b>CONSTRUCTION HOURS</b>	<b>10</b>
<b>6</b>	<b>CONSTRUCTION NOISE AND VIBRATION OBJECTIVES</b>	<b>11</b>
<b>6.1</b>	<b>NOISE OBJECTIVES</b>	<b>11</b>
6.1.1	NSW EPA Interim Construction Noise Guideline	11
6.1.2	Australian Standard AS2436:2010 "Guide to Noise Control on Construction, Maintenance and Demolition Sites"	12
<b>6.2</b>	<b>VIBRATION OBJECTIVES</b>	<b>13</b>
6.2.1	Structure Borne Vibrations	13
6.2.2	Assessing Amenity	14
<b>7</b>	<b>PROPOSED CONSTRUCTION ACTIVITIES</b>	<b>15</b>
<b>8</b>	<b>NOISE AND VIBRATION ASSESSMENT</b>	<b>16</b>
<b>8.1</b>	<b>NOISE IMPACT ASSESMENT</b>	<b>16</b>
<b>8.2</b>	<b>GENERAL DISCUSSION</b>	<b>20</b>
<b>9</b>	<b>RECOMMENDATIONS</b>	<b>21</b>
<b>10</b>	<b>CONTROL OF CONSTRUCTION NOISE AND VIBRATION – PROCEDURAL STEPS</b>	<b>22</b>
<b>11</b>	<b>ADDITIONAL NOISE AND VIBRATION CONTROL METHODS</b>	<b>23</b>
11.1	SELECTION OF ALTERNATE APPLIANCE OR PROCESS	23
11.2	ACOUSTIC BARRIER	23
11.3	MATERIAL HANDLING	23
11.4	TREATMENT OF SPECIFIC EQUIPMENT	23
11.5	ESTABLISHMENT OF SITE PRACTICES	23
11.6	COMBINATION OF METHODS	23
<b>12</b>	<b>COMMUNITY INTERACTION AND COMPLAINTS HANDLING</b>	<b>24</b>
12.1	ESTABLISHMENT OF DIRECT COMMUNICATION WITH AFFECTED PARTIES	24
12.2	DEALING WITH COMPLAINTS	24
12.3	REPORTING REQUIREMENTS	25
12.4	CONTINGENCY PLANS	25
<b>13</b>	<b>CONCLUSION</b>	<b>26</b>
<b>APPENDIX ONE – UNATTENDED NOISE MONITORING</b>		<b>27</b>
SIRIUS SITE, REAR COURTYARD		27
SIRIUS SITE, ROOFTOP TERRACE		38

# 1 INTRODUCTION

Acoustic Logic Consultancy has been engaged to prepare a Construction Noise and Vibration Management Plan for the proposed development at the Sirius Site, 2-60 Cumberland Street, The Rocks.

The principle objective of this study is to undertake an evaluation of works/activities to be performed during the demolition, excavation and construction of the project and forecast the potential impacts of noise and vibration. This assessment will be used to formulate and streamline effective regulation and mitigation measures.

The principle issues which will be addressed in this report are:

- Identification of the noise and vibration standards which will be applicable to this project;
- Identification of potentially impacted nearby development;
- Identify likely sources of noise and vibration generation and predicted noise levels at nearby development; and
- Formulation of a strategy to comply with the standards identified and mitigation treatments in the event that compliance is not achievable.

Provided all measures outlined in this report are fully implemented, noise and vibration impacts associated with the construction of the development site will be strictly controlled, and the impact on the surrounding environment minimised.

## 2 SITE DESCRIPTION

The current proposed timeline extends over an approximate 20-month period.

Demolition, excavation and construction works anticipated are as follows:

- Demolition, excavation and construction period to have an estimated timeframe approximately 20 months
- Bulk and detailed excavation in rock
- Use of electric tower crane, and
- Erection of building structure (powered hand tools for formwork, concrete pump, vibrators).

Investigation has been carried out by this office in regards to the existing properties and noise impacts surrounding the proposed development, which is detailed below:

- Existing residential receivers along the eastern and far western boundaries of the site, and
- Existing commercial developments and historical terraces along the eastern, southern and western boundaries of the site.

The nearest noise receivers around the site include:

- **R1\***: Residential Receiver 1 – Multi storey hotel development to the east at 25 George Street
- **R2\***: Residential Receiver 2 – Multi storey hotel development to the east at 55 George Street
- **R3**: Residential Receiver 3 – Multi storey residential developments to the west at 20-42 Lower Fort Street and 8-16 Trinity Avenue
- **C1**: Commercial Receiver 1 – Multi storey commercial developments to the east at 36-88 George Street
- **C2**: Commercial Receiver 2 – Multi storey commercial developments to the east at 29-47 George Street
- **C3**: Commercial Receiver 3 – Multi storey commercial developments to the south and east along Argyle Street and George Street
- **C4**: Commercial Receiver 4 – Multi storey commercial developments to the south at 86-96 Cumberland Street, and
- **C5**: Commercial Receiver 5 – Multi storey commercial development to the west underneath Bradfield Highway at 3 Cumberland Street.

\*It is noted that hotels are not considered residential developments. Criteria for noise emissions shall be procured through a residential amenity + 5 ideology per Table 2.2 of the NSW EPA Noise Policy for Industry.

A site map, measurement description and surrounding receivers are presented in Figure 1 below.



- Project Site
- Residential Receivers
- Commercial Receivers

**Figure 1 – Project Site**  
**Source: NSW Six Maps**

- Unattended Noise Monitors
- Attended Measurements

### 3 NOISE DESCRIPTORS

Environmental noise constantly varies. Accordingly, it is not possible to accurately determine prevailing environmental noise conditions by measuring a single, instantaneous noise level.

To accurately determine the environmental noise a 15-20 minute measurement interval is utilised. Over this period, noise levels are monitored on a continuous basis and statistical and integrating techniques are used to determine noise description parameters.

In analysing environmental noise, three-principle measurement parameters are used, namely  $L_{10}$ ,  $L_{90}$  and  $L_{eq}$ . The  $L_{10}$  and  $L_{90}$  measurement parameters are statistical levels that represent the average maximum and average minimum noise levels respectively, over the measurement intervals.

The  $L_{10}$  parameter is commonly used to measure noise produced by a particular intrusive noise source since it represents the average of the loudest noise levels produced by the source.

Conversely, the  $L_{90}$  level (which is commonly referred to as the background noise level) represents the noise level heard in the quieter periods during a measurement interval. The  $L_{90}$  parameter is used to set the allowable noise level for new, potentially intrusive noise sources since the disturbance caused by the new source will depend on how audible it is above the pre-existing noise environment, particularly during quiet periods, as represented by the  $L_{90}$  level.

The  $L_{eq}$  parameter represents the average noise energy during a measurement period. This parameter is derived by integrating the noise levels measured over the 15 minute period.  $L_{eq}$  is important in the assessment of environmental noise impact as it closely corresponds with human perception of a changing noise environment; such is the character of environmental noise.

## **4 AMBIENT NOISE SURVEY**

NSW EPA's Rating Background Noise Level (RBL) assessment procedure requires determination of background noise level for each day (the ABL) then the median of the individual days as set out for the entire monitoring period.

Appendices in this report present results of unattended noise monitoring conducted at the project site. Weather affected data was excluded from the assessment. The processed RBL (lowest 10<sup>th</sup> percentile noise levels during operation time period) are presented in Table 4-1.

### **4.1.1 Measurement Position**

Two unattended noise monitors were installed on site, one in the rear courtyard and one on the rooftop terrace facing the harbour bridge. Refer to Figure 1 for detailed location.

### **4.1.2 Measurement Period**

Unattended noise monitoring was conducted from Tuesday 21<sup>st</sup> January 2020 to Thursday 30<sup>th</sup> January 2020. Attended noise measurements were undertaken between the hours of 3:00pm and 4:00pm on Tuesday 21<sup>st</sup> January 2020 and between the hours of 4:00pm and 5:00pm on Thursday 30<sup>th</sup> January 2020.

### **4.1.3 Measurement Equipment**

Equipment used consisted of an Acoustic Research Laboratories Pty Ltd noise logger. The logger was set to A-weighted fast response and was programmed to store 15-minute statistical noise levels throughout the monitoring period. The monitor was calibrated at the start and end of the monitoring period using a Rion NC-73 calibrator. No significant drift was noted. Noise logger data is provided in Appendix One – Unattended Noise Monitoring.

#### 4.1.4 Summarised Rating Background Noise Levels

Summarised rating background noise levels for the project site and immediate surroundings are presented below.

**Table 4-1 – Measured Noise Levels**

<b>Monitor</b>	<b>Time of day</b>	<b>Rating Background Noise Level dB(A) L<sub>90</sub>(Period)</b>
Sirius Site – Rear Courtyard	Day (7am – 6pm)	57
	Evening (6pm – 10pm)	55
	Night (10pm – 7am)	51
Sirius Site – Rooftop Terrace	Day (7am – 6pm)	69
	Evening (6pm – 10pm)	66
	Night (10pm – 7am)	56

On review of the monitoring data, the measured L<sub>90</sub> noise levels during high wind speed days do not increase background noise levels significantly as periods with little to no wind. This demonstrates that even though wind speeds measured at Observatory Hill exceed EPA guidelines, either:

- The wind speed on site at this time was significantly lower than at Observatory Hill, and/or
- The wind on site was not sufficiently consistent to increase background noise levels compared to calm periods.

Therefore, only periods of adverse weather that were determined to have affected the noise data have been eliminated when determining the rating background noise level at the site, which is presented above.

## 5 CONSTRUCTION HOURS

The proposed construction hours are as follows:

- Monday to Friday: 7:00am-6:00pm; and
- Saturday 8:00am-1:00pm.

Construction works during the above hours have been assessed with reference to the standard hours noise management levels (background + 10 dB(A)) in the NSW EPA Interim Construction Noise Guideline.

Vibration objectives will be assessed to management levels defined in Section 6.2.

## 6 CONSTRUCTION NOISE AND VIBRATION OBJECTIVES

### 6.1 NOISE OBJECTIVES

Noise associated with construction activities on the site will be assessed in conjunction with the following guidelines:

- NSW EPA Interim Construction Noise Guideline; and
- Australian Standard 2436-2010 "Guide to Noise and Vibration Control on Construction, Demolition and Maintenance Sites".

#### 6.1.1 NSW EPA Interim Construction Noise Guideline

The EPA Interim Construction Noise Guideline (ICNG) assessment requires:

- Determination of noise management levels (based on ambient noise monitoring);
- Review of operational noise levels at nearby development; and
- If necessary, recommendation of noise controls strategies in the event that compliance with noise emission management levels is not possible.

EPA guidelines adopt differing strategies for noise control depending on the predicted noise level at the nearest residences:

- *"Noise affected" level. Where construction noise is predicted to exceed the "noise affected" level at a nearby residence, the proponent should take reasonable/feasible work practices to ensure compliance with the "noise affected level". For residential properties, the "noise affected" level occurs when construction noise exceeds ambient levels by more than 10dB(A)Leq(15min).*
- *"Highly noise affected level". Where noise emissions are such that nearby properties are "highly noise affected", noise controls such as respite periods should be considered. For residential properties, the "highly noise affected" level occurs when construction noise exceeds 75dB(A)Leq(15min) at nearby residences.*

In addition to the above management levels for residential receivers, the ICNG nominates a Management Level of 70dB(A)  $L_{eq(15min)}$  at commercial receiver facades (typical office, retail). And a Management Level of RBL + 5 dB(A) for any work done outside of standard hours.

It is noted that the ICNG does not make specific mention of noise management levels for hotel developments. Hotel developments are not considered residential developments, however a distinction between hotel and residential amenity levels has been outlined in the NSW EPA Noise Policy for Industry 2017 in Table 2.2. As such, the ideology behind a residential amenity +5 criterion has been adopted for the noise management level of hotel developments surrounding the site (**R1 & R2**).

Due to the high background noise levels around the site, with respect to the noise management level for hotels detailed above, it is noted that the noise management level exceeds that of commercial receivers per the ICNG. Therefore, as per a conservative assessment, hotel receivers **R1 & R2** shall be assessed to the commercial receiver noise management level.

A summary of the above recommended noise levels from the ICNG is presented below.

**Table 6-1 – Noise Emission Goal at Residential Property Boundaries**

Location	"Noise Affected" Level - dB(A) <sub>Leq(15min)</sub> Standard Hours	"Highly Noise Affected" Level - dB(A) <sub>Leq(15min)</sub>
R3 Residents	67 externally at façade	75

Where noise from the construction works is above the "noise affected" level, the proponent should apply any feasible and reasonable work practices to minimise noise. The "noise affected level is representative of a level where there may be some community reaction to noise.

If noise emissions are likely to exceed 75 dB(A)<sub>Leq(15min)</sub> "highly noise affected" at the boundary of surrounding affected residential receivers, the receiver is deemed to be "highly noise affected". The "highly noise affected" level is representative of a level where strong community reaction to noise is expected. Introduction of management controls such as scheduling of noisy periods, or respite periods is then recommended. Refer to Section 8 for specific recommendations.

Section 4.1.2 and 4.1.3 of the EPA Interim Construction Noise Guideline also nominates management levels for other sensitive land uses (other than residences). Criteria relevant to this assessment is detailed below;

**Table 6-2 – Noise Emission Goal at Commercial/Sensitive Property Boundaries**

Location	"Noise Affected" Level – dB(A) <sub>Leq(15min)</sub> Standard Hours
Surrounding Commercial Receivers & R1 & R2	70 externally at façade

**6.1.2 Australian Standard AS2436:2010 "Guide to Noise Control on Construction, Maintenance and Demolition Sites"**

The Australian Standard AS2436 states that where all reasonable and available measures have been taken to reduce construction noise, mitigation strategies may be put in place to reduce noise levels to within a reasonable and acceptable level.

For the control and regulation of noise from construction sites, AS2436:1981 nominates the following:

- a. *That reasonable suitable noise criterion is established,*
- b. *That all practicable measures be taken on the building site to regulate noise emissions, including the siting of noisy static processes to locations of the site where they can be shielded, selecting less noisy processes, and if required regulating construction hours, and*
- c. *The undertaking of noise monitoring where non-compliance occurs to assist in the management and control of noise emission from the construction site.*

The guideline reflects on feasible and reasonable mitigation strategies, management controls and public liaising in the effort to reach realistic compromises between construction sites and potential noise affected receivers.

Based on these criteria the following procedure will be used to assess noise emissions:

- Predict noise levels produced by typical construction activities at the sensitive receivers.
- Adopt management conditions as per AS2436 in the event of a non-compliance.

## 6.2 VIBRATION OBJECTIVES

Vibration caused by construction at any residence or structure outside the subject site will be assessed with reference to:

- For structural damage vibration, German Standard DIN 4150-3 *Structural Vibration: Effects of Vibration on Structures*; and
- For human exposure to vibration, Department of Environment and Conservation NSW "Assessing Vibration: A Technical Guideline" (Feb 2006) is based on the guidelines contained in BS 6472:1992 *Guide to Evaluate Human Exposure to Vibration in Buildings (1Hz to 80Hz)* for low probability of adverse comment.

The criteria and the application of this standard are discussed in separate sections below.

### 6.2.1 Structure Borne Vibrations

German Standard DIN 4150-3 (1999-02) provides a guideline for acceptable levels of vibration velocity in building foundations, to assess the effects of vibration on structures. The table give guidance on the maximum accepted values of velocity at the foundation and in the plane of the highest floor of various types of buildings, to prevent any structural damage.

The table below lists the peak particle velocity, which is the maximum absolute value of the velocity signals for the three orthogonal components. This is measured as a maximum value of any of the three orthogonal component particle velocities when measured at the foundation, and the maximum levels measured in the x- and y-horizontal directions in the plane of the floor of the uppermost storey.

**Table 6-3 – DIN 4150-3 (1999-02) Safe Limits for Building Vibration**

TYPE OF STRUCTURE		PEAK PARTICLE VELOCITY (mms <sup>-1</sup> )			
		At Foundation at a Frequency of			Plane of Floor of Uppermost Storey
		< 10Hz	10Hz to 50Hz	50Hz to 100Hz	All Frequencies
1	Buildings used in commercial purposes, industrial buildings and buildings of similar design	20	20 to 40	40 to 50	40
2	Dwellings and buildings of similar design and/or use	5	5 to 15	15 to 20	15
3	Structures that because of their particular sensitivity to vibration, do not correspond to those listed in Lines 1 or 2 and have intrinsic value (e.g. buildings that are under a preservation order)	3	3 to 8	8 to 10	8

## 6.2.2 Assessing Amenity

The NSW EPA's *Assessing Vibration – a technical guideline* is based on the guidelines contained in British Standard BS 6472-1992 'Guide to Evaluate Human Exposure to Vibration Buildings (1Hz to 80Hz)'. This guideline provides procedures for assessing tactile vibration and regenerated noise within potentially affected buildings.

The recommendations of this guideline should be adopted to assess and manage vibration from the site. Where vibration exceeds, or is likely to exceed, the recommended levels then an assessment of reasonable and feasible methods for the management of vibration should be undertaken.

**Table 6-4 – BS 6472 Vibration Criteria**

		RMS acceleration (m/s <sup>2</sup> )		RMS velocity (mm/s)		Peak velocity (mm/s)	
Place	Time	Preferred	Maximum	Preferred	Maximum	Preferred	Maximum
<b>Continuous Vibration</b>							
Residences	Daytime	0.01	0.02	0.2	0.4	0.28	0.56
Offices	Day or night-time	0.02	0.04	0.4	0.8	0.56	1.1
Workshops		0.04	0.08	0.8	1.6	1.1	2.2
<b>Impulsive Vibration</b>							
Residences	Daytime	0.3	0.6	6.0	12.0	8.6	17.0
Offices	Day or night-time	0.64	1.28	13	26	18	36
Workshops		0.64	1.23	13	26	18	36

**Note 1: Continuous vibration relates to vibration that continues uninterrupted for a defined period (usually throughout the daytime or night-time), e.g. continuous construction or maintenance activity. (DECC, 2006).**

**Note 2: Impulsive vibration relate to vibration that builds up rapidly to a peak followed by a damped decay and that may or may not involve several cycles of vibration (depending on frequency and damping), with up to three occurrences in an assessment period, e.g. occasional loading and unloading, or dropping of heavy equipment. (DECC, 2006).**

## 7 PROPOSED CONSTRUCTION ACTIVITIES

We have been advised of the typical equipment/processes anticipated to be used for the construction of the subject development. Noise impacts from these activities on the amenity of the surrounding identified sensitive receivers, will be predicted in this section. Typically, the most significant sources of noise or vibration generated during a construction project will be demolition, excavation, civil works (compaction, asphaltting) and piling.

The A-weighted sound power levels for the expected loudest equipment/processes for each stage of development are outlined in the table below.

**Table 7-1 – Proposed Construction Activities and Associated Typical Sound Power Levels**

<b>Construction Stage</b>	<b>Equipment /Process</b>	<b>Typical Sound Power Level dB(A)</b>
Demolition	Machine Mounted Hydraulic Drill	113
	Excavator & Trucks	107
	Powered Hand Tools (Electric)	102
Excavation	Vibratory Roller & Concrete Pump	108
	Excavator & Trucks	107
	Tower Crane	105
	Powered Hand Tools (Electric)	102
Construction	Vibratory Roller & Concrete Pump	108
	Excavator & Trucks	107
	Tower Crane	105
	Powered Hand Tools (Electric)	102
	Electric Hoist	92

The noise levels presented in the above table are derived from the following sources:

1. On-site measurements;
2. Table A1 of Australian Standard 2436-2010; and
3. \*Data held by this office from other similar studies.

Noise levels take into account correction factors (for tonality, intermittency where necessary).

## 8 NOISE AND VIBRATION ASSESSMENT

### 8.1 NOISE IMPACT ASSESMENT

The predicted noise levels during excavation and construction will depend on:

- The activity undertaken.
- The distance between the work site and the receiver. For many of the work areas, the distance between the noise source and the receiver will vary depending on which end of the site the work is undertaken. For this reason, the predicted noise levels will be presented as a range.

Predicted noise levels are presented below. Predictions take into account the following:

- Noise reduction as a result of distance.
- Barrier effects resulting from shielding of the surrounding buildings (where applicable).

It is noted that the following predictions are preliminary as construction processes and locations have not been specifically selected at this stage. Further iteration is necessary once construction processes have been finalised.

**Table 8-1 – Predicted Noise Generation to R1 Hotel Receiver**

<b>Activity</b>	<b>Predicted Level – dB(A) <math>L_{eq}(15min)</math> (External Areas)</b>	<b>Comment</b>
Machine Mounted Hydraulic Drill	63-85	Exceeds 70 dB(A) Noise Management Level when working close to the north eastern boundary (Refer to Recommendations Section 9)
58-80	57-68	
Excavator & Trucks	57-79	
Tower Crane	62	Under 70 dB(A) Noise Management Level
Powered Hand Tools (Electric)	52-74	Exceeds 70 dB(A) Noise Management Level when working close to the north eastern boundary (Refer to Recommendations Section 9)
Electric Hoist	42-64	Under 70 dB(A) Noise Management Level

**Table 8-2 – Predicted Noise Generation to R2 Hotel Receiver**

<b>Activity</b>	<b>Predicted Level – dB(A) <math>L_{eq}(15min)</math> (External Areas)</b>	<b>Comment</b>
Machine Mounted Hydraulic Drill	63-72	Under 70 dB(A) Noise Management Level
Vibratory Roller & Concrete Pump	58-67	
Excavator & Trucks	57-66	
Tower Crane	59	
Powered Hand Tools (Electric)	52-61	
Electric Hoist	42-51	

\*A 1-2 dB(A) exceedance is considered imperceptible.

**Table 8-3 – Predicted Noise Generation to R3 Residential Receiver**

<b>Activity</b>	<b>Predicted Level – dB(A) <math>L_{eq}(15min)</math> (External Areas)</b>	<b>Comment</b>
Machine Mounted Hydraulic Drill	53-55	Under 67 dB(A) Noise Management Level
Vibratory Roller & Concrete Pump	48-50	
Excavator & Trucks	47-49	
Tower Crane	47	
Powered Hand Tools (Electric)	42-44	
Electric Hoist	32-34	

**Table 8-4 – Predicted Noise Generation to C1 Commercial Receiver**

<b>Activity</b>	<b>Predicted Level – dB(A) <math>L_{eq}(15min)</math> (External Areas)</b>	<b>Comment</b>
Machine Mounted Hydraulic Drill	62-73	Exceeds 70 dB(A) Noise Management Level when working close to the south eastern boundary (Refer to Recommendations Section 9)
Vibratory Roller & Concrete Pump	57-68	Under 70 dB(A) Noise Management Level
Excavator & Trucks	56-67	
Tower Crane	48	
Powered Hand Tools (Electric)	51-63	
Electric Hoist	41-53	

**Table 8-5 – Predicted Noise Generation to C2 Commercial Receiver**

<b>Activity</b>	<b>Predicted Level – dB(A) <math>L_{eq}(15min)</math> (External Areas)</b>	<b>Comment</b>
Machine Mounted Hydraulic Drill	63-85	Exceeds 70 dB(A) Noise Management Level when working close to the eastern boundary (Refer to Recommendations Section 9)
Vibratory Roller & Concrete Pump	58-80	
Excavator & Trucks	57-79	
Tower Crane	53	Under 70 dB(A) Noise Management Level
Powered Hand Tools (Electric)	52-74	Exceeds 70 dB(A) Noise Management Level when working close to the eastern boundary (Refer to Recommendations Section 9)
Electric Hoist	42-64	Under 70 dB(A) Noise Management Level

**Table 8-6 – Predicted Noise Generation to C3 Commercial Receiver**

<b>Activity</b>	<b>Predicted Level – dB(A) <math>L_{eq}(15min)</math> (External Areas)</b>	<b>Comment</b>
Machine Mounted Hydraulic Drill	63-77	Under 70 dB(A) Noise Management Level
Vibratory Roller & Concrete Pump	58-64	
Excavator & Trucks	57-63	
Tower Crane	52	
Powered Hand Tools (Electric)	52-66	
Electric Hoist	42-56	
		Exceeds 70 dB(A) Noise Management Level when working close to the south eastern boundary (Refer to Recommendations Section 9)

**Table 8-7 – Predicted Noise Generation to C4 Commercial Receiver**

<b>Activity</b>	<b>Predicted Level – dB(A) <math>L_{eq}(15min)</math> (External Areas)</b>	<b>Comment</b>
Machine Mounted Hydraulic Drill	64-81	Exceeds 70 dB(A) Noise Management Level when working close to the southern boundary (Refer to Recommendations Section 9)
Vibratory Roller & Concrete Pump	59-76	
Excavator & Trucks	58-75	
Tower Crane	62	Under 70 dB(A) Noise Management Level
Powered Hand Tools (Electric)	53-74	
Electric Hoist	43-64	

**Table 8-8 – Predicted Noise Generation to C5 Commercial Receiver**

<b>Activity</b>	<b>Predicted Level – dB(A) <math>L_{eq}(15min)</math> (External Areas)</b>	<b>Comment</b>
Machine Mounted Hydraulic Drill	64-79	Exceeds 70 dB(A) Noise Management Level when working close to the western boundary (Refer to Recommendations Section 9)
Vibratory Roller & Concrete Pump	60-74	
Excavator & Trucks	63-79	
Tower Crane	69	Under 70 dB(A) Noise Management Level
Powered Hand Tools (Electric)	53-68	
Electric Hoist	43-58	

## 8.2 GENERAL DISCUSSION

### Noise

Primarily, the use of hydraulic drills and vibratory rollers/ concrete pumps are predicted to be the highest noise generating equipment. All noise predictions have been presented as external noise levels. Internal noise levels at all locations are expected to be 10-20 dB(A) lower dependant on the façade of each receiver. It is also noted that hydraulic drills are only expected to be used in the demolition/ excavation stage.

Receivers **R1, R2, C2, C4** and **C5** have direct line of sight to the development and therefore are exposed to higher levels of construction noise, whereas receiver **C3** is below the hill terrain of Gloucester Walk. Predicted noise levels have not taken into account barrier effects from works likely to be screened by either the existing building shell or by hoarding to present a conservative assessment. Further iteration of proposed construction activities as well as a defined timeframe can be supplemented when finalised.

Treatment processes are recommended as per Section 9.

### Vibration

Typically, excavation and vibratory rolling are the activities with the greatest potential for generation of vibration. Excavation of building footings has the potential to produce vibration levels approaching the criteria set out in Section 6.2.

The primary potential vibration source will be from use of vibratory rolling, especially when operating close to adjacent receivers. The vibration impact on all receivers is expected to be compliant with the criteria in Section 6.2.


## 9 RECOMMENDATIONS

In light of the above, we recommend:

1. **Community Consultation/Notification:** Notification (leaflet or similar) of all residents within 100m of the development is recommended prior to commencement of works. Notification should advise of anticipated date and duration of excavation.
2. **Respite Periods:** To protect the amenity of nearby receivers, it is proposed to introduce respite periods where construction activities exceed the 'noise affected level' (70 dB(A)  $L_{eq(15min)}$ ) based on the predicted noise levels presented in Section 8.1. In the event that respite periods are to be imposed, it is recommended to consider respite hours as follows:
  - a. Monday to Friday: 7:00am-8:00am
  - b. Saturday: 8:00am-9:00am
  - c. Monday to Saturday: 12:00pm-1:00pm
  - d. It is noted that the construction plant which is predicted to exceed the 'noise affected level' would only be in use intermittently during the demolition and excavation stage. As part of any proposed respite conditions, it is recommended to limit demolition and excavation works to not be carried out on Saturdays.
  - e. It is noted that respite periods will extend the length of demolition, excavation and construction works and may provide heavier loss of amenity compared to non-imposed excavation.
3. **Vibration monitoring:** In the event of a complaint, we recommend vibration monitoring is to be implemented along the property boundary closest to the vibration receiver who issued the complaint.
4. **Quiet Work Methods/Technologies:**
  - a. The primary noise generating activity at the site will be the bulk excavation period. As much as practicable, use of quieter excavation methods is to be adopted.
  - b. Excavation is conducted initially using excavator with bucket (quietest excavation method), then use of hydraulic drills, rock saws or rippers. Use of the loudest excavation equipment is used only when other options are not available.
  - c. It is recommended to use rock saws near all boundaries to reduce vibration and noise levels.
  - d. Materials handling/vehicles:
    - i. Trucks and bobcats to use a non-tonal reversing beacon (subject to OH&S requirements) to minimise potential disturbance of neighbours.
    - ii. Avoid careless dropping of construction materials into empty trucks.
    - iii. Trucks, trailers and concrete trucks (if feasible) should turn off their engines during idling to reduce noise impacts (unless truck ignition needs to remain on during concrete pumping).
5. **Complaints Handling:** In the event of complaint, the procedures outlined in Section 9 should be adopted.
6. **Site Induction:**
  - a. A copy of the Noise Management Plan is to be available to contractors. The location of the Noise Management Plan should be advised in any site induction.
  - b. Site induction should also detail the site contact in the event of noise complaint.

# 10 CONTROL OF CONSTRUCTION NOISE AND VIBRATION – PROCEDURAL STEPS

The flow chart presented below illustrates the process that will be followed in assessing construction activities.

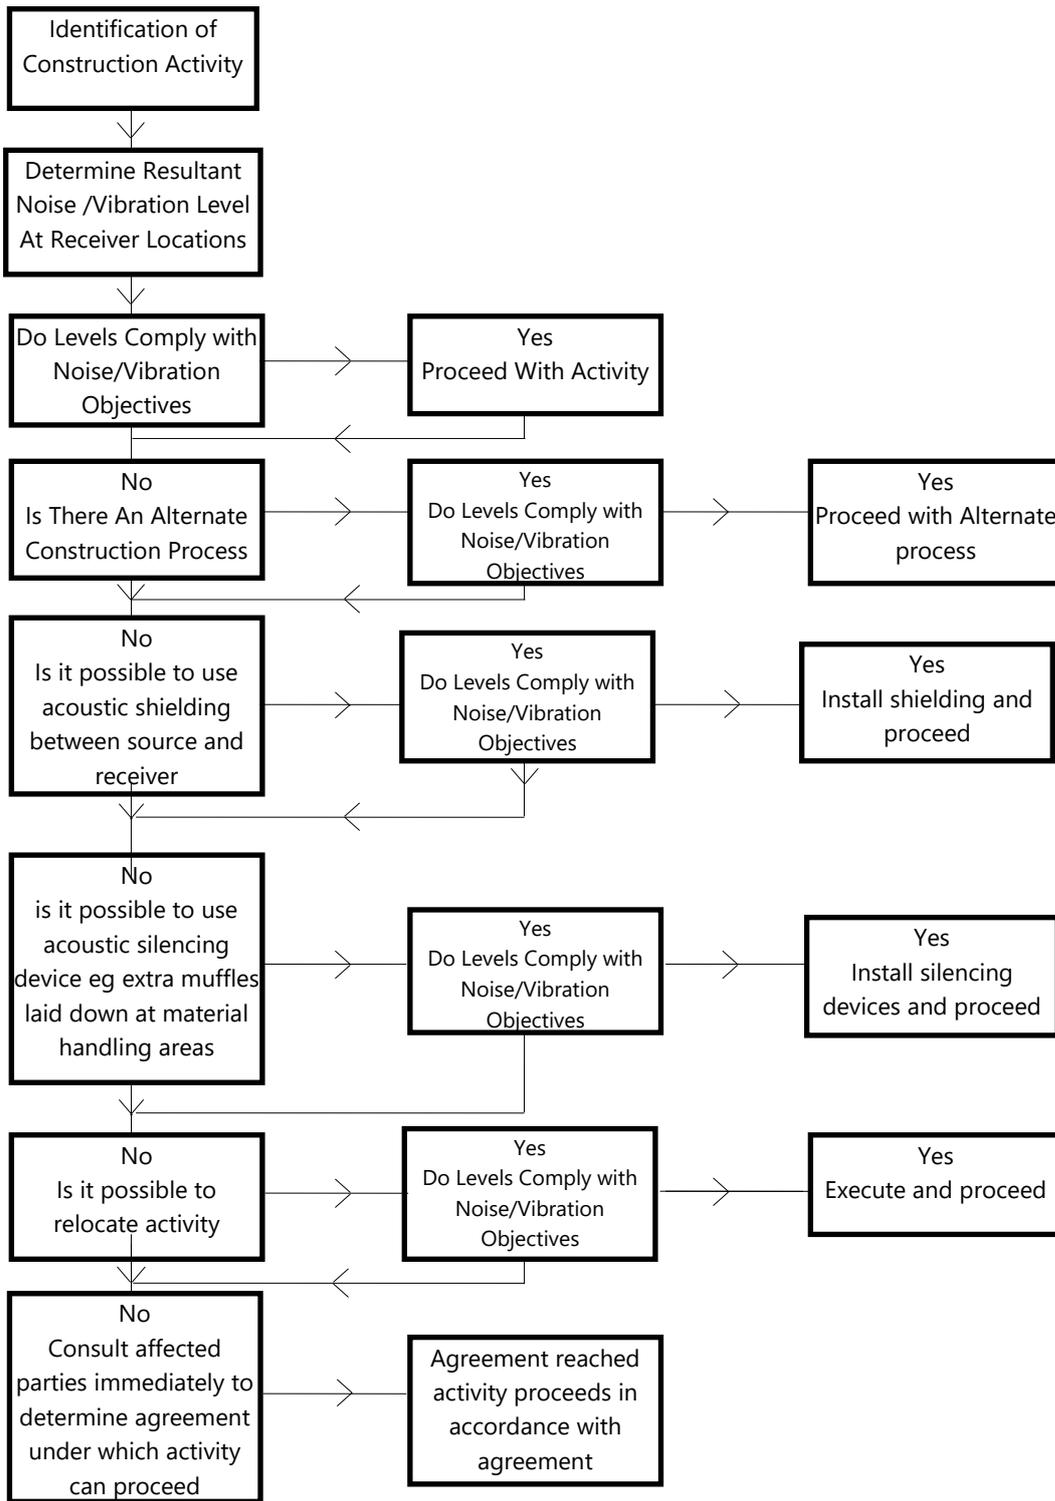

## **11 ADDITIONAL NOISE AND VIBRATION CONTROL METHODS**

In the event of complaints, there are a number of noise mitigation strategies available which can be considered.

The determination of appropriate noise control measures will be dependent on the particular activities and construction appliances. This section provides an outline of available methods.

### **11.1 SELECTION OF ALTERNATE APPLIANCE OR PROCESS**

Where a particular activity or construction appliance is found to generate excessive noise levels, it may be possible to select an alternative approach or appliance. For example; the use of a hydraulic hammer on certain areas of the site may potentially generate high levels of noise. Undertaking this activity using bulldozers, ripping and/or milling machines will result in lower noise levels.

### **11.2 ACOUSTIC BARRIER**

Given the position of adjacent development, it is unlikely that noise screens will provide significant acoustic benefit for commercial or residential receivers, but will provide noticeable improvement for those on ground level.

The placement of barriers at the source is generally only effective for static plant. Equipment which is on the move or working in rough or undulating terrain cannot be effectively attenuated by placing barriers at the source.

Barriers can also be placed between the source and the receiver.

The degree of noise reduction provided by barriers is dependent on the amount by which line of sight can be blocked by the barrier. If the receiver is totally shielded from the noise source reductions of up to 15dB(A) can be effected. Where only partial obstruction of line of sight occurs, noise reductions of 5 to 8dB(A) may be achieved. Where no line of sight is obstructed by the barrier, generally no noise reduction will occur.

As barriers are used to provide shielding and do not act as an enclosure, the material they are constructed from should have a noise reduction performance that is approximately 10dB(A) greater than the maximum reduction provided by the barrier. In this case the use of a material such as 10mm or 15mm thick plywood (radiata plywood) would be acceptable for the barriers.

### **11.3 MATERIAL HANDLING**

The installation of rubber matting over material handling areas can reduce the sound of impacts due to material being dropped by up to 20dB(A).

### **11.4 TREATMENT OF SPECIFIC EQUIPMENT**

In certain cases, it may be possible to specially treat a piece of equipment to dramatically reduce the sound levels emitted.

### **11.5 ESTABLISHMENT OF SITE PRACTICES**

This involves the formulation of work practices to reduce noise generation. A more detailed management plan will be developed for this project in accordance to the construction methodology outlining work procedures and methods for minimising noise.

### **11.6 COMBINATION OF METHODS**

In some cases, it may be necessary that two or more control measures be implemented to minimise noise.

## **12 COMMUNITY INTERACTION AND COMPLAINTS HANDLING**

### **12.1 ESTABLISHMENT OF DIRECT COMMUNICATION WITH AFFECTED PARTIES**

In order for any construction noise management programme to work effectively, continuous communication is required between all parties, which may be potentially impacted upon, the builder and the regulatory authority. This establishes a dynamic response process which allows for the adjustment of control methods and criteria for the benefit of all parties.

The objective in undertaking a consultation process is to:

- Inform and educate the groups about the project and the noise controls being implemented;
- Increase understanding of all acoustic issues related to the project and options available;
- Identify group concerns generated by the project, so that they can be addressed; and
- Ensure that concerned individuals or groups are aware of and have access to a Constructions Complaints Register which will be used to address any construction noise related problems should they arise.

Community consultation is recommended prior to any works commencing on site, with letterbox notifications to all identified surrounding sensitive receivers (refer section 2). This will include a construction management plan detailing the proposed works on site and duration of each stage.

### **12.2 DEALING WITH COMPLAINTS**

Should ongoing complaints of excessive noise or vibration criteria occur immediate measures shall be undertaken to investigate the complaint, the cause of the exceedances and identify the required changes to work practices. In the case of exceedances of the vibration limits all work potentially producing vibration shall cease until the exceedance is investigated.

The effectiveness of any changes shall be verified before continuing. Documentation and training of site staff shall occur to ensure the practices that produced the exceedances are not repeated.

If a noise complaint is received the complaint should be recorded on a Noise Complaint Form. The complaint form should list:

- The name and address of the complainant (if provided);
- The time and date the complaint was received;
- The nature of the complaint and the time and date the noise was heard;
- The name of the employee who received the complaint;
- Actions taken to investigate the complaint, and a summary of the results of the investigation;
- Required remedial action, if required;
- Validation of the remedial action; and
- Summary of feedback to the complainant.

A permanent register of complaints should be held. All complaints received should be fully investigated and reported to management. The complainant should also be notified of the results and actions arising from the investigation.

The investigation of a complaint shall involve where applicable;

- Noise measurements at the affected receiver;
- An investigation of the activities occurring at the time of the incident;
- Inspection of the activity to determine whether any undue noise is being emitted by equipment; and
- Whether work practices were being carried out either within established guidelines or outside these guidelines.

Where an item of plant is found to be emitting excessive noise, the cause is to be rectified as soon as possible. Where work practices within established guidelines are found to result in excessive noise being generated then the guidelines should be modified so as to reduce noise emissions to acceptable levels. Where guidelines are not being followed, the additional training and counselling of employees should be carried out.

Measurement or other methods shall validate the results of any corrective actions arising from a complaint where applicable.

### **12.3 REPORTING REQUIREMENTS**

The following shall be kept on site:

1. A register of complaints received/communication with the local community shall be maintained and kept on site with information as detailed in this report.
2. Where noise/vibration complaints require noise/vibration monitoring, results from monitoring shall be retained on site at all times.
3. Any noise exceedances occurring including the actions taken and results of follow up monitoring.
4. A report detailing complaints received and actions taken shall be presented to the construction liaison committee.

### **12.4 CONTINGENCY PLANS**

Where non-compliances or noise complaints are raised the following methodology will be implemented.

1. Determine the offending plant/equipment/process.
2. Locate the plant/equipment/process further away from the affected receiver(s) if possible.
3. Implement additional acoustic treatment in the form of localised barriers, silencers etc where practical.
4. Selecting alternative equipment/processes where practical.

## 13 CONCLUSION

A construction noise and vibration assessment has been undertaken of the proposed construction works to be undertaken for the Sirius Site, 2-60 Cumberland Street, The Rocks. Potential noise and vibration impacts on nearby developments have been assessed.

Provided that the mitigation techniques and vibration monitoring recommended in Sections 9, 10, 11 & 12 of this report are adopted, noise and vibration impacts on the adjacent buildings are expected to be acceptable.

We trust this information is satisfactory. Please contact us should you have any further queries.

Yours faithfully,

A handwritten signature in blue ink, appearing to read 'Weber Yeh', is positioned below the closing text.


Acoustic Logic Consultancy Pty Ltd  
Weber Yeh

## **APPENDIX ONE – UNATTENDED NOISE MONITORING**


### **SIRIUS SITE, REAR COURTYARD**




### Sirius Building, Rear Courtyard: Tuesday 21 January, 2020

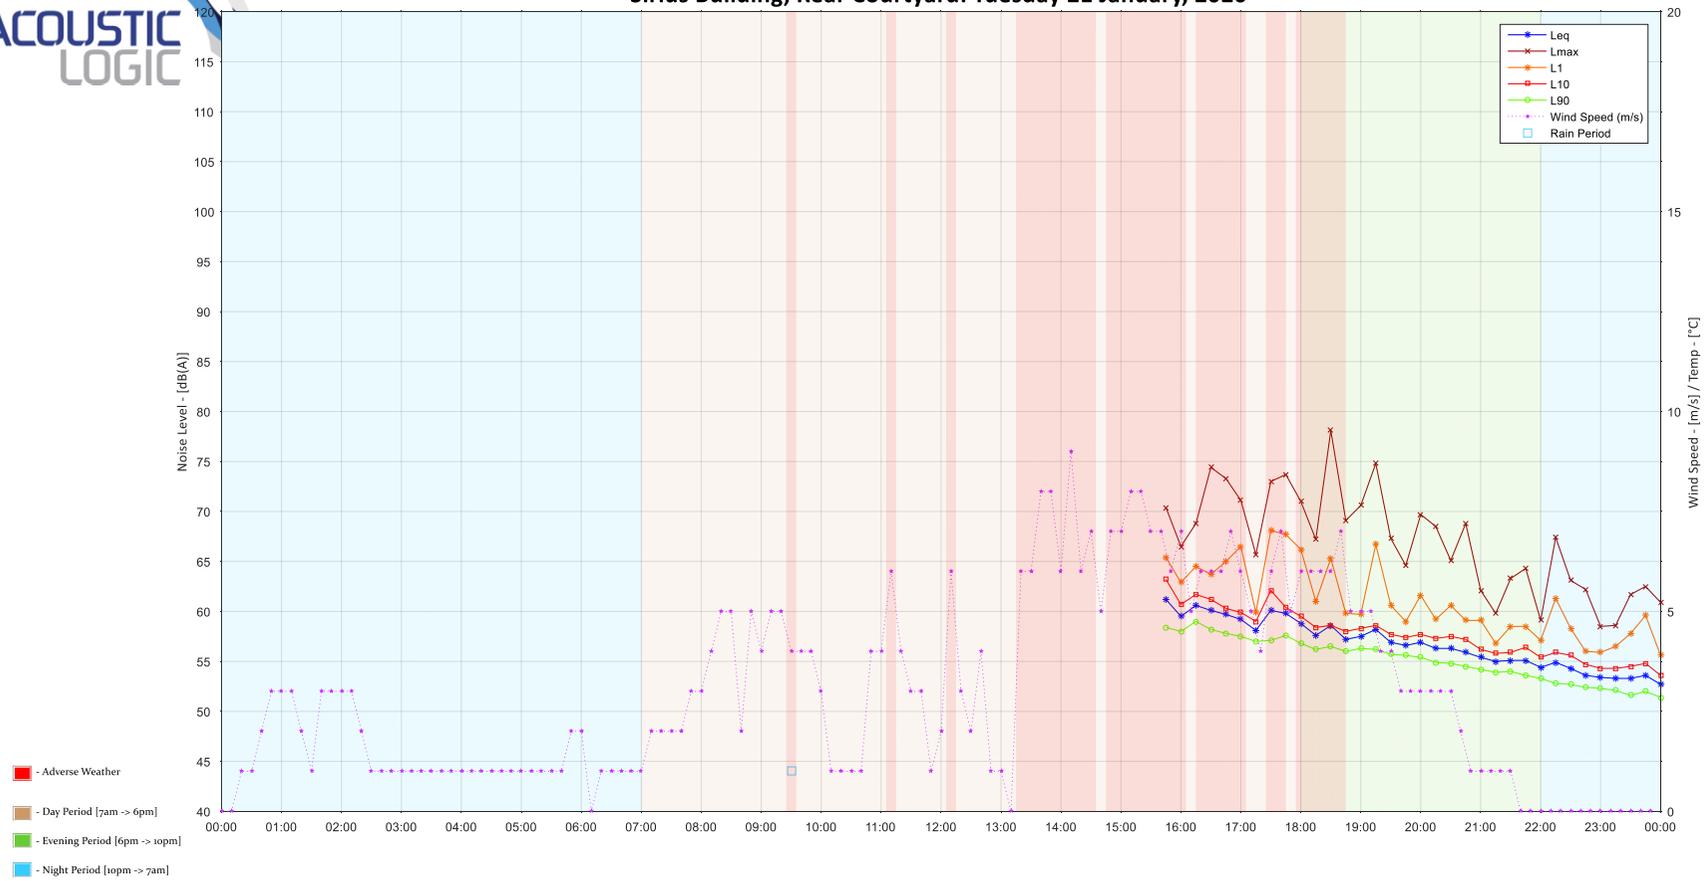


### Sirius Building, Rear Courtyard: Wednesday 22 January, 2020

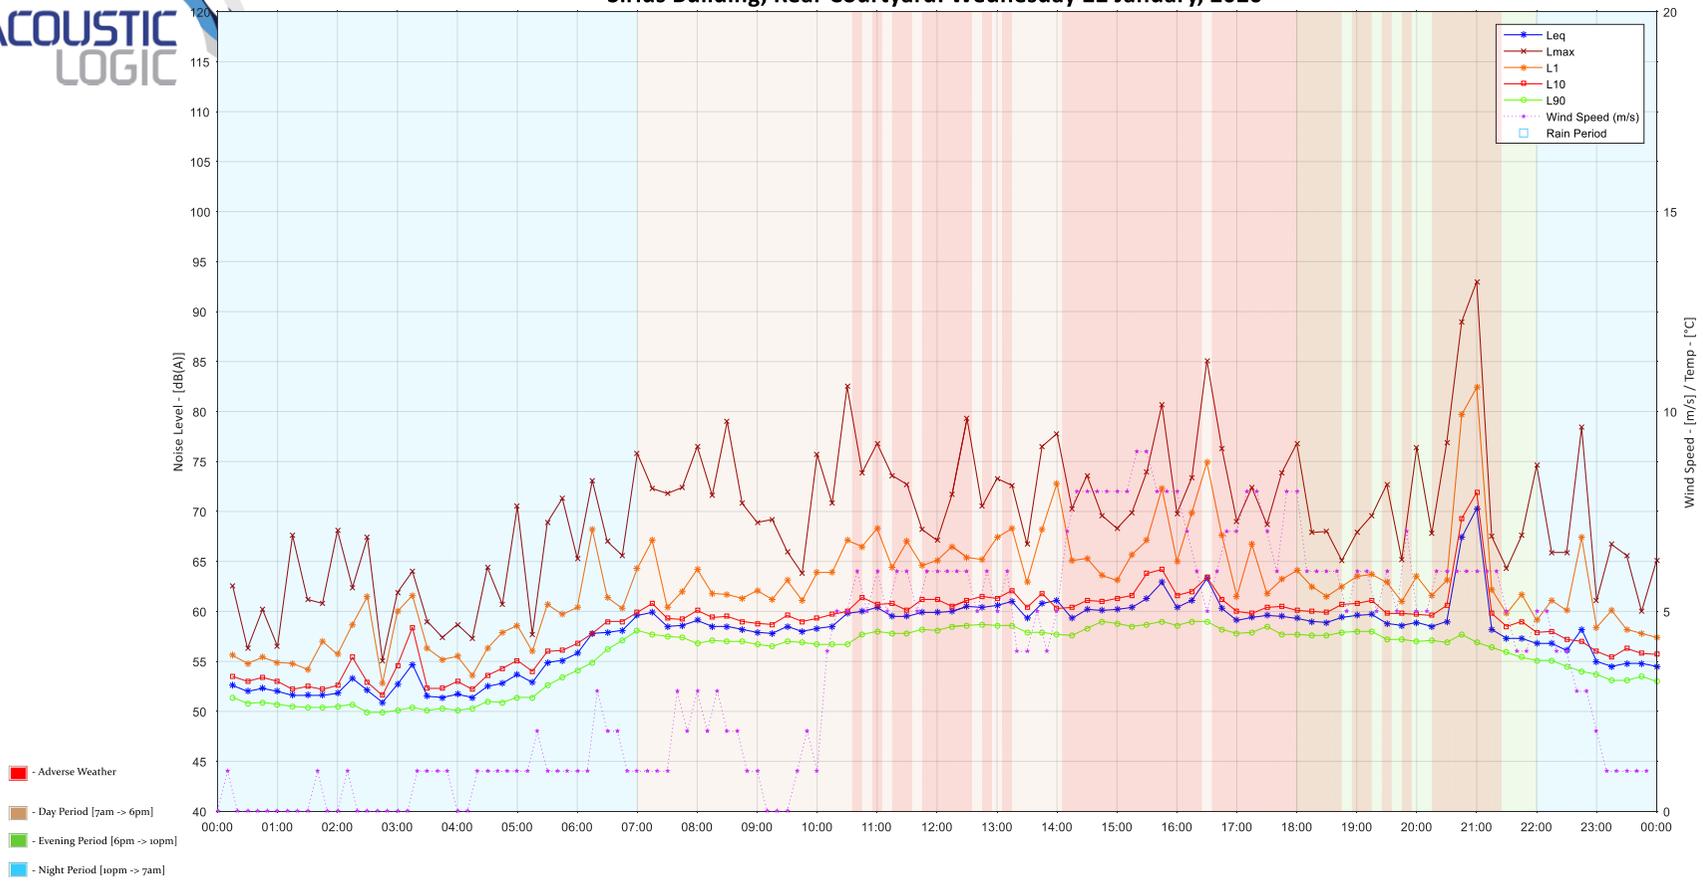

### Sirius Building, Rear Courtyard: Thursday 23 January, 2020

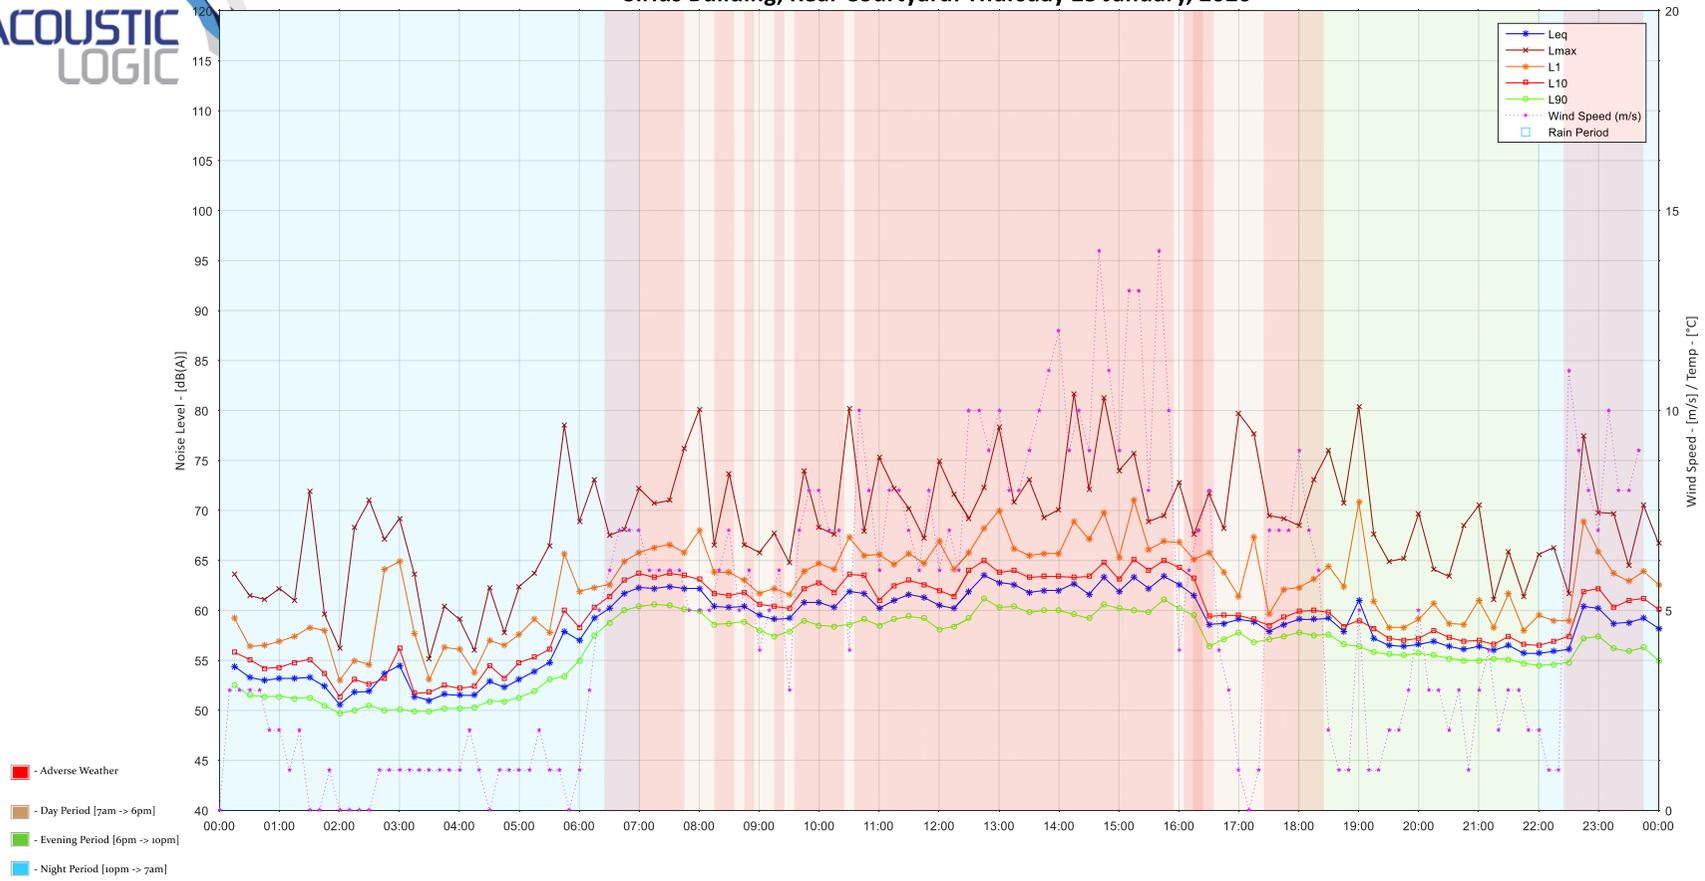


### Sirius Building, Rear Courtyard: Friday 24 January, 2020

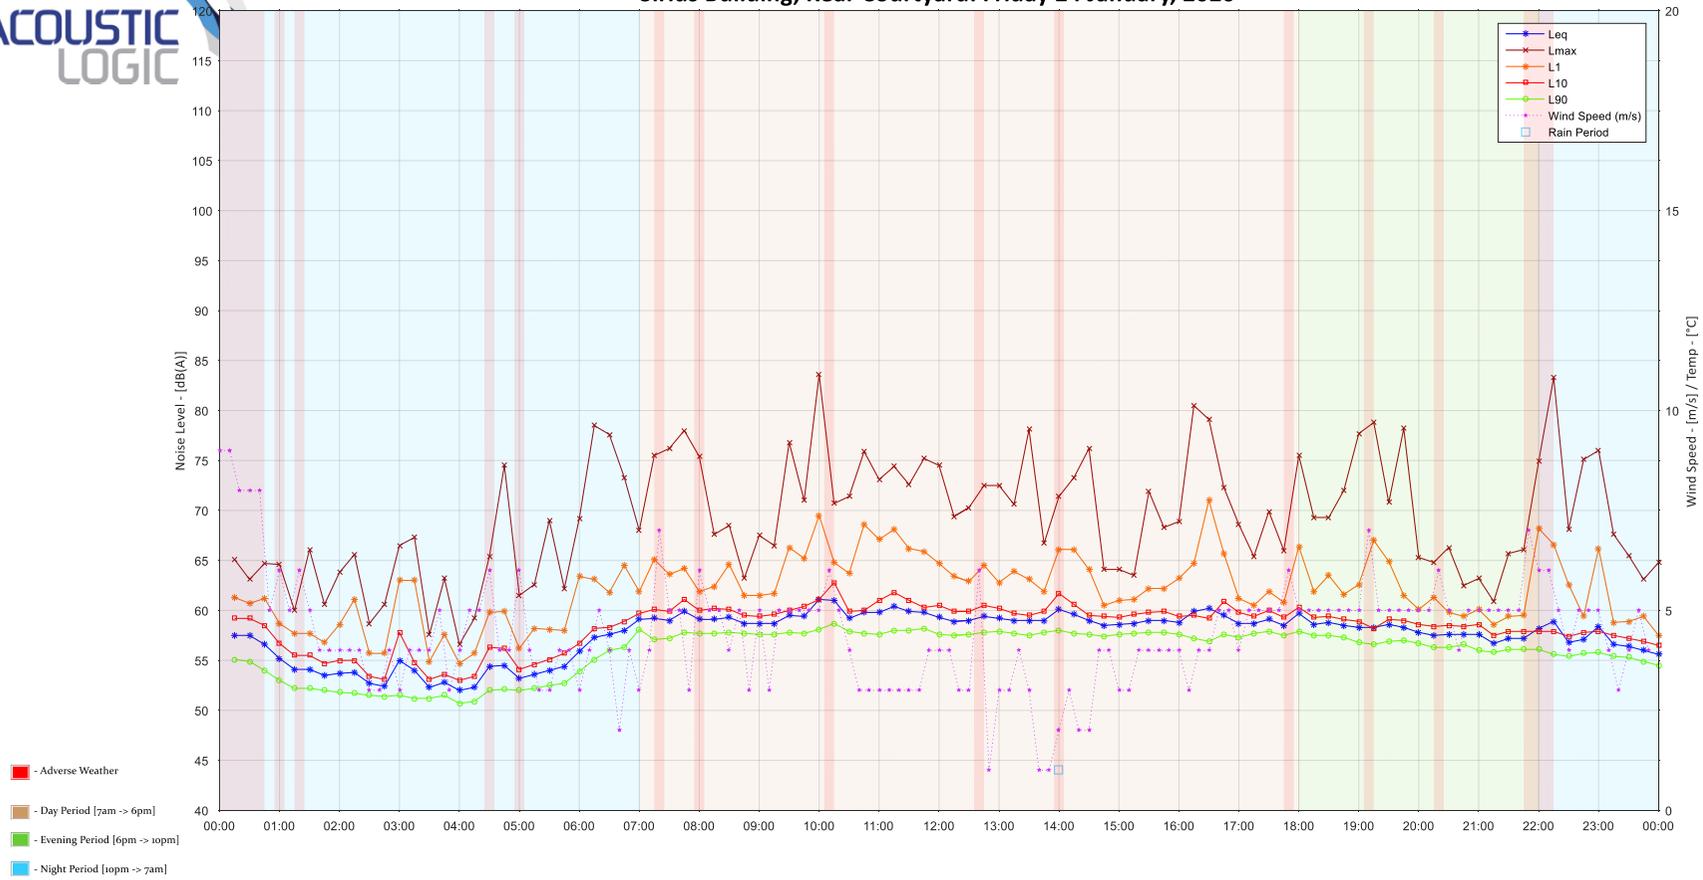




### Sirius Building, Rear Courtyard: Saturday 25 January, 2020

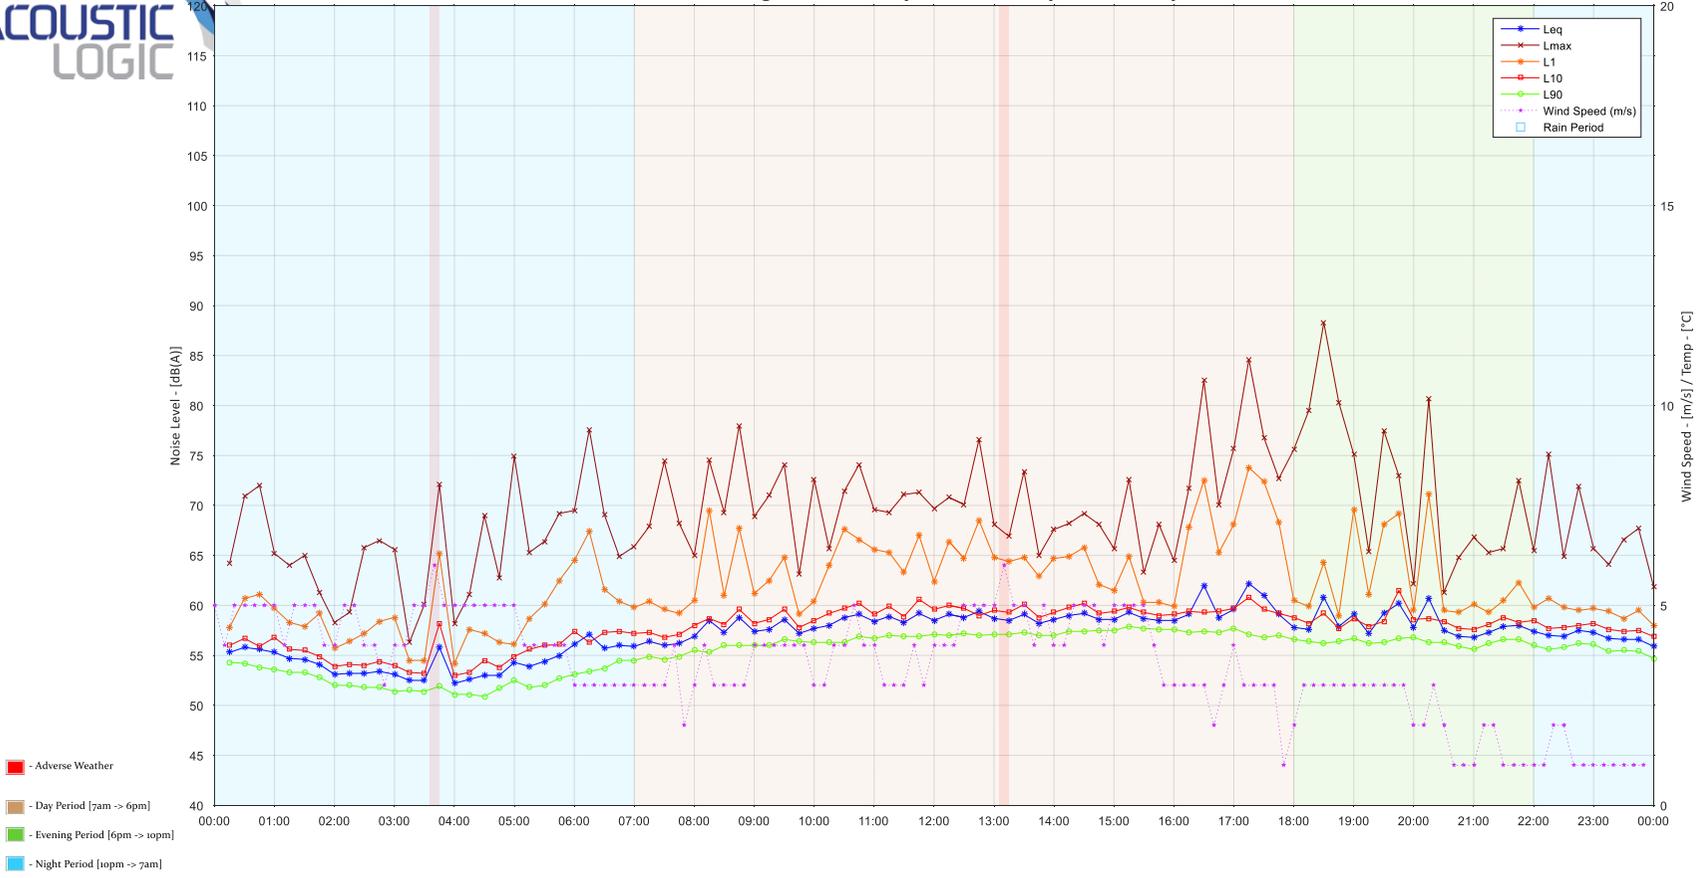




### Sirius Building, Rear Courtyard: Sunday 26 January, 2020

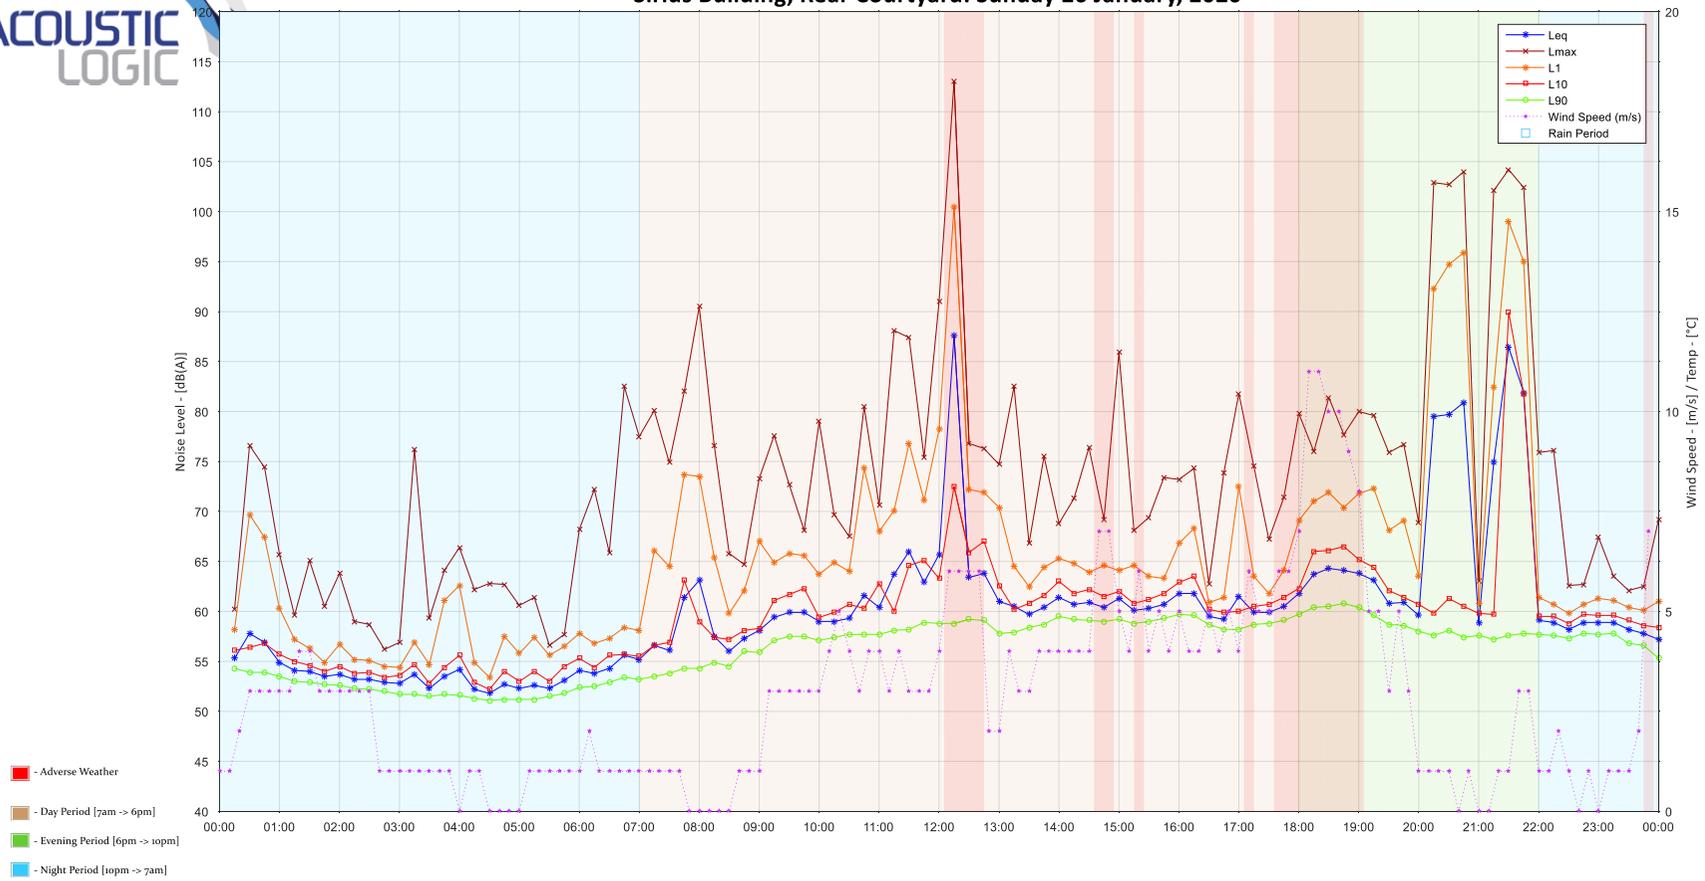




### Sirius Building, Rear Courtyard: Monday 27 January, 2020

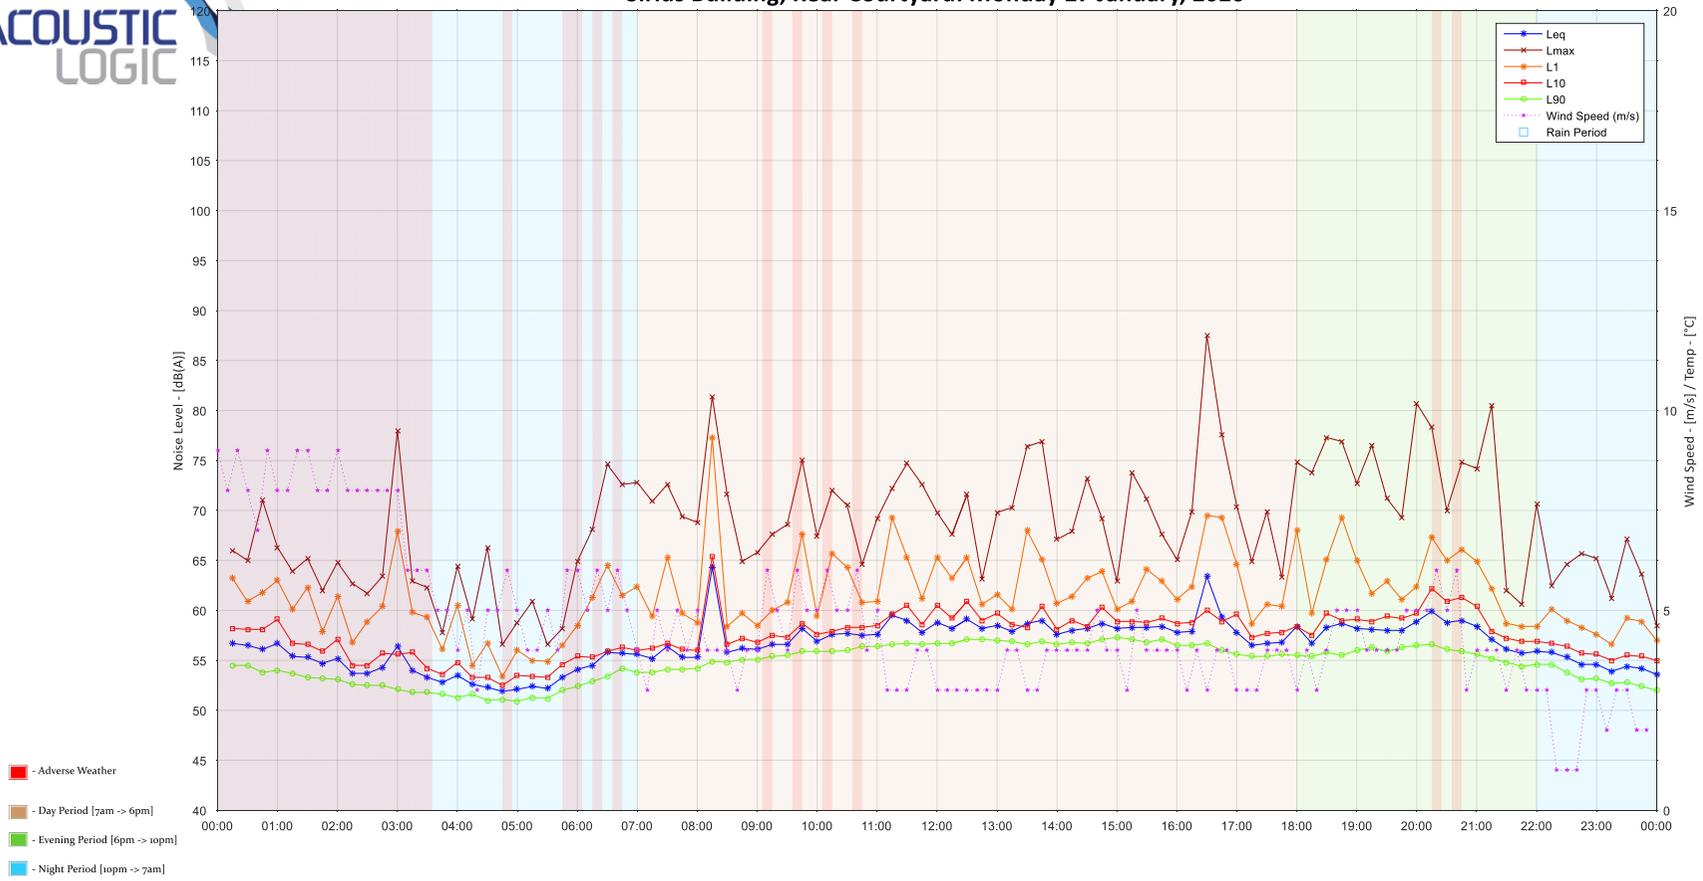


Sirius Building, Rear Courtyard: Tuesday 28 January, 2020

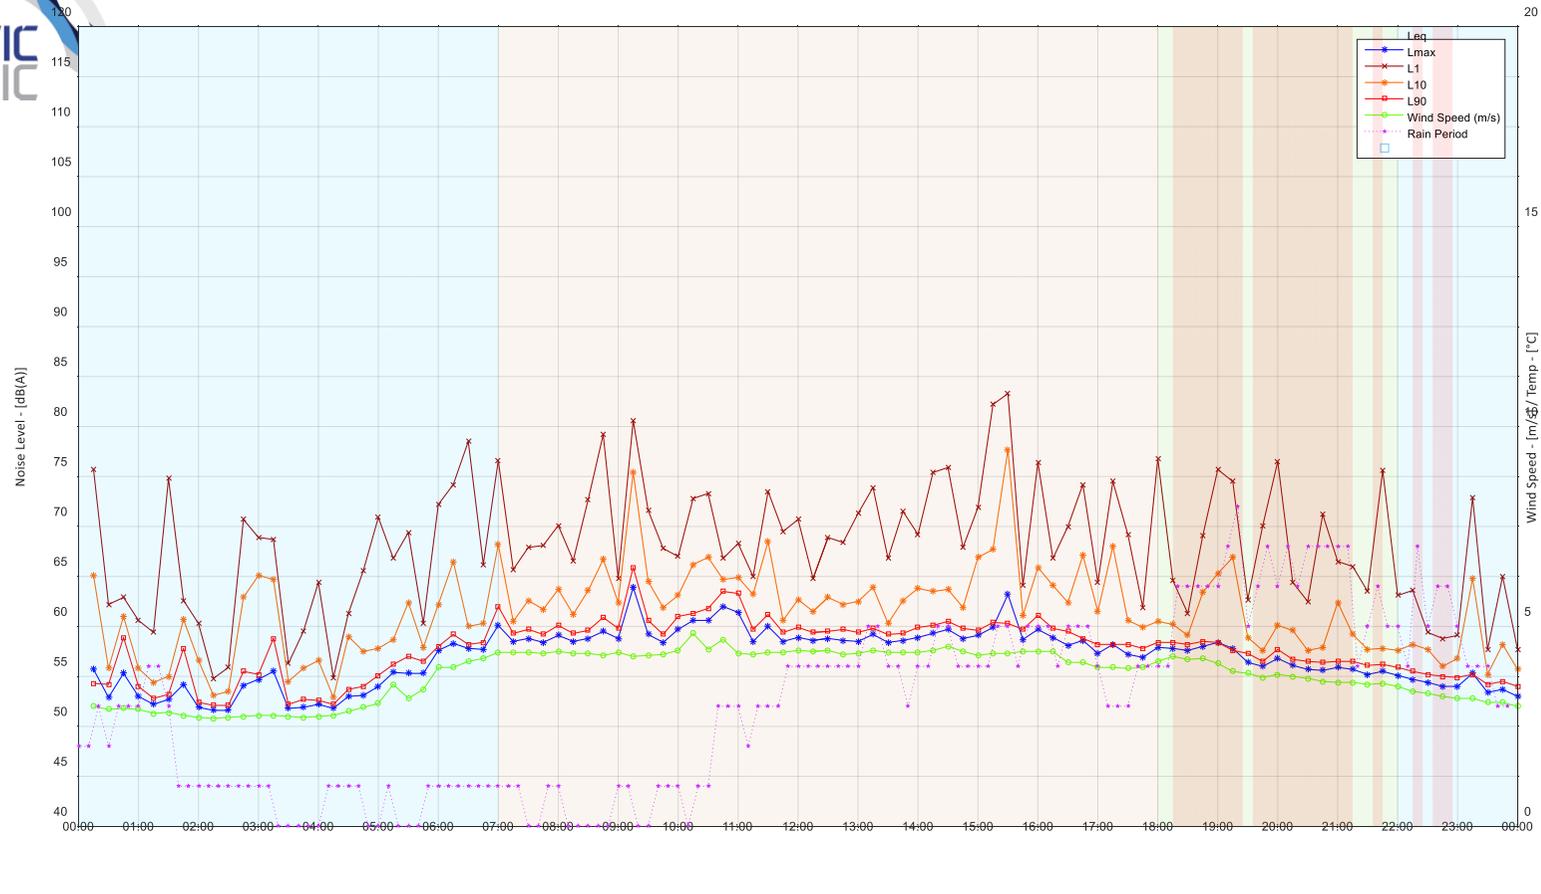




### Sirius Building, Rear Courtyard: Wednesday 29 January, 2020

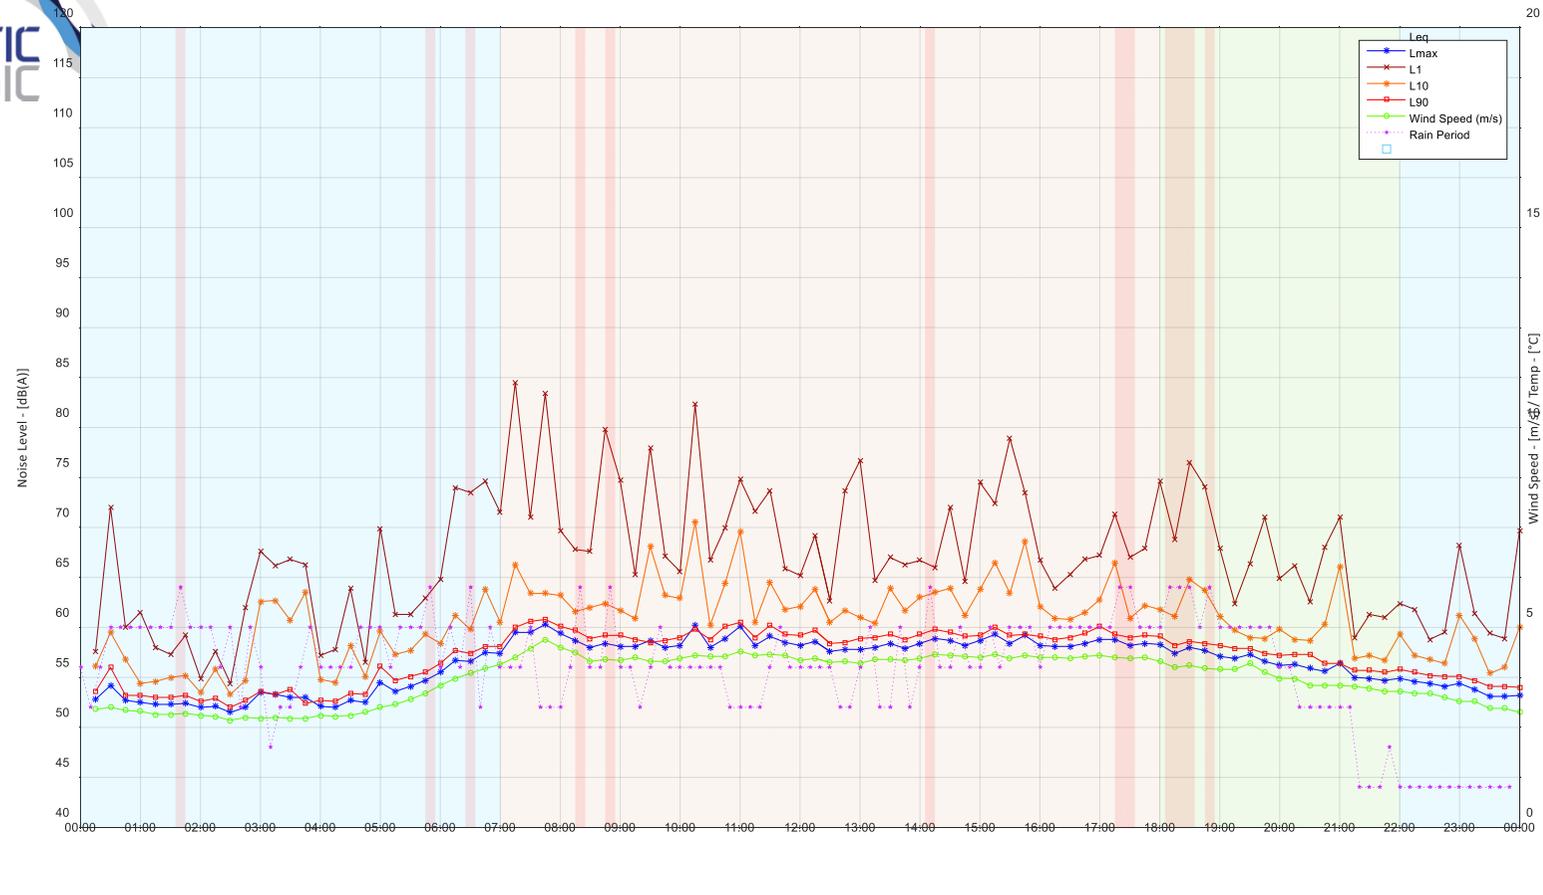


### Sirius Building, Rear Courtyard: Thursday 30 January, 2020

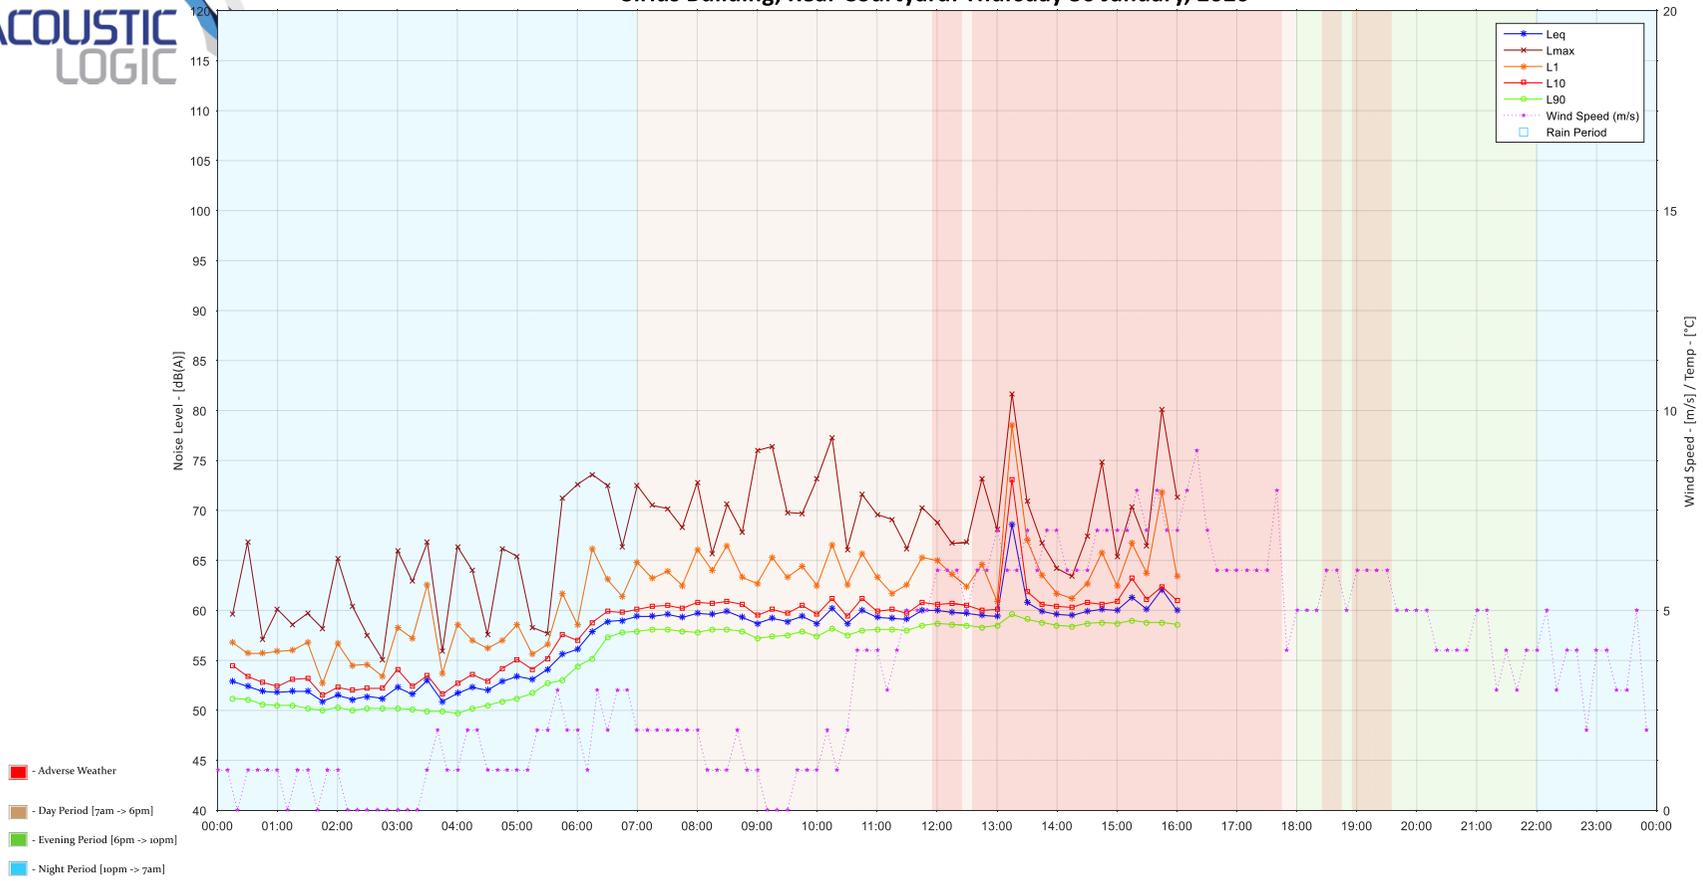

## **SIRIUS SITE, ROOFTOP TERRACE**




### Sirius Building, Rooftop Terrace: Tuesday 21 January, 2020

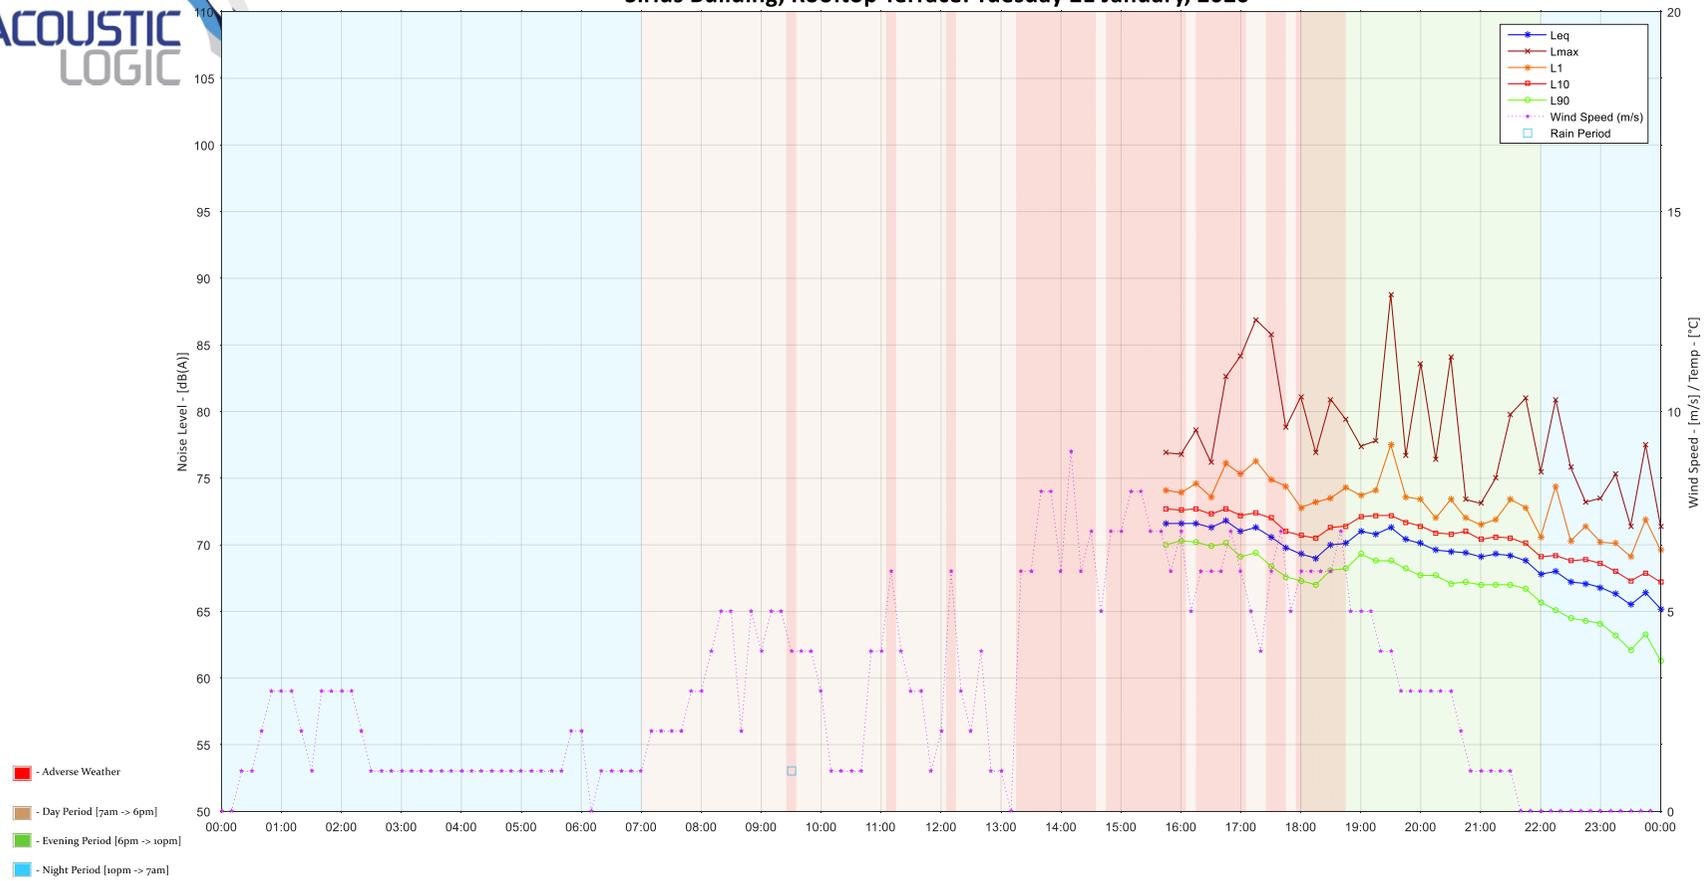




### Sirius Building, Rooftop Terrace: Wednesday 22 January, 2020

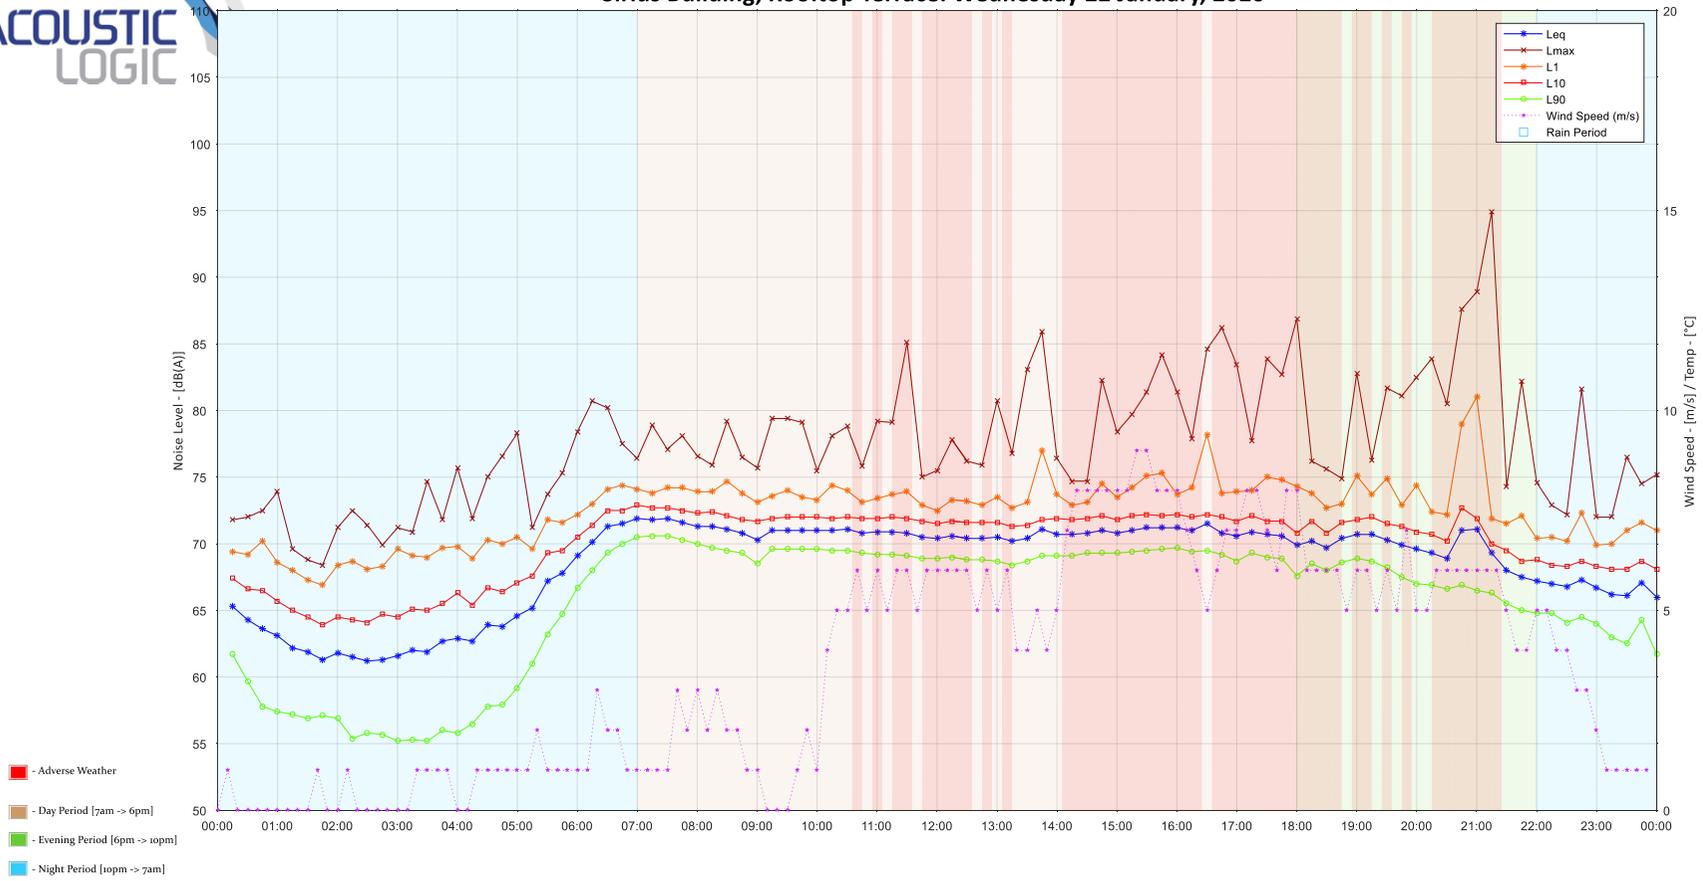




### Sirius Building, Rooftop Terrace: Thursday 23 January, 2020

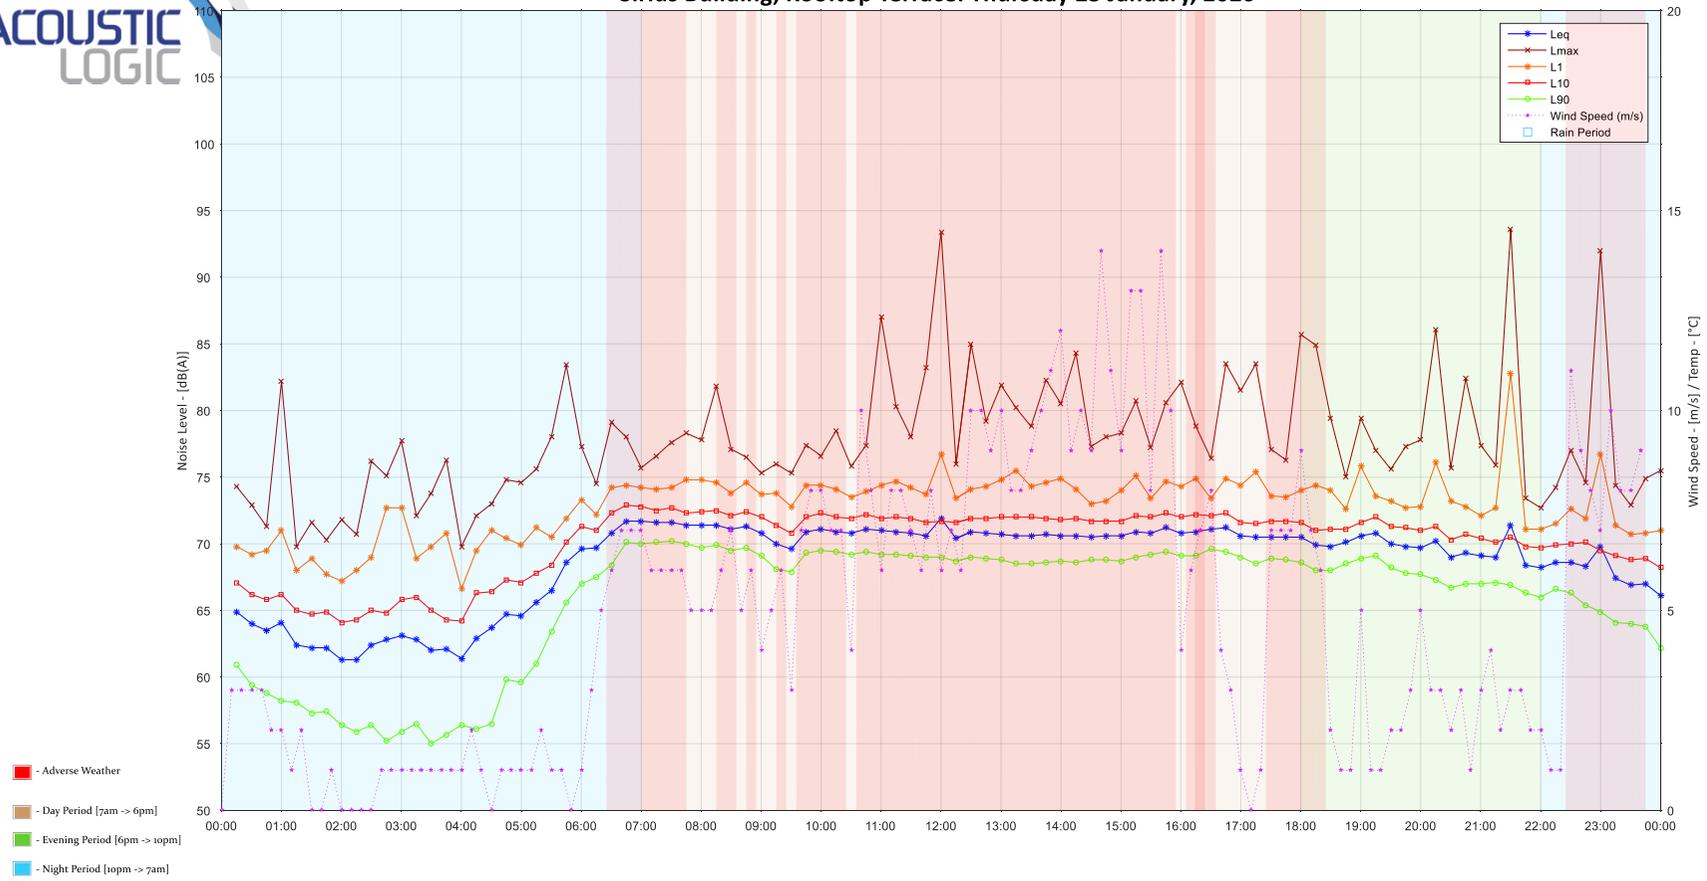




### Sirius Building, Rooftop Terrace: Friday 24 January, 2020

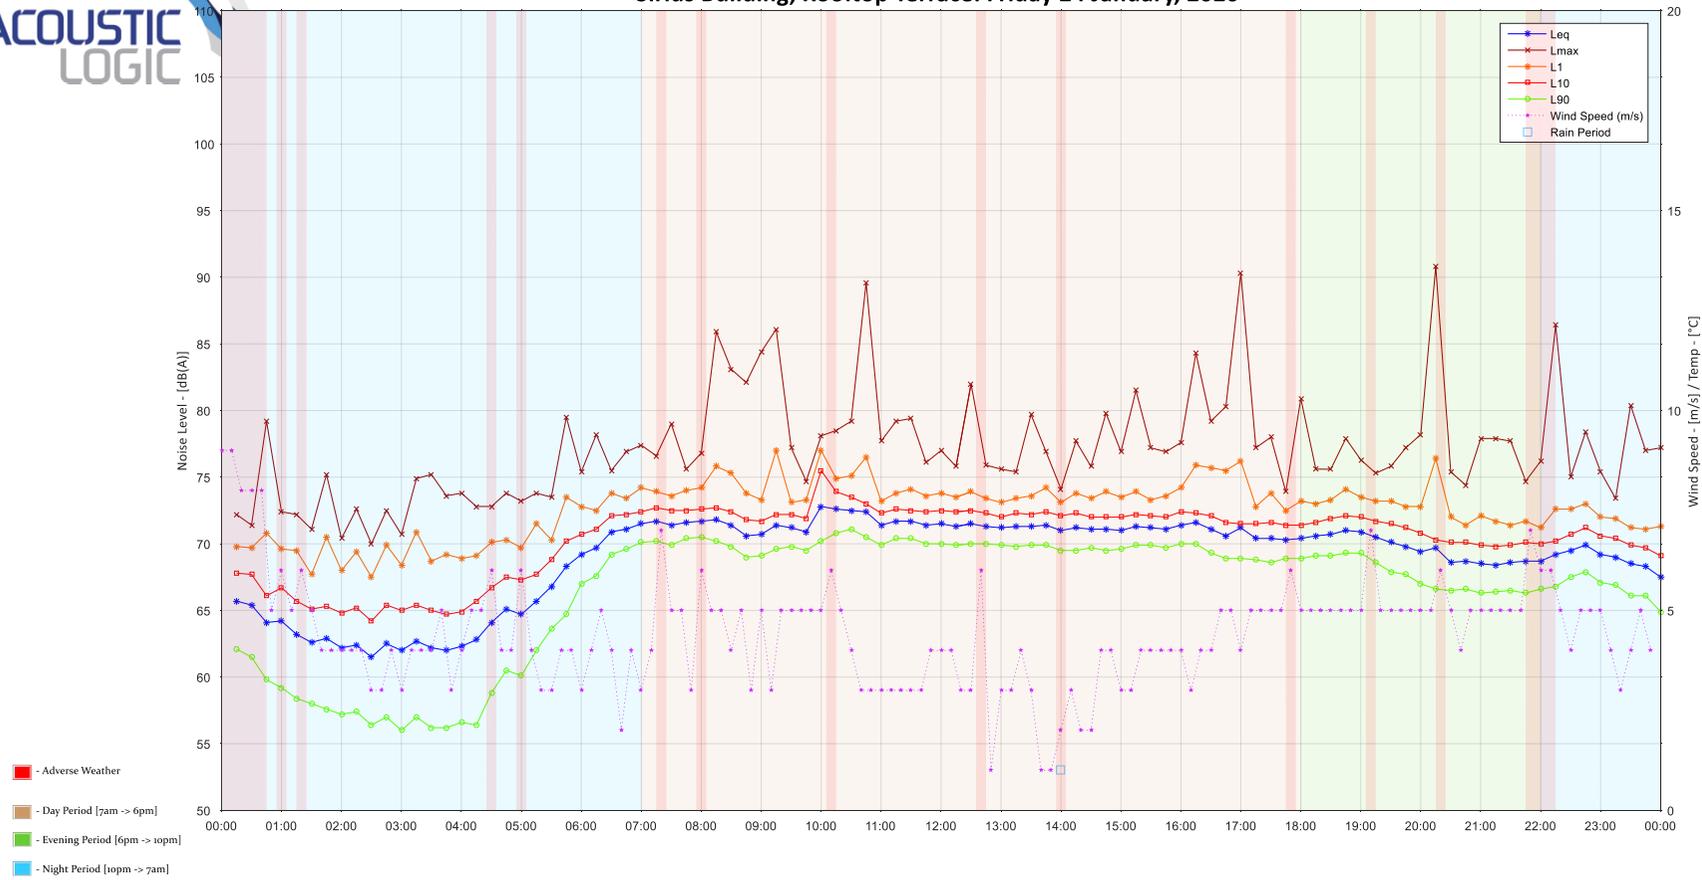




### Sirius Building, Rooftop Terrace: Saturday 25 January, 2020

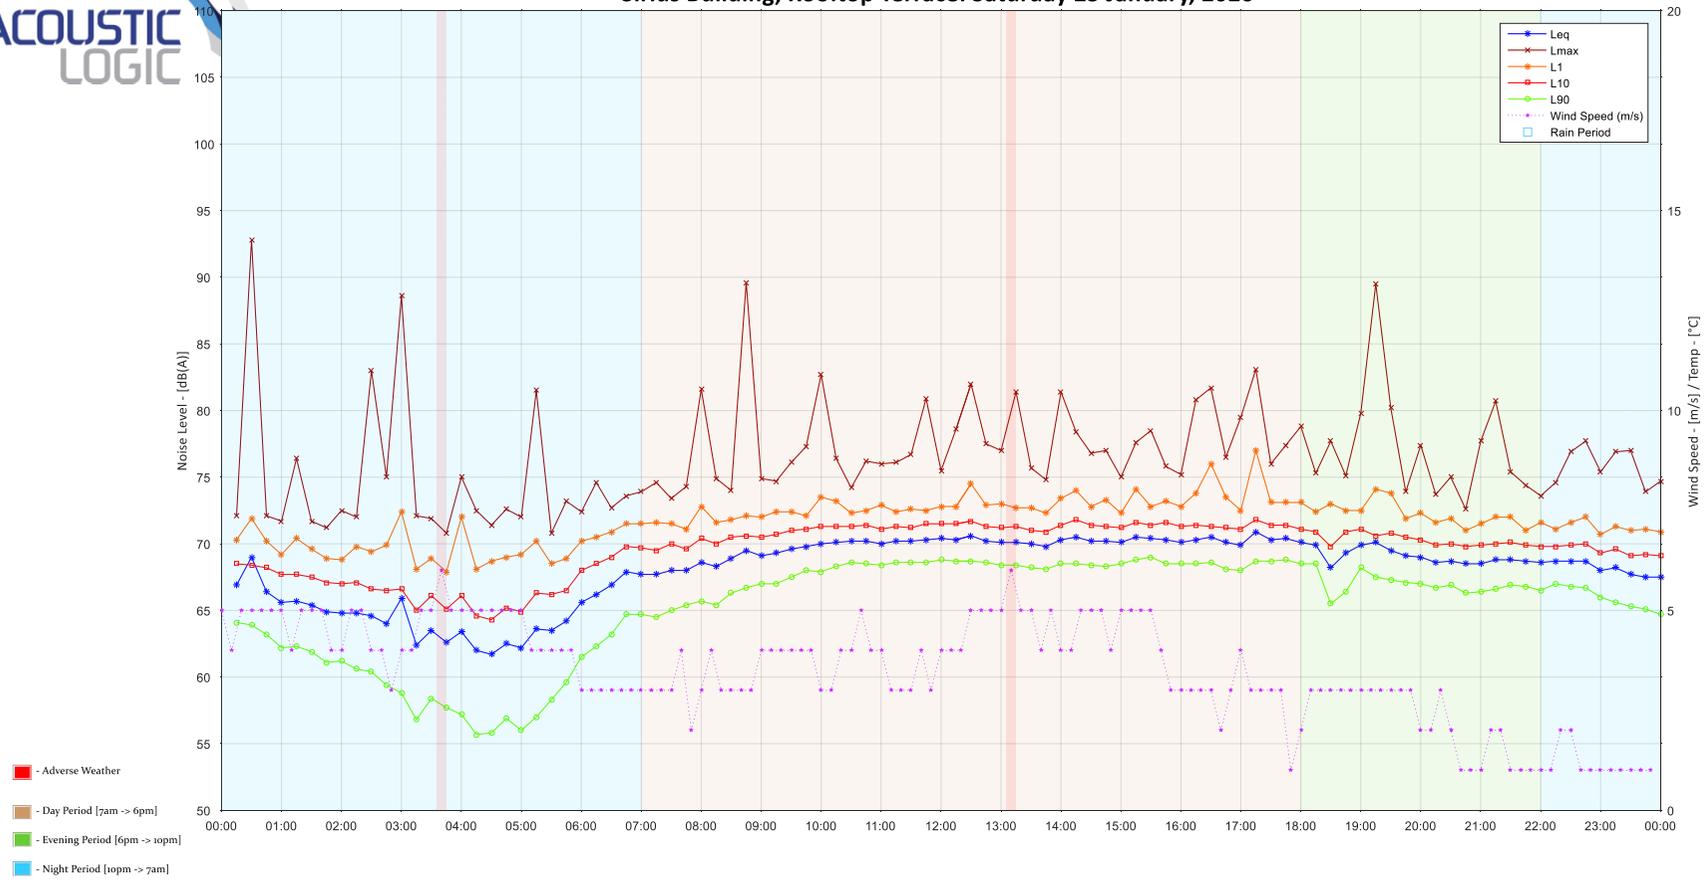


### Sirius Building, Rooftop Terrace: Sunday 26 January, 2020

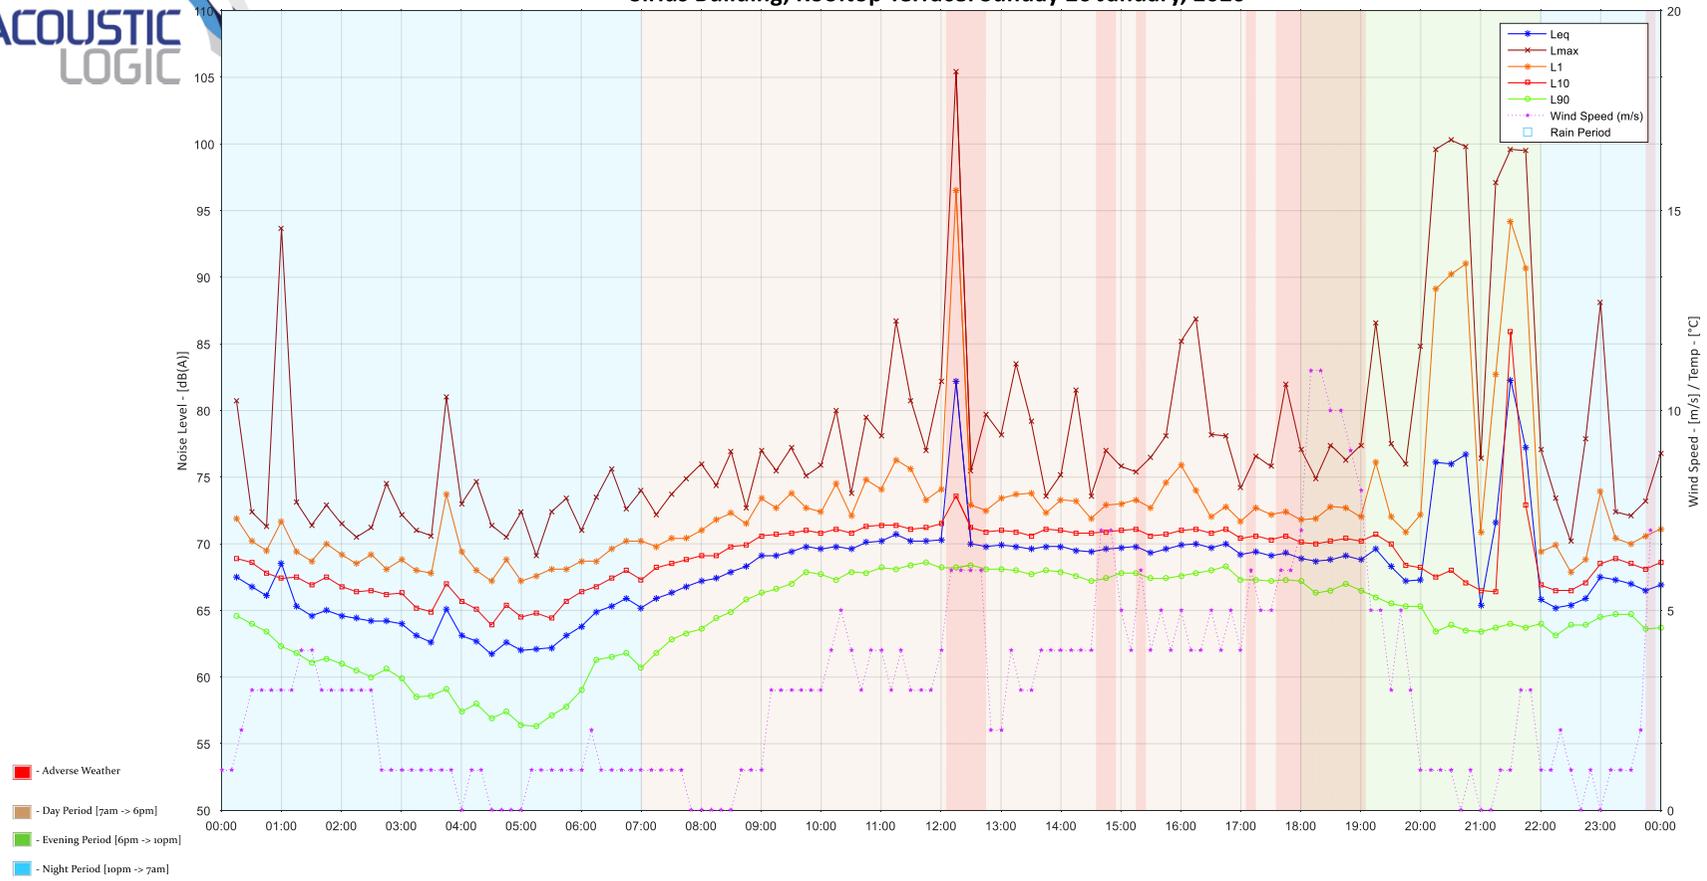




### Sirius Building, Rooftop Terrace: Monday 27 January, 2020

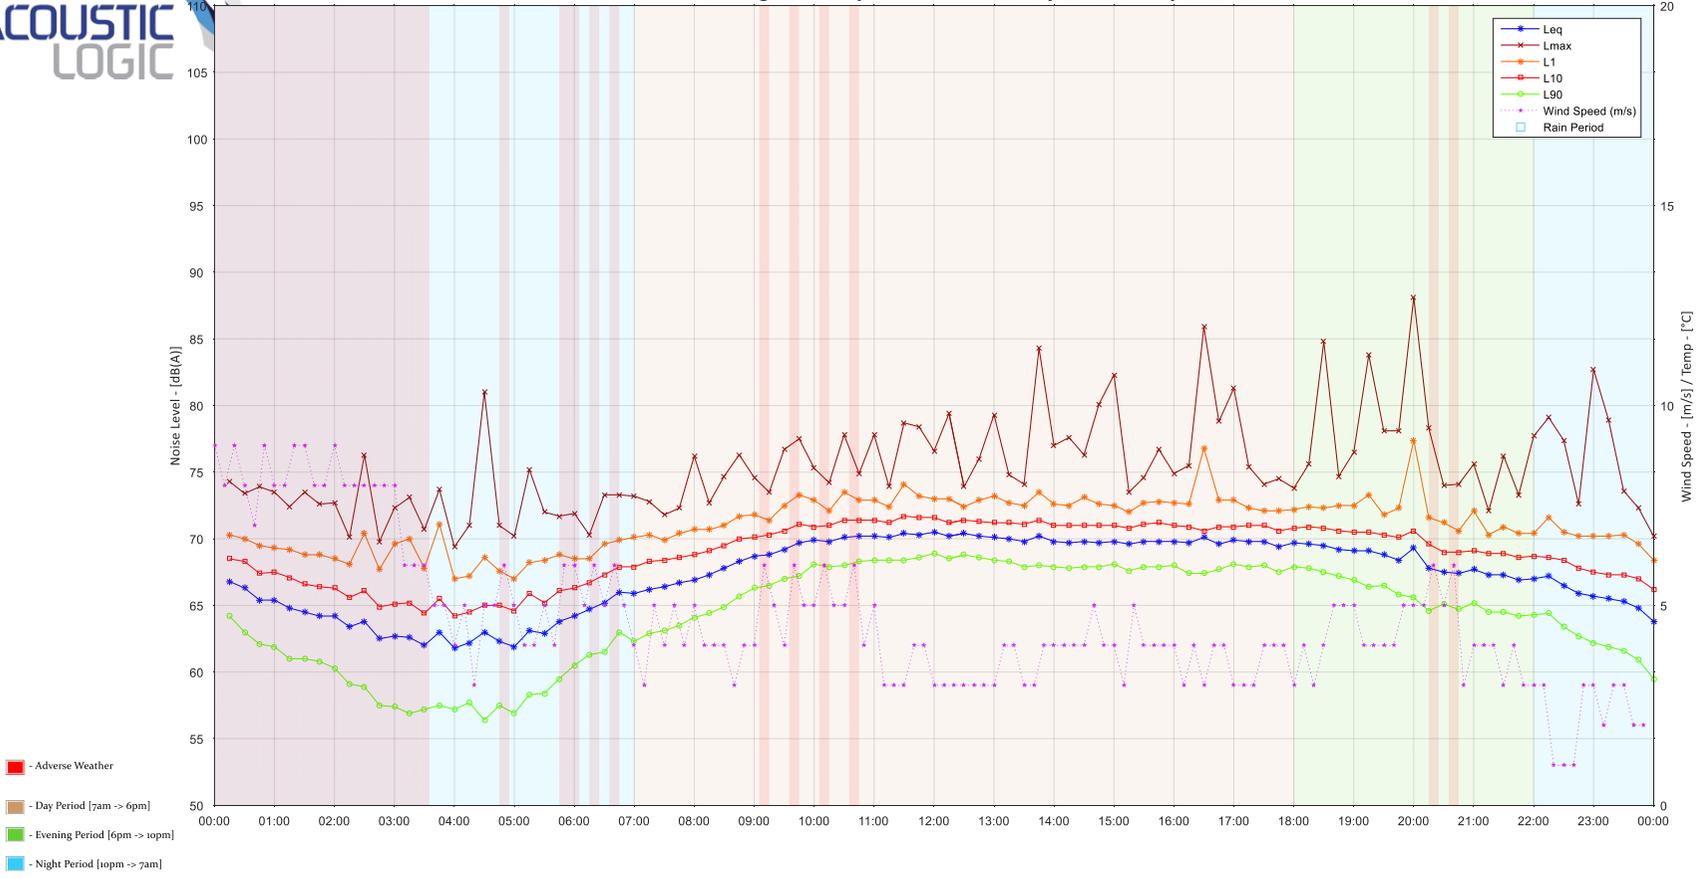




### Sirius Building, Rooftop Terrace: Tuesday 28 January, 2020

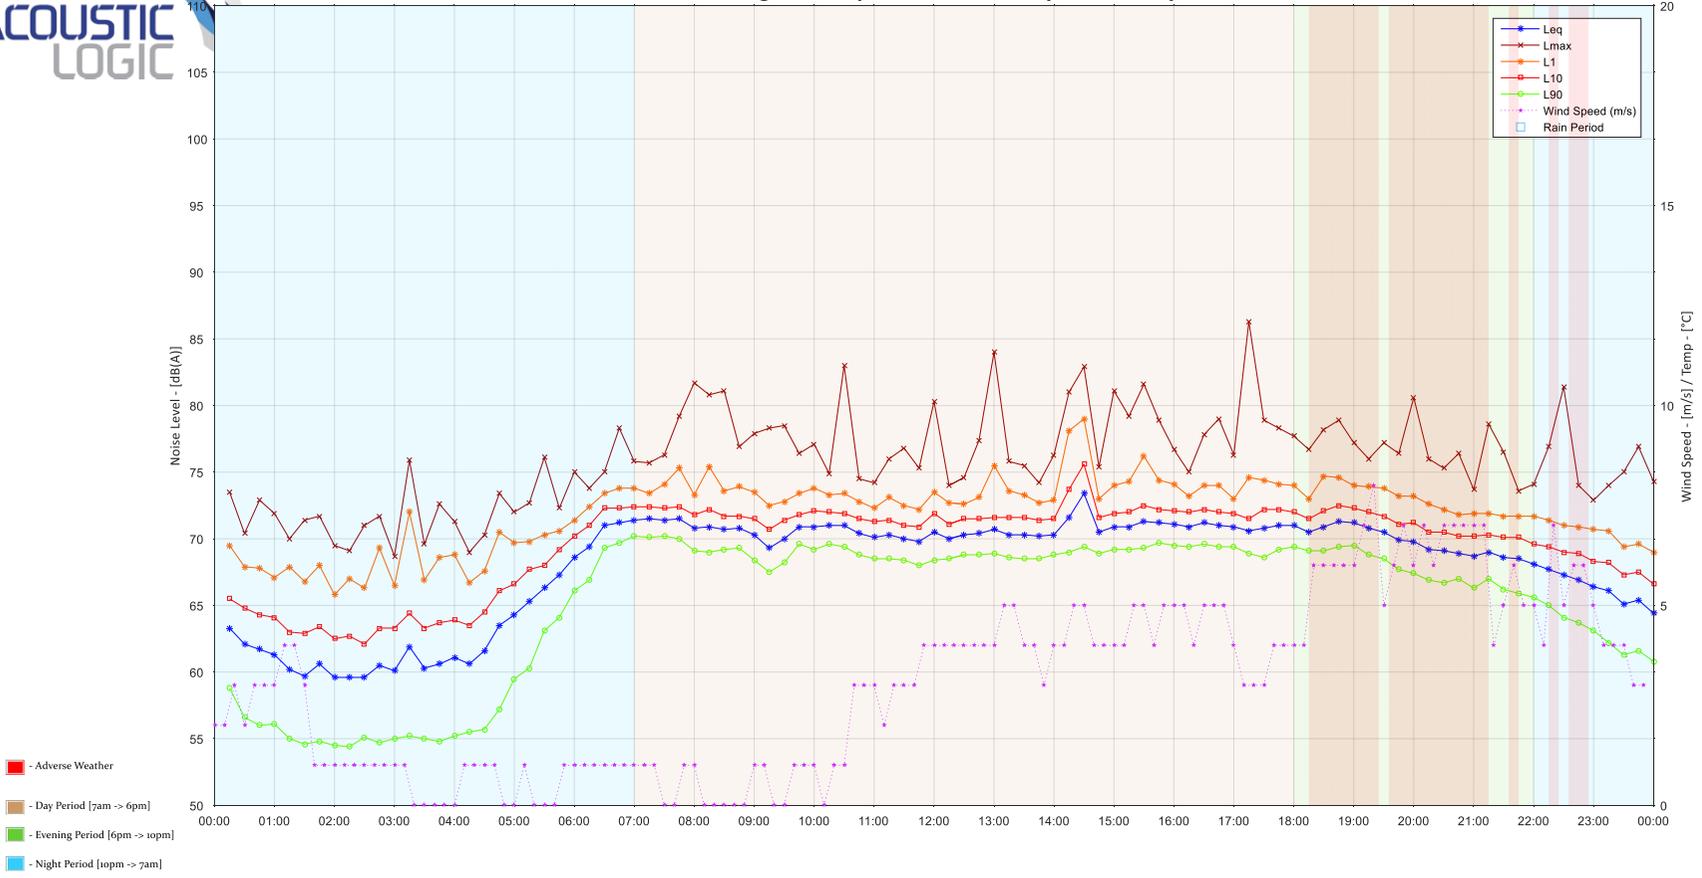



### Sirius Building, Rooftop Terrace: Wednesday 29 January, 2020

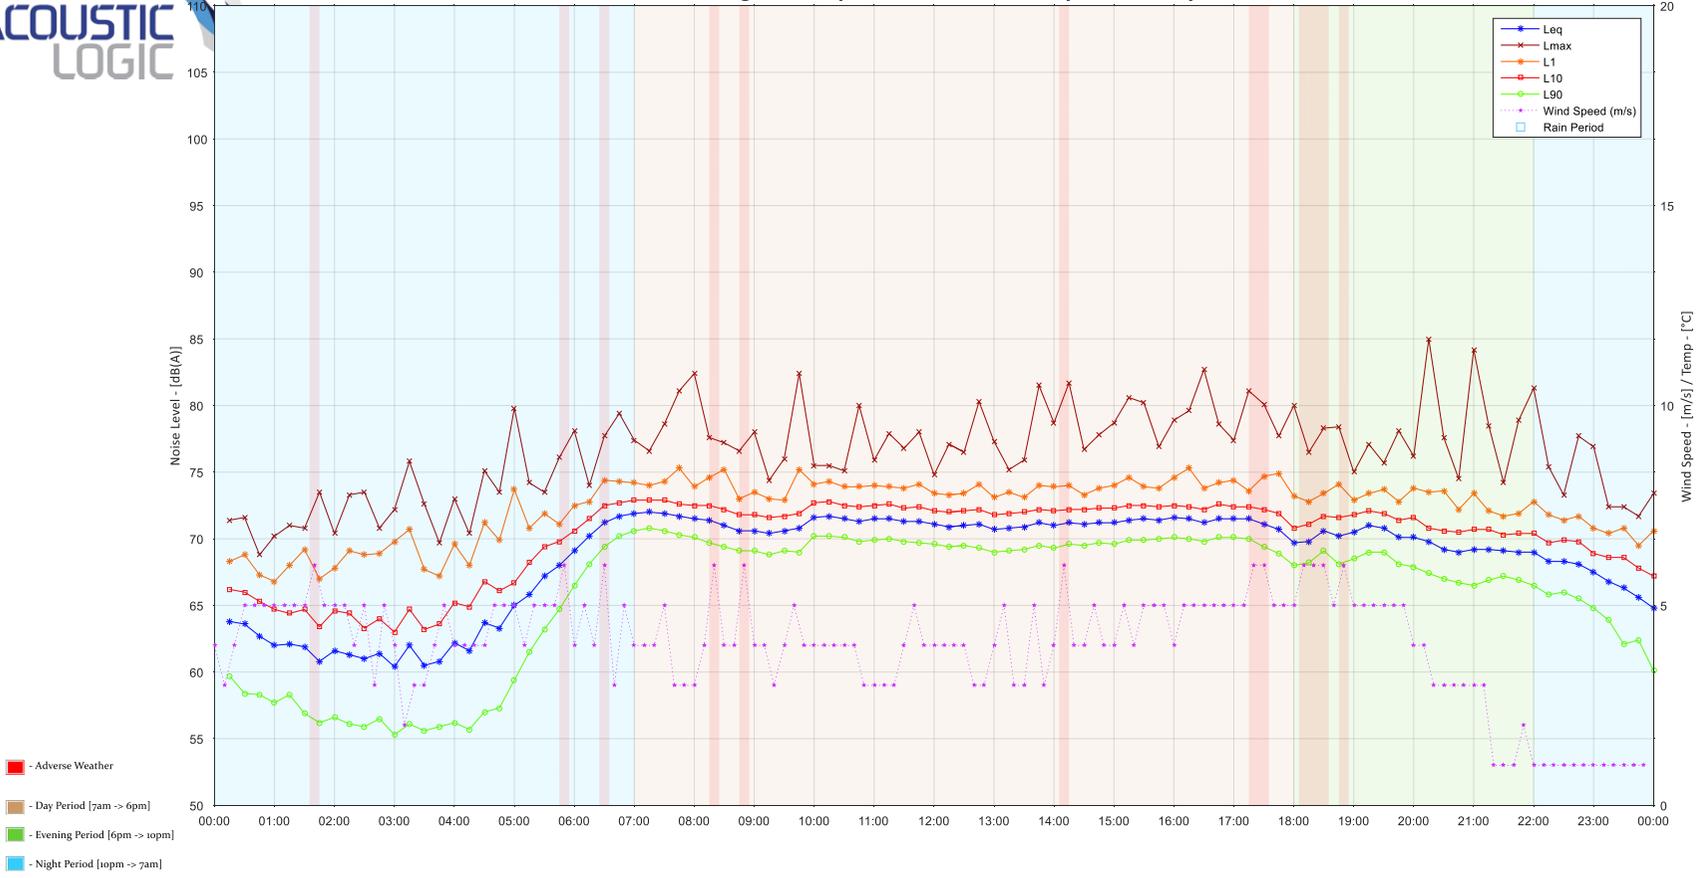



### Sirius Building, Rooftop Terrace: Thursday 30 January, 2020

