



CONCEPT MINE CLOSURE PLAN

**Tweed Sand Plant - Future Expansion
Altona Road, Cudgen**

**A Report Prepared for
Heidelberg Materials Australia**

MAY 2025

DOCUMENT CONTROL

Document

Title	Concept Mine Closure Plan
Job Number	N03074
File Reference	\\JWAServer\Data\2003 CLIENTS\N03074_Tweed Sand Plant\2025\Concept Mine Closure Plan
Version and Date	RW5 13/05/25
Client	Heidelberg Materials Australia

Revision History (office use only)

Version	Draft/ Final	Date Sent	Distributed To	No. Copies	Media	Delivery Method
RW1	DRAFT	11/04/22	Client / All Consultants	1	Word	Email
RW2	DRAFT	22/04/22	Client / All Consultants	1	Word	Email
RW3	FINAL	27/04/22	Client / All Consultants	1	.pdf	Email
RW4	FINAL	20/06/24	Client / All Consultants	1	.pdf	Email
RW5	FINAL	13/05/25	Client / All Consultants	1	.pdf	Email

Client Issue

Version	Date	Author		Approved by	
		Name	Initials	Name	Initials
RW1	11/04/22	Belinda Whyburn / Adam McArthur	BW / AM	Adam McArthur	AM
RW2	22/04/22	Belinda Whyburn / Adam McArthur	BW / AM	Adam McArthur	AM
RW3	27/04/22	Belinda Whyburn / Adam McArthur	BW / AM	Adam McArthur	AM
RW4	20/06/24	Belinda Whyburn / Adam McArthur	BW / AM	Adam McArthur	AM
RW5	13/05/25	Belinda Whyburn / Adam McArthur	BW / AM	Adam McArthur	AM

TABLE OF CONTENTS

1	Introduction.....	4
2	Project Overview.....	5
2.1	Location and Ownership.....	5
2.2	Project Objectives	6
2.3	Project Description	6
2.4	Strategic and Statutory Context	7
3	Identification of Closure Obligations and Commitments	14
4	Stakeholder Engagement.....	15
4.1	Introduction.....	15
4.2	Identification of Key Stakeholders.....	15
4.3	Stakeholder Consultation Strategy	16
5	Post-Mining Land Use	17
5.1	Proposed Scenario.....	17
5.2	Alternative or base-case scenario	18
6	Mine Closure Objectives	19
7	Identification and Management of Closure Issues	20
7.1	Risk Assessment	20
7.2	Further Analysis of Specific Risks	25
8	Completion/Closure Criteria	27
8.1	Introduction.....	27
8.2	Rehabilitation Works.....	27
8.3	Assessment of Biological Indicators.....	27
8.4	End Use Water Quality Management	28
9	Financial Provisioning	29
	References	31
	Appendix 1 - End Use and Final Landform Plan (Zone Landscape architecture 2025)	32
	Appendix 2 - Cross sections of Extraction Area and Proposed Lake Bank Profiles	33

1 INTRODUCTION

JWA Pty Ltd (JWA) were engaged by Heidelberg Materials Australia (HMA) to prepare a Concept Mine Closure Plan (MCP) for the proposed expansion of their Tweed Sand Plant (TSP) operation in Cudgen, NSW. The sand plant has operated on part of the subject site since 1983, with HMA (formerly Hanson Construction Materials Pty Ltd) acquiring and operating the sand plant since 2007. TSP Phase 4 is currently operational on part of the project site. To meet ongoing demand for sand, HMA is proposing to expand its existing operations into lands to the north and west of the TSP site over a thirty (30) year period (market driven). This expansion will be carried out progressively over seven (7) extraction phases (Phase 5 to Phase 11).

This Concept MCP has been prepared to provide a framework for the planning of mine closure activities associated with the proposed expansion. This Concept MCP describes HMA's strategies for decommissioning mining infrastructure, rehabilitating land disturbed by mining activities and preparing the area for future use. The document describes the closure strategies necessary to adequately address environmental issues to the satisfaction of regulatory authorities and HMA at the completion of operations. The strategies are designed to provide a low maintenance site over the long term.

This document has been prepared with regard to the Strategic Framework for Mine Closure (ANZMEC and MCA 2000) and is based upon existing information available from applicable site studies and investigations to meet legislative and policy requirements.

This document addresses the following key elements:

- Closure obligations;
- Closure risks;
- Post-extraction land use;
- Closure objectives and strategy;
- Process for developing closure criteria;
- Closure designs for waste rock landforms and abandonment bunds;
- Monitoring programme for the closure and post-closure phases;
- Action plans for closure and rehabilitation activities to be completed during the operational, closure and post-closure phases; and
- Closure cost estimate and methodology.

This plan is a live document that will be reviewed at each extraction phase and updated (as required) during site operations to ensure it remains accurate and relevant. It is anticipated that subsequent revisions of this document will contain more detailed information concerning actual infrastructure, rehabilitation, closure criteria and management of any issues that may develop as the project moves from the current planning stage through to operation.


2 PROJECT OVERVIEW

2.1 Location and Ownership


TSP is located off Altona Road at Cudgen, NSW within the Tweed local government area (**FIGURE 1**). The project site comprises eight (8) allotments and one (1) unnamed road reserve. Enabling works are required in one (1) additional allotment and two (2) road reserves. The legal description, registered owners / controlling authority (at the time of preparation of this document) and the area of land associated with each are summarised in **TABLE 1**. The site covers a total area of approximately 236 ha, of which 46 ha is currently approved for sand extraction.

TABLE 1
PROJECT SITE SUMMARY

Property Description	Owner / Controlling Authority	Lot / Land Size	Zoning
Project Site			
Lot 22 DP1082435	Heidelberg Materials Australia (HMA)	74.56ha	RU1 Primary Production
Lot 23 DP1077509	Heidelberg Materials Australia (HMA)	2.552ha	RU1 Primary Production
Lot 494 DP720450	Heidelberg Materials Australia (HMA)	0.104ha	RU1 Primary Production
Lot 1 DP1250570	Cudgen Land Pty Ltd	90ha	RU1 Primary Production / RU2 Rural Landscape
Lot 2 DP1192506	Cudgen Land Pty Ltd	11.12ha	RU1 Primary Production
Lot 3 DP1243752	Cudgen Land Pty Ltd	1.612ha	RU1 Primary Production
Lot 51 DP1166990	Heidelberg Materials Australia (HMA)	55.13ha	RU1 Primary Production
Lot 50 DP1056966	Heidelberg Materials Australia (HMA)	1.094ha	RU1 Primary Production
Unnamed road reserve	Tweed Shire Council	~2.077485ha	RU1 Primary Production
Enabling Works			
Lot 51 DP1056966	Roads and Traffic Authority of NSW	0.7690ha	RU1 Primary Production
Pacific Highway / Tweed Valley Way Interchange Road Reserve	RMS / Tweed Shire Council (#)	N/A	SP2 Classified Road
# The RMS is the roads authority for the Pacific Highway and Tweed Shire Council is the roads authority for Tweed Valley Way.			

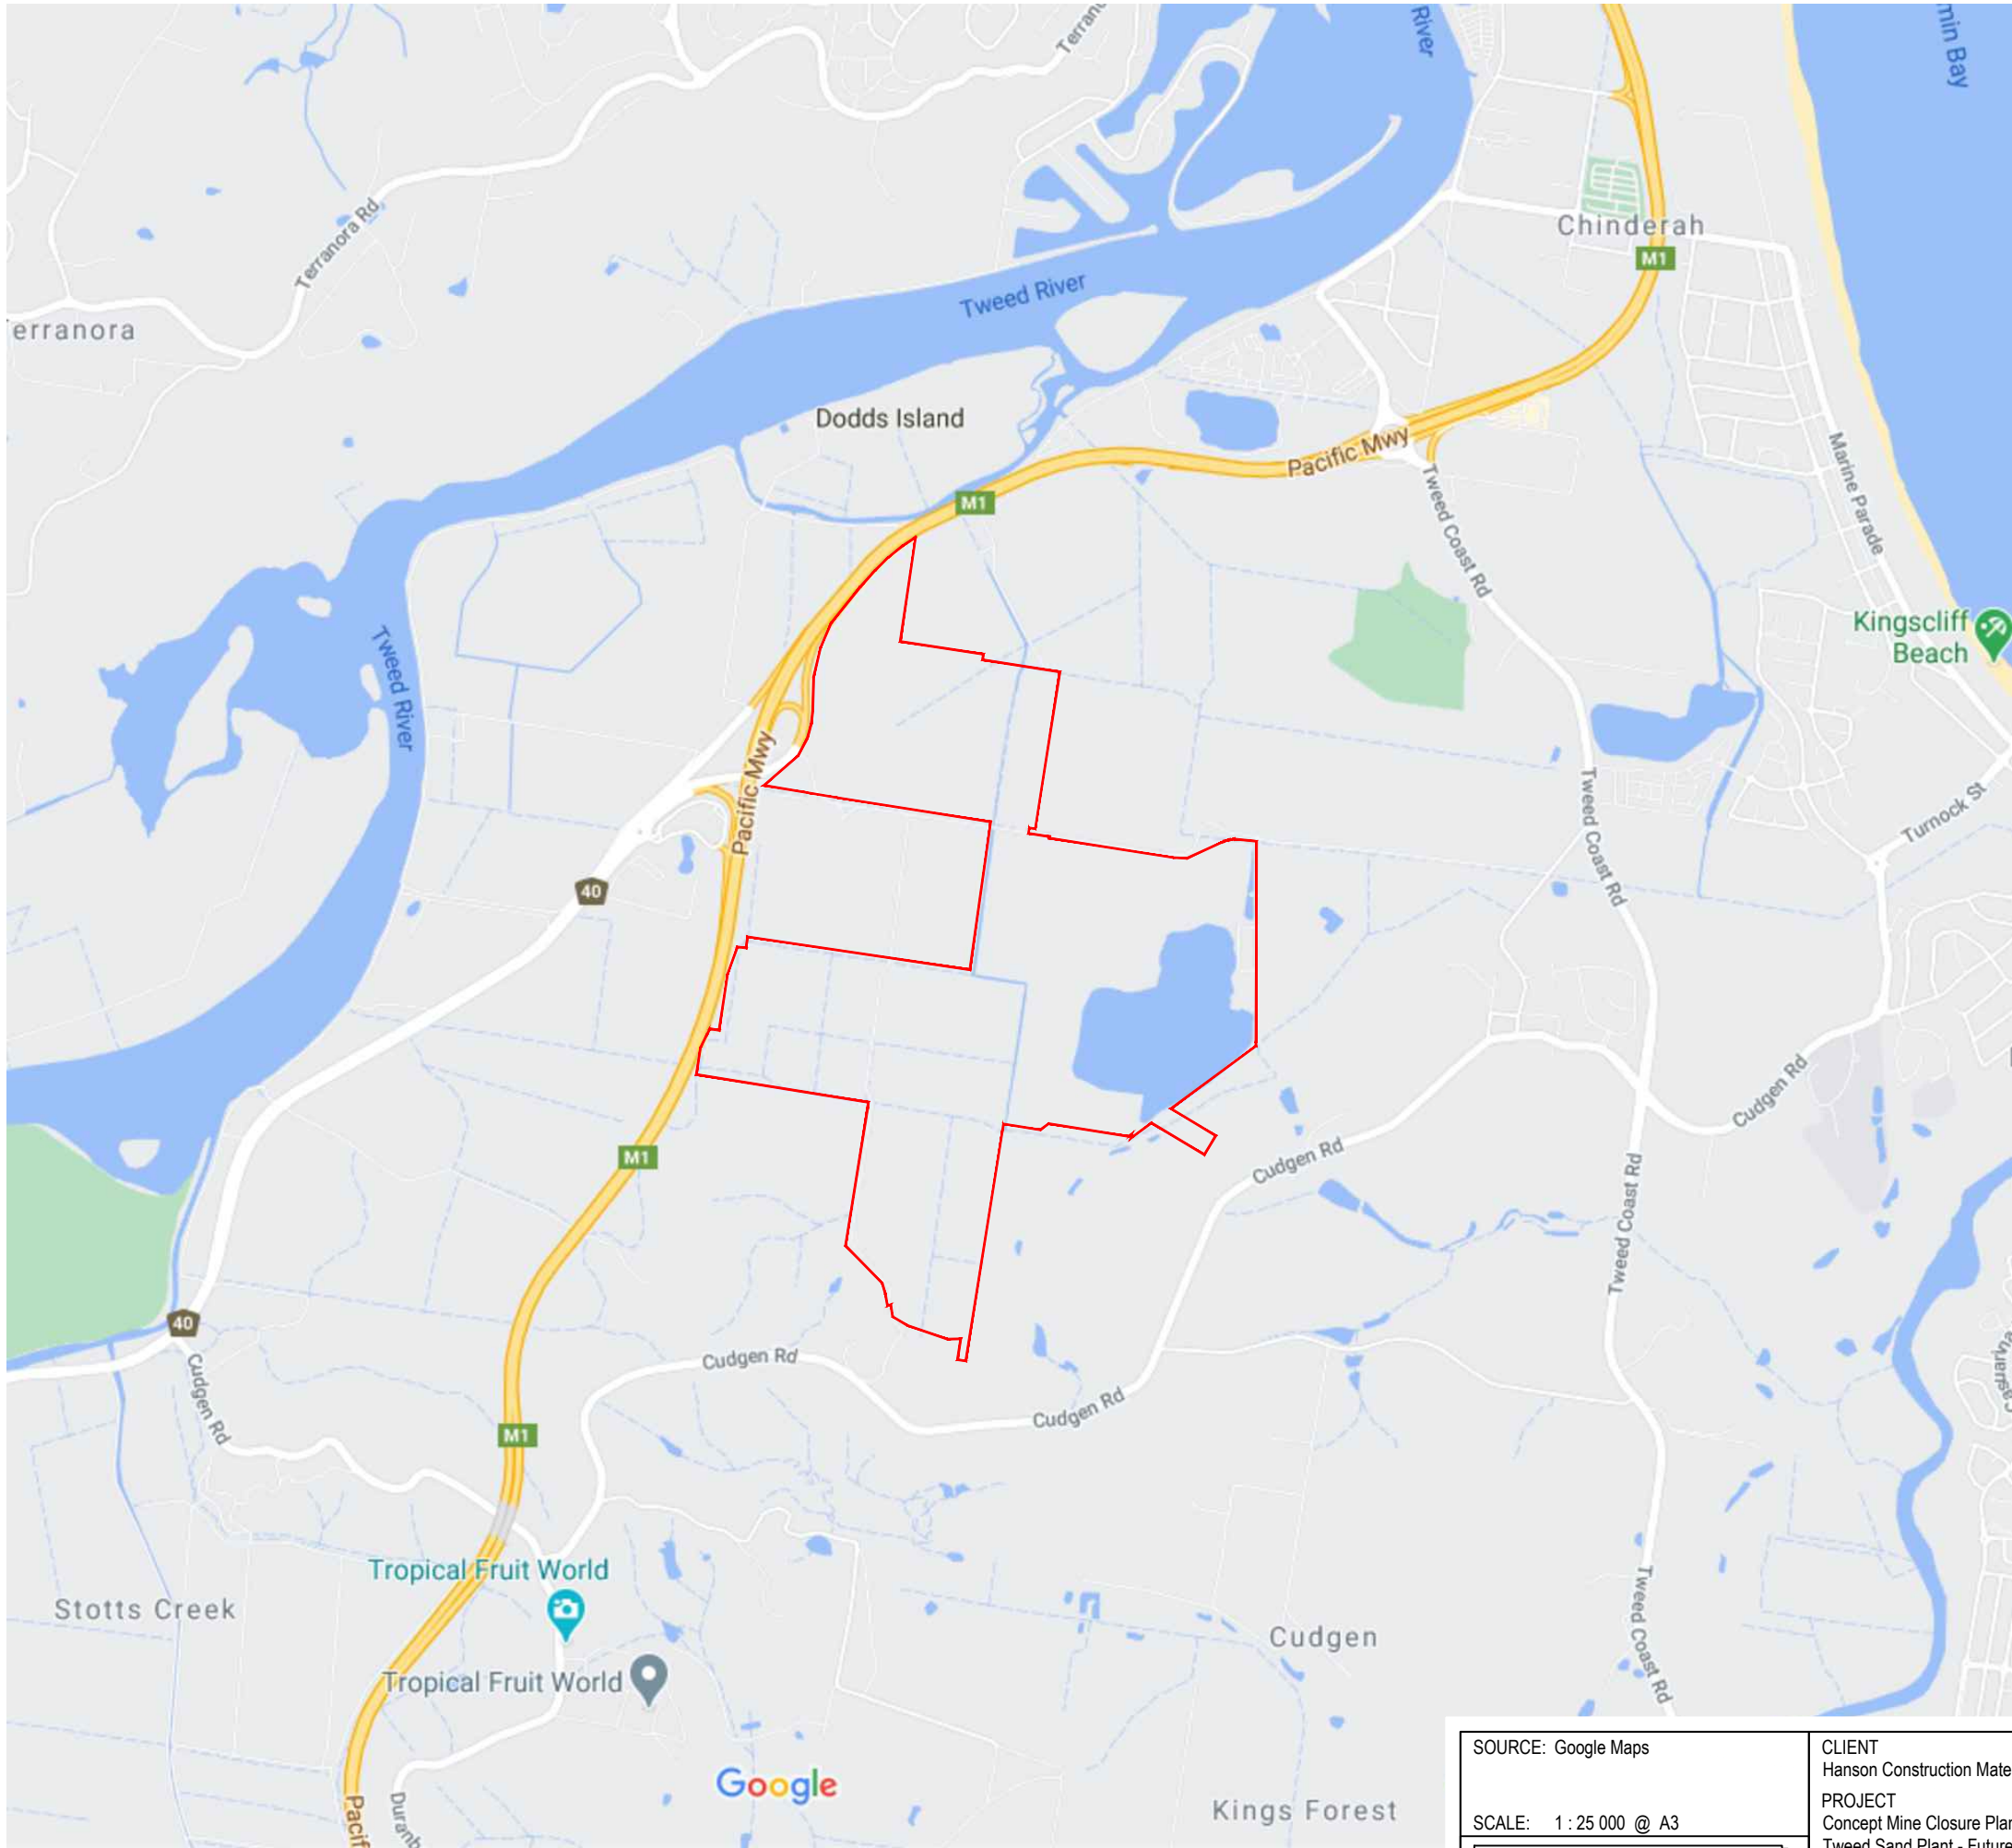

LEGEND
Subject Site



SOURCE: Google Maps SCALE: 1 : 25 000 @ A3 JWA PTY LTD Ecological Consultants	CLIENT Hanson Construction Materials Pty Ltd PROJECT Concept Mine Closure Plan Tweed Sand Plant - Future Expansion Altona Road, Chinderah NSW Tweed Shire Council LGA	FIGURE 1	TITLE LOCALITY PLAN
		PREPARED: BW DATE: 9 May 2025 FILE: N03074_BDAR_20250508.dwg	

TSP is located within the Tweed Valley flood plain and is surrounded by the following land uses:

- North - Tweed Shire Council (TSC)'s wastewater treatment facility; agricultural land (cane, grazing); Pacific Motorway and township of Chinderah in the distance (approximately 2 km).
- East - Cudgen Lake Sand Quarry (Cudgen Lakes); township of Cudgen (approximately 1 km); Township of Kingscliff (approximately 3 km).
- South - Residential receptors located along Cudgen Road ridge; agricultural and partially cleared land.
- West - Australian Bay Lobster Producers Pty Ltd; Melaleuca Station Memorial Gardens and Crematorium; Caltex service station and travel stop; Pacific Motorway; agricultural land (cane, grazing).

An aerial photograph of the site is shown in **FIGURE 2**.

2.2 Project Objectives

The project objectives are to:

- Increase the extraction capacity of TSP in an environmentally, socially, and economically sustainable way.
- Increase the transportation capacity of TSP in an environmentally, socially, and economically sustainable way.
- Secure long term local and regional supply of sand as a construction material.
- Provide capacity to address construction material demand spikes.
- Achieve optimal use of a regionally significant resource.


2.3 Project Description

TSP is currently operating on part of the project site with Phase 1 to 4 either completed or currently under extraction. TSP operates under Development Application (DA) DA 152-6-2005, as modified on 20 August 2018 (Notice of Modification MOD 1). The current MOD 1 approval remains valid until 1 July 2036 and authorises TSP to produce and transport from the site up to 500,000 tonnes of quarry products per financial year. TSP currently operates a single dredge unit which is linked to an onshore wash plant via a floating flow line. Sand product is processed through the wash plant, stockpiled and loaded via a front-end loader into standard highway trucks for transport and ultimate use.

To meet ongoing demand for sand, HMA is proposing to expand its existing operations into lands to the north and west of the TSP site over a thirty (30) year period. Seven (7) extraction phases are proposed (Phase 5 to Phase 11). A layout and staging plan for the extraction works expansion is shown in **FIGURE 3**. The footprint of the expansion area is approximately 190 ha, giving a total combined footprint of 236 ha for the existing and future extraction areas. Expansion works will also include construction of an internal haul



LEGEND
Subject Site



SOURCE: Near Map Aerial dated 15/07/19

SCALE: 1 : 12 500 @ A3

JWA PTY LTD
Ecological Consultants


CLIENT
Hanson Construction Materials Pty Ltd
PROJECT
Concept Mine Closure Plan
Tweed Sand Plant - Future Expansion
Altona Road, Chinderah NSW
Tweed Shire Council LGA

FIGURE 2

PREPARED: BW
DATE: 9 May 2025
FILE: N03074_BDAR_20250508.dwg

TITLE

AERIAL
PHOTOGRAPH

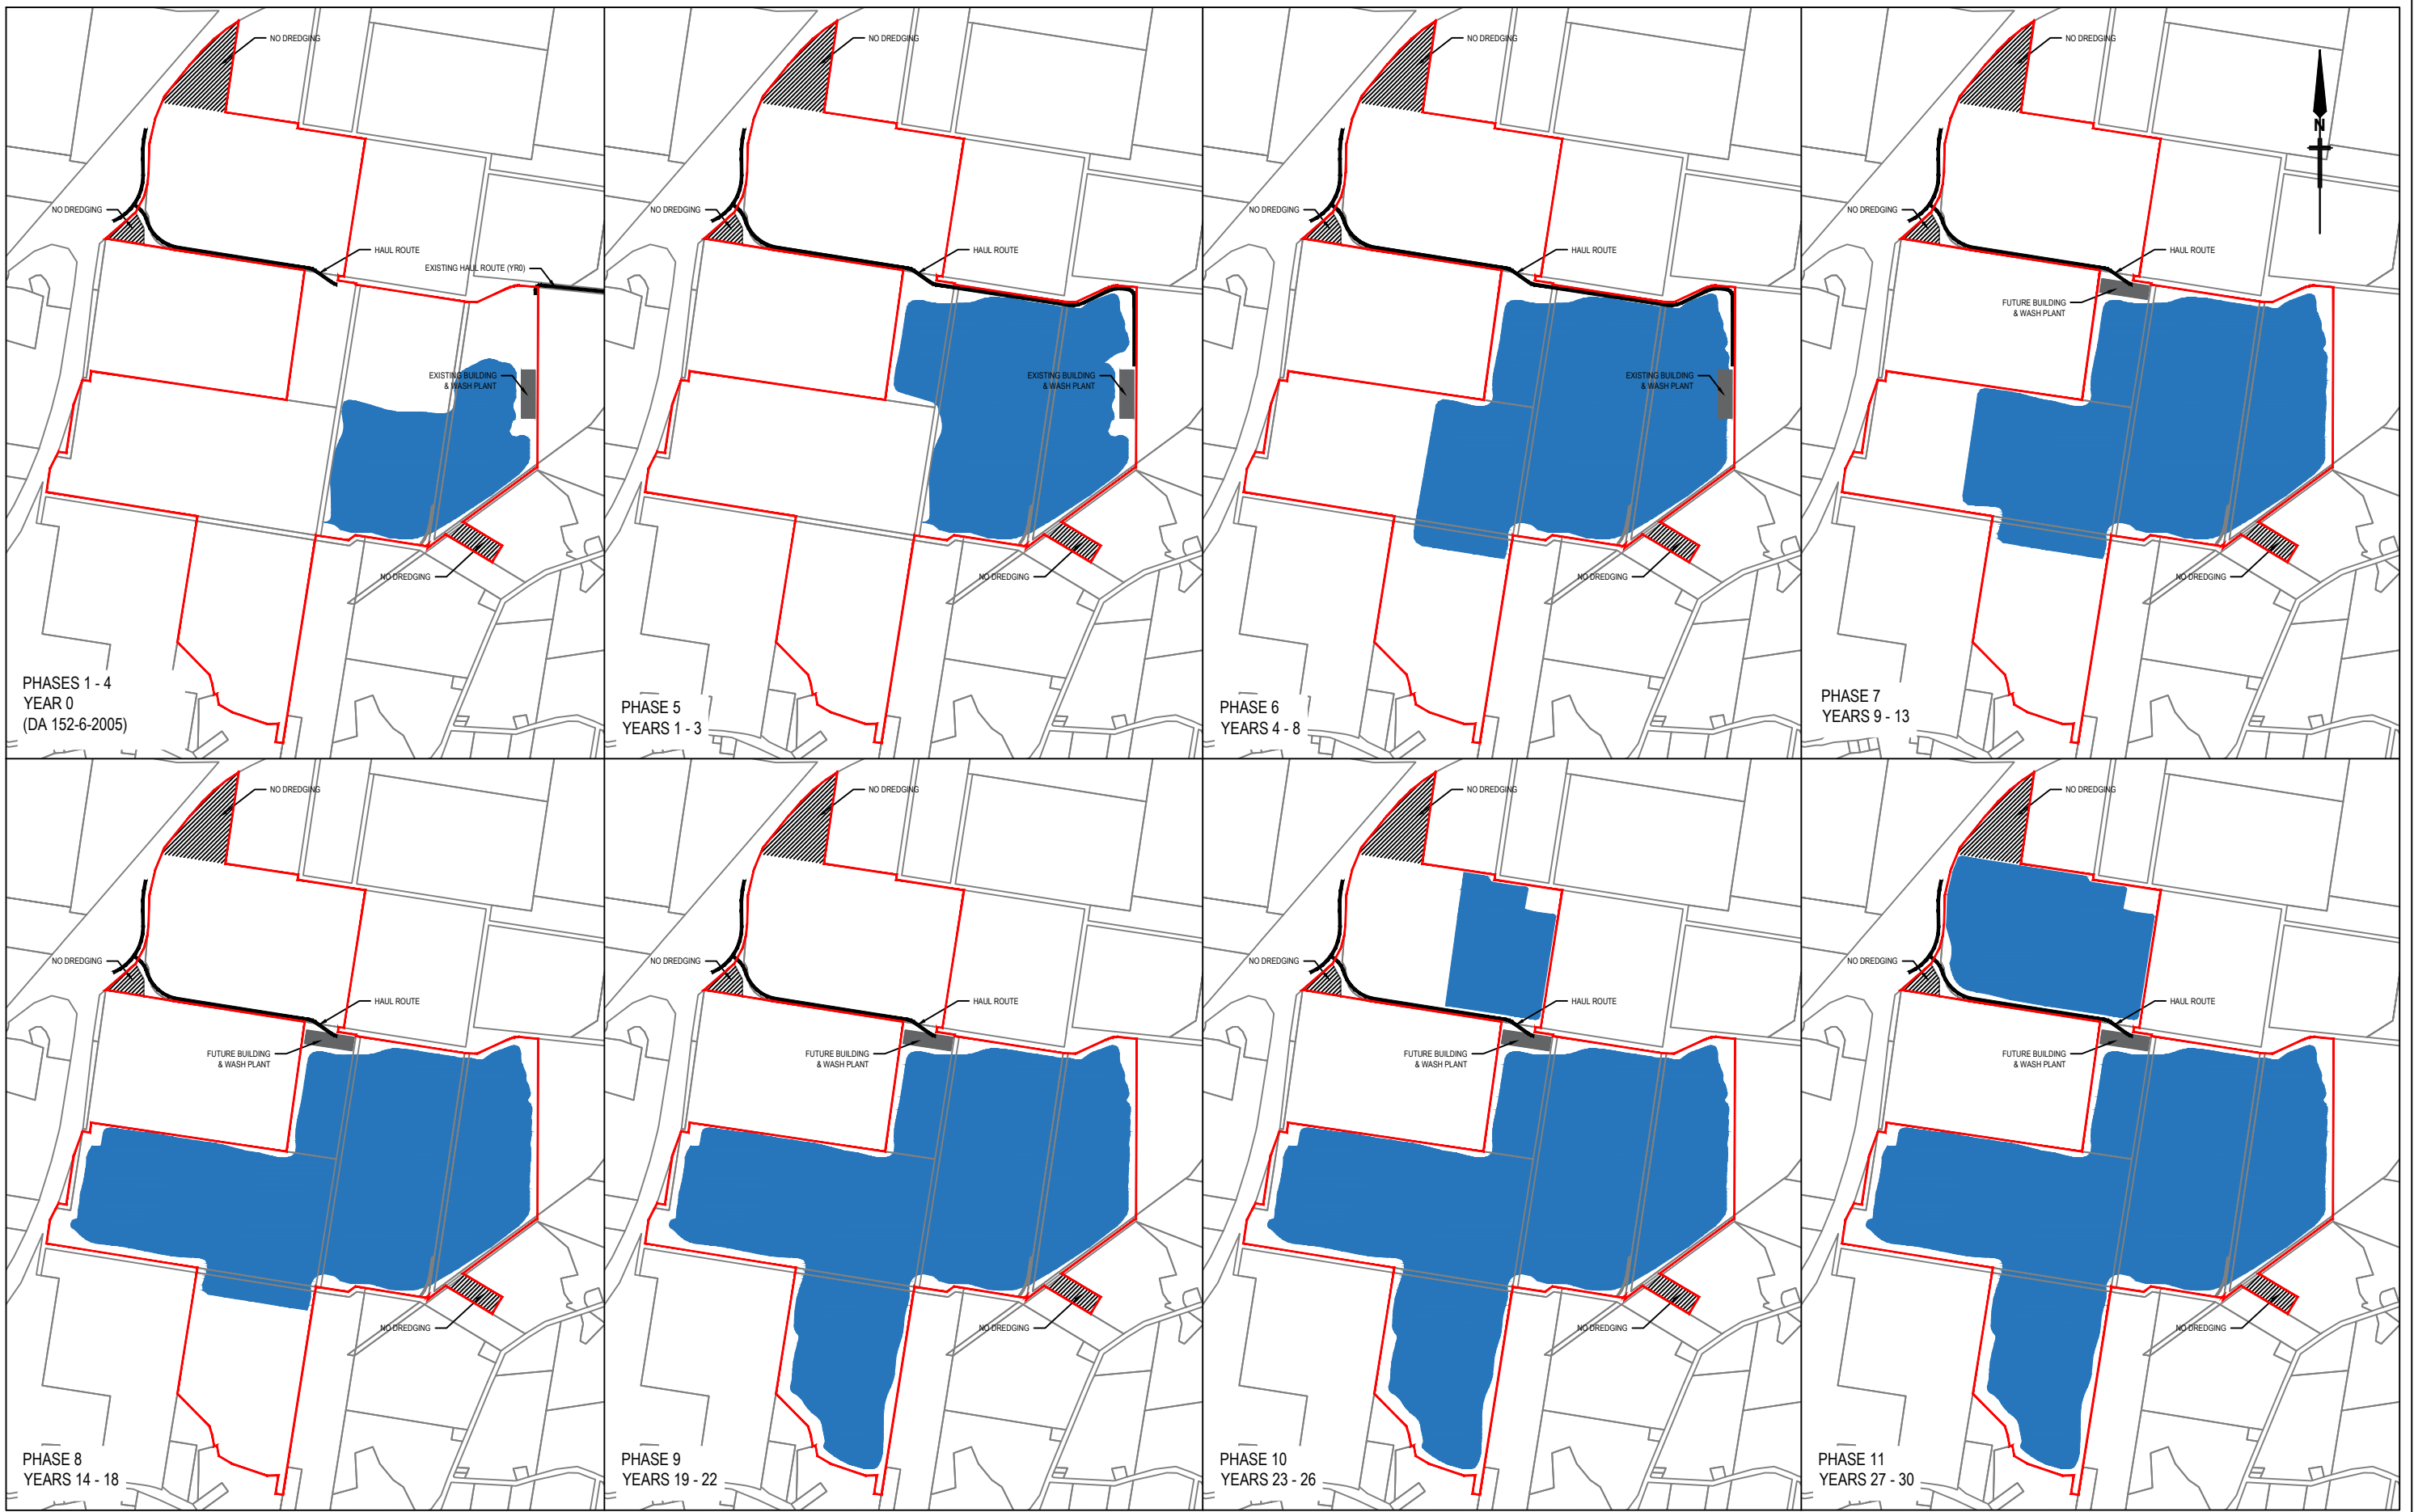

LEGEND

- Subject Site
- Extent of Dredging
- Haul Route
- Building & Wash Plant

Scale 1:25 000 - Lengths in metres

200 0 200 400 600 800 1000

SOURCE: Zone Planning Group - Figure 19:
Extraction Phases dwg No. Z19163-F119 Rev D
dated 31/03/25 (Ref: FIG19.dwg)
SCALE: 1 : 25 000 @ A3

JWA PTY LTD
Ecological Consultants

CLIENT
Hanson Construction Materials Pty Ltd

PROJECT
Concept Mine Closure Plan
Tweed Sand Plant - Future Expansion
Altona Road, Chinderah NSW
Tweed Shire Council LGA

FIGURE 3

PREPARED: BW
DATE: 8 May 2025
FILE: N09007_BDAR_20250508.dwg

TITLE

**CONCEPT
DEVELOPMENT
PHASING**

road connected to the Pacific Motorway and a new sand washing plant and associated buildings.

2.4 Strategic and Statutory Context

2.4.1 North Coast Regional Plan 2041

Although the North Coast Regional Plan (NCRP) 2041 is silent on Cudgen, the plan outlines the direction the region is seeking to take. Specifically, the NCRP 2041 outlines the following Local Government Narrative for Tweed Shire.

Tweed Shire LGA is located on the lands of the Bundjalung people, the traditional custodians of lands that extend from Grafton on the Clarence River in the south to the Logan River in the north and inland as far as the Great Dividing Range at Tenterfield and Warwick.

The Tweed Shire bridges the North Coast Region and South East Queensland and is one of the fastest growing areas in the region. Murwillumbah, Kingscliff and Tweed Heads are the key centres of the shire, with Kingscliff becoming increasingly important as its strong growth continues, and Tweed Heads servicing the shire as its regional city.

Tweed residents will continue to access high quality services and facilities from both sides of the NSW-Queensland border. Local services and facilities are provided at Tweed Heads, Casuarina, Cabarita, Pottsville, Murwillumbah, Fingal Head, Chinderah, Uki and Chillingham.

The coastal settlements of the Tweed Shire have experienced some of the strongest growth on the North Coast with projected growth in the urban release areas of Cobaki, Kings Forest and Dunloe Park. The popularity of the Tweed coast is expected to continue, particularly as opportunities for greenfield housing on the Gold Coast become more limited.

The Tweed Shire is recognised for its idyllic coastline, iconic natural environment and contains the Mount Warning Caldera, World Heritage listed rainforests and dramatic mountain ranges. This environment, and the Tweed's proximity to the nationally significant tourist area of the Gold Coast, will support ongoing growth in the tourism industry.

Regional priorities

- *Manage and support growth across the LGA and implement the Regional City Action Plan for Tweed Heads.*
- *Balance growth in the new housing areas of Cobaki and Kings Forest in conjunction with the urban renewal of Tweed Heads, Kingscliff and Murwillumbah.*

- *Support regenerative agricultural practices which support the development of the agricultural sector and local food production systems.*
- *Continue to promote nature-based and ecotourism opportunities associated with the various national parks, the Northern Rivers Rail Trail and the coastline, and identify opportunities available with agritourism and the Brisbane 2032 Olympics.*

Liveable and Resilient

- *Support Tweed Shire's move toward net zero through low emissions development and transport solutions, and by embedding principles of the circular economy and maximising resource recovery.*
- *Provide support to adapt to climate change, particularly in key risk areas such as water security, infrastructure resilience and coastal management to address storm surges and sea level rise.*
- *Support environmentally sustainable development that is responsive to natural hazards.*
- *Retain and protect local biodiversity through effective management of environmental assets and ecological communities.*

Productive and Connected

- *Foster the growth of knowledge-based and education industries within the Southern Cross University and where enabling land uses or infrastructure is present.*
- *Capitalise on opportunities associated with the new Tweed Valley Hospital.*
- *Deliver new employment and business park opportunities at Kingscliff, Pottsville, Tweed Heads south and South Murwillumbah, and encourage the development of airport related and tech business in the Cobaki release area.*
- *Identify emerging trends affecting work in the Tweed and develop a robust, contemporary and enabling policy framework to foster employment growth.*
- *Encourage employment and mixed-use clustering.*

Housing and Place

- *Enhance housing diversity by increasing housing density in the centres and encouraging a range of housing products.*
- *Deliver housing across the LGA to meet impending growth from South East Queensland.*
- *Prioritise the delivery of affordable housing to support workers in key service industries.*

Smart, Connected and Accessible (Infrastructure)

- *Foster stronger alignment and integration with the Southern Gateway Regional Economic Cluster in South East Queensland and the Northern Rivers subregion.*
- *Collaborate with South East Queensland on the Gold Coast Airport precinct masterplan.*
- *Identify barriers to economic growth and essential infrastructure delivery between South East Queensland and Northern NSW.*

In addition, the NCRP 2041 contains several directions and actions for implementation of sustainable development in the North Coast Region. Of relevance to this Concept MCP and the proposed end use of the project are objective 12 and objective 19.

Objective 12 of the Plan is to ‘Create a diverse visitor economy’. Supporting Strategy 12.1 seeks to create green and open spaces that are accessible and well connected and enhance existing green infrastructure in tourist and recreation facilities. The end use will create a green and open space that is accessible.

Objective 19 of the Plan is ‘Public spaces and green infrastructure support connected and health communities’. The supporting strategies are focused on public open space; however, the proposal will create a green open space that the public can utilise, but which will not burden Tweed Shire Council.

The end use is consistent to the intent of the NCRP 2041.

2.4.2 Tweed Local Strategic Planning Statement 2020

The Tweed Local Strategic Planning Statement (TLSPS) 2020 brings together the community vision and goals in the Community Strategic Plan 2017 - 2027 (see **SECTION 2.4.3**) and aligns those with the vision and goals in the NCRP 2036 (now repealed). Thereby it allows TSC to plan for a future Tweed to meet the community’s expectations and achieve the Tweed’s wider expected role within NSW.

In the words of TSC, the projected population growth and corresponding need for development in the Tweed over the next 20 years is significant. Much of this growth is likely to be concentrated in the new urban release areas of Cobaki Lakes, Kings Forest and Dunloe Park. These growth areas span Tweed’s coastal range from north to south and have been in the planning for over two decades. This coastal concentration of growth adjacent to existing urban areas will augment the Tweed’s already diverse urban communities, however it may lead to lower population growth and demand for development in some of the Tweed’s rural areas.

Relevant to the rationale and importance of this Concept MCP and the proposed end use of the project; the natural values and beauty of the North Coast environment, combined with yearlong warm climate, is highly valued by its residents and is attractive to migrants seeking lifestyle change, particularly in their retirement phase of life. These attributes also sustain a thriving tourism and lifestyle economy.

The proposed end use is one which will contribute to the natural values through the significant body of revegetation proposed and resulting generally consistent with the Tweed Local Strategic Planning Statement.

2.4.3 Tweed Shire Community Strategic Plan

The Tweed Shire Community Strategic Plan 2017-2027 is the overarching, visionary document in Council's Integrated Planning and Reporting Framework, which is part of TSC's hierarchy of planning. The plan translates the community's key priorities and aspirations into long-term strategic goals guiding the future direction of Tweed Shire. Environmental protection and stronger communities were leading concerns identified during community engagement to create the plan.

TSC has a custodial role in developing the Plan, while realising its long-term strategic goals is a shared responsibility between TSC, the community and other Government and Non-Government entities.

The plan includes community aspirations and Council intentions following extensive community consultation. There is acknowledgement the region will grow and is under current growth pressure. Of the policy positions and initiatives within the strategic plan, the following elements are most relevant in relation to this Concept MCP and the proposed end use of the project:

1.1 Natural resource management

- *Lead and engage the community to enhance awareness and improve sustainable management of the environment*
- *Provide for appropriate public access and use of natural areas*

1.2 Asset protection

- *Ensure adequate stormwater drainage infrastructure is provided with new development*

2.2 Engagement

- *Communicate and engage with the community, government and business groups on important matters affecting the Tweed*

3.1 People

- *Protect public health and community safety*

3.2 Places

- *Provide places, spaces and facilities for the sporting, recreation, leisure and cultural pursuits of locals and visitors*

The proposed end use of the project will assist to deliver these outcomes through the provision of additional open space facilities.

2.4.4 Tweed Local Environmental Plan 2014

The site and project are located within the Tweed LGA. The TLEP 2014 is the principal local environmental planning instrument regulating land use within the Tweed LGA. Under this plan most of the site is zoned RU1 Primary Production with a small portion of Lot 1 DP 1250570 being zoned RU2 Rural Landscape.

The objectives and Land Use Table of the RU1 Primary Production and RU2 Rural Landscape Zones are as follows:

Zone RU1 Primary Production

1. Objectives of zone

- *To encourage sustainable primary industry production by maintaining and enhancing the natural resource base.*
- *To encourage diversity in primary industry enterprises and systems appropriate for the area.*
- *To minimise the fragmentation and alienation of resource lands.*
- *To minimise conflict between land uses within this zone and land uses within adjoining zones.*
- *To protect prime agricultural land from the economic pressure of competing land uses.*

2. Permitted without consent

Environmental protection works; Extensive agriculture; Home occupations; Intensive plant agriculture

3. Permitted with consent

Agricultural produce industries; Animal boarding or training establishments; Aquaculture; Bed and breakfast accommodation; Boat launching ramps; Boat sheds; Cellar door premises; Dual occupancies (attached); Dwelling houses; Environmental facilities; Extractive industries; Farm buildings; Farm stay accommodation; Flood mitigation works; Forestry; Group homes; Helipads; Home-based child care; Home businesses; Home industries; Industrial retail outlets; Intensive livestock agriculture; Jetties; Open cut mining; Plant nurseries; Roads; Roadside stalls; Rural workers' dwellings; Turf farming; Water recreation structures; Water storage facilities

4. Prohibited

Any development not specified in item 2 or 3.

And

Zone RU2 Rural Landscape

1. Objectives of zone

- *To encourage sustainable primary industry production by maintaining and enhancing the natural resource base.*
- *To maintain the rural landscape character of the land.*
- *To provide for a range of compatible land uses, including extensive agriculture.*
- *To provide for a range of tourist and visitor accommodation-based land uses, including agri-tourism, eco-tourism and any other like tourism that is linked to an environmental, agricultural or rural industry use of the land.*

2. Permitted without consent

Environmental facilities; Environmental protection works; Extensive agriculture; Home occupations; Intensive plant agriculture

3. Permitted with consent

Airstrips; Animal boarding or training establishments; Aquaculture; Bed and breakfast accommodation; Boat launching ramps; Boat sheds; Camping grounds; Caravan parks; Cellar door premises; Cemeteries; Community facilities; Crematoria; Depots; Dual occupancies (attached); Dwelling houses; Eco-tourist facilities; Educational establishments; Extractive industries; Farm buildings; Farm stay accommodation; Flood mitigation works; Forestry; Funeral homes; Garden centres; Group homes; Helipads; Home-based child care; Home businesses; Home industries; Hostels; Industrial retail outlets; Industrial training facilities; Information and education facilities; Intensive livestock agriculture; Jetties; Kiosks; Landscaping material supplies; Markets; Open cut mining; Places of public worship; Plant nurseries; Recreation areas; Recreation facilities (major); Recreation facilities (outdoor); Restaurants or cafes; Roads; Roadside stalls; Rural industries; Rural supplies; Rural workers' dwellings; Signage; Timber yards; Transport depots; Truck depots; Turf farming; Veterinary hospitals; Water recreation structures; Water supply systems; Wharf or boating facilities

4. Prohibited

Any development not specified in item 2 or 3.

The proposed end use of the project detailed in this this Concept MCP is an 'Environmental Facility' which is defined as follows:

***environmental facility** means a building or place that provides for the recreational use or scientific study of natural systems, and includes walking tracks, seating, shelters, board walks, observation decks, bird hides or the like, and associated display structures.*

Environmental Facility is permitted with consent in both the RU1 Primary Production and RU2 Rural Landscape Zones.

The proposed end use of the project detailed in this this Concept MCP is generally consistent with the stated objectives of the RU1 Primary Production and RU2 Rural Landscape zones. Assessment of the subject site (G&S 2021) has demonstrated the land is not 'prime agricultural' land but rather marginal land that due to its location and the impact of climate change, will be subject to ongoing reduction its agricultural capacity.

The project does not fragment other agricultural land nor introduce a land use that conflicts with or would prevent the ongoing use of other Agricultural lands in the locality.

3 IDENTIFICATION OF CLOSURE OBLIGATIONS AND COMMITMENTS

This conceptual Mine Closure Plan has been prepared in accordance with the Strategic Framework for Mine Closure and to satisfy the rehabilitation requirements set forth in the Planning Secretary's Environmental Assessment Requirements (SEARs). The Plan has been prepared with specific regard to Section 4.12(8) of the Environmental Planning and Assessment Act 1979, Schedule 2 of the Environmental Planning and Assessment Regulation 2000.

The identified closure objectives outlined in Section 6 of this document adhere to the closure obligations and commitments set forth by the SEARs and aim to return mine sites to viable, self-sustaining ecosystems while ensuring adequate financing, implementation and monitoring procedures.

4 STAKEHOLDER ENGAGEMENT

4.1 Introduction

HMA is committed to undertaking a proactive engagement program with its stakeholders, government and the broader community as part of its community engagement program for the TSP. The project has been subject to various forms of consultation as part of its existing operations and as part of the development application process for the proposed expansion of operations. Initial engagements for the proposed expansion have included ‘scoping consultation’, post SEARs public authority consultation, post SEARs community consultation and post public exhibition public authority consultation.

In-depth community engagement should form a key component of any future Closure Plans (or the like) which may be required under standard conditions of approval. This could include, for example, the formation of a community working group focused specifically on the design and implementation of post closure land uses. The timing for this working group should have regard to the phasing of extraction, given the southern of the two extraction areas will be available for development of post closure uses before the northern areas and post-closure planning can therefore commence earlier for this area.

4.2 Identification of Key Stakeholders

Key stakeholders for the project have been identified as having an influence and/or interest throughout the life of the project and who are impacted by the project’s operations. The key stakeholders for the TSP identified to date are listed in **TABLE 2**.

TABLE 2
KEY STAKEHOLDERS

Key Stakeholder Group	Stakeholder
Landowners and Community Groups	• Immediate neighbours, local residents and businesses • Cudgen residents • Cudgen Public School • Tweed Byron Local Aboriginal Land Council
Local Government Authorities	• Tweed Shire Council
State Government Departments and Agencies	• NSW Environment Protection Authority • NSW Department of Planning, Industry and Environment - Resource Assessments • NSW Department of Planning, Industry and Environment - Biodiversity and Conservation Division • NSW Department of Planning, Industry and Environment - Water Division • NSW Department of Planning, Industry and Environment - Division of Resources and Geoscience • North Coast Local Land Services • NSW Health • Natural Resource Access Regulator

Key Stakeholder Group	Stakeholder
	• NSW Roads and Maritime Services • NSW Rural Fire Service • NSW Government - Heritage NSW • NSW Department of Industry - Lands
Non-Government Organisations including Special Interest Groups	• TSP Community Consultative Committee • Tweed Chamber of Commerce

4.3 Stakeholder Consultation Strategy

To ensure stakeholders are continually engaged in the project, particularly any changes to the proposal, consultation with key stakeholders will continue throughout all phases of the expansion, from project planning, operation through to rehabilitation, decommissioning and closure. The ongoing stakeholder consultation process will follow the five principles outlined in the Strategic Framework for Mine Closure (ANZMEC and MCA 2000) as repeated below:

- Stakeholders and interested parties be identified;
- Consultation is carried out on a regular basis with all of these parties;
- A targeted communication strategy should reflect the needs of the stakeholder groups and interested parties;
- Adequate resources have been allocated to ensure the effectiveness of the consultation process; and
- Wherever practical, the company will work with communities to manage the potential impacts of mine closure.

All communication channels utilised for community consultation during the development application process remain open and can be utilised to contact the project team at any time. In addition, the TSP Community Consultative Committee was established as part of the existing TSP operations and will continue to convene during the life of expanded TSP operations.

5 POST-MINING LAND USE

5.1 Proposed Scenario

Following completion of all proposed sand extraction, HMA will retain ownership of the site and propose to create a public access, multi-use recreation facility. A concept end use plan has been prepared by Zone Landscape Architecture and is provided in **APPENDIX 1**. In order to transition the site to this final land use, rehabilitation and works required to establish a stable and self-sustaining final landform will occur progressively as sand extraction progresses.

Final landform restoration works will involve grading of the banks of the extraction lakes to appropriate levels and stabilisation works where necessary. These works will be completed to ensure the banks and batters within and adjacent to the extraction lakes are non-uniform and exhibit an undulating surface (including areas of deep water) to maximise habitat diversity and mimic natural landform variance. The final form of the lake banks will vary from gently inclined sandy 'beach' areas and wetlands to steeper banks reinforced with vegetation, floating wetlands and/or placed rock (or similar).

Rehabilitation works on the site will cover approximately 39.24 ha (over 16% of the total site area) and will be completed on a stage-by-stage basis following completion of sand extraction works within each phase. The rehabilitation works will deliver four (4) types of rehabilitation areas (**FIGURE 4**) as follows:

- Wetland rehabilitation areas - primarily assisted natural regeneration of water plants/macrophytes around the fringes of the lakes;
- Riparian rehabilitation areas - providing a minimum 10 m wide vegetated buffer around the perimeter of the subject site;
- Open space areas - consisting of landscaped and grassed areas and beaches; and
- Road batter areas - consisting of landscaped and grassed areas where major earthworks are to be completed for road works.

A Concept Rehabilitation and Landscape Management Plan (CRLMP) (JWA 2025) has been prepared for the site. The CRLMP establishes responsibilities and procedures for the progressive rehabilitation of the site following completion of sand extraction works, including the stabilising/reprofiling of banks, planting methods, control of weeds and monitoring requirements. Prior to the commencement of rehabilitation works within each phase including the end-use phase, a phase specific Rehabilitation and Landscape Management Plan (RLMP) will be prepared to provide site specific guidance for the rehabilitation and management of the land to be restored.


A Soil and Water Management Plan (SWMP) (G&S 2023) has also been prepared for the site. At completion of sand extraction two (2) large, enclosed lakes with a total surface area of approximately 203ha will have been formed in the landscape. The lakes will provide diverse habitats for aquatic species and bird life. The SWMP provides the strategies to manage the site's soil and water throughout the operational life of the project and following completion of sand extraction such that a stable, self-sustaining ecosystem suitable for



LEGEND

- | | | | |
|---|-----------------------------|---|---|
|  | Subject Site |  | Open Space |
|  | Final Lake Extents |  | Riparian Rehabilitation Area
(minimum width 10m) |
|  | Wetland Rehabilitation Area |  | Vegetated Batters |
|  | Sand (Beach) | | |

Scale 1:25 000 - Lengths in metres



SOURCE: Zone Planning Group - Fig 27:
Rehabilitation Phases Rev E (dwg No. Z19163-F127
(with water))

SCALE: 1 : 25 000 @ A3

JWA PTY LTD
Ecological Consultants

CLIENT
Hanson Construction Materials Pty Ltd

PROJECT
Concept Mine Closure Plan
Tweed Sand Plant - Future Expansion
Altona Road, Chinderah NSW
Tweed Shire Council LGA

FIGURE 4

PREPARED: BW
DATE: 12 May 2025
FILE: N09007_BDAR_20250508.dwg

TITLE

CONCEPT
REHABILITATION
PHASING

recreational end-use can be achieved. The SWMP establishes procedures and responsibilities for the management of soil and water related aspects of the TSP operations, including acid sulfate soil management, erosion and sediment control, surface water and groundwater monitoring programs and cyanobacteria (blue-green algae) management.

5.2 Alternative or base-case scenario

Should a future public recreational use not materialise, HMA will retain ownership of the of the site and complete the rehabilitation works outlined within the Concept Rehabilitation and Landscape Management Plan (CRLMP) (JWA 2025) for the purpose of ecosystem establishment.

6 MINE CLOSURE OBJECTIVES

The core goals to be achieved by the end-use proposal are:

- A self-sustaining, water body with stable water quality suitable for recreational uses;
- A diverse ecosystem of native flora designed to provide habitat for native fauna;
- A visually pleasing site with water bodies and vegetation designed to achieve a 'natural' appearance;
- Low maintenance infrastructure to enhance the recreational appeal of the site; and
- The incorporation of any necessary infrastructure to ensure public safety.

These core goals are supported by more detailed closure objectives which provide the basis for development of closure criteria against which closure performance will be measured. The overall closure objectives as provided in **TABLE 3**.

TABLE 3
CLOSURE OBJECTIVES

Feature	Objective
All areas of the site affected by the development	• Safe • Hydraulically and geotechnically stable, including the extraction lake margins (particularly where subject to regular wind and wave action) • Non-polluting • Fit for the intended post extraction land use(s) • Final landform integrated with surrounding natural landforms as far as is reasonable and feasible, and minimising visual impacts when viewed from surrounding land
Surface infrastructure	• Decommissioned and removed, unless otherwise agreed by the Secretary
Extraction lakes	• Perimeter of extraction lakes landscaped and vegetated using native tree and understory species • Natural looking bank design with curved lake boundaries, with a variety of bank treatments (e.g., beaches, wetlands) providing a variety of habitats • Minimise the occurrence and/or persistence of algal blooms • Water quality fit for the intended post extraction land use(s)

7 IDENTIFICATION AND MANAGEMENT OF CLOSURE ISSUES

7.1 Risk Assessment

Management of impacts is based on the risk management framework. The main objectives of management are:

- Identification of the potential environmental hazards associated with the works program;
- Assessment of environmental risks; and
- Development of controls to eliminate or minimise residual environmental risk.

A key outcome of risk management is to rank impacts and risks, so specific management measures can be developed for high-risk impacts, to reduce the risk to as low as practicable.

A risk assessment has been undertaken to identify and manage potential environmental risks associated with the TSP. The risk assessment is based on an understanding of the existing environment through desktop assessments/site visits and issues raised during the development application process. This risk assessment evaluates unmitigated project specific environmental hazards, including assigning likelihood and consequence levels, to determine a risk rating for each identified risk. The criteria for determining likelihood and consequence levels, and risk ratings for each identified risk are based on AS/NZS ISO 31000:2009 Risk management - Principles and Guidelines.

Each risk event is assigned an overall level which is determined as a factor of probability (likelihood) and the associated environmental consequence. Likelihood and consequence criteria and the risk rating matrix adopted in this risk assessment are provided in **TABLES 4 to 6**. The results of the risk assessment are documented in **TABLE 7**. Note that in cases where the likelihood and consequence of risks relating to a particular hazard varied across the works site, the most conservative figure was adopted.

**TABLE 4
LIKELIHOOD LEVELS**

Level	Descriptor	Qualitative Description
A	Almost Certain	The event is expected to occur. The event will occur on an annual (or more frequent) basis.
B	Likely	It is probable the event will occur. The event has occurred several times before at similar developments.
C	Possible	The event may or may not occur. The event may occur once during the development.
D	Unlikely	The event may occur at some time but is unlikely. The event has been known to happen from time to time at similar developments.
E	Rare	The event may occur in exceptional circumstances. The event has not been heard of occurring at similar developments.

TABLE 5
CONSEQUENCE LEVELS

Level	Descriptor	Qualitative Description
1	Insignificant	Environment: No damaged detected. People: Event does not result in injury (i.e. no medical treatment required). Property: No damage to property. Amenity: No detectable impact on amenity.
2	Minor	Environment: Minor impact of short duration or short-term damage. People: Reversible injury or illness. Property: Minor damage to property (<\$5,000 to repair). Amenity: Minor, localised and short-term amenity impacts, no complaints.
3	Moderate	Environment: Short term damage, localised impact. People: Irreversible disability or impairment (30%) to one or more persons. Property: Moderate damage to property (<\$50,000 to repair). Amenity: One (1) or two (2) complaints, impacts extending to several properties and/or lasting for several days.
4	Major	Environment: Significant impact locally and potential for offsite impacts. People: Severe injuries or impairment (60%) to one or more persons, single fatality. Property: Major damage to property (<\$500,000 to repair). Amenity: Many complaints, impacts extensive and/or lasting for many days, up to five (5) properties rendered uninhabitable for more than one day.
5	Catastrophic	Environment: Significant impacts to regional ecosystems and threatened species, potential for widespread off-site impacts. People: Multiple fatalities, or irreversible injuries/impairment (>60%). Property: Significant loss to property (>\$1,000,000 to repair). Amenity: Multiple dwellings rendered uninhabitable for >1 day.

TABLE 6
RISK MATRIX CRITERIA

Risk Matrix		Consequence				
		1 (Insignificant)	2 (Minor)	3 (Moderate)	4 (Major)	5 (Catastrophic)
Likelihood	A (Almost Certain)	Medium	High	High	Extreme	Extreme
	B (Likely)	Medium	Medium	High	High	Extreme
	C (Possible)	Low	Medium	High	High	High
	D (Unlikely)	Low	Low	Medium	Medium	High
	E (Rare)	Low	Low	Medium	Medium	High

The risk ratings presented in **TABLE 6** are to be interpreted as follows:

- **Low:** Risk can be adequately managed by routine procedures and work practices.
- **Medium:** Corrective action other than administrative controls is needed.
- **High:** Significant risk control measures need to be implemented before works commence.
- **Extreme:** Operations are not to be undertaken without extensive risk control and mitigation measures in place prior to the commencement of works.

**TABLE 7
RISK ASSESSMENT**

Issue	Risk	Before Management			Management Practices to be Implemented to Reduce Risk
		Likelihood Level	Consequence Level	Inherent Risk	
Legislation/Approvals	Non-compliance with legislation and/or approval conditions	C (Possible)	4 (Major)	High	TSP Management to undertake frequent reviews of compliance.
Financial	Insufficient funds to complete closure requirements	C (Possible)	4 (Major)	High	Costs to complete required works will be reviewed at each phase of the operation and funding adjusted as required.
Rehabilitation	Poor rehabilitation performance	C (Possible)	3 (Moderate)	High	Revegetation works including monitoring and maintenance to be completed at each phase in accordance with CRLMP (JWA 2025).
	Limited fauna recolonisation	C (Possible)	3 (Moderate)	High	
	Reduction in ecological value of rehabilitated areas	C (Possible)	3 (Moderate)	High	
Landform Stability	Erosion and/or de-stabilisation of lake banks (including from wave action)	C (Possible)	3 (Moderate)	High	Bank stability shall be monitored and managed in accordance with the SWMP (G&S 2023), and additional bank stabilisation mechanisms employed where required in the event that significant soil deposition occurs. Revegetation works including monitoring and maintenance to be completed along lake banks at each phase in accordance with CRLMP (JWA 2025).
Soil Erosion	Erosion of bunds and/or lake banks	C (Possible)	4 (Major)	High	Appropriate sediment and erosion control measures will be undertaken in accordance with the SWMP (G&S 2023) to minimise sedimentation, erosion and the transportation of materials (across and offsite).
	Decrease in surface water quality (outside the effects of drought or flood) in extraction lakes	C (Possible)	3 (Moderate)	High	
	Transport of materials across and offsite	C (Possible)	3 (Moderate)	High	
Acid Sulfate Soils	Potential for disturbance of Acidic non-acid sulfate soil (ANASS) and/or Acid sulfate soil (ASS) (and subsequent acid generation) during removal of overburden.	C (Possible)	4 (Major)	High	Appropriate procedures for the identification and management of PASS or ASS in the sites overburden will be undertaken in accordance with the SWMP (G&S 2023).
	Potential for disturbance and oxidation of Potential acid sulfate soil (PASS) materials (and subsequent acid generation) associated with the sand extraction and processing operation	C (Possible)	4 (Major)	High	Appropriate procedures for the processing of sands will be undertaken in accordance with the SWMP (G&S 2023) in order to mitigate risks associated with PASS.
Surface Water Quality	Decrease in surface water quality (outside the effects of drought or flood)	C (Possible)	3 (Moderate)	High	Surface waters in the extraction lakes will be hydraulically isolated from external drainage lines except during times of high rainfall. Any effluent generated on-site will be treated prior to disposal using an appropriately designed, operated and maintained treatment system. Surface water quality in the extraction shall be monitored and managed in accordance with the SWMP (G&S 2023).

Issue	Risk	Before Management			Management Practices to be Implemented to Reduce Risk
		Likelihood Level	Consequence Level	Inherent Risk	
					Soil disturbance shall be minimized wherever possible and managed in accordance with the SWMP (G&S 2023). Bank stability shall be monitored and managed in accordance with the SWMP (G&S 2023).
Groundwater	Decrease in groundwater quality (outside the effects of drought or flood)	B (Likely)	4 (Major)	High	All groundwater-related site activities will be undertaken in accordance with the groundwater licences issued for the site and the SWMP (G&S 2023). No dewatering of the extraction lake will occur without an equivalent volume of 'top-up' water being returned to the lake. All sand extraction below the groundwater table shall be undertaken via dredge to minimize impacts on groundwater both on and off-site. Long term groundwater quality and levels will be monitored and analysed against specified water quality objectives in accordance with SWMP (G&S 2023).
	Decrease in groundwater levels (outside the effects of drought or flood)	C (Possible)	4 (Major)	High	
	Offsite dieback of vegetation caused by variations in groundwater table caused by TSP operations	D (Unlikely)	4 (Major)	Medium	
Algal Blooms	Potential occurrence of algal blooms within the extraction lakes	A (Almost Certain)	3 (Moderate)	High	Cyanobacteria (blue-green algae) populations within the extraction lakes shall be monitored on a regular basis in accordance with the SWMP (G&S 2023). TSP Management shall conduct all works in a manner that minimises risks to staff and visitors associated with the potential presence of cyanobacteria in accordance with the SWMP (G&S 2023). Wherever possible, TSP Management shall implement practical measures in accordance with the SWMP (G&S 2023) to reduce the prevalence and severity of algal blooms within the extraction lakes.
	Human health risks associated with exposure to algal blooms and associated toxins	C (Possible)	4 (Major)	High	
Waste Minimisation and Management	Waste produced onsite is stored and disposed of inappropriately	D (Unlikely)	3 (Moderate)	Medium	Management of waste will be in accordance with the SWMP (G&S 2023).

7.2 Further Analysis of Specific Risks

7.2.1 Background

During the preparation of this Concept MCP, the Department has requested further detail regarding:

- stability risks associated with wave action and flooding events; and
- potential constraints associated with revegetation and batter design, including further justification that the proposed pond edge locations and batter slopes will be geotechnically stable in the long-term. Alternatively, a revised landform that achieves this objective should be proposed.

7.2.2 Stability risks

Pacific Geotech (2021) were engaged by H to prepare a Geotechnical Report. Based on the findings of the Geotechnical Report the project will utilise a range of extraction lake batter profiles to ensure long term lake bank stability which include the use of 1:3 slopes and/or gabion walls to protect against wave action in areas taking long wind and in areas protruding into water body (i.e. lake corners). Cross sections of the extraction area and proposed lake bank profiles are provided in **APPENDIX 2**.

The Geotechnical Report (Pacific Geotech 2021) concluded that it is likely that some minor slumping of the upper-level loose sands will occur with some of the lake edge profiles prior to the placement of the revetment/protection rock but this will not impact on the overall global stability of the batter profile. Options to stabilise the upper-level soil profile below the water could include the installation of a rock protection layer of the completion of batter profiling (say 500mm thick with a suitable geofabric under) or further flattening of the batter profile to 6H:1V.

Similarly, stability risks associated with flooding events are considered to be low. Generally flooding at the site is low in velocity with peak velocities reaching 0.2 m/s. The highest velocity at the site reaches 0.6 m/s at the southern M1 culvert set. The hydraulic categorisation of flooding at the site can be defined as a flood storage area. The results of hydraulic modelling for the ultimate developed case are generally the same as the existing scenario with the overall characteristics of flooding being unchanged (Burchills Engineering Solutions 2024).

7.2.3 Potential constraints associated with revegetation and batter design

It is noted that the proposed buffers and extraction areas have been established through a significant body of detailed studies and most importantly is informed by Geotechnical Investigation and knowledge of workable batter angles to ensure stable landform from existing extraction operations. In accordance with the Geotechnical Report (Pacific Geotech 2021), the lake bank profiles will achieve a maximum 1:4 batter below waterline (**APPENDIX 2**).

The Geotechnical Report (Pacific Geotech 2021) identified the most significant degree of risk involves the impact of additional loads being applied to the top of the embankment

slope or over dredging of the sand batter during the dredging operation resulting in steeper batter profiles than those designed. This should be controlled through the strict control and management of development adjacent to the revetment slope to ensure that additional loading does not further impact on the global stability of the revetment profile and monitoring of the dredging and continued underwater surveying during the dredging operation, together with the implementation of a bench in the batter profile.

The likelihood of risk to the development as a consequence of failure of the batter has been assessed as low provided suitable treatment methods and profile have been adopted (Pacific Geotech 2021). It is therefore considered that the proposed batter profiles indicated in **APPENDIX 2** are acceptable in the long term from a geotechnical perspective.

8 COMPLETION/CLOSURE CRITERIA

8.1 Introduction

Performance targets to assess closure completion are outlined in the CRLMP (JWA 2025) and the SWMP (G&S 2023). Relevant performance criteria from these management plans have been reproduced in the following sections.

8.2 Rehabilitation Works

TABLE 8 provides the performance indicators and targets for the proposed rehabilitation works within Wetland and Riparian Rehabilitation Areas.

TABLE 8
REAHBILITATION PERFORMANCE TARGETS AND CORRECTIVE ACTIONS

Performance Indicator	Target - Establishment period ¹	Target - Maintenance period ²
Survival and continued growth of seedlings (i.e. planted stock).	>90% survival of plantings during all monitoring events.	>90% survival of plantings during all monitoring events
Establishment of native ground cover/macrophytes within revegetation areas.	Planted ground covers/macrophytes substantially established.	>60% after three (3) years; >80% after five (5) years;
Establishment of native canopy cover (where applicable) within revegetation areas.	Planted trees substantially established.	>60% canopy cover of native tree species >1.5 m in height after three (3) years; >80% canopy cover of native tree species >2.5m in height after five (5) years.
Natural recruitment of native species throughout rehabilitation areas.	Evidence of natural recruitment of shrub and ground cover species.	Increasing natural recruitment of shrub and groundcover species.
All identified weeds controlled to an acceptable level within retained vegetation and rehabilitation areas.	Foliage Projective Cover (FPC) (%) assessed using eye estimates or photo points reduced to <10% within first year.	Foliage Projective Cover (FPC) (%) assessed using eye estimates or photo points: - reduced to <10% within first year; <10% in second year; <5% in the third year and consecutive years.

8.3 Assessment of Biological Indicators

Data collected as part of ongoing monitoring for existing sand extraction operations (i.e. Phases 1 - 4) will form the baseline for future monitoring of biological indicators on the

site. Biological indicator monitoring will aim for maintenance or improvement on the baseline levels identified in the existing extraction operations as a completion criterion.

8.4 End Use Water Quality Management

To ensure suitability of the extraction lakes for the proposed recreational end-use monitoring of the extraction lakes and groundwater network will be undertaken on a biannual basis at representative locations including a minimum of seven surface water sites and up to fifteen groundwater bores.

Biannual surface water, groundwater and cyanobacterial monitoring shall continue following the completion of sand extraction for five (5) years or until key water quality performance indicators stabilise. Monitoring frequency will then reduce to annual.

The NHMRC Guidelines for Recreational water quality (**TABLE 9**) (or relevant guideline as current at the completion of sand extraction) shall be adopted for water quality performance criteria.

TABLE 9
NHMRC RECREATIONAL WATER QUALITY GUIDELINES

Indicator	Guideline value
Temperature	16 - 34°C
Microbial quality	Preventive risk management practices should be adopted to ensure that designated recreational waters are protected against direct contamination by fresh faecal material, particularly of human or domesticated animal origin.
Cyanobacteria	Fresh recreational water bodies should not contain: • >10 µg/L total microcystins; >50 000 cells/mL toxic <i>Microcystis aeruginosa</i>; or biovolume equivalent • >4 mm³/L for the combined total of all cyanobacteria where a known toxin producer is dominant in the total biovolume;
pH	6.5 - 8.5 (A wider pH range of 5-9 is acceptable for water with a very low buffering capacity.)
Dissolved Oxygen	>80% saturation

9 FINANCIAL PROVISIONING

Since acquiring the site, HMA has demonstrated a consistent approach of integrating TSP's operational objectives with a progressive and adaptive rehabilitation strategy that addresses the here-and-now and provides for careful end-of-production-life planning for the site. Whilst TSP is not a mine site, relevant end-of-production-life planning advice and guidance is set out in the 'Strategic Framework for Mine Closure' ('the Framework'). A key consideration of the Framework is the adequate provision of funds to ensure site rehabilitation and end-use objectives will be met.

Consistent with the principles of the Framework, HMA proposes a funding method to ensure that:

- The costs of closure and site maintenance are adequately identified, estimated and accommodated within the closure plan;
- The closure and maintenance costs are reviewed regularly to appropriately respond to changing circumstances;
- The financial provision for closure and maintenance reflects the real cost;
- The financial provision accrues, is securely held and appropriately managed over time in accordance with appropriate accounting standards;
- The community and other stakeholders are protected from the burden of maintenance liabilities.

The funding method would be codified and realised through a financial structure and/or legal instrument(s) (prepared to the satisfaction of the regulator upon approval of the TSP Expansion) having the following features (or similar):

- Initially established by HMA, the fund structure would feature independent oversight and guarantees that the funds attach and remain dedicated to the TSP site;
- The fund's income would be secured as an amount per tonne of sand product produced from the site;
- Whilst the fund would meet all financial obligations in accordance with appropriate accounting standards, the fund operators would also hold regular (at least five-yearly) reviews of the fund's balance, growth and income provisions to ensure they remain appropriate to the stated rehabilitation and maintenance goals and objectives.

Alternatively, HMA may choose to hold a bank guarantee for the requisite amount as determined through application of the principles of the closure Framework. The ultimate funding method would be determined by HMA in consultation with the regulator upon approval of the TSP expansion.

Closure cost estimates are difficult to accurately define at this stage of the application process however estimates have been provided in **TABLE 10**. Review of these cost

provisions will be completed on a regular basis by HMA. The cost estimates consider the following components:

- Final landform construction;
- Infrastructure costs (i.e. recreational structures and walking tracks, necessary infrastructure to ensure public safety etc.);
- Infrastructure maintenance costs;
- Rehabilitation and biodiversity management (in accordance with the CRLMP);
- Landscape maintenance costs (e.g. regular mowing/slashing etc.);
- Monitoring costs; and
- Allowance for failed rehabilitation or pollution that may necessitate rework of rehabilitation areas (i.e. contingency funding).

TABLE 10
CLOSURE COST ESTIMATES
FOR THE INITIAL 5 YEARS POST CLOSURE (AS AT 2022)

Closure Works Item	Total Cost Estimate (Years 31 - 35)
Final landform/earthworks	To be completed progressively during the life of the operation.
Infrastructure costs	As above.
Infrastructure maintenance costs	\$50,000
Bank stability management costs	\$20,000
Haul road removal costs	\$25,000
Rehabilitation and biodiversity management	\$75,000
Rehabilitation and biodiversity monitoring	\$40,000
Landscape maintenance costs	\$25,000
Water quality monitoring	\$200,000
Contingency fund	\$150,000

It is noted that environmental management and monitoring commitments should extend beyond 2035, particularly in respect of water quality monitoring and weed management (with specific commitments regarding the frequency of monitoring to be provided in post approval management plans).

REFERENCES

Australian and New Zealand Minerals and Energy Council (ANZMEC) and Minerals Council of Australia (MCA) (2000) Strategic Framework for Mine Closure. ANZMEC and MCA, Canberra.


Gilbert & Sutherland (G&S) (2021) Agricultural Land Assessment. Tweed Sand Plant Expansion, Cudgen New South Wales. A report prepared for Hanson Construction Materials.

Gilbert & Sutherland (G&S) (2023) Soil and Water Management Plan. Tweed Sand Plant Expansion, Cudgen New South Wales. A report prepared for Hanson Construction Materials.

JWA (2025) Concept Rehabilitation and Landscape Management Plan. Tweed Sand Plant - Future Expansion, Altona Road, Cudgen. A Report Prepared for Heidelberg Materials Australia.

Pacific Geotech (2021) Geotechnical Report: Proposed Expansion - Hanson Tweed Sand Plant. A Report Prepared for Hanson Construction Materials Pty Ltd.

APPENDIX 1 - END USE AND FINAL LANDFORM PLAN (ZONE LANDSCAPE ARCHITECTURE 2025)

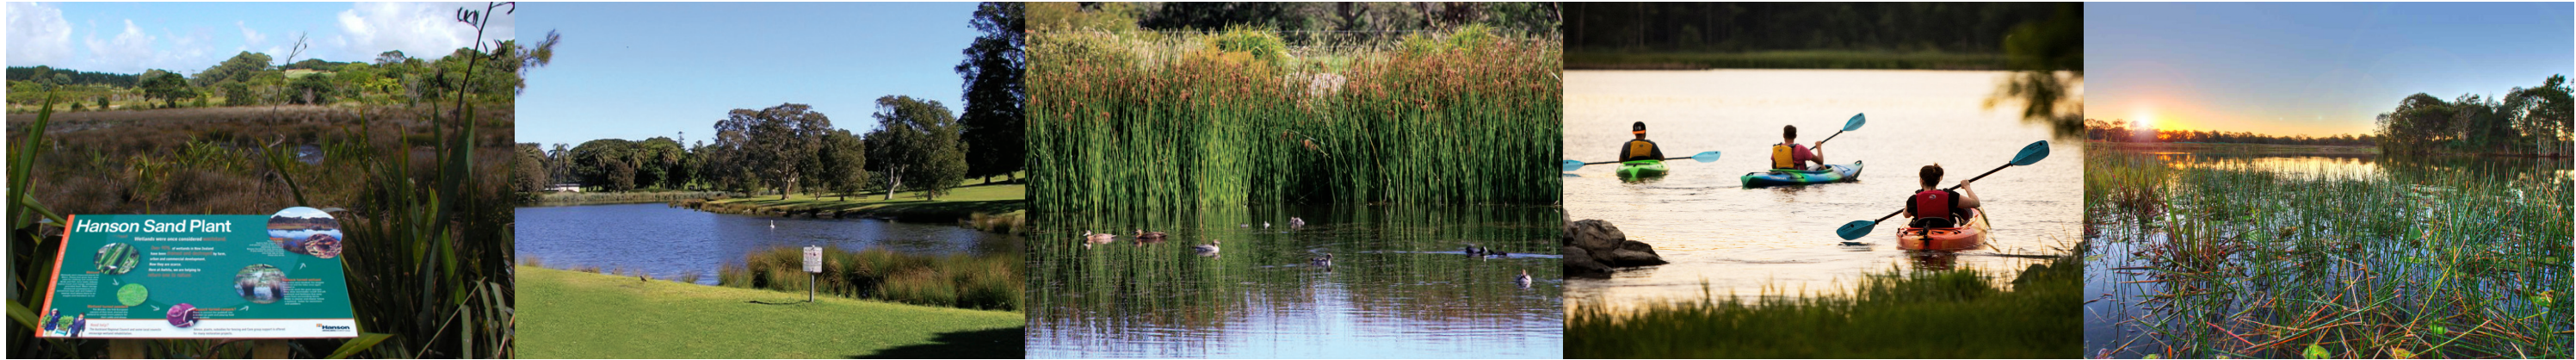

End Use & Final Landform Plan


On completion of the sand extraction works and subsequent final rehabilitation phases, the Project Site will present as a large natural lake bordered by significant vegetation to its perimeter. This vegetated buffer will consist of existing retained vegetation stands as well as revegetated rehabilitation areas consisting of locally occurring native species. The lake banks will vary from gently inclined wetland areas to steeper banks reinforced with vegetation, floating wetlands and/or rock (or similar). The lake edge will also include areas of gently inclined sandy 'beaches' as typically illustrated on this plan.

- A Central Open Space:** An area of grassed open space with scattered shade trees located between the North and South Lake. This central area of open space will feature car parking, pontoon / kayak launch and also serve as the start / finish location for a 2.5m wide access trail to the perimeter of the South Lake. The lake edge will also include areas of gently inclined sandy 'beaches' as typically illustrated on this plan.
- B Riparian Rehabilitation Areas:** The perimeter of the lakes will feature retained and rehabilitated locally occurring native vegetation. This vegetated buffer varies in width from a minimum of 10m, to an average maximum width of 20m. This buffer increases to a width of 50m in key locations noted on this plan.
- C Wetland Rehabilitation:** Wetland rehabilitation is proposed consisting primarily of natural regeneration of macrophytes around the fringes of the lake.

APPENDIX 2 - CROSS SECTIONS OF EXTRACTION AREA AND PROPOSED LAKE BANK PROFILES

- LEGEND
- RP BOUNDARY
 - TOP OF BATTER
 - BOTTOM OF BATTER
 - REHAB PHASE BOUNDARY

REFER ZONE PLAN 21130-F127
FOR HATCHING DETAILS

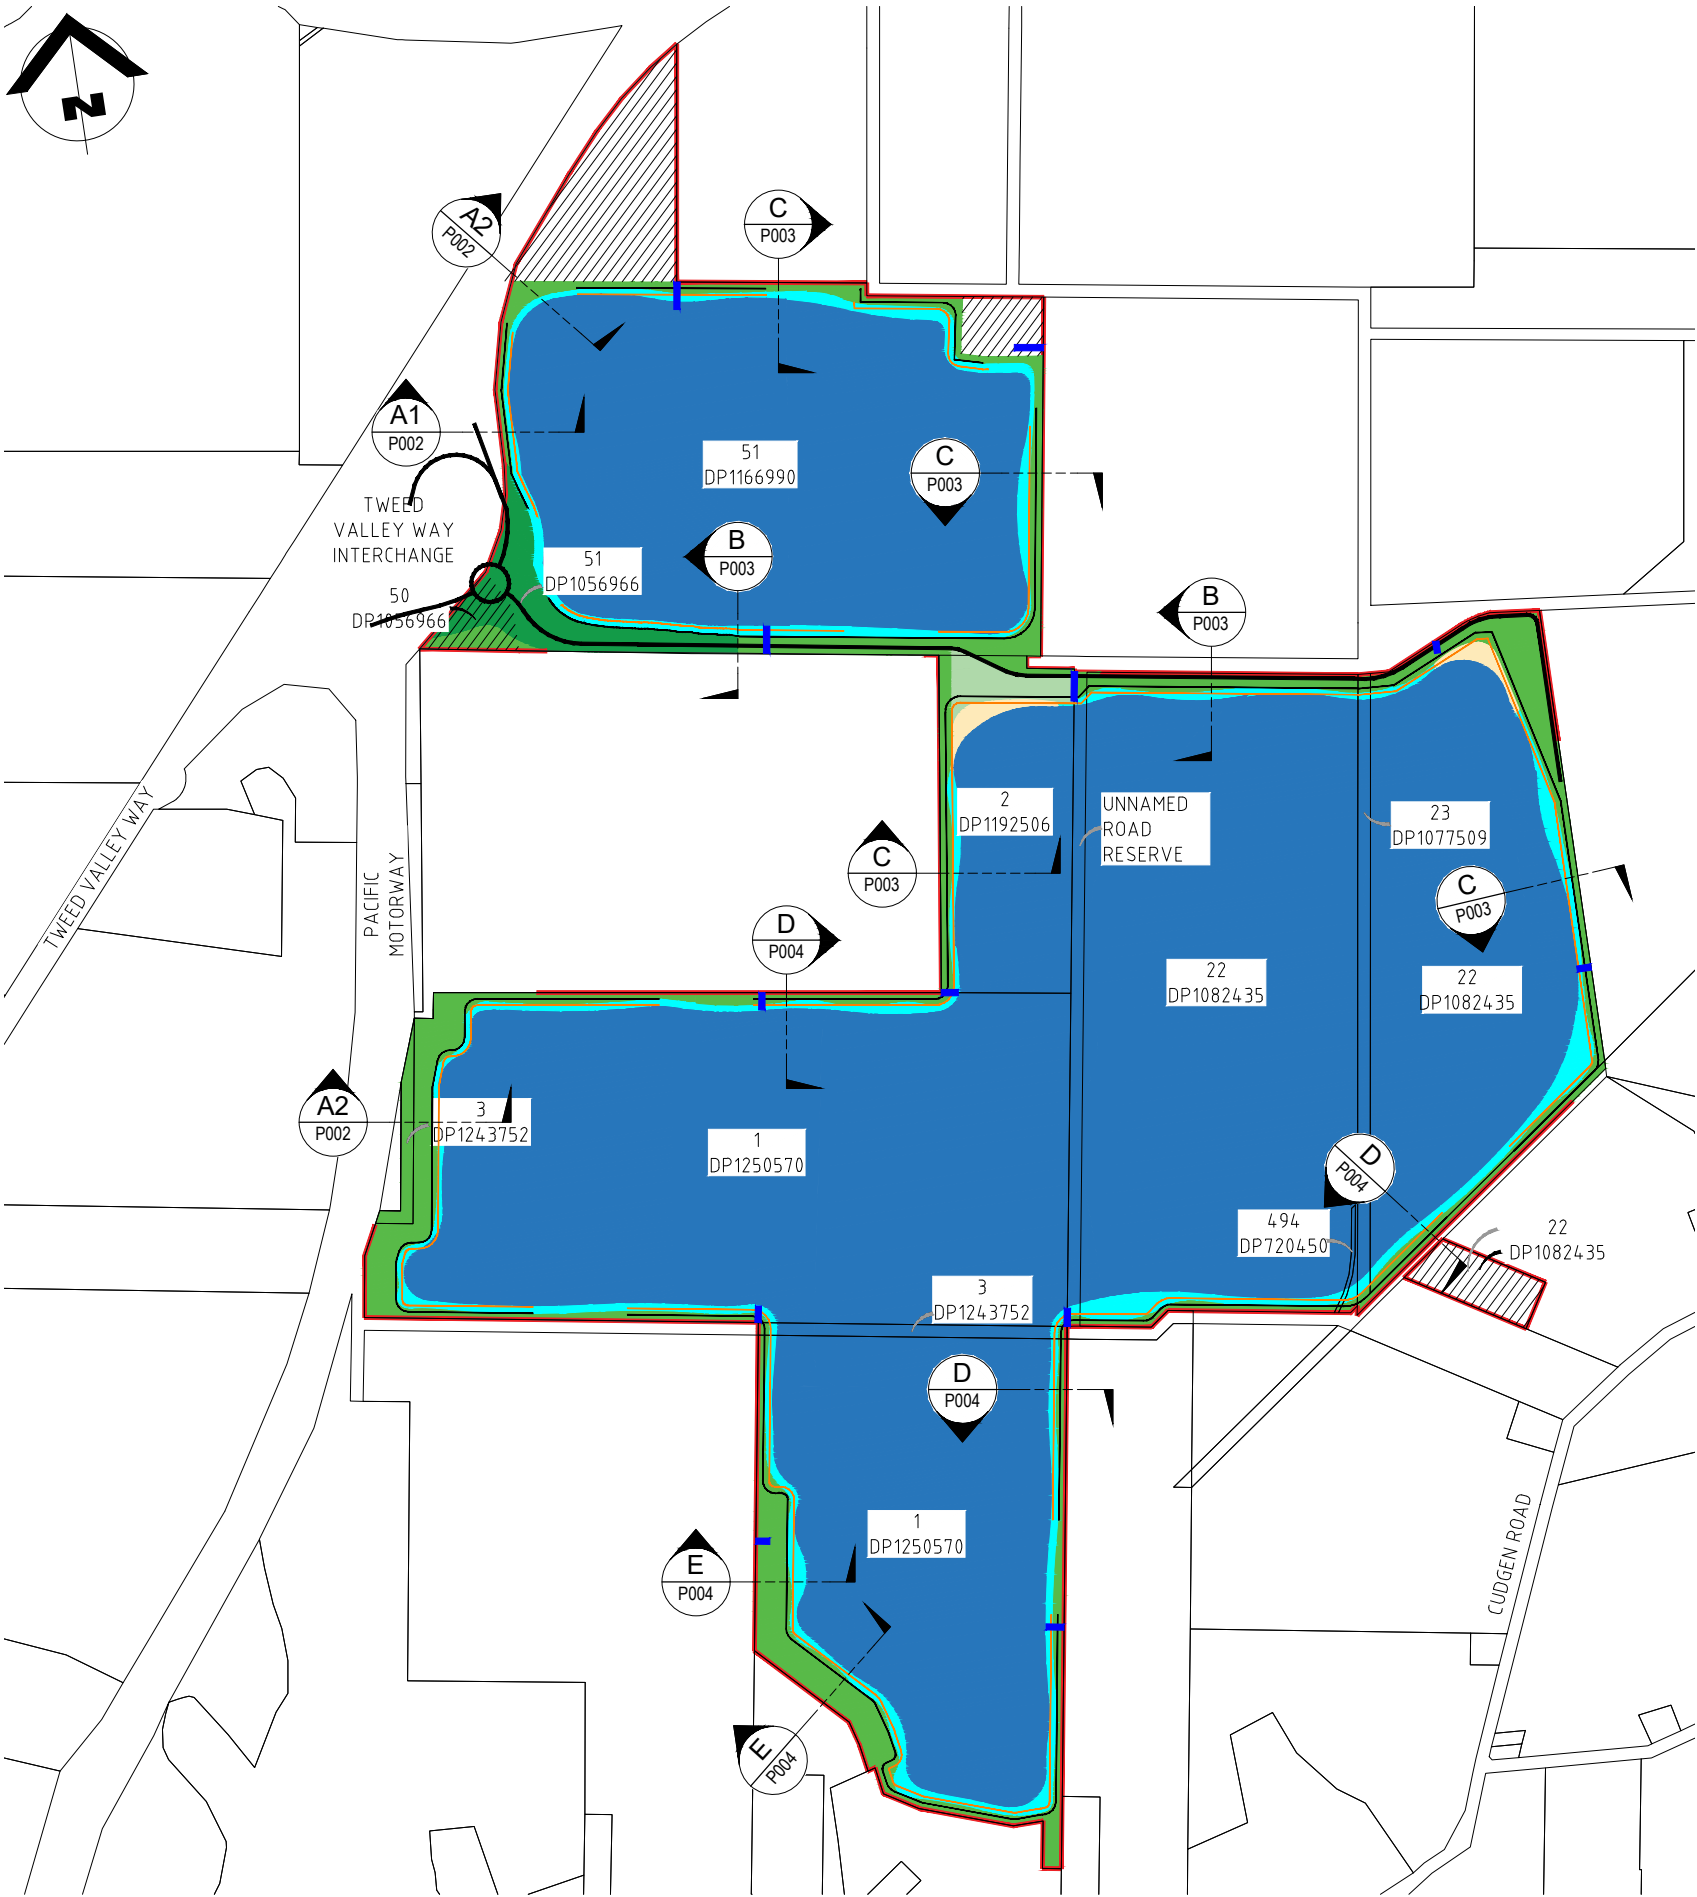

PRELIMINARY ISSUE
NOT FOR CONSTRUCTION



A1 THE SCALE SHOWN IS ORIGINAL DRAWING SCALE

REV	DATE	REVISION DETAILS	APPROVED
C	28.04.25	END USE UPDATE	JW
B	10.12.23	BATTER SLOPES TO 1:4 PER GEOTEH	JW
A	17.10.21	ISSUED FOR INFORMATION	JW

NER NO.

PROJECT
HANSON TWEED SAND PLANT
PROPOSED PLANT EXPANSION
ALTONA ROAD, CUDGEN
NSW, 2487

DRAWN	TV
DESIGNED	TV
CHECKED	JW
APPROVED	JW
DATE	DEC. 22
GRID REF.	AHD


CLIENT
HANSON CONSTRUCTION
MATERIALS PTY LTD

TITLE
LAKE BANK PROFILE
SECTIONS LAYOUT

DRAWING NO.
LC22023-P001

REV.
C

Wednesday, 14 May 2025 7:26:28 AM

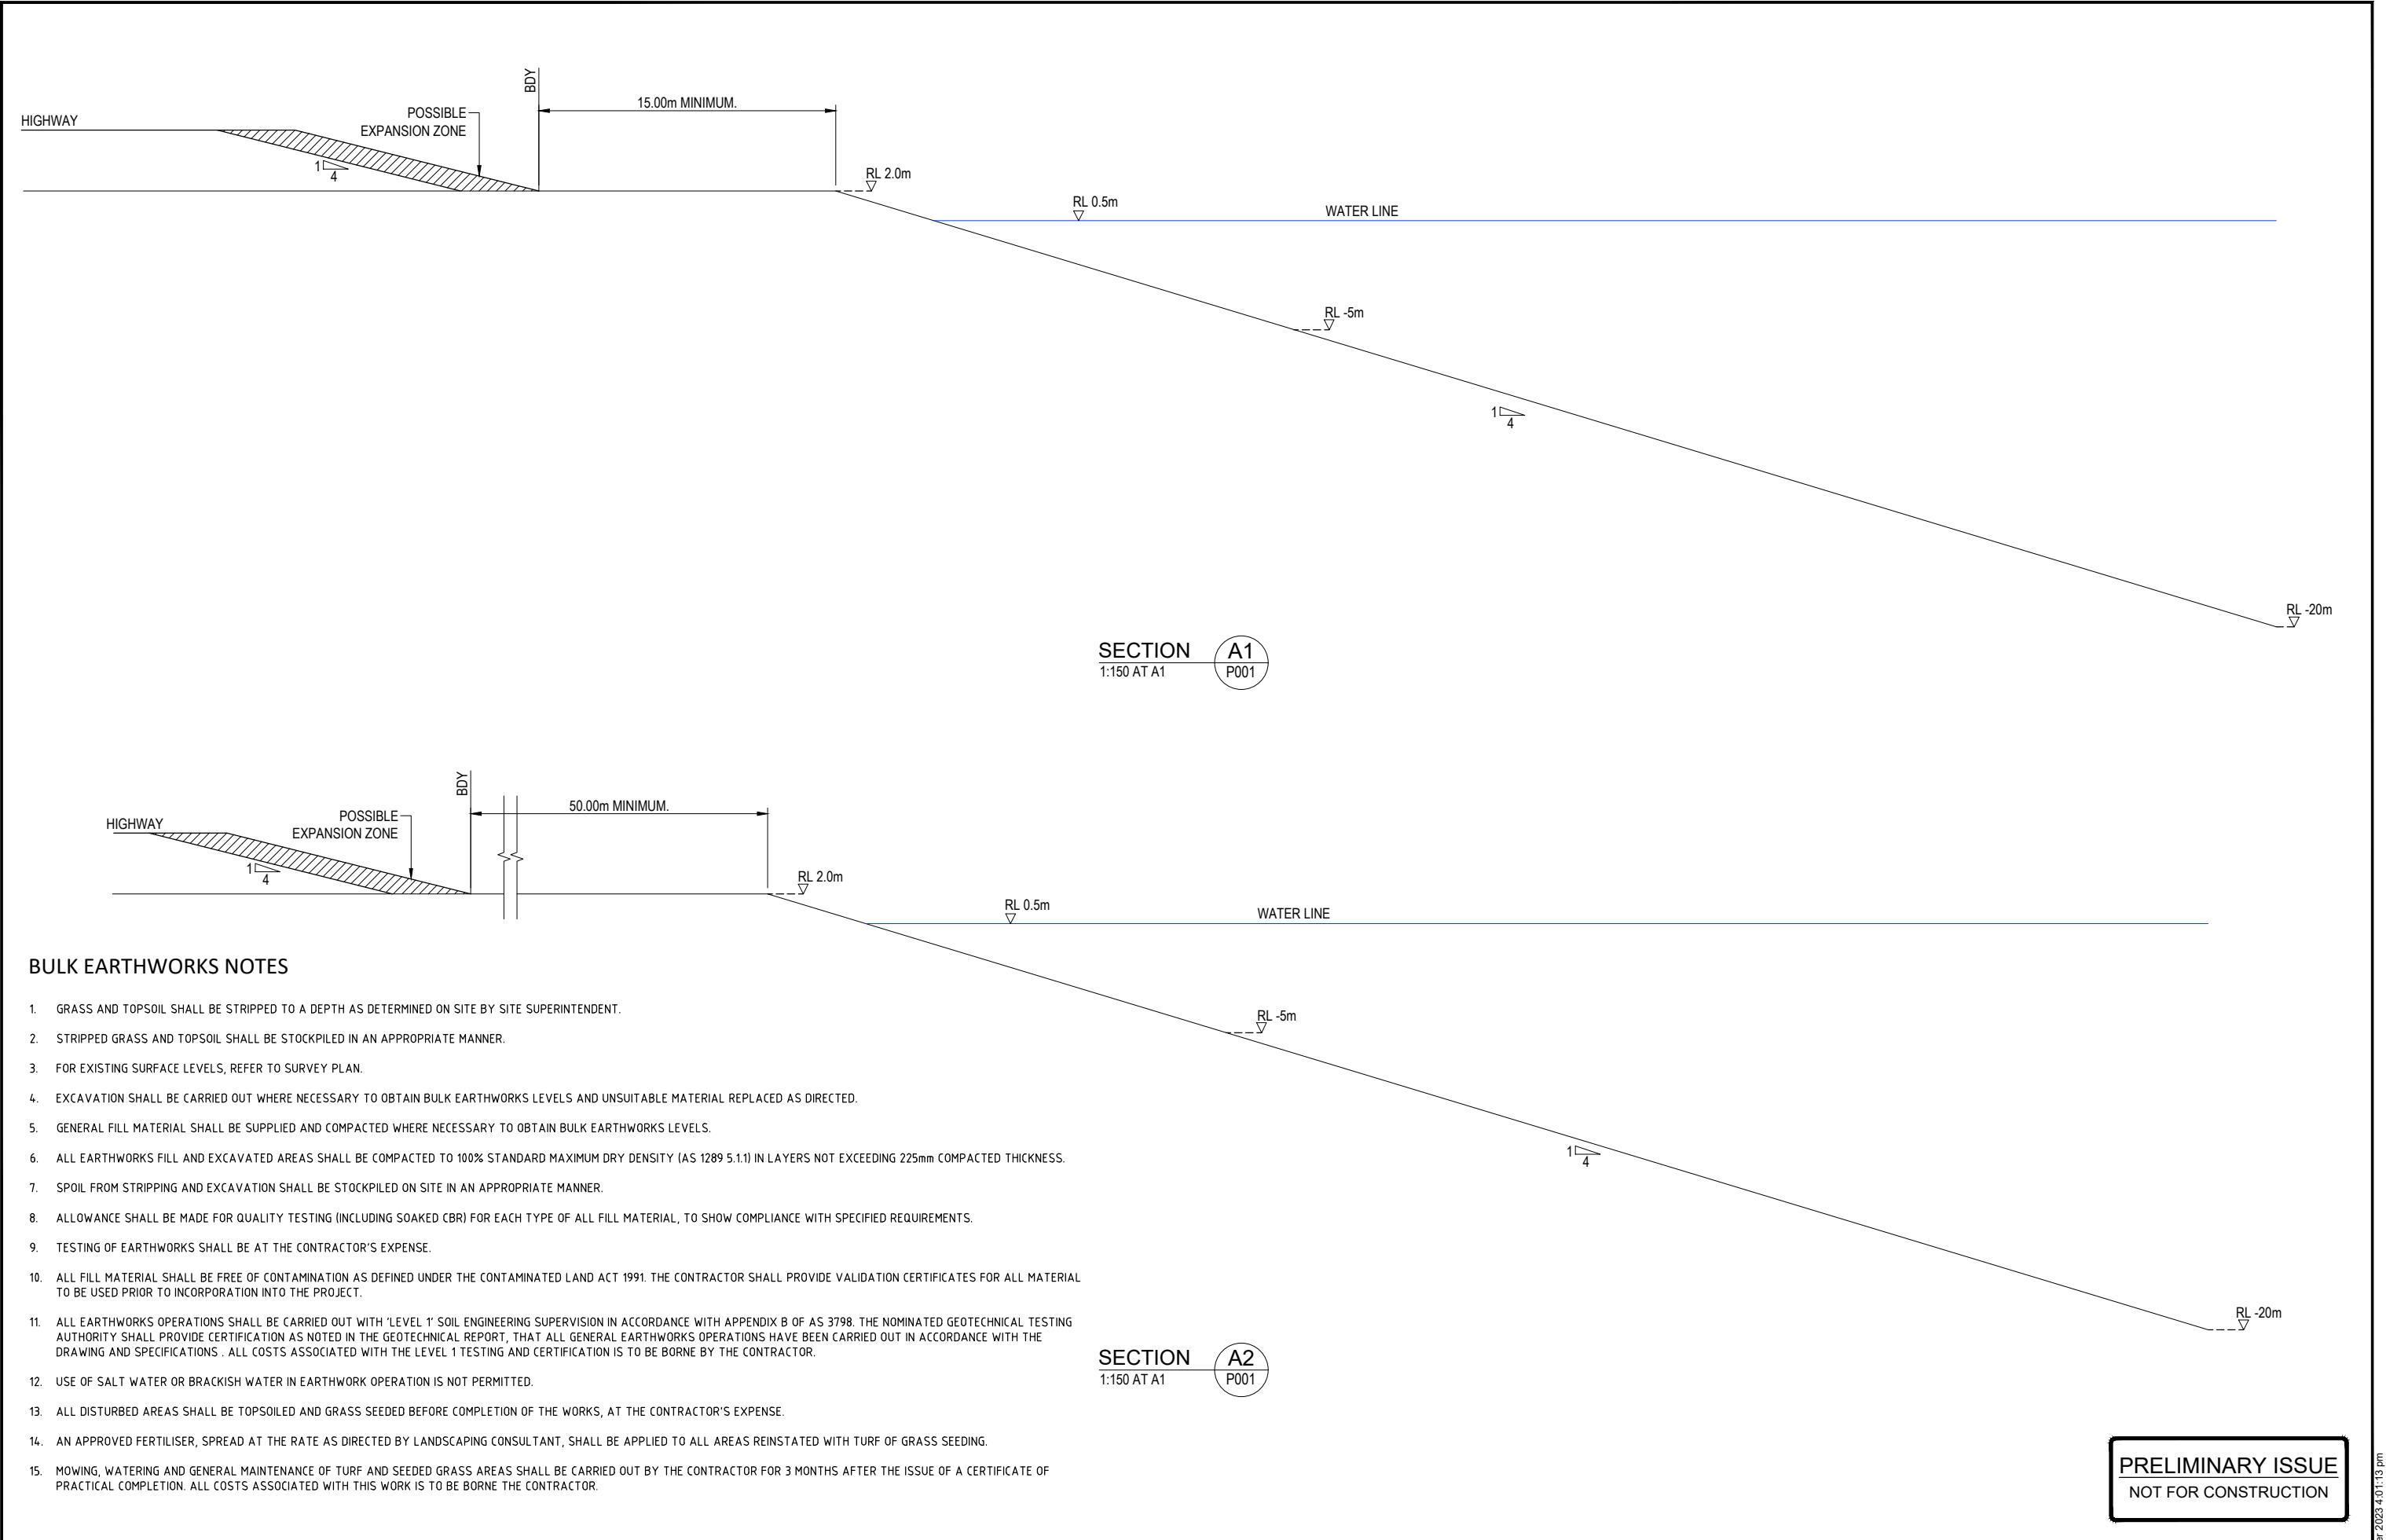


BULK EARTHWORKS NOTES


1. GRASS AND TOPSOIL SHALL BE STRIPPED TO A DEPTH AS DETERMINED ON SITE BY SITE SUPERINTENDENT.
2. STRIPPED GRASS AND TOPSOIL SHALL BE STOCKPILED IN AN APPROPRIATE MANNER.
3. FOR EXISTING SURFACE LEVELS, REFER TO SURVEY PLAN.
4. EXCAVATION SHALL BE CARRIED OUT WHERE NECESSARY TO OBTAIN BULK EARTHWORKS LEVELS AND UNSUITABLE MATERIAL REPLACED AS DIRECTED.
5. GENERAL FILL MATERIAL SHALL BE SUPPLIED AND COMPACTED WHERE NECESSARY TO OBTAIN BULK EARTHWORKS LEVELS.
6. ALL EARTHWORKS FILL AND EXCAVATED AREAS SHALL BE COMPACTED TO 100% STANDARD MAXIMUM DRY DENSITY (AS 1289 5.1.1) IN LAYERS NOT EXCEEDING 225mm COMPACTED THICKNESS.
7. SPOIL FROM STRIPPING AND EXCAVATION SHALL BE STOCKPILED ON SITE IN AN APPROPRIATE MANNER.
8. ALLOWANCE SHALL BE MADE FOR QUALITY TESTING (INCLUDING SOAKED CBR) FOR EACH TYPE OF ALL FILL MATERIAL, TO SHOW COMPLIANCE WITH SPECIFIED REQUIREMENTS.
9. TESTING OF EARTHWORKS SHALL BE AT THE CONTRACTOR'S EXPENSE.
10. ALL FILL MATERIAL SHALL BE FREE OF CONTAMINATION AS DEFINED UNDER THE CONTAMINATED LAND ACT 1991. THE CONTRACTOR SHALL PROVIDE VALIDATION CERTIFICATES FOR ALL MATERIAL TO BE USED PRIOR TO INCORPORATION INTO THE PROJECT.
11. ALL EARTHWORKS OPERATIONS SHALL BE CARRIED OUT WITH 'LEVEL 1' SOIL ENGINEERING SUPERVISION IN ACCORDANCE WITH APPENDIX B OF AS 3798. THE NOMINATED GEOTECHNICAL TESTING AUTHORITY SHALL PROVIDE CERTIFICATION AS NOTED IN THE GEOTECHNICAL REPORT, THAT ALL GENERAL EARTHWORKS OPERATIONS HAVE BEEN CARRIED OUT IN ACCORDANCE WITH THE DRAWING AND SPECIFICATIONS . ALL COSTS ASSOCIATED WITH THE LEVEL 1 TESTING AND CERTIFICATION IS TO BE BORNE BY THE CONTRACTOR.
12. USE OF SALT WATER OR BRACKISH WATER IN EARTHWORK OPERATION IS NOT PERMITTED.
13. ALL DISTURBED AREAS SHALL BE TOPSOILED AND GRASS SEEDED BEFORE COMPLETION OF THE WORKS, AT THE CONTRACTOR'S EXPENSE.
14. AN APPROVED FERTILISER, SPREAD AT THE RATE AS DIRECTED BY LANDSCAPING CONSULTANT, SHALL BE APPLIED TO ALL AREAS REINSTATED WITH TURF OF GRASS SEEDING.
15. MOWING, WATERING AND GENERAL MAINTENANCE OF TURF AND SEEDED GRASS AREAS SHALL BE CARRIED OUT BY THE CONTRACTOR FOR 3 MONTHS AFTER THE ISSUE OF A CERTIFICATE OF PRACTICAL COMPLETION. ALL COSTS ASSOCIATED WITH THIS WORK IS TO BE BORNE THE CONTRACTOR.

PRELIMINARY ISSUE
NOT FOR CONSTRUCTION

 Legend Consultants Efficiency • Innovation • Quality					NER NO.	PROJECT HANSON TWEED SAND PLANT PROPOSED PLANT EXPANSION ALTONA ROAD, CUDGEN NSW, 2487	DRAWN	TV	CLIENT HANSON CONSTRUCTION MATERIALS PTY LTD	TITLE LAKE BANK SECTIONS SHEET 1 OF 3	
							DESIGNED	TV			
							CHECKED	JW			
							APPROVED	JW			
							DATE	DEC 22			
A1 THE SCALE SHOWN IS ORIGINAL DRAWING SCALE	REV	DATE	REVISION DETAILS		APPROVED	DRAWING NO. LC22023-P002	GRID REF.	AHD	REV. B		
	B	10.12.23	BATTER SLOPES TO 1:4 PER GEOTEH		JW						
	A	17.10.21	ISSUED FOR INFORMATION		JW						

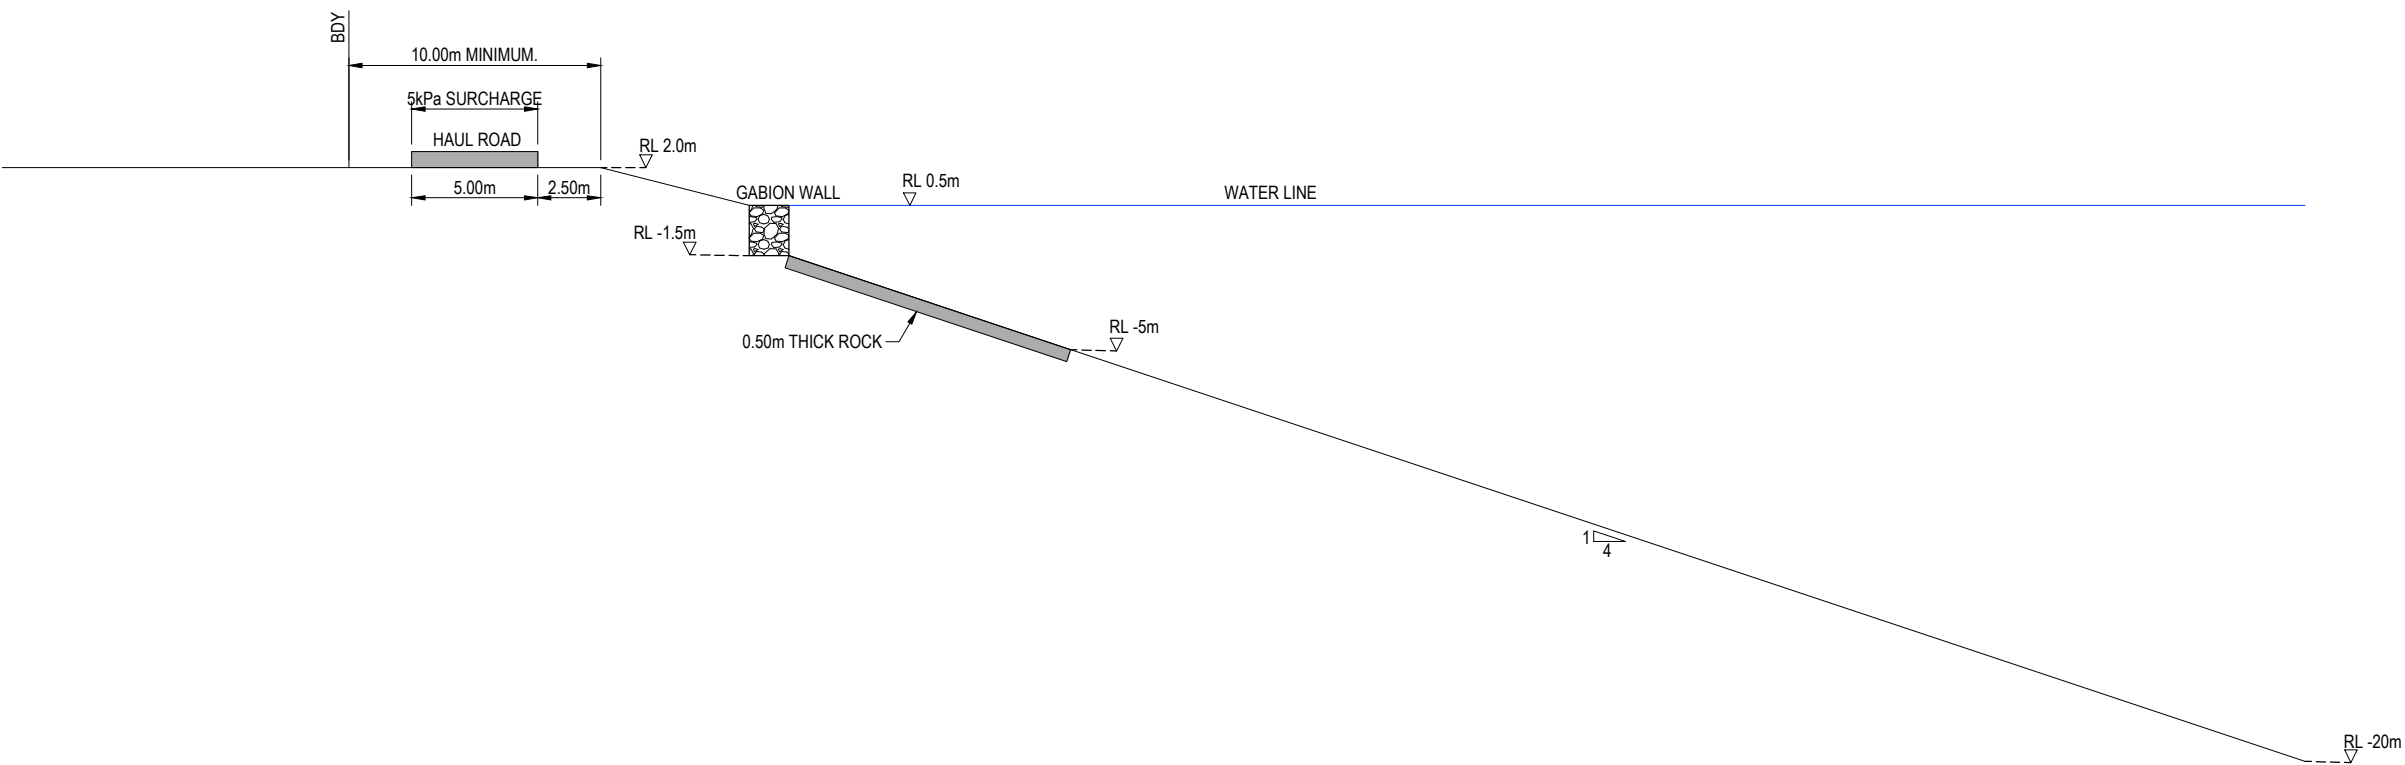

SECTION B
1:150 AT A1
P001

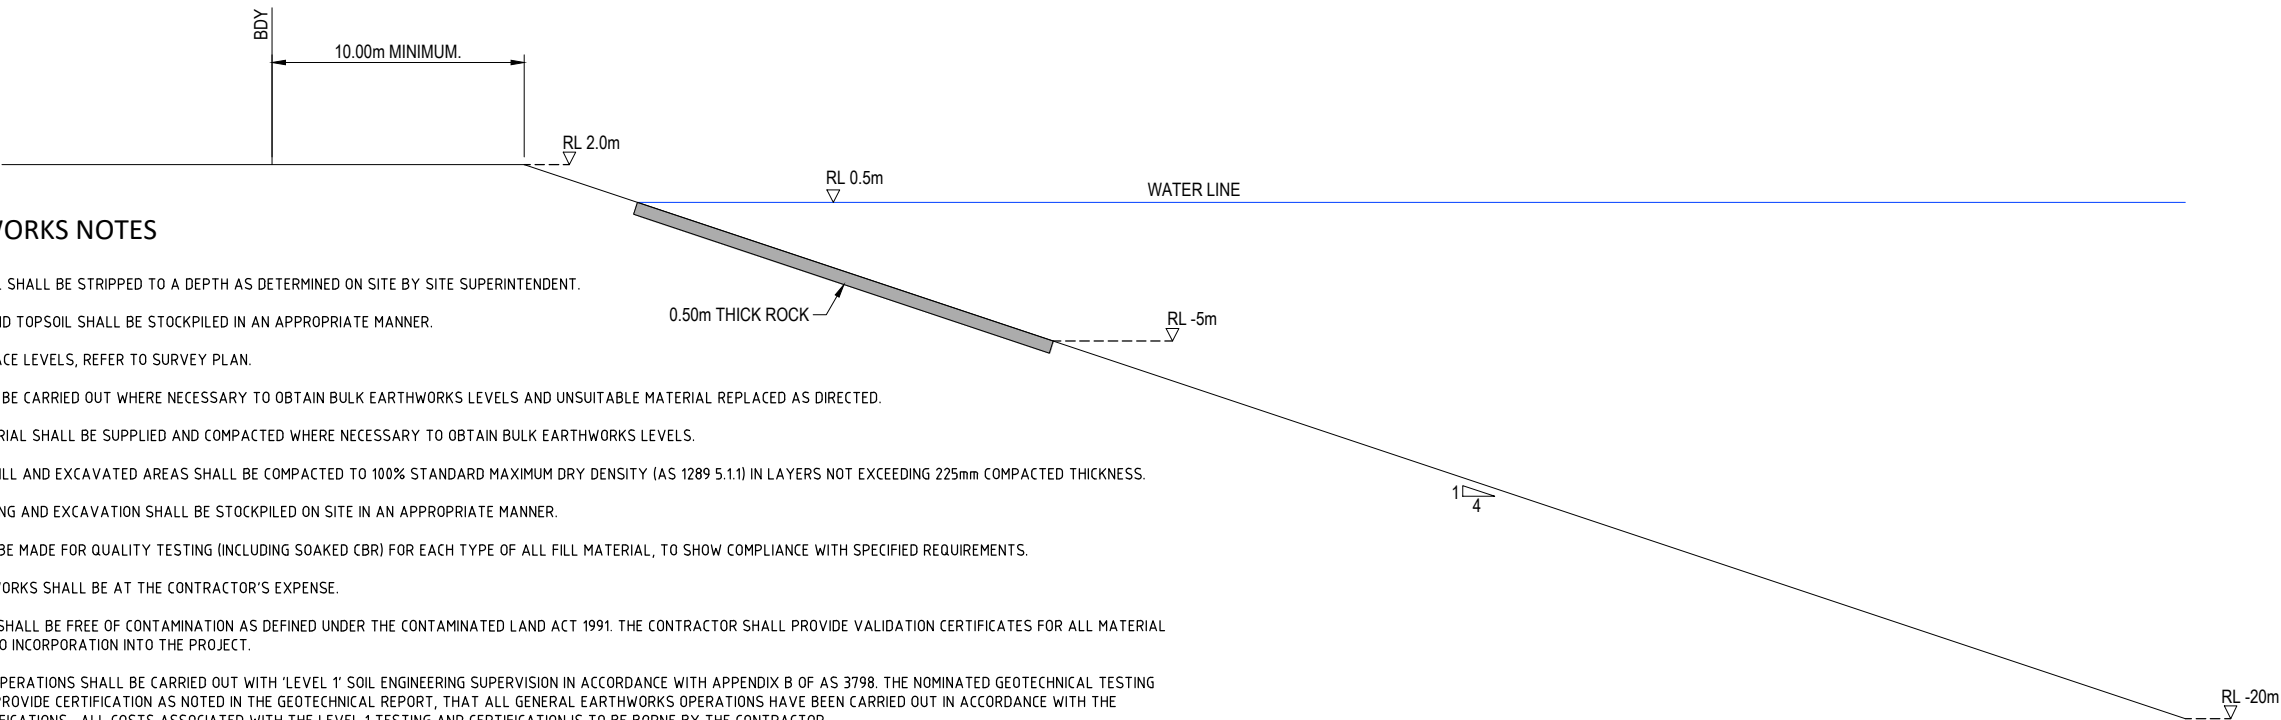



SECTION C
1:150 AT A1
P001

BULK EARTHWORKS NOTES


- GRASS AND TOPSOIL SHALL BE STRIPPED TO A DEPTH AS DETERMINED ON SITE BY SITE SUPERINTENDENT.
- STRIPPED GRASS AND TOPSOIL SHALL BE STOCKPILED IN AN APPROPRIATE MANNER.
- FOR EXISTING SURFACE LEVELS, REFER TO SURVEY PLAN.
- EXCAVATION SHALL BE CARRIED OUT WHERE NECESSARY TO OBTAIN BULK EARTHWORKS LEVELS AND UNSUITABLE MATERIAL REPLACED AS DIRECTED.
- GENERAL FILL MATERIAL SHALL BE SUPPLIED AND COMPACTED WHERE NECESSARY TO OBTAIN BULK EARTHWORKS LEVELS.
- ALL EARTHWORKS FILL AND EXCAVATED AREAS SHALL BE COMPACTED TO 100% STANDARD MAXIMUM DRY DENSITY (AS 1289 5.1.1) IN LAYERS NOT EXCEEDING 225mm COMPACTED THICKNESS.
- SPOIL FROM STRIPPING AND EXCAVATION SHALL BE STOCKPILED ON SITE IN AN APPROPRIATE MANNER.
- ALLOWANCE SHALL BE MADE FOR QUALITY TESTING (INCLUDING SOAKED CBR) FOR EACH TYPE OF ALL FILL MATERIAL, TO SHOW COMPLIANCE WITH SPECIFIED REQUIREMENTS.
- TESTING OF EARTHWORKS SHALL BE AT THE CONTRACTOR'S EXPENSE.
- ALL FILL MATERIAL SHALL BE FREE OF CONTAMINATION AS DEFINED UNDER THE CONTAMINATED LAND ACT 1991. THE CONTRACTOR SHALL PROVIDE VALIDATION CERTIFICATES FOR ALL MATERIAL TO BE USED PRIOR TO INCORPORATION INTO THE PROJECT.
- ALL EARTHWORKS OPERATIONS SHALL BE CARRIED OUT WITH 'LEVEL 1' SOIL ENGINEERING SUPERVISION IN ACCORDANCE WITH APPENDIX B OF AS 3798. THE NOMINATED GEOTECHNICAL TESTING AUTHORITY SHALL PROVIDE CERTIFICATION AS NOTED IN THE GEOTECHNICAL REPORT, THAT ALL GENERAL EARTHWORKS OPERATIONS HAVE BEEN CARRIED OUT IN ACCORDANCE WITH THE DRAWING AND SPECIFICATIONS. ALL COSTS ASSOCIATED WITH THE LEVEL 1 TESTING AND CERTIFICATION IS TO BE BORNE BY THE CONTRACTOR.
- USE OF SALT WATER OR BRACKISH WATER IN EARTHWORK OPERATION IS NOT PERMITTED.
- ALL DISTURBED AREAS SHALL BE TOPSOILED AND GRASS SEEDED BEFORE COMPLETION OF THE WORKS, AT THE CONTRACTOR'S EXPENSE.
- AN APPROVED FERTILISER, SPREAD AT THE RATE AS DIRECTED BY LANDSCAPING CONSULTANT, SHALL BE APPLIED TO ALL AREAS REINSTATED WITH TURF OF GRASS SEEDING.
- MOWING, WATERING AND GENERAL MAINTENANCE OF TURF AND SEEDED GRASS AREAS SHALL BE CARRIED OUT BY THE CONTRACTOR FOR 3 MONTHS AFTER THE ISSUE OF A CERTIFICATE OF PRACTICAL COMPLETION. ALL COSTS ASSOCIATED WITH THIS WORK IS TO BE BORNE THE CONTRACTOR.

PRELIMINARY ISSUE
NOT FOR CONSTRUCTION

 Legend Consultants Efficiency • Innovation • Quality					NER NO.	PROJECT HANSON TWEED SAND PLANT PROPOSED PLANT EXPANSION ALTONA ROAD, CUDGEN NSW, 2487	DRAWN TV DESIGNED TV CHECKED JW APPROVED JW DATE DEC 22 GRID REF. AHD	CLIENT HANSON CONSTRUCTION MATERIALS PTY LTD	TITLE LAKE BANK SECTIONS SHEET 2 OF 3		
	B	10.12.23	BATTER SLOPES TO 1:4 PER GEOTEH	JW							
A1 THE SCALE SHOWN IS ORIGINAL DRAWING SCALE									DRAWING NO. LC22023-P003		REV. B
	REV	DATE	REVISION DETAILS	APPROVED							

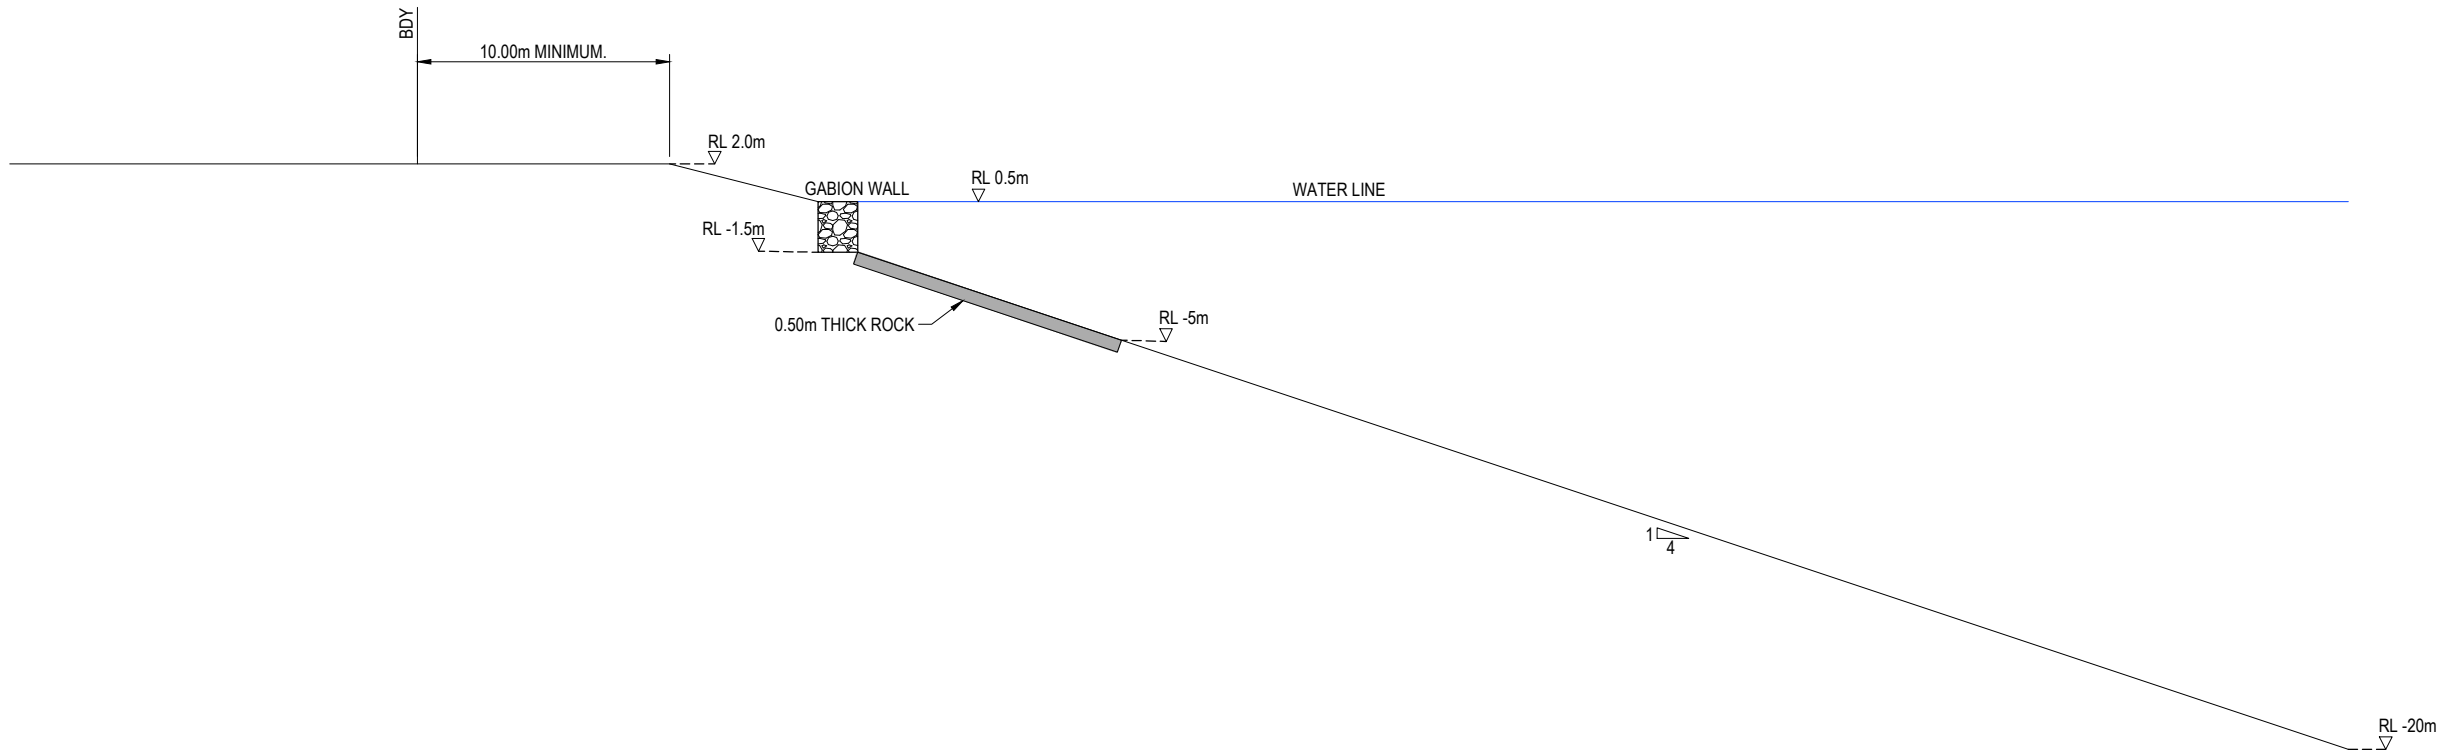

SECTION D
1:150 AT A1
P001

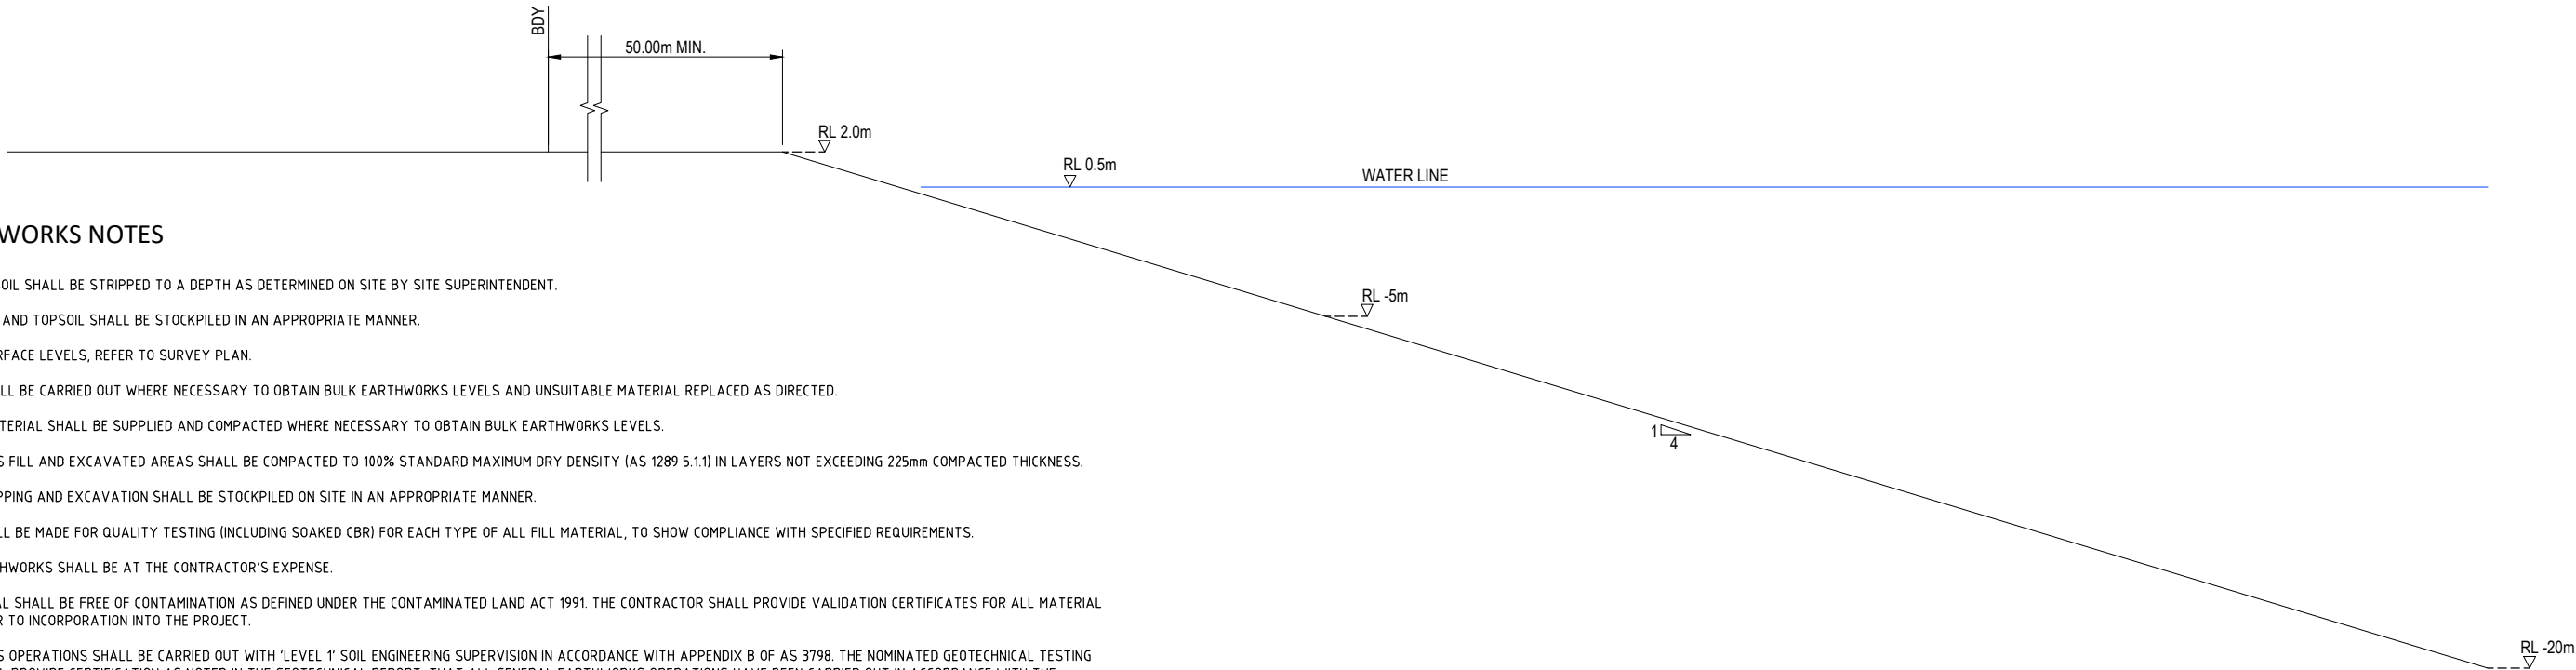


SECTION E
1:150 AT A1
P001

BULK EARTHWORKS NOTES

- GRASS AND TOPSOIL SHALL BE STRIPPED TO A DEPTH AS DETERMINED ON SITE BY SITE SUPERINTENDENT.
- STRIPPED GRASS AND TOPSOIL SHALL BE STOCKPILED IN AN APPROPRIATE MANNER.
- FOR EXISTING SURFACE LEVELS, REFER TO SURVEY PLAN.
- EXCAVATION SHALL BE CARRIED OUT WHERE NECESSARY TO OBTAIN BULK EARTHWORKS LEVELS AND UNSUITABLE MATERIAL REPLACED AS DIRECTED.
- GENERAL FILL MATERIAL SHALL BE SUPPLIED AND COMPACTED WHERE NECESSARY TO OBTAIN BULK EARTHWORKS LEVELS.
- ALL EARTHWORKS FILL AND EXCAVATED AREAS SHALL BE COMPACTED TO 100% STANDARD MAXIMUM DRY DENSITY (AS 1289 5.1.1) IN LAYERS NOT EXCEEDING 225mm COMPACTED THICKNESS.
- SPOIL FROM STRIPPING AND EXCAVATION SHALL BE STOCKPILED ON SITE IN AN APPROPRIATE MANNER.
- ALLOWANCE SHALL BE MADE FOR QUALITY TESTING (INCLUDING SOAKED CBR) FOR EACH TYPE OF ALL FILL MATERIAL, TO SHOW COMPLIANCE WITH SPECIFIED REQUIREMENTS.
- TESTING OF EARTHWORKS SHALL BE AT THE CONTRACTOR'S EXPENSE.
- ALL FILL MATERIAL SHALL BE FREE OF CONTAMINATION AS DEFINED UNDER THE CONTAMINATED LAND ACT 1991. THE CONTRACTOR SHALL PROVIDE VALIDATION CERTIFICATES FOR ALL MATERIAL TO BE USED PRIOR TO INCORPORATION INTO THE PROJECT.
- ALL EARTHWORKS OPERATIONS SHALL BE CARRIED OUT WITH 'LEVEL 1' SOIL ENGINEERING SUPERVISION IN ACCORDANCE WITH APPENDIX B OF AS 3798. THE NOMINATED GEOTECHNICAL TESTING AUTHORITY SHALL PROVIDE CERTIFICATION AS NOTED IN THE GEOTECHNICAL REPORT, THAT ALL GENERAL EARTHWORKS OPERATIONS HAVE BEEN CARRIED OUT IN ACCORDANCE WITH THE DRAWING AND SPECIFICATIONS. ALL COSTS ASSOCIATED WITH THE LEVEL 1 TESTING AND CERTIFICATION IS TO BE BORNE BY THE CONTRACTOR.
- USE OF SALT WATER OR BRACKISH WATER IN EARTHWORK OPERATION IS NOT PERMITTED.
- ALL DISTURBED AREAS SHALL BE TOPSOILED AND GRASS SEEDED BEFORE COMPLETION OF THE WORKS, AT THE CONTRACTOR'S EXPENSE.
- AN APPROVED FERTILISER, SPREAD AT THE RATE AS DIRECTED BY LANDSCAPING CONSULTANT, SHALL BE APPLIED TO ALL AREAS REINSTATED WITH TURF OF GRASS SEEDING.
- MOWING, WATERING AND GENERAL MAINTENANCE OF TURF AND SEEDED GRASS AREAS SHALL BE CARRIED OUT BY THE CONTRACTOR FOR 3 MONTHS AFTER THE ISSUE OF A CERTIFICATE OF PRACTICAL COMPLETION. ALL COSTS ASSOCIATED WITH THIS WORK IS TO BE BORNE THE CONTRACTOR.

PRELIMINARY ISSUE
NOT FOR CONSTRUCTION

 Legend Consultants Efficiency • Innovation • Quality					NER NO.	PROJECT HANSON TWEED SAND PLANT PROPOSED PLANT EXPANSION ALTONA ROAD, CUDGEN NSW, 2487	DRAWN TV DESIGNED TV CHECKED JW APPROVED JW DATE DEC 22 GRID REF. AHD	CLIENT HANSON CONSTRUCTION MATERIALS PTY LTD	TITLE LAKE BANK SECTIONS SHEET 3 OF 3		
	B	10.12.23	BATTER SLOPES TO 1:4 PER GEOTEH	JW							
	A	17.10.21	ISSUED FOR INFORMATION	JW							
A1 THE SCALE SHOWN IS ORIGINAL DRAWING SCALE	REV	DATE	REVISION DETAILS	APPROVED					DRAWING NO. LC22023-P004	REV. B	