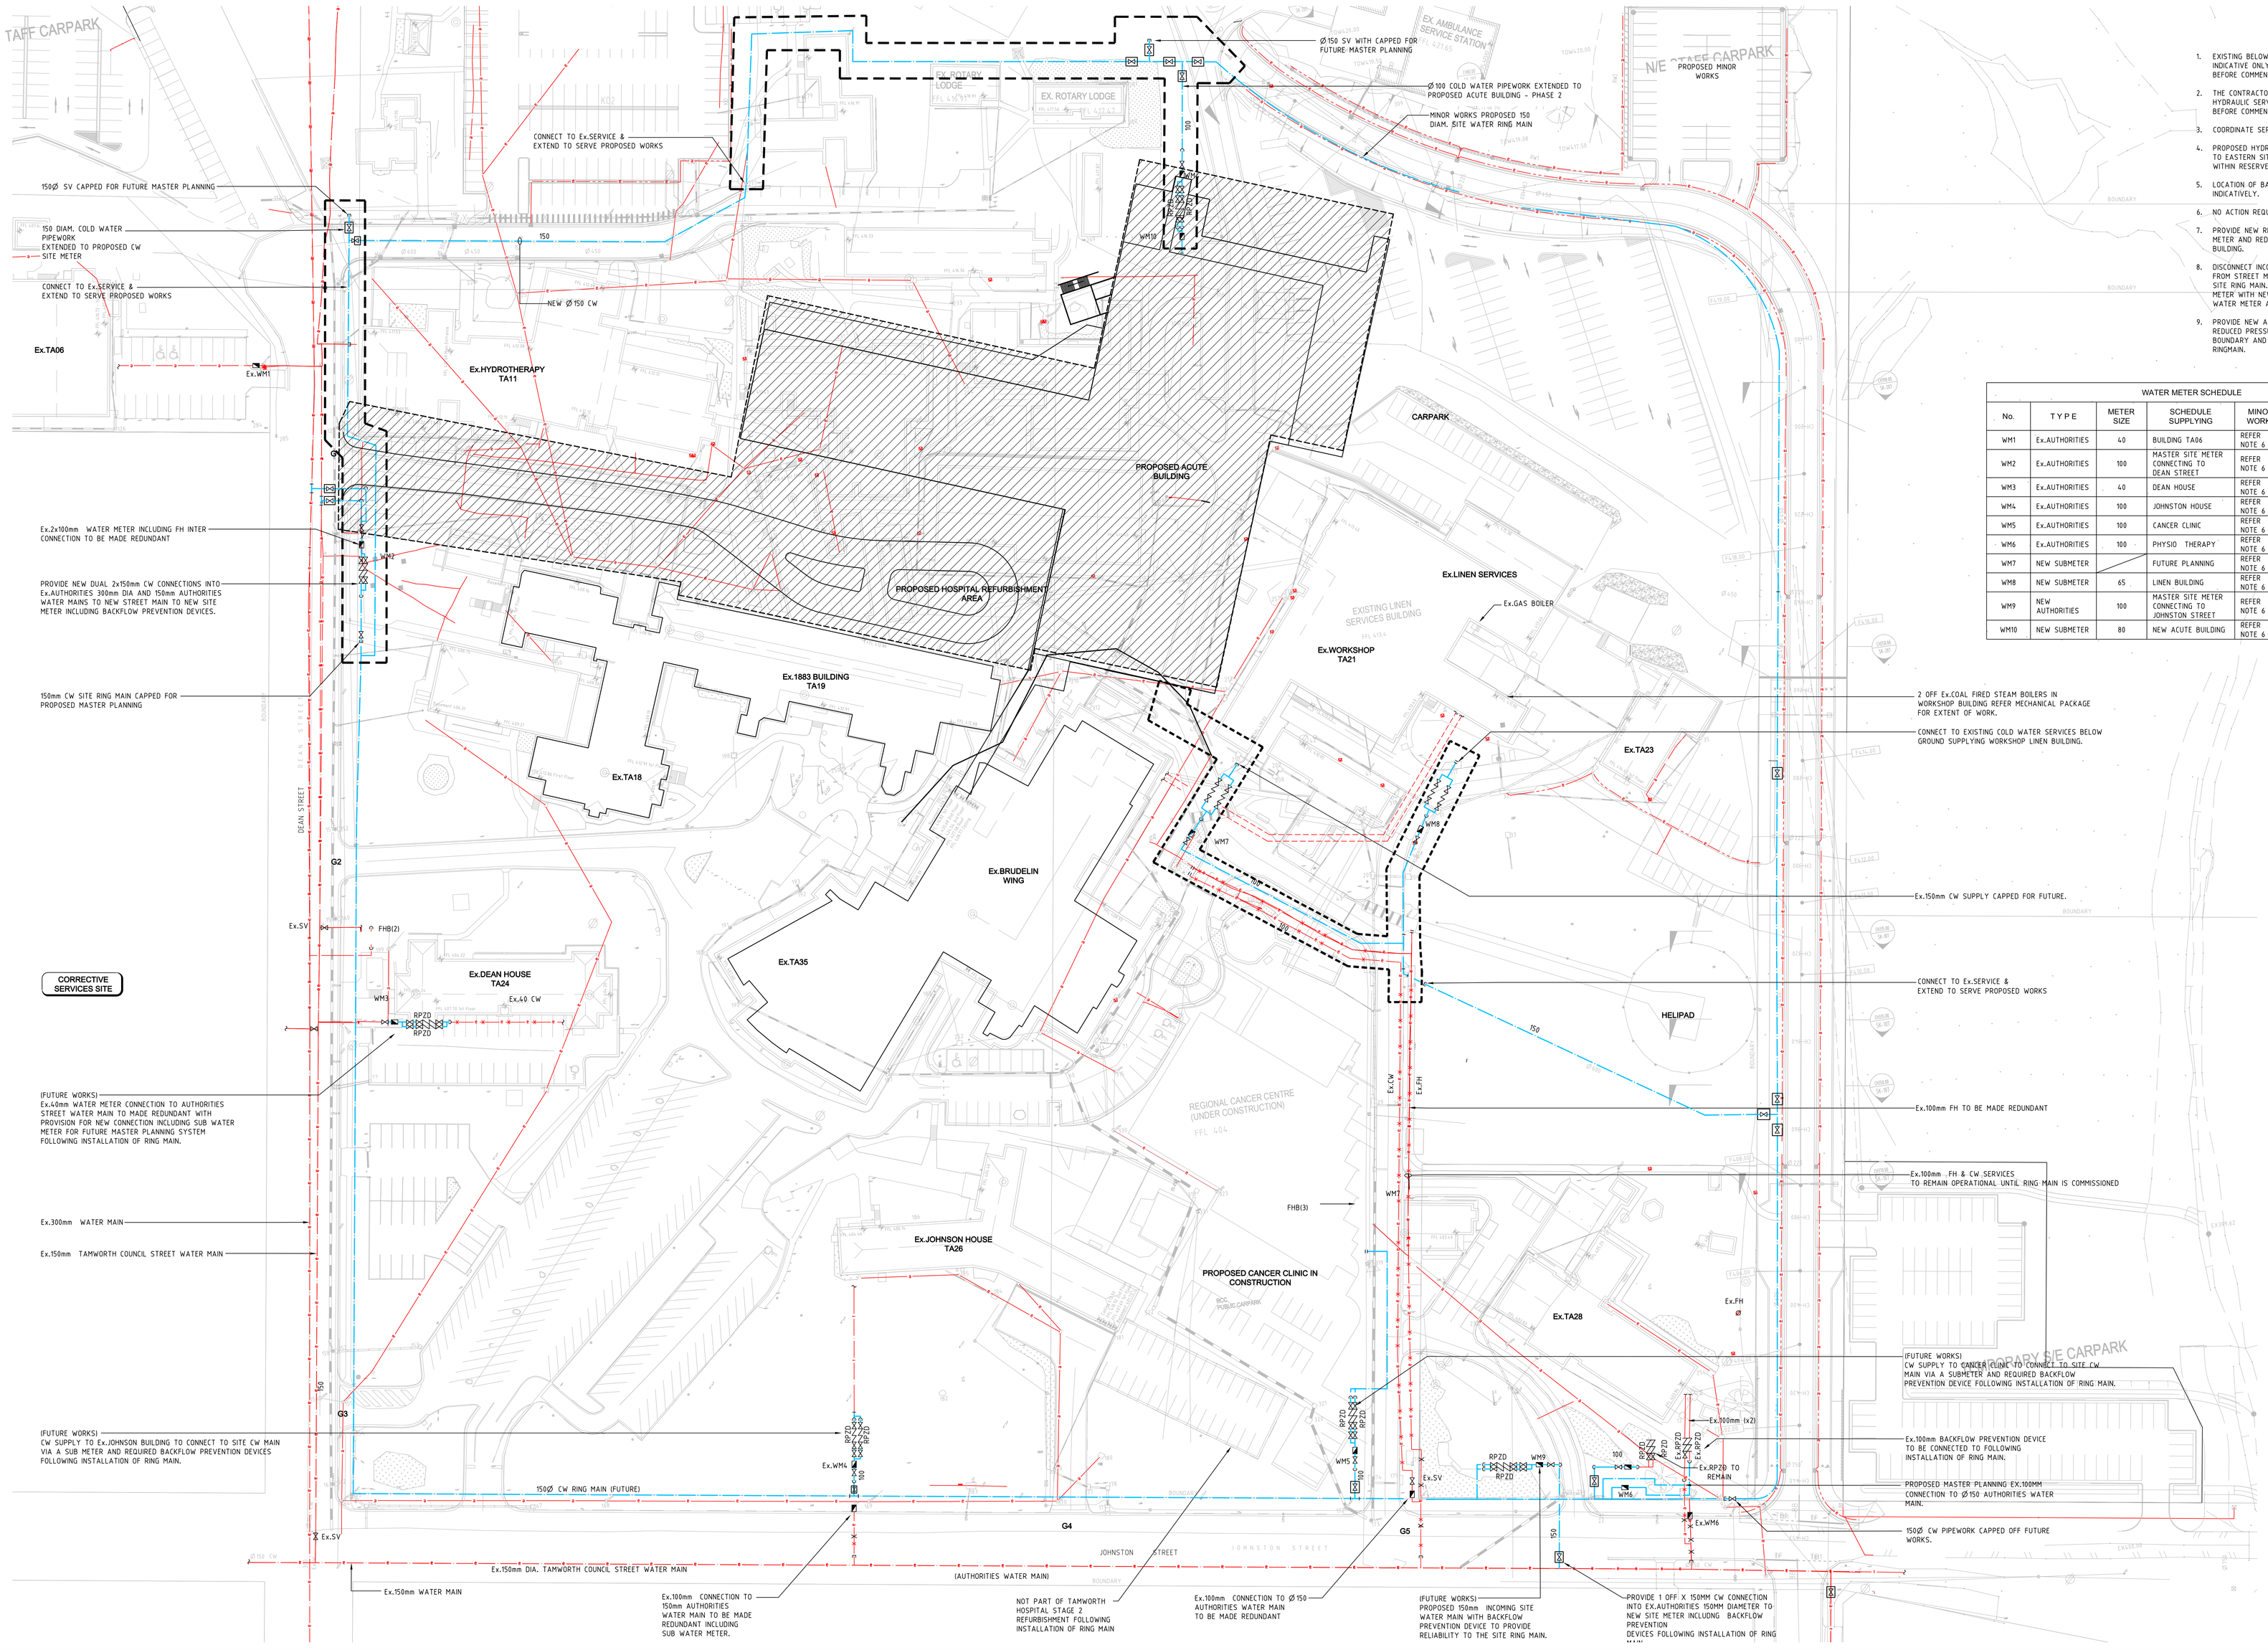


## NOTES

1. EXISTING BELOW GROUND SERVICES SHOWN IS INDICATIVE ONLY AND SUBJECT TO SITE VERIFICATION BEFORE COMMENCING ON SITE.
2. THE CONTRACTOR MUST CONFIRM LOCATION OF ALL HYDRAULIC SERVICES INCLUDING DEPTHS AND SIZES BEFORE COMMENCING ON SITE.
3. COORDINATE SERVICES WITH CIVIL DOCUMENTATION.
4. PROPOSED HYDRAULIC SERVICES LOCATED ADJACENT TO EASTERN SITE BOUNDARY -TO BE LOCATED WITHIN RESERVE OF PROPOSED ROAD.
5. LOCATION OF BACKFLOW PREVENTION DEVICES SHOWN INDICATIVELY.
6. NO ACTION REQUIRED AS PART OF THIS WORKS.
7. PROVIDE NEW REMOTE DATA MONITORING SUB WATER METER AND REDUCED PRESSURE ZONE DEVICES TO BUILDING.
8. DISCONNECT INCOMING AUTHORITIES WATER SUPPLY FROM STREET MAINS AND RECONNECT TO INTERNAL SITE RING MAIN. REPLACE Ex.AUTHORITIES WATER METER WITH NEW REMOTE DATA MONITORING SUB WATER METER AND REDUCED PRESSURE ZONE DEVICE.
9. PROVIDE NEW AUTHORITIES COLD WATER METER WITH REDUCED PRESSURE ZONE DEVICES LOCATED AT SITE BOUNDARY AND INTERCONNECT WITH INTERNAL SITE RINGMAIN.

WATER METER SCHEDULE

| No. | TYPE | METER SIZE | SCHEDULE SUPPLYING | MINOR WORKS | STAGE 2 WORKS | FUTURE PLANNING |
|---|---|---|---|---|---|---|
| WM1 | Ex.AUTHORITIES | 40 | BUILDING TA06 | REFER NOTE 6 | REFER NOTE 6 | |
| WM2 | Ex.AUTHORITIES | 100 | MASTER SITE METER CONNECTING TO DEAN STREET | REFER NOTE 6 | REFER NOTE 9 | |
| WM3 | Ex.AUTHORITIES | 40 | DEAN HOUSE | REFER NOTE 6 | REFER NOTE 6 | REFER NOTE 8 |
| WM4 | Ex.AUTHORITIES | 100 | JOHNSTON HOUSE | REFER NOTE 6 | REFER NOTE 6 | REFER NOTE 8 |
| WM5 | Ex.AUTHORITIES | 100 | CANCER CLINIC | REFER NOTE 6 | REFER NOTE 6 | REFER NOTE 8 |
| WM6 | Ex.AUTHORITIES | 100 | PHYSIO THERAPY | REFER NOTE 6 | REFER NOTE 6 | REFER NOTE 8 |
| WM7 | NEW SUBMETER | | FUTURE PLANNING | REFER NOTE 6 | REFER NOTE 6 | REFER NOTE 6 |
| WM8 | NEW SUBMETER | 65 | LINEN BUILDING | REFER NOTE 6 | REFER NOTE 8 | |
| WM9 | NEW AUTHORITIES | 100 | MASTER SITE METER CONNECTING TO JOHNSTON STREET | REFER NOTE 6 | REFER NOTE 6 | REFER NOTE 9 |
| WM10 | NEW SUBMETER | 80 | NEW ACUTE BUILDING | REFER NOTE 6 | REFER NOTE 7 | |

Copyright of Donnelley Simpson Cleary Consulting Engineers Pty Ltd
ABN 19 000 811 437
All rights reserved.
Figured dimensions shall be taken in preference to scaling. The Contractor shall check all dimensions on site before commencing work.

| No. | DATE | APP'D | AMENDMENT |
|---|---|---|---|
| 3 | 6.6.12 | | ISSUED FOR SCHEMATIC DESIGN |
| 2 | 30.4.12 | | FINAL SCHEMATIC ISSUE |
| 1 | 13.4.12 | | REVIEW ISSUE |

NSW GOVERNMENT Health Infrastructure

PROJECT MANAGER
aurecon
AURECON
Level 32, 116 Military Road,
Neutral Bay NSW 2089
T +612 9465 5599
F +612 9465 5598
Sydney@aurecongroup.com

STRUCTURE & CIVIL
Taylor Thomson Whitting
Level 3, 48 Chandos Street,
St Leonards, Sydney NSW 2065
T +612 9439 7288
F +612 9439 3146
ABN 24 101 643 010

ARCHITECT & PRINCIPAL CONSULTANT
McConnel Smith & Johnson
ARCHITECTS
McCONNEL SMITH & JOHNSON Pty Ltd
36 Richards Avenue Surry Hills NSW 2010
T +612 8353 8888
F +612 9338 2402
ABN 45 000 929 831

Donnelley Simpson Cleary
Consulting Engineers
59 Hill Street, Roseville
N.S.W. 2069
Tel 9416 1177 Fax 9416 8251 Email mail@dsc.com.au
Mechanical Electrical Hydraulic Fire Lifts

| DRAWN | DATE | SCALE @ A0 |
|---|---|---|
| RT | APRIL 2012 | 1:500 |
| DESIGNED | CHECKED | CAD REFERENCE |
| KA | | 7370_SD-HY-NZ-00-0003 |

TAMWORTH RURAL REFERRAL HOSPITAL
DEAN STREET, TAMWORTH NSW 2340

HYDRAULIC SERVICES
SITE DOMESTIC COLD WATER

| No IN SET | PROJECT No | DWG No | |
|---|---|---|---|
| 13 | 7370 | SD-HY-NZ-00-0003 | 3 |