


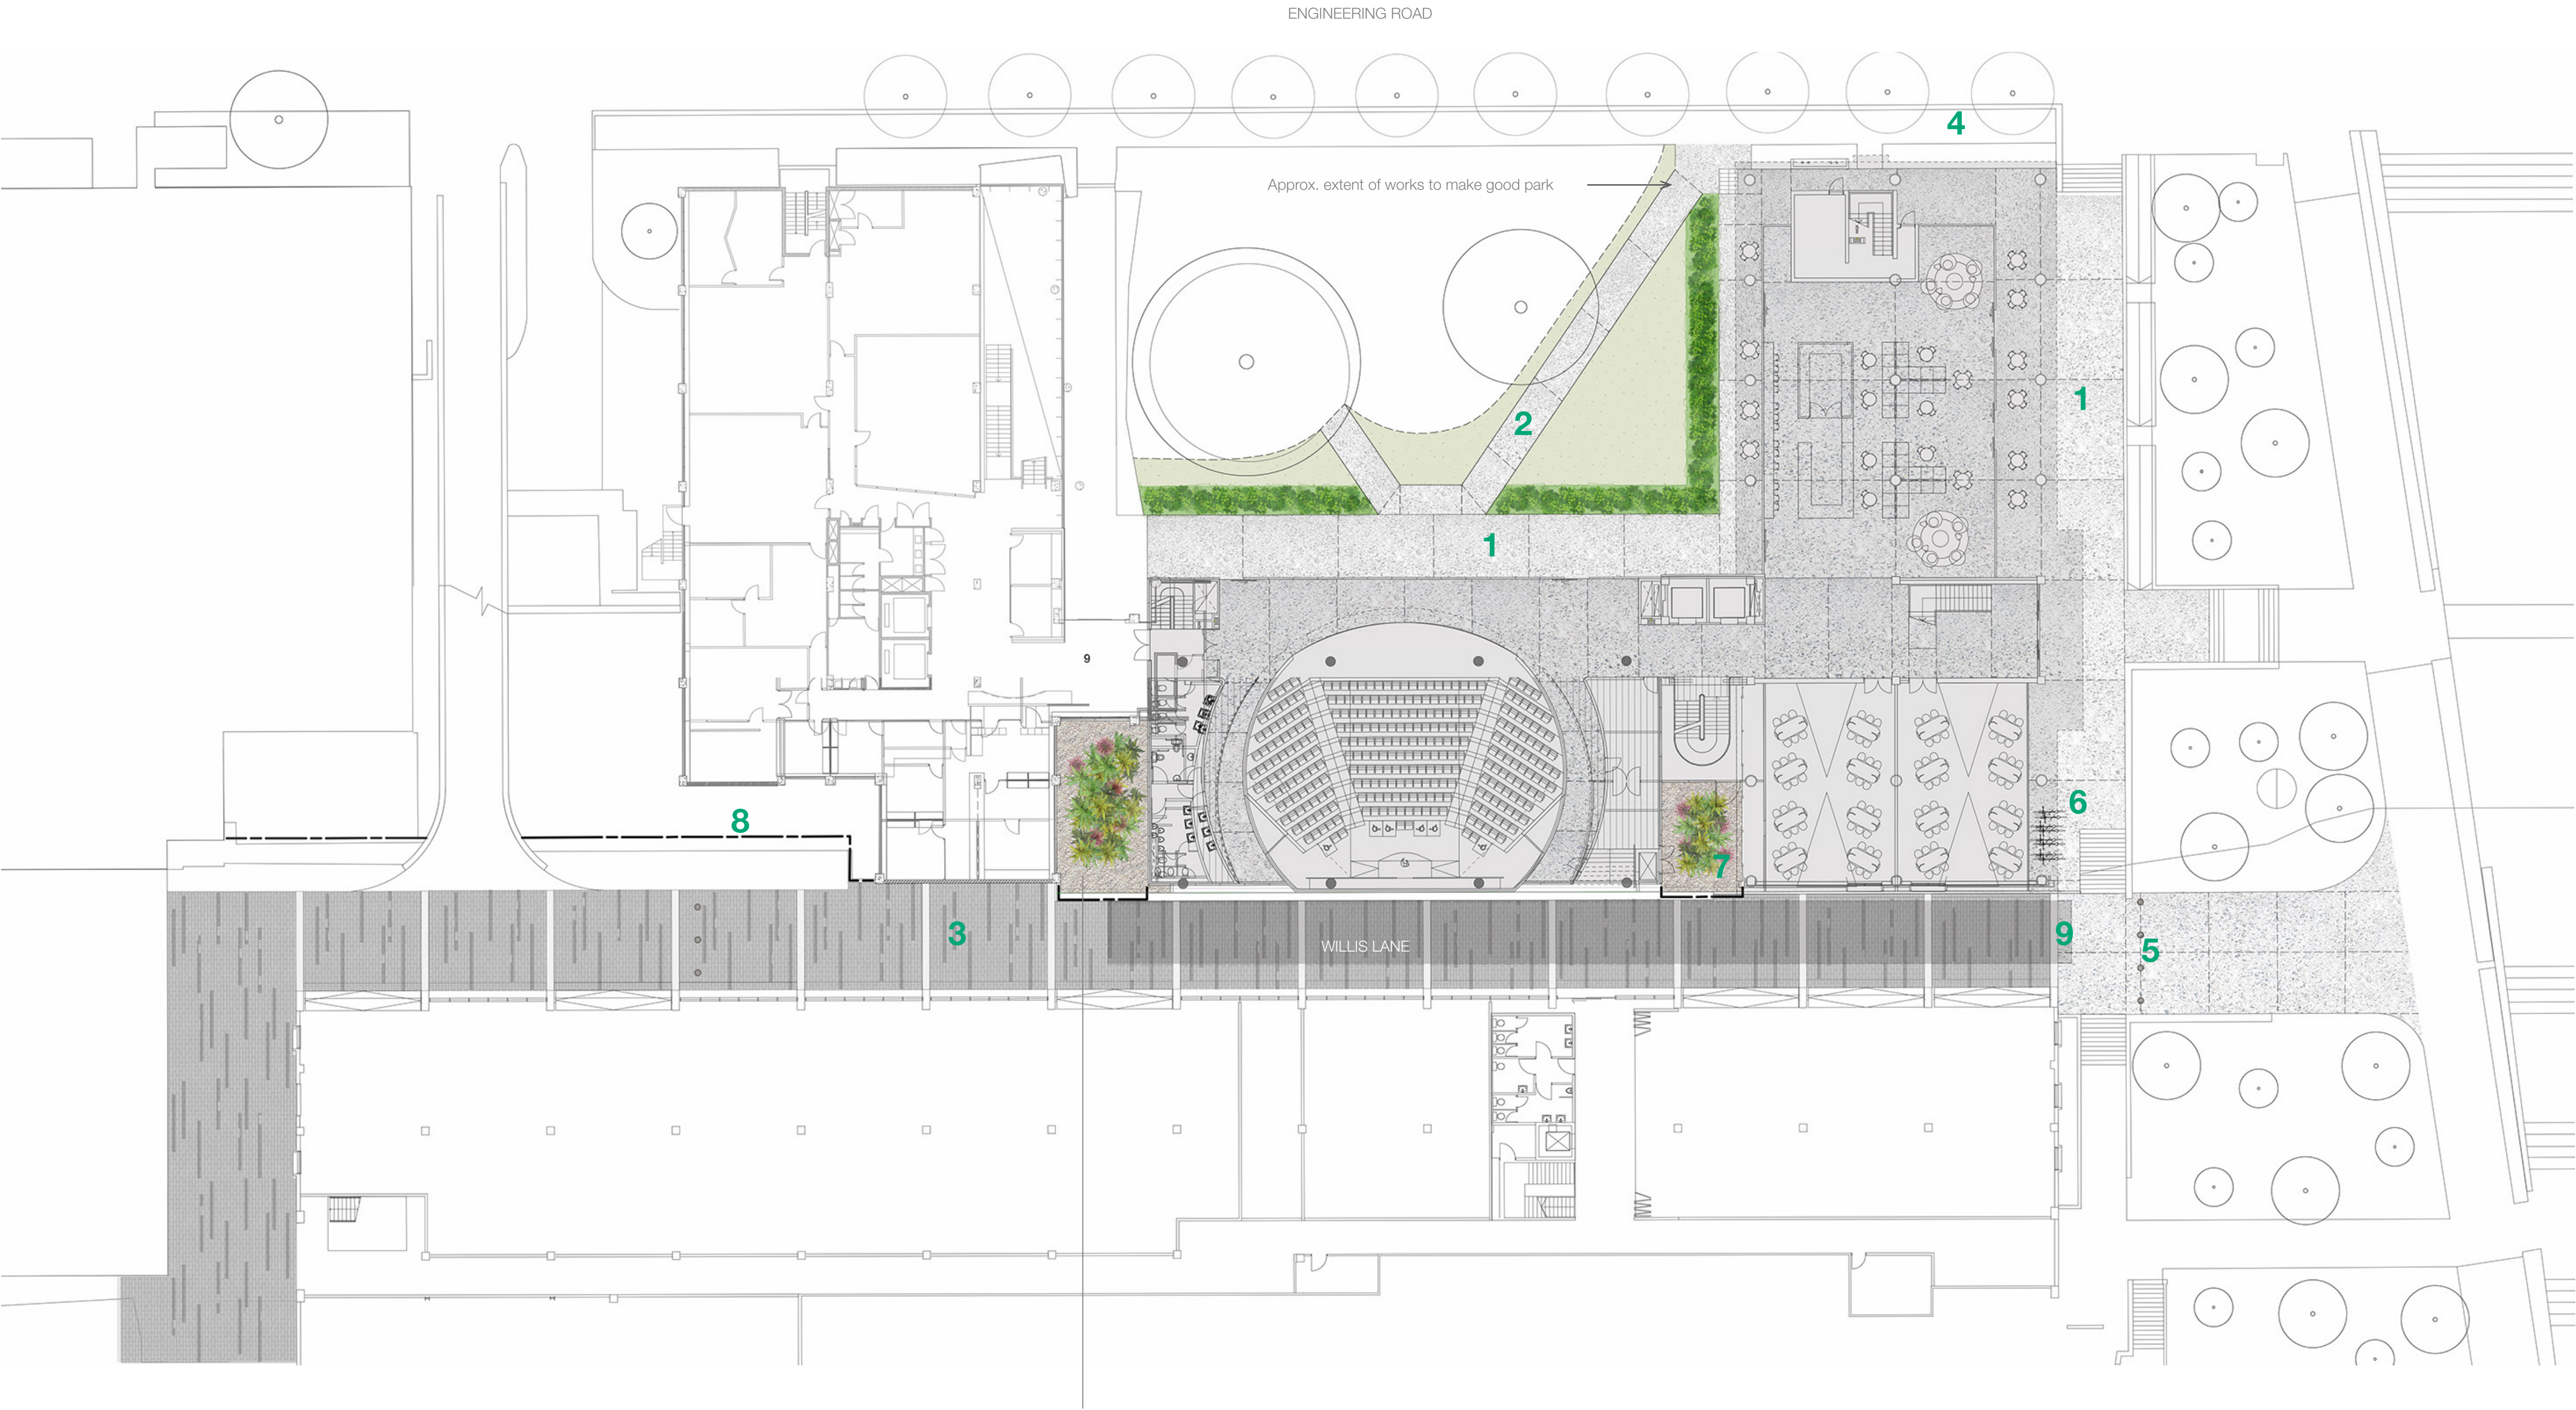

Key

- 1. In situ concrete pavement with exposed aggregate finish and decorative sawcuts.
- 2. New in situ concrete path with exposed aggregate finish. (Minor modification to existing park affected by building works. Existing perimeter planting reinstated to make good existing turf.)
- 3. Concrete unit paving with decorative banding to flush laneway treatment.
- 4. Existing brick paving and planting retained on Engineering Road
- 5. New removable bollards.
- 6. New bike racks.
- 7. Planted courtyards: Lush, shade tolerant species, planted in gravel surface. Refer to plant schedule.
- 8. New stainless steel balustrade.
- 9. Building canopy.

Material and Plant Palette

Exposed aggregate insitu concrete



Concrete unit paver



Courtyard planting



Indicative Plant Schedule

BOTANICAL NAME	COMMON NAME	MATURE HEIGHT	POT SIZE	SPACING
<i>Ctenanthe cvs</i>	Grey Star	900mm	150mm	450mm
<i>Cordyline fruticosa</i>	Cabbage Palm	1500mm	25L	500mm
<i>Zephyranthes candida</i>	Autumn Crocus	300mm	150mm	300mm
<i>Philodendron 'Xanadu'</i>	Dwarf Philodendron	600mm	150mm	400mm
<i>Alpinia caerulea</i>	Native Ginger	1000mm	75L	600mm
<i>Viola hederacea</i>	Native Violet	300mm	150mm	300mm

