

Part 5
Groundwater Assessment

State Significant Development No. 5765

Prepared by:

Jacobs Group (Australia) Pty Limited

May 2020

This page has intentionally been left blank



ABN: 37 009 250 051

Groundwater Assessment

Prepared for: R.W. Corkery & Co. Pty Limited
1st Floor, 12 Dangar Road
PO Box 239
BROOKLYN NSW 2083

Tel: (02) 9985 8511
Email: brooklyn@rwcorkery.com

On behalf of: Bowdens Silver Pty Limited
ABN: 37 009 250 051

Sydney Office
Level 11, 52 Phillip Street
SYDNEY NSW 2000

Tel: (02) 8316 3997
Fax: (02) 8316 3999

Operations Office
68 Maloneys Road
LUE NSW 2850
P.O. Box 1115
MUDGEE NSW 2850

Tel: (02) 6373 6420

Email: information@bowdenssilver.com.au

A Silver Mines Limited company

Prepared by: Jacobs Group (Australia) Pty Limited
177 Pacific Highway
NORTH SYDNEY NSW 2060

Tel: (02) 9032 1284
Email: greg.sheppard@jacobs.com

Ref No: IA132500

May 2020

The logo for Jacobs, in a bold, black, sans-serif font.

This Copyright is included for the protection of this document

COPYRIGHT

**© Jacobs Group (Australia) Pty Limited 2020
and**

© Bowdens Silver Pty Limited 2020

All intellectual property and copyright reserved.

Apart from any fair dealing for the purpose of private study, research, criticism or review, as permitted under the Copyright Act, 1968, no part of this report may be reproduced, transmitted, stored in a retrieval system or adapted in any form or by any means (electronic, mechanical, photocopying, recording or otherwise) without written permission. Enquiries should be addressed to Jacobs Group (Australia) Pty Limited.

CONTENTS

	Page
COMMONLY USED ACRONYMS / ABBREVIATIONS	5-11
EXECUTIVE SUMMARY.....	5-13
1. INTRODUCTION.....	5-15
1.1 HISTORY OF EXPLORATION IN THE AREA.....	5-17
1.2 SECRETARY'S ENVIRONMENTAL ASSESSMENT REQUIREMENTS.....	5-18
1.3 OBJECTIVES AND LAYOUT.....	5-27
2. LEGISLATION AND POLICY.....	5-29
2.1 NEW SOUTH WALES LEGISLATION.....	5-29
2.1.1 Water Management Act 2000	5-29
2.1.2 Water Sharing Plans	5-29
2.1.3 Water Access Licence Rules	5-33
2.1.4 NSW Aquifer Interference Policy	5-39
2.1.5 NSW Groundwater Quality Protection Policy.....	5-43
2.1.6 Water Act 1912	5-44
2.1.7 Protection of the Environment Operations Act 1997.....	5-45
3. PREVIOUS INVESTIGATIONS	5-46
3.1 COFFEY, 1998	5-46
3.2 HYDROILEX, 2003	5-46
3.3 JEWELL, 2003	5-47
3.4 MERRICK, 2011	5-47
3.5 SKM, 2013	5-48
3.6 JACOBS, 2014.....	5-49
4. EXISTING ENVIRONMENT	5-50
4.1 CLIMATE.....	5-50
4.2 TOPOGRAPHY AND DRAINAGE	5-52
4.2.1 Stream Flow	5-55
4.3 GEOLOGY	5-56
4.3.1 Mineralisation	5-59
4.4 STRUCTURAL GEOLOGY.....	5-60
4.4.1 Fracture Orientation	5-60
4.4.2 Vein Orientation	5-62
4.4.3 Nature of Fractures	5-62
4.5 HYDROGEOLOGY	5-62
4.5.1 Aquifer Types	5-63
4.5.2 Existing Groundwater Users	5-64
4.5.3 Water Access Licences.....	5-64

CONTENTS

	Page
4.5.4 Groundwater Dependent Ecosystems	5-66
4.5.5 Groundwater Occurrence on Site.....	5-68
4.5.6 Groundwater Monitoring Bore Drilling	5-70
4.5.7 Previous Hydraulic Testing.....	5-72
4.5.8 Pumping Tests	5-73
4.5.9 Extended Pumping	5-78
4.5.10 Recent Investigations	5-78
4.5.11 Groundwater Levels	5-87
4.5.12 Groundwater Quality	5-96
4.6 GROUNDWATER SUPPLY POTENTIAL.....	5-117
5. GROUNDWATER MODELLING.....	5-118
5.1 CONCEPTUAL HYDROGEOLOGICAL MODEL.....	5-118
5.1.1 Hydrogeological Domain	5-118
5.1.2 Main Hydrostratigraphic Units	5-119
5.1.3 Local Influence of Major Structures.....	5-124
5.1.4 Groundwater Recharge	5-124
5.1.5 Groundwater Discharge	5-124
5.1.6 Potential Impacts.....	5-124
5.1.7 Groundwater Dependent Ecosystems	5-125
5.2 MINE INFRASTRUCTURE	5-126
5.2.1 Mine Schedule.....	5-126
5.2.2 Waste Rock Emplacement.....	5-126
5.2.3 Tailing Storage Facility	5-126
5.3 GROUNDWATER MODELLING	5-128
5.3.1 Model Objective and Class.....	5-128
5.3.2 Model Build.....	5-129
5.3.3 Model Calibration	5-148
5.3.4 Predictive Modelling Scenarios	5-164
5.3.5 Model Results.....	5-166
5.3.6 Model Review	5-178
6. IMPACT ASSESSMENT	5-179
6.1 WATER LEVELS.....	5-179
6.1.1 Groundwater Users	5-179
6.1.2 Groundwater Dependent Ecosystems	5-179
6.1.3 Baseflow	5-180
6.2 GROUNDWATER QUALITY	5-180
6.2.1 Mining.....	5-180
6.2.2 Post Mining.....	5-181
6.2.3 TSF	5-181
6.3 AIP MINIMAL IMPACTS CONSIDERATIONS.....	5-181

CONTENTS

	Page
7. LICENSING REQUIREMENTS.....	5-182
7.1 PREDICTED DEWATERING AND AQUIFER PARTITIONING	5-182
7.2 ONGOING WATER TAKE	5-182
7.3 HISTORICAL WATER MARKET	5-184
7.4 2017 CONTROLLED ALLOCATION	5-184
7.5 SUMMARY – REQUIRED VS SECURED WALS.....	5-184
7.5.1 Mining.....	5-184
7.5.2 Post Mining	5-186
8. MONITORING AND MANAGEMENT	5-187
8.1 MINE DEWATERING VOLUMES	5-187
8.2 GROUNDWATER MONITORING NETWORK	5-187
8.2.1 Ongoing Monitoring Post Mining.....	5-187
8.3 TRIGGER LEVELS AND THRESHOLDS.....	5-187
8.4 TSF SEEPAGE MANAGEMENT	5-188
8.5 FINAL VOID MANAGEMENT	5-188
8.6 GROUNDWATER MODEL REVIEW.....	5-188
9. REFERENCES.....	5-189
 ANNEXURES	
Annexure 1 Aquifer Interference Policy Checklist	5-193
Annexure 2 Groundwater Works Summary.....	5-207
Annexure 3 BGW10, BGW108 Pumping Tests.....	5-219
Annexure 4 Airlift Recovery Tests	5-223
Annexure 5 Packer Injection Tests.....	5-229
Annexure 6 Comprehensive Water Quality Analyses	5-257
Annexure 7 Tailings Storage Facility	5-287
Annexure 8 WAL Summary	5-291
Annexure 9 Uncertainty Analysis – Predicted Groundwater Drawdown	5-295
Annexure 10 Groundwater Model Review	5-303

CONTENTS

	Page
FIGURES	
Figure 1	Indicative Mine Site Layout5-16
Figure 2	Mine Life and Project Life.....5-17
Figure 3	Water Sharing Plan Boundaries and Surface Water Sources5-31
Figure 4	Water Sharing Plan Boundaries and Groundwater Sources5-32
Figure 5	Comparison of Site Rainfall Data with SILO5-51
Figure 6	Long Term Annual Rainfall (SILO)5-52
Figure 7	Cumulative Rainfall Deviation with Daily Rainfall.....5-53
Figure 8	Topography and Drainage of the Study Area and Surrounds.....5-54
Figure 9	Hawkins Creek Flow Gauging (June 2013 to June 2018)5-55
Figure 10	BSF01 Flow Duration Curve5-56
Figure 11	Surface Geology5-57
Figure 12	Stereonet Representation of Fractures5-61
Figure 13	Stereonet Representation of Veins5-61
Figure 14	Registered Groundwater Bores and Groundwater Dependent Ecosystems5-65
Figure 15	Exploration Drilling Water Strikes.....5-69
Figure 16	Monitoring Bore Drilling and Installation5-71
Figure 17	BGW10 and BGW108 Pumping Test Locations5-74
Figure 18	BGW108 Pumping Test - Distance Drawdown Plot.....5-77
Figure 19	Hydraulic Conductivity vs Depth by Test Type5-83
Figure 20	Hydraulic Conductivity vs Average Depth by Lithology5-84
Figure 21	Porosity Determination by Drill Hole5-85
Figure 22	Porosity Determination by Lithology5-85
Figure 23	Bowdens Silver Groundwater Monitoring Network5-88
Figure 24	Alluvial Monitoring Bore Hydrographs (April 2012 to October 2018)5-89
Figure 25a	Regional Monitoring Bore Hydrographs5-90
Figure 26a	Mine Site Monitoring Bore Hydrographs5-92
Figure 27	Paired Monitoring Bore Hydrographs.....5-94
Figure 28	Composite Groundwater Contours5-97
Figure 29	Alluvial Monitoring Bore Electrical Conductivity (January 2014 to August 2018)5-99
Figure 30	Regional Monitoring Bore Electrical Conductivity (January 2014 to August 2018)5-99
Figure 31a	Site Monitoring Bore Electrical Conductivity (January 2014 to August 2018)5-100
Figure 32	Spring Electrical Conductivity (January 2014 to September 2016)5-101
Figure 33	Alluvial Monitoring Bore pH (January 2014 to August 2018)5-102
Figure 34	Regional Monitoring Bore pH (January 2014 to August 2018)5-102

CONTENTS

	Page
Figure 35a Mine Site Monitoring Bore pH (January 2014 to August 2018)	5-103
Figure 36 Spring pH (January 2014 to September 2016)	5-104
Figure 37 Piper Diagram	5-105
Figure 38 Gibbs Diagram – Na + K / Na + K + Ca	5-107
Figure 39 Gibbs Diagram – Cl / Cl + HCO ₃	5-108
Figure 40 Conceptual Hydrogeological Model – Pre-Mining (View looking north)	5-120
Figure 41 Conceptual Hydrogeological Model – During and Post Mining (View looking north)	5-121
Figure 42 Proposed Open Cut Pit Development.....	5-127
Figure 43 Numerical Hydrogeological Model Domain.....	5-130
Figure 44 Groundwater Model Grid – Regional View	5-132
Figure 45 Groundwater Model Grid – Mine Site View.....	5-133
Figure 46 Groundwater Model Boundary Conditions – River (RIV) Cells.....	5-135
Figure 47 Groundwater Model Boundary Conditions – Drain (DRN) Cells.....	5-136
Figure 48 Groundwater Model Boundary Conditions – Well (WEL) Cells	5-139
Figure 49 Groundwater Model Boundary Conditions – Recharge (RCH) Zones.....	5-140
Figure 50 Groundwater Model Boundaries – Evapotranspiration (EVT) Zones	5-142
Figure 51 West-east Geological Cross-section through the Model	5-143
Figure 52 North-south Geological Cross-section through the Model.....	5-143
Figure 53 Groundwater Model Shaded Relief.....	5-144
Figure 54 Distribution of Model Hydraulic Properties Zones (Layer 1 to 6)	5-147
Figure 55 Distribution of Model Hydraulic Properties Zones (Layer 7 and 8)	5-148
Figure 56a Distribution of Model Calibration Targets in Layer 2 and 4.....	5-149
Figure 57 Model Calibration – Modelled vs Observed Heads (m AHD)	5-152
Figure 58 Calibration Residual Maps	5-153
Figure 59 Hydraulic Conductivity Composite Sensitivity.....	5-156
Figure 60 Recharge Composite Sensitivity	5-157
Figure 61 Model Calibration – Hydrographs (Vicinity of Open Cut Pit).....	5-159
Figure 62 Model Calibration – Hydrographs (TSF Area)	5-159
Figure 63 Model Calibration – Hydrographs (hydraulic head in m AHD) north of the Open Cut Pit Area	5-159
Figure 64 Model Calibration – Hydrographs (hydraulic head in m AHD) south of the Open Cut Pit Area	5-160
Figure 65 Model Calibration – Hydrographs (hydraulic head in m AHD) in the vicinity of Hawkins Creek.....	5-160
Figure 66 Model Calibration – Hydrographs (at Lue).....	5-160
Figure 67 Measured Discharge at Hawkins Creek (June 2013 to April 2018).....	5-163

CONTENTS

	Page
Figure 68	Modelled vs Calculated Baseflow in Hawkins Creek (Calibration Period)5-163
Figure 69	Predicted Dewatering Rates5-167
Figure 70	Predicted Annual Dewatering Volumes5-167
Figure 71	Predicted Drawdown at End of Stage 3 (Year 9)5-169
Figure 72	Predicted Drawdown at End of Mining (Year 15.5).....5-170
Figure 73	Sections showing predicted water levels at Year 9 (black) and Year 15.5 (blue).....5-171
Figure 74	Predicted 50 Year Post Mining Residual Drawdown5-173
Figure 75	Pit Lake Equilibrium Level.....5-174
Figure 76	Predicted Baseflow Reduction at Hawkins Creek.....5-175
Figure 77	Predicted Baseflow Reduction at Lawsons Creek5-175
Figure 78	Sensitivity Analysis Results of Mine Inflow Rates.....5-177

TABLES

Table 1	Coverage of SEARs and Additional Requirements.....5-18
Table 2	Share Component of Unregulated River and Current Allocations (2019/2020).....5-33
Table 3	Groundwater Long Term Extraction Limits and Current Allocations (2019/2020)5-33
Table 4	Level 1 Minimum Impact Considerations – Highly Productive Groundwater Sources.....5-41
Table 5	Long Term Average Climate Data (SILO 1900-2018)5-50
Table 6	Local Stratigraphy5-58
Table 7	Summary of Groundwater WALs within a 10km radius of the Mine Site5-64
Table 8	Monitoring Network Drilling Summary.....5-70
Table 9	Monitoring Bore Hydraulic Testing Summary5-72
Table 10	BGW10 Pumping Test – Summary of Results.....5-75
Table 11	BGW108 Pumping Test – Summary of Results.....5-76
Table 12	Airlift Test Hole Details5-79
Table 13	Airlift Testing Summary5-79
Table 14	Packer Testing Summary – Bulk Permeability5-82
Table 15	Packer Testing Summary – Discrete Permeability.....5-82
Table 16	Formation Porosity Determinations.....5-84
Table 17	Specific storage determinations5-86
Table 18	Paired Monitoring Locations.....5-94
Table 19	Electrical Conductivity Monitoring Summary (µS/cm).....5-98
Table 20	pH Monitoring Summary5-104
Table 21	Water Types5-106
Table 22	Comparison of Mean Concentrations with Guideline Values.....5-110

CONTENTS

	Page
Table 23	Comparison Against Hardness Modified Trigger Values 5-115
Table 24	Representative Hydraulic Parameters 5-123
Table 25	Other Mining Operations 5-125
Table 26	Groundwater Model Boundary Conditions – RIV Boundaries 5-134
Table 27	Groundwater Model Boundary Conditions – DRN Boundaries..... 5-137
Table 28	Groundwater Model Boundary Condition – Distribution of Pumping Rate (WEL) 5-138
Table 29	Groundwater Model Boundary Condition – Recharge (RCH) Zones..... 5-140
Table 30	Groundwater Model Boundary Condition – Evapotranspiration (EVT) Zones 5-142
Table 31	Groundwater Model Geometry – Model Layers..... 5-145
Table 32	Groundwater Model – Initial Values of Hydraulic Parameters 5-145
Table 33	Groundwater Model – Calibrated Values of Hydraulic Parameters 5-151
Table 34	Calibration Statistics for Steady State Model..... 5-152
Table 35	Hydraulic Conductivity Parameter Zones Assessed during Sensitivity Analysis 5-155
Table 36	Recharge Zones Assessed during Sensitivity Analysis 5-156
Table 37	Water Balance for Calibrated Steady State Model 5-157
Table 38	Calibrated Model Storage Parameter Values 5-161
Table 39	Calibration Statistics for Transient Simulation 5-162
Table 40	Water Balance for Transient Calibrated Model..... 5-162
Table 41	Recharge Rate within TSF Decant Pond 5-165
Table 42	Recharge rate within TSF Area (post mining)..... 5-166
Table 43	Partitioned Water Take – During Mining 5-183
Table 44	Partitioned Water Take – Post Mining 5-183
Table 45	Water Trading Summary – Lachlan Fold Belt Groundwater Source (Aquifer) 5-185
Table 46	Registration of Interest – 2017 Controlled Allocation 5-185

This page has intentionally been left blank

COMMONLY USED ACRONYMS / ABBREVIATIONS

ADWG	Australian Drinking Water Guidelines
AHD	Australian Height Datum
bgl	below ground level
BoM	Bureau of Meteorology
CL&W	NSW Crown Lands & Water (now Lands and Water - NSW Department of Industry)
CRA	CRA Exploration Pty Ltd
CRD	cumulative rainfall deviation
DES	Department of Environment and Science (QLD)
DGRs	Director General's Requirements
DPIE	Department of Planning, Industry and Environment
DRE	NSW Department of Resources and Energy (now Department of Regional NSW – Mining, Exploration and Geoscience)
DRN	Drain Cell (MODFLOW)
EC	electrical conductivity
EPA	Environment Protection Authority
EVT	Evapotranspiration Cell (MODFLOW)
FAO	Food and Agricultural Organisation of the United Nations
GDE	groundwater dependent ecosystems
GUI	Graphical User Interface
HFB	horizontal flow boundary
KCN	Kingsgate Consolidated Limited
LiDAR	Light detection and ranging
LTAELs	Long Term Average Annual Extraction Limits
ML	Mining Lease

OEH	Office of Environment and Heritage
PAF	potentially acid forming
RC	Reverse Circulation
RCH	Recharge (MODFLOW)
RIV	River Cell (MODFLOW)
RMS	root mean square
SCSC	Specialist Consultant Studies Compendium
SEARs	Secretary's Environmental Assessment Requirements
SILO	Scientific Information for Landowners
SKM	Sinclair Knight Merz
SSD	State Significant Development
SWL	Standing Water Level
TDS	total dissolved solids
TSF	tailings storage facility
USGS	United States Geological Survey
WAL	water access licence
WEL	Well Cell (MODFLOW)
WRE	waste rock emplacement

EXECUTIVE SUMMARY

Bowdens Silver Pty Ltd proposes to develop and operate the Bowdens Silver Project (the Project), located approximately 2.5 km northeast of Lue and approximately 26 km southeast of Mudgee, in New South Wales. The Project would mine epithermal silver deposits hosted in the Rylstone Volcanics and would incorporate a conventional open cut pit where overburden/waste rock is removed from above and around the silver-zinc-lead ore and either used for on-site construction activities or placed in the out-of-pit waste rock emplacement (WRE) or the southern barrier.

Mining operations are planned to be undertaken over 15.5 years. A maximum open cut pit depth at 456 m Australian Height Datum (AHD) would be reached in Year 9 of operations. Other sections of the main open cut pit would be developed to a depth of 460m AHD and two satellite open cut pits would be developed to an elevation of 565m AHD and 580m AHD.

The proposed tailings storage facility (TSF) for the Project is a down-valley discharge style of tailings deposition with deposited tailings impounded against a down-stream embankment. The tailings slurry would be pumped from the processing plant via a pipeline to one of three discharge points and would comprise approximately 56% solids, with an average daily discharge of decant water to the TSF of 4 300 m³/day. Decant water would be reclaimed from a decant pond located at the upstream face of the TSF embankment and returned to the processing plant. Seepage control measures at the TSF would include grouting of the rock foundations beneath the TSF embankment, compacted clay lining of the tailings impoundment area and partial lining of the decant pond area.

Water supply for the project would include a combination of surface water collected on-site, mine dewatering, reuse of water reclaimed from the TSF and water sourced under agreement from the Ulan Coal Mine and/or Moolarben Coal Mine and brought to Mine Site via a dedicated pipeline.

Extensive baseline monitoring of groundwater levels and quality have been undertaken for the Project, as have numerous investigations including drilling and monitoring bore installation and hydraulic testing, airlift testing and packer testing of resource exploration holes and test pumping of existing water supply wells.

A numerical groundwater model has been built for the purposes of assessing mine dewatering requirements and informing a groundwater assessment for the project. Model geometry and hydraulic parameters in and around the mining area have been based on extensive drilling and hydraulic testing, with model calibration to the extensive groundwater monitoring data set.

Once mining advances below the water table during the second year of mining, dewatering requirements are predicted to steadily increase until the open cut pit reaches a depth of 525m AHD at the end of Year 4, with average inflows of the order of 3.5 ML/day. Predicted dewatering rates then drop off as the open cut pit cuts back and expands at higher elevations. For the remainder of mining, predicted inflows range from 2 to 3 ML/day.

Mine dewatering would result in drawdown of groundwater levels in the formations surrounding the open cut pit area. Drawdown propagation would be initially fairly rapid as the pit is mined to its lowest level at the end of Year 9 of mining. Drawdown propagation would then slow down over the remaining mine life. At the end of mining, propagation of drawdown, as represented by

the predicted 1 m drawdown contour, is typically of the order of 1.5 km to the east and south, 2 km to the west and 2.2 km to the north of the open cut pit. During mining, drawdown to the northwest is attenuated due to mounding beneath the TSF, with maximum mounding of the order of 8 m.

Following the completion of mining, a pit lake would form in the mine void. Equilibration of net inflows and evaporative losses from the pit is predicted after approximately 100 years at an elevation of approximately 573.5 m AHD, 16.5 to 26.5 m below the pre-mining water table. This indicates that the mine void would remain a groundwater sink. A groundwater sink develops when net losses (in this case due to evaporation) are greater than the net inflow and as a result groundwater is continually flowing towards the pit lake. Mine closure management measures include allowance for diverting of surface flows around the pit to ensure that it remains a groundwater sink. The salinity of the pit lake would increase due to evaporative concentration. Salinity is predicted to increase to approximately 2 000 mg/L TDS at 100 years post mining and to 5 375 mg/L TDS by 500 years post mining. Being a groundwater sink, the resulting saline water would remain captured within the mine void.

An assessment of potential impacts of the Project has been made against the Minimal Impacts Considerations of the NSW Aquifer Interference Policy. The project is demonstrated to meet the Level 1 Minimal Impact Considerations, including potential water level and water pressure impacts to other groundwater users and to groundwater dependent ecosystems, and water quality impacts. In accordance with the Aquifer Interference Policy, the predicted impacts of the Project are considered to be acceptable.

Mine dewatering take has been partitioned between the applicable groundwater and surface water sources, including allowance for incidental surface water take through baseflow reduction. The maximum predicted annual take from each of the applicable water sources, and therefore the volume of share components for each of the water sources required to be held during mining are as follows.

- Lachlan Fold Belt Groundwater Source (Other) – 907 ML
- Sydney Basin Groundwater Source – 194 ML
- Lawsons Creek Water Source – 12.9 ML

Groundwater take would occur in perpetuity as groundwater inflow to the main pit lake would continue to occur to replace evaporative losses from the main pit lake.

The Project has secured the option to purchase water access licences through the 2017 Controlled Allocation Order (Various Groundwater Sources), to the value of 907 unit shares in the Lachlan Fold Belt Groundwater Source (equivalent to 907 ML/year) and 194 unit shares in the Sydney Basin Groundwater Source (equivalent to 194 ML/year). This is sufficient to cover the peak predicted dewatering requirement over the life of the mine and exceeds the predicted annual average dewatering requirement from each of the groundwater sources.

1. INTRODUCTION

Bowdens Silver Pty Ltd (Bowdens Silver) proposes to develop and operate the Bowdens Silver Project (the Project), located approximately 2.5 km northeast of Lue and approximately 26 km southeast of Mudgee, in New South Wales. The Project would mine epithermal silver deposits hosted in the Rylstone Volcanics and would incorporate a conventional open cut pit where overburden/waste rock is removed from above and around the silver-zinc-lead ore and either used for on-site construction activities or placed in the out-of-pit waste rock emplacement or the southern barrier. The mined ore would be transported by haul trucks to the on-site processing plant where it would be crushed, milled and processed to liberate the silver, zinc and lead minerals. These minerals would be collected by conventional froth flotation to produce two concentrates that would be dewatered and transported off site by truck. The residual materials from processing (tailings) would be pumped in the form of a slurry to a tailings storage facility located to the west of the open cut pit.

The principal infrastructure supporting the Project would be located within a proposed Mine Site that would cover an area of approximately 1 000 hectares (ha) with the open cut pit, processing area, tailings storage facility, WRE and ancillary components resulting in the disturbance of approximately 420 ha. The mine life is expected to be 15.5 years with an annual processing throughput of up to 2 million tonnes.

The proposed Mine Site layout is provided on **Figure 1**. Key components of the Project that would potentially impact on groundwater include:

- open cut mining;
- tailings storage facility (TSF); and
- waste rock emplacement (WRE).

A maximum open cut pit elevation of 456 m AHD (approximately 150 to 200 m below natural ground level) would be reached in Year 9 of operations. Other sections of the main open cut pit would be developed to a depth of 460m AHD and two satellite open cut pits would be developed to an elevation of 565m AHD and 580m AHD.

For the purposes of this assessment reference is made to the “Mine Site”, as displayed in **Figure 1** and the “study area” comprising the Mine Site and the surrounding area, typically up to 10km from the Mine Site.

The Project would require a site establishment and construction period of approximately 18 months during which the processing plant and all related infrastructure and the initial embankment of the TSF would be constructed. Once operational, Bowdens Silver anticipates the mine would produce concentrates for approximately 15 years. In total, it is proposed the mine life would be approximately 16.5 years, i.e. from the commencement of the site establishment and construction stage to the completion of concentrate production. It is envisaged rehabilitation activities would be completed over a period of approximately 7 years, i.e. from Year 16 to Year 23. **Figure 2** displays the duration of each of the main components throughout the mine life and Project life.

Figure 1 Indicative Mine Site Layout


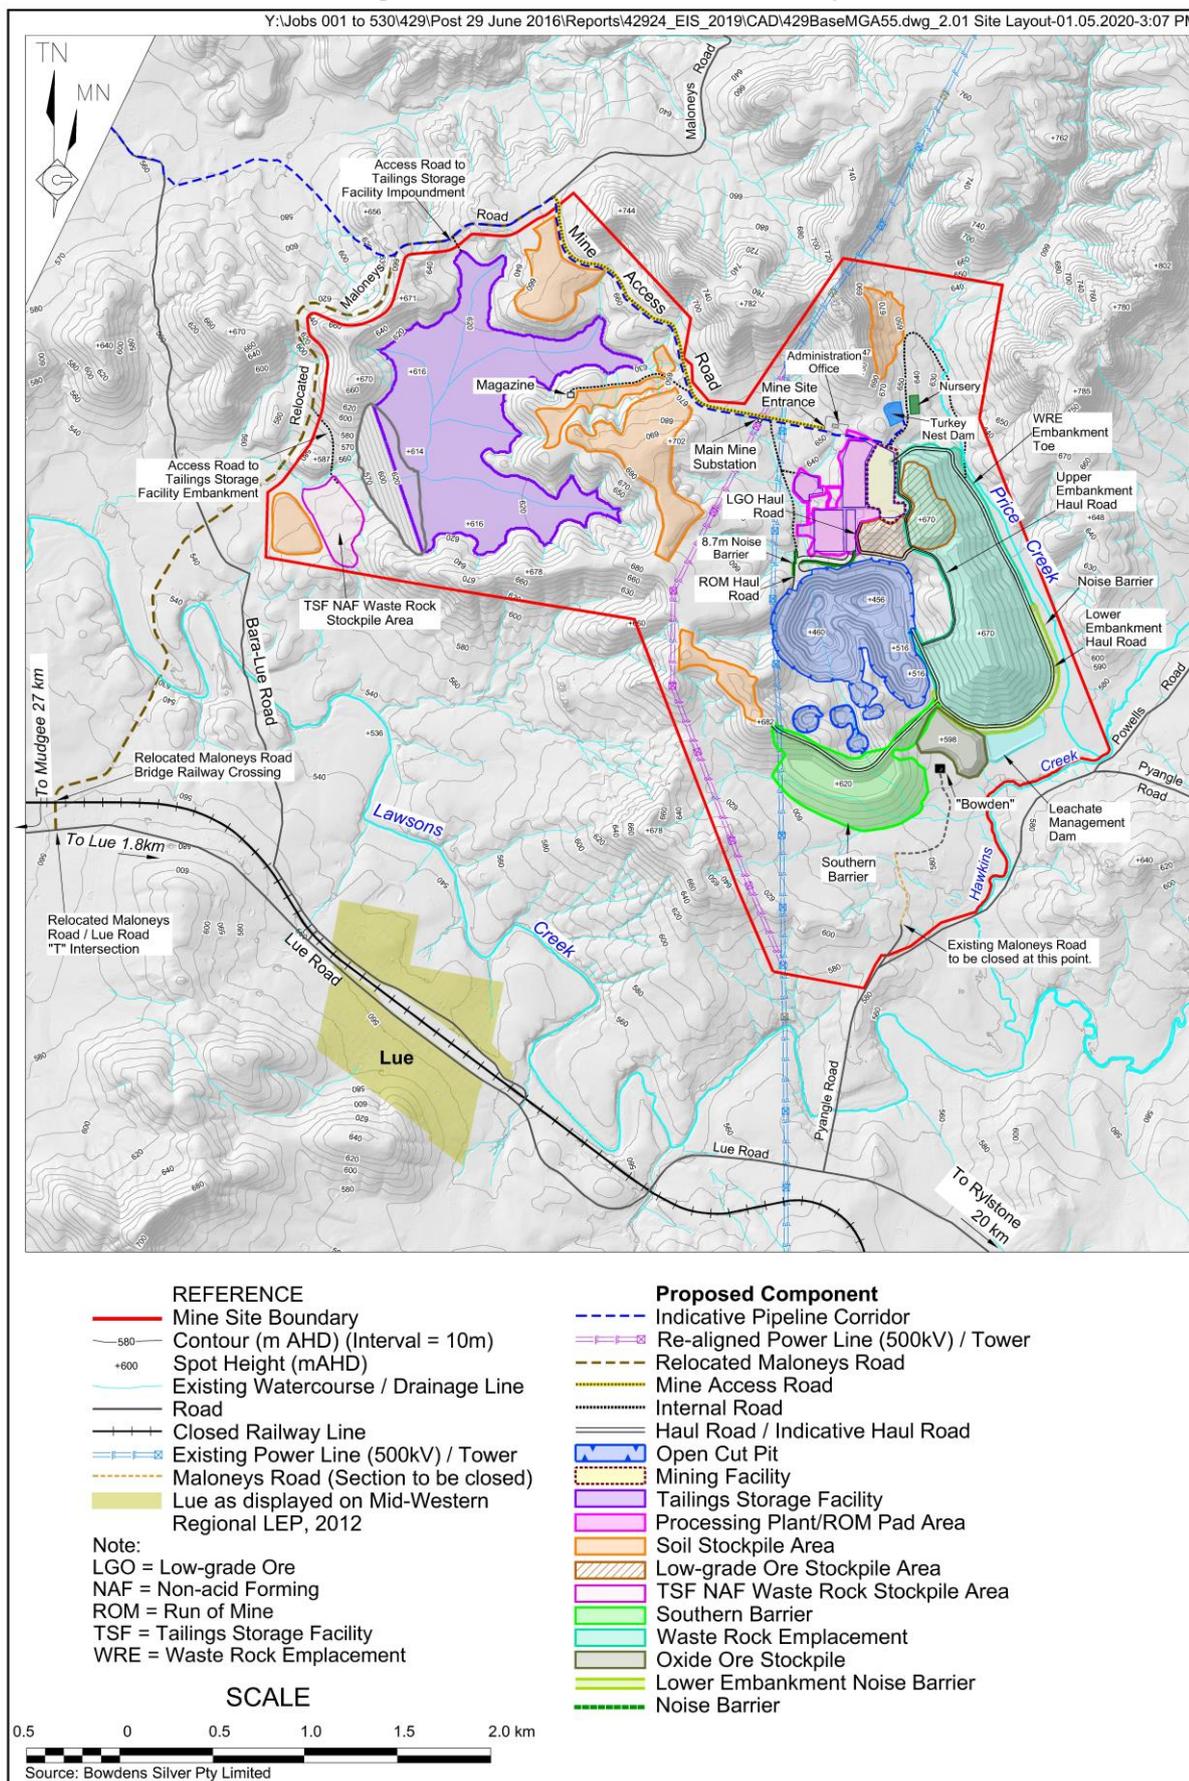


Figure 2 Mine Life and Project Life

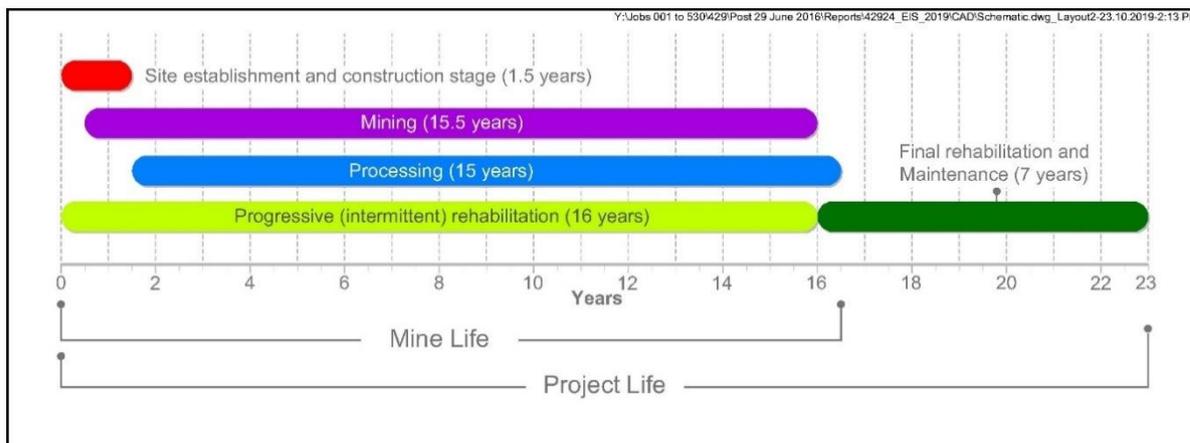

Water supply of approximately 0.5 ML/d to 1.0 ML/d would be required for site establishment and construction, principally for dust suppression and achieving the optimum moisture content in those components or areas where compaction is required. Water during this period would be drawn from on-site groundwater bores and water storages. During operation, water demand will be required primarily for ore processing and dust suppression, with an average annual daily water demand of approximately 5 ML. During operations water would be sourced preferentially from on-site sources such as site dams, return water from the TSF, mine dewatering, and on-site surface water harvesting. Additional make up water would also be sourced from a third party via a purpose-built pipeline.

1.1 HISTORY OF EXPLORATION IN THE AREA

The Bowdens deposit was first discovered in 1989 by CRA Exploration Pty Ltd (CRA) during a regional stream sediment exploration program in which anomalous silver, lead and zinc and high bulk cyanide leachable silver were detected up to 1.5 km from the deposit. Although mineralisation is exposed at the surface, it is not visible in the host rocks. Between 1989 and 1992 CRA undertook exploration activities which resulted in the discovery of the Bowdens Gift Zone of outcropping mineralisation, 500m east of the discovery outcrops.

In 1994, GSM Exploration took over the exploration lease, and in 1997 GSM was acquired by Silver Standard Australia Pty Limited (Silver Standard). Silver Standard undertook a detailed geological and resource evaluation of the deposit through an extensive drilling program. At that time, a reserve of 59 million tonnes (Mt) at 49 g/t Ag equivalent was established for the reserve.

In October 2011, Kingsgate Consolidated Limited (KCN) purchased the exploration leases of the Bowdens Silver Project from Silver Standard. Open cut optimisation studies were completed and indicated a mineable ore reserve of 46 Mt.

In June 2016, Bowdens Silver purchased Kingsgate Bowdens Pty Limited thereby acquiring the Bowdens Silver deposit with a mineable ore reserve of 88 Mt including 134 million ounces of silver (64 g/t Ag equivalent).

An Ore Reserve Statement, compliant to the 2012 JORC standard, was completed for Bowdens Silver deposit in May 2018 by AMC Consultants Pty Ltd. This Ore Reserve Statement was based upon on data from almost 84,000 m of drilling in 653 drill holes that comprised both diamond drill

hole (70%) and reverse circulation (30%) information sourced from both recent Bowdens Silver and previous drilling undertaken by KCN, GSM Exploration, Silver Standard and CRA. Based on the open cut pit optimisation studies and ultimate open cut pit design studies, the recoverable primary and low grade ore within the proposed open cut pit is estimated to be approximately 29.9 million tonnes at an average grade of 69g/t silver, 0.44% zinc and 0.32% lead. This corresponds to total in situ quantities of approximately 66.3 million oz of silver, 130 000t of zinc and 95 000t of lead.

The Bowdens Silver deposit is currently the largest undeveloped silver deposit in Australia.

1.2 SECRETARY’S ENVIRONMENTAL ASSESSMENT REQUIREMENTS

All mining projects in NSW must be assessed under the *Environmental Planning and Assessment Act 1979* (EP&A Act 1979). The Project is classified as a State Significant Development (SSD) in accordance with the *State Environmental Planning Policy (State and Regional Development) 2011*. An Environmental Impact Statement must be prepared in response to requirements set out by the Secretary of the NSW Department of Planning, Industry and Environment (DPIE). These requirements are known as the Secretary’s Environmental Assessment Requirements (SEARs) and were formerly known as the Director-General’s Requirements (DGRs).

The SEARs for the Project (SSD7565), were originally issued to Bowdens Silver on 23 December 2016. The SEARs are prepared in consultation with relevant State and local government agencies and take into consideration concerns and issues raised by community groups and individuals. The SEARs have been modified on two occasions, initially on 15 August 2017, with the most recent version issued on 21 June 2019.

The key issues relating to groundwater, as identified in the SEARs, including relevant agency and individual issues are provided on **Table 1**. **Table 1** also includes direction to the relevant section(s) within this report as to where the issue has been addressed.

**Table 1
Coverage of SEARs and Additional Requirements**

Relevant Requirement(s)	Coverage in Report
Secretary’s Environmental Assessment Requirements	
The EIS must include an assessment of: <ul style="list-style-type: none"> the likely impacts of the development on the quantity and quality of the region’s surface and groundwater resources (including but not limited to, Lawsons Creek and Price Creek), having regards to EPA’s, DPI’s and OEH’s requirements; and the likely impacts of the development on aquifers, watercourses, riparian land, water-related infrastructure and other water users. 	Section 6, See SCSC – Part 6
While not exhaustive, Attachment 1 Extract (below) contains a list of some of the environmental planning instruments, guidelines, policies, and plans that may be relevant to the environmental assessment of this development.	-

Table 1 (Cont'd)
Coverage of SEARs and Additional Requirements

Page 2 of 10

Relevant Requirement(s)		Coverage in Report
Secretary's Environmental Assessment Requirements (Cont'd)		
Attachment 1 Extract		
• Water Sharing Plan for the NSW Murray Darling Basin Fractured Rock Groundwater Sources		Section 2.1.2.1
• Water Sharing Plan for the NSW Murray Darling Basin Porous Rock Groundwater Sources		
• Water Sharing Plan for the Macquarie Bogan Unregulated and Alluvial Water Sources		
• Water Sharing Plan for the Macquarie-Cudgegong Regulated Rivers Water Source		Not relevant
• NSW State Groundwater Policy Framework Document (NOW)		Not relevant
• NSW State Groundwater Quality Protection Policy (NOW)		Section 2.1.5
• NSW State Groundwater Quantity Management Policy (NOW)		Not relevant
• NSW Aquifer Interference Policy 2012 (NOW)		Section 2.1.4, Section 6.3
• Australian Groundwater Modelling Guidelines 2012 (Commonwealth)		Section 5
• National Water Quality Management Strategy Guidelines for Groundwater Protection in Australia (ARMCANZ/ANZECC)		Section 4.5.12.5
Relevant Requirements Nominated by Other Government Agencies		
Department of Primary Industry – Water 19/12/14	Details of the water to be taken (including through inflow and seepage) from each surface and groundwater source as defined by the relevant water sharing plan.	Section 5.3.5, Section 5.3.5.7
	Assessment of any volumetric water licensing requirements (including those for ongoing water take following completion of the project such as evaporative loss from open voids or inflows).	Section 7
	The identification of an adequate and secure water supply for the life of the project. Confirmation that water can be sourced from an appropriately authorised and reliable supply. This is to include an assessment of the current market depth where water entitlement is required to be purchased.	
	Applicability of any exemptions under the <i>Water Management (General) Regulation 2011</i> to the project	N/A
	A detailed and consolidated site water balance	Surface Water Assessment
	An assessment of impacts on surface and groundwater sources (both quality and quantity), related infrastructure, adjacent licensed users, basic landholder rights, watercourses, riparian land and groundwater dependent ecosystems (GDEs) and measures proposed to reduce and mitigate these impacts	Section 6 and 8
	Full technical details and data of all surface and groundwater modelling and an independent peer review.	Section 5.3.1 to 5.3.3, 5.3.6

Table 1 (Cont'd)
Coverage of SEARs and Additional Requirements

Relevant Requirement(s)		Coverage in Report	
Relevant Requirements Nominated by Other Government Agencies (Cont'd)			
Department of Primary Industry – Water 19/12/14 (Cont'd)	Proposed surface and groundwater monitoring activities and methodologies.	Section 8.2	
	Proposed management and disposal of produced or incidental water.	EIS Section 4.7.4.4	
	Details surrounding the final landform of the site, including final void management (where relevant) and rehabilitation measures.	EIS Section 2.16 and 4.6.8.5	
	Assessment of any potential cumulative impacts on water resources, and any proposed options to manage the cumulative impacts.	Section 5.1.6.3	
	Consider relevant Legislation, Water Sharing Plans, Policies and Guidelines.	-	
	Legislation		
	<ul style="list-style-type: none"> Water Management Act 2000 (WMA) and Water Act 1912. In particular, Objects (s.3) and Water Management Principles (s.5) of the WMA. 	Section 2.1.2	
	Policies and Guidelines		
	<ul style="list-style-type: none"> NSW Aquifer Interference Policy (2012) 	Section 2.1.4	
	<ul style="list-style-type: none"> NSW Water Extraction Monitoring Policy (2007) 	Section 6.3	
	<ul style="list-style-type: none"> NSW Groundwater Policy Framework Document – General (August 1997) 	Section 2.1.5	
	<ul style="list-style-type: none"> NSW Groundwater Quality Protection Policy (1998) 	Section 2.1.5	
	<ul style="list-style-type: none"> NSW State Groundwater Dependent Ecosystem Policy (2002) 	Section 6.1.2	
	<ul style="list-style-type: none"> Australian Groundwater Modelling Guidelines (2012) 	Section 5.3	
	<ul style="list-style-type: none"> Risk Assessment Guidelines for Groundwater Dependent Ecosystems (2012) 	Section 6.1.2	
	Water Sharing Plans		
<ul style="list-style-type: none"> Water Sharing Plan for the NSW Murray-Darling Basin Fractured Rock Groundwater Sources 	Section 2.1.2.1		
<ul style="list-style-type: none"> Water Sharing Plan for the NSW Murray-Darling Basin Porous Rock Groundwater Sources 			
<i>Water Sharing Plan for the Macquarie Bogan Unregulated and Alluvial Water Sources</i>	Section 2.1.2.1		
Department of Primary Industry – Water 12/12/16	The EIS is required to include the following issues relating to water: <ul style="list-style-type: none"> Identify water demand and determine whether an adequate and secure water supply is available for the Project; 	EIS Section 2.10.1 and 4.7.4.6	
	<ul style="list-style-type: none"> Identify water sources (surface and groundwater), water disposal/discharge methods and water storage structures in the form of a detailed and consolidated water balance. 	See SCSC – Part 6	
	<ul style="list-style-type: none"> Assessment of any potential cumulative impacts on water resources, and any proposed options to manage the cumulative impacts 	Section 5.1.6.3	

Table 1 (Cont'd)
Coverage of SEARs and Additional Requirements

Page 4 of 10

Relevant Requirement(s)		Coverage in Report
Relevant Requirements Nominated by Other Government Agencies (Cont'd)		
Environment Protection Authority 13/12/16	Describe the proposal including position of any intakes and discharges, volumes, water quality and frequency of all water discharges.	EIS Section 2.10.1
	Demonstrate that all practical options to avoid discharge have been investigated and implemented and outline measures that have been taken to reduce the pollutant load of the discharge so that the environmental impact minimised where a discharge is necessary.	EIS Section 4.7.4
	Provide a water balance...including water requirements (quantity, quality and source(s)) and proposed storm and wastewater disposal, including type, volumes, proposed treatment and management methods and re-use options.	SCSC Part 6
	If the discharge requires treatment prior to disposal, any treatment measures should be described and the predicted water quality outcomes documented. Include a detailed process diagram/flowchart of the proposal specifying all water inputs, outputs and discharge points.	Main EIS Section 4.7.4, 4.7.5.4 and SCSC Part 6 Figure 4.2
	Describe the existing surface and groundwater quality. An assessment must be undertaken for any water resource likely to be affected by the project.	Sections 4.5.12 and 6
	Where the proponent intends to undertake the assessment using site specific water quality trigger values, detail the water quality of a reference site that has been selected based on the site specific considerations outlined in ANZECC (2000).	Section 8.3
	State the Water Quality Objectives for the receiving waters relevant to the proposal...Where groundwater may be impacted the assessment should identify appropriate groundwater environmental values.	N/A
	State the indicators and associated trigger values or criteria for the identified environmental values.	Section 8.3
	State any locally specific objectives, criteria of targets which have been endorsed by the NSW Government.	N/A
	Provide detailed water management strategies for all disturbance areas, paying particular attention to the waste rock emplacement areas and potential impacts to groundwater and off site surface water resources including particular reference to the management of channel and overland flows into and within the disturbance area.	EIS Section 4.7.4.4
	Determine and detail the tailings management and monitoring strategy and dam design to be implemented, including an assessment of the potential impacts of tailings storage on surface and groundwater resources, contingency plans in the event of a leak or seep, rehabilitation and the long term management and feasibility.	EIS Section 2.8, A5.7 and A5.10.7
	Assess any irrigation areas proposed for wastewaters produced in accordance with the EPA Guideline "The Use of Effluent by Irrigation".	Not relevant

Table 1 (Cont'd)
Coverage of SEARs and Additional Requirements

Relevant Requirement(s)		Coverage in Report
Relevant Requirements Nominated by Other Government Agencies (Cont'd)		
Environment Protection Authority 13/12/16 (Cont'd)	Describe how predicted impacts on surface water, groundwater and aquatic ecosystems will be monitored and assessed over time, including monitoring locations, relevant parameters and sampling frequency. The EIS should: <ul style="list-style-type: none"> • Include a ... response management plan, to identify appropriate trigger values and criteria and provide appropriate response actions if impacts are identified through the monitoring program. 	4.6.8, 4.7.6 and 4.11.7
	<ul style="list-style-type: none"> • Identify the process for identifying any trends in the monitoring data obtained. 	Section 8.3
	This EIS should assess impacts on groundwater and GDEs. The assessment should be guided by the principles in <i>The NSW State Groundwater Policy Framework Document</i> (DLWC,1997). <i>Assessment and Management of Groundwater Contamination</i> (DEC, 2007) provides guidance on assessing and managing groundwater contamination. Assess impacts against relevant water quality guidelines for: <ul style="list-style-type: none"> • potentially impacted environmental values and beneficial uses using local Water Quality Objectives; • contamination, such as investigation levels specified in <i>National Environment Protection Measure Guideline on the Investigation Levels for Soil and Groundwater</i> (EPHC, 1999). 	Section 4.5.4 Section 6.2
NSW Division of Resources & Energy 01/03/13	Assess potential impacts to groundwater associated with mine operations and any bore field proposed for water supply purposes. Include long term recovery patterns of groundwater and any bearing these may have on subsequent land use.	Section 6
NSW Division of Resources & Energy 23/01/15	Assess surface water flow and flooding regimes and how these will be impacted and mitigated by the project both during and after mining has ceased. This is to include an evaluation of potential impacts from the final void on both surface and groundwater quality and flow regimes.	See SCSC – Part 6
NSW Division of Resources & Energy 23/12/16	Where a void is proposed to remain as part of the final landform, include...outcomes of the surface and groundwater assessments in relation to the final water level in the void. This should include an assessment of the potential for fill and spill along with measures required to be implemented to minimise associated impacts to the environment and downstream water users.	Section 5.3.5.6, See SCSC – Part 6
Office of Environment and Heritage 13/12/16	The EIS must map the following features relevant to water ... including: <ul style="list-style-type: none"> • Rivers, streams, wetlands, estuaries (as described in Appendix 2 of the Framework for Biodiversity Assessment). • Groundwater. • GDEs • Proposed intake and discharge locations. 	See SCSC – Part 6 Section 4.5

Table 1 (Cont'd)
Coverage of SEARs and Additional Requirements

Page 6 of 10

Relevant Requirement(s)	Coverage in Report	
Relevant Requirements Nominated by Other Government Agencies (Cont'd)		
Office of Environment and Heritage 13/12/16 (Cont'd)	<p>The EIS must describe background conditions for any water resource likely to be affected by the development, including:</p> <ul style="list-style-type: none"> Existing surface and groundwater. Hydrology, including volume, frequency and quality of discharges at proposed intake and discharge locations. Water Quality Objectives (as endorsed by the NSW Government 	Section 4.5
	<ul style="list-style-type: none"> Including groundwater as appropriate that represent the community's uses and values for the receiving waters. 	Section 8.3.7
	<p>The EIS must assess the impacts of the development on water quality, including:</p> <ul style="list-style-type: none"> The nature and degree of impact on receiving waters for both surface and groundwater, demonstrating how the development protects the Water Quality Objectives where they are currently being achieved, and contributes towards achievement of the Water Quality Objectives over time where they are currently not being achieved. This should include an assessment of the mitigating effects of proposed stormwater and wastewater management during and after construction. Identification of proposed monitoring of water quality 	Section 6.2 and SCSC – Part 6
Mid-Western Regional Council 14/02/13	Ensure water usage complies with applicable criteria with reference to Water Sharing Plans.	EIS Section 4.7.2.6
Mid-Western Regional Council 15/01/15	Assess the potential impact to water availability during times of drought.	EIS Sections 4.6.8.4, 4.6.9, 4.7.7.2
Mid-Western Regional Council 15/01/15	The assessment clearly identifies the source of water, amount required and proposed method of reticulation to the mine site.	EIS Section 2.10.1 and 4.7.4.6
Department of Primary Industry – Water 19/12/14	A detailed assessment against the NSW <i>Aquifer Interference Policy 2012</i> .	Sections 6.3 and 2.1.4, Annexure 1
	Details on all bores and excavations for the purpose of investigation, extraction, dewatering, testing and monitoring. All predicted groundwater take must be accounted for through adequate licensing.	Section 4.5
	<p>Where groundwater is expected to be intercepted or impacted, the following requirements should be used to assist the groundwater assessment for the proposal.</p> <ul style="list-style-type: none"> The known or predicted highest groundwater table at the site. Works likely to intercept, connect with or infiltrate the groundwater sources. Any proposed groundwater extraction, including purpose, location and construction details of all proposed bores and expected annual extraction volumes. 	

Table 1 (Cont'd)
Coverage of SEARs and Additional Requirements

Relevant Requirement(s)	Coverage in Report
Relevant Requirements Nominated by Other Government Agencies (Cont'd)	
Department of Primary Industry – Water 19/12/14 (Cont'd)	<ul style="list-style-type: none"> • Bore construction information is to be supplied to DPI Water by submitting a “Form A” template. DPI Water will supply “GW” registration numbers (and licence/approval numbers if required) which must be used as consistent and unique bore identifiers for all future reporting.
	<ul style="list-style-type: none"> • A description of the water table and groundwater pressure configuration, flow directions and rates and physical and chemical characteristics of the groundwater source (including connectivity with other groundwater and surface water sources). • Sufficient baseline monitoring for groundwater quantity and quality for all aquifers and GDEs to establish a baseline incorporating typical temporal and spatial variations. • The predicted impacts of any final landform on the groundwater regime. • The existing groundwater users within the area (including the environment, any potential impacts on these users and safeguard measures to mitigate impacts).
	<ul style="list-style-type: none"> • An assessment of groundwater quality, its beneficial use classification and prediction of any impacts on groundwater quality. • An assessment of the potential for groundwater contamination (considering both the impacts of the proposal on groundwater contamination and the impacts of contamination on the proposal). • Measures proposed to protect groundwater quality, both in the short and long term. • Measures for preventing groundwater pollution so that remediation is not required. • Protective measures for any GDEs.
	<ul style="list-style-type: none"> • Proposed methods of the disposal of waste water and approval from the relevant authority.
	<ul style="list-style-type: none"> • The results of any models or predictive tools used.
	<p>Where potential impact/s are identified the assessment will identify limits to the level of impact and contingency measures that would remediate, reduce or manage potential impacts to the existing groundwater resource and any dependent groundwater environment or water users, including information on:</p> <ul style="list-style-type: none"> • Any proposed monitoring programs, including water levels and quality data. • Reporting procedures for any monitoring program including a mechanism for transfer of information. • An assessment of any groundwater source/aquifer that may be sterilised from future use as a water supply as a consequence of the proposal. • Identification of any nominal thresholds as to the level of impact beyond which remedial measures or contingency plans would be initiated (this may entail water level triggers or a beneficial use category).

Table 1 (Cont'd)
Coverage of SEARs and Additional Requirements

Page 8 of 10

Relevant Requirement(s)		Coverage in Report
Relevant Requirements Nominated by Other Government Agencies (Cont'd)		
Department of Primary Industry – Water 19/12/14 (Cont'd)	<ul style="list-style-type: none"> Description of the remedial measures or contingency plans proposed. 	4.6.8.4
	<ul style="list-style-type: none"> Any funding assurances covering the anticipated post development maintenance cost, for example on-going groundwater monitoring for the nominated period. 	4.6.8.2
Greater Western Area Health Service 24/01/13	Assess potential impacts to groundwater bores from proposal including depth of the open cut mine and effect and disruption to aquifers.	Sections 6.1.1 and 2.1.4, Table 4
	Describe what preventative controls will be put into place to prevent contamination of these aquifers.	Section 8
Department of Education and Communities 13/02/13	Assess the impact to the availability and quality of the school's bore water supply from nearby mining activities during construction and operation periods.	Section 6.1.1
NSW Office of Water 19/12/14	<p>The EIS must consider the potential impacts on GDEs at the site and in the vicinity of the site and:</p> <ul style="list-style-type: none"> Identify any potential impacts on GDEs as a result of the proposal including: <ul style="list-style-type: none"> the effect of the proposal on the recharge to groundwater systems; the potential to adversely affect the water quality of the underlying groundwater system and adjoining groundwater systems in hydraulic connections; and the effect on the function of GDEs (habitat, groundwater levels, connectivity). Provide safeguard measures for any GDEs. 	Section 6.1.2
Relevant Requirements Nominated by Lue and District Community		
Groundwater Monitoring		
Baseline levels in groundwater and surface water of the following. <ul style="list-style-type: none"> Metals e.g. arsenic. pH. Aquatic species populations (using AUSRIVAS). 		Sections 4.5.11 and 4.5.12, See SCSC – Part 6
Will background groundwater quality data include concentrations of lead and other heavy metals?		Annexure 6
How many bores will be monitored?		Section 4.5.11 and 8.2
Will any private bores be monitored?		

Table 1 (Cont'd)
Coverage of SEARs and Additional Requirements

Relevant Requirement(s)	Coverage in Report
Relevant Requirements Nominated by Lue and District Community (Cont'd)	
Groundwater Monitoring (Cont'd)	
What parameters will be monitored (e.g. pH, metals) and what kind of changes to water quality could be expected?	Section 4.5.11 and 4.5.12, Annexure 6
Baseline levels in groundwater and surface water of metals e.g. arsenic and pH.	
Will groundwater monitoring only occur within the footprint of the mine or will a broader area be considered?	
Will historical groundwater sampling data be made available?	
Will the suitability of groundwater for drinking be assessed in the EIS?	
Will ongoing monitoring of groundwater quality and levels be implemented?	Section 8.2.1
Will groundwater monitoring be self-reported or independent/audited?	4.6.8
Will groundwater monitoring results be made available on the website?	See EIS Appendix 5 Table A3.5
Groundwater Modelling	
Will the groundwater model used in the assessment be a "Class 3 Model" under national modelling guidelines?	Section 5.3
How rigorous is the groundwater modelling? Is it based on assumptions or real-world data?	
Is 6 years data sufficient to inform assessment and base modelling on?	
How many peer reviews will be conducted?	
How can we be sure groundwater levels and quality are rigorously assessed prior to mining?	
Mine Dewatering	
How much groundwater does Bowdens Silver propose to extract during the developmental and operational phases of the Project? Is this sustainable?	Section 5.3.5.1, 5.3.5.2 and See SCSC – Part 6
Where will groundwater entering the pit end up?	
Will mining activities result in the drawdown of groundwater?	
TSF	
Use of a double thickness HDPE liner for the Tailings Storage Facility.	Section 8.4
Is soluble arsenic in groundwater likely to increase from tailings seepage?	
Groundwater Impacts – Level and Quality	
Potential impacts to groundwater supplies including impact on any highly productive groundwater (as defined in the Aquifer Interference Policy) and any potential GDEs.	Sections 6.1, 6.2 and 6.3
What effect will there be on local bores? (Effects to the water table)	
What is the area of impact for groundwater levels and quality?	Sections 6.1, 6.2 and 6.3
I am relieved that our bore will be outside of the drawdown area	
Will mining activities impact on the quality of groundwater?	

Table 1 (Cont'd)
Coverage of SEARs and Additional Requirements

Page 10 of 10

Relevant Requirement(s)	Coverage in Report
Relevant Requirements Nominated by Lue and District Community (Cont'd)	
Groundwater Impacts – Level and Quality (Cont'd)	
We rely on our groundwater bores – how can we be sure there will be no impacts to our supply?	
We are concerned about groundwater quality and the potential for contamination. How likely is this and what will be done to prevent it?	
Is it likely that there will be a build-up of nitrates in the groundwater?	
Potential impacts to groundwater supplies including impact on any highly productive groundwater (as defined in the Aquifer Interference Policy) and any potential groundwater dependent ecosystems.	
Groundwater Impacts – Surface Flows	
What will be the effects of groundwater drawdown on flows in Lawsons Creek, especially during droughts?	Section 5.3.5.7 and Section 6.1.3 See SCSC – Part 6
We are concerned about reduced flows in Lawsons Creek as a result of groundwater flowing into the open cut pit	
Will groundwater drawdown impact the flow of Lawsons Creek?	
You will have a drawdown of the groundwater – will it impact on Lawsons Creek?	
Mitigation and Management	
What mitigation strategies will be implemented to reduce impacts to groundwater?	Section 8
Are there any “make good” provisions for surrounding landowners if groundwater becomes unusable or depleted?	Section 6.1.1

1.3 OBJECTIVES AND LAYOUT

The purpose of this report is to collate available groundwater data to present the existing groundwater conditions within the vicinity of the Mine Site, assess how these existing conditions may be affected as a result of operating the Project, and predict the potential impacts that may be caused to groundwater receptors.

This groundwater assessment is divided into the following sections.

- Section 2 - Legislation and Policy. Details the relevant legislation regarding management of groundwater in NSW, as it pertains to the Project.
- Section 3 - Previous Investigation. A summary of investigations and learning as a result of prior groundwater studies undertaken over the history of the Project.
- Section 4 - Existing Environment. Describes the existing physical environment that has potential to influence and control the groundwater regime, including climate, topography, surface water features, and geology. This section also includes information on local groundwater levels, water quality, and sensitive groundwater receptors, and outlines the monitoring programmes that are in place to provide the relevant baseline groundwater data.

- Section 5 - Groundwater Modelling. This section summarises the results of hydrogeological investigations and establishes the Conceptual Hydrogeological Model. The Conceptual Hydrogeological Model has been developed to present the real-world groundwater regime in a simplified representation that can be readily applied for the demonstration of potential impacts as well as being transposed numerically in order to quantify and assess the potential regional groundwater impacts that may arise as a consequence of the Project.
- The establishment and implementation of a transient numerical groundwater model to predict groundwater responses arising from the development of the Project is described. The results of the transient numerical groundwater model present the estimated groundwater inflows to the open cut, and resulting groundwater drawdown, that are predicted over the life of mine, and post closure.
- Section 6 - Impact assessment. This section assesses the potential impacts of the predicted groundwater responses with respect to other groundwater users, GDEs, baseflow to surface water features, and water quality. The predicted impacts are then assessed in regard to the minimal impact considerations of the NSW Aquifer Interference Policy and specific SEARs as required.
- Section 7 - Licencing Requirements. The groundwater and surface water licencing requirements relating to groundwater inflow to the mining operation are determined including the partitioning of the volumetric water take between the various water sources (groundwater and surface water) as required. It is noted that the water supply for the Project would likely comprise a combination of groundwater inflow to mining operations (addressed in this report), harvesting of surface water (addressed in the Surface Water Assessment – see Volume 2, Part 6 of the Specialist Consultant Studies Compendium (SCSC)), as well as externally sourced water (third party supply). The externally sourced water would comprise a piped water supply from the Ulan Coal Mine and/or Moolarben Coal Mine.
- Section 8 - Monitoring and Management. This section outlines the proposed monitoring network and management measures to address the potential groundwater related impacts during construction and mining as identified in the impact assessment section.

2. LEGISLATION AND POLICY

This section presents relevant legislation regarding management of groundwater in NSW, as it pertains to the Project.

2.1 NEW SOUTH WALES LEGISLATION

2.1.1 Water Management Act 2000

The *Water Management Act 2000* (WMA 2000) presents the framework for sustainable and integrated water management in NSW and its objectives are:

- to apply the principles of ecologically sustainable development;
- to protect, enhance and restore water sources, their associated ecosystems, ecological processes and biological diversity and their water quality;
- to recognise and foster the significant social and economic benefits to the State that result from the sustainable and efficient use of water, including:
 - benefits to the environment;
 - benefits to urban communities, agriculture, fisheries, industry and recreation;
 - benefits to culture and heritage;
 - benefits to the Aboriginal people in relation to their spiritual, social, customary and economic use of land and water.
- to recognise the role of the community, as a partner with government, in resolving issues relating to the management of water sources;
- to provide for the orderly, efficient and equitable sharing of water from water sources;
- to integrate the management of water sources with the management of other aspects of the environment, including the land, its soil, its native vegetation and its native fauna;
- to encourage the sharing of responsibility for the sustainable and efficient use of water between the Government and water users; and
- to encourage best practice in the management and use of water.

The primary instruments applied to achieve these objectives are Water Sharing Plans and associated regulations and policies.

2.1.2 Water Sharing Plans

Water Sharing Plans, prepared under Section 50 of the WMA 2000, provide the basis for equitable sharing of surface water and groundwater between water users, including the environment.

The majority of water sources in NSW are covered by a Water Sharing Plan. If an activity leads to a take from a groundwater or surface water source covered by a Water Sharing Plan, then an approval and / or licence is required. In general, the WMA 2000 requires:

- a water access licence (WAL) to take water;
- a water supply works approval to construct a work; and
- a water use approval to use the water.

Where an activity leads to a take from a groundwater or surface water source not covered by a Water Sharing Plan or consists of an activity not specifically addressed by the WMA 2000, then the activity is managed through the *Water Act 1912*. In such cases, the *Water Act 1912* requires:

- a licence to extract groundwater or surface water using any type of work; and
- a water supply work approval to construct a work.

It is noted that, as the Project is considered to be a State Significant Development, under Section 4.41 (1g) of the EP&A Act 1979 the authorisation provided by a water use approval under section 89 of the WMA 2000, a water management work approval under section 90 of the WMA 2000 or an activity approval (other than an aquifer interference approval) under section 91 WMA 2000 are not required. Rather, this authorisation is provided by a development consent.

2.1.2.1 Relevant Water Sharing Plans

For surface water, the Project is included in the *Water Sharing Plan for the Lawsons Creek Water Source of the Macquarie Bogan Unregulated and Alluvial Water Sources, 2012*.

For groundwater, the Project resides within the following water sharing plans:

- Sydney Basin Groundwater Source of the NSW Murray Darling Basin Porous Rock Groundwater Sources, 2011; and
- Lachlan Fold Belt Groundwater Source of the NSW Murray Darling Fractured Rock Groundwater Sources, 2011.

The Plan Maps for the NSW Murray Darling Basin Porous and Fractured Rock Groundwater Sources or Water Source of the Macquarie Bogan Unregulated and Alluvial Water Sources do not indicate any alluvial sources in the vicinity of the Project. Any small, unmapped alluvial deposits that overlie porous or fractured rocks are subject to the provisions of the porous or fractured rock groundwater source on which they occur.

Water Sharing Plan boundaries relevant to the Project are provided on **Figure 3** and **Figure 4**. The Water Sharing Plans would govern any direct or incidental groundwater or surface water 'take' arising from the Project during construction, operation, and post closure.

Table 2 and **Table 3** present a summary of the Long Term Average Annual Extraction Limits (LTAAELs) for the relevant groundwater source water sharing plans.

There is currently a moratorium in place on issuing new WALs in NSW for commercial purposes. Where WALs are required, they would be purchased on the market, or via controlled allocation orders, as appropriate.

Figure 3 Water Sharing Plan Boundaries and Surface Water Sources

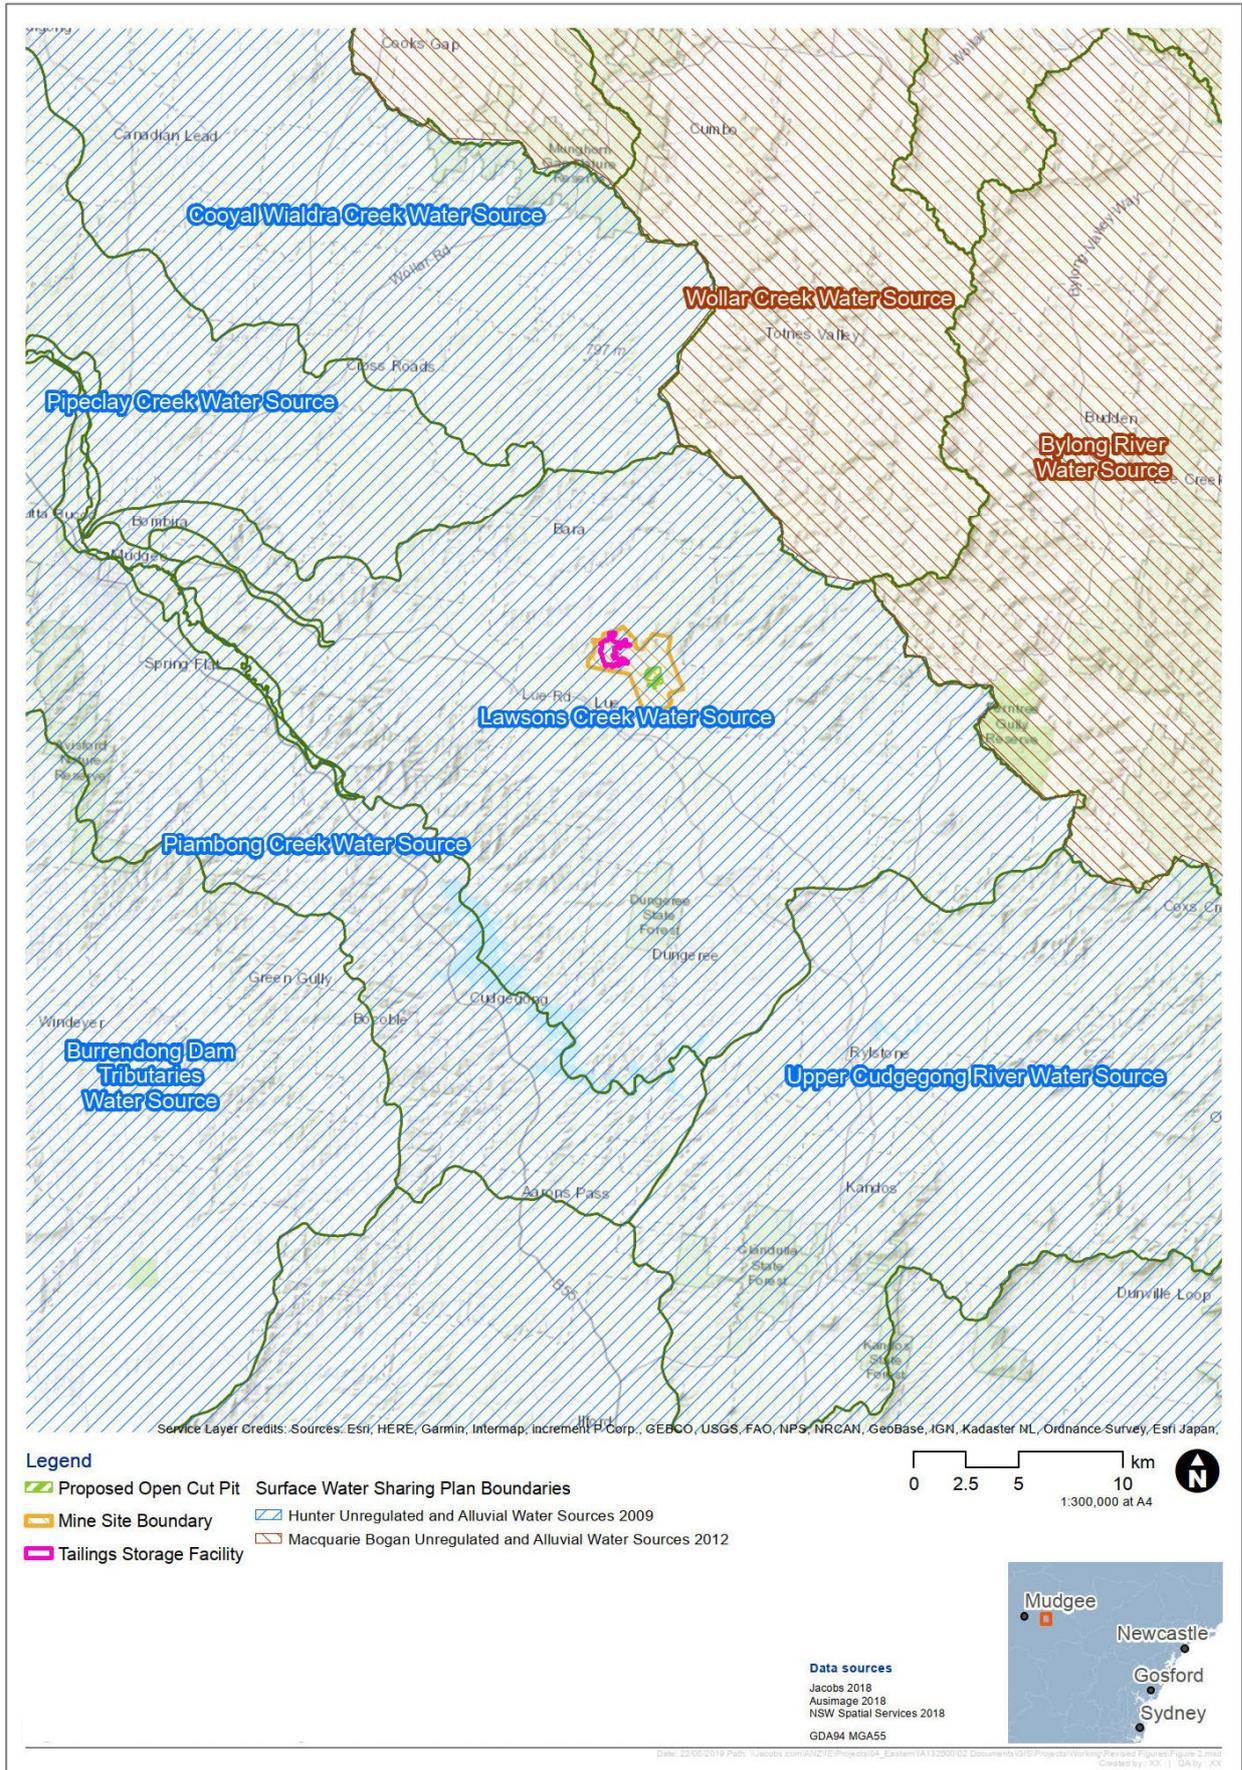


Figure 4 Water Sharing Plan Boundaries and Groundwater Sources

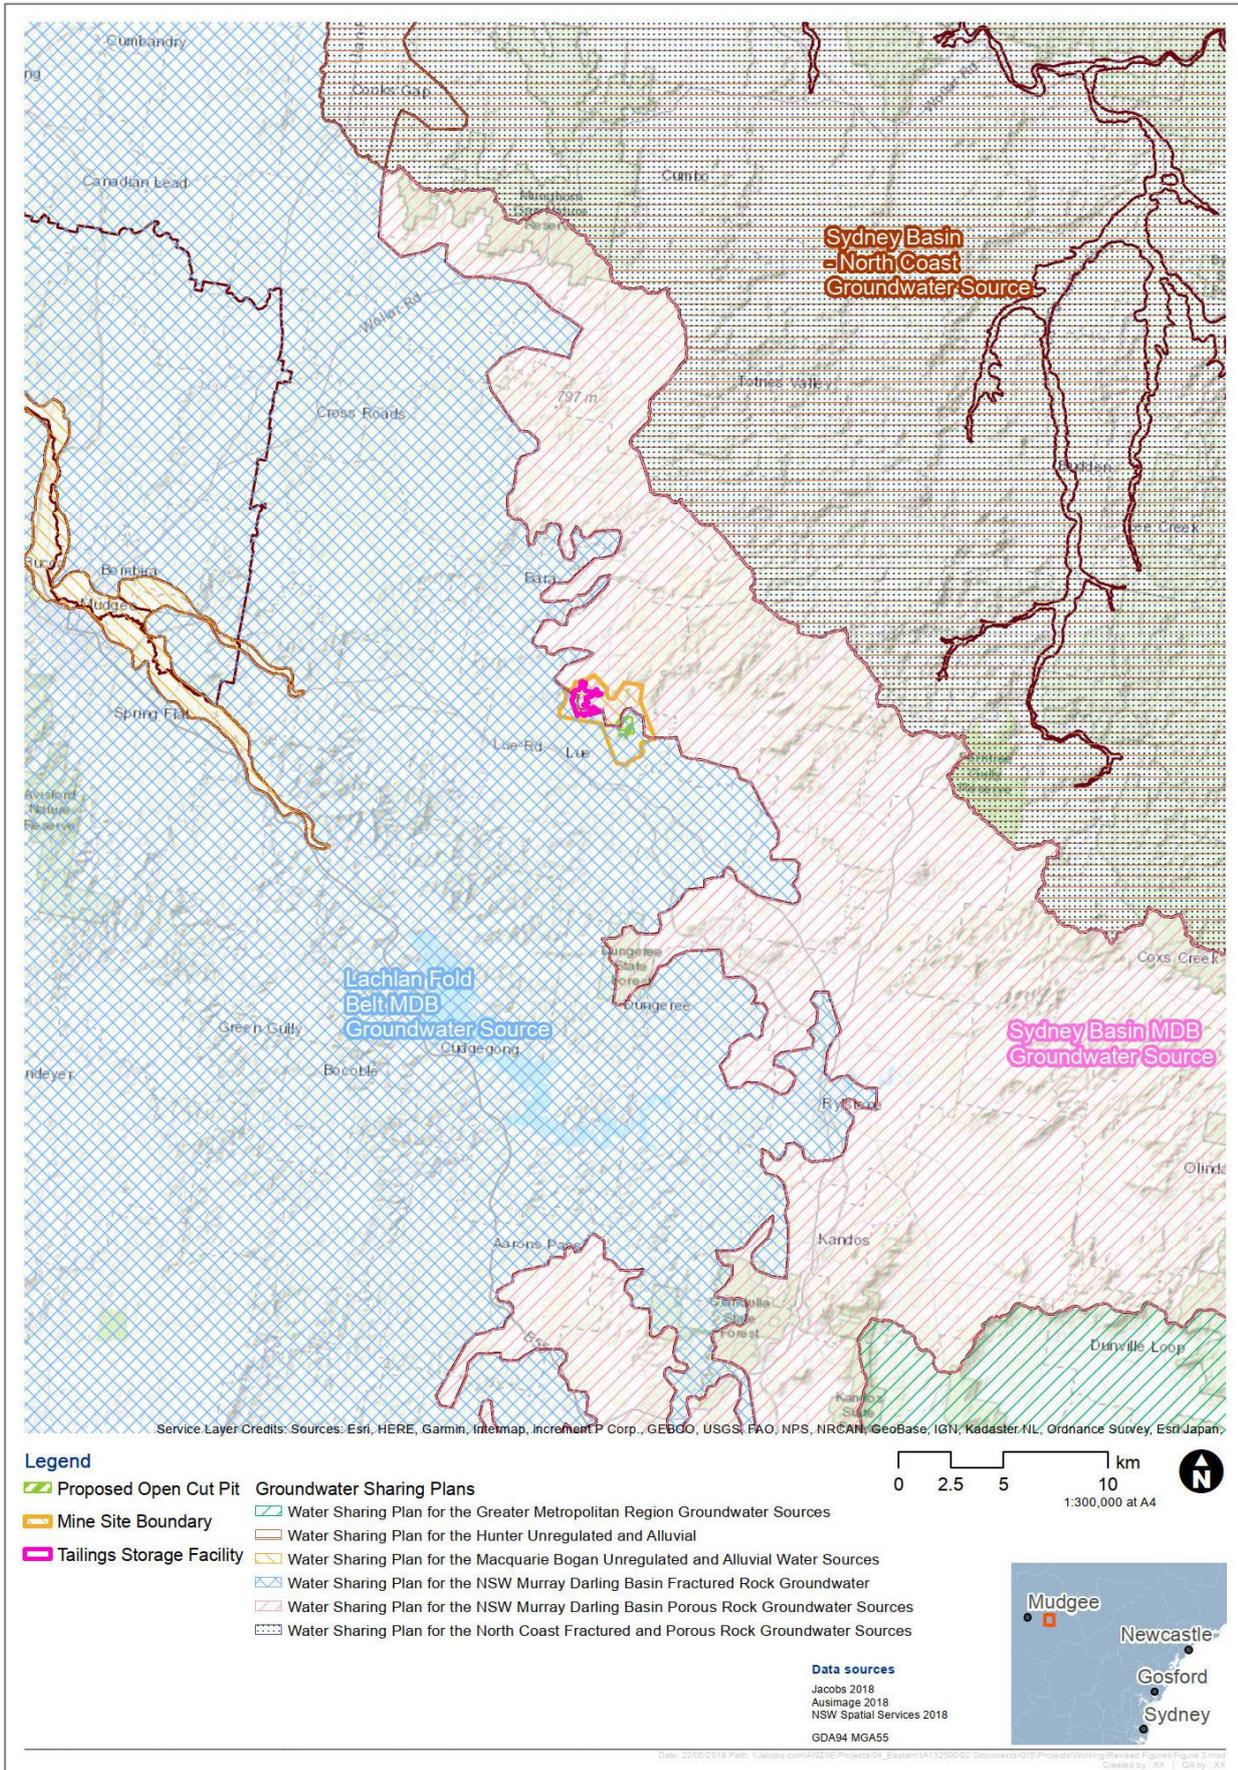


Table 2
Share Component of Unregulated River and Current Allocations (2019/2020)

Water Source and Water Sharing Plan	Share Component (ML/year)	No. WALs	Water made available (ML/year)	Unallocated Water (ML/year)
Lawsons Creek Water Source of the Macquarie Bogan Unregulated and Alluvial Water Sources.	1575	36 (Unregulated River)	1443	-
	53	12 (Domestic and Stock)	53	

Table 3
Groundwater Long Term Extraction Limits and Current Allocations (2019/2020)

Groundwater Source and Water Sharing Plan	LTAEL (ML/year)	No. WALs	Water Made Available (ML/year)	Unallocated Water (ML/year)
Sydney Basin Groundwater Source of the NSW Murray Darling Basin Porous Rock Groundwater Sources	60 443	30 (Aquifer)	5 443	55 000
Lachlan Fold Belt Groundwater Source of the NSW Murray Darling Fractured Rock Groundwater Sources	875 652	1024 (Aquifer) 6 (Town Supply) 36 (Local water Utility) 1 (Salinity Management)	67 231.7 467.4 2 420.5 236.0	805 296

2.1.3 Water Access Licence Rules

Individual Water Sharing Plans contain rules surrounding the granting and management of access licences, as well as rules regarding the access licence dealings. Key rules for each of the Water Sharing Plans are summarised as follows.

2.1.3.1 Sydney Basin Groundwater Source of the NSW Murray Darling Basin Porous Rock Groundwater Sources, 2011

Assessment of Average Annual Extraction against the Long-term Average Annual Extraction Limit

- Growth in extractions would be assessed against the long-term average annual extraction limit over a three year period with a 5 per cent tolerance.
- Assessments would commence in the fourth year of the plan.
- Assessment of the groundwater storage extraction limit would commence in the second year after the first supplementary water (storage) access licence is granted.

Available Water Determinations

- Available water determinations will be made at the commencement of each water year for:
 - Stock and domestic, local and major water utilities and specific purpose access licences – 100 per cent of share component
 - Supplementary water (storage) access licences – 100 per cent of share component
 - Aquifer access licences – 1ML/unit share or lower amount as a result of a growth in extraction response.

Granting of Access Licences

- Granting of new WALs may be considered for the following categories:
 - Local water utility, major water utility, domestic and stock and town water supply
 - These are specific purpose access licences in clause 19 of the *Water Management (General) Regulation 2011*.
 - Supplementary water (storage) access licences
 - These access licences may only be granted if the Minister is satisfied that there is insufficient unassigned water to make further controlled allocation orders.
- Aquifer (Aboriginal cultural), up to 10 ML/year
- Granting of WALs may also be considered as part of a controlled allocation order made in relation to any unassigned water in this water source.

Carryover

- Up to 25 per cent of entitlement can be carried over.
 - No carry-over is allowed for domestic and stock, local water utility or special purpose access licences.

Take Limit

- The maximum amount of water permitted to be taken in any one water year is the water allocation accrued in the water access account for that water year including carry-over from the previous year, adjusted for allocation assignments out of or into individual accounts.

To Minimise Interference between Neighbouring Water Supply Works

- Water supply works (bores) are not to be granted or amended within the following distances of existing bores:
 - 400 metres from an aquifer access licence bore on another landholding
 - 100 metres from a basic landholder rights bore on another landholding
 - 500 metres from a local or major water utility access licence bore
 - 200 metres from a DoI-Water monitoring bore
 - 200 metres from a property boundary.
- The plan lists circumstances in which these distance conditions may be varied.

To Protect Bores Located near Contamination

- Water supply works (bores) are not to be granted or amended within:
 - 250 metres of contamination identified within the plan
 - between 250 metres and 500 metres of contamination as identified within the plan unless no drawdown of water will occur within 250 metres of the contamination
 - a distance greater than 500 metres of contamination as identified within the plan if necessary to protect the water source, the environment or public health or safety.
- The plan lists circumstances in which these distance conditions may be varied and exemptions from these rules.

To Protect Bores Located near Sensitive Environmental Areas

- Water supply works (bores) used solely for extracting basic landholder rights are not to be granted or amended within:
 - 100 metres of high priority GDEs listed in the plan
 - 40 metres of the top of bank of a river or stream.
- Bores not used solely for extracting basic landholder rights are not to be granted or amended within:
 - 200 metres of a high priority GDE listed in the plan
 - greater than 200 metres of a high priority GDE listed in the plan if the bore is likely to cause drawdown at the perimeter of any high priority GDE listed in the plan
 - 500 metres from a high priority karst or escarpment
 - 40 metres from the top of the high bank of a river or stream.
- The plan lists circumstances in which these distance conditions may be varied and exemptions to these rules.

To Protect Groundwater Dependent Culturally Significant Sites

- Water supply works (bores) are not to be granted or amended within the following distances of groundwater dependent culturally significant sites:
 - 100 metres for basic landholder rights bores
 - 200 metres for bores not used solely for extracting basic landholder rights.
- The plan lists circumstances in which these distance conditions may be varied and exemptions from these rules.

To Manage the use of Existing Bores within Restricted Distances

- Existing water supply works (bores) can continue extraction of groundwater with the maximum annual amount extracted equivalent to the shares nominated at the commencement of the plan within:
 - 500 metres of contamination listed in the plan
 - any of the distance restrictions listed above.

To Manage Local Impacts

- The Minister may prohibit or restrict the taking of water from a water source in order to manage local impacts in groundwater sources, where required to:
 - maintain or protect water levels in an aquifer
 - maintain, protect or improve the quality of water in an aquifer
 - prevent land subsidence or compaction in an aquifer
 - protect GDEs
 - maintain pressure or to ensure pressure recovery, in an aquifer.

Trading into Water Source

- Not permitted.

Trading within Water Source

- Permitted
 - subject to any applicable local impact management restrictions.

Conversion to another Category of Access Licence

- Not permitted:
 - except those allowed under the Minister's Access Licence Dealing Principles.

Trading between States

- Not permitted:

2.1.3.2 Lachlan Fold Belt Groundwater Source of the NSW Murray Darling Fractured Rock Groundwater Sources, 2011**Assessment of Average Annual Extraction against the Long-term Average Annual Extraction Limit**

- Growth in extractions would be assessed against the long-term average annual extraction limit over a three year period with a five per cent tolerance.
- Assessments would commence in the fourth year of the plan.

Available Water Determinations

- Available water determinations would be made at the commencement of each water year for:
 - stock and domestic, local and major water utilities and specific purpose access licences – 100 per cent of share component.
 - aquifer access licences – one megalitre per unit share or lower amount as a result of a growth in extraction response.

Granting Access Licences

- Granting new WALs may be considered for the following categories:
 - local water utility, major water utility, domestic and stock and town water supply, and salinity and water table management.
 - These are specific purpose access licences in clause 19 of the *Water Management (General) Regulation 2011*.
 - aquifer (Aboriginal cultural), up to 10 megalitres per year.
- Granting of WALs may also be considered as part of a controlled allocation order made in relation to any unassigned water in this water source.

Carryover

- Up to 10 per cent of entitlement can be carried over.

Take Limit

- The maximum amount of water permitted to be taken in any one water year is the water allocation accrued in the water access account for that water year including carryover from the previous year, adjusted for allocation assignments out of or into individual accounts.

Minimising Interference between Neighbouring Water Supply Works

- Water supply works (bores) are not to be granted or amended within the following distances of existing bores:
 - 400 metres from an aquifer access licence bore on another landholding
 - 200 metres from a basic landholder rights bore on another landholding
 - 500 metres from a local or major water utility access licence bore
 - 400 metres from a DoI-Water monitoring bore
 - 200 metres from a property boundary.
- The plan lists circumstances in which these distance conditions may be varied.

Protecting Bores located near Contamination

- Water supply works (bores) are not to be granted or amended within:
 - 250 metres of contamination identified within the plan
 - between 250 metres and 500 metres of contamination as identified within the plan unless no drawdown of water would occur within 250 metres of the contamination
 - a distance greater than 500 metres of contamination as identified within the plan if necessary to protect the water source, the environment or public health or safety.
- The plan lists circumstances in which these distance conditions may be varied and exemptions from these rules.

Protecting Bores Located near Sensitive Environmental Areas

- Water supply works (bores) used solely for extracting basic landholder rights are not to be granted or amended within:
 - 100 metres of high priority GDE listed in the plan
 - 40 metres of the top of the high bank of a river or stream.
- Bores not used solely for extracting basic landholder rights are not to be granted or amended within:
 - 200 metres of a high priority GDE listed in the plan
 - greater than 200 metres of a high priority GDE listed in the plan if the bore is likely to cause drawdown at the perimeter of any high priority GDE listed in the plan
 - 500 metres from a high priority karst or escarpment
 - 40 metres of the top of the high bank of a river or stream.
- The plan lists circumstances in which these distance conditions may be varied and exemptions to these rules.

Protecting Groundwater Dependent Culturally Significant Sites

- Water supply works (bores) are not to be granted or amended within the following distances of groundwater dependent cultural significant sites:
 - 100 metres for basic landholder rights bores
 - 200 metres for bores not used solely for extracting basic landholder rights.
- The plan lists circumstances in which these distance conditions may be varied and exemptions from these rules

Managing the Use of Existing Bores within Restricted Distances

- Existing water supply works (bores) can continue extraction of groundwater with the maximum annual amount extracted equivalent to the shares nominated at the commencement of the plan within
 - 500 metres of contamination listed in the plan
 - any of the distance restrictions listed above.

Managing Local Impacts

- The Minister may prohibit or restrict the taking of water from a water source in order to manage local impacts in groundwater sources, where required to:
 - maintain or protect water levels in an aquifer
 - maintain, protect or improve the quality of water in an aquifer
 - prevent land subsidence or compaction in an aquifer
 - protect GDEs
 - maintain pressure, or to ensure pressure recovery, in an aquifer.

Trading into Water Source

- Not permitted.

Trading within Water Source

- Permitted
 - subject to any applicable local impact management restrictions
 - unless the dealing would result in the total extraction authorised under access licences from the Lachlan Fold Belt MDB (Mudgee) Management Zone exceeding the limit authorised at the commencement of the plan.

Conversion to another Category of Access Licence

- Not permitted:
 - except those allowed under the Minister's Access Licence Dealing Principles.

Trading between States

- Permitted:
 - where there is an interstate agreement for such dealings
 - such arrangements are specified in the Minister's Access Licence Dealing Principles.

2.1.3.3 Lawsons Creek Water Source of the Macquarie Bogan Unregulated and Alluvial Water Sources, 2012

Cease to Pump

- Pumping is not permitted from natural pools when the water level in the pool is lower than its full capacity.

Trading into Water Source

- Not permitted.

Trading within Water Source

- Permitted within the water source, subject to assessment.

It is noted that, for incidental water take as may result from mine dewatering, the cease to pump rules do not apply. Section 53 (1) of the Water Sharing Plan for the Macquarie Bogan Unregulated and Alluvial Water Sources states... "This clause applies to the taking of water under an access licence from the Macquarie Bogan Unregulated Water Sources, excluding the taking of water under an access licence used only to account for the taking of water in association with an aquifer interference activity."

2.1.4 NSW Aquifer Interference Policy

The NSW Aquifer Interference Policy (AIP) (NSW Office of Water, 2012) presents the requirements of the assessment of aquifer interference activities administered by the WMA 2000.

Key components to the AIP are:

- All water taken must be properly accounted for within the extraction limits set by the relevant Water Sharing Plan. A water licence is required whether water is taken either incidentally or by consumptive use. The AIP also requires consideration of the continued take of groundwater or connected surface waters following cessation of an aquifer interference activity.
- In addition to licencing requirements, the WMA 2000 includes the concept of ensuring “no more than minimal harm”, and the AIP establishes a number of minimal impact considerations relating to water level, water pressure, and water quality. Minimal impact considerations are assigned according to the aquifer category and whether the aquifer is “highly productive” or “less productive”.
- The AIP also requires planning for contingency or mitigating measures in the event that actual impacts are greater than predicted, including making sure there is sufficient monitoring in place.

Both the Sydney Basin Groundwater Source of the NSW Murray Darling Basin Porous Rock Groundwater Sources and the Lachlan Fold Belt Groundwater Source of the NSW Murray Darling Fractured Rock Groundwater Sources are considered to be highly productive aquifers based on the AIP criteria (NSW Office of Water, 2012) of:

- has total dissolved solids of less than 1,500 mg/L; and
- contains water supply works that can yield water at a rate greater than 5 L/s.

While not detailed in the Plan Maps of the associated Water Sharing Plans, shallow alluvial deposits are present in the vicinity of Hawkins and Lawsons Creeks. Drilling along Hawkins Creek has recorded alluvial thickness ranging from 4 m to 6 m with variable saturation, and these alluvial deposits are not considered to be highly productive on the basis of the AIP yield criteria. Notwithstanding, thicker saturated sequences of alluvium still have potential to be highly productive and the alluvial deposits will be considered as such for the purposes of the AIP.

For each of the highly productive and less productive groundwater sources, thresholds for key minimal impact considerations have been developed. These thresholds deal with water table and groundwater pressure drawdown as well as groundwater and surface water quality changes.

Key minimal impact considerations for the highly productive alluvial, porous rock and fractured rock aquifers are provided in **Table 4**.

The minimum impact considerations for water quality refer to the beneficial use category of the groundwater source. Beneficial use categories are outlined in the NSW Groundwater Quality Protection Policy (refer Section 2.1.5 below).

The NSW Government (DoI Water) provides a checklist for assessment under the AIP that is provided in **Annexure 1**.

Assessment of the Project against the AIP Minimal Impacts Considerations is provided in Section 6.1.

Table 4
Level 1 Minimum Impact Considerations – Highly Productive Groundwater Sources

Water Source	Water Table	Water Pressure	Water Quality
<p>Alluvial Aquifer</p>	<p>1. Less than or equal to a 10% cumulative variation in the water table, allowing for typical climatic post-water sharing plan variations, 40 metres from any:</p> <p>(a) high priority GDE or</p> <p>(b) high priority culturally significant site</p> <p>listed in the schedule of the relevant water sharing plan, or</p> <p>A maximum of a 2m water table decline cumulatively at any water supply work.</p>	<p>A cumulative pressure head decline of not more than 40% of the post-water sharing plan pressure head above the base of the water source to a maximum of a 2m decline, at any water supply work.</p>	<p>Any change in the groundwater quality should not lower the beneficial use category of the groundwater source beyond 40 metres from the activity.</p> <p>No increase of more than 1% per activity in long-term average salinity in a highly connected surface water source at the nearest point to the activity.</p> <p>No mining activity to be below the natural ground surface within 200m laterally from the top of high bank or 100m vertically beneath (or the three dimensional extent of the alluvial water source - whichever is the lesser distance) of a highly connected surface water source that is defined as a reliable water supply.</p> <p>Not more than 10% cumulatively of the three dimensional extent of the alluvial material in this water source to be excavated by mining activities beyond 200 metres laterally from the top of high bank and 100 metres vertically beneath a highly connected surface water source that is defined as a reliable water supply.</p>

Table 4 (Cont'd)

Level 1 Minimum Impact Considerations – Highly Productive Groundwater Sources

Water Source	Water Table	Water Pressure	Water Quality
<p>Porous Rock Water Sources</p>	<p>1. Less than or equal to 10% cumulative variation in the water table, allowing for typical climatic “post-water sharing plan” variations, 40m from any</p> <p>(a) high priority GDE, or</p> <p>(b) high priority culturally significant site,</p> <p>listed in the schedule of the relevant water sharing plan.</p> <p>A maximum of a 2m decline cumulatively at any water supply work.</p> <p>2. If more than 10% cumulative variation in the water table, allowing for typical climatic “post-water sharing plan” variations, 40m from any:</p> <p>(a) high priority GDE; or</p> <p>(b) high priority culturally significant site;</p> <p>listed in the schedule of the relevant water sharing plan then appropriate studies (including the hydrogeology, ecological condition and cultural function) would be required to demonstrate to the Minister’s satisfaction that the variation would not prevent the long-term viability of the dependent ecosystem or culturally significant site.</p> <p>If more than 2m decline cumulatively at any water supply work then make good provisions should apply.</p>	<p>1. A cumulative pressure head decline of not more than a 2m decline, at any water supply work.</p> <p>2. If the predicted pressure head decline is greater than requirement 1. above, then appropriate studies are required to demonstrate to the Minister’s satisfaction that the decline would not prevent the long-term viability of the affected water supply works unless make good provisions apply.</p>	<p>1. Any change in the groundwater quality should not lower the beneficial use category of the groundwater source beyond 40m from the activity.</p> <p>2. If condition 1 is not met then appropriate studies would be required to demonstrate to the Minister’s satisfaction that the change in groundwater quality would not prevent the long-term viability of the dependent ecosystem, significant site or affected water supply works.</p>

Table 4 (Cont'd)
Level 1 Minimum Impact Considerations – Highly Productive Groundwater Sources

Page 3 of 3

Water Source	Water Table	Water Pressure	Water Quality
<p>Fractured Rock Water Sources</p>	<p>1. Less than or equal to 10% cumulative variation in the water table, allowing for typical climatic “post-water sharing plan” variations, 40m from any:</p> <p>(a) high priority GDE; or</p> <p>(b) high priority culturally significant site;</p> <p>listed in the schedule of the relevant water sharing plan.</p> <p>A maximum of a 2m decline cumulatively at any water supply work.</p> <p>2. If more than 10% cumulative variation in the water table, allowing for typical climatic “post-water sharing plan” variations, 40m from any:</p> <p>(a) high priority GDE; or</p> <p>(b) high priority culturally significant site;</p> <p>listed in the schedule of the relevant water sharing plan then appropriate studies would be required to demonstrate to the Minister’s satisfaction that the variation would not prevent the long-term viability of the dependent ecosystem or significant site.</p> <p>If more than 2m decline cumulatively at any water supply work then make good provisions should apply.</p>	<p>1. A cumulative pressure head decline of not more than a 2m decline, at any water supply work.</p> <p>2. If the predicted pressure head decline is greater than requirement 1.(a) above, then appropriate studies are required to demonstrate to the Minister’s satisfaction that the decline would not prevent the long-term viability of the affected water supply works unless make good provisions apply.</p>	<p>1. Any change in the groundwater quality should not lower the beneficial use category of the groundwater source beyond 40m from the activity.</p> <p>2. If condition 1 is not met then appropriate studies would be required to demonstrate to the Minister’s satisfaction that the change in groundwater quality would not prevent the long-term viability of the dependent ecosystem, significant site or affected water supply works.</p>

2.1.5 NSW Groundwater Quality Protection Policy

The NSW Groundwater Quality Protection Policy (DLWC, 1998) objectives are:

- All groundwater systems should be managed such that their most sensitive identified beneficial use (or environmental value) is maintained.
- Town water supplies should be afforded special protection against contamination.

- Groundwater pollution should be prevented so that future remediation is not required.
- For new developments, the scale and scope of work required to demonstrate adequate groundwater protection shall be commensurate with the risk the development poses to a groundwater system and the value of the groundwater resource.
- A groundwater pumper shall bear the responsibility for environmental damage or degradation caused by using groundwaters that are incompatible with soil, vegetation or receiving waters.
- GDEs will be afforded protection.
- Groundwater quality protection should be integrated with the management of groundwater quantity.
- The cumulative impacts of developments on groundwater quality should be recognised by all those who manage, use, or impact on the resource.
- Where possible and practical, environmentally degraded areas should be rehabilitated and their ecosystem support functions restored.

The following beneficial uses, or environmental values, are adopted by the NSW Groundwater Quality Protection Policy:

- ecosystem protection
- recreation and aesthetics
- raw water for drinking water supply
- agricultural water
- industrial water.

Specific water quality characteristics are determined on a case-by-case basis with due consideration of existing site conditions and uses within each beneficial class.

2.1.6 Water Act 1912

The *Water Act 1912* (Water Act) is being progressively phased out across NSW and replaced by the WMA 2000.

The Water Act is relevant where an activity leads to a take from a groundwater or surface water source not currently covered by a Water Sharing Plan, or for aquifer interference activities such as temporary construction dewatering.

There are also some relevant residual provisions under the Water Act such as the requirement under Part 5 to obtain a groundwater licence to install a monitoring piezometer, however, there is an exemption to this requirement through the *Water Management (General) Regulation 2011* for piezometers installed as part of an environmental assessment for consideration under the EP&A Act 1979.

2.1.7 Protection of the Environment Operations Act 1997

The *Protection of the Environment Operations Act 1997* (PoEO Act 1997) is the key piece of environment protection legislation administered by the NSW Environment Protection Authority (EPA).

Relevant features of this legislation include:

- protection of the environment policies (PEPs);
- integrated environment protection licensing; and
- regulation of scheduled and non-scheduled activities:
 - The EPA is the regulatory authority for scheduled activities (activities declared under Schedule 1 of the PoEO 1997)
 - The EPA is also the regulatory authority for non-scheduled activities, where activities are undertaken by a public authority.

3. PREVIOUS INVESTIGATIONS

A number of previous groundwater investigations have been undertaken at the Mine Site and are briefly summarised below. These investigations collectively form a substantial body of work that has been collated and incorporated into the current assessment. Investigations have included the undertaking of a regional bore census, installation of a groundwater monitoring network, and hydraulic testing, and form the foundation of the available groundwater information for the Project.

Salient information from previous investigations are summarised in the following sections.

3.1 COFFEY, 1998

Bowdens Silver Project Pre-Feasibility Water Supply Study. Undertaken by Coffey Partners International Pty Ltd for Silver Standard.

- Desktop hydrogeological investigation into potential Project water supplies from surface water and groundwater sources.
- No site-specific investigations were undertaken.
- Conclusions of the investigation are summarised as follows:
 - The initial search should be focused on both surface and groundwater supplies in relatively close proximity to the then Bowdens Silver project area.
 - The highest recorded yield from an alluvial aquifer noted as 3.2L/s from a bore in Lawsons Creek.
 - The highest recorded yield from a 'hard rock' aquifer noted as 4.6L/s from a 35m-deep shale-hosted bore near Lue. However, yields from fractured aquifers in the district were noted to be generally less than 1.1L/s in bores up to about 110m deep.
 - Potential was noted for moderate groundwater yields from alluvial aquifers in the local area.

3.2 HYDROILEX, 2003

Hydrogeological Investigation, Groundwater Supply for the Bowdens Silver Project. Undertaken by Hydroilex Pty Ltd for Silver Standard.

- Desktop hydrogeological investigation into potential project water supplies from groundwater sources. No site-specific investigations were undertaken.
- Identified several areas within the region with the potential of producing moderate to high yields of groundwater and nominated a number of sites within each area for potential drilling and test bores. Target areas included:
 - Hard rock targets in the local area peripheral to the then Bowdens Silver project.
 - Hard rock targets south-southeast of Lue associated with the Walkers Lane Fault system.
 - Alluvial and hard rock targets associated with the Lawsons Creek alluvial system and occurrences of karst limestone between Havilah and Mirrimer approximately 10km west of Lue.

3.3 JEWELL, 2003

Hydrogeological Assessment, Bowdens Silver-Lead-Zinc Deposit. Undertaken by CM Jewell and Associates Pty Ltd for Silver Standard.

- Review of local groundwater and surface water conditions, including pumping tests undertaken on two boreholes (BGR230 and BGR299).
- Key findings were as follows:
 - Groundwater encountered during mineral exploration drilling was predominantly within the Rylstone Volcanics.
 - Groundwater occurrence in the Rylstone Volcanics unit and within the underlying basement rocks of then Bowdens Silver project area is primarily controlled by the presence of secondary porosity due to faulting/fracturing and weathering.
 - Water level survey indicated a general southerly groundwater flow direction.
 - Groundwater quality ranged from neutral to acidic (pH 3.78 to 7.09), with salinity (as electrical conductivity) fresh to brackish (500 to 2400 $\mu\text{S}/\text{cm}$).
 - Surface water quality was found to be acidic to mildly acidic (pH 4.66 to 6.3), with salinity predominantly fresh (130 to 680 $\mu\text{S}/\text{cm}$).
 - Groundwater heavy metal concentrations at a number of locations exceeded the Australian and New Zealand Guidelines for Fresh and Marine Water Quality (ANZG, 2018) (the ANZ Guidelines), (95% level of protection for species in freshwater ecosystem) for iron, arsenic, manganese, lead, and zinc, and in surface water for iron, manganese, and zinc.
 - A 2-hour pumping test was completed on BGR299 and a 45.5 hour pumping test was completed on BGR230.
 - Formation permeability estimates ranged from 0.24 to 0.49 m/day, with test results indicating an aquifer of limited extent.
 - Initial analytical dewatering estimates indicate that mine inflows would be less than the long term project water requirement.
 - Drawdown impacts were expected to be localised with minimal impacts to regional hydrogeology.
 - Due to potential acid generating materials and increased concentrations of heavy metals, any stored waters, particularly within the tailings dam, should be subjected to treatment prior to discharge.

3.4 MERRICK, 2011

An Assessment of Existing Groundwater conditions at the Bowdens Silver Mine Site near Lue, NSW. Undertaken for KCN.

- Desktop hydrogeological investigation and review of previous groundwater investigations and overview of the current legislation.

- Presented proposed groundwater monitoring network for the collection of baseline monitoring data.
- Key findings are as follows:
 - Distinguished two main aquifer systems: an alluvial colluvial aquifer and a substantial fractured rock aquifer system.
 - The dominant groundwater use from the local aquifers is for stock and domestic purposes. Bores accessing the Limestone at Lue are well represented. Within a 5 km radius, 78% of bores are located near the township of Lue, and most likely target the Limestone aquifer in association with the Walkers Lane Fault.
 - Prior inflow estimates of up to 2 ML/day considered unlikely to be sustainable with longer term average inflow rates likely to be less than 0.5ML/day.
 - Alternative water supplies would be required to be sourced and alluvial supplies unlikely to be approved.
 - A groundwater monitoring network was proposed comprising of at least seven (7) monitoring bores converted from exploration holes and utilising additional privately-owned registered bores with at least two holes (P7 and BPD2) installed as multi-level vibrating wire piezometers.
 - Recommendation to obtain additional hydraulic data through hydraulic testing of new monitoring bores and undertaking testing on core samples to determine hydraulic conductivity and effective porosity.

3.5 SKM, 2013

Bowdens Groundwater Monitoring Network, Bore Installation. Undertaken by Sinclair Knight Merz Pty Limited for KCN.

- Factual report detailing the installation and testing of a groundwater monitoring network. A total of 24 observation bores at 16 sites were installed as part of the monitoring network with holes ranging in drilled depth from 5 m to 198 m.
- All of the monitoring bores constructed in the Rylstone Volcanics were found to be of low yield (less than 1 L/s), which was consistent with the conclusions of Coffey (1998). The exception was BGW44, which was screened in volcanic breccia and yielded approximately 2 L/s during airlift and was expected to be capable of higher yields when pumped.
- Monitoring bores constructed in the fractured rock aquifer associated with the underlying Ordovician shale aquifer were generally also low yielding (less than 1 L/s), the exceptions being BGW50, located on the alluvial flat associated with Hopkins Creek and BGW27. These holes indicated yields of approximately 2 to 3 L/s during airlift.
- Seven bores were installed to investigate the Shoalhaven Group sediments. Formation thicknesses of 8 to 52m were encountered and in all instances the formation was unsaturated.

- A total of 36 slug tests (useable) were completed and analysed on 14 bores, with the following results:
 - Hydraulic conductivity evaluated in the sandstone/siltstone ranged from 0.21 to 1.9 m/d,
 - Hydraulic conductivity of the shale ranged from 0.08 to 1.4 m/d, with the exception of BGW46 which is significantly lower,
 - Hydraulic conductivity of the Rylstone Volcanics (undifferentiated) ranged from 5.3×10^{-3} to 1.3 m/d, and
 - Hydraulic conductivity of the crystal tuff at BGW42 ranged from 0.04 to 0.05 m/d.
- Four pumping tests were undertaken, with one test of 2 hours duration and three tests of 4 hours duration. Results are summarised as follows:
 - One of these bores was installed in the Rylstone Volcanics and displayed a range in hydraulic conductivity values of 0.05 to 0.2 m/day.
 - Two bores in Ordovician basement returned pumping test results indicating a range in hydraulic conductivity of 1×10^{-3} to 1.7 m/day.

3.6 JACOBS, 2014

Bowdens Project Aquifer testing 2014. Undertaken by Jacobs Group (Australia) Pty Ltd for Kingsgate Bowdens Pty Ltd.

- Factual report detailing the long-term test pumping undertaken at two boreholes (BGW10 and BGW108), with tests undertaken for 72 hours duration.
- Key findings and conclusions were as follows:
 - Estimated aquifer parameters at BGW10 suggest a fracture network within the target aquifer with transmissivity values of up to 15 m²/d. The bulk rock matrix permeability is estimated to be much lower, with transmissivity values as low as 6×10^{-2} m²/d. This indicates that the dominant supply of groundwater to the well is transferred through the fracture networks at this test site.
 - Parameters at BGW108 suggest an absence of fracture networks, or an absence of interconnected fracturing within the test area. Estimated permeabilities for the aquifers fractures and bulk matrix are similar in value, suggesting any fractures (if present) are not contributing significantly to the water produced from pumping. Water is therefore conceptualised to be released primarily from matrix storage, a concept which is supported by the slow recovery of water levels after pumping has ceased (up to four weeks for recovery to 10% of original water levels).
 - The aquifer testing program has shown that the aquifer underlying the then Mine Site can be characterised as a dual-porosity fractured rock aquifer, consistent with the existing hydrogeological conceptualisation. The fracture network, where interconnected, may have localised permeabilities of up to four orders of magnitude higher than the bulk rock mass. The testing program has also shown that the fracture network is somewhat discrete within the bulk rock mass.

4. EXISTING ENVIRONMENT

4.1 CLIMATE

The closest Bureau of Meteorology (BoM) rainfall gauge to the study area is gauge 062062 Lue at Bayley Street. The record for this gauge is incomplete, with data available from 1902 to 1927, followed by an extensive data gap from 1927 to 1997, and cessation of the record at 2007.

The meteorological data relied upon for this Project has been obtained from the Scientific Information for Landowners (SILO) database due to the incomplete BoM records. SILO is a climate database hosted by the Science Division of the Queensland Department of Environment and Science (DES). The data are based on historical data obtained from the BOM. SILO data are stored as a grid that is derived by interpolating the BoM's station records. Interpolations are calculated by splining and kriging techniques, such that there are no original meteorological station data left in the grid fields.

Information was obtained for the Mine Site and surrounding locality (collectively referred to as the study area) based on extraction of meteorological data from the SILO grid within the Mine Site (Latitude -32.65 degrees North, Longitude 149.85 degrees East, at an elevation of 594.4 m AHD), and included interpolated temperature, rainfall, evaporation and evapotranspiration data. It is noted that while the SILO data set extends back to 1889, only data from 1900 forward have been used due to the limitation in Microsoft Excel in recognising dates prior to 1900. Comparison with the limited Bayley Street rain gauge information indicates the SILO data provides a reasonable set of long-term climate data for the study area.

Bowdens Silver maintains a meteorological station on site, located approximately 600m northeast of the site office (Met 01). Site rainfall data from Met 01 is available from March 2013 and is compared with the SILO data on **Figure 5**. **Figure 5** shows a strong correlation between the Met 01 rainfall observations and SILO data. A brief period of mismatched data from December 2017 to February 2018 is apparent, however, over the 70 month period of observation, there is less than 1% discrepancy in total rainfall between the SILO data and the Met 01 data.

Long term average climate data is summarised on **Table 5**. Rainfall and evaporation both peak during the summer months. The average annual evaporation is approximately 1514 mm/year which is more than twice the average rainfall rate. The average rate of evaporation exceeds the average rate of rainfall in all months of the year except June and July.

Table 5
Long Term Average Climate Data (SILO 1900-2018)

	Jan	Feb	Mar	April	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Monthly Rain (mm)	68.6	63.8	53.8	43.8	43.3	50.0	51.8	50.6	50.8	55.7	64.8	64.8
Daily Min Temp (°C)	15.0	14.9	12.5	8.3	4.9	2.6	1.4	2.1	4.4	7.7	10.7	13.4
Daily Max Temp (°C)	29.7	28.7	26.2	22.2	17.7	14.2	13.5	15.2	18.7	22.4	25.7	28.5
Monthly Evap (mm)	222.0	174.8	154.8	101.3	62.4	42.1	46.9	69.5	99.4	143.0	177.9	220.2

Figure 5 Comparison of Site Rainfall Data with SILO

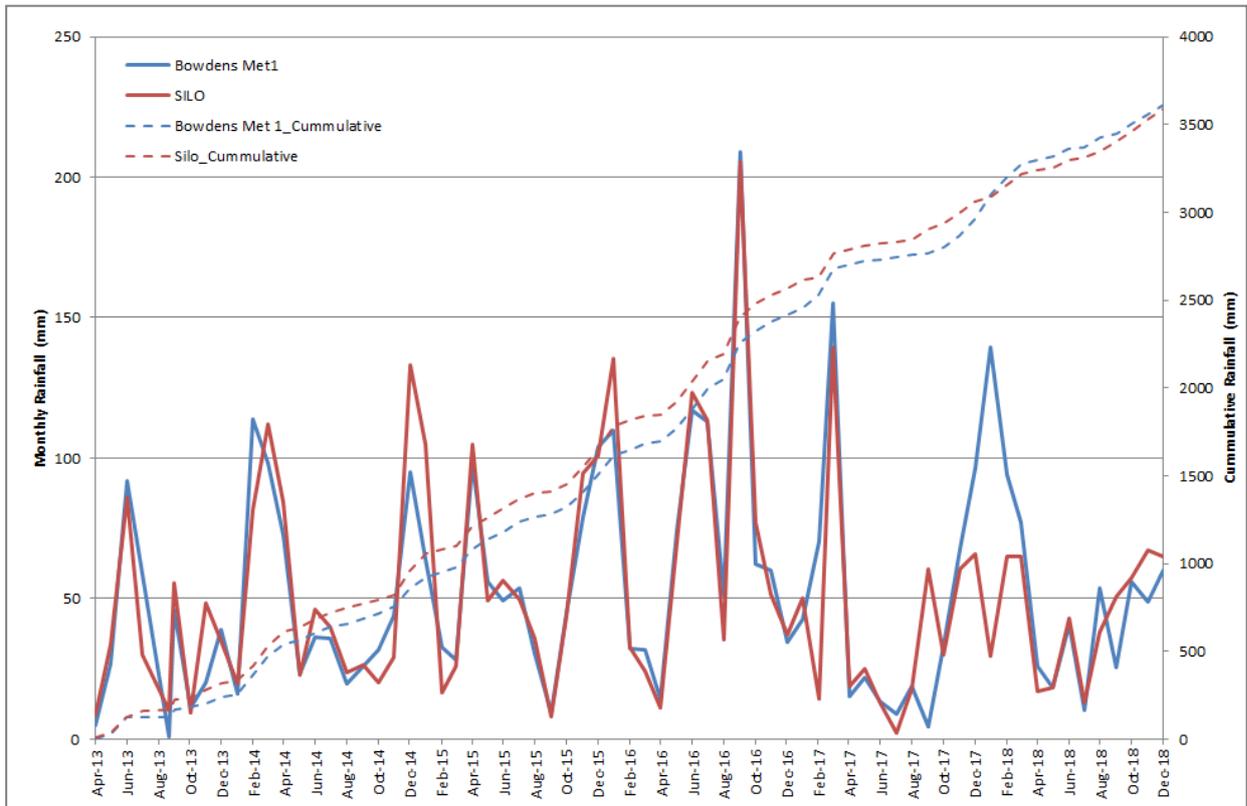


Figure 6 shows the SILO annual rainfall for the study area and indicates a long-term average annual rainfall of approximately 606 mm/year and a higher short-term average (i.e. post 2000) of approximately 692 mm/year.


The cumulative deviation from mean monthly rainfall (cumulative rainfall residual) provides a good indication of longer-term rainfall trends and is presented on Figure 7. For the rainfall record from 1900, the cumulative rainfall deviation (CRD) plot shows two distinct trends, namely:

- a long period of below average rainfall (downward sloping trend) from 1900 to 1947; and
- a long period of predominantly above average rainfall (upward sloping trend) from 1947 to 2017.

These long-term trends are over printed by shorter period trends of above- and below- average rainfall, and by brief periods of predominantly average rainfall (horizontal trend) from 1947 to the present day.

The CRD trends from 2012 are also shown on Figure 7. This period is representative of the duration of groundwater monitoring at the Mine Site.

Figure 6 Long Term Annual Rainfall (SILO)

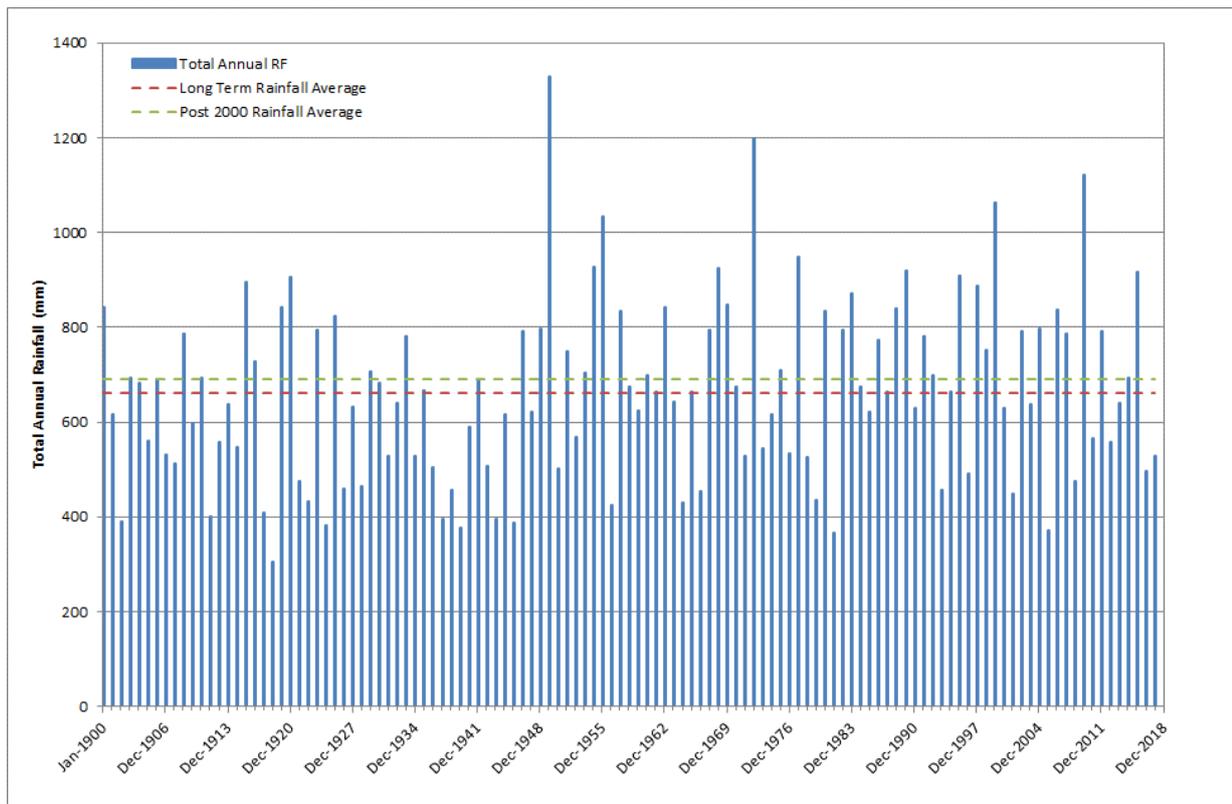

4.2 TOPOGRAPHY AND DRAINAGE

The topography of the vicinity of the Mine Site is primarily influenced by three north-south orientated spurs with small intermediate valleys and a broad, flat valley to the south of the area containing Hawkins Creek (see **Figure 8**).

The eastern spur, adjacent to the north-eastern boundary of the Mine Site, has the highest elevation within the local area with a maximum elevation of approximately 770m AHD. The small valley to the west of this spur, which contains Price Creek and the proposed Waste Rock Emplacement (WRE), falls to an elevation of approximately 600m AHD before rising again to the top of the central spur at an elevation of 660m AHD. Blackmans Gully lies to the west of the central spur in a small valley containing Maloneys Road with elevations between approximately 590m AHD and 620m AHD. The western spur, known as Lydiard Ridge (at an elevation of up to 680m AHD), is located near the western boundary of the Mine Site, directing runoff into either Blackmans Gully or to the west of the Mine Site. Slopes throughout the Mine Site are generally 1:6 to 1:10 (V:H) with the exception of the northeastern corner of the Mine Site that contains relatively steep slopes approaching 1:3 (V:H) to 1:2 (V:H). The drainage lines within the small valleys between these spurs drain to the south where they join differing sections of Hawkins Creek which in turn joins Lawsons Creek approximately 1km from the southernmost point of the Mine Site.

The western ridge extends southwards and joins a near east-west ridge known as the Bingman Ridge and is a prominent local topographic feature between the Mine Site and Lue. Bingman Ridge rises to elevations of between 630m AHD and 678m AHD. Elevations within Lue vary from approximately 550m AHD to 600m AHD.

Figure 7 Cumulative Rainfall Deviation with Daily Rainfall



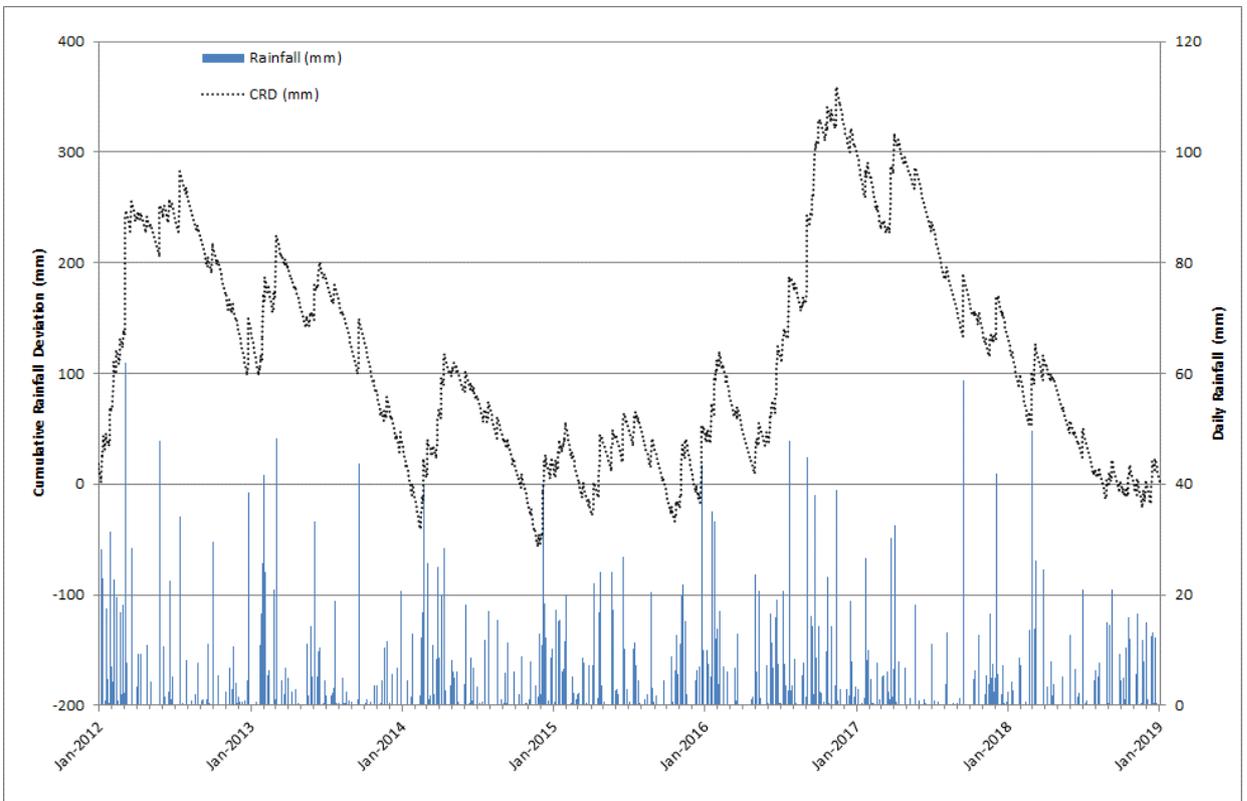


Figure 8 Topography and Drainage of the Study Area and Surrounds

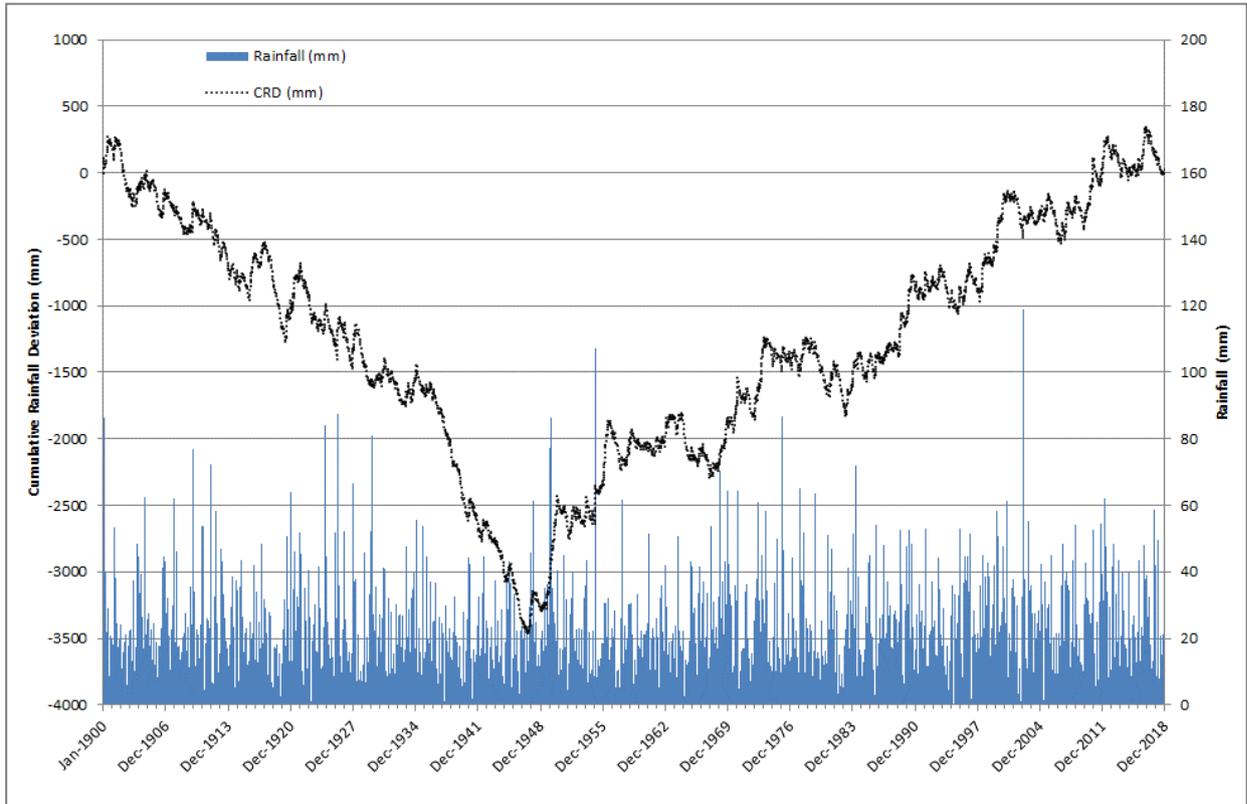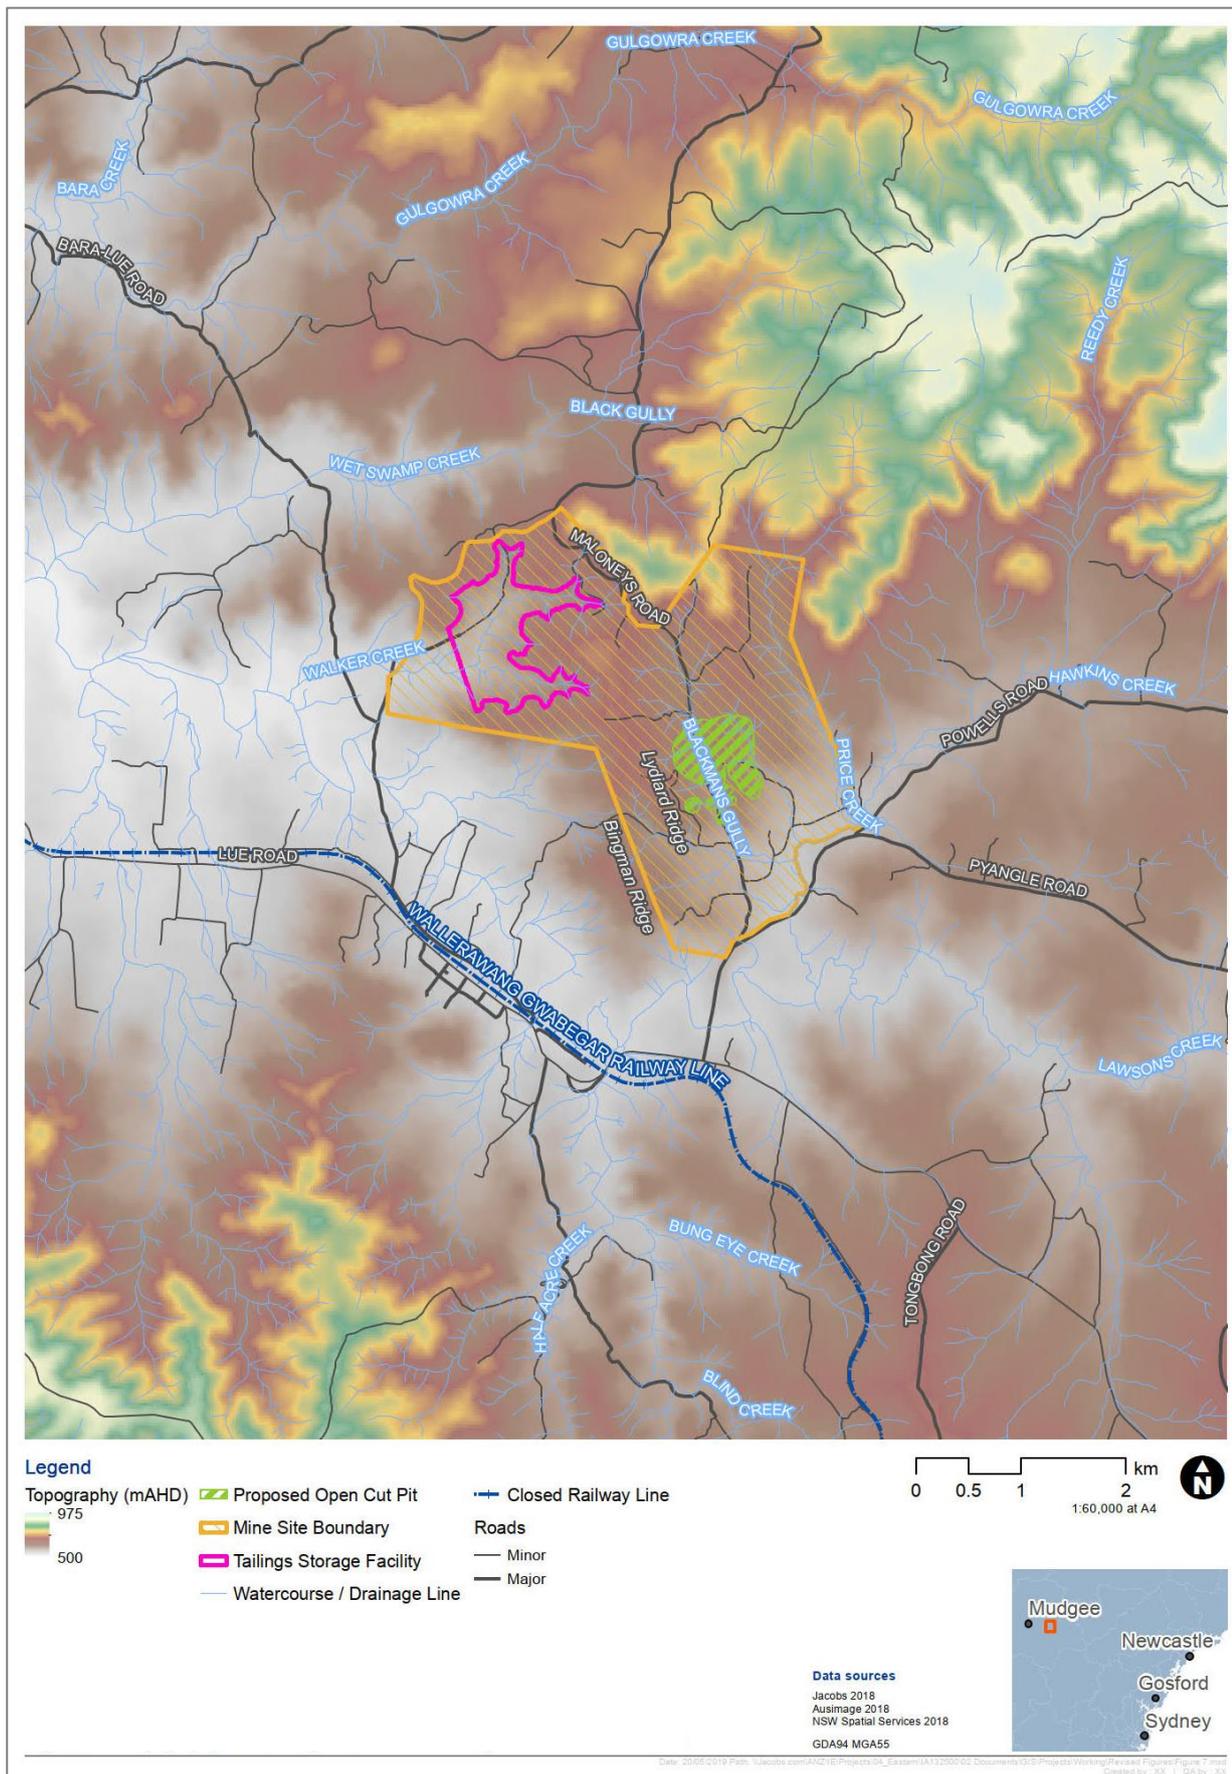

The Mine Site is located within the Macquarie River Basin. Local drainages are typically ephemeral first order drainages (a stream not fed by a perennial stream). Hawkins Creek is primarily perennial, albeit at low levels and joins Lawsons Creek just south of the Mine Site. Lawsons Creek flows in a northwesterly direction immediately north of Lue, and then westerly until its confluence with the Cudgegong River near Mudgee.


The first order drainage catchments present in the Mine Site are ephemeral in nature with flow regimes indicating dependence upon local rainfall runoff and implying negligible groundwater baseflow. A number of these drainages contain partial swamps in the upper reaches, indicating at least semi-permanent saturation resulting from sub-surface flows (or inter-flow) through the soil profile. These ephemeral swamps and seeps are often developed as farm dams for stock water supply.

Downstream from these first order drainage features, the intermittent Hawkins Creek is likely sustained by groundwater baseflow, as indicated by continued flow (or the presence of 'water holes') observed during the drier seasons.

4.2.1 Stream Flow

Bowdens Silver monitor stream flow in Hawkins Creek at two V-notch weirs, BSF01 (downstream) and BSF02 (upstream). The locations of the weirs are shown on **Figure 23**. Data are available from BSF01 from June 2013, and from BSF02 from June 2016 and are presented on **Figure 9**.

Figure 9 Hawkins Creek Flow Gauging (June 2013 to June 2018)

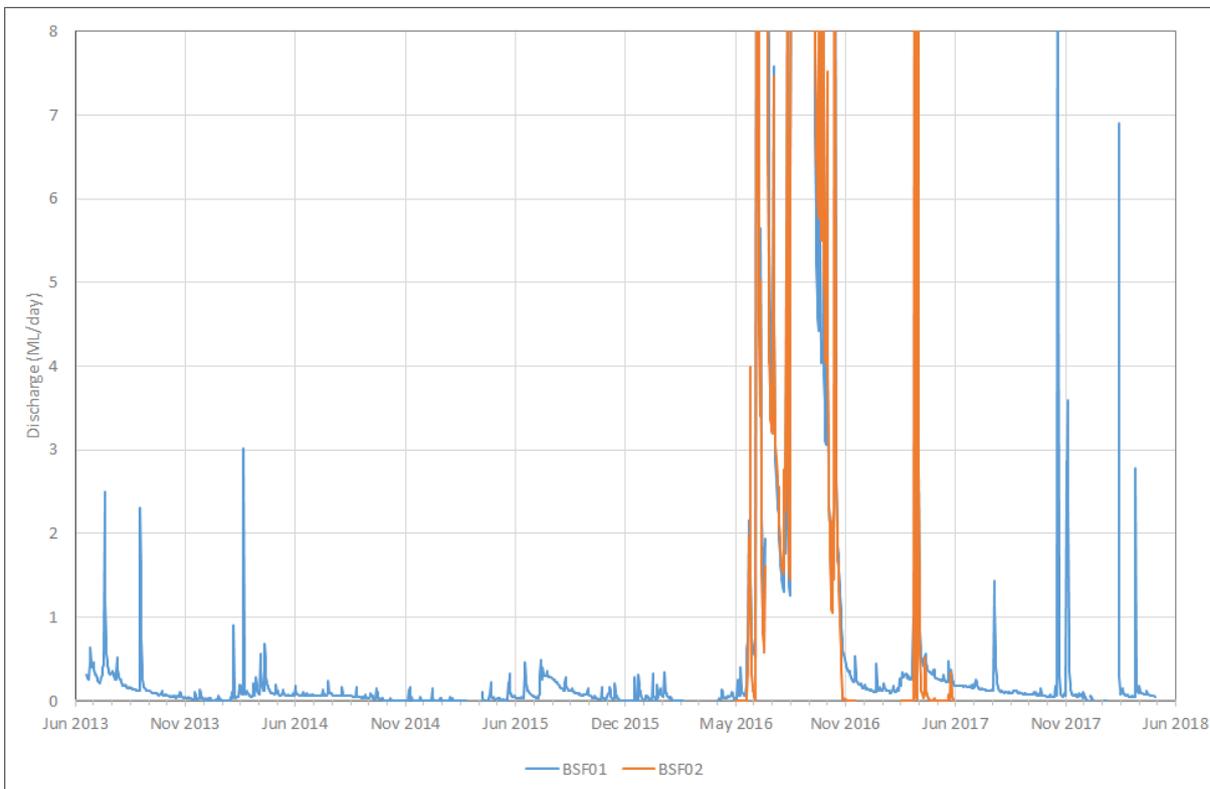


Recorded flows are typically very low, with the exception of a period of high rainfall and runoff from July 2016 through to November 2016. BSF01 displays flow, albeit very low, for the majority of the time with some observed periods of no flow. BSF02 typically displays no flow over the V-notch with the exception of the high-runoff flow events.

There are no local gauging sites for Lawsons Creek, however, WRM (2020) have assessed average flows in Lawsons Creek at approximately 19.5ML/day.

A flow duration curve for BS01 is presented on **Figure 10**. **Figure 10** shows flows at BSF01 to be typically in the range of 0.02 to 0.33 ML/day (0.2 to 3.8 L/s), with a median flow of 0.09 ML/day (1.0 L/s).

Figure 10 BSF01 Flow Duration Curve

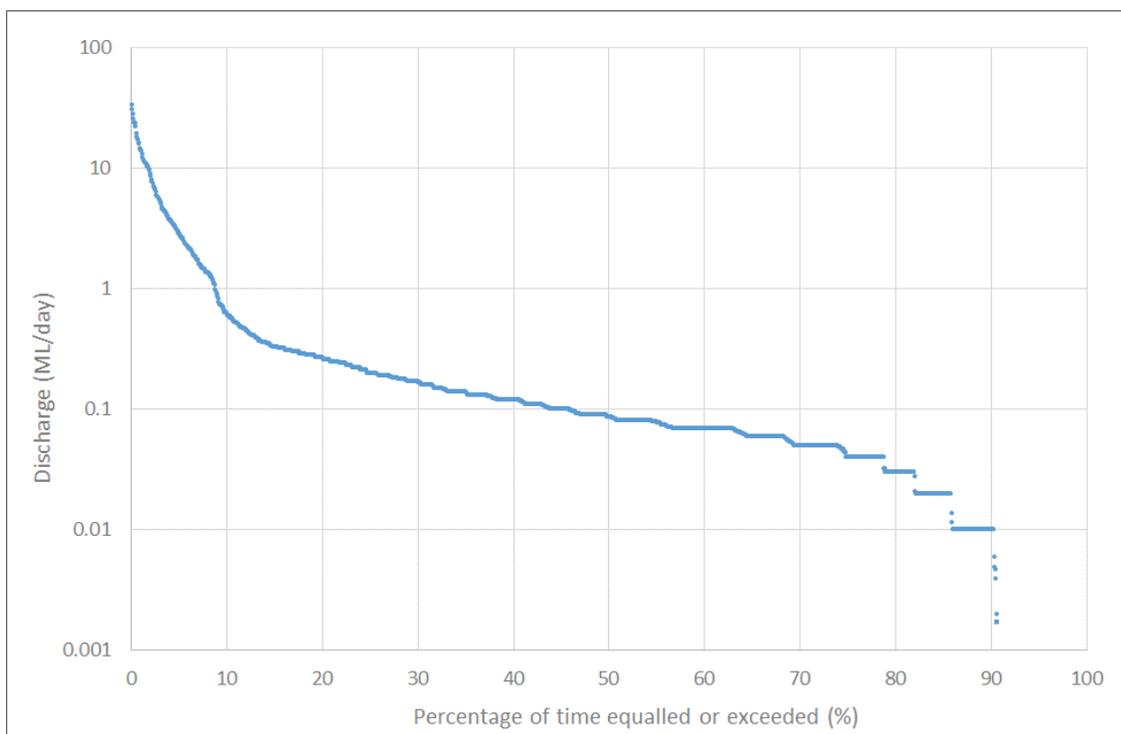

4.3 GEOLOGY

The surface geology in the vicinity of the Mine Site, from the NSW Seamless Geology dataset (Colquhoun et al, 2019), is shown in **Figure 11** and regional stratigraphy is summarised on **Table 6**. The dataset represents a seamless GIS compilation of the best available vector geology data for New South Wales, and in the vicinity of the Mine Site, is the equivalent of the Mudgee 1:100,000 geological map sheet.

The lithological basement in the area comprises the marine metasediments of the Ordovician Adaminaby Group and Coomber Formation of the Lachlan Orogen. In the vicinity of the Mine Site, the Coomber Formation (approximately 460 million years old) is dominated by poorly bedded mudstones, siltstones and arenites which have been folded and are moderately to strongly cleaved and locally schistose. These rocks outcrop in a south-southeast trending syncline in the west of the Mine Site and as an inlier within a low-lying area to the east of the Bowdens silver deposit. The Coomber Formation is unconformably overlain by the flat lying to gently dipping Early Permian Rylstone Volcanics (approximately 280 million years old), which locally comprises (in order of deposition) crystal tuff, ignimbrite, rhyolite breccia and flow-banded rhyolite, with a combined thickness of up to approximately 200 m.

Figure 11 Surface Geology

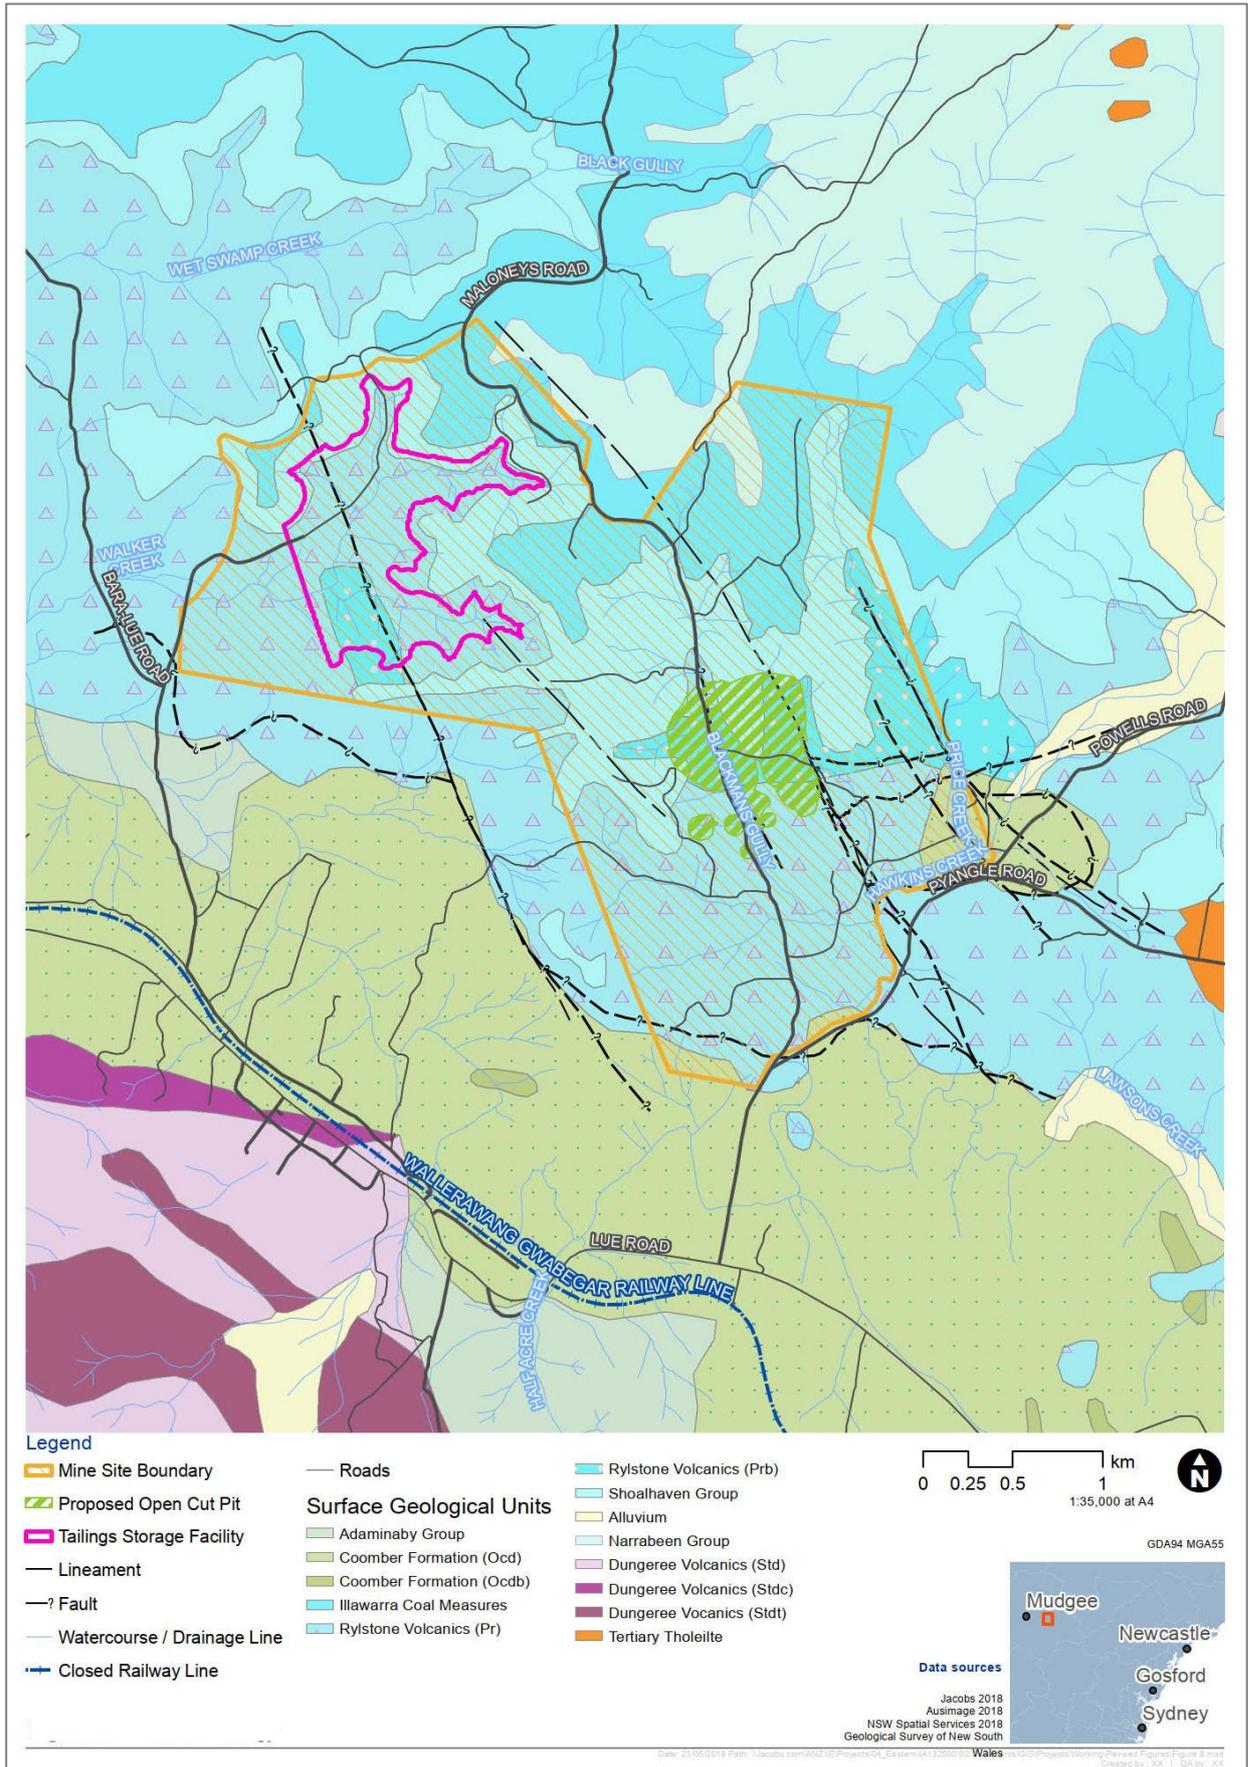


Table 6
Local Stratigraphy

Geologic Province	Stratigraphic Unit	Age	Description
n/a	Undifferentiated alluvium & colluvium	Holocene / Quaternary	Alluvium and colluvium of varying thickness are found at the base of most drainages in the study area. These materials are best developed around Hawkins and Lawsons Creeks. Recent observation bore drilling along Hawkins Creek recorded alluvial thickness ranging from 4 m to 6 m. The alluvium encountered during this drilling was dominated by silty sandy gravel and clay lithology.
Sydney Basin	Narrabeen Group	Triassic	In the study area the Shoalhaven Group is present as elongated hill-capping and comprises conglomerate, siltstone and shale. It overlies the Rylstone Volcanics only to a minor extent in the proposed open cut pit area and more extensively to the north. The sandstone, mudstone, claystone and coal of the Illawarra Coal Measures overlie the Shoalhaven Group further north and are in turn overlain by the younger sandstone and mudstone of the Narrabeen Group.
	Illawarra Coal Measures	Permian	
	Shoalhaven Group	Permian	
	Rylstone Volcanics	Early Permian	The Rylstone Volcanics primarily consist of felsic volcanic breccias, ignimbrites and tuffs and range in thickness from 10 m to 200 m. As a result of hydrothermal activity at the site, alteration has occurred causing mineralisation of the Rylstone Volcanics leading to an epithermal-style silver-gold and base metal deposit. The majority of silver mineralisation at the study area is hosted by a thick zone ranging from the surface to depths of approximately 200 m below the surface. The Rylstone Volcanics are deposited unconformably on the Coomber Formation. The Rylstone Volcanics are noted as a constituent unit of both the Sydney Basin and the Lachlan Orogen.
Lachlan Fold Belt (Orogen)	Coomber Formation	Ordovician	The Coomber Formation comprises a deep marine sandstone and mudstone sequence, which outcrops extensively around Lue. It conformably overlies the Early Ordovician Adaminaby Group and is disconformably overlain by Late Silurian Dungeree Volcanics, which are not represented at site.
	Adaminaby Group	Ordovician	The Adaminaby Group comprises turbiditic quartzose sandstones and mudstones, suggestive of a deep marine depositional environment.
Source: after Colqhoun et al. 2000.			

The basal unit of the Rylstone Volcanics is generally represented by a thick zone of crystal tuff up to approximately 170 m thick. The crystal tuff is generally well sorted and comprises minor crystals and lithic clasts of altered volcanic glass fragments and rare volcanic glass shards up to 4 mm in diameter within a very fine vitric ash groundmass. The crystal tuff consists of abundant feldspar, minor quartz and muscovite, with rare altered mafic minerals and trace primary crystal fragments. The crystal tuffs are overlain by a variable sequence of ignimbrites, rhyolitic breccias and laminated tuffs. The base of this sequence is dominated by ignimbrites which generally directly overlie the crystal tuff.

Within the ignimbrites, crystal fragments are consistent with the crystal tuff. However, volcanic glass fragments are more common, locally forming fiamme. These fragments are set in a vitroclastic, locally vesicular groundmass of volcanic glass. The welded nature of the ignimbrite's groundmass results in reduced primary porosity and permeability compared with the crystal tuff and tuff breccia units. The ignimbrites are overlain by air-fall tuffs to the north and east of the Bowdens silver deposit. These units vary from moderately coarse lithic tuffs to crystal lithic and crystal tuffs with rare thin laminated layers of fine ash fall tuffs.

The volcanic breccia units of the Rylstone Volcanics are poorly sorted with sub-angular to sub-rounded clasts of crystal and welded tuff up to 30 mm in diameter within a fine grained vitric tuff groundmass.

The Rylstone Volcanics are unconformably overlain by the stratified sandstones and conglomerates of the Shoalhaven Group's Snapper Point Formation of the Sydney Basin. The basal contact of this unit is generally marked by a thin layer of pebbly, fossiliferous sandstone. The Snapper Point Formation is dominated by sandstone with minor zones of conglomeratic interbeds, siltstone, shale and coal.

In the north of the Mine Site, the Shoalhaven Group is in turn overlain by the Illawarra Coal Measures, which are overlain by the Narrabeen Group sediments. The Sydney Basins sediments dip gently to the northeast by approximately 0.5 degrees (DoIR&E, 2016).

Mapped alluvium in the vicinity of the Mine Site on **Figure 11** is limited to Hawkins and Lawsons Creeks upstream from the Mine Site boundary, however, a veneer of alluvium exists within the Mine Site boundary associated with the Hawkins Creek floodplain.

Table 6 provides a description of the stratigraphic units in the study area and the nomenclature adopted for this report.

4.3.1 Mineralisation

The majority of the silver-zinc-lead mineralisation of the Bowdens silver deposit lies within the Rylstone Volcanics where it occurs as zones of disseminations and silicic filling of fractures. Silver mineralisation generally occurs within tennantite, silver sulphosalts, silver sulphides, and as native silver. Higher grade portions are associated with sulphides of iron, arsenic, lead and zinc.

Higher grade silver mineralisation includes rare steeply dipping fracture zones which have been interpreted to potentially represent feeder zones to the dominant flat lying disseminated mineralisation.

Mineralisation occurs within all units of the Rylstone Volcanics including crystal tuff, volcanic breccia and ignimbrites. The style of mineralisation varies between rock types. Mineralisation is interpreted to be generally fracture controlled in ignimbrite units, fracture controlled and locally disseminated in crystal tuff units, and mainly disseminated in volcanic breccias.

The bulk of the mineralisation within the Bowdens silver deposit occurs as a thick zone extending from surface, and near surface, to vertical depths of approximately 200m. The deposit is not well defined below this level as existing drilling data below this is limited.

Broadly spaced deeper drilling has intersected mineralisation within the basement Coomber Formation metasediments which commonly show abundant quartz veining.

Depth of weathering is typically shallow within the main mineralised area and saprolite is poorly developed with hard competent lithology encountered at shallow depths. The base of oxidation from drilling results ranges in the order of 1 to 35 m below surface with an average depth of approximately 9 m.

4.4 STRUCTURAL GEOLOGY

The geology of the Mine Site is heavily fractured, with six major fracture sets, two of which (a north-northwesterly trending set and an easterly trending set) primarily control the distribution of mineralisation. Major geological structures are shown on **Figure 8**.

The most dominant faulting in the area is associated with the north-northwesterly structures that are aligned with Blackmans Gully. The Blackmans Gully fault can be traced for at least two kilometres via aerial photography and strikes parallel to the valley floor along Maloneys Road and the low ground east of the Bowdens silver deposit.

The major fault that bounds the eastern side of the Bowdens silver deposit is not well exposed in the vicinity of the deposit but is marked by quartz float, argillic alteration and manganese - iron oxide filled fractures and breccias can be traced for several hundreds of metres.

A number of similarly oriented, less prominent faults have been identified which cross cut the Rylstone Volcanics but do not persist into the Shoalhaven Group sediments. These faults are interpreted to offset the main units of the Rylstone Volcanics units by up to approximately 100m vertically. However, they appear to predate mineralising events and have little influence on the distribution of mineralisation.


4.4.1 Fracture Orientation

In fractured rock aquifers, uniformly distributed fractures sets can behave as a pseudo-porous rock aquifer with relatively uniform and isotropic groundwater flow. However, if there is a dominant fracture orientation this can result in a preferred groundwater flow direction, or flow anisotropy.

Dominant fracture and vein orientations derived from core logging are presented on stereonet plots on **Figure 12** and **Figure 13**. It is noted that the stereonet plots are presented in mine grid. The mine grid is rotated -18 degrees (counter clockwise) from true north.


The stereonet plots the poles to the plane of the fractures, which are then contoured by concentrations and a centroid or representative pole selected for each concentration. From **Figure 12**, two dominant clusters are apparent, one in the northwestern sector (Cluster 1), and one in the southwestern sector (Cluster 2 – comprising three sub-clusters), a third smaller concentration (Cluster 3) is apparent to the east.

Figure 12 Stereonet Representation of Fractures

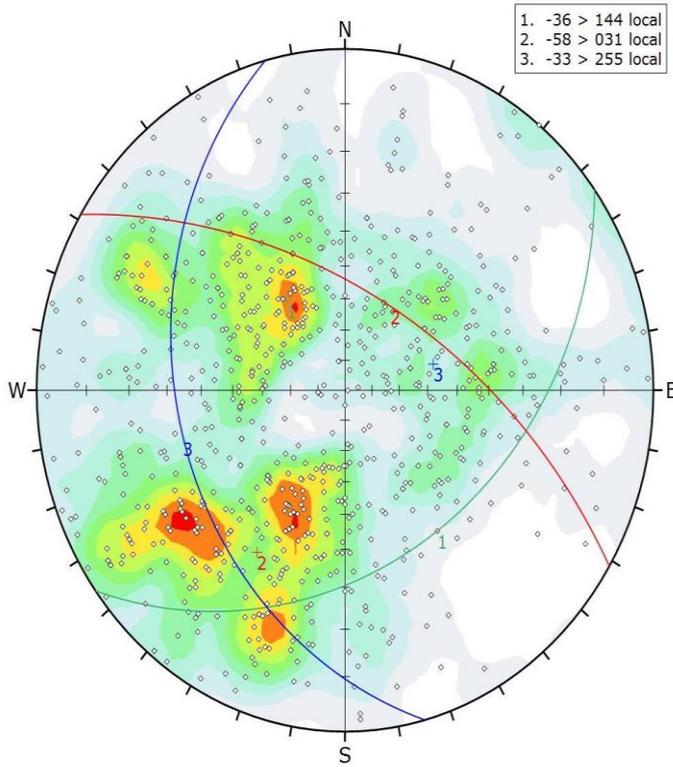

Symbol	Feature
◊	Pole Vectors
Color	Density Concentrations
	0.00 - 0.30
	0.30 - 0.60
	0.60 - 0.90
	0.90 - 1.20
	1.20 - 1.50
	1.50 - 1.80
	1.80 - 2.10
	2.10 - 2.40
	2.40 - 2.70
	2.70 - 3.00
Contour Data Pole Vectors	
Maximum Density	2.81%
Contour Distribution	Fisher
Counting Circle Size	1.0%
Plot Mode	Pole Vectors
Vector Count	774 (774 Entries)
Hemisphere	Lower
Projection	Equal Angle

Figure 13 Stereonet Representation of Veins

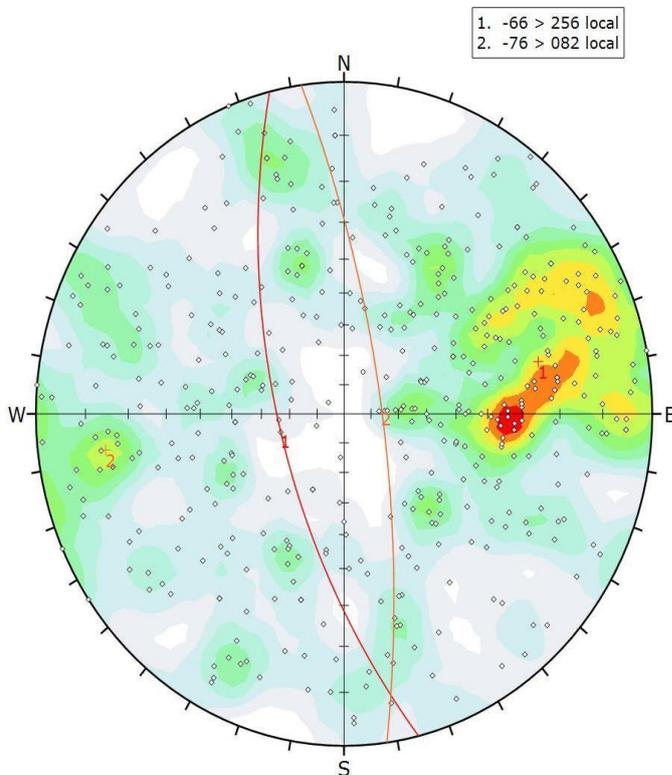

Symbol	Feature
◊	Pole Vectors
Color	Density Concentrations
	0.00 - 0.35
	0.35 - 0.70
	0.70 - 1.05
	1.05 - 1.40
	1.40 - 1.75
	1.75 - 2.10
	2.10 - 2.45
	2.45 - 2.80
	2.80 - 3.15
	3.15 - 3.50
Contour Data Pole Vectors	
Maximum Density	3.45%
Contour Distribution	Fisher
Counting Circle Size	1.0%
Plot Mode	Pole Vectors
Vector Count	441 (441 Entries)
Hemisphere	Lower
Projection	Equal Angle

The two main fracture orientations cross-cut and intersect at approximately 67 degrees and are described as follows:

- Cluster 1: One main concentration.
 - Typical strike ranges from 20 to 85 degrees local, dipping 20 to 50 degrees to the southeast.
 - Average strike of 54 degrees local, dipping 36 degrees southeast.
 - Average strike of 36 degrees from true north, dipping 36 degrees southeast
- Cluster 2: Three concentrations.
 - Typical strike ranges from 100 to 150 degrees local, dipping 30 to 75 degrees to the southwest to south-southwest.
 - Average strike of 121 degrees local, dipping 58 degrees southeast.
 - Average strike of 103 degrees from true north, dipping 58 degrees south.

4.4.2 Vein Orientation

From **Figure 13**, vein orientations are highly variable, and outside of the main cluster, show a fairly uniform distribution across the stereonet. One dominant concentration (Cluster 1) is apparent, and while a second concentration (Cluster 2) is plotted, on closer inspection, Cluster 2 is interpreted as being the over-vertical continuation of Cluster 1.

The main vein orientation is described as follows:

- Cluster 1.
 - Typical strike ranges from 140 to 190 degrees local, dipping 50 degrees west to 70 degrees east.
 - Average strike of 166 degrees local, dipping 66 degrees west.
 - Average strike of 148 degrees local, dipping 66 degrees southwest.

4.4.3 Nature of Fractures

From review of drill core, it is apparent that the nature of the fractures and veins vary widely. For the most part veins and fractures appear moderately welded and tight. Some veins however show varying degrees of clayey alteration and/or the presence of minor dissolution cavities or vugs, and some fractures display weathering or precipitation deposits suggesting movement of groundwater.

4.5 HYDROGEOLOGY

The Mine Site is situated in the eastern extent of the Macquarie-Bogan surface water catchment. Regional hydrogeology is dominated by three main aquifer groups: alluvial deposits of Quaternary age typically associated with the major drainages, the underlying basement lithologies of the Lachlan Fold Belt, and, overlying the Lachlan Fold Belt to the east, the sedimentary rocks of the Sydney Basin.

Throughout the Macquarie-Bogan catchment, the dominant surface drainage direction is to the northwest toward the Darling River, and this will also be the case for shallow groundwater within the regolith profile. More locally shallow groundwater flow will mimic topography, initially to the south toward Hawkins and Lawsons Creeks and then in a northwesterly direction immediately north of Lue.

Deeper groundwater flow within the Ordovician basement is likely to be more structurally controlled with the dominant structures trending in a north-northwesterly direction, locally inducing groundwater flow to the south.

To the east of the Mine Site, regional groundwater flow within the overlying Sydney Basin lithologies is more likely to be bedding controlled with downward infiltration inhibited by lower permeability strata. Regional groundwater flow will therefore be dominated by down-dip flow to the northeast, consistent with regional bedding dip on the western flank of the Sydney Basin. Localised flow towards the southwest and seepage faces at outcrop from the Sydney Basin sediments is also likely.

4.5.1 Aquifer Types

Within the study area, five key aquifer types have potential to exist or have been identified in the vicinity of the Mine Site, these being:

- Alluvial / Colluvial Aquifers – Unconsolidated sedimentary / detrital aquifers
- Porous Rock Aquifers – Consolidated sedimentary / detrital rock with connected primary porosity
- Fractured Rock Aquifers – Consolidated rock with secondary fracture controlled permeability
- Shear / Fault Controlled Aquifer – Typically linear/planar fractured aquifer of defined width and extent
- Regolith Transition Zone Aquifers – In situ weathered rock with permeability enhanced by chemical weathering processes

Within each of these aquifer types, there are potentially very broad variations in hydraulic properties.

Alluvial aquifers are poorly developed in the vicinity of the proposed open cut pit, however more substantial alluvial deposits are associated with Hawkins and Lawsons Creeks and have the potential to be within the area of groundwater drawdown resulting from the development of the open cut pit. Groundwater occurs in all of the hard rock formations encountered beneath the Mine Site, these being the Rylstone Volcanics, the overlying Sydney Basin sedimentary rocks, and the underlying Ordovician basement lithologies.

Within the hard rock formations, some limited primary porosity and permeability may occur within the Sydney Basin lithologies and the Rylstone Volcanics, however, fracture flow is expected to be the dominant groundwater flow mechanism.

4.5.2 Existing Groundwater Users

A search of the WaterNSW database has been undertaken within a notional 10km radius of the proposed pit. Bore construction, geology and drilling information was sourced from database and surface geology maps to identify potential aquifers, bore depths and approximate aquifer yields. The locations of groundwater works are presented on **Figure 14**.

Approximately 106 groundwater bores are registered within the 10km search radius, with 24 of those being monitoring bores currently utilised by Bowdens Silver. The majority of private bores are used for stock, domestic and irrigation purposes.

The closest town, Lue, has approximately 23 private bores (within a 2km radius from the centre of town) that are used for stock, domestic and irrigation purposes. These bores extract groundwater from the Coomber Formation, Tannabutta Group, Adaminaby Group, Dungeree Volcanics, and alluvium at depths ranging from 3.65 to 60m and yields ranging from 0.05 to 7.00 L/s.

A summary of existing groundwater works is provided in **Annexure 2**.

4.5.3 Water Access Licences

Of the 106 bores within a 10km radius, 6 bores are associated with WALs. Authorised extraction limits range from 6 to 60 ML/year. Yields from the associated groundwater work range from 0.06 to 5.00 L/sec. Two of these WALs are located within Lue.

Details of the WALs are summarised on **Table 7**. The locations of the groundwater works associated with the WALs are also provided on **Figure 14**. A summary of WALs within 20km of the Project, for consideration in the groundwater modelling, is provided in **Annexure 8**.

Table 7
Summary of Groundwater WALs within a 10km radius of the Mine Site

WAL	Associated Groundwater Work	Use	Water Source	Extraction Limit (ML)
27907	GW011493	Stock, Irrigation, Domestic	Sydney Basin Murray Darling Basin Porous Rock Groundwater Source	50
35671	GW065121	Irrigation	Sydney Basin Murray Darling Basin Porous Rock Groundwater Source	60
28443	GW802732	Irrigation	Lachlan Fold Belt Murray Darling Basin Fractured Rock Groundwater Source	19
28946	GW042966	Stock, Irrigation, Domestic	Lachlan Fold Belt Murray Darling Basin Fractured Rock Groundwater Source	35
29014	GW066291	Stock, Irrigation, Domestic	Lachlan Fold Belt Murray Darling Basin Fractured Rock Groundwater Source	6
29247	GW062111	Industrial	Lachlan Fold Belt Murray Darling Basin Fractured Rock Groundwater Source	30

4.5.4 Groundwater Dependent Ecosystems

4.5.4.1 Bureau of Meteorology

A review of the Bureau of Meteorology (BoM) Groundwater Dependent Ecosystem Atlas (GDE Atlas) (<http://www.bom.gov.au/water/groundwater/gde/map.shtml>) indicates no previously identified GDEs in the vicinity of the Mine Site. The Atlas does however indicate rivers, springs, or wetlands with moderate to high potential for groundwater interaction, as well as vegetation with moderate to high potential for groundwater interaction are present within the Mine Site. The locations of high potential GDEs are presented on **Figure 14**.

4.5.4.2 High Priority Groundwater Dependent Ecosystems

High priority GDEs are identified in the Water Sharing Plan for the water source in which they reside. The included high priority GDEs in the Water Sharing Plans relevant to the Project are summarised as follows.

Macquarie Bogan Unregulated and Alluvial Water Sources 2012

No high priority GDEs are identified in the Water Sharing Plan for the Macquarie Bogan Unregulated and Alluvial Water Sources.

NSW Murray Darling Basin Fractured Rock Groundwater Sources 2011

The *Water Sharing Plan for the NSW Murray Darling Basin Fractured Rock Ground Water Sources 2011*, Schedule 3, identifies 98 individual springs and wetlands and 57 karst environments as being high priority GDEs.

The closest high priority spring to the Project is Bailey Spring, located approximately 35km to the north-northwest of the Mine Site.

High priority karst environments are located at Apple Tree Flat and Cudgegong, approximately 14km west to 20km south of the Mine Site.

NSW Murray Darling Basin Porous Rock Groundwater Sources 2011

The *Water Sharing Plan for the NSW Murray Darling Basin Porous Rock Ground Water Sources 2011*, Schedule 3, identifies 15 individual springs and wetlands and one karst environment as being high priority GDEs.

The closest high priority springs to the Mine Site is Kellys Springs, located approximately 60km to the north of the Mine Site.

The only high priority karst environment is located at Ilford, approximately 36km south of the Mine Site.

4.5.4.3 Other Potential GDEs

The then DPI Water (DPI Water, 2016) defined ecosystems that depend on groundwater as those ecosystems that require access to groundwater to meet all or some of their water requirements so as to maintain their communities of plants and animals, and ecological processes.

Within the Mine Site, a number of potential GDEs have been identified including springs and seeps, terrestrial vegetation, and river baseflow systems.

River Baseflow Systems

As identified in the GDE Atlas, there is a high potential for GDEs to be associated with the drainages in the vicinity of the Mine Site. In particular, Wet Swamp Creek and Black Gully, Blackmans Creek, Hawkins and Lawsons Creeks are identified on the GDE Atlas in the vicinity of the Project. The locations of these drainages are shown on **Figure 14**.

Riverine baseflow systems include ecosystems that are dependent on groundwater derived baseflow in streams and rivers (Dresel et al., 2010). Baseflow is that part of stream flow derived from groundwater discharge and bank storage. Baseflow is considered likely to contribute year round to flows in Hawkins and Lawsons Creeks.

Ecosystems that exist in baseflow dependent streams can themselves be groundwater dependent and differentiating between groundwater dependent terrestrial vegetation, wetlands, and base flow systems can be difficult, as the different communities can represent a spectrum of habitat and groundwater dependency (Dresel et al., 2010). Groundwater levels can be important in maintaining flows or pools that sustain ecosystems, particularly during times of drought.

Springs and Seeps

In addition to those drainages identified in the GDE Atlas, a number of ephemeral seeps and partial wetlands are also present, particularly in the upper reaches of the minor drainages. These ephemeral swamps and seeps are often developed as farm dams for stock water supply. Typical vegetation comprises grasses and sedges.

For the most part, these seeps are inferred to be the ephemeral expression of a saturated soil profile and result from sub-surface flows (or inter-flow) through the soil profile expressing at surface either due to a break in slope or a barrier to flow such as sub-cropping bedrock. This inference is supported by water level observations near KCN Spring at monitoring bores BGW29 and BGW38 (**Figure 27**) that show deep groundwater levels to be substantially below shallow groundwater levels associated with this spring (Section 4.5.11.1).

As discussed in Section 4.5.12, from the springs that have been included in the water quality sampling, there does not appear to be a close correlation in water quality with regional groundwater. As such, the majority of these areas are inferred to be reliant on rainfall recharge and sub-flow, rather than regional groundwater.

At least one spring, Battery Creek Spring, that is located adjacent to the northwest boundary of the Mine Site is inferred to be sourced from groundwater. Monitoring bore BGW16 located adjacent, and slightly up gradient, from the spring has also been observed to display intermittent artesian conditions. BGW16 is installed in the Rylstone Volcanics down gradient of the contact with the overlying Shoalhaven Group.

Terrestrial Vegetation

Terrestrial vegetation GDEs include vegetation which has seasonal or episodic dependence on groundwater.

An aquatic ecology assessment (Cardno, 2020) undertaken for the Project has noted the presence of occasional eucalypts (River Red Gums) associated with Hawkins and Lawsons Creeks. Eucalypts are not necessarily obligate phreatophytes, but typically root below the water table and benefit from frequent replenishment of soil moisture. Studies have noted that River Red Gums may rely on groundwater to maintain ecosystem function between river flow or flooding events. In drainages such Hawkins and Lawsons Creeks it is likely that the Red Gums would be dependent on groundwater only during times of drought and no-flow.

Cardno (2020) also note the presence of two ecological communities that are listed as endangered under the *Biodiversity Conservation Act 2016*. These being, Fuzzy Box Woodland on alluvial Soils of the South Western Slopes, Darling Riverine Plains and Brigalow Belt South Bioregions and Swamp Oak Floodplain Forest of the New South Wales North Coast, Sydney Basin and South East Corner Bioregions. These ecological communities are known to occur in, or directly adjacent to, the Study Area (Cardno, 2020) and may be reliant on groundwater and would therefore be considered to be potential GDEs.

In the Terrestrial Ecology Assessment, EnviroKey (2020) suggest that none of the terrestrial vegetation present within the study area are likely to be wholly groundwater dependent (obligate phreatophytes).

Stygofauna

The aquatic ecology assessment (Cardno, 2020) has also identified a number of stygofauna assemblages in the vicinity of the Mine Site.

Only one stygofauna taxa (*Psammaspides* sp.) was identified from the 6 groundwater bores located either within, or in relatively close proximity to, the proposed open cut pit. All remaining stygofauna were sampled from groundwater bores located either some distance to the west of the proposed open cut pit (BGW16 and 17), or from those associated with Hawkins and Lawsons creeks (BGW39, 48, 50 and 51).

All stygofauna taxa identified were found to be typical of alluvial aquifers in eastern Australia and are not endemic to the area.

4.5.5 Groundwater Occurrence on Site

Extensive mineral exploration drilling, utilising Reverse Circulation (RC) and Diamond Core drilling, has been undertaken on the Mine Site. Both of these drilling methods provide an opportunity to identify areas of potentially elevated permeability and groundwater occurrence; RC drilling through the production of water during drilling, and Diamond Core drilling through loss of drilling fluids to the formation. Groundwater intercepts have not been consistently documented in historical drilling campaigns, however, the available data and accumulated knowledge is beneficial.

Figure 15 presents a map of recorded water strikes from RC drilling showing the depth of the first water strike. Yield information is not available, however, a number of drill holes are noted as having been abandoned due to groundwater.

Seventy percent of the water strikes occur shallower than 60m below ground level (bgl), and no significant correlation is apparent between the depth of water strike and the drill collar elevation.

While the water strike map suggests a concentration of water strikes in the southeastern open cut pit area, anecdotal evidence suggests that the wettest part of the ore body is in the northern open cut pit area and to the west of the structure that runs along Maloneys Road.

4.5.6 Groundwater Monitoring Bore Drilling


During the drilling undertaken during 2013 for the installation of the groundwater monitoring network (SKM, 2013), airlift yields were recorded during drilling and again during bore development where a monitoring bore was established. Results are summarised on **Figure 16** and **Table 8**.

Table 8
Monitoring Network Drilling Summary

Bore ID	Drilled Depth (mbgl)	Screened Interval (mbgl)	Screened Formation	Airlift Yield (L/s)		Comment
				Drilling	Development	
BGW18	100	45-48	Crystal Tuff	<0.1	0.06	
BGW19	120	90-96	Coomber Formation	<1	0.3	
BGW20	96	42-48	Coomber Formation	<1	0.3	
BGW27	90	58-70	Coomber Formation	2	1.8	Water strike at 30m increasing at 57m in Ordovician Basement
BGW27/2	48	30-36	Coomber Formation	<1	-	
BGW28	6	0-6	Alluvium	-	-	Water strike 2-3m, no airlift
BGW29	6.5	1.5-6.5	Volcanic Breccia	Dry ¹	-	Bore not developed
BGW38	100	88-94	Volcanic Breccia	Dry ¹	-	Bore not developed
BGW39	48	30-42	Coomber Formation	<1	1.5	Water strike at 36m in Ordovician Basement
BGW40	145	127-139	Volcanic Breccia	<1	0.3	
BGW41	198	186-192	Crystal Tuff	<1	0.2	
BGW42	120	36-42, 108-114	Crystal Tuff	<1	0.6	Water after 36m top of Rylstone Volcanics
BGW43	120	92-98	Crystal Tuff	<1	0.2	
BGW44	84	73-79	Volcanic Breccia	2	2	Water struck at 76-78m in Rylstone Volcanics
BGW45	78	66-72	Crystal Tuff	<0.1	no flow	
BGW46	180	168-174	Coomber Formation	<0.1	no flow	
BGW47	48	36-42	Rylstone Volcanics	<0.1	no flow	
BGW48	6	1-6	Alluvium	<0.1	0.2	Alluvium
BGW49	5	1.5-3.5	Alluvium	<0.1	0.5	Alluvium
BGW50	28	21-27	Coomber Formation	3	3	Water strike at 25m in Ordovician Basement
BGW51	12	3-9	Alluvium	<1	0.3	Alluvium
BGW52	30	17-23	Coomber Formation	<1	0.6	Water strike at 18m in Ordovician Basement
BGW53	12	3-9	Alluvium	<1	0.6	Alluvium
BGW54	8	2.5-6.5	Alluvium	<1	0.5	Alluvium

Note ¹ - BGW29 and BGW38, no significant water during drilling but subsequently used for monitoring – refer Figure 24.

Figure 16 Monitoring Bore Drilling and Installation

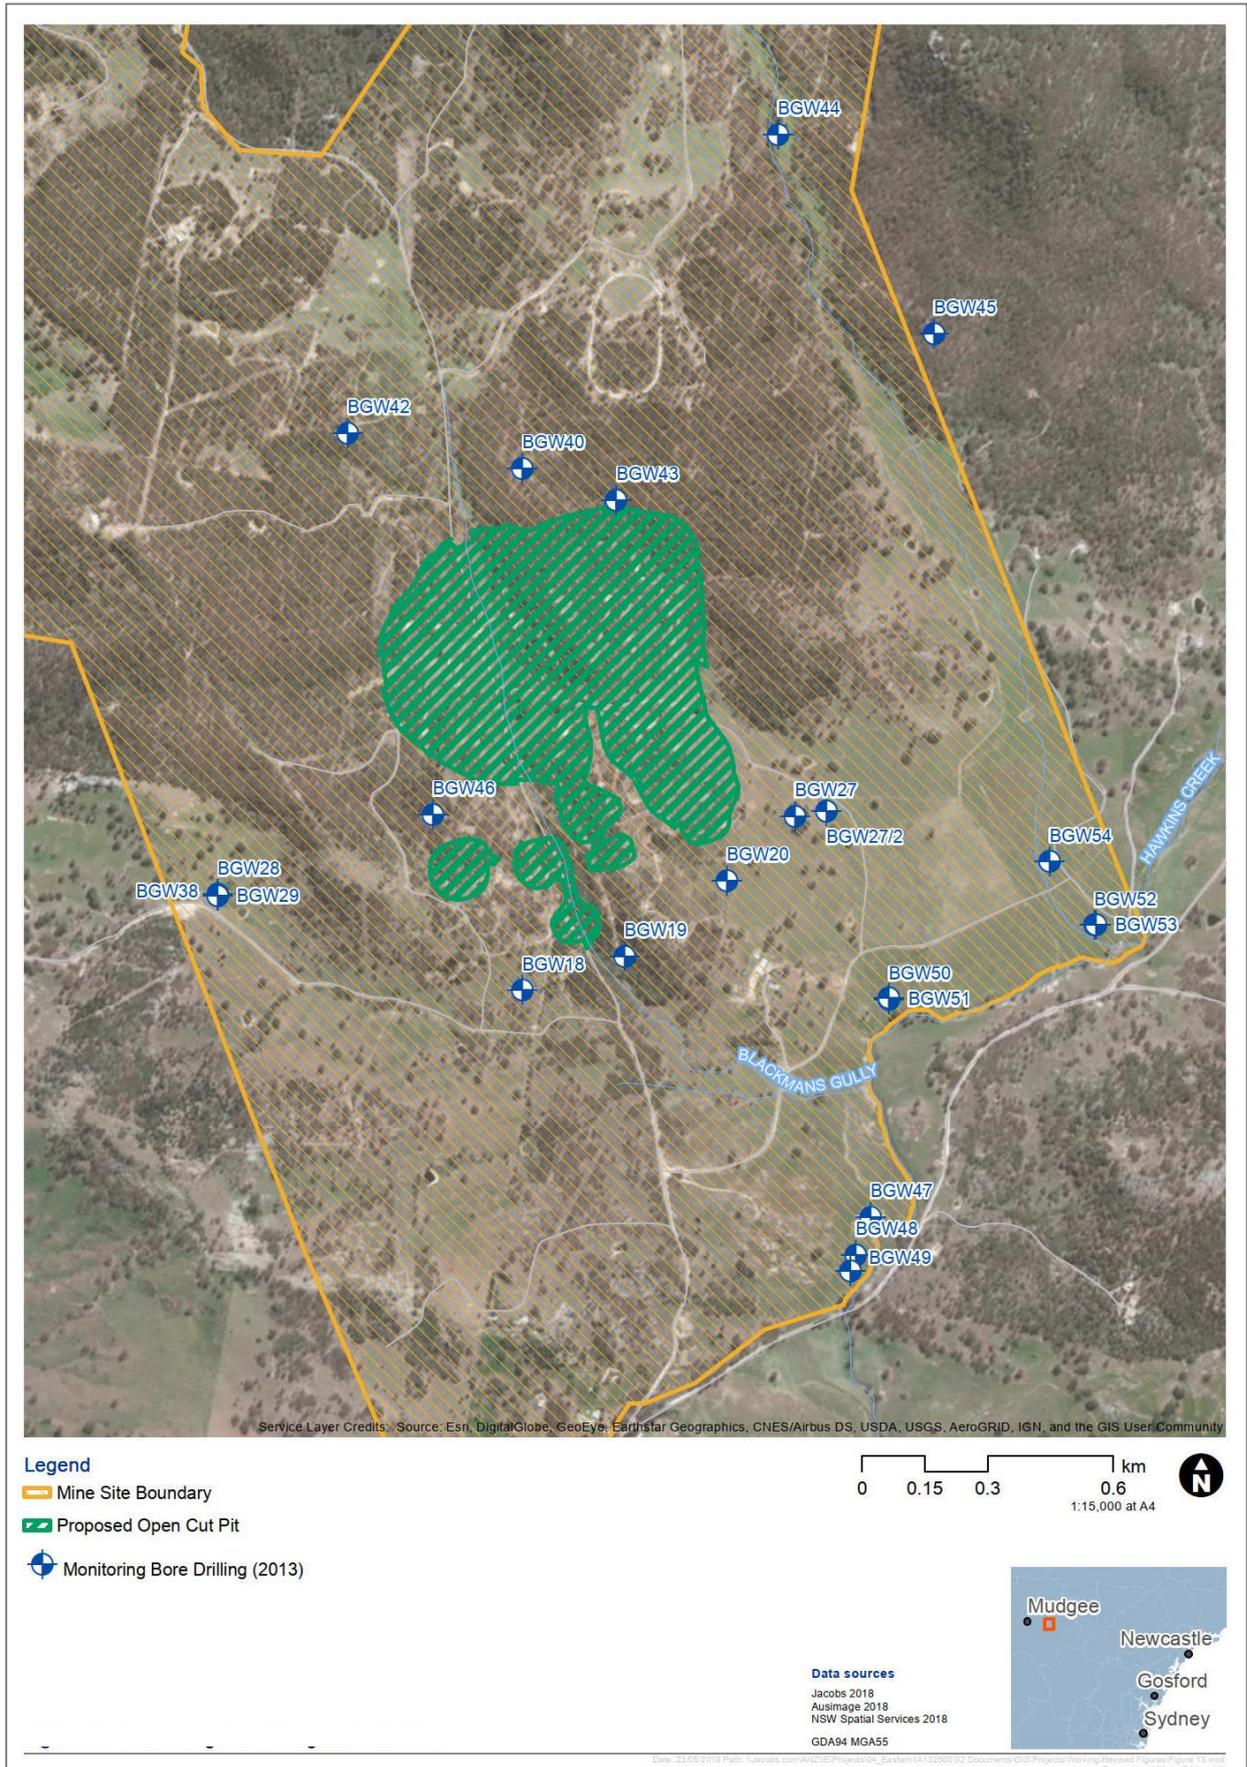

The installed monitoring bore locations are shown on **Figure 16**.

The majority of holes returned yields of less than 0.1 L/s during drilling, although some of these holes returned modest yields following completion, illustrating the RC drilling method's tendency to limit water ingress to the hole during drilling. On completion, only 4 out of the 24 holes returned airlift yields in excess of 1 L/s, these being BGW27, BGW39, BGW44, and BGW50. Three of these holes returned yields from the Ordovician Basement with one hole (BGW44) striking water in the Rylstone Volcanics. The yields were all from generally shallow depths, ranging from 18 to 78 mbgl.

From assessment of the monitoring bore locations against geological sections, it has been determined that none of the monitoring bores intercepted any of the major structures on site.

4.5.7 Previous Hydraulic Testing

Following completion of drilling and construction, the monitoring bores were subject to permeability testing (SKM, 2013). Data derived from these tests have been re-assessed for the current assessment and the derived representative hydraulic conductivity values are provided on **Table 9**.

Table 9
Monitoring Bore Hydraulic Testing Summary

Bore ID	Screened Depth (mbgl)	Screened Formation	Representative Hydraulic Conductivity (m/d)
BGW48	1-6	Alluvium	9.2
BGW51	3-9	Alluvium	1.15
BGW53	3-9	Alluvium	6.4
BGW54	2.5-6.5	Alluvium	7.2
BGW42	36-42	Crystal Tuff	0.09
BGW42 Pump test	36-42	Crystal Tuff	0.05
BGW47	36-42	Rylstone Volcanics (un diff.)	0.01
BGW18	45-48	Crystal Tuff	1.07
BGW19	90-96	Coomber Formation	0.27
BGW19 Pump test	90-96	Coomber Formation	0.001
BGW20	42-48	Coomber Formation	0.22
BGW27	58-70	Coomber Formation	3.3
BGW27 Pump test	58-70	Coomber Formation	0.15
BGW27A	30-36	Coomber Formation	6.5
BGW39	30-42	Coomber Formation	0.45
BGW46	168-174	Coomber Formation	0.0014
BGW50	21-27	Coomber Formation	1.14
BGW50 Pump test	21-27	Coomber Formation	0.55
BGW52	17-23	Coomber Formation	1.04

A number of these bores were also subject to short term (2 to 4 hour) pumping tests (SKM, 2013). This data has also been reviewed and the derived representative hydraulic conductivity values are provided on **Table 9**.

From **Table 9**, it is apparent that the majority of tests have been undertaken on bores screened within the Ordovician basement, or Coomber Formation. Test results are summarised as follows:

- Hydraulic conductivity values derived from four bores installed in the Alluvium range from 1.1 to 9.2 m/d.
- Hydraulic conductivity values derived from four bores installed in the Rylstone Volcanics range from 0.01 to 1.07 m/d.
- Hydraulic conductivity values derived from eight bores installed in the Coomber Formation range from 0.001 to 6.5 m/d.

Within the Coomber Formation, there is a significant variation in permeability determinations, and this variation displays a reasonable correlation with depth as shown on **Figure 19**. Results from the Rylstone Volcanics (including the result for the Crystal Tuff) also show significant variation but are derived from similar depths.

4.5.8 Pumping Tests

Pumping tests of 72 hours duration were undertaken on BGW10 and BGW108 during November and December 2014 (Jacobs, 2014). Data for these tests have been reviewed and re-assessed as part of the current Project.

BGW10 is located approximately 500m to the southeast of the open cut pit area and is the water supply bore for the Bowdens homestead. Lithological information is not available, however, ignimbrite is mapped at surface and the bore is close to the mapped Coomber Formation. The position of the bore also coincides with a number of mapped lineaments. BGW10 is recorded as being 100m deep and screened from 90 to 100 mbgl. It is assumed that at this depth the bore would be within the Coomber Formation.

BGW108 is located within the open cut pit area and is screened from 24 to 96 mbgl and is installed within the ignimbrite unit.

Locations of the pumping bores and associated monitoring bores are shown on **Figure 17**. Drawdown and recovery plots for the tests at BGW10 and BGW108 are provided in **Annexure 3**.

BGW10

BGW10 was pumped at a rate of 467 kL/day (5.4 L/s) for a period of 72 hours. Drawdown was monitored at the pumping well and at three observation bores, WAP16, BGW50, and BGW51 (**Figure 15**).

Analytical results of the pumping test are summarised on **Table 10**. Results derived from the pumping well (BGW10) and the adjacent observation well, WAP16 located at a distance of 22m, indicate a good hydraulic connection between the two bores.

Figure 17 BGW10 and BGW108 Pumping Test Locations

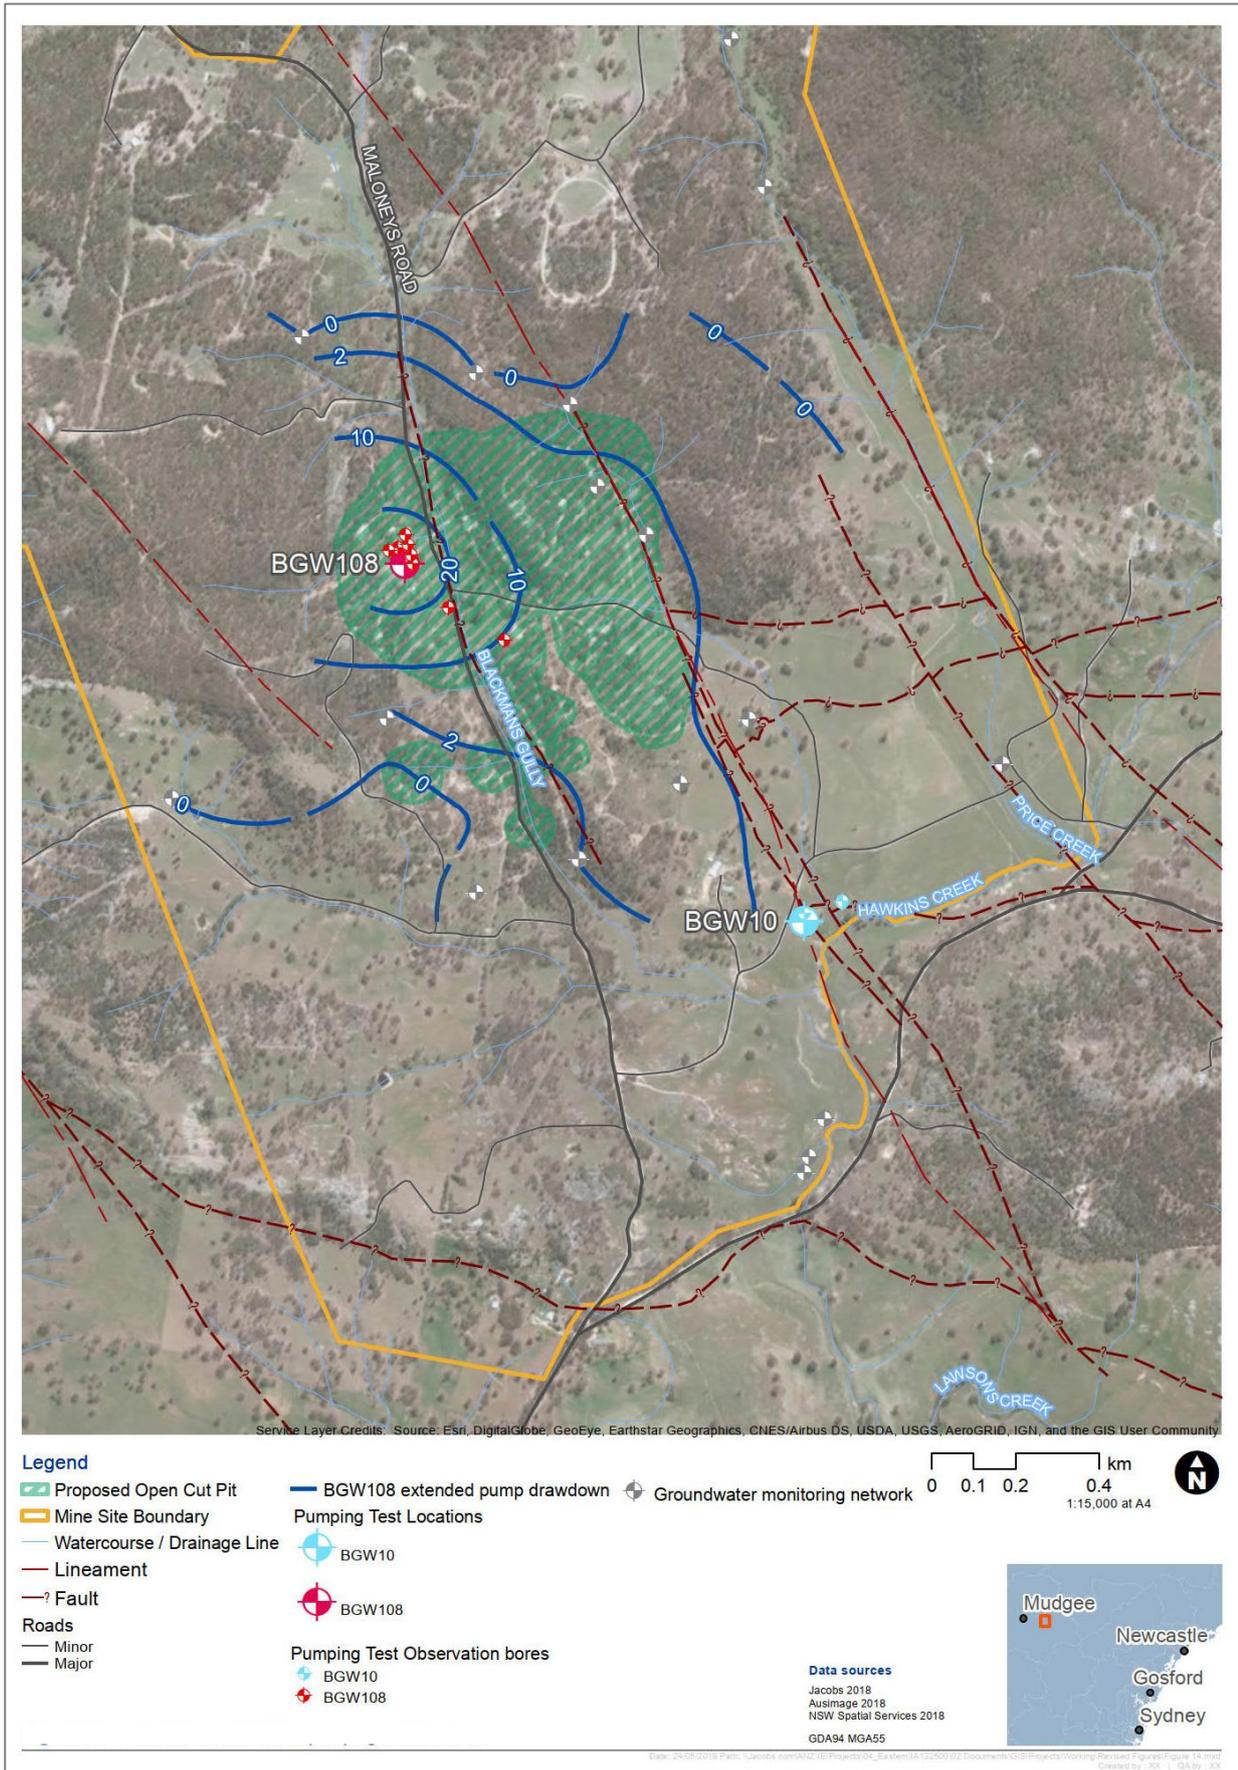


Table 10
BGW10 Pumping Test – Summary of Results

ID	Distance	Transmissivity	Hydraulic Conductivity	Storativity	Specific Storage
	m	m ² /day	m/d	-	m ⁻¹
Early Time (<30 min)					
BGW10	-	81.5	1.07	-	-
WAP16	20.5	81.5	1.07	8.04x10 ⁻⁰⁵	1.06x10 ⁻⁰⁶
Mid Time (0.5-1 day)					
BGW10	-	13.2	0.17	-	-
WAP16	20.5	13.2	0.17	9.79x10 ⁻⁴	1.29x10 ⁻⁵
Late Time (2-3days)					
BGW10	-	6.3	0.08	-	-
WAP16	20.5	6.3	0.08	6.06x10 ⁻³	7.98x10 ⁻⁵
BGW50	102.8	111.0	1.46	1.64x10 ⁻²	2.16x10 ⁻⁴
BGW51	103	276.0	3.63	4.39x10 ⁻²	5.78x10 ⁻⁴
Recovery					
BGW10	-	10.9	0.14	-	-

Derived transmissivity estimates assume a saturated formation thickness of 76m, however, it is noted that the screened interval of the bore is only 10m. Partial penetration of an aquifer induces vertical flow components in the vicinity of the well, and the general assumption that the well receives water from horizontal flow is not valid. Partial penetration can cause the flow velocity in the immediate vicinity of the well to be higher than it would be otherwise, leading to an extra loss of head. It is noted however, that the effects of this are not readily apparent in the data.

Initial transmissivity estimates of the order of 80 m²/day decline to 13 m²/day mid test, and by the end of testing have dropped off to 6 m²/day. The results are indicative of a moderate yielding aquifer of limited extent.

The elevated transmissivity values derived from observation wells BGW50 and BGW51 (as well as limited drawdown response) located at a distance of approximately 103m, suggest poor hydraulic connection with the pumping well, indicating that the fracture network intercepted by the pumping well is not highly connected to a regional fracture network. It is noted that BGW50 and BGW51 are isolated from the pumping well by the main sub north-south lineament that runs along the eastern margin of the Bowdens silver deposit.

Indicative values of aquifer storage derived from observation bore WAP16 are initially consistent with a confined aquifer, transitioning to more partially confined leaky conditions by end of test. Derived aquifer storage values at late time range from 6.1x10⁻³ to 4.4x10⁻², with an average value of 2.2x10⁻².

Given the poor hydraulic connection, values derived from BGW50 and BGW51 observations are not considered to be representative.

Jacobs (2014) indicated that the estimated aquifer parameters at BGW10 suggest a fracture network within the target aquifer with transmissivity values of up to 15 m²/day. The bulk rock matrix permeability was estimated to be much lower, with transmissivity values as low as 6x10⁻² m²/day, indicating that the dominant supply of groundwater to BGW10 was transferred through the fracture networks at this test site. While this assessment is generally agreed with, it is noted that the bulk of the groundwater storage will be within the bulk rock matrix and will be released more slowly.

Flow characteristic, or diagnostic, plots of the BGW10 pumping test indicate a dominance of bi-linear (double porosity) and suggest the presence of parallel no-flow boundaries.

BGW108

BGW108 was pumped at a rate of 432 kL/day (5.0 L/s) for a period of 72 hours. Drawdown was monitored at the pumping well and at eight observation bores as indicated on **Table 11** and **Figure 15**.

Table 11
BGW108 Pumping Test – Summary of Results


ID	Distance	Transmissivity	Hydraulic Conductivity	Storativity	Specific Storage
	m	m ² /day	m/d	-	m ⁻¹
Early Time (<100 min)					
BGW108	-	45.2	0.63	-	-
BGR163	20.5	45.2	0.63	4.20x10 ⁻⁴	5.83x10 ⁻⁶
BGD027	46.3	79.1	1.10	4.03x10 ⁻⁴	5.60x10 ⁻⁶
Late Time (2-3 days)					
BGW108	-	2.1	0.03	-	-
BGR163	20.5	2.1	0.03	5.24x10 ⁻³	7.28x10 ⁻⁵
BGR242	26	2.4	0.03	2.76x10 ⁻³	3.83x10 ⁻⁵
BGR240	41.6	3.9	0.05	1.46x10 ⁻³	2.03x10 ⁻⁵
BGD027	46.3	2.3	0.03	1.70x10 ⁻³	2.35x10 ⁻⁵
BGR147	48.8	3.0	0.04	1.06x10 ⁻³	1.47x10 ⁻⁵
BGR236	69.5	2.8	0.04	6.55x10 ⁻⁴	9.10x10 ⁻⁶
BGR252	150.5	3.3	0.05	1.18x10 ⁻⁴	1.64x10 ⁻⁶
BGR102	300	-	-	--	-
Recovery					
BGW108	-	6.5	0.09	-	-
Distance Drawdown					
End of test	-	4.8	0.06	1.03x10 ⁻⁴	1.07x10 ⁻⁶

Analytical results of the pumping test are summarised on **Table 11**. Results derived from the pumping well (BGW108) and the adjacent observation well, BGR163 at a distance of 20 m, indicate a good hydraulic connection between the two bores.

All derived transmissivity values at late time are very consistent, ranging from 2.14 to 3.95 m²/day, indicating a good hydraulic connection between the majority of the observation wells, and indicating consistent hydraulic connection between the ignimbrite, breccia, and crystal tuff.

An assessment of distance drawdown has also been undertaken for the end of the pumping test and is presented on **Figure 18**. The distance drawdown analysis indicates an aquifer transmissivity of the order of 4.8 m²/day ($K = 0.06$ m/day). One observation well, BGR102, did not display significant drawdown and is a distinct outlier on the distance drawdown plot, with approximately 10m less drawdown than would be anticipated. It is noted that all bores, with the exception of BGR102, are located within the same fault block, while BGR102 is isolated from the pumping well by a major north-south trending fault.

Figure 18 **BGW108 Pumping Test - Distance Drawdown Plot**

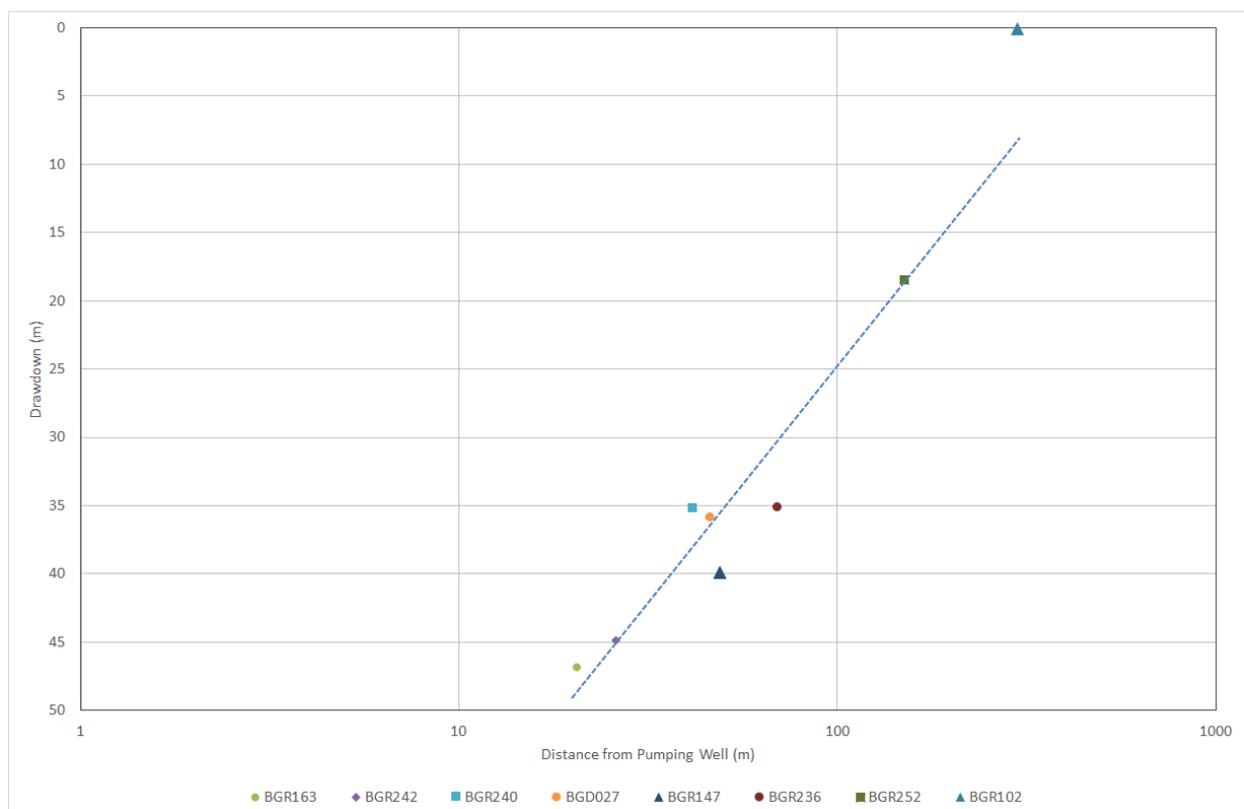

Derived values for aquifer storage at late time range from 1.2×10^{-4} to 5.2×10^{-3} , with an average value of 1.8×10^{-3} .

BGW108 displays a similar increase in rate of drawdown as pumping progresses as seen at BGW10, however the transition is more abrupt. Flow characteristic or diagnostic plots of the BGW108 pumping test indicate a dominance of linear (fracture) flow and suggest the presence of a closed boundary at late time.

Summary

From the pumping test at BGW108, it is indicated that within the Bowdens silver deposit, fracture flow is the dominant groundwater flow mechanism, however on a broader scale and with consideration for the fracture orientations (Section 4.4.1) groundwater flow can be expected to behave in a pseudo-radial and porous media flow fashion.

Both BGW10 and BGW108 pumping tests, highlight the presence of low permeability flow boundaries. These boundaries are inferred to be represented by the major regional structures (refer **Figure 9**) which act to retard, but not completely restrict, groundwater flow across these structures. Given that the highest groundwater yields (Section 4.5.6) have also been associated with these structures, it is possible that zones of enhanced fracturing exist bounding these structures and resulting in elevated permeability along strike (and potentially up and down dip) of these structures.

4.5.9 Extended Pumping

From review of the groundwater level hydrographs (**Figure 26**, Section 4.5.11) it is apparent that extended pumping occurred at BGW108 during the period December 2013 through to February 2014. Although this abstraction is not documented, the response to abstraction is apparent at a number of the monitoring bores. The groundwater level monitoring data has been reviewed to assess the response to pumping (drawdown) observed at individual monitoring locations over the duration of the abstraction. This response has been contoured and is plotted on **Figure 17**. It is noted that abstraction during this period is also likely to have occurred from BGW10 for stock and domestic purposes, and the pumping response will also be overprinted by climatic effects. The CRD curve (**Figure 23**) shows the pumping to occur towards the end of an extended dry period, however hydrographs from monitoring bores outside the area of influence of BGW108 demonstrate that the climatic influence over the period is not significant.

The drawdown response to this extended period of pumping (**Figure 17**), highlighted by the interpreted 2m drawdown contour, suggests that groundwater flow is constrained by the two major north-south trending structures, with preferential drawdown within the fault block between the two structures. There is also a suggestion that drawdown is restricted northwards towards BGW40 and southwards towards BGW46.

4.5.10 Recent Investigations

Additional groundwater investigations have been recently undertaken in conjunction with ongoing resource definition drilling. The investigations included packer injection testing on four deep Diamond Core drill holes, and airlift recovery testing undertaken on a number of RC drill holes to investigate formation permeability around some of the major structures and at depth.

The recent investigation sites are presented on **Figure 15** and discussed in the following sections.

4.5.10.1 Airlift Testing

A programme of airlift recovery testing was undertaken on site from 5th to 10th June 2017. Airlift recovery testing was undertaken on eight (8) RC drill holes as shown on **Figure 15** and in **Table 12**. Test results are provided in **Annexure 4** with test holes and results summarised in **Table 13**.

Holes for airlift testing were selected based on proximity to major geological structures and specifically included a number of drill holes with noted groundwater intersections during drilling.

Table 12
Airlift Test Hole Details

Hole ID	Easting	Northing	Dip (deg)	Hole Depth (mbgl)	Primary Lithology	Water Intersections during Drilling
BRC17005	769323	6385453	65	102	Welded Tuff / Structure intercept	N/A
BRC17009	769300	6385341	65	180	Welded Tuff in vicinity of structure	N/A
BRC17012	769303	6385316	65	102	Crystal Tuff / Welded Tuff contact in vicinity of structure	Hole abandoned due to excess water
BRC17018	769137	6385500	65	180	Welded Tuff	Water strike at 60m
BRC17021	769226	6385537	65	72	Welded Tuff / Structure intercept	N/A
BRC17025	768666	6385376	65	102	Welded Tuff in vicinity of east dipping structure	Hole abandoned due to excess water. Water strike at 90m
BRC17027	768669	6385324	60	174	Welded Tuff in vicinity of east dipping structure	N/A
BRC17029	768859	6385332	60	150	Welded Tuff / Structure intercept	Water strike at 24m

Table 13
Airlift Testing Summary

Hole ID	SWL (m vert)	Hole Depth (m down hole)	Airline Depth (m down hole)	Average Airlift Yield (L/s)	Airlift Duration (mins)	Transmissivity (m ² /d)	Hydraulic Conductivity (m/d)
BRC17005	6.5	102	94	0.49	52	0.26	3.0x10 ⁻³
BRC17009	15.8	180	120	0.01	16	1.21	3.0x10 ⁻⁵
BRC17012	23.3	102	96	3.32	122	42.0	0.61
BRC17018	34.6	180	120	0.13	37	0.04	3.0x10 ⁻⁴
BRC17021	NA	72	54	0.40	12	NA	NA
BRC17025	26.2	102	94	1.96	121	3.89	5.9x10 ⁻²
BRC17027	26.9	174	120	0.12	36	0.03	2.0x10 ⁻⁴
BRC17029	9.1	150	136	0.82	122	3.52	2.8x10 ⁻²

Airlifting was undertaken utilising the RC drill string as the airline. Airlift durations ranged from 30 minutes to 2 hrs, with the duration of airlifting generally being proportional to the airlift yield. Airlift yields were measured throughout the duration of airlifting by a combination of V-notch weir and timed bucket. Field water quality parameters were also monitored during the airlifting. On completion of airlifting, the recovery in water level was monitored through the inner tube of the RC drill string. As the testing was undertaken on angled drill holes all water depth measurements were converted to vertical depths prior to analysis using the Theis recovery method.

The airlift testing returned a wide range of results. Airlift yield ranged from negligible (0.01 L/s) at BRC17009 to 3.3L/s at BRC17012. BRC17009 and BRC17012 highlight the highly variable and anisotropic nature of the formations and fracturing. These two holes are drilled in similar orientations, approximately 25m apart, with BRC17009 drilled 78m deeper than BRC17012. BRC17009 and BRC17012 returned the lowest and highest airlift yields and corresponding hydraulic conductivities, respectively.

A brief summary of individual airlift tests is provided as follows. Plots of the airlift recovery tests are provided in **Annexure 4**.

BRC17005

- Moderate yield, bore storage effects in early recovery data, possible partial dewatering.
- EC = 970 $\mu\text{S/cm}$, pH = 6.20

BRC17009

- Very low yielding, no significant recovery.
- EC = 940 $\mu\text{S/cm}$, pH = 6.00

BRC17012

- High yielding with strong recovery, partial dewatering possible.
- EC = 964 $\mu\text{S/cm}$, pH = 6.14

BRC17018

- Low yield, good recovery, possible leakage or recharge boundary indicated.
- EC = 781 $\mu\text{S/cm}$, pH = 6.37

BRC17021

- Problems measuring water levels prevented standing water level reading and recovery data. Producing a lot of cuttings / silt during airlift.
- Moderate yielding, EC = 254 $\mu\text{S/cm}$, pH = 6.77.

BRC17025

- Moderate to high yielding, possible partial dewatering, also with potential leakage indicated.
- EC = 1490 $\mu\text{S/cm}$, pH = 6.77

BRC17027

- Low yielding with delayed recovery, potential leakage. Significant dewatering.
- EC = 1300 $\mu\text{S/cm}$, pH = 7.44

BRC17029

- Moderate yield
- EC = 850 $\mu\text{S/cm}$, pH = 6.64

4.5.10.2 Packer Testing

Packer testing was undertaken on four (4) deep Diamond Core drill holes, from 26th April through to 6th May 2017. The test locations are shown on **Figure 15**. Packer testing flow plots are provided in **Annexure 5** with results presented below and summarised on **Table 14** and **Table 15**. The testing was undertaken once drilling of all four test holes had been completed.

The packer testing was generally undertaken using a single packer configuration on the completed drill hole. Several straddle packer tests were attempted; however, these resulted in a number of blown elements due to difficulty in locating a suitable unbroken borehole for seating both packer elements. Two successful straddle tests were completed with the results provided in **Table 15**.

For the single packer tests, the NQ drill string was run to base of the drill hole and the drill hole was flushed by pumping clean water through the rods. The aim of flushing was to remove drilling fluids and sediment from the drill hole that could act to reduce the formation hydraulic conductivity and block fractures. It is noted that following approximately 30 minutes of flushing at each drill hole, only BD16005 returned flows at the surface and could be considered to have been successfully flushed, and the effects of blocked fractures were observed in a number of tests at other drill holes, however, this was taken into account when assessing representative values of hydraulic conductivity. Given the relatively low permeability results returned at depth, it is considered that the bulk of the lost circulation and lack of returns during flushing may have been through loss of water in the shallower unsaturated formation.

Core photos from each of the drill holes to be tested had first been assessed to identify suitable locations (depth) for packer placement that would maximise the potential for sealing of the drill hole and minimise potential for damage to the packer element. Testing comprised Lugeon injection testing which involves injecting water at a series of increasing pressure steps and recording the flow to the formation at each pressure. The pressure is stepped upwards for 3 to 5 pressure steps and then cycled back through the same sequence of pressures to assess for changes in the formation properties, either through blocking or through fracture dilation.

Testing for each drill hole proceeded in a cumulative fashion with the packer being placed at lithological boundaries or selected intervals as successive tests at increasing elevations (decreasing depth) were conducted on the way out of the drill hole. In testing this way each successive test zone incorporates the test zone of the preceding test. The tests provide a bulk hydraulic conductivity value for the entire formation from the packer to the base of the drill hole, but it is also possible to derive the incremental bulk hydraulic conductivity attributable to each successive test. Results are summarised on **Table 14** and **Table 15**.

4.5.10.3 Geotechnical Investigations

As part of the geotechnical investigations in the TSF embankment footprint, ATC Williams (2020a) installed and tested three boreholes to depths ranging from 25 m to 33 m. Permeability testing included packer testing and falling head tests. Two piezometers were installed (BGW60 and BGW61). Reported permeabilities for bedrock ranged from 6.9×10^{-6} m/s in shallow regolith to 1.6×10^{-10} m/s in fresh bedrock (equivalent to 0.6 m/d to 1.4×10^{-5} m/d).

Table 14
Packer Testing Summary – Bulk Permeability

Depth From	Depth To	Dominant Formation	Derived Formation Hydraulic Conductivity (m/day)
BD16003			
85.2	109.2	Volcanic Breccia	N/A
109.2	139.2	Rylstone Volcanics (undifferentiated)	N/A
139.2	241.2	Welded Tuff / Ignimbrite	1.14x10 ⁻²
241.2	278.2	Crystal Tuff	N/A
278.2	393.2	Coomber Formation	1.31x10 ⁻³
393.2	456.7	Coomber Formation	8.02x10 ⁻⁴
BD16005			
53.7	91.7	Rylstone Volcanics (undifferentiated)	2.29x10 ⁻⁵
91.7	151.7	Volcanic Breccia	N/A
151.7	220.7	Welded Tuff / Ignimbrite	N/A
220.7	283.7	Welded Tuff / Ignimbrite	1.94x10 ⁻⁴
283.7	316.7	Crystal Tuff	N/A
316.7	351.9	Coomber Formation	3.26x10 ⁻⁴
BD16007			
88.2	154.2	Welded Tuff / Ignimbrite	1.49x10 ⁻²
154.2	211.2	Welded Tuff / Ignimbrite	N/A
211.2	281.2	Crystal Tuff	1.15x10 ⁻²
281.2	312.2	Crystal Tuff	N/A
312.2	342.8	Coomber Formation	7.52x10 ⁻⁴
BD17010			
88.2	142.2	Volcanic Breccia plus Welded Tuff / Ignimbrite	6.03x10 ⁻⁵
142.2	166.2	Welded Tuff / Ignimbrite	N/A
166.2	226.2	Crystal Tuff	1.53x10 ⁻⁵
226.2	240.1	Coomber Formation	6.70x10 ⁻⁴

Table 15
Packer Testing Summary – Discrete Permeability

Depth From	Depth To	Structure / Formation	Lugeon Value	Derived Hydraulic Conductivity (m/day)
BD16007				
213.7	218.7	Fracture Zone Crystal Tuff	0.2	2.7x10 ⁻³
331.2	336.2	Fracture Zone Coomber Formation	15.4	0.19

4.5.10.4 Hydraulic Conductivity Summary

Hydraulic conductivity values derived from airlift testing are presented alongside the packer testing results and previous hydraulic testing results against depth on **Figure 19** and **Figure 20**. On **Figure 19** the packer testing and airlift testing derived hydraulic conductivity values are presented as the bulk hydraulic conductivity over the depth interval tested. On **Figure 20** the results are plotted at the average depth tested.

Figure 19 presents test results by test type. No bias due to test methodology is indicated, and the airlift testing results fall within previously measured hydraulic conductivity values. **Figure 20** presents the test results grouped according to dominant lithology, again no strong bias due to lithology is indicated, although as expected, alluvial results are fairly consistently elevated. It is noted that the very lowest permeability values are associated with the volcanic units and not the Coomber Formation, however, this may be due to the deeper packer testing locations within the Coomber Formation being targeted in the vicinity of the major north-south trending structures.

Tested drill holes that are known to intersect, or are inferred to intersect, one of the major north-south trending structures are also indicated. The results show that the presence of these structures does not always equate with increased permeability, although it is still considered that proximity to these structures will increase the chance of encountering increased fracturing and permeability.

Figure 19 Hydraulic Conductivity vs Depth by Test Type


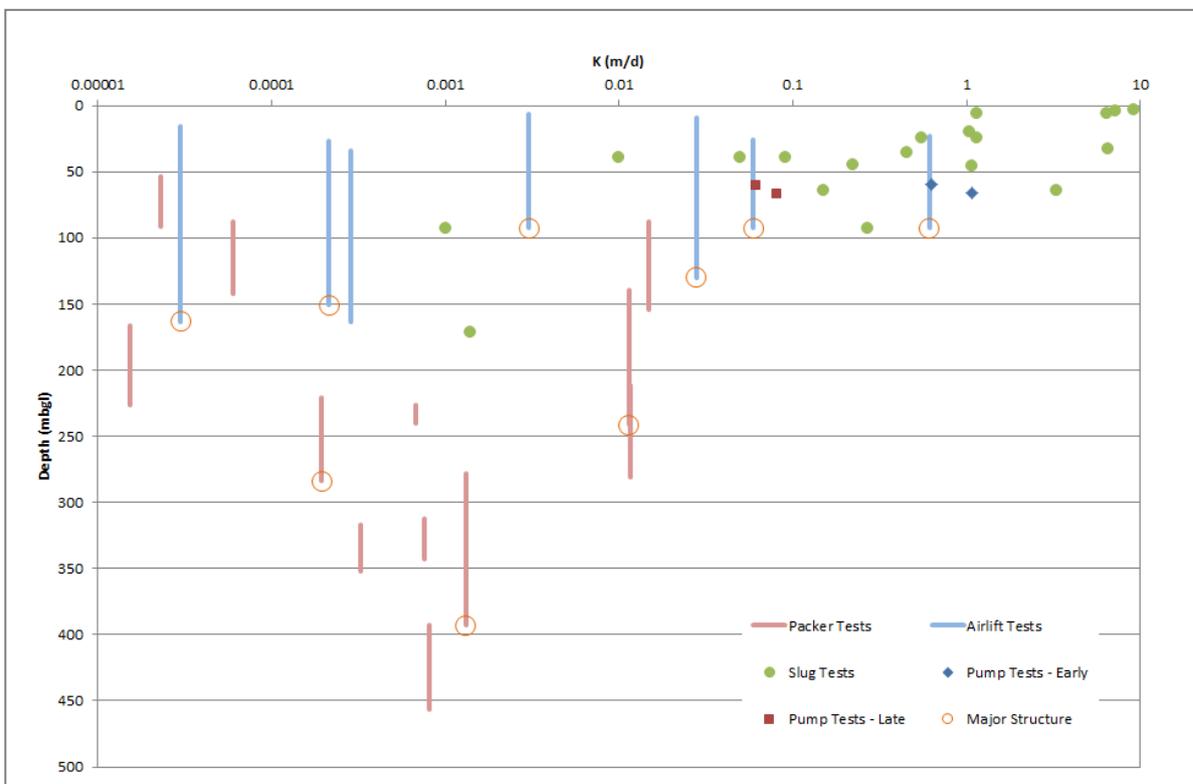


Figure 20 Hydraulic Conductivity vs Average Depth by Lithology

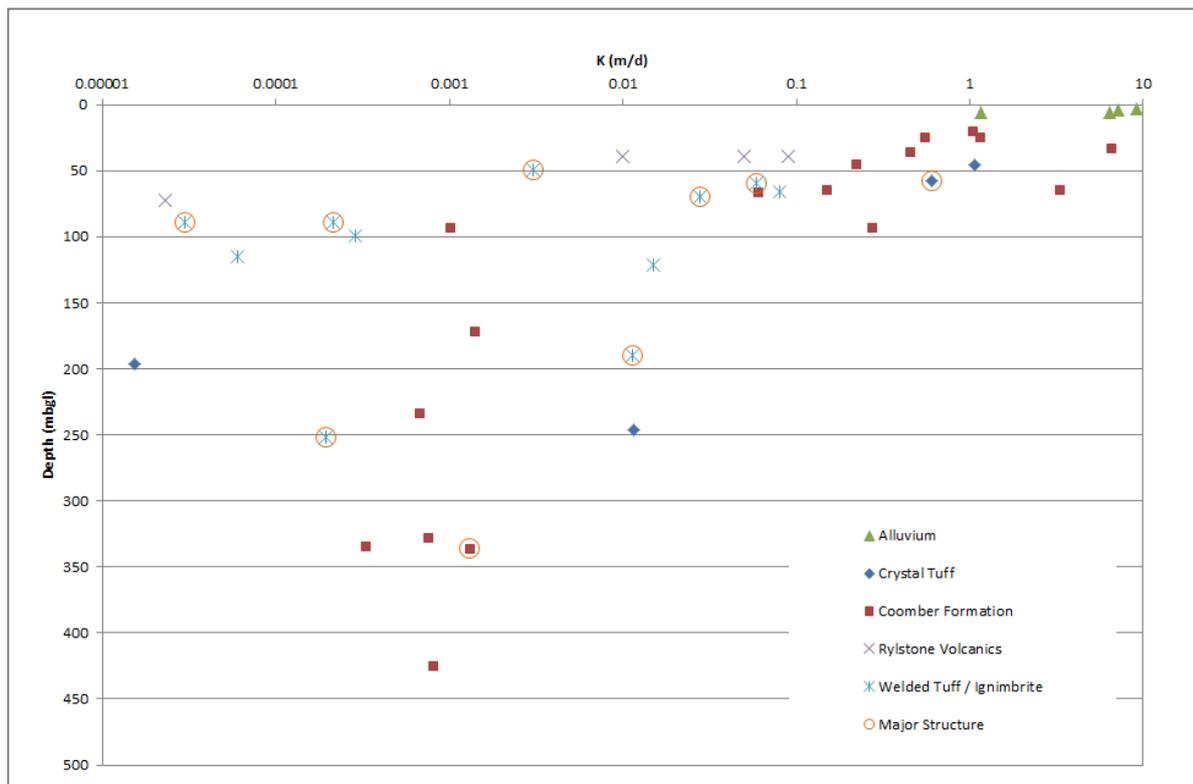

4.5.10.5 Porosity

Estimates of formation porosity have been derived from the core samples that were used for determining specific gravity. The porosity estimate has been determined from the total sample volume and saturated water content (saturated weight less dry weight) of the core sample.

Porosity determinations have been made from 244 core samples from 10 drill holes. The results are presented on **Figure 21** and **Figure 22**, and are summarised on **Table 16**.

**Table 16
Formation Porosity Determinations**

	Coomber Formation	Volcanic Breccia	Crystal Tuff	Ignimbrite	Rylstone Volcanics (undifferentiated)	Shoalhaven Group
No. Samples	24	53	48	51	20	6
Mean	0.5%	2.2%	1.3%	1.9%	1.8%	5.1%
Median	0.5%	2.1%	1.2%	1.4%	1.2%	3.9%

It is noted that the selection process of the core samples for analysis specifically avoids noticeable discontinuities. As such the values provided can be considered applicable for the intact, unfractured and non-jointed lithology and are indicative of the minimum likely porosity values for the bulk formation.

Figure 21 Porosity Determination by Drill Hole


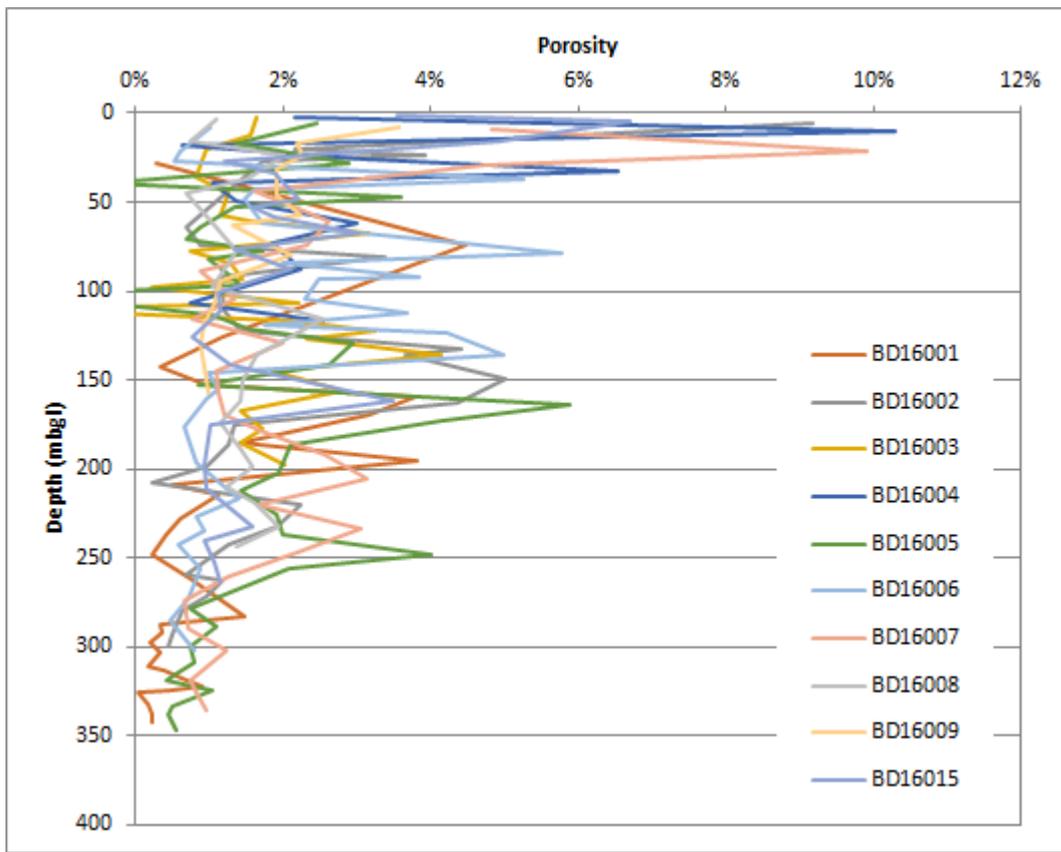


Figure 22 Porosity Determination by Lithology

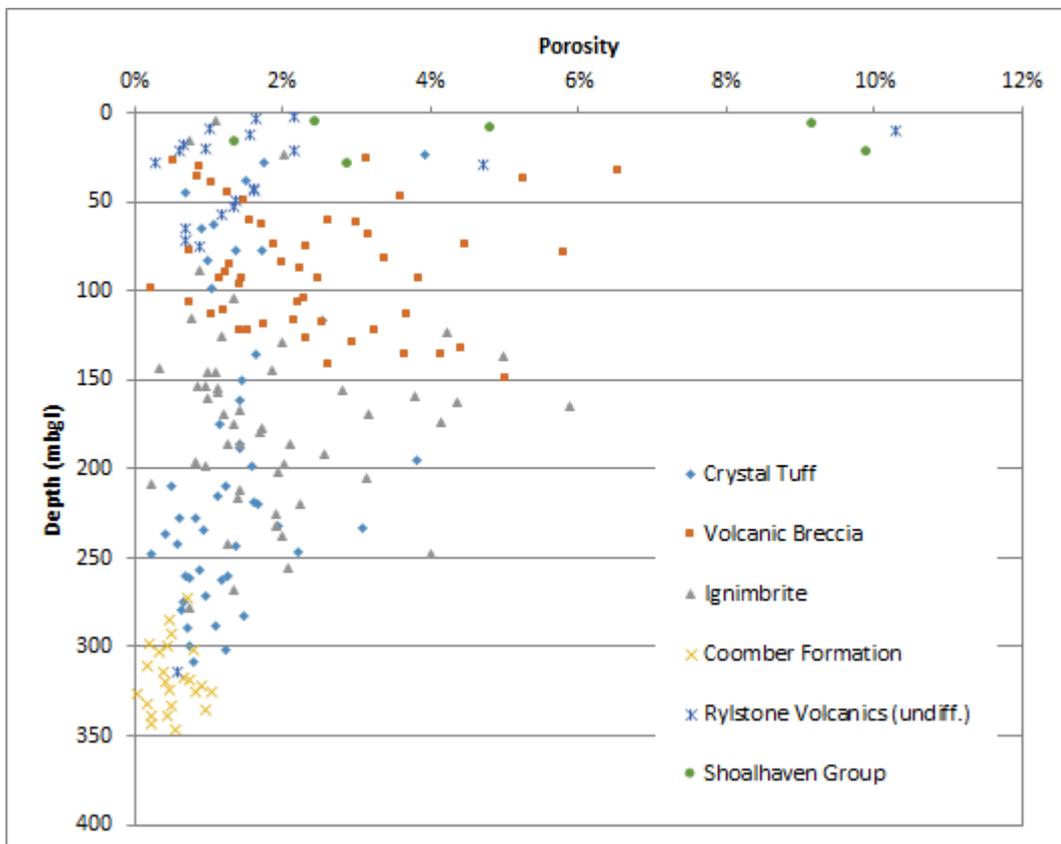

From **Figure 21** and **Figure 22** a reasonable correlation of porosity with both depth of sample and lithology is apparent, with a reduction in the range of porosity values with depth.

The formation with the least variation and lowest observed porosity is the Coomber Formation. Results for the Coomber Formation are considered to be more indicative of deeper fresh occurrences of this formation. Where this formation outcrops to the south of the Mine Site at shallower depths porosities are likely to be higher, enhanced by weathering and unloading, as is observed with the shallow samples and elevated porosity of the Shoalhaven Group.

Of the volcanic formations the Crystal Tuff returned the lowest average porosity of 1.3%, and the Volcanic Breccia the highest at 2.2%.

4.5.10.6 Specific Storage

Storage coefficients have been derived from the respective constant rate pumping tests for the ignimbrite (BGW108) and Coomber Formation (BGW10).

It is also possible to derive values for specific storage from rock strength data, including Young's Modulus, also known as the modulus of elasticity, and Poisson's Ratio. Young's Modulus is a measure of the stiffness of a solid material, while Poisson's Ratio is a measure of lateral expansion divided by axial compression under load.

Specific storage is determined as the product of rock compressibility and the unit weight of water, where rock compressibility is a function of Poisson's Ratio and Young's Modulus.

Poisson's Ratio and Young's Modulus have been determined from laboratory testing of core samples that were undertaken for geotechnical investigations completed in 2012 (AMC, 2012). The testing is undertaken on intact core samples and the resultant values of specific storage are of the intact rock mass and do not take into account any fractures or discontinuities. As such, the values derived are indicative of the minimum likely values for the bulk formation.

The determination of specific storage has been undertaken by applying the average values of Poisson's Ratio and Young's Modulus for each lithology type to derive a representative specific storage value for the particular lithology. Results are presented on **Table 17**.

Table 17
Specific storage determinations

Lithology	No. Samples	Average Youngs Modulus (GPa)	Average Poisson's ratio	Compressibility (LT2/m)	Calculated Specific Storage (m ⁻¹)
Ignimbrite	5	31.1	0.25	4.8x10 ⁻⁸	4.7x10 ⁻⁷
Breccia	5	6.0	0.25	2.5x10 ⁻⁷	2.5x10 ⁻⁶
Crystal Lithic Tuff	6	14.1	0.26	1.1x10 ⁻⁷	1.1x10 ⁻⁶
Sandstone	2	13.8	0.22	1.0x10 ⁻⁷	1.0x10 ⁻⁶

The result derived for the ignimbrite unit of 4.7x10⁻⁷ m⁻¹ is two orders of magnitude lower than the average value derived at late time from the BGW108 pumping test of 2.6x10⁻⁵ m⁻¹, demonstrating the significant influence that fracturing has on the availability of groundwater released from storage. The elevated values derived from test pumping are also likely influenced by gravity drainage of groundwater from the fracture network in the host rock.

4.5.11 Groundwater Levels

Comprehensive groundwater monitoring has been undertaken on site and throughout the surrounding area since March 2012. The monitoring network includes a network of private bores in addition to the site monitoring bores as described in Section 4.5.6. The layout of the groundwater monitoring network is provided on **Figure 23**.

Groundwater level hydrographs for the period from April 2012 to October 2018 are presented on **Figure 24** to **Figure 26**. The hydrographs are separated into monitoring bores identified as intersecting alluvium (**Figure 24**), regional monitoring bores (**Figure 25a** and **b**), and Mine Site monitoring bores (**Figure 26a** and **b**). The CRD is also presented on the hydrographs for comparison. The distinction between Mine Site and regional monitoring is based on the Mine Site boundary, with those monitoring bores within, or close to, the Mine Site boundary falling into the Mine Site monitoring bore category. It is noted that half of the alluvial monitoring bores (BGW48, BGW49, BGW51, BGW53, BGW54, and BGW61) are within the Mine Site boundary.

Water levels in alluvial monitoring bores, as shown on **Figure 24**, show significant fluctuation with longer term trends showing a close correlation to the CRD.

Water levels in the regional monitoring bores on **Figure 25** also show a correlation with CRD, although at the scale plotted this is less apparent, particularly in those monitoring bores that are situated in hard rock. Monitoring bores with water level less than 10 metres below ground level (mbgl), generally show similar magnitude in water level fluctuations to the alluvial monitoring bores, with this fluctuation decreasing with an increasing depth to water.

BGW36 (**Figure 25**) displays an exaggerated response with close correlation to the CRD, with in excess of 30 m variation in water level over the period of monitoring. BGW36 is located approximately 2.4 km to the east-southeast of the open cut pit area and 100 m from a private residence. It is inferred that the exaggerated water level fluctuations are most likely due to local groundwater use, such as irrigation, exacerbating dry period water level decline. Two other bores, BGW33 and BGW35, both located in the township of Lue, also show the influence of intermittent abstraction.

The Mine Site hard rock monitoring bore hydrographs (**Figure 26**) generally display similar trends to those of the regional hard rock monitoring bores. The majority of Mine Site monitoring bores show a response to a recharge event in mid-2016.

Apparent on **Figure 26a** is the drawdown and recovery at BGW108 in response to the pumping test that was undertaken in November 2014 (Section 4.5.8). BGW108 also shows another significant period of pumping from December 2013 through to February 2014, as discussed previously in Section 4.5.9. During this period of abstraction responses are observed in a number of other Mine Site monitoring bores, as discussed in Section 4.5.9. BGW108 displays a very slow recovery, indicative of a limited hydraulic connection with the regional groundwater system.

Figure 23 Bowdens Silver Groundwater Monitoring Network

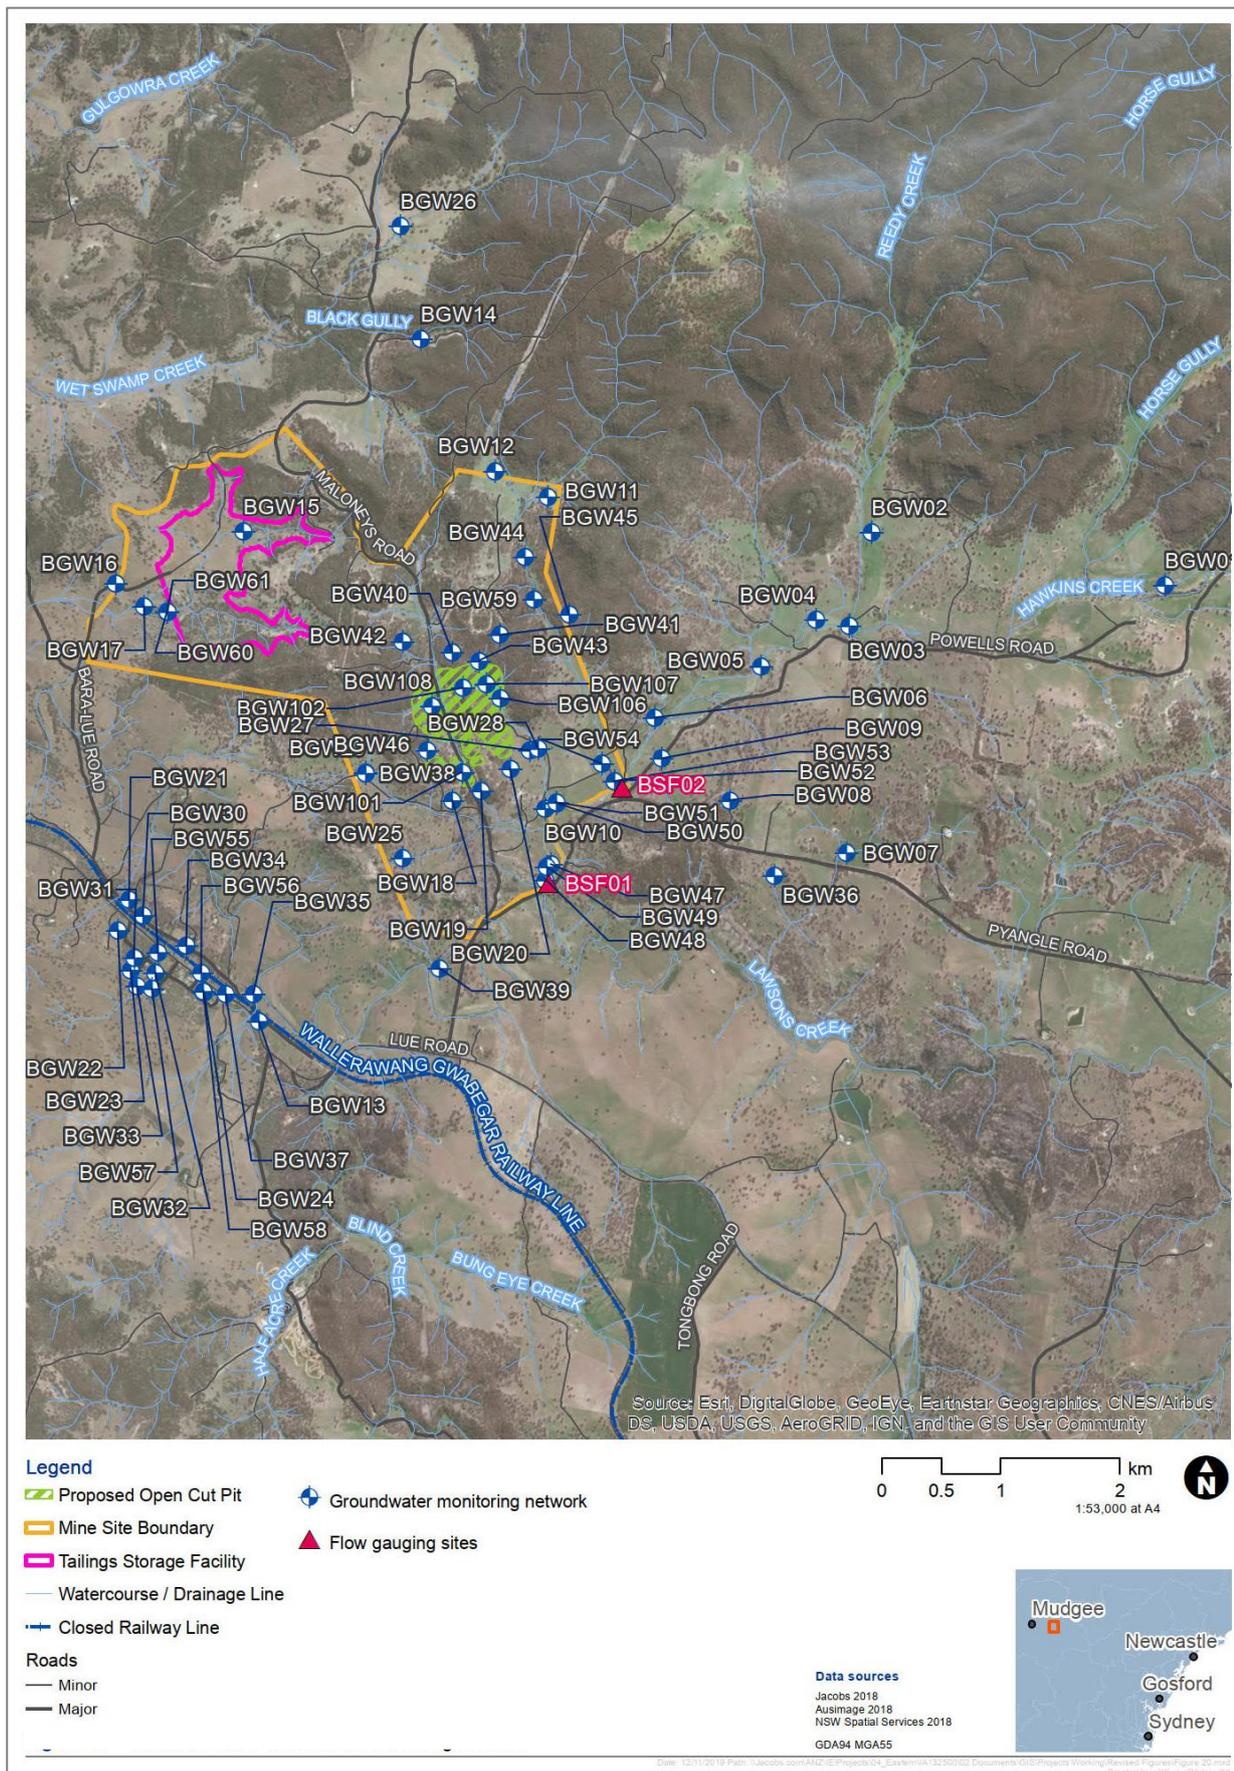


Figure 24 Alluvial Monitoring Bore Hydrographs (April 2012 to October 2018)

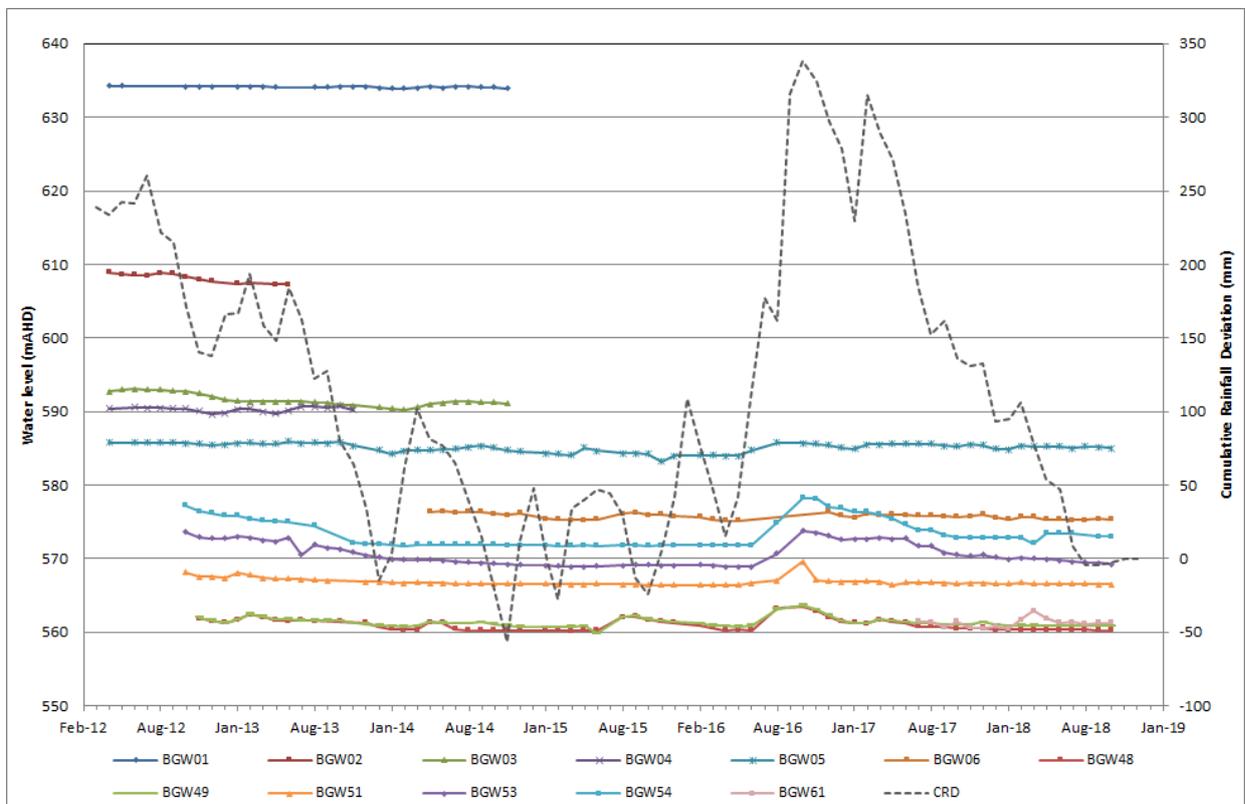


Figure 25a Regional Monitoring Bore Hydrographs

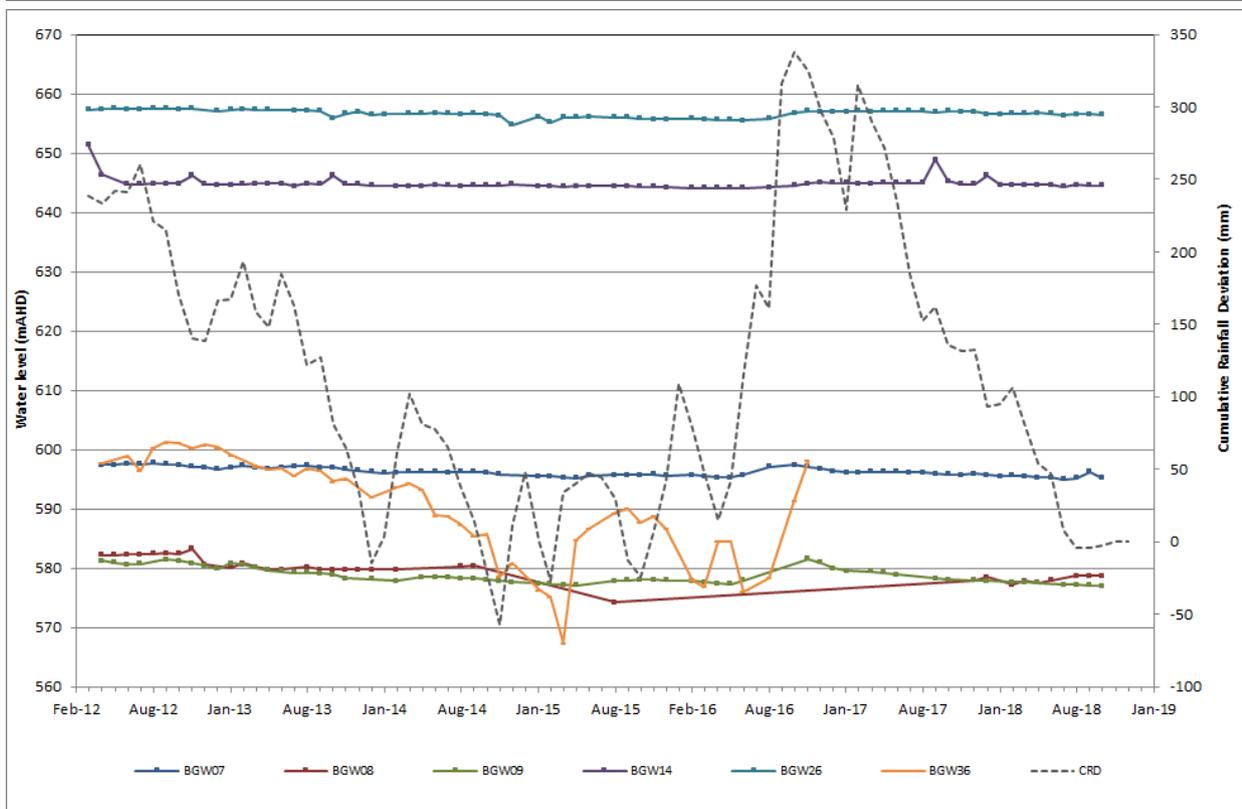
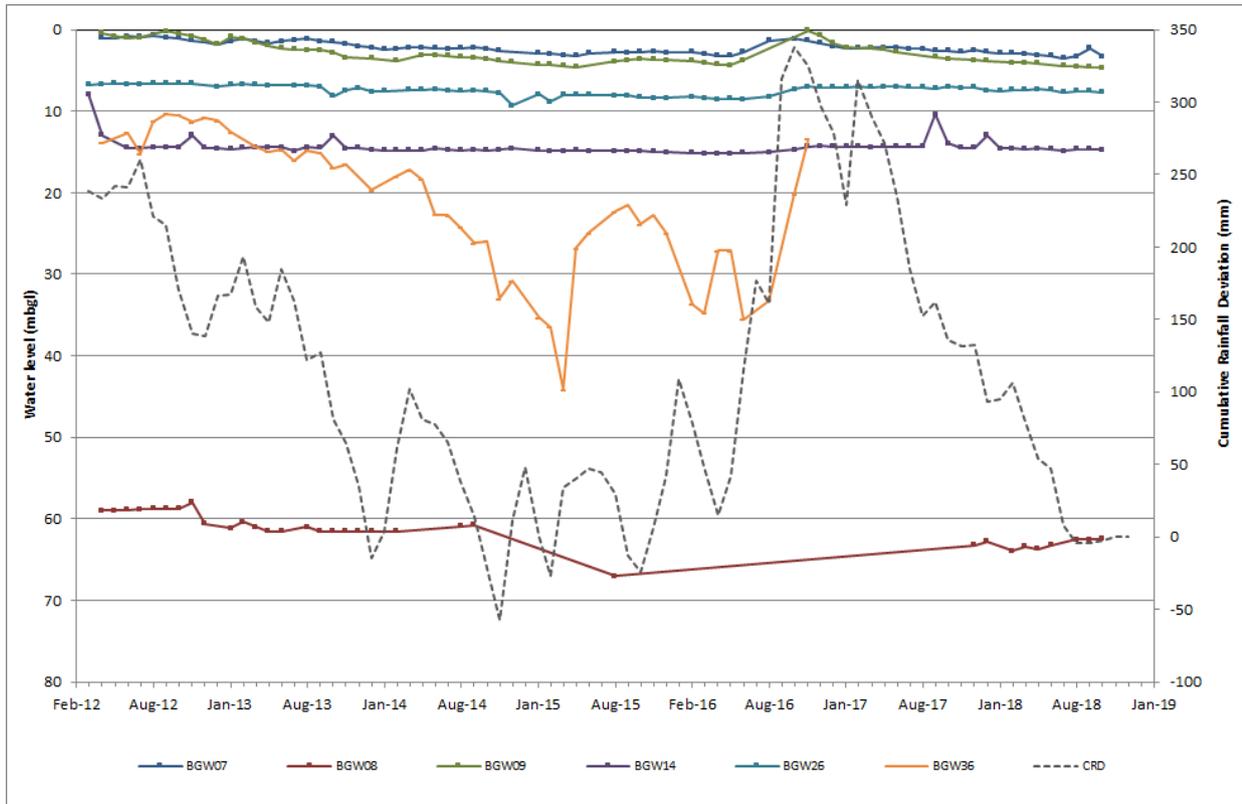


Figure 25b Regional Monitoring Bore Hydrographs (Lue)

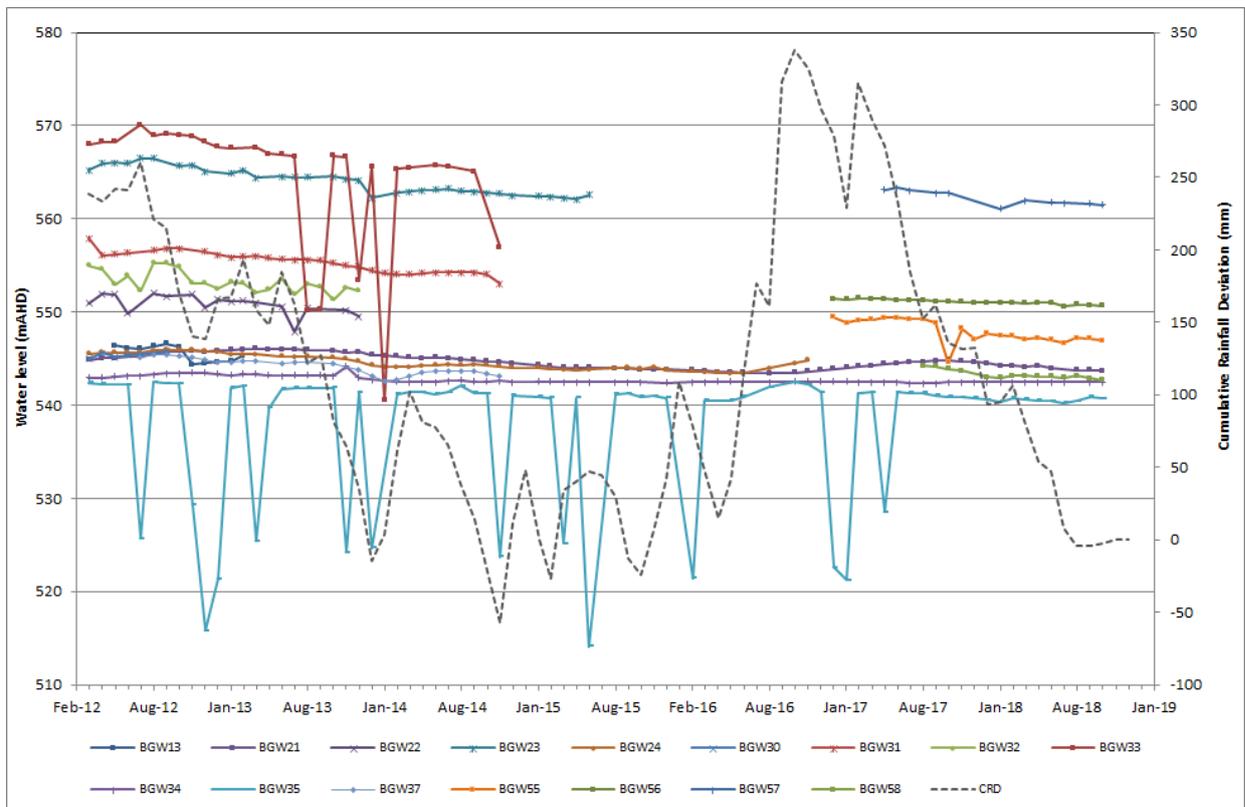
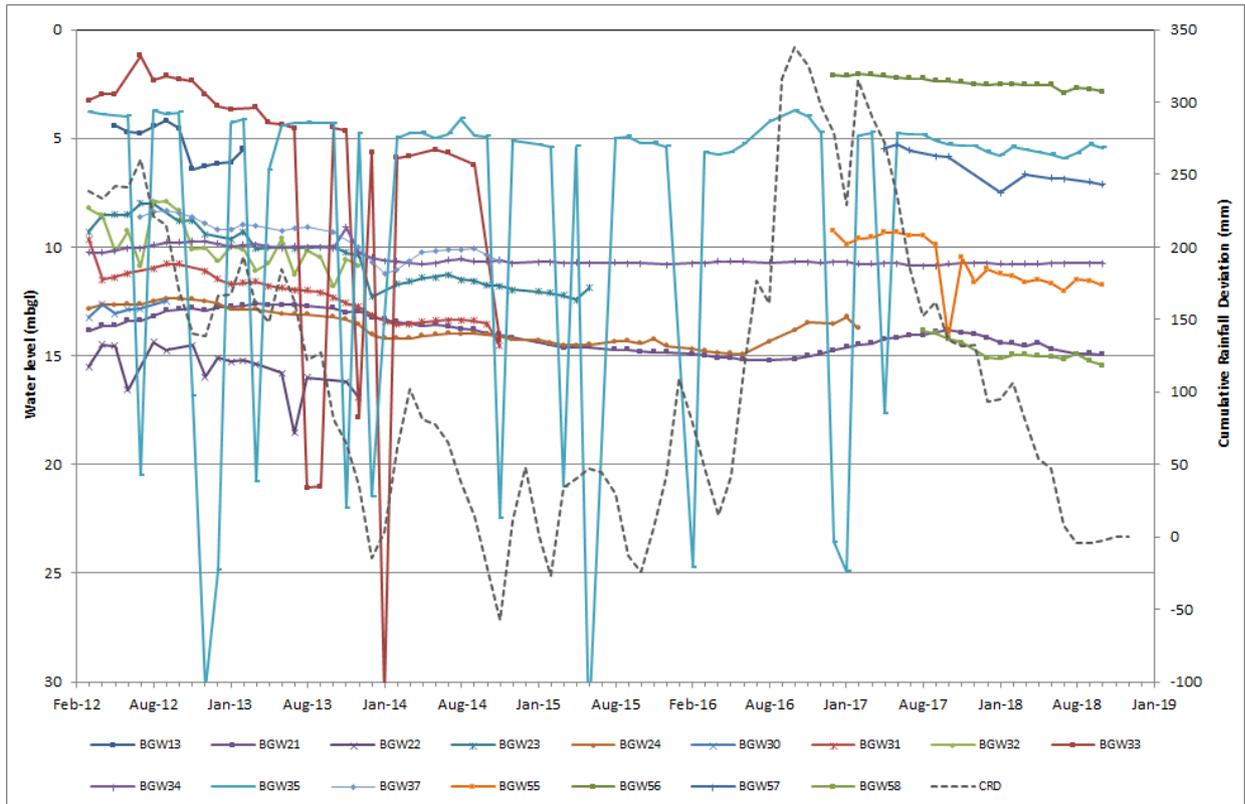


Figure 26a Mine Site Monitoring Bore Hydrographs




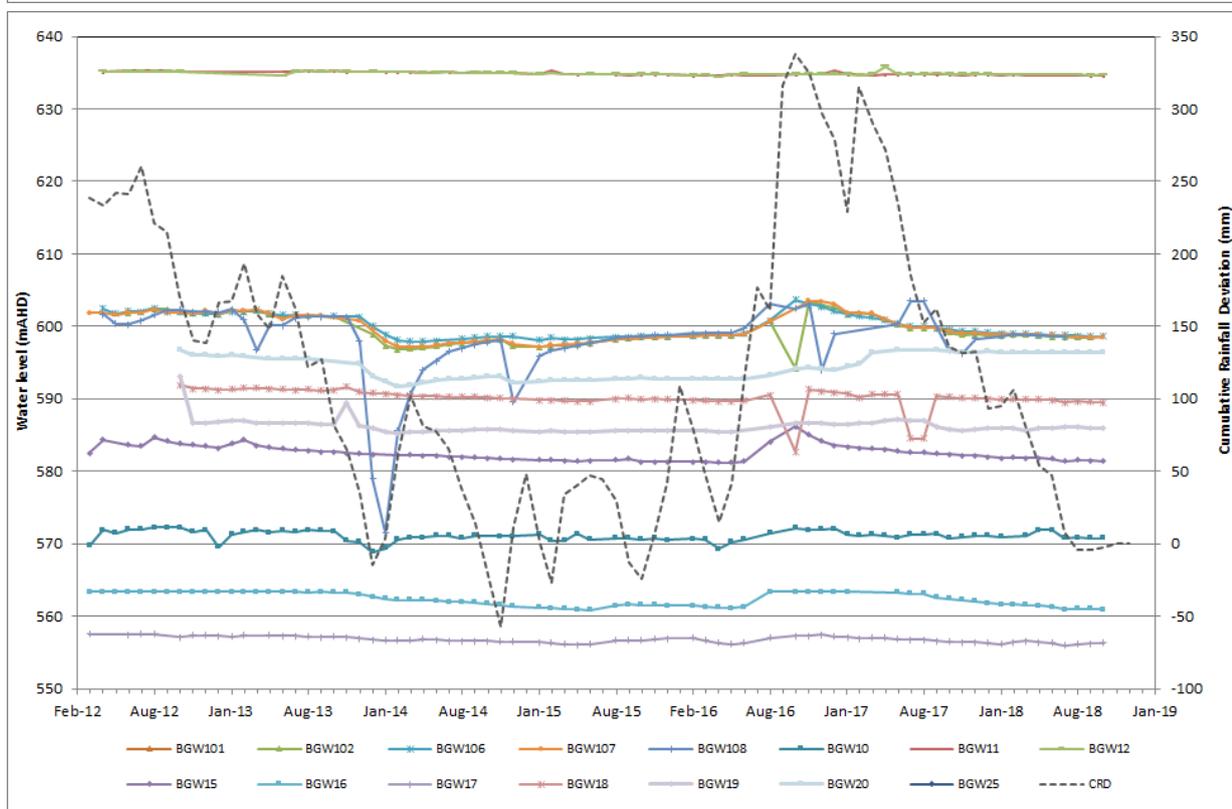


Figure 26b Mine Site Monitoring Bore Hydrographs

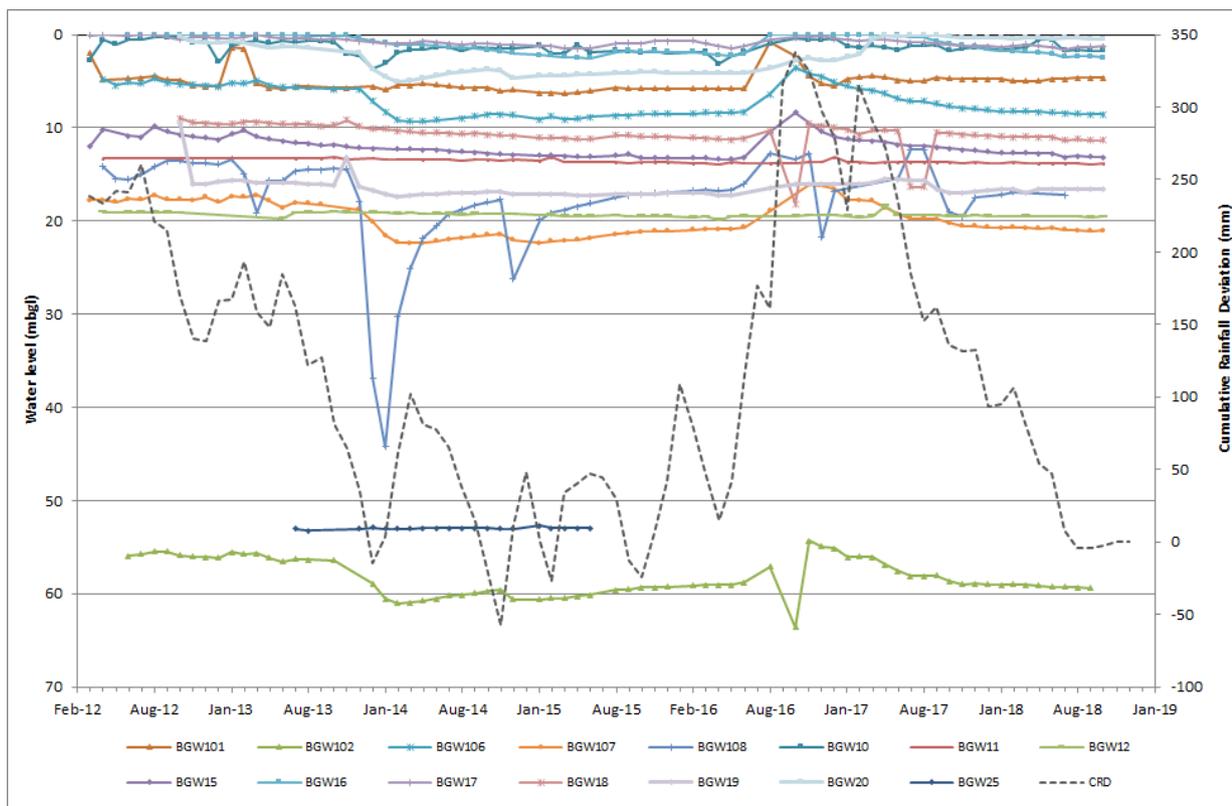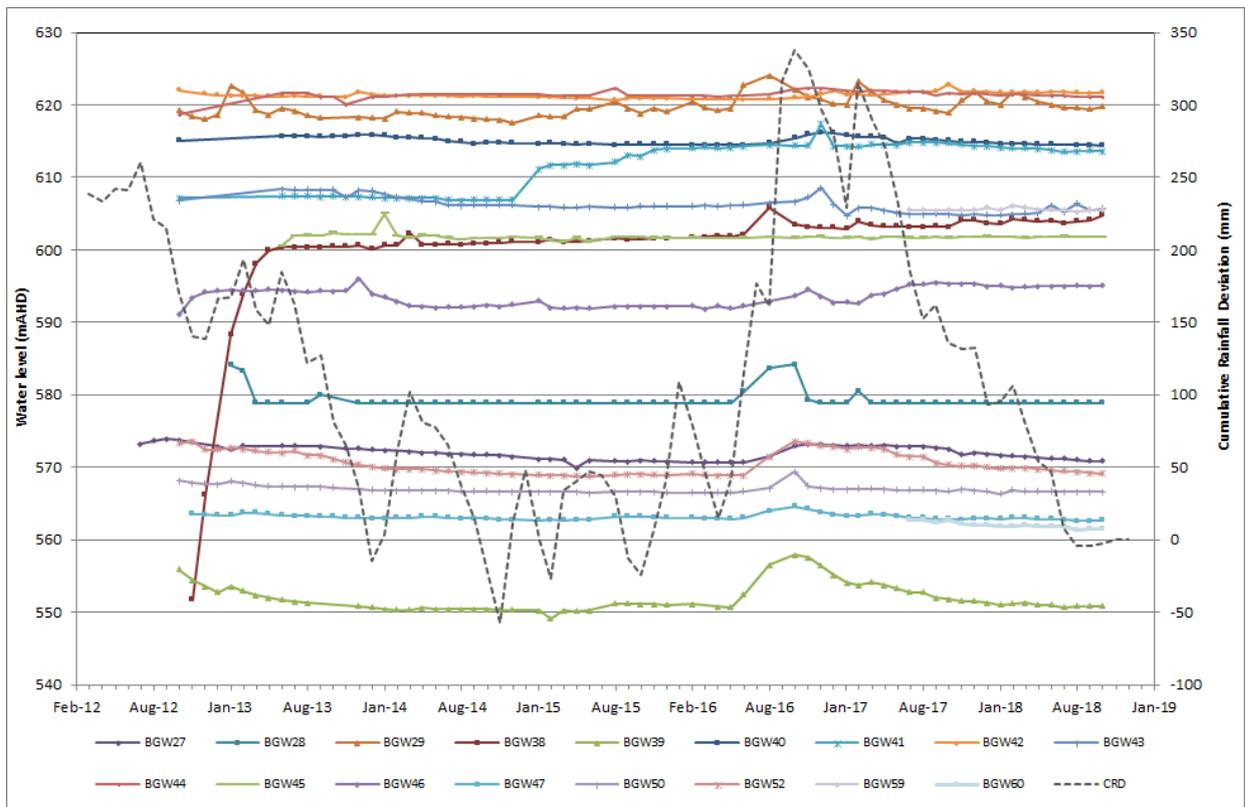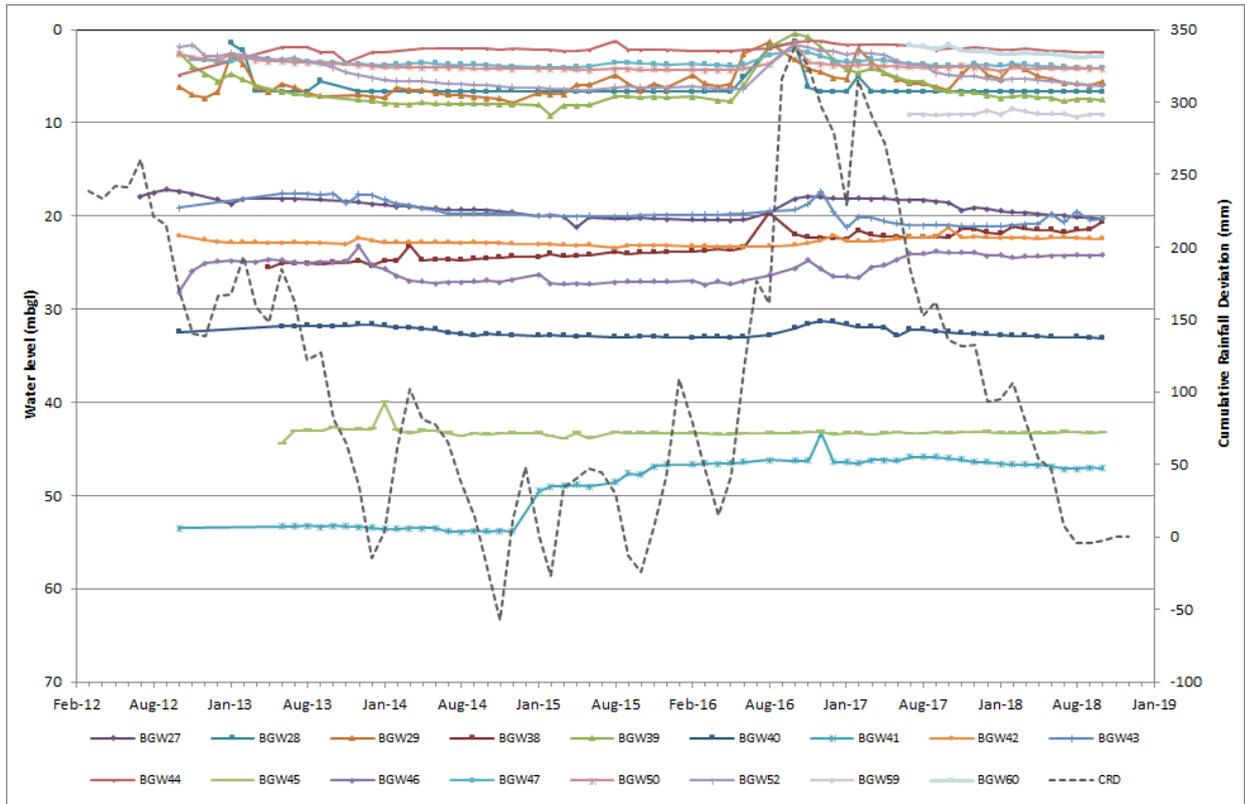


4.5.11.1 Paired Monitoring Bore Locations

A number of monitoring locations include paired, deep and shallow monitoring bores. These locations are summarised on **Table 18** and hydrographs are presented on **Figure 27**. The monitoring locations are provided on **Figure 23**.

Table 18
Paired Monitoring Locations

Location	Bore ID	Drilled Depth (mbgl)	Screened Interval (mbgl)	Screened Formation
Pit South	BGW28	6	0-6	Alluvium
	BGW27	90	58-70	Coomber Formation
KCN Spring	BGW29	6.5	1.5-6.5	Volcanic Breccia
	BGW38	100	88-94	Volcanic Breccia
Hawkins Creek (upstream)	BGW53	12	3-9	Alluvium
	BGW52	30	17-23	Coomber Formation
Hawkins Creek (downstream)	BGW48	6	1-6	Alluvium
	BGW47	48	36-42	Rylstone Volcanics
Hawkins Creek (mid-chainage)	BGW51	12	3-9	Alluvium
	BGW50	28	21-27	Coomber Formation
TSF	BGW61	5	1-5	Alluvium
	BGW60	33	21-33	Rylstone Volcanics

Figure 27 Paired Monitoring Bore Hydrographs

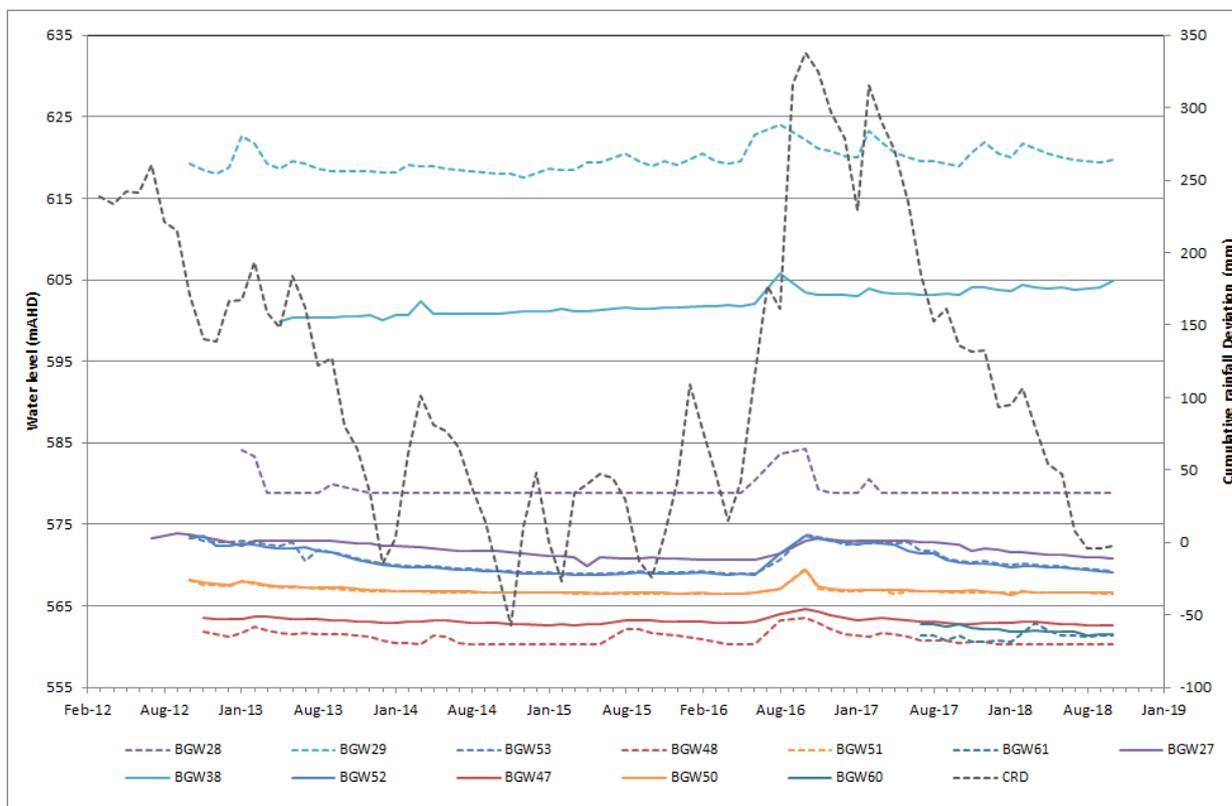

From **Figure 27** the following trends are apparent:

- South of the open cut pit area at BGW27/BGW28 (Pit South) there is an approximately 8 to 10 m head (water level) difference between the groundwater level in the Coomber Formation and the shallow alluvial groundwater system. This shows net downward hydraulic gradient (although the two systems are likely disconnected) and indicates the potential for recharge/leakage from the alluvium to the deeper groundwater. The predominantly flat response at BGW28 suggests that for the majority of the time the shallow water level is below the level of the screen, at approximately 578 mAHD, with only intermittent responses to rainfall events.
- A similar but more marked difference is observed at BGW29/BGW38 in the vicinity of KCN Spring, located on the southeastern flank of Lydiard Ridge. At this location, the head difference is of the order of 18 m. This difference in water levels indicates that the spring is likely to be the surface expression of a shallow water table and unlikely to be connected to the deeper groundwater system.
- At sites BGW50/BGW51, and BGW52/BGW53, the deep and shallow groundwater systems show relatively uniform levels and responses, indicating hydraulic connectivity. This is likely an area of seasonal recharge and discharge. Upstream at BGW52/BGW53, shallow alluvial groundwater levels are marginally higher than deeper groundwater levels, indicating a net downwards gradient, albeit very minor. At BGW50/BGW51, the opposite is true, with deep groundwater levels typically slightly elevated above shallow groundwater levels, indicating a net upwards gradient. Average groundwater levels at BGW51 and BGW53 are at a similar elevation to the bed of Hawkins Creek, indicating a seasonal variation between groundwater discharge to baseflow and groundwater recharge conditions.
- BGW47 and BGW48, while not paired, are located in close proximity to each other in the vicinity of Hawkins Creek. The deep groundwater levels observed at BGW47 are consistently elevated above the shallow groundwater levels of BGW48, indicating a zone of permanent upward hydraulic gradient and discharge from deep groundwater to shallow groundwater. At BGW48, average groundwater elevations slightly below the inferred creek bed elevation of Hawkins Creek, indicating a predominantly losing stream at that location, with groundwater discharge as baseflow after sustained recharge events.
- At BGW60/BGW61 in the area of the TSF, the water levels of the deeper groundwater system are generally elevated above the shallow alluvial water level. Prior to April 2018, the deeper water level was elevated by approximately 1 to 1.5 m over the shallow water level. Following high rainfall and corresponding rise in CRD in the preceding months, the shallow water level in BGW61 briefly exceeded the deeper water level before receding and remaining approximately 0.5 m below BGW60 for the remainder of the observation data.

4.5.11.2 Groundwater Contours and Flow

Composite groundwater level contours derived from the results obtained from the groundwater monitoring network are provided on **Figure 28**. The groundwater contours plotted are generated from average water levels from all available data between February 2012 and October 2018. Where obvious influences of groundwater pumping are apparent, such as at BGW35 and BGW55, an equivalent natural water level has been approximated.

The composite groundwater elevation map provides a good overview of groundwater flow in the study area. The groundwater contours indicate lines of equal groundwater elevation. Groundwater flow direction is inferred as being directly down gradient, perpendicular to the contours.


From **Figure 28**, the following key flow characteristics are apparent:

- The groundwater contours show a good correlation with topography and indicate groundwater flow is generally from areas of higher elevation to areas of lower elevation.
- Groundwater flow directions are variable. In the TSF and open cut pit area however, a general southeasterly flow direction is indicated.
- Through the central Mine Site area, the hydraulic gradient is typically 1:40 or 0.025.
- Groundwater contours indicate that Hawkins Creek is a groundwater sink and as such the creek and associated alluvial areas (valley fill) are likely a point of regional groundwater discharge. This is consistent with the upwards head gradients observed between BGW47 and BGW48.
- Groundwater contours in the open cut pit area are disrupted compared to the relatively uniform contours intervals elsewhere and indicate a general flattening of the water table in the southern open cut pit area. This could be indicative of a highly connected fracture network and proximity to the major fault structures, or may be artificially induced by the high density of drill holes in the area.
- Groundwater elevations in the open cut pit area range from around 610 mAHD in the north to 590 mAHD in the south to southeast. Depth below ground level is highly variable and dependant on topography, but typically ranges from approximately 2 mbgl in the lower reaches of Blackmans Gully to 60 mbgl beneath the elevated ridges in the central mining area.
- Groundwater elevation beneath the TSF area ranges from approximately 600 mAHD beneath the upper valley areas (10 to 60 mbgl) to approximately 560 mAHD beneath the lower embankment, which is near ground level in the middle of the valley.

4.5.12 Groundwater Quality

Comprehensive groundwater quality sampling has been undertaken on the regional monitoring network on a quarterly basis since January 2014. The layout of the groundwater monitoring network is provided on **Figure 23**.

Figure 28 Composite Groundwater Contours

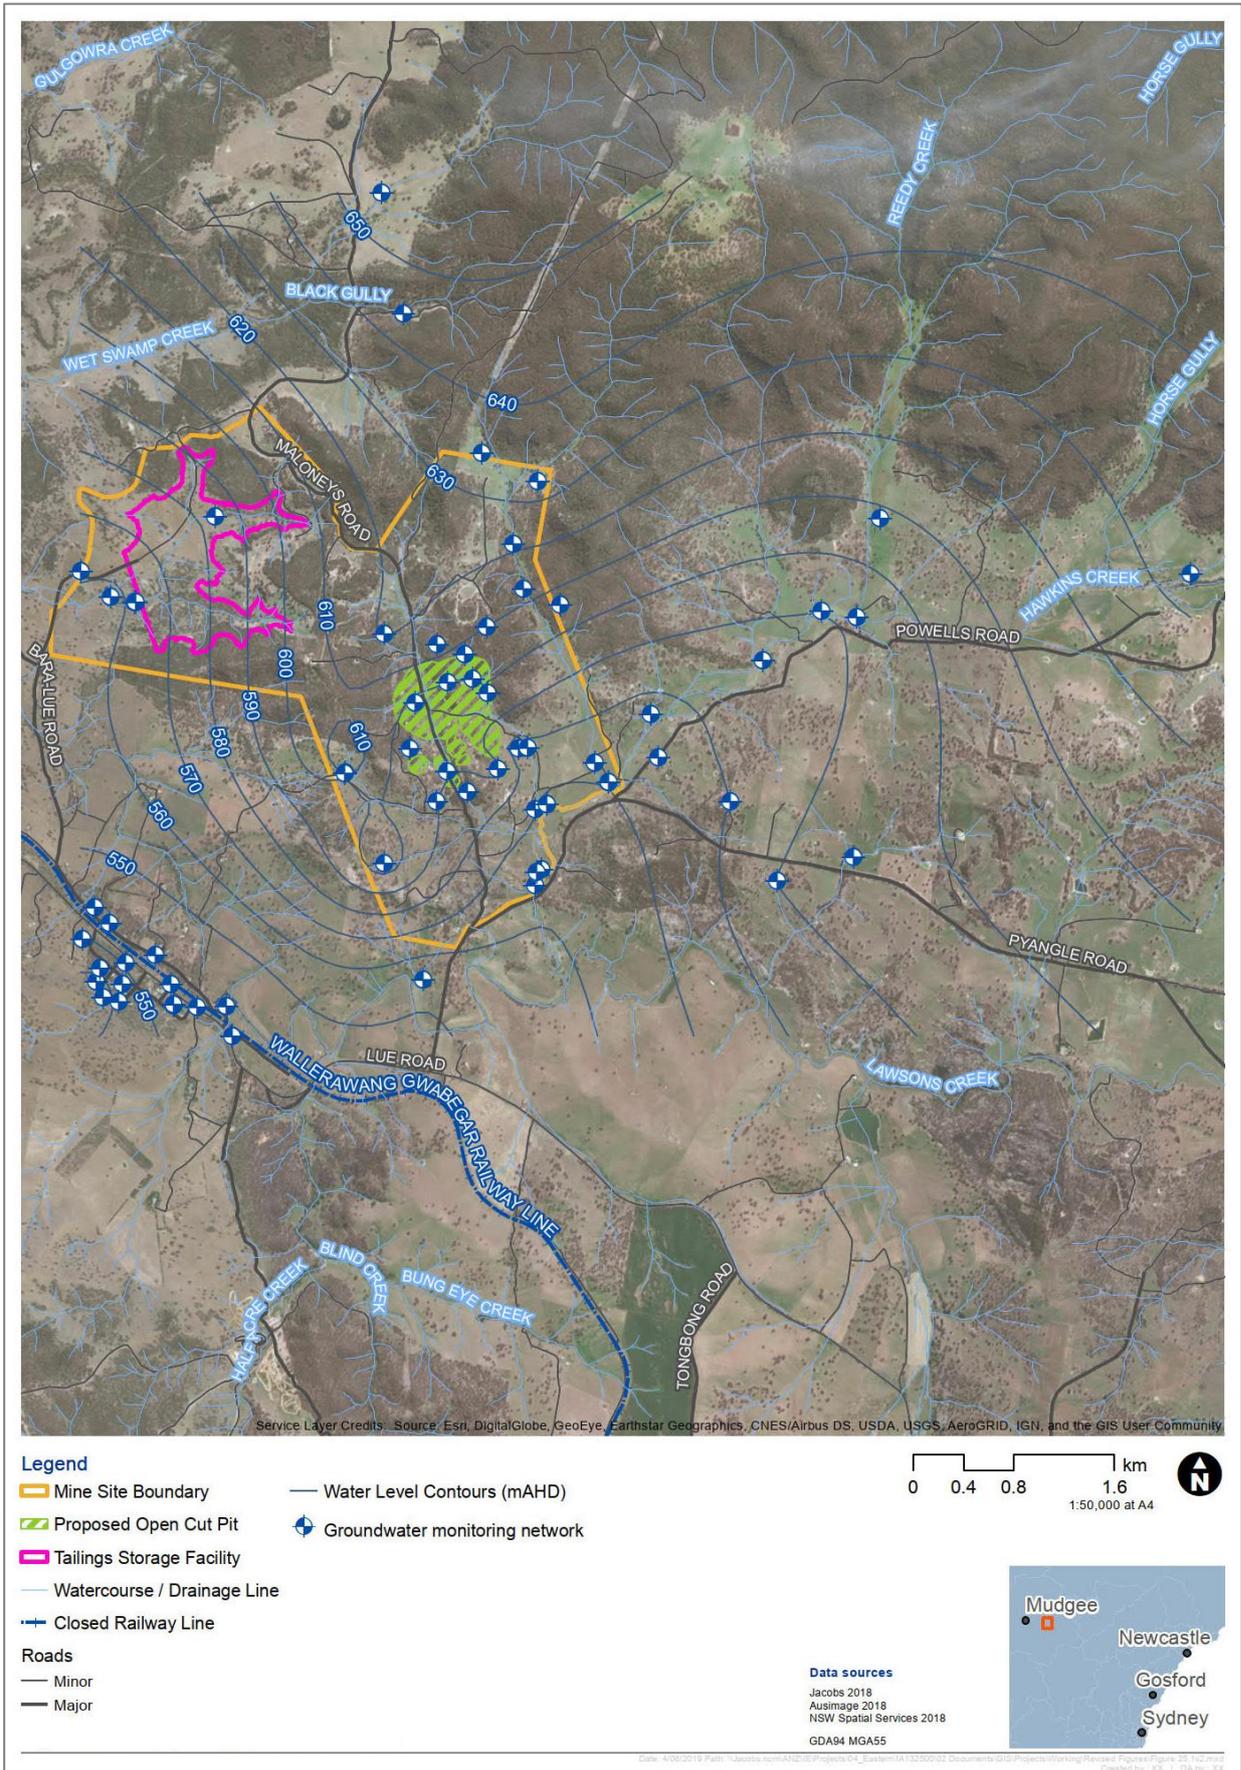

The monitoring network for water quality includes alluvial and hard rock groundwater systems, springs, and surface water. The full comprehensive water quality sampling results for the period between January 2014 and August 2018 are summarised in **Annexure 6**. The dataset provides a comprehensive water quality baseline for comparison to any results of future water quality monitoring. For the purposes of this assessment of water quality, the key parameters of electrical conductivity and pH are discussed, as are the major ions for the purposes of water type characterisation and an indication of groundwater recharge processes.

It is noted that groundwater sampling was rationalised following September 2016, including cessation of monitoring at spring locations which were deemed not to be connected to the regional water table.

4.5.12.1 Electrical Conductivity

Electrical conductivity (EC) is presented on **Figure 29** to **Figure 31**. For reference, measured EC from spring monitoring points are provided on **Figure 32**. A statistical summary of EC results is provided on **Table 19**.

Table 19
Electrical Conductivity Monitoring Summary ($\mu\text{S}/\text{cm}$)

	Alluvium	Site	Regional	Springs
Count	123	518	184	44
Mean	802.0	1420.3	1819.9	150.3
Median	654.0	1260.0	1640.0	151.0
Min	121.0	153.0	310.0	71.0
Max	2620.0	5680.0	4060.0	252.0
20th Percentile	330.8	938.8	1276.0	102.2
80th Percentile	1316.0	1820.0	2644.0	189.0

The alluvial groundwater EC is typically less than 1000 $\mu\text{S}/\text{cm}$, with two sites (BGW51 and BGW53) displaying higher but variable EC. The recharge event evident in the alluvial water levels in mid-2016 (**Figure 24**) is also observed in the water quality results at several monitoring locations. At BGW51 and BGW53 this response is apparent as a distinct decrease in EC due to the influx of rainfall recharge, whereas at BGW05 and BGW06 the response is an increase in EC due to the flushing of salts within the soil profile and unsaturated aquifer material. BGW48, BGW49 and BGW54 show no significant response.

Regional hard rock aquifer groundwater salinity (**Figure 30**) is typically in the range 1000 to 3000 $\mu\text{S}/\text{cm}$. BGW56, located in the Rail Reserve in Lue, is notably fresher at approximately 300 $\mu\text{S}/\text{cm}$, and may be associated with Lawsons Creek alluvium, rather than the hard rock aquifer. Most monitoring locations display relatively stable trends, however, BGW07 displays a decrease from 3350 $\mu\text{S}/\text{cm}$ to 1350 $\mu\text{S}/\text{cm}$ between October 2015 and February 2016, which is unexplained, however, the subsequent data is more consistent with other regional monitoring results.

Figure 29 Alluvial Monitoring Bore Electrical Conductivity (January 2014 to August 2018)

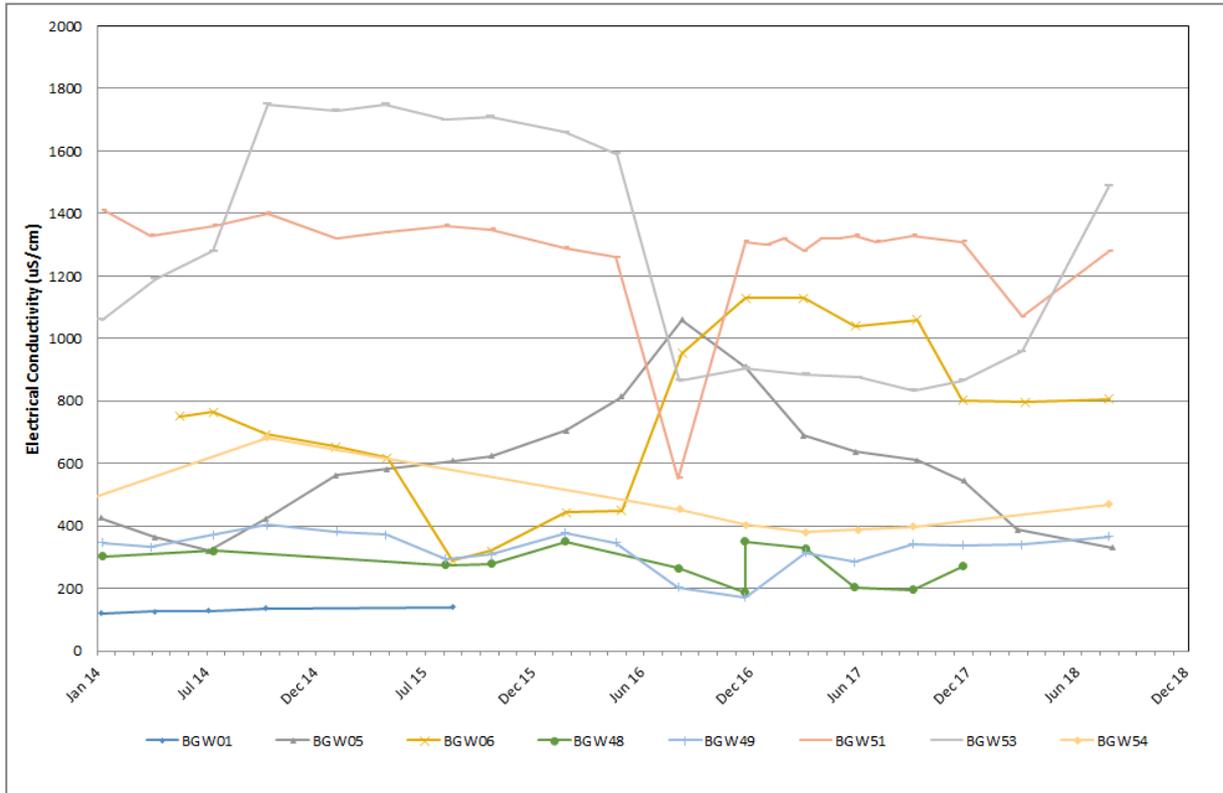


Figure 30 Regional Monitoring Bore Electrical Conductivity (January 2014 to August 2018)

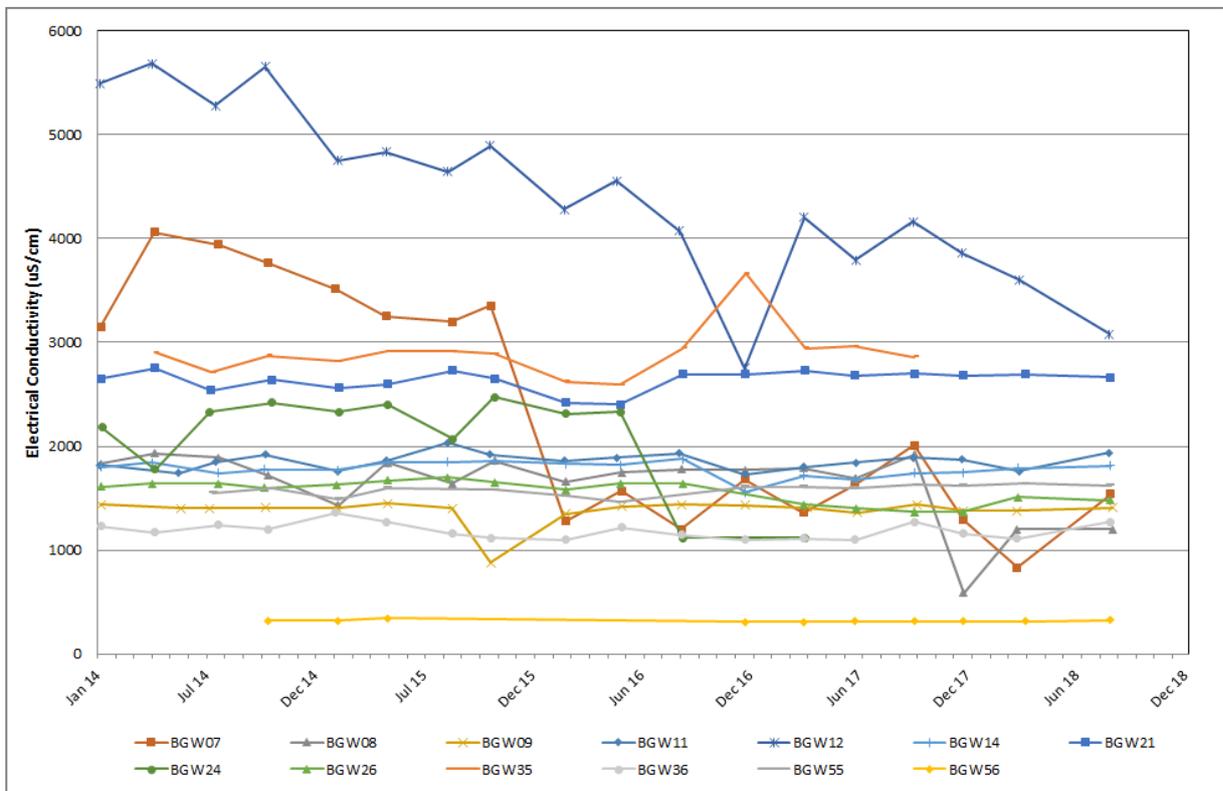


Figure 31a Site Monitoring Bore Electrical Conductivity (January 2014 to August 2018)

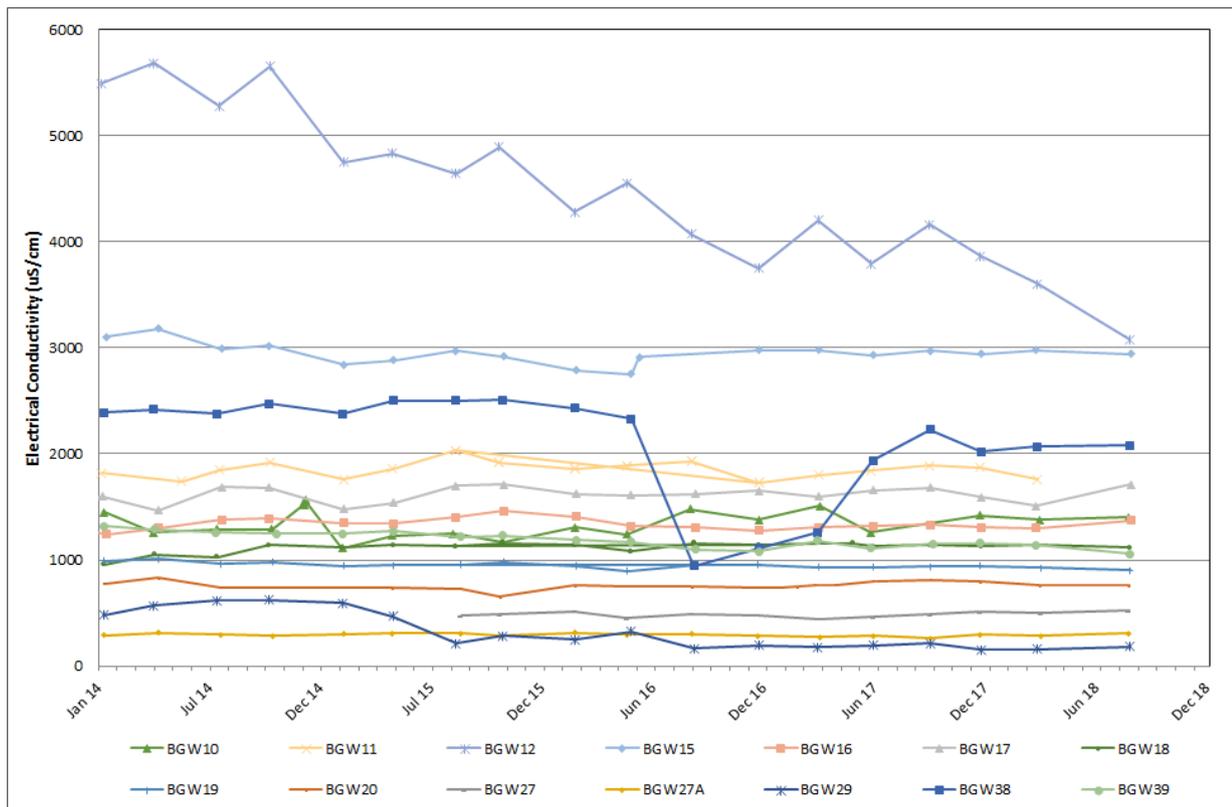


Figure 31b Site Monitoring Bore Electrical Conductivity (January 2014 to August 2018)


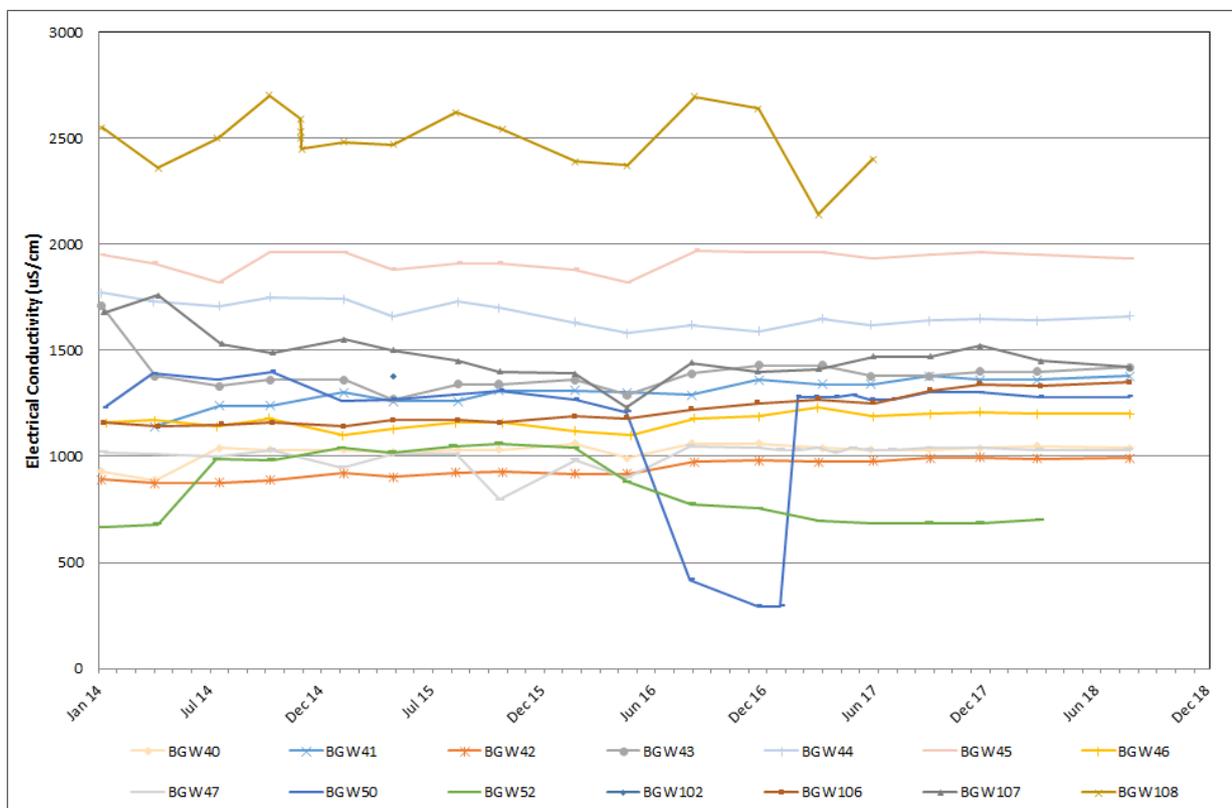


Figure 32 Spring Electrical Conductivity (January 2014 to September 2016)

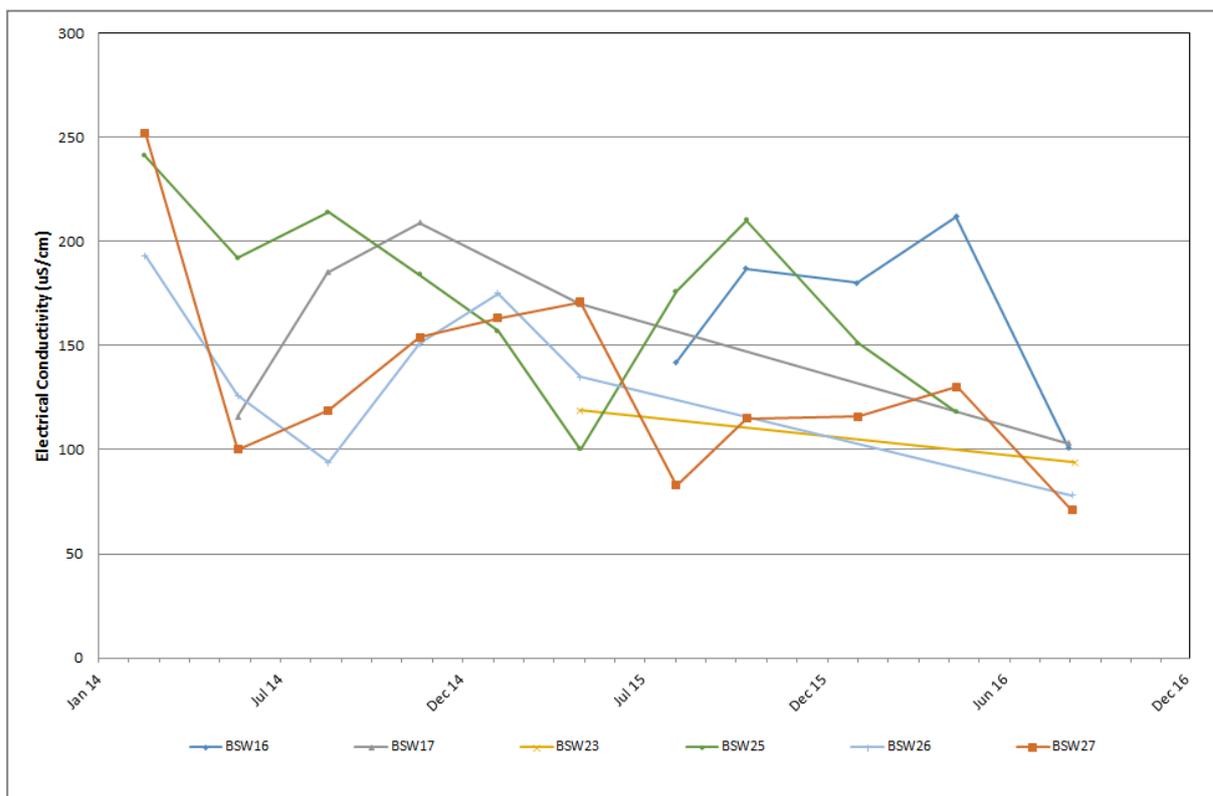

The EC at Mine Site monitoring bores (**Figure 31**) is typically below 2000 $\mu\text{S}/\text{cm}$, with an average value of 1420 $\mu\text{S}/\text{cm}$ (**Table 19**). BGW15, BGW38, and BGW108 show elevated EC, typically in the range 2000 to 3000 $\mu\text{S}/\text{cm}$. Historic EC results at BGW12 were anomalously elevated and in excess of 5000 $\mu\text{S}/\text{cm}$, however EC at BGW12 has been consistently declining and is currently approximately 3000 $\mu\text{S}/\text{cm}$. BGW38 and BGW50 also display a strong decrease in EC, and subsequent recovery to background levels, following the mid-2016 recharge event.

The EC results at the spring monitoring locations are considerably fresher than both the alluvial and hard rock aquifer water quality. This indicates that the springs are derived from seepage and surface expression of recent rainfall recharge and interflow within the soil profile rather than groundwater, as is discussed further in Section 4.5.12.4. Spring water EC ranges from 71 to 252 $\mu\text{S}/\text{cm}$, with an average of 150 $\mu\text{S}/\text{cm}$.

4.5.12.2 pH

Groundwater monitoring results for pH are presented on **Figure 33** to **Figure 35**. For reference pH from spring monitoring points are also provided on **Figure 36**. A statistical summary of pH results is provided on **Table 20**.

The majority of pH measurements from groundwater samples fall in the range 6.8 to 7.6. Groundwater pH results for Mine Site monitoring bores show the greatest range, from 5.2 to 8.9, with the alluvial bores showing the lowest range, from 5.6 to 7.1. Median pH values from all groundwater and spring samples were within a similar range, from 6.7 to 7.2.

Figure 33 Alluvial Monitoring Bore pH (January 2014 to August 2018)

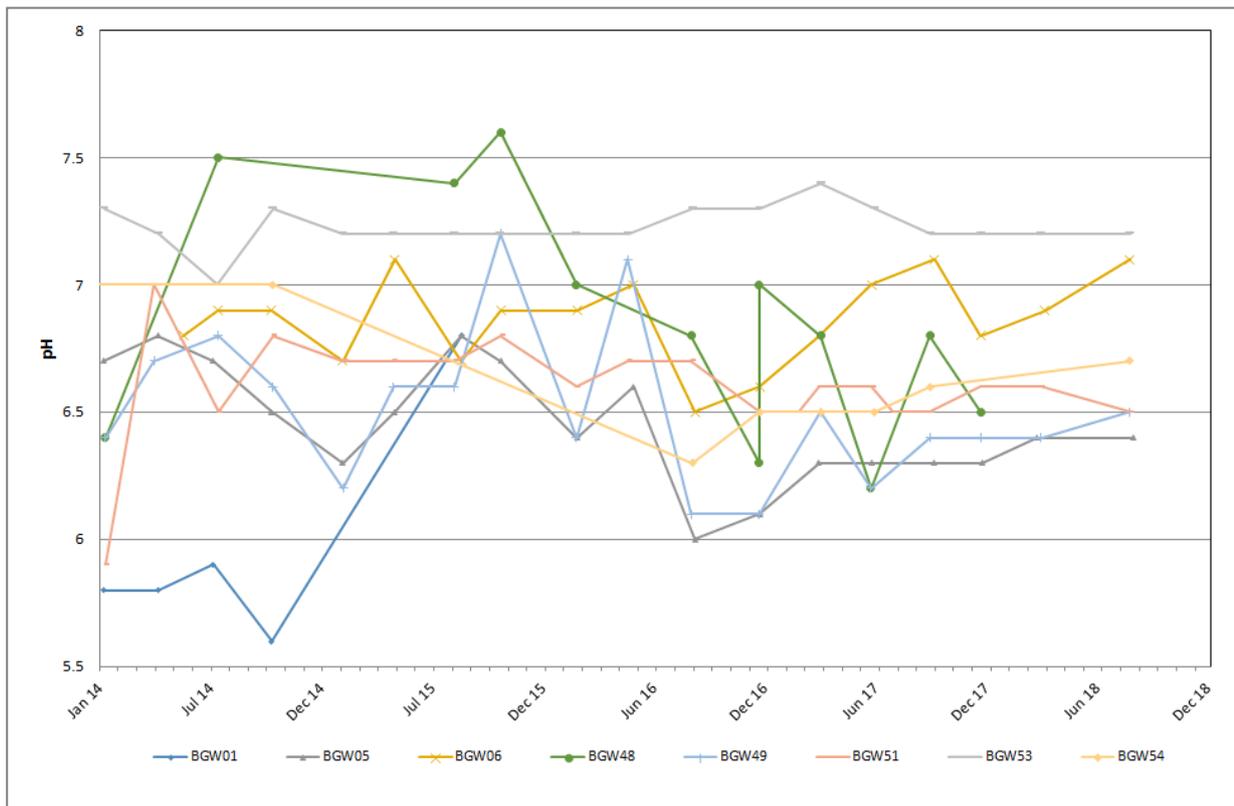


Figure 34 Regional Monitoring Bore pH (January 2014 to August 2018)

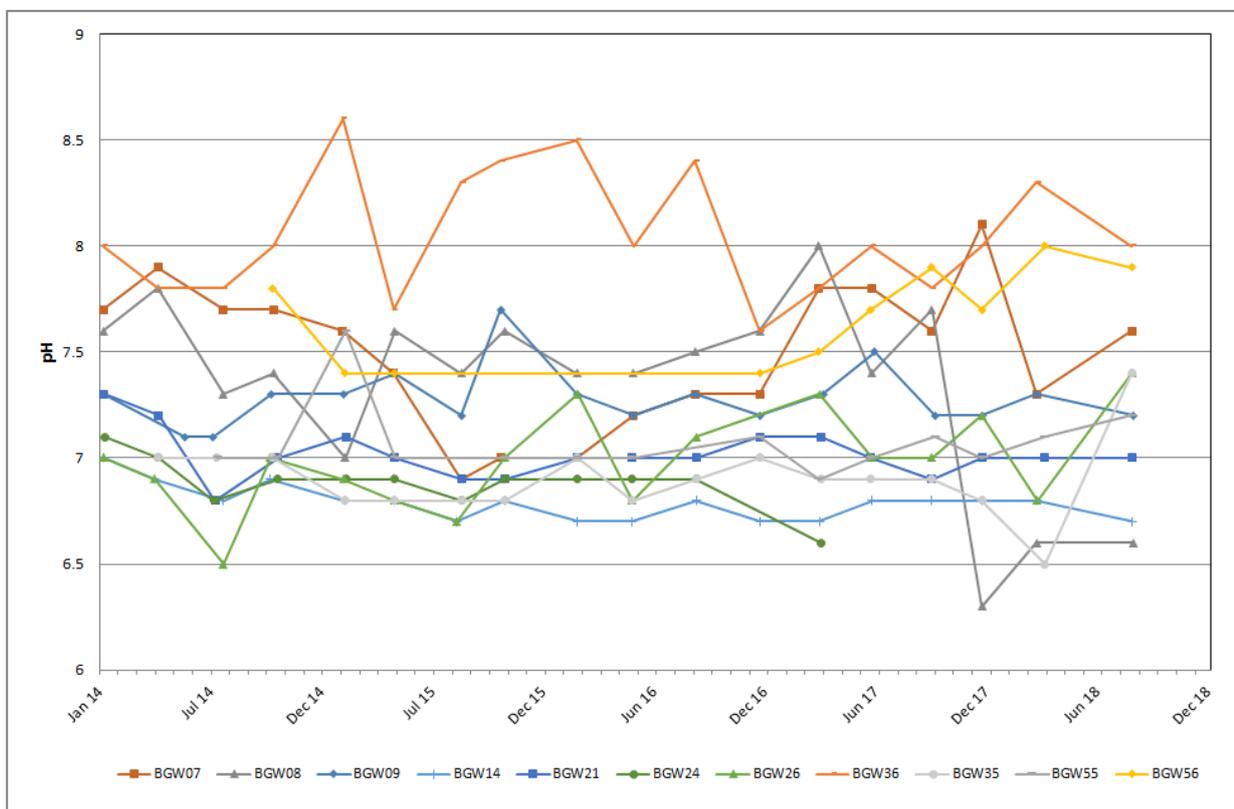


Figure 35a Mine Site Monitoring Bore pH (January 2014 to August 2018)

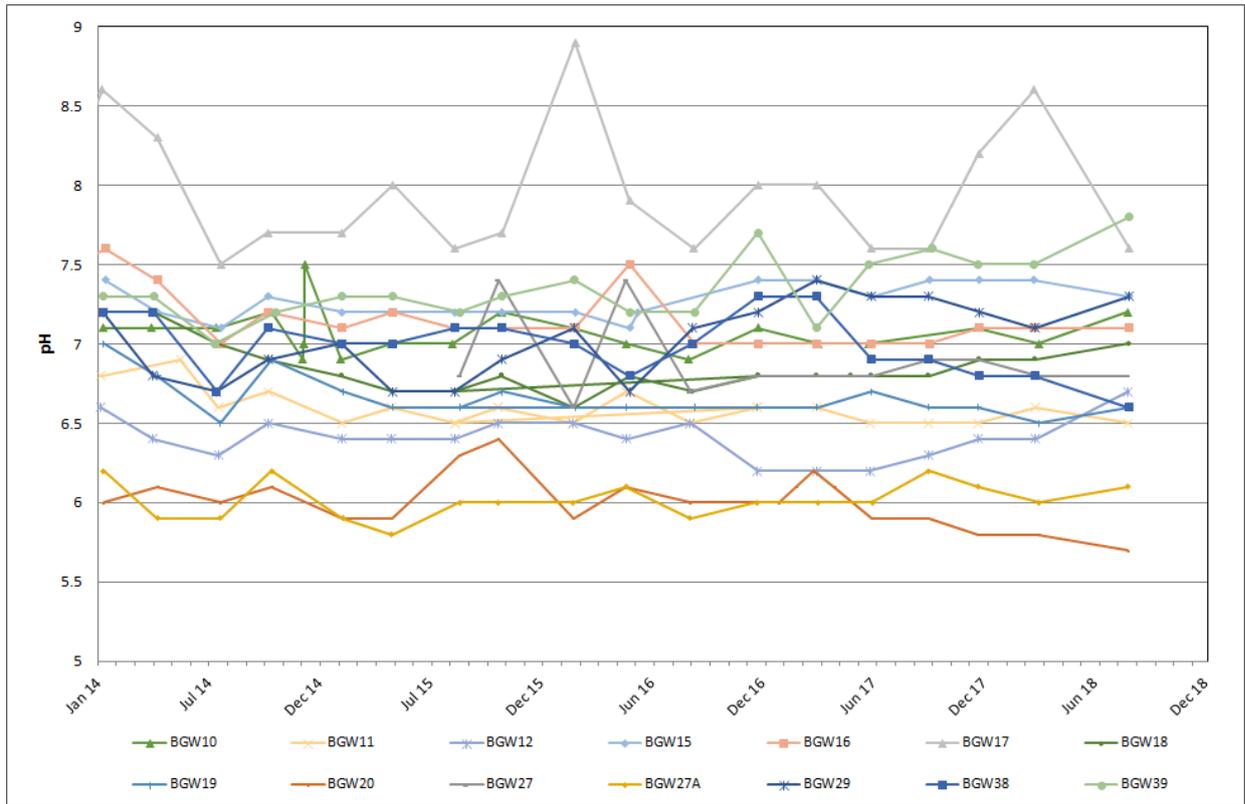


Figure 35b Mine Site Monitoring Bore pH (January 2014 to August 2018)

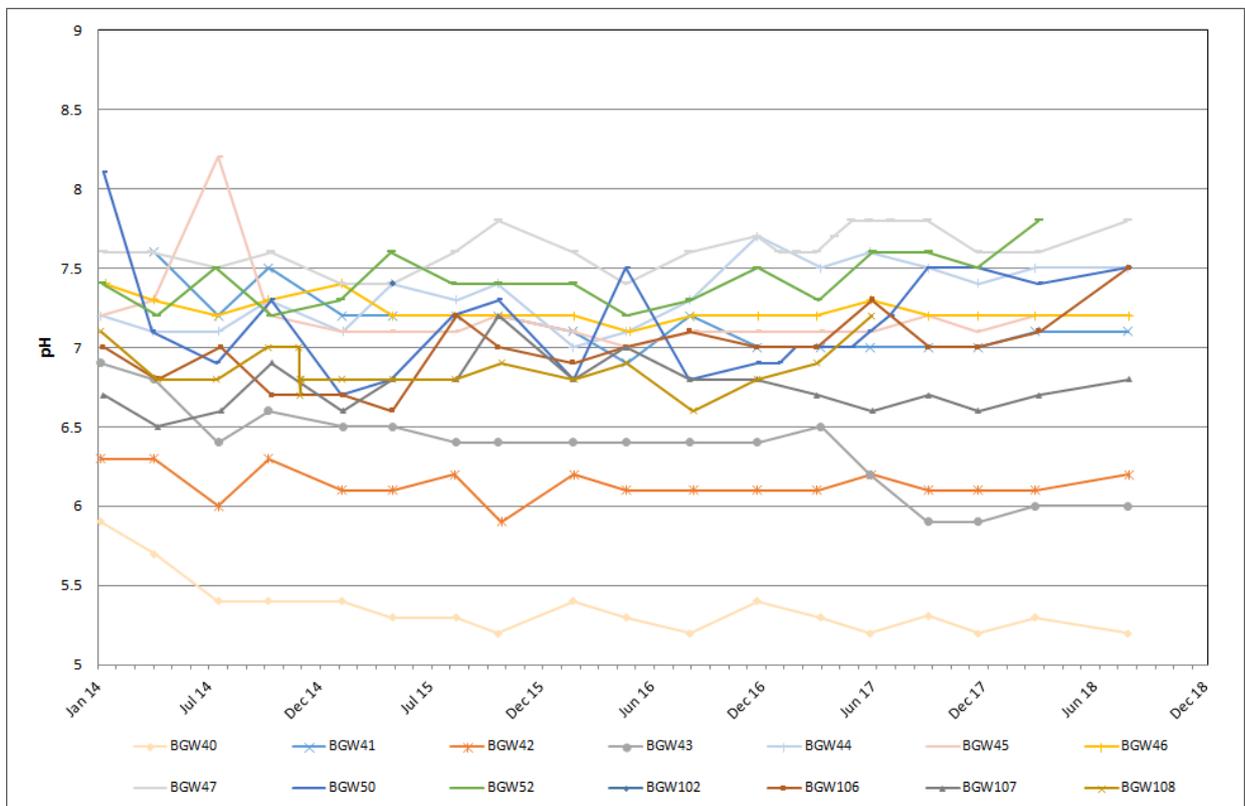


Figure 36 Spring pH (January 2014 to September 2016)

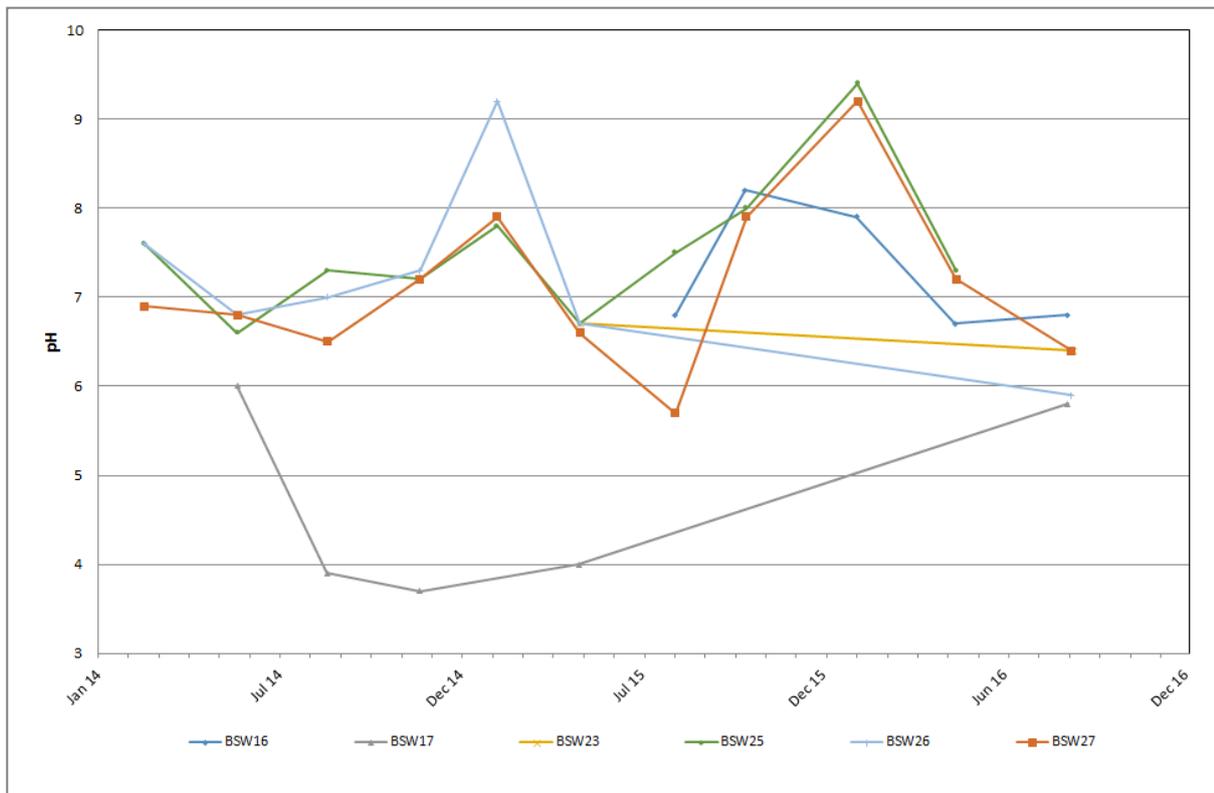


Table 20
pH Monitoring Summary


	Alluvium	Site	Regional	Springs
Count	123	518	187	44
Mean	6.7	6.9	7.2	6.8
Median	6.7	7.0	7.1	6.8
Min	5.6	5.2	6.3	3.7
Max	7.7	8.9	8.6	9.4
20 th Percentile	6.4	6.5	6.9	6.0
80 th Percentile	7.1	7.3	7.6	7.7

Individual groundwater monitoring locations show some variation in pH, however these variations are typically less than one pH unit. pH levels from the spring samples show the largest total range, from 3.7 to 9.4, and also the highest variability with individual samples varying by 2 to 3 pH units. The lowest spring pH is attributed to BSW17, excluding this site the other spring pH values range from 5.7 to 9.4. Rainfall is typically mildly acidic, with pH in the range of 5 to 6. The highly variable acidity observed in the spring samples is attributed to varying soil properties, with abundance of CO₂ resulting in more acidic groundwater and HCO₃ generating more alkaline groundwater.

4.5.12.3 Water Types

Major anion and cation concentrations from the water samples are presented on a Piper Diagram in **Figure 37**. The Piper Diagram (Piper, 1944) can be used to identify different water types, or hydrochemical facies.

Figure 37 Piper Diagram

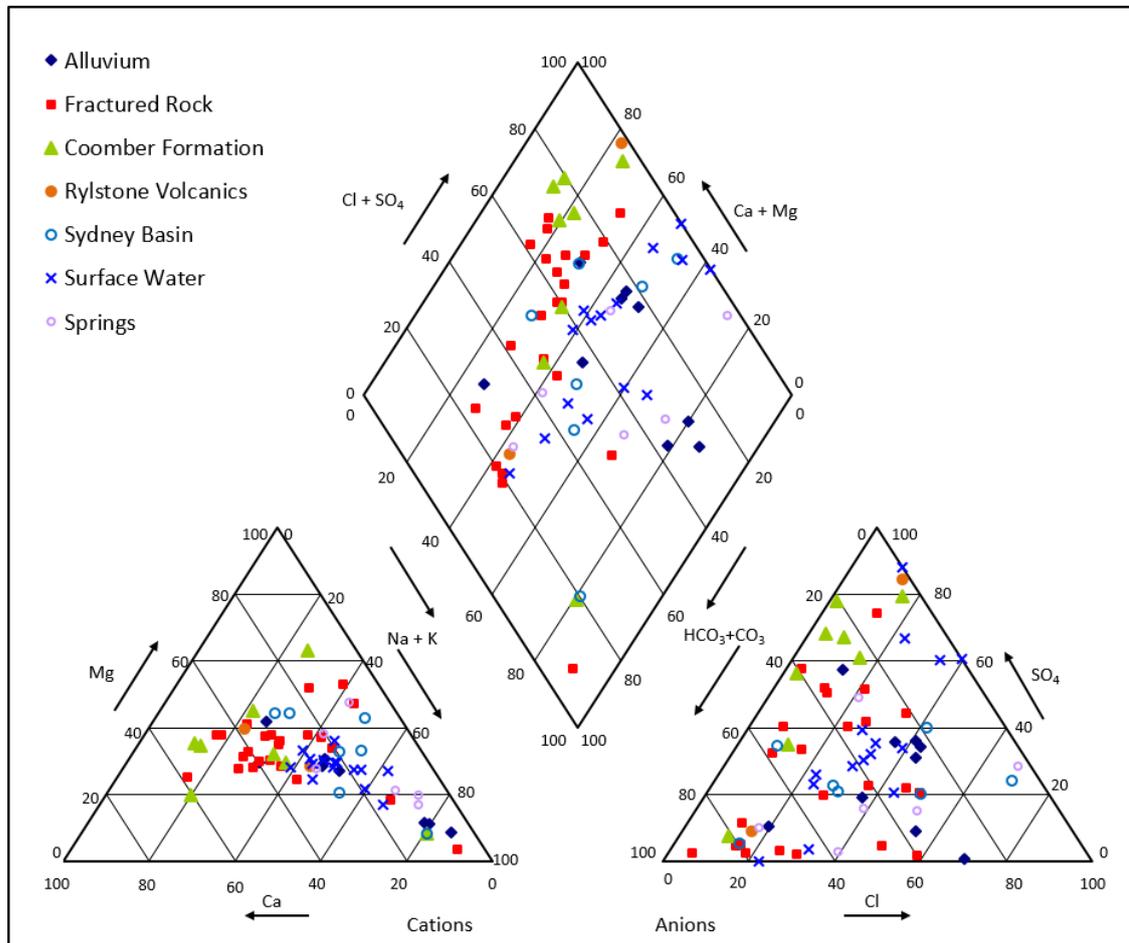

Normalised anion and cation concentrations (as milliequivalents per litre) are plotted in the corresponding ternary fields and are then projected into the rhomboid field to aid in the classification and comparison between water samples of different ionic compositions.

Given the extremely large water quality data base, it is not feasible to plot all individual samples. To aid in the identification different hydrochemical facies, the average ionic compositions from all sampling events have been applied for each monitoring location.

It is noted that the samples grouped as Coomber Formation, Rylstone Volcanics or Sydney Basin, typically correlates with the Mine Site monitoring bores where lithology is known. The Sydney Basin samples related to bore installed in either the Illawarra Coal Measures or Shoalhaven Group. Fractured rock monitoring bores are from the non-alluvial regional monitoring bores where detailed lithology is not known.

The dominant water types are summarised on **Table 21**. From **Table 21** and **Figure 37** there are a broad range of water types represented within the monitoring network, with no one sample group displaying distinct characteristics.

Table 21
Water Types

Sample Group	Cation Type	Anion Type
Alluvium	Typically no dominant cation. Three bores (BGW01, BGW03, and BGW06) plot as sodium plus potassium dominant.	Typically no dominant anion. BGW54 plots as bicarbonate dominant with BGW03 chloride dominant and BGW51 sulphate dominant.
Fractured Rock	No dominant cation, three bores (BGW8, BGW15 and BGW17) sodium plus potassium dominant.	Bicarbonate dominant to no dominant anion.
Coomber Formation	No dominant cation. Minor magnesium (BGW47) or sodium plus potassium dominant (BGW41).	Bicarbonate dominant to sulphate dominant.
Rylstone Volcanics	No dominant cations.	Bicarbonate to sulphate dominant.
Sydney Basin	No dominant cations.	Bicarbonate to chloride dominant.
Surface Water	Tending towards sodium plus potassium dominant.	No dominant anion to sulphate dominant.
Springs	Sodium plus potassium, or no dominant cation.	Bicarbonate dominant or no dominant anion.

In the cation field most of the hard rock aquifer samples (Fractured Rock, Coomber Formation, Rylstone Volcanics and Sydney Basin), all plot within a similar range and display a trend from no dominant cation through to sodium and potassium dominant, with those samples in the sodium plus potassium range representing more mature groundwaters. Groundwater typically undergoes a compositional change, moving from calcium dominant to sodium dominant as it matures while flowing through the aquifer. All of the other samples (Alluvium, Surface water, and Springs) also lie within this range.

Within the anion field there is generally a fairly even distribution throughout, with the exception of a general lack of any strongly chloride dominant samples. Within the hard rock aquifer system, the Coomber Formation, Rylstone Volcanics and Fractured Rock samples tend to be more bicarbonate to sulphate orientated, while the Sydney Basin samples trend from bicarbonate to chloride dominated. Surface water samples show a relatively narrow range of chloride (20-40%) but also show a distinct trend from bicarbonate dominant to sulphate dominant.

Elevated sulphate concentrations may result due to dissolution of naturally occurring gypsum in the soil profile or from sulphide minerals within the aquifers. Waste characterisation was undertaken of samples from the proposed open cut pit, comprising sandstone, crystal tuff, and volcanic breccia (GCA, 2020). The results of testing noted samples, particularly from the volcanics as being a source of sulphate and manganese.

The distribution of springs samples suggests more of a trend from bicarbonate to chloride dominance.

4.5.12.4 Major Hydrogeochemical Processes

Several factors control the development of groundwater chemistry. Key influences can be related to the physical situation of the aquifer (e.g. confined or unconfined, proximity to sources of recharge or evapotranspiration etc), formation mineralogy and climate. Gibbs (1970) correlated the relative dominance of major cations and anions against total dissolved solids (TDS) to illustrate the major natural mechanisms influencing groundwater chemistry, with the three major influences being either: rainfall dominance, resulting in recharge and dilution; rock weathering, resulting in ion exchange of sodium and chloride; and evaporative concentration.

Gibbs diagrams for cations (sodium, potassium and calcium) and anions (chloride and bicarbonate) are provided on **Figure 38** and **Figure 39** respectively. Similarly to the Piper Diagram (**Figure 37**), due to the very large data set, the average ionic compositions have been applied for each sampling location.

It is noted that since the anion diagram does not include sulphate, which is shown to be a significant constituent of groundwater (Section 4.5.12.3), less emphasis should be placed on the anion interpretation compared to the cations.

Figure 38 Gibbs Diagram – Na + K / Na + K + Ca


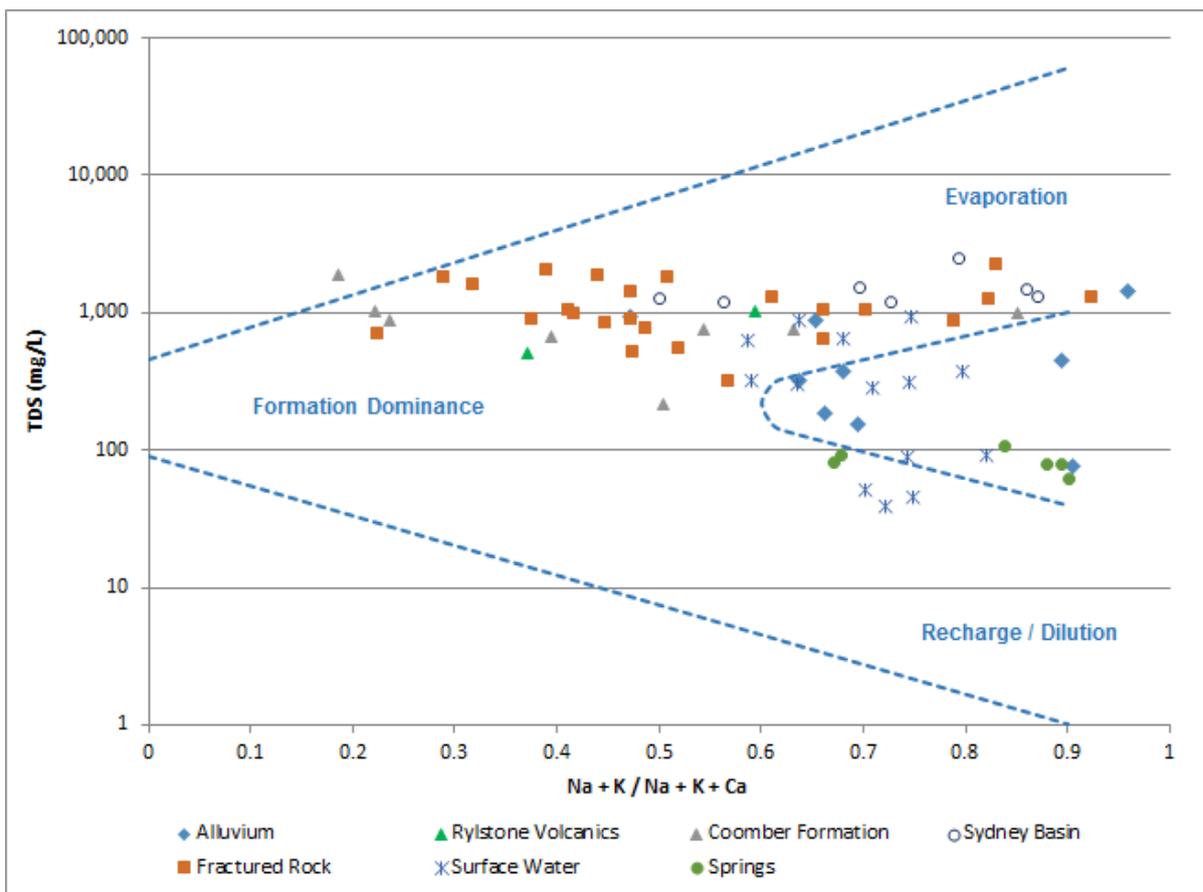


Figure 39 Gibbs Diagram – Cl / Cl + HCO₃

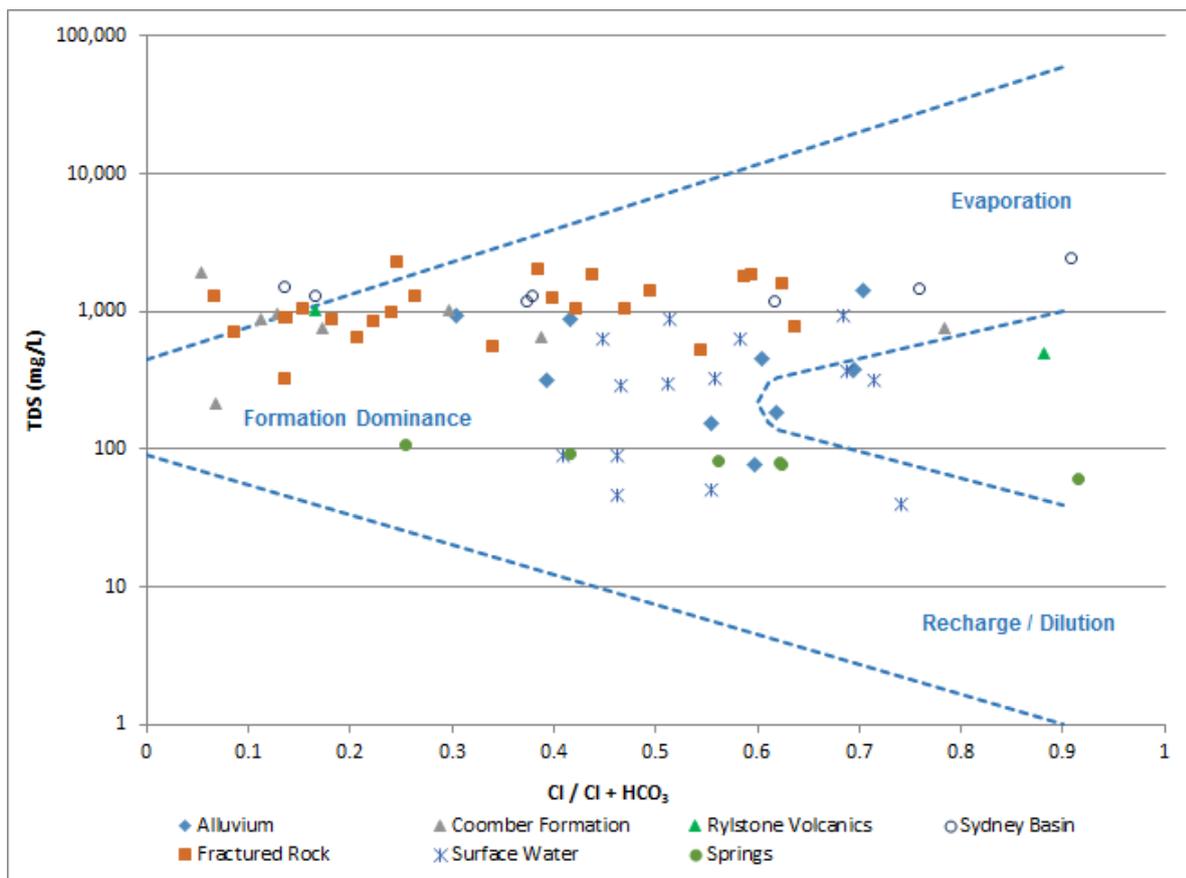

From Figure 38 and Figure 39 the following can be determined.

Groundwater

- The majority of groundwater monitoring locations show a formation influence on groundwater chemistry. However, a number of monitoring locations suggest an evaporative influence. In particular BGW03 and BGW06 (alluvial), BGW15, BGW17, and BGW31 (Fractured Rock), BGW41 (Coomber Formation), BGW07, BGW08 and BGW12 (Sydney Basin), suggest evaporative influences. This indicates that groundwater at these locations has received evaporatively enriched water from either a surface water source or shallow groundwater.
- A number of the alluvial monitoring locations (BGW05, BGW53 and BGW54) are formation dominant with mixing influences from recharge apparent at BGW48 and BGW49. BGW03 and BGW06 show evaporative influences, and BGW01 plots as strongly rainfall dominant. The formation influences may be indicative of the alluvial aquifer receiving through flow from the hardrock aquifers in those locations

Surface Water

- Several surface water monitoring locations (BSW07, BSW11, BSW12, BSW19, BSW21, and BSW22) are closely associated with formation dominant groundwater suggesting a significant groundwater contribution to surface water upstream of these monitoring locations. Five sites (BSW03, BSW05, BSW06, BSW08, and BSW15) plot as strongly influenced by rainfall. The remainder of the surface water monitoring locations plot closely to the rainfall dominance zone and suggest a

mixing of rainfall and groundwater influences. It is noted that two of the surface water monitoring locations (BSW07 and BSW11, correspond to adjacent alluvial monitoring location (BGW51 and BGW53 respectively), but are offset in the direction of dilution by rainfall.

- In addition, two monitoring locations (BSW13 and BSW20) display evaporative influences.

Springs

- None of the springs sampled display a strong correlation with formation groundwater, although BSW16 and BSW23 may be indicative of mixing of water sources. Rather, the results suggest a dominance of rainfall recharge influences and it is likely that these springs result from interflow through the soil profile as opposed to groundwater discharge from aquifers.

4.5.12.5 Water Quality Guidelines

The results of comprehensive hydrochemical analyses of water quality samples (**Annexure 6**) have been compared against relevant guideline values to identify any elements or physical parameters which may be of concern in terms of either an aquatic ecosystem toxicity or human health perspective. The relevant guidelines include the Australian and New Zealand Guidelines for Fresh and Marine Water Quality (ANZG, 2018), and the Australian Drinking Water Guidelines (ADWG, 2011) (the Drinking Water Guidelines).

Individual exceedances of the relevant guideline value for individual samples are highlighted in **Annexure 6**. For simplicity, only exceedances by mean constituent concentrations from all samples are discussed in the following sections. Guideline values calculated mean concentrations for all monitoring locations, and the identification of results where the calculated mean exceeds guideline values are summarised on **Table 22**.

ANZ Guidelines

The ANZ Guidelines provide guidelines for the protection of aquatic ecosystems. For this assessment, trigger values for physical and chemical stressors for slightly disturbed ecosystems - upland rivers (above 150 mAHD) have been applied, and for potentially toxic constituents, such as dissolved metals, the trigger values for 95% protection of freshwater aquatic ecosystems have been applied.

It is noted that due to the number of exceedances of the ANZ Guidelines within the baseline data, for operational purposes, it is recommended that site specific trigger values, reflecting the formation influences on groundwater chemistry, be developed using the methodology prescribed in the ANZ Guidelines.

Physical and Chemical Stressors

Concentrations of total nitrogen, total phosphorus, nitrates of nitrogen, and EC consistently exceed trigger values for slightly disturbed ecosystems - upland rivers. Key exceptions with regard to EC are for surface water samples from BSW03, BSW04, BSW05, BSW06, BSW08 and BSW15, where mean EC was below the 350 $\mu\text{S}/\text{cm}$ trigger value, as were groundwater samples from BGW01, BGW27A, BGW29, BGW48 and BGW49, and all of the spring samples.

Table 22
Comparison of Mean Concentrations with Guideline Values

Monitoring Location	Physical and Chemical Stressors						Toxicants									
	Electrical Conductivity @ 25°C µS/cm	pH Value pH Unit	Nitrate as N mg/L	Nitrite as N mg/L	Total Nitrogen as N mg/L	Total Phosphorus as P mg/L	Arsenic - Dissolved mg/L	Cadmium - Dissolved mg/L	Chromium - Dissolved mg/L	Copper - Dissolved mg/L	Lead - Dissolved mg/L	Lithium - Dissolved mg/L	Manganese - Dissolved mg/L	Nickel - Dissolved mg/L	Zinc - Dissolved mg/L	
ANZG	350	6.5-7.5	0.015	0.015	0.25	0.02	0.013	0.0002	0.001	0.0014	0.0034	0.0025	1.9	0.0011	0.008	
ADWG	-	6.5-8.51	50	-	-	-	0.01	0.002	0.05	2	0.01	-	0.5	0.02	-	
Alluvial Monitoring Bore																
BGW01	131	5.98	0.584		1.200	0.066				0.001		0.002	0.006	0.002	0.016	
BGW03	2320	7.18	0.040	0.050	1.150	0.050				0.002	0.003	0.704	0.314		0.018	
BGW05	638	6.45	0.093		0.345	0.052		0.0001		0.012		0.003	1.916	0.006	0.025	
BGW48	278	6.86	0.615	0.420	4.250	0.570	0.004	0.0004	0.001	0.015	0.004	0.004	0.356	0.003	0.022	
BGW49	328	6.51	0.548	0.017	1.824	0.807	0.020	0.0002		0.002	0.002	0.004	0.210	0.002	0.021	
BGW51	1281	6.60	0.106		0.578	0.642	0.002	0.0008		0.004	0.007	0.086	0.629	0.004	0.039	
BGW53	1283	7.23	3.407	0.020	4.006	0.110		0.0002		0.003		0.004	0.008	0.001	0.009	
BGW54	453	6.64	0.985	0.030	5.288	3.839	0.002			0.001		0.001	0.611	0.005	0.006	
Mine Site Monitoring Bore																
BGW102	1380	7.40			0.850	0.180	0.078	0.0003		0.013	0.014	0.360	2.847	0.003	0.126	
BGW106	1219	6.99	0.148	0.020	0.488	0.033	0.002	0.0002	0.001	0.003	0.003	0.166	0.851	0.004	0.150	
BGW107	1476	6.76	0.033	0.020	0.306	0.100	0.009			0.003	0.016	0.326	1.752	0.003	0.060	
BGW108	2363	6.86	0.125		0.607	0.217	0.290	0.0002		0.002	0.016	0.483	1.478	0.003	0.373	
BGW10	1349	7.06	0.164		0.883	0.045	0.015			0.002		0.073	0.326	0.002	0.008	
BGW11	1865	6.59	0.056	0.010	0.455	0.067	0.002			0.001		0.136	0.106	0.003	0.020	
BGW12	4364	6.41	0.576	0.059	1.679	0.189	0.001	0.0001		0.003		0.131	0.422	0.042	0.214	
BGW15	2933	7.26	0.333	0.043	0.536	0.158	0.001	0.0001		0.002	0.003	0.656	0.097	0.001	0.012	
	Indicates exceedance of ANZ Guideline trigger values						Indicates exceeds both ANZ Guideline and Drinking Water Guidelines					Indicates exceedance of Drinking Water Guidelines health based value				

Table 22 (Cont'd)
Comparison of Mean Concentrations with Guideline Values

Monitoring Location	Physical and Chemical Stressors						Toxicants									
	Electrical Conductivity @ 25°C µS/cm	pH Value pH Unit	Nitrate as N mg/L	Nitrite as N mg/L	Total Nitrogen as N mg/L	Total Phosphorus as P mg/L	Arsenic - Dissolved mg/L	Cadmium - Dissolved mg/L	Chromium - Dissolved mg/L	Copper - Dissolved mg/L	Lead - Dissolved mg/L	Lithium - Dissolved mg/L	Manganese - Dissolved mg/L	Nickel - Dissolved mg/L	Zinc - Dissolved mg/L	
ANZG	350	6.5-7.5	0.015	0.015	0.25	0.02	0.013	0.0002	0.001	0.0014	0.0034	0.0025	1.9	0.0011	0.008	
ADWG	-	6.5-8.51	50	-	-	-	0.01	0.002	0.05	2	0.01	-	0.5	0.02	-	
Mine Site Monitoring Bore (Cont'd)																
BGW16	1347	7.15	0.658	0.090	0.812	0.048				0.001		0.068	0.014		0.007	
BGW17	1624	7.94	0.778	0.090	0.971	0.082	0.002			0.002		0.214	0.079		0.007	
BGW18	1121	6.82	0.051		0.365	0.051	0.003			0.001		0.065	23.392	0.004	0.075	
BGW19	950	6.65	0.045	0.020	0.760	0.320	0.085	0.0002		0.002	0.002	0.065	3.895	0.001	0.015	
BGW20	774	6.13	0.237		0.631	0.135	0.033	0.0001		0.002	0.002	0.046	29.495	0.004	0.078	
BGW27	486	6.89	0.508		0.700	0.286	0.008						0.765	0.002	0.045	
BGW27A	294	6.02	0.062		0.350	0.456	0.053	0.0001		0.003			7.230	0.013	1.112	
BGW29	326	7.03	2.708	0.020	3.433	0.203		0.0002		0.002		0.002	0.024	0.002	0.031	
BGW38	2109	6.99	1.266	0.025	1.839	0.169	0.002	0.0001		0.002		0.073	2.076	0.003	0.039	
BGW39	1191	7.36	0.185	0.010	0.444	0.082				0.002		0.073	0.029	0.008	0.013	
BGW40	1043	5.40	0.059	0.052	0.789	0.035	0.005		0.002	0.003	0.002	0.050	8.918	0.250	0.885	
BGW41	1304	7.15	0.138		0.447	0.176	0.004			0.001		0.618	0.200	0.003	0.061	
BGW42	940	6.14	0.063	0.020	0.422	0.042	0.015	0.0001	0.001	0.002		0.047	1.243	0.040	0.056	
BGW43	1366	6.32	0.157	0.030	0.500	0.065	0.008	0.0002				0.138	2.639	0.022	0.165	
BGW44	1671	7.33	0.344	0.270	0.628	0.069	0.001			0.005		0.225	0.156	0.003	0.012	
BGW45	1923	7.20	0.043	0.020	0.667	0.041	0.002			0.002	0.005	0.408	0.258	0.002	0.017	
BGW46	1168	7.23	0.090	0.015	0.744	0.137	0.105				0.001	0.601	1.602	0.001	0.012	
BGW47	1007	7.63	0.302	0.028	0.457	0.069	0.002			0.002		0.078	0.135		0.009	
BGW50	1166	7.15	0.394	0.010	0.775	0.043	0.002			0.002		0.085	0.218	0.003	0.027	
BGW52	836	7.43	1.136		1.583	0.020	0.001	0.0001		0.003		0.014	0.004	0.002	0.030	
	Indicates exceedance of ANZ Guideline trigger values						Indicates exceeds both ANZ Guideline and Drinking Water Guidelines				Indicates exceedance of Drinking Water Guidelines health based value					

Table 22 (Cont'd)
Comparison of Mean Concentrations with Guideline Values

Monitoring Location	Physical and Chemical Stressors						Toxicants									
	Electrical Conductivity @ 25°C µS/cm	pH Value pH Unit	Nitrate as N mg/L	Nitrite as N mg/L	Total Nitrogen as N mg/L	Total Phosphorus as P mg/L	Arsenic - Dissolved mg/L	Cadmium - Dissolved mg/L	Chromium - Dissolved mg/L	Copper - Dissolved mg/L	Lead - Dissolved mg/L	Lithium - Dissolved mg/L	Manganese - Dissolved mg/L	Nickel - Dissolved mg/L	Zinc - Dissolved mg/L	
ANZG	350	6.5-7.5	0.015	0.015	0.25	0.02	0.013	0.0002	0.001	0.0014	0.0034	0.0025	1.9	0.0011	0.008	
ADWG	-	6.5-8.51	50	-	-	-	0.01	0.002	0.05	2	0.01	-	0.5	0.02	-	
Regional Monitoring Bore																
BGW06	708	6.84	0.105	0.020	2.239	0.248	0.002		0.001	0.006	0.003		0.223	0.004	0.021	
BGW07	2287	7.40	0.474	0.040	1.271	0.045				0.002		0.040	0.290	0.001	0.065	
BGW08	1665	7.38	0.110		1.425	0.239	0.005			0.005	0.005	0.287	0.098	0.003	0.037	
BGW09	1364	7.29	0.117	0.010	0.791	0.066	0.003			0.015		0.108	0.063	0.016	0.285	
BGW14	1786	6.78	0.150	0.020	0.483	0.100				0.002		0.234	0.029	0.003	0.017	
BGW21	2627	7.01	0.523	0.010	0.600	0.074	0.002			0.009	0.002	0.021	1.354	0.002	0.044	
BGW24	2068	6.88	2.842	0.064	3.524	0.052		0.0002		0.027			0.273	0.003	0.112	
BGW26	1563	6.98	0.377	0.015	0.594	0.065		0.0042		0.006		0.054	0.005	0.002	0.019	
BGW32	3095	7.10	5.530		6.000	0.090		0.0002		0.068	0.003		0.023	0.002	0.054	
BGW33	921	8.13	1.823		2.433	0.035	0.001		0.003	0.011	0.001	0.007	0.004	0.002	0.132	
BGW35	2415	6.90	5.080	0.033	5.947	0.028		0.0007		0.010	0.001	0.006	0.005	0.003	0.258	
BGW36	1186	8.06	0.136	0.010	0.446	0.046	0.001	0.0003		0.007	0.021	0.081	0.084	0.002	0.264	
BGW37	2703	6.93	10.878	0.020	11.925	0.030		0.0001		0.052		0.007	0.030	0.002	0.071	
BGW32	3095	7.10	5.530		6.000	0.090	0.020		0.0002		0.068	0.003	0.017	0.023	0.054	
BGW33	921	8.13	1.823		2.433	0.035	0.070	0.001		0.003	0.011	0.001	0.007	0.004	0.132	
BGW35	2893	6.90	5.549	0.038	6.727	0.037	0.055				0.012	0.001	0.011	0.006	0.128	
BGW36	1193	8.09	0.171		0.475	0.058	0.062	0.001	0.0003		0.008	0.029	0.081	0.038	0.263	
BGW37	2703	6.93	10.878	0.020	11.925	0.030	0.020		0.0001		0.042		0.007	0.026	0.071	
	Indicates exceedance of ANZ Guideline trigger values						Indicates exceeds both ANZ Guideline and Drinking Water Guidelines					Indicates exceedance of Drinking Water Guidelines health based value				

Table 22 (Cont'd)
Comparison of Mean Concentrations with Guideline Values

Monitoring Location	Physical and Chemical Stressors						Toxicants									
	Electrical Conductivity @ 25°C µS/cm	pH Value pH Unit	Nitrate as N mg/L	Nitrite as N mg/L	Total Nitrogen as N mg/L	Total Phosphorus as P mg/L	Arsenic - Dissolved mg/L	Cadmium - Dissolved mg/L	Chromium - Dissolved mg/L	Copper - Dissolved mg/L	Lead - Dissolved mg/L	Lithium - Dissolved mg/L	Manganese - Dissolved mg/L	Nickel - Dissolved mg/L	Zinc - Dissolved mg/L	
ANZG	350	6.5-7.5	0.015	0.015	0.25	0.02	0.013	0.0002	0.001	0.0014	0.0034	0.0025	1.9	0.0011	0.008	
ADWG	-	6.5-8.51	50	-	-	-	0.01	0.002	0.05	2	0.01	-	0.5	0.02	-	
Springs																
BSW16	164	7.28	0.153		0.400	0.063	0.028	0.001			0.002			0.050	0.018	
BSW17	157	4.68	0.720		2.280	0.063	0.110				0.007		0.001	0.032	0.054	
BSW23	107	6.55	0.020		2.200	0.285	0.030	0.002			0.005	0.008		0.423	0.023	
BSW25	174	7.54	0.105		0.970	0.078	0.078	0.003			0.002	0.002		0.077	0.013	
BSW26	136	7.21	0.213		2.329	0.083	0.048	0.004			0.001	0.001		0.074	0.016	
BSW27	134	7.12	0.379		3.736	0.200	0.235	0.007			0.003	0.003		0.073	0.019	
	Indicates exceedance of ANZ Guideline trigger values					Indicates exceeds both ANZ Guideline and Drinking Water Guidelines					Indicates exceedance of Drinking Water Guidelines health based value					

The consistency of these exceedances throughout groundwater and surface water samples would suggest that the elevated levels are a representation of the predominantly disturbed local catchment, and are likely to be anthropogenic in origin, resulting from land uses such as grazing, horticulture, and pasture improvement, which have disrupted the natural hydrologic regime.

Dissolved Metals

The trigger values for the dissolved metals; copper, lithium, nickel and zinc, are consistently exceeded by median concentrations in most groundwater samples, with regular exceedances of cadmium, lead and manganese in most groundwater groups (with the exception of cadmium and manganese at the springs).

Mean concentrations of chromium occasionally exceed trigger levels when the samples return positive values (greater than the limit of reporting). It is noted that positive results for chromium are only returned for groundwater samples.

Hardness Modified Trigger Values

The bio-availability of certain dissolved metals can be dependent on the hardness of the water due to complexation with carbonate ions. The ANZ Guidelines specify algorithms and factors for modifying trigger values according to water hardness for cadmium, chromium III, copper, lead, nickel, and zinc.

With the application of the calculated hardness modified trigger values, the frequency of trigger exceedances are significantly reduced for the groundwater samples. Given that the springs are typically soft (a maximum hardness of 42 mg/L as CaCO₃ at BSW25) the hardness modified trigger values have no influence. **Table 23** lists the comparison against hardness modified trigger levels for the alluvial, Mine Site and regional monitoring bores.

- Alluvial Monitoring Bores
 - BGW48 consistently exceeded the calculated hardness modified trigger values for cadmium, chromium, copper, lead, nickel and zinc.
 - Occasional exceedances of copper, nickel and zinc.
- Mine Site Monitoring Bores
 - 12 exceedances of zinc (BGW12, BGW18, BGW20, BGW27, BGW27A, BGW29, BGW40, BGW41, BGW43, BGW102, BGW106 and BGW108), and 2 exceedances of nickel (BGW27A and BGW40).
- Regional Monitoring Bores
 - Moderate exceedances of zinc (BGW06, BGW08, BGW09, BGW24, BGW33, BGW35 and BGW36), copper (BGW06, BGW09, BGW24, BGW32 and BGW37), and two exceedances of nickel (BGW06 and BGW09), and one of cadmium (BGW26).

Australian Drinking Water Guidelines

The Drinking Water Guidelines are not mandatory standards; however, they are intended to provide a framework for good management of drinking water supplies that, if implemented, would assure safety at point of use.

Table 23
Comparison Against Hardness Modified Trigger Values

Page 1 of 2

Monitoring Location	Hardness as CaCO ₃ (mg/L)	Cadmium - Dissolved mg/L	Chromium - Dissolved mg/L	Copper - Dissolved mg/L	Lead - Dissolved mg/L	Nickel - Dissolved mg/L	Zinc - Dissolved mg/L
Alluvial Monitoring Bore							
BGW01	10.8			0.0013		0.0020	0.0160
BGW03	115.7			0.0015	0.0030		0.0180
BGW05	156.0	0.0001		0.0119		0.0062	0.0248
BGW48	56.2	0.0004	0.0010	0.0150	0.0040	0.0033	0.0223
BGW49	73.8	0.0002		0.0020	0.0020	0.0024	0.0210
BGW51	468.1	0.0008		0.0043	0.0070	0.0036	0.0386
BGW53	352.6	0.0002		0.0026		0.0010	0.0092
BGW54	117.4			0.0010		0.0045	0.0060
Mine Site Monitoring Bore							
BGW102	625.2	0.0003		0.0125	0.0140	0.0030	0.1263
BGW106	405.1	0.0002	0.0010	0.0032	0.0025	0.0037	0.1503
BGW107	577.1			0.0025	0.0160	0.0030	0.0597
BGW108	992.2	0.0002		0.0023	0.0158	0.0025	0.3727
BGW10	542.0			0.0016		0.0016	0.0079
BGW11	657.2			0.0010		0.0026	0.0199
BGW12	977.4	0.0001		0.0029		0.0425	0.2143
BGW15	516.3	0.0001		0.0020	0.0030	0.0010	0.0118
BGW16	438.7			0.0010			0.0071
BGW17	98.5			0.0016			0.0070
BGW18	469.0			0.0010		0.0035	0.0749
BGW19	425.4	0.0002		0.0018	0.0020	0.0010	0.0149
BGW20	222.7	0.0001		0.0021	0.0020	0.0035	0.0777
BGW27	132.4					0.0018	0.0450
BGW27A	87.2	0.0001		0.0030		0.0125	1.1116
BGW29	103.3	0.0002		0.0023		0.0015	0.0310
BGW38	1215.7	0.0001		0.0018		0.0030	0.0387
BGW39	475.9			0.0021		0.0084	0.0127
BGW40	229.6		0.0020	0.0030	0.0020	0.2499	0.8845
BGW41	156.7			0.0013		0.0029	0.0608
BGW42	378.2	0.0001	0.0010	0.0017		0.0397	0.0564
BGW43	637.7	0.0002				0.0216	0.1652
BGW44	434.4				0.0052		0.0025
BGW45	463.6				0.0015	0.0050	0.0023
BGW46	474.5					0.0010	0.0010
BGW47	337.5				0.0018		
BGW50	432.2				0.0021		0.0033
BGW52	268.8		0.0001		0.0025		0.0020
Indicates exceedance of ANZ Guideline hardness modified trigger values							

**Table 23 (Cont'd)
Comparison Against Hardness Modified Trigger Values**

Monitoring Location	Hardness as CaCO ₃ (mg/L)	Cadmium - Dissolved mg/L	Chromium - Dissolved mg/L	Copper - Dissolved mg/L	Lead - Dissolved mg/L	Nickel - Dissolved mg/L	Zinc - Dissolved mg/L
Regional Monitoring Bore							
BGW06	69.1		0.0010	0.0058	0.0026	0.0043	0.0205
BGW07	602.1			0.0021		0.0014	0.0650
BGW08	195.4			0.0053	0.0048	0.0030	0.0370
BGW09	428.3			0.0152		0.0158	0.2847
BGW14	712.8			0.0017		0.0027	0.0174
BGW21	1256.4			0.0085	0.0020	0.0018	0.0444
BGW24	807.9	0.0002		0.0267		0.0026	0.1125
BGW26	559.6	0.0042		0.0058		0.0020	0.0189
BGW32	1062.5	0.0002		0.0675	0.0030	0.0020	0.0535
BGW33	311.6		0.0025	0.0107	0.0010	0.0020	0.1317
BGW35	1121.1	0.0007		0.0097	0.0010	0.0034	0.2583
BGW36	393.9	0.0003		0.0065	0.0211	0.0020	0.2644
BGW37	1169.4	0.0001		0.0523		0.0020	0.0705
Springs							
BSW16	36.9			0.0024		0.0034	0.0225
BSW17	13.9			0.0065		0.0030	0.0803
BSW23	29.4			0.0045	0.0080	0.0100	0.0225
BSW25	42.1			0.0019	0.0015		0.0126
BSW26	15.7			0.0013	0.0010		0.0150
BSW27	16.3			0.0027	0.0028		0.0235
Indicates exceedance of ANZ Guideline hardness modified trigger values							

The following exceedances of the health-based Drinking Water Guidelines are noted.

- Arsenic – exceedance in eight Mine Site monitoring bores and one alluvial monitoring bore.
- Cadmium – one exceedance in regional monitoring bore (BGW26).
- Lead – exceedance in three Mine Site monitoring bores and one regional monitoring bore.
- Manganese - numerous exceedances in Mine Site monitoring bores, with occasional exceedance from alluvial and regional monitoring. As noted in Section 4.5.12.3, GCA (2020) have identified the presence of rhodochrosite in ore and waste rock material as source of manganese.

4.6 GROUNDWATER SUPPLY POTENTIAL

In addition to mine dewatering (whether via in-pit sump pumping or perimeter dewatering bores), there is potential to access supplementary groundwater supply, if required, via the installation of additional groundwater bores within the Mine Site and surrounds. Previous investigations have identified that enhanced permeability and useful yields are possible from fractured rock aquifers in the vicinity of the major geological structures. In addition, deeper exploration drilling at the Mine Site and beyond 600 m in depth has confirmed large regional structures with significant porosity that have the potential to accommodate productive aquifers. It is understood that Bowdens Silver are not seeking to source water from groundwater bores for operational requirements (groundwater bores would be used for water supply during site establishment and construction). Water that cannot be sourced from Mine Site water storage, TSF return water or dewatering of the open cut pit would be supplied externally from either the Ulan Coal Mine and/or Moolarben Coal Mine via a dedicated water pipeline. The following overview of groundwater supply potential is theoretical and is provided for the purpose of highlighting the potential for alternative sources of water should they be required.

Any groundwater that may be sourced from bores within the Mine Site or nearby land would require additional investigation to identify sources of sufficient and sustained supply (not been carried out to date). Some indications of groundwater potential have been identified during exploration activities. However, it is worth noting that potential groundwater yields as indicated by airlift yields during exploratory drilling are not always representative of long-term sustainable yields, particularly in fractured rock aquifers. Fractured rock aquifers typically have significantly reduced storage capacity and recharge when compared to sedimentary aquifers with equivalent permeability. This characteristic is demonstrated by early exploration drilling and bore construction at the Mine Site, where two particularly high yielding exploration holes were converted to water supply bores. Exploration holes BGR166 and WAP015 recorded airlift yields as high as 15.0 L/s and 19.7 L/s, respectively. These holes were subsequently converted to test bores BGW108 and BGW10. Test pumping at BGW108 and BGW10 (refer Section 4.5.8) showed that the short-term sustainable pumping yields of the bores was approximately 5 L/s, substantially lower than the initial airlift yields. Notwithstanding, when managed accordingly, such bores can provide a useful groundwater resource and it is anticipated that BGW108 and BGW10 will provide the bulk of the initial water demand during construction.

Prospective groundwater supply bores located within the Mine Site may provide an opportunity for advanced mine dewatering (that is, supply of groundwater via groundwater bores consistent with the licenced entitlement held by Bowdens Silver to account for future dewatering requirements). However, advanced mine dewatering can only be relied upon until the open cut pit is developed. Ongoing supplementary water supplies may also be sourced from similar hydrogeological environments within land surrounding the Mine Site or at depth in deeply seated aquifers. Potential groundwater supply bores would need to be located away from the open cut pit area such that drawdown due to mine dewatering does not significantly reduce the available drawdown and supply capacity at the bore. The predicted drawdown due to mine dewatering is presented in Section 5.3.5.2. Water supply via these bores would be subject to licensing and assessment to ensure that the cumulative water use is not impacting water supply at registered groundwater bores (in accordance with the AIP).

The siting of any prospective water supply bores would be dependent on successful investigation results and would be subject to the appropriate water supply works and water use approvals administered under section 92 of the Water Management Act 2000.

5. GROUNDWATER MODELLING

5.1 CONCEPTUAL HYDROGEOLOGICAL MODEL

The Australian Groundwater Modelling Guidelines (Barnett et al. 2012) outline the requirements for developing a conceptual hydrogeological model. A conceptual hydrogeological model is a descriptive representation of a groundwater system that incorporates an interpretation of the geological and hydrological conditions and consolidates the current understanding of the key processes of the groundwater system, including the influence of stresses, and assists in the understanding of possible future changes.

Barnett et al. (2012) provide the following guiding principles for the conceptualisation of a groundwater system:

Guiding Principle 1

- The level of detail within the conceptual model should be chosen, based on the modelling objectives, the availability of quality data, knowledge of the groundwater system of interest, and its complexity.

Guiding Principle 2

- Alternative conceptual models should be considered to explore the significance of the uncertainty associated with different views of how the system operates.

Guiding Principle 3

- The conceptual model should be developed based on observation, measurement and interpretation wherever possible. Quality-assured data should be used to improve confidence in the conceptual model.

Guiding Principle 4

- The hydrogeological domain should be conceptualised to be large enough to cover the location of the key stresses on the groundwater system (both the current locations and those in the foreseeable future) and the area influenced or impacted by those stresses. It should also be large enough to adequately capture the processes controlling groundwater behaviour in the study area.

Guiding Principle 5

- There should be an ongoing process of refinement and feedback between conceptualisation, model design and model calibration to allow revisions and refinements to the conceptual model over time.

The conceptual hydrogeological model for the Project is described in the following sections. Key elements of the conceptual hydrogeological model in the vicinity of the Mine Site are presented on **Figure 37** for the pre-mining condition and **Figure 38** for the operational and post-mining conditions.

5.1.1 Hydrogeological Domain

The domain for the conceptual hydrogeological model has been designed such that the model boundary location does not constrain or influence the simulation of the dewatering of the open cut pit during mining operations and the associated propagation of the dewatering-induced

groundwater drawdown. Accordingly, the domain boundary is 12 km from the open cut pit at its closest point and approximately 28 km from the open cut pit at its most distant point (refer Section 5.3.2.2).

The domain boundaries comprise a combination of surface water catchment boundaries and drainage features, and groundwater source boundaries presented in relevant water sharing plans. It is noted that the domain does not extend to incorporate the nearest mining operations (refer Section 5.1.6.3) as this would result in a too large and unwieldy model.

The primary geological provinces within the hydrogeological domain are the Lachlan Fold Belt (or Orogen) and the Sydney Basin, with limited Quaternary alluvium associated with the major surface water drainage features. These geological provinces also host two distinct regional groundwater systems with groundwater flow and discharge in the Lachlan Fold Belt system occurring to the northwest, whilst regional groundwater flow and discharge in the Sydney Basin system occurring to the northeast.

Flow in the Lachlan Fold Belt lithologies is largely controlled by topography and surface water drainage, whilst flow within the Sydney Basin sedimentary lithologies is largely controlled by the bedding planes.

5.1.2 Main Hydrostratigraphic Units

The regional lithologies and stratigraphic units encountered at, or in the vicinity of the Mine Site (refer to Section 4.2.1) each have various aquifer potential and may include one or a number of the potential aquifer types identified in Section 4.5.1. For the purposes of groundwater investigations, it is useful to re-assign the conventional geological lithological or stratigraphic units into hydrostratigraphic units based on similar or grouped hydraulic properties.

Four main hydrostratigraphic units exist in the Mine Site in a regional context. For the purposes of a more detailed assessment of groundwater inflows during mining operations and the potential response in regional groundwater systems, the main hydrostratigraphic units can be further divided in sub-units as outlined below.

The key hydrostratigraphic units and sub-units adopted for this groundwater assessment are shown on **Figure 40** and include:

1. Alluvium
2. Sydney Basin sediments
 - a) Narrabeen Group
 - b) Illawarra Coal Measures
 - c) Shoalhaven Group
3. Rylstone Volcanics
 - a) Rhyolite Breccia
 - b) Welded Tuff / Ignimbrite
 - c) Crystal Tuff
4. Lachlan Fold Belt / Coomber Formation

Figure 40 Conceptual Hydrogeological Model – Pre-Mining (View looking north)


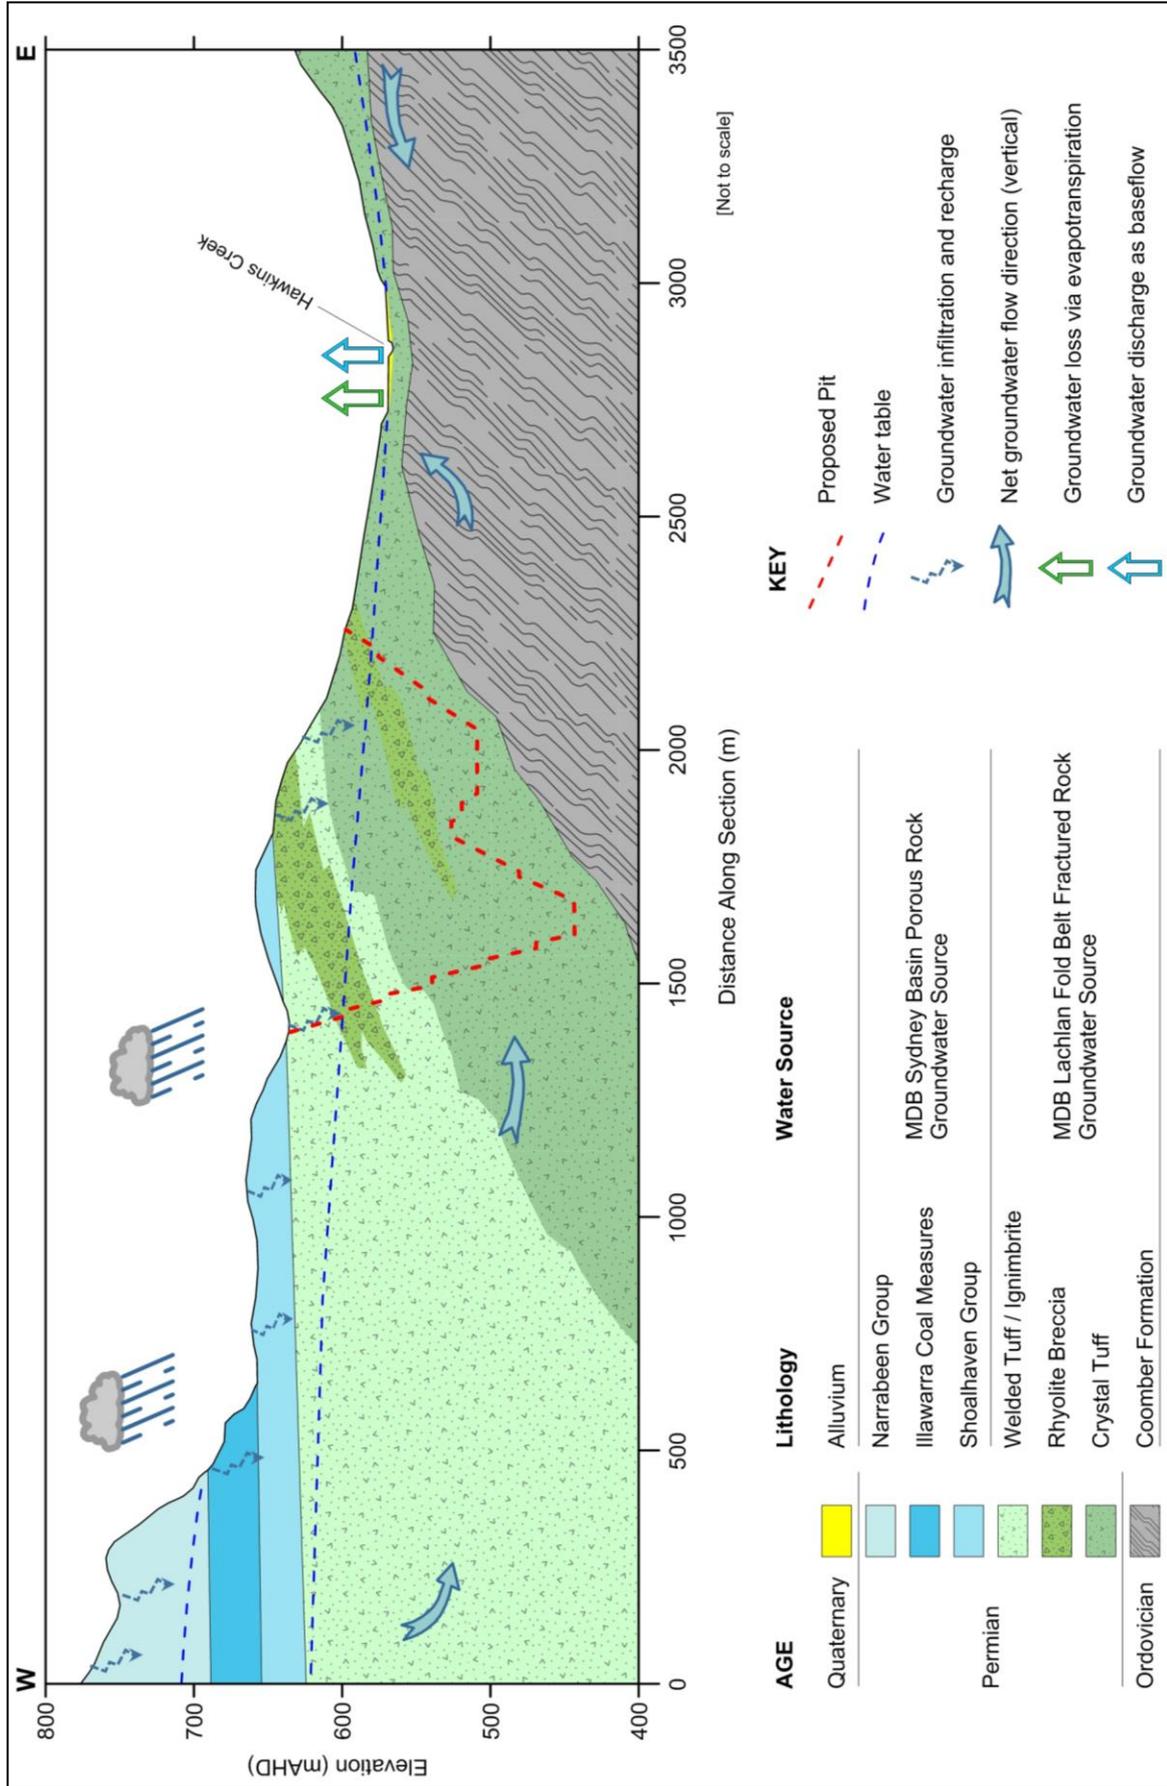


Figure 41 Conceptual Hydrogeological Model – During and Post Mining (View looking north)

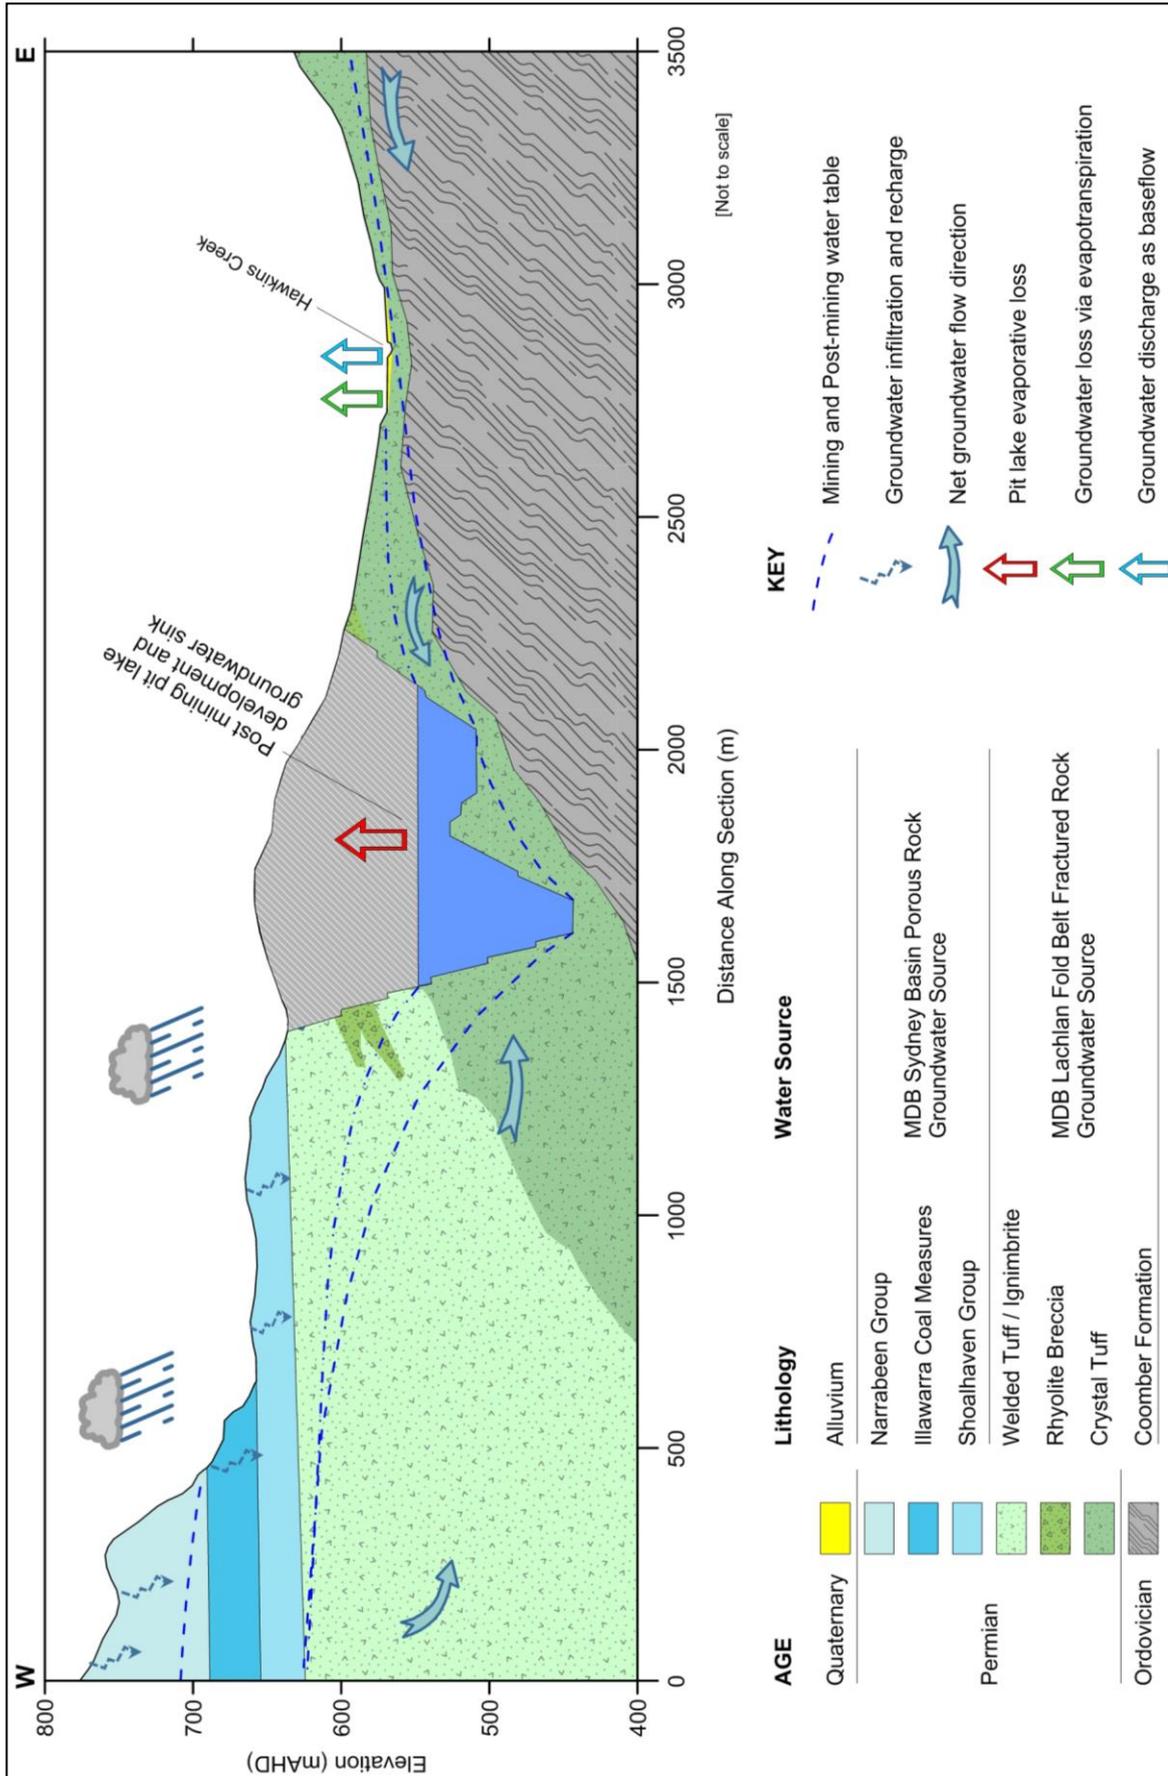

5.1.2.1 Alluvium

Alluvial deposits are mostly developed in association with Hawkins and Lawsons Creeks. Monitoring bore drilling along Hawkins Creek recorded alluvial thickness ranging from 4 to 6 m. The alluvial material encountered during this drilling was dominated by silty sandy gravel and clay sediments. Mapped alluvium in the vicinity of the Mine Site on **Figure 11** is limited to Hawkins and Lawsons Creeks upstream from the Mine Site boundary, however, a veneer of alluvium exists within the Mine Site boundary associated with the Hawkins Creek floodplain.

This hydrostratigraphic unit has moderate potential for local water supply and is utilised for domestic and stock watering purposes.

5.1.2.2 Sydney Basin Sediments

The Sydney Basin sediments contain a number of significant sandstone units. Within the Illawarra Coal Measures, the coal seams themselves are typically the main aquifer unit due to the development of cleats within the coal seams. Only limited primary porosity and permeability is likely to remain within the Sydney Basin sediments with original interstitial pore spaces being largely infilled by carbonate and silicate crystallisation during diagenesis. Groundwater flow is typically dominated by fracture flows, with some flow through relict primary porosity. Regional flow is largely sub-horizontal, controlled by bedding planes and cleats, with stratification and low permeability layers acting to impede vertical groundwater flow.

The Shoalhaven Group is typically regarded as being of low permeability and may act as an aquitard separating groundwater flow in the Sydney Basin sediments from those in underlying formations.

No permeability testing has been undertaken locally for the Sydney Basin sediments, however, Bish (1999) suggested that the bulk permeability of the Bankswall Sandstone of the Narrabeen Group could be as high as 0.9 m/d. Other literature values suggest representative permeabilities ranging from 1×10^{-4} to 1×10^{-1} m/d for the Narrabeen Group and 1×10^{-3} to 1×10^{-2} m/d for the Illawarra Coal Measures.

5.1.2.3 Rylstone Volcanics

Groundwater flow within the Rylstone Volcanics is dominated by fracture flow, however high fracture density and sub-orthogonal fracturing within the orebody means that on a meso-scale, groundwater flow behaves in a pseudo-radial manner, similar to a porous aquifer. Given the dominance of fracture flow, the horizontal to vertical flow anisotropy is not as great as that assumed for the Sydney Basin sediments.

Within the Rylstone Volcanics hydrostratigraphic unit, the individual sub-units display differing hydraulic properties. The welded tuff / ignimbrite unit typically displays lower primary porosity and permeability. From **Figure 22**, there does not appear to be a significant distinction in porosity between the volcanic units. Given that groundwater flow within the volcanic units is predominantly fracture-controlled, the minor differences in primary porosity between the volcanic units are unlikely to cause significant differences in dewatering and drawdown impacts within the volcanic units.

Permeability testing suggests representative hydraulic conductivity values range from 0.01 to 0.1 m/d.

5.1.2.4 Lachlan Fold Belt / Coomber Formation

The Coomber Formation is considered to be the hydrogeological basement for the groundwater systems in which the Mine Site is situated. However, this unit still has potential to have reasonably high permeability in the vicinity of major structures.

Regionally the formations of the Lachlan Foldbelt are highly structurally deformed and comprise meta-sedimentary and meta-volcaniclastic lithologies with minor primary porosity. The bedding orientation of this unit is variable, with bedding typically varying from moderately dipping to steeply dipping. Where this unit outcrops, to the west and south of the Mine Site, there is a prevailing cleavage orientation trending northwest-southeast, to north-south, consistent with the prevailing structural orientation. Cleavage planes dip variably to the east and west. As groundwater flow in this unit will be controlled by fracture flow there is likely to be a preferred flow direction consistent with cleavage and fracturing. Shallower groundwater flow within the weathered zones of this unit (typically in the upper 20-30 m) will be more topographically controlled.

Permeability testing suggests that representative hydraulic conductivity values for this unit range from 0.001 to 6.5 m/d, with the higher values being obtained from shallow weathered material in the vicinity of one of the major structures (BGW27A). Hydraulic conductivity determined from the pump testing at BGW10 was of the order of 0.08 m/d.

Representative hydraulic parameters for these units are presented in **Table 24**.

Table 24
Representative Hydraulic Parameters

Unit	Indicative Hydraulic Conductivity (m/d)	Kv / Kh Ratio	Indicative Specific Storage m ⁻¹	Indicative Specific Yield
Alluvium	1 to 10	0.1	-	0.2
Narrabeen Group	0.15	0.1	5.0x10 ⁻⁵	0.05
Illawarra Coal Measures	0.15	0.1	5.0x10 ⁻⁵	0.05
Shoalhaven Group	0.05	0.1	2.0x10 ⁻⁵	0.05
Rhyolite Breccia	0.01 to 0.1	0.5	5.0x10 ⁻⁵	0.02 to 0.05
Welded Tuff / Ignimbrite	0.05	0.5	1.0x10 ⁻⁵	0.02 to 0.05
Crystal Tuff	0.10	0.5	5.0x10 ⁻⁵	0.02 to 0.05
Ordovician Basement	0.001 to 1 (up to 10 in shallow, weathered zones)	0.5	2.0x10 ⁻⁵	0.01 (up to 0.05 in shallow, weathered zones)

5.1.3 Local Influence of Major Structures

Pump test data from BGW10 and BGW108 suggest that the two major sub north-south trending structures in the vicinity of the orebody act to inhibit but not completely prevent groundwater flow, while drilling results suggest that relatively high groundwater yields can be obtained in the vicinity of the structures.

These major structures have, therefore, been conceptualised as acting to inhibit groundwater flow across the structure while enhancing groundwater flow parallel to strike in the vicinity of the structure, both laterally and vertically.

5.1.4 Groundwater Recharge

Groundwater recharge will be dominated by infiltration of rainfall runoff and ephemeral streamflow on outcropping and sub-cropping hard rock lithologies and regolith, and directly onto the alluvium. A small component of vertical leakage is also likely from the Sydney Basin sediments to underlying formations.

The major drainage features, such as Hawkins and Lawsons Creeks, are likely to alternate between being zones of groundwater recharge and groundwater discharge, depending on streamflow conditions and topography.

5.1.5 Groundwater Discharge

Groundwater discharge will occur locally in lower lying areas to the alluvium aquifers, drainage features (periodically), and via evapotranspiration from riparian vegetation and deep-rooted terrestrial vegetation. Regionally, groundwater discharge (throughflow) will be to the northwest in the Coomber Formation and wider Lachlan Fold Belt. Within the Sydney Basin sediments, regional groundwater discharge will be to the northeast, to the drainage features, the Totnes and Barigan Valleys, as well as the Bylong Valley, with minor vertical leakage to underlying formations.

Groundwater abstraction by other groundwater users is also considered a mechanism of groundwater discharge.

5.1.6 Potential Impacts

Potential groundwater related impacts arising from the Project relate primarily to issues of water level and water quality.

5.1.6.1 Water Level

Water level drawdown resulting from dewatering of the open cut pit has the potential to:

- reduce groundwater availability to GDEs and other sensitive environmental receptors (springs, creeks etc);

- reduce groundwater availability to other groundwater users; and
- modify the long-term availability of groundwater from an aquifer.

There is also potential for groundwater mounding beneath and down-gradient of the TSF.

5.1.6.2 Water Quality

Potential groundwater quality impacts include:

- Acidification of groundwater and mobilisation of heavy metals due to exposure and oxidisation of potentially acid forming materials associated with groundwater drawdown.
- Salinification of the final void pit lake.
- Seepage from the TSF and/or waste rock emplacement (WRE).
- Deterioration of the groundwater quality leading to a reduction in the beneficial uses of groundwater.

5.1.6.3 Potential Cumulative Impacts

Mine dewatering has potential to result in cumulative impacts associated with groundwater abstraction by other groundwater users within the model domain. Known groundwater users, identified in Sections 4.5.2 and 4.5.3, have been incorporated into the numerical hydrogeological model.

The potential for cumulative impacts with other significant mining operations has also been considered. The other mining operations in the region are summarised on **Table 25**, however, it is noted that none of these operations fall within the study area or hydrogeological model domain.

Table 25
Other Mining Operations

Mine	Approximate Distance from Bowdens Silver Project	Description
Wilpinjong	32 km to the north	Open cut coal mine.
Moolarben	38 km to the north	Open cut and underground coal mine.
Ulan	44 km to the north	Open cut and underground coal mine.

5.1.7 Groundwater Dependent Ecosystems

No high priority GDEs have been identified within the conceptual hydrogeological model domain.

Potential impacts on other GDEs (Section 4.5.4.3) are assessed as a result of predicted groundwater drawdown and reduced baseflow contributions to stream discharge.

5.2 MINE INFRASTRUCTURE

5.2.1 Mine Schedule

Mining operations at the Project are planned to be undertaken over a 15.5 year mine life, with the annual development of the open cut pit shown on **Figure 42**.

Each open cut pit would be progressed in 5m bench intervals, with an annual average processing throughput of 2 million tonnes (Mt) and total annual mining material movement of typically between 5 Mtpa and 6 Mtpa.

A maximum open cut pit depth at 456 m AHD would be reached in Year 9. The western pit would then be developed to a depth of 460 m AHD.

5.2.2 Waste Rock Emplacement

The WRE would be progressively developed in stages (cells) to encapsulate potentially acid forming (PAF) waste rock material. Each cell of the WRE would be lined with a 1.5mm HDPE liner that would be protected by geofabric and a cushion layer of crushed rock (Advisian, 2020a).

Cell development would include the construction of intercell embankments that would, in conjunction with the lower perimeter embankment, enable the collection, storage and management of the leachate generated by the PAF waste rock material. Leachate intercepted by the 1.5 mm HDPE liner would flow via gravity to the point where the intercell embankment joins the lower embankment and be directed via underdrainage infrastructure to the Leachate Management Dam from where it would be returned to the processing plant for use.

Progressive rehabilitation of completed WRE cells would be undertaken and this would include a low permeability Geosynthetic clay liner overlain by a store and release cover (Advisian, 2020b).

As the lined WRE would not have any interaction with groundwater, it is not considered further in this assessment.

5.2.3 Tailing Storage Facility

The proposed TSF for the Project would be constructed in three stages, with an initial embankment developed for Stage 1, and successive embankment lifts for Stages 2 and 3. The TSF design is for a down-valley discharge style of tailings deposition with deposited tailings impounded against a down-stream embankment. The location of the TSF is shown in **Figure 1**.

The tailings slurry would be pumped from the processing plant via a pipeline to one of three discharge points and would comprise approximately 56% solids, with an average daily discharge of decant water to the TSF of 4 302 m³/day. Decant water would be reclaimed from a decant pond located at the upstream face of the TSF embankment and returned to the processing plant.

Seepage control measures would include grouting of the rock foundations beneath the TSF embankment, compacted clay lining of the tailings impoundment area and partial lining of the decant pond area. The TSF embankment would be constructed using a zoned rockfill embankment with a low permeability bituminous geomembrane liner on the upstream face. The grout curtain beneath the TSF embankment would be installed to depth of approximately 40 m with primary, secondary and possibly tertiary grouting to achieve a permeability of around 10^{-7} m/sec (8.64×10^{-3} m/d).

A toe drain and a seepage collection drain would be installed to collect any seepage from the TSF (including natural infiltration higher in the catchment) and runoff from the downstream face of the TSF embankment. This would then be pumped back to the TSF.

Details of the TSF design and investigations are provided in the TSF Preliminary Design Report (ATC Williams, 2020a).

Tailings slurry and decant water quality is expected to be of neutral pH (pH 7-8). Electrical conductivity would be commensurate with process water supply. Minor manganese concentrations in the order of 10 to 30 mg/L above the process water quality are anticipated.

The results of laboratory testing of tailings solids samples indicate that the tailings are classified as PAF due to the presence of trace and accessory sulphide minerals and the absence of reactive carbonate materials.

Total and weak acid dissociable cyanide concentrations within the decant pond are expected to be well below the 50 mg/L guideline value generally accepted for the protection of wildlife (DRET, 2008).

Plans showing the TSF layout, surface elevation, tailings impoundment area and decant pond for each stage are provided in **Annexure 7**. Predicted seepage rates for each stage of the TSF development for a nominal tailings thickness of 20 m and compacted clay liner of 0.45m thickness, are estimated at 1.56×10^{-8} m³/s/m² (1.35×10^{-3} m³/d/m²) (ATC Williams, 2020a).

It is noted that the anticipated seepage meets the NSW Environment Protection Authority (EPA) guideline seepage rate whereby seepage rates must be equivalent to or less than that transmitted by a 1 m thick clay liner with a permeability of 1×10^{-9} m/s.

5.3 GROUNDWATER MODELLING

5.3.1 Model Objective and Class

A numerical groundwater model is a computer model of a groundwater flow system that is used to simulate and predict groundwater flow. A numerical groundwater model has been developed to assess groundwater inflow to the open cut mining operations and aid in the assessment of potential groundwater related impacts from the Project, such as groundwater level drawdown due to mine dewatering and groundwater mounding beneath the TSF.

The objectives for the numerical groundwater model are as follows:

- Calculate drawdown in the vicinity of the Mine Site due to the Project, including at any existing groundwater works or GDEs in the area of potential impact.
- Calculate the volumetric take of groundwater from the open cut pit for dewatering purposes due to the Project.

- Calculate the incidental volumetric take from surface watercourses due to baseflow reduction, in particular Hawkins and Lawsons Creeks, due to the Proposal.

In accordance with the Australian Groundwater Modelling Guidelines, the intended model confidence class is Class 2 – Impact Assessment.

5.3.2 Model Build

5.3.2.1 Selection of Numerical Code

A numerical groundwater model was prepared using the United States Geological Survey (USGS) modelling code, MODFLOW which is an industry standard groundwater modelling code. The variant of MODFLOW used in this assessment was MODFLOW-USG and the model was executed in the saturated flow mode. The input for MODFLOW, as well as output files from MODFLOW were processed using the Groundwater Vistas Graphical User Interface (GUI) Version 7.23 Build 39.

5.3.2.2 Model Domain

Figure 41 presents the extent of the model domain. The spatial extent encompassing the modelled area is 43.5km east to west by 44km north to south, and based on Map Grid of Australia 1994, Zone 55. The areal extent of the modelled area is as follows:


- the northern and north-eastern boundaries are the upper catchments of the Bylong Valley, including Peters Creek, Barigan Creek and Burrumbelong Creek;
- the eastern boundary is the Growee River;
- the south-eastern boundary is Coxs Creek and the Cudgegong River/Rylstone Dam;
- the southern and southwestern boundary is the Cudgegong River/Lake Windamere;
- the western boundary transects a series of east to west flowing creeks, including Lawsons Creek, Buckaroo Creek and Pipeclay Creek; and,
- the northern and north-west boundaries of the model are Cooyal Creek.

5.3.2.3 Model Grid

The model grid comprises cell sizes ranging from 31.25 m to 250 m, with the finer resolution grid cell (31.25 m) being used in the vicinity of the open cut pit. The origin point (0, 0) for the model grid was easting 749 000 m and northing 6 364 000 m, based on Map Grid of Australia 1994, Zone 55.

The total number of cells, across 8 model layers (vertical) is 460 512, of which 364 072 cells are active. Cells outside of the area of interest (Inactive Cells on **Figure 43**) are made inactive to reduce unnecessary computational power.

Figure 43 Numerical Hydrogeological Model Domain

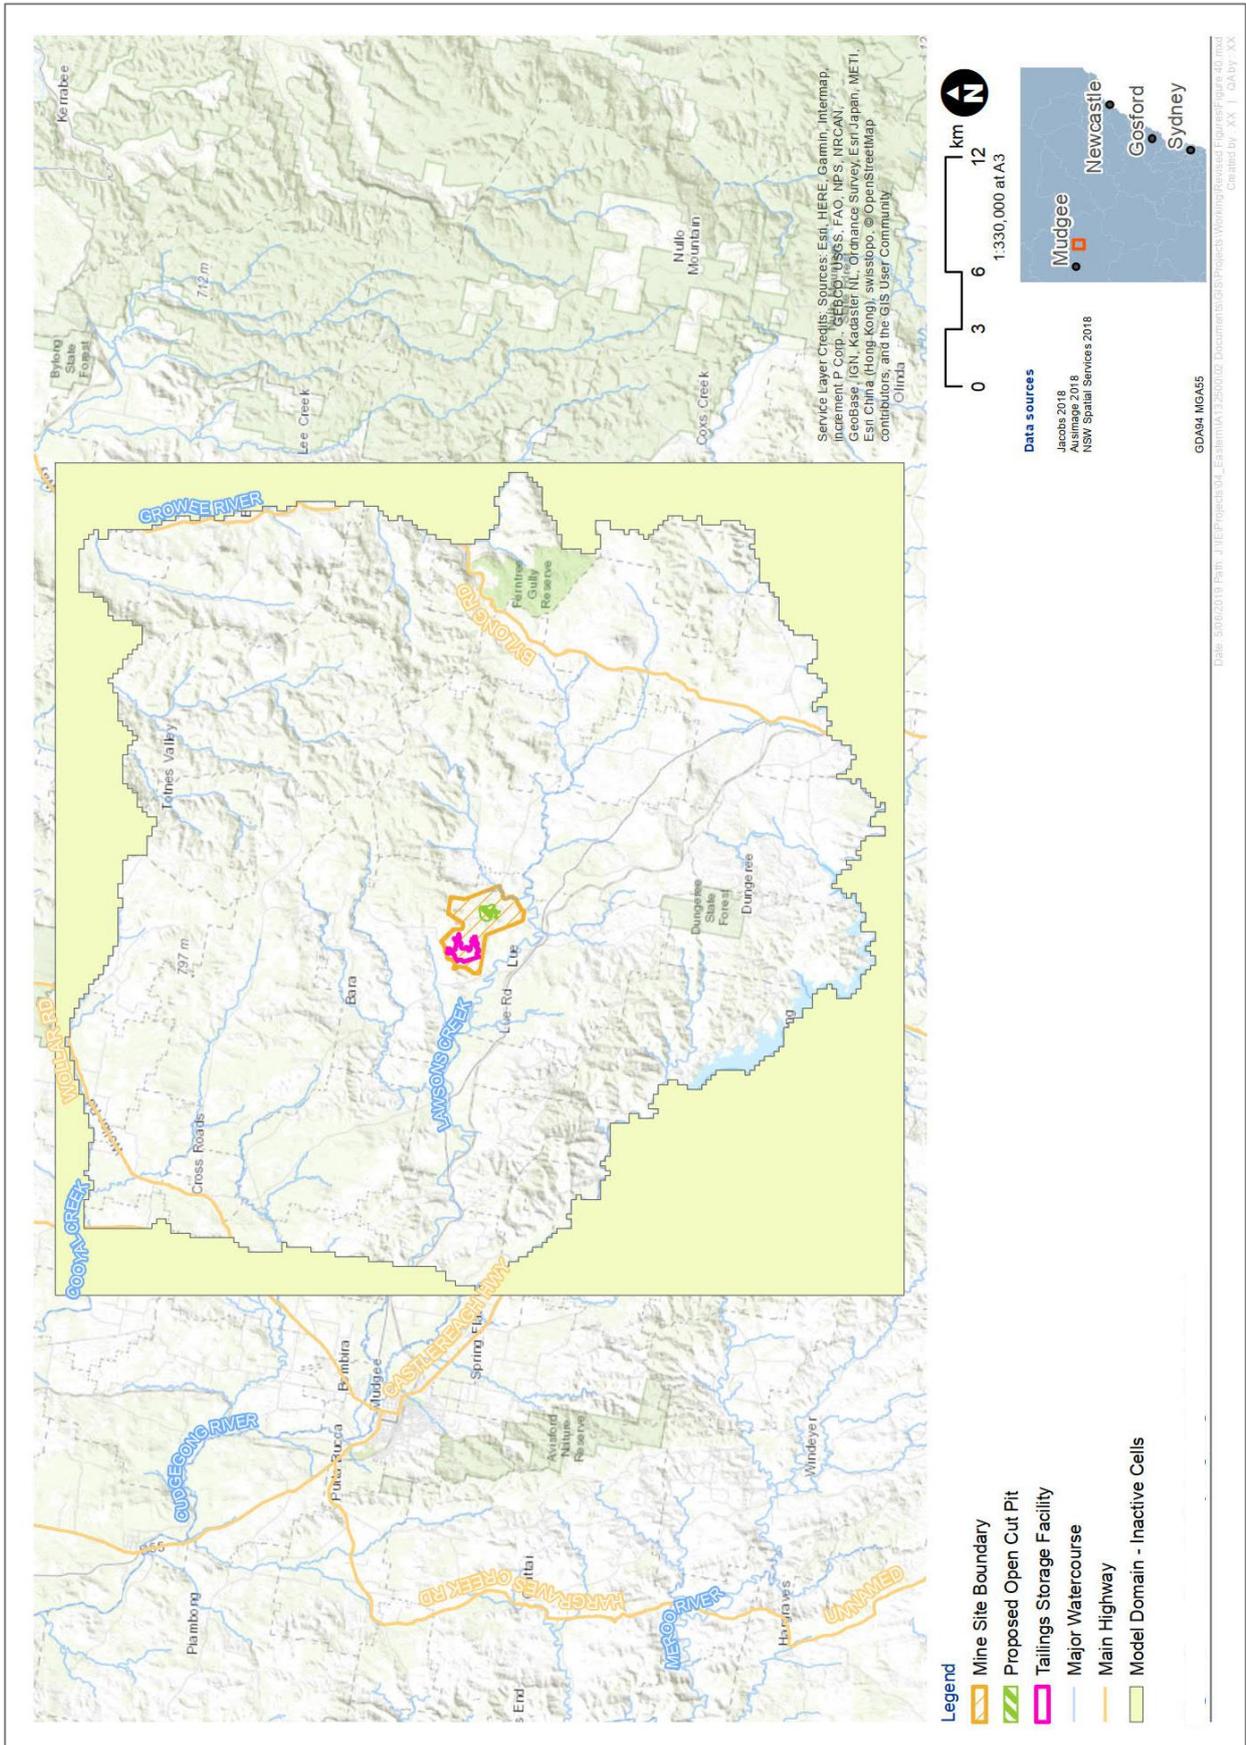

It is noted that the Quadtree and Nested Grid options available within MODFLOW-USG were not utilised in the numerical groundwater model for this assessment. Accordingly, the model approach adopted is akin to the 'traditional' approach to modelling with MODFLOW, with continuous columns and rows of grid cells. While adopting the traditional grid cells, MODFLOW-USG has the benefit of a 'more robust' computational engine, based on control volume finite difference, therefore delivering a more robust numerical solution.

Similarly, the opportunity to 'pinch-out' discontinuous layers in the model grid was not utilised, since the geological model was already available from an earlier version of the groundwater model, not reported here and not completed, and which was prepared in AlgoMesh. **Figure 44** presents the model grid, at regional scale and **Figure 45** presents the model grid at Mine Site scale.

5.3.2.4 Boundary Conditions

The boundary conditions adopted for the numerical groundwater model grid are described below.

Rivers (RIV)

The River (RIV) boundary condition was used for major watercourses, including Lawsons Creek in the centre of the model, Pipeclay Creek on the western boundary, Cooyal Creek on the northwestern boundary, Barigan Creek on the northeastern boundary. On the southern boundary, the Cudgegong River, including Rylstone Dam and Lake Windamere were included as RIV boundary conditions. The location of the major watercourses was guided by the 1:25,000 scale hydrology layer obtained from NSW Lands and Property Information.

The RIV boundary condition is a head dependant flux boundary suitable for simulating permanent drainages. In the RIV package if the head in the cell falls below a certain threshold, the flux from the river to the model cell is set to a specified lower bound.

In MODFLOW, Conductance is the factor that relates the difference in head (between the surface water body and groundwater) to the rate of flow. Conductance is computed in MODFLOW using the following equation:

$$c = \frac{k * l * w}{m}$$

Where

c = conductance ($\frac{L^2}{T}$),

k = hydraulic conductivity of the sediment in the river boundary condition (L/T),

l = the length of the boundary condition (L),

w = the width of the boundary condition (L), and

m = the thickness of the sediment in the boundary condition perpendicular to flow between the boundary and the cell. Usually this would be vertical thickness of the sediment (L)

Figure 44 Groundwater Model Grid – Regional View


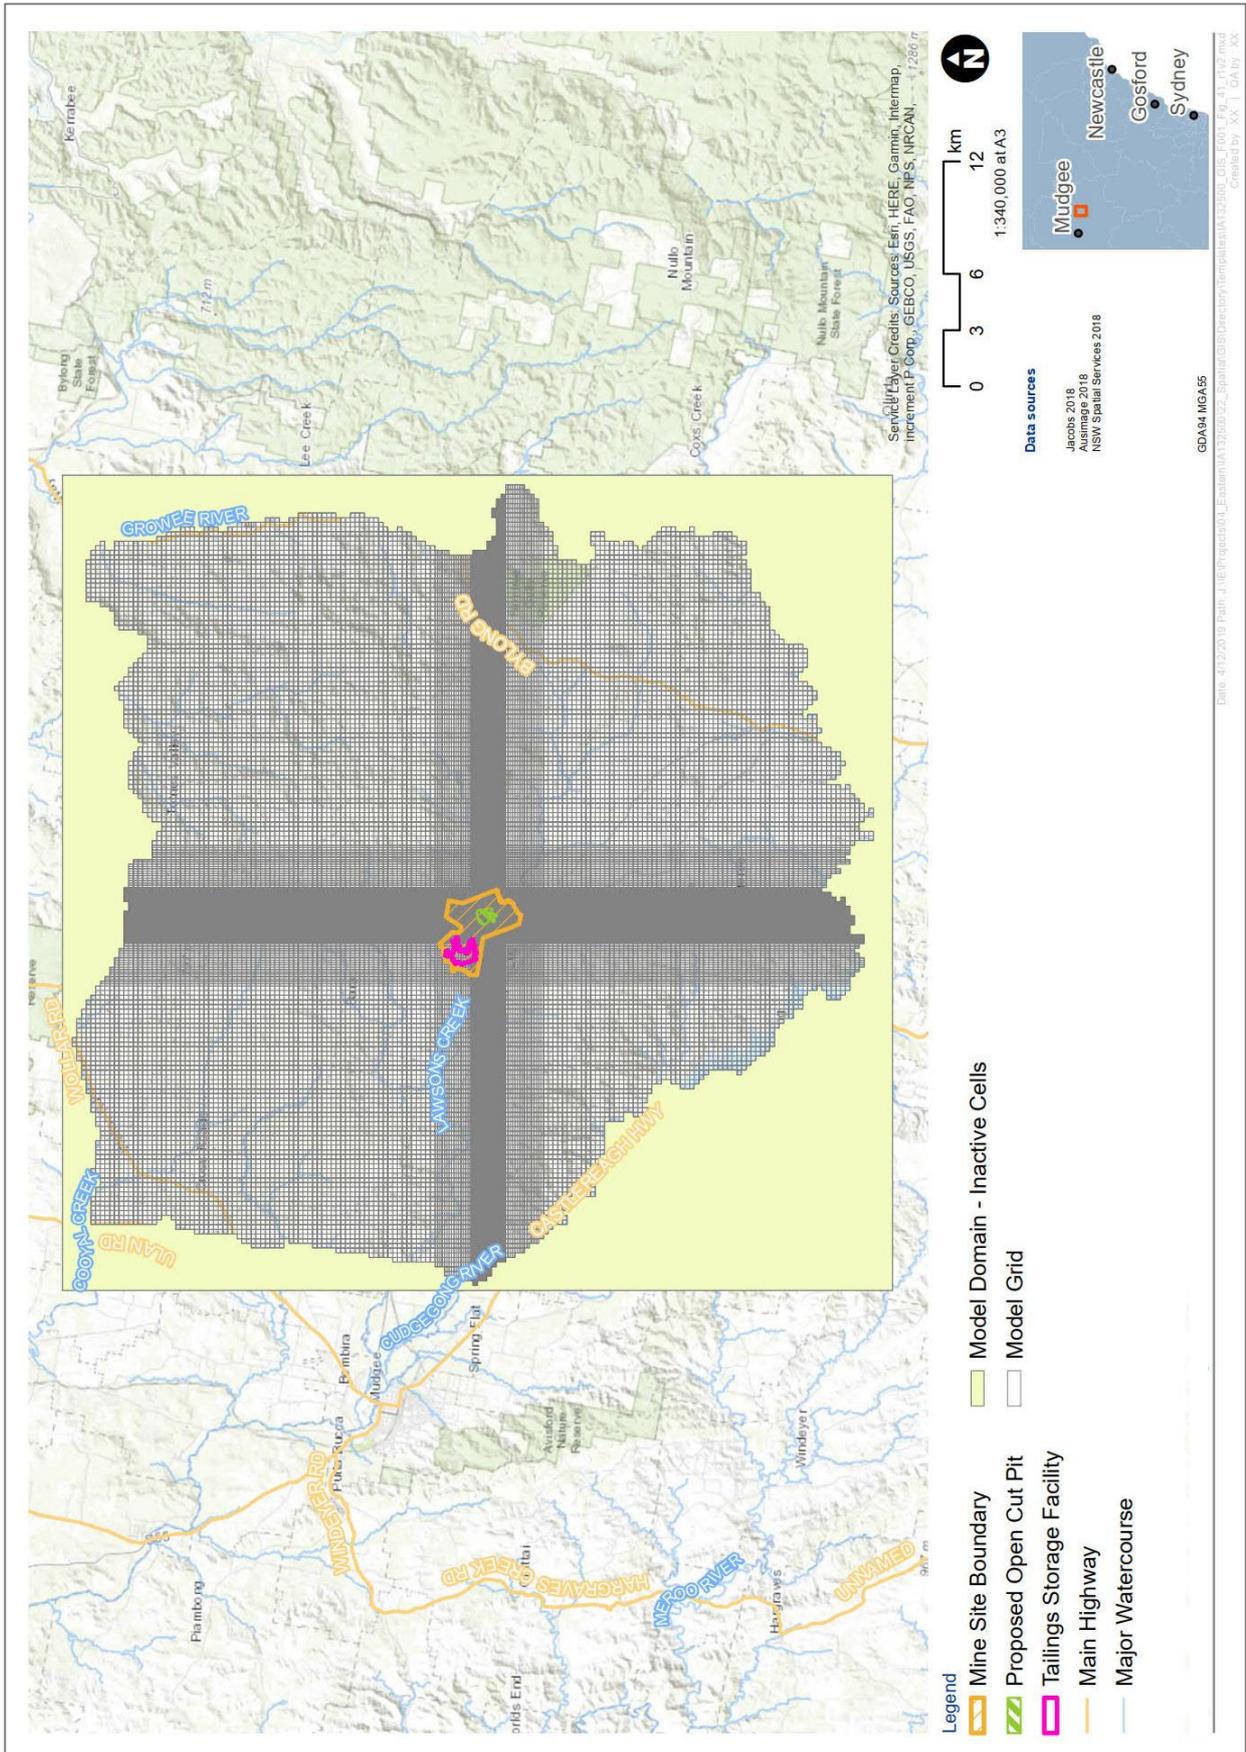


Figure 45 Groundwater Model Grid – Mine Site View

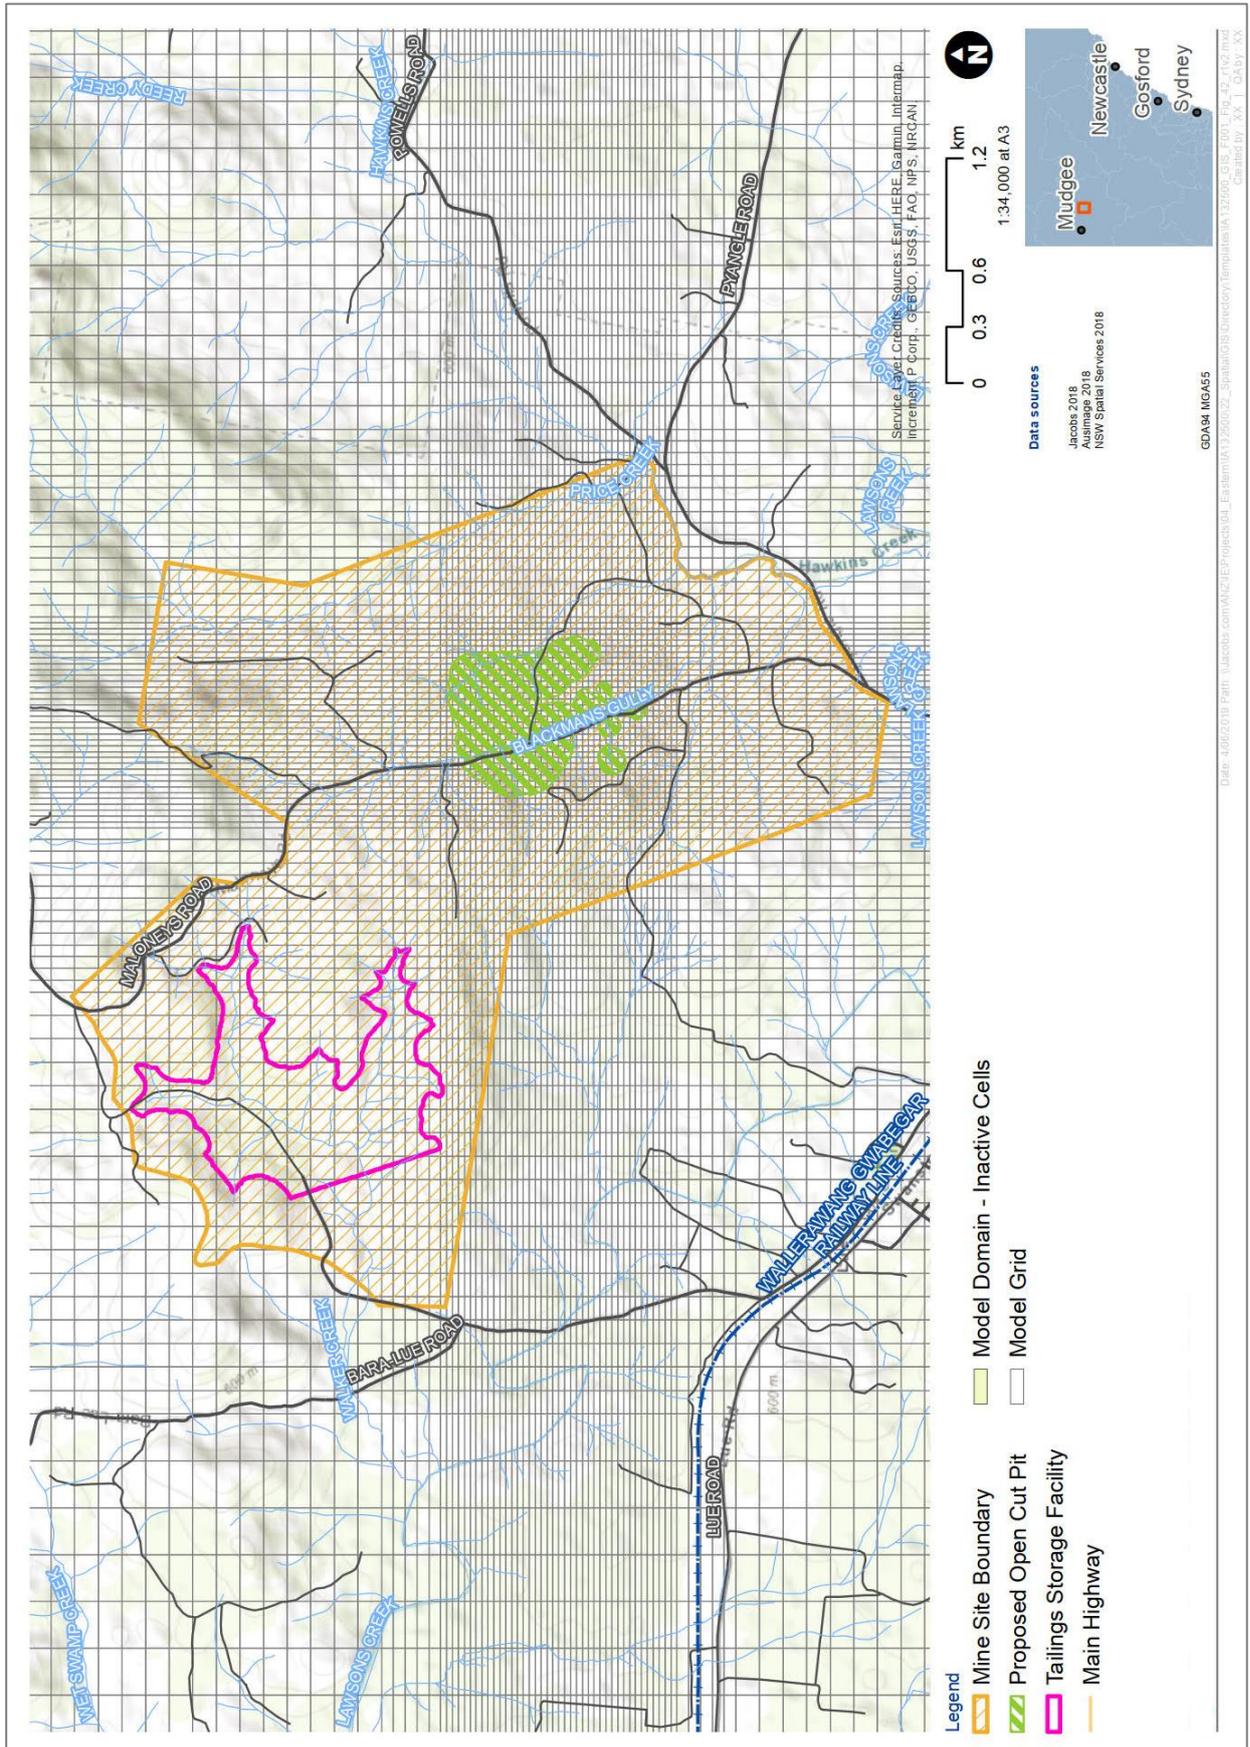

The assumed hydraulic conductivity of the streambed in the surface watercourses modelled was 0.2 m/d whilst the width of those surface watercourses modelled as rivers ranged between 5 and 125 m. The thickness of the streambed ranged between 0.5 and 1.0 m. Accordingly, the conductance, which is grid cell size dependent ranged between 156.25 m²/d and 6,250 m²/d.

The stage of the RIV cells was set at 2 m below the top elevation of those cells and the bottom of the RIV cells was set at 4m below the top elevation.


Figure 46 presents the location of the RIV boundary conditions within the model domain.

Table 26 presents the reach numbers used in setting the RIV boundary conditions and the applicable water source under water sharing plans.

Table 26
Groundwater Model Boundary Conditions – RIV Boundaries

Reach	Groundwater Water Source	Groundwater Water Sharing Plan	Surface Water Water Source	Surface Water Water Sharing Plan
1	Lachlan Fold Belt MDB Groundwater Source	NSW Murray Darling Basin Fractured Rock Groundwater Sources 2011	Lawsons Creek Water Source	Macquarie Bogan Unregulated and Alluvial Water Sources 2012
10	Lachlan Fold Belt MDB Groundwater Source	NSW Murray Darling Basin Fractured Rock Groundwater Sources 2011	Lawsons Creek Water Source	Macquarie Bogan Unregulated and Alluvial Water Sources 2012
10	Sydney Basin MDB Groundwater Source	NSW Murray Darling Basin Porous Rock Groundwater Sources 2011	Lawsons Creek Water Source	Macquarie Bogan Unregulated and Alluvial Water Sources 2012
11	Lachlan Fold Belt MDB Groundwater Source	NSW Murray Darling Basin Fractured Rock Groundwater Sources 2011	Upper Cudgong River Water Source	Macquarie Bogan Unregulated and Alluvial Water Sources 2012
11	Sydney Basin MDB Groundwater Source	NSW Murray Darling Basin Porous Rock Groundwater Sources 2011	Upper Cudgong River Water Source	Macquarie Bogan Unregulated and Alluvial Water Sources 2012
12	Lachlan Fold Belt MDB Groundwater Source	NSW Murray Darling Basin Fractured Rock Groundwater Sources 2011	Pipeclay Creek Water Source	Macquarie Bogan Unregulated and Alluvial Water Sources 2012
13	Lachlan Fold Belt MDB Groundwater Source	NSW Murray Darling Basin Fractured Rock Groundwater Sources 2011	Cooyal Wialdra Creek Water Source	Macquarie Bogan Unregulated and Alluvial Water Sources 2012
30	Lachlan Fold Belt MDB Groundwater Source	NSW Murray Darling Basin Fractured Rock Groundwater Sources 2011	Lawsons Creek Water Source (Lake Windamere)	Macquarie Bogan Unregulated and Alluvial Water Sources 2012
20	Sydney Basin - North Coast Groundwater Source	North Coast Fractured and Porous Rock Groundwater Sources 2016	Wollar Creek Water Source	Hunter Unregulated and Alluvial Water Sources 2009

Figure 46 Groundwater Model Boundary Conditions – River (RIV) Cells

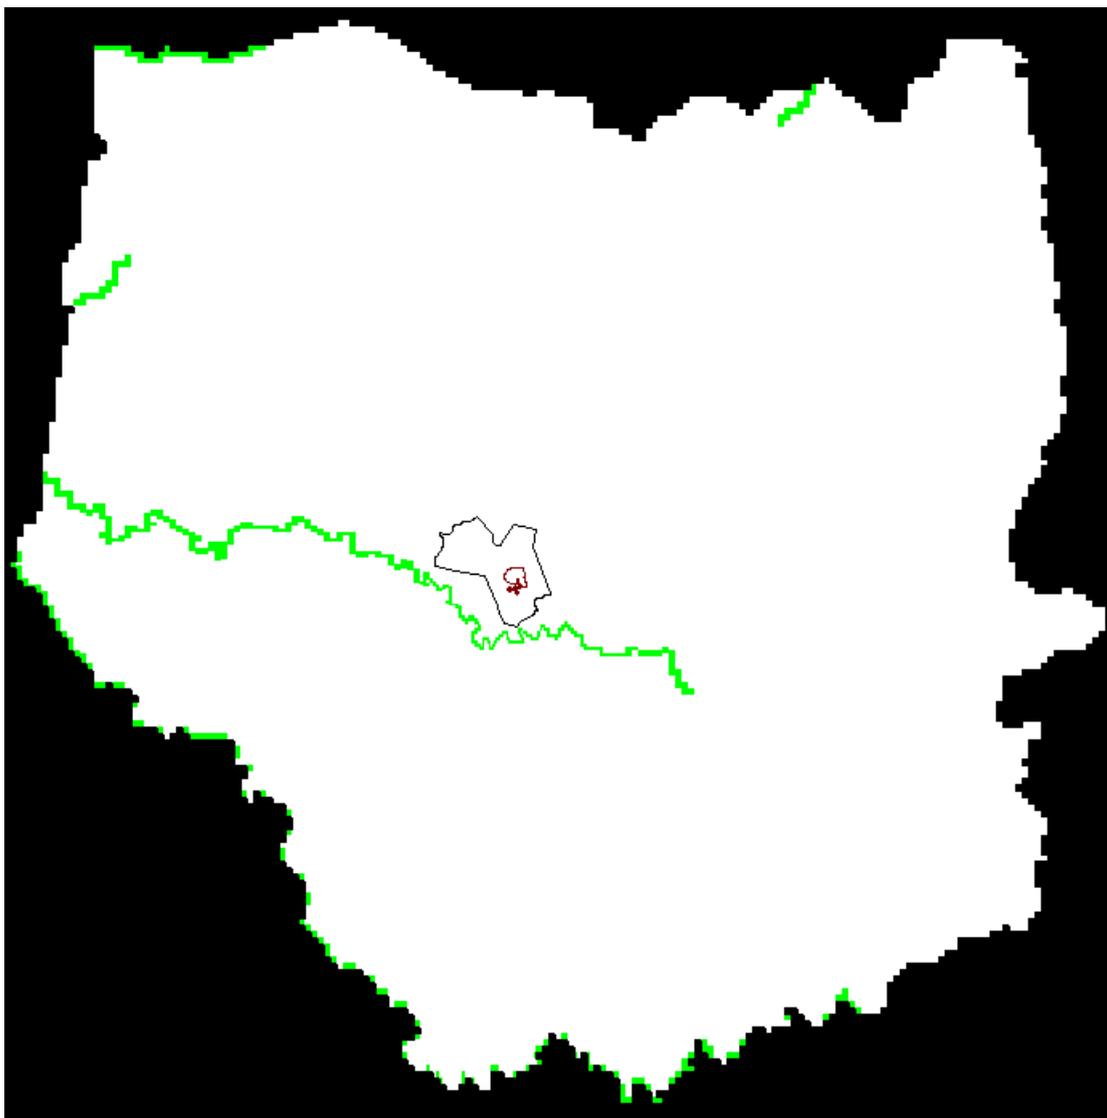

Drains (DRN)

The Drain (DRN) boundary condition was used for minor watercourses within the model domain.

The DRN boundary condition is a head dependant flux boundary suitable for simulating seasonal or ephemeral drainages. In the DRN package if the head in the cell falls below a certain threshold, the flux from the drain to the model cell drops to zero.

The location of the minor watercourses was guided by the 1:25,000 scale hydrology layer obtained from NSW Lands and Property Information. The approach adopted was to include the 'major' or more significant watercourses at distance from the Mine Site, but to include all of the watercourses in the 1:25,000 scale hydrology layer, close to, or within the Mine Site.

The stage of the DRN cells was set at 2 m below top elevation of those cells. The calculated conductance was grid cell size dependent and ranged between 16.2 m²/d and 129.6 m²/d.

Figure 47 presents the location of the DRN boundary conditions within the model grid.

Figure 47 Groundwater Model Boundary Conditions – Drain (DRN) Cells



Table 27 presents the reach numbers used in the DRN boundary conditions and the applicable water source under water sharing plans.

Wells (WEL)

The PINNEENA database from the NSW Department of Industry - Crown Lands & Water (CL&W), together with the NSW Water Registry, was used to identify active groundwater works within the model domain.

Table 27
Groundwater Model Boundary Conditions – DRN Boundaries

Reach	Groundwater Water Source	Groundwater Water Sharing Plan	Surface Water Water Source	Surface Water Sharing Plan
1	Lachlan Fold Belt MDB Groundwater Source	NSW Murray Darling Basin Fractured Rock Groundwater Sources 2011	Lawsons Creek Water Source	Macquarie Bogan Unregulated and Alluvial Water Sources 2012
10	Lachlan Fold Belt MDB Groundwater Source	NSW Murray Darling Basin Fractured Rock Groundwater Sources 2011	Lawsons Creek Water Source	Macquarie Bogan Unregulated and Alluvial Water Sources 2012
10	Sydney Basin MDB Groundwater Source	NSW Murray Darling Basin Porous Rock Groundwater Sources 2011	Lawsons Creek Water Source	Macquarie Bogan Unregulated and Alluvial Water Sources 2012
11	Lachlan Fold Belt MDB Groundwater Source	NSW Murray Darling Basin Fractured Rock Groundwater Sources 2011	Upper Cudgegong River Water Source	Macquarie Bogan Unregulated and Alluvial Water Sources 2012
11	Sydney Basin MDB Groundwater Source	NSW Murray Darling Basin Porous Rock Groundwater Sources 2011	Upper Cudgegong River Water Source	Macquarie Bogan Unregulated and Alluvial Water Sources 2012
12	Lachlan Fold Belt MDB Groundwater Source	NSW Murray Darling Basin Fractured Rock Groundwater Sources 2011	Pipeclay Creek Water Source	Macquarie Bogan Unregulated and Alluvial Water Sources 2012
13	Lachlan Fold Belt MDB Groundwater Source	NSW Murray Darling Basin Fractured Rock Groundwater Sources 2011	Cooyal Wialdra Creek Water Source	Macquarie Bogan Unregulated and Alluvial Water Sources 2012
13	Sydney Basin MDB Groundwater Source	NSW Murray Darling Basin Porous Rock Groundwater Sources 2011	Cooyal Wialdra Creek Water Source	Macquarie Bogan Unregulated and Alluvial Water Sources 2012
20	Sydney Basin - North Coast Groundwater Source	North Coast Fractured and Porous Rock Groundwater Sources 2016	Wollar Creek Water Source	Hunter Unregulated and Alluvial Water Sources 2009
21	Sydney Basin - North Coast Groundwater Source	North Coast Fractured and Porous Rock Groundwater Sources 2016	Bylong River Water Source	Hunter Unregulated and Alluvial Water Sources 2009
21	Unnamed Upriver Alluvium in WSP in the Bylong River	Hunter Unregulated and Alluvial Water Sources 2009	Bylong River Water Source	Hunter Unregulated and Alluvial Water Sources 2009

These works were designated pumping wells in the model domain using the MODFLOW Well Package (WEL). The pumping rate assigned to these works was based on the WAL entitlement, and the distribution of pumping adjusted for seasonal variation. Details of the WALs included are

provided in **Annexure 8**. The pumping distribution for those groundwater works utilised under basic landholder rights was also seasonal, however, these works were assumed to be active throughout the year. The pumping distribution for all other works were based on an assumed dry season irrigation as outline on **Table 28**.

Table 28
Groundwater Model Boundary Condition – Distribution of Pumping Rate (WEL)

Month	Basic Landholder Rights	Other Works
Jan	15.0%	12.0%
Feb	11.5%	10.0%
Mar	0.0%	8.0%
Apr	0.0%	7.0%
May	0.0%	6.0%
Jun	0.0%	5.0%
Jul	0.0%	5.0%
Aug	9.0%	7.0%
Sep	11.5%	8.0%
Oct	15.0%	9.0%
Nov	19.0%	11.0%
Dec	15.0%	12.0%

Figure 48 presents the distribution of the WELs in each layer of the model. It is noted that there were no wells installed in Layer 1, Layer 3, Layer 7 and Layer 8 of the model.

Table 28 presents the percentage distribution of pumping at each work. It is noted that the basic landholder rights works were assumed to abstract 2 ML per year.

Recharge (RCH)

Rainfall recharge to the groundwater model was represented using the Recharge (RCH) boundary condition.

Rainfall data was obtained from the SILO climatic database, which is maintained by the Queensland Department of Environment and Science (DES).

Rainfall station data obtained from Bureau of Meteorology Stations 62012, 62021, 62026 and 62032 was also used in the groundwater model. The daily rainfall data obtained from the SILO database was totalised with respect to months, as the groundwater model was established with monthly stress periods and a recharge factor was then applied. The recharge factor was included as a calibration parameter, except for Lake Windamere, which was assigned a factor of 1.0 (equivalent to 100%). Recharge factor zones in the model grid were derived based on land-use and topography, and included:

- Hilltops
- Foothills
- Floodplain
- Lake

The distribution of rainfall data, from the respective station, was based on the Thiessen polygon approach. **Figure 49** presents the distribution of recharge zones. **Table 29** presents the calibrated recharge factors, including the relevant zone colour from **Figure 49**.

Figure 48 Groundwater Model Boundary Conditions – Well (WEL) Cells

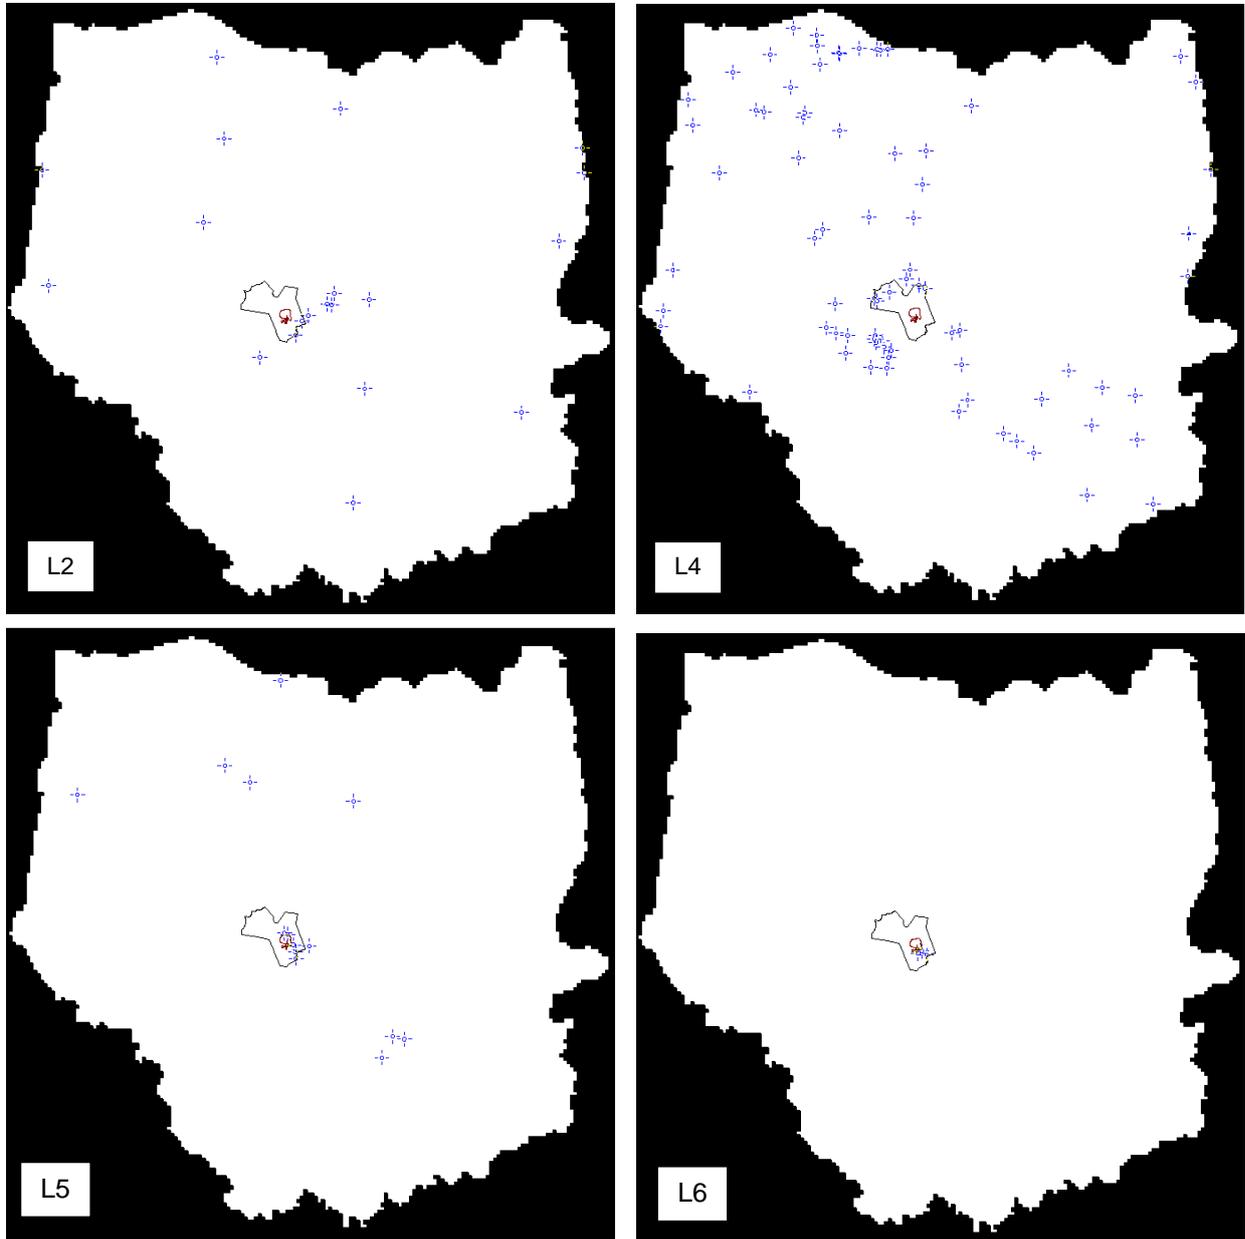
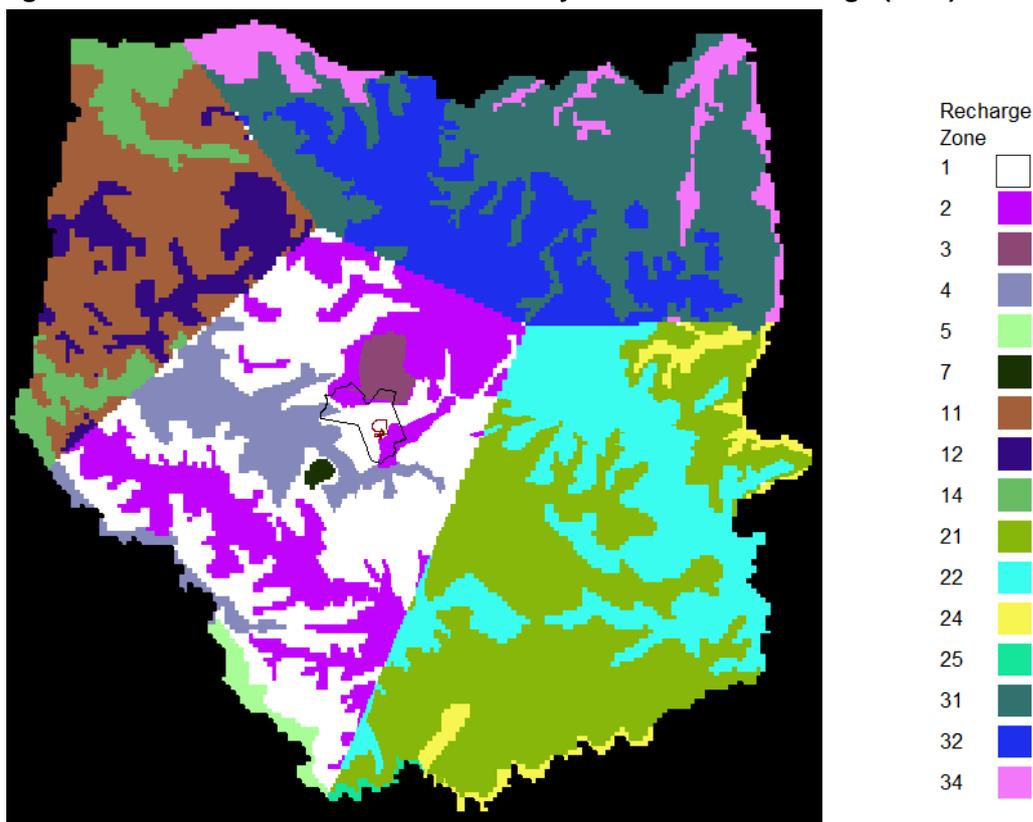


Figure 49 Groundwater Model Boundary Conditions – Recharge (RCH) Zones



**Table 29
Groundwater Model Boundary Condition – Recharge (RCH) Zones**

Zone Number	Rainfall Station	Description	Recharge Factor
1	62012	Foothills	0.12
2	62012	Hilltops	0.02
3	62012	Hilltops	0.04
4	62012	Floodplain	0.025
5	62012	Lake	1.00
11	62021	Foothills	0.06
12	62021	Hilltops	0.12
14	62021	Floodplain	0.25
21	62026	Foothills	0.04
22	62026	Hilltops	0.02
24	62026	Floodplain	0.39
25	62026	Lake	1.00
31	62032	Foothills	0.04
32	62032	Hilltops	0.04
34	62032	Floodplain	0.40

Evapotranspiration (EVT)

Evapotranspiration from the groundwater model grid was represented using the Evapotranspiration (EVT) boundary condition.

Evapotranspiration data was obtained from the SILO climatic database. The approach adopted was to use evapotranspiration rather than Pan A evaporation to calculate losses.

The Food and Agricultural Organisation of the United Nations (FAO), short crop version of the Penman-Monteith equation, available from the SILO climatic dataset, was utilised at each of the identified weather stations. Daily FAO56 data obtained from the SILO database was totalised with respect to months and an evapotranspiration factor applied.

The evapotranspiration factor was also included as a model calibration factor however, in earlier versions of the groundwater model, this was found to be insensitive. Accordingly, a fixed value of 0.4 (equivalent to 40%) was applied to most land-use types, and a fixed value of 1.0 (equivalent to 100%) was applied to Lake Windamere.

Evapotranspiration factor zones were derived based on land-use and topography, and included:

- Foothill/Floodplain
- Hilltop
- Lake

It is noted that the EVT extinction depth was set at a uniform value of 3.0 m, where the extinction depth is the depth at which EVT approaches zero, and beyond which EVT cannot remove water from the model.

The 3m extinction depth has been adopted, in part, as it is also a way to represent the soil moisture deficit process. The soil moisture deficit method, put simply, accounts for the fact that percolating rainfall (with an allowance for rainfall/runoff loss) must overcome the cumulative moisture deficit before recharge to the water table can occur. An advantage of this approach is that it resolves the potential for “flooded cells” in the model simulation. “Flooded cells” is a term used to describe the situation where the modelled hydraulic head, in some cells, is above ground surface. Flooded cells should not be present in a groundwater model, as they are non-physical. Areas of flooded cells are also often areas in the model where the numerical solver struggles to converge. In practice, flooded cells adopt the values of hydraulic parameters of the uppermost active layer of the model.

A disadvantage of the combined RCH and EVT approach is that it is a simplification of the Soil Moisture Deficit method. The disadvantage is, however, partly overcome by the inclusion of recharge factor in the calibration process. As noted above, it was found during an earlier version of the calibration model, that the calibration was insensitive to the evapotranspiration factors, so these were ‘locked’ at assumed values. Accordingly, the combined RCH and EVT approach, whilst having limitations due to its simplification of the Soil Moisture Deficit process, is considered superior to the externally calculated ‘effective’ recharge via the RCH package due to its advantage in resolving areas of flooded cells.

The distribution of evapotranspiration data, from the respective stations, was again based on the Thiessen polygon approach. **Figure 50** presents the distribution of evapotranspiration zones in the model grid and **Table 30** presents the adopted evapotranspiration factors, including the relevant zone colour from **Figure 50**.

Figure 50 Groundwater Model Boundaries – Evapotranspiration (EVT) Zones

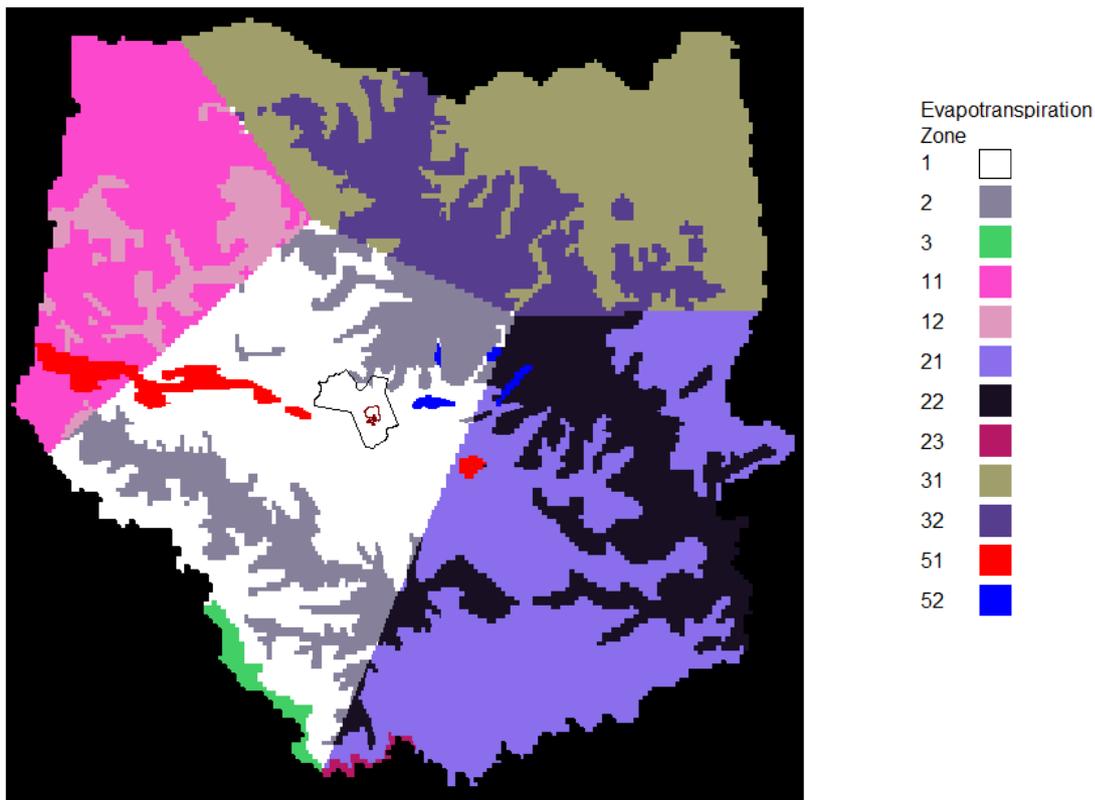


Table 30
Groundwater Model Boundary Condition – Evapotranspiration (EVT) Zones

Zone Number	Rainfall Station	Description	Evapotranspiration Factor	Extinction Depth (m)
1	62012	Foothills/Floodplain	0.40	3.0
2	62012	Hilltops	0.40	3.0
3	62012	Lake	1.00	3.0
11	62021	Foothills/Floodplain	0.40	3.0
12	62021	Hilltops	0.40	3.0
21	62026	Foothills/Floodplain	0.40	3.0
22	62026	Hilltops	0.40	3.0
23	62026	Lake	1.00	3.0
31	62032	Foothills/Floodplain	0.40	3.0
32	62032	Hilltops	0.40	3.0

5.3.2.6 Model Geometry

The geometry of the numerical groundwater model was based on Mine Site data and open cut pit geology and was supplemented, regionally, with data from the Western Coalfield Geological Modelling Project undertaken by the NSW Department of Resources and Energy (DRE).

The top of the model was based on Mine Site Light detection and ranging (LiDAR) data and supplemented, regionally, by the 1:25,000 topographic dataset of NSW Lands and Property Information.

Figure 51 and **Figure 52** present west-east and north-south geological cross-sections through the model, respectively. The location of the cross-section lines is shown on the 3D surface of the model presented in **Figure 53**. The layering of the model is summarised in **Table 32**.

Figure 51 West-east Geological Cross-section through the Model


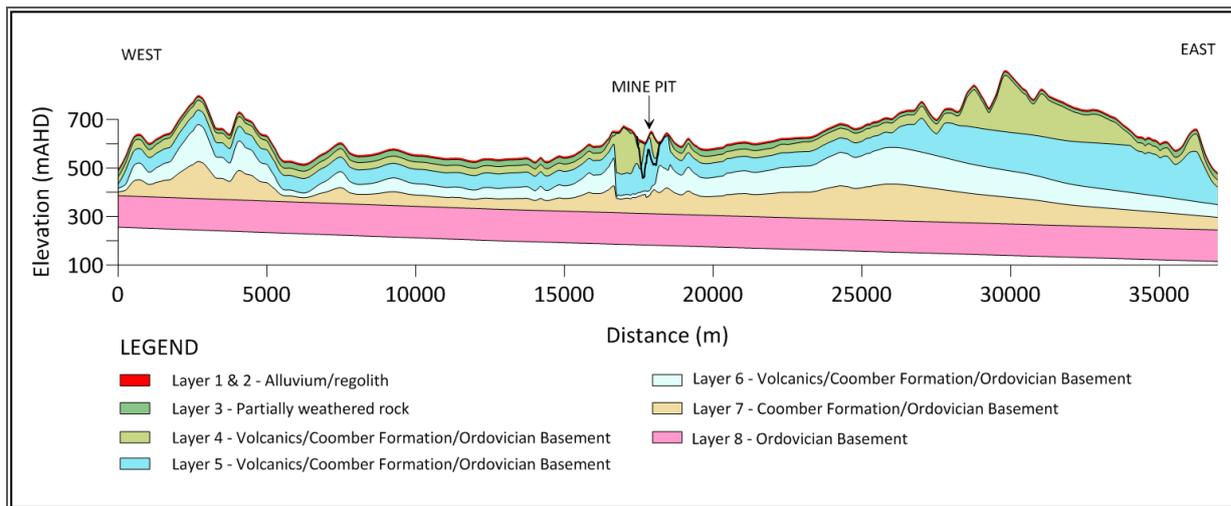



Figure 52 North-south Geological Cross-section through the Model

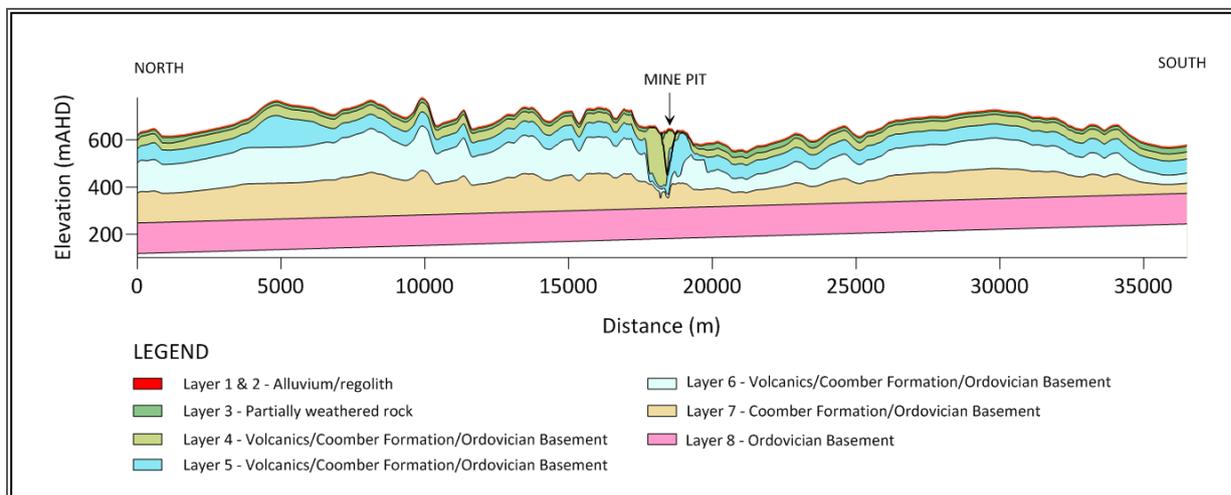

5.3.2.7 Initial Hydraulic Parameters

Table 32 presents the zone numbers for the hydraulic parameters used to represent the various hydrostratigraphic units. **Figure 54** and **Figure 55** presents the distribution of the initial hydraulic parameters in each model layer, with zone descriptions provided on **Table 31**.

Figure 53 Groundwater Model Shaded Relief

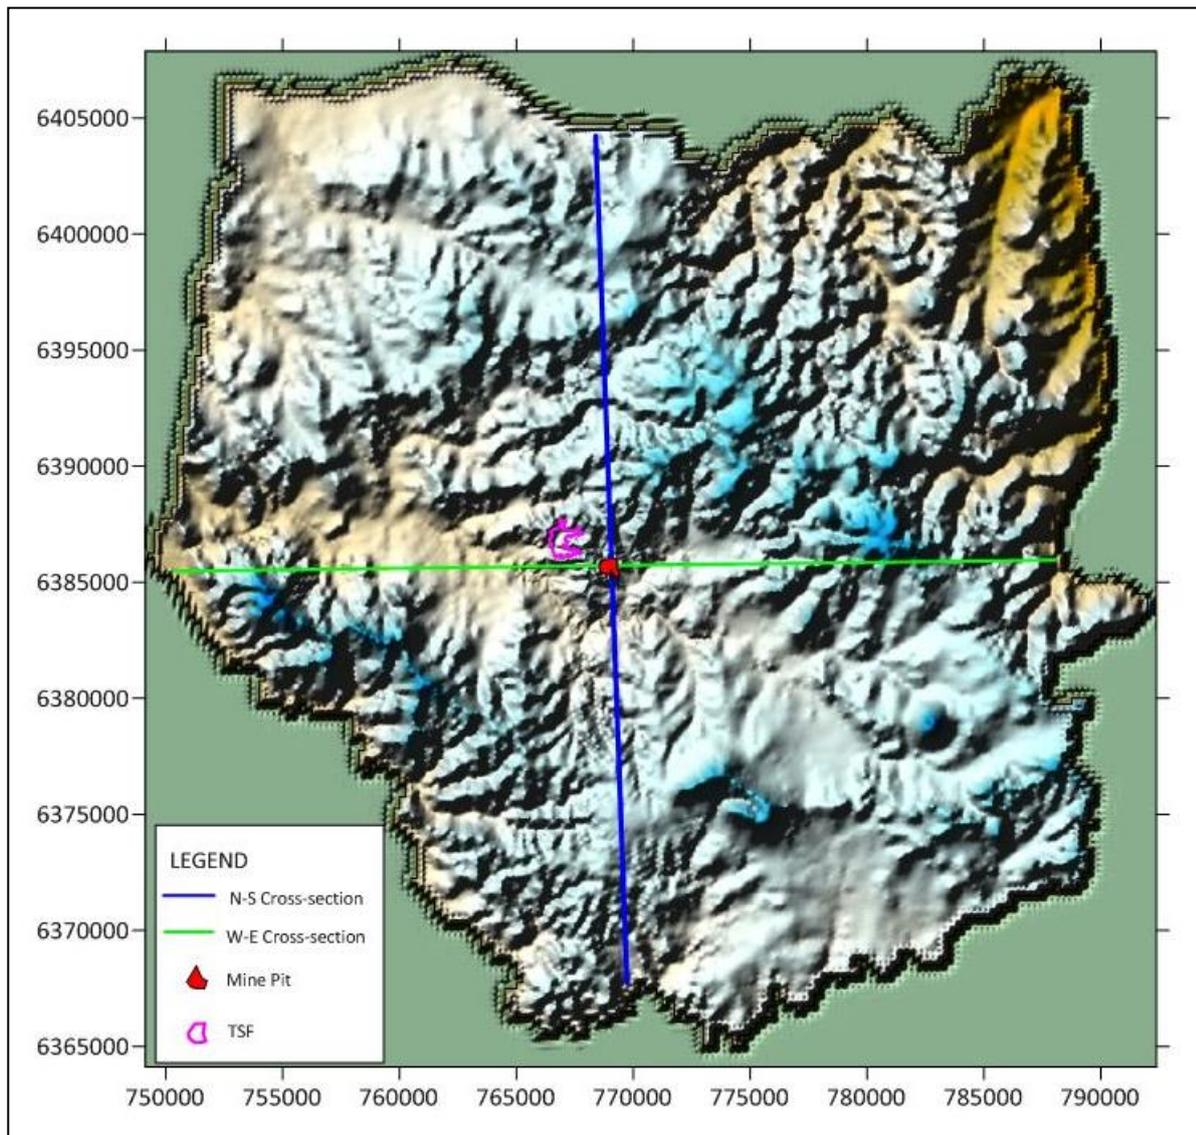

To assist with the correlation with model geometry, zone numbers are assigned according to the layer they are in with the layer being the first numeral of the two-digit zone number, e.g. Layer 1 contains zones 11, 12, 13..., Layer 2 contains zone 21, 22, 23..., and Layer 3 contains zones 31, 32, 33..., and so on.

Pilot Points were initially used during model calibration of hydraulic conductivity values in the near vicinity of the Mine Site Layer 4, 5 and 6, to assess if finer resolution hydraulic conductivity zones would improve calibration, with regional values adopted outside of that Mine Site area. Detail of the resultant hydraulic conductivity fields are presented further below, including the calibrated values of the various other hydraulic parameters.

Results of hydraulic testing indicated that the orebody and the Mine Site have relatively higher hydraulic conductivity due to the high fracture concentration. Although the major geological structures are not specifically represented in the groundwater model, a zone of moderately elevated hydraulic conductivity has been introduced surrounding the orebody in Layers 4, 5 and 6 to account for the increased concentration of structural deformation.

Table 31
Groundwater Model Geometry – Model Layers

Near Surface				
Layer	Valleys	Hills	Outcrop Rock (Local)	Thickness (m)
1	Alluvium (Sandy Silt)	Regolith (clayey silt with vegetation)	Rock	3.0
2	Alluvium (Silty Sand)	Extremely Weathered Rock (silty clay)	Rock	3.0
3	Partially Weathered Rock (weathered work with stiff clay)	Partially Weathered Rock	Rock	3.0 to 104 (median 17.8)
Underlying Rock				
Layer	South West	Mine Site	North East	Thickness (m)
4	Volcanics / Coomber Formation / Ordovician Basement	Volcanics	Sydney Basin	3.0 to 287 (median 37.7)
5	Volcanics / Coomber Formation / Ordovician Basement	Volcanics	Volcanics / Sydney Basin	3.0 to 249 (median 60)
Basement				
Layer	South West	Mine Site	North East	Thickness (m)
6	Volcanics / Ordovician Basement	Volcanics / Coomber Formation	Ordovician Basement	4.3 to 235 (median 83.8)
7	Ordovician Basement	Coomber Formation	Ordovician Basement	4.3 to 235 (median 83.9)
8	Ordovician Basement	Ordovician Basement	Ordovician Basement	130

Despite the dominance of fracture flow at the small scale, the groundwater system has been implemented in the model as an equivalent porous medium due to the field scale observations from pump testing (Section 4.5.8 and Section 4.5.9). The equivalent porous medium approach is also supported by calibration as discussed in the following sections.

Table 32 presents the modelled values of the various hydraulic parameters.

Table 32
Groundwater Model – Initial Values of Hydraulic Parameters

Page 1 of 2

Zone	Kx (m/d)	Ky (m/d)	Kz (m/d)	Ss (m ⁻¹)	Sy	Locality	Description
Layer 1							
11	2.5	2.5	0.5	9.0x10 ⁻⁴	0.11	Valley	Alluvium (Sandy Silt)
12	0.5	0.5	0.1	9.0x10 ⁻⁴	0.09	Hills	Regolith (clayey silt with vegetation)
13	0.02	0.02	0.01	5.0x10 ⁻⁵	0.02	Outcrop Rock (Local)	Weathered Rock

Table 32 (Cont'd)
Groundwater Model – Initial Values of Hydraulic Parameters

Page 2 of 2

Zone	Kx (m/d)	Ky (m/d)	Kz (m/d)	Ss (m ⁻¹)	Sy	Locality	Description
Layer 2							
21	5	5	0.5	7.0x10 ⁻⁴	0.2	Valley	Alluvium (Silty Sand)
22	0.025	0.025	0.005	7.0x10 ⁻⁴	0.04	Hills	Extremely Weathered Rock (silty clay)
23	0.02	0.02	0.01	5.0x10 ⁻⁵	0.02	Outcrop Rock (Local)	Weathered Rock
Layer 3							
31	1	1	0.15	5.0x10 ⁻⁴	0.09	Valley	Partially Weathered Rock (weathered work with stiff clay)
32	0.25	0.25	0.0375	5.0x10 ⁻⁴	0.09	Hills	Partially Weathered Rock
33	0.02	0.02	0.01	5.0x10 ⁻⁵	0.02	Outcrop Rock (Local)	Weathered Rock
Layer 4							
41	0.05	0.05	0.025	2.0x10 ⁻⁵	0.01	South West	Ordovician Basement
42	0.075	0.075	0.0075	5.0x10 ⁻⁵	0.02	North East	Sydney Basin
45	0.2	0.2	0.01	5.0x10 ⁻⁵	0.01	Outer Mine Area	Volcanics / Coomber Formation
46	0.2	0.2	0.02	2.0x10 ⁻⁵	0.01	Mine Area	Volcanics
Layer 5							
51	0.04	0.04	0.02	3.0x10 ⁻⁵	0.01	West	Volcanics / Ordovician
52	0.025	0.025	0.0025	3.0x10 ⁻⁵	0.01	North East	Sydney Basin
53	0.005	0.005	0.0025	3.0x10 ⁻⁵	0.01	Outer Mine Area	Volcanics / Coomber Formation
55	0.2	0.2	0.02	2.0x10 ⁻⁵	0.01	Mine Area	Volcanics / Coomber Formation
Layer 6							
61	0.025	0.025	0.0125	2.0x10 ⁻⁵	0.01	Whole Model	Ordovician Basement
63	0.001	0.001	0.001	2.0x10 ⁻⁵	as 61	Mine Area	Volcanics / Coomber Formation
Layer 7							
71	0.01	0.01	0.005	1.0x10 ⁻⁵	0.01	Whole Model	Ordovician Basement
Layer 8							
81	0.005	0.005	0.0025	8.0x10 ⁻⁶	0.01	Whole Model	Ordovician Basement

Figure 54 Distribution of Model Hydraulic Properties Zones (Layer 1 to 6)

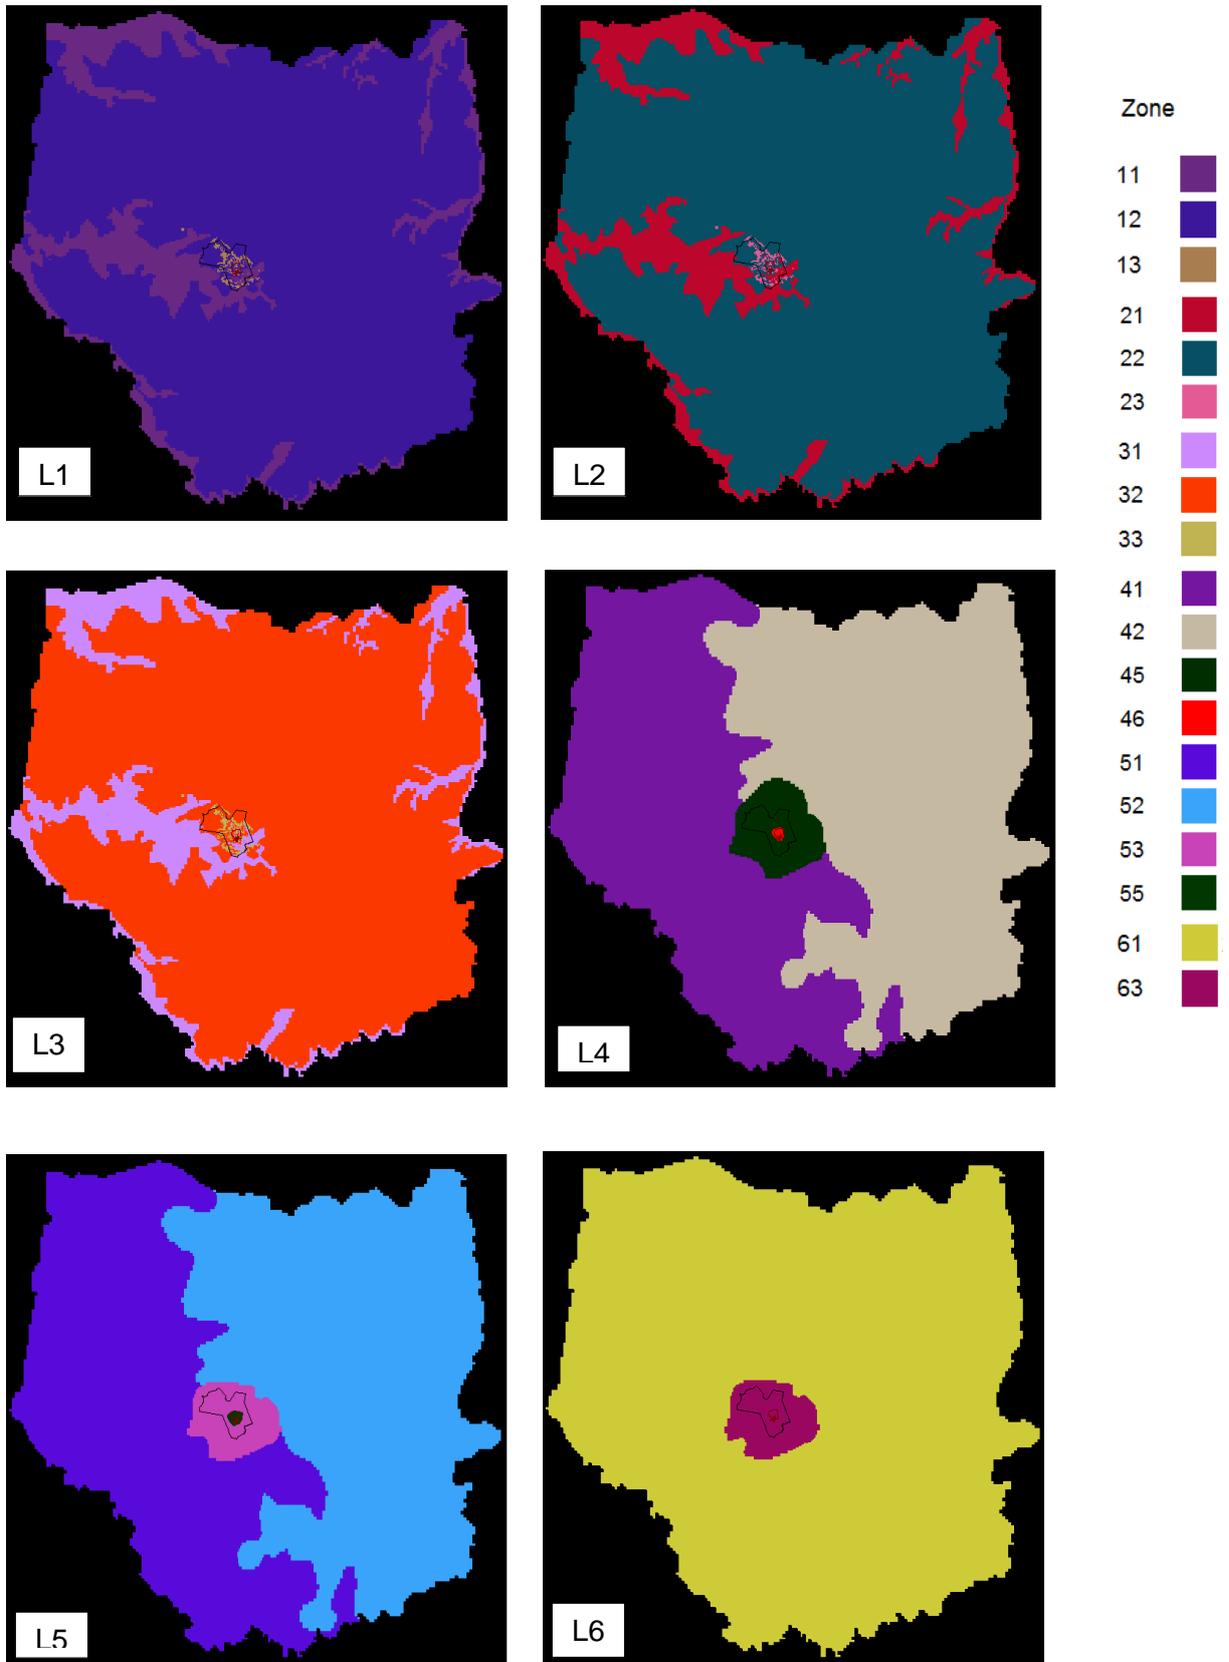
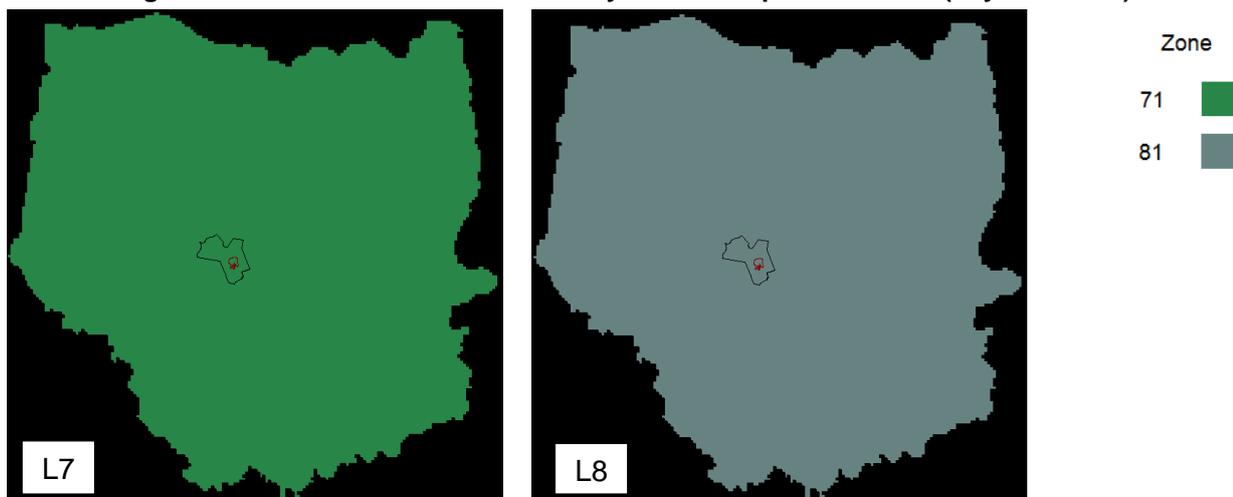


Figure 55 Distribution of Model Hydraulic Properties Zones (Layer 7 and 8)

5.3.3 Model Calibration

In order to test the ability of the numerical groundwater model to reflect the behaviour of the groundwater system being modelled, the model was calibrated to actual measured groundwater. The model was calibrated for groundwater levels (heads) and baseflow. Calibration was performed for both steady state and transient groundwater conditions.

5.3.3.1 Calibration for Groundwater Levels – Steady State Conditions

The steady state groundwater model was calibrated using the following head targets:

- The average (mean) of groundwater levels measured for the period from 1 January 2011 through to 30 April 2017 as part of the Bowdens Silver Mine groundwater monitoring programme.
- one-off water levels extracted from the CL&W PINNEENA database.

During the calibration, equal weighting was assigned to observed groundwater levels from the CL&W PINNEENA database and average groundwater levels from the mine site monitoring data.

Average (mean) pumping rates based on pumping data from 2011 to 2017 were applied to the steady state model to represent average pumping conditions.

Figure 56a presents the distribution of model targets used in the model calibration simulation in model Layer 2 and Layer 4. **Figure 56b** presents the distribution of model targets used in the model calibration simulation in model Layer 5 and Layer 6. There were no calibration targets in model layers 1, 3, 7 and 8.

The model was calibrated initially using PEST-HP, an automated parameter estimation tool (Doherty, 2018), and then by iterative manual step-wise adjustment of model input parameters to achieve an acceptable match between simulated and observed heads (groundwater levels). Calibration was achieved by qualitatively assessing the match between modelled and observed heads as well as assessing statistical calibration measures.

Figure 56a Distribution of Model Calibration Targets in Layer 2 and 4


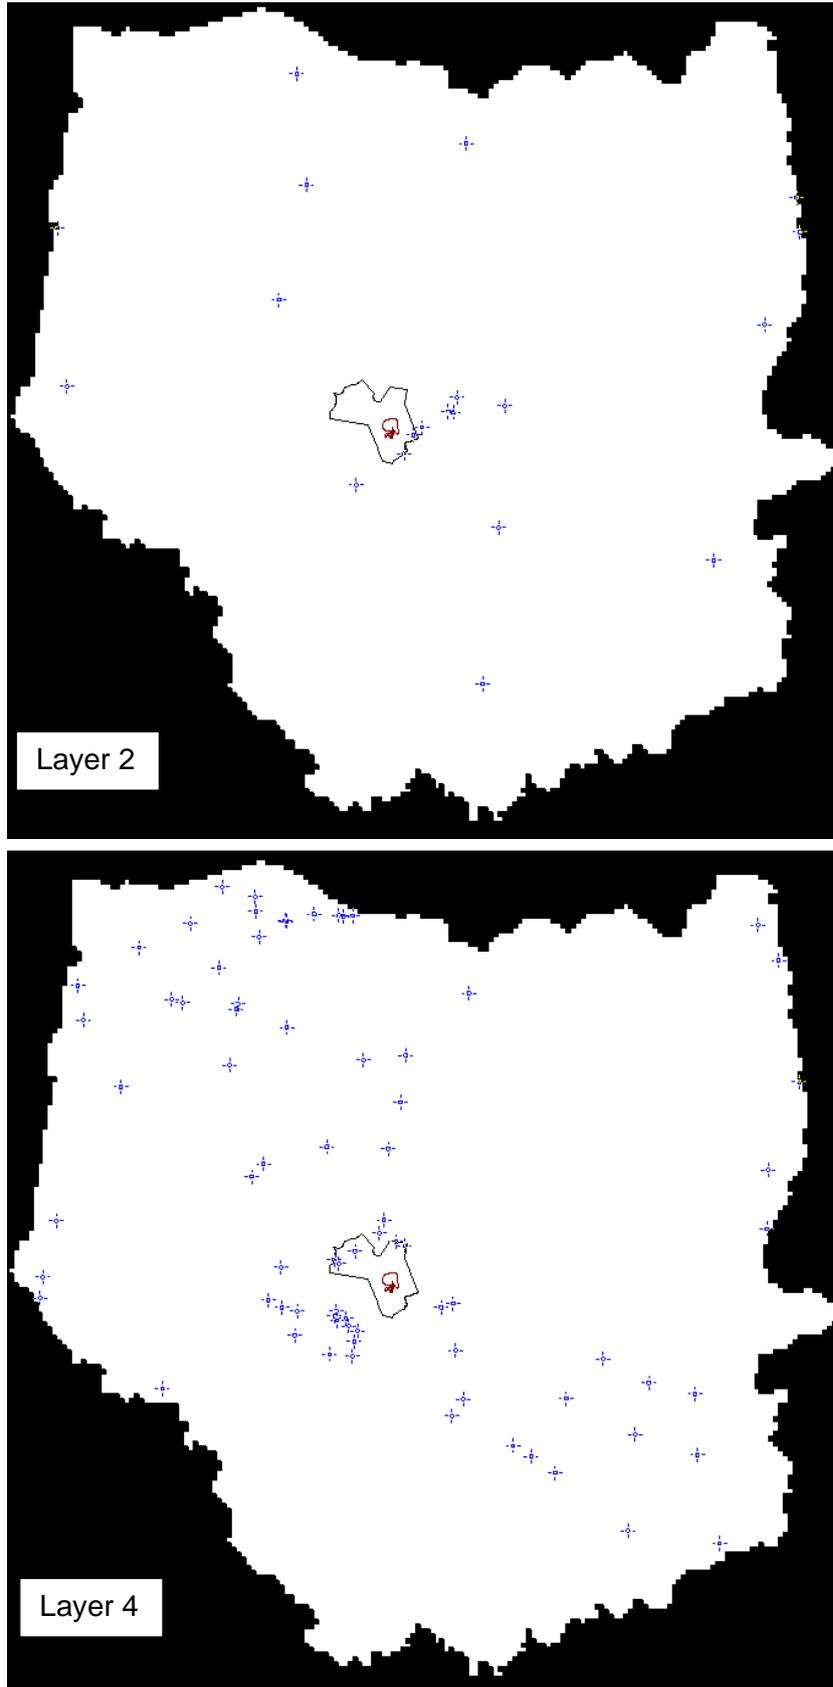


Figure 56b **Distribution of Model Calibration Targets in Layer 5 and 6**

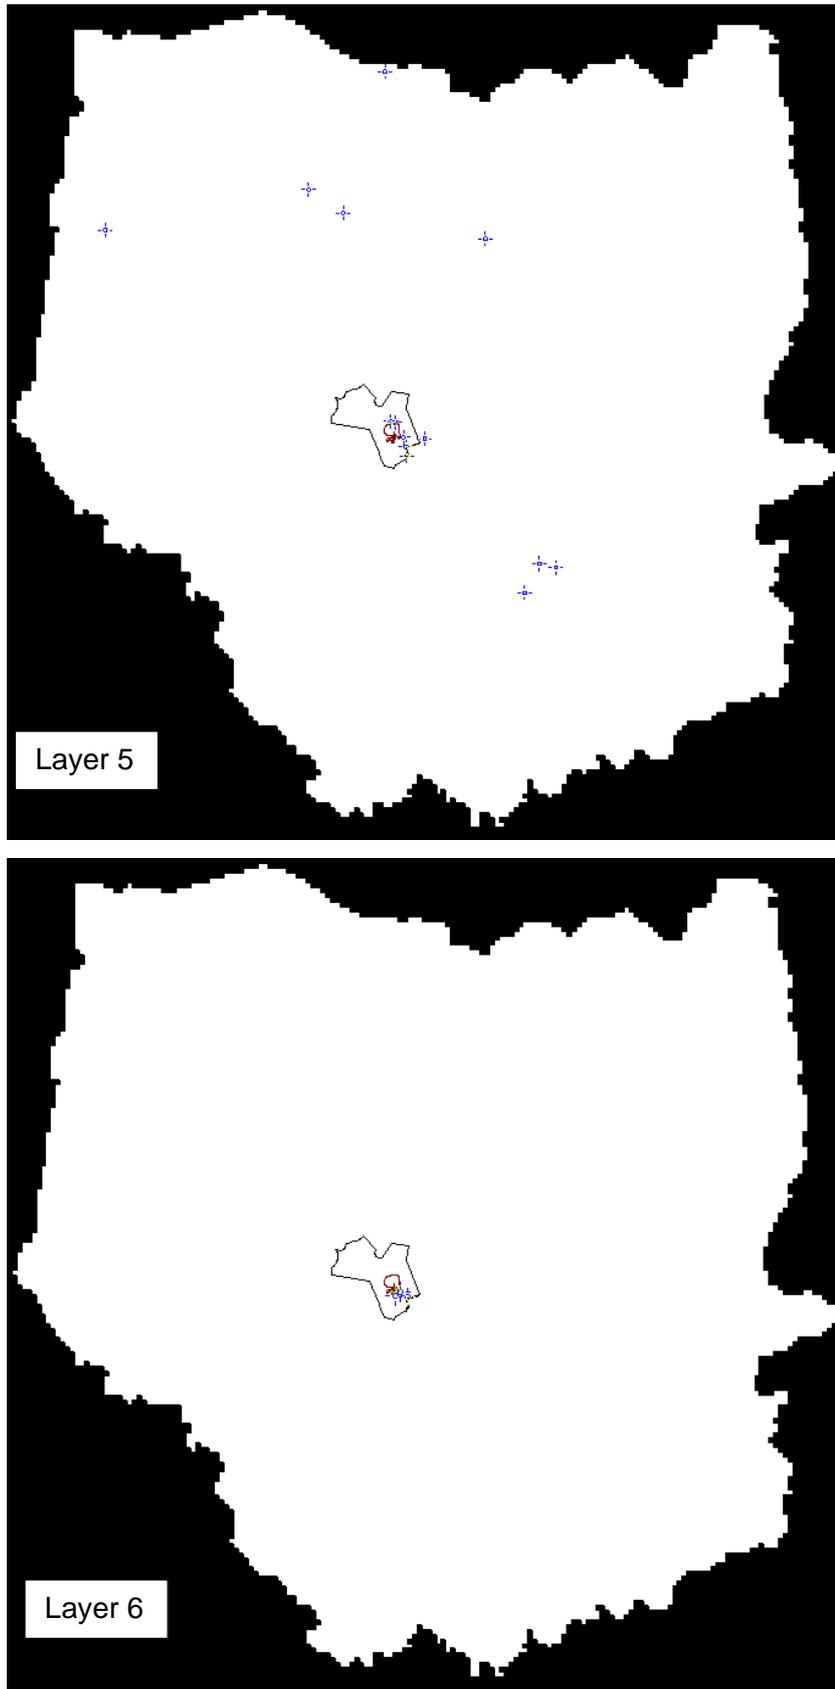

Hydraulic conductivity and recharge rates were adjusted, within realistic ranges, during the manual calibration process. Calibration was considered complete when a reasonably good match was obtained between observed and simulated heads.

Hydraulic conductivity values assigned to the calibrated steady state model are presented in **Table 33**. Recharge factors assigned to the calibrated model are presented in **Table 29**.

Table 33
Groundwater Model – Calibrated Values of Hydraulic Parameters

Zone	Kx (m/d)	Ky (m/d)	Kz (m/d)	Locality	Description
11	2.05	2.05	1.06	Valley	Alluvium (Sandy Silt)
12	0.098	0.098	0.08	Hills	Regolith (clayey silt with vegetation)
13	0.1	0.1	0.02	Outcrop Rock (Local)	Weathered Rock
21	3	3	0.6	Valley	Alluvium (Silty Sand)
22	0.05	0.05	0.01	Hills	Extremely Weathered Rock (silty clay)
23	0.25	0.25	0.05	Outcrop Rock (Local)	Weathered Rock
31	0.89	0.89	0.09	Valley	Partially Weathered Rock (weathered work with stiff clay)
32	0.57	0.57	0.057	Hills	Partially Weathered Rock
33	0.87	0.87	0.09	Outcrop Rock (Local)	Weathered Rock
41	0.003	0.003	0.0003	South West	Ordovician Basement
42	0.003	0.003	0.0003	North East	Sydney Basin
45	0.06	0.06	0.012	Outer Mine Area	Volcanics / Coomber Formation
46	0.1	0.1	0.02	Mine Area	Volcanics
51	0.0021	0.0021	0.0004	West	Volcanics / Ordovician
52	0.0021	0.0021	0.0004	North East	Sydney Basin
53	0.02	0.02	0.002	Outer Mine Area	Volcanics / Coomber Formation
55	0.2	0.2	0.02	Mine Area	Volcanics / Coomber Formation
61	0.00023	0.00023	0.00004	Whole Model	Ordovician Basement
63	0.01	0.01	0.002	Outer Mine Area	Volcanics / Coomber Formation
71	0.0006	0.0006	0.0001	Whole Model	Ordovician Basement
81	0.0005	0.0005	0.0001	Whole Model	Ordovician Basement

Initial attempts to use pilot points within PEST-HP to assess if finer resolution hydraulic conductivity zones would improve calibration in the vicinity of the Mine Site, provided little benefit, and ultimately resulted in the adoption of the Mine Area and Outer Mine Area hydraulic parameter zones presented in Section 5.3.2.7. Manual calibration then proceeded on the basis of this zonation.

Figure 57. shows the match between simulated groundwater levels (heads) in the calibrated steady model and observed heads. Qualitatively assessing the match between modelled and observed heads (**Figure 57**), the degree of calibration can be assessed according to how close the plotted points are to the diagonal line from the origin (i.e. along the line $y=x$ that represents perfect calibration). **Figure 57** shows a good match between simulated groundwater levels (heads) in the calibrated model and observed heads.

Figure 57 Model Calibration – Modelled vs Observed Heads (m AHD)


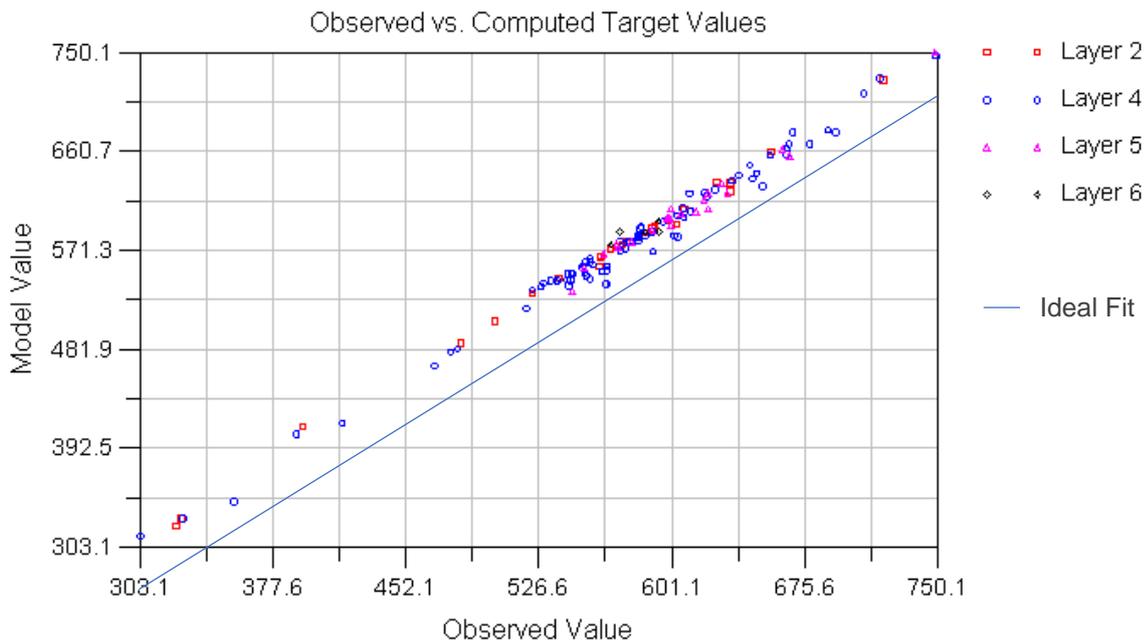


Table 34 presents a summary of the calibration statistics for the steady state model. **Figure 58** shows the error (residual) for calibration targets in each model layer. The residual is the difference between the model-computed head and the observed head.

Table 34
Calibration Statistics for Steady State Model

Statistical Parameters	Value
Residual Mean	0.02 m
Residual Standard Deviation	7.74 m
Absolute Residual Mean	5.73 m
Residual Sum of Squares	8,090
RMS Error	7.74 m
Minimum Residual	-17.22 m
Maximum Residual	23.93 m
Range of Observation	446.08 m
Scaled Residual Standard Deviation	0.017 m
Scaled Absolute Mean	0.013 m
Scaled RMS	1.7%
Number of Observations	135

Figure 58 Calibration Residual Maps

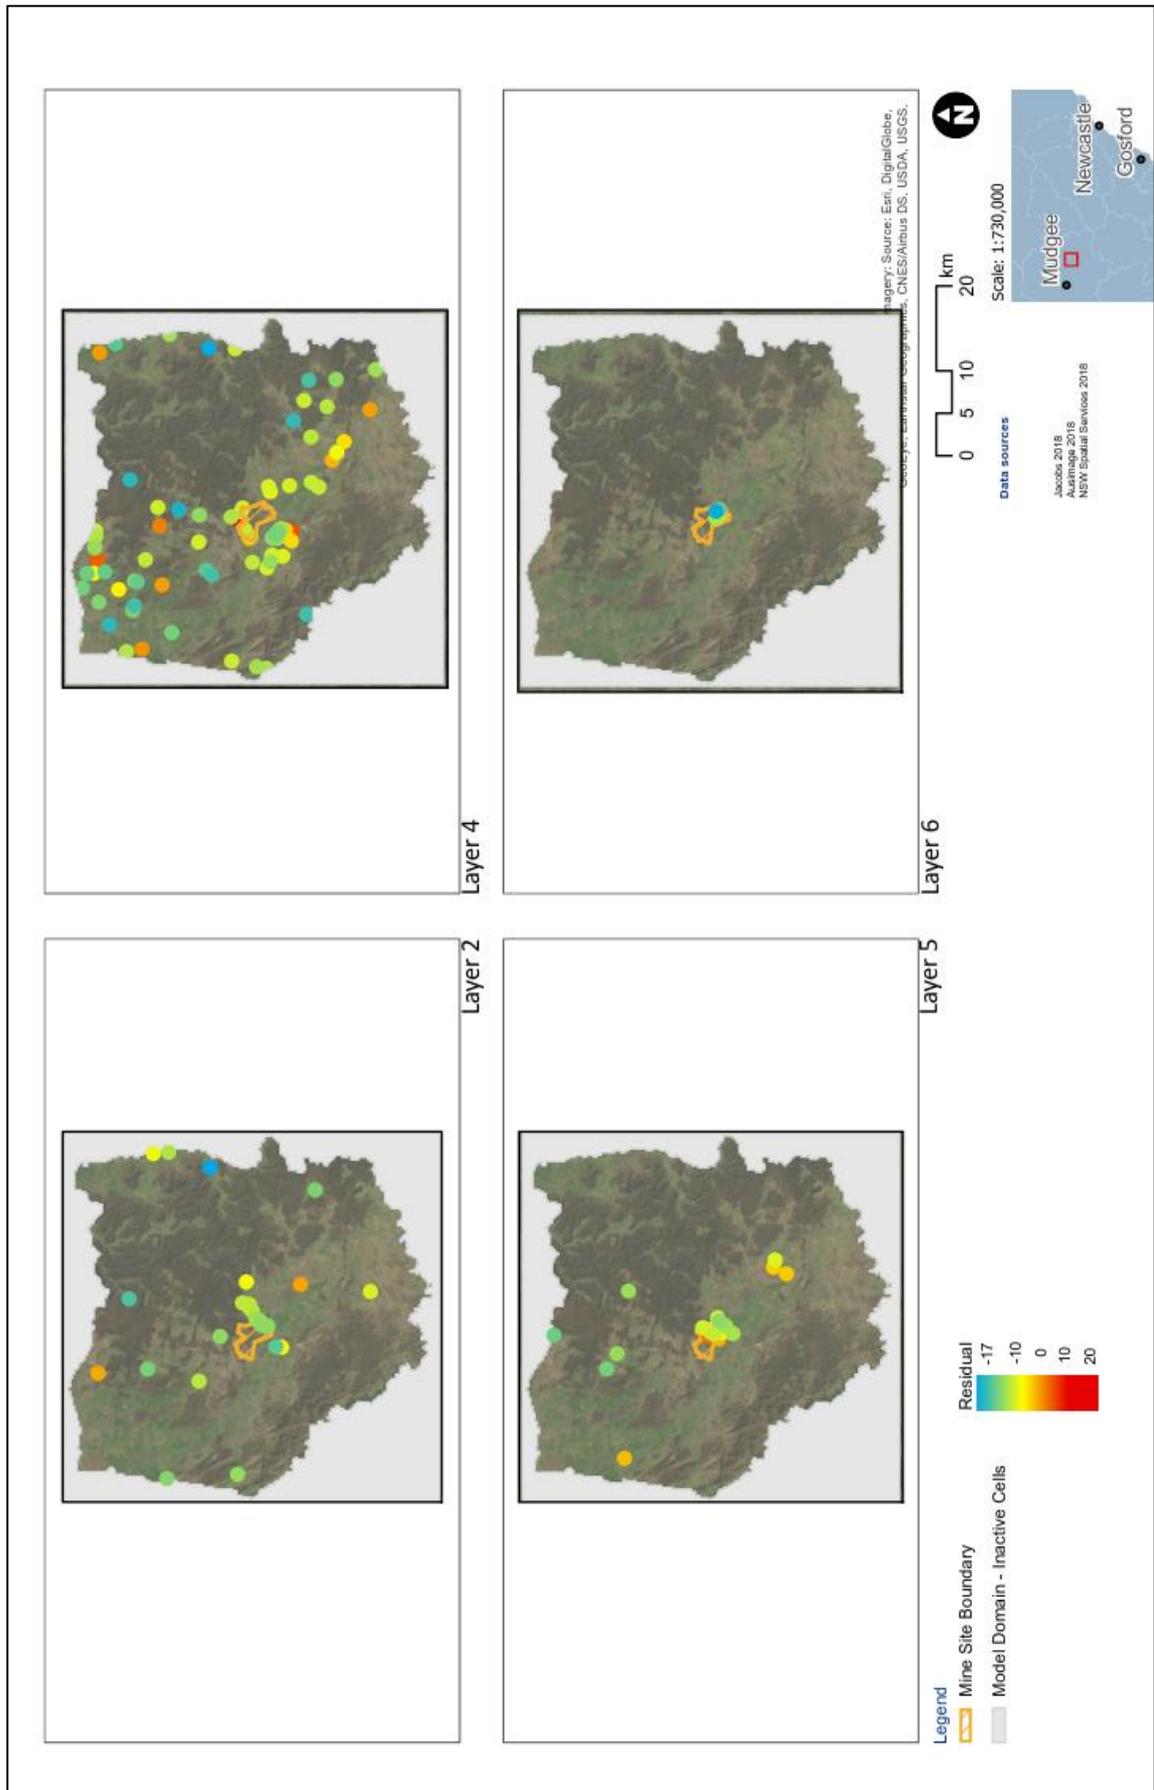

The scaled root mean square (scaled RMS) is one of the statistics often used to quantitatively assess the goodness-of-fit between simulated groundwater levels and actual observed groundwater levels. A scaled RMS error less than ten per cent usually indicates a reasonably high degree of calibration. The scaled RMS error of 1.7% obtained in the calibrated steady state model (**Table 34**) shows that the model is well calibrated to measured heads.

Given the good match between simulated and observed heads in **Figure 57** and the acceptable calibration statistics (**Table 34**) it was concluded that the steady state model simulates average groundwater levels (heads) with reasonable accuracy.

5.3.3.2 Sensitivity Analysis – Steady State Model

Following the manual calibration of the steady state model, automated sensitivity analysis was undertaken with PEST_HP (Watermark Numerical Computing, 2016) to identify those parameters that have the greatest/least influence on model calibration.

The sensitivity analysis assessed the effect of changing hydraulic conductivity and recharge values on the objective function. The objective function is a measure of the level of agreement between observed water levels and model-simulated values.

Parameter sensitivities were calculated during the PEST_HP automated parameter estimation process. PEST_HP systematically varies each of the adjustable parameters (i.e. hydraulic conductivity and recharge), one at a time and runs the model with the adjusted parameter set to establish the change in the objective function. PEST_HP calculates a “composite sensitivity” for each parameter at the end of each optimisation iteration.

To calculate the composite sensitivity, the groundwater model is run at least ‘m’ times (where m is the number of adjustable parameters) during each PEST_HP optimisation iteration. PEST_HP calculates the Jacobian matrix during each optimisation iteration (Doherty, 2015). Based on the contents of the Jacobian matrix, PEST calculates the composite sensitivity for each parameter using the Jacobian matrix (Watermark Numerical Computing, 2016).

The horizontal hydraulic conductivity and recharge parameters assessed during the sensitivity analysis are presented in **Table 35** and **Table 36** respectively. Vertical hydraulic conductivity was tied to horizontal hydraulic conductivity during the automated calibration. This means that only horizontal hydraulic conductivity values are estimated, and then vertical hydraulic conductivity is scaled as PEST estimates horizontal hydraulic conductivity.

Figure 59 shows composite sensitivity values for the horizontal hydraulic conductivity parameter zones hydraulic conductivity zones. The most sensitive horizontal hydraulic conductivity parameter zone is kx51, which is the zone in model layer 5 representing Volcanic/Ordovician rocks located to the west of the mine site. The kx51 composite sensitivity of 2,885 is several orders of magnitude higher than the next most sensitive hydraulic conductivity parameter zone kx12. Parameter zone kx12 is the zone in model layer 1 representing clayey silt regolith material in hilly areas. The composite sensitivity values for all the other hydraulic conductivity zones are zero or very close to zero. A composite sensitivity of zero indicates that changing the parameter value from the calibrated model value does not degrade or improve the calibration (i.e. the calibration objective function is not affected). From the sensitivity analysis, it was concluded that further refinement of all hydraulic conductivity zones, except zone kx51 and kx12 through extended calibration would not provide any meaningful improvement in the reliability of the model since the calibration statistics are relatively insensitive to variation of these three parameters. Moreover, doing so could lead to assigning physically unrealistic values to the parameters in order to make model results fit the measurements.

Table 35
Hydraulic Conductivity Parameter Zones Assessed during Sensitivity Analysis

Parameter	Layer	Locality	Geology	Variability range allowed during analysis
kx11	1	Valley	Alluvium (Sandy Silt)	Minimum value was one order of magnitude lower than calibrated model value. Maximum value was one order of magnitude higher than calibrated model value.
kx12	1	Hills	Regolith (clayey silt with vegetation)	
kx13	1	Outcrop Rock (Local)	Weathered Rock	
kx21	2	Valley	Alluvium (Silty Sand)	
kx22	2	Hills	Extremely Weathered Rock (silty clay)	
kx23	2	Outcrop Rock (Local)	Weathered Rock	
kx31	3	Valley	Partially Weathered Rock (weathered work with stiff clay)	
kx32	3	Hills	Partially Weathered Rock	
kx33	3	Outcrop Rock (Local)	Weathered Rock	
kx41	4	South West	Ordovician Basement	
kx42	4	North East	Sydney Basin	
kx45	4	Outer Mine Area	Volcanics / Coomber Formation	
kx46	4	Mine Area	Volcanics	
kx51	5	West	Volcanics / Ordovician	
kx52	5	North East	Sydney Basin	
kx53	5	Outer Mine Area	Volcanics / Coomber Formation	
kx55	5	Mine Area	Volcanics / Coomber Formation	
kx61	6	Whole Model	Ordovician Basement	
kx63	6	Outer Mine Area	Volcanics / Coomber Formation	
kx71	7	Whole Model	Ordovician Basement	
kx81	8	Whole Model	Ordovician Basement	

Figure 60 shows composite sensitivity values for recharge zones. The most sensitive recharge zones are zones r32 and r34, located further to the north of the mine site. The composite sensitivities of approximately 2,885 for recharge zones r32 and r34 are several orders of magnitude higher than the composite sensitivities for the rest of the recharge zones. Recharge zones r1, r2, r3, r7, r14, r21, r31, with composite sensitivities of zero are insensitive to changing recharge from calibrated model values.

Table 36
Recharge Zones Assessed during Sensitivity Analysis

Zone	Location	Variability range allowed during analysis
r1	Foothills	Maximum value was 200% of calibrated model value. Minimum value was 50% of calibrated model value.
r2	Hilltops	
r3	Hilltops	
r4	Floodplain	
r11	Foothills	
r12	Hilltops	
r14	Floodplain	
r21	Foothills	
r22	Hilltops	
r24	Floodplain	
r31	Foothills	
r32	Hilltops	
r34	Floodplain	

Figure 59 Hydraulic Conductivity Composite Sensitivity


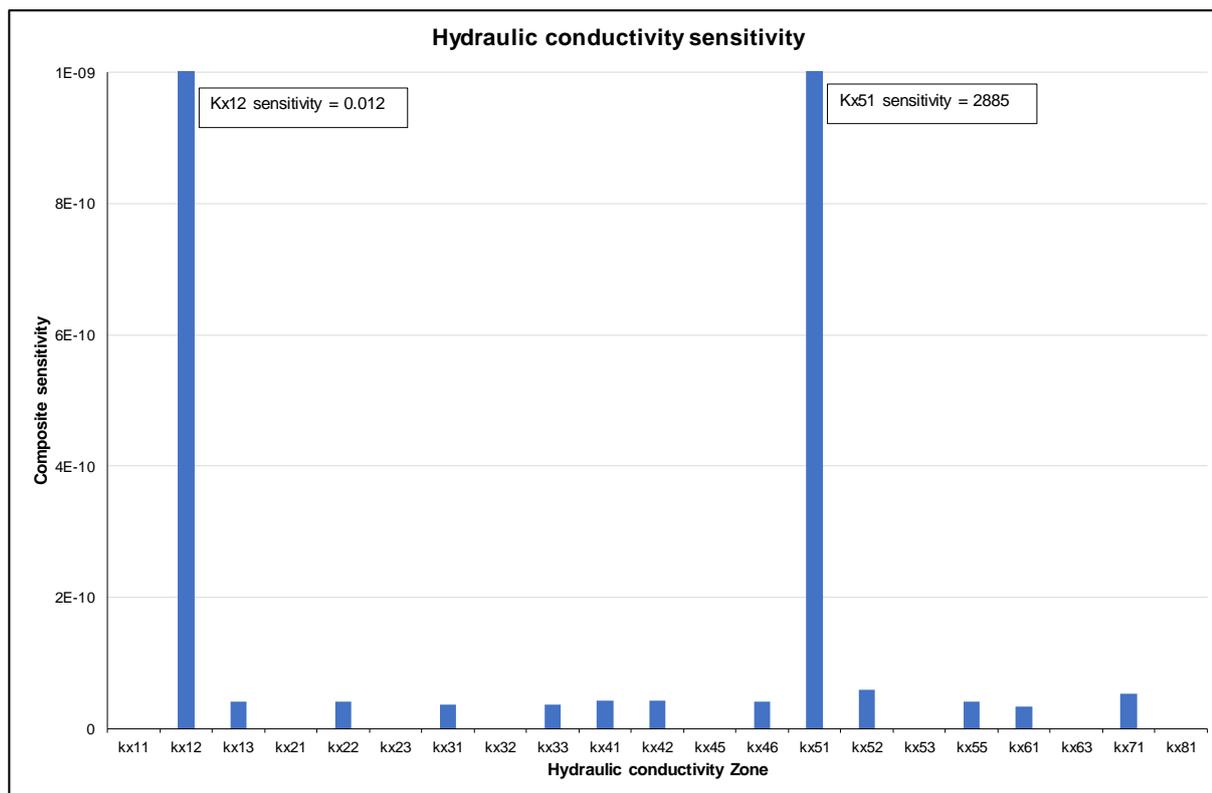


Figure 60 Recharge Composite Sensitivity

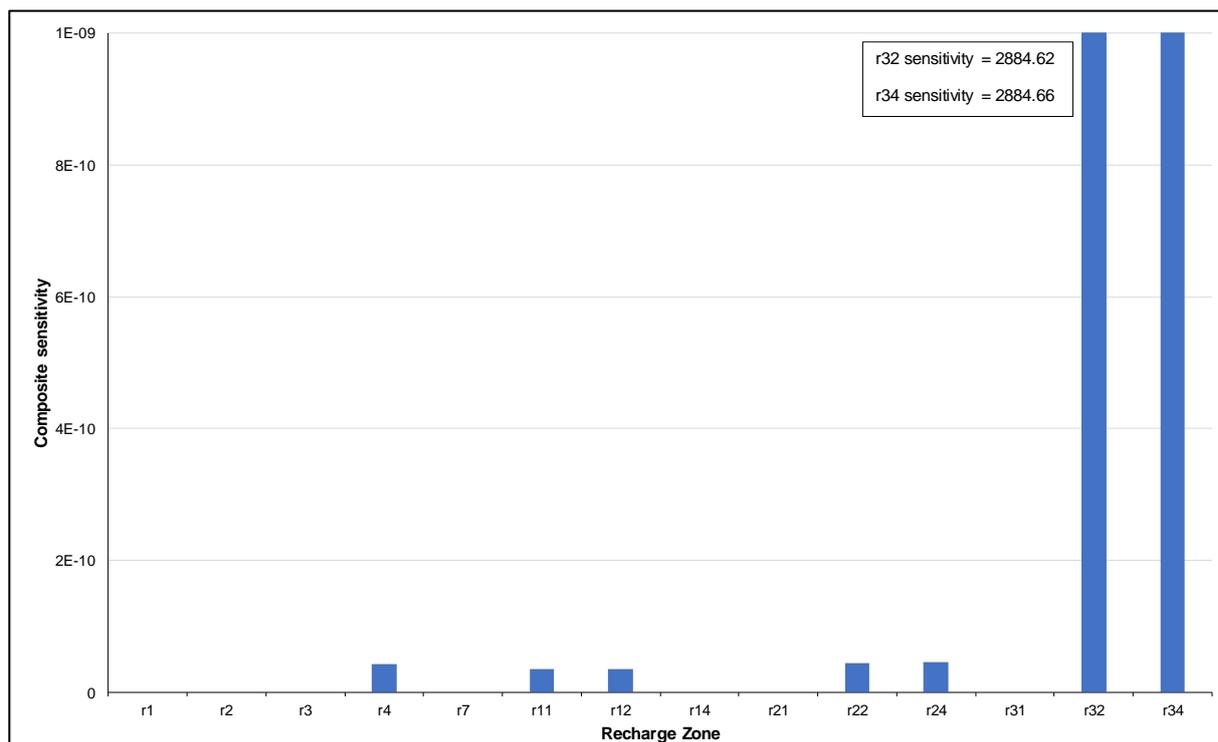

5.3.3.3 Water Balance – Steady State Model

Table 37 presents the water balance for the calibrated steady state model. Groundwater outflows along water courses, represented in the model by drain and river boundary cells, account for approximately 52% of the outflows from the groundwater model domain. Evapotranspiration accounts for approximately 46% of the losses from the groundwater system, with groundwater pumping from wells accounting for the balance of the groundwater losses. Groundwater recharge contributes approximately 99 % of the inflows to the groundwater system. The water balance indicates that, on average, the modelled groundwater system predominantly losses water to water courses.

Table 37
Water Balance for Calibrated Steady State Model

Component	Inflow (m ³ /day)	Outflow (m ³ /day)
Well	0	3 910
River	2 746	26 270
Drain	0	77 302
Recharge	196 648	0
Evapotranspiration	0	91 911
Total	199 394	199 394
Error		0
Percentage Error		0%

The water balance error of approximately 0% is lower than the suggested upper threshold of 1% presented in the Australian Groundwater Modelling Guidelines for a Class 2 groundwater model.

5.3.3.4 Calibration for Groundwater Levels – Transient Conditions

The model was calibrated for the period from 1 January 2011 through to 30 April 2017. The calibration simulation used transient stress periods (monthly), with the exception of the initial stress period which was assumed to be 1 day in duration and the model in steady-state to allow the model to settle in. Initial water levels were approximated from regional water levels in the CL&W PINNEENA database.

Water level targets for calibration included one-off water levels extracted from the CL&W PINNEENA database, as well as time series water level data collected from the Bowdens Silver groundwater monitoring network.

Hydraulic conductivity values assigned to the calibrated steady state model (**Table 33**) were assigned as initial values in the transient model. Storage parameters (specific yield and specific storage) and, if necessary, hydraulic conductivity values were adjusted manually to obtain a suitable match between observed and simulated heads.

Calibration was conducted by iterative manual step-wise adjustment of model input parameters to achieve an acceptable match between simulated and observed heads (groundwater levels). Calibration was achieved by visually comparing simulated and observed hydrographs, as well as by assessing the statistical calibration measures.

A reasonable level of calibration for the transient model was achieved with the same hydraulic conductivity values assigned to the calibrated steady state model (**Table 33**) (i.e. transient calibration was attained with no modification to the hydraulic conductivity data included in the steady state model).

During the calibration, storage parameters were adjusted within the range of typical values for the formations occurring within the region. Storage parameters assigned to the calibrated model are presented in **Table 38**.

Calibration hydrographs showing observed and simulated heads for bores located in the vicinity of the open cut pit and TSF area are presented in **Figure 61** and **Figure 62**. Calibration hydrographs for bores to the north and south of the open cut pit area are presented in **Figure 63** and **Figure 64** respectively. Calibration hydrographs for bores in the vicinity of Hawkins Creek and the groundwater works at Lue are presented in **Figure 65** and **Figure 66**, respectively.

A qualitative assessment of the hydrographs shows a reasonably good match between simulated and observed heads. The simulated groundwater level peak elevations were slightly lower than observed peaks because the model is formulated with monthly stress periods. High intensity short duration rainfall events cannot be represented explicitly in the model and as a result the peaks in groundwater levels are under-predicted. In addition, an average pumping rate was assigned to the extraction wells and hence the impact of daily and variable pumping cycles cannot be simulated accurately.

Figure 61 Model Calibration – Hydrographs (Vicinity of Open Cut Pit)

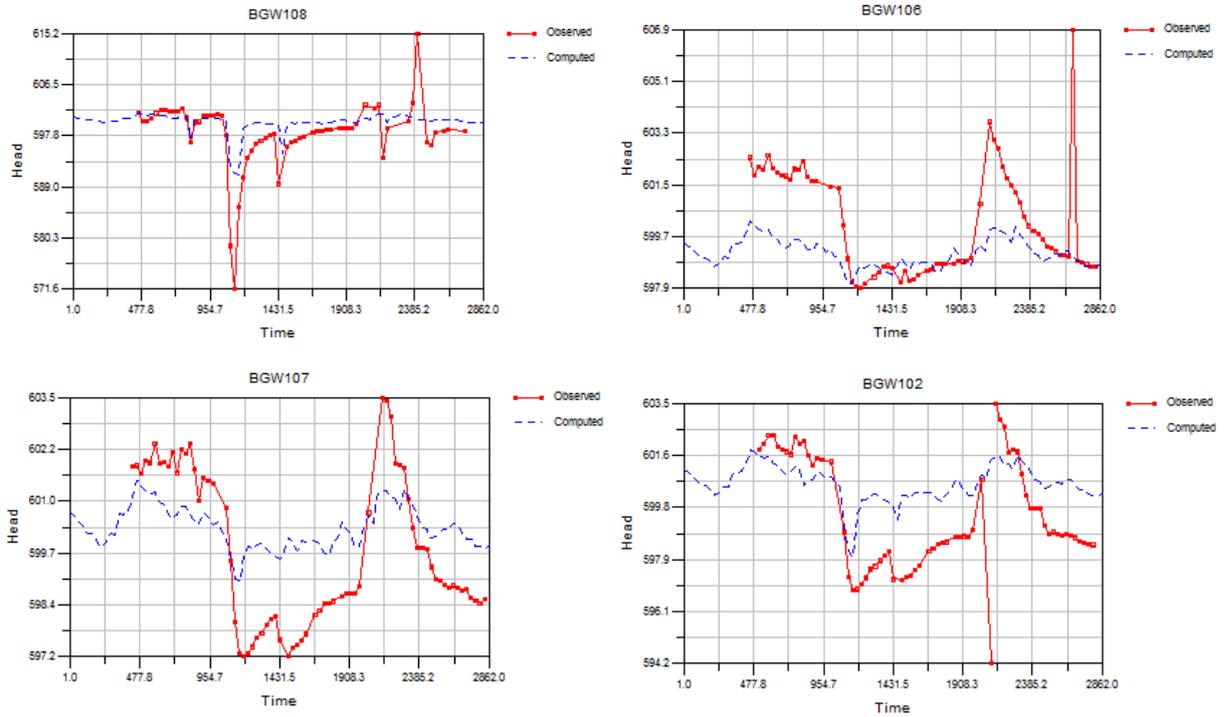


Figure 62 Model Calibration – Hydrographs (TSF Area)

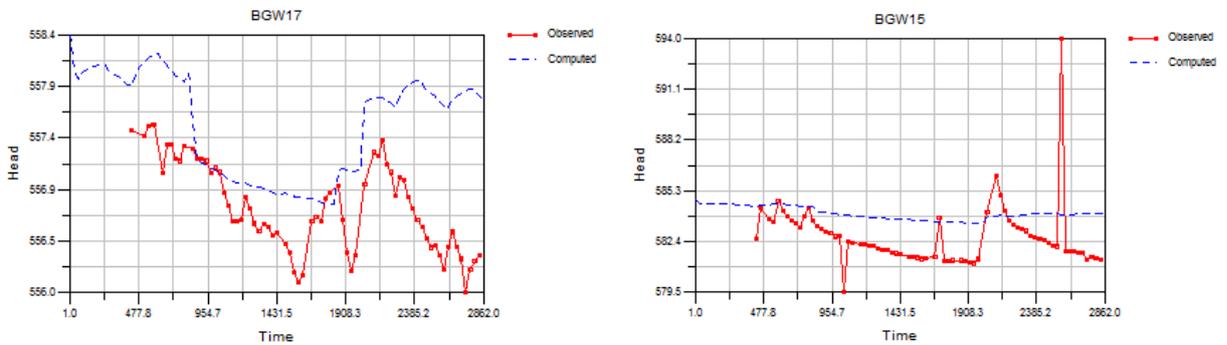


Figure 63 Model Calibration – Hydrographs (hydraulic head in m AHD) north of the Open Cut Pit Area

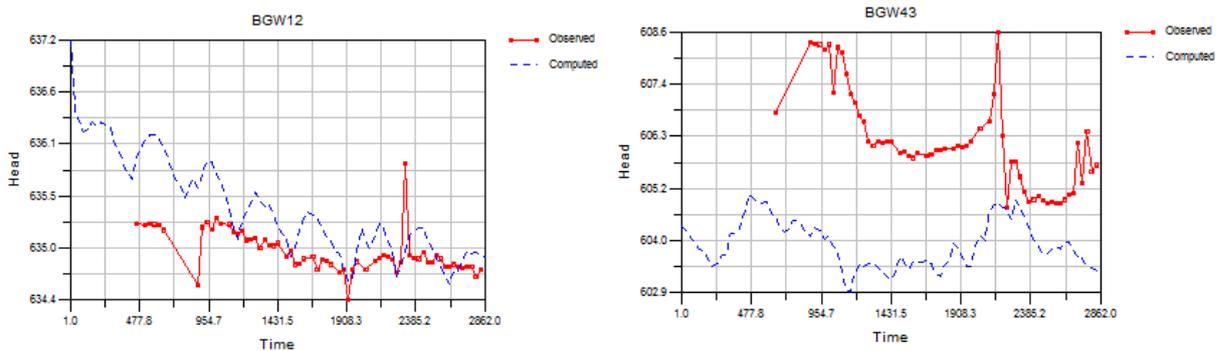


Figure 64 Model Calibration – Hydrographs (hydraulic head in m AHD) south of the Open Cut Pit Area

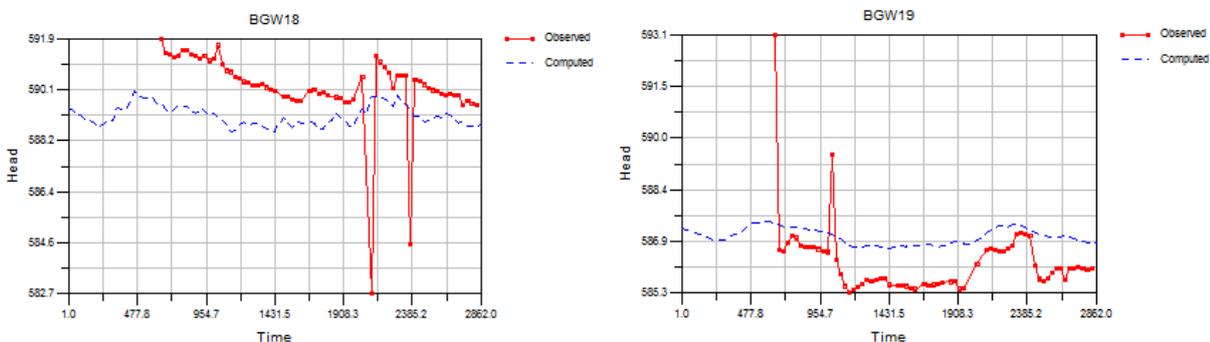


Figure 65 Model Calibration – Hydrographs (hydraulic head in m AHD) in the vicinity of Hawkins Creek

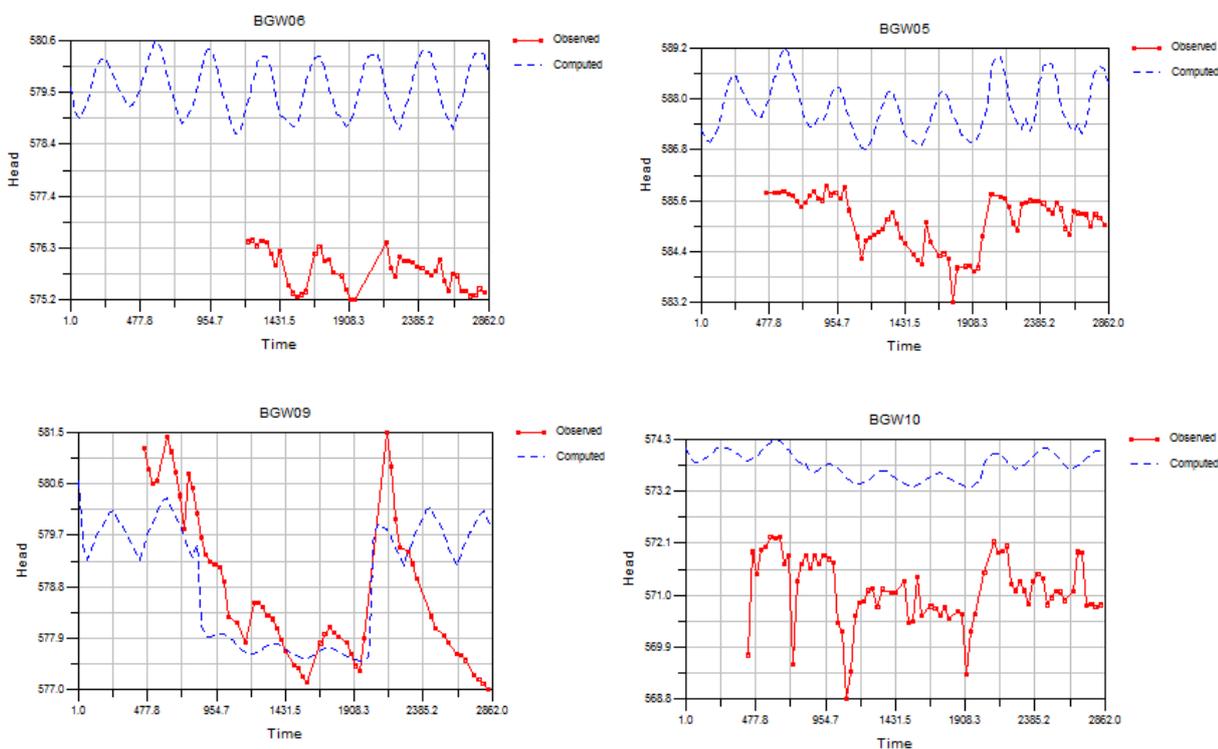


Figure 66 Model Calibration – Hydrographs (at Lue)

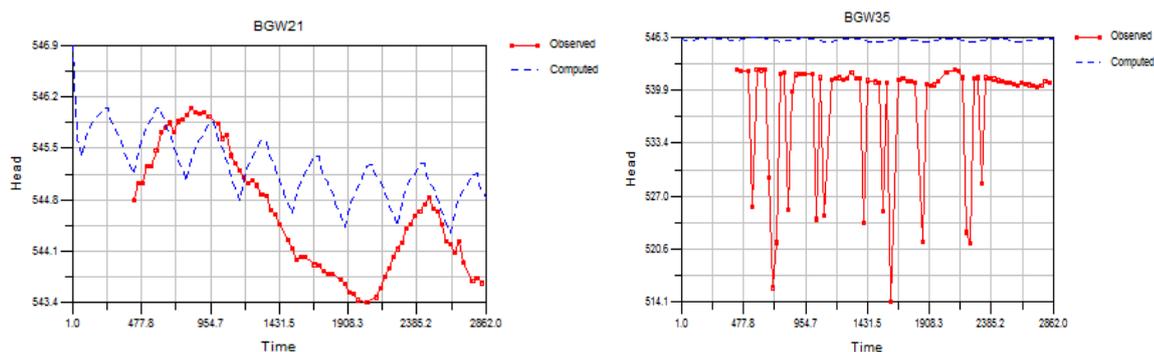


Table 38
Calibrated Model Storage Parameter Values

Zone	Ss (m ⁻¹)	Sy	Locality	Description
11	9.0x10 ⁻⁴	0.11	Valley	Alluvium (Sandy Silt)
12	9.0x10 ⁻⁴	0.09	Hills	Regolith (clayey silt with vegetation)
13	5.0x10 ⁻⁵	0.02	Outcrop Rock (Local)	Weathered Rock
21	7.0x10 ⁻⁴	0.3	Valley	Alluvium (Silty Sand)
22	7.0x10 ⁻⁴	0.04	Hills	Extremely Weathered Rock (silty clay)
23	5.0x10 ⁻⁵	0.02	Outcrop Rock (Local)	Weathered Rock
31	5.0x10 ⁻⁴	0.09	Valley	Partially Weathered Rock (weathered work with stiff clay)
32	5.0x10 ⁻⁴	0.09	Hills	Partially Weathered Rock
33	5.0x10 ⁻⁵	0.02	Outcrop Rock (Local)	Weathered Rock
41	2.0x10 ⁻⁵	0.01	South West	Ordovician Basement
42	4.0x10 ⁻⁵	0.02	North East	Sydney Basin
45	5.0x10 ⁻⁵	0.01	Outer Mine Area	Volcanics / Coomber Formation
51	2.0x10 ⁻⁵	0.01	South West	Volcanics / Ordovician
52	2.0x10 ⁻⁵	0.01	North East	Sydney Basin
53	2.0x10 ⁻⁵	0.01	Outer Mine Area	Volcanics / Coomber Formation
55	2.0x10 ⁻⁵	0.01	Mine Area	Volcanics / Coomber Formation
61	2.0x10 ⁻⁵	0.01	Whole Model	Ordovician Basement
63	2.0x10 ⁻⁵	0.01	Outer Mine Area	Volcanics / Coomber Formation
71	1.0x10 ⁻⁵	0.01	Whole Model	Ordovician Basement
81	8.0x10 ⁻⁶	0.01	Whole Model	Ordovician Basement

The calibration statistics for quantitatively assessing the goodness-of-fit between simulated and observed heads are presented in **Table 40**. For calibration of groundwater models, one of the key performance measures is the correlation between observed and predicted water levels in terms of absolute levels, with the difference in observed and predicted water levels termed the residual. The maximum residuals are accentuated due to the pumping effect on the extraction wells located within the area. An average pumping rate was assigned to the extraction wells and hence the impact of daily and variable pumping cycles cannot be simulated accurately as shown in the above hydrographs.

The calculated residuals for the water level calibration targets are then treated statistically as described in the Australian Groundwater Modelling Guidelines (Barnett et al. 2012) and presented on **Table 39**.

Overall the calibration achieved a very good scaled root mean square (RMS) error of 1.4%.

Table 39
Calibration Statistics for Transient Simulation

Statistical Parameters	Value
Residual Mean	-1.68 m
Residual Standard Deviation	4.03 m
Absolute Residual Mean	7.07e+6 m
RMS Error	6.26 m
Minimum Residual	-41.71 m
Maximum Residual	28.74 m
Range of Observation	446.08 m
Scaled Residual Standard Deviation	0.014 m
Scaled Absolute Mean	0.010 m
Scaled RMS	1.4%
Number of Observations	180 361

5.3.3.5 Water Balance – Transient Model

The transient calibration water balance is provided on **Table 40**. Groundwater outflows along water courses, represented in the model by drain and river boundary cells, account for approximately 42% of the outflows from the groundwater model domain. Evapotranspiration also accounts for approximately 42% of the losses from the groundwater system. On average, groundwater pumping from wells accounted for approximately 2% of the losses from the modelled groundwater system. Groundwater recharge and river leakage contribute approximately 91 % and 1% of the inflows to the groundwater system. The net negative change in groundwater storage indicates a net gain in groundwater storage over the modelled period.

Table 40
Water Balance for Transient Calibrated Model

Component	Inflow (m ³ /day)	Outflow (m ³ /day)
Storage	18 389	32 111
Well	0	4 975
River	2 881	24 693
Drain	0	74 363
Recharge	212 132	0
Evapotranspiration	0	97 260
Total	233 402	233 402
Error		0
Percentage Error		0%

The water balance error of approximately 0 % is lower than the suggested upper threshold of 1% presented in the Australian Groundwater Modelling Guidelines for a Class 2 groundwater model.

5.3.3.6 Base Flow Calibration

The model was also calibrated for flows by comparing predicted baseflow in Hawkins Creek to baseflow estimated from measured streamflows. Streamflow in Hawkins Creek (downstream of the Mine Site) is monitored by a gauge and the results are presented in **Figure 67** with the corresponding calculated baseflow presented in **Figure 68**. The baseflow contribution was calculated from the gauged streamflow data using the method described by Chapman (1999).

Figure 67 Measured Discharge at Hawkins Creek (June 2013 to April 2018)


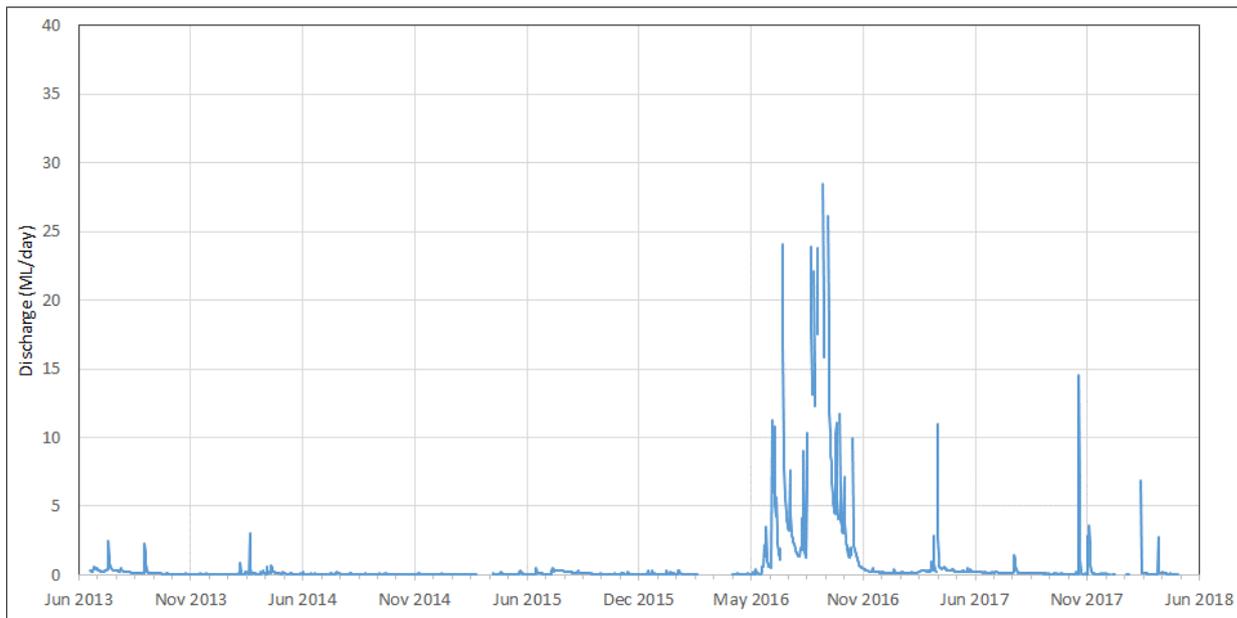


Figure 68 Modelled vs Calculated Baseflow in Hawkins Creek (Calibration Period)

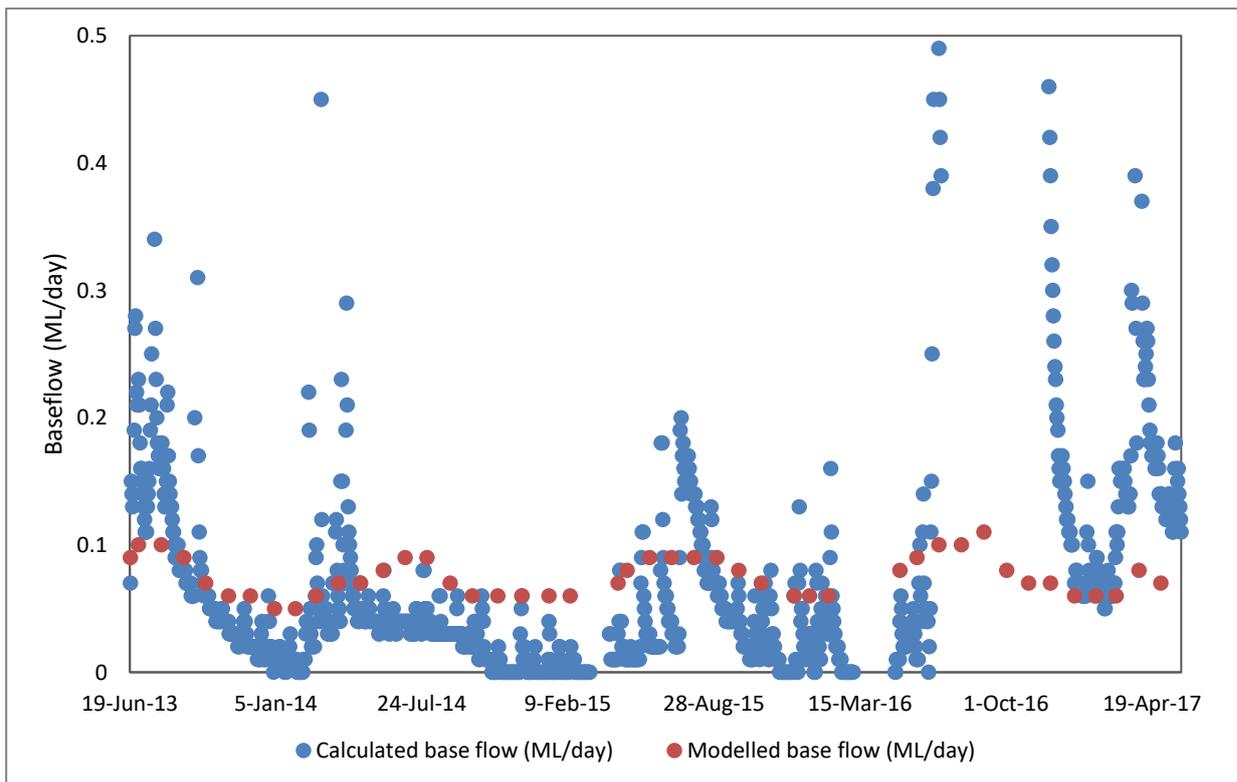

Chapman's approach utilises the recession constant of the hydrograph, which represents the ratio of the flow to the preceding flow during a period of no direct runoff. This filter is based on the assumption that the baseflow is a weighted average of the quick flow (immediate runoff) and the baseflow at the previous time interval and only requires a single pass through the data.

The estimated baseflow component generally remains less than 0.2 ML/day with the exception being during periods of peak rainfall runoff. The model predicted baseflow contributions also show a rise and fall with rainfall recharge to the aquifer, in response to rising and falling groundwater levels. The model baseflow value matches well with the calculated value based on measured flows (**Figure 68**).

5.3.4 Predictive Modelling Scenarios

Following successful calibration, two predictive scenarios of the numerical groundwater model were run. One scenario represents the "Null Case" in which no active mining takes place, with the other scenario being the "Mining Case", in which the proposed open cut pit development and other associated mine infrastructure is included.

The modelled Mining Case scenario included:

- a period of one year (pre-mining),
- the 15.5 year proposed mine development; and
- a period of 100 years following mine closure.

Groundwater inflows due to open cut pit dewatering are obtained as a direct output from the Mining Case scenario, whereas effects due to mining, such as groundwater drawdown or baseflow reduction, are calculated by comparing the Mining Case scenario to the same period from the Null Case scenario.

5.3.4.1 Mining

The predictive Mining Case scenario assumes that mining operations and open cut pit development would occur as summarised in Section 5.2.1. This scenario also assumes no temporal variation in climatic stresses in the future. In this regard, the model assumes average rainfall and evaporation in the future as estimated from historic climate observations. It is noted that potential future climatic variability has been assessed by applying high and low recharge scenarios in the Model Sensitivity Analysis (Section 5.3.5.8).

Mine dewatering has been simulated by MODFLOW Drain cells (using the DRN Package) drain cells that simulate the capture of mine water via sump dewatering as the mine operation advances the open cut pit. A series of drain (DRN) cells were assigned to the model to simulate the removal of water flowing into the open cut pits throughout the life of the Project. These cells are activated in a manner that replicates the mining schedule based on 6-monthly open cut pit progression. The drain elevations have been set to the elevation and extent of the proposed mine development.

For the post mining period, the final voids were represented as regions of high hydraulic conductivity and specific yield was set to 1.0 which are the appropriate settings for the simulation of a void in which water can accumulate.

Rainfall and evaporation were assumed to be active in the final voids and these climatic stresses help to predict post-mining final void water levels.

5.3.4.2 Tailings Storage Facility

The TSF has been replicated in accordance with the TSF Preliminary Design Report (ATC Williams, 2020a), including the staged development and of the TSF decant pond.

During mining, the TSF has been simulated by applying higher recharge rates to the area of inundation of the decant pond within the proposed TSF. Post-mining it is assumed that the TSF would be capped to reduce recharge and minimise seepage, and a reduced rate of recharge is applied over the TSF area. Nominal rainfall recharge is applied to the TSF areas outside of the decant pond area.

Adopted recharge rates for the TSF decant pond during mining are provided in **Table 41**. A seepage rate of $1.56 \times 10^{-8} \text{ m}^3/\text{s}/\text{m}^2$ ($1.3 \times 10^{-3} \text{ m}/\text{day}$) considering a 20 m thick tailings profile (ATC Williams, 2020a) was applied over the entire ponded area for each stage.

Table 41
Recharge Rate within TSF Decant Pond

Predictive modelling (Mine schedule)	Recharge applied (m/day)	Comments
Pre-mining (Year 0-1)	9.55×10^{-5}	Average climatic condition
Mining (Years 1-2)	9.55×10^{-5}	Average climatic condition
Mining (Years 2 -15.5)	1.3×10^{-3}	Elevated recharge due to TSF ponding

A low permeability grout curtain is proposed beneath the TSF embankment to mitigate against potential seepage. The grout curtain was simulated using the Wall horizontal flow boundary (HFB) package in layers 1, 2 and 3 of the model beneath the TSF embankment in accordance with ATC Williams (2020a) TSF design. The HFB was assigned a wall thickness of 25 m and a hydraulic conductivity of 0.00864 m/day ($1 \times 10^{-7} \text{ m/s}$).

5.3.4.3 Post-Mining

Post mining, when active dewatering is discontinued, groundwater levels in the vicinity of the open cut pit would rebound resulting in the net inflow of groundwater to the open cut pit. This inflow, combined with incident rainfall and runoff from any contributing catchments would result in the formation of an open cut pit lake, within the mine void, that would develop until equilibrium is reached between total inflows and total outflows.

During this period, the model assumes specific hydraulic conditions in the final mining voids, as follows.

- Hydraulic conductivity of 1,000 m/d, which represents very high conductivity consistent with a void filled with water. The assumption ensures that there are no substantial head gradients within the void.

- In the pit area where the pit lake climbs through a number of model layers, the specific storage is set to equal 5×10^{-6} to match the compressibility of water. The specific yield in the pit area is set to 1.
- Rainfall is assumed to accumulate in the void at a rate equivalent to 100% of the mean annual rainfall.
- In the void area, a maximum evaporation rate of 4.15 mm/day was applied when the water table/void water level was above the ET surface. This maximum evaporation rate is equivalent to the mean daily evaporation from the SILO data. The ET surface was assigned as the top elevation of the highest active model cell in a column. An extinction depth of 55 m was applied with the extinction depth determined based on an iterative process of matching model simulated evaporation volumes to evaporation volumes calculated analytically.
- Recharge rate in the TSF Area was reduced gradually assuming the TSF would be capped and would drain over time. A very low recharge rate was applied following six years post closure. Applicable recharge rates adopted are provided on **Table 42**.
- A lower recharge rate (1.15×10^{-7} m/day) was applied in the post mining period to the WRE located at the eastern side of the open cut pit on the basis that the WRE would be lined and encapsulated (Advisian, 2020).

Table 42
Recharge rate within TSF Area (post mining)

Predictive Modelling (Mine schedule)	Recharge Applied (m/day) in the Decant Pond Area of the Model	Comments
Post-mining (1-2 years)	1.3×10^{-3}	Higher recharge due to TSF ponding
Post-mining (2 to 6 years)	1.3×10^{-4}	Capped and draining
Post-mining (6-200 years)	1.3×10^{-6}	Fully drained

5.3.5 Model Results

5.3.5.1 Mine Dewatering

Predicted mine inflows are provided on **Figure 69** with predicted annual dewatering volumes provided on **Figure 70**.

Figure 69 provides both the raw drain cell output (Modelled Inflows) and a smoothed inflow that is considered to be more representative of the likely actual inflow rates. The direct model output displays large spiked inflow events that are an artefact of the six-monthly open cut pit shells being implemented in the model. As each 6-month block is extracted (via drain cells replicating the base elevation of the block), inflows spike as the surrounding groundwater system equilibrates with the newly imposed drain elevation. In reality, mining would progress at a relatively steady rate of advancement resulting in a more gradual increase in inflows as represented by the smoothed inflow curve.

Figure 69 Predicted Dewatering Rates


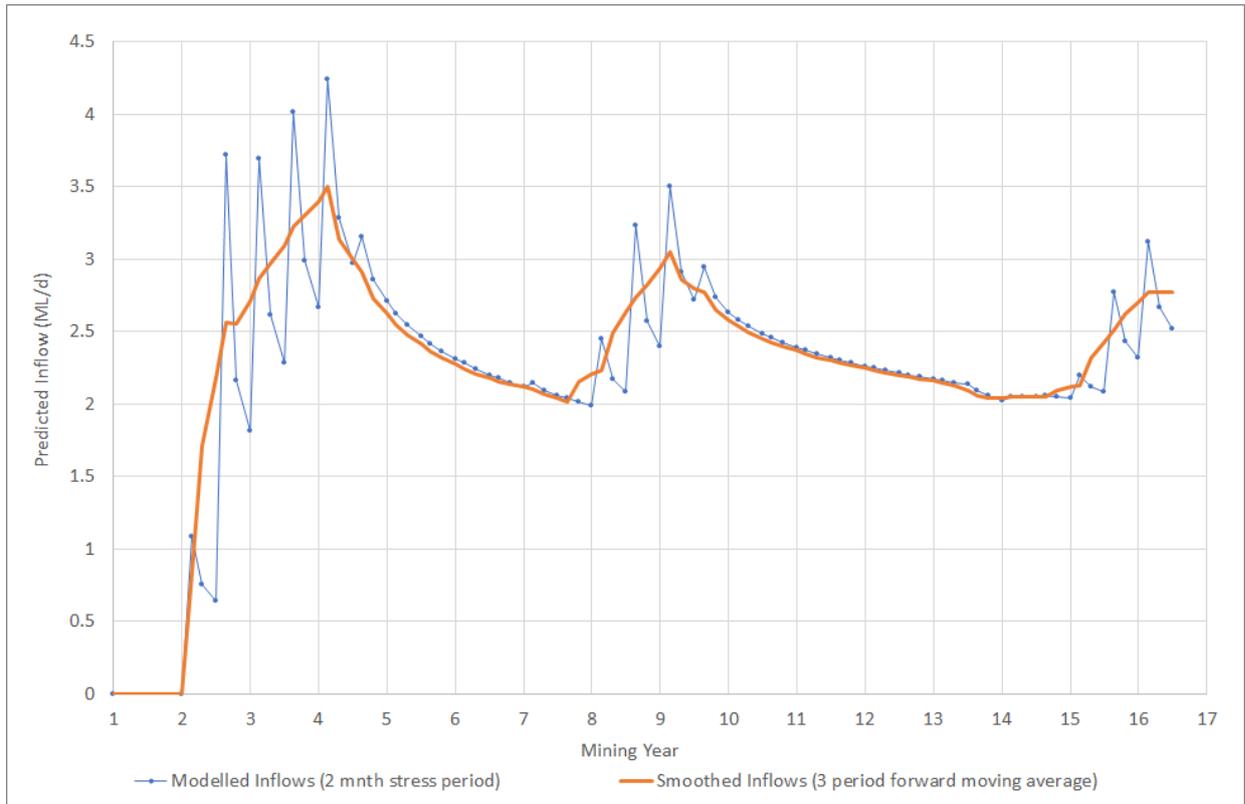


Figure 70 Predicted Annual Dewatering Volumes

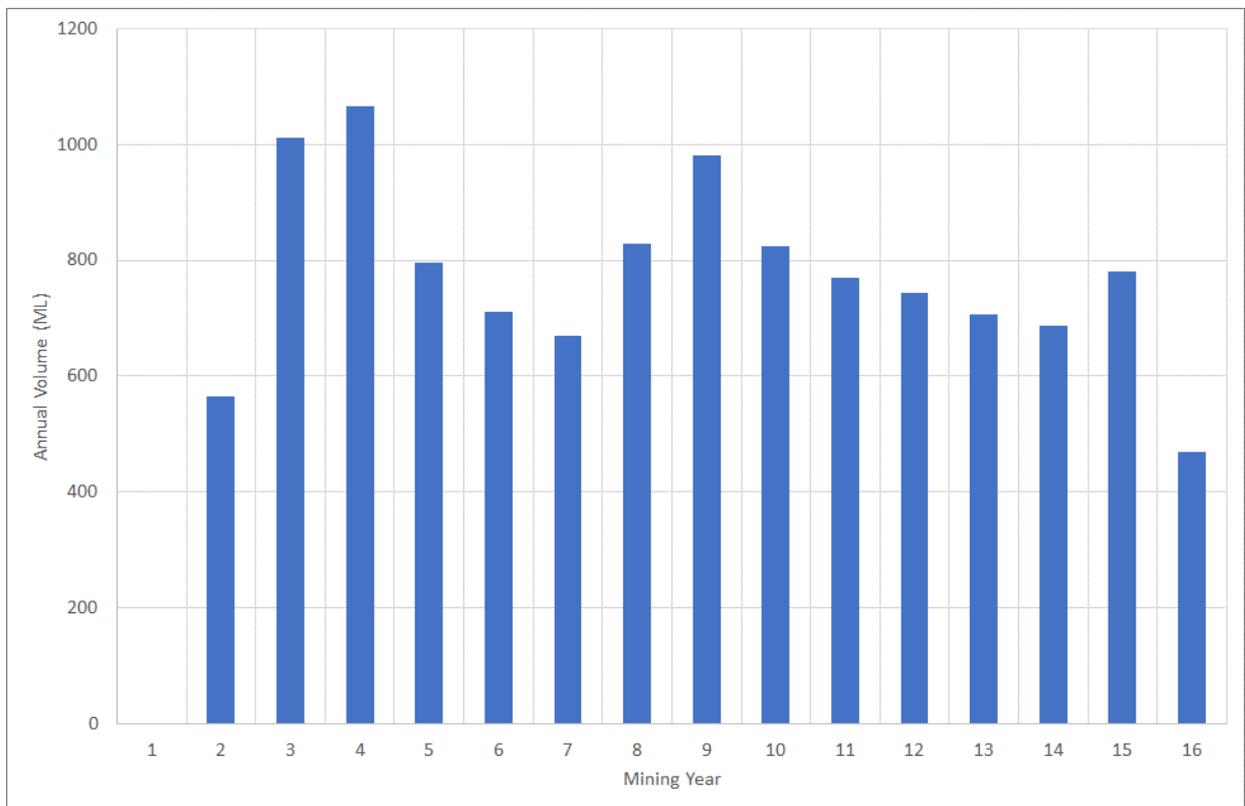

Once mining advances below the water table during the second year of mining, dewatering requirements steadily increase until the open cut pit reaches a depth of 525 m AHD at the end of Year 4, with average inflows of the order of 3.5 ML/day.

Dewatering rates then drop off as cut backs expand the open cut pit at higher elevations. Inflows start to increase again mining advances below 525 m AHD during Year 7, peaking at approximately 3 ML/day as the open cut pit reaches its maximum depth of 456 m AHD at the end of Year 9.

Subsequent open cut pit development is initially another expansion to the west at shallower depths, resulting in diminishing dewatering requirements until Year 15. In the last year and a half of mining, dewatering requirements are predicted to increase again as the eastern pit advances towards its final depth of 460 m AHD.

Average inflows over the life of mining are of the order of 2.4 ML/day. The satellite mines stages do not significantly influence overall mine dewatering requirements.

Annualised dewatering volumes (January to December) are provided on **Figure 70**. Rapid vertical advancement of the open cut pit means that the dewatering requirements increase rapidly once mining proceeds below the water table. The peak annual dewatering requirement is during Year 4 with a predicted annual volume of approximately 1066 ML. The average annual dewatering requirement, once dewatering commences, is approximately 800 ML.

It is noted that as dewatering will be achieved via pumping from sumps within the mine pit, there is potential for significant evaporative losses as groundwater seeps from exposed faces or is directed around active work areas towards dewatering sumps. While these evaporative losses cannot be readily quantified, there is potential that the volume of active dewatering required, may be somewhat less than the predicted dewatering requirement.


5.3.5.2 Groundwater Drawdown

Inflow of groundwater over the duration of mining would result in drawdown of groundwater levels in the formations surrounding the open cut pit area. Predicted drawdown at the water table at the end of Year 9 and at the completion of mining in Stage 6 (15.5 years) are shown in **Figure 71** and **Figure 72** respectively.

The extent of drawdown was noted to extend to Hawkins Creek, with drawdown of the order of 1 to 2 m at Hawkins Creek at the end of Year 9 over a 1.9km section of the creek (**Figure 71**) and typically of the order of 2 m at the end of mining over a 2.8km section of the creek (**Figure 72**).

Figure 73 show a section through the pit and TSF with water table after 9 years of mining (black line) and 15.5 years of mining (blue line). As mining has reached its maximum depth by the end of Year 9, there is not a significant difference in water levels between year 9 and year 15.5 in the vicinity of the mine.

Figure 73 Sections showing predicted water levels at Year 9 (black) and Year 15.5 (blue)

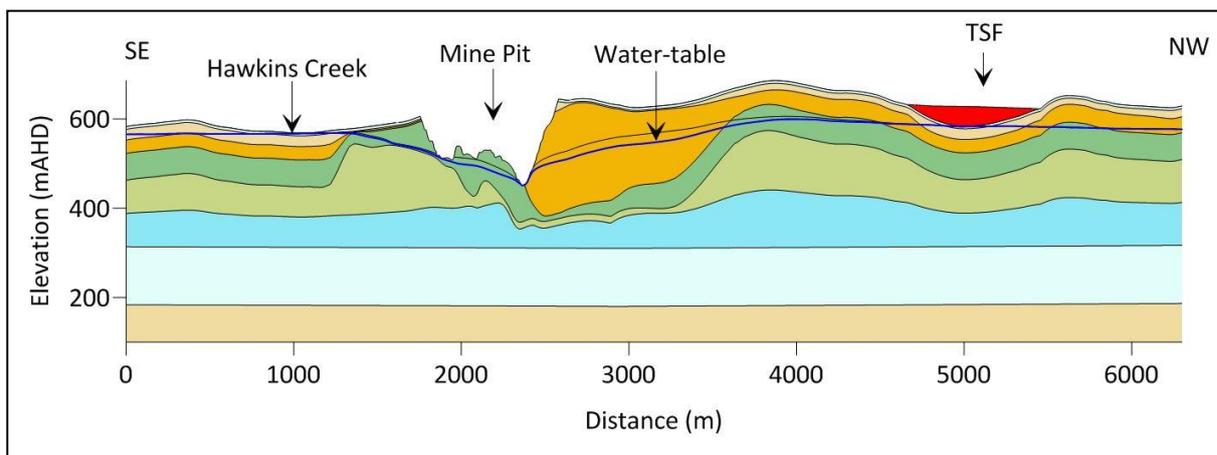

At the end of mining propagation of drawdown, as represented by the predicted 1 m drawdown contour is typically in the order of 1.5 km to the east and south, 2 km to the west and 2.2km to the north. Drawdown to the northwest is attenuated due to mounding beneath the TSF, with maximum mounding of the order of 8 m.

It is noted that the model is conservative with respect to predicted drawdowns within the Sydney Basin lithologies that overlie the Rylstone Volcanics. In reality, hydraulic connection between mining related drawdown in the Rylstone Volcanics and Coomber Formation of the Lachlan Orogen, and the Sydney Basin lithologies is likely to be limited due to the highly stratified nature of the sediments and the presence of low permeability siltstone and shale horizons. These low permeability layers are not specifically represented in the model but will act to inhibit vertical migration of groundwater and isolate the Sydney Basin lithologies from the mining induced depressurisation in the underlying formations. Therefore, the drawdowns as predicted within the Sydney Basin, are unlikely to be realised to the full extent predicted.

5.3.5.3 Tailings Storage Facility

As discussed in Section 5.3.4.2 a higher recharge rate applied in the model to account for the TSF decant pond. In the vicinity of the TSF, the groundwater is predicted to rise and would form a mound beneath the TSF impoundment area. The groundwater mounding in the aquifer at the end of 9 years and 15.5 years of mining is presented in **Figure 71** and **Figure 72** respectively. A total maximum rise of 8 m was predicted beneath the TSF area due to higher recharge from the TSF. The mounding is not readily apparent on **Figure 73** due to the scale of the section.

As can be seen from **Figure 71** and **Figure 72**, the modelled low permeability grout curtain is effective in containing the down-valley migration of the seepage mound.

Groundwater flow in the vicinity of the TSF post-mining is discussed in Section 5.3.5.5.

5.3.5.4 Waste Rock Emplacement

As the WRE is to be fully lined and encapsulated, it has not been simulated via modelling during mining. In the post mining period, the WRE has been modelled as an area of reduced recharge consistent with the design of the structure (that is, design to maximise runoff and minimise infiltration).

5.3.5.5 Post Mining Recovery

Post mining, the drawdown cone from the end of mining is initially predicted to expand until equilibrium is reached between the total groundwater inflows towards the open cut pit and the final losses from the open cut pit. The cone of drawdown is predicted to approach its maximum extent 16 years post closure with further minor increases occurring until approximately 50 years post closure. Predicted residual drawdown at this time is shown in **Figure 74**.

In the post mining period, mounding beneath the TSF diminishes and the TSF area is encompassed by the cone of drawdown.

Drawdown propagation at 50 years post mining, as represented by the predicted 1 m drawdown contour is typically less than 2 km to the east and south, up to 3 km to the west and 2.5 km to the north. Drawdown to the south is largely attenuated due to Lawsons Creek. Predicted drawdown at Lawsons Creek is typically less than 1 m, with approximately 2m maximum drawdown at Hawkins Creek.

The residual drawdown as predicted at 50 years post mining is indicative of the long-term residual drawdown representing the new post-mining equilibrium with the final void acting as a groundwater sink. Some minor continued recovery is likely before complete dynamic equilibrium is achieved. However, any variations in residual drawdown at greater than 50 years post mining are insignificant with respect to the inherent uncertainty of the model and time span of predictions.

5.3.5.6 Final Void

The predictive model scenario was continued through to 200 years post mine closure to inform the final void water and salt balance being undertaken by WRM Water + Environment (WRM, 2020). Because the Project's mining activities result in excavations to below the regional water table level, the model predicts the formation of pit lakes in the final voids once mining and water removal from the voids ceases. A final void recovery scenario was undertaken without fluxes of rainfall or evaporation over the pit area, to develop a groundwater inflow vs pit lake elevation relationship to inform the final void water balance (WRM, 2020).

Residual inflows to the mine void were supplied to WRM Water + Environment for inclusion in the final void water balance (WRM, 2020). **Figure 75** shows the predicted long-term equilibrium water level in the pit lake fluctuating between approximately 571 and 577 mAHD after approximately 100 years, with an average of approximately 574 mAHD. This is approximately 16 to 26m below the pre-mining water table, and 23m below the pit crest spill height of 597 mAHD.

The salt balance undertaken for the final void (WRM, 2020) indicates that salts would gradually accumulate within the pit lake due to evaporative concentration. Based on an indicative groundwater inflow electrical conductivity of 1420 $\mu\text{S}/\text{cm}$ the following pit lake salinities are predicted to develop over time:

- 100 years – 2000 $\mu\text{S}/\text{cm}$
- 200 years – 2880 $\mu\text{S}/\text{cm}$
- 300 years – 3725 $\mu\text{S}/\text{cm}$
- 400 years – 4375 $\mu\text{S}/\text{cm}$
- 500 years – 5375 $\mu\text{S}/\text{cm}$

Figure 74 Predicted 50 Year Post Mining Residual Drawdown


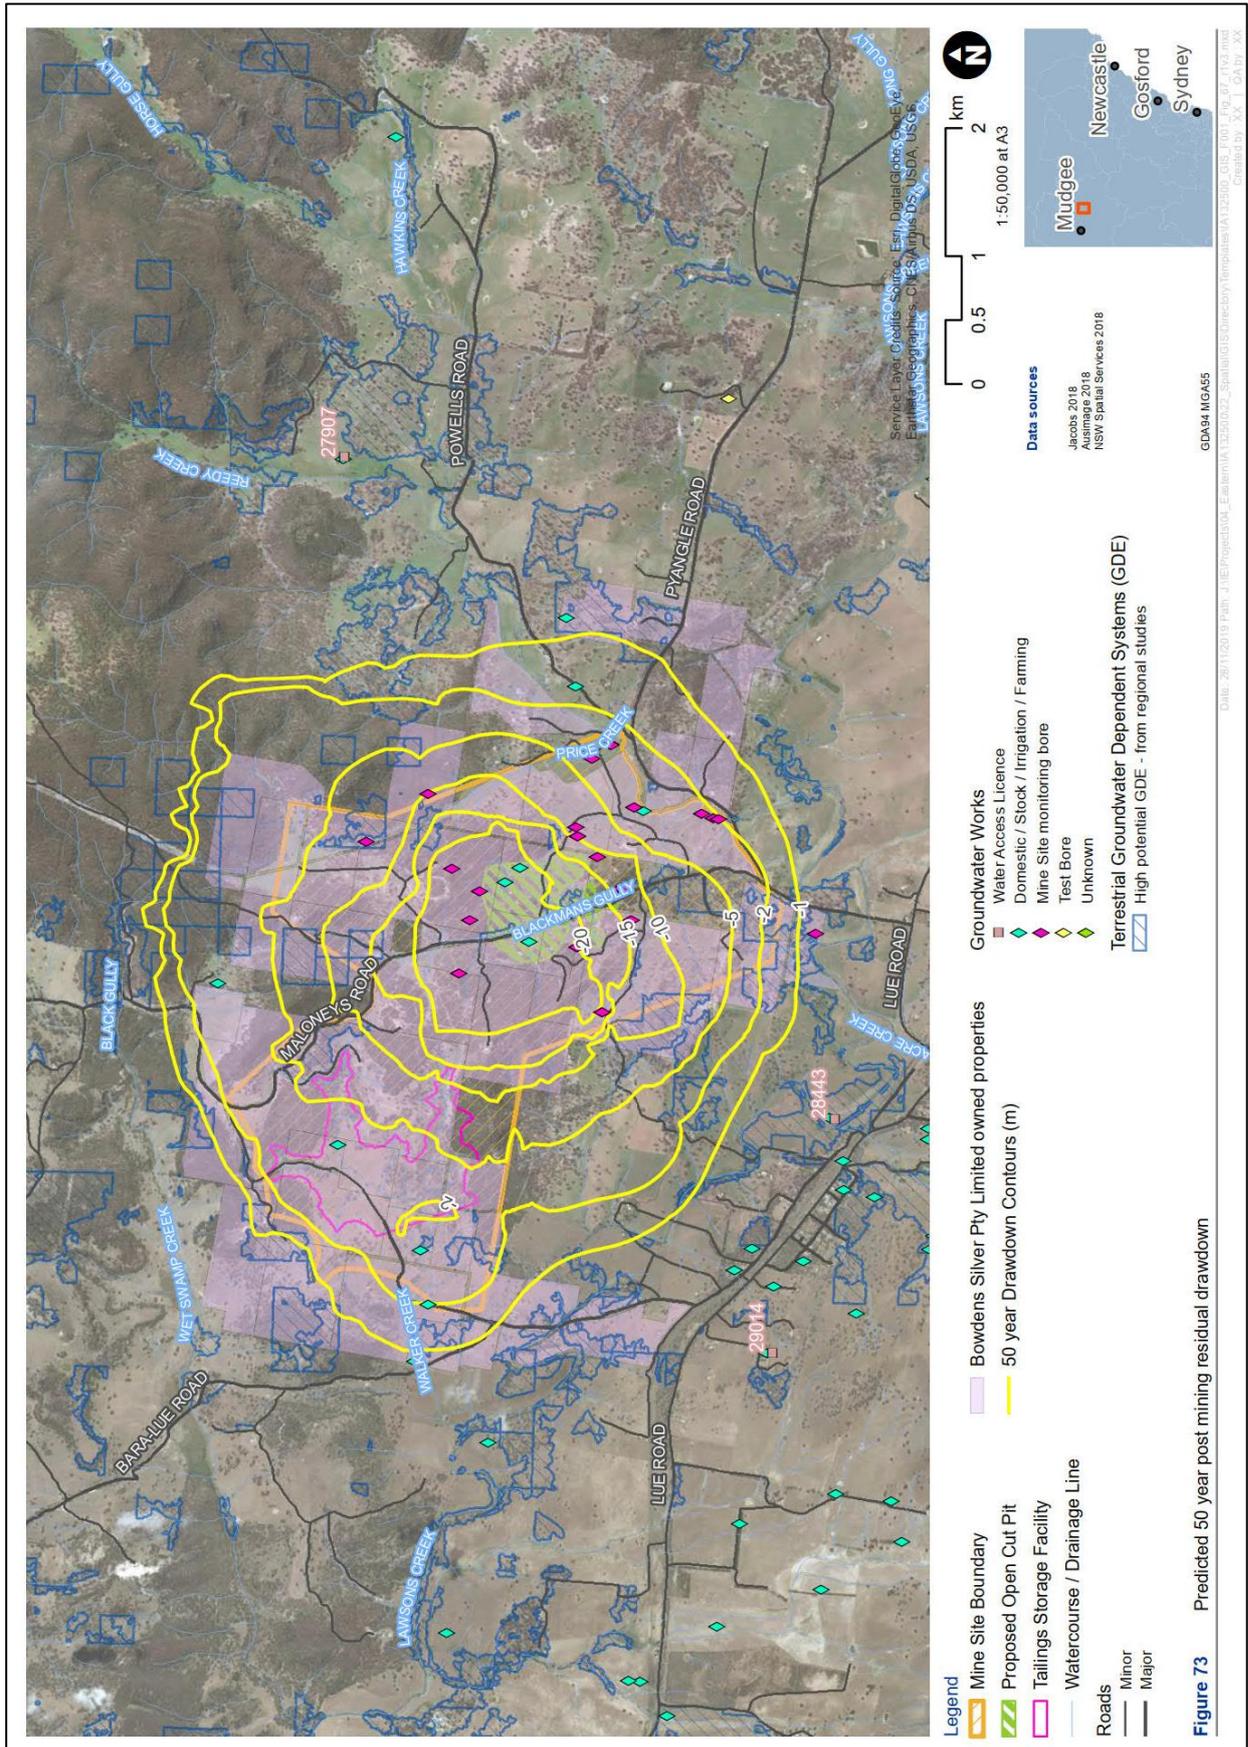


Figure 75 Pit Lake Equilibrium Level

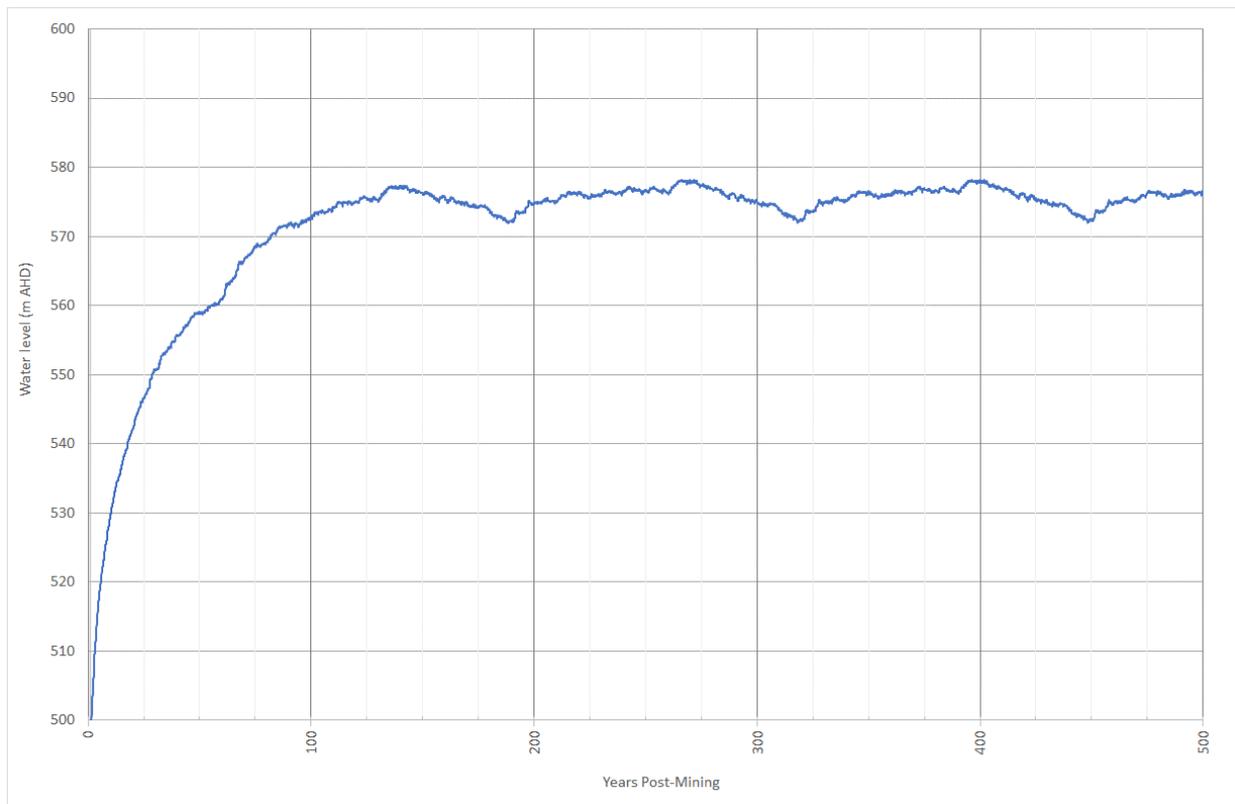

Further detail on the final void water balance, including pit lake water quality is provided in Section 7 of the Surface Water Assessment (WRM, 2020).

5.3.5.7 Baseflow Reduction

Groundwater drawdown has potential to reduce streamflow through either direct stream depletion or through intercepting groundwater that would otherwise discharge to surface water. Baseflow reductions to Hawkins and Lawsons Creeks have been calculated from the change in flux from either River boundaries (Lawsons Creek) or Drain boundaries (Hawkins Creek) between the Mining Case and Null Case scenarios. The flux calculations have been undertaken including reaches of Hawkins and Lawsons Creeks extending beyond the predicted area of drawdown. For Hawkins Creek the reaches considered extend from the confluence with Lawsons Creek to approximately 6 km to the northeast of the Mine Site in the upper catchment of Reedy Creek and Horse Gully tributaries (**Figure 8**). For Lawsons Creek, the reach extends from approximately 3.5 km southeast of the Mine Site to 4 km west of the Mine Site.

The modelled baseflow (Null Case) to Hawkins and Lawsons Creeks is found to be relatively low with groundwater contribution to streamflow at Hawkins Creek less than half that to Lawsons Creek with contributions of approximately 72 m³/day (0.072 ML/day) and 184 m³/day (0.184 ML/day), respectively (**Figure 76** and **Figure 77**). As noted in Section 5.3.3.1, the predicted baseflow to Hawkins Creek matches well with the overall baseflow calculated for the downstream gauging station, however, the model over-predicts baseflow contribution during times of low or no flow.

Figure 76 Predicted Baseflow Reduction at Hawkins Creek


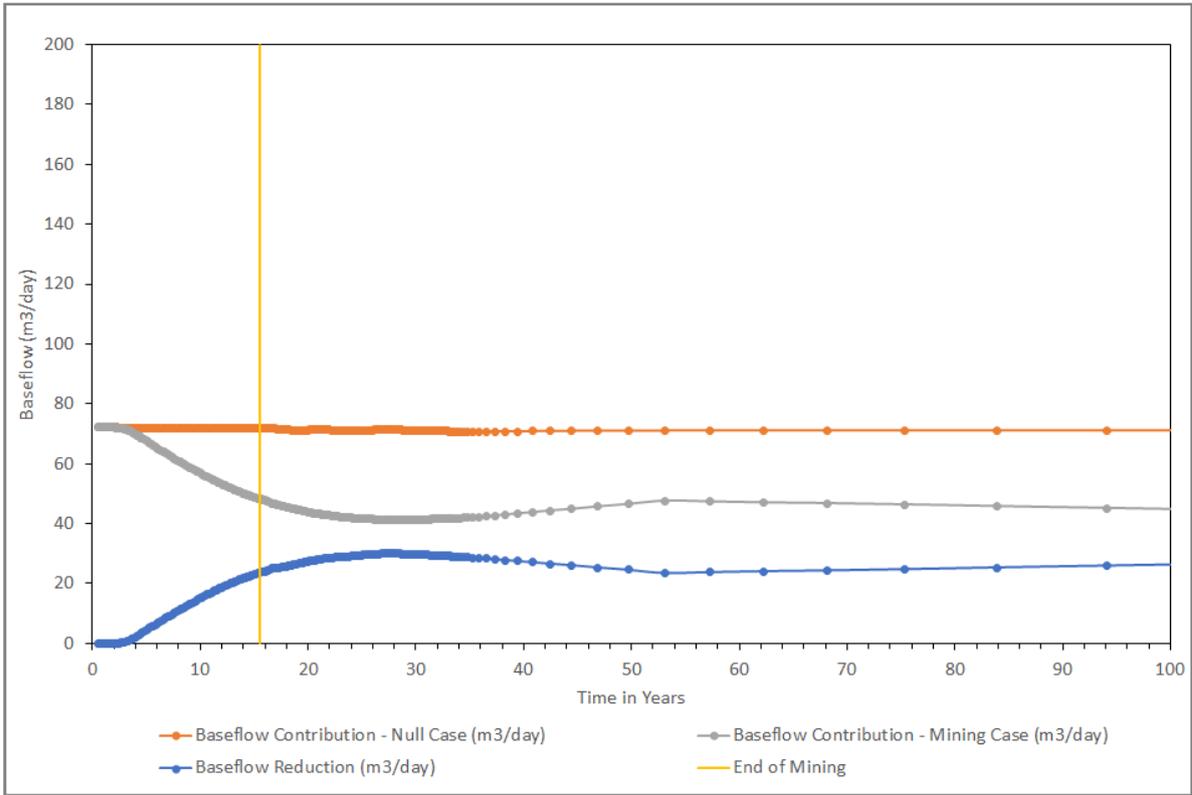


Figure 77 Predicted Baseflow Reduction at Lawsons Creek

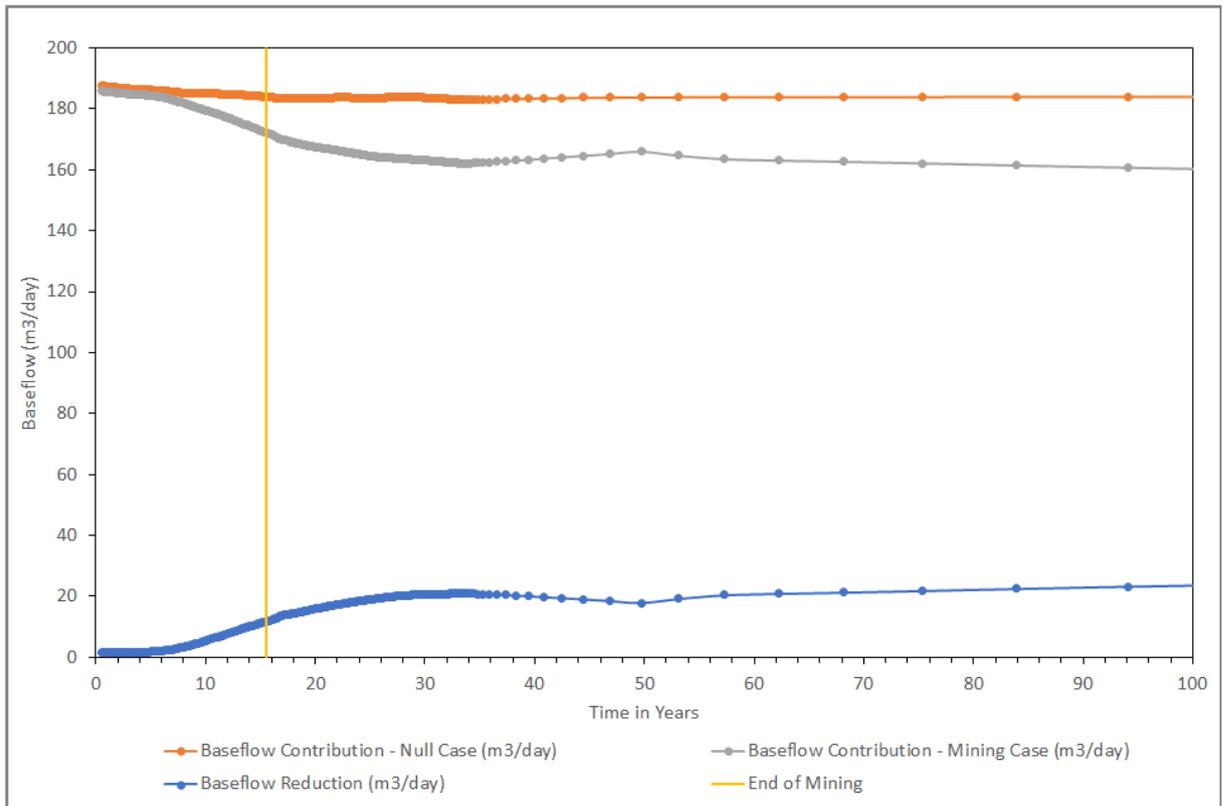

During mining, the baseflow to both Hawkins and Lawsons Creeks reduces with the expansion of the cone of drawdown. The reduction of base flow has been estimated by subtracting the modelled base flow during mining from that of the null case. From **Figure 76** and **Figure 77** it can be seen that baseflow reductions attributed to the Project continue to increase beyond the end of mining, peaking at approximately 28 to 34 years from the commencement of mining (12 to 18 years post mining). The slight reduction in baseflow that is apparent past approximately 50 years (approximately 34 years post mining) is the result of changes to model boundary conditions in the post mining period and is not related to the Project. The long term baseflow reduction due to the project is likely to reach equilibrium at around the values of 0.024 ML/day for Hawkins Creek and 0.018 ML/day for Lawsons Creek approximately 34 years post mining as indicated on **Figure 76** and **Figure 77**.

A maximum baseflow reduction of approximately 30 m³/day (0.030 ML/day) is predicted for Hawkins Creek and 24 m³/day (0.024 ML/day) for Lawsons Creek within 100 years of commencement of mining. However, as noted above, actual baseflow reduction attributable to the project is likely to be less.

5.3.5.8 Model Uncertainty Analysis

Uncertainty analysis was undertaken to assess the effect of individually varying model input parameter values including hydraulic conductivity, recharge and storage parameters on model predictions. The following uncertainty analysis models were developed:


- **High and low hydraulic conductivity scenario:** Bulk hydraulic conductivity (K) values assigned to the uncertainty analysis models were one order of magnitude higher and lower than K values assigned to the base case model (**Table 33**) for high and low K scenario respectively.
- **High and low storage parameter scenario:** All storage parameter values were varied by 200% higher and 50% lower than values in the base case model (**Table 33**) for the high and low storage parameter scenarios respectively.
- **High and low recharge scenario:** Recharge factor values were varied by 200% higher and 50% lower than in the base case model for the high and low recharge scenario models respectively.

Predicted mine inflows from the sensitivity models above are compared to predictions from the base case model (i.e. prediction model used to generate results presented above). Sensitivity analysis results for predicted groundwater inflow are presented in **Figure 78** below. Associated predicted drawdown at the end of mining for each scenario is provided in **Annexure 9**.

If the hydraulic conductivity value is one order magnitude higher, then inflows could be as much as about 1.5 to 3.5 times higher than the base case scenario (**Figure 78**). However, this scenario is considered to be extremely unlikely as the range of formation permeability in the vicinity of mining is well understood. High permeability zones have been identified during field testing, however longer-term testing has shown these zones to be discrete and rapidly dewatered.

The elevated formation storage and elevated recharge scenarios also result in marginally higher inflows than the base case, with approximately up to 1.4 and 1.2 times the base case scenario, respectively.

Figure 78 Sensitivity Analysis Results of Mine Inflow Rates

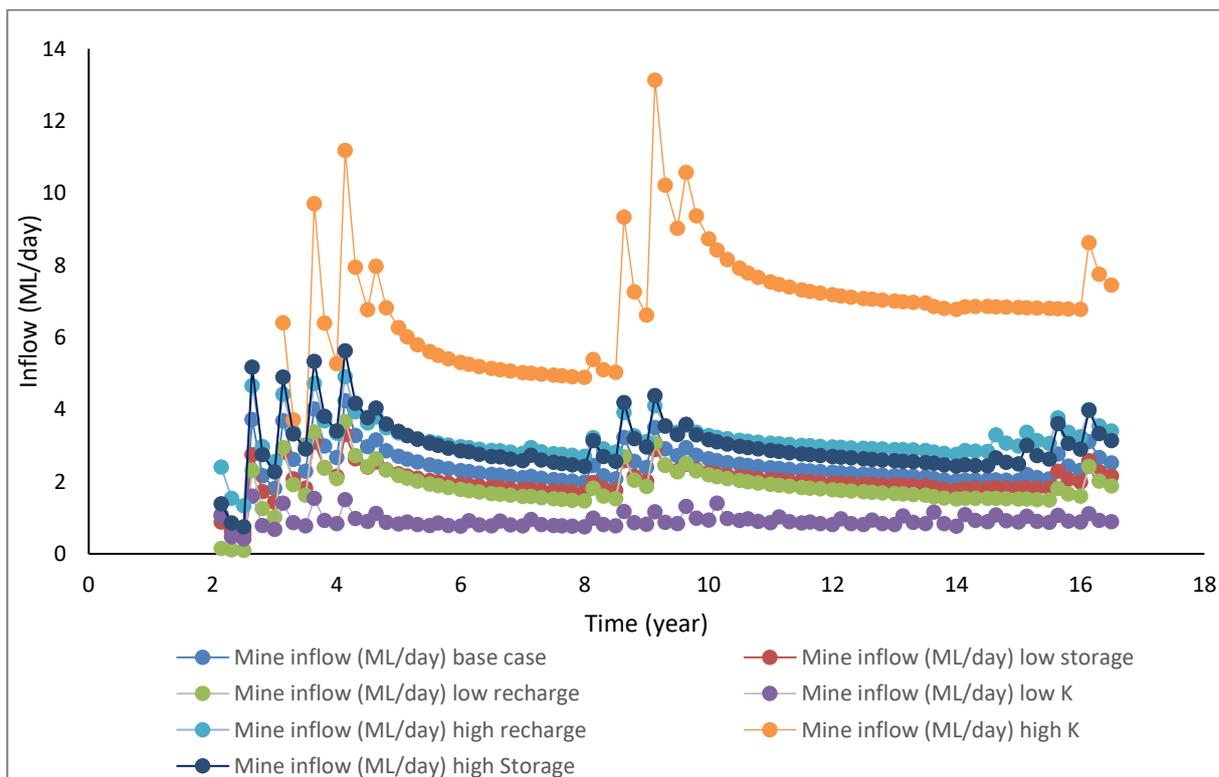

As expected, the reduced parameter scenarios result in lower predicted inflows with the low hydraulic conductivity scenario giving the lowest predicted inflows. Reduced mine inflows, while not considered to be likely, would be of little consequence to the Project as any required make-up water would be sourced from the Ulan Coal Mine and/or Moolarben Coal Mine.

Predicted drawdown at end of mining for the sensitivity analyses are provided in **Annexure 9**. The only significant increase in the extent of drawdown is for the elevated hydraulic conductivity scenario, with the other scenarios being of either similar extent (low recharge and low storage), or significantly reduced (low hydraulic conductivity, high recharge, and high storage).

The difference between the high and low recharge scenarios is not significant, indicating that the bulk of the mine inflows are derived from storage.

The main difference in drawdown for the high hydraulic conductivity scenario is increased drawdown propagation to the north and east, with propagation to the south and southwest likely attenuated by Lawsons Creek. However, as noted previously, the high hydraulic conductivity scenario is considered to be extremely unlikely.

The sole purpose of the uncertainty analyses was to assess the effect of applying parameter values at the high end and low ends of the probable range of values for the parameters. The high and low parameter values assigned to the uncertainty analysis models do not necessarily result in well calibrated models. It was noted in the hydraulic conductivity (K) sensitivity analysis discussion (Section 5.3.3) that for the range of K values assessed spanning two orders of magnitude (i.e. one order of magnitude higher to one order of magnitude lower than the calibrated model K values), the objective function was not significantly affected by changes in all horizontal K values zone except zones kx51 and Kx12. The objective function is a statistical

measure used to measure the degree of calibration. The recharge rate sensitivity analysis (Section 5.3.3) indicated that for the range of recharge values assessed, the objective function was not significantly affected by changes in all recharge zone values, except zones r32 and r34.

5.3.5.9 Predictive Uncertainty

Groundwater flow models are inherently subject to uncertainties arising from the fact that models are generally unable to incorporate the full complexity of the natural environment. In particular, groundwater models are unable to capture all of the salient features of the natural environment that influence groundwater behaviour.

Predictive uncertainty also arises from the fact that groundwater models are generally founded on relatively sparse data resulting in the need to apply bulk parameters and simplify assumptions. While it is generally not possible to map and include all of the spatial complexity of the aquifer being modelled, it is necessary to acknowledge predictive uncertainty and to try to quantify and deal with such uncertainties.

For the Project, a balance has been struck between an overly conservative approach and getting entangled in overly complex small-scale detail. Initial attempts at high resolution pilot point calibration in the near open cut pit area, to replicate short term pumping observations and structural influences, were found to be of little overall benefit and with little influence on predicted inflows or drawdown. A more simplified approach with relatively uniform and elevated permeability in the mining area surrounded by an outer zone of intermediate permeability was ultimately adopted and provided for a better calibration.

5.3.6 Model Review

Independent peer review of the groundwater model and modelling process has been undertaken by Dr Noel Merrick of SLR Consulting (formerly of HydroSimulations). The review comprised progressive reviews throughout model development including:

- Inception review and groundwater model study plan.
- Calibration review.
- Final review.

Review comments have been taken onboard and used to refine the groundwater model and modelling process as relevant. The final review finds the groundwater model fit for the purpose of estimation of water take and the prediction of the reduction in regional groundwater levels (and associated impacts). A copy of the model review is provided as **Annexure 10**.

6. IMPACT ASSESSMENT

6.1 WATER LEVELS

Potential impacts arising from reduced water levels associated with mine dewatering and groundwater drawdown are assessed in the following sections. Predicted groundwater drawdowns are presented on **Figure 71** to **Figure 74**.

6.1.1 Groundwater Users

Potential groundwater drawdown is noted at 11 registered groundwater works that are recorded as being for water supply (domestic, stock, irrigation, or farming). Of these works, 9 are located on properties owned by Bowdens Silver. Potential impacts to the remaining works are noted as follows:

- **GW061475**. Located to the north of the Mine Site on the Dryden property. The bore is recorded as being 15 m deep utilising supply from the Illawarra Coal Measures. Predicted drawdown at the end of mining is approximately 1 m, with maximum potential drawdown of the order of 2 to 5 m predicted. If the upper range of drawdown is realised, there is potential for groundwater supply from this bore to be compromised. It is noted that this bore is elevated significantly above the main open cut pit, and within the Sydney Basin sediments. As noted in Section 5.3.5.2, the groundwater model is considered to be conservative with respect to predicted drawdowns within the Sydney Basin lithologies, and it is considered unlikely that that drawdowns as predicted would eventuate at that location.
- **GW802888**. Located to the east of the Mine Site on the Robinson property. The bore is recorded as being 51 m deep and is inferred to be utilising supply from the Coomber Formation. Maximum predicted drawdown is of the order of 1 to 2 m. Post-mining drawdown of this magnitude is not expected to significantly impact supply from the well.

The above notwithstanding, if water supplies to these groundwater users are compromised due to mining induced water level drawdown, then “make good” provisions would apply.

6.1.2 Groundwater Dependent Ecosystems

There are no high priority GDEs within the area of predicted groundwater drawdown.

The predicted area of drawdown encompasses a number of areas mapped as having a high potential for terrestrial GDEs and GDEs associated with river baseflow systems. These areas are predominantly associated with Hawkins and Lawsons Creeks.

Predicted maximum drawdown beneath Hawkins Creek is typically in the range of 1 to 2m, with some localised areas of increased drawdown (3 to 4 m). Predicted maximum drawdown beneath Lawsons Creek is typically of the order of 1m or less.

Predicted drawdowns in areas adjacent to Hawkins Creek are not anticipated to have detrimental effect on terrestrial vegetation. Vegetation has been largely cleared for pasture. Where remnant vegetation does exist, it is expected that this would be sustained by soil moisture and intermittent wetting by rainfall, elevated creek flows, and flooding.

There is potential that any terrestrial GDEs within areas of drawdown greater than 2m, and away from Hawkins Creek may have potential to deteriorate due to reduced access to water, however, as noted by EnviroKey (2020), none of the terrestrial vegetation within the project area is considered to be reliant on access to groundwater and therefore no terrestrial GDEs have been identified.

Springs and swamp meadow areas that are maintained by rainfall fed sub-flow within the soil profile are not anticipated to be impacted by mine dewatering as they are not inferred to be groundwater dependant. Springs associated with discharge from bedding planes within the Sydney Basin sediments are also unlikely to be impacted by drawdown.

6.1.3 Baseflow

Predicted baseflow reduction to Hawkins Creek is summarised in Section 5.3.5.7.

A maximum reduction in baseflow to Hawkins Creek of 0.03 ML/day is predicted over the 3.1km reach of Hawkins Creek located within the area of predicted drawdown. This is compared to a median flow of approximately 0.09 ML/day. In Lawsons Creek, the maximum reduction in baseflow is predicted be 0.024 ML/day which isn't considered to be significant and is only approximately 0.1% of the average daily flow of 19.5ML/day (WRM, 2020).

As noted in Section 5.3.5.7, while achieving a good calibration to calculated overall baseflow values, the groundwater model over predicts baseflow contributions during ongoing periods of low to no stream flow. Predicted baseflow impacts during periods of low to no flow are, therefore, also considered to be over predicted. For the significant periods of no flow in Hawkins Creek, there can be no further reduction in flow, while for periods of median to high flow, the predicted baseflow reductions are not considered to be significant.

During periods of no flow, when remnant pools are present, and where these pools are a direct reflection of the regional water table, there is potential for pool levels to decline inside the area of predicted drawdown (**Figure 72**). For remnant pools that are isolated from the regional water table (impounded by bedrock bars) or are sustained by smaller perched groundwater systems, pool depths are unlikely to be impacted by mining related groundwater drawdown.

It is noted that there is potential for reduced frequency and depth of remnant pools during extended dry periods as a result of groundwater drawdown. Where permanent pools within the area of predicted drawdown are utilised for water supply, the availability of water in these areas may be compromised. Where this is the case, it is recommended that additional investigations be undertaken to ascertain the connectedness and reliance of the pool on the regional water table and to establish the need (if any) for contingency measures.

6.2 GROUNDWATER QUALITY

6.2.1 Mining

Excavation below the water table would expose potential acid forming material in the open cut pit walls. Oxidation of acid forming materials and subsequent mobilisation by groundwater inflows or rainfall runoff has potential to generate acid drainage within the open cut pit. During mining, any generated drainage would be captured by the dewatering system and pumped to the processing plant for use in processing.

6.2.2 Post Mining

Salinification of the pit lake due to evaporative concentration is expected to occur gradually over time as indicated in Section 5.3.5.6, with pit lake salinity reaching approximately 2000 mg/L TDS after 100 years and 5375 mg/L TDS after 500 years.

However, as discussed in Section 5.3.5.6, the final mine void is also predicted to remain a groundwater sink, with final equilibrium levels predicted to be below the pre-mining groundwater level and ongoing evaporative losses from the pit of the order 500 kL/day (0.5 ML/day). This means that the direction of net groundwater flow would be towards the pit and the saline water that develops within the pit would not be able to escape or impact on local water quality.

While not considered in the post-mining simulations, water that is captured in the TSF following the completion of processing activities would be pumped to the main open cut pit. There is also potential for runoff captured within the Blackmans Gully catchment to be initially diverted into the main open cut pit to expedite pit void equilibrium and to help mitigate post mining drawdown expansion. The drainage would then be re-directed around the pit once the pit lake approaches equilibrium.

6.2.3 TSF

Seepage from the base of the TSF is predicted to result in localised groundwater mounding. The salinity of the tailings water would be commensurate with process water salinity which is anticipated to be of the order of up to 850 $\mu\text{S/cm}$, approximately 550 mg/L TDS. This is considerably lower salinity than the baseline groundwater quality in the vicinity of the TSF which is of the order of 2900 $\mu\text{S/cm}$ at BGW15, 1350 $\mu\text{S/cm}$ at BGW16, and 1600 $\mu\text{S/cm}$ at BGW17.

The tailings materials have potential to be acid forming and therefore tailings seepage has potential for low pH and elevated metals concentrations. The TSF design incorporates measures to minimise seepage, including a low permeability cut-off wall beneath the embankment. Seepage interception measures and groundwater monitoring would also be implemented downgradient of the TSF.

Any water quality impacts are expected to be localised to the area of potential mounding as indicated on **Figure 71** to **Figure 72** and would ultimately be captured within the predicted cone of drawdown as shown on **Figure 74**.

6.3 AIP MINIMAL IMPACTS CONSIDERATIONS

The AIP minimal impact considerations for highly productive alluvial, fractured rock and porous rock aquifers are outlined in Section 2.1.4. A detailed assessment against the AIP minimal impacts considerations, along with a completed AIP framework checklist, is provided in Annexure A.

In general, the Project would meet with the Level 1 Minimal Impact Considerations for highly productive, alluvial, porous rock and fractured rock aquifers, meaning that under the AIP, the predicted impacts of the Project are considered to be acceptable.

7. LICENSING REQUIREMENTS

7.1 PREDICTED DEWATERING AND AQUIFER PARTITIONING

The modelled groundwater inflow to the main open cut pit is contributed from the two following groundwater sources:

- Sydney Basin Groundwater Source of the NSW Murray Darling Basin Porous Rock Groundwater Sources, 2011; and
- Lachlan Fold Belt Groundwater Source of the NSW Murray Darling Fractured Rock Groundwater Sources, 2011.

The predicted mine dewatering volumes derived from modelling have been partitioned to determine the water take (either direct or induced) from the relevant groundwater and surface water sources.

During drilling and testing within and close to the proposed open cut pits, it was noticed that the Sydney Basin sediments remain largely unsaturated. Hence, the lateral inflow from Sydney Basin at the Mine Site is negligible. However, the Sydney Basin sediments would become saturated away from the Mine Site and would contribute indirectly to mine inflows via vertical leakage to the volcanic units. To predict the component of contribution from the Sydney Basin Groundwater Source the vertical water loss from the Sydney Basin sediments was estimated using a zone budget of the model within the area of influence of drawdown within Sydney Basin. The annualised inflow volumes from the relevant water sharing plans are presented in **Table 43**.

Baseflow reduction from Hawkins and Lawsons Creeks, as a result of mining activity, is considered as take from the Lawsons Creek Water Source of the Macquarie Bogan Unregulated and Alluvial Water Source 2012.

The partitioning has been balanced such that the sum of the partitioned takes, does not exceed the total dewatering volume. Any modelled take from a surface water source, resulting from reduced baseflow contribution, has been deducted from the total take of the underlying groundwater source. It is noted that the reduced take in the final year of mining is due to active dewatering not being undertaken for the full year.

From **Table 43**, the maximum predicted take from each of the applicable water sources, and therefore the volume of share components for each of the water sources required to be held during mining are as follows.

- Lachlan Fold Belt Groundwater Source (Other) – 907 ML
- Sydney Basin Groundwater Source – 194 ML
- Lawsons Creek Water Source – 12.9 ML

7.2 ONGOING WATER TAKE

Post mining water take resulting from residual drawdown and ongoing evaporative losses from the final mine void have been partitioned to determine the water take (either direct or induced) from the relevant groundwater and surface water sources. Partitioned post-mining water takes are provided on **Table 44**.

Table 43
Partitioned Water Take – During Mining

Mine Year	Total Annual Dewatering Volume (ML/year)	Partitioned Water Take (ML/year)		
		Lachlan Fold Belt Groundwater Source (Other)	Sydney Basin Groundwater Source	Lawsons Creek Water Source
1				
2	566	496	70	0.7
3	1012	883	127	1.1
4	1066	907	157	1.9
5	797	636	158	2.8
6	710	579	128	3.8
7	669	540	124	4.8
8	830	661	162	5.9
9	981	780	194	7.0
10	825	645	171	8.1
11	770	602	159	9.2
12	743	569	164	10.2
13	707	516	180	11.2
14	686	504	170	12.1
15	780	582	186	12.9
16	469	338	119	11.3
Maximum				
		907	194	12.9
Average				
		616	151	6.9

Note: Bold/red = maximum predicted take

Table 44
Partitioned Water Take – Post Mining

Post Mine Year	Total Water Take (residual inflow) (ML/year)	Partitioned Water Take (ML/year)		
		Lachlan Fold Belt Groundwater Source	Sydney Basin Groundwater Source	Lawsons Creek Water Source
5	626	386	223	17
10	554	330	206	18
15	520	371	131	18
45	240	108	116	16
90	147	69	59	19
200	133	59	52	22

Note: Bold/red = maximum predicted take

The predicted ongoing equilibrium water take for the final void is approximately 133 ML/year, comprising 59 ML from the Lachlan Fold Belt Groundwater Source, 52 ML from the Sydney Basin Groundwater Source, and 22 ML from the Lawsons Creek Water Source.

Takes from the Sydney Basin Groundwater Source and the Lawsons Creek Water Source are predicted to peak in the post mining period at 223 ML/year and 22 ML/year, respectively. However, as discussed in Section 5.3.5.7, baseflow reduction attributable to the Project is likely to be less than the 22 ML/year indicated above. It is recommended that only the predicted take during mining be covered by water access licences with the post mining residual takes to be confirmed during mining operation and ongoing validation of the groundwater model.

7.3 HISTORICAL WATER MARKET

A review of past water trading has been undertaken on the NSW Water Register (WaterNSW, 2019) for the Lachlan Fold Belt Groundwater Source and the Sydney Basin Groundwater Source. Past trades for the Lachlan Fold Belt Groundwater Source are summarised on **Table 45**. Annual trades range from 136 to 395 ML, averaging approximately 266 ML/year.

There have been no trades recorded within the Sydney Basin Groundwater Source or the Lawsons Creek Water Source in the 2014 to 2018 water years.

7.4 2017 CONTROLLED ALLOCATION

Bowdens Silver has acquired the right to apply for an aquifer access licence pursuant to the Controlled Allocation Order (Various Groundwater Sources) 2017, gazetted on 5 May 2017, and subsequently amended on 1 June 2018 in respect of the Sydney Basin Groundwater Source of the NSW Murray Darling Basin Porous Rock Groundwater Sources, 2011 and the Lachlan Fold Belt Groundwater Source of the NSW Murray Darling Fractured Rock Groundwater Sources, 2011. Bowdens Silver has secured groundwater allocations in both the 2018 and 2019 registration of interest periods totalling 194 unit shares in the Sydney Basin MDB Groundwater Source and 907 unit shares in the Lachlan Fold Belt MDB Groundwater Source. Bowdens Silver has deferral contracts for the full volume of unit shares, allowing the deferral of payment of the total purchase price for these rights. Details of the registration are provided on **Table 46**.

7.5 SUMMARY – REQUIRED VS SECURED WALS

7.5.1 Mining

From **Table 46**, the Project has secured the option to purchase WALS to the value of 907 unit shares in the Lachlan Fold Belt Groundwater Source (equivalent to 907 ML/year) and 194 unit shares in the Sydney Basin Groundwater Source (equivalent to 194 ML/year). This is sufficient to cover the peak predicted dewatering requirement over the life of the mine and is significantly greater than the predicted annual average take of 616 ML from the Lachlan Fold Belt Groundwater Source and 151 ML from the Sydney Basin Groundwater Source.

Table 45
Water Trading Summary – Lachlan Fold Belt Groundwater Source (Aquifer)

Assigned From - WAL	Assigned To - WAL	Date	Volume (ML)	Price paid (\$/ML)
2014/2015				
29265	35442	01-OCT-2014	6	50
28668	31090	08-SEP-2014	130	100
2015/2016				
28778	28773	31-MAR-2016	300	0
36185	37388	27-JAN-2016	10	0
29153	37285	14-JAN-2016	4	0
31041	31090	18-DEC-2015	75	0
29265	35442	04-NOV-2015	6	50
2016/2017				
29265	35442	18-NOV-2016	6	50
28506	37716	23-SEP-2016	20	0
28691	30047	12-AUG-2016	150	0
2017/2018				
29142	41159	29-JUN-2018	10	0
37730	35442	16-JAN-2018	6	0
29142	28565	03-JAN-2018	200	0
36529	41205	12-SEP-2017	40	20
29153	28752	21-AUG-2017	100	0

Table 46
Registration of Interest – 2017 Controlled Allocation

Groundwater Source / Management Zone	Registration of Interest Number	Number of Unit Shares	Total
Sydney Basin MDB Groundwater Source	ROI2-18-111	118	194
	ROI3-19-097	76	
Lachlan Fold Belt MDB Groundwater Source - (Other) Management Zone	ROI2-18-112	885	907
	ROI3-19-096	22	

An entitlement of 13 ML (12.9 ML) from the Lawsons Creek Water Source would be secured on the open market or through upcoming Controlled Allocation Orders. It is noted that at time of writing Bowdens Silver were in the process of negotiating the acquisition of an allocation in the Lawsons Creek Water Source that would more than cover the predicted incidental take.

It is recommended that groundwater modelling be revisited during the first two years of mining below the water table to validate or revise predicted inflows and water take as required. The results of this modelling can be used to confirm the required future entitlement.

7.5.2 Post Mining

The secured options to purchase WALs as outlined in **Table 46** are more than sufficient to account for predicted long-term water take from the Lachlan Fold Belt and Sydney Basin Groundwater Sources.

An entitlement of 22 ML (or 9 ML in addition to the mining requirement) would be secured from the Lawsons Creek Water Source to account for the slightly increased post mining water take. As mentioned above, at time of writing Bowdens Silver were in a private negotiation for an allocation in the Lawsons Creek Water Source that would more than cover the predicted ongoing take in the post mining period.

8. MONITORING AND MANAGEMENT

A dedicated Groundwater Management Plan detailing proposed groundwater monitoring and management during mine operations would be prepared prior to the commencement of mining. The following outlines the key monitoring and management components that would be required.

8.1 MINE DEWATERING VOLUMES

Monitoring and reporting of mine dewatering volumes would include the following.

- Mine Dewatering - accumulating flow meters at all dewatering points – weekly record
- Emergency and / or temporary dewatering – minimum record of hours run vs pump capacity – daily record

8.2 GROUNDWATER MONITORING NETWORK

The groundwater monitoring network would comprise a combination of existing and proposed monitoring bores and vibrating wire piezometer installations to facilitate both operational, and environmental and compliance monitoring requirements. The existing groundwater monitoring network would be utilised for monitoring during mine operation and identification of potential impacts. Additional monitoring bores would be installed downgradient of the WRE and TSF to monitor for potential seepage migration. The monitoring bores would be installed downgradient of any seepage detection and interception measures (to be confirmed during detailed design), and between the WRE/TSF and sensitive receptors such as Hawkins and Lawsons Creeks and their associated alluvial aquifers.

Operational groundwater monitoring would likely comprise both standpipe piezometers and vibrating wire piezometers to monitor dewatering effectiveness and open cut pit slope depressurisation. Individual monitoring sites would be installed on an as-required basis.

It is proposed that the current monthly water levels and quarterly comprehensive water quality monitoring be continued. Selected monitoring bores would be equipped with water level data loggers for the collection of high frequency/continuous water level data.

8.2.1 Ongoing Monitoring Post Mining

The requirement for ongoing monitoring during the post mining and final rehabilitation phase will be determined at the mine closure planning stage and in consultation with the relevant authorities. Initial post mining monitoring will likely be a rationalised version of the operational monitoring network paired back to focussing on key areas such as the TSF and mine void.

8.3 TRIGGER LEVELS AND THRESHOLDS

Trigger levels and thresholds would be developed with regard to water level and water quality prior to the commencement of mining.

Groundwater level thresholds would be based on predicted water level decline and identification of potential impacts at sensitive groundwater receptors such as other groundwater users, and baseflow contributions to Hawkins and Lawsons Creeks.

Groundwater quality guideline values or trigger values would be adopted or developed to identify potential deleterious impacts particularly arising from potential acid rock drainage, TSF seepage or salinification. Triggers for selected parameters would be developed in accordance with the Australian and New Zealand Guidelines for Fresh and Marine Water Quality (<http://www.waterquality.gov.au/anz-guidelines>).

8.4 TSF SEEPAGE MANAGEMENT

A TSF Seepage Management Plan would be developed in tandem with the TSF detailed design prior to construction (ATC Williams, 2020a).

Key components of the TSF seepage management measures are likely to include:

- A low permeability geomembrane/clay zone and a low permeability (1×10^{-13} m/s) bituminous geomembrane (BGM) liner on the upstream face of the TSF embankment (ATC Williams, 2020a – Section 22.1).
- Compacted clay liner and partial geosynthetic liner beneath the TSF decant pond area
- A concrete plinth connected to a 40 m deep foundation curtain grouting beneath the upstream toe of the TSF embankment (ATC Williams, 2020a – Section 22.1).
- Seepage interception measures involving seepage collection drains at the TSF embankment downstream toe, and ponds (ATC Williams, 2020a – Section 23.1).
- Embankment pore pressure monitoring.
- Groundwater monitoring bores down gradient and adjacent to the TSF.

8.5 FINAL VOID MANAGEMENT

Detailed management of the final mine void would be outlined in the Final Void Management Plan within the Mine Site closure plan to be developed prior to mine closure. Preliminary mine closure plans include allowance for diverting up-catchment surface water flows and run-off around the mine void. There is also potential for surface water to be utilised to accelerate the pit void recovery with diversion once water levels approach equilibrium.

Ongoing validation of the groundwater model during mine operation, with recalibration to observed inflows, would allow a more detailed assessment of final void conditions to be undertaken, with the subsequent refinement of management measures as required.

8.6 GROUNDWATER MODEL REVIEW

It is recommended that the groundwater model be reviewed within the first two years of mining below the water table to validate and update predicted mine inflows and impacts as required.

9. REFERENCES

- Advisian – Worley Parsons Group (2020a) Preliminary Design of PAF Waste Rock Emplacement, Oxide Ore Stockpile and the Southern Barrier, May 2020, Part 16b of the Specialist Consultant Studies Compendium. Prepared on behalf of Bowdens Silver Pty Limited.
- Advisian – Worley Parsons Group (2020b) TSF and WRE Closure Cover Design, May 2020, Part 16c of the Specialist Consultant Studies Compendium. Prepared on behalf of Bowdens Silver Pty Limited.
- AMC, 2012. Bowdens Open Pit Geotechnical Study. Consultants report prepared for Kingsgate Consolidated Limited by AMC Consultants.
- ATC Williams, 2020a. Tailings Storage Facility Preliminary Design, Bowdens Silver Pty Ltd, Lue N.S.W. Reference 201010-00790-CI DSK-1001_E. May 2020.
- ATC Williams, 2020b. Email communications detailing predicted TSF seepage rates. Wardlaw-Sheppard, May 2020.
- ANZG, 2018. Australian and New Zealand Guidelines for Fresh and Marine Water Quality. The 2018 revision of the Water Quality Guidelines is presented as an online platform, to improve usability and facilitate updates as new information becomes available (<http://www.waterquality.gov.au/anz-guidelines>).
- Barnett, B., Townley, L.R., Post, V., Evans, R.E., Hunt, R.J., Peeters, I., Richardson, S., Werner, A.D., Knapp, A., and Boronkay, A. 2012. Australian groundwater modelling guidelines. Sinclair Knight Merz and National Centre for Groundwater Research and Training. Waterlines Report Series No. 82, June 2012.
- Bish, S., 1999. Hydrogeological Assessment for Coxs River Catchment, Sydney – South Coast Region, NSW. Department of Land and Water Conservation. October 1999.
- Cardno, 2013. Bowdens Silver Mine Aquatic Ecology Assessment. Consultant report prepared for R.W. Corkery and Co. Pty Ltd by Cardno Pty Ltd. Job No. EL1112038. May 2013.
- Chapman, T., 1999. A comparison of algorithms for stream flow recession and baseflow separation. *Hydrol. Processes* 13, 701–714.
- Coffey, 1998. Bowdens Silver Project Pre-Feasibility Water Supply Study. Consultant report prepared by Coffey Partners International Pty Ltd for Silver Standard Australia Pty Ltd.
- Colqhoun G.P., Hughes K.S., Deyssing L., Ballard J.C., Phillips G., Troedson A.L., Folkes C.B. & Fitzherbert J.A. 2019. New South Wales Seamless Geology dataset, version 1.1 [Digital Dataset]. Geological Survey of New South Wales, NSW Department of Planning and Environment, Maitland.
- Colqhoun G.P., Meakin N.S., Henderson G.A.M., Krynen J.P., Jagodzinski E.A., Watkins J.J. and Yoo E.K., 2000, Mudgee 1:100 000 Geological Sheet 8832, 1st edition. Geological Survey of New South Wales, Sydney & Geoscience Australia, Canberra.
- Doherty, J. 2018. PEST, Model-Independent Parameter Estimation – User Manual. 7th Edition published in 2018.
- DoIR&E, 2016. Western Coalfield Geological Modelling Project. Department of Industry, Resources and Energy. 16 December 2016.
- DPI Water, 2016. Methods for the identification of high probability groundwater dependent vegetation ecosystems. Department of Primary Industries. ISBN 978-1-74256-967-3. September 2016.

- Dresel, P. E., Clark, R. Cheng, X., Reid, M., Fawcett, J., and Cochraine, D. (2010) Mapping Terrestrial Groundwater Dependent Ecosystems: Method Development and Example Output. Victoria Department of Primary Industries, Melbourne VIC. 66 pp
- Dresel, P. E., Clark, R. Cheng, X., Reid, M., Fawcett, J., and Cochraine, D. (2010) Mapping Terrestrial Groundwater Dependent Ecosystems: Method Development and Example Output. Victoria Department of Primary Industries, Melbourne VIC. 66 pp
- Dresel, P.E., Clark, R., Cheng, X., Reid, M., Fawcett, J., Cochraine, D. 2010. Mapping Terrestrial Groundwater Dependent Ecosystems: Method Development and Example Output. Victoria Department of Primary Industries, Melbourne, VIC. 66 pp.
- DRET, 2008. Cyanide Management - Leading Practise Sustainable Development Program for the Mining Industry. Australian Government, Department of Resources, Energy and Trade. May 2008.
- EnviroKey, 2020. Terrestrial Ecology Assessment, Part 9a of the Specialist Consultant Studies Compendium. Prepared on behalf of Bowdens Silver Pty Limited.
- GCA, 2020. Materials Characterisation, Part 3 of the Specialist Consultant Studies Compendium. Prepared on behalf of Bowdens Silver Pty Limited.
- Gibbs, R.J., 1970. Mechanisms controlling world water chemistry. *Science* 170 (3962), 1088-1090.
- Hydroilex, 2003. Hydrogeological Investigation, Groundwater Supply for Bowdens Silver Project. Consultant report prepared Hydroilex (Geological Services Division of Panorama Drilling Company Pty Ltd) for Silver Standard Australia Pty Ltd. Report No. HG03.5.3. 5th May 2003.
- Jacobs, 2014. Bowdens Project: Aquifer Testing. Consultant memo report prepared by Jacobs (Australia) Pty Ltd for Kingsgate Consolidated Limited. Project No. IA035500.03. 12 January 2015.
- Jewell, 2003. Hydrogeological Assessment, Bowdens Silver-lead-Zinc Deposit. Consultant report prepared by C. M. Jewell and Associates Pty Ltd for Silver Standard Australia Pty Ltd. Report No. J0824.3. September 2003.
- Merrick, 2011. An Assessment of Existing Groundwater Conditions at the Bowdens Silver Mine Project Site near Lue, NSW. Consultant report prepared by Heritage Computing Pty Ltd for Kingsgate Consolidated Limited. Report HC2011/14. November 2011.
- NSW Office of Water, 2012. NSW Aquifer Interference Policy. NSW Government policy for the licensing and assessment of aquifer Interference activities. NSW Department of Primary Industries, Publication number: 11445. First published: September 2012.
- NHMRC, 2011. Australian Drinking Water Guidelines, Paper 6. National Water Quality Management Strategy. National Health and Medical Research Council, National Resource Management Ministerial Council, Commonwealth of Australia, Canberra.
- Piper A.M., 1944. A graphic procedure in the geochemical interpretation of water analysis [M]. *Trans. AM Geophys. Union.* 25, 914–923.
- SKM, 2013. Bowdens Groundwater Monitoring Network, Bore Construction and Aquifer Testing. Consultant report prepared by Sinclair Knight Merz Pty Ltd for Kingsgate Consolidated Limited. 11 February 2013.
- WaterNSW, 2019. NSW Water Register - <https://waterregister.waternsw.com.au/water-register-frame#>
- WRM, 2020. Surface Water Assessment, Part 6 of the Specialist Consultant Studies Compendium. Prepared on behalf of Bowdens Silver Pty Limited.

Annexures

(Total No. of pages including blank pages = 128)

- Annexure 1 Aquifer Interference Policy Checklist (14 pages)
- Annexure 2* Groundwater Works Summary (12 pages)
- Annexure 3* BGW10, BGW108 Pumping Tests (4 pages)
- Annexure 4* Airlift Recovery Tests (6 pages)
- Annexure 5* Packer Injection Tests (28 pages)
- Annexure 6* Comprehensive Water Quality Analyses
(30 pages)
- Annexure 7 TSF Design Drawings (4 pages)
- Annexure 8 WAL Summary (4 pages)
- Annexure 9* Uncertainty Analysis Predicted Drawdown
(8 pages)
- Annexure 10* Groundwater Model Review (16 pages)

* This Annexure is only available on the digital version of this document

This page has intentionally been left blank

Annexure 1

Aquifer Interference Policy Checklist

(Total No. of pages including blank pages = 14)

This page has intentionally been left blank



AQUIFER INTERFERENCE ASSESSMENT FRAMEWORK

Assessing a proposal against the NSW Aquifer Interference Policy – step by step guide

Note for proponents

This is the basic framework which the NSW Office of Water uses to assess project proposals against the **NSW Aquifer Interference Policy (AIP)**.

The NSW Aquifer Interference Policy can be downloaded from the NSW Office of Water website (www.water.nsw.gov.au under Water management > Law and policy > Key policies > Aquifer interference).

While you are not required to use this framework, you may find it a useful tool to aid the development of a proposal or an **Environmental Impact Statement (EIS)**.

We suggest that you summarise your response to each AIP requirement in the tables following and provide a reference to the section of your EIS that addresses that particular requirement. Using this tool can help to ensure that all necessary factors are considered, and will help you understand the requirements of the AIP.

Table 1. Does the activity require detailed assessment under the AIP?

Consideration		Response
1	Is the activity defined as an aquifer interference activity?	If NO , then no assessment is required under the AIP. If YES , continue to Question 2.
2	Is the activity a defined minimal impact aquifer interference activity according to section 3.3 of the AIP?	If YES , then no further assessment against this policy is required. Volumetric licensing still required for any water taken, unless exempt. If NO , then continue on for a full assessment of the activity.

Note for proponents

Section 3.2 of the AIP defines the framework for assessing impacts. These are addressed here under the following headings:

1. Accounting for or preventing the take of water
2. Addressing the minimal impact considerations
3. Proposed remedial actions where impacts are greater than predicted.

1. Accounting for, or preventing the take of water

Where a proposed activity will take water, adequate arrangements must be in place to account for this water. It is the proponent's responsibility to ensure that the necessary licences are held. These requirements are detailed in Section 2 of the AIP, with the specific considerations in Section 2.1 addressed systematically below.

Where a proponent is unable to demonstrate that they will be able to meet the requirements for the licensing of the take of water, consideration should be given to modification of the proposal to prevent the take of water.

Table 2. Has the proponent:

	AIP requirement	Proponent response	NSW Office of Water comment
1	Described the water source(s) the activity will take water from?	Refer Section 2.1.2	
2	Predicted the total amount of water that will be taken from each connected groundwater or surface water source on an annual basis as a result of the activity?	Refer Section 7.1	
3	Predicted the total amount of water that will be taken from each connected groundwater or surface water source after the closure of the activity?	Refer Section 7.2	
4	Made these predictions in accordance with Section 3.2.3 of the AIP? (refer to Table 3, below)	Yes	
5	Described how and in what proportions this take will be assigned to the affected aquifers and connected surface water sources?	Take will be apportioned on a pro-rata bases from mine dewatering based on modelling predictions. The groundwater model will be re-calibrated and updated as required throughout mining to confirm assigned proportions.	
6	Described how any licence exemptions might apply?	No exemptions apply.	
7	Described the characteristics of the water requirements?	Direct and incidental takes for mine dewatering.	

2 NSW Department of Primary Industries, August 2013

	AIP requirement	Proponent response	NSW Office of Water comment
8	Determined if there are sufficient water entitlements and water allocations that are able to be obtained for the activity?	Refer Section 7.5 The proponent has secured substantial entitlement in excess of total predicted water take for 13 out of 15 years of mine dewatering. In the remaining 2 years of dewatering, total licence allocations are 94% and 99% of the predicted total water take.	
9	Considered the rules of the relevant water sharing plan and if it can meet these rules?	The project can meet the rules of the relevant WSPs.	
10	Determined how it will obtain the required water?	Water requirements over and above mine dewatering volumes will be secured via a financial arrangement with Ulan Coal.	
11	Considered the effect that activation of existing entitlement may have on future available water determinations?	Ongoing water take diminishes post mining with a long term take of approximately 200ML/yr is anticipated. Given that this constitutes on less than 0.08% and 0.02% of the LTAAELs of the Sydney Basin and Lachlan Fold Belt groundwater sources, respectively, it is not anticipated that this will significantly affect future available water determinations.	
12	Considered actions required both during and post-closure to minimize the risk of inflows to a mine void as a result of flooding?	Mine closure management includes the diversion of surface water around the mine void.	
13	Developed a strategy to account for any water taken beyond the life of the operation of the project?	Ongoing water take has been assessed as outlined at Item 3. WALs for ongoing water take to be held in perpetuity.	
<p>Will uncertainty in the predicted inflows have a significant impact on the environment or other authorised water users?</p> <p>If YES, items 14-16 must be addressed. No – sensitivity has shown that variations in hydraulic parameters outside of the adopted calibration model will not result in significantly greater impacts. As mine dewatering is not the primary water supply for the project, variation in inflows will not significantly affect operations.</p>			
14	Considered any potential for causing or enhancing hydraulic connections, and quantified the risk?	Not considered to be applicable.	

Aquifer Interference Assessment Framework - Assessing a proposal against the NSW Aquifer Interference Policy – step by step guide

AIP requirement		Proponent response	NSW Office of Water comment
15	Quantified any other uncertainties in the groundwater or surface water impact modelling conducted for the activity?	Refer Sections 5.3.5.8 and 5.3.5.9	
16	Considered strategies for monitoring actual and reassessing any predicted take of water throughout the life of the project, and how these requirements will be accounted for?	Ongoing monitoring and modelling updates will be undertaken to verify modelling predictions.	

4 NSW Department of Primary Industries, August 2013

Table 3. Determining water predictions in accordance with Section 3.2.3
(complete one row only – consider both during and following completion of activity)

	AIP requirement	Proponent response	NSW Office of Water comment
1	For the Gateway process , is the estimate based on a simple modelling platform, using suitable baseline data, that is, fit-for-purpose?	N/A	
2	For State Significant Development or mining or coal seam gas production , is the estimate based on a complex modelling platform that is: <ul style="list-style-type: none"> • Calibrated against suitable baseline data, and in the case of a reliable water source, over at least two years? • Consistent with the Australian Modelling Guidelines? • Independently reviewed, robust and reliable, and deemed fit-for-purpose? 	Yes	
3	In all other processes, estimate based on a desk-top analysis that is: <ul style="list-style-type: none"> • Developed using the available baseline data that has been collected at an appropriate frequency and scale; and • Fit-for-purpose? 	N/A	

Other requirements to be reported on under Section 3.2.3

Table 4. Has the proponent provided details on:

	AIP requirement	Proponent response	NSW Office of Water comment
1	Establishment of baseline groundwater conditions?	Yes – refer Section 4.5	
2	A strategy for complying with any water access rules?	Refer Section 7.5. The project will operate within water access rules without need for a specific strategy.	
3	Potential water level, quality or pressure drawdown impacts on nearby basic landholder rights water users?	Yes – refer Section 5.3.5.2 and 6.1	
4	Potential water level, quality or pressure drawdown impacts on nearby licensed water users in connected groundwater and surface water sources?	Yes – refer Section 5.3.5.2 and 6.1	
5	Potential water level, quality or pressure drawdown impacts on groundwater dependent ecosystems?	Yes – refer Section 5.3.5.2 and 6.1	
6	Potential for increased saline or contaminated water inflows to aquifers and highly connected river systems?	Yes – refer Section 6.2	
7	Potential to cause or enhance hydraulic connection between aquifers?	Other than direct excavation of the mine void, the project will not cause or enhance hydraulic connection between aquifers.	
8	Potential for river bank instability, or high wall instability or failure to occur?	The project will not undermine or encroach on any major drainages.	
9	Details of the method for disposing of extracted activities (for coal seam gas activities)?	N/A	

6 NSW Department of Primary Industries, August 2013

2. Addressing the minimal impact considerations

Note for proponents

Section 3.2.1 of the AIP describes how aquifer impact assessment should be undertaken.

1. Identify all water sources that will be impacted, referring to the water sources defined in the relevant water sharing plan(s). Assessment against the minimal impact considerations of the AIP should be undertaken for each ground water source.
2. Determine if each water source is defined as 'highly productive' or 'less productive'. If the water source is named in then it is defined as highly productive, all other water sources are defined as less productive.
3. With reference to pages 13-14 of the Aquifer Interference Policy, determine the sub-grouping of each water source (eg alluvial, porous rock, fractured rock, coastal sands).
4. Determine whether the predicted impacts fall within Level 1 or Level 2 of the minimal impact considerations defined in Table 1 of the AIP, for each water source, for each of water table, water pressure, and water quality attributes. The tables below may assist with the assessment. There is a separate table for each sub-grouping of water source – only use the tables that apply to the water source(s) you are assessing, and delete the others.
5. If unable to determine any of these impacts, identify what further information will be required to make this assessment.
6. Where the assessment determines that the impacts fall within the Level 1 impacts, the assessment should be 'Level 1 – Acceptable'
7. Where the assessment falls outside the Level 1 impacts, the assessment should be 'Level 2'. The assessment should further note the reasons the assessment is Level 2, and any additional requirements that are triggered by falling into Level 2.
8. If water table or water pressure assessment is not applicable due to the nature of the water source, the assessment should be recorded as 'N/A – reason for N/A'.

Table 5. Minimal impact considerations

Aquifer	Alluvial aquifer	
Category	Highly Productive	
Level 1 Minimal Impact Consideration		Assessment
<p>Water table</p> <p>Less than or equal to a 10% cumulative variation in the water table, allowing for typical climatic post-water sharing plan variations, 40 metres from any:</p> <ul style="list-style-type: none"> • high priority groundwater dependent ecosystem or • high priority culturally significant site listed in the schedule of the relevant water sharing plan. <p>OR</p> <p>A maximum of a 2 metre water table decline cumulatively at any water supply work.</p>		<p>Level 1 – Acceptable</p> <p>No significant drawdown predicted at Alluvial water supply works that are not owned by the project.</p>
<p>Water pressure</p> <p>A cumulative pressure head decline of not more than 40% of the post-water sharing plan pressure head above the base of the water source to a maximum of a 2 metre decline, at any water supply work.</p>		<p>N/A – alluvial aquifer is very shallow</p>
<p>Water quality</p> <p>Any change in the groundwater quality should not lower the beneficial use category of the groundwater source beyond 40 metres from the activity.</p> <p>No increase of more than 1% per activity in long-term average salinity in a highly connected surface water source at the nearest point to the activity.</p> <p>No mining activity to be below the natural ground surface within 200 metres laterally from the top of high bank or 100 metres vertically beneath (or the three dimensional extent of the alluvial water source - whichever is the lesser distance) of a highly connected surface water source that is defined as a reliable water supply.</p> <p>Not more than 10% cumulatively of the three dimensional extent of the alluvial material in this water source to be excavated by mining activities beyond 200 metres laterally from the top of high bank and 100 metres vertically beneath a highly connected surface water source that is defined as a reliable water supply.</p>		<p>Level 1 – Acceptable.</p> <p>Level 1 – Acceptable.</p> <p>Level 1 – Acceptable.</p> <p>Level 1 – Acceptable.</p>

Aquifer	Porous Rock – except Great Artesian Basin	
Category	Highly Productive	
Level 1 Minimal Impact Consideration		Assessment
<p>Water table Less than or equal to a 10% cumulative variation in the water table, allowing for typical climatic 'post-water sharing plan' variations, 40 metres from any:</p> <ul style="list-style-type: none"> • high priority groundwater dependent ecosystem or • high priority culturally significant site listed in the schedule of the relevant water sharing plan. <p>OR A maximum of a 2 metre water table decline cumulatively at any water supply work.</p>		<p>Level 1 – Acceptable</p> <p>It is noted that in excess of 2m decline is predicted at GW061475, however, given the elevation of the water supply work and it's installation within the Illawarra Coal Measures, predicted impacts are considered to be conservative and unlikely to be realised.</p> <p>Notwithstanding, in the event that water supply is compromised and attributed to drawdown associated with the Project, make good provisions will apply.</p>
<p>Water pressure A cumulative pressure head decline of not more than a 2 metre decline, at any water supply work.</p>		<p>Level 1 – Acceptable</p>
<p>Water quality Any change in the groundwater quality should not lower the beneficial use category of the groundwater source beyond 40 metres from the activity.</p>		<p>Level 1 – Acceptable</p>

Aquifer	Fractured Rock	
Category	Highly Productive	
Level 1 Minimal Impact Consideration	Assessment	
<p>Water table Less than or equal to a 10% cumulative variation in the water table, allowing for typical climatic 'post-water sharing plan' variations, 40 metres from any:</p> <ul style="list-style-type: none"> • high priority groundwater dependent ecosystem; or • high priority culturally significant site; listed in the schedule of the relevant water sharing plan. <p>OR A maximum of a 2 metre water table decline cumulatively at any water supply work.</p>	<p>Level 1 – Acceptable</p> <p>It is noted that of the order of 1 to 2m decline in water table is predicted at GW802888.</p> <p>Given the bore is recorded as being 51m deep, a drawdown of this magnitude is not expected to impact on supply from the well.</p> <p>Notwithstanding, in the event that water supply is compromised and attributed to drawdown associated with the Project, make good provisions will apply.</p>	
<p>Water pressure A cumulative pressure head decline of not more than a 2 metre decline, at any water supply work.</p>	<p>Level 1 – Acceptable</p>	
<p>Water quality Any change in the groundwater quality should not lower the beneficial use category of the groundwater source beyond 40 metres from the activity.</p>	<p>Level 1 – Acceptable</p> <p>Given baseline groundwater conditions seepage from the TSF is not expected to lower the beneficial use of the aquifer.</p> <p>Any potential water quality impacts are not expected beyond 40 m from the mine site boundary.</p> <p>The post-mining void will remain a groundwater sink. Salinification within the pit lake due to evaporative concentration will be retained within the void.</p>	

3. Proposed remedial actions where impacts are greater than predicted.

Note for proponents

Point 3 of section 3.2 of the AIP provides a basic framework for considerations to consider when assessing a proponent's proposed remedial actions.

Table 6. Has the proponent:

AIP requirement	Proponent response	NSW Office of Water comment
1 Considered types, scale, and likelihood of unforeseen impacts <i>during operation</i> ?	Yes – generally mine inflows and dewatering requirement to which the project is not particularly susceptible	
2 Considered types, scale, and likelihood of unforeseen impacts <i>post closure</i> ?	Yes – potential that the final void does not remain a groundwater sink. Surface water management to minimise inflow to the pit.	
3 Proposed mitigation, prevention or avoidance strategies for each of these potential impacts?	To be developed within Final Void Management Plan	
4 Proposed remedial actions should the risk minimization strategies fail?	To be developed within Final Void Management Plan	
5 Considered what further mitigation, prevention, avoidance or remedial actions might be required?	To be developed within Final Void Management Plan	
6 Considered what conditions might be appropriate?	To be developed within Final Void Management Plan	

4. Other considerations

Note for proponents

These considerations are not included in the assessment framework outlined within the AIP, however are discussed elsewhere in the document and are useful considerations when assessing a proposal.

Table 7: Has the proponent:

AIP requirement	Proponent response	NSW Office of Water comment
1 Addressed how it will measure and monitor volumetric take? (page 4 of the AIP)	Yes - Volumetric water take will be monitored at all dewatering points. Water take will be assigned to relevant water sources on a pro-rata basis defined by the groundwater model outputs.	
2 Outlined a reporting framework for volumetric take? (page 4 of the AIP)	Volumetric water take will be reported annually within the Annual Environmental Monitoring Review	

More information

www.water.nsw.gov.au

© State of New South Wales through the Department of Trade and Investment, Regional Infrastructure and Services, 2019. You may copy, distribute and otherwise freely deal with this publication for any purpose, provided that you attribute the NSW Department of Primary Industries as the owner.

Disclaimer:

This is a draft document produced as a guide for discussion, and to aid interpretation and application of the NSW Aquifer Interference Policy (2012). All information in this document is drawn from that policy, and where there is any inconsistency, the policy prevails over anything contained in this document. Any omissions from this framework do not remove the need to meet any other requirements listed under the Policy.

The information contained in this publication is based on knowledge and understanding at the time of writing (June 2019). However, because of advances in knowledge, users are reminded of the need to ensure that information upon which they rely is up to date and to check currency of the information with the appropriate officer of the Department of Primary Industries or the users independent adviser.

Published by the NSW Department of Primary Industries.

Reference 12279.1

Annexure 2

Groundwater Works Summary

(Total No. of pages including blank pages = 12)

Note: This Annexure is only available on the digital version of this document

This page has intentionally been left blank

GW#	Easting	Northing	Date	Final Depth (mBGL)	Screen Top (mBGL)	Screen Bottom (mBGL)	Screened Unit	Water Level (mBGL)	Salinity	Yield (L/s)
GW005408	788992.4	6402272.9	1/01/1914	28.7	16.5	28.7	Basalt decomposed	13.1	Hard	0.63
GW005409	789071.8	6401407.0						n/a		
GW005410	787921.6	6404123.2	1/01/1914	46.9	42.7	46.9	Limestone	10.7	Hard	1.05
GW005434	755036.0	6395703.0	1/01/1914	16.1	10.9	16.1	Rock Slate Water Supply	6	Brackish	0.63
GW005435	755192.0	6399769.0						n/a		
GW005436	753134.0	6406171.0	1/01/1914	22.8	9.1	22.8	Rock Slate Water Supply	6	Brackish	0.63
GW011434	766985.0	6381672.0						n/a		
GW011606	767792.0	6379677.0	1/01/1948	18.2	11.8	18.2	Rock Hard	4.5		0.13
GW011607	767084.0	6382440.0	1/01/1926	10.6	3.04	10.66	Gravel Wash/Slate	3		
GW011608	767166.0	6382561.0	1/01/1936	12.1	6	12.1		4.5	Hard	
GW011609	766977.0	6382319.0						n/a		
GW011610	765814.0	6381765.0	1/01/1948	7.6	6.09	7.62	Rock Water Supply	1.5		
GW011611	763570.0	6381701.0						n/a		
GW011612	764016.0	6382768.0	1/01/1935	9.1	0	9.1	Gravel Nominal Water Supply	3		
GW011613	764153.0	6384029.0	1/01/1936	10.6	0	10.6	Gravel Wash Nominal Water Supply	6		0.13
GW011614	763349.0	6384204.0	1/01/1935	18.2	11.8	18.2		7.6		0.13
GW011615	762922.0	6384801.0						n/a		
GW011616	765798.0	6383122.0	1/01/1948	12.1	5.7	12.1	Gravel Wash Nominal Water Supply	6		0.05
GW011617	762655.0	6384592.0	1/01/1936	9.1	0	9.1		3		
GW013110	766985.0	6381672.0	1/05/1957	36.5	18.2	24.2	Slate Water Supply	9.1	Good	0.61
GW013215	788646.2	6391181.7						n/a		
GW013218	789539.3	6390446.1						n/a		
GW014168	757657.0	6403158.0						n/a		

GW#	Easting	Northing	Date	Final Depth (mBGL)	Screen Top (mBGL)	Screen Bottom (mBGL)	Screened Unit	Water Level (mBGL)	Salinity	Yield (L/s)
GW014538	760106.0	6401893.0	1/09/1960	18.8	14	18.8	Rock Water Supply	6.7	2000	0.51
GW014540	762186.0	6403503.0	1/10/1960	26.2	17.9	26.2	Rock Water Supply	17.6	2000	0.51
GW017060	755979.0	6402955.0	1/01/1958	22.8	17.2	22.8	Slate	18.5	750	1.14
GW017461	784050.9	6368340.4	1/12/1957	12.2	11	12.2	Shale Black Water Supply	6.1		
GW018929	791063.7	6382753.8						n/a		
GW019500	789160.7	6394527.4						n/a		
GW021844	789733.6	6398982.6						n/a		
GW021845	789979.8	6397557.4	1/05/1964	5.5	0	5.5	Sand Gravel Water Supply	2.4	Good	10.1
GW021900	788325.6	6390913.3	1/05/1964	14.6	0	14.6	Sand Gravel Water Supply	12.2		
GW023075	790137.0	6395763.5	1/08/1965	4.3	0	4.3	Sand	2.1		2.53
GW023104	789945.1	6399963.4						n/a		
GW023337	755621.0	6401207.0						n/a		
GW023618	755612.0	6401885.0						n/a		
GW023756	758624.0	6404212.0	1/04/1966	42.6	24.6	42.6	Sandstone Grey Water Supply	18.2	2000	0.4
GW024015	761102.0	6400017.0	1/04/1966	36.5	14.3	36.5	Sandstone Grey Water Supply	9.1	2000	
GW025796	773239.0	6372036.0	1/04/1966	9.4	5.5	9.5	Alluvium	4.8	Good	4.17
GW025814	762012.0	6404833.0		18.2	18.2	18.3	Rock Slightly Soft Slatey Water Supply	2.7	Good Stock	0.19
GW025820	773738.0	6372176.0	unknown	5.5	0	5.4	Alluvium	0.7	Good	3.79
GW026422	770456.0	6376028.0						n/a		
GW026583	792598.1	6383510.5	1/05/1966	6.7	0	6.7	Sand Water Supply	2.4	Good	
GW026726	760991.0	6399742.0	1/03/1967	45.7	23.9	45.7	Basalt Black Hard Slightly Fractured Water Supply	16.7		0.38
GW026783	748603.0	6391088.0	1/12/1966	5.4	0	5.4	Gravel Clay Water Supply	3.6		7.58
GW027701	751701.0	6388729.0	1/07/1967	3.6	0	3.6	Gravel Water Supply	1.5		18.95
GW027960	761232.0	6399983.0						n/a		
GW028676	790586.9	6392358.3						n/a		
GW028811	751701.0	6395973.0	1/02/1968	3.6	0	3.6	Gravel Water Supply	2.1	Hard	3.79
GW028890	789630.2	6398090.9						n/a		
GW029487	790368.2	6392919.6						n/a		

GW#	Easting	Northing	Date	Final Depth (mBGL)	Screen Top (mBGL)	Screen Bottom (mBGL)	Screened Unit	Water Level (mBGL)	Salinity	Yield (L/s)
GW029488	790260.8	6394619.5						n/a		
GW029489	790418.9	6393782.2						n/a		
GW029543	777329.0	6405778.0	1/02/1968	11.8	7.3	11.8	Gravel Sandy Water Supply	7		0.63
GW031053	750870.0	6384711.0		9.7	0	9.6		6		12.63
GW031201	759540.0	6405268.0						n/a		
GW031324	760879.0	6397464.0						n/a		
GW031325	760347.0	6397077.0						n/a		
GW031594	764910.0	6382066.0						n/a		
GW031595	761785.0	6385201.0						n/a		
GW031597	766408.0	6382520.0						n/a		
GW031598	766305.0	6382553.0						n/a		
GW031600	766710.0	6382111.0						n/a		
GW031601	763641.0	6383395.0						n/a		
GW031602	767244.0	6382559.0						n/a		
GW031603	764331.0	6382852.0						n/a		
GW032084	763301.0	6386302.0	1/08/1968	76.2	7.7	76.2	Basalt, Sandstone, Slate, Shale	6	Fresh	3.16
GW032259	752806.0	6402480.0						n/a		
GW042766	758496.0	6405325.0						n/a		
GW042767	758247.0	6404777.0						n/a		
GW042767	758247.0	6404777.0						n/a		
GW042966	758849.0	6387652.0						n/a		
GW045103	772328.0	6382514.0						n/a		
GW045422	760017.0	6400477.0						n/a		
GW045433	753114.0	6399174.0	1/05/1976	28.1	10.5	28.1	Basalt Water Supply	8.2	2000	
GW045434	753963.0	6398659.0						n/a		
GW045445	789350.5	6401090.8						n/a		
GW045450	751113.0	6389175.0						n/a		
GW047371	772868.0	6400381.0	1/08/1979	16.8	10.7	16.5	Coal/Shale Water Supply	10.7		0.15
GW047410	773450.0	6400643.0						n/a		

GW#	Easting	Northing	Date	Final Depth (mBGL)	Screen Top (mBGL)	Screen Bottom (mBGL)	Screened Unit	Water Level (mBGL)	Salinity	Yield (L/s)
GW047609	790064.4	6395950.9	1/12/1979	9	4	9	Gravel Sandstone Water Supply	5		34.1
GW047612	790141.1	6396812.0						n/a		
GW047613	790021.9	6397185.4						n/a		
GW047614	772864.0	6400227.0						n/a		
GW047766	779368.0	6372235.0						n/a		
GW048149	771847.0	6367819.0						n/a		
GW048618	767707.0	6404745.0						n/a		
GW048812	786141.6	6403125.6						n/a		
GW048879	763604.0	6398780.0	1/01/1979	20	6	20	Schist Dark Grey Very Hard Water Supply	6		0.46
GW049674	773004.0	6400563.0	1/09/1979	15.2	9.1	14.6	Sand Very Fine Water Supply	11.6	Good	0.19
GW051109	754132.0	6396066.0	1/06/1980	31.7	16.5	31.7	Shale Hard Water Supply	5.5	Good	0.38
GW051992	774999.0	6386695.0						n/a		
GW052605	760653.0	6396823.0		20	10	20		9		0.67
GW053097	789549.0	6389890.6						n/a		
GW053263	780452.0	6406215.0		6.4	0	6.4		3.3		8.84
GW053717	789626.0	6400681.6						n/a		
GW053718	789695.6	6400371.1						n/a		
GW053788	754084.0	6403434.0						n/a		
GW053838	779734.0	6401117.0						n/a		
GW054125	751532.0	6398597.0	1/01/1981	23.6	4.3	23.6	Granite Bands Water Supply	17.8	2000	1.1
GW054498	777437.0	6405929.0	1/09/1981	18.3	9	12	Sand Gravel Water Supply	5	Good	
GW054519	768064.0	6405382.0						n/a		
GW054670	774549.0	6372277.0						n/a		
GW055553	762399.0	6391690.0	1/07/1982	54.4	18.4	54.4	Slate Water Supply	17.8		0.07
GW055992	766293.0	6404628.0	1/07/1981	51.8	25.9	51.8	Granite Hard Water Supply	6.1	Good	4.54
GW056328	765685.0	6392559.0	1/04/1981	53	10.7	12.2	Clay Sandy Water Supply	4.5		0.33
GW056368	761805.0	6399906.0						n/a		

GW#	Eastings	Northing	Date	Final Depth (mBGL)	Screen Top (mBGL)	Screen Bottom (mBGL)	Screened Unit	Water Level (mBGL)	Salinity	Yield (L/s)
GW056738	764634.0	6405165.0						n/a		
GW056762	766137.0	6384068.0						n/a		
GW056911	768585.0	6389737.0						n/a		
GW057059	779942.0	6381531.0	1/01/1983	31.1	13.7	31.1	Shale Black	9.1	Good	1.14
GW057061	752197.0	6387699.0	1/02/1983	34.4	24.6	30	Shale Water Supply	13.8		1.1
GW057083	763170.0	6392225.0		30.5	6.1	6.7	Dolomite Water Supply	4.6		0.25
GW058386	763515.0	6404362.0	1/02/1983	30.5	24.4	30.5	Shale Grey Water Supply	4.6		2.27
GW058394	781227.8	6372583.4	1/04/1983	30.50	10.00	30.00	Weathered Shale	8	2000	0.51
GW058417	782306.9	6380292.7	1/07/1983	30.5	24.4	30.5	Sandstone	3.9	Good	0.31
GW058996	770795.0	6403922.0						n/a		
GW059652	773881.0	6401094.0						n/a		
GW060769	755816.0	6400647.0	1/05/1985	61.5	49	60	Shale Decomposed Water Supply	32	Fresh	0.63
GW060850	773783.0	6395608.0	1/02/1985	69	12	69	Sandstone Pink Water Supply	21		0.55
GW061320	753090.0	6387923.0						n/a		
GW061475	768383.0	6388078.0	1/02/1986	15.2	13.7	15.2	Granite Water Supply	6.7		0.1
GW062111	768316.0	6379755.0						n/a		
GW062206	765202.0	6397998.0						n/a		
GW062357	790638.5	6385172.0						n/a		
GW062492	788206.4	6386784.1						n/a		
GW063804	779191.0	6402242.0						n/a		
GW064010	781578.4	6377599.6	1/02/1987	47.2	16.1	47.2	Shale Black Water Supply	2.4	Good	1.77
GW064265	785866.8	6401714.8						n/a		
GW064288	766428.0	6396948.0	1/01/1987	16.3	12.3	16.3	Shale Black Broken Bands	6.5	Fresh	1.75
GW065121	768849.0	6392477.0	29/03/1983	78	39	78		5	Good	3
GW065219	764608.0	6398229.0	10/06/1988	49.2	3.1	49.2	Granite	8.6	Fresh	1.63
GW065918	752874.0	6381485.0						n/a		
GW066291	765493.0	6383815.0	23/02/1989	60.3	33.5	48.7	Broken Shale and Quartz	30.4		1.25
GW066763	766998.0	6404609.0	18/06/1991	32	16.7	32	Fractured	3.3		0.63
GW070892	761980.0	6405605.0	12/05/1993	47.2	30.5	47.2	Grey Shale	7.6	Good	0.21

GW#	Easting	Northing	Date	Final Depth (mBGL)	Screen Top (mBGL)	Screen Bottom (mBGL)	Screened Unit	Water Level (mBGL)	Salinity	Yield (L/s)
GW073023	788459.8	6391373.5	29/06/1994	61	31	37	Shale	16	Fresh	1.25
GW078051	789452.2	6389277.0						n/a		
GW200185	789721.4	6391435.5						n/a		
GW200369	788396.4	6388301.9	15/09/2005	48	36	45	Shale (grey)	20		1.7
GW800047	755353.0	6400936.0						n/a		
GW800071	752524.0	6382080.0	3/12/1991	29	9.5	29	Basalt	3	Very Good	1.9
GW800095	763349.0	6396043.0	18/11/1995	37	14	20	Basalt	5	Good	2.44
GW800115	769484.0	6394897.0	21/03/1996	51	42	48	Sandstone	11		6.67
GW800122	777433.0	6378518.0	4/05/1996	27.4	12.2	27.4	Blue Shale	1.8	Poor	0.51
GW800269	769868.0	6404698.0	5/10/1995	59	14	59	Shale	27	Good	2.575
GW800273	764213.0	6406040.0						n/a		
GW800468	757812.0	6379879.0						n/a		
GW800509	774721.0	6380280.0						n/a		
GW800548	773513.0	6379458.0	15/06/1997	63.1	1.52	63.1	Granite	1		0.12
GW800579	774563.0	6380333.0	16/06/1997	99.1	4.57	99.1	Granite	10		0.13
GW800642	775283.0	6377003.0	3/11/1998	37	34	35	Sandstone	8		0.63
GW800763	763588.0	6404308.0	24/07/1995	32	6	32	Shale, blue	6	Good	1.4
GW800764	764101.0	6404018.0	13/05/1995	32	9.1	32	Shale, blue	3	Good	1.25
GW800765	764013.0	6404133.0						n/a		
GW801005	766013.0	6383763.0						n/a		
GW801106	757183.0	6379983.0	24/09/1999	30	15	30	Shale, blue	9		0.98
GW801199	756680.0	6405713.0						n/a		
GW801306	777673.0	6377653.0						n/a		insuffici ent
GW801307	758115.0	6400296.0	3/07/2000	90	35	90	Granite	60		1.2
GW801423	771978.0	6380558.0	18/05/2000	70	15	43	Siltstones/Shales	5.5		0.4
GW801424	772311.0	6381973.0	22/05/2000	51	4	7.5	Gravel	1	Fresh	3
GW801425	771181.0	6376751.0						n/a		abando ned, dry
GW801426	772451.0	6377788.0						n/a		abando ned, dry

GW#	Easting	Northing	Date	Final Depth (mBGL)	Screen Top (mBGL)	Screen Bottom (mBGL)	Screened Unit	Water Level (mBGL)	Salinity	Yield (L/s)
GW801427	771468.0	6377133.0						n/a		
GW801432	778023.0	6379473.0	1/01/1980					3		1
GW801435	766995.0	6383223.0	3/09/2001	24	18	24	Basalt	8		2.5
GW801536	764633.0	6398173.0	23/04/2002	48	46	48	Decomposed Sandstone	8		0.01
GW801723	783655.6	6376643.5	22/11/2002	40	35	39	Sandstone	22		0.315
GW801737	770753.0	6403883.0						n/a		
GW801739	772958.0	6384113.0	3/10/2002	72	48	61	Limestone	20		0.315
GW801745	777323.0	6375883.0	9/10/2002	80	56	56.5	Limestone	20		0.227
GW801866	763953.0	6403673.0						n/a		
GW801884	777463.0	6375603.0	4/10/2002	48	36	38	Limestone	6		2.527
GW801915	764253.0	6404223.0						n/a		
GW801955	772708.0	6379431.0	5/06/2000	52	6	9	Volcanics - Weathered	0.71	793.6	4
GW801957	772123.0	6378563.0	2/06/2000	21	5	21	Siltstone and Slate	0.85	1408	5
GW801959	772222.0	6380990.0	28/02/2002	23	12	23	Siltstone	11.01	Fresh	5
GW801986	776568.0	6378713.0	30/01/2003	80	23	25	Granite	5.5		0.315
GW802015	751643.0	6398929.0	29/09/1997	60.96	51.82	57.91	Shale & Quartz	27.43		2.27
GW802124	756393.0	6403894.0						n/a		
GW802232	766293.0	6386504.0						n/a		
GW802253	757658.0	6400254.0	24/09/2004	35	11	23	Shale	15		5
GW802265	766307.0	6383930.0						n/a		
GW802328	770388.0	6392863.0	8/12/2004	56	38	56	Siltstone	36		0.3
GW802370	785941.1	6371923.2	11/03/1998	37	27.4	33.4	Basalt	4		
GW802414	773998.0	6378538.0						n/a		
GW802427	769827.0	6404721.0						n/a		
GW802481	760605.0	6405390.0						n/a		
GW802482	764628.0	6403613.0						n/a		
GW802487	775813.0	6377195.0	29/01/2003	40	26	33	Granite	3.5		2.275
GW802489	764543.0	6404583.0						n/a		
GW802732	767333.0	6383330.0	21/10/2003	7.5	0	7.5	Alluvial	5.3		
GW802734	785686.0	6378623.8	22/12/2003	48	41	48	Alluvium	16		1.26

GW#	Easting	Northing	Date	Final Depth (mBGL)	Screen Top (mBGL)	Screen Bottom (mBGL)	Screened Unit	Water Level (mBGL)	Salinity	Yield (L/s)
GW802799	767121.0	6387145.0	19/11/2003	100	4.8	66		10.5		0.5
GW802814	754189.0	6387676.0	14/02/2004	66	54	66	Shale, soft, grey	28		2.5
GW802846	756468.0	6404825.0						n/a		
GW802864	784675.4	6379720.8	22/06/2004	80	45	49	Sandstone	32		0.063
GW802902	776668.0	6375790.0						n/a		
GW802931	776222.0	6376460.0	9/09/2003	40	30	40	Sandstone	14		0.442
GW802987	768298.0	6405445.0	30/07/1995	64	21.7	65	Shale, hard, brittle, grey	21.34	Slightly Brackish	0.15
GW802998	767093.0	6403700.0						n/a		
GW803070	766973.0	6403910.0						n/a		
GW803075	758678.0	6400285.0	5/01/2007	35	17	35	Shale	26		1
GW803149	761796.0	6391019.0		15				7		1
GW803161	764730.0	6398408.0						n/a		
GW803217	772911.0	6362570.0	23/08/2006	66	36	60	Diorite	10		1.82
GW803249	765008.0	6404683.0	16/02/2006	42	10	36	Shale, blue/Sandstone & Coal bands	4		1.39
GW803261	752815.0	6400979.0	30/03/2007	50	20	50	Basalt, Granite	10		0.379
GW803263	751180.0	6385050.0	22/01/2007	35	17	35	Shale	19		0.6
GW803280	768595.0	6404300.0	11/04/2007	50	15	50	Shale	15		0.4
GW803280	768595.0	6404300.0						n/a		
GW803497	748318.0	6388492.0	7/12/2006	60	20	60	Shale, blue	22.5	481	0.5
GW803522	758220.0	6400073.0	17/11/2007	49	24	49	Shale	15		0.9
GW803598	785475.0	6369888.0						n/a		
GW803613	753728.0	6406021.0						n/a		
GW803707	782668.0	6384357.0	4/02/2000	76.2	18.29	76.2	Shale and Basalt	22.86		12.61
GW803786	769748.0	6397329.0	10/12/2008	20	0	20		12		0.2
GW803824	766530.0	6404570.0	1/02/1995	26	16.7	26	Shale, blue	8	Slightly Brackish	1.26
GW804060	767555.0	6394430.0						n/a		
GW804203	765225.0	6404730.0						n/a		
GW804217	751020.0	6385801.0	11/09/2009	107	89	101	Shale, blue; Quartz	10	Good	1.26

GW#	Easting	Northing	Date	Final Depth (mBGL)	Screen Top (mBGL)	Screen Bottom (mBGL)	Screened Unit	Water Level (mBGL)	Salinity	Yield (L/s)
GW804297	776480.0	6377110.0						n/a		
GW804302	756690.0	6405713.0						n/a		
GW804303	766711.0	6382980.0						n/a		
GW804351	777999.0	6366819.0	22/07/2010	7.5	4.5	7.5	Sand	4.39		
GW804354	777983.0	6366788.0	22/07/2010	5.8	2.8	5.8	Sandy Clay	4.27		
GW804360	767560.0	6397100.0	2/07/2009	33	24	33	Shale, black	8		0.758
GW804404	766395.0	6404885.0						n/a		
GW804433	756760.0	6403730.0						n/a		
GW804557	748195.0	6388665.0	1/07/1991	35				15		0.8
GW804951	768772.0	6383438.0	12/09/2012	48	30	42	Shale	1.51		0.6
GW805002	760280.0	6406115.0	13/11/2012	42	16	22	Shale, brown	10		1.2
GW805120	784800.5	6376536.5	17/03/2013	60	27	41	Sandstone	20		0.217
GW805155	784950.0	6374040.0						n/a		

This page has intentionally been left blank



Annexure 3



BGW10, BGW108 Pumping Tests

(Total No. of pages including blank pages = 4)

Note: This Annexure is only available on the digital version of this document

This page has intentionally been left blank

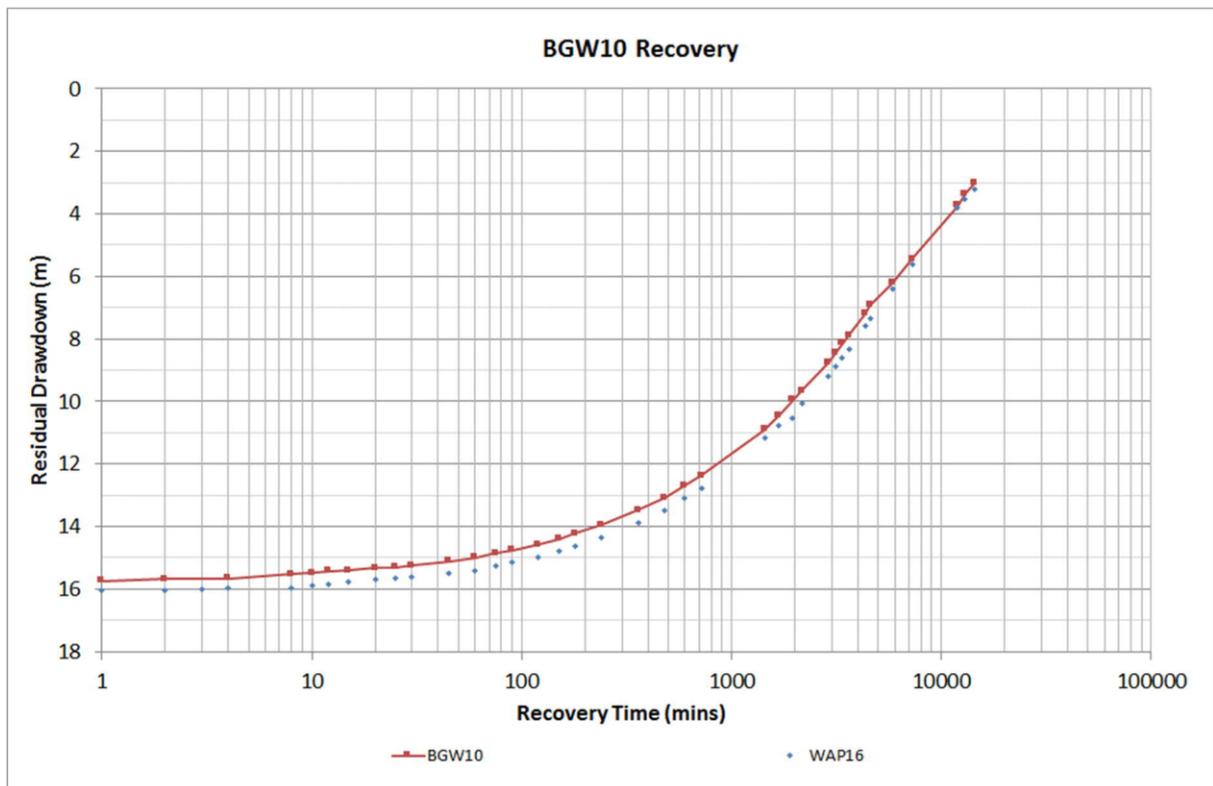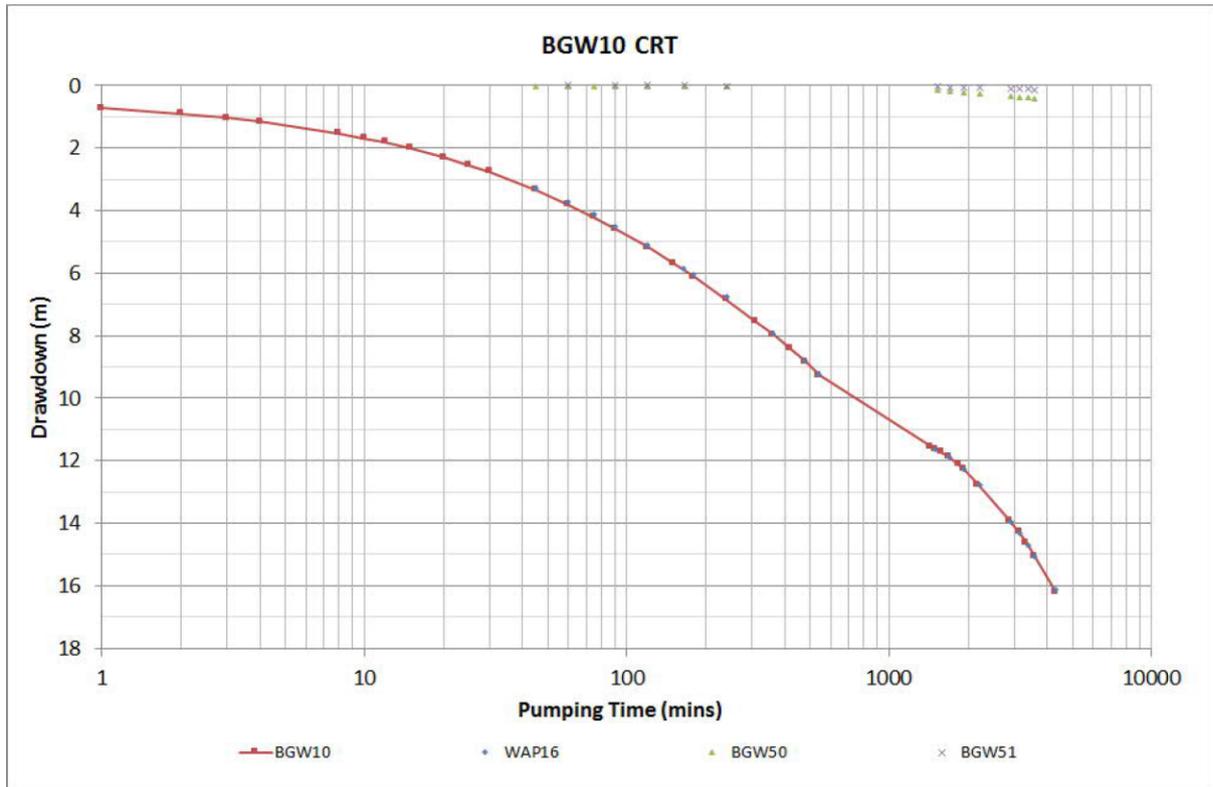

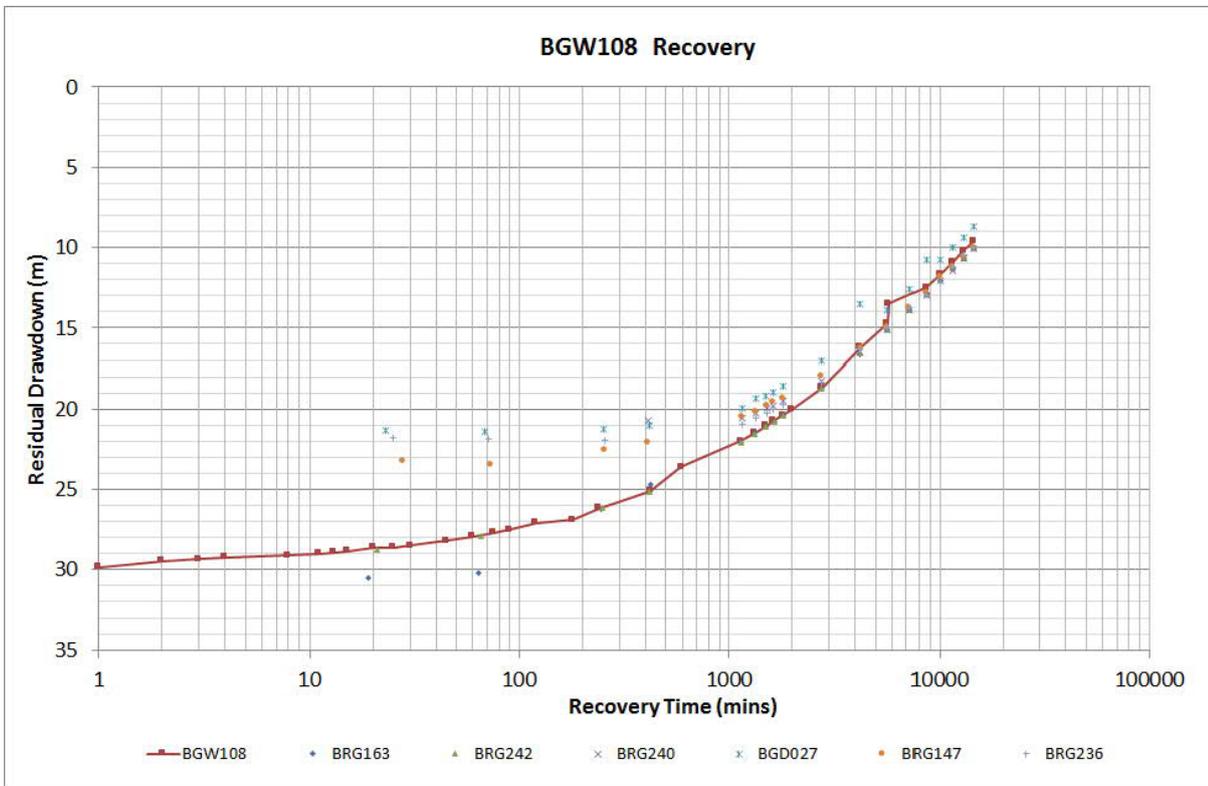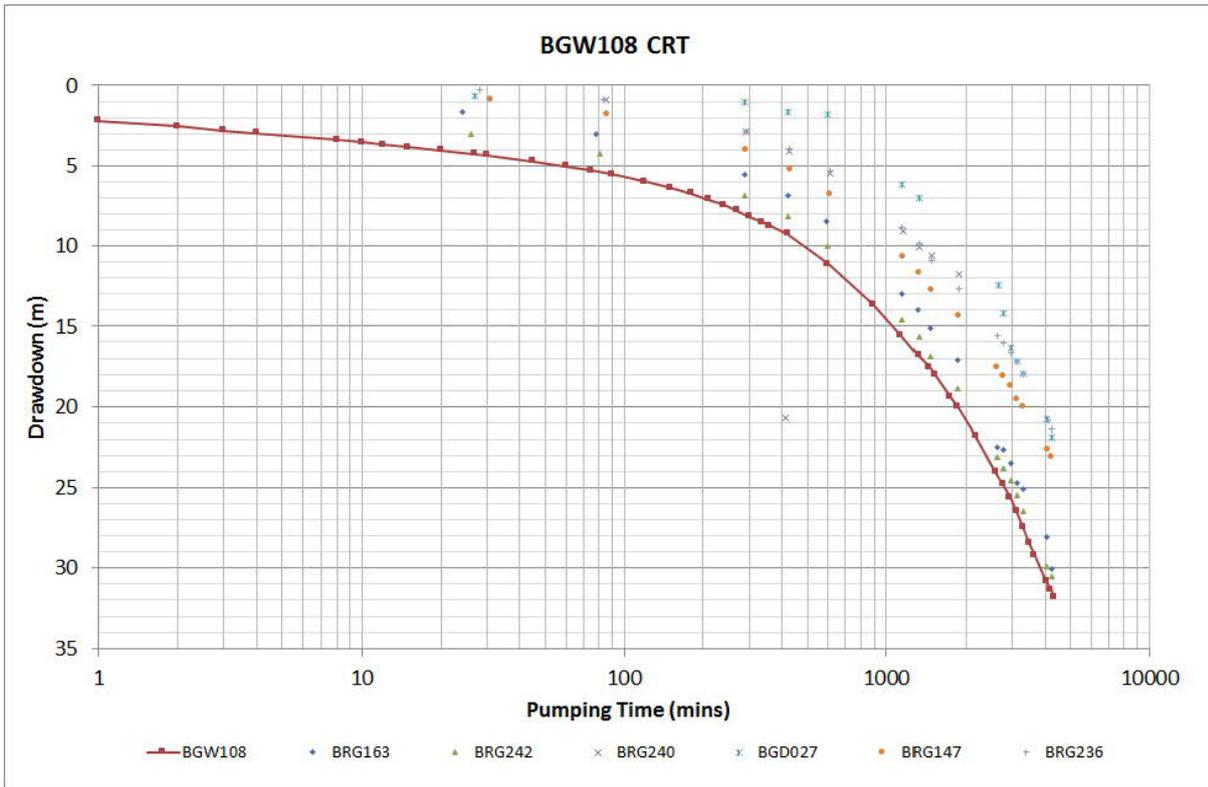


Annexure 4

Airlift Recovery Tests


(Total No. of pages including blank pages = 6)

Note: This Annexure is only available on the digital version of this document


This page has intentionally been left blank

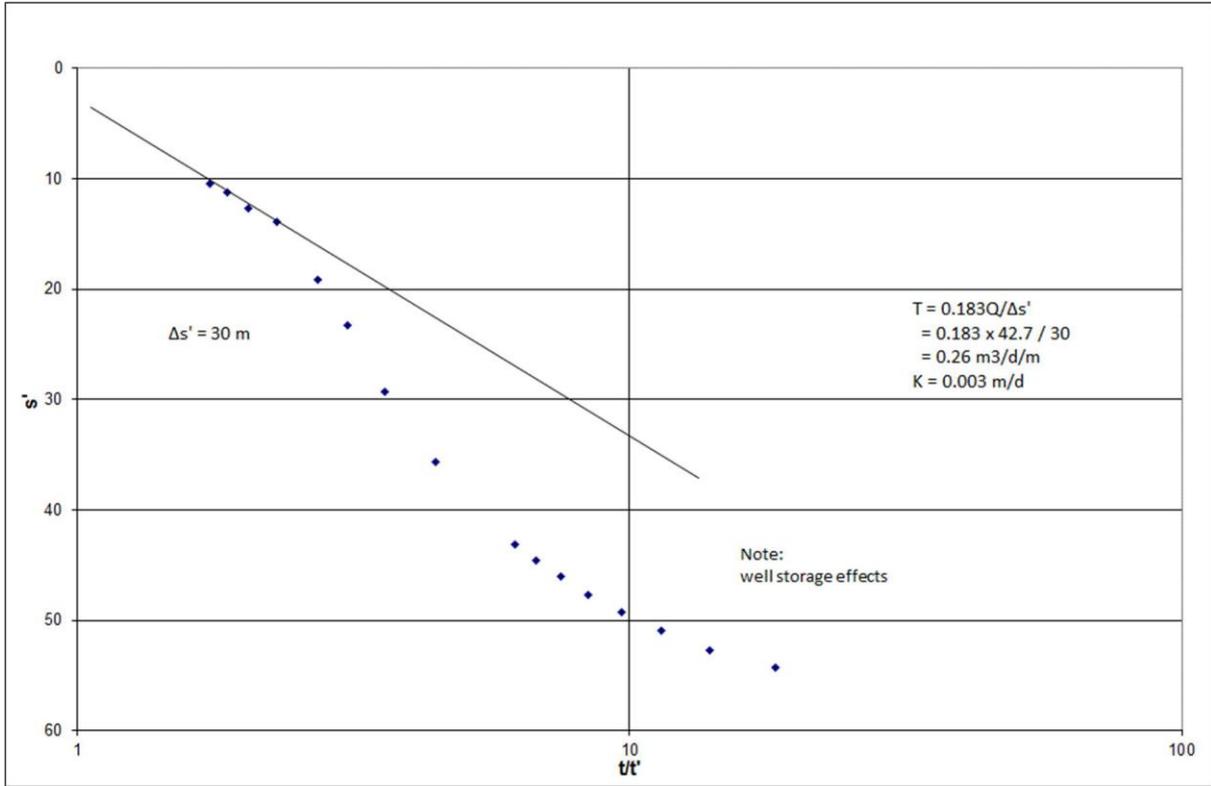


BRC17005

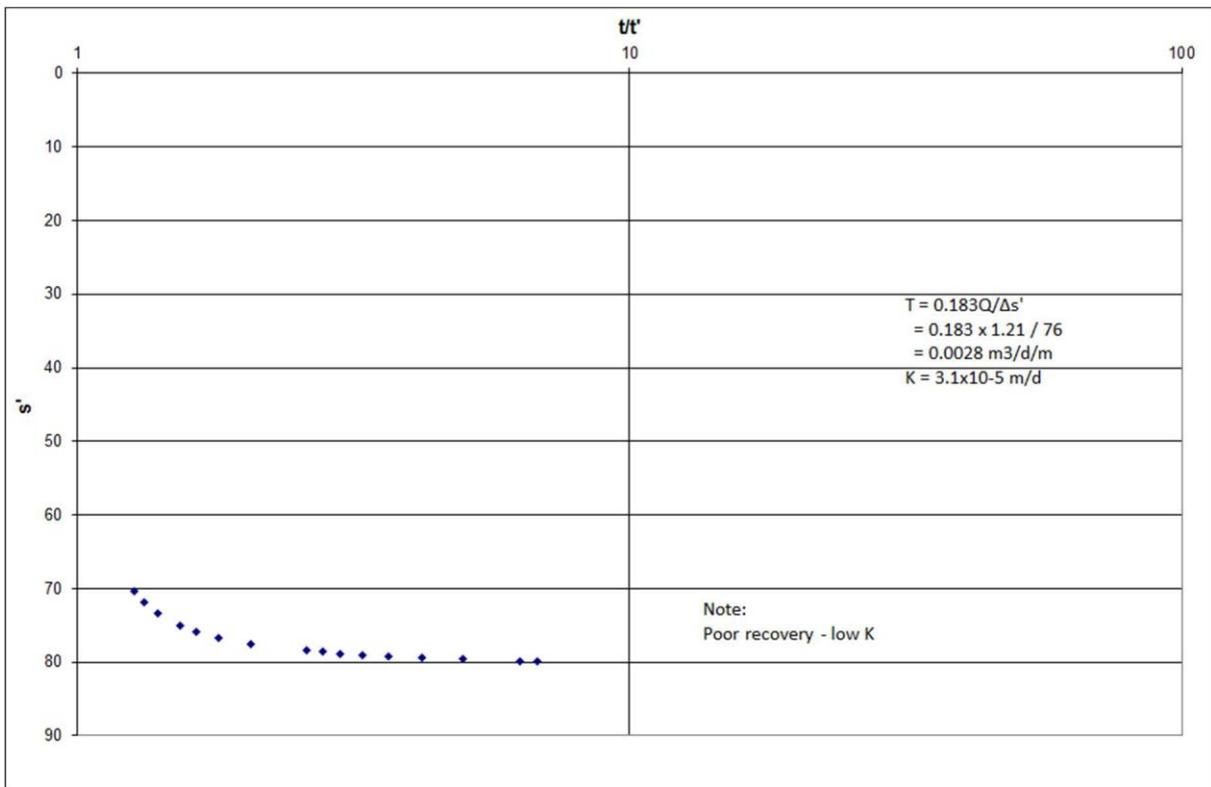


BRC17009

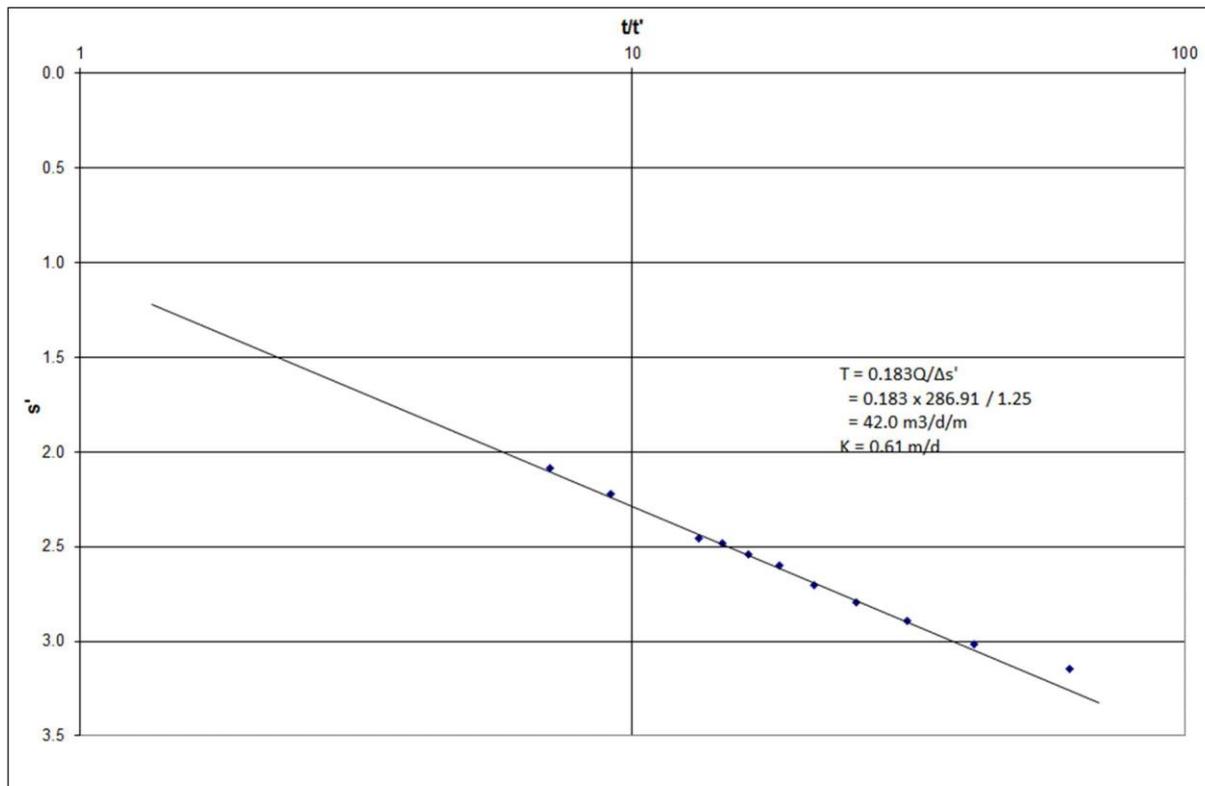


BRC17012

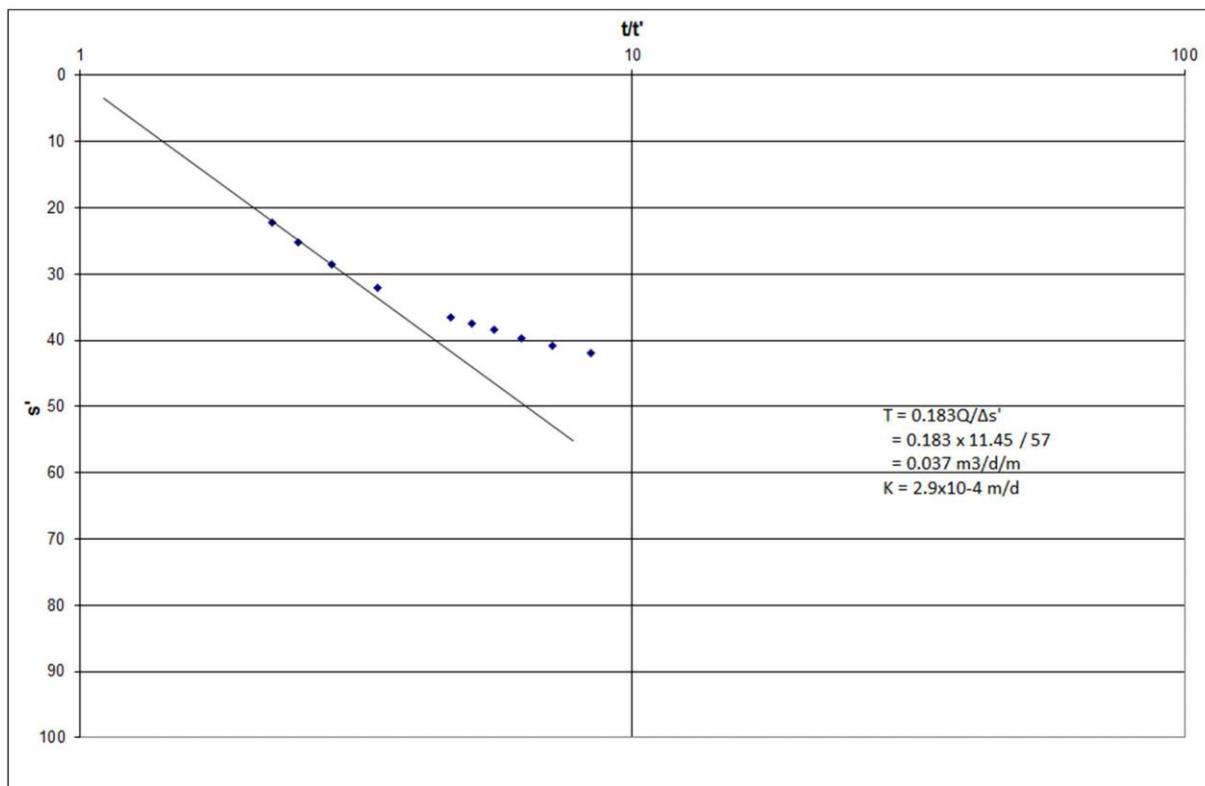


BRC17018

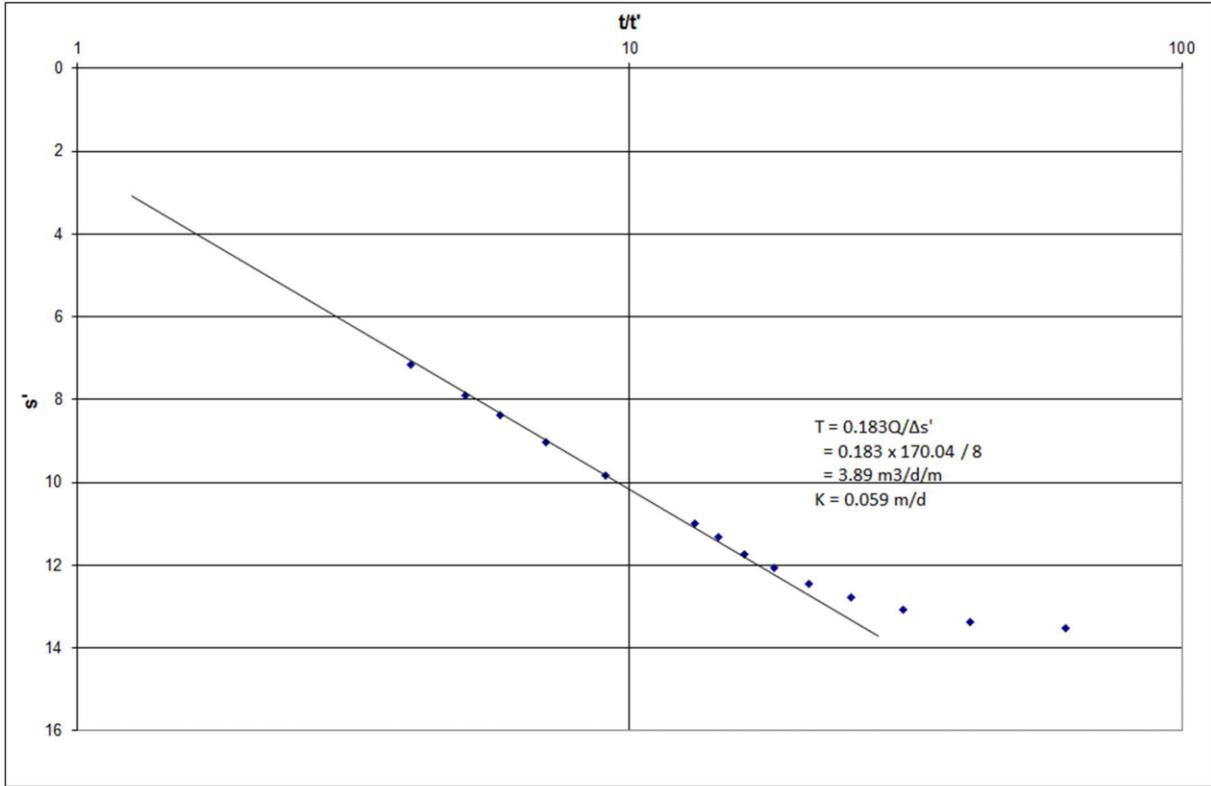

BRC17025

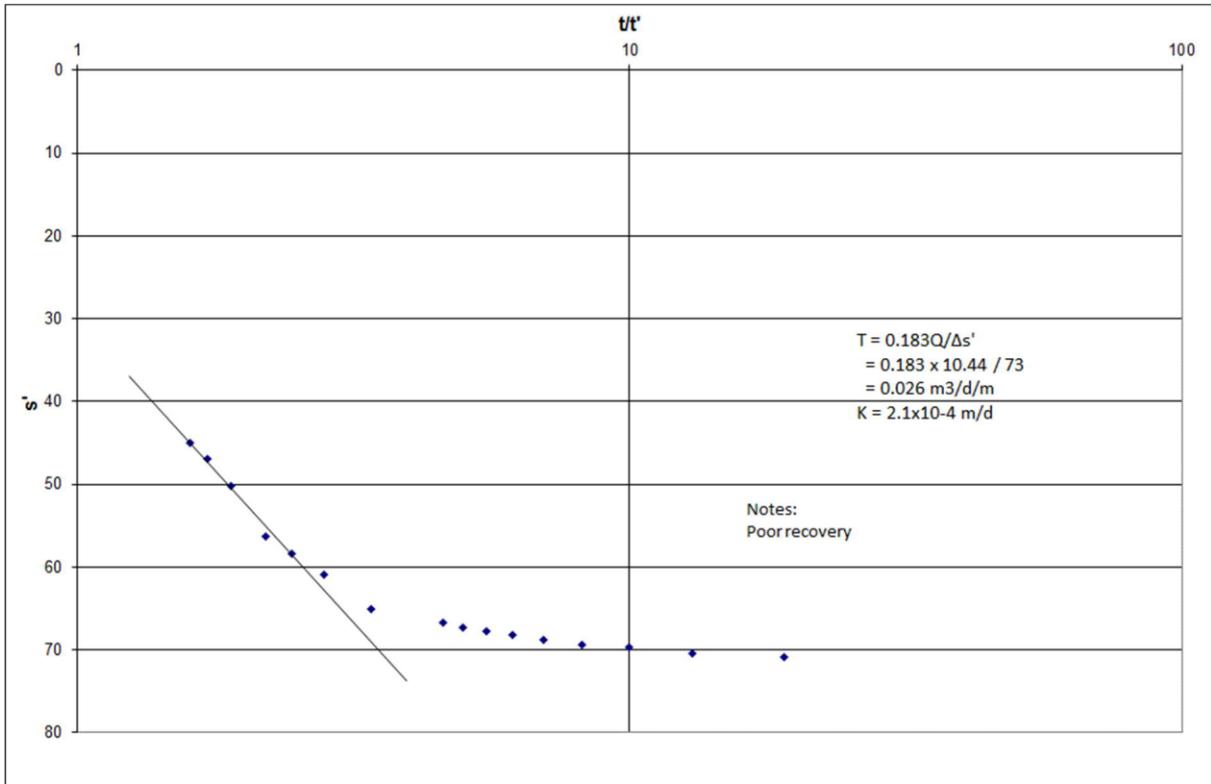

BRC17027

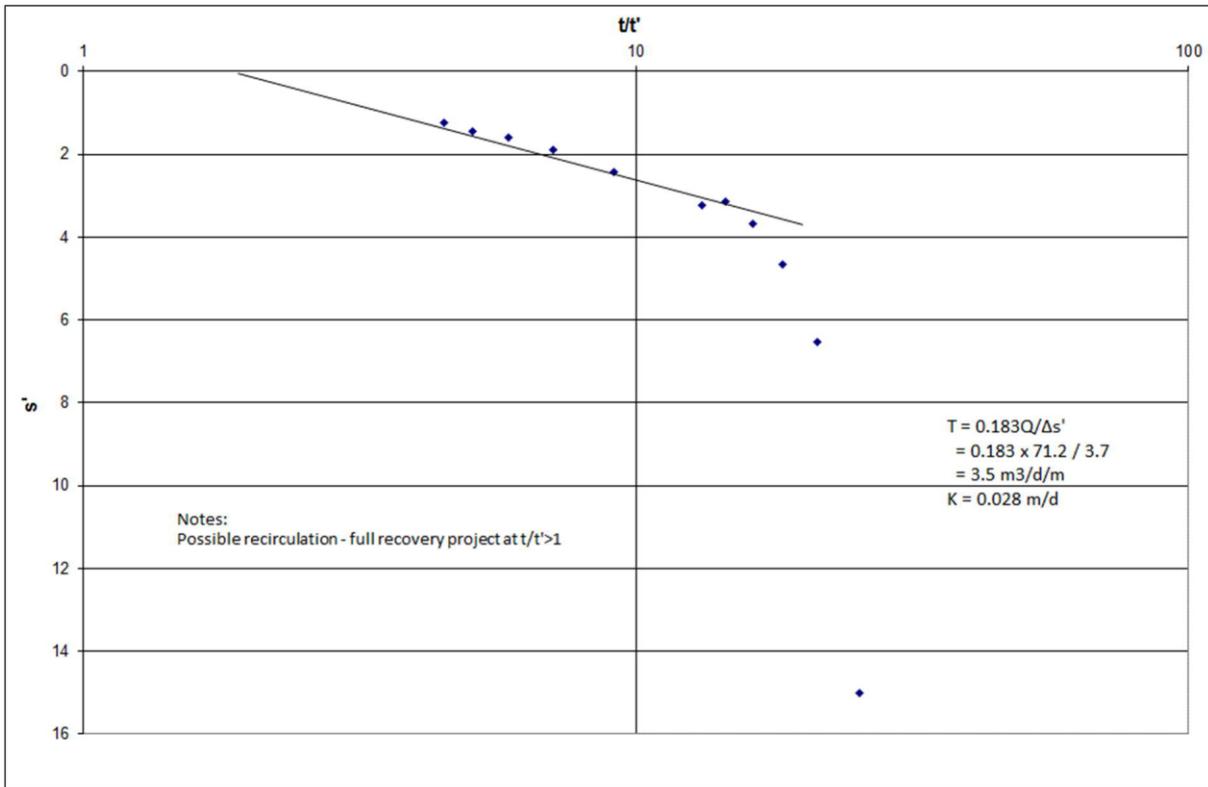

BRC17029


Annexure 5

Packer Injection Tests

(Total No. of pages including blank pages = 28)

Note: This Annexure is only available on the digital version of this document

This page has intentionally been left blank

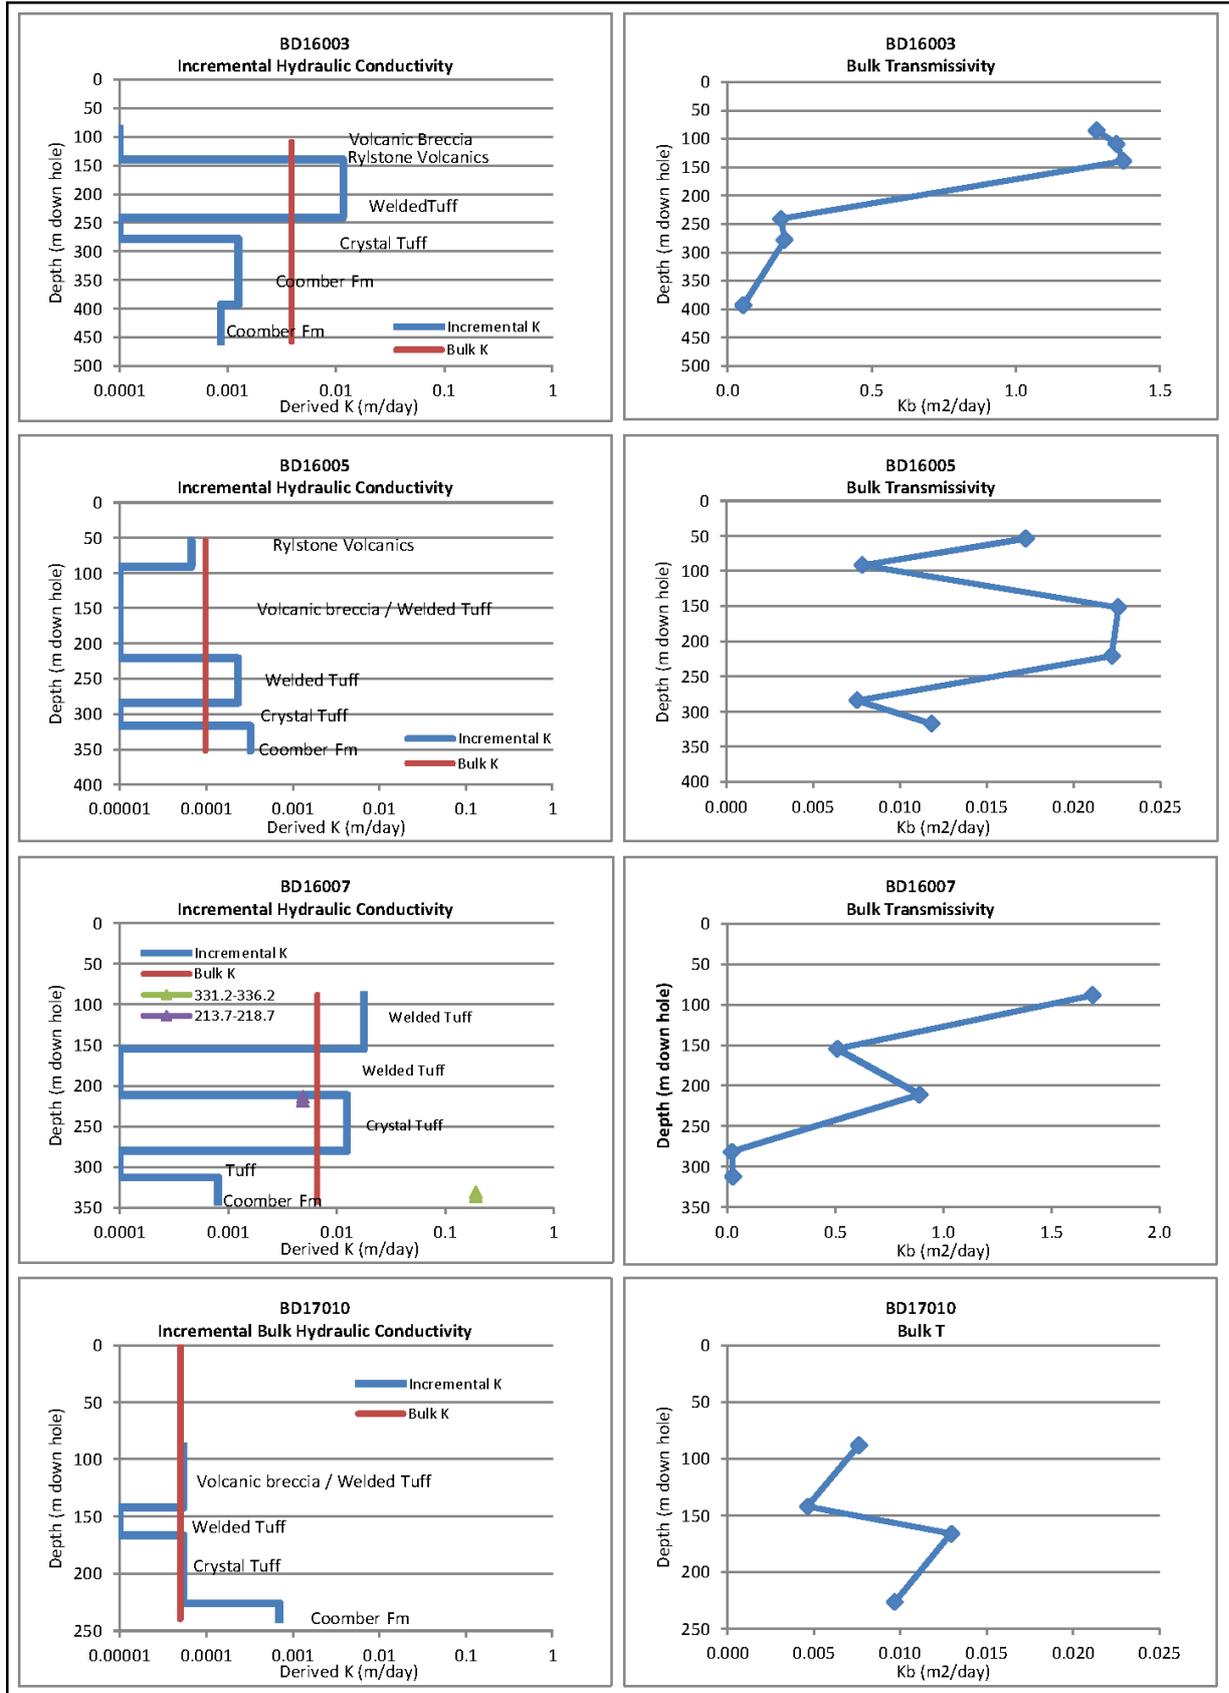

Packer Testing Results

J:\IE\Projects\04_Eastern\A132800\02 Documents\Data\Packer Testing\Packer Testing Summary


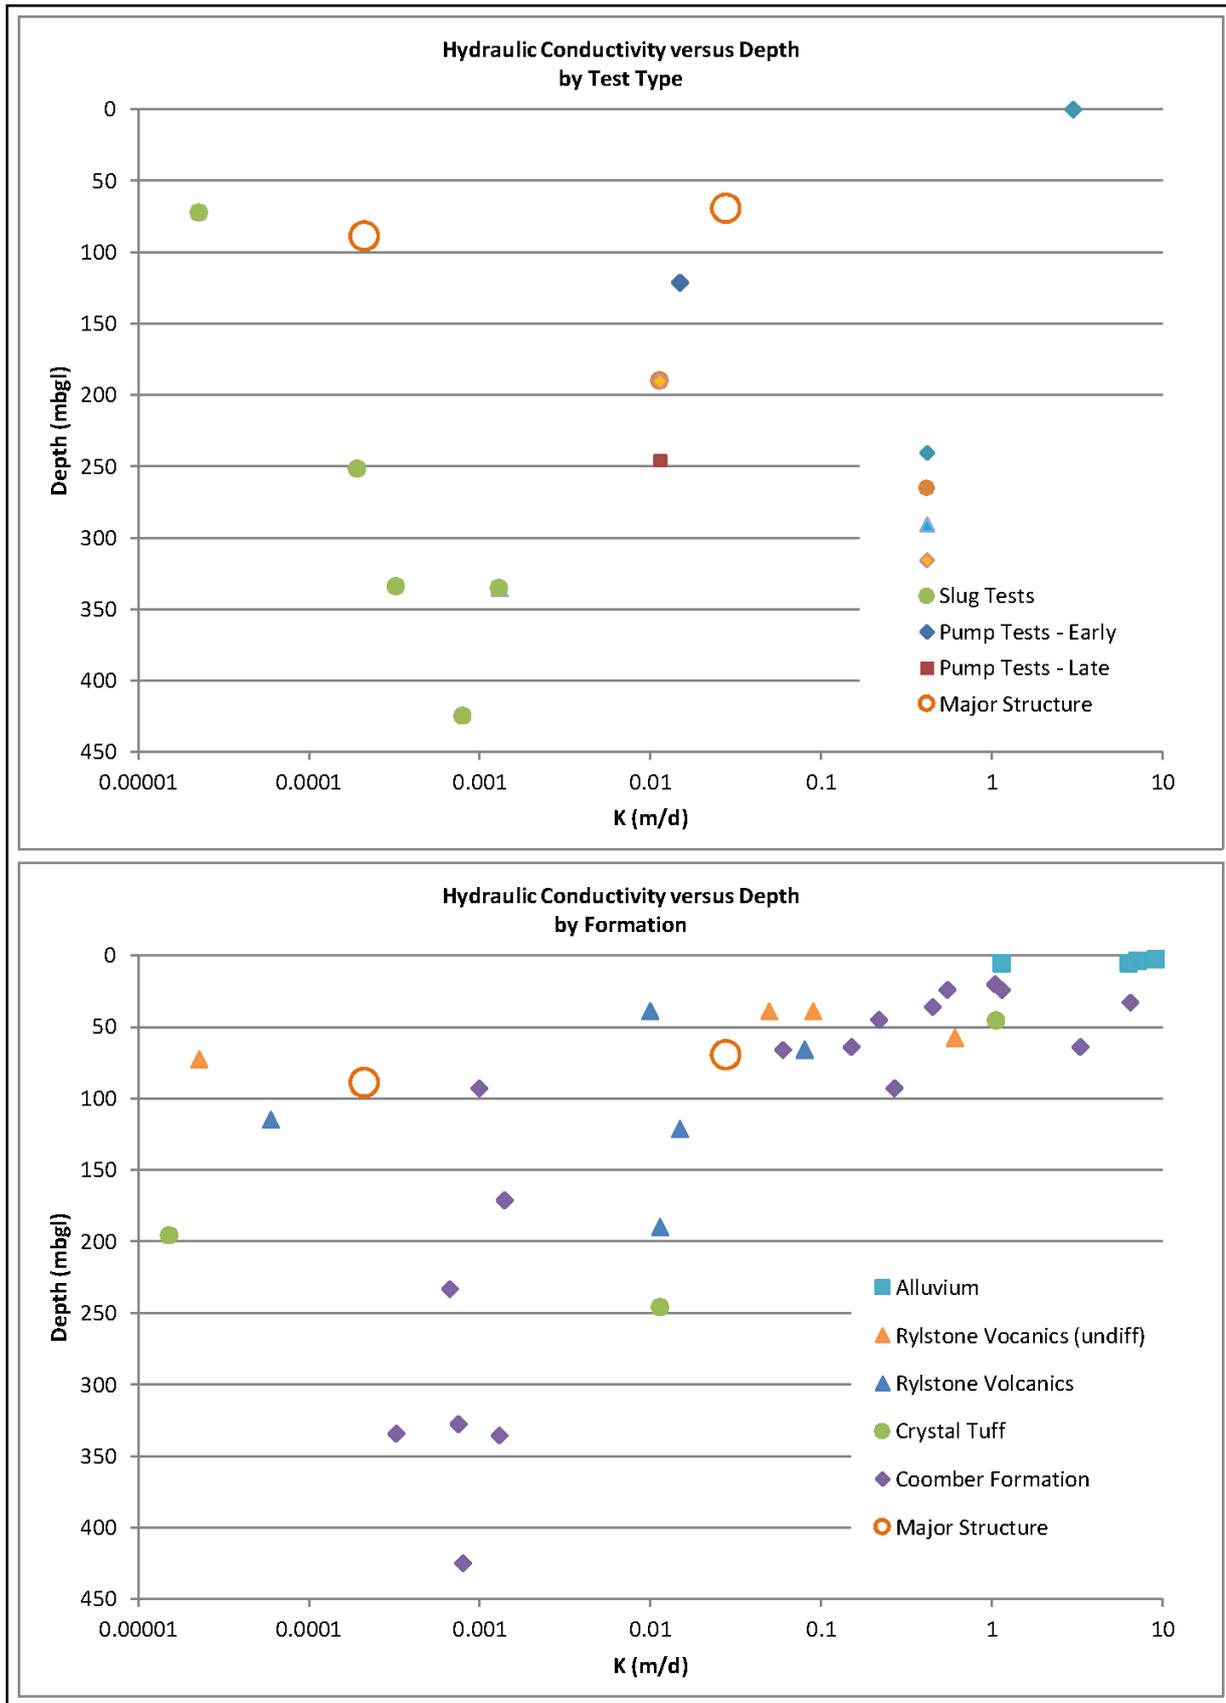


Figure 5 - Hydraulic Conductivity versus Depth

Packer Test Data Sheet

Project: Bowdens Silver DFS		Project No.: IA132800	
Hole No.:	BD16003	Test No.:	Single No. 2
Test Depth (m)	85.2	Location:	Easting (m)
			Northing (m)
			Date: 12/5/2017
			Operator: JT
			Azimuth:

Summary							
Test Pressure (Kpa)	769	869	969	1069	969	869	769
Flow Rate (L/min/m)	0.248	0.259	0.272	0.281	0.257	0.242	0.222

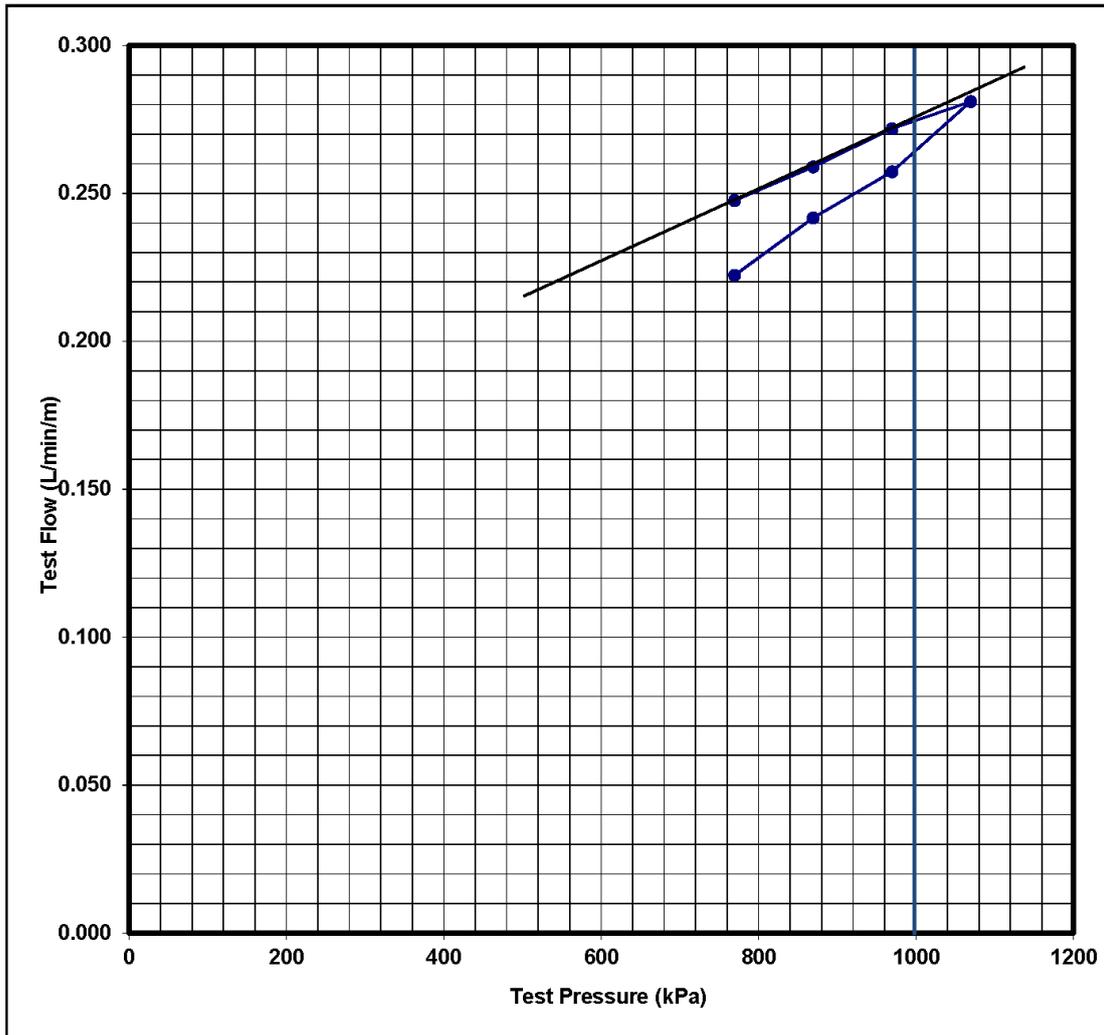

Lugeon units = Test Flow (L/min/m) at 1000kPa = 0.275
 Permeability (m/day) = 3.45E-03
 Permeability (m/s) = 3.99E-08


J:\IE\Projects\04_Eastern\IA132800\02 Documents\Data\Packer Testing\BD16003_JT.xls\85.2

Test No. 9

Packer Test Data Sheet

Project: Bowdens Silver DFS		Project No.: IA132800			
Hole No.:	BD16003	Test No.:	Single No. 2	Date: 12/5/2017	Operator: JT
Test Depth (m)	109.2	Location:	Easting (m)	Azimuth:	
			Northing (m)		

Summary							
Test Pressure (Kpa)	670	770	870	970	870	770	670
Flow Rate (L/min/m)	0.264	0.276	0.290	0.314	0.291	0.268	0.250

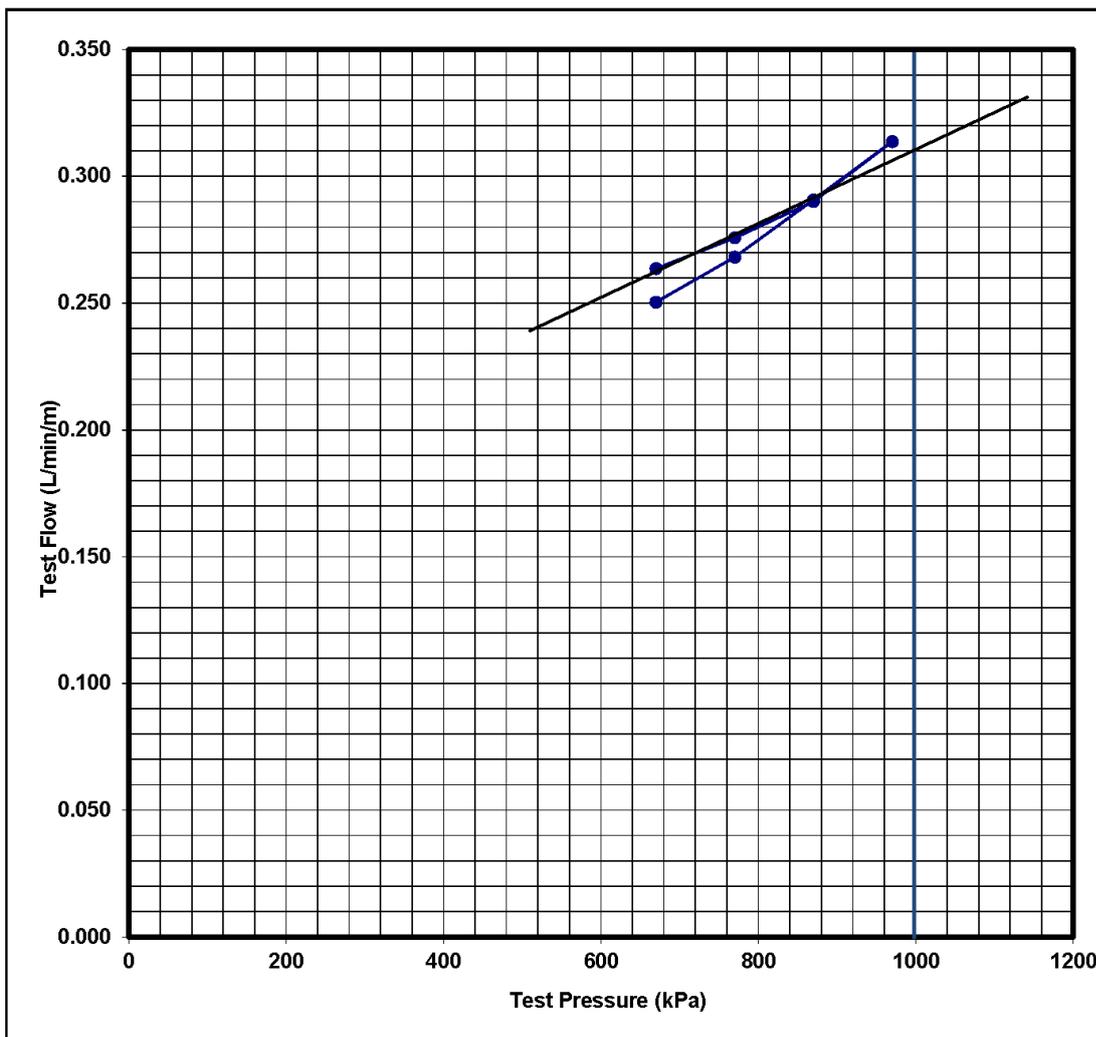

Lugeon units = Test Flow (L/min/m) at 1000kPa = **0.31**
 Permeability (m/day) = **3.88E-03**
 Permeability (m/s) = **4.50E-08**


J:\IE\Projects\04_Eastern\IA132800\02 Documents\Data\Packer Testing\BD16003_JT.xls\109.2

Test No. 9

Packer Test Data Sheet

Project: Bowdens Silver DFS		Project No.: IA132800			
Hole No.:	BD16003	Test No.:	Single No. 2	Date: 12/5/2017	Operator: JT
Test Depth (m)	139.2	Location:	Easting (m)		Azimuth:
			Northing (m)		

Summary							
Test Pressure (Kpa)	770	870	970	870	770		
Flow Rate (L/min/m)	0.303	0.323	0.338	0.317	0.294		

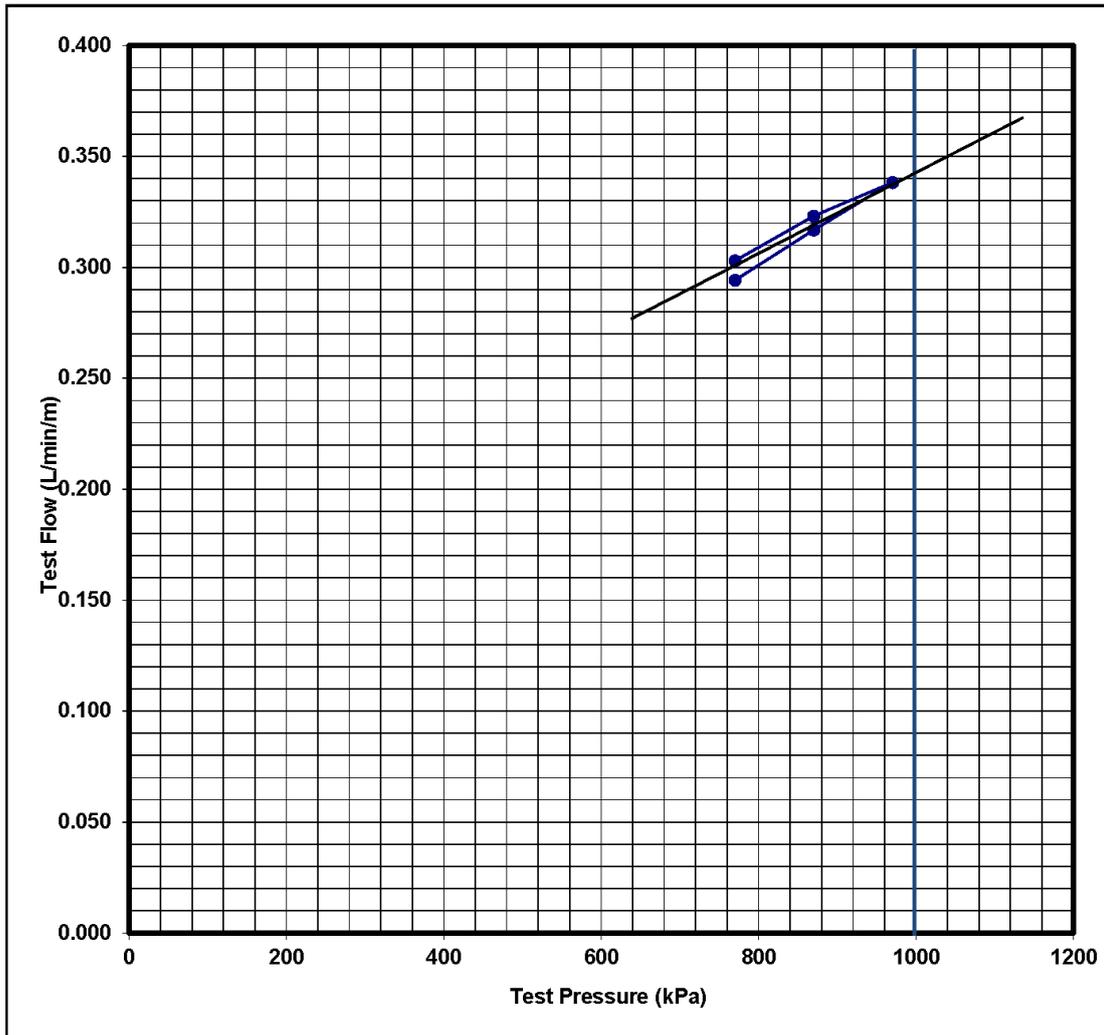

Lugeon units = Test Flow (L/min/m) at 1000kPa = 0.345
 Permeability (m/day) = 4.32E-03
 Permeability (m/s) = 5.00E-08


J:\IE\Projects\04_Eastern\IA132800\02 Documents\Data\Packer Testing\BD16003_JT.xls\139.2

Test No. 9

Packer Test Data Sheet

Project: Bowdens Silver DFS		Project No.: IA132800			
Hole No.:	BD16003	Test No.:	Single No. 2	Date: 12/5/2017	Operator: JT
Test Depth (m)	241.2	Location:	Easting (m)	Azimuth:	
			Northing (m)		

Summary							
Test Pressure (Kpa)	570	770	970	1170	970	770	570
Flow Rate (L/min/m)	0.053	0.060	0.067	0.074	0.060	0.048	0.035

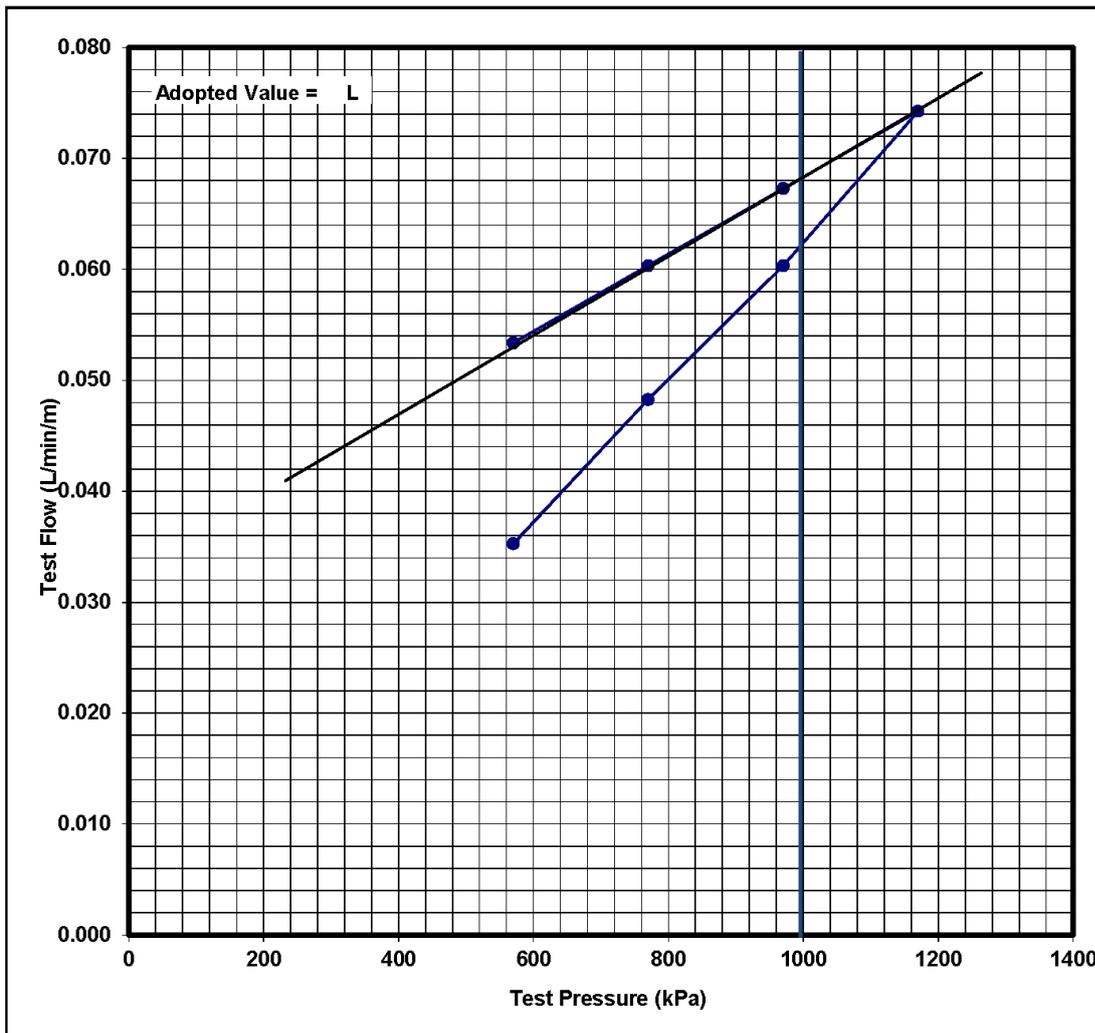

Lugeon units = Test Flow (L/min/m) at 1000kPa = **0.069**
Permeability (m/day) = 8.65E-04
Permeability (m/s) = 1.00E-08


J:\IE\Projects\04_Eastern\IA132800\02 Documents\Data\Packer Testing\BD16003_JT.xls\241.2

Test No. 9

Packer Test Data Sheet

Project: Bowdens Silver DFS		Project No.: IA132800	
Hole No.:	BD16003	Test No.:	Single No. 2
Test Depth (m)	280.2	Location:	Easting (m)
			Northing (m)
			Date: 12/5/2017
			Operator: JT
			Azimuth:

Summary							
Test Pressure (Kpa)	570	770	970	1170	970	770	570
Flow Rate (L/min/m)	0.074	0.086	0.097	0.103	0.085	0.067	0.051

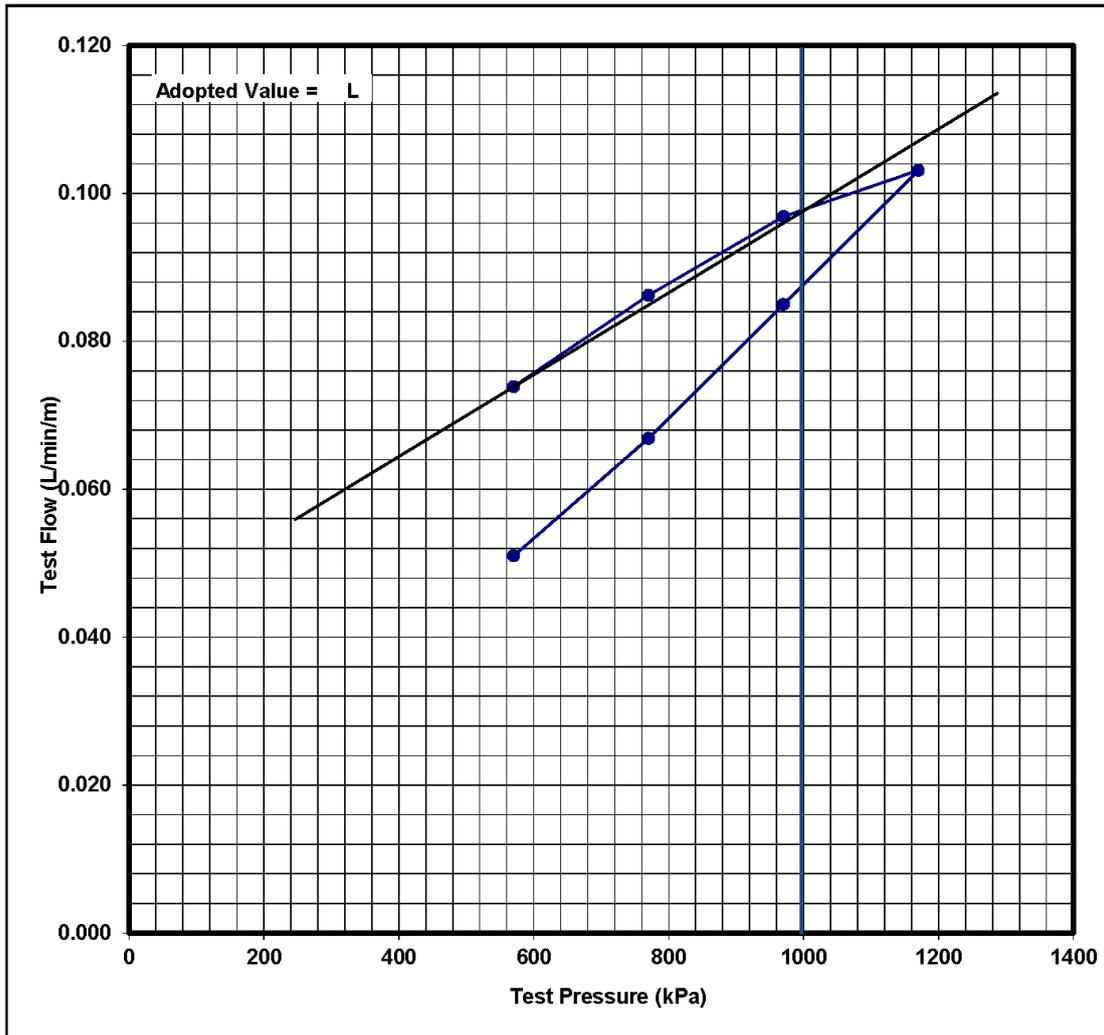

Lugeon units = Test Flow (L/min/m) at 1000kPa = 0.09
 Permeability (m/day) = 1.13E-03
 Permeability (m/s) = 1.31E-08


J:\IE\Projects\04_Eastern\IA132800\02 Documents\Data\Packer Testing\BD16003_JT.xls\280.2

Test No. 9

Packer Test Data Sheet

Project: Bowdens Silver DFS		Project No.: IA132800	
Hole No.: BD16003	Test No.: Single No. 2	Date: 12/5/2017	Operator: JT
Test Depth (m): 394.2	Location:	Easting (m)	Azimuth:
		Northing (m)	

Summary							
Test Pressure (Kpa)	570	870	1170	1470	1170	870	570
Flow Rate (L/min/m)	0.039	0.059	0.082	0.096	0.079	0.061	0.044

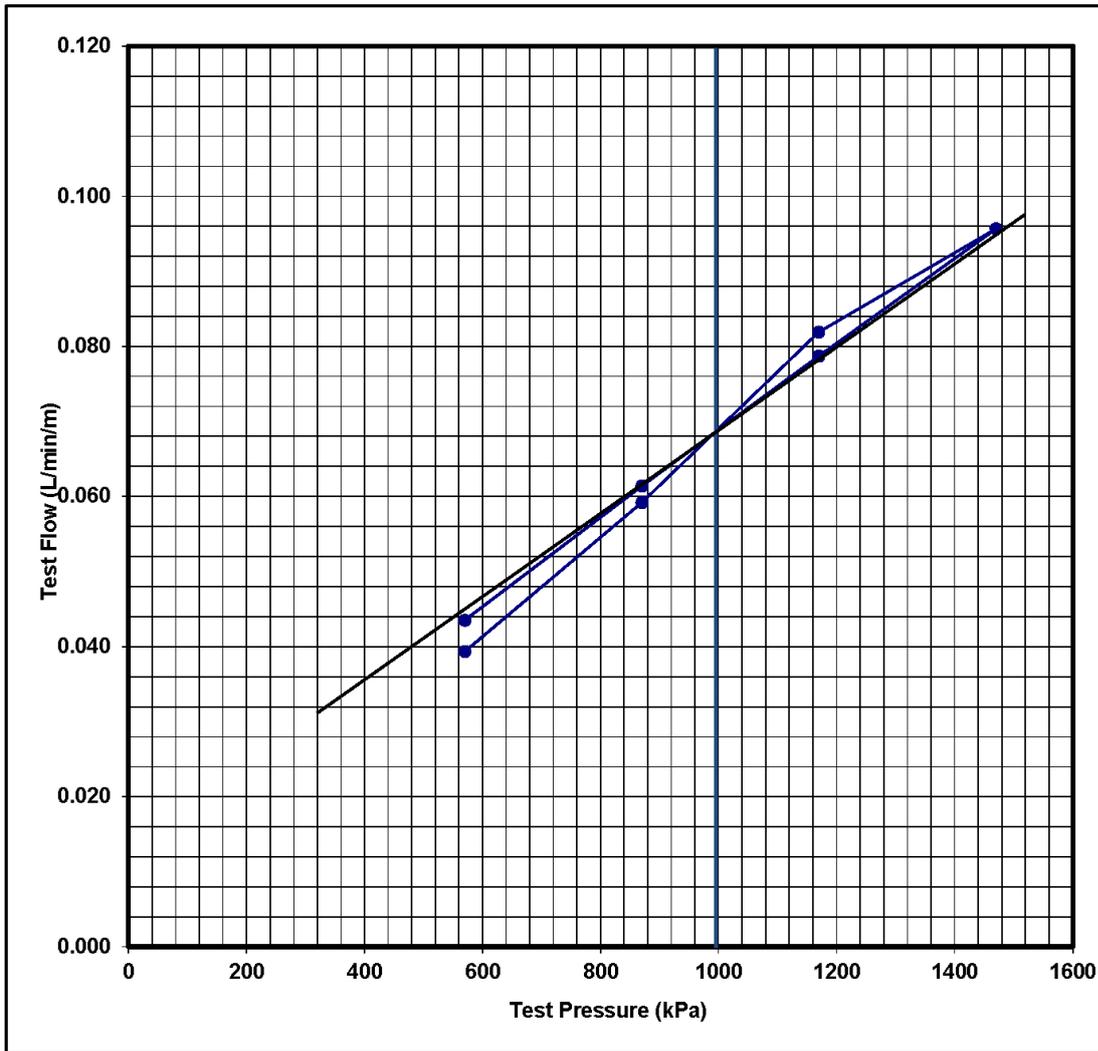

Lugeon units = Test Flow (L/min/m) at 1000kPa = **0.069**
 Permeability (m/day) = **8.65E-04**
 Permeability (m/s) = **1.00E-08**


J:\VE\Projects\04_Eastern\IA132800\02 Documents\Data\Packer Testing\BD16003_JT.xls\394.2

Test No. 9

Packer Test Data Sheet

Project: Bowdens Silver DFS		Project No.: IA132800	
Hole No.:	BD16005	Test No.:	6
Test Depth (m)	53.7	Date:	1-May-17
		Operator:	JT
		Location:	
		Easting (m)	769044.7
		Northing (m)	6385916.4
		Azimuth:	200

Summary							
Test Pressure (Kpa)	491	616	766	616	491		
Flow Rate (L/min/m)	0.001	0.001	0.002	0.001	0.001		

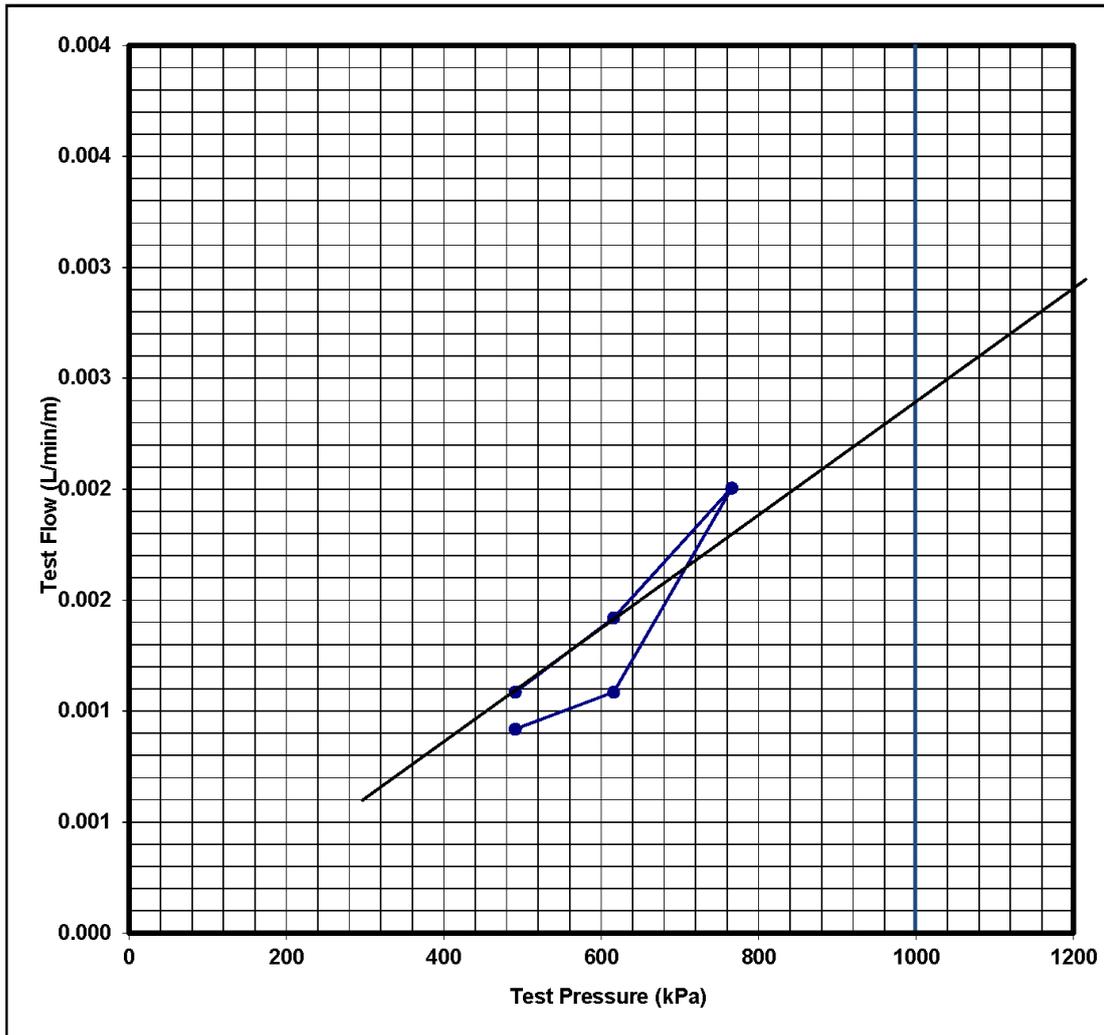

Lugeon units = Test Flow (L/min/m) at 1000kPa = 0.0024
 Permeability (m/day) = 3.01E-05
 Permeability (m/s) = 3.48E-10


J:\IE\Projects\04_Eastern\IA132800\02 Documents\Data\Packer Testing\BD16005_JT.xls\53.7

Test No. 9

Packer Test Data Sheet

Project: Bowdens Silver DFS		Project No.: IA132800			
Hole No.:	BD16005	Test No.:	6	Date:	1-May-17
Test Depth (m)	91.7	Location:	Easting (m)	769044.7	Operator: JT
			Northing (m)	6385916.4	
		Azimuth:	200		

Summary						
Test Pressure (Kpa)	566	866	1166	866	566	
Flow Rate (L/min/m)	0.002	0.004	0.006	0.002	0.001	

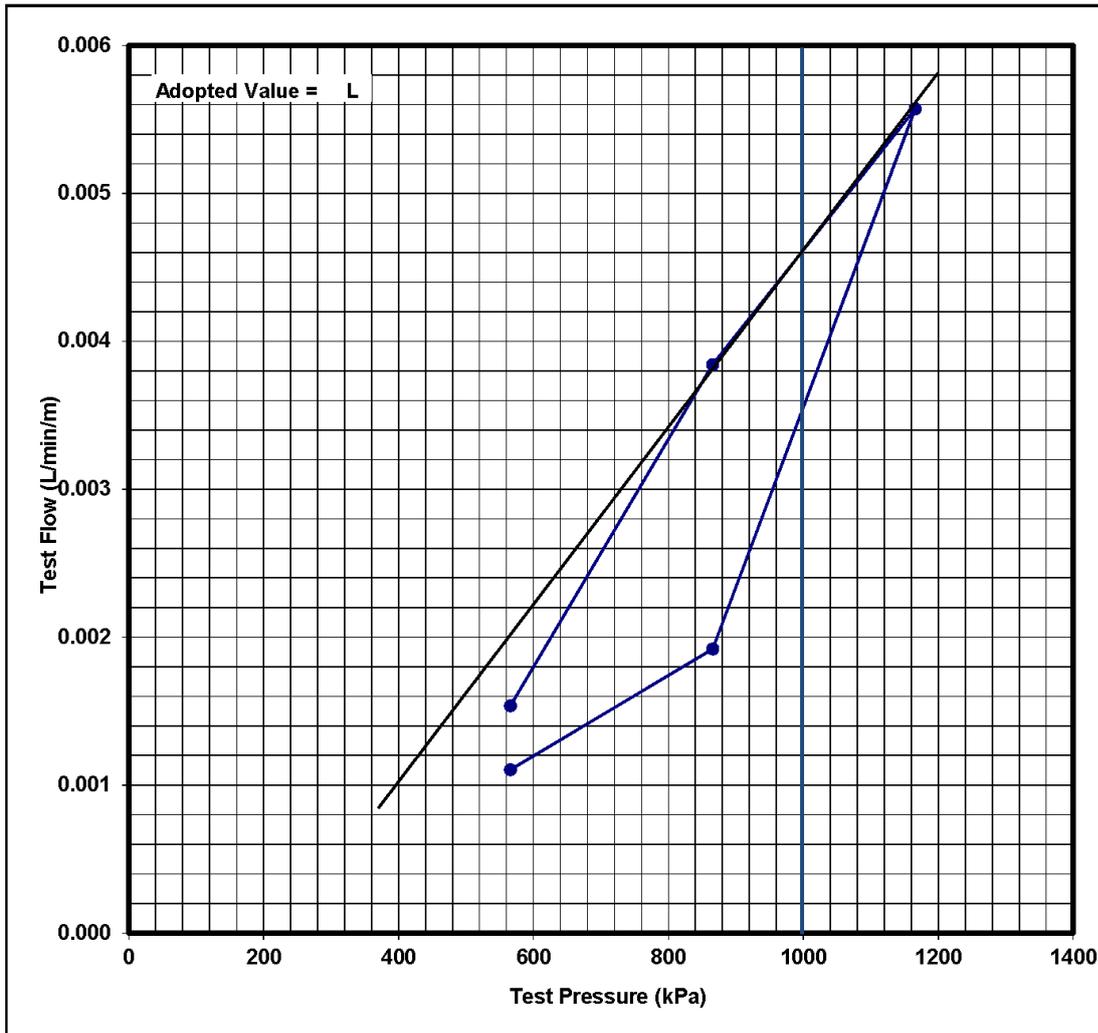

Lugeon units = Test Flow (L/min/m) at 1000kPa = 0.0046
 Permeability (m/day) = 5.76E-05
 Permeability (m/s) = 6.67E-10


J:\IE\Projects\04_Eastern\IA132800\02 Documents\Data\Packer Testing\BD16005_JT.xls\91.7

Test No. 9

Packer Test Data Sheet

Project: Bowdens Silver DFS		Project No.: IA132800					
Hole No.:	BD16005	Test No.:	6	Date:	1-May-17	Operator:	JT
Test Depth (m)	151.7	Location:	Easting (m)	769044.7		Azimuth:	200
			Northing (m)	6385916.4			

Summary							
Test Pressure (Kpa)	517	917	1317	1617	1317	917	
Flow Rate (L/min/m)	0.005	0.007	0.014	0.015	0.009	0.005	

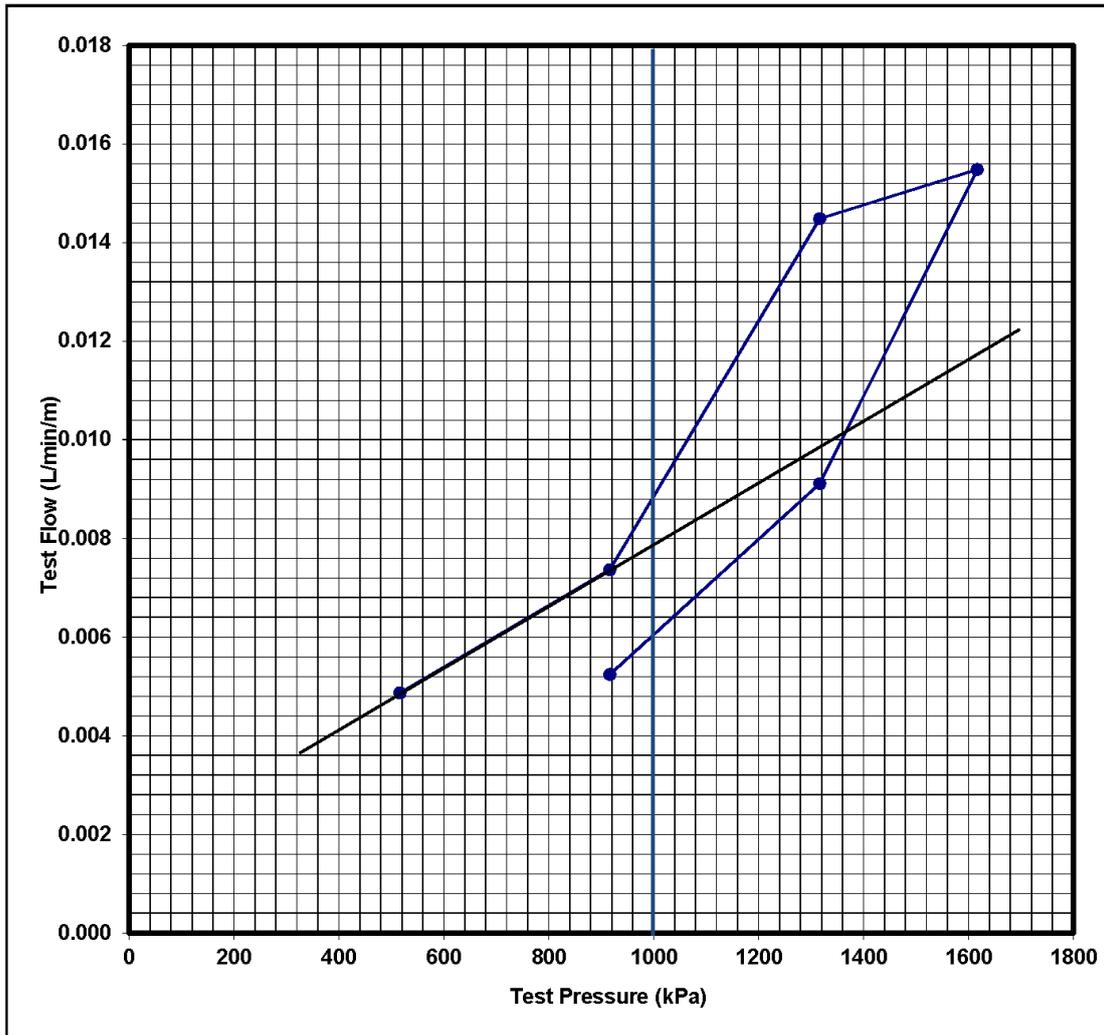

Lugeon units = Test Flow (L/min/m) at 1000kPa = 0.009
 Permeability (m/day) = 1.13E-04
 Permeability (m/s) = 1.31E-09


J:\IE\Projects\04_Eastern\IA132800\02 Documents\Data\Packer Testing\BD16005_JT.xls\151.7

Test No. 9

Packer Test Data Sheet

Project: Bowdens Silver DFS		Project No.: IA132800			
Hole No.:	BD16005	Test No.:	6	Date:	1-May-17
Test Depth (m)	220.7	Location:	Easting (m)	769044.7	Operator: JT
			Northing (m)	6385916.4	
		Azimuth:	200		

Summary						
Test Pressure (Kpa)	521	921	1321	1621	1321	921
Flow Rate (L/min/m)	0.005	0.010	0.031	0.030	0.018	0.011

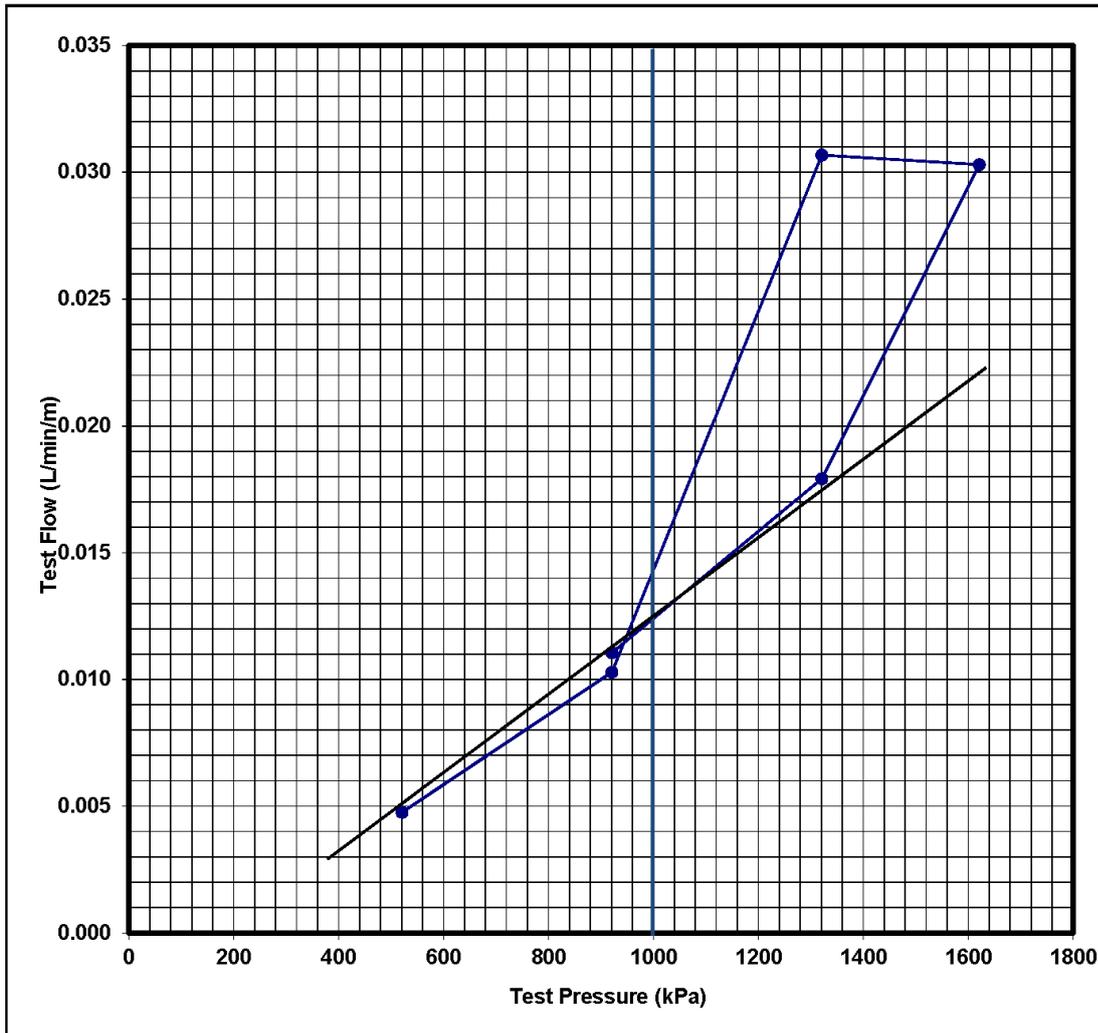

Lugeon units = Test Flow (L/min/m) at 1000kPa = 0.0135
 Permeability (m/day) = 1.69E-04
 Permeability (m/s) = 1.96E-09


J:\IE\Projects\04_Eastern\IA132800\02 Documents\Data\Packer Testing\BD16005_JT.xls\220.7

Test No. 9

Packer Test Data Sheet

Project: Bowdens Silver DFS			Project No.: IA132800		
Hole No.:	BD16005	Test No.:	6	Date:	1-May-17
Test Depth (m)	283.7	Location:	Easting (m)	769044.7	Operator: JT
			Northing (m)	6385916.4	
		Azimuth:	200		

Summary									
Test Pressure (Kpa)	421	721	1021	1321	1621	1321	1021	721	421
Flow Rate (L/min/m)	0.006	0.007	0.010	0.012	0.015	0.012	0.009	0.005	0.004

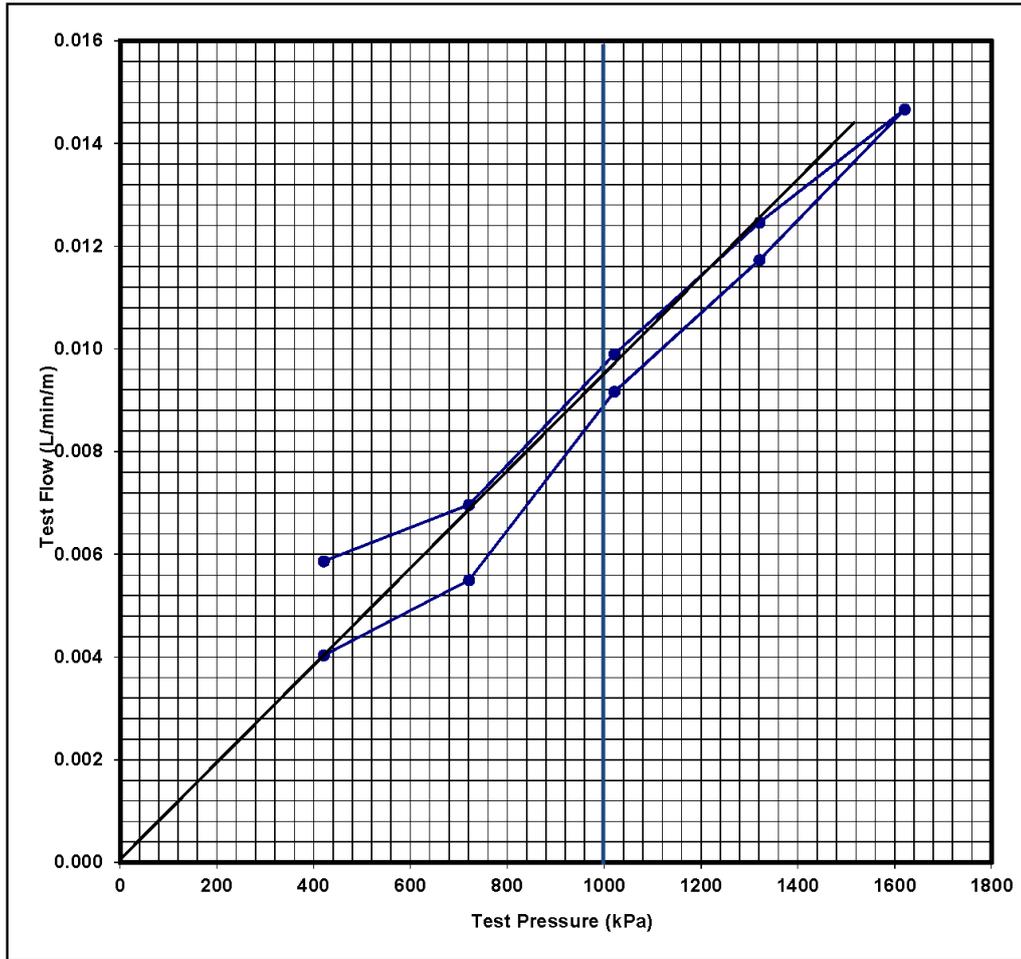

Lugeon units = Test Flow (L/min/m) at 1000kPa = **0.0088**
 Permeability (m/day) = **1.10E-04**
 Permeability (m/s) = **1.28E-09**


J:\NE\Projects\04_Eastern\IA132800\02 Documents\Data\Packer Testing\BD16005_JT.xls\283.7

Test No. 9

Packer Test Data Sheet

Project: Bowdens Silver DFS		Project No.: IA132800					
Hole No.:	BD16005	Test No.:	6	Date:	1-May-17	Operator:	JT
Test Depth (m)	316.7	Location:	Easting (m)	769044.7	Azimuth:	200	
			Northing (m)	6385916.4			

Summary									
Test Pressure (Kpa)	421	721	1021	1321	1621	1321	1021	721	421
Flow Rate (L/min/m)	0.013	0.018	0.026	0.036	0.054	0.040	0.032	0.025	0.015

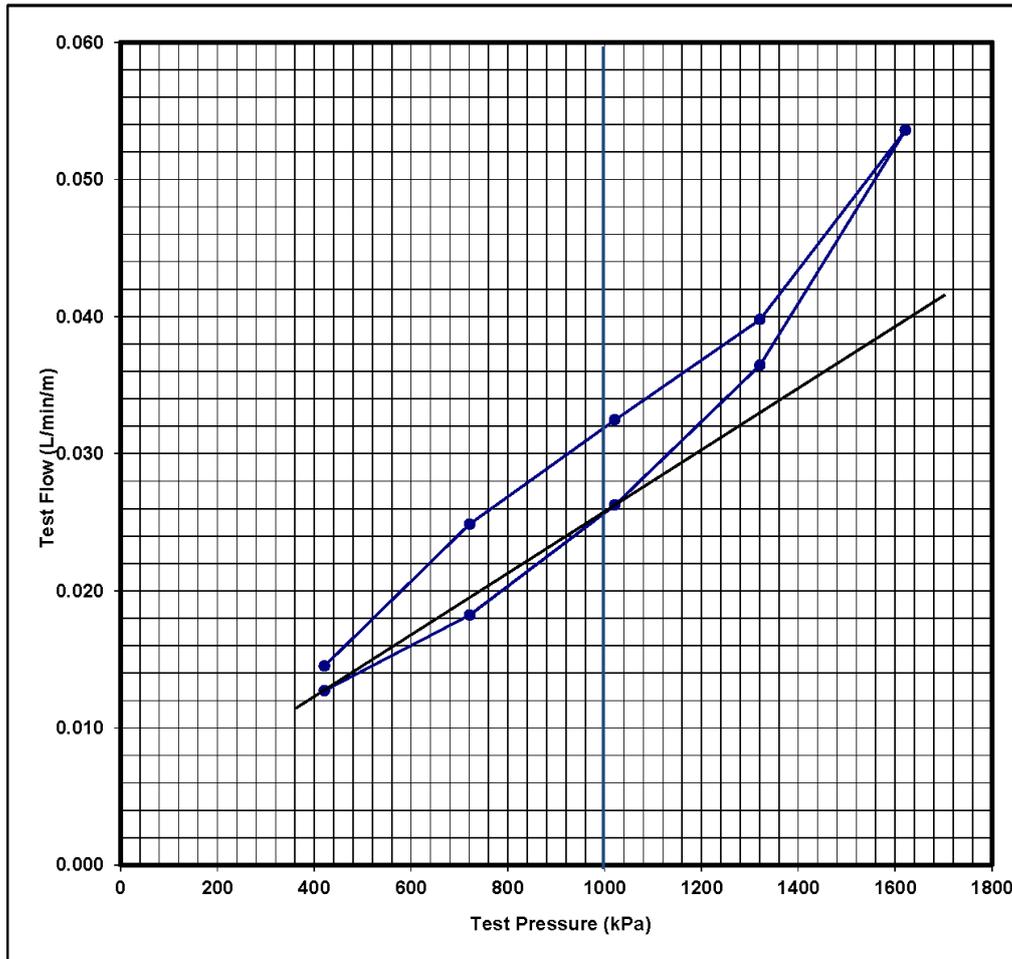

Lugeon units = Test Flow (L/min/m) at 1000kPa = **0.026**
 Permeability (m/day) = **3.26E-04**
 Permeability (m/s) = **3.77E-09**


J:\IEVProjects\04_Eastern\IA132800\02 Documents\Data\Packer Testing\BD16005_JT.xls\316.7

Test No. 9

Packer Test Data Sheet

Project: Bowdens Silver DFS		Project No.: IA132800				
Hole No:	BD160057	Test No:	Single No. 5	Date:	Operator: JT	
Test Depth (m)	88.2	Location:	Easting (m)	768965	Azimuth:	60.5
			Northing (m)	6385795		

Summary							
Test Pressure (Kpa)	985	1085	1185	1085	985		
Flow Rate (L/min/m)	0.526	0.559	0.592	0.559	0.529		

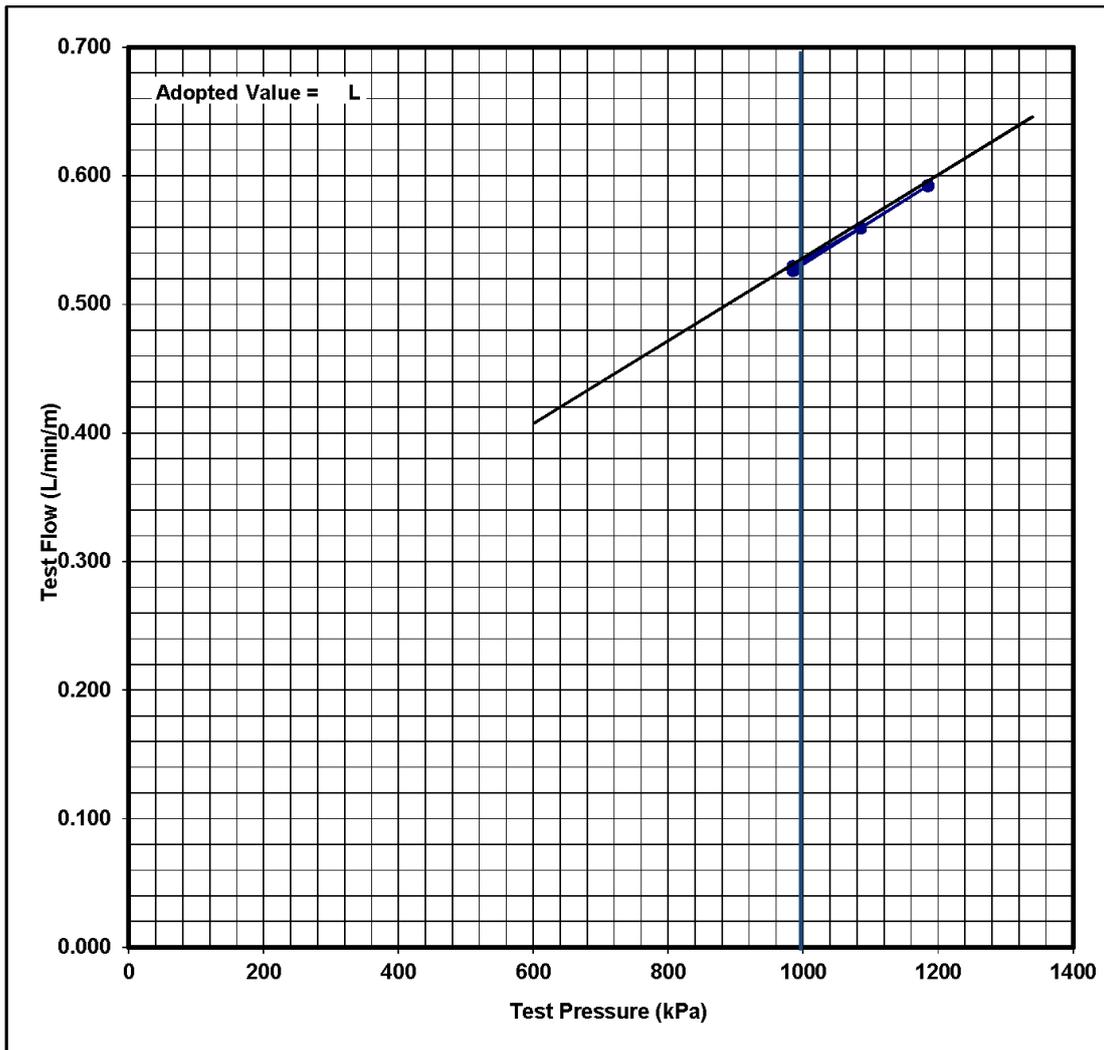

Lugeon units = Test Flow (L/min/m) at 1000kPa = **0.53**
Permeability (m/day) = 6.64E-03
Permeability (m/s) = 7.69E-08


J:\IE\Projects\04_Eastern\IA 132800\02 Documents\Data\Packer Testing\BD16007_JT.xls\88.2

Test No. 9

Packer Test Data Sheet

Project: Bowdens Silver DFS		Project No.: IA132800				
Hole No.:	BD160057	Test No.:	Single No. 4	Date:	Operator: JT	
Test Depth (m)	154.2	Location:	Easting (m)	768965	Azimuth:	60.5
			Northing (m)	6385795		

Summary						
Test Pressure (Kpa)	985	1185	1335	1185	985	
Flow Rate (L/min/m)	0.172	0.200	0.266	0.238	0.210	

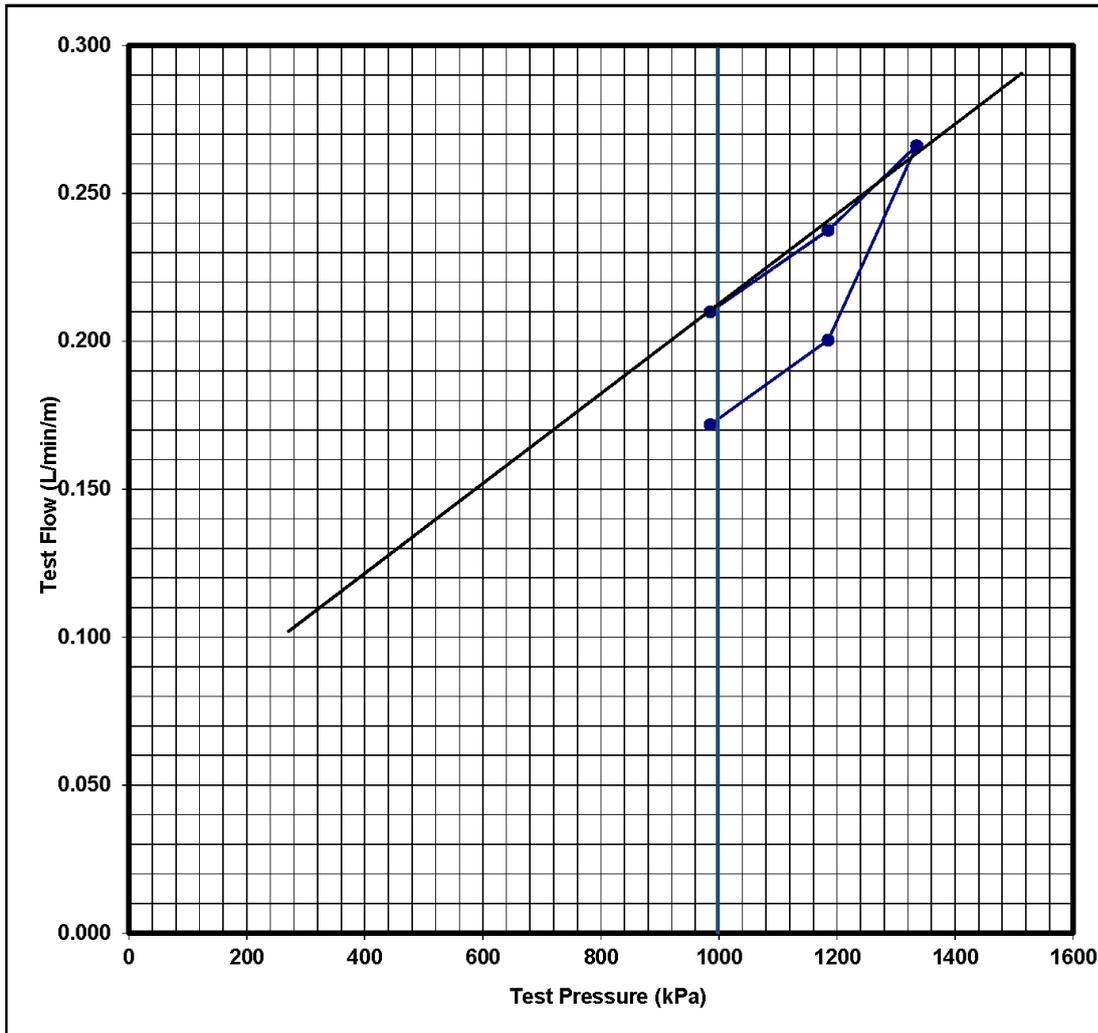

Lugeon units = Test Flow (L/min/m) at 1000kPa = **0.215**
 Permeability (m/day) = **2.69E-03**
 Permeability (m/s) = **3.12E-08**


J:\IE\Projects\04_Eastern\IA132800\02 Documents\Data\Packer Testing\BD16007_JT.xls\154.2

Test No. 9

Packer Test Data Sheet

Project: Bowdens Silver DFS		Project No.: IA132800					
Hole No.:	BD160057	Test No.:	Single No. 3	Date:		Operator:	JT
Test Depth (m)	211.2	Location:	Easting (m)	768965	Azimuth:	60.5	
			Northing (m)	6385795			

Summary							
Test Pressure (Kpa)	1085	1185	1335	1185	1085		
Flow Rate (L/min/m)	0.564	0.590	0.631	0.583	0.555		

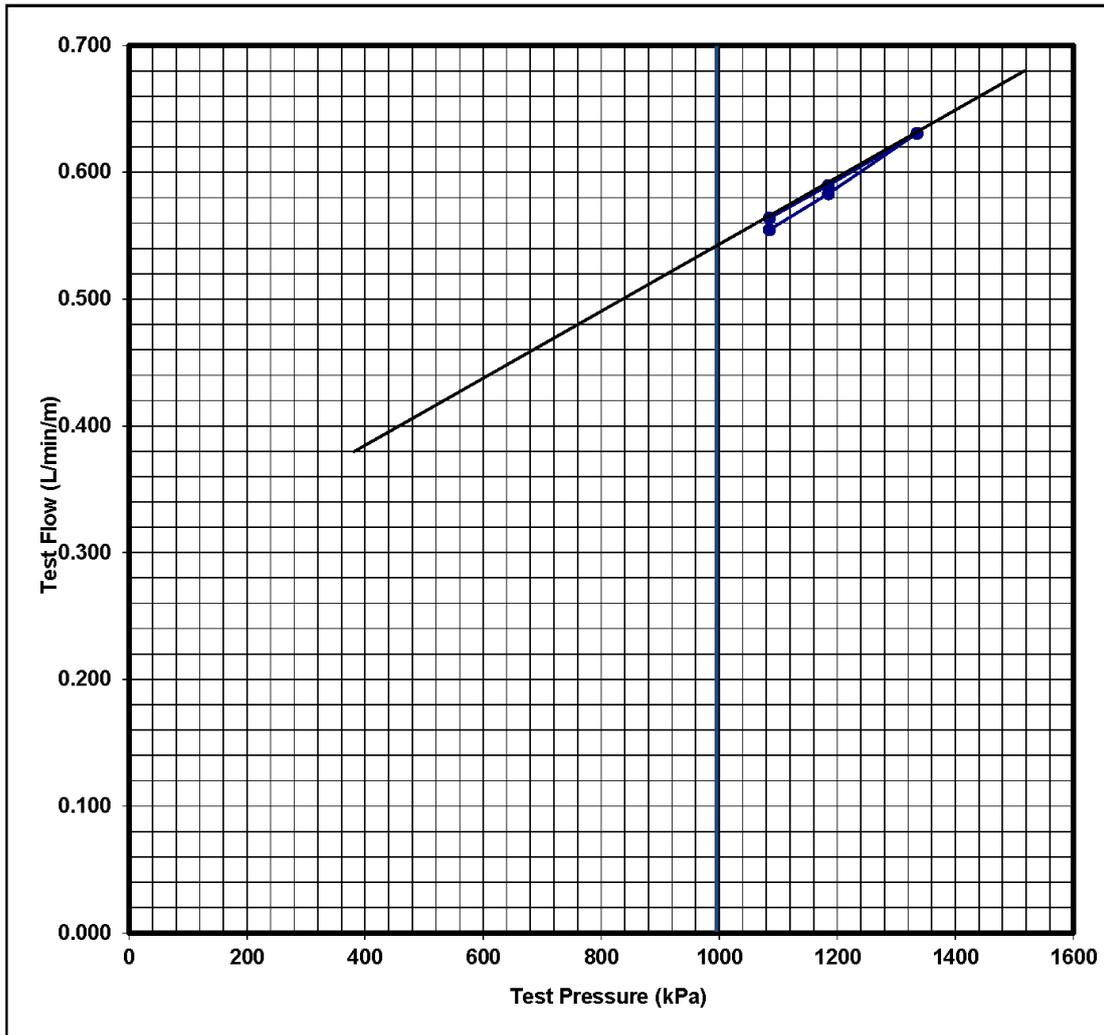

Lugeon units = Test Flow (L/min/m) at 1000kPa = 0.54
 Permeability (m/day) = 6.77E-03
 Permeability (m/s) = 7.83E-08


J:\IE\Projects\04_Eastern\IA132800\02 Documents\Data\Packer Testing\BD16007_JT.xls\211.2

Test No. 9

Packer Test Data Sheet

Project: Bowdens Silver DFS		Project No.: IA132800			
Hole No.:	BD160057	Test No.:	Single No. 2	Date:	Operator: JT
Test Depth (m)	280.2	Location:	Easting (m)	768965	Azimuth: 60.5
			Northing (m)	6385795	

Summary							
Test Pressure (Kpa)	985	1385	1785	2085	1785	1385	985
Flow Rate (L/min/m)	0.029	0.038	0.044	0.049	0.043	0.035	0.026

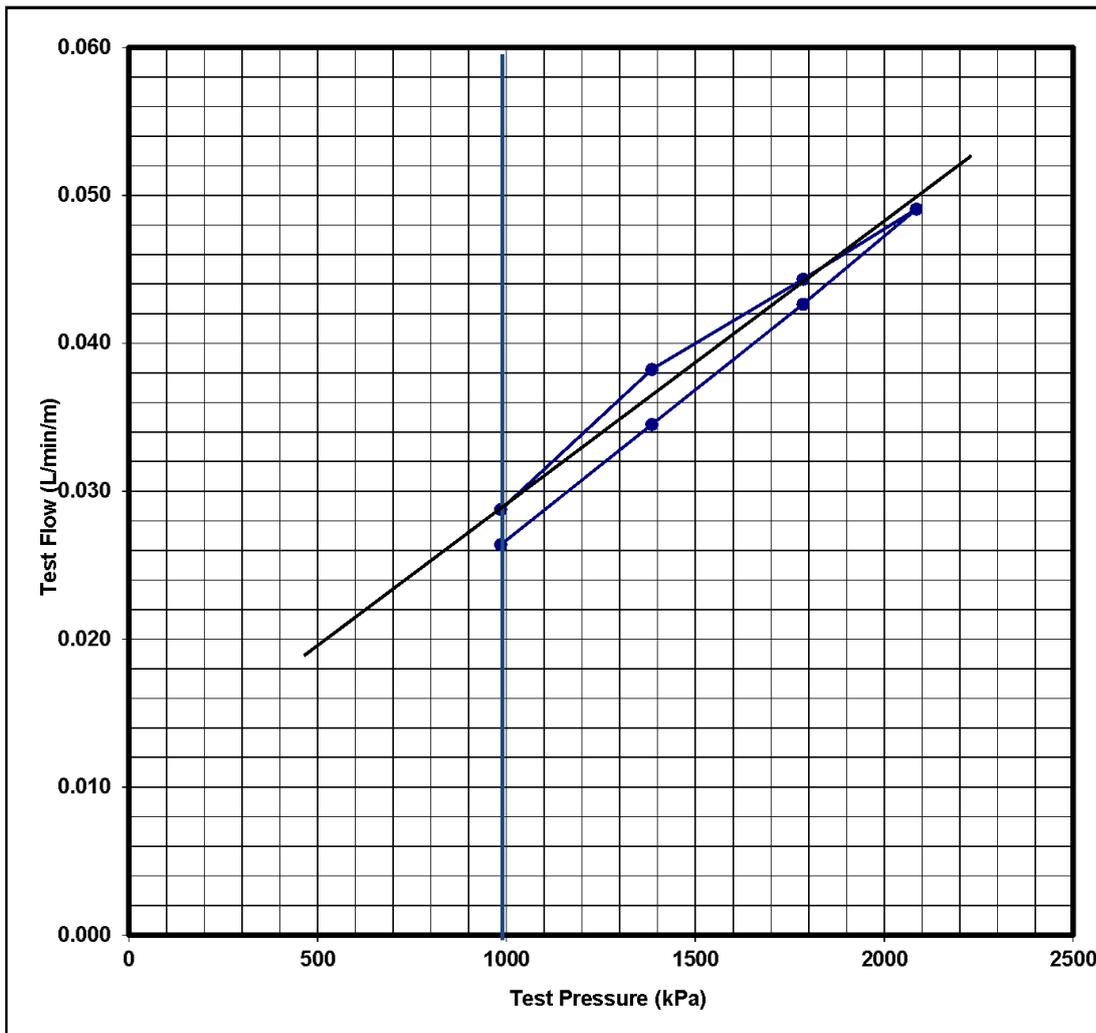

Lugeon units = Test Flow (L/min/m) at 1000kPa = **0.029**
 Permeability (m/day) = **3.63E-04**
 Permeability (m/s) = **4.21E-09**


J:\IE\Projects\04_Eastern\IA132800\02 Documents\Data\Packer Testing\BD16007_JT.xls\280.2

Test No. 9

Packer Test Data Sheet

Project: Bowdens Silver DFS		Project No.: IA132800	
Hole No:	BD160057	Test No:	Single No. 1
Test Depth (m)	310.2	Location:	Easting (m) 768965 Northing (m) 6385795
		Date:	
		Operator:	JT
		Azimuth:	60.5

Summary							
Test Pressure (Kpa)	985	1385	1785	2085	1785	1385	985
Flow Rate (L/min/m)	0.064	0.085	0.104	0.119	0.107	0.088	0.067

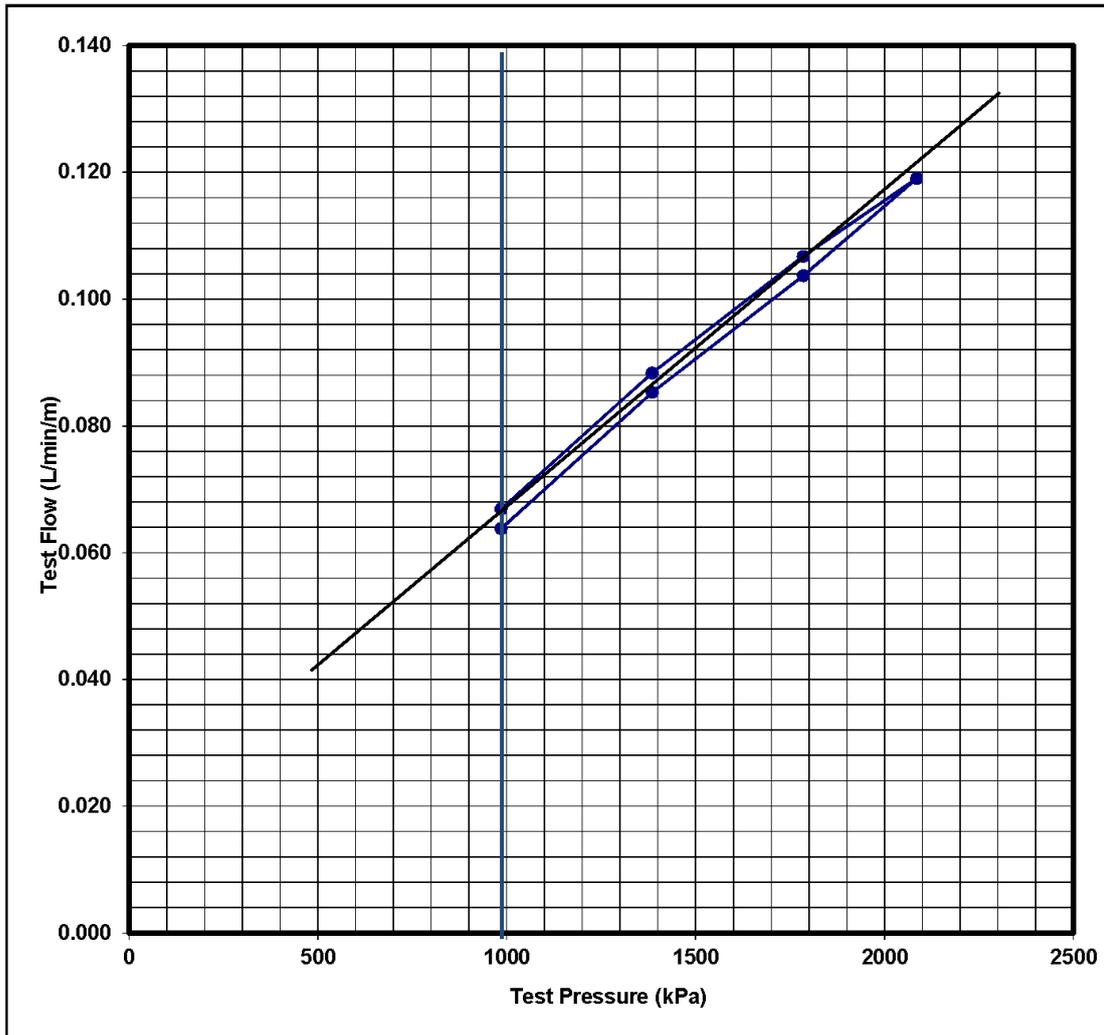

Lugeon units = Test Flow (L/min/m) at 1000kPa = 0.064
 Permeability (m/day) = 8.02E-04
 Permeability (m/s) = 9.28E-09


J:\IE\Projects\04_Eastern\IA132800\02 Documents\Data\Packer Testing\BD16007_JT.xls\310.2

Test No. 9

Packer Test Data Sheet

Project: Bowdens Silver DFS		Project No.: IA132800				
Hole No.:	BD160057	Test No.:	Stradle No. 2	Date:	Operator: JT	
Test Depth (m)	213.7 - 218.7	Location:	Easting (m)	768965	Azimuth:	60.5
			Northing (m)	6385795		

Summary							
Test Pressure (Kpa)	985	1385	1585	1785	1585	1385	985
Flow Rate (L/min/m)	0.392	0.464	0.552	0.520	0.452	0.404	0.296

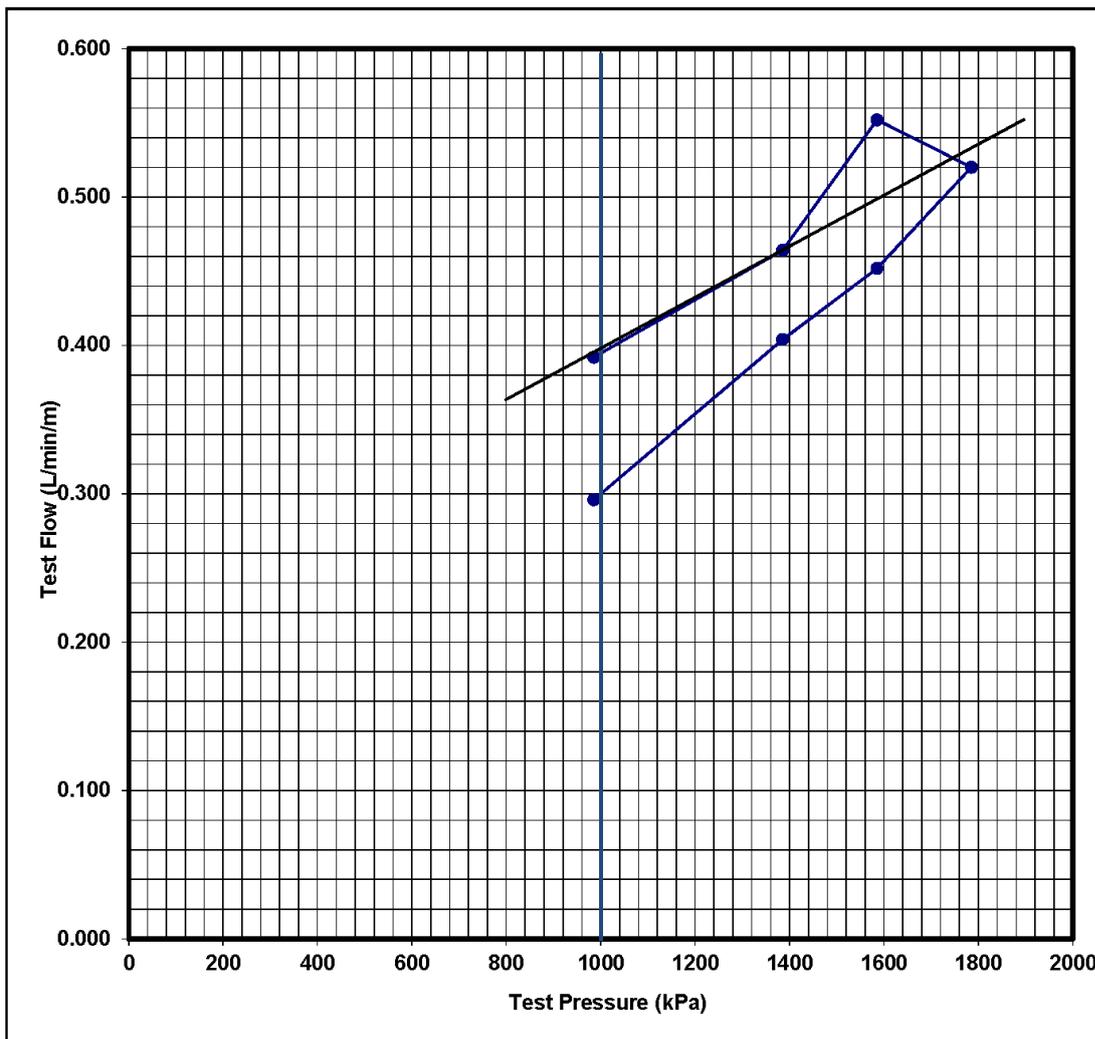

Lugeon units = Test Flow (L/min/m) at 1000kPa = 0.39
 Permeability (m/day) = 4.89E-03
 Permeability (m/s) = 5.66E-08


J:\IE\Projects\04_Eastern\IA132800\02 Documents\Data\Packer Testing\BD16007_JT.xls\213.7 - 218.7

Test No. 9

Packer Test Data Sheet

Project: Bowdens Silver DFS		Project No.: IA132800				
Hole No.:	BD160057	Test No.:	Stradle No. 1	Date:	Operator: JT	
Test Depth (m)	331.2 - 336.2	Location:	Easting (m)	768965	Azimuth:	60.5
			Northing (m)	6385795		

Summary						
Test Pressure (Kpa)	1085	1185	1285	1185	1085	
Flow Rate (L/min/m)	15.650	16.000	16.700	15.650	15.350	

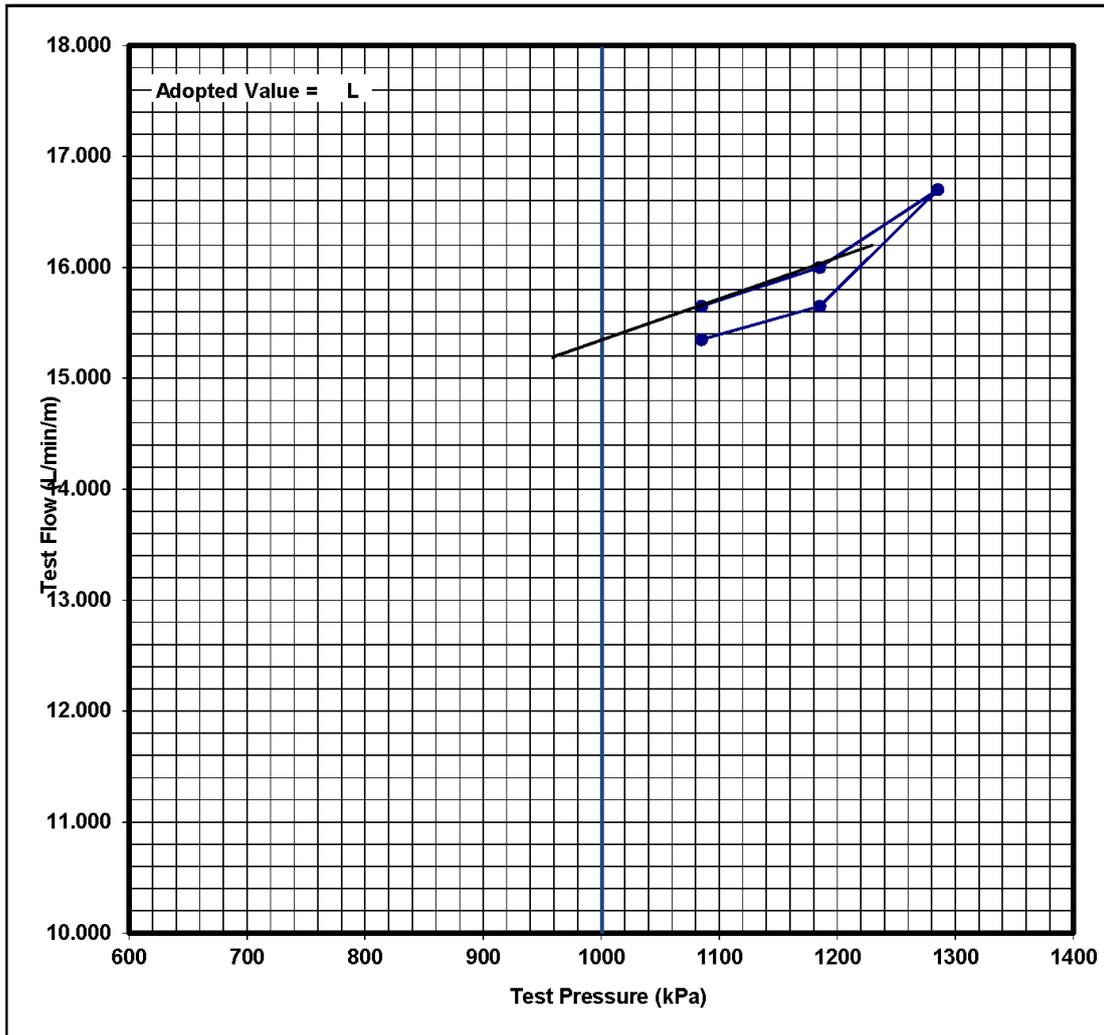

Lugeon units = Test Flow (L/min/m) at 1000kPa = 15.35
 Permeability (m/day) = 1.92E-01
 Permeability (m/s) = 2.23E-06


J:\IE\Projects\04_Eastern\IA132800\02 Documents\Data\Packer Testing\BD16007_JT.xls\331.2 - 336.2

Test No. 9

Packer Test Data Sheet

Project: Bowdens Silver		Project No.: IA132800			
Hole No.: BD17010	Test No.: Single No. 4	Date:	9-May-17	Operator: JT	
Test Depth (m)	88.2	Location:	Easting (m)	768619.2	
			Northing (m)	6385518.3	
			Azimuth:	60.5	

Summary							
Test Pressure (Kpa)	747	947	1147	1347	1147	947	747
Flow Rate (L/min/m)	0.0024	0.0038	0.0046	0.0054	0.0038	0.0029	0.0017

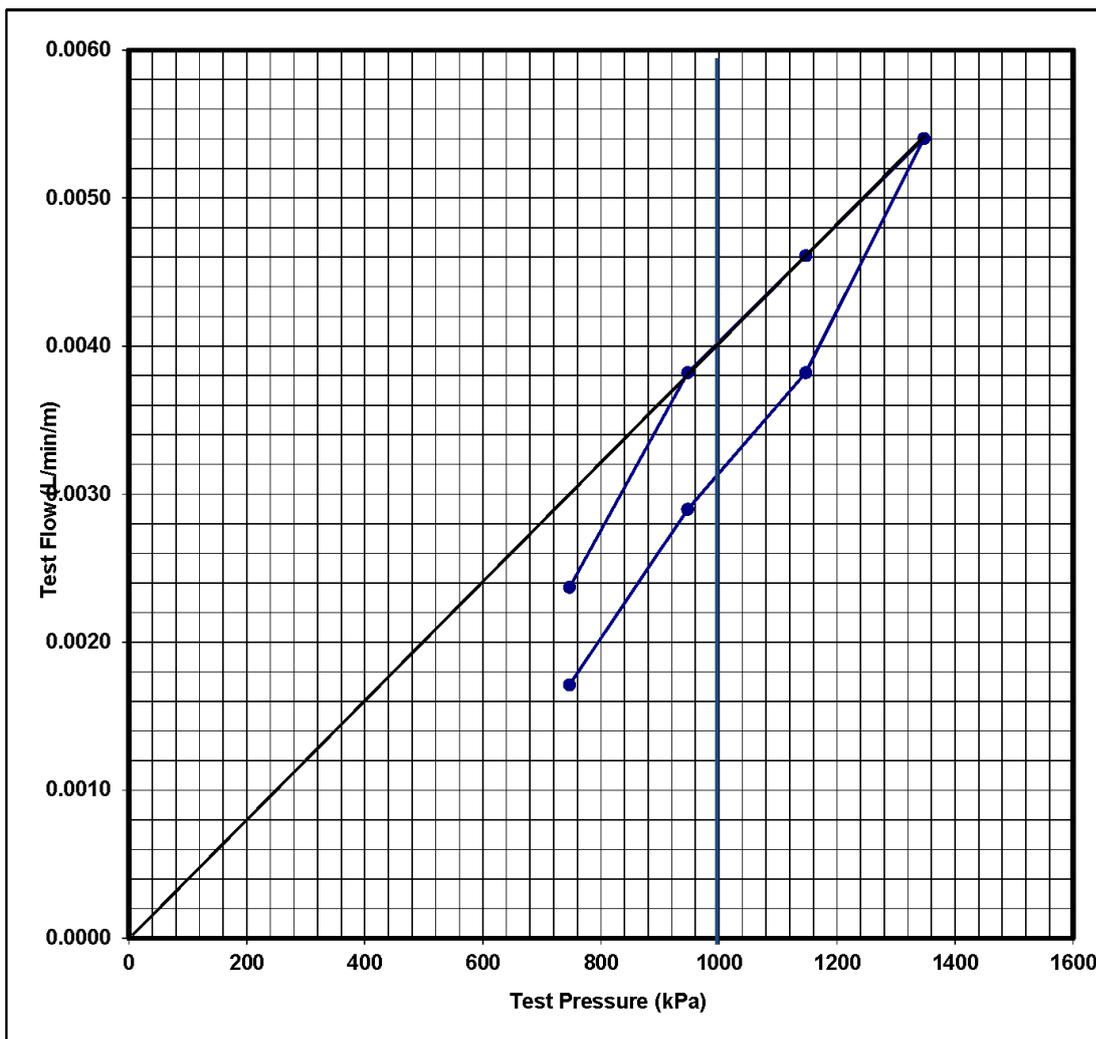

Lugeon units = Test Flow (L/min/m) at 1000kPa = **0.004**
 Permeability (m/day) = **5.01E-05**
 Permeability (m/s) = **5.80E-10**


J:\IE\Projects\04_Eastern\IA132800\02 Documents\Data\Packer Testing\BD17010_JT.xls\88.2

Test No. 9

Packer Test Data Sheet

Project: Bowdens Silver		Project No.: IA132800					
Hole No.:	BD17010	Test No.:	Single No. 4	Date:	9-May-17	Operator:	JT
Test Depth (m)	142.2	Location:	Easting (m)	768619.2		Azimuth:	60.5
			Northing (m)	6385518.3			

Summary							
Test Pressure (Kpa)	847	1147	1447	1747	1447	1147	847
Flow Rate (L/min/m)	0.0024	0.0043	0.0052	0.0066	0.0048	0.0028	0.0016

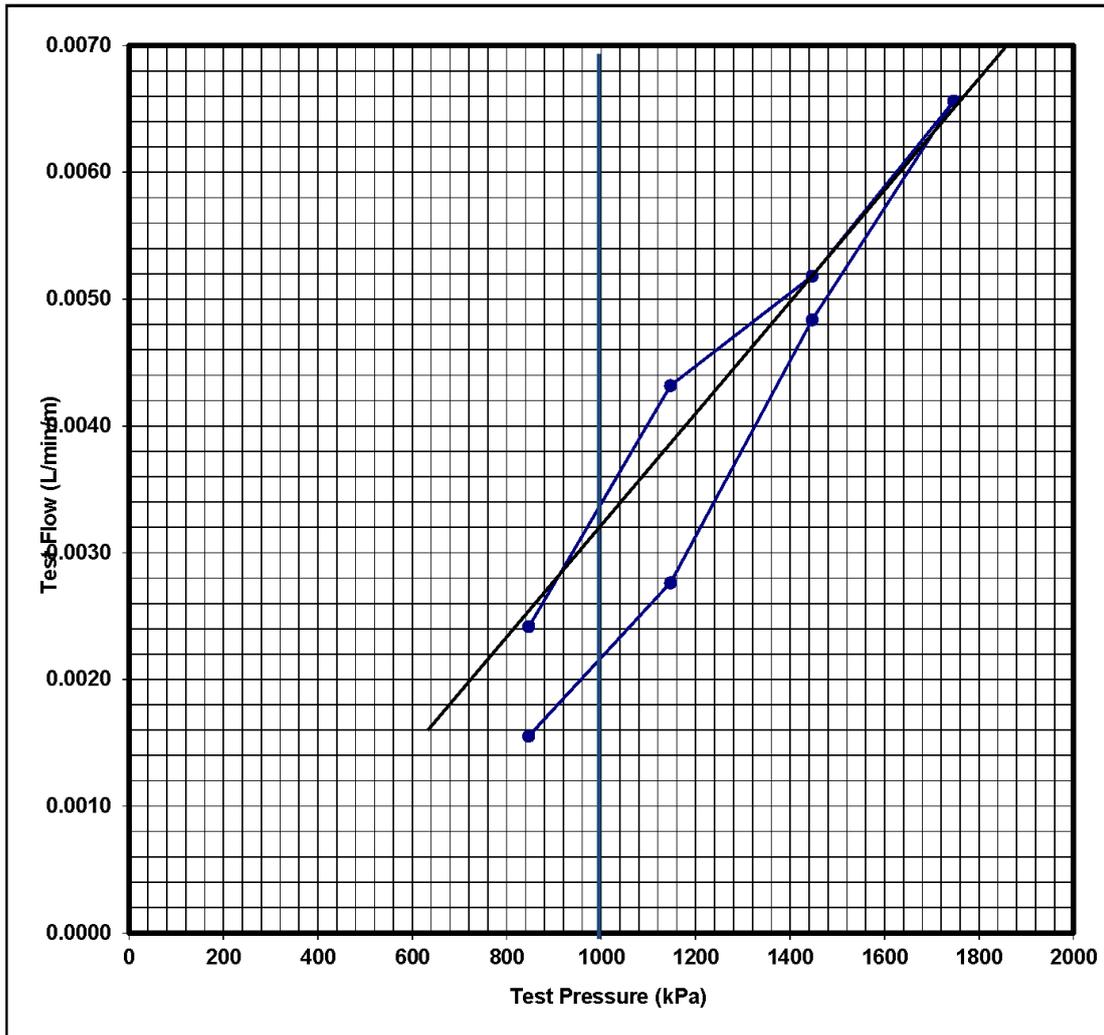

Lugeon units = Test Flow (L/min/m) at 1000kPa = 0.0032
 Permeability (m/day) = 4.01E-05
 Permeability (m/s) = 4.64E-10


J:\IE\Projects\04_Eastern\IA132800\02 Documents\Data\Packer Testing\BD17010_JT.xls\142.2

Test No. 9

Packer Test Data Sheet

Project: Bowdens Silver		Project No.: IA132800				
Hole No.: BD17010	Test No.: Single No. 4	Date:	9-May-17	Operator: JT		
Test Depth (m)	166.2	Location:	Easting (m)	768619.2	Azimuth:	60.5
			Northing (m)	6385518.3		

Summary							
Test Pressure (Kpa)	847	1147	1447	1747	1447	1147	847
Flow Rate (L/min/m)	0.0103	0.0122	0.0146	0.0157	0.0125	0.0100	0.0070

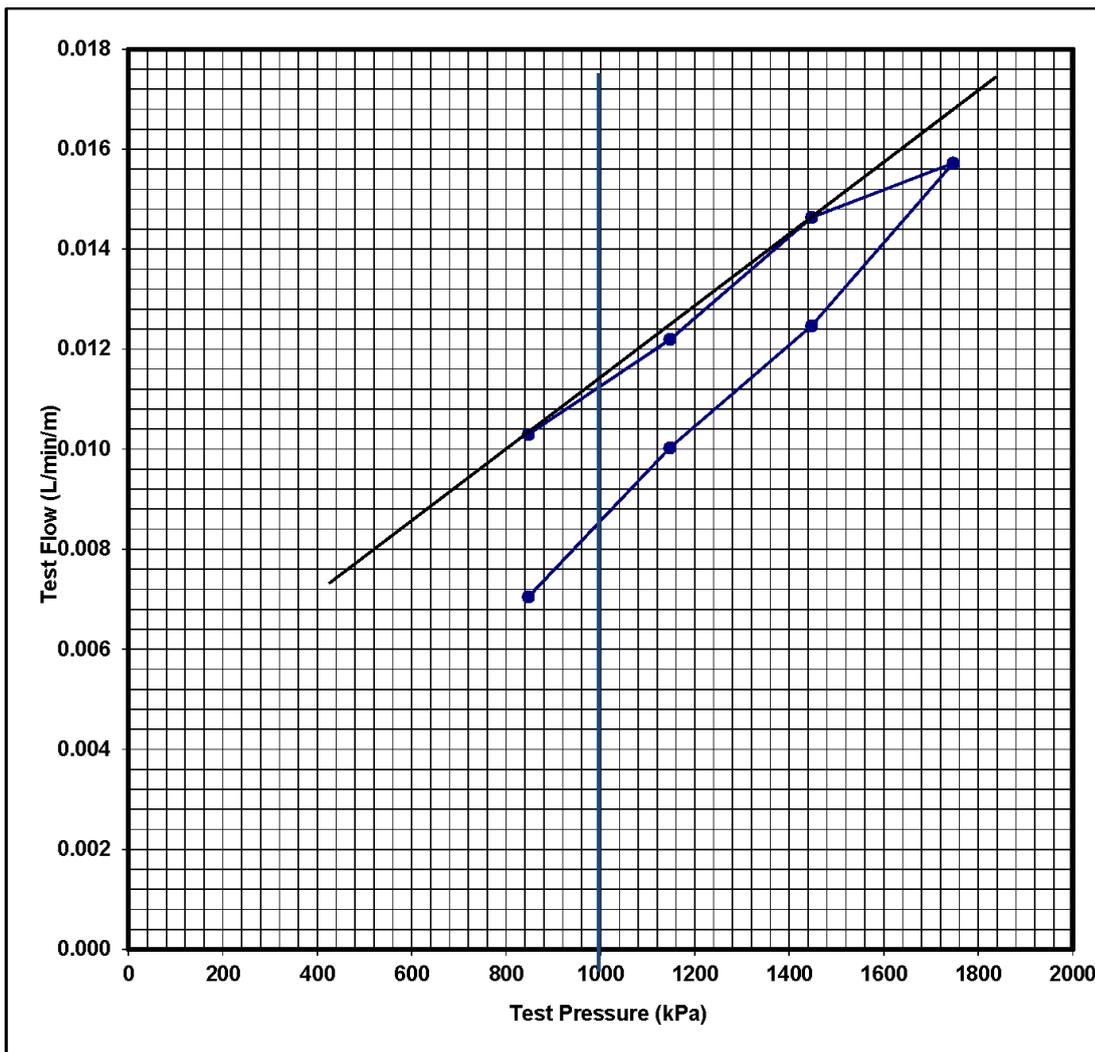

Lugeon units = Test Flow (L/min/m) at 1000kPa = **0.014**
 Permeability (m/day) = **1.75E-04**
 Permeability (m/s) = **2.03E-09**


J:\VE\Projects\04_Eastern\IA132800\02 Documents\Data\Packer Testing\BD17010_JT.xls\166.2

Test No. 9

Packer Test Data Sheet

Project: Bowdens Silver		Project No.: IA132800					
Hole No.: BD17010	Test No.:	Single No. 4	Date:	9-May-17	Operator:	JT	
Test Depth (m)	225.2	Location:	Easting (m)	768619.2	Azimuth:	60.5	
			Northing (m)	6385518.3			

Summary							
Test Pressure (Kpa)	637	937	1237	1537	1237	937	637
Flow Rate (L/min/m)	0.0391	0.0536	0.0681	0.0783	0.0536	0.0391	0.0217

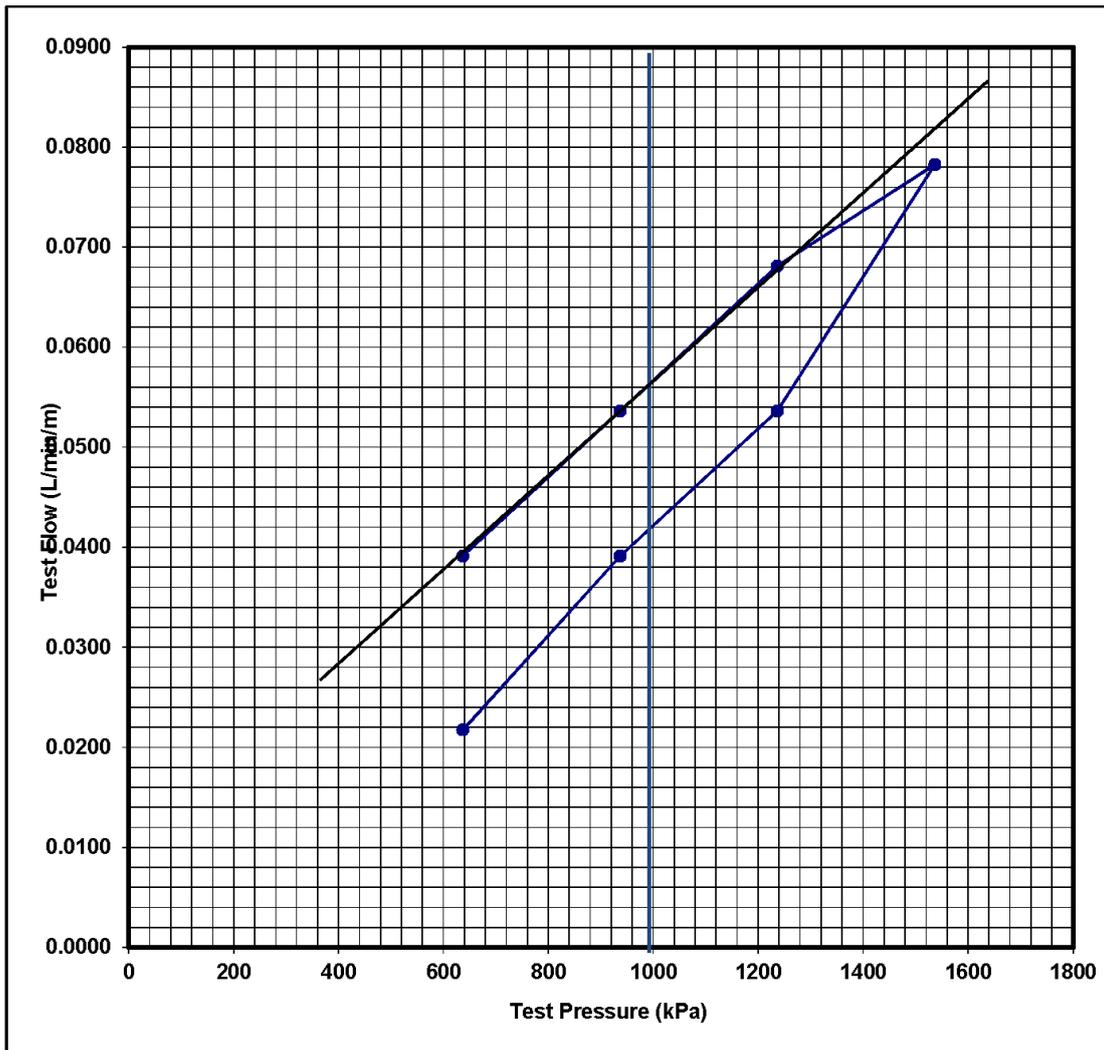

Lugeon units = Test Flow (L/min/m) at 1000kPa = 0.056
 Permeability (m/day) = 7.02E-04
 Permeability (m/s) = 8.12E-09

J:\IE\Projects\04_Eastern\IA 132800\02 Documents\Data\Packer Testing\BD17010_JT.xls\226.2

Test No. 9

This page has intentionally been left blank

Annexure 6

Comprehensive Water Quality Analyses

(Total No. of pages including blank pages = 30)

Note: This Annexure is only available on the digital version of this document

This page has intentionally been left blank

Sample Location	Sampling Date	Sample Num	Electrical Conductivity @ 25°C µS/cm	pH Value	Total Suspended Solids mg/L	TDS (mg/L)	Calc	Total Anions	Total Cations	Ionic Balance %	Ammonia as N mg/L	Antimony - Dissolved mg/L	Arsenic - Dissolved mg/L	Bicarbonate Alkalinity as CaCO3 mg/L	Calcium - Dissolved mg/L	Calcium - Dissolved mg/L	Carbonate Alkalinity as CaCO3 mg/L	Chloride mg/L	Chromium - Dissolved mg/L	Cobalt - Dissolved mg/L	Copper - Dissolved mg/L	Hydroxide Alkalinity as CaCO3 mg/L	Iron - Dissolved mg/L
BGW01	7/01/2014	ME140079002	121	5.8	5	67	1.01	1.02	1.02	0.02	0	<0.001	<0.001	22	<0.0001	2	<0.0001	15	<0.001	<0.001	0.001	<0.001	<0.05
BGW01	7/04/2014	ME140054001	127	5.8	3	82	1.29	1.17	1.17	0.13	0	<0.001	<0.001	26	<0.0001	1	<0.0001	22	<0.001	<0.001	0.002	<0.001	0.14
BGW01	7/07/2014	ME1401051001	129	5.9	6	77	1.18	1.15	1.15	<0.01	0	<0.001	<0.001	30	<0.0001	2	<0.0001	19	<0.001	<0.001	0.001	<0.001	0.06
BGW01	10/10/2014	ME1401512001	136	5.6	4	85	1.42	1.19	1.19	0.04	<0.001	<0.001	<0.001	16	<0.0001	2	<0.0001	28	<0.001	<0.001	<0.001	<0.001	0.06
BGW01	18/08/2015	ME1510328024	141	6.8	2	74	0	0	0	0	0.02	<0.001	<0.001	24	<0.0001	3	<0.0001	18	<0.001	<0.001	<0.001	<0.001	0.06
BGW03	7/01/2014	ME1400079003	2620	7.7	29	1631	24.2	26.3	26.3	4.09	0.35	0	<0.001	585	<0.0001	9	<0.0001	441	<0.001	<0.001	0.001	<0.001	0.78
BGW03	7/04/2014	ME1400540002	2140	6.6	132	1136	18.5	17.2	3.62	1.68	0	<0.001	<0.001	178	<0.0001	20	<0.0001	523	<0.001	<0.001	<0.001	<0.001	43.8
BGW03	7/07/2014	ME1401051002	2240	6.9	70	1346	22.4	20.4	4.66	0.6	0	<0.001	<0.001	303	<0.0001	24	<0.0001	575	<0.001	<0.001	0.002	<0.001	11.4
BGW03	10/10/2014	ME1401512002	2280	7.5	47	1592	24.7	26	2.52	0.35	<0.001	<0.001	<0.001	450	<0.0001	17	<0.0001	551	<0.001	<0.001	<0.001	<0.001	1.79
BGW05	7/01/2014	ME1400079004	426	6.7	6	251	3.85	3.82	0.43	0.07	0	<0.001	<0.001	90	<0.0001	11	<0.0001	49	<0.001	0.005	<0.001	<0.001	0.13
BGW05	7/04/2014	ME1400540003	365	6.8	27	229	3.55	3.52	0.44	0.04	0	<0.001	<0.001	81	<0.0001	12	<0.0001	44	<0.001	<0.001	0.002	<0.001	0.15
BGW05	7/07/2014	ME1401051003	321	6.7	15	207	3.09	3.18	1.45	0.02	0	<0.001	<0.001	92	<0.0001	12	<0.0001	28	<0.001	<0.001	<0.001	<0.001	<0.05
BGW05	10/10/2014	ME1401512003	423	6.5	8	254	3.97	3.87	1.34	0.08	<0.001	<0.001	<0.001	68	<0.0001	15	<0.0001	49	<0.001	0.006	0.002	<0.001	<0.05
BGW05	4/02/2015	ME1500221013	562	6.3	27	325	5.14	5.26	1.14	0.08	0	<0.001	<0.001	68	<0.0001	25	<0.0001	81	<0.001	0.006	0.004	<0.001	0.08
BGW05	1/05/2015	ME1500659001	583	6.5	10	327	4.99	5.76	7.09	0.04	0	<0.001	<0.001	62	<0.0001	26	<0.0001	77	<0.001	0	0.024	<0.001	<0.05
BGW05	18/08/2015	ME1510328020	608	6.8	22	313	0	0	0	0.02	0	<0.001	<0.001	63	<0.0001	28	<0.0001	62	<0.001	0.002	0.024	<0.001	<0.05
BGW05	22/10/2015	ME1510717010	624	6.7	5	348	0	0	0	0.08	0	<0.001	<0.001	73	<0.0001	30	<0.0001	90	<0.001	0	0.009	<0.001	<0.05
BGW05	24/02/2016	ME160265029	705	6.4	4	438	7.09	7.05	0.26	0.06	0	<0.001	<0.001	75	<0.0001	36	<0.0001	117	<0.001	0	0.034	<0.001	<0.05
BGW05	27/05/2016	ME1600733001	815	6.6	2	472	7.95	7.19	5	0.02	0	<0.001	<0.001	40	<0.0001	40	<0.0001	133	<0.001	<0.001	0.034	<0.001	<0.05
BGW05	5/09/2016	ME1601226041	1060	6	18	629	10.4	9.9	2.68	0.14	0	<0.001	<0.001	43	<0.0001	48	<0.0001	190	<0.001	0.023	<0.001	<0.001	<0.05
BGW05	20/12/2016	ME1601793015	909	6.1	10	564	9.44	8.27	6.6	0.04	0	<0.001	<0.001	55	<0.0001	38	<0.0001	160	<0.001	<0.017	<0.001	<0.001	1.08
BGW06	19/05/2014	ME1401741013	751	6.8	65	458	6.81	7.33	1.41	0.24	0	<0.001	<0.001	86	<0.0001	10	<0.0001	86	<0.001	0.001	0.008	<0.001	3.28
BGW06	14/07/2014	ME1401051004	765	6.9	14	503	7.62	7.01	2	<0.01	0	<0.001	<0.001	105	<0.0001	10	<0.0001	91	<0.001	<0.001	0.008	<0.001	3.28
BGW06	10/10/2014	ME1401512004	694	6.9	9	471	7.06	7.36	2.09	0.04	<0.001	<0.001	<0.001	101	<0.0001	8	<0.0001	87	<0.001	<0.001	0.006	<0.001	2.86
BGW06	4/02/2015	ME1500221014	654	6.7	36	383	5.77	5.83	0.48	0.2	0	<0.001	<0.001	84	<0.0001	9	<0.0001	77	<0.001	<0.001	0.004	<0.001	1.22
BGW06	1/05/2015	ME1500659002	618	7.1	44	400	5.68	6.54	7.01	<0.01	0	<0.001	<0.001	111	<0.0001	12	<0.0001	65	<0.001	<0.001	0.004	<0.001	2.4
BGW06	18/08/2015	ME1510328021	289	6.7	34	197	0	0	0	0.18	0	<0.001	<0.001	41	<0.0001	7	<0.0001	22	<0.001	0	0.004	<0.001	2.49
BGW06	22/10/2015	ME1510717011	320	6.9	454	206	0	0	0	0.19	0	<0.001	<0.001	52	<0.0001	8	<0.0001	27	<0.001	0.002	0.006	<0.001	4.19
BGW06	24/02/2016	ME160265030	444	6.9	55	292	4.16	4.54	4.31	0.43	0	<0.001	<0.001	75	<0.0001	7	<0.0001	48	<0.001	0.001	<0.013	<0.001	4.45
BGW06	27/05/2016	ME1600733002	450	7	33	283	4.38	3.96	4.97	0.48	0	<0.001	<0.001	90	<0.0001	7	<0.0001	56	<0.001	<0.001	0.004	<0.001	2.1
BGW06	5/09/2016	ME1601226042	952	6.5	38	621	9.11	9.28	0.9	0.17	0	<0.001	<0.001	158	<0.0001	20	<0.0001	82	<0.001	0.002	<0.001	<0.001	4.16
BGW06	20/12/2016	ME1601793016	1130	6.6	24	742	11.6	10.6	4.25	0.18	0	<0.001	<0.001	158	<0.0001	26	<0.0001	147	<0.001	0	<0.001	<0.001	3.98
BGW07	7/01/2014	ME1400079005	3150	7.7	110	1982	31.2	33.3	3.21	0.02	0	<0.001	<0.001	459	<0.0001	52	<0.0001	480	<0.001	<0.001	0.002	<0.001	0.84
BGW07	7/04/2014	ME1400540004	4060	7.9	41	2569	41.8	42	0.2	0.07	0	<0.001	<0.001	390	<0.0001	66	<0.0001	635	<0.001	<0.001	<0.001	<0.001	0.27
BGW07	23/07/2014	ME1401051005	3940	7.7	80	2878	46.8	46.5	0.33	0.19	0	<0.001	<0.001	506	<0.0001	66	<0.0001	700	<0.001	<0.001	0.002	<0.001	0.38
BGW07	14/10/2014	ME1401512005	3760	7.7	90	2800	43.9	48.3	4.79	0.31	<0.001	<0.001	<0.001	542	<0.0001	70	<0.0001	681	<0.001	<0.001	<0.001	<0.001	1.69
BGW07	4/02/2015	ME1500221015	3510	7.6	61	2429	39.2	39.3	0.07	0.25	0	<0.001	<0.001	435	<0.0001	57	<0.0001	589	<0.001	<0.001	0.002	<0.001	0.49
BGW07	29/04/2015	ME1500659003	3250	7.4	81	2211	34.7	37.8	4.33	0.38	0	<0.001	<0.001	318	<0.0001	48	<0.0001	513	<0.001	<0.001	0.004	<0.001	9.02
BGW07	18/08/2015	ME1510328022	3200	6.9	272	2082	0	0	0	0.4	0	<0.001	<0.001	115	<0.0001	53	<0.0001	388	<0.001	<0.001	<0.001	<0.001	0.89
BGW07	22/10/2015	ME1510717012	3350	7	116	1978	0	0	0	0.37	0	<0.001	<0.001	111	<0.0001	59	<0.0001	419	<0.001	<0.001	<0.001	<0.001	0.71
BGW07	24/02/2016	ME1600265031	1280	7	53	879	14	13.9	0.06	0.18	0	<0.001	<0.001	86	<0.0001	26	<0.0001	160	<0.001	<0.001	<0.001	<0.001	2.62
BGW07	27/05/2016	ME1600733003	1570	7.2	49	988	16.7	14	8.96	0.88	0	<0.001	<0.001	122	<0.0001	33	<0.0001	226	<0.001	<0.001	0.002	<0.001	<0.05
BGW07	5/09/2016	ME1601226043	1200	7.3	42	763	12	12.4	1.26	0.12	0	<0.001	<0.001	52	<0.0001	22	<0.0001	130	<0.001	<0.001	0.002	<0.001	<0.05
BGW07	20/12/2016	ME1601793017	1680	7.3	152	1059	17.5	16.3	3.4	0.3	0	<0.001	<0.001	107	<0.0001	45	<0.0001	244	<0.001	<0.001	<0.001	<0.001	1.98
BGW08	7/01/2014	ME1400079006	1830	7.6	11	1351	18.5	20.5	4.87	0.04	0	<0.001	<0.001	766	<0.0001	25	<0.0001	88	<0.001	<0.001	0.005	<0.001	<0.05
BGW08	7/04/2014	ME1400540005	1930	7.8	3	1314	19	18.1	2.42	<0.01	0	<0.001	<0.001	774	<0.0001	22	<0.0001	98	<0.001	<0.001	0.006	<0.001	<0.05
BGW08	23/07/2014	ME1401051006	1890	7.3	43	1613	22.7	23.2	1.06	<0.01	0	<0.001	<0.001	964	<0.0001	38	<0.0001	94	<0.001	<0.001	0.008	<0.001	<0.05
BGW08	14/10/2014	ME1401512006	1720	7.4	2	1484	20.5	23	5.88	0.02	<0.001	<0.001	<0.001	818	<0.0001	51	<0.0001	109	<0.001	<0.001	0.002	<0.001	<0.05
BGW08	8/02/2015	ME1500221016	1430	7	13	1040	15.1	15.5	1.31	0.08	0	<0.001	<0.001	551	<0.0001	60	<0.0001	105	<0.001	<0.001	<0.001	<0.001	0.47
BGW08	1/05/201																						

Sample Location	Sampling Date	Sample Num	Electrical Conductivity @ 25 C µs/cm	pH Value pH Unit	Total Suspended Solids mg/L	TDS (mg/L)	Calc	Total Anions meq/L	Total Cations meq/L	Ionic Balance %	Ammonia as N mg/L	Antimony - Dissolved mg/L	Arsenic - Dissolved mg/L	Bicarbonate Alkalinity as CaCO3 mg/L	Cadmium - Dissolved mg/L	Calcium - Dissolved mg/L	Carbonate Alkalinity as CaCO3 mg/L	Chloride mg/L	Chromium - Dissolved mg/L	Cobalt - Dissolved mg/L	Copper - Dissolved mg/L	Hydroxide Alkalinity as CaCO3 mg/L	Iron - Dissolved mg/L
BGW08	18/08/2015	ME1510328023	1640	7.4	1247	0	0	0	0	0.43	0	<0.001	696	<0.0001	49	<0.0001	<0.0001	59	0	<0.001	<0.001	<0.001	0.23
BGW08	28/10/2015	ME1510717013	1860	7.6	1477	0	0	0	0	0.21	0	<0.001	904	<0.0001	33	<0.0001	<0.0001	84	0	<0.001	0.001	<0.001	0.1
BGW08	24/02/2016	ME1602650332	1660	7.4	1339	18.6	19.9	3.24	3.24	0.02	0	<0.001	784	<0.0001	45	<0.0001	<0.0001	75	0	<0.001	0.002	<0.001	<0.05
BGW08	27/05/2016	ME1600733004	1750	7.4	1385	19.8	19.4	1.23	1.23	<0.01	0	<0.001	830	<0.0001	41	<0.0001	<0.0001	84	0	<0.001	0.001	<0.001	<0.05
BGW08	5/09/2016	ME1602260044	1780	7.5	1340	18.2	20.5	5.9	2.79	0.2	0	0.005	766	<0.0001	47	<0.0001	<0.0001	78	0	<0.001	0.002	<0.001	12
BGW08	20/12/2016	ME1607930318	1770	7.6	1343	18.9	20	2.79	2.79	<0.01	0	<0.001	762	<0.0001	42	<0.0001	<0.0001	102	0	<0.001	<0.001	<0.001	<0.05
BGW09	7/01/2014	ME1400079007	1440	7.3	1062	15.8	15.7	0.16	0.16	0.08	0	<0.001	654	<0.0001	57	<0.0001	<0.0001	75	<0.001	<0.001	0.001	<0.001	0.66
BGW09	21/05/2014	ME140741014	1400	7.1	1017	14.9	15.6	2.26	2.26	0.06	0	0.007	597	<0.0001	60	<0.0001	<0.0001	76	<0.001	0.004	<0.001	1.28	2.04
BGW09	7/07/2014	ME1401051007	1400	7.1	1123	16.9	16.1	2.4	2.4	<0.01	0	<0.001	685	<0.0001	65	<0.0001	<0.0001	79	<0.001	<0.001	0.001	<0.001	2.11
BGW09	10/10/2014	ME1405121007	1410	7.3	1072	16.8	13.7	10.2	10.2	<0.01	<0.001	<0.001	696	<0.0001	52	<0.0001	<0.0001	77	<0.001	<0.001	0.004	<0.001	0.43
BGW09	6/02/2015	ME1500211017	1410	7.3	1039	15.4	15.9	1.45	1.45	0.03	0	<0.001	628	<0.0001	61	<0.0001	<0.0001	64	0	<0.001	<0.001	<0.001	1.7
BGW09	1/05/2015	ME1500659005	1450	7.4	1095	15.5	18.2	8	8	<0.01	0	0.001	661	<0.0001	73	<0.0001	<0.0001	64	0	<0.001	<0.001	<0.001	0.4
BGW09	18/08/2015	ME1510328025	1400	7.2	1067	0	0	0	0	0.05	0	<0.001	640	<0.0001	72	<0.0001	<0.0001	50	0	<0.001	<0.001	<0.001	1.95
BGW09	22/10/2015	ME1510717014	877	7.7	943	0	0	0	0	0.02	0	<0.001	510	<0.0001	66	<0.0001	<0.0001	64	0	<0.001	<0.001	<0.001	0.48
BGW09	24/02/2016	ME1602650333	1350	7.3	1089	15.8	16.9	3.39	3.39	0.03	0	<0.001	671	<0.0001	67	<0.0001	<0.0001	63	0	<0.001	<0.001	<0.001	1.21
BGW09	27/05/2016	ME1600733005	1420	7.2	1098	16.7	15.3	4.63	4.63	0.03	0	<0.001	705	<0.0001	66	<0.0001	<0.0001	71	0	<0.001	<0.001	<0.001	0.06
BGW09	5/09/2016	ME1601226045	1440	7.3	1077	15.5	17.2	5.12	5.12	0.02	0	<0.001	651	<0.0001	73	<0.0001	<0.0001	68	0	<0.001	0.035	<0.001	0.66
BGW09	20/12/2016	ME1607930319	1430	7.2	1024	15	15.8	2.71	2.71	0.03	0	<0.001	624	<0.0001	70	<0.0001	<0.0001	69	0	<0.001	<0.001	<0.001	1.26
BGW10	10/01/2014	ME1400079008	1450	7.1	1042	15.8	15.6	0.49	0.49	0.02	0	<0.014	307	<0.0001	118	<0.0001	<0.0001	66	<0.001	<0.001	0.001	<0.001	1.19
BGW10	31/03/2014	ME1400540006	1260	7.1	882	12.9	14.2	4.62	4.62	0.06	0	<0.016	270	<0.0001	108	<0.0001	<0.0001	54	<0.001	<0.001	<0.001	<0.001	1.04
BGW10	15/07/2014	ME1400510008	1290	7.1	954	14.2	14.8	2.37	2.37	0.02	0	<0.01	316	<0.0001	116	<0.0001	<0.0001	57	<0.001	<0.001	<0.001	<0.001	<0.05
BGW10	13/10/2014	ME1401512008	1290	7.2	916	14.3	12.5	6.62	6.62	0.03	0	<0.015	324	<0.0001	96	<0.0001	<0.0001	56	<0.001	<0.001	<0.001	<0.001	0.98
BGW10	4/12/2014	ME140772005	1520	6.9	1243	18.5	19.7	3.16	3.16	0.005	0	0	360	<0.0001	168	<0.0001	<0.0001	82	0	0.001	0.002	<0.001	1.17
BGW10	5/12/2014	ME140172006	1520	7	1252	18.6	19.9	3.36	3.36	0.008	0	0	366	<0.0001	167	<0.0001	<0.0001	80	0	0.001	<0.001	<0.001	0.92
BGW10	6/12/2014	ME140172007	1550	7	1275	19	20.2	2.97	2.97	0.008	0	0	366	<0.0001	169	<0.0001	<0.0001	81	0	0.001	<0.001	<0.001	<0.05
BGW10	7/12/2014	ME140172008	1560	7.5	1284	19.1	20.4	3.2	3.2	0.006	0	0	370	<0.0001	174	<0.0001	<0.0001	82	0	0.001	0.001	<0.001	<0.05
BGW10	5/02/2015	ME1500211018	1110	6.9	826	12.3	12.7	1.64	1.64	0.03	0	0.02	262	<0.0001	99	<0.0001	<0.0001	39	0	<0.001	0.001	<0.001	0.98
BGW10	29/04/2015	ME1500659006	1230	7	912	13.4	14.3	3.06	3.06	0.04	0	<0.018	281	<0.0001	113	<0.0001	<0.0001	43	0	<0.001	0.002	<0.001	1.01
BGW10	7/08/2015	ME1510328026	1250	7	917	0	0	0	0	0.06	0	<0.016	288	<0.0001	110	<0.0001	<0.0001	36	0	<0.001	<0.001	<0.001	1.18
BGW10	27/10/2015	ME1510717015	1170	7.2	846	0	0	0	0	0.06	0	<0.012	302	<0.0001	90	<0.0001	<0.0001	44	0	<0.001	<0.001	<0.001	<0.05
BGW10	23/02/2016	ME160265017	1310	7.1	1008	15.2	14.9	0.94	0.94	0.03	0	0.02	317	<0.0001	119	<0.0001	<0.0001	48	0	<0.001	<0.001	<0.001	0.74
BGW10	18/05/2016	ME1600733006	1240	7	801	12.4	11.4	4.18	4.18	<0.01	0	<0.016	242	<0.0001	82	<0.0001	<0.0001	54	0	<0.001	<0.001	<0.001	1.18
BGW10	30/08/2016	ME1601226001	1480	6.9	1096	16.2	17.2	3.04	3.04	0.04	0	0.008	332	<0.0001	134	<0.0001	<0.0001	62	0	<0.001	<0.001	<0.001	0.92
BGW10	21/12/2016	ME1601790332	1380	7.1	997	15.2	14.5	2.29	2.29	0.04	0	<0.017	296	<0.0001	119	<0.0001	<0.0001	60	0	<0.001	<0.001	<0.001	1.21
BGW102	10/01/2014	ME1400079053			7	0	0	0	0	0.21	0	0.048	0.0002	0.0002	96	<0.0001	<0.0001	<0.001	<0.001	0.001	0.02	1.86	
BGW102	10/01/2014	ME140079053			7	0	0	0	0	0.21	0	0.048	0.0002	0.0002	96	<0.0001	<0.0001	<0.001	<0.001	0.001	0.02	1.86	
BGW102	14/10/2014	ME1401512051			332					<0.001		<0.001	0.079	<0.0001	151	<0.0001	<0.0001	<0.001	<0.001	0.001	<0.001	1.32	
BGW102	14/10/2014	ME1401512051			332					<0.001		<0.001	0.079	<0.0001	151	<0.0001	<0.0001	<0.001	<0.001	0.001	<0.001	1.32	
BGW102	30/04/2015	ME1500659043	1380	7.4	1040	15.3	16.1	2.74	2.74	0.17	0	0.106	283	0.0003	142	<0.0001	<0.0001	51	0	0.003	0.005	<0.001	2.47
BGW102	30/04/2015	ME1500659043	1380	7.4	1040	15.3	16.1	2.74	2.74	0.17	0	0.106	283	0.0003	142	<0.0001	<0.0001	51	0	0.003	0.005	<0.001	2.47
BGW106	10/01/2014	ME140079045	1160	7	728	11.3	11.2	0.29	0.29	0.96	0	<0.001	151	0.0002	77	<0.0001	<0.0001	126	0.001	<0.001	<0.001	<0.001	0.77
BGW106	9/04/2014	ME1400540043	1140	6.8	741	11.3	12	3.07	3.07	1.03	0	<0.001	144	<0.0001	87	<0.0001	<0.0001	138	<0.001	<0.001	<0.001	<0.001	0.18
BGW106	22/07/2014	ME1401051046	1150	7	798	12.5	12	2.05	2.05	0.68	0	<0.001	168	<0.0001	84	<0.0001	<0.0001	140	<0.001	<0.001	<0.001	<0.001	0.13
BGW106	14/10/2014	ME1401512048	1160	6.7	781	12.1	12.3	0.66	0.66	0.85	<0.001	0.002	163	<0.0001	85	<0.0001	<0.0001	147	<0.001	<0.001	<0.001	<0.001	<0.05
BGW106	8/02/2015	ME1500211020	1140	6.7	736	11.5	11.6	0.46	0.46	0.1	0	0.005	138	<0.0001	82	<0.0001	<0.0001	132	0	0.001	0.002	<0.001	<0.05
BGW106	30/04/2015	ME1500659044	1170	6.6	792	12.3	12.6	1	1	0.03	0	0.005	146	<0.0001	91	<0.0001	<0.0001	151	0	0.001	0.003	<0.001	<0.05
BGW106	14/08/2015	ME1510328027	1170	7.2	742	0	0	0	0	0.02	0	0.003	141	<0.0001	86	<0.0001	<0.0001	114	0	<0.001	<0.001	<0.001	<0.05
BGW106	22/10/2015	ME1510717051	1160	7	709	0	0	0	0	0.02	0	<0.001	109	<0.0001	91	<0.0001	<0.0001	120	0	<0.001	0.003	<0.001	<0.05
BGW106	22/02/2016	ME160265001	1190	6.9	782	12.1	12.4	1.17	1.17	<0.01	0	0.001	138	<0.0001	94	<0.0001	<0.0001	145	0	<0.001	0.004	<0.001	<0.05
BGW106	18/05/2016	ME1600733007	1180	7	689	11.2	10.4	3.66	3.66	<0.01	0	0.001	122	<0.0001	73	<							

Sample Location	Sampling Date	Sample Num	Electrical Conductivity @ 25°C µS/cm	pH Value pH	Total Suspended Solids mg/L	TDS (mg/L)	Calc	Total Anions	Total Cations	mg/L	% Ionic Balance	Ammonia as N mg/L	Antimony - Dissolved mg/L	Arsenic - Dissolved mg/L	Bicarbonate Alkalinity as CaCO3 mg/L	Calcium - Dissolved mg/L	Calcium - Dissolved mg/L	Alkalinity as CaCO3 mg/L	Chloride mg/L	Chromium - Dissolved mg/L	Cobalt - Dissolved mg/L	Copper - Dissolved mg/L	Hydroxide Alkalinity as CaCO3 mg/L	Iron - Dissolved mg/L	
BGW106	1/09/2016	ME1601226020	1220	7.1	1	824	13	12.6	1.75	0.08	<-0.001	165	<-0.0001	92	<-0.0001	147	0	<-0.001	0.008	<-0.001	<-0.001	0.008	<-0.001	<-0.05	
BGW106	19/12/2016	ME1601793001	1250	7	2	766	12.2	11.9	1.02	<-0.001	0	0.001	146	<-0.0001	91	<-0.0001	154	0	<-0.001	0.003	<-0.001	0.003	<-0.001	<-0.05	
BGW107	10/01/2014	ME140079046	1680	6.7	96	1109	17.4	17.4	0.06	0.25	0	0.008	232	<-0.0001	145	<-0.0001	192	216	<-0.001	0.002	0.002	<-0.001	0.002	6.62	
BGW107	9/04/2014	ME1400540044	1780	6.5	48	1155	18.1	19.2	3.13	0.13	0	<-0.011	195	<-0.0001	168	<-0.0001	168	277	<-0.001	0.004	0.004	<-0.001	<-0.001	7.88	
BGW107	22/07/2014	ME1401051049	1530	6.6	34	1136	17.8	16.5	3.7	0.19	0	0.008	328	<-0.0001	178	<-0.0001	178	166	<-0.001	0.002	0.002	0.003	0.002	4.12	
BGW107	14/10/2014	ME1401512048	1490	6.9	35	1109	16.8	17.2	1.19	0.18	<-0.001	347	<-0.0001	148	<-0.0001	148	139	<-0.001	<-0.001	<-0.001	<-0.001	<-0.001	<-0.001	3.48	
BGW107	8/02/2015	ME1500221021	1550	6.6	63	1111	17.2	17.7	1.59	0.3	0	0.008	273	<-0.0001	140	<-0.0001	140	182	0	0.001	0.001	<-0.001	<-0.001	3.77	
BGW107	30/04/2015	ME150069045	1500	6.8	55	1103	17	16.7	0.69	0.2	0	0.06	315	<-0.0001	141	<-0.0001	141	150	0	<-0.001	0.002	0.002	<-0.001	7.43	
BGW107	14/08/2015	ME1510328028	1450	6.8	21	993	0	0	0	0.2	0	0.006	316	<-0.0001	132	<-0.0001	132	63	0	<-0.001	<-0.001	<-0.001	<-0.001	2.17	
BGW107	22/10/2015	ME1510717052	1400	7.2	52	1015	0	0	0	0.21	0	0.003	300	<-0.0001	132	<-0.0001	132	74	0	<-0.001	<-0.001	<-0.001	<-0.001	1.44	
BGW107	22/02/2016	ME1600285002	1390	6.8	22	1011	15	15.7	2.39	0.22	0	0.003	319	<-0.0001	135	<-0.0001	135	82	0	<-0.001	<-0.001	<-0.001	<-0.001	1.6	
BGW107	18/05/2016	ME1600733008	1230	7	20	873	12.3	14.8	9.2	0.05	0	0.003	285	<-0.0001	128	<-0.0001	128	54	0	<-0.001	<-0.001	<-0.001	<-0.001	1.36	
BGW107	1/09/2016	ME1601226021	1440	6.8	25	1094	16.6	16	1.62	0.29	0	0.004	386	<-0.0001	132	<-0.0001	132	86	0	<-0.001	<-0.001	<-0.001	<-0.001	1.42	
BGW107	19/12/2016	ME1601793002	1400	6.8	16	991	14.8	15.1	1.25	0.17	0	0.002	356	<-0.0001	128	<-0.0001	128	87	0	<-0.001	<-0.001	<-0.001	<-0.001	0.7	
BGW108	6/01/2014	ME140079047	2550	7.1	8	1956	29.8	29.9	0.14	0.48	0	0.118	461	0.0003	218	<-0.0003	218	207	<-0.001	<-0.001	<-0.001	0.006	<-0.001	0.92	
BGW108	9/04/2014	ME1400540045	2360	6.8	22	1784	27.2	27.2	0.05	0.42	0	0.112	460	0.0002	218	<-0.0002	218	191	<-0.001	<-0.001	<-0.001	<-0.001	<-0.001	2.14	
BGW108	15/07/2014	ME1401051050	2500	6.8	26	2098	32.4	30.9	2.29	0.34	0	0.036	512	0.0001	214	<-0.0001	214	229	<-0.001	<-0.001	<-0.001	<-0.001	<-0.001	4.16	
BGW108	8/10/2014	ME1401512050	2700	7	32	2121	32.2	33.5	2.03	0.44	0.008	489	0.0002	242	<-0.0002	242	262	<-0.001	<-0.001	<-0.001	<-0.001	<-0.001	<-0.001	1.92	
BGW108	28/11/2014	ME140172001	2590	7	3	2188	32.9	35.1	3.17	0.299	0	0	493	0.0001	284	<-0.0001	284	245	0	<-0.001	0.001	0.001	0.001	<-0.001	<-0.05
BGW108	29/11/2014	ME140172002	2530	6.8	6	2147	32.1	34.6	3.82	0.205	0	0	490	0.0002	288	<-0.0002	288	228	0	<-0.001	<-0.001	<-0.001	<-0.001	<-0.05	
BGW108	30/11/2014	ME140172003	2500	6.7	<2	2116	31.7	33.9	3.31	0.127	0	0	488	0.0001	276	<-0.0001	276	224	0	<-0.001	<-0.001	0.002	<-0.001	<-0.05	
BGW108	1/12/2014	ME140172004	2450	6.8	<2	2072	31.1	33	3	0.096	0	0	486	0.0001	276	<-0.0001	276	221	0	<-0.001	<-0.001	0.002	<-0.001	<-0.05	
BGW108	7/02/2015	ME1500221022	2480	6.8	41	1933	29.8	29.5	0.46	0.31	0	0.185	454	0.0002	218	<-0.0002	218	223	0	<-0.001	<-0.001	0.002	<-0.001	1.15	
BGW108	30/04/2015	ME150059046	2470	6.8	36	2053	31	32.8	2.79	0.43	0	0.247	480	0.0002	249	<-0.0002	249	235	0	<-0.001	<-0.001	<-0.001	<-0.001	1.79	
BGW108	11/08/2015	ME1510328029	2620	6.8	16	1957	0	0	0	0.41	0	0.161	409	0.0003	251	<-0.0003	251	190	0	<-0.001	<-0.001	0.002	<-0.001	0.94	
BGW108	27/10/2015	ME1510717053	2540	6.9	12	2093	0	0	0	0.38	0	0.227	481	0.0002	213	<-0.0002	213	233	0	<-0.001	<-0.001	<-0.001	<-0.001	1.26	
BGW108	23/02/2016	ME160265018	2390	6.8	8	2021	31.3	29.6	2.68	0.47	0	0.225	504	<-0.0001	228	<-0.0001	228	204	0	<-0.001	<-0.001	<-0.001	<-0.001	1.61	
BGW108	19/05/2016	ME1600733009	2370	6.9	6	1997	30.9	28.8	3.57	0.36	0	0.233	542	0.0001	221	<-0.0001	221	186	0	<-0.001	<-0.001	<-0.001	<-0.001	0.06	
BGW108	6/09/2016	ME1601226056	295	6.6	4	192	2.86	2.84	0	<-0.001	0	0.036	51	0.0002	19	<-0.0002	19	21	0	<-0.001	<-0.001	0.001	<-0.001	0.9	
BGW11	6/01/2014	ME1400079009	1820	6.8	22	1105	18	18.2	0.33	0.08	0	<-0.001	328	<-0.0001	84	<-0.0001	84	293	<-0.001	<-0.001	<-0.001	<-0.001	<-0.05		
BGW11	17/05/2014	ME1400741015	1740	6.9	1110	1123	18	19	2.75	0.05	0	<-0.001	365	<-0.0001	113	<-0.0001	113	283	<-0.001	<-0.001	0.001	<-0.001	0.06		
BGW11	18/07/2014	ME1401051009	1850	6.6	55	1268	21.4	19.6	4.35	0.04	0	<-0.001	352	<-0.0001	98	<-0.0001	98	360	<-0.001	<-0.001	<-0.001	<-0.001	<-0.05		
BGW11	9/10/2014	ME1401512009	1920	6.7	28	1313	21.2	22.9	3.87	0.05	<-0.001	355	<-0.0001	95	<-0.0001	95	378	<-0.001	<-0.001	<-0.001	<-0.001	<-0.001	<-0.001	0.08	
BGW11	7/02/2015	ME1500221023	1760	6.5	32	1134	19.2	17.6	4.58	0.09	0	<-0.001	285	<-0.0001	87	<-0.0001	87	328	0	<-0.001	<-0.001	0.001	<-0.001	0.31	
BGW11	29/04/2015	ME1500690007	1860	6.6	38	1226	19.8	21.2	3.38	0.05	0	0.001	348	<-0.0001	102	<-0.0001	102	328	0	<-0.001	<-0.001	0.001	<-0.001	0.17	
BGW11	11/08/2015	ME1510328030	2030	6.5	32	1163	0	0	0	0.07	0	<-0.001	310	<-0.0001	95	<-0.0001	95	281	0	<-0.001	<-0.001	0.001	<-0.001	<-0.05	
BGW11	21/10/2015	ME1510717016	1920	6.6	25	1218	0	0	0	0.1	0	<-0.001	329	<-0.0001	102	<-0.0001	102	321	0	<-0.001	<-0.001	<-0.001	<-0.001	<-0.05	
BGW11	22/02/2016	ME1600285003	1860	6.5	22	1179	19.1	20.2	2.82	0.06	0	<-0.001	317	<-0.0001	100	<-0.0001	100	331	0	<-0.001	<-0.001	<-0.001	<-0.001	0.16	
BGW11	19/05/2016	ME1600733010	1890	6.7	11	1258	21.2	19.5	4.1	0.04	0	<-0.001	365	<-0.0001	94	<-0.0001	94	343	0	<-0.001	<-0.001	<-0.001	<-0.001	0.08	
BGW11	1/09/2016	ME1601226022	1930	6.5	12	1274	21	20.6	1.19	<-0.001	0	<-0.001	370	<-0.0001	99	<-0.0001	99	343	0	<-0.001	<-0.001	<-0.001	<-0.001	0.17	
BGW11	20/12/2016	ME1601793020	1730	6.6	19	1110	18.7	18.7	5.24	0.1	0	<-0.001	348	<-0.0001	92	<-0.0001	92	305	0	<-0.001	<-0.001	<-0.001	<-0.001	0.82	
BGW12	6/01/2014	ME1400079010	5490	6.6	13	2917	47.6	52.5	4.93	0.05	0	<-0.001	204	<-0.0001	137	<-0.0001	137	1130	<-0.001	0.002	0.002	0.002	<-0.001	0.05	
BGW12	2/04/2014	ME1400540008	5680	6.4	51	3179	52.9	58.8	3.58	0.04	0	<-0.001	179	0.0002	152	<-0.0002	152	1310	<-0.001	0.002	0.002	0.002	<-0.001	<-0.05	
BGW12	18/07/2014	ME1401051010	5280	6.3	6	3319	56.7	56.6	0.08	0.23	0	<-0.001	210	0.0001	156	<-0.0001	156	1420	<-0.001	0.003	0.002	0.002	<-0.001	<-0.05	
BGW12	9/10/2014	ME1401512010	5650	6.5	13	2963	51.6	48.1	3.6	0.03	<-0.001	200	0.0001	126	<-0.0001	126	1250	<-0.001	0.003	0.004	0.004	<-0.001	<-0.05		
BGW12	7/02/2015	ME1500221024	4750	6.4	43	2908	48.7	51.3	2.59	0.64	0	0.001	168	<-0.0001	131	<-0.0001	131	1220	0	0.009	0.003	0.004	<-0.001	0.21	
BGW12	29/04/2015	ME1500690008	4830	6.4	39	2799	46.2	49.9	3.82	0.61	0	0.002	168	<-0.0001	135	<-0.0001	135	1120	0	0.006	0.002	0.002	<-0.001	0.9	
BGW12	11/08/2015	ME1510328031	4640	6.4	10	2258	0	0	0	0.1	0	0.001	158	<-0.0001	126	<-0.0001	126	772	0	0.004	0.004	0.004	<-0.001	<-0.05	
BGW12	21/10/2015	ME151071701																							

Sample Location	Sampling Date	Sample Num	Electrical Conductivity @ 25 C µs/cm	pH Value pH Unit	Total Suspended Solids mg/L	TDS (mg/L)	Calc	Total Anions meq/L	Total Cations meq/L	Ionic Balance %	Ammonia as N mg/L	Antimony - Dissolved mg/L	Arsenic - Dissolved mg/L	Bicarbonate Alkalinity as CaCO3 mg/L	Cadmium - Dissolved mg/L	Calcium - Dissolved mg/L	Carbonate Alkalinity as CaCO3 mg/L	Chloride mg/L	Chromium - Dissolved mg/L	Cobalt - Dissolved mg/L	Copper - Dissolved mg/L	Hydroxide Alkalinity as CaCO3 mg/L	Iron - Dissolved mg/L
BGW12	22/02/2016	ME160265004	4280	6.5	10	2522	42	44.9	3.31	0.91	0	<-0.001	158	<-0.001	127	<-0.001	1040	0	0.004	<-0.001	<-0.001	<-0.001	0.34
BGW12	19/05/2016	ME160733011	4550	6.4	10	2699	44	47.9	4.18	0.37	0	<-0.001	195	<-0.001	127	<-0.001	1020	0	0.002	<-0.001	<-0.001	<-0.001	<-0.05
BGW12	1/09/2016	ME1601226023	4070	6.5	10	2334	38.7	41.5	3.5	0.57	0	0.001	189	<-0.001	119	<-0.001	946	0	0.003	<-0.001	<-0.001	<-0.001	1.02
BGW12	20/12/2016	ME1601793021	2750	6.2	10	1599	27.8	25.1	5.19	0.06	0	<-0.001	134	<-0.001	84	<-0.001	664	0	0.003	<-0.001	<-0.001	<-0.001	0.32
BGW14	8/01/2014	ME1400790111	1850	7	494	1248	19.3	20	1.77	0.02	0	<-0.001	513	<-0.001	106	<-0.001	176	<-0.001	<-0.001	<-0.001	<-0.001	<-0.001	<-0.05
BGW14	2/04/2014	ME140540007	1840	6.9	480	1252	19.6	19.6	0.05	0.04	0	<-0.001	513	<-0.001	105	<-0.001	188	<-0.001	<-0.001	<-0.001	<-0.001	<-0.001	<-0.05
BGW14	23/07/2014	ME1401051011	1740	6.8	217	1264	19.6	19.9	0.72	<-0.01	0	<-0.001	564	<-0.001	110	<-0.001	188	<-0.001	<-0.001	<-0.001	0.002	<-0.001	<-0.05
BGW14	8/10/2014	ME1405120111	1780	6.9	189	1264	20.6	17.7	7.75	<-0.01	<-0.001	<-0.001	566	<-0.001	95	<-0.001	197	<-0.001	<-0.001	<-0.001	0.001	<-0.001	<-0.05
BGW14	7/02/2015	ME1500221025	1770	6.8	261	1245	19.6	19.9	0.78	0.03	0	<-0.001	508	<-0.001	110	<-0.001	183	0	<-0.001	<-0.001	0.002	<-0.001	<-0.05
BGW14	1/05/2015	ME150069009	1840	6.8	185	1345	20.5	22.6	4.79	<-0.01	0	<-0.001	544	<-0.001	121	<-0.001	186	0	<-0.001	<-0.001	0.002	<-0.001	<-0.05
BGW14	11/08/2015	ME1510328032	1850	6.7	274	1338	0	0	0	0.07	0	<-0.001	603	<-0.001	121	<-0.001	154	0	<-0.001	<-0.001	0.002	<-0.001	<-0.05
BGW14	28/10/2015	ME1510717018	1860	6.8	61	1344	0	0	0	0.02	0	<-0.001	580	<-0.001	116	<-0.001	175	0	<-0.001	<-0.001	0.001	<-0.001	<-0.05
BGW14	25/02/2016	ME160265036	1830	6.7	19	1310	20.2	21.4	2.87	<-0.01	0	<-0.001	503	<-0.001	121	<-0.001	191	0	<-0.001	<-0.001	0.002	<-0.001	<-0.05
BGW14	25/05/2016	ME160073012	1820	6.7	57	1428	22.9	21.1	4.05	0.08	0	<-0.001	618	<-0.001	126	<-0.001	215	0	<-0.001	<-0.001	0.002	<-0.001	<-0.05
BGW14	7/09/2016	ME1601226057	1880	6.8	44	1381	21.4	22.2	2.02	<-0.01	0	<-0.001	542	<-0.001	128	<-0.001	195	0	<-0.001	<-0.001	<-0.001	<-0.001	<-0.05
BGW14	21/12/2016	ME1601793033	1560	6.7	201	1030	16.6	15.8	2.53	0.18	0	<-0.001	391	<-0.001	86	<-0.001	209	0	<-0.001	<-0.001	<-0.001	<-0.001	<-0.05
BGW15	13/01/2014	ME1400079012	3100	7.4	30	2412	34.6	37.1	3.42	0.06	0	<-0.001	860	<-0.001	101	<-0.001	181	<-0.001	<-0.001	<-0.001	<-0.001	<-0.001	<-0.05
BGW15	9/04/2014	ME140540009	3180	7.2	11	2294	34.1	33.2	1.41	0.08	0	0.001	848	<-0.001	98	<-0.001	195	<-0.001	<-0.001	<-0.001	<-0.001	<-0.001	<-0.05
BGW15	22/07/2014	ME1401051012	2990	7.1	4	2463	36.3	35.4	1.3	0.06	0	0.001	1030	<-0.001	99	<-0.001	187	<-0.001	<-0.001	<-0.001	<-0.001	<-0.001	<-0.05
BGW15	8/10/2014	ME140512012	3020	7.3	17	2508	35.1	38.3	6.23	0.06	<-0.001	0	0.001	1030	<-0.001	92	<-0.001	186	<-0.001	<-0.001	<-0.001	<-0.001	<-0.05
BGW15	7/02/2015	ME1500221026	2840	7.2	30	2225	32.5	32.3	0.36	0.11	0	0.002	931	<-0.001	83	<-0.001	155	0	<-0.001	<-0.001	0.002	<-0.001	<-0.05
BGW15	1/05/2015	ME150069010	2880	7.2	23	2312	33.1	35.1	2.85	0.08	0	0.002	954	<-0.001	98	<-0.001	160	0	<-0.001	<-0.001	0.002	<-0.001	<-0.05
BGW15	11/08/2015	ME1510328033	2970	7.2	38	2205	0	0	0	0.09	0	0.001	907	<-0.001	100	<-0.001	138	0	<-0.001	<-0.001	0.002	<-0.001	<-0.05
BGW15	28/10/2015	ME1510717019	2920	7.2	8	2262	0	0	0	0.11	0	0.001	982	<-0.001	90	<-0.001	151	0	<-0.001	<-0.001	<-0.001	<-0.001	<-0.05
BGW15	25/02/2016	ME160265037	2790	7.2	5	2201	31.5	33.4	2.89	0.06	0	0.001	862	<-0.001	92	<-0.001	158	0	<-0.001	<-0.001	<-0.001	<-0.001	<-0.05
BGW15	25/05/2016	ME160733013	2750	7.1	11	2363	34.2	34.3	0.09	0.06	0	<-0.001	1030	<-0.001	87	<-0.001	156	0	<-0.001	<-0.001	<-0.001	<-0.001	<-0.05
BGW15	7/06/2016	ME1601226058	2910	7.2	6	2296	32.6	35.8	4.71	0.09	0	<-0.001	913	<-0.001	101	<-0.001	168	0	<-0.001	<-0.001	<-0.001	<-0.001	<-0.05
BGW15	21/12/2016	ME1601793034	2980	7.4	15	2194	32.1	32.7	0.9	<-0.01	0	<-0.001	840	<-0.001	93	<-0.001	191	0	<-0.001	<-0.001	<-0.001	<-0.001	<-0.05
BGW16	14/10/2013	ME1400079054	1380	7.4	16	956	14	14.3	0.78	<-0.01	0	<-0.001	556	<-0.001	76	<-0.001	69	<-0.001	<-0.001	<-0.001	<-0.001	<-0.001	<-0.05
BGW16	13/01/2014	ME1400079013	1240	7.6	5	897	13.1	13.6	2.02	0.02	0	<-0.001	500	<-0.001	51	<-0.001	74	<-0.001	<-0.001	<-0.001	<-0.001	<-0.001	<-0.05
BGW16	9/04/2014	ME140540010	1300	7.4	8	888	13.2	13.2	0.14	0.49	0	<-0.001	494	<-0.001	55	<-0.001	81	<-0.001	<-0.001	<-0.001	<-0.001	<-0.001	<-0.05
BGW16	22/07/2014	ME1401051013	1380	7	<2	1077	16	15.5	1.63	<-0.01	0	<-0.001	646	<-0.001	89	<-0.001	77	<-0.001	<-0.001	<-0.001	<-0.001	<-0.001	<-0.05
BGW16	8/10/2014	ME140512013	1390	7.2	3	1119	16.4	16.6	0.54	0.08	<-0.001	0	<-0.001	657	<-0.001	83	<-0.001	76	<-0.001	<-0.001	<-0.001	<-0.001	<-0.05
BGW16	7/02/2015	ME1500221027	1350	7.1	18	930	13.5	14.7	4.29	0.05	0	<-0.001	512	<-0.001	80	<-0.001	72	0	<-0.001	<-0.001	0.001	<-0.001	<-0.05
BGW16	1/05/2015	ME150069011	1340	7.2	13	1031	14.7	16.4	5.45	<-0.01	0	<-0.001	586	<-0.001	91	<-0.001	63	0	<-0.001	<-0.001	0.001	<-0.001	<-0.05
BGW16	11/08/2015	ME1510328034	1400	7.1	10	981	0	0	0	0.02	0	<-0.001	564	<-0.001	110	<-0.001	46	0	<-0.001	<-0.001	<-0.001	<-0.001	<-0.05
BGW16	28/10/2015	ME1510717020	1460	7.1	6	1129	0	0	0	0.02	0	<-0.001	642	<-0.001	112	<-0.001	77	0	<-0.001	<-0.001	<-0.001	<-0.001	<-0.05
BGW16	25/02/2016	ME160265038	1410	7.1	4	1028	14.6	17.2	8.4	0.07	0	<-0.001	547	<-0.001	104	<-0.001	77	0	<-0.001	<-0.001	<-0.001	<-0.001	<-0.05
BGW16	25/05/2016	ME160733014	1320	7.5	4	1052	15.8	15.2	1.69	<-0.01	0	<-0.001	607	<-0.001	76	<-0.001	79	0	<-0.001	<-0.001	<-0.001	<-0.001	<-0.05
BGW16	7/09/2016	ME1601226059	1310	7	<1	1008	14.1	16.7	8.51	<-0.01	0	<-0.001	584	<-0.001	106	<-0.001	62	0	<-0.001	<-0.001	<-0.001	<-0.001	<-0.05
BGW16	21/12/2016	ME1601793035	1280	7	<1	944	13.4	15	5.59	<-0.01	0	<-0.001	549	<-0.001	97	<-0.001	57	0	<-0.001	<-0.001	<-0.001	<-0.001	<-0.05
BGW17	14/10/2013	ME1400079055	1580	7.8	27	1278	17.7	17.8	0.38	<-0.01	0	0.002	814	<-0.001	22	<-0.001	34	<-0.001	<-0.001	<-0.001	0.002	<-0.001	<-0.05
BGW17	8/03/2014	ME140079014	1600	8.6	8	1264	16.9	18.7	4.78	0.03	0	0.003	696	<-0.001	8	88	32	<-0.001	<-0.001	<-0.001	0.003	<-0.001	<-0.05
BGW17	9/04/2014	ME1400540011	1470	8.3	5	1064	15	14.2	2.91	0.03	0	0.002	632	<-0.001	6	47	37	<-0.001	<-0.001	<-0.001	0.001	<-0.001	0.07
BGW17	22/07/2014	ME1401051014	1690	7.5	<2	1452	20.1	20.2	0.19	<-0.01	0	0.00											

Sample Location	Sampling Date	Sample Num	Electrical Conductivity @ 25 °C µS/cm	pH Value pH Unit	Total Suspended Solids mg/L	TDS (mg/L)	Total Anions mg/L	Total Cations mg/L	% Ionic Balance	Ammonia as N mg/L	Antimony - Dissolved mg/L	Arsenic - Dissolved mg/L	Bicarbonate Alkalinity as CaCO3 mg/L	Calcium - Dissolved mg/L	Calcium - Dissolved mg/L	Chloride mg/L	Chromium - Dissolved mg/L	Cobalt - Dissolved mg/L	Copper - Dissolved mg/L	Hydroxide Alkalinity as CaCO3 mg/L	Iron - Dissolved mg/L	
BGW17	25/02/2016	ME160285039	1620	8.9	<1	121.4	16.1	18.6	7.24	<<0.01	0	0.003	606	<0.0001	10	130	37	0	<0.001	<0.001	<0.05	
BGW17	25/05/2016	ME1600733015	1610	7.9	2	1412	19.5	19.9	1.04	<<0.01	0	0.002	911	<0.0001	29	<1	35	0	<0.001	<0.001	<0.05	
BGW17	7/09/2016	ME1601226060	1620	7.6	2	1352	18.4	19.8	3.6	0.05	0	<0.001	854	<0.0001	39	<1	35	0	<0.001	<0.001	<0.05	
BGW17	21/12/2016	ME1601793036	1650	8	1	1297	17.6	19	3.65	0.02	0	0.001	766	<0.0001	36	51	34	0	<0.001	<0.001	<0.05	
BGW18	9/01/2014	ME1400079015	956	7.2	17	716	9.82	10.2	0.02	0	0.003	160	<0.0001	94	<1	19	<0.001	<0.001	<0.001	<0.001	0.35	
BGW18	3/04/2014	ME1400540012	1050	7.2	21	792	11.7	12.5	3.17	0.1	0	<0.001	248	<0.0001	110	<1	20	<0.001	<0.001	<0.001	0.1	
BGW18	15/07/2014	ME1401051015	1030	7	6	858	11.9	11.2	3.18	0.2	0	<0.001	254	<0.0001	128	<1	14	<0.001	<0.001	<0.001	0.08	
BGW18	8/10/2014	ME1405120115	1140	6.9	25	877	12.4	11.7	2.64	0.18	<0.001	213	<0.0001	138	<1	20	<0.001	<0.001	<0.001	<0.001	7.25	
BGW18	6/02/2015	ME1500221029	1120	6.8	36	901	13.3	12.3	3.68	0.17	0	<0.001	172	<0.0001	130	<1	12	0	<0.001	<0.001	<0.001	10.5
BGW18	11/08/2015	ME1510328036	1130	6.7	50	845	0	0	0	0.17	0	<0.001	185	<0.0001	145	<1	11	0	0.002	<0.001	<0.001	11.8
BGW18	27/10/2015	ME1510717022	1160	6.8	26	898	0	0	0	0.16	0	<0.001	185	<0.0001	152	<1	14	0	0.002	<0.001	<0.001	10.9
BGW18	23/02/2016	ME1602850119	1140	6.6	24	925	13.2	12.4	2.97	0.18	0	<0.001	186	<0.0001	154	<1	13	0	<0.001	<0.001	<0.001	12
BGW18	25/05/2016	ME1600733016	1080	6.8	24	919	13.4	11.6	7.2	0.13	0	<0.001	198	<0.0001	145	<1	15	0	<0.001	<0.001	<0.001	10.3
BGW18	9/09/2016	ME1601226046	1160	6.7	16	906	12.9	12.5	1.54	0.14	0	<0.001	178	<0.0001	155	<1	14	0	<0.001	<0.001	<0.001	8.96
BGW18	21/12/2016	ME1601793037	1140	6.8	23	831	11.8	11.6	0.69	0.11	0	<0.001	162	<0.0001	146	<1	14	0	<0.001	<0.001	<0.001	8.54
BGW19	10/01/2014	ME1400079016	994	7	26	708	10.1	10.3	0.9	0.12	0	0.088	226	<0.0001	116	<1	11	<0.001	<0.001	<0.001	3.38	
BGW19	9/04/2014	ME1400540013	1010	6.8	22	729	10.2	11.1	4	0.17	0	0.087	229	<0.0001	127	<1	11	<0.001	<0.001	<0.001	4.17	
BGW19	21/07/2014	ME1401051016	964	6.5	12	776	11.3	10.9	1.64	0.11	0	0.089	260	<0.0001	128	<1	12	<0.001	<0.001	<0.001	4.43	
BGW19	14/10/2014	ME1401512016	978	6.9	23	727	10.6	10.1	2.18	0.11	<0.001	0.093	254	<0.0001	116	<1	11	<0.001	<0.001	<0.001	4.85	
BGW19	8/02/2015	ME1500221030	944	6.7	40	723	10.5	10.3	0.99	0.06	0	0.094	219	<0.0001	120	<1	12	0	<0.001	<0.001	<0.001	4.66
BGW19	30/04/2015	ME150659014	951	6.6	25	752	10.7	11.2	2.46	0.1	0	0.115	224	<0.0001	129	<1	12	0	<0.001	<0.001	<0.001	5.86
BGW19	19/08/2015	ME1510328037	957	6.6	18	732	0	0	0	0.11	0	0.084	234	<0.0001	126	<1	11	0	<0.001	<0.001	<0.001	4.95
BGW19	28/10/2015	ME1510717023	980	6.7	14	731	0	0	0	0.12	0	0.091	236	<0.0001	120	<1	12	0	<0.001	<0.001	<0.001	4.69
BGW19	25/02/2016	ME160285040	943	6.6	12	730	10.5	10.8	1.61	0.09	0	0.085	203	<0.0001	126	<1	13	0	<0.001	<0.001	<0.001	4.9
BGW19	19/05/2016	ME1600733017	899	6.6	16	745	11	10.2	3.96	0.08	0	0.084	230	0.0002	120	<1	13	0	<0.001	<0.001	<0.001	4.9
BGW19	8/09/2016	ME1601226073	954	6.6	18	694	9.8	10.4	2.92	0.07	0	0.087	212	<0.0001	120	<1	12	0	<0.001	<0.001	<0.001	5.28
BGW19	19/12/2016	ME1601793004	957	6.6	17	684	9.86	9.75	0.58	0.09	0	0.086	222	<0.0001	116	<1	13	0	<0.001	<0.001	<0.001	5.29
BGW20	10/01/2014	ME1400079017	780	6	50	538	7.28	7.51	1.57	0.22	0	0.065	41	<0.0001	47	<1	15	<0.001	<0.001	<0.001	20.6	
BGW20	9/04/2014	ME1400540014	832	6.1	18	553	7.81	7.8	0.03	0.15	0	0.066	45	<0.0001	48	<1	21	<0.001	<0.001	<0.001	21.9	
BGW20	21/07/2014	ME1401051017	744	6	18	578	8.07	7.69	2.4	<<0.01	0	<0.001	25	<0.0001	57	<1	16	<0.001	0.002	<0.001	<0.05	
BGW20	14/10/2014	ME1401512017	744	6.1	4	512	7.18	6.56	4.54	<<0.01	<0.001	<0.001	25	<0.0001	42	<1	17	<0.001	<0.001	<0.001	<0.05	
BGW20	8/02/2015	ME1500221031	745	5.9	16	536	7.76	7.65	0.7	<<0.01	0	<0.001	32	0.0001	48	<1	20	0	<0.001	0.004	<0.001	0.32
BGW20	29/04/2015	ME1500659015	739	5.9	8	483	7.41	6.25	8.44	0.04	0	<0.001	25	0.0001	46	<1	16	0	<0.001	<0.016	<0.001	0.06
BGW20	19/08/2015	ME1510328038	732	6.3	9	499	0	0	0	0.04	0	<0.001	26	<0.0001	45	<1	14	0	<0.001	<0.001	<0.001	<0.05
BGW20	22/10/2015	ME1510717024	653	6.4	3	507	0	0	0	0.03	0	<0.001	27	<0.0001	46	<1	18	0	<0.001	<0.001	<0.001	<0.05
BGW20	22/02/2016	ME160285005	760	5.9	12	521	7.41	6.44	6.98	1.02	0	<0.001	32	<0.0001	46	<1	20	0	<0.001	0.003	<0.001	0.06
BGW20	25/02/2016	ME160285047	1350	8.7	9	863	14.1	14.1	0.16	<<0.01	0	0.002	112	<0.0001	32	13	227	0	<0.001	0.002	<0.001	<0.05
BGW20	18/05/2016	ME1600733018	755	6.1	25	464	6.68	6.11	4.44	0.11	0	<0.004	30	<0.0001	43	<1	20	0	<0.001	<0.001	<0.001	13.1
BGW20	1/09/2016	ME1601226024	750	6	6	542	7.96	6.24	12	<<0.01	0	<0.001	28	<0.0001	44	<1	18	0	<0.001	<0.001	<0.001	<0.05
BGW20	19/12/2016	ME1601793005	745	6	2	485	6.91	5.85	8.34	<<0.01	0	0.001	36	<0.0001	44	<1	18	0	<0.001	<0.001	<0.001	<0.05
BGW21	8/01/2014	ME1400079018	2650	7.3	2	2045	31.4	32.6	1.79	0.08	0	<0.001	627	<0.0001	222	<1	239	<0.001	<0.001	<0.001	0.15	
BGW21	8/04/2014	ME1400540015	2750	7.2	2	1942	30.5	31	0.73	<0.01	0	<0.001	577	<0.0001	220	<1	255	<0.001	<0.001	<0.001	0.46	
BGW21	10/07/2014	ME1401051018	2540	6.8	<2	2285	35.4	35.6	0.3	<<0.01	0	<0.001	723	<0.0001	251	<1	273	<0.001	<0.001	<0.001	<0.05	
BGW21	11/10/2014	ME1401512018	2640	7	<2	2138	34.7	31.1	5.53	0.02	<0.001	<0.001	722	<0.0001	222	<1	284	<0.001	<0.001	<0.001	<0.05	
BGW21	9/02/2015	ME1500221032	2560	7.1	5	2053	32.3	32.4	0.16	0.02	0	<0.001	628	<0.0001	226	<1	261	0	<0.001	0.024	<0.001	<0.05
BGW21	1/05/2015	ME150659016	2600	7	4	2160	32.9	34.7	2.62	<<0.01	0	0.002	664	<0.0001	257	<1	253	0	<0.001	0.004	<0.001	<0.05
BGW21	19/08/2015	ME1510328039	2730	6.9	<1	2075	0	0	0	0.03	0	<0.001	632	<0.0001	286	<1	208	0	<0.001	0.009	<0.001	<0.05
BGW21	28/10/2015	ME1510717025	2650	6.9	<1	1620	0	0	0	<<0.01	0	<0.001	692	<0.0001	253	<1	88	0	<0.001	0.009	<0.001	<0.05
BGW21	25/02/2016	ME160285041	2420	7	<1	2107	33	33.7	1.06	<<0.01	0	<0.001	607	<0.0001	238	<1	257	0	<0.001	<0.014	<0.001	0.07

Sample Location	Sampling Date	Sample Num	Electrical Conductivity @ 25 C µs/cm	pH Value pH Unit	Total Suspended Solids mg/L	TDS (mg/L)	Calc	Total Anions mg/L	Total Cations mg/L	Ionic Balance %	Ammonia as N mg/L	Antimony - Dissolved mg/L	Arsenic - Dissolved mg/L	Bicarbonate Alkalinity as CaCO3 mg/L	Cadmium - Dissolved mg/L	Calcium - Dissolved mg/L	Carbonate Alkalinity as CaCO3 mg/L	Chloride mg/L	Chromium - Dissolved mg/L	Cobalt - Dissolved mg/L	Copper - Dissolved mg/L	Hydroxide Alkalinity as CaCO3 mg/L	Iron - Dissolved mg/L
BGW21	25/05/2016	ME1600730019	2400	7	1	2205	34.9	32.8	3.2	<-0.01	0	<-0.001	0	731	<-0.0001	226	<-0.0001	247	0	<-0.001	0.009	<-0.001	0.07
BGW21	7/09/2016	ME1601226061	2890	7	<1	2187	34.4	33.8	0.86	<-0.01	0	<-0.001	0	664	<-0.0001	244	<-0.0001	252	0	<-0.001	0.007	<-0.001	0.07
BGW21	21/12/2016	ME1601793038	2690	7.1	1	2059	32.5	32.1	0.53	<-0.01	0	<-0.001	0	645	<-0.0001	240	<-0.0001	274	0	<-0.001	0.008	<-0.001	0.06
BGW24	9/04/2014	ME1400079020	2180	7.1	27	1413	22.4	23.5	2.46	0.05	0	<-0.001	0	610	<-0.0001	137	<-0.0001	329	<-0.001	0.006	0.02	<-0.001	<-0.05
BGW24	8/04/2014	ME1400540017	1780	7	20	1126	17.7	18.2	1.4	0.61	0	<-0.001	0	545	<-0.0001	121	<-0.0001	210	<-0.001	0.003	0.026	<-0.001	<-0.05
BGW24	8/07/2014	ME1401051020	2330	6.8	17	1669	27.6	25.8	3.52	0.02	0	<-0.001	0	719	<-0.0001	164	<-0.0001	443	<-0.001	0.004	0.02	<-0.001	<-0.05
BGW24	21/10/2014	ME1401512020	2420	6.9	17	1762	28.8	28.4	0.59	0.03	<-0.001	0	<-0.001	710	<-0.0001	156	<-0.0001	476	<-0.001	0.004	0.026	<-0.001	<-0.05
BGW24	9/02/2015	ME1500221034	2330	6.9	24	1561	25.4	26.1	1.31	0.04	0	<-0.001	0	601	<-0.0001	160	<-0.0001	432	0	0.004	0.023	<-0.001	<-0.05
BGW24	1/05/2015	ME1500569018	2400	6.9	24	1660	26.2	28.7	4.5	<-0.01	0	<-0.001	0	658	<-0.0001	178	<-0.0001	422	0	0.003	0.025	<-0.001	<-0.05
BGW24	19/08/2015	ME1510328040	2070	6.8	23	1326	0	0	0	0.77	0	<-0.001	0	580	<-0.0001	173	<-0.0001	281	0	0.004	<-0.017	<-0.001	0.11
BGW24	28/10/2015	ME1510717026	2470	6.9	6	1604	0	0	0	<-0.01	0	<-0.001	0	688	<-0.0001	163	<-0.0001	412	0	0.003	0.031	<-0.001	<-0.05
BGW24	25/02/2016	ME1600285042	2310	6.9	8	1622	26	28.3	4.24	<-0.01	0	<-0.001	0	594	<-0.0001	179	<-0.0001	461	0	0.003	0.033	<-0.001	<-0.05
BGW24	25/05/2016	ME1600733020	2330	6.9	12	1783	28.6	29.3	1.1	<-0.01	0	<-0.001	0	745	<-0.0001	172	<-0.0001	112	0	0.002	0.033	<-0.001	<-0.05
BGW24	7/09/2016	ME1601226062	1120	6.9	5	742	11	13.1	8.64	<-0.01	0	<-0.001	0	368	<-0.0001	101	<-0.0001	198	<-0.001	<-0.001	0.028	<-0.001	<-0.05
BGW26	8/01/2014	ME1400079022	1610	7	2	1051	16.6	17.6	2.79	0.04	0	<-0.001	0	390	<-0.0001	54	<-0.0001	112	0	<-0.001	0.007	<-0.001	<-0.05
BGW26	2/04/2014	ME1400540019	1640	6.9	10	1052	17	17.2	0.81	0.02	0	<-0.001	0	380	<-0.0001	56	<-0.0001	214	<-0.001	<-0.001	0.008	<-0.001	<-0.05
BGW26	23/07/2014	ME1401051022	1640	6.5	4	1177	19.4	17.8	4.15	0.02	0	<-0.001	0	449	<-0.0001	62	<-0.0001	228	<-0.001	<-0.001	0.024	<-0.001	<-0.05
BGW26	8/10/2014	ME1401512022	1600	7	2	1086	18.1	16.2	5.5	<-0.01	<-0.001	0	<-0.001	420	<-0.0001	52	<-0.0001	220	<-0.001	<-0.001	0.007	<-0.001	<-0.05
BGW26	5/02/2015	ME1500221036	1630	6.9	5	1094	17.7	17.6	0.24	0.02	0	<-0.001	0	394	<-0.0001	59	<-0.0001	220	0	<-0.001	0.007	<-0.001	<-0.05
BGW26	1/05/2015	ME1500569020	1670	7	2	1155	18.2	19.7	3.75	<-0.01	0	<-0.001	0	414	<-0.0001	66	<-0.0001	224	0	<-0.001	0.006	<-0.001	<-0.05
BGW26	11/08/2015	ME1510328041	1700	6.7	1	1163	0	0	0	0.05	0	<-0.001	0	462	<-0.0001	63	<-0.0001	188	0	<-0.001	0.003	<-0.001	<-0.05
BGW26	28/10/2015	ME1510717027	1650	7	<1	1108	0	0	0	0.02	0	<-0.001	0	418	<-0.0001	57	<-0.0001	210	0	<-0.001	0.006	<-0.001	<-0.05
BGW26	25/02/2016	ME1600285043	1580	7.3	<1	1112	17.7	18.8	2.81	<-0.01	0	<-0.001	0	358	<-0.0001	61	<-0.0001	225	0	<-0.001	0.004	<-0.001	<-0.05
BGW26	11/08/2015	ME1510328042	477	6.8	<1	1185	19.4	18.1	3.51	<-0.01	0	<-0.001	0	449	<-0.0001	58	<-0.0001	223	0	<-0.001	0.005	<-0.001	<-0.05
BGW26	7/09/2016	ME1601226063	1640	7.1	<1	1143	18.2	18.8	1.75	<-0.01	0	<-0.001	0	399	<-0.0001	63	<-0.0001	218	0	<-0.001	0.001	<-0.001	<-0.05
BGW27	19/08/2015	ME1510328042	477	6.8	23	324	0	0	0	0.04	0	<-0.001	0	130	<-0.0001	33	<-0.0001	9	0	<-0.001	<-0.001	<-0.001	1.86
BGW27	22/10/2015	ME1510717028	486	7.4	24	345	0	0	0	0.03	0	<-0.001	0	144	<-0.0001	36	<-0.0001	11	0	<-0.001	<-0.001	<-0.001	1.56
BGW27	22/02/2016	ME1600285006	518	6.6	21	338	4.72	5.22	5.05	0.04	0	<-0.001	0	129	<-0.0001	34	<-0.0001	14	0	<-0.001	<-0.001	<-0.001	2.65
BGW27	18/05/2016	ME1600733022	452	7.4	47	313	4.6	4.29	3.49	<-0.01	0	<-0.001	0	132	<-0.0001	27	<-0.0001	12	0	<-0.001	<-0.001	<-0.001	2.28
BGW27	1/09/2016	ME1601226025	494	6.7	18	345	4.93	4.92	0.19	0.08	0	<-0.001	0	146	<-0.0001	32	<-0.0001	11	0	<-0.001	<-0.001	<-0.001	2.64
BGW27	19/12/2016	ME1601793006	479	6.8	10	304	4.4	4.35	0.49	0.03	0	<-0.001	0	127	<-0.0001	30	<-0.0001	12	0	<-0.001	<-0.001	<-0.001	1.76
BGW27A	10/01/2014	ME1400079023	288	6.2	54	182	2.53	2.31	4.55	<-0.01	0	0.077	0	55	0.0001	8	<-0.0001	10	<-0.001	0.026	0.008	<-0.001	9.87
BGW27A	9/04/2014	ME1400540020	312	5.9	24	189	2.59	2.52	0.06	0.06	0	0.075	0	52	<-0.0001	9	<-0.0001	10	<-0.001	0.023	0.001	<-0.001	10.8
BGW27A	21/07/2014	ME1401051023	299	5.9	39	196	2.82	2.4	0.02	0.02	0	0.063	0	57	<-0.0001	9	<-0.0001	11	<-0.001	0.022	<-0.001	<-0.001	10.1
BGW27A	14/10/2014	ME1401512023	283	6.2	54	212	3.04	2.74	0.07	<-0.01	<-0.001	0.07	0	51	<-0.0001	10	<-0.0001	20	<-0.001	0.025	<-0.001	<-0.001	12.5
BGW27A	8/02/2015	ME1500221037	302	5.9	52	187	2.67	2.38	0.056	<-0.01	0	0.056	0	42	<-0.0001	9	<-0.0001	11	0	0.026	0.001	<-0.001	9.93
BGW27A	29/04/2015	ME1500569021	307	5.8	60	197	2.73	2.71	0.02	0.02	0	0.056	0	39	<-0.0001	10	<-0.0001	9	0	0.024	<-0.001	<-0.001	11.3
BGW27A	19/08/2015	ME1510328043	310	6	18	194	0	0	0.02	0.02	0	0.044	0	48	<-0.0001	9	<-0.0001	9	0	0.02	<-0.001	<-0.001	9.78
BGW27A	22/10/2015	ME1510717029	285	6	37	111	0	0	0.06	0.06	0	0.05	0	22	<-0.0001	9	<-0.0001	3	0	0.023	<-0.001	<-0.001	11.8
BGW27A	22/02/2016	ME1600285007	313	6	34	188	2.69	2.4	0	0.03	0	0.042	0	52	<-0.0001	8	<-0.0001	12	0	0.022	<-0.001	<-0.001	9.48
BGW27A	18/05/2016	ME1600733023	295	6.1	32	175	2.34	2.38	0.74	<-0.01	0	0.064	0	52	<-0.0001	8	<-0.0001	10	0	0.022	<-0.001	<-0.001	13
BGW27A	1/09/2016	ME1601226026	305	5.9	21	193	2.78	2.28	0	0.11	0	0.049	0	57	<-0.0001	8	<-0.0001	11	0	0.021	<-0.001	<-0.001	11.2
BGW27A	19/12/2016	ME1601793007	283	6	17	169	2.5	2.29	0	<-0.01	0	<-0.001	0	52	<-0.0001	6	<-0.0001	12	0	<-0.001	0.004	<-0.001	2.99
BGW28	1/09/2016	ME1601226027	188	5.8	14	101	1.49	1.55	0	0.04	0	<-0.001	0	14	0.0004	8	<-0.0001	17	0	<-0.001	0.008	<-0.001	0.07
BGW29	9/01/2014	ME1400079024	480	7.2	670	299	4.61	4.56	0.5	<-0.01	0	<-0.001	0	110	<-0.0001	29	<-0.0001	4	<-0.001	<-0.001	<-0.001	<-0.001	<-0.05
BGW29	2/04/2014	ME1400540021	573	6.8	242	310	5.44	5.66	1.96	0.02	0	<-0.001	0	59	<-0.0001	39	<-0.0001	4	<-0.001	<-0.001	<-0.001	<-0.001	<-0.05
BGW29	15/07/2014	ME1401051024	618	6.7	466	433	6.27	6.43	1.2	<-0.01	0	<-0.001	0	116	<-0.0001	46	<-0.0001	3	<-0.001	<-0.001	0.001	<-0.001	<-0.05
BGW29	8/10/2014	ME1401512024	626	6.9	1162	429	6.31	6.26	0	<-0.01	<-0.001	0	<-0.001	128	<-0.0001	43	<-0.0001	4	<-0.001	<-0.001	<-0.001	<-0.001	<-0.05
BGW29	6/02/2015	ME1500221038	593	7	47	398	5.8	5.92	1.04	0.02	0	<-0.001	0	120	<-0.0001	45	<-0.0001	4	0	<-0.001	0.005	<-0.001	<-0.05
BGW29	30/04/2015	ME1500569022	472	6.7	227	328	4.59	5.2	6.18	0.03	0	<-0.001	0	75	<-0.0001	36	<-0.0001	2	0	<-0.001	0.006	<-0.001	<-0.05

Sample Location	Sampling Date	Sample Num	Electrical Conductivity @ 25°C µS/cm	pH Value pH	Total Solids mg/L	TDS (mg/L)	Total Anions mg/L	Total Cations mg/L	% Ionic Balance	Ammonia as N mg/L	Antimony - Dissolved mg/L	Arsenic - Dissolved mg/L	Bicarbonate Alkalinity as CaCO3 mg/L	Calcium - Dissolved mg/L	Calcium - Dissolved mg/L	Chloride mg/L	Chromium - Dissolved mg/L	Cobalt - Dissolved mg/L	Copper - Dissolved mg/L	Hydroxide Alkalinity as CaCO3 mg/L	Iron - Dissolved mg/L
BGW29	11/08/2015	ME1510328046	211	6.7	3	151	0	0	0	0.05	0	<-0.001	70	<-0.0001	12	2	0	<-0.001	0.002	<-0.001	<-0.05
BGW29	27/10/2015	ME1510717030	284	6.9	229	201	0	0	0	0.03	0	<-0.001	94	<-0.0001	18	6	0	<-0.001	0.002	<-0.001	<-0.05
BGW29	23/02/2016	ME1600265020	250	7.1	7	159	2.19	2.49	0	0.02	0	<-0.001	59	<-0.0001	14	5	0	<-0.001	0.001	<-0.001	<-0.05
BGW29	25/05/2016	ME1600733024	325	6.7	57	214	3.14	3.04	1.67	<-0.01	0	<-0.001	82	0.0002	20	6	0	<-0.001	0.001	<-0.001	<-0.05
BGW29	5/09/2016	ME1601226047	167	7.1	5	119	1.19	1.66	0	<-0.01	0	<-0.001	58	<-0.0001	10	3	0	<-0.001	0.002	<-0.001	<-0.05
BGW29	21/12/2016	ME1601793039	194	7.2	2	129	1.8	1.94	3.7	<-0.01	0	<-0.001	79	<-0.0001	14	2	0	<-0.001	0.002	<-0.001	<-0.05
BGW30	9/04/2014	ME1400799026	3080	7.2	<2	1870	30.3	32.1	2.87	<-0.01	0	<-0.001	692	0.0002	194	566	<-0.001	<-0.001	0.053	<-0.001	0.57
BGW32	8/04/2014	ME1400540023	3110	7	5	1842	30.5	30.8	0.41	0.02	0	<-0.001	665	<-0.0001	202	592	<-0.001	<-0.001	0.082	<-0.001	<-0.05
BGW33	9/01/2014	ME1400079027	1280	8.1	7	897	13.2	14.5	4.7	0.07	0	<-0.001	508	<-0.0001	60	28	0	<-0.001	0.021	<-0.001	<-0.05
BGW33	8/07/2014	ME1401051026	633	8.4	<2	465	7.02	7.1	0.55	<-0.01	0	0.001	259	<-0.0001	25	41	0	<-0.001	0.004	<-0.001	<-0.05
BGW33	25/02/2016	ME1600285044	849	7.9	<1	590	8.56	10.3	9.28	<-0.01	0	<-0.001	346	<-0.0001	52	47	0	<-0.001	0.007	<-0.001	<-0.05
BGW35	8/04/2014	ME1400540024	2900	7	2	1837	30.1	31	1.38	0.12	0	<-0.001	518	<-0.0001	266	<-0.001	<-0.001	0.005	<-0.001	<-0.001	<-0.05
BGW35	12/07/2014	ME1401051027	2710	7	<2	1964	33.1	30.7	3.87	<-0.01	0	<-0.001	600	<-0.0001	251	546	<-0.001	<-0.001	<-0.01	<-0.001	<-0.05
BGW35	13/10/2014	ME1401512026	2870	7	2	1919	31.9	30.9	1.6	<-0.01	<-0.001	<-0.001	611	<-0.0001	259	506	<-0.001	0.004	<-0.001	<-0.001	<-0.05
BGW35	8/02/2015	ME1500221039	2820	6.8	3	1816	30.3	30.4	0.18	0.03	0	<-0.001	451	<-0.0001	264	545	0	<-0.001	0.008	<-0.001	<-0.05
BGW35	1/05/2015	ME1500659023	2910	6.8	4	1985	32	34	3.02	<-0.01	0	<-0.001	539	<-0.0001	311	531	0	<-0.001	0.002	<-0.001	<-0.05
BGW35	19/08/2015	ME1510328045	2910	6.8	4	1942	0	0	0	0.04	0	<-0.001	508	<-0.0001	351	482	0	<-0.001	0.008	<-0.001	<-0.05
BGW35	28/10/2015	ME1510717031	2890	6.8	<1	1921	0	0	0	0.03	0	<-0.001	550	<-0.0001	310	492	0	<-0.001	0.003	<-0.001	<-0.05
BGW35	25/02/2016	ME1600285045	2620	7	15	1975	32.5	33.8	1.9	<-0.01	0	<-0.001	487	<-0.0001	305	566	0	<-0.001	0.002	<-0.001	<-0.05
BGW35	25/05/2016	ME1600733025	2590	6.8	2	1920	31.5	31.6	0.22	<-0.01	0	<-0.001	615	<-0.0001	274	497	0	<-0.001	0.003	<-0.001	<-0.05
BGW35	7/09/2016	ME1601226064	2940	6.9	2	1951	32.1	32.1	0.04	<-0.01	0	<-0.001	562	<-0.0001	276	509	0	<-0.001	0.002	<-0.001	<-0.05
BGW35	21/12/2016	ME1601793040	3660	7	<1	2398	40.5	39.3	1.46	<-0.01	0	<-0.001	613	<-0.0001	304	738	0	<-0.001	0.003	<-0.001	<-0.05
BGW36	7/04/2014	ME1400079028	1230	8	3	892	13.7	13.9	0.55	0.14	0	<-0.001	509	<-0.0002	36	84	<-0.001	<-0.011	<-0.001	<-0.001	<-0.05
BGW36	7/04/2014	ME1400540025	1170	7.8	5	784	12	12.6	2.37	0.02	0	<-0.001	447	0.0002	21	86	<-0.001	0.046	<-0.001	<-0.001	<-0.05
BGW36	23/07/2014	ME1401051028	1240	7.8	<2	958	14.9	14.3	2.24	0.09	0	<-0.001	590	<-0.0011	39	87	<-0.001	0.009	<-0.001	<-0.001	<-0.05
BGW36	14/10/2014	ME1401512027	1200	8	2	902	14.3	12.9	5.16	<-0.01	<-0.001	<-0.001	514	<-0.0001	25	95	<-0.001	0.006	<-0.001	<-0.001	<-0.05
BGW36	4/02/2015	ME1500221040	1360	8.6	103	973	15.5	12.7	10	0.06	0	0.001	537	<-0.0001	6	104	0	<-0.001	0.004	<-0.001	<-0.05
BGW36	29/04/2015	ME1500659024	1270	7.7	6	970	14	15.8	5.93	<-0.01	0	<-0.001	582	<-0.0001	43	58	0	<-0.001	0.005	<-0.001	<-0.05
BGW36	18/08/2015	ME1510328046	1160	8.3	8	823	0	0	0	0.03	0	<-0.001	469	<-0.0001	19	32	0	<-0.001	0.002	<-0.001	<-0.05
BGW36	22/10/2015	ME1510717032	1120	8.4	4	878	0	0	0	<-0.01	0	0.001	429	<-0.0001	6	60	0	<-0.001	0.002	<-0.001	<-0.05
BGW36	24/02/2016	ME1600285034	1100	8.5	6	836	12.4	13.5	4.4	<-0.01	0	<-0.001	451	<-0.0001	9	63	0	<-0.001	0.002	<-0.001	<-0.05
BGW36	27/05/2016	ME1600733026	1220	8	<1	976	14.3	15.4	3.65	<-0.01	0	<-0.001	596	<-0.0001	30	65	0	<-0.001	<-0.001	<-0.001	<-0.05
BGW36	5/09/2016	ME1601226048	1150	8.4	1	844	12.4	13.6	4.53	0.03	0	<-0.001	460	<-0.0001	13	37	0	<-0.001	0.001	<-0.001	<-0.05
BGW36	20/12/2016	ME1601793022	1100	7.6	<1	790	12	12	0.4	<-0.01	0	<-0.001	532	0.0001	70	36	0	<-0.001	0.004	<-0.001	<-0.05
BGW37	9/01/2014	ME1400079029	2590	7.1	5	1672	26.9	28.3	2.64	0.02	0	<-0.001	490	<-0.0001	229	426	<-0.001	<-0.01	<-0.001	<-0.001	<-0.05
BGW37	8/04/2014	ME1400540026	2720	6.9	3	1736	28	29.6	2.83	0.02	0	<-0.001	485	0.0001	253	449	<-0.001	0.022	<-0.001	<-0.001	<-0.05
BGW37	8/07/2014	ME1401051029	2670	6.8	3	1996	32.8	31.1	2.75	<-0.01	0	<-0.001	604	<-0.0001	263	466	<-0.001	0.007	<-0.001	<-0.001	<-0.05
BGW37	21/10/2014	ME1401512028	2830	6.9	2	1944	31.9	30.8	1.84	0.02	<-0.001	<-0.001	601	<-0.0001	266	460	<-0.001	0.065	<-0.001	<-0.001	<-0.05
BGW38	9/01/2014	ME1400079030	2390	7.2	105	2077	31.3	30.4	1.43	0.43	0	0.002	383	<-0.0001	295	12	<-0.001	0.002	<-0.001	<-0.001	0.27
BGW38	2/04/2014	ME1400540027	2420	7.2	123	2035	29.8	31.9	3.38	0.46	0	0.001	390	<-0.0001	16	60	0	<-0.001	0.002	<-0.001	<-0.05
BGW38	15/07/2014	ME1401051030	2380	6.7	2	2282	34.1	32.9	1.71	0.48	0	0.002	436	0.0002	324	13	<-0.001	<-0.001	<-0.001	<-0.001	0.36
BGW38	8/10/2014	ME1401512029	2470	7.1	187	2066	30.8	31.2	0.56	0.49	<-0.001	0.002	433	<-0.0001	309	26	<-0.001	<-0.001	<-0.001	<-0.001	0.66
BGW38	6/02/2015	ME1500221041	2380	7	231	2228	34.2	31.3	4.48	0.46	0	0.004	396	<-0.0001	308	0	0.005	0.001	<-0.001	<-0.001	0.12
BGW38	30/04/2015	ME1500659025	2500	7	240	2301	33.6	36.2	3.79	0.52	0	<-0.016	400	0.0001	361	13	0	0.006	<-0.001	<-0.001	4.76
BGW38	11/08/2015	ME1510328047	2500	7.1	34	2518	0	0	0	0.51	0	0.003	454	<-0.0001	400	11	0	<-0.001	<-0.001	<-0.001	0.71
BGW38	27/10/2015	ME1510717033	2510	7.1	164	2322	0	0	0	0.55	0	0.002	427	<-0.0001	356	12	0	<-0.001	<-0.001	<-0.001	0.37
BGW38	23/02/2016	ME1600285021	2430	7	106	2562	39.3	36.1	4.24	0.46	0	0.002	427	<-0.0001	363	12	0	<-0.001	<-0.001	<-0.001	0.46
BGW38	25/05/2016	ME1600733027	2330	6.8	40	2478	38.2	34.4	5.3	0.39	0	0.002	436	<-0.0001	345	13	0	0.002	<-0.001	<-0.001	0.71
BGW38	5/09/2016	ME1601226049	944	7	56	727	10.8	10.9	0.77	<-0.01	0	<-0.001	126	<-0.0001	111	3	0	<-0.001	0.001	<-0.001	<-0.05
BGW38	21/12/2016	ME1601793041	1110	7.3	60	818	12.2	12.3	0.56	<-0.01	0	<-0.001	124	<-0.0001	133	3	0	<-0.001	0.001	<-0.001	<-0.05

Sample Location	Sampling Date	Sample Num	Electrical Conductivity @ 25 C µs/cm	pH Value pH Unit	Total Solids mg/L	TDS (mg/L)	Calc	Total Anions mg/L	Total Cations mg/L	Ion Balance %	Ammonia as N mg/L	Antimony - Dissolved mg/L	Arsenic - Dissolved mg/L	Bicarbonate Alkalinity as CaCO3 mg/L	Cadmium - Dissolved mg/L	Calcium - Dissolved mg/L	Chloride mg/L	Chromium - Dissolved mg/L	Cobalt - Dissolved mg/L	Copper - Dissolved mg/L	Hydroxide Alkalinity as CaCO3 mg/L	Iron - Dissolved mg/L
BGW39	9/01/2014	ME140079031	1320	7.3	8	972	14.4	14.9	14.9	1.74	0.04	0	<-0.001	582	<-0.0001	102	55	<-0.001	<-0.001	0.002	<-0.001	<-0.05
BGW39	3/04/2014	ME140054028	1290	7.3	4	906	13.3	14.7	14.7	5.19	0.06	0	<-0.001	507	<-0.0001	99	61	<-0.001	<-0.001	<-0.001	<-0.001	0.26
BGW39	13/07/2014	ME1401051031	1260	7	163	1022	15.4	15	15.4	1.47	<-0.01	0	<-0.001	611	<-0.0001	102	58	<-0.001	<-0.001	<-0.001	<-0.001	0.23
BGW39	21/10/2014	ME1401512030	1250	7.2	6	996	15.5	13.8	13.8	5.82	<-0.01	<-0.001	<-0.001	609	<-0.0001	90	68	<-0.001	<-0.001	<-0.001	<-0.001	<-0.05
BGW39	6/02/2015	ME150221042	1250	7.3	12	957	14.5	14.3	14.3	0.6	0.03	0	<-0.001	566	<-0.0001	106	61	0	<-0.001	0.002	0.002	<-0.05
BGW39	1/05/2015	ME1500659026	1270	7.3	6	974	14.2	15.8	15.8	5.55	0.02	0	<-0.001	564	<-0.0001	106	48	0	<-0.001	0.005	0.005	<-0.05
BGW39	19/08/2015	ME1510328048	1220	7.2	12	883	0	0	0	0	0.03	0	<-0.001	498	<-0.0001	96	45	0	<-0.001	0.002	0.002	<-0.05
BGW39	27/10/2015	ME1510717034	1230	7.3	2	959	0	0	0	0	0.03	0	<-0.001	581	<-0.0001	99	54	0	<-0.001	<-0.001	<-0.001	<-0.05
BGW39	24/02/2016	ME160265035	1190	7.4	4	971	14.3	15.1	15.1	2.47	<-0.01	0	<-0.001	577	<-0.0001	100	49	0	<-0.001	<-0.001	<-0.001	<-0.05
BGW39	25/05/2016	ME1600733028	1170	7.2	4	963	15	13.1	13.1	6.87	<-0.01	0	<-0.001	604	<-0.0001	89	54	0	<-0.001	<-0.001	<-0.001	<-0.05
BGW39	8/09/2016	ME1601226074	1100	7.2	2	804	11.6	13.1	13.1	6.16	<-0.01	0	<-0.001	480	<-0.0001	101	38	0	<-0.001	<-0.001	<-0.001	<-0.05
BGW39	21/12/2016	ME1601793042	1080	7.7	2	784	11.6	12.1	12.1	1.96	<-0.01	0	<-0.001	460	<-0.0001	74	43	0	<-0.001	<-0.001	<-0.001	<-0.05
BGW40	6/01/2014	ME140079932	931	5.9	100	737	10.5	10	2.34	0.25	0	0	0.002	52	<-0.0001	27	58	<-0.001	0.082	0.001	0.001	144
BGW40	4/04/2014	ME1400540029	888	5.7	48	696	9.7	10.4	3.31	0.54	0	0	0.002	64	<-0.0001	22	62	<-0.001	0.135	<-0.001	<-0.001	140
BGW40	18/07/2014	ME1401051032	1040	5.4	13	773	11.5	13.3	7.1	0.17	0	0	0.005	45	<-0.0001	9	68	0.003	0.176	<-0.001	<-0.001	142
BGW40	9/10/2014	ME1401512031	1030	5.4	37	750	10.9	13.8	11.8	0.2	0	<-0.001	0.006	15	<-0.0001	8	76	0.003	0.176	<-0.001	<-0.001	150
BGW40	7/02/2015	ME1500221043	1030	5.4	28	809	12.4	13.8	5.29	0.15	0	0	0.007	25	<-0.0001	8	70	0	0.176	<-0.001	<-0.001	142
BGW40	30/04/2015	ME1500659027	1020	5.3	31	771	11.1	14.2	12.3	0.22	0	0	0.008	12	<-0.0001	10	55	0	0.177	0.003	<-0.001	148
BGW40	14/08/2015	ME1510328049	1030	5.3	61	761	0	0	0	0.18	0	0	0.005	24	<-0.0001	10	66	0	0.168	<-0.001	<-0.001	157
BGW40	21/10/2015	ME1510717035	1030	5.2	59	732	0	0	0	0	0.19	0	0.005	10	<-0.0001	10	64	0	0.178	<-0.001	<-0.001	157
BGW40	22/02/2016	ME160265008	1060	5.4	12	829	12	14.7	9.98	0.19	0	0	0.007	32	<-0.0001	13	63	0	0.172	<-0.001	<-0.001	126
BGW40	19/05/2016	ME1600733029	992	5.3	34	771	11.4	13.3	7.72	0.2	0	0	0.005	24	<-0.0001	10	65	0	0.164	<-0.001	<-0.001	147
BGW40	20/12/2016	ME1601226028	1060	5.2	30	769	11.5	12.9	5.57	0.29	0	0	0.003	9	<-0.0001	12	66	0	0.168	0.008	<-0.001	148
BGW41	4/04/2014	ME1400540030	1140	7.6	24	783	10.9	11.1	1.06	0.42	0	0	0.005	24	<-0.0001	9	66	0	0.168	<-0.001	<-0.001	157
BGW41	18/07/2014	ME1401051033	1240	7.2	8	991	14.1	13.3	3.13	0.16	0	0	0.008	625	<-0.0001	24	50	<-0.001	0.172	<-0.001	<-0.001	0.37
BGW41	9/10/2014	ME1401512032	1240	7.5	16	999	14.2	13.5	2.43	0.19	<-0.001	0	0.008	629	<-0.0001	20	45	<-0.001	0.172	<-0.001	<-0.001	0.53
BGW41	7/02/2015	ME1500221044	1300	7.2	21	983	14.1	13.5	2.23	0.1	0	<-0.001	0.008	592	<-0.0001	29	51	0	0.164	<-0.001	<-0.001	0.34
BGW41	30/04/2015	ME1500659028	1260	7.2	32	1010	13.8	15.2	4.93	0.1	0	0	<-0.01	580	<-0.0001	33	42	0	0.164	<-0.001	<-0.001	0.94
BGW41	14/08/2015	ME1510328052	1260	7.2	32	921	0	0	0	0.2	0	0	0.008	536	<-0.0001	32	37	0	0.168	0.002	<-0.001	0.92
BGW41	21/10/2015	ME1510717036	1310	7.2	30	946	0	0	0	0.16	0	0	0.007	518	<-0.0001	32	53	0	0.168	<-0.001	<-0.001	2.35
BGW41	22/02/2016	ME160265009	1310	7.1	11	936	12.9	14.1	4.65	0.13	0	0	0.003	520	<-0.0001	34	47	0	0.168	<-0.011	<-0.001	0.66
BGW41	19/05/2016	ME1600733030	1300	6.9	8	1101	15.1	16.8	5.46	0.07	0	0	0.002	608	<-0.0001	34	54	0	0.168	<-0.001	<-0.001	0.37
BGW41	1/09/2016	ME1601226029	1290	7.2	9	1061	15.2	14.6	1.96	0.04	0	0	0.002	616	<-0.0001	39	47	0	0.168	<-0.001	<-0.001	0.81
BGW41	20/12/2016	ME1601793024	1360	7	11	970	13.8	14	0.91	<-0.01	<-0.001	0	0.002	530	<-0.0001	41	52	0	0.168	<-0.001	<-0.001	<-0.05
BGW42	6/01/2014	ME1400799033	892	6.3	30	603	9.13	8.84	1.68	0.14	0	0	0.025	131	<-0.0001	55	48	<-0.001	0.002	0.002	<-0.001	16.5
BGW42	4/04/2014	ME1400540031	874	6.3	35	612	9.15	9.24	0.46	0.14	0	0	0.021	138	<-0.0001	59	51	<-0.001	0.002	<-0.001	<-0.001	16.3
BGW42	18/07/2014	ME1401051034	877	6	10	648	9.88	9.58	1.52	0.08	0	0	<-0.018	136	<-0.0001	63	62	0.001	0.008	<-0.001	<-0.001	34
BGW42	9/10/2014	ME1401512033	888	6.3	66	634	9.48	9.89	2.11	0.13	0	<-0.001	0.02	130	<-0.0001	63	61	<-0.001	0.008	<-0.001	<-0.001	16.1
BGW42	7/02/2015	ME1500221045	922	6.1	48	657	10.3	11.2	4.26	0.24	0	0	0.02	126	<-0.0001	66	56	0	0.008	0.002	<-0.001	14.6
BGW42	30/04/2015	ME1500659029	902	6.1	23	650	9.65	10.1	2.45	0.08	0	0	<-0.017	126	<-0.0001	66	44	0	0.009	<-0.001	<-0.001	15.9
BGW42	11/08/2015	ME1510328051	925	6.2	14	591	0	0	0	0.1	0	0	<-0.016	134	<-0.0001	64	34	0	0.008	0.001	<-0.001	15.3
BGW42	27/10/2015	ME1510717037	927	5.9	28	660	0	0	0	0.12	0	0	<-0.016	132	<-0.0001	65	50	0	0.008	<-0.001	<-0.001	13.9
BGW42	23/02/2016	ME160265022	917	6.2	7	686	10.4	10.1	1.76	0.13	0	0	0.016	139	<-0.0001	68	44	0	0.009	<-0.001	<-0.001	13.5
BGW42	19/05/2016	ME1600733031	917	6.1	20	665	10.2	9.76	2.03	0.09	0	0	<-0.012	138	<-0.0001	65	48	0	0.007	<-0.001	<-0.001	15.1
BGW42	6/09/2016	ME1601226065	974	6.1	9	715	10.9	10.4	2.66	0.19	0	0	<-0.014	144	<-0.0001	67	48	0	0.008	<-0.001	<-0.001	15.4
BGW42	20/12/2016	ME1601793025	981	6.1	12	676	10.5	9.57	4.5	0.13	0	0	<-0.015	120	<-0.0001	67	53	0	0.008	<-0.001	<-0.001	15.1
BGW43	6/01/2014	ME1400799034	1710	6.9	31	821	12.4	12	1.74	0.22	0	0	<-0.001	194	<-0.0001	122	32	<-0.001	0.008	<-0.001	<-0.001	4.48
BGW43	4/04/2014	ME1400540032	1380	6.8	18	1029	15	16.6	4.93	0.24	0	0	<-0.001	220	<-0.0001	171	46	<-0.001	0.009	<-0.001	<-0.001	4.99
BGW43	18/07/2014	ME1401051035	1330	6.4	10	1082	15.8	17.3	4.48	0.2	0	0	<-0.001	249	<-0.0001	180	49	<-0.001	0.006	<-0.001	<-0.001	5.65

Sample Location	Sampling Date	Sample Num	Electrical Conductivity @ 25 °C µS/cm	pH Value pH	Total Suspended Solids mg/L	TDS (mg/L)	Total Anions meq/L	Total Cations meq/L	% Ionic Balance	Ammonia as N mg/L	Antimony - Dissolved mg/L	Arsenic - Dissolved mg/L	Bicarbonate Alkalinity as CaCO3 mg/L	Calcium - Dissolved mg/L	Calcium - Dissolved mg/L	Chloride mg/L	Chromium - Dissolved mg/L	Cobalt - Dissolved mg/L	Copper - Dissolved mg/L	Hydroxide Alkalinity as CaCO3 mg/L	Iron - Dissolved mg/L	
BGW43	9/10/2014	ME1401512034	1360	6.6	25	1051	15.6	16.5	2.95	0.22	<0.001	<0.001	240	<0.0001	167	54	<0.001	0.005	<0.001	<	5.32	
BGW43	8/02/2015	ME1500221046	1360	6.5	24	1048	16.2	15	3.83	0.2	0	0.001	208	<0.0001	150	50	0	0.006	<0.001	<	5.16	
BGW43	30/04/2015	ME1500695930	1270	6.5	24	1037	15	17.1	6.52	0.25	0	<0.001	209	<0.0001	172	38	0	0.005	<0.001	<	4.75	
BGW43	14/08/2015	ME1510328050	1340	6.4	34	1016	0	0	0	0.25	0	<0.001	198	<0.0001	182	35	0	0.005	<0.001	<	4.2	
BGW43	21/10/2015	ME1510717038	1340	6.4	18	1014	0	0.24	0	0.24	0	<0.001	207	<0.0001	157	44	0	0.005	<0.001	<	4.15	
BGW43	22/02/2016	ME1600285010	1360	6.4	9	1018	15	16	3.16	0.39	0	<0.001	194	<0.0001	176	44	0	0.006	<0.001	<	4.11	
BGW43	19/05/2016	ME1600733032	1290	6.4	8	1115	17.4	15.4	6.13	0.26	0	<0.001	234	0.0002	154	44	0	0.004	<0.001	<	4.1	
BGW43	1/09/2016	ME1601226030	1390	6.4	18	1176	18.2	16.4	5.1	0.34	0	<0.001	235	<0.0001	169	44	0	0.005	<0.001	<	5.08	
BGW43	20/12/2016	ME1601793026	1430	6.4	20	1147	17.8	16	5.25	0.23	0	0.002	204	<0.0001	171	48	0	0.005	<0.001	<	4.24	
BGW44	6/04/2014	ME1400790335	1770	7.2	6	1193	18	18.8	2.12	<<0.01	0	<0.001	474	<0.0001	64	176	<0.001	<0.001	<	<	0.08	
BGW44	2/04/2014	ME1400540033	1730	7.1	7	1160	18.2	17.4	2.19	0.15	0	<0.001	457	<0.0001	60	194	<0.001	0.002	<	<	0.11	
BGW44	18/07/2014	ME1401510336	1710	7.1	9	1296	20.2	19.4	2.09	<<0.01	0	<0.001	538	<0.0001	76	204	<0.001	<0.001	<	<	<0.05	
BGW44	9/10/2014	ME1401512035	1750	7.3	<2	1242	19.7	17.9	4.93	<<0.01	0	<0.001	540	<0.0001	72	196	<0.001	<0.001	<	<	<0.05	
BGW44	8/02/2015	ME1500221047	1740	7.1	19	1197	18.6	18	1.79	0.03	0	<0.001	495	<0.0001	65	182	0	<0.001	0.001	<	<	<0.05
BGW44	29/04/2015	ME1500695931	1660	7.4	5	1256	18.8	20.6	4.61	<<0.01	0	<0.001	484	<0.0001	72	192	0	<0.001	<0.001	<	<	<0.05
BGW44	14/08/2015	ME1510328053	1730	7.3	1	1184	0	0	0	0.05	0	<0.001	474	<0.0001	75	160	0	<0.001	0.02	<	<	<0.05
BGW44	21/10/2015	ME1510717039	1700	7.4	2	1233	0	0	0.02	0	0	<0.001	523	<0.0001	67	175	0	<0.001	<0.001	<	<	<0.05
BGW44	22/02/2016	ME160285011	1630	7	3	1122	16.8	18	3.36	1.31	0	<0.001	458	<0.0001	70	166	0	0.001	0.003	<	0.07	<0.05
BGW44	19/05/2016	ME1600733033	1580	7.1	3	1221	19	17.7	3.55	0.03	0	<0.001	557	<0.0001	67	161	0	<0.001	<0.001	<	<	<0.05
BGW44	1/09/2016	ME1601226031	1620	7.3	4	1243	19.2	18.1	2.92	<<0.01	0	<0.001	571	<0.0001	70	158	0	<0.001	<0.001	<	<	<0.05
BGW44	20/12/2016	ME1601793027	1590	7.7	2	1112	17.5	16.3	3.61	<<0.01	0	<0.001	438	<0.0001	43	185	0	<0.001	<0.001	<	<	<0.05
BGW45	6/04/2014	ME1400790336	1950	7.2	22	1522	21.6	23	2.99	0.36	0	0.002	660	<0.0001	106	64	<0.001	<0.001	<	<	0.12	
BGW45	2/04/2014	ME1400540034	1910	7.3	95	1430	21	20.5	1.18	0.49	0	0.002	622	<0.0001	103	70	<0.001	<0.001	<	<	0.15	
BGW45	18/07/2014	ME1401510337	1820	8.2	2	1586	23.3	22.3	2.15	0.39	0	0.002	715	<0.0001	110	69	<0.001	<0.001	<	<	0.2	
BGW45	9/10/2014	ME1401512036	1960	7.2	14	1580	22.9	22.7	0.53	0.39	<0.001	<0.001	721	<0.0001	98	68	<0.001	<0.001	<	<	0.08	
BGW45	8/02/2015	ME1500221048	1960	7.1	26	1524	22.5	21.4	2.65	0.38	0	0.001	666	<0.0001	100	69	0	<0.001	0.001	<	<	<0.05
BGW45	29/04/2015	ME1500695932	1880	7.1	28	1581	21.9	25.2	7.01	0.38	0	0.004	678	<0.0001	124	54	<0.001	<0.001	<	<	0.42	
BGW45	14/08/2015	ME1510328054	1910	7.1	10	1486	0	0	0	0.37	0	<0.001	634	<0.0001	113	51	0	<0.001	<0.001	<	<	0.06
BGW45	21/10/2015	ME1510717040	1910	7.2	6	1453	0	0	0	0.33	0	<0.001	618	<0.0001	103	64	0	<0.001	<0.001	<	<	<0.05
BGW45	22/02/2016	ME160285012	1880	7.1	12	1494	21.2	22.6	3.07	0.45	0	<0.001	649	<0.0001	112	65	0	<0.001	<0.001	<	<	0.08
BGW45	19/05/2016	ME1600733034	1820	7	19	1571	23	22	2.27	0.38	0	<0.001	724	<0.0001	105	63	0	<0.001	<0.001	<	<	0.07
BGW45	8/09/2016	ME1601226075	1970	7.1	14	1487	20.6	23.7	6.94	0.4	0	<0.001	663	<0.0001	111	58	0	<0.001	<0.001	<	<	0.09
BGW45	20/12/2016	ME1601793028	1960	7.1	15	1518	22.1	21.8	0.74	0.46	0	<0.001	680	<0.0001	106	66	0	<0.001	<0.001	<	<	<0.05
BGW46	13/01/2014	ME1400079037	1160	7.4	44	868	12.6	12.8	0.76	0.04	0	0.107	412	<0.0001	112	40	<0.001	<0.001	<	<	0.16	
BGW46	3/04/2014	ME1400540035	1170	7.3	67	858	12.2	13.4	4.82	0.15	0	0.059	379	<0.0001	117	42	<0.001	<0.001	<	<	0.12	
BGW46	15/07/2014	ME1401510338	1140	7.2	48	956	14	13.9	0.24	0.17	0	0.114	446	<0.0001	124	40	<0.001	<0.001	<	<	0.13	
BGW46	8/10/2014	ME1401512037	1180	7.3	52	923	13.8	13	2.97	0.2	<0.001	0.126	452	<0.0001	114	48	<0.001	<0.001	<	<	0.1	
BGW46	6/02/2015	ME1500221049	1100	7.4	34	881	13.3	12.2	4.24	0.22	0	0.102	408	<0.0001	109	46	<0.001	<0.001	<	<	0.09	
BGW46	30/04/2015	ME1500695933	1130	7.2	21	921	13.2	14.5	4.93	0.22	0	0.149	417	<0.0001	134	35	0	<0.001	<0.001	<	<	0.09
BGW46	11/08/2015	ME1510328055	1160	7.2	3	925	0	0	0	0.26	0	0.085	404	<0.0001	132	33	0	<0.001	<0.001	<	<	0.08
BGW46	27/10/2015	ME1510717041	1160	7.2	4	916	0	0	0	0.27	0	0.055	422	<0.0001	123	32	0	<0.001	<0.001	<	<	0.1
BGW46	23/02/2016	ME160285023	1120	7.2	6	926	13.5	13.8	1.39	0.31	0	0.083	425	<0.0001	128	35	0	<0.001	<0.001	<	<	0.09
BGW46	25/05/2016	ME1600733035	1100	7.1	5	966	14.2	14.2	<0.01	0.72	0	0.272	452	<0.0001	114	41	<0.001	<0.001	<	<	<0.05	
BGW46	6/09/2016	ME1601226066	1180	7.2	5	928	13.6	13.8	0.75	0.3	0	0.121	409	<0.0001	128	39	0	<0.001	<0.001	<	<	0.06
BGW47	21/12/2016	ME1601793043	1190	7.2	4	828	12.6	11.3	5.3	0.32	0	0.073	390	<0.0001	97	40	<0.001	<0.001	<	<	<0.05	
BGW47	10/01/2014	ME1400079038	1020	7.6	9	742	10.9	10.9	0.33	0.16	0	0.003	328	<0.0001	70	42	<0.001	<0.001	<	<	0.64	
BGW47	31/03/2014	ME1400540036	1010	7.6	11	726	10.6	11.1	2.3	0.18	0	0.002	314	<0.0001	69	44	<0.001	<0.001	<	<	0.66	
BGW47	15/07/2014	ME1401510339	999	7.5	6	788	11.8	11.3	1.83	0.02	0	0.001	352	<0.0001	76	42	<0.001	<0.001	<	<	<0.05	
BGW47	13/10/2014	ME1401512038	1030	7.6	7	762	11.6	10.5	5.02	<<0.01	<0.001	0.001	345	<0.0001	70	41	<0.001	<0.001	<	<	<0.05	
BGW47	5/02/2015	ME1500221050	949	7.4	23	756	11.3	11.3	0.1	0.08	0	0.002	315	<0.0001	76	48	0	<0.001	0.002	<	<	<0.05

Sample Location	Sampling Date	Sample Num	Electrical Conductivity @ 25 C µs/cm	pH Value pH	Total Solids mg/L	TSS (mg/L)	Calc	Total Anions	Total Cations	Ionic Balance %	Ammonia as N mg/L	Antimony - Dissolved mg/L	Arsenic - Dissolved mg/L	Bicarbonate Alkalinity as CaCO3 mg/L	Cadmium - Dissolved mg/L	Calcium - Dissolved mg/L	Carbonate Alkalinity as CaCO3 mg/L	Chloride mg/L	Chromium - Dissolved mg/L	Cobalt - Dissolved mg/L	Copper - Dissolved mg/L	Hydroxide Alkalinity as CaCO3 mg/L	Iron - Dissolved mg/L
BGW47	29/04/2015	ME1500659034	1010	7.4	777	777	11.2	12.1	3.94	0.06	0	0	0.002	332	<0.0001	82	<1	37	0	<0.001	0.002	<1	<0.05
BGW47	11/08/2015	ME1510328056	1010	7.6	819	819	0	0	0	0.03	0	0	0.002	368	<0.0001	84	<1	34	0	<0.001	0.001	<1	<0.05
BGW47	22/10/2015	ME1510717042	795	7.8	780	780	0	0	<0.01	<0.01	0	0	<0.001	338	<0.0001	80	<1	35	0	<0.001	<0.001	<1	<0.05
BGW47	23/02/2016	ME1600265024	982	7.6	796	796	11.7	11.9	1.1	0.14	0	0	0.001	344	<0.0001	82	<1	37	0	<0.001	<0.001	<1	<0.05
BGW47	18/05/2016	ME1600733036	901	7.4	592	592	9.06	8.43	3.65	0.02	0	0	<0.001	224	<0.0001	32	<1	46	0	<0.001	<0.001	<1	<0.05
BGW47	30/08/2016	ME1601226002	1050	7.6	798	798	11.8	11.8	0.32	<0.01	<0.01	0	<0.001	349	<0.0001	80	<1	40	0	<0.001	<0.001	<1	<0.05
BGW47	19/12/2016	ME1601793008	1040	7.7	745	745	11.1	10.9	0.83	<0.01	<0.01	0	<0.001	323	<0.0001	76	<1	46	0	<0.001	<0.001	<1	<0.05
BGW48	10/01/2014	ME140079039	303	6.4	179	179	2.66	2.8	0.4	0.4	0	0	0.008	30	0.004	12	<1	36	<0.001	0.005	0.028	3.73	3.73
BGW48	15/07/2014	ME1401051040	320	7.5	168	168	2.69	2.67	0	<0.01	0	0	<0.001	12	<0.0001	13	<1	44	<0.001	<0.001	<0.001	<1	<0.05
BGW48	7/08/2015	ME1510328057	270	7.4	144	144	0	0	0	0.02	0	0	<0.001	17	<0.0001	11	<1	32	0	<0.001	<0.001	<1	<0.05
BGW48	22/10/2015	ME1510717043	285	7.6	141	141	0	0	0	<0.01	0	0	<0.001	15	<0.0001	11	<1	32	0	<0.001	<0.001	<1	<0.05
BGW48	23/02/2016	ME1600265025	350	7	205	205	2.99	2.71	0	6.67	0	0	0.003	91	<0.0001	12	<1	38	0	<0.001	<0.001	<1	8.1
BGW48	30/08/2016	ME1601226003	266	6.8	154	154	2.29	2.51	0	<0.01	0	0	<0.001	31	<0.0001	11	<1	26	0	<0.001	<0.001	<1	<0.05
BGW48	19/12/2016	ME1601793009	189	6.3	104	104	1.64	1.53	0	<0.01	<0.01	0	<0.001	22	<0.0001	6	<1	22	0	<0.001	<0.001	<1	<0.05
BGW48	19/12/2016	ME1600265026	350	7	205	205	2.99	2.71	0	6.67	0	0	0.003	91	<0.0001	12	<1	38	0	<0.001	<0.001	<1	8.1
BGW49	10/01/2014	ME140079040	347	6.4	1010	1010	3.18	3.2	0.29	0.05	0	0	0.002	48	0.002	14	<1	44	<0.001	0.001	<0.018	<1	0.51
BGW49	31/03/2014	ME1400540037	332	6.7	3450	188	2.91	3.07	1.94	0.24	0	0	<0.001	40	<0.0001	14	<1	38	<0.001	0.004	<0.001	<1	0.51
BGW49	10/01/2014	ME1401051041	372	6.8	201	216	3.49	3.36	1.94	0.02	0	0	<0.001	44	<0.0001	15	<1	60	<0.001	0.001	<0.001	<1	0.1
BGW49	15/07/2014	ME1401512041	405	6.6	254	254	4	4.14	1.74	<0.01	<0.01	0	<0.001	64	<0.0001	18	<1	67	<0.001	<0.001	<0.001	<1	<0.05
BGW49	5/02/2015	ME1500221051	383	6.2	222	222	3.53	3.29	3.53	0.46	0	0	0.002	79	<0.0001	14	<1	48	0	0.002	0.002	<1	1.12
BGW49	29/04/2015	ME1500659035	372	6.6	216	208	3.33	2.87	2.1	2.1	0	0	<0.001	74	<0.0001	14	<1	37	0	0.001	0.001	<1	0.93
BGW49	7/08/2015	ME1510328058	295	6.6	153	153	0	0	0	0.03	0	0	<0.001	11	<0.0001	12	<1	30	0	<0.001	<0.001	<1	<0.05
BGW49	22/10/2015	ME1510717044	309	7.2	140	140	0	0	<0.01	<0.01	0	0	<0.001	11	<0.0001	12	<1	26	0	<0.001	<0.001	<1	<0.05
BGW49	23/02/2016	ME1600265026	378	6.4	20	223	3.38	3.64	3.64	0.06	0	0	<0.001	44	<0.0001	19	<1	40	0	<0.001	<0.001	<1	<0.05
BGW49	18/05/2016	ME1600733037	346	7.1	9840	205	3.21	3.03	2.88	0.28	0	0	<0.001	46	<0.0001	15	<1	43	0	0.002	<0.001	<1	0.41
BGW49	30/08/2016	ME1601226004	204	6.1	188	112	1.68	1.87	0	0.03	0	0	<0.001	15	<0.0001	9	<1	21	0	<0.001	<0.001	<1	<0.05
BGW49	19/12/2016	ME1601793010	173	6.1	220	90	1.4	1.43	0	0.03	0	0	<0.001	16	<0.0001	7	<1	19	0	<0.001	<0.001	<1	<0.05
BGW50	10/01/2014	ME1400790941	1230	8.1	914	914	14.1	13.7	1.18	0.36	0	0	0.003	462	<0.0001	103	<1	138	<0.001	<0.001	<0.001	<1	0.11
BGW50	31/03/2014	ME1400540038	1390	7.1	12	1012	14.7	15.8	3.58	0.14	0	0	0.002	306	<0.0001	134	<1	51	<0.001	<0.001	<0.001	<1	1.52
BGW50	15/07/2014	ME1401051042	1360	6.9	1090	16.7	15.2	16.2	4.81	0.09	0	0	0.001	347	<0.0001	114	<1	54	<0.001	<0.001	<0.001	<1	<0.05
BGW50	13/10/2014	ME1401512042	1400	7.3	1090	1090	16.2	16.5	0.94	0.04	0	0	0.001	347	<0.0001	136	<1	59	<0.001	<0.001	<0.001	<1	<0.05
BGW50	5/02/2015	ME1500221052	1260	6.7	8	1001	15.3	14.5	2.68	0.04	0	0	0.004	253	<0.0001	119	<1	66	0	0.002	0.002	<1	1.23
BGW50	28/04/2015	ME1500659036	1270	6.8	989	989	14.5	15.4	3.14	0.07	0	0	<0.001	281	<0.0001	125	<1	51	0	0.002	0.001	<1	2.86
BGW50	7/08/2015	ME1510328059	1290	7.2	951	951	0	0	0	0.08	0	0	<0.001	260	<0.0001	122	<1	48	0	<0.001	0.002	<1	<0.05
BGW50	22/10/2015	ME1510717045	1310	7.3	951	951	0	0	0	0.03	0	0	<0.001	256	<0.0001	121	<1	49	0	<0.001	<0.001	<1	<0.05
BGW50	23/02/2016	ME160265027	1270	6.8	991	991	14.7	15.1	1.38	0.04	0	0	0.001	280	<0.0001	125	<1	52	0	<0.001	<0.001	<1	<0.05
BGW50	18/05/2016	ME1600733038	1210	7.5	857	857	13.5	11.6	7.63	<0.01	<0.01	0	0.001	235	<0.0001	90	<1	62	0	<0.001	<0.001	<1	<0.05
BGW50	30/08/2016	ME1601226005	420	6.8	274	274	4.04	4.19	1.74	<0.01	<0.01	0	<0.001	88	<0.0001	27	<1	25	0	<0.001	<0.001	<1	<0.05
BGW50	19/12/2016	ME1601793011	294	6.9	12	175	2.62	2.62	0	0.17	0	0	<0.001	62	<0.0001	18	<1	18	0	<0.001	0.002	<1	<0.05
BGW51	10/01/2014	ME1400079042	1410	5.9	1011	1011	15.2	15.2	<0.01	0.07	0	0	0.002	259	<0.0001	113	<1	70	<0.001	0.002	0.004	<1	0.84
BGW51	31/03/2014	ME1400540039	1330	7	1370	941	13.9	14.9	3.58	0.08	0	0	0.002	241	<0.0001	114	<1	74	<0.001	0.002	<0.001	<1	0.96
BGW51	15/07/2014	ME1401051043	1360	6.5	179	1073	16.3	15.7	1.76	0.02	0	0	0.004	280	<0.0001	119	<1	74	<0.001	0.003	<0.001	<1	2.47
BGW51	13/10/2014	ME1401512043	1400	6.8	5	1065	15.5	17.1	4.92	0.02	<0.001	<0.001	0.006	277	<0.0001	130	<1	80	<0.001	0.003	<0.001	<1	3.47
BGW51	5/02/2015	ME1500221053	1320	6.7	350	1029	16	14.4	5.49	0.28	0	0	0.004	248	<0.0001	110	<1	75	0	0.004	0.001	<1	1.53
BGW51	28/04/2015	ME1500659037	1340	6.7	528	1031	15	16.5	4.93	<0.01	0	0	<0.001	254	<0.0001	128	<1	59	0	0.008	0.008	<1	3.37
BGW51	7/08/2015	ME1510328060	1360	6.7	179	995	0	0	0.03	0.04	0	0	0.003	239	<0.0001	125	<1	52	0	0.005	<0.001	<1	2.46
BGW51	22/10/2015	ME1510717046	1350	6.8	82	1002	0	0	0	0.06	0	0	0.004	255	<0.0001	119	<1	54	0	0.004	<0.001	<1	3.04

Sample Location	Sampling Date	Sample Num	Electrical Conductivity @ 25 °C µS/cm	pH Value pH	Total Suspended Solids mg/L	TDS (mg/L)	Calc	Total Anions	Total Cations	Ion Balance %	Ammonia as N mg/L	Antimony - Dissolved mg/L	Arsenic - Dissolved mg/L	Bicarbonate Alkalinity as CaCO3 mg/L	Calcium - Dissolved mg/L	Calcium - Dissolved mg/L	Chloride mg/L	Chromium - Dissolved mg/L	Cobalt - Dissolved mg/L	Copper - Dissolved mg/L	Hydroxide Alkalinity as CaCO3 mg/L	Iron - Dissolved mg/L
BGW51	19/12/2016	ME1601793012	1310	6.5	250	906	13.6	13.8	0.82	0.02	0	0.003	229	<1	108	<1	73	0	0.004	<0.001	<1	2.42
BGW52	8/01/2014	ME1400079043	655	7.6	12	416	6.41	6.24	1.35	0.04	0	<0.001	180	<1	46	<1	57	<0.001	<0.001	0.005	<1	<0.05
BGW52	8/04/2014	ME1400540040	655	7.4	6	439	6.96	7.13	1.23	0.02	0	<0.001	188	<1	55	<1	61	<0.001	<0.001	0.002	<1	<0.05
BGW52	14/07/2014	ME1401051044	680	7.2	7	474	7.34	7.01	2.31	0.02	0	<0.001	216	<1	53	<1	63	<0.001	<0.001	<0.015	<1	<0.05
BGW52	13/10/2014	ME1401512044	987	7.5	97	712	10.9	11	0.67	<0.01	<0.001	<0.001	315	<1	68	<1	101	<0.001	<0.001	0.001	<1	<0.05
BGW52	4/02/2015	ME1500221054	984	7.2	15	672	10.7	9.48	5.99	<0.01	<0.001	0.001	388	<1	60	<1	96	0	<0.001	0.002	<1	<0.05
BGW52	28/04/2015	ME1500659038	1040	7.3	11	729	11.1	11.4	1.49	0.02	0	0.001	303	<1	73	<1	105	0	<0.001	0.006	<1	<0.05
BGW52	7/08/2015	ME1510328061	1020	7.6	2	679	0	0	0	0.03	0	0.001	285	<1	76	6	72	0	<0.001	0.003	<1	0.17
BGW52	21/10/2015	ME1510717047	1050	7.4	1	742	0	0	0	0.02	0	<0.001	322	<1	75	<1	102	0	<0.001	0.002	<1	<0.05
BGW52	22/02/2016	ME1602650113	1060	7.4	9	707	10.5	11.7	5.18	0.02	0	0.001	289	<1	81	<1	104	0	<0.001	0.002	<1	<0.05
BGW52	19/05/2016	ME1600793040	1040	7.4	4	752	11.6	11.2	2.04	<0.01	0	<0.001	336	<1	69	<1	105	0	<0.001	0.001	<1	<0.05
BGW52	1/09/2016	ME1601226032	878	7.2	2	599	9.09	9.41	1.72	<0.01	0	<0.001	243	<1	59	<1	89	0	<0.001	0.001	<1	<0.05
BGW52	20/12/2016	ME1601793029	775	7.3	3	487	7.35	7.62	1.84	<0.01	0	<0.001	233	<1	65	<1	60	0	<0.001	<0.001	<1	<0.05
BGW53	8/01/2014	ME1400079044	1060	7.3	200	666	10.2	10.4	0.6	0.04	0	<0.001	265	<1	52	<1	115	<0.001	<0.001	0.003	<1	<0.05
BGW53	8/04/2014	ME1400540041	1190	7.2	35	766	12	12	0.17	<0.01	0	<0.001	273	<1	64	<1	156	<0.001	<0.001	0.003	<1	<0.05
BGW53	14/07/2014	ME1401051045	1280	7	56	914	14.2	14	0.97	<0.01	0	<0.001	345	<1	62	<1	163	<0.001	<0.001	0.004	<1	<0.05
BGW53	13/10/2014	ME1401512045	1750	7.3	63	1213	18.8	19.2	1	<0.01	<0.001	<0.001	437	<1	84	<1	244	<0.001	<0.001	0.001	<1	<0.05
BGW53	4/02/2015	ME1500221055	1730	7.2	167	1209	18.8	19.1	0.61	0.04	0	<0.001	443	<1	86	<1	235	0	<0.001	0.001	<1	<0.05
BGW53	28/04/2015	ME1500659039	1750	7.2	122	1229	19	19.7	1.73	0.05	0	<0.001	441	<1	105	<1	248	0	<0.001	0.002	<1	<0.05
BGW53	7/08/2015	ME1510328062	1700	7.2	34	1013	0	0	0	0.03	0	<0.001	408	<1	112	<1	112	0	<0.001	<0.001	<1	<0.05
BGW53	21/10/2015	ME1510717048	1710	7.2	10	1223	0	0	0	0.02	0	<0.001	452	<1	87	<1	229	0	<0.001	<0.001	<1	<0.05
BGW53	22/02/2016	ME1602650114	1660	7.2	61	1107	16.9	18	3.17	<0.01	0	<0.001	383	<1	86	<1	218	0	<0.001	<0.001	<1	<0.05
BGW53	19/05/2016	ME1600793041	1590	7.2	126	1144	17.4	18	1.57	<0.01	0	<0.001	471	<1	82	<1	189	0	<0.001	<0.001	<1	<0.05
BGW53	1/09/2016	ME1601226033	866	7.3	6	608	9.29	9	1.57	<0.01	0	<0.001	239	<1	37	<1	81	0	<0.001	<0.001	<1	<0.05
BGW53	20/12/2016	ME1601793030	905	7.3	<1	608	9.24	9.15	0.47	<0.01	0	<0.001	310	<1	72	<1	60	0	<0.001	<0.001	<1	<0.05
BGW54	15/10/2013	ME1400079056	444	7	3480	264	4.27	4.27	0.03	0.19	0	0.001	79	<1	39	<1	53	<0.001	0.006	0.001	<1	<0.05
BGW54	13/10/2014	ME1401512046	684	7	7	872	14.6	6.15	40.8	0.43	<0.001	0.002	582	<1	39	<1	54	<0.001	0.003	<0.001	<1	7.55
BGW54	1/09/2016	ME1601226034	453	6.3	25	274	4.33	4.46	1.49	<0.01	0	<0.001	27	<1	21	<1	61	0	<0.001	<0.001	<1	<0.05
BGW54	20/12/2016	ME1601793031	404	6.5	425	223	3.6	3.47	1.9	<0.01	0	<0.001	59	<1	17	<1	52	0	<0.001	<0.001	<1	<0.05
BSW01	31/08/2016	ME1601226007	247	6.1	3	154	2.4	2.37	0	0.03	0	<0.001	10	<1	10	<1	23	0	0.002	0.002	<1	0.16
BSW02	1/09/2016	ME1601226036	131	4.9	2	50	0.72	1.08	0	0.05	0	<0.001	4	<1	<1	19	0	<0.001	<0.001	<1	0.06	
BSW03	17/02/2014	ME1400288001	67	5.8	45	34	0.65	0.7	0.08	0	0.008	6	<1	8	<1	8	<0.001	0.004	0.003	<1	0.52	
BSW03	21/05/2014	ME1400741001	85	6.1	32	47	0.7	0.72	0.21	0	0.008	14	<1	2	<1	8	<0.001	0.003	<0.001	<1	0.88	
BSW03	20/08/2014	ME1401208001	70	5.9	41	50	0.67	0.77	0.03	0	0.008	5	<1	2	<1	4	<0.001	0.002	0.004	<1	0.79	
BSW03	30/04/2015	ME1500659047	68	5.7	19	39	0.44	0.78	0	<0.01	0	0.007	6	<1	4	0	0	0.004	0.005	<1	0.77	
BSW03	4/08/2015	ME1510328001	83	6.1	32	27	0	0	0	0.05	0	0.004	5	<1	2	0	0	0.001	0.002	<1	0.63	
BSW03	3/02/2016	ME1602650948	128	8	172	90	1.23	1.29	0	<0.01	0	<0.036	42	<1	6	0	0	0.004	0.002	<1	1.65	
BSW03	12/05/2016	ME1600662001	70	7.5	16	48	0.61	0.76	0	<0.01	0	<0.013	25	<1	4	0	0	0.003	0.002	<1	1.12	
BSW03	5/09/2016	ME1601226050	57	6.2	3	32	0.5	0.4	11.6	0.05	0	<0.001	5	<1	1	0	0	<0.001	<0.001	<1	0.1	
BSW04	17/02/2014	ME1400288002	429	3.8	13	236	3.67	3.8	1.8	0.1	0	0.002	1	<1	10	<1	7	<0.001	0.02	0.008	<1	0.08
BSW04	21/05/2014	ME1400741002	344	3.9	5	188	2.95	2.95	0	0.03	0	0.001	<1	<1	8	<1	7	<0.017	0.004	<1	0.12	
BSW04	20/08/2014	ME1401208002	402	3.6	3	201	3.2	3.33	2.06	0.09	0	0.001	<1	<1	7	<1	7	<0.001	0.005	<1	0.09	
BSW04	20/11/2014	ME1401676001	429	4	324	272	4.08	4.28	2.4	0.52	<0.001	0.007	<1	<1	17	<1	14	<0.001	0.03	0.007	<1	0.23
BSW04	5/02/2015	ME1500221001	338	3.8	17	167	2.58	1.62	0	0.88	0	0.004	<1	<1	8	0	0	<0.018	0.004	<1	0.2	
BSW04	30/04/2015	ME1500659048	203	3.9	6	90	1.36	1	0	0.04	0	0.001	<1	<1	5	0	0	0.009	0.002	<1	0.12	
BSW04	4/08/2015	ME1510328002	191	4.3	2	92	0	0	0	<0.01	0	<0.001	<1	<1	4	0	0	0.007	0.003	<1	0.14	
BSW04	2/02/2016	ME1602650949	165	4.3	4	78	1.16	0.85	0	0.04	0	<0.001	<1	<1	5	0	0	<0.01	0.007	<1	0.14	
BSW04	11/05/2016	ME1600662002	122	4.6	34	55	0.8	0.62	0	<0.01	0	<0.001	<1	<1	4	0	0	0.006	0.005	<1	0.06	
BSW04	30/08/2016	ME1601226008	342	4.3	1	195	3.15	2.57	0	<0.01	0	<0.001	<1	<1	11	<1	26	0	0.004	0.004	<1	0.16
BSW05	30/04/2015	ME1500659049	42	5.9	135	29	0.38	0.5	0.002	<0.01	0	0.002	<1	<1	4	<1	1	0	0.002	0.004	<1	0.7

Sample Location	Sampling Date	Sample Num	Electrical Conductivity @ 25 C µs/cm	pH Value pH	Total Suspended Solids mg/L	TDS (mg/L)	Calc	Total Anions	Total Cations	Ionic Balance %	Ammonia as N mg/L	Antimony - Dissolved mg/L	Arsenic - Dissolved mg/L	Bicarbonate Alkalinity as CaCO3 mg/L	Calcium - Dissolved mg/L	Calcium - Dissolved mg/L	Carbonate Alkalinity as CaCO3 mg/L	Chloride mg/L	Chromium - Dissolved mg/L	Cobalt - Dissolved mg/L	Copper - Dissolved mg/L	Hydroxide Alkalinity as CaCO3 mg/L	Iron - Dissolved mg/L	
BSW05	4/08/2015	ME1510328003	110	5.4	22	55	0	0	0	0.02	0	<-0.001	<-0.001	<-0.001	2	<-0.0001	2	11	0	0.001	0.001	<-0.001	0.07	
BSW05	5/09/2016	ME1601226051	63	6.2	5	34	0.49	0.51	1.68	0.15	0	<-0.001	<-0.001	<-0.001	2	<-0.0001	2	8	0	<-0.001	<-0.001	<-0.001	0.2	
BSW06	11/05/2016	ME1600662003	41	6.2	66	23	0.3	0.34	0	0.02	0	<-0.001	<-0.001	<-0.001	2	<-0.0001	2	2	0	<-0.001	<-0.001	<-0.001	0.23	
BSW06	30/08/2016	ME1601226009	143	6.8	2	79	1.22	1.2	0.88	0.02	0	<-0.001	<-0.001	<-0.001	7	<-0.0001	7	14	0	<-0.001	<-0.001	<-0.001	0.05	
BSW07	17/02/2014	ME1402288003	456	6.6	57	286	4.65	4.95	3.07	0.06	0	<-0.001	<-0.001	<-0.001	29	<-0.0001	29	53	<-0.001	<-0.001	<-0.001	<-0.001	0.22	
BSW07	20/05/2014	ME140741003	446	6.4	12	274	4.5	4.57	0.76	0.02	0	<-0.001	<-0.001	<-0.001	26	<-0.0001	26	53	<-0.001	<-0.001	<-0.001	<-0.001	0.15	
BSW07	19/08/2014	ME1401208003	452	6.7	10	253	3.88	4.06	2.21	<-0.001	<-0.001	<-0.001	<-0.001	<-0.001	23	<-0.0001	23	50	<-0.001	<-0.001	<-0.001	<-0.001	0.56	
BSW07	21/11/2014	ME1401676002	478	6.7	15	309	4.76	4.89	1.41	0.08	<-0.001	<-0.001	<-0.001	109	<-0.0001	36	<-0.0001	59	<-0.001	<-0.001	<-0.001	<-0.001	0.14	
BSW07	5/02/2015	ME1500221002	507	6.5	12	294	4.54	4.78	2.54	<-0.001	<-0.001	<-0.001	<-0.001	96	<-0.0001	32	<-0.0001	59	0	<-0.001	<-0.001	<-0.001	0.92	
BSW07	28/04/2015	ME1500699050	495	6.6	44	298	4.45	5.2	7.74	0.04	0	<-0.001	<-0.001	<-0.001	33	<-0.0001	33	59	0	<-0.001	<-0.001	<-0.001	0.2	
BSW07	4/08/2015	ME1510328004	526	6.6	10	260	0	0	0	0.05	0	<-0.001	<-0.001	<-0.001	33	<-0.0001	33	42	0	<-0.001	<-0.001	<-0.001	0.47	
BSW07	13/10/2015	ME1510717001	525	8.1	23	324	0	0	0	0.03	0	<-0.001	<-0.001	<-0.001	37	<-0.0001	37	64	0	<-0.001	<-0.001	<-0.001	0.21	
BSW07	2/02/2016	ME1602659050	523	6.5	55	334	5.17	5.65	4.46	0.03	0	<-0.001	<-0.001	<-0.001	41	<-0.0001	41	88	0	<-0.001	<-0.001	<-0.001	0.12	
BSW07	11/05/2016	ME1600662004	618	6.6	14	357	5.59	5.93	2.95	0.86	<-0.001	<-0.001	<-0.001	113	<-0.0001	41	<-0.0001	80	0	<-0.001	<-0.001	<-0.001	0.27	
BSW07	30/08/2016	ME1601226010	925	7.1	7	579	9.28	9.45	0.86	0.04	0	<-0.001	<-0.001	<-0.001	29	<-0.0001	29	165	0	<-0.001	<-0.001	<-0.001	0.44	
BSW08	20/05/2014	ME140741004	114	6.4	440	104	1.49	1.56	0	0	<-0.001	<-0.001	<-0.001	17	<-0.0001	5	<-0.0001	12	<-0.001	<-0.001	<-0.001	<-0.001	2.53	
BSW08	19/08/2014	ME1401208004	152	6.4	19	74	1.11	1.26	0	0.06	0	<-0.001	<-0.001	<-0.001	6	<-0.0001	6	7	<-0.001	<-0.001	<-0.001	<-0.001	0.3	
BSW08	4/08/2015	ME1510328005	155	6.4	188	96	0	0	0	0.02	0	<-0.001	<-0.001	<-0.001	11	<-0.0001	11	10	0	<-0.001	<-0.001	<-0.001	1.96	
BSW08	2/02/2016	ME1602659051	137	6.7	2050	83	1.1	1.02	0	0.34	0	<-0.001	<-0.001	<-0.001	21	<-0.0001	21	13	0	0.008	<-0.001	<-0.001	10.1	
BSW08	30/08/2016	ME1601226011	145	6.4	6	87	1.17	1.5	0	0.02	0	<-0.001	<-0.001	<-0.001	7	<-0.0001	7	14	0	<-0.001	<-0.001	<-0.001	0.63	
BSW09	31/08/2016	ME1601226012	634	6.4	30	334	5.18	5.72	4.87	0.07	0	<-0.001	<-0.001	<-0.001	22	<-0.0001	22	84	0	<-0.001	<-0.001	<-0.001	<-0.001	<-0.001
BSW11	20/02/2014	ME1400288004	370	6.5	271	219	3.66	3.82	2.11	0.28	0	<-0.001	<-0.001	<-0.001	15	<-0.0001	15	53	<-0.001	<-0.001	<-0.001	<-0.001	0.12	
BSW11	21/05/2014	ME140741005	372	6.8	7	228	4.09	4	1.15	0.08	0	<-0.001	<-0.001	<-0.001	108	<-0.0001	17	33	<-0.001	<-0.001	<-0.001	<-0.001	1.15	
BSW11	19/08/2014	ME1401208005	380	7.1	13	249	3.39	3.48	1.23	<-0.001	0	<-0.001	<-0.001	<-0.001	14	<-0.0001	14	30	<-0.001	<-0.001	<-0.001	<-0.001	0.2	
BSW11	19/11/2014	ME1401676003	640	7.3	266	476	7.07	7.02	0.32	1.23	<-0.001	<-0.001	<-0.001	253	<-0.0001	38	<-0.0001	117	0	<-0.001	<-0.001	<-0.001	<-0.001	<-0.001
BSW11	4/02/2015	ME1500221003	873	7.6	544	483	8.73	4.63	30.8	0.52	0	0.002	0.002	249	0.0002	19	<-0.0001	38	0	0.002	<-0.001	<-0.001	0.37	
BSW11	28/04/2015	ME1500699051	544	6.7	139	338	4.93	5.45	5	0.29	0	<-0.001	<-0.001	<-0.001	30	<-0.0001	30	38	0	<-0.001	<-0.001	<-0.001	0.09	
BSW11	4/08/2015	ME1510328006	105	6.4	18	61	0	0	0	0.1	0	<-0.001	<-0.001	<-0.001	55	<-0.0001	55	8	0	<-0.001	<-0.001	<-0.001	0.07	
BSW11	2/02/2016	ME1602659052	265	7.1	54	148	2.44	1.62	0	0.03	0	<-0.001	<-0.001	<-0.001	8	<-0.0001	8	13	0	<-0.001	<-0.001	<-0.001	0.07	
BSW11	11/05/2016	ME1600662005	267	7.1	110	171	2.48	2.36	0	1.87	0	0.002	0.002	85	<-0.0001	10	<-0.0001	24	0	0.003	<-0.001	<-0.001	0.44	
BSW11	1/09/2016	ME1601226037	810	7.5	8	495	7.84	8.11	1.67	0.06	0	<-0.001	<-0.001	<-0.001	20	<-0.0001	20	132	0	<-0.001	<-0.001	<-0.001	0.52	
BSW12	18/02/2014	ME1400288005	680	7.5	13	453	6.93	7.84	6.16	0.03	0	0.002	0.002	199	<-0.0001	42	<-0.0001	78	<-0.001	<-0.001	<-0.001	<-0.001	0.12	
BSW12	21/05/2014	ME140741006	444	6.9	6	271	4.35	4.56	2.37	0.04	0	<-0.001	<-0.001	<-0.001	73	<-0.0001	21	50	<-0.001	<-0.001	<-0.001	<-0.001	0.1	
BSW12	20/08/2014	ME1401208006	465	6.7	5	286	4.54	4.75	2.26	<-0.001	<-0.001	<-0.001	<-0.001	72	<-0.0001	23	<-0.0001	51	<-0.001	<-0.001	<-0.001	<-0.001	0.07	
BSW12	19/11/2014	ME1401676004	552	7.4	37	366	5.62	5.8	1.62	0.05	<-0.001	0.001	0.001	144	<-0.0001	35	<-0.0001	61	<-0.001	<-0.001	<-0.001	<-0.001	<-0.001	
BSW12	5/02/2015	ME1500221004	571	7.6	111	340	5.34	5.3	0.46	0.02	0	0.001	0.001	127	<-0.0001	27	<-0.0001	67	0	<-0.001	<-0.001	<-0.001	<-0.001	<-0.001
BSW12	29/04/2015	ME1500699052	537	6.9	9	322	4.87	5.44	5.48	0.02	0	<-0.001	<-0.001	<-0.001	82	<-0.0001	82	60	0	<-0.001	<-0.001	<-0.001	0.07	
BSW12	7/08/2015	ME1510328007	344	6.7	2	182	0	0	0	0.02	0	<-0.001	<-0.001	<-0.001	11	<-0.0001	11	24	0	<-0.001	<-0.001	<-0.001	0.06	
BSW12	14/10/2015	ME1510717002	473	8	6	266	0	0	<-0.001	<-0.001	<-0.001	<-0.001	<-0.001	74	<-0.0001	26	<-0.0001	44	0	<-0.001	<-0.001	<-0.001	0.24	
BSW12	3/02/2016	ME1602659053	286	8.7	35	196	2.91	3.54	0	0.03	0	<-0.001	<-0.001	<-0.001	60	<-0.0001	20	42	0	<-0.001	<-0.001	<-0.001	0.31	
BSW12	11/05/2016	ME1600662006	480	6.1	14	275	4.25	4.41	1.88	<-0.001	<-0.001	<-0.001	<-0.001	30	<-0.0001	25	<-0.0001	54	0	0.001	<-0.001	<-0.001	0.08	
BSW12	31/08/2016	ME1601226013	642	7.1	4	354	5.56	5.59	0.24	0.03	0	<-0.001	<-0.001	<-0.001	84	<-0.0001	19	<-0.0001	80	<-0.001	<-0.001	<-0.001	0.16	
BSW13	20/02/2014	ME1402288006	209	7	376	131	1.93	2.07	0	0.75	0	<-0.001	<-0.001	<-0.001	12	<-0.0001	6	23	<-0.001	<-0.001	<-0.001	<-0.001	0.08	
BSW13	19/05/2014	ME140741007	572	6.8	9	329	5.34	5.49	1.39	0.04	0	<-0.001	<-0.001	<-0.001	57	<-0.0001	13	<-0.0001	84	<-0.001	<-0.001	<-0.001	<-0.001	<-0.001
BSW13	19/08/2014	ME1401208007	1210	7	13	720	11.6	11.7	0.51	<-0.001	0	<-0.001	<-0.001	<-0.001	78	<-0.0001	36	<-0.0001	213	<-0.001	<-0.001	<-0.001	0.35	
BSW13	19/11/2014	ME1401676005	1380	7.3	71	933	14.9	14.2	2.36	0.18	<-0.001	<-0.001	<-0.001	178	<-0.0001	47	<-0.0001	230	<-0.001	<-0.001	<-0.001	<-0.001	<-0.001	
BSW13	4/02/2015	ME1500221005	356	7.3	2195	360	4.33	7.35	25.9	0.66	0	0.004	0.004	75	<-0.0001	24	<-0.0001	28	0	0.003	<-0.001	<-0.001	0.1	
BSW13	1/05/2015	ME1500699053	259	6.6	140	166	2.39	2.74	0	0.02	0	<-0.001	<-0.001	<-0.001	10	<-0.0001	10	23	0	0.001	<-0.001	<-0.001	1.23	
BSW13	7/08/2015	ME1510328008	312	6.9	190	115	0	0	0	<-0.001	<-0.001	<-0.001	<-0.001	31	<-0.0001	10	<-0.0001	7	0	0.001	<-0.001	<-0.001	0.09	
BSW13	3/02																							

Sample Location	Sampling Date	Sample Num	Electrical Conductivity @ 25°C µS/cm	pH Value pH Unit	Total Suspended Solids mg/L	TDS (mg/L)	Calc	Total Anions mg/L	Total Cations mg/L	% Ionic Balance	Ammonia as N mg/L	Antimony - Dissolved mg/L	Arsenic - Dissolved mg/L	Bicarbonate Alkalinity as CaCO3 mg/L	Calcium - Dissolved mg/L	Calcium - Dissolved mg/L	Carbonate Alkalinity as CaCO3 mg/L	Chloride mg/L	Chromium - Dissolved mg/L	Cobalt - Dissolved mg/L	Copper - Dissolved mg/L	Hydroxide Alkalinity as CaCO3 mg/L	Iron - Dissolved mg/L
BSW13	11/05/2016	ME1600662007	123	6.9	72	70	1	1.1	0	<<0.01	0	<0.001	<0.001	10	<0.0001	3	<0.0001	13	0	<0.001	0.003	<0.001	0.57
BSW13	31/08/2016	ME1601226014	1230	7.4	5	739	12	12	0.13	0.03	0	<0.001	<0.001	126	<0.0001	34	<0.0001	238	0	0.003	<0.001	<0.001	0.64
BSW14	20/02/2014	ME140288007	1430	6.5	17	896	15	16.3	4.4	0.14	0	<0.001	<0.001	35	<0.0001	63	<0.0001	156	<0.001	<0.001	0.007	<0.001	<0.05
BSW14	19/08/2014	ME140288008	155	6.8	6	81	1.17	1.37	<<0.01	<<0.01	0	<0.001	<0.001	11	<0.0001	3	<0.0001	16	<0.001	<0.001	0.002	<0.001	0.33
BSW14	31/08/2016	ME1601226015	1300	7.6	7	942	14.2	14.5	0.74	0.02	0	<0.001	<0.001	247	<0.0001	76	<0.0001	66	0	<0.001	0.002	<0.001	<0.05
BSW15	19/08/2014	ME140288009	114	6.7	1110	74	1.02	1.2	0	0.03	0	<0.001	<0.001	17	<0.0001	3	<0.0001	7	<0.001	<0.001	0.001	<0.001	0.19
BSW15	7/08/2015	ME1510328009	192	6.7	13	64	0	0	0	0.02	0	<0.001	<0.001	13	<0.0001	5	<0.0001	6	0	0.002	0.003	<0.001	1.09
BSW15	5/09/2016	ME1601226052	206	6.6	5	133	1.95	2.06	2.65	0.1	0	<0.001	<0.001	36	<0.0001	6	<0.0001	20	0	<0.001	0.002	<0.001	0.43
BSW16	4/08/2015	ME1510328010	142	6.8	2	78	0	0	0	0.03	0	<0.001	<0.001	35	<0.0001	5	<0.0001	16	0	<0.001	0.003	<0.001	0.08
BSW16	4/08/2015	ME1510328010	142	6.8	2	78	0	0	0	0.03	0	<0.001	<0.001	35	<0.0001	5	<0.0001	16	0	<0.001	0.003	<0.001	0.08
BSW16	13/10/2015	ME1510717003	187	8.2	7	101	0	0	0	0.02	0	<0.001	<0.001	58	<0.0001	4	<0.0001	24	0	<0.001	0.002	<0.001	0.15
BSW16	2/02/2016	ME1601226058	180	7.9	3	94	1.72	0.83	0	0.04	0	<0.001	<0.001	58	<0.0001	3	<0.0001	20	0	<0.001	<0.001	<0.001	<0.05
BSW16	11/05/2016	ME1600662008	212	6.7	7	129	1.92	2.13	0	0.02	0	0.001	<0.001	60	<0.0001	10	<0.0001	24	0	0.003	0.002	<0.001	1.33
BSW16	1/09/2016	ME1601226038	101	6.8	<1	63	0.98	1.03	2.48	<<0.01	0	<0.001	<0.001	28	<0.0001	4	<0.0001	15	0	<0.001	0.002	<0.001	0.27
BSW17	21/05/2014	ME140741008	116	6	167	54	0.86	0.97	0	0.2	0	<0.001	<0.001	2	<0.0001	1	<0.0001	26	<0.001	<0.001	0.009	<0.001	0.09
BSW17	19/08/2014	ME140288010	185	3.9	42	64	0.99	1.12	0	0.11	0	<0.001	<0.001	<1	<0.0001	2	<0.0001	24	<0.001	<0.001	0.009	<0.001	0.08
BSW17	20/11/2014	ME1407676006	209	3.7	54	73	1.29	0.93	0	0.11	<0.001	<0.001	<0.001	<1	<0.0001	1	<0.0001	25	<0.001	0.004	0.006	<0.001	0.08
BSW17	29/04/2015	ME1500659054	170	4	4	68	1.1	1.18	0	<0.01	0	<0.001	<0.001	<1	<0.0001	2	<0.0001	30	0	<0.001	0.002	<0.001	0.1
BSW17	1/09/2016	ME1601226039	103	5.8	5	49	0.77	0.88	0	0.02	0	<0.001	<0.001	6	<0.0001	2	<0.0001	20	0	<0.001	<0.001	<0.001	0.12
BSW18	1/09/2016	ME1601226040	161	5.8	23	98	1.4	1.52	0	0.03	0	0.008	0	6	0.0022	6	<0.0001	19	0	<0.001	0.004	<0.001	1.28
BSW19	20/08/2014	ME140288011	526	6.2	26	305	4.7	4.66	0	0.03	0	<0.001	<0.001	33	<0.0001	14	<0.0001	59	<0.001	0.008	0.001	<0.001	0.2
BSW19	14/08/2015	ME1510328011	445	6.5	43	256	0	0	0	0.02	0	<0.001	<0.001	23	<0.0001	21	<0.0001	30	0	0.002	0.001	<0.001	0.09
BSW19	31/08/2016	ME1601226016	652	7.2	43	385	6.19	6.16	0	<<0.01	0	<0.001	<0.001	75	<0.0001	21	<0.0001	102	0	<0.001	<0.001	<0.001	0.32
BSW20	18/02/2014	ME140288008	2050	8.5	92	1329	20.8	23	5.38	0.09	0	0.006	<0.001	295	<0.0001	62	<0.0001	351	<0.001	<0.001	0.002	<0.001	<0.05
BSW20	22/05/2014	ME140741017	1200	7	79	777	12.1	13	3.44	0.05	0	<0.001	<0.001	136	<0.0001	61	<0.0001	151	<0.001	<0.001	0.002	<0.001	<0.05
BSW20	20/08/2014	ME140288012	1190	7.2	11	748	12.1	12.2	0.27	0.02	0	<0.001	<0.001	130	<0.0001	46	<0.0001	193	<0.001	<0.001	0.002	<0.001	<0.05
BSW20	20/11/2014	ME1407676007	1540	8.3	72	1053	17.6	16.4	3.55	0.04	<0.001	0.002	0.002	223	<0.0001	40	<0.0001	298	<0.001	<0.001	<0.001	<0.001	0.06
BSW20	9/02/2015	ME1500221006	1930	7.6	71	1243	20.2	20.3	0.35	0.05	0	0.005	0.003	274	0.001	60	<0.0001	348	0	0.002	0.005	<0.001	0.09
BSW20	1/05/2015	ME1500659055	1900	8.4	103	1283	20.8	21.3	0.97	0.03	0	0.003	0.003	227	<0.0001	54	<0.0001	376	0	0.002	0.004	<0.001	0.67
BSW20	14/08/2015	ME1510328012	1000	7	6	619	0	0	0	0.02	0	<0.001	<0.001	101	<0.0001	48	<0.0001	104	0	<0.001	0.002	<0.001	0.06
BSW20	14/10/2015	ME1510717004	1350	7.6	34	895	0	0	0	<0.01	0	<0.001	<0.001	208	<0.0001	75	<0.0001	167	0	<0.001	<0.001	<0.001	<0.05
BSW20	12/05/2016	ME1600662009	1560	8.7	14	996	16.2	16.5	1.03	<0.01	0	0.002	0.002	181	<0.0001	34	<0.0001	280	0	<0.001	0.002	<0.001	0.06
BSW20	31/08/2016	ME1601226017	776	7.6	10	484	7.84	7.63	1.4	<0.01	0	<0.001	<0.001	104	<0.0001	30	<0.0001	104	0	<0.001	0.001	<0.001	0.16
BSW21	18/02/2014	ME140288009	1710	7.8	15	1199	18	19.7	4.65	<0.01	0	0.003	0.003	390	<0.0001	93	<0.0001	192	<0.001	<0.001	0.002	<0.001	<0.05
BSW21	22/05/2014	ME140741018	1260	7.3	48	841	13	13.8	2.71	0.04	0	<0.001	<0.001	192	<0.0001	70	<0.0001	152	<0.001	<0.001	<0.001	<0.001	0.06
BSW21	20/08/2014	ME140288013	1200	7.2	14	755	12	12.4	1.4	0.03	0	<0.001	<0.001	133	<0.0001	51	<0.0001	184	<0.001	<0.001	0.001	<0.001	<0.05
BSW21	20/11/2014	ME1407676008	1560	7.4	14	1192	18.6	18	1.73	0.04	<0.001	0.002	0.002	446	<0.0001	95	<0.0001	195	<0.001	<0.001	<0.001	<0.001	<0.05
BSW21	8/02/2015	ME1500221007	1890	7.5	190	1313	20.4	20.8	0.97	0.02	0	0.002	0.002	361	<0.0001	104	<0.0001	236	0	<0.001	0.001	<0.001	<0.05
BSW21	1/05/2015	ME1500659056	1420	7.5	10	1030	15.8	16.6	2.4	0.02	0	<0.001	<0.001	289	<0.0001	97	<0.0001	173	0	<0.001	0.001	<0.001	<0.05
BSW21	4/08/2015	ME1510328013	1020	7.1	3	372	0	0	0	<<0.01	0	<0.001	<0.001	72	<0.0001	37	<0.0001	38	0	<0.001	0.001	<0.001	0.06
BSW21	14/10/2015	ME1510717005	1380	7.6	8	847	0	0	0	0.02	0	0.001	0.001	149	<0.0001	85	<0.0001	152	0	<0.001	<0.001	<0.001	0.1
BSW21	3/02/2016	ME160265056	1544	7.4	88	1105	16.4	18.7	6.49	<0.01	0	<0.001	<0.001	373	<0.0001	101	<0.0001	159	0	<0.001	0.001	<0.001	<0.05
BSW21	12/05/2016	ME1600662010	1410	7.7	6	987	15.1	16.1	3.16	<<0.01	0	<0.001	<0.001	281	<0.0001	98	<0.0001	170	0	<0.001	<0.001	<0.001	<0.05
BSW21	5/09/2016	ME1601226067	272	7.2	18	166	2.56	2.6	0	0.12	0	<0.001	<0.001	46	<0.0001	11	<0.0001	30	0	<0.001	0.002	<0.001	0.61
BSW22	18/02/2014	ME140288010	961	7.9	5	659	10	11.2	5.63	0.03	0	0.004	0.004	290	<0.0001	54	<0.0001	106	<0.001	<0.001	0.002	<0.001	<0.05
BSW22	22/05/2014	ME140741019	1040	7.4	21	684	10.6	11	1.73	0.04	0	<0.001	<0.001	200	<0.0001	62	<0.0001	107	<0.001	<0.001	<0.001	<0.001	0.05
BSW22	20/08/2014	ME140288014	1140	7.5	2	745	11.6	12.2	2.21	<0.01	0	<0.001	<0.001	171	<0.0001	63	<0.0001	148	<0.001	<0.001	<0.001	<0.001	0.08
BSW22	20/11/2014	ME1407676009	1200	7.4	6	893	14.1	13.8	1.1	0.02	<0.001	<0.001	<0.001	298	<0.0001	87	<0.0001	155	<0.001	<0.001	<0.001	<0.001	<0.05
BSW22	8/02/2015	ME1500221008	945	7.7	6	623	9.6	9.9	1.51	0.02	0	0.002	0.002	252	<0.0001	58	<0.0001	96	0	<0.001	0.004	<0.001	<0.05
BSW22	1/05/2015	ME1500659057	1010	7.7	10	706	10.9	11.5	2.69	0.02	0	0.001	0.001	264	<0.0001	65	<0.0001	127	0	<0.001	<0.001	<0.001	<0.05

Sample Location	Sampling Date	Sample Num	Electrical Conductivity @ 25°C µS/cm	pH Value	Total Solids mg/L	TDS (mg/L)	Calc	Total Anions meq/L	Total Cations meq/L	Ionic Balance %	Ammonia as N mg/L	Antimony - Dissolved mg/L	Arsenic - Dissolved mg/L	Bicarbonate Alkalinity as CaCO3 mg/L	Calcium - Dissolved mg/L	Carbonate Alkalinity as CaCO3 mg/L	Chloride mg/L	Chromium - Dissolved mg/L	Cobalt - Dissolved mg/L	Copper - Dissolved mg/L	Hydroxide Alkalinity as CaCO3 mg/L	Iron - Dissolved mg/L
BSW22	7/08/2015	ME1510328014	991	7.3	4	540	0	0	0	<-0.01	0	<-0.001	98	<-0.001	59	<-0.001	56	0	<-0.001	0.001	<-0.001	0.11
BSW22	14/10/2015	ME1510717006	1080	7.7	44	739	0	0	0	0.04	0	0.001	241	<-0.001	70	<-0.001	112	0	<-0.001	<-0.001	<-0.001	0.06
BSW22	3/02/2016	ME160265057	648	8.5	94	402	6.18	6.27	0.79	<-0.01	0	<-0.001	205	<-0.001	36	<-0.001	56	0	<-0.001	<-0.001	<-0.001	0.07
BSW22	12/05/2016	ME1600662011	992	7.8	3	667	10.3	10.7	1.56	<-0.01	0	<-0.001	274	<-0.001	55	<-0.001	119	0	<-0.001	<-0.001	<-0.001	0.07
BSW23	30/04/2015	ME1500659058	119	6.7	444	114	1.71	1.48	0	0.03	0	0.002	29	<-0.001	8	<-0.001	12	0	<-0.001	0.006	0.006	2.18
BSW23	7/09/2016	ME1601226068	94	6.4	<1	50	0.72	0.93	0	<-0.01	0	<-0.001	10	<-0.001	4	<-0.001	17	0	<-0.001	0.003	0.003	0.28
BSW24	7/09/2016	ME1601226069	86	5.5	<1	42	0.61	0.77	0	<-0.01	0	<-0.001	4	<-0.001	3	<-0.001	15	0	<-0.001	0.001	0.001	0.2
BSW25	17/02/2014	ME140288011	241	7.6	68	161	2.35	2.57	0	0.04	0	0.002	89	<-0.001	2	<-0.001	12	<-0.001	0.002	0.002	0.002	0.16
BSW25	21/05/2014	ME1400741009	192	6.6	24	122	1.7	1.87	0	0.08	0	0.001	58	<-0.001	2	<-0.001	11	<-0.001	<-0.001	<-0.001	<-0.001	1.38
BSW25	20/08/2014	ME1401208015	214	7.3	28	126	1.88	1.78	0	0.02	0	<-0.001	58	<-0.001	4	<-0.001	13	<-0.001	0.001	0.001	0.001	0.4
BSW25	20/11/2014	ME1401676010	184	7.2	30	121	1.7	1.81	0	<-0.01	<-0.001	0.002	60	<-0.001	2	<-0.001	11	<-0.001	0.002	0.002	0.002	1.25
BSW25	6/02/2015	ME1500221009	157	7.8	26	98	1.38	1.47	0	0.05	0	0.003	48	<-0.001	3	<-0.001	9	0	0.002	0.003	0.003	1.28
BSW25	30/04/2015	ME1500659059	100	6.7	28	65	0.88	1.01	0	0.04	0	0.005	21	<-0.001	2	<-0.001	6	0	0.001	0.001	0.001	0.56
BSW25	4/08/2015	ME1510328015	176	7.5	9	91	0	0	0	0.05	0	<-0.001	41	<-0.001	2	<-0.001	8	0	<-0.001	0.001	0.001	0.14
BSW25	14/10/2015	ME1510717007	210	8	111	133	0	0	0	0.03	0	<-0.001	72	<-0.001	3	<-0.001	14	0	<-0.001	<-0.001	<-0.001	0.49
BSW25	3/02/2016	ME160265058	151	9.4	23	73	1.41	0.31	0	0.05	0	<-0.001	39	<-0.001	<1	14	11	<-0.001	<-0.001	<-0.001	<-0.001	0.23
BSW25	12/05/2016	ME1600662012	118	7.3	94	74	1.03	1.06	0	0.34	0	<-0.001	32	<-0.001	<1	<1	8	0	0.002	0.002	0.002	0.43
BSW26	17/02/2014	ME140288012	193	7.6	41	128	1.86	2.03	0	0.04	0	0.006	37	<-0.001	3	<-0.001	30	<-0.001	0.001	0.001	0.001	2.4
BSW26	21/05/2014	ME1400741010	126	6.8	5	69	1.11	1.12	0	0.06	0	0.002	15	<-0.001	1	<-0.001	17	<-0.001	<-0.001	<-0.001	<-0.001	0.49
BSW26	20/08/2014	ME1401208016	94	7	40	47	0.66	0.63	0	0.02	0	0.002	8	<-0.001	<1	<1	11	<-0.001	0.001	0.001	0.001	<-0.05
BSW26	20/11/2014	ME1401676011	151	7.3	4	91	1.25	1.32	0	0.02	<-0.001	0.004	27	<-0.001	2	<-0.001	20	<-0.001	<-0.001	<-0.001	<-0.001	0.73
BSW26	6/02/2015	ME1500221010	175	9.2	24	95	1.31	1.37	0	0.02	0	0.004	25	<-0.001	2	<-0.001	23	0	<-0.001	<-0.001	<-0.001	0.51
BSW26	30/04/2015	ME1500659060	135	6.7	13	81	1.02	1.33	0	0.13	0	0.004	17	<-0.001	4	<-0.001	16	0	<-0.001	0.001	0.001	0.33
BSW26	5/09/2016	ME1601226053	78	5.9	6	41	0.6	0.56	0	<-0.01	0	<-0.001	6	<-0.001	1	<-0.001	12	0	<-0.001	<-0.001	<-0.001	0.14
BSW27	17/02/2014	ME140288013	252	6.9	256	150	2.8	2.58	0	1.01	0	0.022	10	<-0.001	3	<-0.001	47	<-0.001	0.001	0.004	0.004	0.45
BSW27	21/05/2014	ME1400741011	100	6.8	37	53	0.7	0.79	0	0.04	0	0.004	12	<-0.001	<1	<1	12	<-0.001	<-0.001	<-0.001	<-0.001	0.14
BSW27	20/08/2014	ME1401208017	119	6.5	5	61	0.79	0.93	0	0.96	0	0.001	6	<-0.001	1	<-0.001	15	<-0.001	<-0.001	0.001	0.001	0.23
BSW27	20/11/2014	ME1401676012	154	7.2	48	91	1.18	1.38	0	0.03	<-0.001	<-0.001	34	<-0.001	4	<-0.001	14	<-0.001	0.001	<-0.001	<-0.001	0.67
BSW27	6/02/2015	ME1500221011	163	7.9	60	97	1.34	1.48	0	0.05	0	<-0.012	32	<-0.001	3	<-0.001	21	0	<-0.001	0.003	0.003	0.22
BSW27	30/04/2015	ME1500659061	171	6.6	8	99	1.33	1.61	0	0.11	0	0.002	9	<-0.001	3	<-0.001	23	0	<-0.001	<-0.001	<-0.001	0.26
BSW27	4/08/2015	ME1510328016	83	5.7	6	41	0	0	0	0.05	0	0.001	6	<-0.001	2	<-0.001	7	0	<-0.001	<-0.001	<-0.001	0.07
BSW27	14/10/2015	ME1510717008	115	7.9	12	76	1.04	1.09	0	0.03	0	0.005	24	<-0.001	2	<-0.001	12	0	<-0.001	<-0.001	<-0.001	0.8
BSW27	3/02/2016	ME160265059	116	9.2	27	76	1.07	1.2	0	0.05	0	0.004	35	<-0.001	3	<-0.001	12	0	<-0.001	<-0.001	<-0.001	0.26
BSW27	12/05/2016	ME1600662013	130	7.2	54	80	1.07	1.2	0	0.02	0	0.005	27	<-0.001	3	<-0.001	15	0	<-0.001	<-0.001	<-0.001	0.58
BSW27	5/09/2016	ME1601226054	71	6.4	20	37	0.6	0.5	0	<-0.01	0	<-0.001	4	<-0.001	1	<-0.001	14	0	<-0.001	<-0.001	<-0.001	0.1
BSW27	8/01/2014	ME140079048	76	5.4	24	35	0.53	0.61	0	0.03	0	<-0.001	2	<-0.001	<1	<1	15	<-0.001	0.003	0.026	0.026	0.56
KURTZ	16/05/2014	ME1400741016	1590	6.9	5	1188	17.6	18.6	2.8	0.05	0	<-0.001	626	<-0.001	122	<-0.001	103	<-0.001	<-0.001	0.043	0.043	<-0.05
Lue Pub Cellar	8/04/2014	ME1400540046	384	7.3	2	228	3.94	3.79	1.95	<-0.01	0	0.002	102	<-0.001	27	<-0.001	31	<-0.001	<-0.001	0.072	0.072	<-0.05

Sample Location	Sampling Date	Sample Num	Lead - Dissolved mg/L	Magnesium - Dissolved mg/L	Manganese - Dissolved mg/L	Mercury - Dissolved mg/L	Molybdenum - Dissolved mg/L	Nickel - Dissolved mg/L	Potassium - Dissolved mg/L	Silver - Dissolved mg/L	Sodium - Dissolved mg/L	Strontium - Dissolved mg/L	Sulfate as SO ₄ - Turbidimetric mg/L	Zinc - Dissolved mg/L	Nitrate as N mg/L	Nitrate + Nitrite as N mg/L	Nitrite as N mg/L	Total Kjeldahl Nitrogen as N mg/L	Total Nitrogen as N mg/L	Total Phosphorus as P mg/L	Total Alkalinity as CaCO ₃ mg/L
BGW01	7/01/2014	ME140079002	<0.001	1	0.008	<0.0001	<0.001	<0.001	2	<0.001	18	0.025	7	0.036	0.08	0.08	<0.01	0.9	1	0.07	22
BGW01	7/04/2014	ME140054001	<0.001	0.002	<0.001	<0.0001	<0.001	0.002	3	<0.001	22	0.029	7	<0.011	0.2	0.2	<0.01	1.4	1.6	0.06	26
BGW01	7/07/2014	ME1401051001	<0.001	1	0.004	<0.0001	<0.001	<0.001	2	<0.001	21	0.028	2	<0.018	0.38	0.38	<0.01	0.1	0.5	0.03	30
BGW01	10/10/2014	ME1401512001	<0.001	0.002	0.006	<0.0001	<0.001	<0.001	2	<0.001	20	0.033	15	0.006	0.6	0.6	<0.01	0.4	1	0.04	16
BGW01	18/08/2015	ME1510328024	<0.001	2	<0.01	0	0	<0.001	3	0	22	0	2	0.006	1.66	1.66	<0.01	0.2	1.9	0.13	24
BGW03	7/01/2014	ME1400079003	<0.001	0.94	0.034	<0.0001	<0.001	<0.001	6	<0.001	571	0.3	6	0.028	<0.01	0.02	0.02	1.3	1.3	0.08	585
BGW03	7/04/2014	ME1400540002	<0.001	0.564	0.874	<0.0001	<0.001	<0.001	5	<0.001	331	0.382	11	<0.005	<0.01	0.09	0.08	1.9	2	0.02	178
BGW03	7/07/2014	ME1401051002	0.003	0.626	0.292	<0.0001	<0.001	<0.001	6	<0.001	400	0.464	5	0.008	<0.01	<0.01	<0.01	0.7	0.7	<0.01	303
BGW03	10/10/2014	ME1401512002	0.001	0.686	0.056	<0.0001	<0.001	<0.001	6	<0.001	540	0.392	7	<0.005	0.04	0.04	<0.01	0.6	0.6	<0.01	450
BGW05	7/01/2014	ME140079004	<0.001	0.003	1.43	<0.0001	<0.001	0.005	2	<0.001	55	0.173	32	0.078	<0.01	<0.01	<0.01	0.7	0.7	0.04	90
BGW05	7/04/2014	ME1400540003	<0.001	0.002	0.022	<0.0001	<0.001	<0.001	2	<0.001	47	0.139	33	<0.016	0.42	0.42	<0.01	0.8	1.2	0.05	81
BGW05	7/07/2014	ME1401051003	<0.001	0.006	0.175	<0.0001	<0.001	<0.001	2	<0.001	43	0.129	22	0.021	0.07	0.07	<0.01	<0.1	<0.01	<0.01	92
BGW05	10/10/2014	ME1401512003	<0.001	0.001	1.45	<0.0001	<0.001	0.004	2	0.004	44	0.202	59	<0.016	0.06	0.06	<0.01	0.2	0.3	0.02	68
BGW05	4/02/2015	ME1500221013	<0.001	0.19	1.62	0	0	0.005	4	0	54	0	72	0.048	0.03	0.03	<0.01	0.5	0.5	0.06	68
BGW05	1/05/2015	ME1500659001	<0.001	0	0.371	<0.0001	<0.001	0.002	3	0	61	0	76	0.027	0.23	0.23	<0.01	0.4	0.6	0.02	62
BGW05	18/08/2015	ME1510328020	<0.001	0	0.469	0	0	0.002	4	0	59	0	73	<0.018	0.07	0.07	<0.01	0.1	0.2	0.1	63
BGW05	22/10/2015	ME1510717010	<0.001	0	0.957	0	0	0.003	2	0	58	0	70	0.041	0.07	0.07	<0.01	0.2	0.3	0.02	73
BGW05	24/02/2016	ME1600285029	<0.001	0	2.35	<0.0001	<0.001	0.008	3	0	68	0	110	0.023	0.07	0.07	<0.01	0.2	0.3	<0.01	75
BGW05	27/05/2016	ME1600733001	<0.001	0	0.488	0	0	0.002	4	0	60	0	143	<0.017	0.13	0.13	<0.01	0.1	0.1	<0.01	61
BGW05	5/09/2016	ME1601226041	<0.001	0	5.63	0	0	0.015	3	0	97	0	203	0.025	0.07	0.07	<0.01	0.2	0.3	<0.01	43
BGW05	20/12/2016	ME1601793015	<0.001	0	4.19	0	0	0.013	3	0	90	0	184	0.02	<0.01	<0.01	<0.01	0.2	0.2	<0.01	55
BGW06	19/05/2014	ME1401741013	<0.001	<0.001	0.27	<0.0001	<0.001	0.005	6	<0.001	131	0.438	128	<0.018	<0.01	<0.01	<0.01	2.4	2.4	0.24	86
BGW06	14/07/2014	ME1401051004	0.001	9	0.081	<0.0001	<0.001	0.005	5	<0.001	137	0.434	142	0.024	0.02	0.02	<0.01	0.9	0.9	0.13	105
BGW06	10/10/2014	ME1401512004	<0.001	8	0.123	<0.0001	<0.001	0.005	5	0.005	142	0.402	116	0.065	0.03	0.03	<0.01	2.4	2.4	0.27	101
BGW06	4/02/2015	ME1500221014	0.002	7	0.193	0	0	0.004	4	0	108	0	92	<0.014	<0.01	<0.01	<0.01	2.6	2.6	0.33	84
BGW06	1/05/2015	ME1500659002	0.002	8	0.157	0	0	0.004	4	0	119	0	78	0.047	0.03	0.04	<0.01	1.9	1.9	0.37	111
BGW06	18/08/2015	ME1510328021	0.002	4	0.18	0	0	0.007	5	0	53	0	62	0.023	<0.01	<0.01	<0.01	3	3	0.23	41
BGW06	22/10/2015	ME1510717011	0.002	5	0.202	0	0	0.007	5	0	58	0	46	<0.014	<0.01	<0.01	<0.01	3.9	3.9	0.4	52
BGW06	24/02/2016	ME1600285030	0.007	5	0.215	0	0	0.009	5	0	84	0	63	0.031	0.02	0.02	<0.01	4.9	4.9	0.58	75
BGW06	7/01/2016	ME1600733002	0.001	4	0.144	0	0	0.004	5	0	70	0	48	<0.01	0.08	0.08	<0.01	2.9	3	0.42	90
BGW06	5/09/2016	ME1601226042	<0.001	0	0.42	0	0	0.002	5	0	163	0	175	0.007	0.05	0.05	<0.01	0.8	0.8	0.12	158
BGW06	20/12/2016	ME1601793016	<0.001	0	0.474	0	0	0.002	4	0	180	0	205	<0.005	0.02	0.02	<0.01	0.5	0.5	0.02	158
BGW07	7/01/2014	ME1400790005	<0.001	0.029	0.244	<0.0001	<0.001	<0.001	9	<0.001	428	0.957	408	0.007	<0.01	0.02	0.02	0.9	0.9	0.04	459
BGW07	7/04/2014	ME1400540004	<0.001	0.036	0.205	<0.0001	<0.001	<0.001	12	<0.001	479	1.18	772	<0.005	<0.01	<0.01	<0.01	0.6	0.6	0.02	390
BGW07	23/07/2014	ME1401051005	<0.001	0.049	0.222	<0.0001	0.002	<0.001	12	<0.001	544	1.18	814	<0.005	<0.01	<0.01	<0.01	0.3	0.3	0.02	506
BGW07	14/10/2014	ME1401512005	<0.001	0.047	0.232	<0.0001	0.002	<0.001	13	<0.001	603	1.26	665	<0.013	0.09	0.09	<0.01	0.3	0.4	0.02	542
BGW07	4/02/2015	ME1500221015	<0.001	0	0.231	0	0	<0.001	11	0	485	0	638	<0.005	0.1	0.1	<0.01	0.7	0.8	0.03	466
BGW07	29/04/2015	ME1500659003	<0.001	0	0.245	0	0	<0.001	10	0	463	0	666	0.241	<0.01	0.06	0.06	0.8	0.8	0.04	318
BGW07	18/08/2015	ME1510328022	<0.001	0	0.379	0	0	<0.001	8	0	450	0	873	<0.005	0.02	0.04	<0.01	0.7	0.7	0.06	115
BGW07	22/10/2015	ME1510717012	<0.001	0	0.355	0	0	<0.001	9	0	436	0	748	<0.005	0.05	0.05	<0.01	0.5	0.6	0.05	111
BGW07	24/02/2016	ME1600285031	<0.001	0	0.289	0	0	0.002	7	0	158	0	371	<0.005	0.06	0.06	<0.01	1	1.1	0.03	86
BGW07	27/05/2016	ME1600733003	<0.001	0	0.338	0	0	<0.001	11	0	148	0	353	<0.005	0.04	0.04	<0.01	1.2	1.2	0.04	122
BGW07	5/09/2016	ME1601226043	<0.001	0	0.143	0	0	<0.001	7	0	132	0	353	0.006	0.17	0.17	<0.01	0.9	1.1	0.06	52
BGW07	20/12/2016	ME1601793017	<0.001	0	0.683	0	0	<0.001	5	0	166	0	407	<0.005	0.02	0.02	<0.01	1.7	1.7	0.1	107
BGW08	7/01/2014	ME1400790006	0.002	0.307	0.008	<0.0001	0.002	0.004	10	<0.001	413	0.818	36	0.044	0.34	0.34	<0.01	1.3	1.6	0.04	766
BGW08	7/04/2014	ME1400540005	0.002	0.332	0.001	<0.0001	0.002	<0.001	9	<0.001	361	0.838	36	<0.01	0.3	0.3	<0.01	0.1	0.4	<0.01	774
BGW08	23/07/2014	ME1401051006	<0.001	0.317	0.004	<0.0001	0.002	<0.001	9	<0.001	454	0.957	37	0.029	0.54	0.54	<0.01	0.2	0.7	0.17	964
BGW08	14/10/2014	ME1401512006	<0.001	0.201	0.127	<0.0001	0.002	<0.001	15	<0.001	415	1.06	50	<0.014	0.12	0.12	<0.01	0.1	0.2	0.02	818
BGW08	8/02/2015	ME1500221016	<0.001	0	0.205	0	0	<0.001	14	0	225	0	55	<0.011	0.02	0.02	<0.01	0.4	0.4	0.02	551
BGW08	1/05/2015	ME1500659004	<0.001	0	0.069	0	0	0.002	9	0	433	0	49	0.029	0.08	0.1	0.02	<0.1	0.1	0.02	860

Sample Location	Sampling Date	Sample Num	Lead - Dissolved mg/L	Lithium - Dissolved mg/L	Magnesium - Dissolved mg/L	Manganese - Dissolved mg/L	Mercury - Dissolved mg/L	Molybdenum - Dissolved mg/L	Nickel - Dissolved mg/L	Potassium - Dissolved mg/L	Silver - Dissolved mg/L	Sodium - Dissolved mg/L	Sr - Dissolved mg/L	Sulfate as SO4 - Turbidimetric mg/L	Zinc - Dissolved mg/L	Nitrate as N mg/L	Nitrate + N mg/L	Nitrite as N mg/L	Total Kjeldahl Nitrogen as N mg/L	Total Nitrogen as N mg/L	Phosphorus as P mg/L	Total Alkalinity as CaCO3 mg/L
BGW08	18/08/2015	ME1510328023	<0.001	0.363	22	0.142	0	0	<0.001	11	0	365	0	44	<0.01	0.05	0.05	<0.01	0.5	0.5	0.36	696
BGW08	28/10/2015	ME1510717013	<0.001	0	15	0.074	0	0	<0.001	9	0	396	0	36	<0.005	0.08	0.08	<0.01	8.6	8.7	0.81	904
BGW08	24/02/2016	ME1600265032	<0.001	0	18	0.064	0	0	<0.001	10	0	366	0	41	<0.012	0.04	0.04	<0.01	0.3	0.3	0.05	784
BGW08	27/05/2016	ME1600733004	<0.001	0	16	0.07	0	0	<0.001	9	0	362	0	42	<0.01	0.08	0.08	<0.01	<0.1	<0.1	<0.01	830
BGW08	5/09/2016	ME1601226004	0.008	0	19	0.176	0	0	<0.001	9	0	376	0	33	0.061	0.04	0.04	<0.01	0.2	0.2	0.13	766
BGW08	20/12/2016	ME1601793018	<0.001	0	16	0.092	0	0	<0.001	9	0	375	0	37	<0.005	0.08	0.08	<0.01	0.1	0.2	0.12	762
BGW09	7/01/2014	ME1400079007	<0.001	0.117	61	0.065	<0.0001	<0.001	<0.001	8	<0.001	176	2.26	28	0.03	0.04	0.04	<0.01	1	1	0.03	654
BGW09	21/05/2014	ME1400741014	<0.001	0.112	63	0.062	<0.0001	<0.001	0.038	8	<0.001	166	2.79	40	2.75	0.17	0.17	<0.01	<0.1	0.2	0.08	597
BGW09	7/07/2014	ME1401051007	<0.001	0.115	64	0.072	<0.0001	<0.001	<0.001	8	<0.001	170	2.33	47	0.007	<0.01	<0.01	<0.01	<0.1	<0.1	<0.01	685
BGW09	10/10/2014	ME1401512007	<0.001	0.087	59	0.084	<0.0001	<0.001	<0.001	7	<0.001	140	2.51	36	<0.005	0.05	0.05	<0.01	<0.1	<0.1	<0.01	696
BGW09	1/05/2015	ME1500659005	<0.001	0	71	0.071	0	0	0.022	7	0	166	0	28	<0.005	<0.01	<0.01	<0.01	0.2	0.2	0.02	632
BGW09	18/08/2015	ME1510328025	<0.001	0	71	0.085	0	0	0.018	8	0	195	0	22	<0.005	<0.01	<0.01	<0.01	0.2	0.2	<0.01	661
BGW09	22/10/2015	ME1510717014	<0.001	0	70	0.063	0	0	<0.001	7	0	202	0	23	<0.012	<0.01	<0.01	<0.01	0.1	0.1	0.02	640
BGW09	24/02/2016	ME1600285033	<0.001	0	64	0.069	0	0	<0.001	8	0	186	0	29	<0.005	0.05	0.05	<0.01	<0.1	<0.1	0.02	525
BGW09	27/05/2016	ME1600733005	<0.001	0	61	0.063	0	0	<0.001	8	0	155	0	31	<0.005	0.02	0.02	<0.01	<0.1	<0.1	<0.01	671
BGW09	5/09/2016	ME1601226005	<0.001	0	66	0.075	0	0	0.028	7	0	183	0	29	0.15	0.04	0.04	<0.01	<0.1	<0.1	<0.01	651
BGW09	20/12/2016	ME1601793019	<0.001	0	59	0.061	0	0	<0.001	6	0	168	0	27	<0.005	0.06	0.06	<0.01	<0.1	<0.1	<0.01	624
BGW10	10/01/2014	ME1400079008	<0.001	0.076	64	0.414	<0.0001	<0.001	0.022	21	<0.001	90	0.785	373	<0.012	<0.01	<0.01	<0.01	0.4	0.4	0.04	307
BGW10	31/03/2014	ME1400540006	<0.001	0.075	56	0.342	<0.0001	<0.001	<0.001	19	<0.001	84	0.638	288	0.007	1.65	1.65	<0.01	0.8	2.4	0.12	270
BGW10	15/07/2014	ME1400510008	<0.001	0.073	58	0.301	<0.0001	<0.001	<0.001	20	<0.001	87	0.657	299	<0.01	<0.01	<0.01	<0.01	0.3	0.3	0.05	316
BGW10	13/10/2014	ME1401512008	<0.001	0.066	52	0.311	<0.0001	<0.001	<0.001	16	<0.001	70	0.676	300	0.009	0.04	0.04	<0.01	0.3	0.3	0.06	324
BGW10	4/12/2014	ME1401720005	<0.001	0	74	0.378	0	0	<0.001	20	0	108	0	431	<0.016	0	0	0	0	0	0	360
BGW10	5/12/2014	ME1401720006	<0.001	0	77	0.369	0	0	0.022	19	0	109	0	434	0.009	0	0	0	0	0	0	366
BGW10	6/12/2014	ME1401720007	<0.001	0	78	0.351	0	0	<0.001	20	0	110	0	451	0.007	0	0	0	0	0	0	366
BGW10	7/12/2014	ME1401720008	<0.001	0	78	0.363	0	0	0.022	20	0	109	0	451	0.008	0	0	0	0	0	0	370
BGW10	5/02/2015	ME1500221018	<0.001	0	52	0.292	0	0	<0.001	17	0	70	0	286	<0.005	<0.01	<0.01	<0.01	<0.1	0.08	282	
BGW10	29/04/2015	ME1500659006	<0.001	0	57	0.309	0	0	0.002	19	0	80	0	318	<0.014	<0.01	<0.01	<0.01	<0.1	0.03	281	
BGW10	7/08/2015	ME1510328026	<0.001	0	59	0.299	0	0	<0.001	18	0	87	0	318	<0.005	<0.01	<0.01	<0.01	<0.1	0.03	288	
BGW10	27/10/2015	ME1510717015	<0.001	0	46	0.306	0	0	<0.001	14	0	66	0	284	<0.005	0.07	0.07	<0.01	<0.1	0.05	302	
BGW10	23/02/2016	ME1600285017	<0.001	0	56	0.297	0	0	<0.001	18	0	89	0	359	0.006	0.02	0.02	<0.01	<0.1	0.05	317	
BGW10	30/08/2016	ME1601226001	<0.001	0	68	0.318	0	0	<0.001	14	0	69	0	290	0.007	0.03	0.03	<0.01	<0.1	<0.01	0.03	242
BGW10	18/05/2016	ME1600733006	<0.001	0	48	0.318	0	0	<0.001	14	0	69	0	290	0.007	0.03	0.03	<0.01	<0.1	<0.01	0.03	332
BGW10	30/08/2016	ME1601226001	<0.001	0	68	0.331	0	0	<0.001	19	0	103	0	377	<0.01	0.04	0.04	<0.01	<0.1	<0.01	0.03	332
BGW10	21/12/2016	ME1601793032	<0.001	0	57	0.336	0	0	<0.001	17	0	80	0	366	0.006	0.04	0.04	<0.01	<0.1	<0.01	0.03	296
BGW102	10/01/2016	ME1400079053	0.002	0.363	43	3.22	<0.0001	0.013	0.003	17	<0.001	80	1.34	366	0.037	<0.01	<0.01	0.6	0.6	0.21	296	
BGW102	10/01/2014	ME1400079053	0.002	0.363	43	3.22	<0.0001	0.013	0.003	17	<0.001	80	1.34	366	0.037	<0.01	<0.01	0.6	0.6	0.21	296	
BGW102	14/10/2014	ME1401512051	<0.001	0.357	63	2.59	<0.0001	0.013	<0.001	37	<0.001	75	1.26	366	0.103	<0.01	<0.01	0.6	0.6	0.21	296	
BGW102	14/10/2014	ME1401512051	<0.001	0.357	63	2.59	<0.0001	0.013	<0.001	37	<0.001	75	1.26	366	0.103	<0.01	<0.01	0.6	0.6	0.21	296	
BGW102	30/04/2015	ME1500659043	0.026	0	63	2.73	<0.0001	0.013	0.003	32	0	70	0	393	0.239	0.04	0.04	<0.01	1.1	1.1	0.15	283
BGW102	30/04/2015	ME1500659043	0.026	0	63	2.73	<0.0001	0.013	0.003	32	0	70	0	393	0.239	0.04	0.04	<0.01	1.1	1.1	0.15	283
BGW106	10/01/2014	ME1400079045	0.002	0.171	39	2.41	<0.0001	<0.001	0.002	24	<0.001	81	0.94	225	0.044	<0.01	<0.01	<0.01	1.5	1.5	0.03	151
BGW106	9/04/2014	ME1400540043	<0.001	0.175	42	2.65	<0.0001	<0.001	<0.001	24	<0.001	83	1.14	218	<0.019	<0.01	<0.01	<0.01	1.1	1.1	<0.01	144
BGW106	22/07/2014	ME1401051046	<0.001	0.156	42	2.5	<0.0001	<0.001	<0.001	25	<0.001	85	1.02	249	<0.015	0.3	0.3	<0.01	0.8	1.1	<0.01	168
BGW106	14/10/2014	ME1401512048	<0.001	0.16	44	2.36	<0.0001	<0.001	<0.001	26	<0.001	86	0.979	226	0.043	0.12	0.14	0.02	1	1.1	<0.01	163
BGW106	8/02/2015	ME1500221020	<0.001	0	43	2.55	<0.0001	0	0.002	21	0	78	0	239	0.302	0.42	0.42	<0.01	0.4	0.8	0.05	138
BGW106	30/04/2015	ME1500659044	0.003	0	46	2.29	<0.0001	0.003	0.003	22	0	85	0	248	0.45	0.14	0.14	<0.01	0.2	0.3	<0.01	146
BGW106	14/08/2015	ME1510328027	<0.001	0	45	0.04	0	0	<0.001	22	0	89	0	245	0.071	0.13	0.13	<0.01	0.1	0.2	<0.01	141
BGW106	22/10/2015	ME1510717051	<0.001	0	50	0.124	0	0	<0.001	24	0	86	0	229	0.12	0.08	0.08	<0.01	<0.1	<0.01	0.03	109
BGW106	22/02/2016	ME1600285001	<0.001	0	41	0.037	0	0	<0.001	24	0	86	0	254	0.152	0.05	0.05	<0.01	0.2	0.2	<0.01	138
BGW106	18/05/2016	ME1600733007	<0.001	0	38	0.052	0	0	<0.001	18	0	72	0	218	0.113	0.12	0.12	<0.01	<0.1	<0.01	0.03	122

Sample Location	Sampling Date	Sample Num	Lead - Dissolved mg/L	Lithium - Dissolved mg/L	Magnesium - Dissolved mg/L	Manganese - Dissolved mg/L	Mercury - Dissolved mg/L	Molybdenum - Dissolved mg/L	Nickel - Dissolved mg/L	Potassium - Dissolved mg/L	Silver - Dissolved mg/L	Sodium - Dissolved mg/L	Strontium - Dissolved mg/L	Sulfate as SO4 - Turbidimetric mg/L	Zinc - Dissolved mg/L	Nitrate as N mg/L	Nitrate + Nitrite as N mg/L	Nitrite as N mg/L	Total Kjeldahl Nitrogen as N mg/L	Total Nitrogen as N mg/L	Total Phosphorus as P mg/L	Total Alkalinity as CaCO3 mg/L
BGW106	1/09/2016	ME1601226020	<0.001	0	45	0.021	0	0	<0.001	21	0	86	0	268	0.141	0.11	0.11	<0.01	<0.1	0.1	0.03	165
BGW106	19/12/2016	ME1601793001	<0.001	0	42	0.026	0	0	<0.001	20	0	77	0	235	0.104	0.14	0.14	<0.01	<0.1	0.1	<0.01	146
BGW107	10/01/2014	ME140079946	<0.001	0.279	70	3.16	<0.0001	0.003	0.006	33	<0.001	81	1.62	320	0.07	0.02	0.02	<0.01	0.6	0.6	0.31	232
BGW107	9/04/2014	ME1400540044	<0.001	0.264	78	4.43	<0.0001	0.003	0.008	34	<0.001	82	2.04	306	0.074	<0.01	<0.01	<0.01	0.2	0.2	0.05	195
BGW107	22/07/2014	ME1401051049	<0.001	0.383	63	2.04	<0.0001	0.006	0.002	31	<0.001	96	1.57	316	0.052	<0.01	<0.01	<0.01	0.2	0.2	0.05	328
BGW107	14/10/2014	ME1401512049	0.001	0.377	61	1.43	<0.0001	0.006	<0.001	30	<0.001	101	1.56	284	0.049	0.1	0.1	<0.01	0.3	0.4	0.05	347
BGW107	8/02/2015	ME1500221021	<0.001	0	69	2.06	0	0	0.002	28	0	90	0	315	0.037	<0.01	<0.01	<0.01	0.2	0.2	0.07	273
BGW107	30/04/2015	ME1500659045	0.031	0	61	1.46	0	0	0.002	26	0	92	0	309	0.074	<0.01	<0.01	<0.01	0.3	0.3	0.08	315
BGW107	14/08/2015	ME1510328028	<0.001	0	59	1.23	0	0	<0.001	26	0	99	0	294	0.033	<0.01	<0.01	<0.01	0.3	0.3	0.06	316
BGW107	22/10/2015	ME1510717052	<0.001	0	64	1.11	0	0	<0.001	28	0	100	0	314	0.058	0.03	0.03	<0.01	0.2	0.2	0.06	300
BGW107	22/02/2016	ME1600285002	<0.001	0	50	1.01	0	0	<0.001	24	0	97	0	301	0.069	<0.01	<0.01	<0.01	0.4	0.4	0.04	319
BGW107	18/05/2016	ME1600733008	<0.001	0	50	1.01	0	0	<0.001	24	0	85	0	308	0.046	0.04	0.04	<0.01	<0.1	<0.01	0.07	285
BGW107	1/09/2016	ME1601226021	<0.001	0	54	1.04	0	0	<0.001	25	0	100	0	308	0.046	0.02	0.02	<0.01	0.2	0.2	0.05	386
BGW107	19/12/2016	ME1601793002	<0.001	0	48	1.11	0	0	<0.001	23	0	97	0	250	0.03	<0.01	0.03	0.02	0.2	0.2	0.08	356
BGW108	6/01/2014	ME140079947	0.007	0.478	111	1.32	<0.0001	0.014	0.003	35	<0.001	207	3.1	710	0.514	<0.01	<0.01	<0.01	1.5	1.4	0.08	461
BGW108	9/04/2014	ME1400540045	0.006	0.496	102	1.4	<0.0001	0.012	0.002	33	<0.001	163	3.73	608	0.409	<0.01	<0.01	<0.01	0.4	0.4	0.15	480
BGW108	15/07/2014	ME1401051050	0.003	0.479	114	1.98	<0.0001	0.012	0.002	34	<0.001	230	3.1	754	0.418	0.06	0.06	<0.01	0.4	0.5	0.18	512
BGW108	8/10/2014	ME1401512050	0.008	0.48	122	1.45	<0.0001	0.011	<0.001	37	<0.001	240	3.17	721	0.438	0.07	0.07	<0.01	0.4	0.5	0.27	489
BGW108	28/11/2014	ME140172001	<0.001	0	120	1.51	0	0	0.002	32	0	235	0	777	0.321	0	0	0	0	0	0	493
BGW108	29/11/2014	ME140172002	<0.001	0	116	1.48	0	0	0.002	32	0	228	0	763	0.352	0	0	0	0	0	0	490
BGW108	30/11/2014	ME140172003	<0.001	0	114	1.34	0	0	0.002	32	0	228	0	752	0.352	0	0	0	0	0	0	488
BGW108	1/12/2014	ME140172004	<0.001	0	108	1.28	0	0	0.002	31	0	220	0	728	0.398	0	0	0	0	0	0	486
BGW108	7/02/2015	ME1500221022	0.005	0	109	2.28	0	0	<0.001	31	0	203	0	691	0.432	<0.01	<0.01	<0.01	0.4	0.4	0.24	454
BGW108	30/04/2015	ME1500659046	0.007	0	120	1.82	0	0	0.002	32	0	222	0	710	0.422	<0.01	<0.01	<0.01	0.5	0.5	0.44	480
BGW108	11/08/2015	ME1510328029	<0.015	0	116	1.59	0	0	<0.001	31	0	228	0	728	0.45	<0.01	<0.01	<0.01	0.4	0.4	0.28	409
BGW108	27/10/2015	ME1510717053	0.022	0	112	1.3	0	0	<0.001	31	0	207	0	722	0.404	0.04	0.04	<0.01	0.4	0.4	0.14	481
BGW108	23/02/2016	ME1602650318	0.021	0	106	1.16	0	0	0.002	30	0	202	0	743	0.379	0.04	0.04	<0.01	0.4	0.4	0.1	504
BGW108	19/05/2016	ME1600733009	0.021	0	98	1.25	0	0	0.002	28	0	206	0	712	0.345	0.02	0.02	<0.01	1	1	0.06	542
BGW108	6/09/2016	ME1601226056	0.05	0	8	0.126	0	0	0.007	9	0	23	0	60	0.288	0.73	0.73	<0.01	0.4	1.1	0.04	51
BGW108	19/12/2016	ME1601793003	0.024	0	107	2.32	0	0	0.002	29	0	198	0	710	0.725	0.02	0.02	<0.01	0.4	0.4	0.11	439
BGW11	6/01/2014	ME1400079009	<0.001	0.162	94	0.116	<0.0001	<0.001	0.003	16	<0.001	134	0.58	155	0.023	0.04	0.04	<0.01	1.1	1.1	0.02	328
BGW11	17/05/2014	ME140741015	<0.001	0.152	94	0.103	<0.0001	<0.001	0.002	15	<0.001	121	0.551	131	0.068	0.14	0.14	<0.01	0.4	0.5	0.43	365
BGW11	18/07/2014	ME1401051009	<0.001	0.131	100	0.981	<0.0001	<0.001	0.003	14	<0.001	141	0.528	202	0.037	0.06	0.06	<0.01	0.2	0.3	0.04	352
BGW11	9/10/2014	ME1401512009	<0.001	0.1	117	0.09	<0.0001	<0.001	0.003	18	<0.001	185	0.573	164	<0.015	0.1	0.1	<0.01	0.2	0.3	<0.01	355
BGW11	7/02/2015	ME1500221023	<0.001	0	92	0.12	0	0	0.002	13	0	122	0	206	0.007	0.03	0.03	<0.01	0.4	0.4	0.03	285
BGW11	29/04/2015	ME1500659007	<0.001	0	112	0.115	0	0	0.002	15	0	149	0	172	0.021	0.05	0.05	<0.01	0.3	0.4	0.03	348
BGW11	11/08/2015	ME1510328030	<0.001	0	114	0.086	0	0	0.002	14	0	162	0	187	<0.016	0.05	0.05	<0.01	<0.1	0.1	0.14	310
BGW11	21/10/2015	ME1510717016	<0.001	0	116	0.104	0	0	0.002	15	0	165	0	170	0.02	0.11	0.11	<0.01	0.1	0.2	0.03	329
BGW11	22/02/2016	ME1600285003	<0.001	0	104	0.102	0	0	0.003	14	0	146	0	167	0.026	<0.01	<0.01	<0.01	0.2	0.2	0.03	317
BGW11	19/05/2016	ME1600733010	<0.001	0	102	0.102	0	0	0.003	14	0	139	0	201	<0.017	0.09	0.09	<0.01	0.1	0.2	<0.01	365
BGW11	1/09/2016	ME1601226022	<0.001	0	105	0.107	0	0	0.004	14	0	152	0	191	0.021	0.03	0.03	<0.01	1.6	1.6	0.06	370
BGW11	20/12/2016	ME1601793002	<0.001	0	84	0.122	0	0	0.002	12	0	116	0	152	<0.011	<0.01	0.02	<0.01	0.1	0.1	<0.01	348
BGW12	6/01/2014	ME1400799410	<0.001	0.152	195	0.275	<0.0001	0.004	0.044	20	<0.001	670	0.968	559	0.274	1.29	1.29	<0.01	1.3	2.6	<0.01	204
BGW12	2/04/2014	ME1400540008	<0.001	0.138	224	0.284	<0.0001	0.003	0.053	23	<0.001	695	0.957	594	0.318	1.73	1.73	<0.01	0.6	2.3	0.02	179
BGW12	18/07/2014	ME1401051010	<0.001	0.116	220	0.556	<0.0001	0.013	0.07	21	<0.001	693	1.04	596	0.521	1.02	1.04	0.02	0.5	1.5	0.03	210
BGW12	9/10/2014	ME1401512010	<0.001	0.119	199	0.353	<0.0001	0.009	0.068	17	<0.001	574	1.04	595	0.35	1.5	1.5	<0.01	0.3	1.8	0.02	200
BGW12	7/02/2015	ME1500221024	<0.001	0	199	0.6	0	0	0.053	18	0	643	0	527	0.219	0.62	0.62	<0.01	1.4	2.3	0.24	168
BGW12	29/04/2015	ME1500659008	<0.001	0	187	0.492	0	0	0.049	16	0	629	0	541	0.119	0.32	0.32	0.05	1.3	1.7	0.23	168
BGW12	11/08/2015	ME1510328031	<0.001	0	168	0.371	0	0	0.047	14	0	539	0	480	0.243	0.36	0.36	<0.01	0.4	0.8	0.25	158
BGW12	21/10/2015	ME1510717017	<0.001	0	190	0.278	0	0	0.042	16	0	640	0	491	0.273	0.83	0.83	<0.01	0.3	1.1	0.1	178

Sample Location	Sampling Date	Sample Num	Lead - Dissolved mg/L	Lithium - Dissolved mg/L	Magnesium - Dissolved mg/L	Manganese - Dissolved mg/L	Mercury - Dissolved mg/L	Molybdenum - Dissolved mg/L	Nickel - Dissolved mg/L	Potassium - Dissolved mg/L	Silver - Dissolved mg/L	Sodium - Dissolved mg/L	Strontium - Dissolved mg/L	Sulfate as SO4 - Turbidimetric mg/L	Zinc - Dissolved mg/L	Nitrate as N mg/L	Nitrate + Nitrite as N mg/L	Nitrite as N mg/L	Nitrate as N mg/L	Total Kjeldahl Nitrogen as N mg/L	Total Nitrogen as N mg/L	Total Phosphorus as P mg/L	Total Alkalinity as CaCO3 mg/L
BGW12	22/02/2016	ME1602265004	<0.001	0	171	0.333	0	0	0.043	14	0	554	0	456	0.105	0.19	0.21	0.02	1.4	1.6	0.27	158	
BGW12	19/05/2016	ME160733011	<0.001	0	168	0.356	0	0	0.043	15	0	628	0	545	0.195	0.32	0.34	0.02	0.5	0.8	0.07	195	
BGW12	1/09/2016	ME1601226023	<0.001	0	155	0.387	0	0	0.041	13	0	516	0	394	0.057	0.18	0.18	<0.01	0.6	0.8	0.1	189	
BGW12	20/12/2016	ME1601793021	<0.001	0	87	0.685	0	0	0.022	10	0	310	0	309	0.101	0.22	0.23	<0.01	0.1	0.3	0.04	134	
BGW14	8/01/2014	ME1400799011	<0.001	0.251	106	0.026	<0.0001	<0.001	0.003	34	<0.001	117	0.843	195	<0.018	0.12	0.12	<0.01	0.6	0.7	0.15	513	
BGW14	2/04/2014	ME1400540007	<0.001	0.257	105	<0.015	<0.0001	<0.001	0.002	33	<0.001	112	0.895	195	<0.012	0.21	0.21	<0.01	0.8	1	0.11	513	
BGW14	23/07/2014	ME1401051011	<0.001	0.219	102	<0.01	<0.0001	<0.001	0.003	32	<0.001	120	0.774	147	0.024	0.14	0.14	<0.01	0.3	0.4	0.09	564	
BGW14	8/10/2014	ME1401512011	<0.001	0.208	95	<0.013	<0.0001	<0.001	0.002	28	<0.001	101	0.886	181	<0.018	0.22	0.22	<0.01	0.5	0.7	0.06	566	
BGW14	7/02/2015	ME1500221025	<0.001	0	107	<0.013	0	0	0.005	30	0	112	0	207	<0.005	0.21	0.21	<0.01	0.4	0.6	0.08	508	
BGW14	1/05/2015	ME1500699009	<0.001	0	122	<0.011	0	0	0.002	32	0	130	0	210	0.03	0.12	0.12	<0.01	0.6	0.7	0.14	544	
BGW14	11/08/2015	ME1510328032	<0.001	0	107	0.006	0	0	0.025	29	0	113	0	211	0.025	0.16	0.16	<0.01	0.2	0.2	0.06	603	
BGW14	28/10/2015	ME1510717018	<0.001	0	108	<0.014	0	0	0.002	31	0	117	0	217	0.024	0.21	0.21	<0.01	0.1	0.3	0.04	580	
BGW14	25/02/2016	ME160265036	<0.001	0	115	0.003	0	0	0.003	30	0	119	0	231	0.021	0.18	0.18	<0.01	0.1	0.3	0.04	593	
BGW14	25/05/2016	ME1600734012	<0.001	0	109	0.039	0	0	0.006	29	0	117	0	214	<0.018	0.13	0.13	<0.01	0.2	0.2	<0.01	503	
BGW14	7/09/2016	ME1601226057	<0.001	0	116	0.029	0	0	0.003	31	0	127	0	242	<0.017	0.17	0.17	<0.01	0.2	0.2	<0.01	542	
BGW14	21/12/2016	ME1601793033	<0.001	0	76	0.098	0	0	<0.001	21	0	108	0	139	0.008	0.1	0.1	<0.01	0.3	0.4	0.15	391	
BGW15	13/01/2014	ME1400079012	0.003	0.691	83	0.136	<0.0001	0.01	<0.001	26	<0.001	565	2.16	593	<0.011	0.58	0.58	<0.01	0.6	1.2	0.02	860	
BGW15	9/04/2014	ME1400540009	<0.001	0.673	80	0.123	<0.0001	0.01	<0.001	27	<0.001	483	2.16	560	<0.005	0.54	0.54	<0.01	0.3	0.8	0.01	848	
BGW15	22/07/2014	ME1401051012	<0.001	0.658	74	0.099	<0.0001	0.01	<0.001	26	<0.001	544	2.03	500	<0.012	0.5	0.5	<0.01	0.2	0.7	<0.01	1030	
BGW15	8/10/2014	ME1401512012	<0.001	0.601	77	0.11	<0.0001	0.01	<0.001	28	0	647	2.02	445	<0.011	0.43	0.43	<0.01	0.4	0.8	<0.01	1030	
BGW15	7/02/2015	ME1500221026	<0.001	0	66	0.105	0	0	<0.001	23	0	509	0	458	<0.005	0.33	0.33	<0.01	0.5	0.8	0.1	931	
BGW15	1/05/2015	ME1500699010	<0.001	0	70	0.099	0	0	<0.001	23	0	548	0	458	<0.017	0.3	0.3	<0.01	0.2	0.5	<0.01	954	
BGW15	11/08/2015	ME1510328033	<0.001	0	68	0.096	0	0	<0.001	21	0	514	0	457	<0.018	0.29	0.29	<0.01	0.3	0.6	0.15	907	
BGW15	28/10/2015	ME1510717019	<0.001	0	67	0.098	0	0	<0.001	22	0	512	0	438	<0.01	0.53	0.53	<0.01	0.2	0.7	0.04	982	
BGW15	25/02/2016	ME160265037	<0.001	0	64	0.099	0	0	<0.001	21	0	530	0	474	<0.011	0.39	0.39	<0.01	0.1	0.5	<0.01	862	
BGW15	25/05/2016	ME160733013	<0.001	0	58	0.106	0	0	<0.001	21	0	567	0	444	0.007	0.34	0.34	<0.01	0.2	0.5	<0.01	1030	
BGW15	7/06/2016	ME1601226058	<0.001	0	72	0.138	0	0	<0.001	23	0	558	0	461	<0.014	0.26	0.26	<0.01	0.1	0.3	<0.01	913	
BGW15	21/12/2016	ME1601793034	<0.001	0	66	0.064	0	0	<0.001	21	0	507	0	476	<0.016	0.35	0.35	<0.01	0.1	0.4	<0.01	840	
BGW16	14/10/2013	ME1400079054	<0.001	0.067	48	0.009	<0.0001	<0.001	<0.001	15	<0.001	141	4.25	47	0.006	0.6	0.6	<0.01	0.4	1	0.06	556	
BGW16	13/01/2014	ME1400079013	<0.001	0.071	48	0.007	<0.0001	<0.001	<0.001	16	<0.001	155	3.83	49	0.007	0.85	0.85	<0.01	0.8	1.6	0.14	500	
BGW16	9/04/2014	ME1400540010	<0.001	0.074	47	0.003	<0.0001	<0.001	<0.001	16	<0.001	142	4	48	<0.005	0.96	0.97	<0.01	1	2	0.11	494	
BGW16	22/07/2014	ME1401051013	<0.001	0.069	49	<0.01	<0.0001	<0.001	<0.001	14	<0.001	153	4.48	44	<0.011	0.47	0.47	<0.01	<0.1	0.5	<0.01	646	
BGW16	8/10/2014	ME1401512013	<0.001	0.058	54	0.005	<0.0001	<0.001	<0.001	15	<0.001	175	4.7	54	0.005	0.57	0.57	<0.01	0.2	0.8	<0.01	657	
BGW16	7/02/2015	ME1500221027	<0.001	0	50	<0.016	0	0	<0.001	13	0	144	0	59	<0.005	0.73	0.73	<0.01	0.1	0.8	<0.01	584	
BGW16	1/05/2015	ME1500699011	<0.001	0	53	0.094	0	0	<0.001	14	0	164	0	58	<0.016	0.85	0.85	<0.01	0.4	1.2	0.03	586	
BGW16	11/08/2015	ME1510328034	<0.001	0	51	0.002	0	0	<0.001	13	0	150	0	47	<0.001	0.61	0.61	<0.01	0.1	0.6	<0.01	564	
BGW16	28/10/2015	ME1510717020	<0.001	0	59	0.006	0	0	<0.001	14	0	165	0	60	<0.01	0.49	0.49	<0.01	0.1	0.5	0.02	642	
BGW16	25/02/2016	ME160265038	<0.001	0	58	0.036	0	0	<0.001	14	0	159	0	66	0.006	0.37	0.37	<0.01	0.2	0.7	0.05	547	
BGW16	25/05/2016	ME160733014	<0.001	0	53	0.003	0	0	<0.001	14	0	155	0	68	<0.005	0.59	0.59	<0.01	0.1	0.6	0.02	607	
BGW16	7/09/2016	ME1601226059	<0.001	0	51	0.028	0	0	<0.001	13	0	159	0	33	<0.005	0.91	0.91	<0.01	0.9	0.9	<0.01	584	
BGW16	21/12/2016	ME1601793035	<0.001	0	42	<0.018	0	0	<0.001	12	0	147	0	40	<0.005	0.75	0.75	<0.01	0.1	0.8	0.02	549	
BGW17	14/10/2013	ME1400079055	<0.001	0.213	6	<0.01	<0.0001	0.007	<0.001	11	<0.001	367	1.56	22	<0.005	0.25	0.38	0.13	0.4	0.8	0.1	814	
BGW17	8/01/2014	ME1400799014	<0.001	0.233	5	0.009	<0.0001	0.008	<0.001	11	<0.001	404	1.3	18	<0.014	<0.01	<0.01	<0.01	0.7	0.7	0.09	784	
BGW17	9/04/2014	ME1400540011	<0.001	0.211	4	0.157	<0.0001	0.006	<0.001	10	<0.001	306	1.12	20	<0.005	<0.01	<0.01	<0.01	0.5	0.5	0.03	679	
BGW17	22/07/2014	ME1401051014	<0.001	0.206	7	0.055	<0.0001	0.008	<0.001	12	<0.001	433	1.8	20	<0.014	0.03	0.03	<0.01	0.1	0.1	<0.01	994	
BGW17	8/10/2014	ME1401512014	<0.001	0.208	8	<0.016	<0.0001	0.01	<0.001	12	<0.001	470	1.88	32	<0.005	0.06	0.06	<0.01	0.1	0.2	<0.01	943	
BGW17	7/02/2015	ME1500221028	<0.001	0	8	0.495	0	0	<0.001	10	0	333	0	21	<0.005	1.14	1.19	0.05	1.1	2.3	0.18	740	
BGW17	1/05/2015	ME1500699012	<0.001	0	9	<0.01	0	0	<0.001	11	0	397	0	21	<0.012	0.88	0.88	<0.01	0.2	1.1	0.11	798	
BGW17	11/08/2015	ME1510328035	<0.001	0	8	0.11	0	0	<0.001	9	0	376	0	14	0.008	<0.01	<0.01	<0.01	0.1	0.1	0.06	854	
BGW17	28/10/2015	ME1510717021	<0.001	0	9	0.145	0	0	<0.001	10	0	378	0	15	<0.005	0.1	0.1	<0.01	0.3	0.4	0.03	889	

Sample Location	Sampling Date	Sample Num	Lead - Dissolved mg/L	Lithium - Dissolved mg/L	Magnesium - Dissolved mg/L	Manganese - Dissolved mg/L	Mercury - Dissolved mg/L	Molybdenum - Dissolved mg/L	Nickel - Dissolved mg/L	Potassium - Dissolved mg/L	Silver - Dissolved mg/L	Sodium - Dissolved mg/L	Strontium - Dissolved mg/L	Sulfate as SO4 - Turbidimetric mg/L	Zinc - Dissolved mg/L	Nitrate as N mg/L	Nitrate + Nitrite as N mg/L	Nitrite as N mg/L	Total Kjeldahl Nitrogen as N mg/L	Total Nitrogen as N mg/L	Total Phosphorus as P mg/L	Total Alkalinity as CaCO3 mg/L
BGW17	25/02/2016	ME160285039	<0.001	0	8	<0.001	0	0	<0.001	10	0	396	0	17	0.006	0.98	0.98	<0.01	0.2	1.2	0.09	736
BGW17	25/02/2016	ME1600733015	<0.001	0	8	0.003	0	0	<0.001	10	0	404	0	15	<0.005	1.94	1.94	<0.01	0.2	2.1	0.14	911
BGW17	7/09/2016	ME1601226060	<0.001	0	8	0.114	0	0	<0.001	9	0	390	0	17	<0.005	0.1	0.1	<0.01	<0.1	0.1	<<0.01	864
BGW17	21/12/2016	ME1601793036	<0.001	0	8	0.026	0	0	<0.001	9	0	375	0	18	0.006	2.79	2.79	<0.01	0.8	3.6	0.14	817
BGW18	9/01/2014	ME1400079015	<0.001	0.077	20	62.8	<0.0001	0.002	<0.001	48	<0.001	22	0.365	289	0.025	<0.02	<0.02	<0.01	0.9	0.9	0.09	160
BGW18	3/04/2014	ME1400540012	<0.001	0.069	24	50.7	<0.0001	0.003	<0.001	46	<0.001	26	0.475	267	<0.017	0.02	0.02	<0.01	0.4	0.4	0.02	248
BGW18	15/07/2014	ME1401051015	<0.001	0.065	26	43.7	<0.0001	<0.001	<0.001	52	<0.001	30	0.492	309	0.022	<0.01	<0.01	<0.01	0.3	0.3	<<0.01	254
BGW18	8/10/2014	ME1401512015	<0.001	0.048	30	32	<0.0001	<0.001	<0.001	48	<0.001	26	0.601	362	0.006	0.06	0.06	<0.01	0.4	0.5	0.06	213
BGW18	6/02/2015	ME1500221029	<0.001	0	27	23.6	0	0	<0.001	43	0	23	0	447	0.035	<0.01	<0.01	<0.01	0.4	0.4	0.08	182
BGW18	30/04/2015	ME1500659013	<0.001	0	29	26.9	0	0	0.003	48	0	27	0	421	0.205	0.04	0.04	<0.01	0.4	0.4	0.06	176
BGW18	11/08/2015	ME1510328036	<0.001	0	26	24.2	0	0	0.002	42	0	23	0	397	0.194	0.03	0.03	<0.01	0.2	0.2	0.05	165
BGW18	27/10/2015	ME1510717022	<0.001	0	30	22.1	0	0	<0.001	49	0	26	0	409	0.033	0.12	0.12	<0.01	0.2	0.3	0.05	185
BGW18	23/02/2016	ME1600285019	<0.001	0	28	20.6	0	0	<0.001	48	0	27	0	436	<0.015	0.06	0.06	<0.01	0.3	0.4	0.06	186
BGW18	25/05/2016	ME1600733016	<0.001	0	28	20.5	0	0	<0.001	43	0	23	0	436	0.024	0.03	0.03	<0.01	0.2	0.2	0.04	198
BGW18	5/09/2016	ME1601226046	<0.001	0	29	19.2	0	0	0.004	49	0	25	0	428	0.134	0.07	0.07	<0.01	0.1	0.2	0.02	178
BGW18	21/12/2016	ME1601793037	<0.001	0	27	17.3	0	0	<0.001	44	0	22	0	390	0.009	0.04	0.04	<0.01	0.2	0.2	0.04	162
BGW19	10/01/2014	ME140079016	<0.001	0.077	31	23.6	<0.0001	<0.001	<0.001	44	<0.001	19	0.726	254	0.023	0.02	0.02	<0.01	1	1	0.27	226
BGW19	9/04/2014	ME1400540013	<0.001	0.073	33	2.5	<0.0001	<0.001	<0.001	42	<0.001	22	0.708	257	<0.011	0.05	0.05	<0.01	0.2	0.2	0.17	229
BGW19	21/07/2014	ME1401051016	<0.001	0.068	33	3.1	<0.0001	<0.001	<0.001	40	<0.001	18	0.677	276	0.034	<0.01	<0.01	<0.01	0.4	0.4	0.24	260
BGW19	14/10/2014	ME1401512016	<0.001	0.04	32	2.96	<0.0001	<0.001	<0.001	38	0	17	0.688	250	<0.014	0.06	0.06	<0.01	0.2	0.3	0.18	254
BGW19	8/02/2015	ME1500221030	<0.001	0	32	3.28	0	0	<0.001	38	0	16	0	278	<0.005	<0.01	<0.01	<0.01	0.2	0.2	0.11	219
BGW19	30/04/2015	ME1500659014	0.002	0	35	3.02	0	0	<0.001	42	0	19	0	282	0.023	0.05	0.05	<0.01	0.2	0.2	0.22	224
BGW19	19/08/2015	ME1510328037	<0.001	0	31	3.42	0	0	<0.001	37	0	17	0	267	<0.019	<0.01	<0.01	<0.01	0.2	0.2	0.24	234
BGW19	28/10/2015	ME1510717023	<0.001	0	32	3.2	0	0	<0.001	38	0	17	0	268	<0.016	0.06	0.06	<0.01	0.2	0.3	0.22	236
BGW19	25/02/2016	ME1602659040	<0.001	0	34	3.6	0	0	<0.001	38	0	16	0	290	<0.015	0.06	0.06	<0.01	0.4	0.5	0.26	203
BGW19	19/05/2016	ME1600733017	<0.001	0	31	4.26	0	0	<0.001	36	0	16	0	290	<0.011	0.03	0.03	<0.01	<0.1	<0.1	0.21	230
BGW19	8/09/2016	ME1601226073	<0.001	0	32	4.26	0	0	<0.001	40	0	17	0	251	<0.01	0.09	0.09	<0.01	0.2	0.3	0.47	212
BGW19	19/12/2016	ME1601793004	<0.001	0	29	4.39	0	0	<0.001	36	0	15	0	243	0.009	0.03	0.03	<0.01	<0.1	<0.1	0.32	222
BGW20	10/01/2014	ME1400079017	<0.001	0.046	25	31.8	<0.0001	<0.001	<0.001	49	<0.001	18	0.073	290	0.039	0.04	0.04	<0.01	1.4	1.4	0.29	41
BGW20	9/04/2014	ME1400540014	<0.001	0.049	27	30.5	<0.0001	0.002	<0.001	46	<0.001	19	0.085	294	<0.018	0.02	0.02	<0.01	0.3	0.3	0.28	45
BGW20	21/07/2014	ME1401051017	<0.001	0.046	29	28.4	<0.0001	<0.001	0.01	57	<0.001	23	0.073	342	0.187	0.1	0.1	<0.01	0.2	0.3	0.1	25
BGW20	14/10/2014	ME1401512017	<0.001	0.041	28	31.2	<0.0001	<0.001	0.002	52	<0.001	19	0.063	298	0.16	0.18	0.18	<0.01	0.1	0.3	0.02	25
BGW20	8/02/2015	ME1500221031	0.002	0	27	32.2	0	0	0.008	44	0	17	0	315	0.224	0.09	0.09	<0.01	<0.1	<0.1	0.03	32
BGW20	29/04/2015	ME1500659015	<0.001	0	26	0.037	0	0	0.002	42	0	17	0	310	0.153	0.14	0.14	<0.01	0.5	0.6	0.02	25
BGW20	19/08/2015	ME1510328038	<0.001	0	25	30.7	0	0	0.002	40	0	16	0	302	0.136	0.38	0.38	<0.01	0.2	0.6	0.02	26
BGW20	22/10/2015	ME1510717024	<0.001	0	28	29.2	0	0	<0.001	44	0	18	0	297	0.094	0.3	0.3	<0.01	0.3	0.3	0.29	27
BGW20	22/02/2016	ME1602659005	<0.001	0	26	32.8	0	0	<0.001	46	0	19	0	298	0.107	0.03	0.03	<0.01	2.4	2.4	0.16	32
BGW20	25/02/2016	ME1602659047	<0.001	0	66	0.023	0	0	<0.001	4	0	161	0	248	<0.005	0.04	0.04	<0.01	1.1	1.1	0.04	126
BGW20	18/05/2016	ME1600733018	<0.001	0	25	32.4	0	0	<0.001	18	0	16	0	265	0.028	0.09	0.09	<0.01	0.2	0.3	<<0.01	30
BGW20	1/09/2016	ME1601226024	<0.001	0	26	32	0	0	<0.001	46	0	18	0	331	0.052	0.23	0.23	<0.01	<0.1	0.2	<<0.01	28
BGW20	19/12/2016	ME1601793005	<0.001	0	24	35	0	0	<0.001	40	0	15	0	273	0.028	0.57	0.57	<0.01	<0.1	0.6	0.02	36
BGW21	8/01/2014	ME1400079018	0.002	0.021	163	0.028	<0.0001	<0.001	0.002	4	<0.001	183	3.28	583	0.063	0.56	0.56	<0.01	1.5	2.1	0.04	627
BGW21	8/04/2014	ME1400540015	<0.001	0.022	157	0.063	<0.0001	<0.001	0.002	2	<0.001	161	3.47	566	0.042	0.55	0.55	<0.01	<0.1	0.6	<<0.01	577
BGW21	10/07/2014	ME1401051018	<0.001	0.02	174	0.084	<0.0001	<0.001	0.002	3	<0.001	200	4.27	637	0.048	0.38	0.38	<0.01	<0.1	0.4	0.02	723
BGW21	21/10/2014	ME1401512018	<0.001	<0.012	161	0.057	<0.0001	<0.001	<0.001	3	0	153	3.66	589	0.186	0.64	0.64	<0.01	0.1	0.7	<<0.01	722
BGW21	9/02/2015	ME1500221032	<0.001	0	163	0.086	0	0	<0.001	3	0	176	0	596	0.08	0.56	0.56	<0.01	0.1	0.7	0.02	628
BGW21	1/05/2015	ME1500659016	<0.001	0	168	31.1	0	0	0.002	2	0	183	0	600	0.195	0.5	0.5	<0.01	<0.1	0.5	<<0.01	664
BGW21	19/08/2015	ME1510328039	<0.001	0	158	0.101	0	0	0.002	2	0	179	0	610	0.028	0.46	0.46	<0.01	<0.1	0.5	0.05	632
BGW21	28/10/2015	ME1510717025	<0.001	0	160	0.056	0	0	<0.001	2	0	190	0	235	0.024	0.54	0.54	<0.01	<0.1	0.5	0.19	692
BGW21	25/02/2016	ME1602659041	<0.001	0	170	0.052	0	0	<0.001	2	0	179	0	654	0.033	0.49	0.49	<0.01	<0.1	0.5	<<0.01	607

Sample Location	Sampling Date	Sample Num	Lead - Dissolved mg/L	Lithium - Dissolved mg/L	Magnesium - Dissolved mg/L	Manganese - Dissolved mg/L	Mercury - Dissolved mg/L	Molybdenum - Dissolved mg/L	Nickel - Dissolved mg/L	Potassium - Dissolved mg/L	Silver - Dissolved mg/L	Sodium - Dissolved mg/L	Strontium - Dissolved mg/L	Sulfate as SO4 - Turbidimetric mg/L	Zinc - Dissolved mg/L	Nitrate as N mg/L	Nitrate + Nitrite as N mg/L	Nitrite as N mg/L	Total Kjeldahl Nitrogen as N mg/L	Total Nitrogen as N mg/L	Total Phosphorus as P mg/L	Total Alkalinity as CaCO3 mg/L
BGW21	25/05/2016	ME1600730119	<0.001	0	153	0.058	0	0	<0.001	3	0	203	0	642	<0.015	0.57	0.57	<0.01	<0.1	0.6	<0.01	731
BGW21	7/09/2016	ME1601226061	<0.001	0	163	0.087	0	0	<0.001	2	0	188	0	674	<0.013	0.53	0.53	<0.01	<0.1	0.5	<0.01	664
BGW21	21/12/2016	ME1601793038	<0.001	0	149	0.033	0	0	<0.001	2	0	180	0	569	<0.019	0.55	0.55	<0.01	<0.1	0.6	<0.01	645
BGW24	9/04/2014	ME1400079020	<0.001	<0.018	104	0.579	<0.0001	<0.001	0.003	2	<0.001	185	2.21	43	0.093	0.76	0.76	<0.01	1.1	1.9	0.07	610
BGW24	08/04/2014	ME1400509017	<0.001	<0.013	86	0.485	<0.0001	<0.001	0.002	2	<0.001	116	1.99	43	0.091	10.3	10.5	0.19	2.7	13.2	<0.01	545
BGW24	08/07/2014	ME1401051020	<0.001	<0.019	114	0.328	<0.0001	<0.001	0.003	2	<0.001	187	2.56	37	0.118	1.84	1.86	0.02	0.4	2.3	0.11	719
BGW24	21/10/2014	ME1401512020	<0.001	<0.016	127	0.323	<0.0001	<0.001	0.004	2	<0.001	233	2.69	55	0.128	1.76	1.79	0.03	0.4	2.2	0.02	710
BGW24	9/02/2015	ME1500221034	<0.001	0	118	0.295	0	0	0.002	2	0	191	0	57	0.102	1.54	1.56	0.02	0.4	2	0.07	601
BGW24	1/05/2015	ME1500659018	<0.001	0	128	0.296	0	0	0.003	2	0	212	0	56	0.134	1.57	1.61	0.04	0.4	2	0.02	658
BGW24	19/08/2015	ME1510328004	<0.001	0	97	0.289	0	0	0.004	4	0	143	0	43	0.121	0.92	1.04	0.04	0.4	2	0.05	580
BGW24	28/10/2015	ME1510717026	<0.001	0	110	0.256	0	0	0.002	4	0	184	0	46	0.126	0.35	0.35	<0.01	0.4	0.1	0.01	688
BGW24	25/02/2016	ME1600285042	<0.001	0	129	0.26	0	0	0.003	2	0	201	0	56	0.146	0.85	0.86	0.01	0.2	1.1	0.02	594
BGW24	25/05/2016	ME1600733020	<0.001	0	125	0.275	0	0	0.002	2	0	238	0	52	0.145	0.95	1.01	0.06	0.1	1.1	0.02	745
BGW24	7/09/2016	ME1601226062	<0.001	0	58	0.065	0	0	<0.001	1	0	76	0	26	0.057	1.3	1.3	<0.01	0.6	1.9	<0.01	368
BGW26	8/01/2014	ME1400079022	<0.001	0.053	108	<0.011	<0.0001	0.002	0.002	17	<0.001	128	0.298	156	0.04	0.27	0.27	<0.01	1.5	1.8	0.05	390
BGW26	2/04/2014	ME1400540019	<0.001	0.064	108	0.007	<0.0001	<0.001	<0.001	15	<0.001	119	0.301	160	<0.015	0.31	0.31	<0.01	0.3	0.6	<0.01	380
BGW26	23/07/2014	ME1401051022	<0.001	0.055	108	0.002	<0.0001	<0.001	<0.001	14	<0.001	126	0.31	190	0.024	0.29	0.29	<0.01	0.4	0.7	0.08	449
BGW26	8/10/2014	ME1401512022	<0.001	0.044	102	0.008	<0.0001	<0.001	<0.001	13	<0.001	112	0.291	167	0.023	0.38	0.38	<0.01	0.3	0.7	<0.01	420
BGW26	5/02/2015	ME1500221036	<0.001	0	109	0.005	0	0	<0.001	13	0	124	0	175	<0.005	0.31	0.31	<0.01	0.4	0.7	<0.01	394
BGW26	1/05/2015	ME1500659020	<0.001	0	120	0.004	0	0	<0.001	14	0	141	0	175	0.02	0.31	0.31	<0.01	0.2	0.5	<0.01	414
BGW26	11/08/2015	ME1510328041	<0.001	0	112	0.002	0	0	<0.001	13	0	130	0	195	0.008	0.3	0.3	<0.01	0.3	0.6	0.08	462
BGW26	28/10/2015	ME1510717027	<0.001	0	106	0.002	0	0	<0.001	13	0	131	0	173	<0.014	0.43	0.43	<0.01	0.4	0.4	0.05	418
BGW26	25/02/2016	ME1600285043	<0.001	0	116	0.002	0	0	<0.001	14	0	134	0	204	<0.013	0.32	0.32	<0.01	0.3	0.6	<0.01	358
BGW26	25/05/2016	ME1600733021	<0.001	0	111	0.002	0	0	<0.001	17	0	129	0	198	<0.017	0.34	0.34	<0.01	0.3	0.6	<0.01	449
BGW26	7/09/2016	ME1601226063	<0.001	0	110	<0.001	<0.001	0	<0.001	13	0	145	0	195	<0.005	0.34	0.34	<0.01	0.3	0.6	<0.01	399
BGW27	19/08/2015	ME1510328042	<0.001	0	13	0.698	0	0	<0.001	12	0	37	0	87	0.024	0.47	0.47	<0.01	0.2	0.7	0.34	130
BGW27	22/10/2015	ME1510717028	<0.001	0	16	0.613	0	0	0.002	15	0	43	0	78	0.048	0.25	0.25	<0.01	0.1	0.4	0.33	144
BGW27	22/02/2016	ME1600285006	<0.001	0	16	0.939	0	0	<0.001	15	0	42	0	84	0.051	0.08	0.08	<0.01	0.2	0.3	0.4	129
BGW27	18/05/2016	ME1600733022	<0.001	0	13	1.04	0	0	<0.001	12	0	36	0	78	0.028	0.05	0.05	<0.01	<0.1	<0.1	0.05	132
BGW27	1/09/2016	ME1601226025	<0.001	0	14	0.952	0	0	<0.001	15	0	41	0	82	0.043	0.19	0.19	<0.01	0.3	0.5	0.18	146
BGW27A	10/01/2014	ME1400079023	<0.001	<0.016	15	8.04	<0.0001	<0.001	0.016	11	<0.001	9	0.092	55	1.14	0.04	0.04	<0.01	0.8	0.8	0.43	55
BGW27A	9/04/2014	ME1400540020	<0.001	<0.017	17	7.69	<0.0001	0.002	0.013	11	<0.001	9	0.088	61	1.04	0.02	0.02	<0.01	0.2	0.2	0.27	52
BGW27A	21/07/2014	ME1401051023	<0.001	<0.017	16	7.06	<0.0001	<0.001	0.013	11	<0.001	8	0.088	66	1.09	<0.01	<0.01	<0.01	0.2	0.2	0.37	57
BGW27A	14/10/2014	ME1401512023	<0.001	<0.018	19	8.02	<0.0001	0.002	0.015	11	0	9	0.088	70	1.15	0.07	0.07	<0.01	0.4	0.5	0.33	51
BGW27A	8/02/2015	ME1500221037	<0.001	0	17	7.95	0	0	0.015	9	0	7	0	73	1.29	0.03	0.03	<0.01	<0.1	<0.1	0.14	42
BGW27A	29/04/2015	ME1500659021	<0.001	0	19	7.05	0	0	0.014	10	0	9	0	80	1.17	0.05	0.05	<0.01	0.4	0.4	0.51	39
BGW27A	19/08/2015	ME1510328043	<0.001	0	17	7.5	0	0	0.012	9	0	76	0	76	1.11	0.03	0.03	<0.01	0.3	0.3	0.88	48
BGW27A	22/10/2015	ME1510717029	<0.001	0	18	7	0	0	0.013	10	0	8	0	21	1.16	0.07	0.07	<0.01	<0.1	<0.1	0.4	22
BGW27A	28/05/2016	ME1600285007	<0.001	0	17	7.05	0	0	0.014	10	0	8	0	63	1.24	0.14	0.14	<0.01	0.2	0.3	0.74	52
BGW27A	18/05/2016	ME1600733023	<0.001	0	17	7.78	0	0	0.012	9	0	8	0	49	1.14	0.06	0.06	<0.01	<0.1	<0.1	0.34	52
BGW27A	1/09/2016	ME1601226026	<0.001	0	16	7.7	0	0	0.012	10	0	7	0	64	1.18	0.04	0.04	<0.01	<0.1	<0.1	0.47	57
BGW27A	19/12/2016	ME1601793007	<0.001	0	14	7.28	0	0	0.012	9	0	54	0	54	1.21	0.06	0.06	<0.01	<0.1	<0.1	0.33	52
BGW28	1/09/2016	ME1601226027	<0.001	0	5	0.064	0	0	<0.001	9	0	14	0	35	0.377	1.54	1.54	<0.01	0.3	1.8	<0.01	14
BGW29	9/04/2014	ME1400079024	<0.001	0.002	17	<0.001	<0.0001	<0.001	<0.001	16	<0.001	30	0.317	93	<0.005	3.61	3.63	0.02	1.5	5.1	0.87	110
BGW29	2/04/2014	ME1400540021	<0.001	0.002	21	<0.012	<0.0001	<0.001	<0.001	18	<0.001	35	0.367	134	0.008	17.3	17.3	<0.01	2	19.3	0.19	59
BGW29	15/07/2014	ME1401051024	<0.001	0.003	24	0.027	<0.0001	<0.001	<0.001	18	<0.001	39	0.48	186	<0.013	8.46	8.46	<0.01	1	9.5	0.47	116
BGW29	8/10/2014	ME1401512024	<0.001	0.002	27	0.055	<0.0001	<0.001	<0.001	18	<0.001	33	0.432	175	<0.011	2.28	2.28	<0.01	1.3	3.6	0.67	128
BGW29	6/02/2015	ME1500221038	<0.001	0	23	0.11	0	0	<0.001	17	0	31	0	158	0.078	2.38	2.38	<0.01	0.7	3.1	0.11	120
BGW29	30/04/2015	ME1500659022	<0.001	0	20	<0.017	<0.0001	0	<0.001	16	0	31	0	146	0.055	0.99	0.99	<0.01	0.8	4.8	0.32	75

Sample Location	Sampling Date	Sample Num	Lead - Dissolved mg/L	Lithium - Dissolved mg/L	Magnesium - Dissolved mg/L	Manganese - Dissolved mg/L	Mercury - Dissolved mg/L	Molybdenum - Dissolved mg/L	Nickel - Dissolved mg/L	Potassium - Dissolved mg/L	Silver - Dissolved mg/L	Sodium - Dissolved mg/L	Strontium - Dissolved mg/L	Sulfate as SO4 - Turbidimetric mg/L	Zinc - Dissolved mg/L	Nitrate as N mg/L	Nitrate + Nitrite as N mg/L	Nitrite as N mg/L	Total Kjeldahl Nitrogen as N mg/L	Total Nitrogen as N mg/L	Total Phosphorus as P mg/L	Total Alkalinity as CaCO3 mg/L
BGW29	11/08/2015	ME1510328044	<0.001	0	7	<0.01	0	0	<0.001	9	0	15	0	36	<0.005	0.84	0.84	<0.01	0.4	1.2	0.06	70
BGW29	27/10/2015	ME1510717030	<0.001	0	10	0.009	0	0	<0.001	17	0	19	0	37	<0.011	0.33	0.33	<0.01	0.6	0.9	0.3	94
BGW29	23/02/2016	ME1600265020	<0.001	0	8	0.008	0	0	<0.001	12	0	19	0	42	0.009	2.93	2.93	<0.01	0.8	3.7	0.05	59
BGW29	25/05/2016	ME1600733024	<0.001	0	11	0.002	0	0	<0.001	12	0	19	0	64	0.005	2.7	2.7	<0.01	0.3	3	0.09	82
BGW29	5/09/2016	ME1601226047	<0.001	0	5	0.004	0	0	<0.001	9	0	12	0	22	<0.005	0.83	0.83	<0.01	0.4	1.2	0.04	58
BGW29	21/12/2016	ME1601793039	<0.001	0	7	0.008	0	0	<0.001	9	0	10	0	8	<0.005	0.16	0.16	<0.01	0.3	0.5	0.03	79
BGW32	9/01/2014	ME1400790226	0.003	<0.018	139	0.001	<0.0001	<0.001	0.002	<1	<0.001	252	1.92	24	0.066	5.5	5.5	<0.01	0.4	5.9	0.15	692
BGW32	8/04/2014	ME1400540023	<0.001	<0.016	137	0.024	<0.0001	<0.001	0.002	1	<0.001	216	2.41	26	0.112	5.56	5.56	<0.01	0.5	6.1	0.03	665
BGW33	9/01/2014	ME1400079027	0.001	0.009	65	0.009	<0.0001	<0.001	0.002	2	<0.001	171	0.649	12	0.112	2.28	2.28	<0.01	1.5	3.8	0.05	536
BGW33	8/07/2014	ME1401051026	<0.001	0.004	32	0.001	<0.0001	<0.001	<0.001	<1	<0.001	74	0.3	8	0.156	1.35	1.35	<0.01	0.3	1.6	0.02	285
BGW33	25/02/2016	ME1600265044	<0.001	0	47	0.001	0	0	<0.001	1	0	88	0	9	0.127	1.84	1.84	<0.01	0.1	1.9	<0.01	346
BGW35	8/04/2014	ME1400540024	<0.001	<0.014	145	0.006	<0.0001	<0.001	0.002	1	<0.001	132	3.26	269	0.036	6.28	6.28	0.06	1	7.3	0.03	518
BGW35	12/07/2014	ME1401051027	<0.001	<0.012	145	0.004	<0.0001	<0.001	0.002	1	<0.001	142	2.84	276	0.152	5.95	6	0.05	0.4	6.4	0.03	600
BGW35	13/10/2014	ME1401512026	<0.001	0.006	151	0.004	<0.0001	<0.001	<0.001	1	0	127	2.83	261	0.024	6.07	6.09	0.02	1.2	7.3	0.07	611
BGW35	8/02/2015	ME1500221039	<0.001	0	141	0.008	0	0	<0.001	1	0	129	0	285	<0.013	4.9	4.92	0.02	5.9	10.8	0.07	451
BGW35	1/05/2015	ME1500659023	<0.001	0	151	0.004	0	0	<0.001	1	0	139	0	302	<0.018	5.45	5.45	<0.01	0.5	6	<0.01	539
BGW35	19/08/2015	ME1510328045	0.001	0	141	0.003	0	0	0.01	1	0	133	0	325	0.898	5.73	5.74	<0.01	0.3	6	<0.01	508
BGW35	28/10/2015	ME1510717031	<0.001	0	141	0.003	0	0	0.002	1	0	136	0	291	0.212	5.66	5.66	<0.01	0.4	6.1	0.02	550
BGW35	25/02/2016	ME1600265045	<0.001	0	153	<0.018	0	0	<0.001	1	0	136	0	327	<0.011	5.17	5.17	<0.01	1.9	7.1	0.02	487
BGW35	25/05/2016	ME1600733025	<0.001	0	144	0.004	0	0	<0.001	2	0	139	0	249	0.022	4.42	4.43	<0.01	0.4	4.8	0.02	615
BGW35	7/09/2016	ME1601226064	<0.001	0	147	0.002	0	0	<0.001	1	0	143	0	313	<0.011	5.89	5.9	<0.01	0.6	6.5	<0.01	562
BGW35	21/12/2016	ME1601793040	<0.001	0	192	0.006	0	0	<0.001	1	0	192	0	358	<0.014	5.52	5.53	<0.01	0.2	5.7	<0.01	613
BGW36	7/01/2014	ME1400079028	0.034	0.072	87	0.007	<0.0001	<0.001	0.002	10	<0.001	107	0.305	34	0.376	0.16	0.16	<0.01	2.7	2.9	0.1	532
BGW36	7/04/2014	ME1400540025	0.092	0.079	81	<0.014	<0.0001	<0.001	0.002	8	<0.001	108	0.195	32	0.387	<0.01	<0.01	<0.01	0.2	0.2	0.02	447
BGW36	23/07/2014	ME1401051028	0.009	0.075	88	0.337	<0.0001	<0.001	<0.001	8	<0.001	112	0.332	32	1.08	<0.01	<0.01	<0.01	0.2	0.2	<0.01	590
BGW36	14/10/2014	ME1401512027	0.009	0.098	83	0.005	<0.0001	<0.001	<0.001	8	0	107	0.223	34	0.171	0.18	0.18	<0.01	0.2	0.4	<0.01	548
BGW36	4/02/2015	ME1500221040	0.001	0	75	0.035	0	0	<0.001	9	0	138	0	31	0.022	0.27	0.27	<0.01	0.5	0.8	0.13	641
BGW36	29/04/2015	ME1500659024	<0.001	0	73	0.006	0	0	<0.001	7	0	171	0	35	0.318	0.15	0.15	<0.01	0.2	0.2	<0.01	582
BGW36	18/08/2015	ME1510328046	<0.001	0	61	<0.001	0	0	<0.001	6	0	158	0	27	0.085	0.16	0.16	<0.01	0.1	0.2	<0.01	501
BGW36	22/10/2015	ME1510717032	<0.001	0	69	0.001	0	0	<0.001	7	0	182	0	23	0.047	0.2	0.2	<0.01	0.1	0.2	0.02	531
BGW36	24/02/2016	ME1600265034	<0.001	0	75	0.002	0	0	<0.001	7	0	154	0	29	0.049	0.15	0.15	<0.01	0.2	0.2	0.05	499
BGW36	27/05/2016	ME1600733026	<0.001	0	74	0.002	0	0	<0.001	7	0	176	0	28	0.062	0.16	0.16	<0.01	0.2	0.2	0.03	596
BGW36	5/09/2016	ME1601226048	<0.001	0	67	0.002	0	0	<0.001	7	0	166	0	28	0.059	0.14	0.14	<0.01	0.1	0.1	<0.01	487
BGW36	20/12/2016	ME1601793022	<0.001	0	70	<0.014	0	0	<0.001	4	0	62	0	15	0.505	0.14	0.14	<0.01	0.1	0.1	<0.01	532
BGW37	9/01/2014	ME1400079029	<0.001	0.007	122	0.022	<0.0001	<0.001	<0.001	<1	<0.001	158	2.48	244	0.022	5.5	5.5	<0.01	1.1	6.6	0.04	490
BGW37	8/04/2014	ME1400540026	<0.001	0.008	128	0.021	<0.0001	<0.001	<0.001	<1	<0.001	148	3.34	270	0.038	8.21	8.21	<0.01	1.5	9.7	0.02	485
BGW37	8/07/2014	ME1401051029	<0.001	0.008	135	0.046	<0.0001	<0.001	0.002	1	<0.001	157	3.07	367	0.156	15.4	15.4	0.02	1	16.4	<0.01	604
BGW37	21/10/2014	ME1401512028	<0.001	0.004	138	<0.014	<0.0001	<0.001	0.002	2	<0.001	140	3.2	334	0.066	14.4	14.4	0.02	0.6	15	<0.01	601
BGW38	9/01/2014	ME1400079030	<0.001	0.07	132	3.14	<0.0001	0.002	0.005	41	<0.001	87	2.96	1120	0.045	<0.01	0.03	0.02	1.4	1.4	0.22	383
BGW38	2/04/2014	ME1400540027	<0.001	0.07	134	3.25	<0.0001	0.002	0.005	44	<0.001	94	3.85	1040	0.036	0.02	0.02	<0.01	0.7	0.7	0.13	390
BGW38	15/07/2014	ME1401051030	<0.001	0.069	137	2.72	<0.0001	0.002	0.004	47	<0.001	98	3.32	1200	0.08	0.04	0.04	<0.01	0.8	0.8	0.34	436
BGW38	8/10/2014	ME1401512029	<0.001	0.083	134	3.17	<0.0001	0.002	0.004	42	85	3.38	1030	0.054	0.07	0.08	<0.01	0.7	0.8	0.31	493	
BGW38	6/02/2015	ME1500221041	<0.001	0	134	3.26	0	0	0.002	42	0	87	0	1230	0.009	<0.01	0.04	0.04	1.1	1.1	0.37	396
BGW38	30/04/2015	ME1500659025	<0.01	0	152	4.19	0	0	0.006	46	0	103	0	1210	0.072	3.32	3.34	0.02	1.4	4.7	0.41	400
BGW38	11/08/2015	ME1510328047	<0.001	0	139	3.2	0	0	0.003	41	0	89	0	1380	0.034	0.07	0.07	<0.01	0.5	0.6	0.2	454
BGW38	27/10/2015	ME1510717033	<0.001	0	140	3.13	0	0	0.002	47	0	96	0	1240	<0.014	0.08	0.08	<0.01	0.6	0.7	0.37	427
BGW38	23/02/2016	ME1600265021	<0.001	0	152	2.83	0	0	0.002	46	0	98	0	1460	0.02	0.08	0.1	0.02	0.5	0.6	0.15	427
BGW38	25/05/2016	ME1600733027	<0.001	0	147	3.09	0	0	<0.001	41	0	92	0	1400	<0.012	0.09	0.09	<0.01	0.4	0.5	0.07	436
BGW38	5/09/2016	ME1601226049	<0.001	0	46	<0.014	0	0	<0.001	26	0	22	0	393	<0.016	0.44	0.44	<0.01	0.4	0.4	0.06	126
BGW38	21/12/2016	ME1601793041	<0.001	0	52	<0.014	0	0	<0.001	25	0	18	0	463	0.009	0.35	0.35	<0.01	0.4	0.4	0.07	124

Sample Location	Sampling Date	Sample Num	Lead - Dissolved mg/L	Lithium - Dissolved mg/L	Magnesium - Dissolved mg/L	Manganese - Dissolved mg/L	Mercury - Dissolved mg/L	Molybdenum - Dissolved mg/L	Nickel - Dissolved mg/L	Potassium - Dissolved mg/L	Silver - Dissolved mg/L	Sodium - Dissolved mg/L	Sroutium - Dissolved mg/L	Sulfate as SO4 - Turbidimetric mg/L	Zinc - Dissolved mg/L	Nitrate as N mg/L	Nitrate + Nitrite as N mg/L	Nitrite as N mg/L	Total Kjeldahl Nitrogen as N mg/L	Total Nitrogen as N mg/L	Total Phosphorus as P mg/L	Total Alkalinity as CaCO3 mg/L
BGW39	9/01/2014	ME140079031	<0.001	0.072	65	0.07	<0.0001	<0.001	0.003	6	<0.001	100	1.42	60	<0.017	0.02	0.02	<0.01	0.9	0.9	0.04	582
BGW39	3/04/2014	ME140054028	<0.001	0.069	65	0.057	<0.0001	<0.001	0.002	5	<0.001	99	1.8	68	<0.01	0.06	0.06	<0.01	0.2	0.3	<0.01	507
BGW39	13/07/2014	ME1401051031	<0.001	0.068	65	0.052	<0.0001	<0.001	0.002	5	<0.001	102	1.42	77	0.029	0.06	0.06	<0.01	<0.1	<0.1	0.15	611
BGW39	21/10/2014	ME1401512030	<0.001	0.084	64	0.004	<0.0001	<0.001	0.002	5	<0.001	90	1.53	68	<0.018	0.09	0.09	<0.01	0.2	0.3	0.03	609
BGW39	6/02/2015	ME1500221042	<0.001	0	66	0.008	0	0	<0.001	5	0	94	0	71	<0.01	0.09	0.09	<0.01	0.2	0.3	<0.01	566
BGW39	17/08/2015	ME1510328048	<0.001	0	65	0.061	0	0	<0.001	4	0	100	0	75	0.026	0.16	0.17	<0.01	0.2	<0.01	<0.01	498
BGW39	27/10/2015	ME1510717034	<0.001	0	65	0.009	0	0	<0.001	5	0	96	0	59	0.007	0.16	0.16	<0.01	0.2	0.19	<0.01	581
BGW39	24/02/2016	ME1602850035	<0.001	0	65	0.004	0	0	<0.001	5	0	106	0	69	<0.01	0.14	0.14	<0.01	0.1	<0.01	<0.01	577
BGW39	25/05/2016	ME160733028	<0.001	0	57	0.002	0	0	<0.001	4	0	88	0	67	0.007	0.15	0.15	<0.01	0.2	0.02	<0.01	604
BGW39	8/09/2016	ME1601226074	<0.001	0	55	0.006	0	0	<0.001	4	0	80	0	46	0.007	0.08	0.08	<0.01	<0.1	<0.01	<0.01	480
BGW39	21/12/2016	ME1601793042	<0.001	0	54	0.001	0	0	<0.001	4	0	89	0	50	<0.005	0.46	0.46	<0.01	<0.1	<0.01	<0.01	470
BGW40	6/01/2014	ME140079032	<0.001	0.05	39	7.01	<0.0001	<0.001	0.068	16	<0.001	34	0.182	377	0.165	0.04	0.04	<0.01	5.4	5.4	0.11	52
BGW40	4/04/2014	ME1400540028	<0.001	0.052	41	8.51	<0.0001	<0.001	0.016	11	<0.001	34	0.152	309	0.046	0.1	0.1	0.1	0.8	0.8	0.05	64
BGW40	18/07/2014	ME1401051032	<0.001	0.051	46	9.05	<0.0001	<0.001	0.248	6	<0.001	31	0.07	417	0.885	0.1	0.1	0.1	0.2	0.2	0.03	45
BGW40	9/10/2014	ME1401512031	<0.001	0.045	47	9.98	<0.0001	<0.001	0.324	5	0	30	0.058	406	1.04	<0.01	0.03	0.04	0.4	0.4	<0.01	15
BGW40	7/02/2015	ME1500221043	<0.001	0	40	9.9	0	0	0.308	5	0	28	0	479	1.02	<0.01	<0.01	<0.01	0.2	0.2	0.03	25
BGW40	30/04/2015	ME1500659027	0.002	0	49	9.3	0	0	0.326	6	0	35	0	445	1.18	0.05	0.05	0.05	0.3	0.3	0.02	12
BGW40	14/08/2015	ME1510328049	<0.001	0	44	9.73	0	0	0.316	4	0	30	0	442	1.24	<0.01	<0.01	<0.01	0.3	0.3	0.02	24
BGW40	21/10/2015	ME1510717035	<0.001	0	48	9.26	0	0	0.31	6	0	36	0	419	1.3	0.05	0.05	0.05	0.3	0.4	0.03	10
BGW40	22/02/2016	ME1602850038	<0.001	0	45	9.54	0	0	0.332	6	0	33	0	462	1.28	0.05	0.05	0.05	0.2	0.2	0.03	32
BGW40	19/05/2016	ME160733029	<0.001	0	41	9.98	0	0	0.294	6	0	31	0	435	1.2	0.07	0.07	<0.01	0.2	0.3	<0.01	24
BGW40	1/09/2016	ME1601226028	<0.001	0	45	9.87	0	0	0.313	6	0	35	0	456	1.05	<0.01	0.03	0.03	0.3	0.3	<0.01	9
BGW40	20/12/2016	ME1601793023	<0.001	0	42	9.85	0	0	0.318	5	0	29	0	426	1.02	<0.01	0.04	0.04	0.2	0.2	<0.01	24
BGW41	4/04/2014	ME1400540030	<0.001	0.609	6	0.292	<0.0001	<0.001	<0.001	18	<0.001	211	0.387	16	<0.01	<0.01	<0.01	<0.01	0.6	0.6	0.36	486
BGW41	18/07/2014	ME1401051033	<0.001	0.621	7	0.28	<0.0001	<0.001	<0.001	18	<0.001	254	0.408	11	<0.01	0.3	0.3	<0.01	0.2	0.5	0.36	625
BGW41	9/10/2014	ME1401512032	<0.001	0.623	7	0.276	<0.0001	<0.001	<0.001	17	<0.001	264	0.392	15	0.005	0.07	0.07	<0.01	0.4	0.5	0.41	629
BGW41	7/02/2015	ME1500221044	<0.001	0	12	0.306	0	0	<0.001	16	0	244	0	38	0.03	<0.01	<0.01	<0.01	0.3	0.3	0.35	592
BGW41	30/04/2015	ME1500659028	<0.001	0	15	0.307	0	0	<0.001	18	0	273	0	44	0.024	0.03	0.03	<0.01	0.4	0.4	0.52	580
BGW41	14/08/2015	ME1510328052	<0.001	0	14	0.42	0	0	0.005	15	0	240	0	44	0.029	0.02	0.02	<0.01	0.7	0.7	0.36	536
BGW41	21/10/2015	ME1510717036	<0.001	0	18	0.346	0	0	<0.001	18	0	262	0	43	<0.015	0.04	0.04	<0.01	0.3	0.3	0.16	518
BGW41	22/02/2016	ME1602850039	<0.001	0	15	0.425	0	0	0.002	16	0	248	0	55	0.038	0.04	0.04	<0.01	0.3	0.3	0.02	520
BGW41	19/05/2016	ME160733030	<0.001	0	19	0.163	0	0	<0.001	15	0	303	0	67	<0.019	<0.01	<0.01	<0.01	0.1	0.1	0.02	608
BGW41	1/09/2016	ME1601226029	<0.001	0	18	0.112	0	0	0.004	15	0	249	0	76	0.044	0.03	0.03	<0.01	0.1	0.1	0.02	616
BGW41	20/12/2016	ME1601793024	<0.001	0	20	0.005	0	0	<0.001	15	0	229	0	83	0.036	0.04	0.04	<0.01	<0.1	<0.01	<0.01	530
BGW42	6/01/2014	ME140079033	<0.001	0.05	46	1.43	<0.0001	<0.001	0.032	16	<0.001	41	0.232	248	0.069	0.06	0.06	<0.01	1.2	1.3	0.08	131
BGW42	4/04/2014	ME1400540031	<0.001	0.047	48	1.48	<0.0001	<0.001	0.028	15	<0.001	45	0.233	238	0.066	0.04	0.04	<0.01	0.4	0.4	0.04	138
BGW42	18/07/2014	ME1401051034	<0.001	0.046	48	1.2	<0.0001	<0.001	0.026	14	<0.001	49	0.233	260	0.108	<0.01	<0.01	<0.01	0.4	0.4	0.06	136
BGW42	9/10/2014	ME1401512033	<0.001	0.044	53	1.3	<0.0001	<0.001	0.029	15	0	46	0.237	248	0.038	0.12	0.12	<0.01	0.4	0.5	0.1	130
BGW42	7/02/2015	ME1500221045	<0.001	0	51	1.28	0	0	0.028	13	0	39	0	296	0.032	0.02	0.02	<0.01	0.4	0.4	0.04	126
BGW42	30/04/2015	ME1500659029	<0.001	0	55	1.22	0	0	0.027	14	0	45	0	283	0.041	0.03	0.03	<0.01	0.2	0.2	0.04	126
BGW42	11/08/2015	ME1510328051	<0.001	0	50	1.3	0	0	0.026	13	0	40	0	239	0.05	0.02	0.02	<0.01	0.2	0.2	0.02	134
BGW42	27/10/2015	ME1510717037	<0.001	0	61	1.16	0	0	0.026	15	0	43	0	277	0.057	0.06	0.06	<0.01	0.4	0.5	0.06	132
BGW42	23/02/2016	ME1602850032	<0.001	0	53	1.18	0	0	0.029	14	0	45	0	308	0.113	0.06	0.06	<0.01	0.2	0.3	0.03	139
BGW42	19/05/2016	ME160733031	<0.001	0	53	1.29	0	0	0.025	13	0	42	0	291	0.081	0.05	0.05	<0.01	0.2	0.2	0.02	138
BGW42	6/09/2016	ME1601226065	<0.001	0	56	1.29	0	0	0.022	14	0	45	0	322	0.073	0.11	0.11	<0.01	0.3	0.4	0.04	144
BGW42	20/12/2016	ME1601793025	<0.001	0	51	1.23	0	0	0.029	13	0	39	0	316	0.063	0.05	0.05	0.02	0.7	0.8	0.03	120
BGW43	6/01/2014	ME140079034	<0.001	0.141	51	2.64	<0.0001	<0.001	0.005	20	<0.001	27	1.8	366	<0.019	0.31	0.31	<0.01	0.9	1.2	0.13	194
BGW43	4/04/2014	ME1400540032	<0.001	0.14	69	2.88	<0.0001	<0.001	0.005	26	<0.001	39	2.18	448	<0.015	<0.01	<0.01	<0.01	0.3	0.3	0.06	220
BGW43	18/07/2014	ME1401051035	<0.001	0.131	70	2.4	<0.0001	<0.001	0.009	28	<0.001	42	1.74	454	0.055	<0.01	<0.01	<0.01	0.2	0.2	0.07	249

Sample Location	Sampling Date	Sample Num	Lead - Dissolved mg/L	Lithium - Dissolved mg/L	Magnesium - Dissolved mg/L	Manganese - Dissolved mg/L	Mercury - Dissolved mg/L	Molybdenum - Dissolved mg/L	Nickel - Dissolved mg/L	Potassium - Dissolved mg/L	Silver - Dissolved mg/L	Sodium - Dissolved mg/L	Strontium - Dissolved mg/L	Sulfate as SO4 - Turbidimetric mg/L	Zinc - Dissolved mg/L	Nitrate as N mg/L	Nitrate + Nitrite as N mg/L	Nitrite as N mg/L	Total Kjeldahl Nitrogen as N mg/L	Total Nitrogen as N mg/L	Total Phosphorus as P mg/L	Total Alkalinity as CaCO3 mg/L
BGW43	9/10/2014	ME1401512034	<0.001	0.141	71	2.38	<0.0001	<0.001	0.006	28	0	37	1.82	444	<0.014	0.91	<0.01	0.4	1.3	0.06	240	
BGW43	8/02/2015	ME150021046	<0.001	0	66	2.17	0	0	0.006	24	0	33	0	509	<0.005	0.07	<0.01	0.6	0.7	0.07	208	
BGW43	30/04/2015	ME1500659030	<0.001	0	75	1.9	0	0	0.006	28	0	38	0	470	<0.019	<0.01	<0.01	0.5	0.5	0.06	209	
BGW43	14/08/2015	ME1510328050	<0.001	0	64	1.9	0	0	0.005	24	0	32	0	475	0.022	<0.01	<0.01	0.4	0.4	0.13	198	
BGW43	21/10/2015	ME1510717038	<0.001	0	81	1.62	0	0	0.005	28	0	39	0	452	0.005	0.08	<0.01	0.2	0.3	0.07	207	
BGW43	22/02/2016	ME1600285010	<0.001	0	63	1.69	0	0	0.004	26	0	32	0	477	0.029	0.02	<0.01	0.5	0.5	0.06	194	
BGW43	19/05/2016	ME1600733032	<0.001	0	68	1.75	0	0	0.004	24	0	34	0	551	<0.019	0.03	<0.01	0.3	0.3	0.04	234	
BGW43	1/09/2016	ME1601226030	<0.001	0	70	1.69	0	0	0.005	26	0	36	0	589	0.02	0.05	<0.01	0.4	0.4	0.1	235	
BGW43	20/12/2016	ME1601793026	<0.001	0	66	1.6	0	0	0.004	26	0	32	0	594	<0.016	0.03	<0.01	0.3	0.3	0.07	204	
BGW44	6/01/2014	ME140079035	<0.001	0.229	66	0.026	<0.0001	<0.001	<0.001	18	<0.001	223	0.795	171	0.022	0.43	<0.01	0.6	1	0.04	474	
BGW44	2/04/2014	ME1400540033	<0.001	0.227	70	0.892	<0.0001	<0.001	<0.001	18	<0.001	188	0.839	171	<0.012	0.16	<0.01	0.3	0.5	0.02	457	
BGW44	18/07/2014	ME1401051036	<0.001	0.207	73	<0.012	<0.0001	<0.001	<0.001	17	<0.001	210	0.946	177	0.021	0.26	<0.01	<0.1	0.3	<0.01	538	
BGW44	9/10/2014	ME1401512035	<0.001	0.236	73	0.002	<0.0001	<0.001	<0.001	17	<0.001	180	0.851	163	<0.019	0.33	<0.01	0.2	0.5	<0.01	540	
BGW44	8/02/2015	ME150021047	<0.001	0	71	0.006	0	0	<0.001	16	0	195	0	173	<0.005	0.37	<0.01	0.3	0.7	<0.01	495	
BGW44	29/04/2015	ME1500659031	<0.001	0	80	0.007	0	0	<0.001	18	0	230	0	179	<0.011	0.65	<0.01	0.3	1	0.02	484	
BGW44	14/08/2015	ME1510328053	<0.001	0	69	<0.01	0	0	<0.001	15	0	200	0	191	0.009	0.46	<0.01	0.2	0.7	<0.01	474	
BGW44	21/10/2015	ME1510717039	<0.001	0	78	0.003	0	0	<0.001	16	0	207	0	167	0.008	0.35	<0.01	<0.1	0.4	0.02	523	
BGW44	22/02/2016	ME1600285011	<0.001	0	62	0.479	0	0	0.002	16	0	206	0	142	0.025	0.08	0.61	1.7	2.3	0.39	458	
BGW44	19/05/2016	ME1600733033	<0.001	0	64	<0.01	0	0	<0.001	14	0	205	0	158	0.008	0.53	<0.01	0.1	0.6	0.04	557	
BGW44	1/09/2016	ME1601226031	<0.001	0	65	0.002	0	0	<0.001	14	0	200	0	160	<0.005	0.3	<0.01	<0.1	0.6	0.03	721	
BGW44	20/12/2016	ME1601793027	<0.001	0	62	0.004	0	0	<0.001	15	0	199	0	170	<0.005	0.42	<0.01	0.1	0.5	<0.01	438	
BGW45	6/01/2014	ME140079036	<0.001	0.412	54	0.28	<0.0001	<0.001	<0.001	28	<0.001	288	1.4	319	0.005	<0.01	<0.01	1.1	1.1	0.09	660	
BGW45	2/04/2014	ME1400540034	<0.001	0.414	52	0.391	<0.0001	<0.001	0.003	26	<0.001	239	1.71	315	0.006	0.04	<0.01	0.5	0.5	0.04	622	
BGW45	18/07/2014	ME1401051037	<0.001	0.391	53	0.279	<0.0001	<0.001	0.002	25	<0.001	272	1.44	339	<0.011	<0.01	<0.01	0.6	0.6	0.07	715	
BGW45	9/10/2014	ME1401512036	<0.001	0.416	53	0.248	<0.0001	<0.001	<0.001	23	<0.001	296	1.51	318	0.006	0.06	<0.01	0.5	0.6	0.03	721	
BGW45	8/02/2015	ME150021048	<0.001	0	51	0.279	0	0	<0.001	23	0	266	0	348	<0.005	0.02	<0.01	1.6	1.6	0.04	666	
BGW45	29/04/2015	ME1500659032	0.005	0	58	0.314	0	0	0.002	25	0	313	0	328	0.062	0.04	<0.01	0.7	0.7	0.06	678	
BGW45	14/08/2015	ME1510328054	<0.001	0	50	0.224	0	0	<0.001	21	0	271	0	345	<0.005	<0.01	0.02	0.6	0.6	0.02	634	
BGW45	21/10/2015	ME1510717040	<0.001	0	57	0.237	0	0	<0.001	24	0	276	0	310	0.005	0.11	<0.01	0.5	0.6	0.03	618	
BGW45	22/02/2016	ME1600285012	<0.001	0	47	0.262	0	0	<0.001	22	0	289	0	309	<0.005	<0.01	<0.01	0.6	0.6	0.03	649	
BGW45	19/05/2016	ME1600733034	<0.001	0	48	0.248	0	0	<0.001	22	0	282	0	326	<0.01	0.06	<0.01	0.4	0.5	0.04	724	
BGW45	8/09/2016	ME1601226075	<0.001	0	52	0.316	0	0	<0.001	23	0	305	0	274	<0.005	0.06	<0.01	0.4	0.5	0.03	663	
BGW45	20/12/2016	ME1601793028	<0.001	0	46	0.254	0	0	<0.001	20	0	280	0	319	<0.005	0.04	<0.01	0.5	0.6	0.02	680	
BGW46	13/01/2014	ME1400079037	<0.001	0.626	42	1.87	<0.0001	<0.001	<0.001	32	<0.001	68	1.82	157	<0.018	<0.01	<0.01	0.6	0.6	0.19	412	
BGW46	3/04/2014	ME1400540035	<0.001	0.616	43	2.09	<0.0001	<0.001	<0.001	30	<0.001	76	2.29	166	0.006	0.02	<0.01	0.6	0.6	0.04	379	
BGW46	15/07/2014	ME1401051038	<0.001	0.581	44	1.76	<0.0001	<0.001	<0.001	30	<0.001	77	1.92	190	0.034	0.02	<0.01	0.4	0.4	0.13	446	
BGW46	8/10/2014	ME1401512037	<0.001	0.581	44	1.84	<0.0001	<0.001	<0.001	27	<0.001	69	1.98	164	<0.011	0.68	<0.01	0.4	0.4	0.08	452	
BGW46	6/02/2015	ME150021049	0.001	0	41	1.85	0	0	<0.001	25	0	64	0	186	<0.005	<0.01	<0.01	0.7	0.7	0.1	408	
BGW46	30/04/2015	ME1500659033	<0.001	0	48	1.5	0	0	<0.001	29	0	72	0	184	<0.012	<0.01	<0.01	0.5	0.5	0.08	417	
BGW46	11/08/2015	ME1510328055	<0.001	0	44	1.67	0	0	<0.001	26	0	72	0	212	0.008	<0.01	0.02	0.3	0.3	0.05	404	
BGW46	27/10/2015	ME1510717041	<0.001	0	50	1.62	0	0	<0.001	28	0	69	0	190	0.008	0.05	<0.01	0.3	0.4	0.1	422	
BGW46	23/02/2016	ME1600285023	<0.001	0	43	1.48	0	0	<0.001	26	0	75	0	192	0.006	0.05	<0.01	0.4	0.4	0.06	425	
BGW46	25/05/2016	ME1600733035	<0.001	0	52	1.61	0	0	<0.001	26	0	83	0	196	<0.005	0.02	<0.01	0.9	0.9	0.05	452	
BGW46	6/09/2016	ME1601226066	<0.001	0	44	1.6	0	0	<0.001	26	0	72	0	208	<0.005	0.06	<0.01	0.3	0.4	0.04	409	
BGW46	21/12/2016	ME1601793043	<0.001	0	39	1.1	0	0	<0.001	24	0	61	0	176	<0.005	0.04	<0.01	0.4	0.4	0.19	390	
BGW47	10/01/2014	ME1400079038	<0.001	0.083	36	1.22	<0.0001	<0.001	<0.001	18	<0.001	91	0.855	154	<0.005	0.04	<0.01	1	1	0.19	328	
BGW47	31/03/2014	ME1400540036	<0.001	0.08	38	1.28	<0.0001	<0.001	<0.001	18	<0.001	93	1.06	147	<0.005	0.06	0.09	0.03	0.4	0.5	0.06	314
BGW47	15/07/2014	ME1401051039	<0.001	0.074	37	0.004	<0.0001	<0.001	<0.001	16	<0.001	94	0.881	170	0.007	0.35	<0.01	0.2	0.6	0.09	352	
BGW47	13/10/2014	ME1401512038	<0.001	0.076	36	0.002	<0.0001	<0.001	<0.001	15	<0.001	85	0.954	158	0.006	0.37	<0.01	0.3	0.7	0.06	345	
BGW47	5/02/2015	ME150021050	<0.001	0	40	0.032	0	0	<0.001	15	0	88	0	174	<0.005	0.68	0.7	0.02	0.2	0.07	315	

Sample Location	Sampling Date	Sample Num	Lead - Dissolved mg/L	Lithium - Dissolved mg/L	Magnesium - Dissolved mg/L	Manganese - Dissolved mg/L	Mercury - Dissolved mg/L	Molybdenum - Dissolved mg/L	Nickel - Dissolved mg/L	Potassium - Dissolved mg/L	Silver - Dissolved mg/L	Sodium - Dissolved mg/L	Strontium - Dissolved mg/L	Sulfate as SO4 - Turbidimetric mg/L	Zinc - Dissolved mg/L	Nitrate as N mg/L	Nitrite + Nitrate as N mg/L	Nitrite as N mg/L	Nitrate as N mg/L	Total Kjeldahl Nitrogen as N mg/L	Total Nitrogen as N mg/L	Total Phosphorus as P mg/L	Total Alkalinity as CaCO3 mg/L
BGW47	29/04/2015	ME15005934	<0.001	0	41	0.338	<0.0001	0	<0.001	16	0	98	0	170	0.027	0.46	0.46	0.02	0.2	0.7	0.07	332	
BGW47	11/08/2015	ME1510328056	<0.001	0	38	0.041	0	0	<0.001	14	0	87	0	194	0.008	0.27	0.27	<0.01	<0.1	0.3	0.04	368	
BGW47	22/10/2015	ME1510717042	<0.001	0	45	0.002	0	0	<0.001	16	0	92	0	174	<0.005	0.17	0.17	<0.01	<0.1	0.2	0.02	338	
BGW47	23/02/2016	ME1600285024	<0.001	0	39	0.009	0	0	<0.001	15	0	98	0	181	0.005	0.55	0.59	0.04	0.2	0.8	0.09	344	
BGW47	18/05/2016	ME1600733036	<0.001	0	35	0.088	0	0	<0.001	15	0	82	0	158	0.006	0.32	0.32	<0.01	0.2	0.5	0.08	224	
BGW47	30/08/2016	ME1601226002	<0.001	0	40	0.003	0	0	<0.001	14	0	95	0	180	0.006	0.2	0.2	<0.01	<0.1	0.2	0.05	349	
BGW47	19/12/2016	ME1601793008	<0.001	0	36	0.001	0	0	<0.001	14	0	88	0	162	<0.005	0.42	0.42	<0.01	<0.1	0.4	0.04	323	
BGW48	10/01/2014	ME1400079039	0.004	0.005	9	1.31	<0.0001	<0.001	0.01	6	<0.001	30	0.195	50	0.09	0.7	0.71	<0.01	4.9	5.6	1.53	30	
BGW48	15/07/2014	ME1401051040	<0.001	0.002	9	0.007	<0.0001	<0.001	<0.001	6	<0.001	26	0.167	58	<0.011	0.53	0.53	<0.01	0.6	1.1	0.27	12	
BGW48	7/08/2015	ME1510328057	<0.001	0	8	<0.016	0	0	0.002	3	0	30	0	42	<0.013	0.92	0.92	<0.01	0.2	1.1	0.04	17	
BGW48	22/10/2015	ME1510717043	<0.001	0	9	0.031	0	0	0.002	4	0	29	0	41	0.021	0.58	0.58	<0.01	0.1	0.7	0.03	15	
BGW48	23/02/2016	ME1600285025	<0.001	0	9	0.726	0	0	<0.001	6	0	28	0	5	0.005	0.1	0.1	<0.01	9.7	9.8	1.14	91	
BGW48	30/08/2016	ME1601226003	<0.001	0	6	0.007	0	0	<0.001	3	0	32	0	45	0.02	2.12	2.12	<0.01	0.5	2.6	0.04	31	
BGW48	19/12/2016	ME1601793009	<0.001	0	4	<0.015	0	0	<0.001	3	0	19	0	28	<0.017	0.81	0.81	<0.01	1.6	2.4	0.13	22	
BGW48	19/12/2016	ME160285025	<0.001	0	9	0.726	0	0	<0.001	6	0	28	0	5	0.005	0.1	0.1	<0.01	9.7	9.8	1.14	91	
BGW49	10/01/2014	ME1400079040	0.002	0.006	10	0.215	<0.0001	<0.001	0.004	6	<0.001	35	0.23	47	0.043	0.14	0.14	<0.01	1.3	1.4	1.18	48	
BGW49	31/03/2014	ME1400540037	<0.001	0.007	9	0.503	<0.0001	<0.001	0.002	7	<0.001	34	0.209	46	0.006	0.09	0.11	0.02	1	1.1	2.5	40	
BGW49	15/07/2014	ME1401051041	<0.001	0.002	11	0.04	<0.0001	<0.001	0.002	7	<0.001	35	0.232	44	<0.018	0.18	0.18	<0.01	<0.2	<0.2	0.2	44	
BGW49	13/10/2014	ME1401512041	<0.001	0.002	14	<0.014	<0.0001	<0.001	<0.001	7	<0.001	44	0.275	40	<0.015	0.15	0.15	<0.01	0.4	0.6	0.22	64	
BGW49	5/02/2015	ME1500221051	<0.001	0	11	0.295	0	0	0.005	7	0	30	0	67	<0.01	0.09	0.09	<0.01	0.9	1	0.23	39	
BGW49	29/04/2015	ME1500659035	<0.001	0	9	0.305	0	0	0.002	6	0	26	0	39	<0.018	0.07	0.07	<0.01	2.8	2.9	0.48	74	
BGW49	7/08/2015	ME1510328058	<0.001	0	9	0.004	0	0	0.002	4	0	25	0	62	0.029	1.34	1.34	<0.01	0.3	1.6	0.04	11	
BGW49	23/02/2016	ME1510717044	<0.001	0	12	0.004	0	0	0.002	5	0	29	0	45	0.03	1.05	1.05	<0.01	<0.1	0.2	0.03	11	
BGW49	18/05/2016	ME1600285026	<0.001	0	9	<0.017	0	0	<0.001	7	0	35	0	66	<0.019	0.56	0.56	<0.01	0.2	0.8	0.03	44	
BGW49	30/08/2016	ME1601226004	<0.001	0	6	0.004	0	0	0.002	4	0	19	0	38	0.031	1.82	1.82	<0.01	0.6	2.4	0.07	15	
BGW49	19/12/2016	ME1601793010	<0.001	0	5	0.003	0	0	0.002	4	0	13	0	26	0.026	1.65	1.65	<0.01	0.5	2.2	0.07	16	
BGW50	10/01/2014	ME1400079041	<0.001	0.084	45	0.318	<0.0001	<0.001	<0.001	16	<0.001	103	0.706	45	<0.013	<0.01	<0.01	<0.01	1	1	0.25	462	
BGW50	31/03/2014	ME1400540038	<0.001	0.086	50	0.32	<0.0001	<0.001	<0.001	18	<0.001	105	0.804	345	<0.005	<0.01	<0.01	<0.01	0.7	0.7	0.05	306	
BGW50	15/07/2014	ME1401051042	<0.001	0.084	53	0.009	<0.0001	<0.001	0.002	17	<0.001	111	0.77	395	0.038	0.03	0.03	<0.01	<0.1	<0.1	0.02	347	
BGW50	5/02/2015	ME1500221052	<0.001	0	49	0.501	0	0	0.004	15	0	95	0	402	<0.012	0.05	0.05	<0.01	0.3	0.4	0.04	253	
BGW50	28/04/2015	ME1500659036	<0.001	0	52	0.499	0	0	0.004	15	0	104	0	357	0.02	0.02	0.02	<0.01	0.1	0.1	0.04	281	
BGW50	7/08/2015	ME1510328059	<0.001	0	46	0.008	0	0	0.002	14	0	93	0	368	0.024	0.07	0.07	<0.01	<0.1	<0.1	0.03	260	
BGW50	22/10/2015	ME1510717045	<0.001	0	55	0.025	0	0	<0.001	16	0	100	0	354	0.062	0.14	0.14	<0.01	<0.1	0.1	0.02	256	
BGW50	23/02/2016	ME1600285027	<0.001	0	48	0.004	0	0	<0.001	14	0	105	0	367	0.042	0.31	0.31	<0.01	<0.1	0.3	0.04	280	
BGW50	18/05/2016	ME1600733038	<0.001	0	40	0.005	0	0	<0.001	12	0	80	0	338	0.034	0.28	0.28	<0.01	0.1	0.4	0.02	235	
BGW50	30/08/2016	ME1601226005	<0.001	0	11	0.004	0	0	<0.001	6	0	41	0	76	<0.011	1.84	1.84	<0.01	0.4	2.2	0.03	88	
BGW50	19/12/2016	ME1601793011	<0.001	0	7	0.003	0	0	<0.001	4	0	24	0	42	<0.01	0.49	0.49	<0.01	1.3	1.8	0.02	62	
BGW51	10/01/2014	ME1400079042	<0.001	0.092	53	0.667	<0.0001	<0.001	0.005	19	<0.001	108	0.694	386	<0.014	0.02	0.02	<0.01	0.5	0.5	0.8	259	
BGW51	31/03/2014	ME1400540039	<0.001	0.078	48	0.384	<0.0001	<0.001	0.004	18	<0.001	110	0.699	334	0.024	0.06	0.06	<0.01	0.9	1	0.36	241	
BGW51	15/07/2014	ME1401051043	<0.001	0.085	54	0.82	<0.0001	<0.001	0.004	19	<0.001	111	0.684	412	<0.018	<0.01	<0.01	<0.01	<0.1	<0.1	0.47	280	
BGW51	13/10/2014	ME1401512043	<0.001	0.087	59	0.674	<0.0001	<0.001	0.004	21	<0.001	121	0.712	372	<0.016	0.04	0.04	<0.01	0.2	0.2	0.97	277	
BGW51	5/02/2015	ME1500221053	<0.001	0	52	0.612	0	0	0.003	16	0	96	0	430	<0.005	0.02	0.02	<0.01	0.3	0.3	1.09	248	
BGW51	28/04/2015	ME1500659037	0.007	0	58	0.963	0	0	0.006	18	0	113	0	396	0.388	0.03	0.03	<0.01	0.3	0.3	1.38	254	
BGW51	7/08/2015	ME1510328060	<0.001	0	54	0.765	0	0	0.004	16	0	102	0	404	<0.016	<0.01	<0.01	<0.01	0.1	0.1	0.7	239	
BGW51	22/10/2015	ME1510717046	<0.001	0	62	0.739	0	0	0.003	17	0	108	0	383	<0.014	<0.01	<0.01	<0.01	<0.1	<0.1	0.74	255	
BGW51	23/02/2016	ME1600285028	<0.001	0	52	0.455	0	0	0.004	16	0	113	0	407	<0.01	0.04	0.04	<0.01	<0.1	<0.1	0.34	262	
BGW51	18/05/2016	ME1600733039	<0.001	0	46	0.433	0	0	<0.001	14	0	89	0	384	0.008	0.03	0.03	<0.01	<0.1	<0.1	0.35	254	
BGW51	30/08/2016	ME1601226006	<0.001	0	16	<0.014	0	0	<0.001	7	0	51	0	109	<0.005	0.47	0.47	<0.01	0.5	1	0.06	131	

Sample Location	Sampling Date	Sample Num	Lead - Dissolved mg/L	Lithium - Dissolved mg/L	Magnesium - Dissolved mg/L	Manganese - Dissolved mg/L	Mercury - Dissolved mg/L	Molybdenum - Dissolved mg/L	Nickel - Dissolved mg/L	Potassium - Dissolved mg/L	Silver - Dissolved mg/L	Sodium - Dissolved mg/L	Strontium - Dissolved mg/L	Sulfate as SO4 - Turbidimetric mg/L	Zinc - Dissolved mg/L	Nitrate as N mg/L	Nitrate + Nitrite as N mg/L	Nitrite as N mg/L	Total Kjeldahl Nitrogen as N mg/L	Total Nitrogen as N mg/L	Total Phosphorus as P mg/L	Total Alkalinity as CaCO3 mg/L
BGW51	19/12/2016	ME1601793012	<0.001	0	0.945	0	0	0	0.004	14	0	97	0	335	<0.014	0.03	0.03	<0.01	0.9	0.9	0.34	229
BGW52	8/01/2014	ME1400799043	<0.001	0.006	0.008	<0.0001	<0.0001	<0.001	0.003	3	<0.001	53	0.356	58	0.021	0.46	0.46	<0.01	1.3	1.8	0.04	180
BGW52	8/04/2014	ME1400540040	<0.001	0.006	0.003	<0.0001	<0.0001	<0.001	0.002	2	<0.001	58	0.377	53	<0.01	0.66	0.66	<0.01	1.3	1.8	<0.01	188
BGW52	14/07/2014	ME1401051044	<0.001	0.008	0.005	<0.0001	<0.0001	<0.001	<0.001	3	<0.001	57	0.394	60	<0.015	0.68	0.68	<0.01	0.1	0.8	<0.01	216
BGW52	13/10/2014	ME1401512044	<0.001	0.034	0.003	<0.0001	<0.0001	<0.001	<0.001	4	0	103	0.986	83	<0.013	0.82	0.82	<0.01	0.2	1	0.02	315
BGW52	4/02/2015	ME1500221054	<0.001	0	<0.01	0	0	0	<0.001	3	0	85	0	107	<0.005	0.8	0.8	<0.01	0.3	1.1	0.02	288
BGW52	28/04/2015	ME1500659038	<0.001	0	<0.012	0	0	0	0.002	4	0	103	0	100	0.062	0.87	0.87	<0.01	0.3	1.2	0.02	303
BGW52	7/08/2015	ME1510328061	<0.001	0	0.001	0	0	0	<0.001	3	0	97	0	102	<0.019	0.82	0.82	<0.01	0.1	0.9	<0.01	291
BGW52	21/10/2015	ME1510717047	<0.001	0	0.006	0	0	0	<0.001	3	0	102	0	93	<0.016	1.55	1.55	<0.01	0.3	1.8	0.02	322
BGW52	22/02/2016	ME160265013	<0.001	0	0.009	0	0	0	<0.001	3	0	106	0	88	<0.013	1.85	1.85	<0.01	0.4	2.2	<0.01	289
BGW52	19/05/2016	ME1600793040	<0.001	0	0.009	0	0	0	<0.001	6	0	106	0	94	<0.012	1.78	1.78	<0.01	0.2	2	<0.01	336
BGW52	1/09/2016	ME1601226032	<0.001	0	0.003	0	0	0	<0.001	3	0	94	0	83	0.008	1.58	1.58	<0.01	0.3	1.9	<0.01	243
BGW52	20/12/2016	ME1601793029	<0.001	0	0.003	0	0	0	<0.001	2	0	56	0	48	<0.005	1.58	1.58	<0.01	0.2	1.8	<0.01	233
BGW53	8/01/2014	ME1400079044	<0.001	0.005	0.004	<0.0001	<0.0001	<0.001	<0.001	4	<0.001	114	0.616	82	<0.016	2.62	2.62	<0.01	1.4	4	0.28	285
BGW53	8/04/2014	ME1400540041	<0.001	0.004	0.001	<0.0001	<0.0001	<0.001	<0.001	4	<0.001	124	0.691	104	<0.005	3.01	3.01	<0.01	0.6	3.6	0.07	273
BGW53	14/07/2014	ME1401051045	<0.001	0.003	0.002	<0.0001	<0.0001	<0.001	<0.001	4	<0.001	164	0.695	131	<0.011	2.85	2.85	<0.01	0.3	3.2	0.13	345
BGW53	13/10/2014	ME1401512045	<0.001	0.003	0.002	<0.0001	<0.0001	<0.001	<0.001	4	0	226	0.935	155	0.023	5.58	5.58	<0.01	0.8	6.4	0.1	497
BGW53	4/02/2015	ME1500221055	<0.001	0	0.005	0	0	0	<0.001	4	0	213	0	162	<0.005	7.07	7.07	<0.01	1.2	8.3	0.21	443
BGW53	28/04/2015	ME1500659039	<0.001	0	0.007	0	0	0	<0.001	4	0	203	0	154	<0.015	3.48	3.48	<0.01	1.2	4.7	0.23	441
BGW53	7/08/2015	ME1510328062	<0.001	0	0.009	<0.0001	0	0	<0.001	3	0	199	0	147	0.006	5.23	5.23	<0.01	0.6	5.8	0.08	408
BGW53	21/10/2015	ME1510717048	<0.001	0	0.003	0	0	0	<0.001	5	0	215	0	165	0.008	5.34	5.34	<0.01	0.5	5.8	0.06	452
BGW53	22/02/2016	ME160265014	<0.001	0	0.006	0	0	0	<0.001	3	0	214	0	150	0.007	4.74	4.74	<0.01	0.5	5.2	0.09	383
BGW53	19/05/2016	ME1600793041	<0.001	0	0.003	0	0	0	<0.001	3	0	215	0	129	0.006	4.53	4.53	<0.01	0.5	5	0.16	471
BGW53	1/09/2016	ME1601226033	<0.001	0	0.002	0	0	0	<0.001	2	0	118	0	107	<0.005	1.08	1.08	<0.01	0.2	1.3	0.04	239
BGW53	20/12/2016	ME1601793030	<0.001	0	0.008	0	0	0	<0.001	2	0	68	0	65	<0.005	2.28	2.28	<0.01	0.4	2.7	<0.01	310
BGW54	15/10/2013	ME1400079056	<0.001	0.001	1.46	<0.0001	<0.0001	<0.001	0.006	2	<0.001	49	0.273	47	<0.005	0.23	0.23	<0.01	2.8	3	2.41	79
BGW54	13/10/2014	ME1401512046	<0.001	<0.001	3.37	<0.0001	<0.0001	<0.001	0.003	5	0	37	0.676	71	0.006	0.51	0.51	0.05	26	26.6	24	582
BGW54	1/09/2016	ME1601226034	<0.001	0	0.002	0	0	0	<0.001	4	0	42	0	58	0.006	0.68	0.68	<0.01	0.1	0.8	0.02	70
BGW54	20/12/2016	ME1601793031	<0.001	0	0.005	0	0	0	<0.001	3	0	32	0	46	0.006	1.71	1.71	<0.01	0.5	2.2	0.18	59
BSW01	31/08/2016	ME1601226007	<0.001	0	0.3	0	0	0	0.008	2	0	23	0	58	<0.016	0.04	0.04	<0.01	0.4	0.4	0.02	27
BSW02	1/09/2016	ME1601226036	<0.001	0	0.049	0	0	0	<0.001	2	0	16	0	5	0.008	4.41	4.41	<0.01	0.7	5.1	<0.01	4
BSW03	17/02/2014	ME140288001	0.006	0.001	0.488	<0.0001	<0.0001	<0.001	0.019	24	<0.001	3	0.023	<10	0.043	0.06	0.06	<0.01	1.6	1.6	0.44	6
BSW03	21/05/2014	ME1400741001	0.002	<0.001	0.41	<0.0001	<0.0001	<0.001	<0.001	11	<0.001	4	0.032	4	0.063	0.09	0.09	<0.01	1.5	1.6	0.52	14
BSW03	20/08/2014	ME1401208001	0.002	<0.001	0.261	<0.0001	<0.0001	<0.001	<0.001	6	<0.001	8	0.026	22	0.028	<0.01	<0.01	<0.01	2.4	2.4	0.29	5
BSW03	30/04/2015	ME1500659047	0.006	0	0.307	0	0	0	0.002	8	0	3	0	10	0.102	0.04	0.04	<0.01	1.3	1.3	0.1	6
BSW03	4/08/2015	ME1510328001	0.003	0	0.166	0	0	0	<0.001	6	0	7	0	1	0.022	0.02	0.02	<0.01	1.2	1.2	0.13	5
BSW03	3/02/2016	ME1602650948	0.002	0	0.963	0	0	0	<0.001	16	0	4	0	<10	0.014	1.38	1.38	<0.01	3.3	4.7	0.41	42
BSW03	12/05/2016	ME1600662001	0.003	0	0.291	0	0	0	<0.001	9	0	2	0	<1	0.026	<0.01	<0.01	<0.01	1.1	1.1	0.16	25
BSW03	09/09/2016	ME1601226050	<0.001	0	0.008	0	0	0	<0.001	5	0	5	0	7	<0.011	0.06	0.06	<0.01	0.5	0.6	<0.01	5
BSW04	17/02/2014	ME140288002	0.059	<0.016	5.15	<0.0001	<0.0001	<0.001	0.019	24	<0.001	15	0.129	164	1.39	0.23	0.23	<0.01	0.6	0.8	0.02	<1
BSW04	21/05/2014	ME1400741002	0.041	0.009	4.72	<0.0001	<0.0001	<0.001	0.015	16	<0.001	11	0.039	132	1.06	<0.01	<0.01	<0.01	0.3	0.3	0.06	<1
BSW04	2/02/2016	ME1401208002	0.039	0.008	3.16	<0.0001	<0.0001	<0.001	0.013	14	<0.001	14	0.105	144	1.06	<0.01	<0.01	<0.01	0.4	0.4	0.02	<1
BSW04	20/11/2014	ME1401676001	0.046	<0.015	10.2	<0.0001	<0.0001	<0.001	0.03	24	<0.001	17	0.187	177	2.12	0.04	0.04	<0.01	1.4	1.4	0.05	<1
BSW04	5/02/2015	ME1500221001	0.037	0	6.86	0	0	0	0.019	15	0	8	0	113	1.32	0.03	0.03	<0.01	1.6	1.6	0.09	<1
BSW04	30/04/2015	ME1500659048	<0.014	0	2.96	0	0	0	0.01	8	0	5	0	62	0.805	0.04	0.04	<0.01	0.3	0.3	<0.01	<1
BSW04	4/08/2015	ME1510328002	<0.014	0	2.46	0	0	0	0.008	9	0	8	0	62	0.656	<0.01	<0.01	<0.01	<0.1	<0.1	<0.01	<1
BSW04	2/02/2016	ME1602650949	<0.013	0	3.34	0	0	0	0.011	6	0	4	0	49	0.85	0.09	0.09	<0.01	0.3	0.4	<0.01	<1
BSW04	11/05/2016	ME1600662002	0.007	0	2.18	0	0	0	0.008	7	0	3	0	33	0.564	<0.01	<0.01	<0.01	0.2	0.2	0.03	<1
BSW04	30/08/2016	ME1601226008	<0.012	0	1.2	0	0	0	0.012	8	0	21	0	116	1.06	0.03	0.03	<0.01	<0.1	<0.1	0.02	<1
BSW05	30/04/2015	ME1500659049	0.006	0	0.152	0	0	0	0.002	2	0	2	0	17	0.037	<0.01	<0.01	<0.01	0.7	0.7	0.25	<1

Sample Location	Sampling Date	Sample Num	Lead - Dissolved mg/L	Lithium - Dissolved mg/L	Magnesium - Dissolved mg/L	Manganese - Dissolved mg/L	Mercury - Dissolved mg/L	Molybdenum - Dissolved mg/L	Nickel - Dissolved mg/L	Potassium - Dissolved mg/L	Silver - Dissolved mg/L	Sodium - Dissolved mg/L	Strontium - Dissolved mg/L	Sulfate as SO4 - Turbidimetric mg/L	Zinc - Dissolved mg/L	Nitrate as N mg/L	Nitrate + N mg/L	Nitrite as N mg/L	Total Kjeldahl Nitrogen as N mg/L	Total Nitrogen as N mg/L	Total Phosphorus as P mg/L	Total Alkalinity as CaCO3 mg/L
BSW05	4/08/2015	ME1510328003	<0.001	0	3	0.062	0	0	<0.001	7	0	9	0	23	0.055	<0.01	<0.01	<0.01	0.4	0.4	<0.01	<1
BSW05	5/09/2016	ME1601226051	<0.001	0	1	<0.018	0	0	<0.001	6	0	4	0	9	<0.013	0.03	0.03	<0.01	0.8	0.8	<0.01	4
BSW06	11/05/2016	ME1600662003	<0.001	0	0	0.039	0	0	<0.001	6	0	<1	0	<1	0.025	0.02	0.02	<0.01	1	1	0.14	12
BSW06	30/08/2016	ME1601226009	<0.001	0	4	0.126	0	0	0.002	5	0	9	0	30	0.096	<0.01	<0.01	<0.01	0.2	0.2	0.12	10
BSW07	17/02/2014	ME140288003	<0.001	0.003	15	0.87	<0.0001	<0.001	<0.001	7	<0.001	48	0.25	38	0.033	<0.01	<0.01	<0.01	2	2	1.85	95
BSW07	20/05/2014	ME140741003	<0.001	0.003	15	0.201	<0.0001	<0.001	<0.001	5	<0.001	44	0.2239	46	<0.018	<0.01	<0.01	<0.01	0.4	0.4	0.04	84
BSW07	19/08/2014	ME1401208003	<0.001	0.003	13	0.24	<0.0001	<0.001	<0.001	4	<0.001	40	0.242	43	0.009	<0.01	<0.01	<0.01	0.2	0.2	0.04	79
BSW07	21/11/2014	ME1401676002	<0.001	0.004	16	1.08	<0.0001	<0.001	<0.001	5	0	38	0	44	<0.01	0.03	0.03	<0.01	1.5	1.5	0.05	109
BSW07	5/02/2015	ME1500221002	<0.001	0	17	0.457	0	0	<0.001	5	0	38	0	46	0.009	0.02	0.02	<0.01	0.1	0.1	0.06	96
BSW07	28/04/2015	ME1500690050	<0.001	0	18	0.081	0	0	<0.001	6	0	44	0	57	<0.014	0.13	0.13	<0.01	3.7	3.8	0.38	80
BSW07	4/08/2015	ME1510328004	<0.001	0	17	0.234	0	0	<0.001	4	0	45	0	50	0.005	0.19	0.19	<0.01	0.1	0.3	<0.01	68
BSW07	13/10/2015	ME1510717001	<0.001	0	20	0.332	0	0	<0.001	5	0	48	0	38	0.008	0.05	0.05	<0.01	0.9	1	0.1	111
BSW07	2/02/2016	ME1600285050	<0.001	0	20	0.235	0	0	<0.001	8	0	45	0	46	0.008	0.2	0.2	<0.01	0.8	1	0.2	98
BSW07	11/05/2016	ME1600662004	<0.001	0	20	0.173	0	0	<0.001	6	0	48	0	41	<0.011	<0.01	<0.01	<0.01	<0.1	<0.1	0.45	113
BSW07	30/08/2016	ME1601226010	<0.001	0	33	0.143	0	0	0.004	6	0	118	0	113	0.009	0.06	0.06	<0.01	1	1.1	0.05	114
BSW08	20/05/2014	ME140741004	0.002	0.002	4	0.17	<0.0001	<0.001	0.01	11	<0.001	8	0.077	<10	0.021	<0.01	<0.01	<0.01	3	3	0.38	35
BSW08	19/08/2014	ME1401208004	0.001	0.003	3	0.163	<0.0001	<0.001	0.005	6	<0.001	21	0.071	39	0.033	<0.01	<0.01	<0.01	6.5	6.5	1.01	17
BSW08	4/08/2015	ME1510328005	0.008	0	6	0.665	0	0	0.019	18	0	21	0	<10	0.682	<0.01	<0.01	<0.01	1.6	1.6	0.2	27
BSW08	2/02/2016	ME1600285051	0.027	0	3	0.457	0	0	0.047	6	0	12	0	15	0.206	0.28	0.35	0.07	1.3	1.6	0.51	21
BSW08	30/08/2016	ME1601226011	<0.001	0	0	0.028	0	0	0.005	10	0	11	0	<10	0.038	<0.01	<0.01	<0.01	2.7	2.7	0.18	39
BSW09	31/08/2016	ME1601226012	<0.001	0	26	<0.017	0	0	0.002	17	0	47	0	70	0.032	3.51	3.51	<0.01	1	4.5	0.05	68
BSW11	20/02/2014	ME140288004	<0.001	0.002	10	0.629	<0.0001	<0.001	0.006	8	<0.001	47	0.145	75	<0.005	0.93	0.96	0.03	2.1	3.1	0.36	10
BSW11	21/05/2014	ME140741005	<0.001	<0.001	12	0.354	<0.0001	<0.001	0.005	6	<0.001	45	0.187	24	0.025	0.08	0.08	<0.01	2	2.1	0.16	108
BSW11	19/08/2014	ME1401208005	<0.001	<0.001	10	0.216	<0.0001	<0.001	0.004	5	<0.001	42	0.183	32	0.032	0.08	0.08	<0.01	1.3	1.4	0.08	94
BSW11	19/11/2014	ME1401676003	<0.001	0.001	22	2.91	<0.0001	0.004	0.007	14	0	68	0.348	18	0.008	0.02	0.08	0.06	5.6	5.7	0.3	253
BSW11	4/02/2015	ME1500221003	0.007	0	16	0.419	0	0	0.011	9	0	49	0	22	0.206	0.02	0.02	<0.01	11.6	11.6	0.87	249
BSW11	28/04/2015	ME1500690051	<0.001	0	20	0.69	0	0	0.004	12	0	46	0	171	0.032	2.26	2.32	0.06	2	4.3	0.22	15
BSW11	4/08/2015	ME1510328006	<0.001	0	3	0.257	0	0	0.004	5	0	9	0	12	0.007	0.02	0.02	<0.01	0.5	0.5	0.05	18
BSW11	2/02/2016	ME1600285052	<0.001	0	6	0.119	0	0	<0.001	8	0	12	0	43	<0.012	0.05	0.05	<0.01	0.8	0.8	0.09	59
BSW11	11/05/2016	ME1600662005	<0.001	0	8	1.1	0	0	0.007	20	0	16	0	5	0.006	0.02	0.02	<0.01	4.6	4.6	0.53	85
BSW11	1/09/2016	ME1601226037	<0.001	0	30	0.089	0	0	0.004	8	0	102	0	95	0.009	<0.01	<0.01	<0.01	0.2	0.2	<0.01	107
BSW12	18/02/2014	ME140288005	<0.001	0.003	29	0.134	<0.0001	<0.001	<0.001	14	<0.001	69	0.441	21	<0.012	<0.01	<0.01	<0.01	0.7	0.7	0.09	199
BSW12	21/05/2014	ME140741006	<0.001	0.002	16	0.078	<0.0001	<0.001	<0.001	6	<0.001	47	0.225	58	<0.01	<0.01	<0.01	<0.01	0.5	0.5	0.02	73
BSW12	20/08/2014	ME1401208006	<0.001	0.003	17	0.094	<0.0001	<0.001	<0.001	8	<0.001	46	0.269	69	<0.018	0.15	0.15	<0.01	0.3	0.4	0.02	72
BSW12	19/11/2014	ME1401676004	<0.001	0.003	21	<0.013	<0.0001	<0.001	<0.001	6	0	50	0.313	49	0.005	<0.01	<0.01	<0.01	1.4	1.4	0.04	144
BSW12	5/02/2015	ME1500221004	<0.001	0	20	0.008	0	0	<0.001	5	0	50	0	44	<0.005	<0.01	<0.01	<0.01	0.8	0.8	0.07	127
BSW12	29/04/2015	ME1500690052	<0.001	0	21	0.111	0	0	0.002	9	0	49	0	74	0.037	<0.01	<0.01	<0.01	0.4	0.4	0.02	82
BSW12	7/08/2015	ME1510328007	<0.001	0	8	0.022	0	0	<0.001	4	0	22	0	60	0.007	0.06	0.06	<0.01	<0.1	<0.1	<0.01	53
BSW12	14/10/2015	ME1510717002	<0.001	0	19	0.217	0	0	<0.001	8	0	49	0	44	0.008	0.02	0.02	<0.01	0.3	0.3	0.02	85
BSW12	3/02/2016	ME1600285053	<0.001	0	14	0.181	0	0	<0.001	5	0	29	0	13	0.008	0.07	0.07	<0.01	0.4	0.5	<0.01	73
BSW12	11/05/2016	ME1600662006	<0.001	0	15	0.361	0	0	0.004	9	0	39	0	102	0.126	<0.01	<0.01	<0.01	0.3	0.3	0.04	30
BSW12	31/08/2016	ME1601226013	<0.001	0	19	0.058	0	0	0.002	8	0	66	0	78	0.023	0.02	0.02	<0.01	0.6	0.6	0.02	84
BSW13	20/02/2014	ME140288006	<0.001	0.002	5	0.59	<0.0001	<0.001	0.005	4	<0.001	29	0.066	50	0.008	0.42	0.46	0.04	3.3	3.8	1.01	12
BSW13	19/05/2014	ME140741007	<0.001	0.002	13	0.042	<0.0001	<0.001	0.002	2	<0.001	86	0.153	74	<0.013	<0.01	<0.01	<0.01	0.6	0.6	0.05	57
BSW13	19/08/2014	ME1401208007	<0.001	0.006	35	0.903	<0.0001	<0.001	0.004	7	<0.001	157	0.413	192	0.006	<0.01	<0.01	<0.01	1.1	1.1	0.08	78
BSW13	19/11/2014	ME1401676005	<0.001	0.002	39	0.581	<0.0001	0.003	0.006	11	0	193	0.491	234	<0.017	0.05	0.05	<0.01	1.9	2	0.07	178
BSW13	4/02/2015	ME1500221005	0.001	0	20	0.286	0	0	0.01	25	0	89	0	98	<0.018	0.36	0.39	0.03	10.3	10.7	2.62	75
BSW13	1/05/2015	ME1500690053	0.002	0	9	0.291	0	0	0.008	6	0	31	0	55	0.029	<0.01	<0.01	<0.01	1.4	1.4	0.29	30
BSW13	7/08/2015	ME1510328008	<0.001	0	10	0.546	0	0	0.004	4	0	38	0	14	<0.005	0.02	0.02	<0.01	0.2	0.2	0.03	31
BSW13	3/02/2016	ME1600285054	<0.001	0	7	0.113	0	0	0.003	2	0	19	0	14	<0.005	0.18	0.18	<0.01	0.8	0.8	0.1	83


Sample Location	Sampling Date	Sample Num	Lead - Dissolved mg/L	Lithium - Dissolved mg/L	Magnesium - Dissolved mg/L	Manganese - Dissolved mg/L	Mercury - Dissolved mg/L	Molybdenum - Dissolved mg/L	Nickel - Dissolved mg/L	Potassium - Dissolved mg/L	Silver - Dissolved mg/L	Sodium - Dissolved mg/L	Strontium - Dissolved mg/L	Sulfate as SO4 - Turbidimetric mg/L	Zinc - Dissolved mg/L	Nitrate as N mg/L	Nitrate + Nitrite as N mg/L	Nitrite as N mg/L	Total Kjeldahl Nitrogen as N mg/L	Total Nitrogen as N mg/L	Total Phosphorus as P mg/L	Total Alkalinity as CaCO3 mg/L
BSW13	11/05/2016	ME160662007	<0.001	0	3	0.061	0	0	0.004	7	0	12	0	21	0.009	<0.01	<0.01	<0.01	0.7	0.7	0.2	10
BSW13	31/08/2016	ME1601226014	<0.001	0	40	1.01	0	0.003	6	0.003	6	158	0	135	<0.005	0.03	0.03	<0.01	1.1	1.1	0.05	12.6
BSW14	20/02/2014	ME1400288007	<0.001	0.022	56	0.084	<0.0001	<0.001	0.003	9	<0.001	192	0.512	384	0.049	17.8	17.9	0.08	4	21.9	0.18	35
BSW14	19/08/2014	ME1401298008	<0.001	0.003	3	0.008	<0.0001	<0.001	0.002	4	<0.001	20	0.04	24	<0.013	<0.01	<0.01	<0.01	1.5	1.5	0.1	11
BSW14	31/08/2016	ME1601226015	<0.001	62	6	0.038	0	0	0.007	12	0	121	0	358	0.006	0.03	0.03	<0.01	1.5	1.5	0.04	247
BSW15	19/08/2014	ME1401298009	<0.001	<0.001	4	0.081	<0.0001	<0.001	<0.001	4	<0.001	18	0.078	23	0.006	<0.01	<0.01	<0.01	2.7	2.7	0.37	17
BSW15	7/08/2015	ME1510328009	<0.001	0	3	0.304	0	0	0.004	4	0	20	0	12	0.007	0.03	0.03	<0.01	0.7	0.7	0.05	13
BSW15	5/09/2016	ME1601226052	<0.001	0	5	0.022	0	0	<0.001	5	0	28	0	32	<0.005	0.03	0.03	<0.01	0.8	0.8	0.04	36
BSW16	4/08/2015	ME1510328010	<0.001	0	6	0.006	0	0	0.002	2	0	14	0	<1	0.027	0.02	0.02	<0.01	0.2	0.2	<0.01	35
BSW16	13/10/2015	ME1510717003	<0.001	0	5	0.024	0	0	0.004	1	0	9	0	<1	0.007	0.25	0.25	<0.01	0.2	0.2	<0.01	35
BSW16	2/02/2016	ME1602659055	<0.001	0	4	0.008	0	0	<0.001	2	0	7	0	<1	0.029	0.32	0.32	<0.01	0.2	0.2	<0.01	35
BSW16	11/05/2016	ME1600662008	<0.001	0	10	0.211	0	0	0.006	6	0	15	0	2	<0.01	<0.01	<0.01	<0.01	0.6	0.6	0.15	60
BSW16	1/09/2016	ME1601226038	<0.001	0	4	0.003	0	0	0.003	1	0	11	0	<10	<0.005	0.02	0.02	<0.01	0.3	0.3	0.02	28
BSW17	21/05/2014	ME1400741008	<0.001	<0.001	2	<0.016	<0.0001	<0.001	0.003	4	<0.001	15	<0.014	4	0.13	0.48	0.48	<0.01	3.2	3.7	0.08	2
BSW17	19/08/2014	ME1401298010	<0.001	0.001	2	<0.013	<0.0001	<0.001	0.003	3	<0.001	18	0.025	15	0.071	1.3	1.3	<0.01	2.2	3.5	0.08	<1
BSW17	20/11/2014	ME1401676006	<0.001	0.001	2	0.106	<0.0001	<0.001	0.004	2	0	14	<0.014	28	0.04	0.06	0.06	<0.01	1.5	1.6	0.03	<1
BSW17	29/04/2015	ME1500659054	<0.001	0	4	<0.019	0	0	0.002	2	0	16	0	12	<0.015	0.99	0.99	<0.01	0.4	1.4	<0.01	<1
BSW17	1/09/2016	ME1601226039	<0.001	0	2	0.006	0	0	0.003	2	0	13	0	4	<0.013	0.77	0.77	<0.01	0.4	1.2	<0.01	6
BSW18	1/09/2016	ME1601226040	0.005	0	4	0.158	<0.0001	<0.001	0.006	11	0	14	0	36	0.84	<0.01	<0.01	<0.01	2.4	2.4	0.12	6
BSW19	20/08/2014	ME1401298011	<0.001	0.002	13	0.858	<0.0001	<0.001	0.004	11	<0.001	60	0.182	114	0.041	0.13	0.13	<0.01	1.3	1.4	0.1	33
BSW19	14/08/2015	ME1510328011	<0.001	0	16	0.177	0	0	0.004	5	0	42	0	118	0.061	0.03	0.03	<0.01	0.3	0.3	<0.01	23
BSW19	31/08/2016	ME1601226016	<0.001	0	22	0.063	0	0	0.003	5	0	73	0	87	<0.014	0.02	0.02	<0.01	1.5	1.5	0.1	75
BSW20	18/02/2014	ME140288008	<0.001	0.002	93	0.082	<0.0001	0.003	0.002	10	<0.001	277	0.799	219	<0.005	<0.01	0.02	<0.01	2	2	0.12	316
BSW20	22/05/2014	ME1400741017	<0.001	0.004	57	0.545	<0.0001	<0.001	0.003	8	<0.001	116	0.484	247	0.008	<0.01	<0.01	<0.01	1	1	0.06	136
BSW20	20/08/2014	ME1401298012	<0.001	0.007	50	0.348	<0.0001	<0.001	0.002	5	<0.001	129	0.419	194	<0.016	0.05	0.05	<0.01	0.6	0.6	0.04	130
BSW20	20/11/2014	ME1401676007	<0.001	0.003	74	0.349	<0.0001	<0.001	0.002	5	0	187	0.29	225	<0.005	<0.01	<0.01	<0.01	1.3	1.3	0.06	223
BSW20	9/02/2015	ME1500221006	0.005	0	85	0.994	0	0	0.005	9	0	232	0	234	0.109	<0.01	<0.01	<0.01	2.1	2.1	0.11	274
BSW20	1/05/2015	ME1500659055	0.001	0	92	0.607	0	0	0.005	15	0	244	0	274	<0.014	0.02	0.02	<0.01	2.4	2.4	0.16	227
BSW20	14/08/2015	ME1510328012	<0.001	0	45	0.244	0	0	0.002	5	0	106	0	210	<0.005	<0.01	<0.01	<0.01	0.4	0.4	<0.01	101
BSW20	14/10/2015	ME1510717004	<0.001	0	63	1.38	0	0	0.002	6	0	129	0	246	<0.005	0.03	0.03	<0.01	0.7	0.7	0.06	208
BSW20	12/05/2016	ME160662009	<0.001	0	76	<0.016	0	0	0.003	11	0	190	0	195	<0.005	<0.01	<0.01	<0.01	1.1	1.1	0.06	210
BSW20	31/08/2016	ME1601226017	<0.001	0	37	0.167	0	0	0.003	5	0	68	0	136	<0.005	0.02	0.02	<0.01	0.7	0.7	0.03	104
BSW21	18/02/2014	ME140288009	<0.001	0.002	62	0.653	<0.0001	<0.001	<0.001	3	<0.001	228	1.16	229	0.006	<0.01	<0.01	<0.01	0.6	0.6	0.08	390
BSW21	22/05/2014	ME1400741018	<0.001	0.004	55	0.203	<0.0001	<0.001	<0.001	7	<0.001	128	0.61	236	<0.01	0.15	0.15	<0.01	0.7	0.8	0.04	192
BSW21	20/08/2014	ME1401298013	<0.001	0.006	50	0.098	<0.0001	<0.001	<0.001	5	<0.001	129	0.479	202	<0.013	0.14	0.14	<0.01	0.8	0.9	0.04	133
BSW21	20/11/2014	ME1401676008	<0.001	0.003	58	0.154	<0.0001	<0.001	<0.001	4	0	192	0.953	201	<0.005	0.05	0.05	<0.01	1	1	0.04	446
BSW21	8/02/2015	ME1500221007	<0.001	0	70	0.279	0	0	<0.001	3	0	225	0	314	<0.005	<0.01	<0.01	<0.01	0.5	0.5	0.1	361
BSW21	1/05/2015	ME1500659056	<0.001	0	54	0.053	0	0	<0.001	2	0	167	0	248	0.007	<0.01	<0.01	<0.01	0.4	0.4	0.02	289
BSW21	4/08/2015	ME1510328013	<0.001	0	33	0.06	0	0	0.002	4	0	74	0	114	<0.005	0.08	0.08	<0.01	0.6	0.7	<0.01	72
BSW21	14/10/2015	ME1510717005	<0.001	0	62	1.38	0	0	0.002	6	0	154	0	232	0.006	0.04	0.04	<0.01	0.4	0.4	0.03	154
BSW21	3/02/2016	ME1602659056	<0.001	0	64	0.02	0	0	<0.001	4	0	190	0	214	0.008	1.24	1.24	<0.01	0.3	1.5	0.02	373
BSW21	12/05/2016	ME1600662010	<0.001	0	51	0.249	0	0	<0.001	3	0	159	0	225	<0.005	<0.01	<0.01	<0.01	0.1	0.1	<0.01	281
BSW21	5/09/2016	ME1601226067	<0.001	0	10	0.075	0	0	0.003	4	0	26	0	38	<0.014	0.09	0.09	<0.01	1	1.1	0.07	46
BSW22	18/02/2014	ME140288010	<0.001	0.001	46	0.068	<0.0001	<0.001	<0.001	6	<0.001	105	0.529	51	0.009	<0.01	<0.01	<0.01	0.7	0.7	0.12	290
BSW22	22/05/2014	ME1400741019	<0.001	0.001	44	0.103	<0.0001	<0.001	<0.001	4	<0.001	95	0.523	171	0.005	0.06	0.06	<0.01	0.4	0.5	0.04	200
BSW22	20/08/2014	ME1401298014	<0.001	0.002	48	0.093	<0.0001	<0.001	<0.001	5	<0.001	114	0.515	195	<0.005	0.03	0.03	<0.01	0.4	0.4	0.03	171
BSW22	20/11/2014	ME1401676009	<0.001	0.002	52	0.077	<0.0001	<0.001	<0.001	4	0	116	0.688	180	<0.005	<0.01	<0.01	<0.01	0.6	0.6	0.02	298
BSW22	8/02/2015	ME1500221008	<0.001	0	40	0.041	0	0	<0.001	4	0	83	0	72	<0.005	0.03	0.03	<0.01	0.5	0.5	0.03	270
BSW22	1/05/2015	ME1500659057	<0.001	0	46	0.047	0	0	<0.001	4	0	101	0	99	0.005	<0.01	<0.01	<0.01	0.4	0.4	0.02	264

Sample Location	Sampling Date	Sample Num	Lead - Dissolved mg/L	Lithium - Dissolved mg/L	Magnesium - Dissolved mg/L	Manganese - Dissolved mg/L	Mercury - Dissolved mg/L	Molybdenum - Dissolved mg/L	Nickel - Dissolved mg/L	Potassium - Dissolved mg/L	Silver - Dissolved mg/L	Sodium - Dissolved mg/L	Strontium - Dissolved mg/L	Sulfate as SO4 - Turbidimetric mg/L	Zinc - Dissolved mg/L	Nitrate as N mg/L	Nitrate + Nitrite as N mg/L	Nitrite as N mg/L	Nitrate as N mg/L	Total Kjeldahl Nitrogen as N mg/L	Total Nitrogen as N mg/L	Total Phosphorus as P mg/L	Total Alkalinity as CaCO3 mg/L
BSW22	7/08/2015	ME1510328014	<0.001	0	44	0.078	0	0	<0.001	5	0	98	0	180	<0.005	<0.01	<0.01	<0.01	0.2	0.2	0.2	<<0.01	98
BSW22	14/10/2015	ME1510717006	<0.001	0	48	0.422	0	0	<0.001	4	0	97	0	166	<0.005	0.03	0.03	<0.01	0.3	0.3	0.3	0.03	241
BSW22	3/02/2016	ME1600265057	<0.001	0	26	0.176	0	0	<0.001	3	0	52	0	74	<0.005	0.45	0.45	<0.01	0.4	0.4	0.4	0.04	295
BSW22	12/05/2016	ME1600662011	<0.001	0	42	0.066	0	0	<0.001	6	0	99	0	22	0.007	<0.01	<0.01	<0.01	0.2	0.2	0.2	<0.01	274
BSW23	30/04/2015	ME1500659058	0.008	0	5	0.829	0	0	0.018	9	0	10	0	38	0.039	0.02	0.02	<0.01	3.9	3.9	3.9	0.54	29
BSW23	7/09/2016	ME1601226068	<0.001	0	2	<0.017	0	0	0.002	5	0	10	0	2	0.006	0.02	0.02	<0.01	0.5	0.5	0.5	0.03	10
BSW24	7/09/2016	ME1601226069	<0.001	0	2	0.005	0	0	<0.001	6	0	7	0	5	0.006	0.04	0.04	<0.01	0.5	0.5	0.5	<<0.01	4
BSW25	17/02/2014	ME1400288011	<0.001	<0.001	14	0.242	<0.0001	<0.0001	<0.001	24	<0.001	14	0.079	3	0.008	0.04	<0.01	<0.01	1.3	1.3	1.3	0.12	89
BSW25	21/05/2014	ME1400741009	<0.001	<0.001	10	0.046	<0.0001	<0.0001	<0.001	15	<0.001	13	0.062	11	<0.018	0.02	0.02	<0.01	1.1	1.1	1.1	0.07	58
BSW25	20/08/2014	ME1401208015	<0.001	<0.001	10	0.03	<0.0001	<0.0001	<0.001	13	<0.001	12	0.078	17	0.006	<0.01	<0.01	<0.01	0.6	0.6	0.6	0.03	58
BSW25	20/11/2014	ME1401676010	<0.001	<0.001	10	0.068	<0.0001	<0.0001	<0.001	19	<0.001	7	0.057	9	0.009	<0.01	<0.01	<0.01	1.9	1.9	1.9	0.11	60
BSW25	6/02/2015	ME1500221009	0.001	0	9	0.172	0	0	<0.001	14	0	5	0	8	<0.005	<0.01	<0.01	<0.01	0.6	0.6	0.6	0.06	48
BSW25	30/04/2015	ME1500659059	0.002	0	8	0.075	0	0	<0.001	11	0	5	0	14	0.034	0.04	0.04	<0.01	0.9	0.9	0.9	0.04	21
BSW25	4/08/2015	ME1510328015	<0.001	0	8	0.022	0	0	<0.001	8	0	9	0	15	<0.005	0.09	0.09	<0.01	0.1	0.2	0.2	<<0.01	41
BSW25	14/10/2015	ME1510717007	<0.001	0	13	<0.018	0	0	<0.001	12	0	11	0	7	<0.005	0.04	0.04	<0.01	0.7	0.7	0.7	0.04	72
BSW25	3/02/2016	ME1600265058	<0.001	0	2	<0.018	0	0	<0.001	4	0	1	0	2	0.006	0.25	0.25	<0.01	0.8	1	1	0.05	53
BSW25	12/05/2016	ME1600662012	<0.001	0	5	0.077	0	0	<0.001	13	0	5	0	8	<0.013	0.19	0.2	<0.01	1.2	1.4	1.4	0.18	32
BSW26	17/02/2014	ME1400288012	<0.001	<0.001	3	0.36	<0.0001	<0.0001	<0.001	35	<0.001	17	0.054	<1	0.021	<0.01	<0.01	<0.01	3.5	3.5	3.5	0.11	37
BSW26	21/05/2014	ME1400741010	<0.001	<0.001	2	<0.012	<0.0001	<0.0001	<0.001	20	<0.001	9	0.031	4	0.02	0.32	0.32	<0.01	2	2.3	2.3	0.03	15
BSW26	20/08/2014	ME1401208016	<0.001	<0.001	<1	0.008	<0.0001	<0.0001	<0.001	11	<0.001	8	0.025	9	0.005	<0.01	<0.01	<0.01	3.4	3.4	3.4	0.19	8
BSW26	20/11/2014	ME1401676011	<0.001	<0.001	3	<0.014	<0.0001	<0.0001	<0.001	21	<0.001	10	0.033	7	0.005	<0.01	<0.01	<0.01	2.4	2.4	2.4	0.06	27
BSW26	6/02/2015	ME1500221010	<0.001	0	3	0.031	0	0	<0.001	23	0	10	0	8	<0.005	<0.01	<0.01	<0.01	1.1	1.1	1.1	0.05	25
BSW26	30/04/2015	ME1500659060	0.001	0	3	0.083	0	0	<0.001	21	0	8	0	11	0.023	0.08	0.08	<0.01	2.6	2.7	2.7	0.12	17
BSW26	5/09/2016	ME1601226053	<0.001	0	1	0.008	0	0	<0.001	10	0	4	0	7	<0.018	0.24	0.24	<0.01	0.7	0.9	0.9	0.02	6
BSW27	17/02/2014	ME1400288013	0.008	<0.001	2	0.264	<0.0001	<0.0001	<0.001	35	<0.001	31	0.054	20	0.075	0.39	0.39	<0.01	11.8	12.2	12.2	0.73	10
BSW27	21/05/2014	ME1400741011	<0.001	<0.001	1	0.023	<0.0001	<0.0001	<0.001	14	<0.001	8	0.025	6	<0.012	0.1	0.1	<0.01	3.3	3.4	3.4	0.12	12
BSW27	20/08/2014	ME1401208017	<0.001	<0.001	1	<0.015	<0.0001	<0.0001	<0.001	16	<0.001	9	0.025	12	<0.014	0.5	0.5	<0.01	1.8	1.8	1.8	0.06	6
BSW27	20/11/2014	ME1401676012	0.001	<0.001	3	0.1	<0.0001	<0.0001	<0.001	21	0	9	0.054	5	0.009	<0.01	<0.01	<0.01	4.5	4.5	4.5	0.25	34
BSW27	6/02/2015	ME1500221011	<0.001	0	4	0.047	0	0	<0.001	22	0	10	0	5	0.006	0.02	0.02	<0.01	5.7	5.7	5.7	0.34	32
BSW27	30/04/2015	ME1500659061	<0.001	0	4	<0.012	0	0	<0.001	24	0	12	0	24	0.038	0.02	0.02	<0.01	2.3	2.3	2.3	0.06	9
BSW27	4/08/2015	ME1510328016	<0.001	0	2	0.024	0	0	<0.001	8	0	8	0	8	<0.01	0.43	0.43	<0.01	0.6	1	1	0.02	6
BSW27	14/10/2015	ME1510717008	0.001	0	3	0.166	0	0	<0.001	13	0	10	0	6	0.007	0.03	0.03	<0.01	2	2	2	0.14	24
BSW27	3/02/2016	ME1600265059	<0.001	0	3	0.082	0	0	<0.001	17	0	6	0	<1	<0.014	1.88	1.88	<0.01	1.5	3.4	3.4	0.11	35
BSW27	12/05/2016	ME1600662013	0.001	0	3	0.061	0	0	<0.001	18	0	8	0	5	0.006	<0.01	<0.01	<0.01	3.3	3.3	3.3	0.31	27
BSW27	5/09/2016	ME1601226054	<0.001	0	1	0.008	0	0	<0.001	6	0	5	0	6	<0.014	0.04	0.04	<0.01	1	1	1	0.06	4
BSW27	8/01/2014	ME140079048	<0.001	0.001	<1	0.043	<0.0001	<0.0001	0.002	<1	<0.001	14	0.004	3	<0.012	<0.01	<0.01	<0.01	0.4	0.4	0.4	0.1	2
KURTZ	16/05/2014	ME1400741016	<0.001	<0.015	86	0.021	<0.0001	<0.0001	<0.001	4	<0.001	122	1.89	103	0.088	0.95	0.95	<0.01	0.6	1.6	1.6	0.08	626
Lue Pub Cellar	8/04/2014	ME1400540046	<0.001	0.002	12	0.003	<0.0001	<0.0001	0.003	6	<0.001	30	0.289	20	0.048	5.04	5.04	<0.01	1	6	6	0.29	102


Annexure 7

Tailings Storage Facility

(Total No. of pages including blank pages = 4)

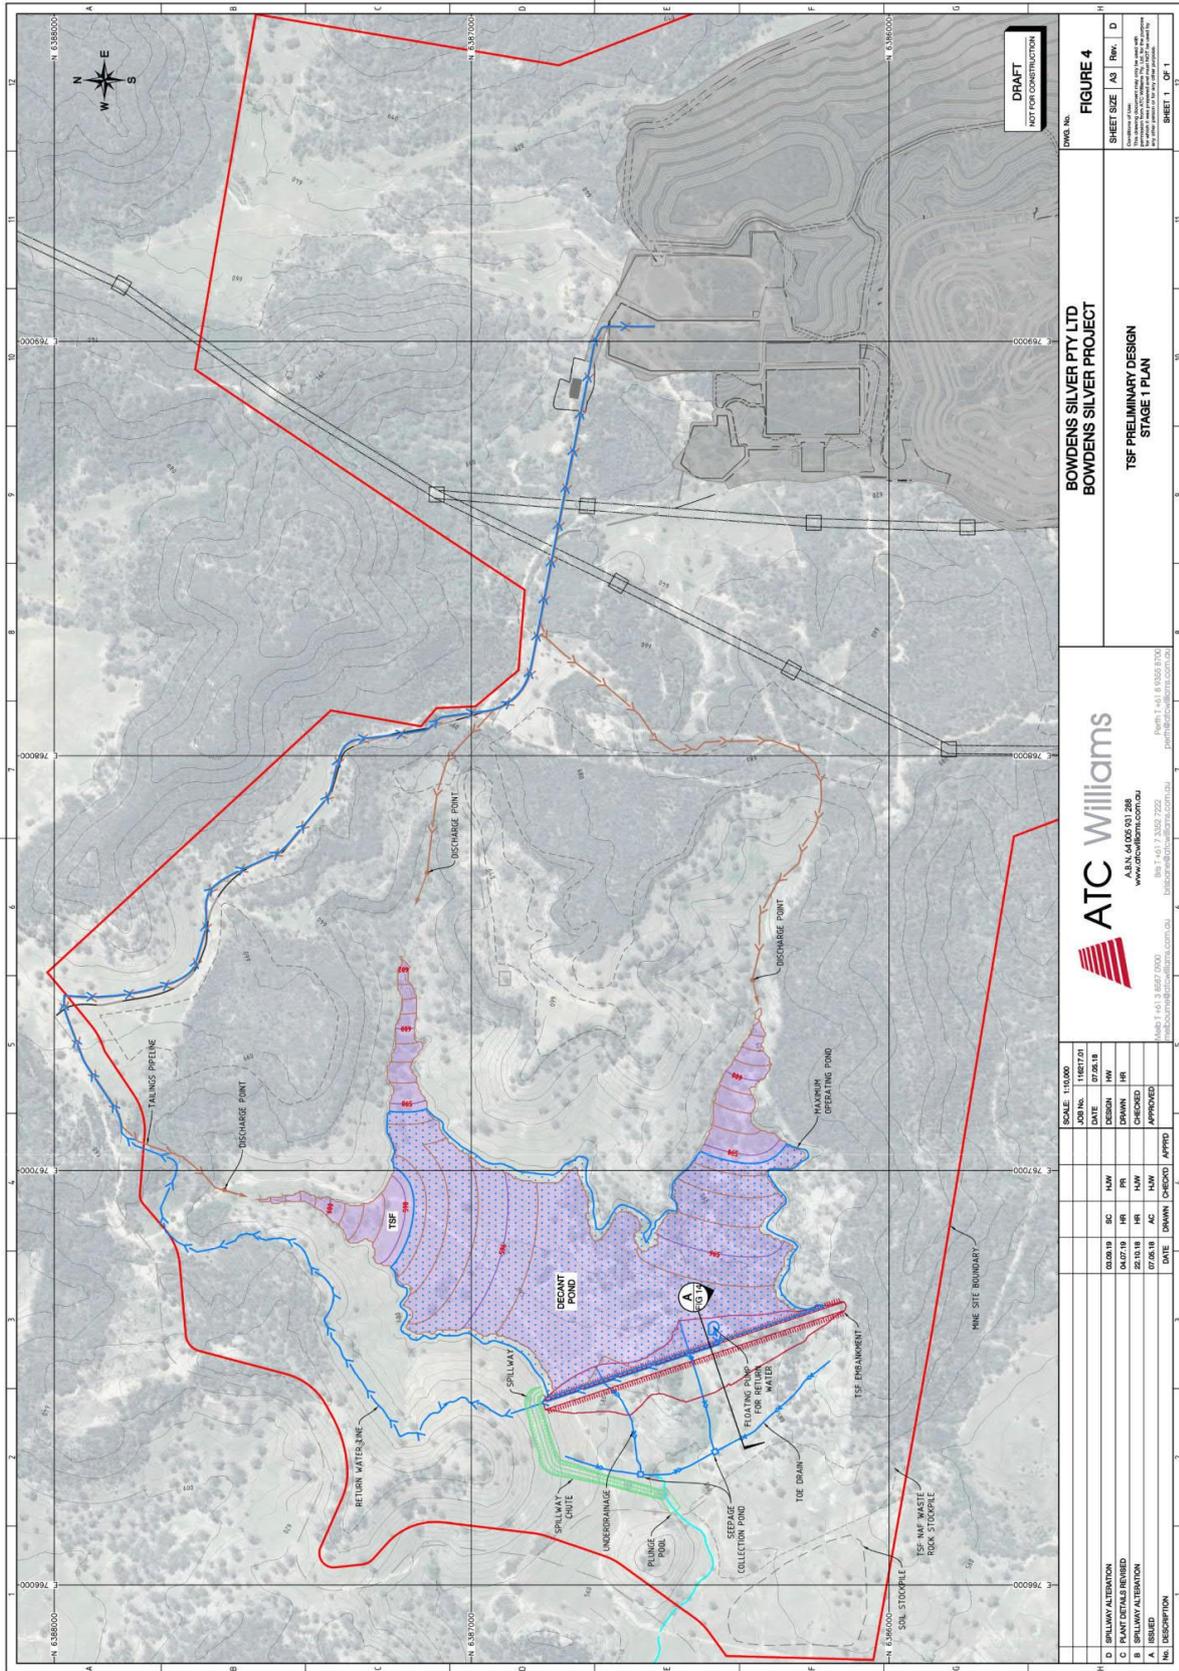

<p>DRAFT NOT FOR CONSTRUCTION</p>		<p>FIGURE 4</p>
<p>BOWDENS SILVER PTY LTD BOWDENS SILVER PROJECT</p>		<p>FIGURE 4</p>
<p>TSPF PRELIMINARY DESIGN STAGE 1 PLAN</p>		<p>FIGURE 4</p>
<p>ATC Williams A.S.N. 44 006 931 288 www.atcwilliams.com.au</p>		<p>FIGURE 4</p>
<p>SCALE: 1:10,000 JOB No. 11677201 DATE 07.06.18 DESIGN HW DRAWN HW CHECKED HW APPROVED HW</p>		<p>FIGURE 4</p>
<p>D SPILLWAY ALTERATION 06.06.18 SC NAW C PLANT DETAILS REVISED 04.07.18 HR PR B SPILLWAY ALTERATION 25.03.18 AC NAW A ISSUED 07.06.18 AC NAW</p>		<p>FIGURE 4</p>
<p>DATE [DOWN] [CHECKED] [APPROVED]</p>		<p>FIGURE 4</p>
<p>NO. DESCRIPTION</p>		<p>FIGURE 4</p>

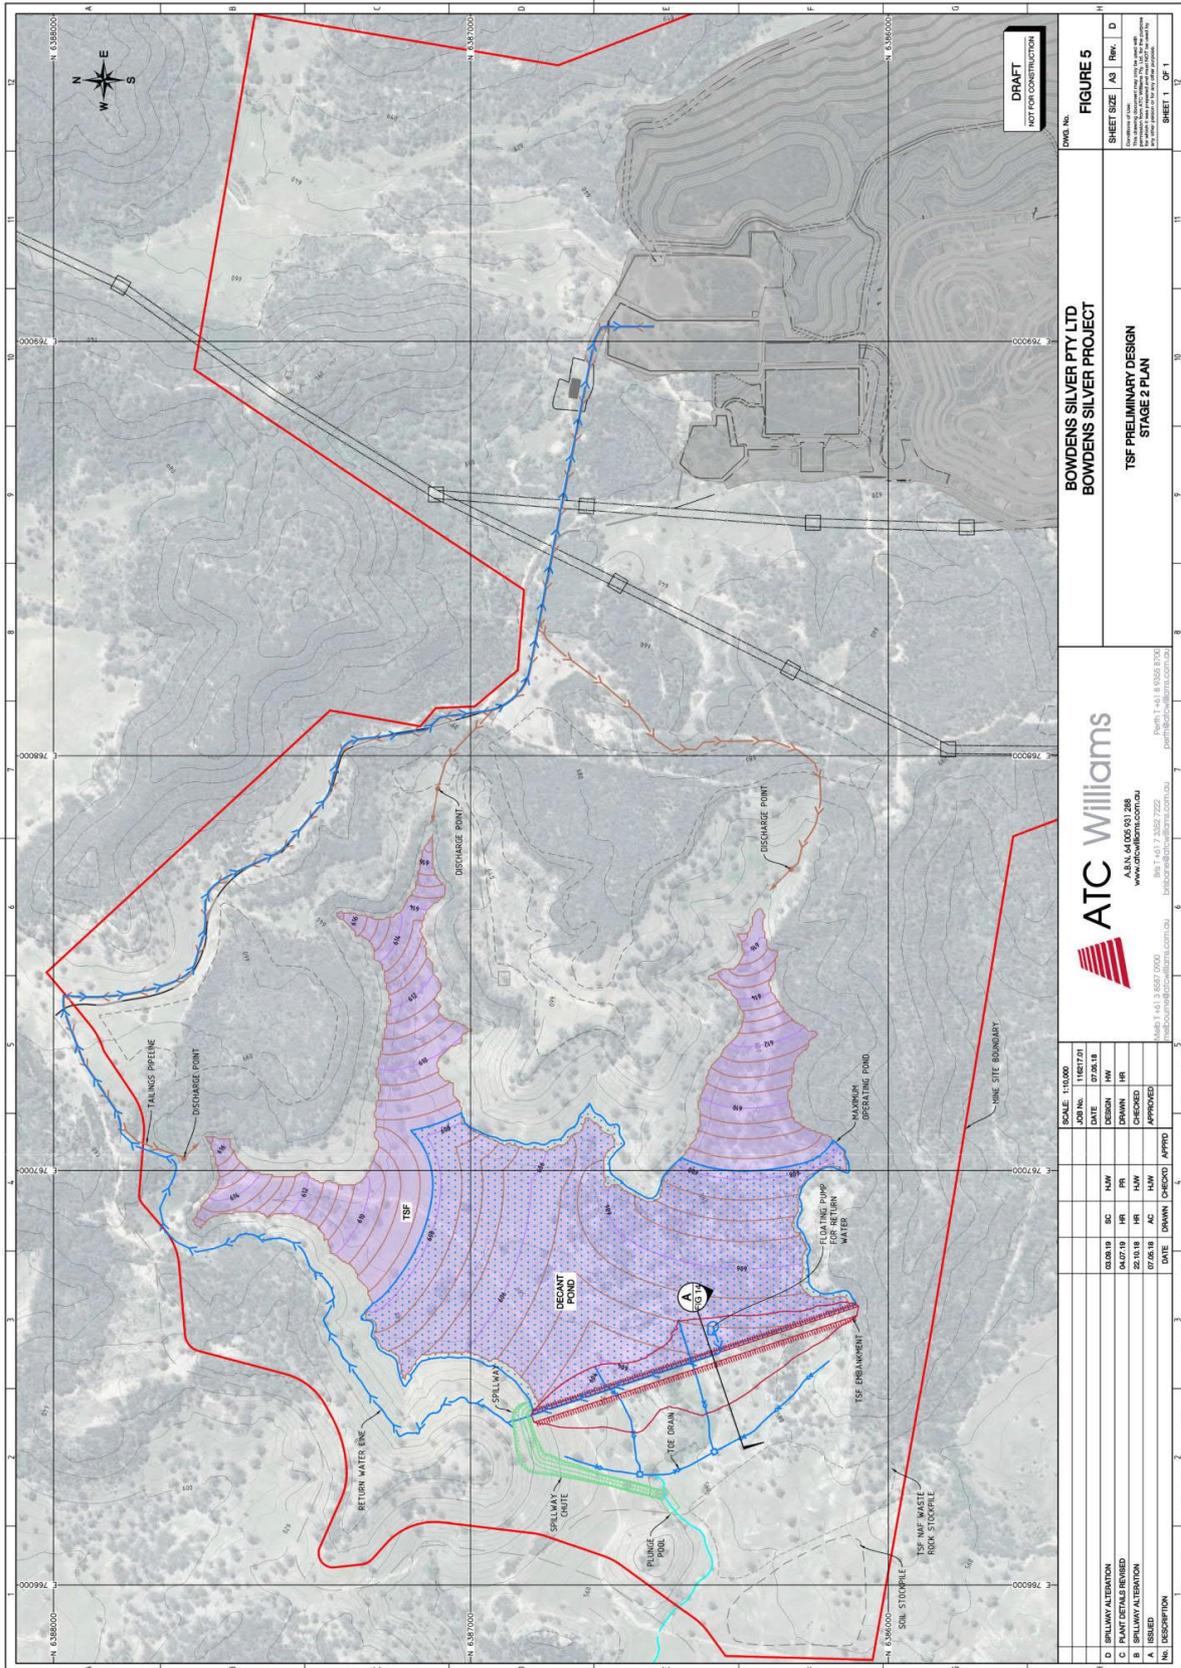

DRAFT
NOT FOR CONSTRUCTION

DWG No. **FIGURE 5**

SHEET SIZE A3 Rev. D

BOWDENS SILVER PTY LTD
BOWDENS SILVER PROJECT

TSP PRELIMINARY DESIGN
STAGE 2 PLAN

ATC Williams
Aust. Lic. No. 100000000
www.atcwilliams.com.au
Phone: +61 8 9387 8700
Fax: +61 8 9387 8700
info@atcwilliams.com.au

NO.	DESCRIPTION	DATE	ISSUED	BY	CHKD	APPD
D	SPILLWAY ALTERATION	06/01/18	NW	PR		
C	PLANT DETAILS REVISED	25/10/18	HR	NW	CHKD	
B	SPILLWAY ALTERATION	07/06/18	AC	NW	CHKD	
A	ISSUED					

SCALE: 1:10,000

NO.	DESCRIPTION	DATE	ISSUED	BY	CHKD	APPD
1	DESIGN	11/07/21	NW	PR		
2	DESIGN	12/02/18	HR	NW	CHKD	
3	DESIGN	14/01/18	HR	NW	CHKD	
4	DESIGN	14/01/18	HR	NW	CHKD	
5	DESIGN	14/01/18	HR	NW	CHKD	
6	DESIGN	14/01/18	HR	NW	CHKD	
7	DESIGN	14/01/18	HR	NW	CHKD	
8	DESIGN	14/01/18	HR	NW	CHKD	
9	DESIGN	14/01/18	HR	NW	CHKD	
10	DESIGN	14/01/18	HR	NW	CHKD	
11	DESIGN	14/01/18	HR	NW	CHKD	
12	DESIGN	14/01/18	HR	NW	CHKD	

PROJECT NO. 429/25
PROJECT TITLE: Bowdens Silver Project
DRAWN BY: [Name]
CHECKED BY: [Name]
APPROVED BY: [Name]

Annexure 8

WAL Summary

(Total No. of pages including blank pages = 4)

Water Access Licence	Bore ID	Easting	Northing	Geology form logs	Unit/ Formation	Depth	License	Licence Status	Authorised Purpose	Authorised Quantity (ML)
17710	GW062492	225206	6387163			8	20BL131613	CONVERTED	STOCK, IRRIGATION, DOMESTIC, FARMING	90
17717	GW013215	225397	6391578				20BL004858	CONVERTED	STOCK, IRRIGATION	240
23879	GW026411	225610	6386681	Sand		5.49	20BL017082	CONVERTED	STOCK, IRRIGATION, DOMESTIC	5
27800	GW015524	292117	6562130	Gravel		7.92	90BL010004	CONVERTED	IRRIGATION	19
27891	GW803707	782668	6384357	Sandstone/Shale/Basalt	Narrabeen Group	76.2	80BL238940	CONVERTED	STOCK, IRRIGATION, FARMING	41
27895	GW062206	765202	6397998		Cainzoic units	5	80BL134844	CONVERTED	IRRIGATION, DOMESTIC, STOCK	96
27904	GW802427	769827	6404721	Shale	Narrabeen Group	83.92	80BL242302	CONVERTED	IRRIGATION, PISCICULTURE, STOCK, DOMESTIC	30
27907	GW011493	772480	6387103	Sandstone	Illawarra coal measures	19.5	80BL005330	CONVERTED	STOCK, IRRIGATION, DOMESTIC	50
28443	GW802732	767333	6383330	sand/gravel	Coomber Formation	7.5	80BL241925	CONVERTED	IRRIGATION	19
28475	GW053730	755082	6379148	Sandstone	Buckaroo Conglomerate	49.99	80BL120882	CONVERTED	STOCK, IRRIGATION, DOMESTIC	92
28540	GW801307	758115	6400296	Granite	Adaminaby Group	90	80BL238631	CONVERTED	IRRIGATION	19
28806	GW803075	758678	6400285	Shale	Adaminaby Group	35	80BL243057	CONVERTED	IRRIGATION	23
28887	GW801026	749513	6384084	Shale	Windamere Volcanics	53.4	80BL237311	CONVERTED	IRRIGATION, DOMESTIC, STOCK	210
28946	GW042966	758849	6387652		Coomber Formation		80BL106727	CONVERTED	STOCK, DOMESTIC, IRRIGATION	35

Water Access Licence	Bore ID	Easting	Northing	Geology form logs	Unit/ Formation	Depth	License	Licence Status	Authorised Purpose	Authorised Quantity (ML)
29014	GW066291	765493	6383815	Slate	Coomber Formation	60.3	80BL237544	CONVERTED	STOCK, DOMESTIC, IRRIGATION	6
29247	GW062111	768316	6379755	Volcanics	Adaminaby Group	180	80BL133125	CONVERTED	INDUSTRIAL	30
30035	GW025810	773738	6372176	Gravel/Clay	Cainzoic units	5.4	80BL017263	CONVERTED	IRRIGATION	50
30617	GW053837	779681	6401057		Illawarra coal measures	6	20BL122969	CONVERTED	IRRIGATION, DOMESTIC, STOCK	90
30617	GW053838	779734	6401117		Illawarra coal measures	6	20BL122970	CONVERTED	IRRIGATION, DOMESTIC, STOCK	90
30617	GW053839	779785	6401054		Illawarra coal measures	6	20BL122971	CONVERTED	IRRIGATION, DOMESTIC, STOCK	90
30617	GW053836	779731	6400994		Illawarra coal measures	6	20BL122968	CONVERTED	IRRIGATION, DOMESTIC, STOCK	90
34129	GW065919	753132	6381386		Cainzoic units	6	80BL133816	CONVERTED	IRRIGATION	150
34129	GW065918	752874	6381485		Cainzoic units	5	80BL133814	CONVERTED	IRRIGATION	150
34137	GW800450	749194	6386032		Cainzoic units	8	80BL133027	CONVERTED	IRRIGATION	130
34137	GW800449	748868	6386307		Cainzoic units	8	80BL133026	CONVERTED	IRRIGATION	130
34144	GW023362	750997	6383537		Cainzoic units	6.7	80BL017018	CONVERTED	IRRIGATION	59
34144	GW062189	750821	6383819		Cainzoic units	5.5	80BL133036	CONVERTED	IRRIGATION, DOMESTIC, STOCK	59
34148	GW044583	749406	6385642		Cainzoic units	12.2	80BL238328	CONVERTED	IRRIGATION, DOMESTIC, STOCK	105
34148	GW800426	749619	6385907		Cainzoic units	7.2	80BL236534	CONVERTED	IRRIGATION	105
34148	GW804739	749495	6386015		Cainzoic units	6.8	80BL242669	CONVERTED	IRRIGATION	105
34150	GW802861	750773	6384337	Gravel/Clay	Cainzoic units	13	80BL242242	CONVERTED	IRRIGATION	35

Water Access Licence	Bore ID	Easting	Northing	Geology form logs	Unit/ Formation	Depth	License	Licence Status	Authorised Purpose	Authorised Quantity (ML)
34161	GW802186	749304	6390453	Gravel	Cainzoic units	6	80BL238163	CONVERTED	IRRIGATION, DOMESTIC, STOCK	16
34182	GW063099	751455	6383124		Cainzoic units	6.1	80BL133041	CONVERTED	IRRIGATION, DOMESTIC, STOCK	290
34182	GW029158	751068	6383288	Gravel	Cainzoic units	5.49	80BL022058	CONVERTED	IRRIGATION, DOMESTIC, STOCK	290
34196	GW800459	748800	6386594		Cainzoic units	8	80BL133031	CONVERTED	IRRIGATION	137
34196	GW019438	748815	6386727	Gravel	Cainzoic units	7	80BL011833	CONVERTED	IRRIGATION	137
34199	GW800453	748523	6386100		Cainzoic units	9.1	80BL133028	CONVERTED	IRRIGATION	238
34199	GW800457	748568	6386633		Cainzoic units	7.3	80BL133030	CONVERTED	IRRIGATION	238
34204	GW031052	751030	6384862		Cainzoic units	8.5	80BL022931	CONVERTED	IRRIGATION	42
34205	GW021926	749728	6385736	Gravel	Cainzoic units	5.7	80BL014451	CONVERTED	IRRIGATION	170
34208	GW804672	750129	6385088	Gravel/Clay	Cainzoic units	12	80BL238744	CONVERTED	IRRIGATION	67
34210	GW027701	751701	6388729	Gravel	Cainzoic units	3.66	80BL020966	CONVERTED	IRRIGATION, STOCK	68
34211	GW029471	749702	6385974	Gravel	Cainzoic units	8.7	80BL019095	CONVERTED	IRRIGATION	130
34211	GW800472	749644	6386032		Cainzoic units	9.7	80BL133049	CONVERTED	IRRIGATION, STOCK	130
34211	GW800474	749744	6386082		Cainzoic units	9.1	80BL133050	CONVERTED	IRRIGATION, STOCK	130
34211	GW029472	749311	6385984	Gravel	Cainzoic units	12.4	80BL022618	CONVERTED	IRRIGATION	130
35671	GW065121	768849	6392477		Illawarra coal measures		80BL144189	CONVERTED	IRRIGATION	60


Annexure 9

Uncertainty Analysis – Predicted Groundwater Drawdown

(Total No. of pages including blank pages = 8)

Note: This Annexure is only available on the digital version of this document

This page has intentionally been left blank

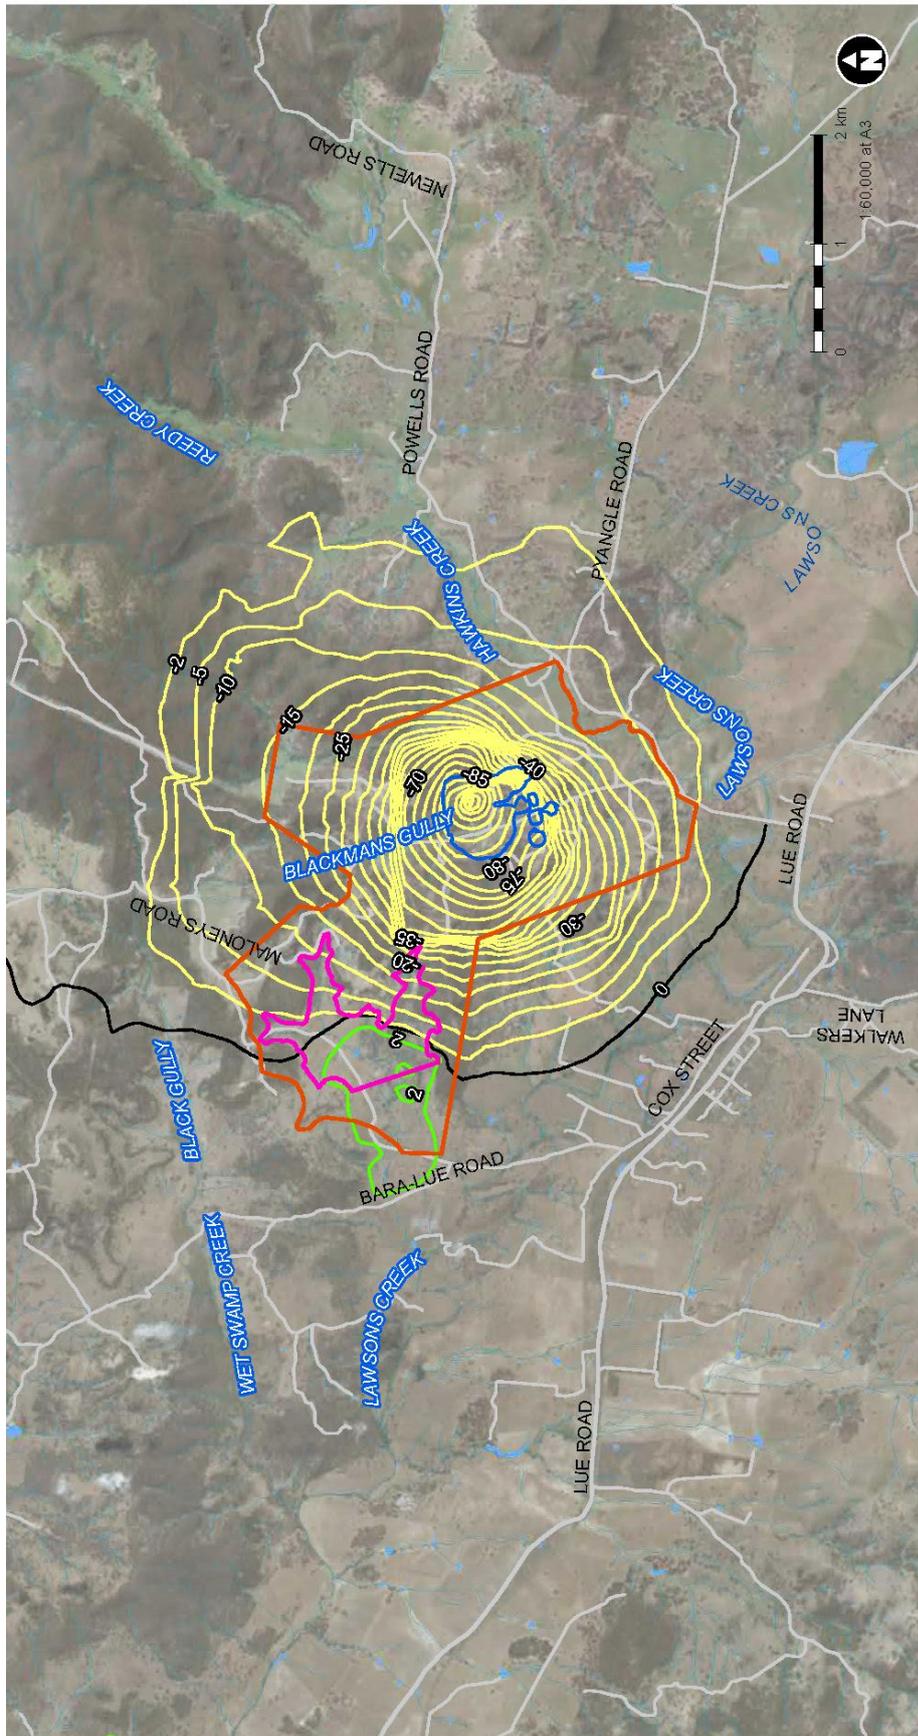

Service Layer Credits: Source: Esri, DigitalGlobe, GeoEye, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AeroGRID, IGN, and the GIS User Community



Date: 13/02/2019 Path: \\jacobs.com\AU\Projects\BOWDEN_SILVER\GIS\Drawdown\Map\MapA8-1 - High Hydraulic Conductivity Scenario.aprx
Created by: GJK | 04/11/2018

Figure A8-1 - High Hydraulic Conductivity Scenario

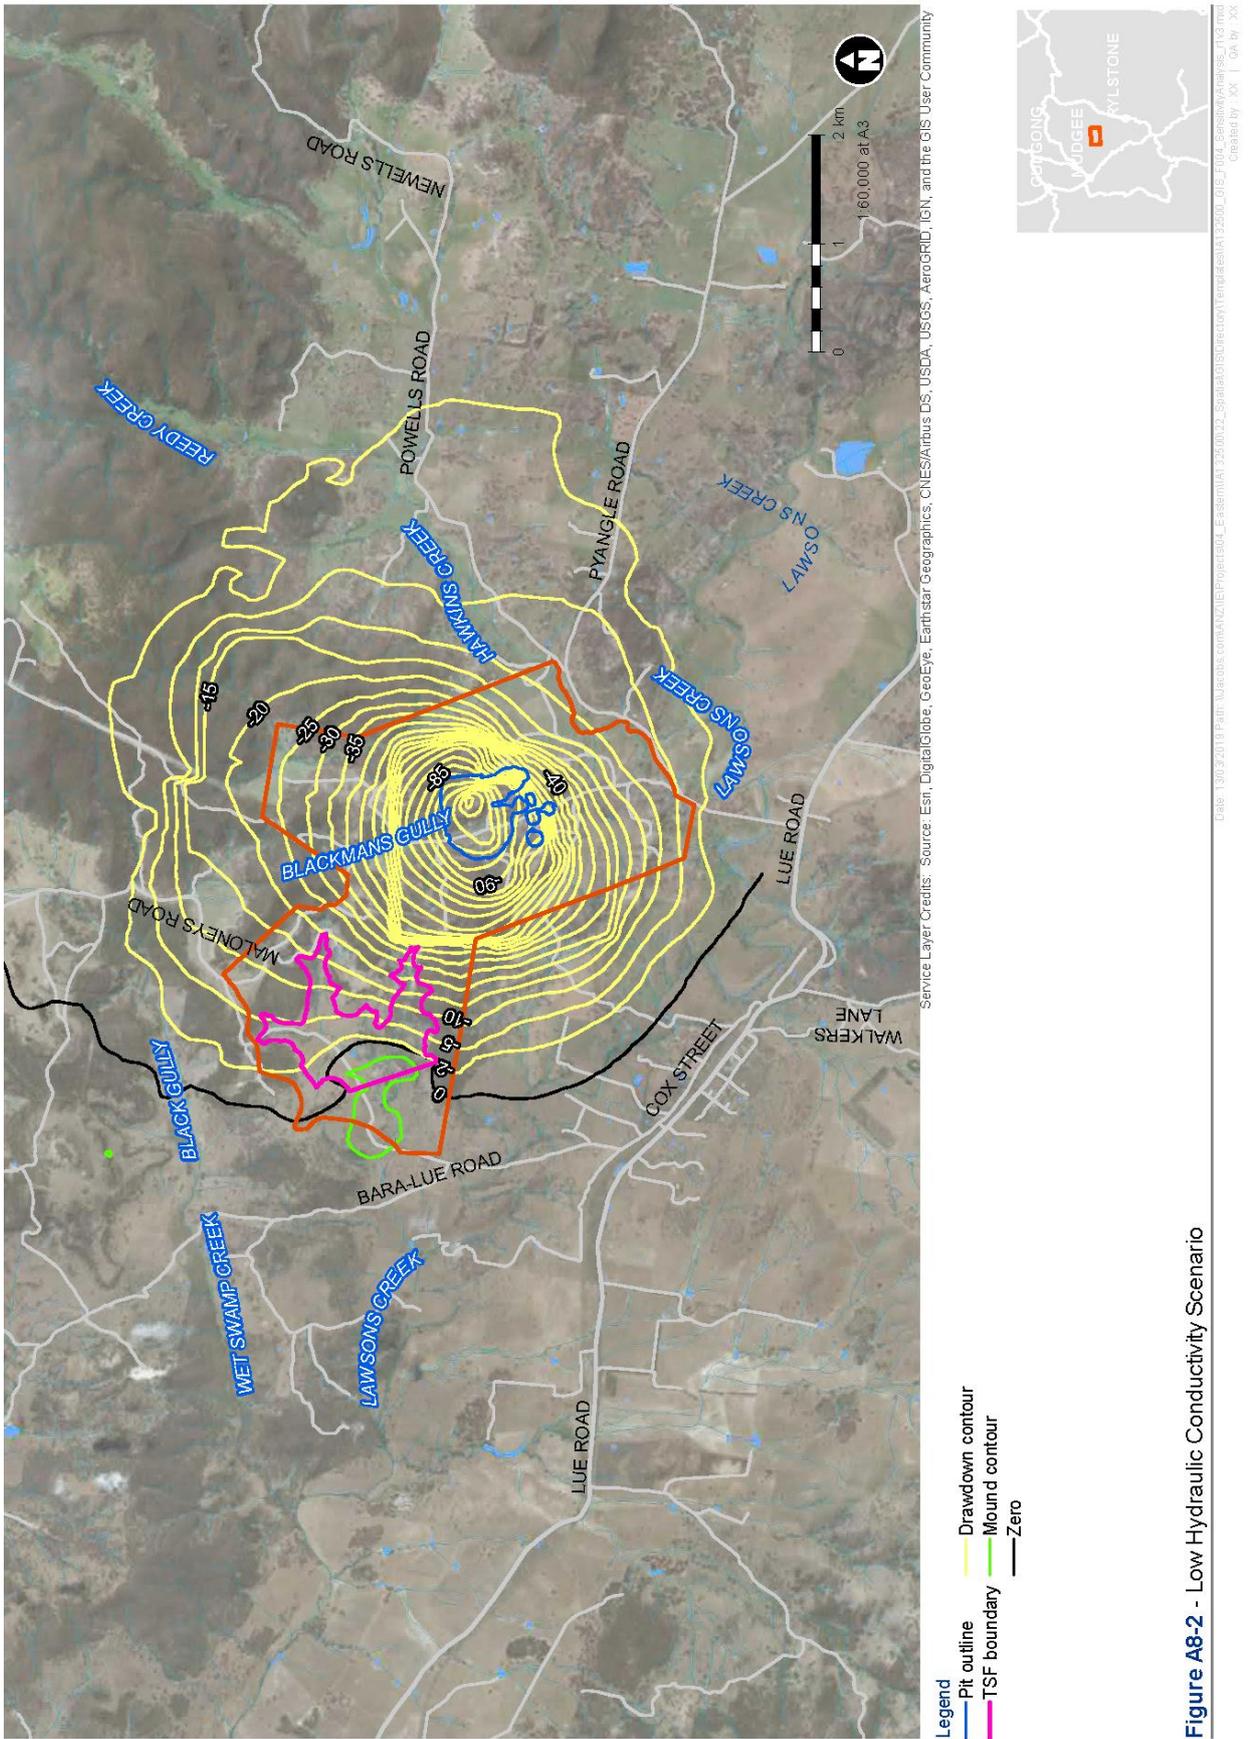
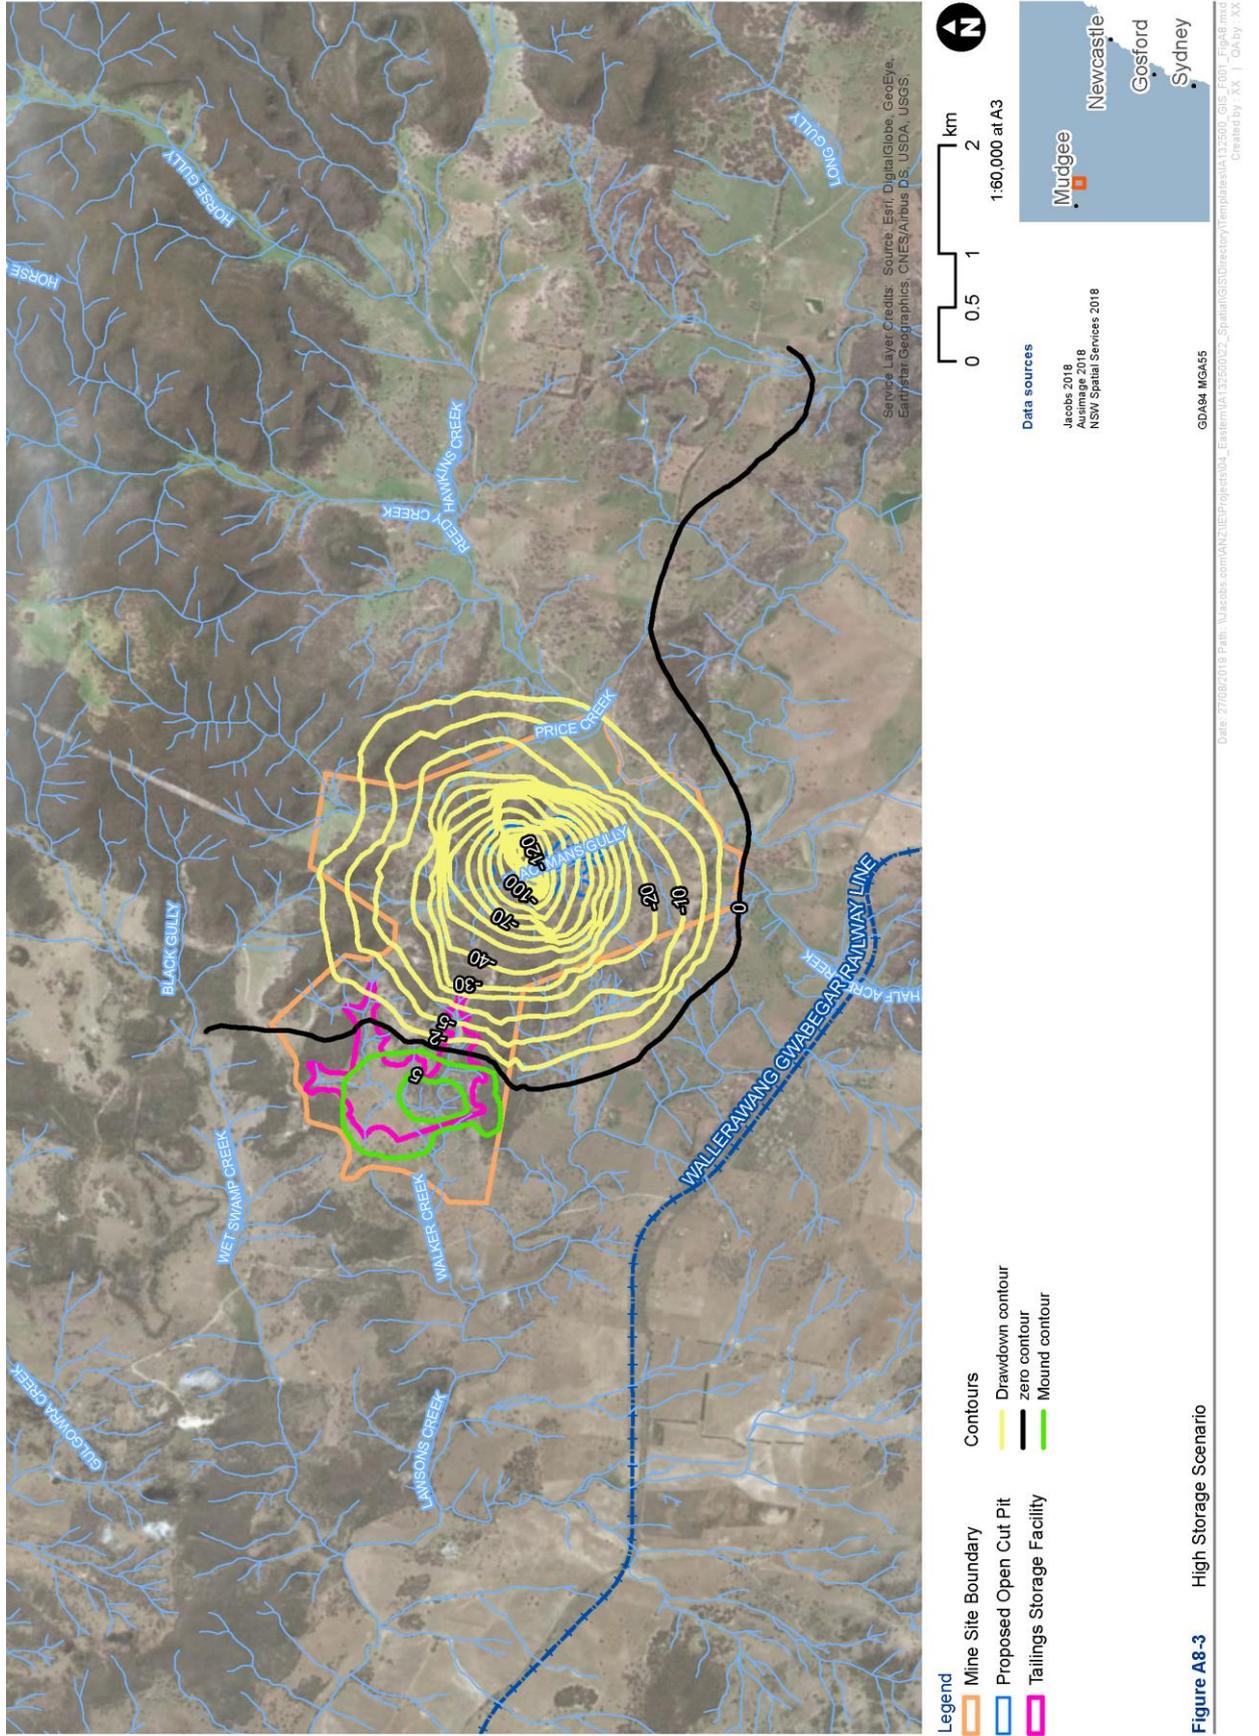
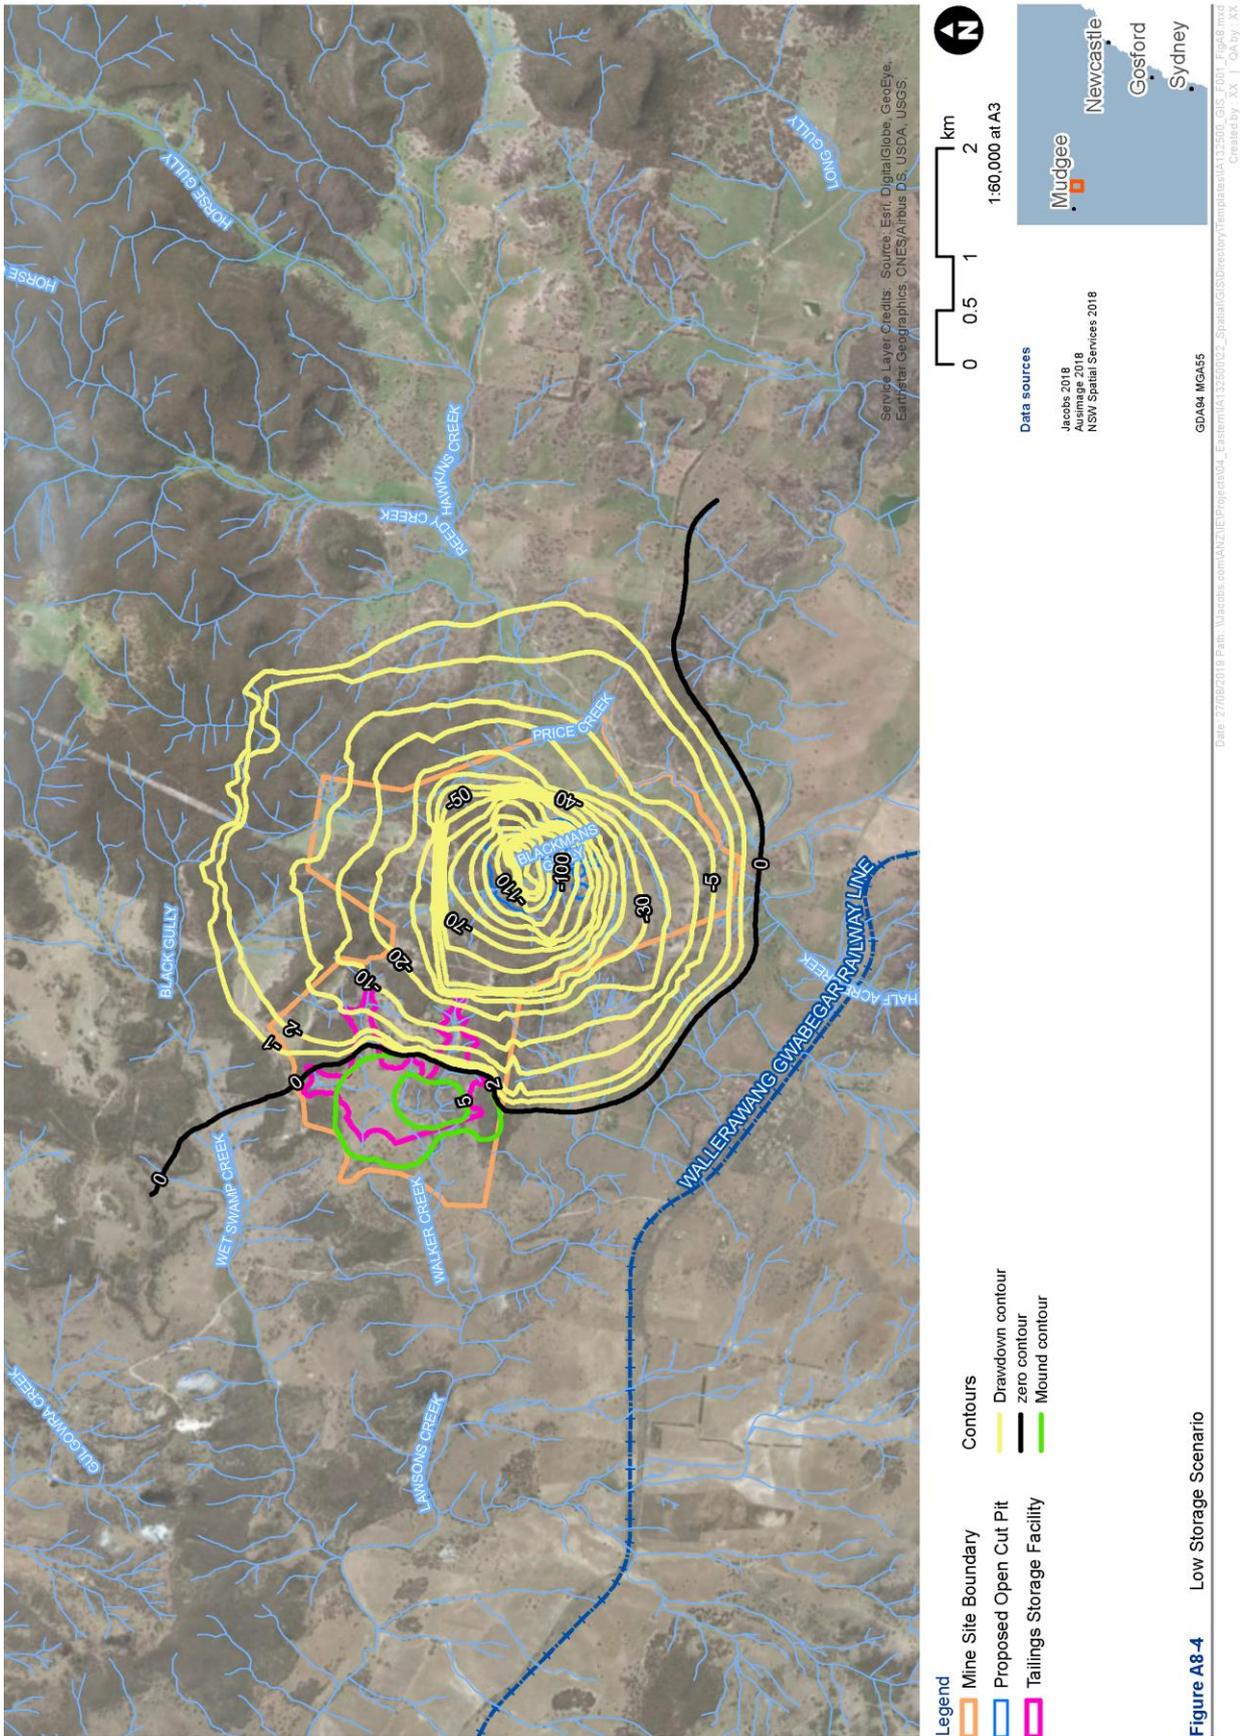


Figure A8-2 - Low Hydraulic Conductivity Scenario





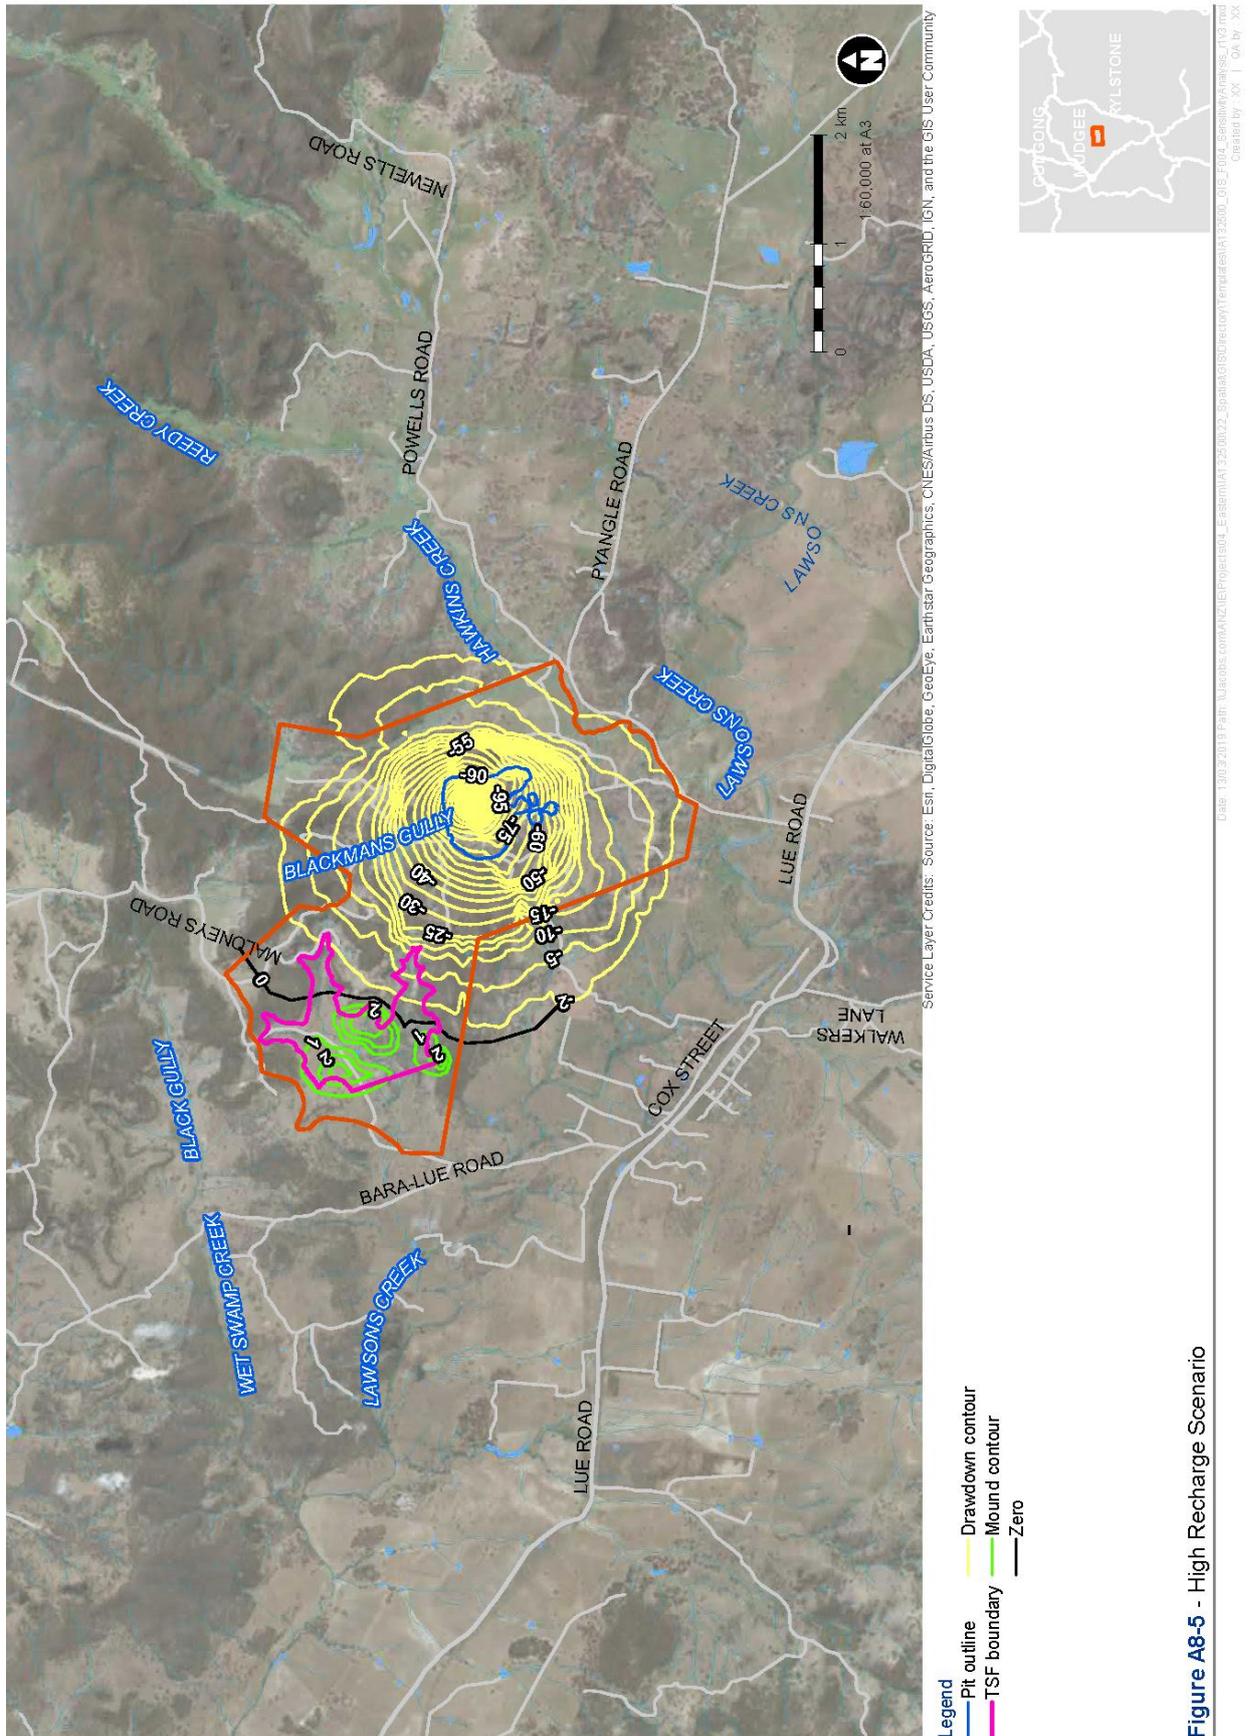


Figure A8-5 - High Recharge Scenario

Annexure 10

Groundwater Model Review

prepared by

HydroSimulations

(Total No. of pages including blank pages = 16)

Note: This Annexure is only available on the digital version of this document

This page has intentionally been left blank



Date: 23 November 2019
To: Nick Warren
Senior Environmental Consultant
R.W.Corkery & Co. Pty Ltd
1st Floor, 12 Dangar Road
BROOKLYN NSW 2083

NPM TECHNICAL PTY LTD
ABN 52 613 099 540
Trading as *HydroSimulations*
PO Box 241 Gerringong N.S.W. 2534
Phone (+61 2) 42343802
noel.merrick@hydrosimulations.com

From: Dr Noel Merrick
Re: **Bowdens Silver Project - Peer
Review of Groundwater Impact
Assessment**

Your Ref: 429
Our Ref: HS2019/36b

Introduction

This report provides a peer review of the groundwater impact assessment (GIA) and associated modelling for the Bowdens Silver Project to the south-east of Mudgee, NSW. The GIA has been prepared by Jacobs Group (Australia) Pty Limited [Jacobs] under the project management of R.W.Corkery & Co. Pty Ltd, for the client Bowdens Silver Pty Ltd.

Documentation

The review is based on the following report:

1. Jacobs, 2019, Bowdens Silver Project Groundwater Impact Assessment. Specialist Consultant Studies Compendium Volume 2, Part 5, report prepared for Bowdens Silver Pty Ltd, version 3, 27 September 2019. 198p + 10 Annexures.

Document #1 has the following sections:

- Executive Summary
- 1. Introduction
- 2. Legislation and policy
- 3. Previous investigations
- 4. Existing environment
- 5. Groundwater modelling
- 6. Impact assessment
- 7. Licensing requirements
- 8. Monitoring Management
- 9. References

The Annexures are:

1. Aquifer Interference Policy Checklist
2. Groundwater Works Summary
3. BGW10, BGW108 Pumping Tests
4. Airlift Recovery Tests
5. Packer Injection Tests
6. Comprehensive Water Quality Analyses
7. Tailings Storage Facility

8. WAL Summary
9. Uncertainty Analysis – Predicted Groundwater Drawdown
10. Groundwater Model Review

Apart from the current peer review report, progressive reviews were conducted by HydroSimulations as documented in these reports:

2. Merrick, N., 2016, Review of Bowdens Silver Mine Groundwater Proposal. HydroSimulations Report HS2016/59. 22 November 2016. 2p.
3. Merrick, N., 2017, Bowdens Silver Project – Peer Review of Hydrogeological Assessment. HydroSimulations Report HS2017/18. 7 May 2017. 5p.
4. Merrick, N., 2019, Bowdens Silver Project – Peer Review of Groundwater Impact Assessment. HydroSimulations Report HS2019/36. 4 August 2017. 14p.

Document #2 reviewed the groundwater model study plan. Document #3 reviewed model calibration. Document #4 is a draft version of the current review, based on:

5. Jacobs, 2019, Bowdens Silver Project Groundwater Impact Assessment. Specialist Consultant Studies Compendium Volume 2, Part 5, report prepared for Bowdens Silver Pty Ltd, version 2, 4 June 2019. 185p + 9 Annexures.

Comments on the review in Document #4 have been received from Jacobs (file "Review comments register_GS.xlsx").

The peer review was conducted progressively and included face-to-face meetings on two occasions at the Jacobs office in North Sydney:

1. Inception meeting (held on 3 November 2016).
2. Calibration milestone meeting (held on 20 April 2017).

Review Methodology

While there are no standard procedures for peer reviews of entire groundwater assessments, there are guidelines for the numerical modelling that underpins the assessment.

There are two accepted guides to the review of groundwater models: (A) the Murray-Darling Basin Commission (MDBC) Groundwater Flow Modelling Guideline¹, issued in 2001, and (B) guidelines issued by the National Water Commission (NWC) in June 2012 (Barnett *et al.*, 2012²). The NWC national guidelines were built upon the original MDBC guide, with substantial consistency in the model conceptualisation, design, construction and calibration principles, and the performance and review criteria, although there are differences in details.

The NWC guide promotes the concept of "model confidence level", which is defined using a number of criteria that relate to data availability, calibration, and prediction scenarios. The NWC guide is almost silent on modelling of mines and offers no direction on best practice methodology for such applications. There is, however, an expectation of more effort in uncertainty analysis, although the guide is not prescriptive as to which methodology should be adopted.

Guidelines on uncertainty analysis for groundwater models were issued by the Independent Expert Scientific Committee (IESC) on Coal Seam Gas and Large Coal Mining Development in February 2018

¹ MDBC (2001). Groundwater flow modelling guideline. Murray-Darling Basin Commission. URL: www.mdbc.gov.au/hrm/water_management/groundwater/groundwater_guides

² Barnett, B, Townley, L.R., Post, V., Evans, R.E., Hunt, R.J., Peeters, L., Richardson, S., Werner, A.D., Knapp, A. and Boronkay, A. (2012). *Australian Groundwater Modelling Guidelines*. Waterlines report 82, National Water Commission, Canberra.

in draft form and finalised in December 2018³. Although it could be argued that this guide has no applicability to metalliferous mining, the document contains useful generic advice relevant to the broader mining industry.

The groundwater guides include useful checklists for peer review. This groundwater impact assessment has been reviewed according to the 2-page Model Appraisal checklist⁴ in MDBC (2001). This checklist has questions on (1) The Report; (2) Data Analysis; (3) Conceptualisation; (4) Model Design; (5) Calibration; (6) Verification; (7) Prediction; (8) Sensitivity Analysis; and (9) Uncertainty Analysis. Non-modelling components of the groundwater impact assessment are addressed by the first three sections of the checklist.

The review has also considered whether compliance with the minimal impact considerations of the *NSW Aquifer Interference Policy* (AIP) (NSW Government, 2012⁵) has been addressed adequately.

It should be recognised that the effort put into the modelling component of a groundwater impact assessment is very dependent on possible timing and budgetary constraints that are generally not known to a reviewer. However, this is less of an issue with a progressive review. This review has been conducted progressively since November 2016. The meeting on 20 April 2017 was an interrogative review based on screen displays of model construction and model performance, with consensus completion of detailed checklists for *Model Design* and *Model Calibration*, as presented at **Table 1** and **Table 2** for model development at that time.

The assessment of all aspects of finalised groundwater modelling is recorded in the checklist at **Table 3** and **Table 4**. This includes updated commentary on aspects of **Table 1** and **Table 2** which required attention at April 2017, but have now been addressed satisfactorily. Supplementary comment is offered in the following sections of this review.

Report Matters

The GIA report is a standalone report of about 200 pages in total, to which are appended 10 Annexures of another almost 100 pages, providing an adequate groundwater impact assessment in support of the Project. The report commences with a succinct 2-page Executive Summary that addresses each potential impact and water licensing requirement in turn.

The report is well structured, written very clearly, and offers substantial explanations of concepts and background material. The illustrations are well chosen and informative. Consequently, there is a very thorough basis for conceptualisation of the groundwater system.

The objectives are outlined at the start and those objectives are addressed at the end of the report. In particular, Annexure 1 includes an *Aquifer Interference Policy* checklist.

The discussion on stream flow does not appear until late in the report at Section 5.3.3.3 and Figures 64 and 65. A flow-duration curve for Hawkins Creek would assist or confirm the Chapman baseflow separation analysis, which is explained at Section 5.3.3.3. It is understood that more detail is provided in the Surface Water Assessment.

A global water balance is provided for both steady-state and transient calibration, but not for prediction. That for transient calibration is presumably averaged over the 6.3 years of the calibration period (2011-2017). Included is an interpretation of the components in the form of the main recharge and discharge drivers, as relative

³ Middlemis H and Peeters LJM (2018) *Uncertainty analysis—Guidance for groundwater modelling within a risk management framework*. A report prepared for the Independent Expert Scientific Committee on Coal Seam Gas and Large Coal Mining Development through the Department of the Environment and Energy, Commonwealth of Australia 2018.

⁴ The NWC guidelines include a more detailed checklist with yes/no answers but without the graded assessments of the 2001 checklist, which this reviewer regards as more informative for readers.

⁵ NSW Government, 2012, *NSW Aquifer Interference Policy – NSW Government policy for the licensing and assessment of aquifer interference activities*. Office of Water, NSW Department of Primary Industries, September 2012.

percentages, whether the streams are mostly gaining or losing, and whether the net storage means a net gain or a net loss.

Data Matters

The geology and hydrogeology of the area are explained very clearly and in detail. The case for dominant fracture flow is advanced convincingly, and justification for implementation in the model as an equivalent porous medium (EPM) is presented at Section 5.3.2.6. The reviewer agrees that an EPM is appropriate, and attempts to model discrete fracture paths in a regional model would be counter-productive.

Given a lengthy history of geological and hydrogeological investigations in the area, extant data sources and information are investigated to sufficient detail. There is a very expansive coverage of background data and baseline data analysis of all types: rainfall, stream flow, hydraulic conductivity, porosity, EC, pH, major ions.

A thorough cause-and-effect analysis has been conducted on groundwater hydrographs, EC charts, and Piper / Gibbs Diagrams, to infer the importance of driver mechanisms. Vertical hydraulic gradients have also been investigated. The key processes are shown schematically on pre-mining and post-mining cross-section conceptual models (Figures 37 and 38). However, a notional Tailings Storage Facility (TSF) could have been included on the latter figure.

Model Matters

The model is said to have a Class 2 confidence level, but this has not been substantiated. Nevertheless, Class 2 is the appropriate target confidence level for a mining impact assessment. Justification could have been provided for this ranking by completion of a table modified from Table 2-1 in the NWC guide as recommended in the IESC guide on Uncertainty Analysis (see attached **Table 5** template). By examining counts for each relevant attribute in each Class, a model can be characterised as having stated percentages of each Class.

There are no issues with model design in terms of areal extent, vertical subdivision into model layers, spatial resolution scales, choice of boundary conditions, or software. There are many options at the disposal of the modeller with MODFLOW-USG, but they have not been listed (see item 4.3 in **Table 3**).

Although the modelling appears to have been undertaken competently and successfully, there are deficiencies in reporting, namely:

- No scattergram is reported for transient calibration.
- A global water balance table for prediction is not presented for comparison with that shown for the calibration period.
- Figures 58-63 are poor quality. The y-axis should have integer intervals (e.g. 1m, 5m or 10m), not fractional, and the x-axis should show the date, not number of days.

Nevertheless, calibration statistics are very good: 1.4 %RMS and about 6.3 mRMS⁶. Qualitative comparison of hydrographs (Figures 58-63) suggests a mixture from “good” to “bad” agreement, but it is not easy for the reader to judge whether there is any spatial pattern to the degree of performance. The lack of replication of many measured amplitudes could be due to overestimation of specific storage (Ss). The calibrated values happen to be always higher (except for one case) than the purported maximum in a recent publication by Rau *et al.* (2018)⁷. However, this reviewer is of the opinion that considerably higher values are legitimate, especially for unconsolidated sediments.

⁶ There is a presumed “typo” for absolute residual mean = 7.07E+06 m.

⁷ Rau, G.C., Acworth, R.I., Halloran, L.J.S., Timms, W.A. and Cuthbert, M.O., 2018. Quantifying compressible groundwater storage by combining cross-hoe seismic surveys and head response to atmospheric tides. *Journal of Geophysical Research: Earth Surface*, **123**, 1910-1930.

Rainfall recharge is accomplished by a simple fraction of actual rainfall, partitioned into separate spatial zones for ridgetops, foothills, floodplain and Lake Windamere. Similarly, maximum evapotranspiration (ET) rate is taken to be a fraction of Actual ET for the same divisions, with extinction depth uniformly 3 m. This approach is satisfactory.

It is not clear to a reader how the TSF has been modelled (Section 5.3.4.2). Is it regarded as a thicker Layer 1? Has it been given material properties? Is it handled only as a time-varying recharge rate? If the latter, how can a water level rise be predicted?

The drawdown predictions and regional extents appear plausible, as does the predicted expansion post-mining. Baseflow reduction impacts are quantified by a proper process.

The predicted pit lake water level is in good agreement with more thorough final void modelling by WRM (2019), and modelling of final voids by surface water specialists should always take priority. It is likely that the pit lake water level in Figure 72 is from the WRM model but a reader could interpret otherwise. As the final salinities are not high, and the freeboard is about 27 m, there is little risk of density-dependent flow against the apparent hydraulic gradient. The final void is likely to remain a perennial sink.

The sensitivity of hydraulic properties and rainfall recharge factors was investigated using the steady-state model with PEST software and the Jacobian matrix.

An IES-Type1 uncertainty analysis has been conducted through perturbations of key properties for their effects on predicted outputs of interest. During the sensitivity analysis with the same ranges for hydraulic properties and rainfall recharge factors, no significant effect on calibration performance was noted. This suggests the uncertainty outputs are consistent with model realisations that remain calibrated. While a factor of 2 is appropriate for S_y , it is not for S_s , where an order-of-magnitude perturbation should have been applied in order to see any appreciable effects.

Conclusion


The degree of model complexity and modelling effort for this groundwater assessment are considered to be appropriate.

Modelling of a dominant fracture-flow groundwater system by an equivalent porous medium is also appropriate.

There is very low risk that the owners of private bores near Lue township would be affected by drawdown caused by mining of the deposit.

The reviewer regards this model as being *fit for purpose*, where the purpose is jointly estimation of water take and prediction of the reduction in regional groundwater levels.

Yours sincerely



Dr Noel Merrick

Table 1. Peer Review of Model Design [at 20 April 2017]^

Q.	QUESTION	Not Applicable or Unknown	Score 0	Score 1	Score 3	Score 5	Score	Max. Score (0, 3, 5)	COMMENT
4.1	Is the choice of mathematical model appropriate (analytical / numerical)?			No	Maybe	Yes			Numerical
4.2	Is the spatial extent of the model appropriate?			No	Maybe	Yes			Yet to specify km
4.3	Is the spatial discretisation scale appropriate?	Missing		No	Maybe	Yes			20-31m minimum at pit
4.4	Is the number of model layers justified?	Missing		No	Maybe	Yes			8
4.5	Is steady state simulated?	Missing		Deficient	Adequate	Very Good			
4.6	Is transient behaviour simulated?	Missing		Deficient	Adequate	Very Good			183 months = 15.25 yrs (calib) + 15 yrs prediction
4.7	Is the stress period reasonable?	Missing		No	Maybe	Yes			6 months
4.8	Is the number of time steps per stress period justified?	Missing		Deficient	Adequate	Very Good			
4.9	Are the applied boundary conditions plausible and unrestrictive?	Missing		Deficient	Adequate	Very Good			
4.10	Are boundary condition locations consistent with the model grid configuration?	Missing		No	Maybe	Yes			
4.11	Are the initial conditions defensible?	Missing		Deficient	Adequate	Very Good			Steady state base
4.12	Is it clear what software has been selected?	Missing		No	Maybe	Yes			MF-USG
4.13	Is the software appropriate for the objectives of the study?	Missing		No	Maybe	Yes			
4.14	Is the software reputable?	Missing		No	Maybe	Yes			AlgoMesh & Groundwater Vistas
4.15	Is the software in common use and accessible to reviewers?	Missing		No	Maybe	Yes			
4.16	How detailed is the rainfall recharge algorithm?	Missing		Deficient	Adequate	Very Good			Rain fraction
4.	TOTAL SCORE								

^ Items marked in **green** have been addressed satisfactorily since April 2017

Table 2. Peer Review of Model Calibration [at 20 April 2017]^

Q.	QUESTION	Not Applicable or Unknown	Score 0	Score 1	Score 3	Score 5	Score	Max. Score (0, 3, 5)	COMMENT
5.1	Is sufficient data available for spatial calibration?			No	Maybe	Yes			PINNEENA + monitoring network
5.2	Is sufficient data available for temporal calibration?			No	Maybe	Yes			40 hydrographs measured monthly from 2012
5.3	Does the model claim to be adequately calibrated for the purpose of the study?	Missing	Missing	No	Maybe	Yes			Not yet finalised
5.4	Are calibration difficulties acknowledged?	Missing	Missing	Deficient	Adequate	Very Good			Difficulty with bores upgradient from mine site
5.5	Is it clear whether calibration is automated or trial-and-error?	Missing	Missing	No		Yes			Trial & error
5.6	Is there sufficient evidence provided for model calibration?	Missing	Missing	Deficient	Adequate	Very Good			Scattergram. Statistics. Hydrographs. Spatial water level contours. Yet to see a check of baseflow magnitudes.
5.7	Is the model sufficiently calibrated against spatial observations?	Missing	Missing	Deficient	Adequate	Very Good			Can infer from scattergram. Yet to see a comparison with observed/interpolated water table contour pattern
5.8	Is the model sufficiently calibrated against temporal observations?	Missing	Missing	Deficient	Adequate	Very Good			Good trends.
5.9	Are parts of the model well calibrated?	Unknown	Unknown	No	Maybe	Yes			Most of the area.
5.10	Are parts of the model poorly calibrated?	Unknown	Unknown	Yes	Maybe	No			At present – north of mine site.
5.11	Is the model calibrated to data from different hydrological regimes?	Unknown	Unknown	No	Maybe	Yes			The 2002-2017 period covers wet and dry episodes. Data are limited to about 5 years.
5.12	Are calibrated parameter distributions and ranges plausible?	Missing	Missing	No	Maybe	Yes			Examined for each layer – plausible.
5.13	Is a calibration statistic reported?	Missing	Missing	No		Yes			1.9 %RMS: 10 mRMS (should reduce)
5.14	Does the calibration statistic satisfy agreed performance criteria?	Missing	Missing	Deficient	Adequate	Very Good			<<5 %RMS target
5.15	Are there good reasons for not meeting agreed performance criteria?	Missing	Missing	Deficient	Adequate	Very Good			Awaiting finalised calibration.
5.	TOTAL SCORE								

^ Items marked in green have been addressed satisfactorily since April 2017

Table 3. Peer Review of Bowdens Silver Project Model [Part A]

Q.	QUESTION	Not Applicable or Unknown	Score 0	Score 1	Score 3	Score 5	Score	Max. Score (0, 3, 5)	COMMENT
1.0	THE REPORT								
1.1	Is there a clear statement of project objectives in the modelling report?		Missing	Deficient	Adequate	Very Good			Agency requirements: Table 1. Sections 1.2, 1.3. Modelling objectives S5.3.1.
1.2	Is the level of model complexity clear or acknowledged?		Missing	No	Yes				Stated as Class 2 – agreed. But evidence not provided (see Table 5 template following here).
1.3	Is a water or mass balance reported?		Missing	Deficient	Adequate	Very Good			Calibration (Tables 38, 41). Interpretation of relativities. Not prediction.
1.4	Has the modelling study satisfied project objectives?		Missing	Deficient	Adequate	Very Good			
1.5	Are the model results of any practical use?			No	Maybe	Yes			
2.0	DATA ANALYSIS								
2.1	Has hydrogeology data been collected and analysed?		Missing	Deficient	Adequate	Very Good			Section 4.5. Hydraulic tests in S4.5.7 to S4.5.10 (airlift tests, pumping tests, 4 packer tests). Figure 16 summary of K(z). Figure 18 summary of porosity(z). Table 17: calculation of Ss. Geology: S4.3, S4.4. Fracture stereonet. Figure 25.
2.2	Are groundwater contours or flow directions presented??		Missing	Deficient	Adequate	Very Good			
2.3	Have all potential recharge data been collected and analysed? (rainfall, streamflow, irrigation, floods, etc.)		Missing	Deficient	Adequate	Very Good			SIL0 rainfall compared to site. Used 4 stations in model (Thiessen polygons). Streamflow Figure 64 S5.3.3.3 – could include flow-duration curve.
2.4	Have all potential discharge data been collected and analysed? (abstraction, evapotranspiration, drainage, springflow, etc.)		Missing	Deficient	Adequate	Very Good			Baseflow analysis Figure 65 S5.3.3.3. Chapman method explained. Users: S4.5.2 & Annexure 2: 82 private bores within 10km.

2.5	Have the recharge and discharge datasets been analysed for their groundwater response?		Missing	Deficient	Adequate	Very Good	CRD comparison. Evident rain and pumping effects. Good analysis of vertical gradients at paired sites (Table 18). Analysis of EC(t) plots and Piper / Gibbs Diagrams.
2.6	Are groundwater hydrographs used for calibration?			No	Maybe	Yes	Many hydrograph sites on Figures 20-23: unstated number. Hydrograph plots in 3 groups.
2.7	Have consistent data units and standard geometrical datums been used?			No	Yes		
3.0	CONCEPTUALISATION						
3.1	Is the conceptual model consistent with project objectives and the required model complexity?		Unknown	No	Maybe	Yes	
3.2	Is there a clear description of the conceptual model?		Missing	Deficient	Adequate	Very Good	S5.1: extensive detail. Inferences from dh/dz and water quality.
3.3	Is there a graphical representation of the modeller's conceptualisation?		Missing	Deficient	Adequate	Very Good	X-Sections Fig.37, 38 with mine cutout and flow indicators. Should add TSF.
3.4	Is the conceptual model unnecessarily simple or unnecessarily complex?			Yes	No		Conceptualised as a fracture flow system but implemented appropriately as an equivalent porous medium. Pumping test: "... groundwater flow can be expected to behave in a pseudo-radial and porous media flow fashion." Rylstone Volcanics: "... on a meso-scale, groundwater flow behaves in a pseudo-radial manner, similar to a porous aquifer."
4.0	MODEL DESIGN						
4.1	Is the spatial extent of the model appropriate?			No	Maybe	Yes	Some abandoned prior models Very large: 43.5km x 44km. 8 layers. Max 32k cells/layer (less pinchouts). Total 0.36 million active cells. Cell sizes 31.25-250m. No neighbouring mines.
4.2	Are the applied boundary conditions plausible and unrestrictive?		Missing	Deficient	Adequate	Very Good	Justified in S5.3.2.4.

4.3	Is the software appropriate for the objectives of the study?		No	Maybe	Yes		Gw-Vistas GUI. MF-USG variable structured grid. Unstated USG options: e.g. upstream weighting? CONSTANTCV? Lateral connections?
-----	--	--	----	-------	-----	--	---

Table 4. Peer Review of Bowdens Silver Project Model [Part B]

Q.	QUESTION	Not Applicable or Unknown	Score 0	Score 1	Score 3	Score 5	Score	Max. Score (0, 3, 5)	COMMENT
5.0	CALIBRATION								
5.1	Is there sufficient evidence provided for model calibration?		Missing	Deficient	Adequate	Very Good			Steady-state. Transient Jan.2011-April 2017 (6.3 years). Steady-state: scattergram and statistics; ; residuals map; no head contours. Transient: 16 hydrographs shown (Figs.58-63); statistics; good spread of sites (x.z). No scattergram Baseflow agreement.
5.2	Is the model sufficiently calibrated against spatial observations?		Missing	Deficient	Adequate	Very Good			Steady-state residuals map and scattergram suggests OK but no heads map.
5.3	Is the model sufficiently calibrated against temporal observations?		Missing	Deficient	Adequate	Very Good			Figs.58-63 hydrograph comparisons: 7 good, 5 fair, 4 bad. Trends reasonable. Amplitudes mostly underpredicted – could require lower Ss. Figs.58-63 poor quality: need standard y-axis intervals, and date as x-axis.
5.4	Are calibrated parameter distributions and ranges plausible?		Missing	No	Maybe	Yes			Table 39: Ss values seem high. K values agree reasonably with field range (Table 34 vs Figure 17).
5.5	Does the calibration statistic satisfy agreed performance criteria?		Missing	Deficient	Adequate	Very Good			1.4%RMS, 6.3 mRMS. Need to correct Absolute Residual Mean = 7.07e+6m
5.6	Are there good reasons for not meeting agreed performance criteria?		Missing	Deficient	Adequate	Very Good			Mining complexity; homogeneous K per zone; fracture flow represented as equivalent porous medium.
6.0	VERIFICATION								Optional for heads subset
6.1	Is there sufficient evidence provided for model verification?	N/A	Missing	Deficient	Adequate	Very Good			

6.2	Does the reserved dataset include stresses consistent with the prediction scenarios?	N/A	Unknown	No	Maybe	Yes		
6.3	Are there good reasons for an unsatisfactory verification?	N/A	Missing	Deficient	Adequate	Very Good		
7.0	PREDICTION							
7.1	Have multiple scenarios been run for climate variability?		Missing	Deficient	Adequate	Very Good		2020?-2035 (15.5 years) + 200 years Long-term average during prediction and recovery.
7.2	Have multiple scenarios been run for operational /management alternatives?		Missing	Deficient	Adequate	Very Good		One mine plan.
7.3	Is the time horizon for prediction comparable with the length of the calibration / verification period?		Missing	No	Maybe	Yes		6.3 versus 15.5 years. Ratio Pred/Calib = 2.4 (implies high "confidence")
7.4	Are the model predictions plausible?			No	Maybe	Yes		Mostly radial pattern. Recovery pit hydrograph Fig.72 suggests 90% recovery in 7.5years. Regional drawdown increases post-mining (as expected).
8.0	SENSITIVITY ANALYSIS							K, Rain recharge
8.1	Is the sensitivity analysis sufficiently intensive for key parameters?		Missing	Deficient	Adequate	Very Good		Composite sensitivities for K and %RCH by PEST and Jacobian matrix. Only 4 significant zones (2 K, 2 RCH). Sensible explored ranges.
8.2	Are sensitivity results used to qualify the reliability of model calibration?		Missing	Deficient	Adequate	Very Good		
8.3	Are sensitivity results used to qualify the accuracy of model prediction?		Missing	Deficient	Adequate	Very Good		Output of interest: mine inflow. Not baseflow.
9.0	UNCERTAINTY ANALYSIS							

9.1	If required by the project brief, is uncertainty quantified in any way?		Missing	No	Maybe	Yes			Based on sensitivity analysis by perturbation (IESC Type 1). Factors on K (x10, /10) are sufficient. Factors on Ss are inadequate (x2, /2); OK for Sy. Factors on recharge are OK (x2, /2). During the sensitivity analysis with the same ranges for K and %RCH, no significant effect on calibration performance was noted. This suggests the uncertainty outputs are consistent with model realisations that remain calibrated.
9.2	Are uncertainty results used to qualify the reliability of model calibration?		Missing	Deficient	Adequate	Very Good			No significant effect on calibration performance was noted with the PEST objective function value.
9.3	Are uncertainty results used to qualify the accuracy of model prediction?		Missing	Deficient	Adequate	Very Good			Outputs of interest: mine inflow; drawdown extents. Not baseflow.
TOTAL SCORE									PERFORMANCE: %

Table 5. Model Confidence Level Classification

CLASS	DATA	CALIBRATION	PREDICTION	INDICATORS
1	Not much. Sparse. No metered usage. Remote climate data.	Not possible. Large error statistic. Inadequate data spread. Targets incompatible with model purpose.	Timeframe >> calibration Long stress periods. Transient prediction but steady-state calibration. Bad verification.	Timeframe > 10x Stresses > 5x Mass balance > 1% (or single 5%) Properties <> field. Bad discretisation. No review.
2	Some. Poor coverage. Some usage info. Baseflow estimates.	Partial performance. Long-term trends wrong. Short time record. Weak seasonal replication. No use of targets compatible with model purpose.	Timeframe > calibration. Long stress periods. New stresses not in calibration. Poor verification.	Timeframe = 3-10x Stresses = 2-5x Mass balance < 1% Some properties <> field measurements. Some key coarse discretisation. Review by hydrogeo.
3	Lots. Good aquifer geometry. Good usage info. Local climate info. K measurements. Hi-res DEM.	Good performance stats. Long-term trends replicated. Seasonal fluctuations OK. Present day data targets. Head and flux targets.	Timeframe ~ calibration. Similar stress periods. Similar stresses to those in calibration. Steady-state prediction consistent with steady-state calibration. Good verification.	Timeframe < 3x Stresses < 2x Mass balance < 0.5% Properties ~ field measurements. No key coarse discretisation. Review by modeller.