


IKEA MFLU
MARSDEN PARK INDUSTRIAL PRECINCT, NSW

PLANT SCHEDULE

15-267 - IKEA MFLU Marsden Park PLANT SCHEDULE						
CODE	BOTANIC NAME	COMMON NAME	MATURE SIZE (h x w) (m)	PROPOSED POT SIZE	QUANTITY	LOCAL NATIVE
TREES						
AC	<i>Angophora costata</i>	Smooth-Barked Apple	20 x 10	75L	53	Y
ES	<i>Eucalyptus sclerophylla</i>	Scrubby Gum	10 x 8	75L	47	Y
EP	<i>Eucalyptus punctata</i>	Grey Gum	20 x 10	75L	21	Y
MD	<i>Melaleuca decora</i>	Narrow Leaved Paperbark	15 x 10	75L	21	Y
SHRUBS & ACCENTS						
Al	<i>Asplenium platyneuron</i>	Sickle Wattle	5 x 4	200mm	1209	Y
Altr	<i>Asplenium platyneuron</i>	Kangaroo Paw	1.5 x 1.5	200mm	13	
Bsp	<i>Banksia spinulosa</i>	Giant Candle Banksia	1.5 x 1	300mm	592	
Doc	<i>Gallathea capensis</i>	Captain Cook	2 x 1.5	300mm	1209	
Cr	<i>Callistemon rigidus</i>	Red Anem	2.5 x 1.5	300mm	16	
Co	<i>Cordyline allportii</i>	Cordyline	1.5 x 1.5	200mm	16	
De	<i>Doryanthes excelsa</i>	Gymea Lily	3 x 1.5	200mm	131	
Gj	<i>Grevillea juniperina</i>	Juniper-leaved Grevillea	2 x 1	200mm	610	Y
Pp	<i>Pultenaea parviflora</i>	Sydney Bush Pea	1 x 1	150mm	733	Y
Ww	<i>Westringia myrsinoides</i>	Wynabbie Gem	1.5 x 1.5	200mm	97	
GRASSES & RUBBIES						
Dr	<i>Dactyloctenium aegyptium</i>	Wallaby Grass	1 x 1	150mm	119	Y
Dr	<i>Dactyloctenium aegyptium</i>	Sheep's Tail Lily	0.3 x 0.3	150mm	62	
Ed	<i>Echinochloa crusgalli</i>	Hedgehog Grass	0.8 x 0.8	150mm	589	Y
Lmo	<i>Liriodendron latifolium</i>	Lilyturf	0.6 x 0.6	200mm	148	
Lmu	<i>Liriodendron latifolium</i>	Lilyturf	0.6 x 0.6	200mm	148	
Me	<i>Microseris stipoides</i>	Weeping Meadow Grass	1 x 1	200mm	632	Y
Pt	<i>Poa labillardieri</i>	Tussock Grass	0.5 x 0.5	150mm	1231	Y
Ta	<i>Themeda australis</i>	Kangaroo Grass	1 x 1	150mm	498	
GROUNDCOVERS & CLIMBERS						
Aau	<i>Araucaria arborescens</i>	Bugle	0.5 x 0.5	150mm	1792	Y
Dre	<i>Dichondra repens</i>	Kidney Weed	0.3 x 0.5	150mm	368	Y
Hd	<i>Hibiscus diffusus</i>	Guinea Flower	0.4 x 0.5	200mm	210	Y
Pz	<i>Pharbitis nil</i>	Pea	0.25 x 0.5	150mm	21	Y
Wq	<i>Wahlenbergia gracilis</i>	Australian Bluebell	0.25 x 0.5	150mm	3687	Y
BIO SWALE MATRIX						
Ba	<i>Baumea articulata</i>	Jointed Twig Rush	1 x 1	150mm	1530	
Cap	<i>Carex appressa</i>	Swamp Sedge	1 x 1	150mm	1530	
In	<i>Ischaemum nodosum</i>	Koobly Club Rush	1 x 1	150mm	1530	
Ju	<i>Juncus ustulatus</i>	Common Rush	1 x 1	150mm	1530	Y
Shu	<i>Schoenoplectus mucronatus</i>	Tail Rush	1 x 1	150mm	1530	

KEY PLAN
Scale: 1:2500 @ A1

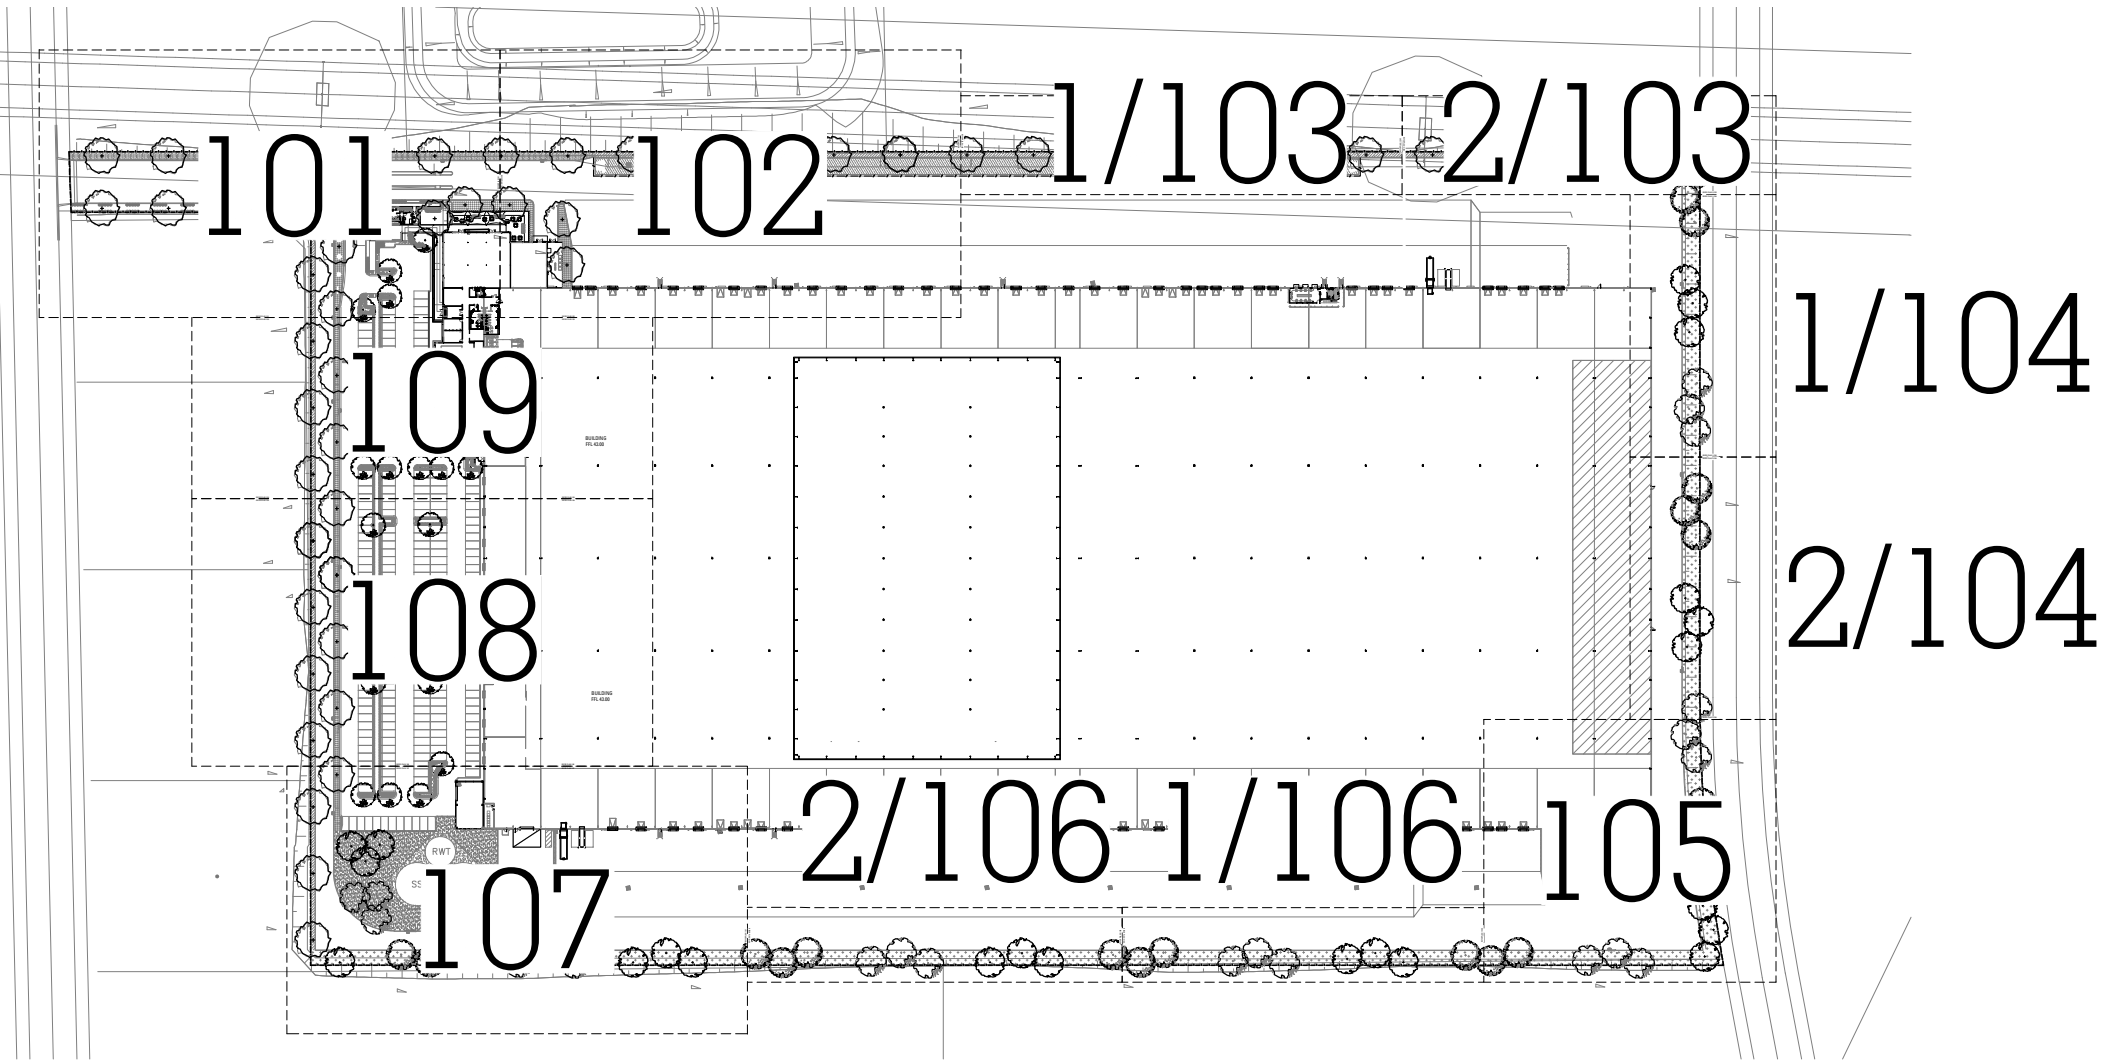


LOCATION PLAN
Scale: NTS




DRAWING SCHEDULE


DRAWING NO.	DRAWING TITLE	REVISION
000	COVER SHEET	A
001	LANDSCAPE MASTER PLAN	A
101	LANDSCAPE PLAN	A
102	LANDSCAPE PLAN	A
103	LANDSCAPE PLAN	A
104	LANDSCAPE PLAN	A
105	LANDSCAPE PLAN	A
106	LANDSCAPE PLAN	A
107	LANDSCAPE PLAN	A
108	LANDSCAPE PLAN	A
109	LANDSCAPE PLAN	A
501	LANDSCAPE DETAILS	A
502	LANDSCAPE DETAILS	A

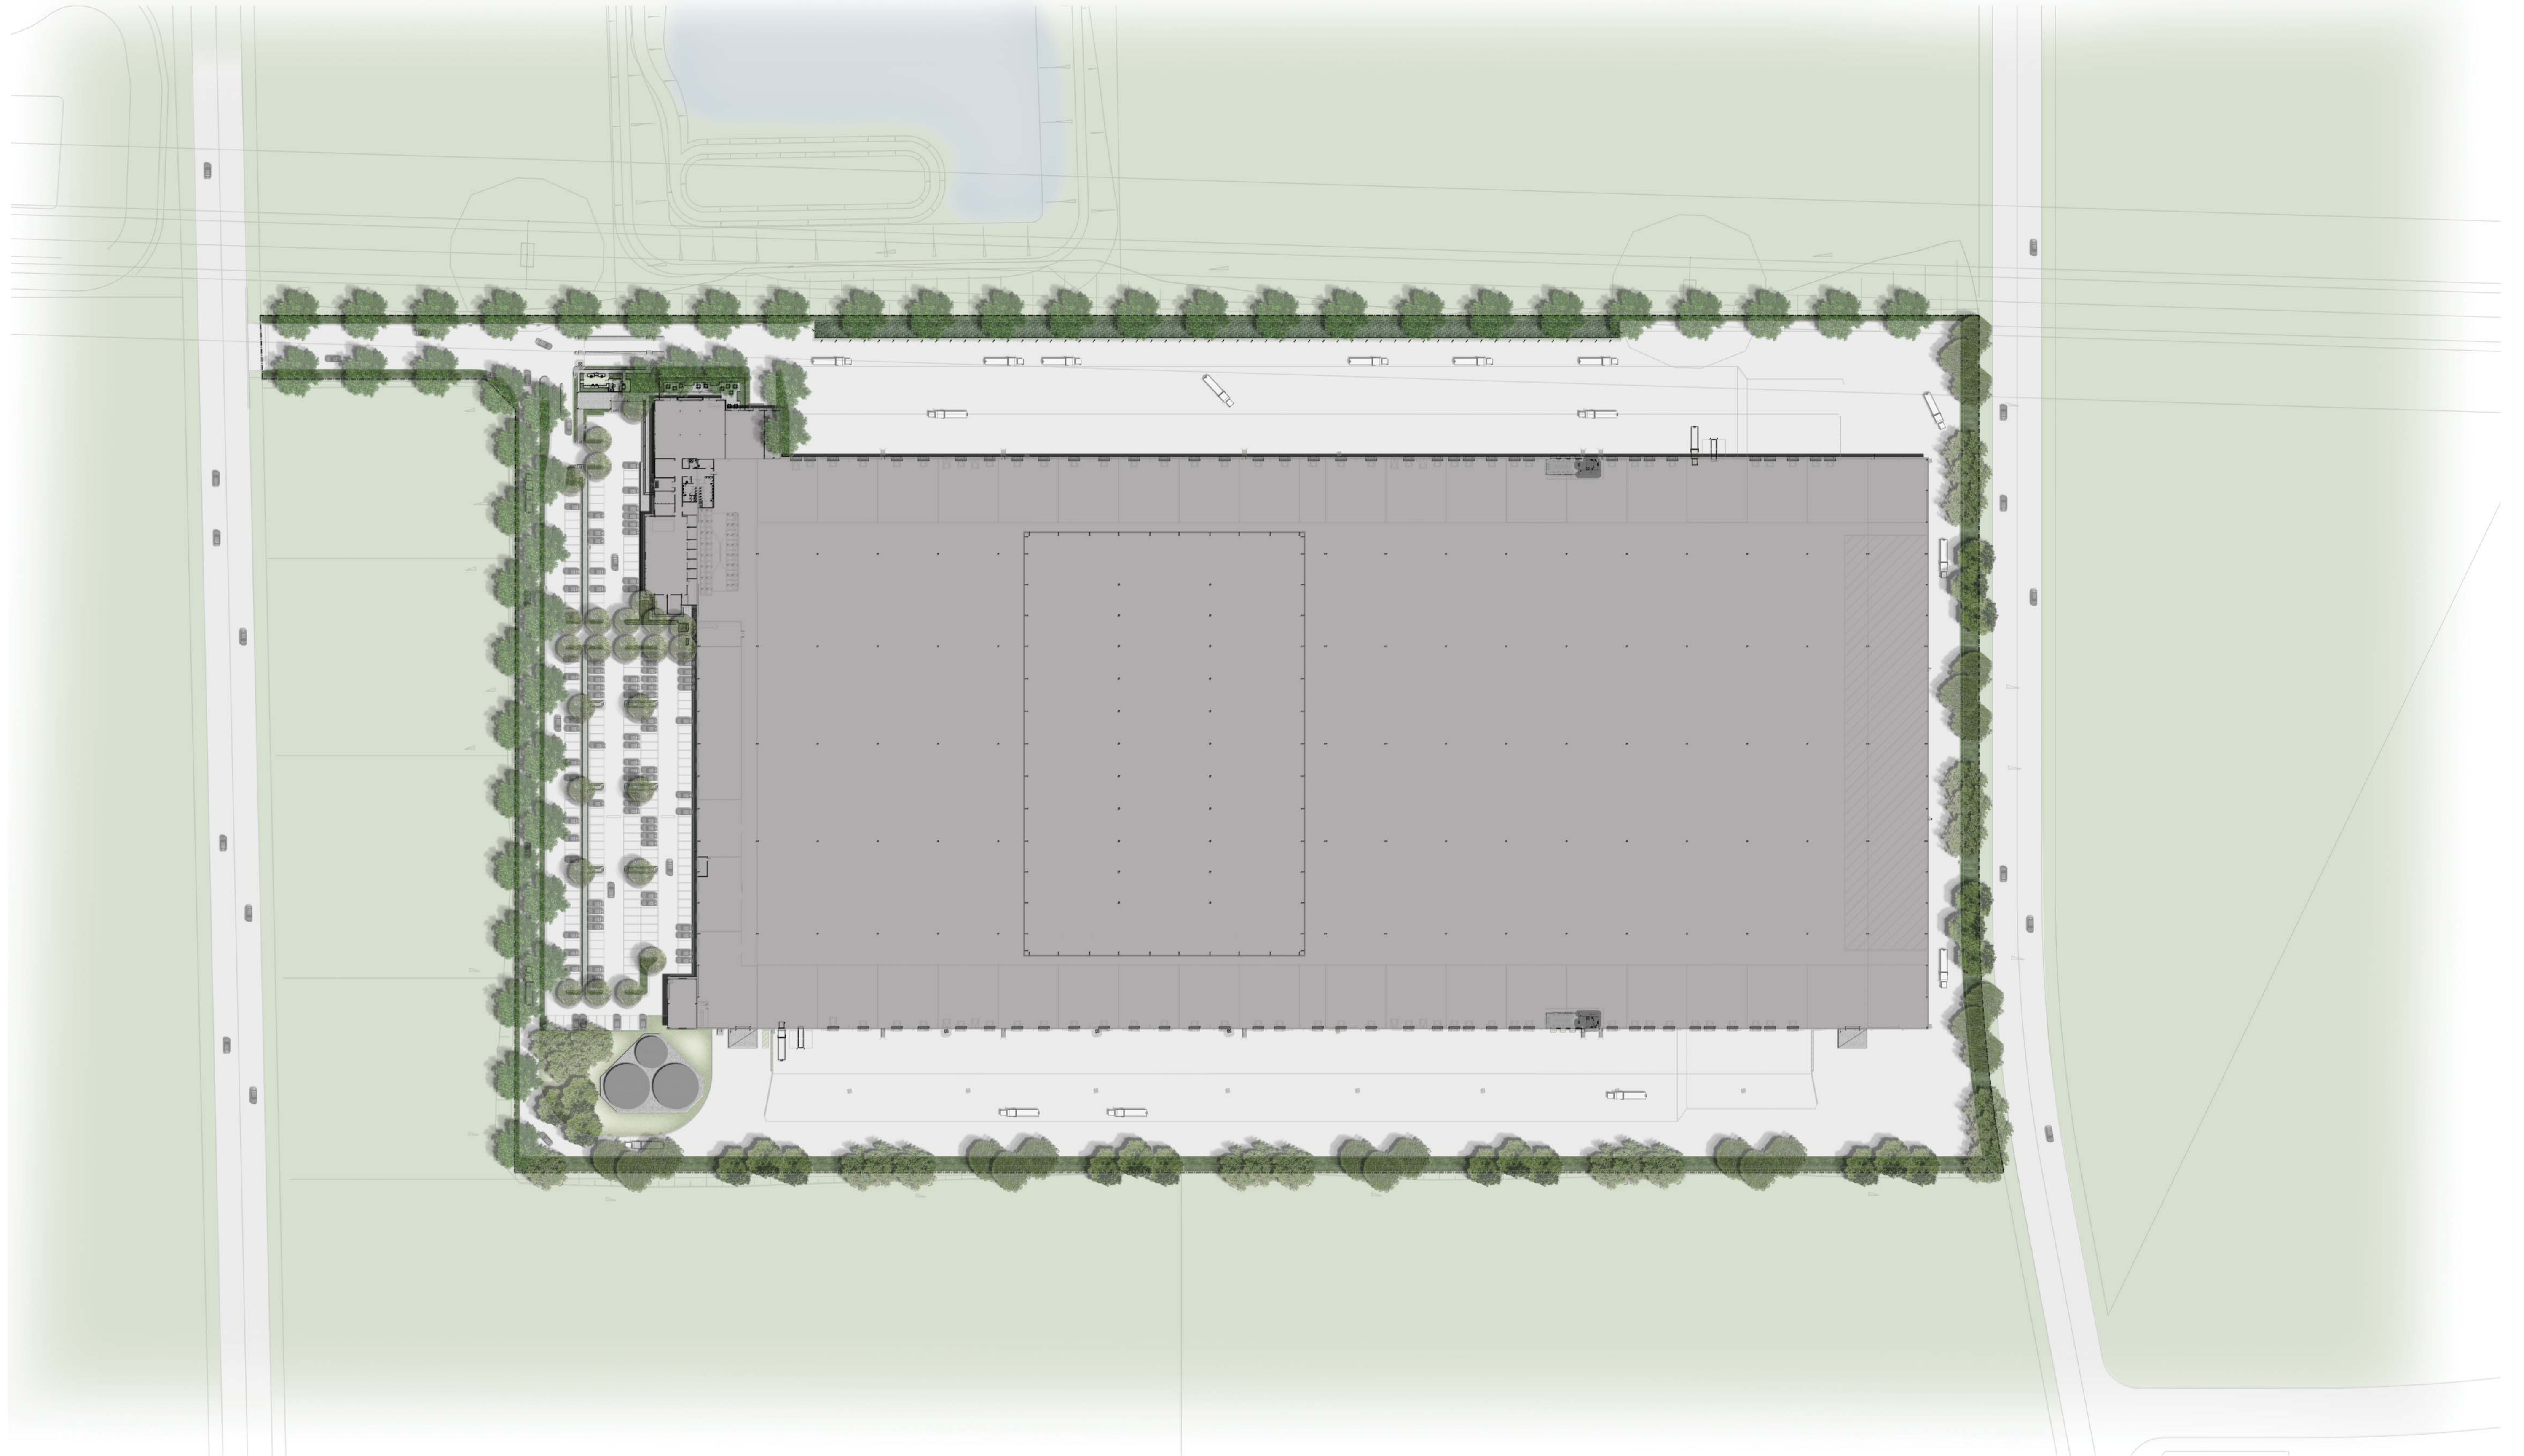

1:1000 @ A1 0 5 10 25 50m




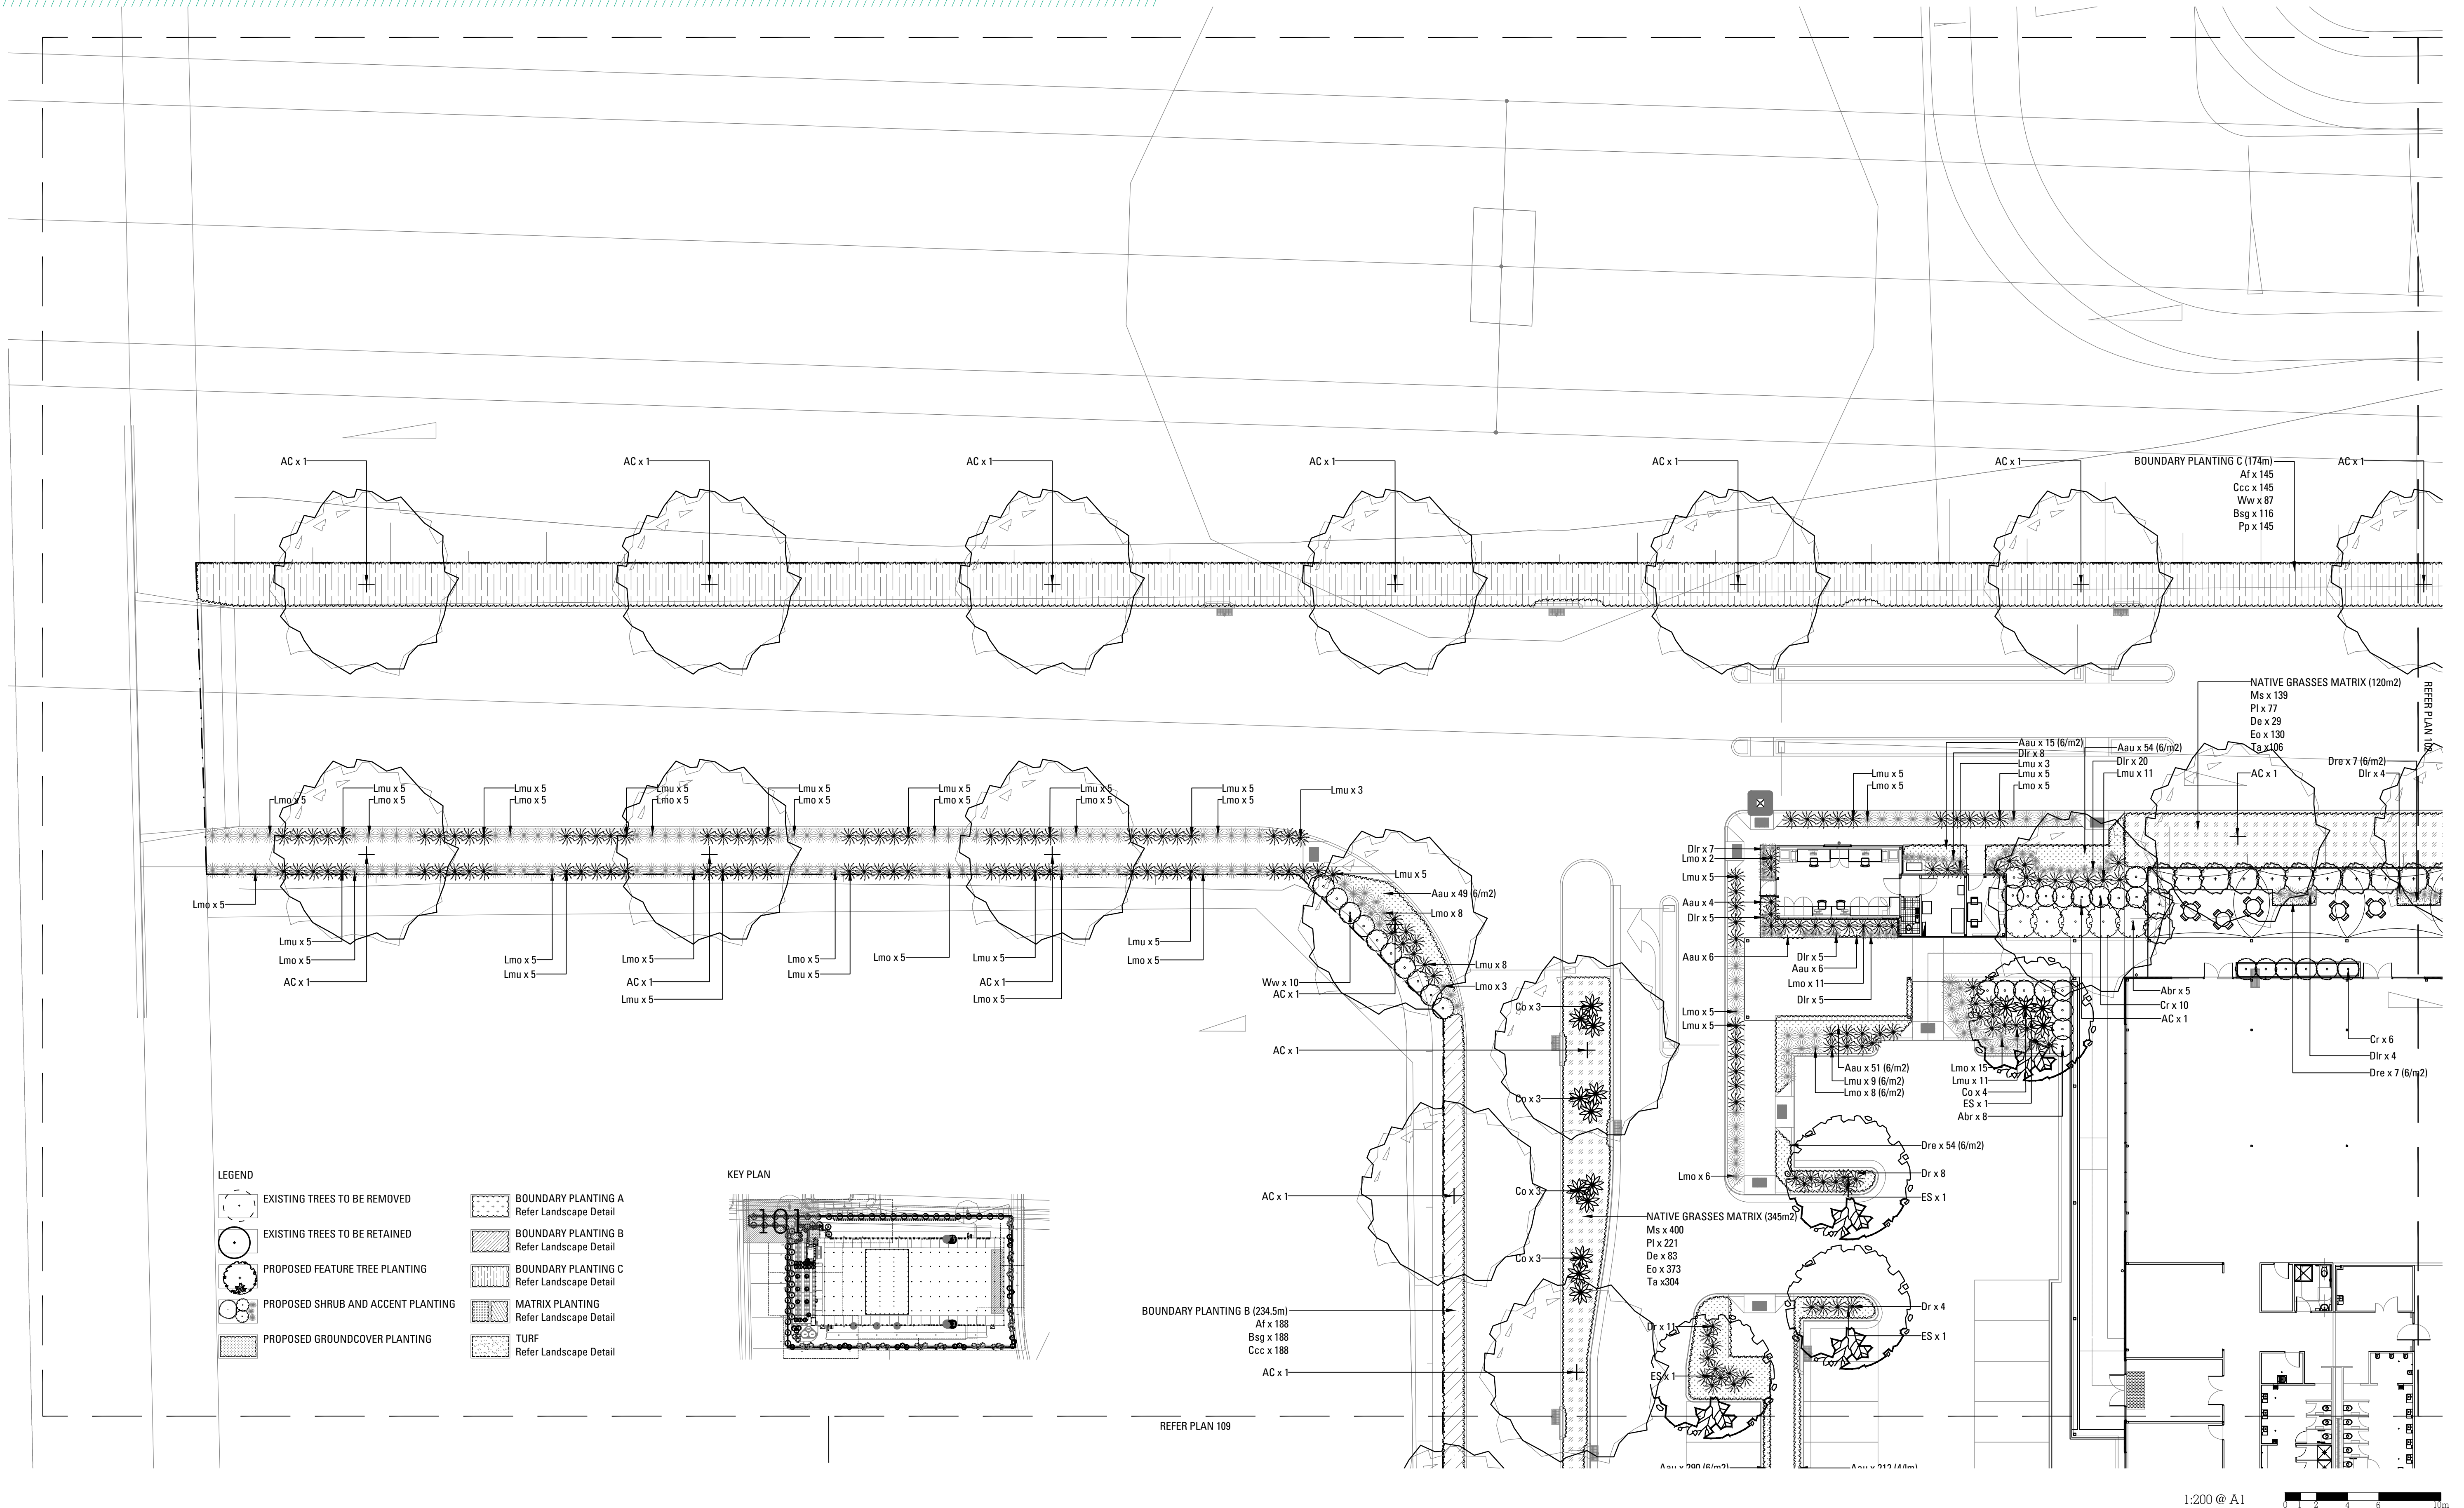

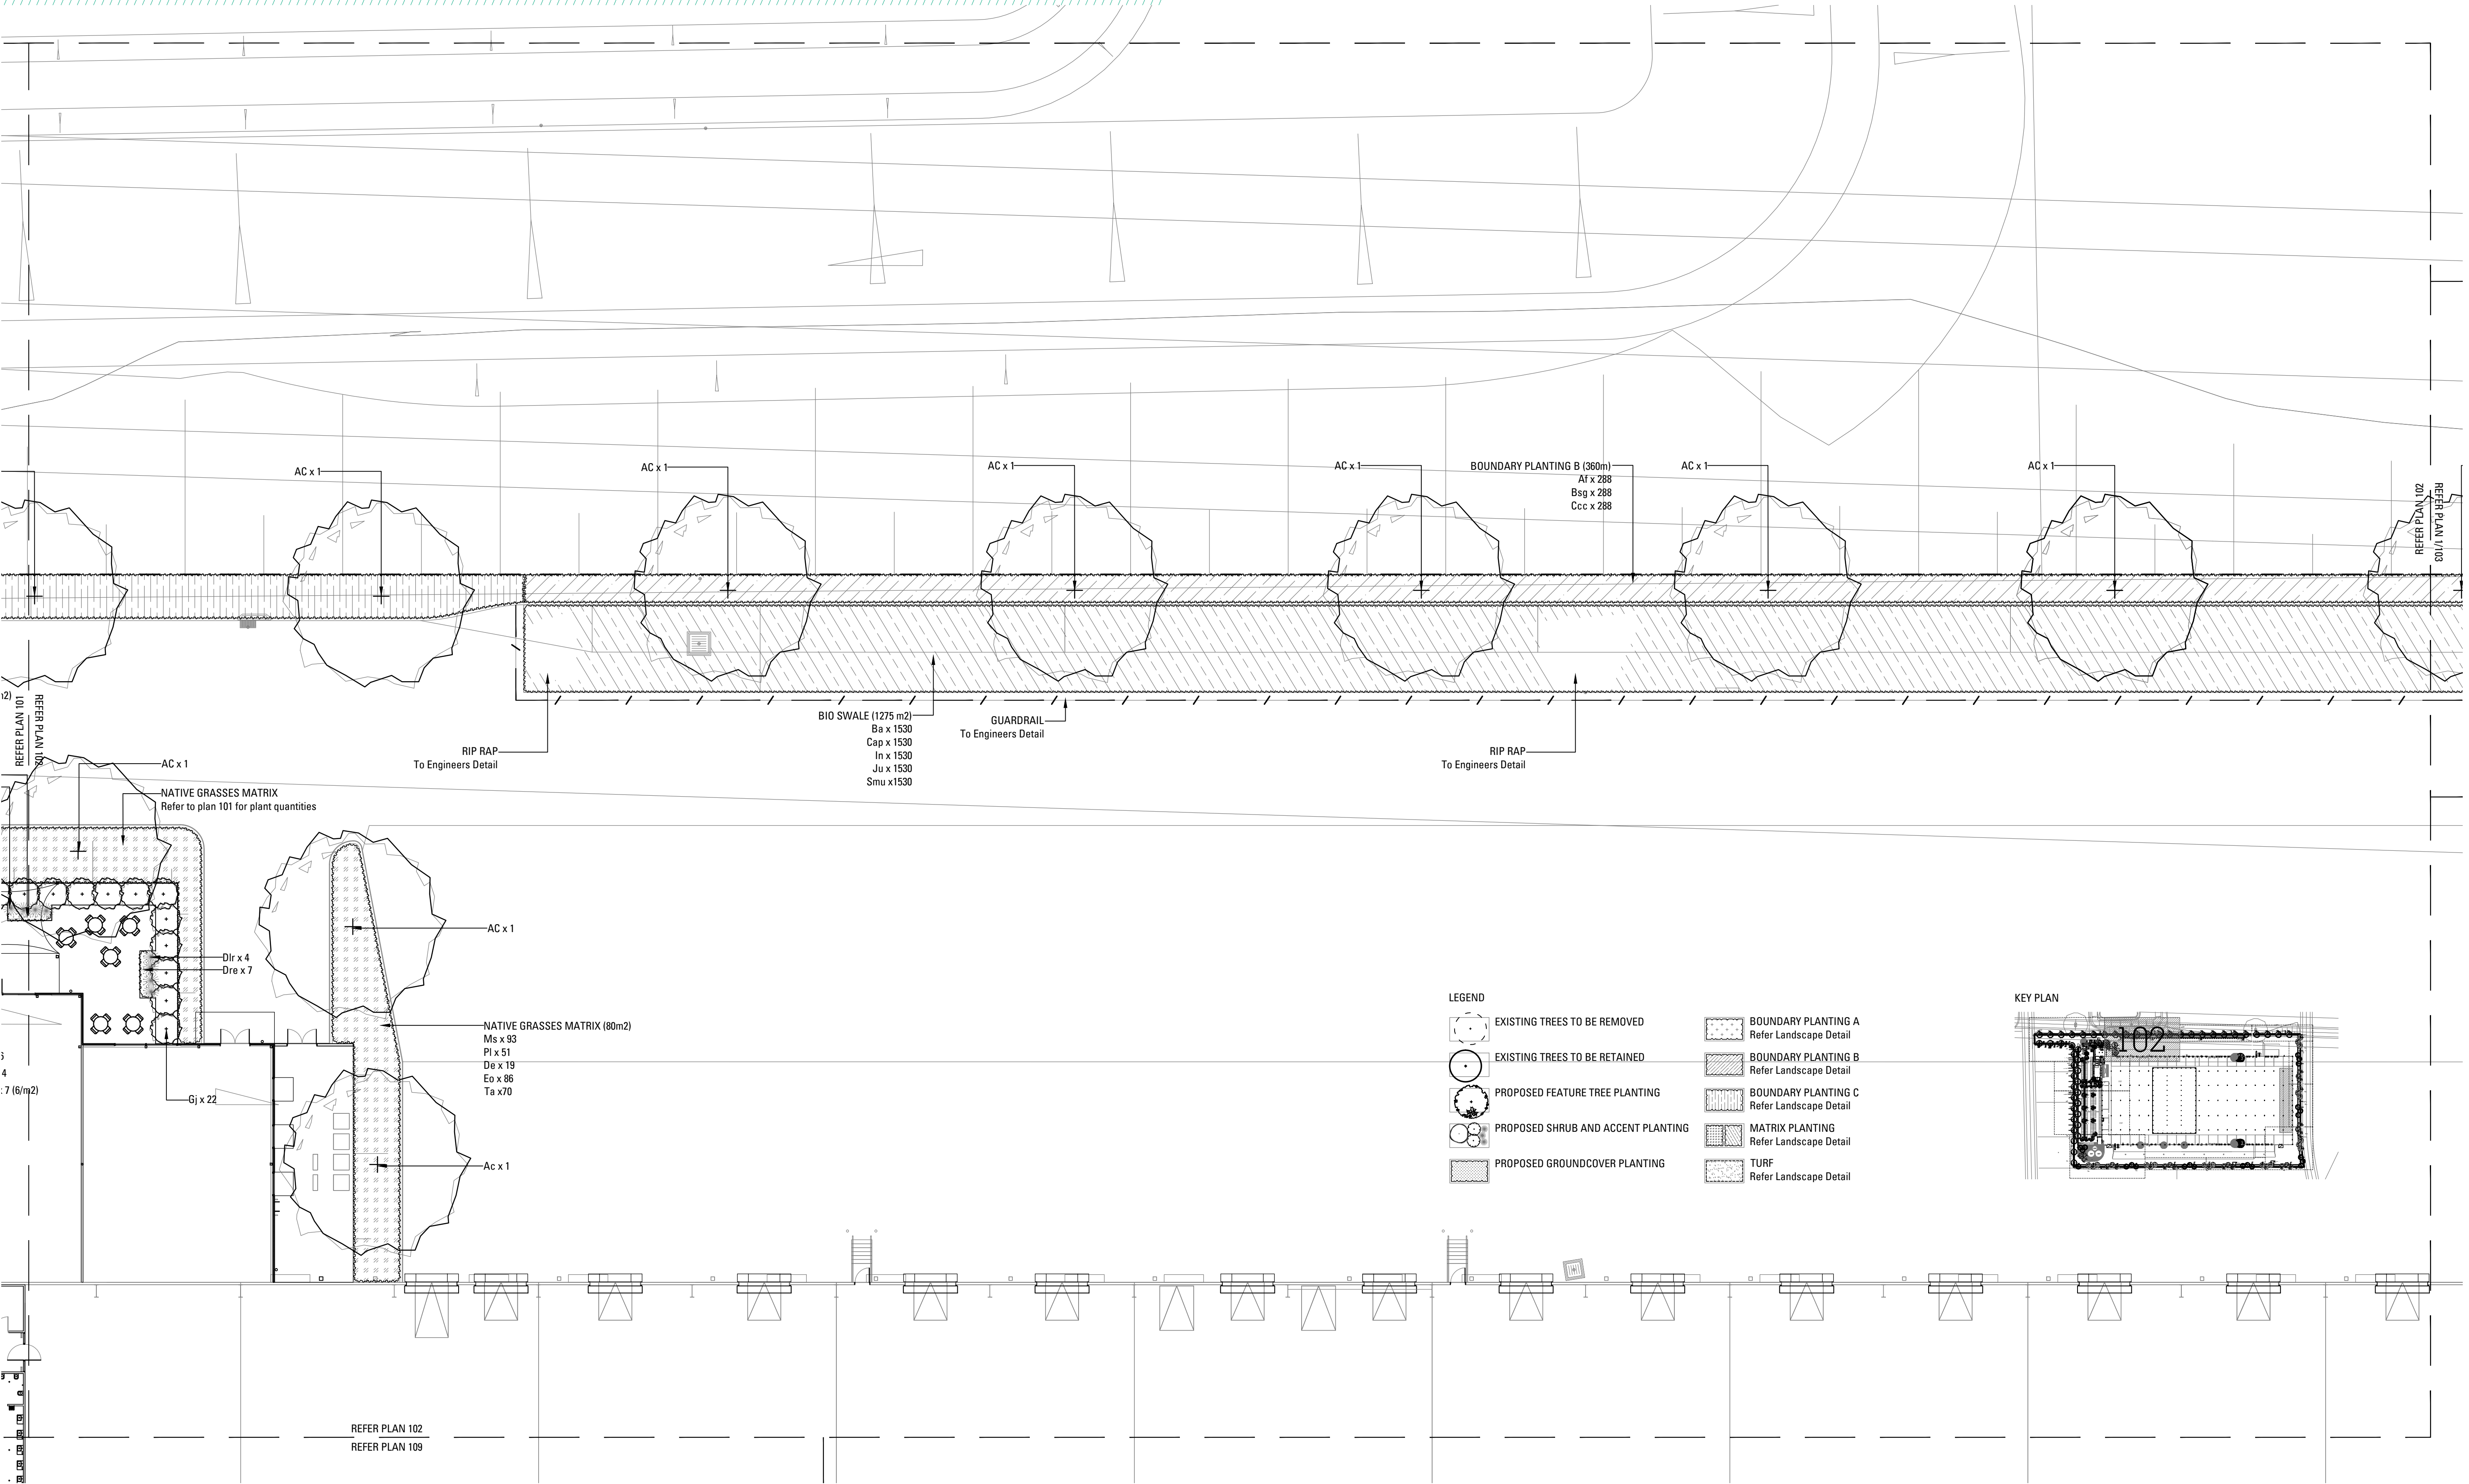


LEGEND

	EXISTING TREES TO BE REMOVED		BOUNDARY PLANTING A Refer Landscape Detail
	EXISTING TREES TO BE RETAINED		BOUNDARY PLANTING B Refer Landscape Detail
	PROPOSED FEATURE TREE PLANTING		BOUNDARY PLANTING C Refer Landscape Detail
	PROPOSED SHRUB AND ACCENT PLANTING		MATRIX PLANTING Refer Landscape Detail
	PROPOSED GROUNDCOVER PLANTING		TURF Refer Landscape Detail

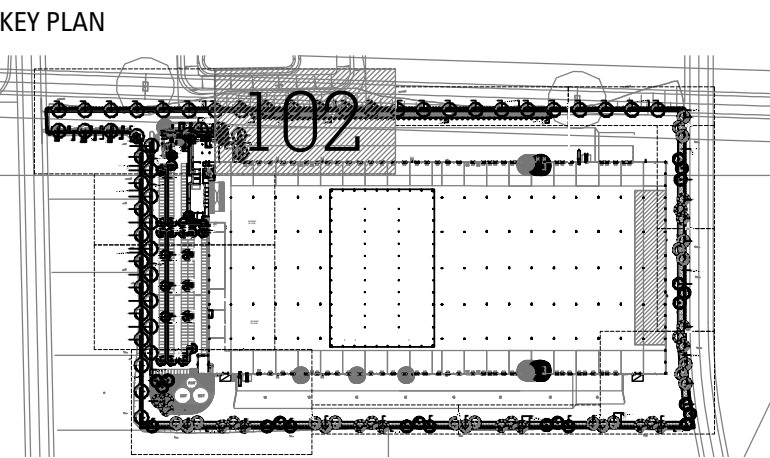


1:200 @ A1 0 1 2 4 6 10m



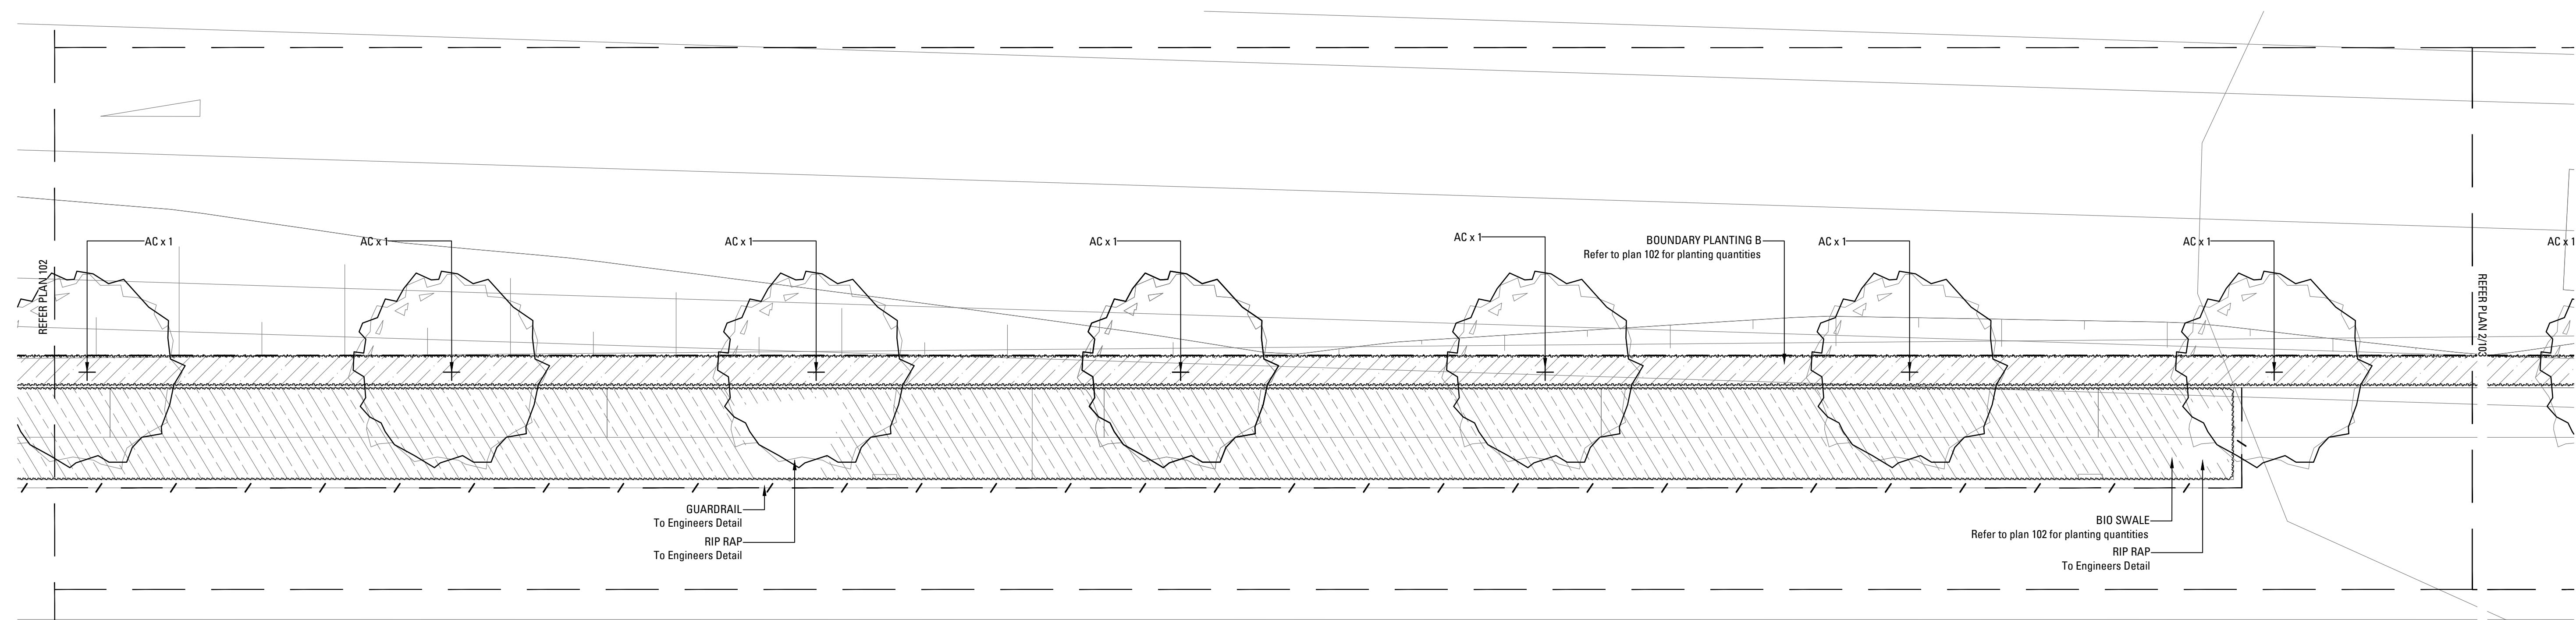


01 DETAILED LANDSCAPE PLAN
103

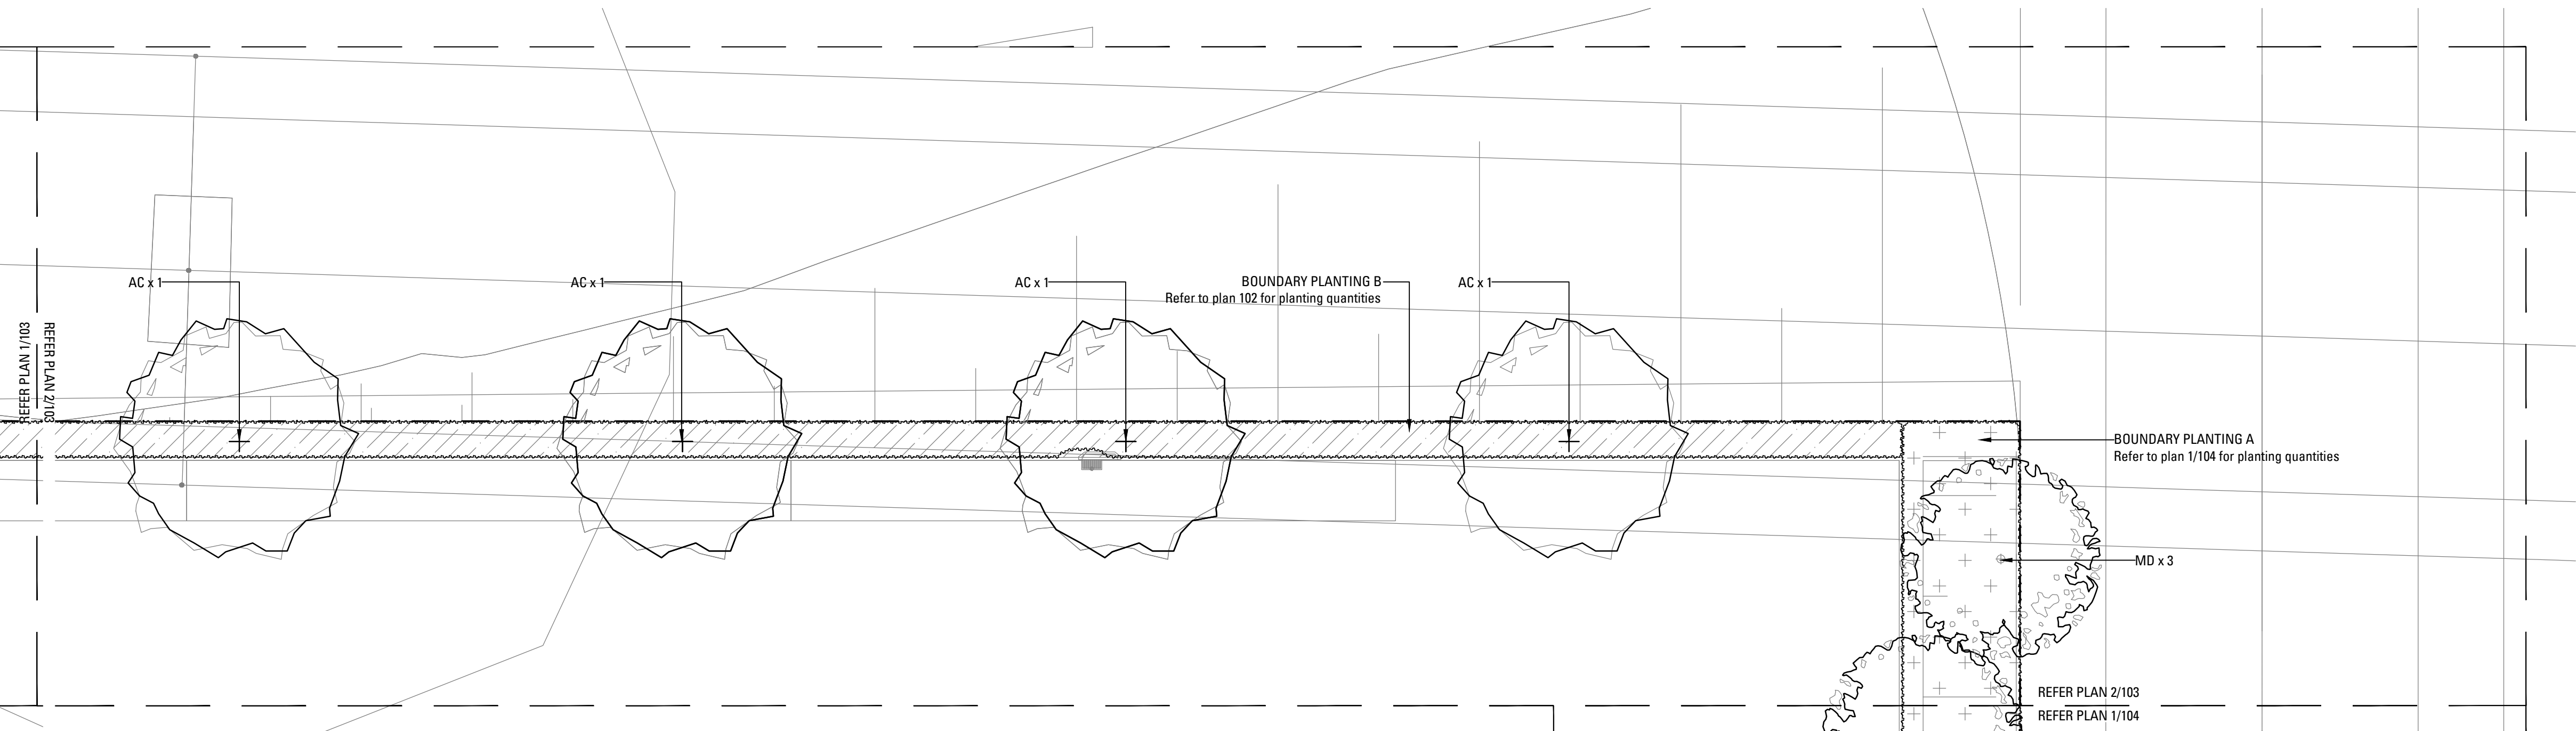



02 DETAILED LANDSCAPE PLAN
103

- LEGEND
- EXISTING TREES TO BE REMOVED
 - EXISTING TREES TO BE RETAINED
 - PROPOSED FEATURE TREE PLANTING
 - PROPOSED SHRUB AND ACCENT PLANTING
 - PROPOSED GROUNDCOVER PLANTING
 - BOUNDARY PLANTING A
Refer Landscape Detail
 - BOUNDARY PLANTING B
Refer Landscape Detail
 - BOUNDARY PLANTING C
Refer Landscape Detail
 - MATRIX PLANTING
Refer Landscape Detail
 - TURF
Refer Landscape Detail

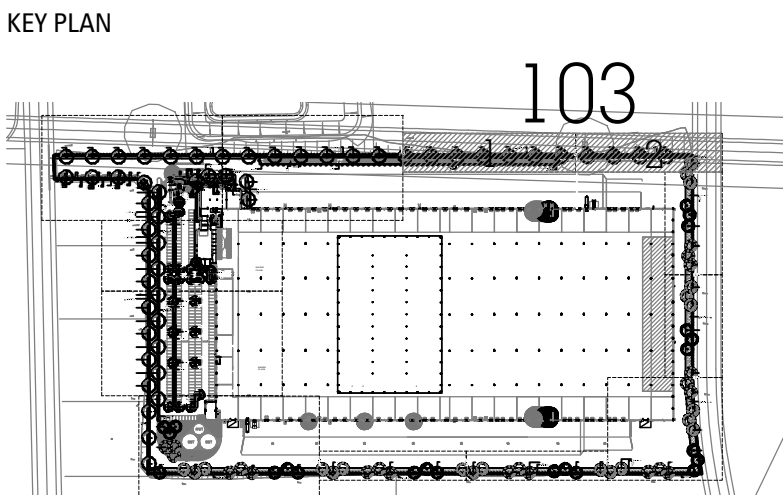


1:200 @ A1 0 1 2 4 6 10m



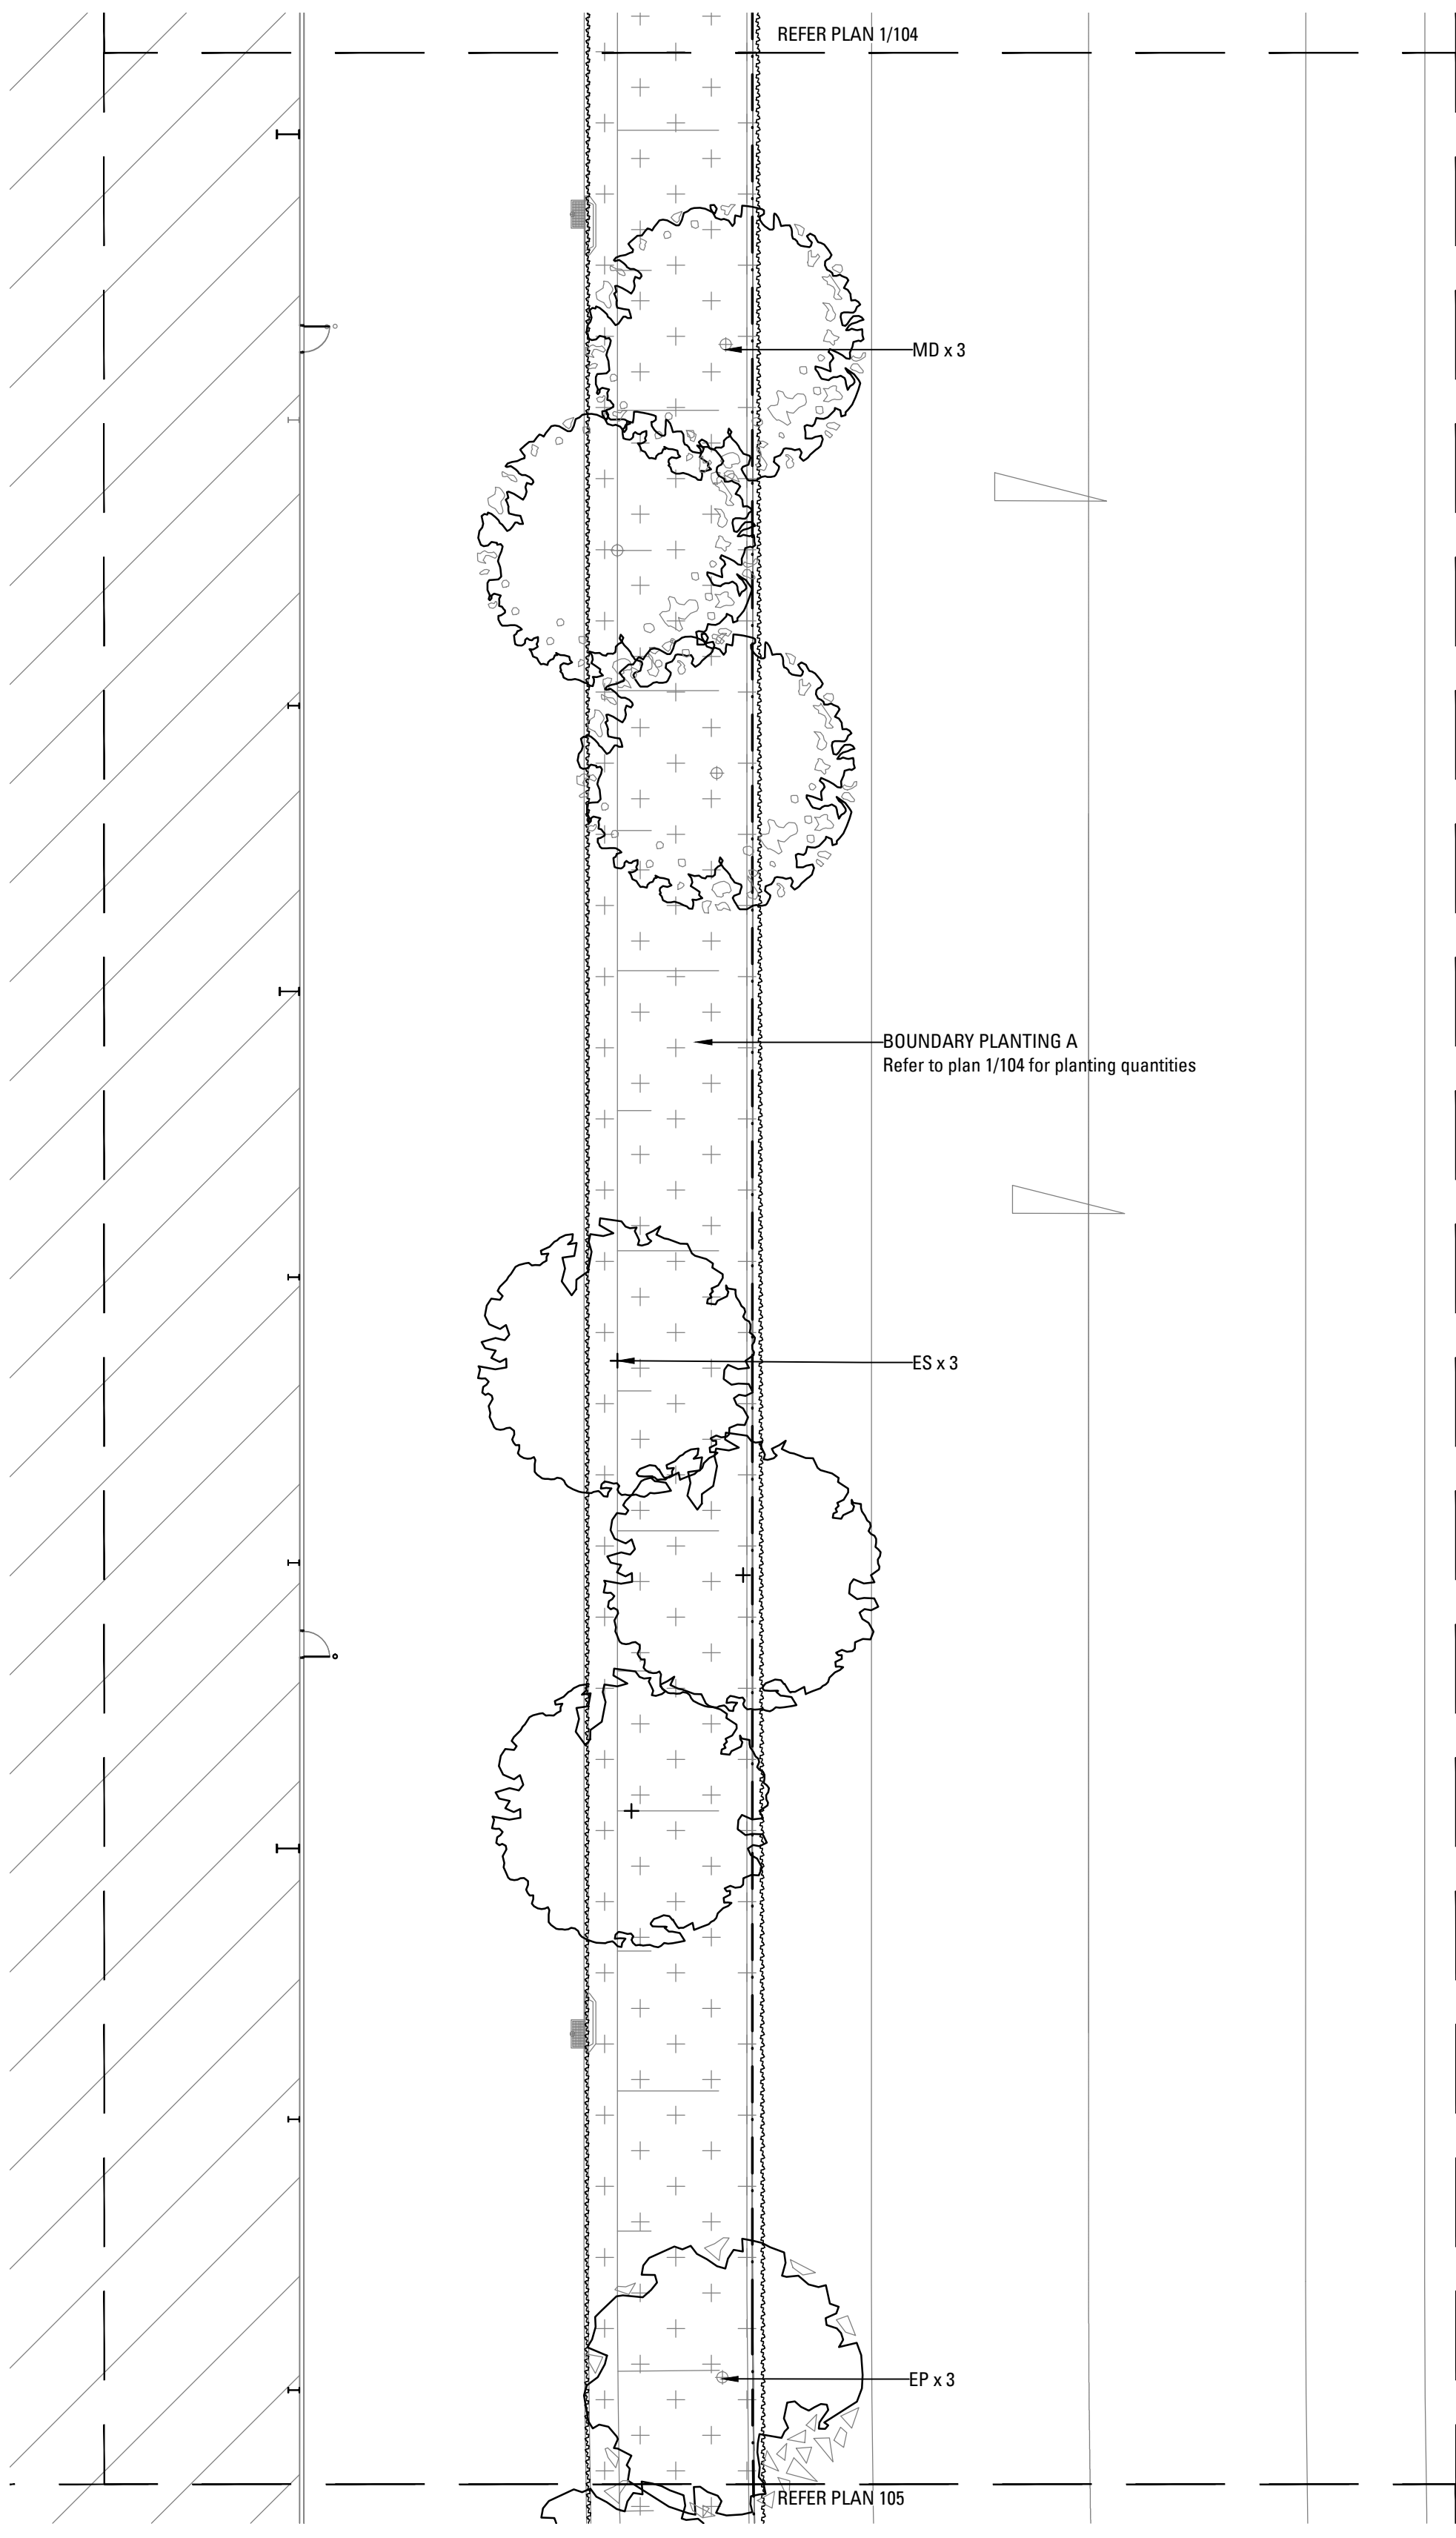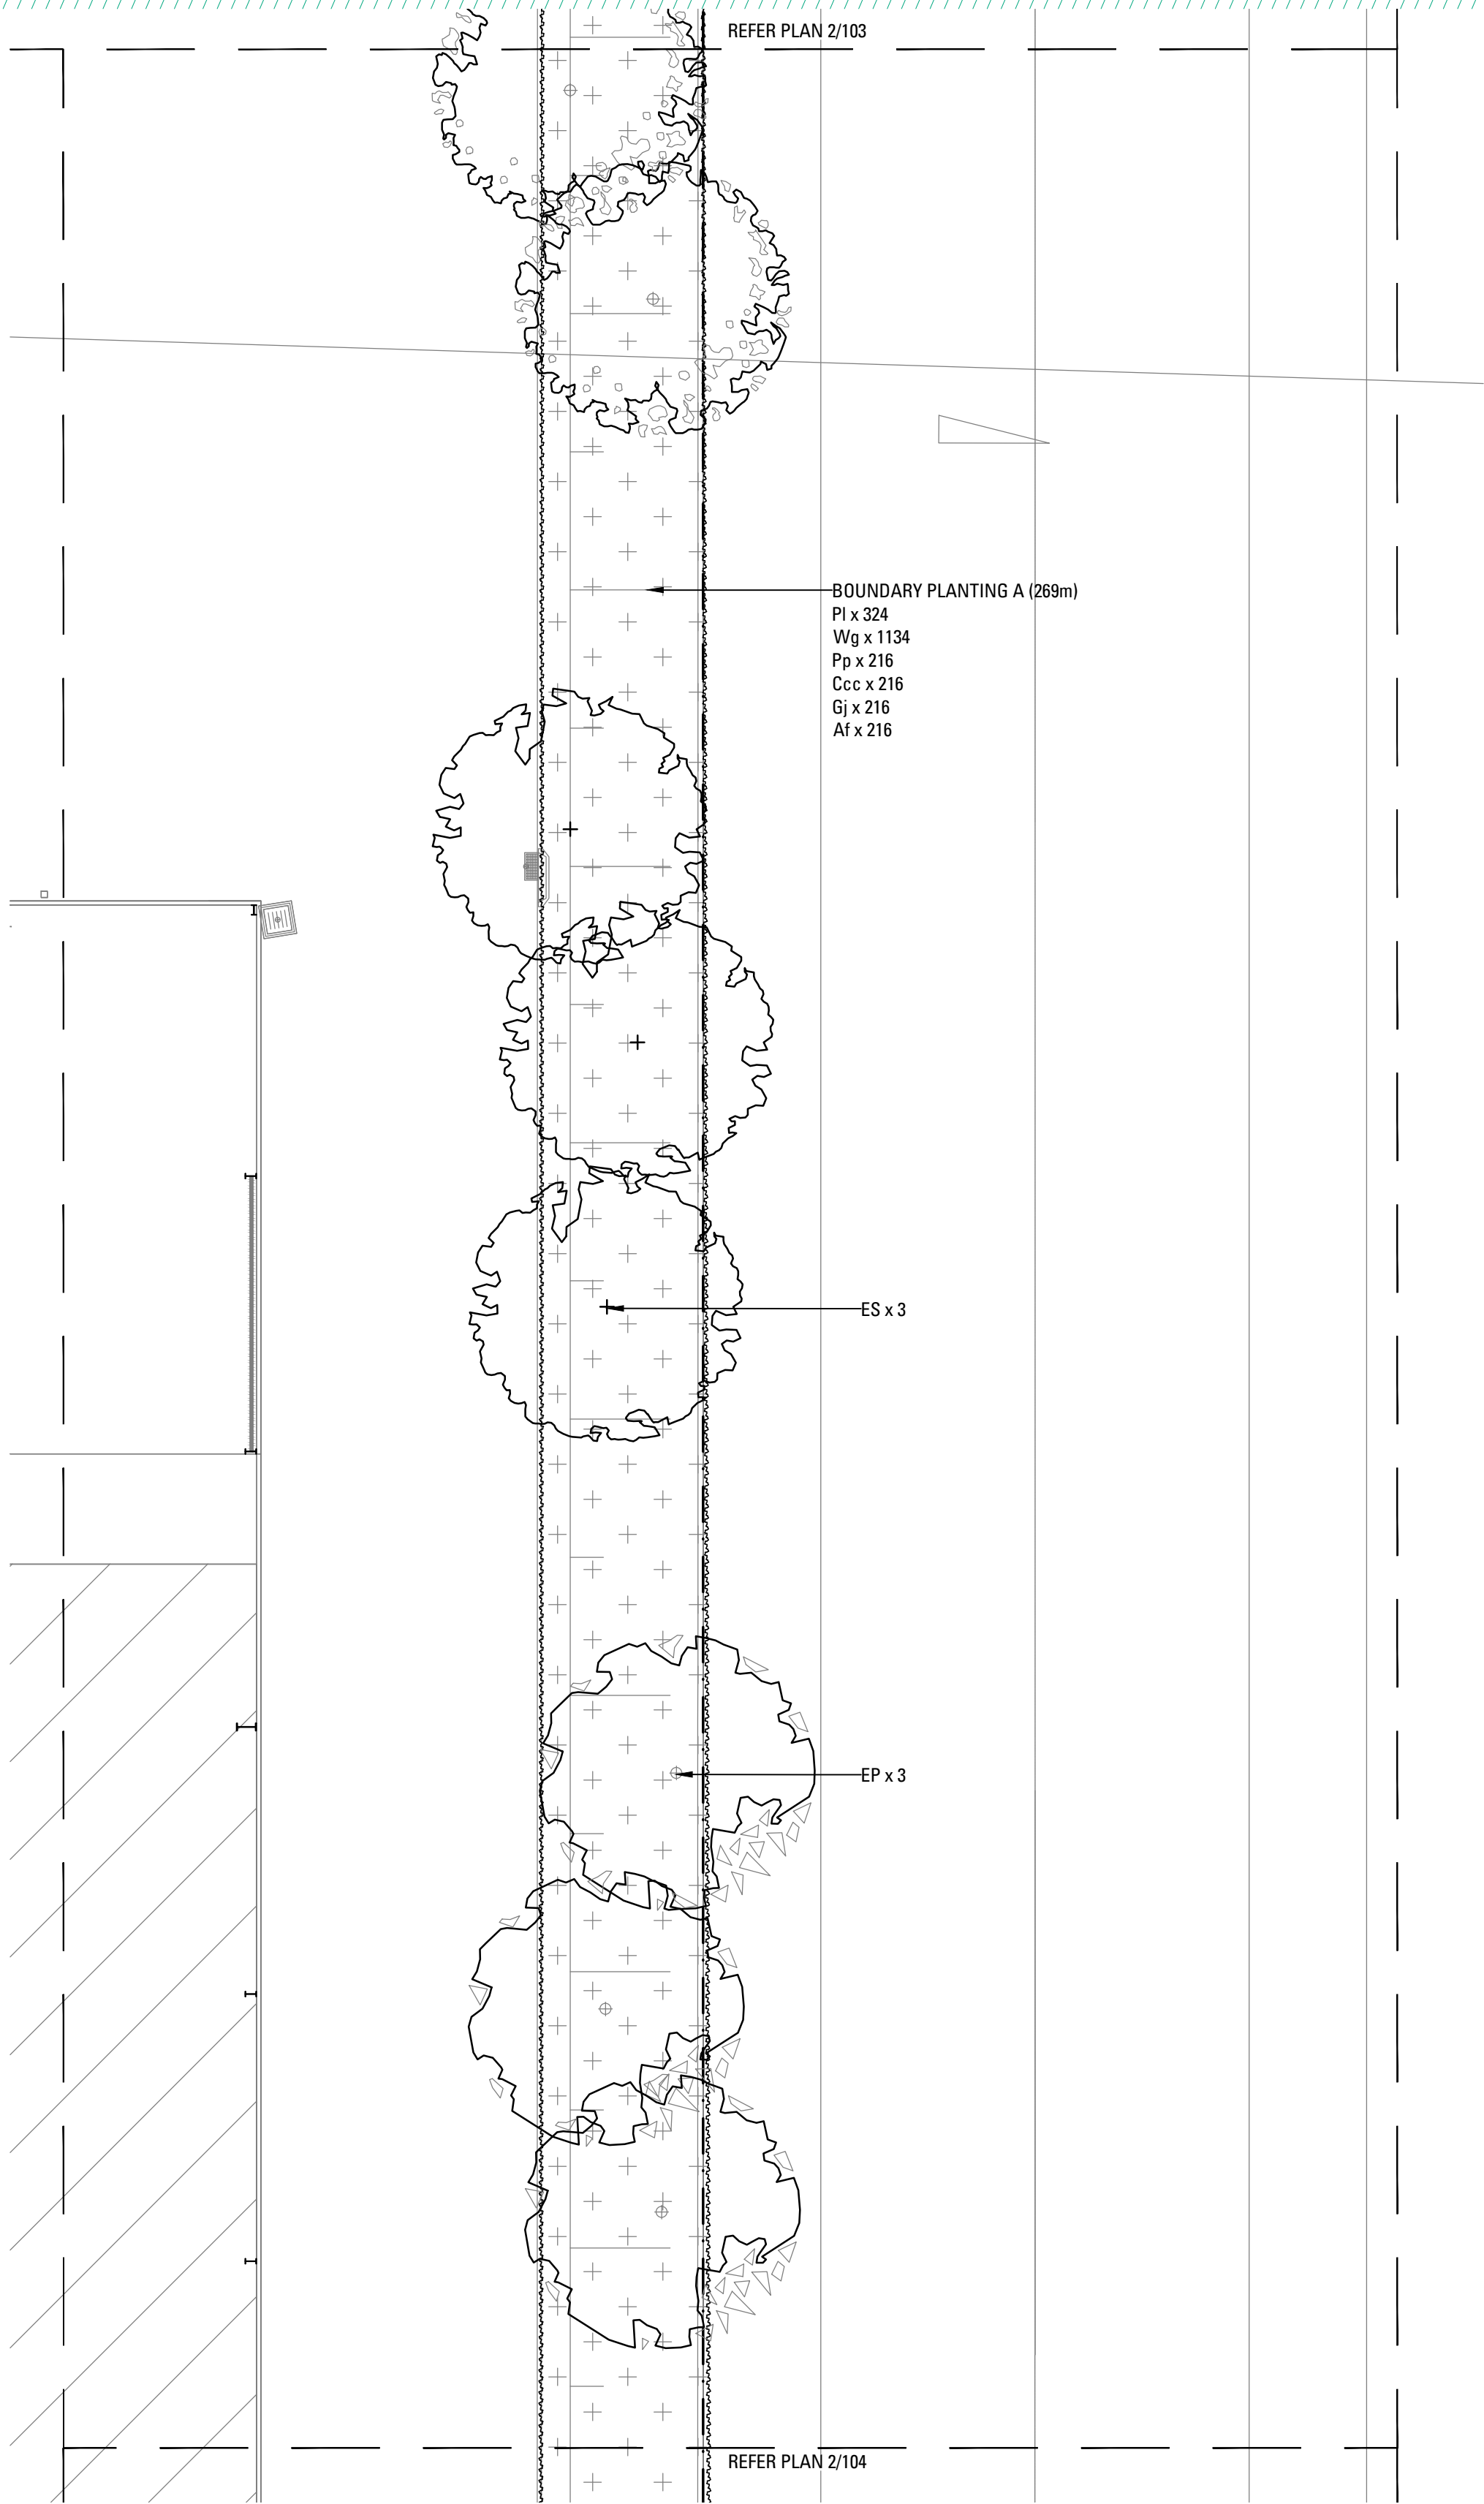



- LEGEND
- EXISTING TREES TO BE REMOVED
 - EXISTING TREES TO BE RETAINED
 - PROPOSED FEATURE TREE PLANTING
 - PROPOSED SHRUB AND ACCENT PLANTING
 - PROPOSED GROUNDCOVER PLANTING
 - BOUNDARY PLANTING A
Refer Landscape Detail
 - BOUNDARY PLANTING B
Refer Landscape Detail
 - BOUNDARY PLANTING C
Refer Landscape Detail
 - MATRIX PLANTING
Refer Landscape Detail
 - TURF
Refer Landscape Detail

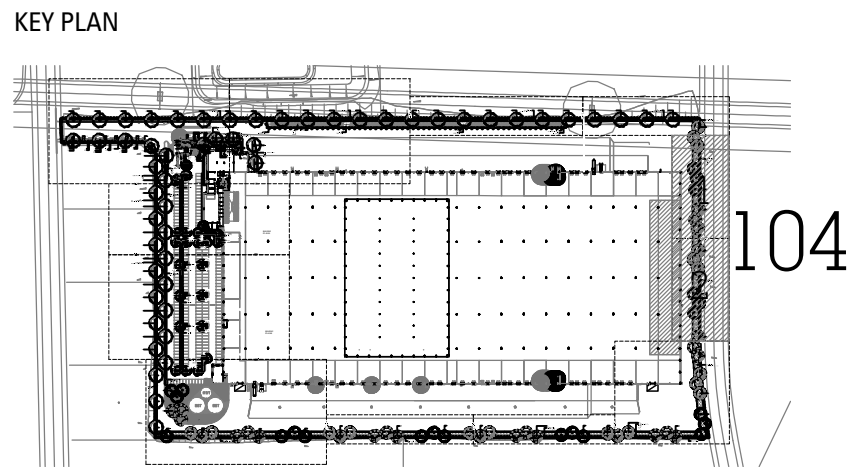


1:200 @ A1

0 1 2 4 6 10m




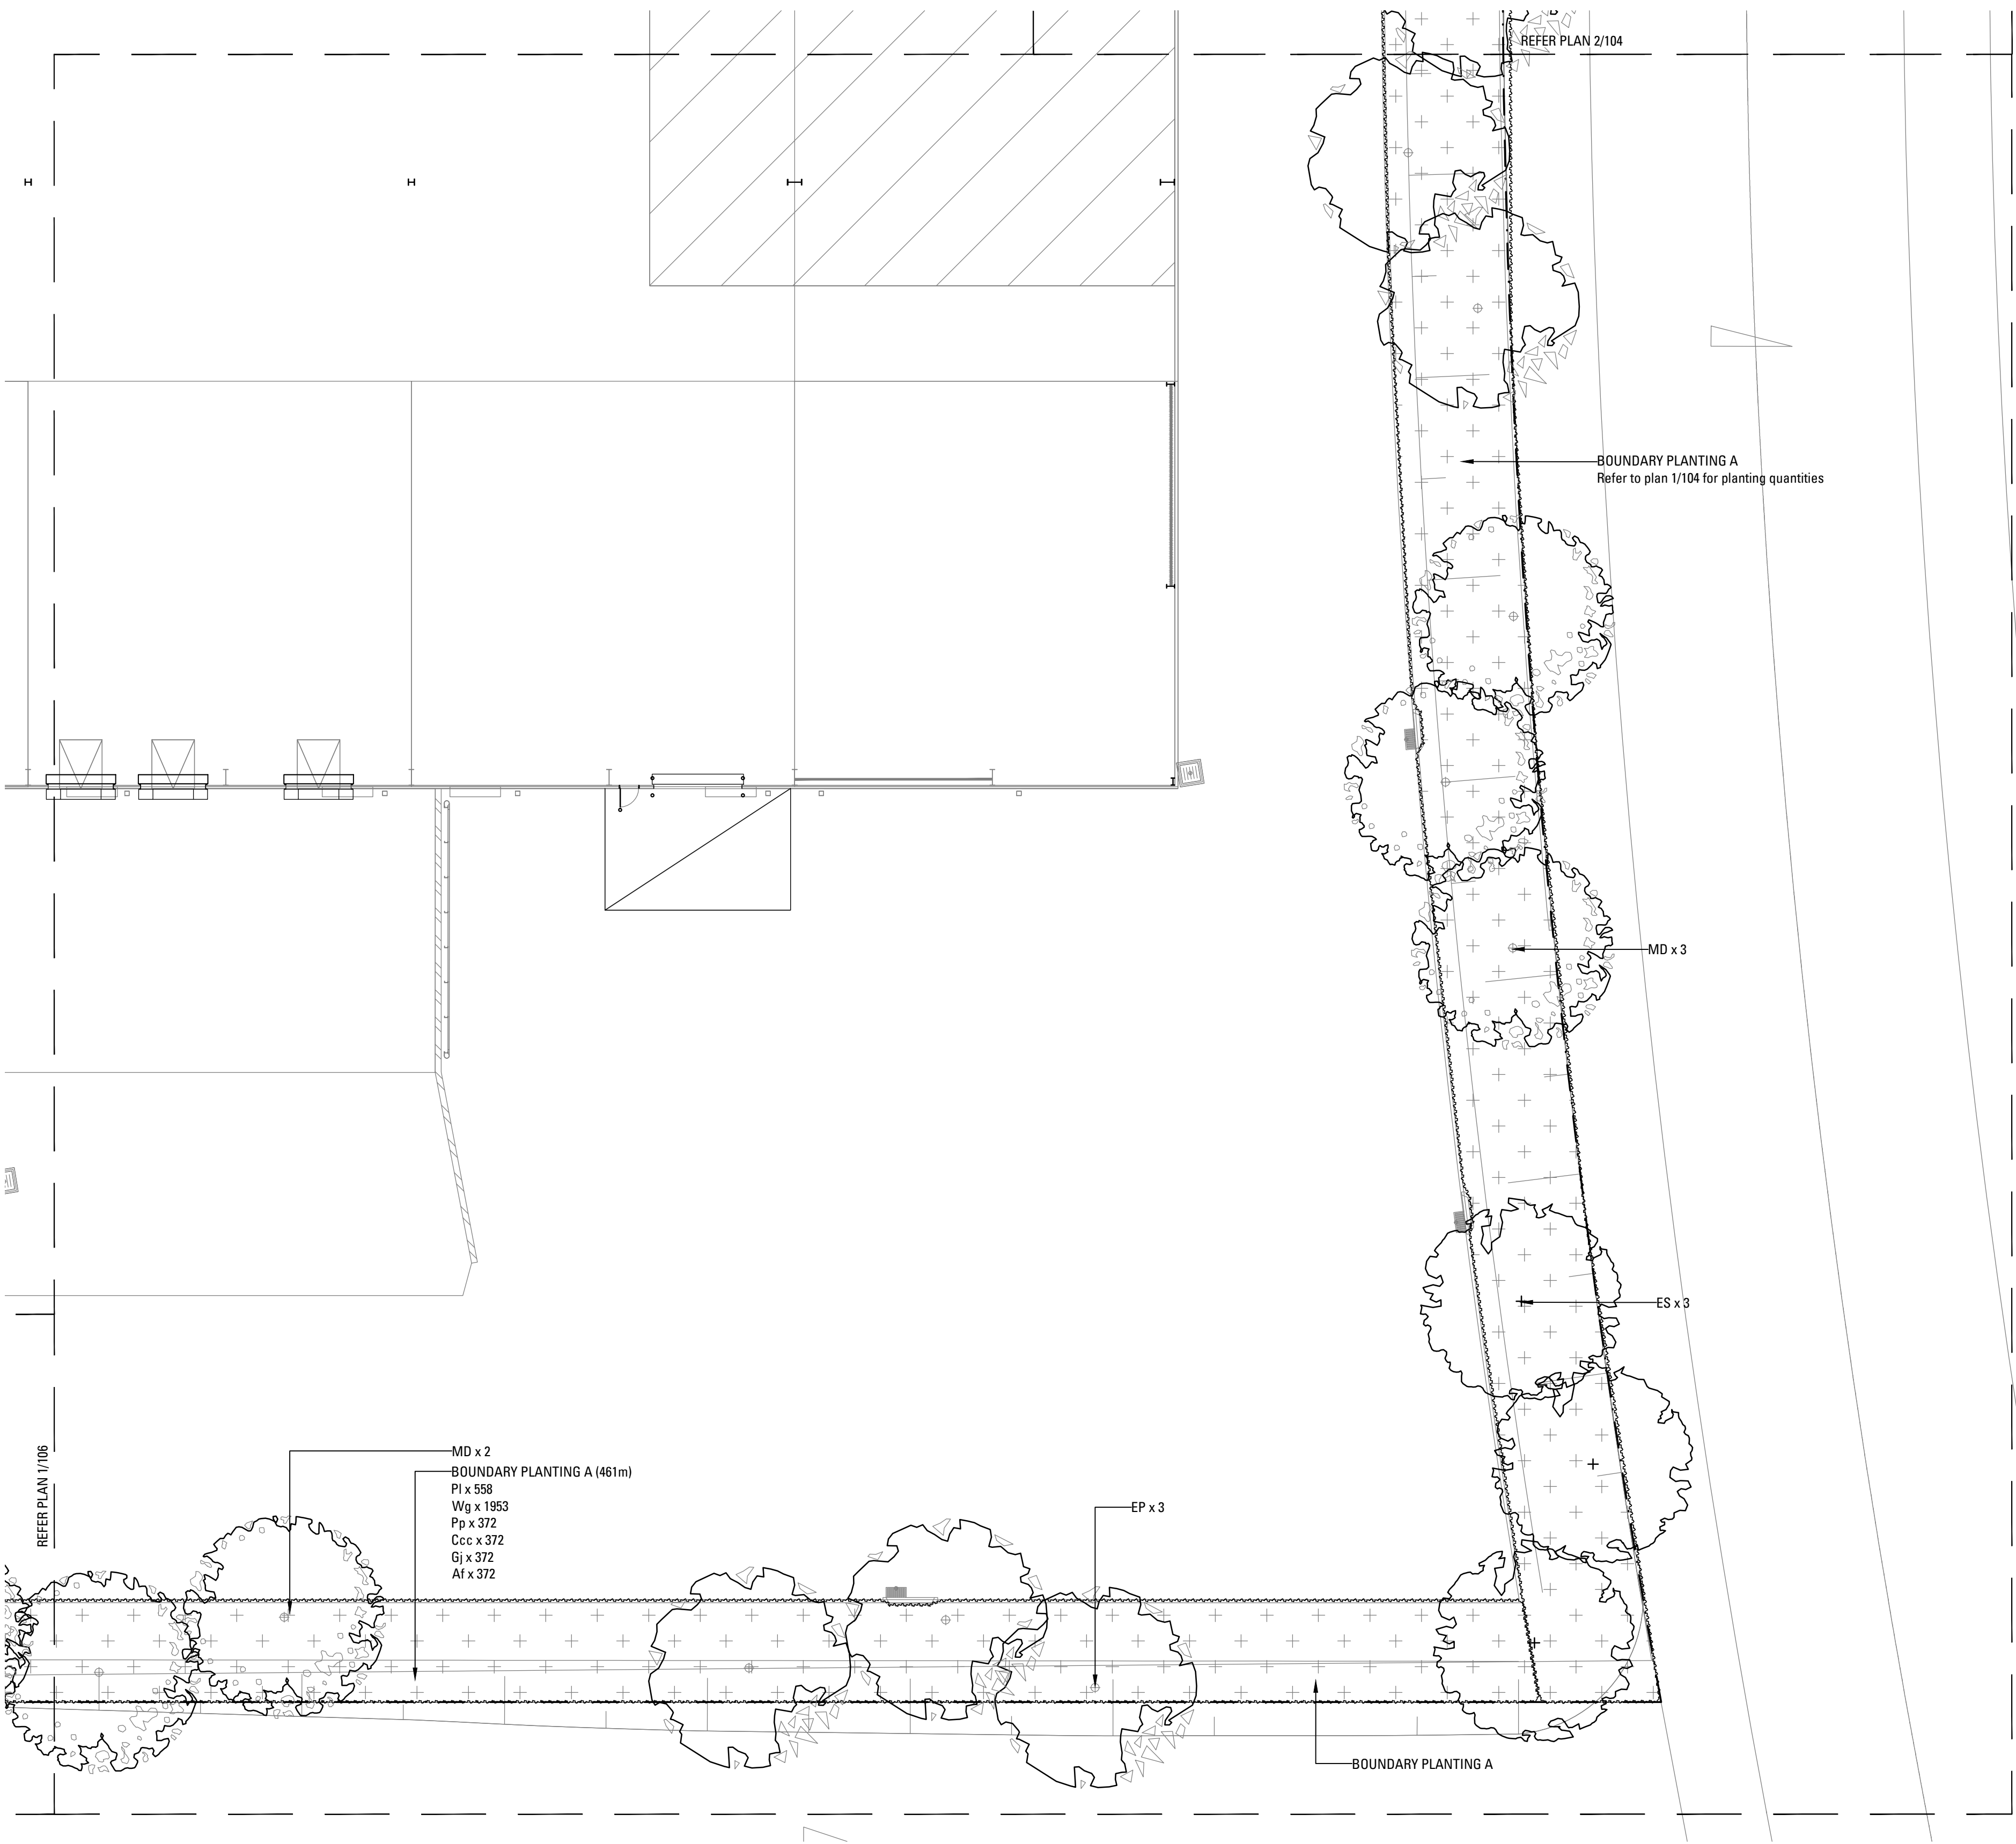


- LEGEND
- EXISTING TREES TO BE REMOVED
 - EXISTING TREES TO BE RETAINED
 - PROPOSED FEATURE TREE PLANTING
 - PROPOSED SHRUB AND ACCENT PLANTING
 - PROPOSED GROUNDCOVER PLANTING
 - BOUNDARY PLANTING A
Refer Landscape Detail
 - BOUNDARY PLANTING B
Refer Landscape Detail
 - BOUNDARY PLANTING C
Refer Landscape Detail
 - MATRIX PLANTING
Refer Landscape Detail
 - TURF
Refer Landscape Detail


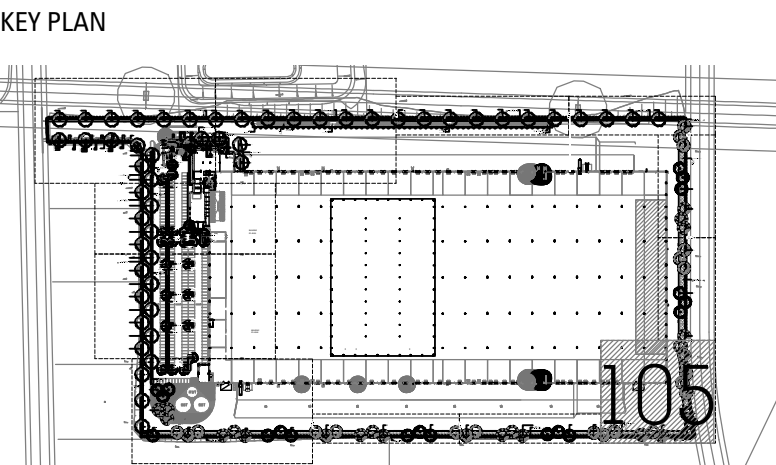


1:200 @ A1



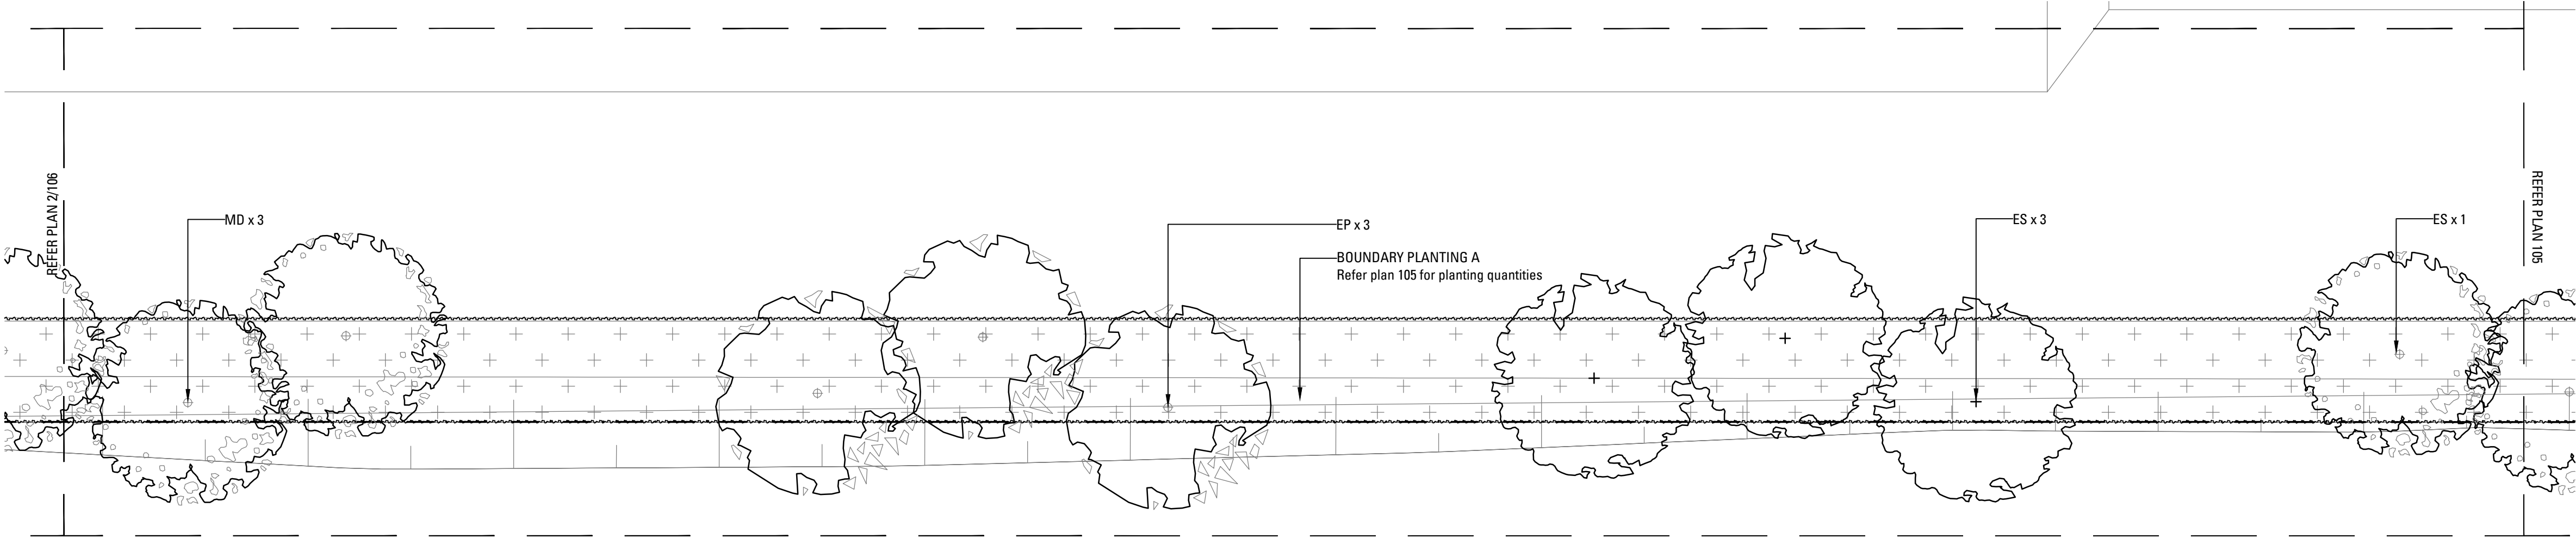


01 DETAILED LANDSCAPE PLAN
106

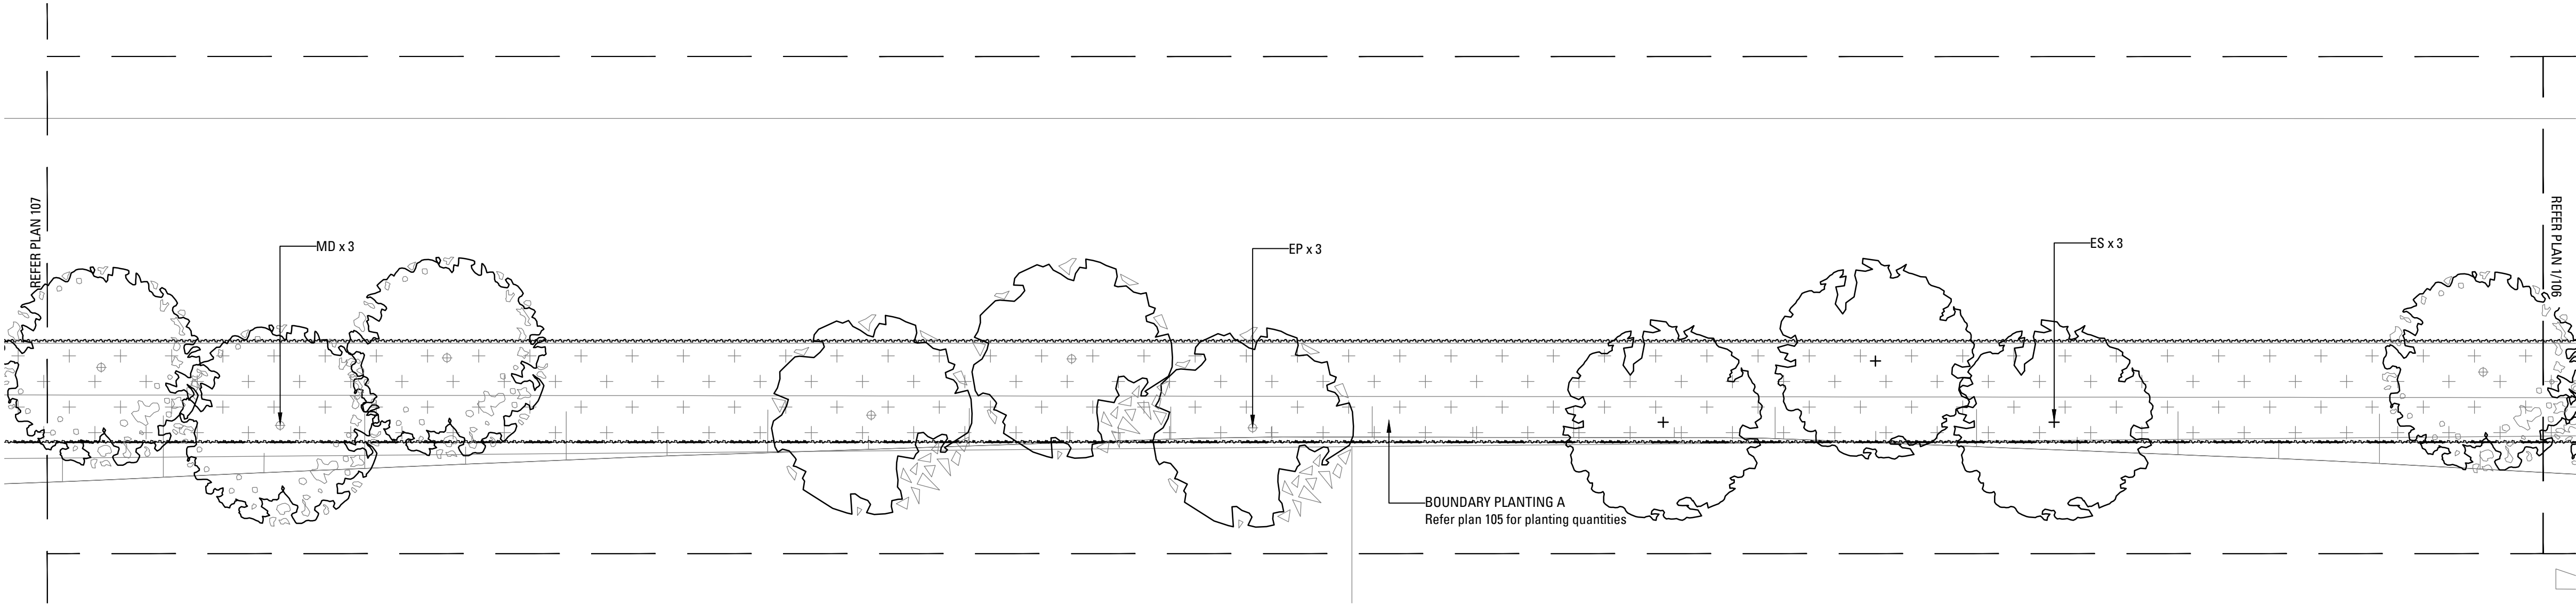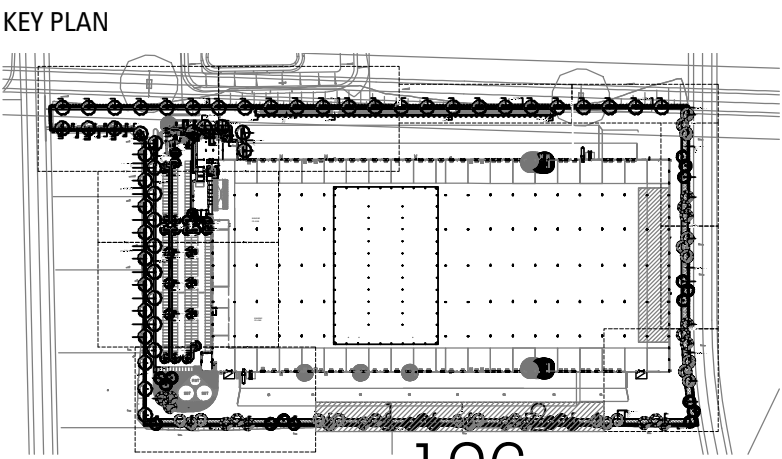


02 DETAILED LANDSCAPE PLAN
106


1:200 @ A1 0 1 2 4 6 10m



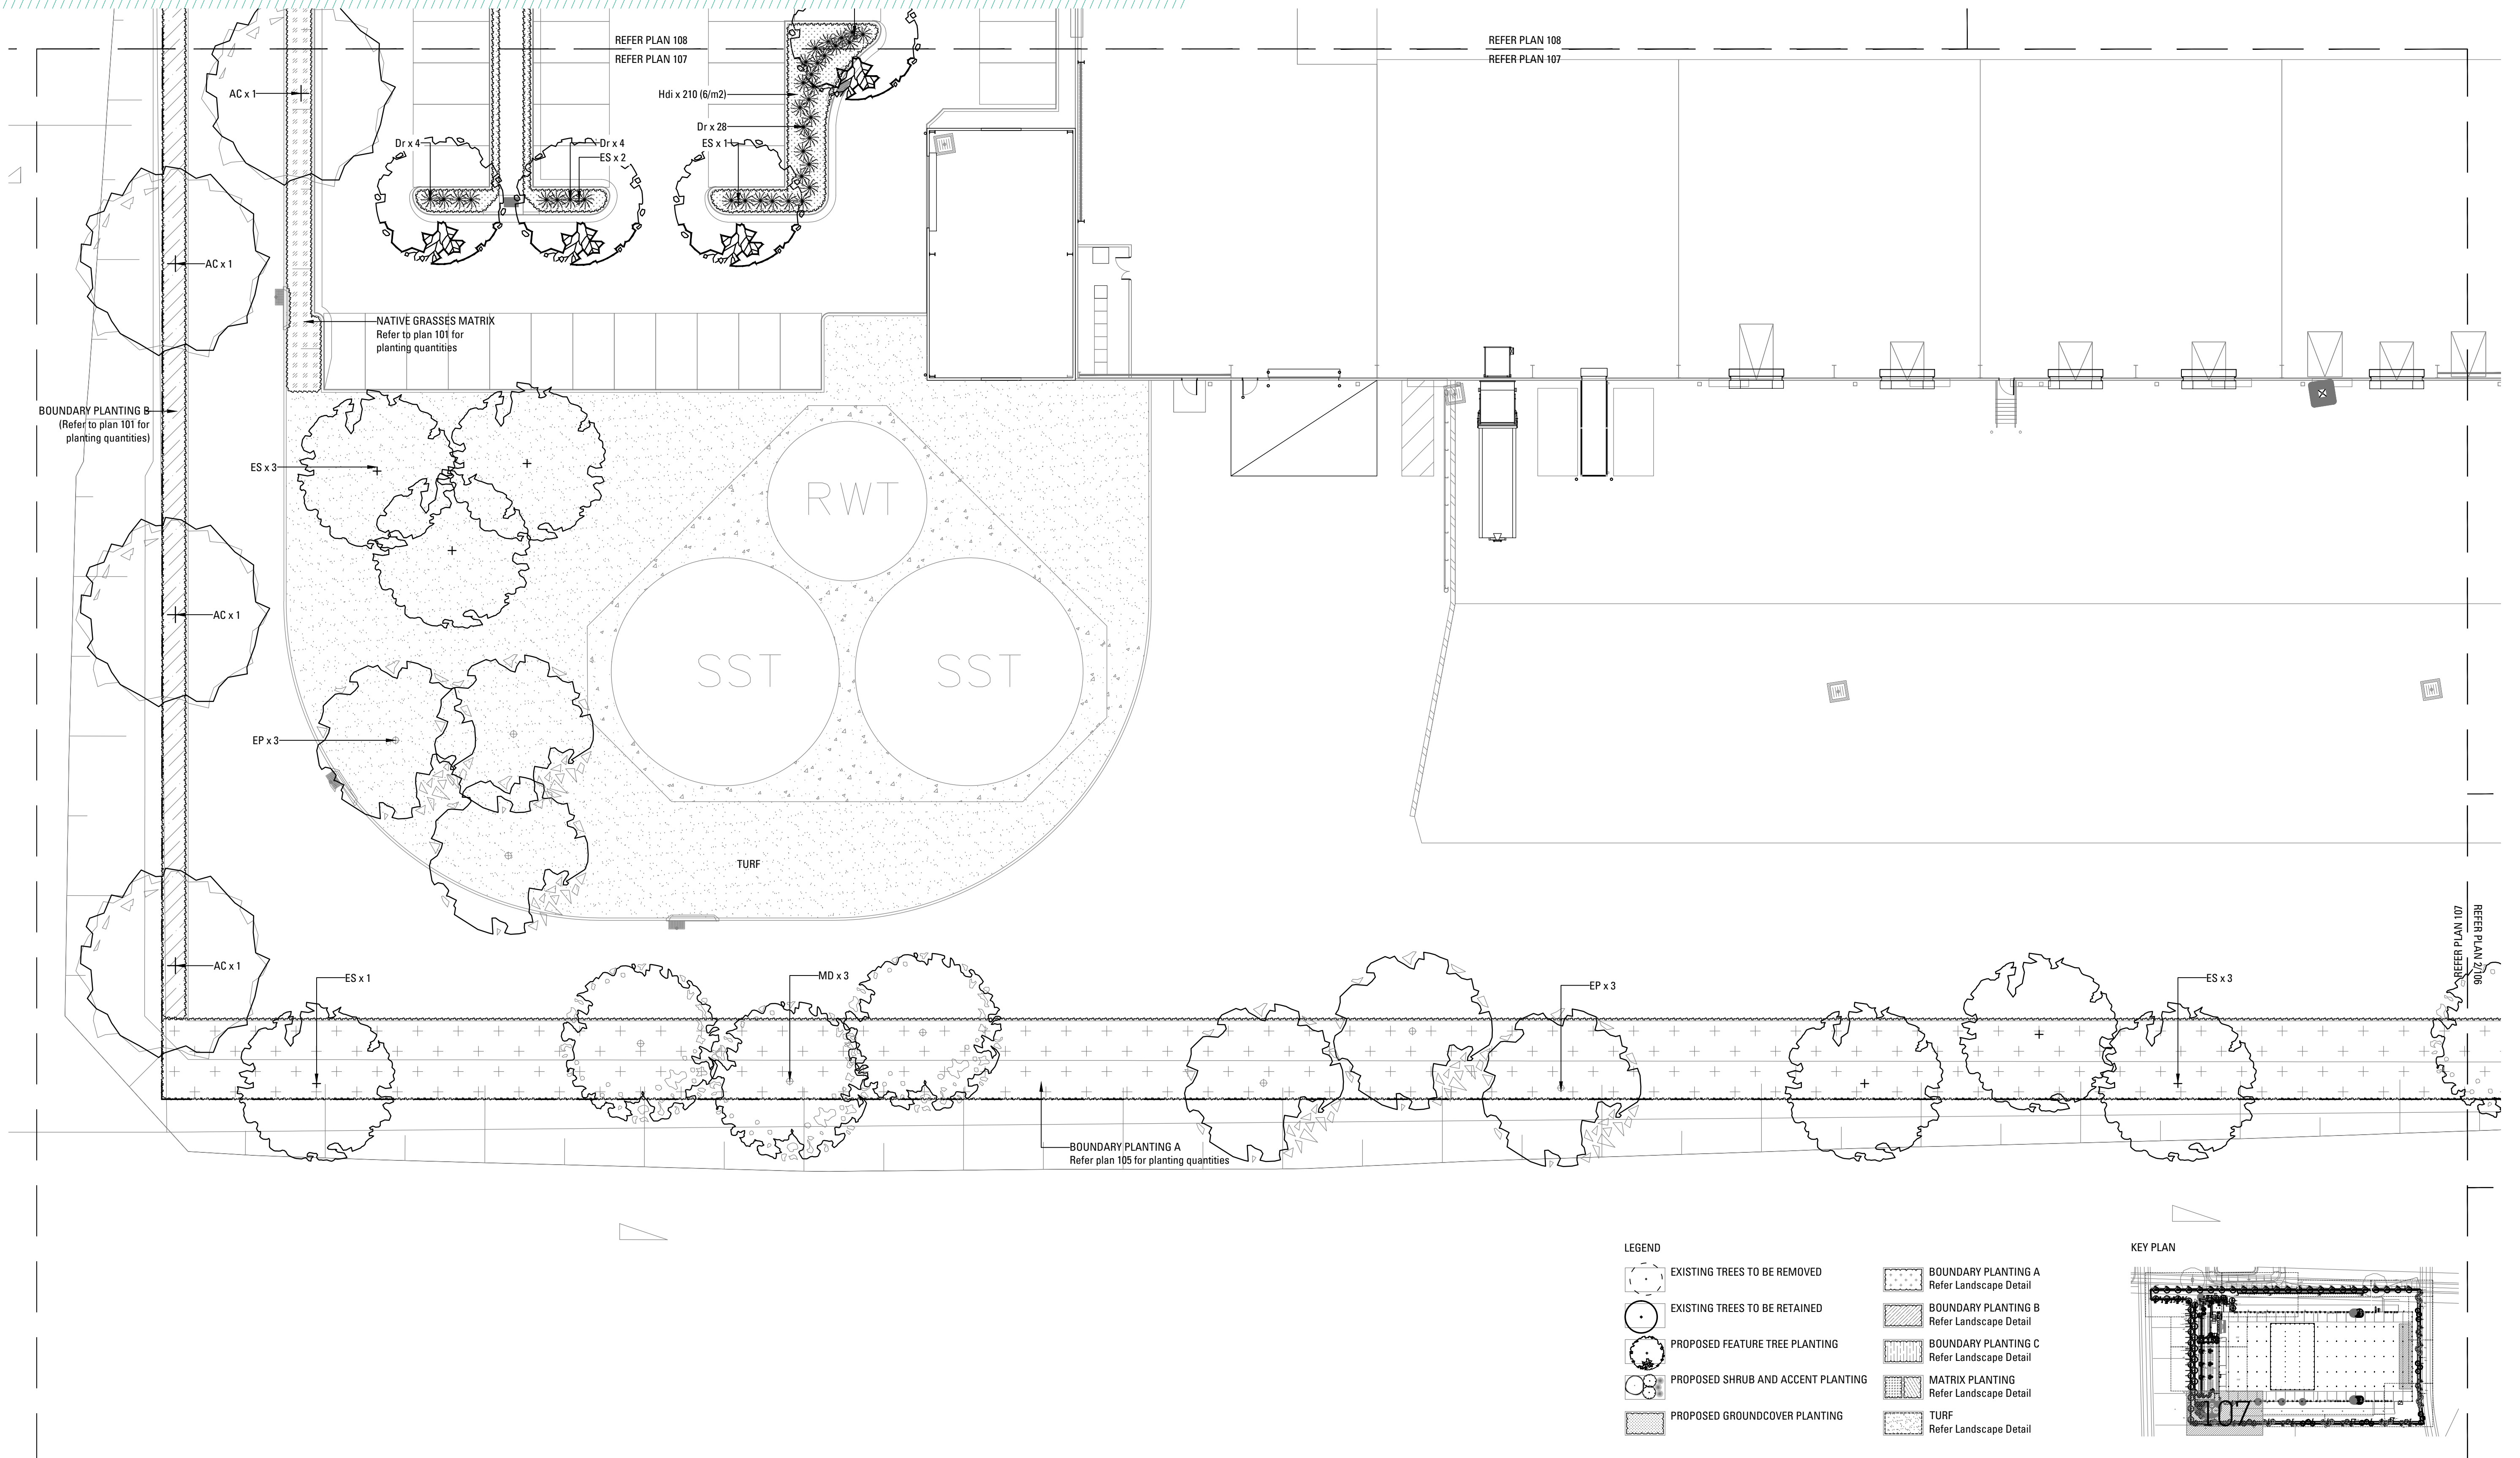


1:200 @ A1 0 1 2 4 6 10m



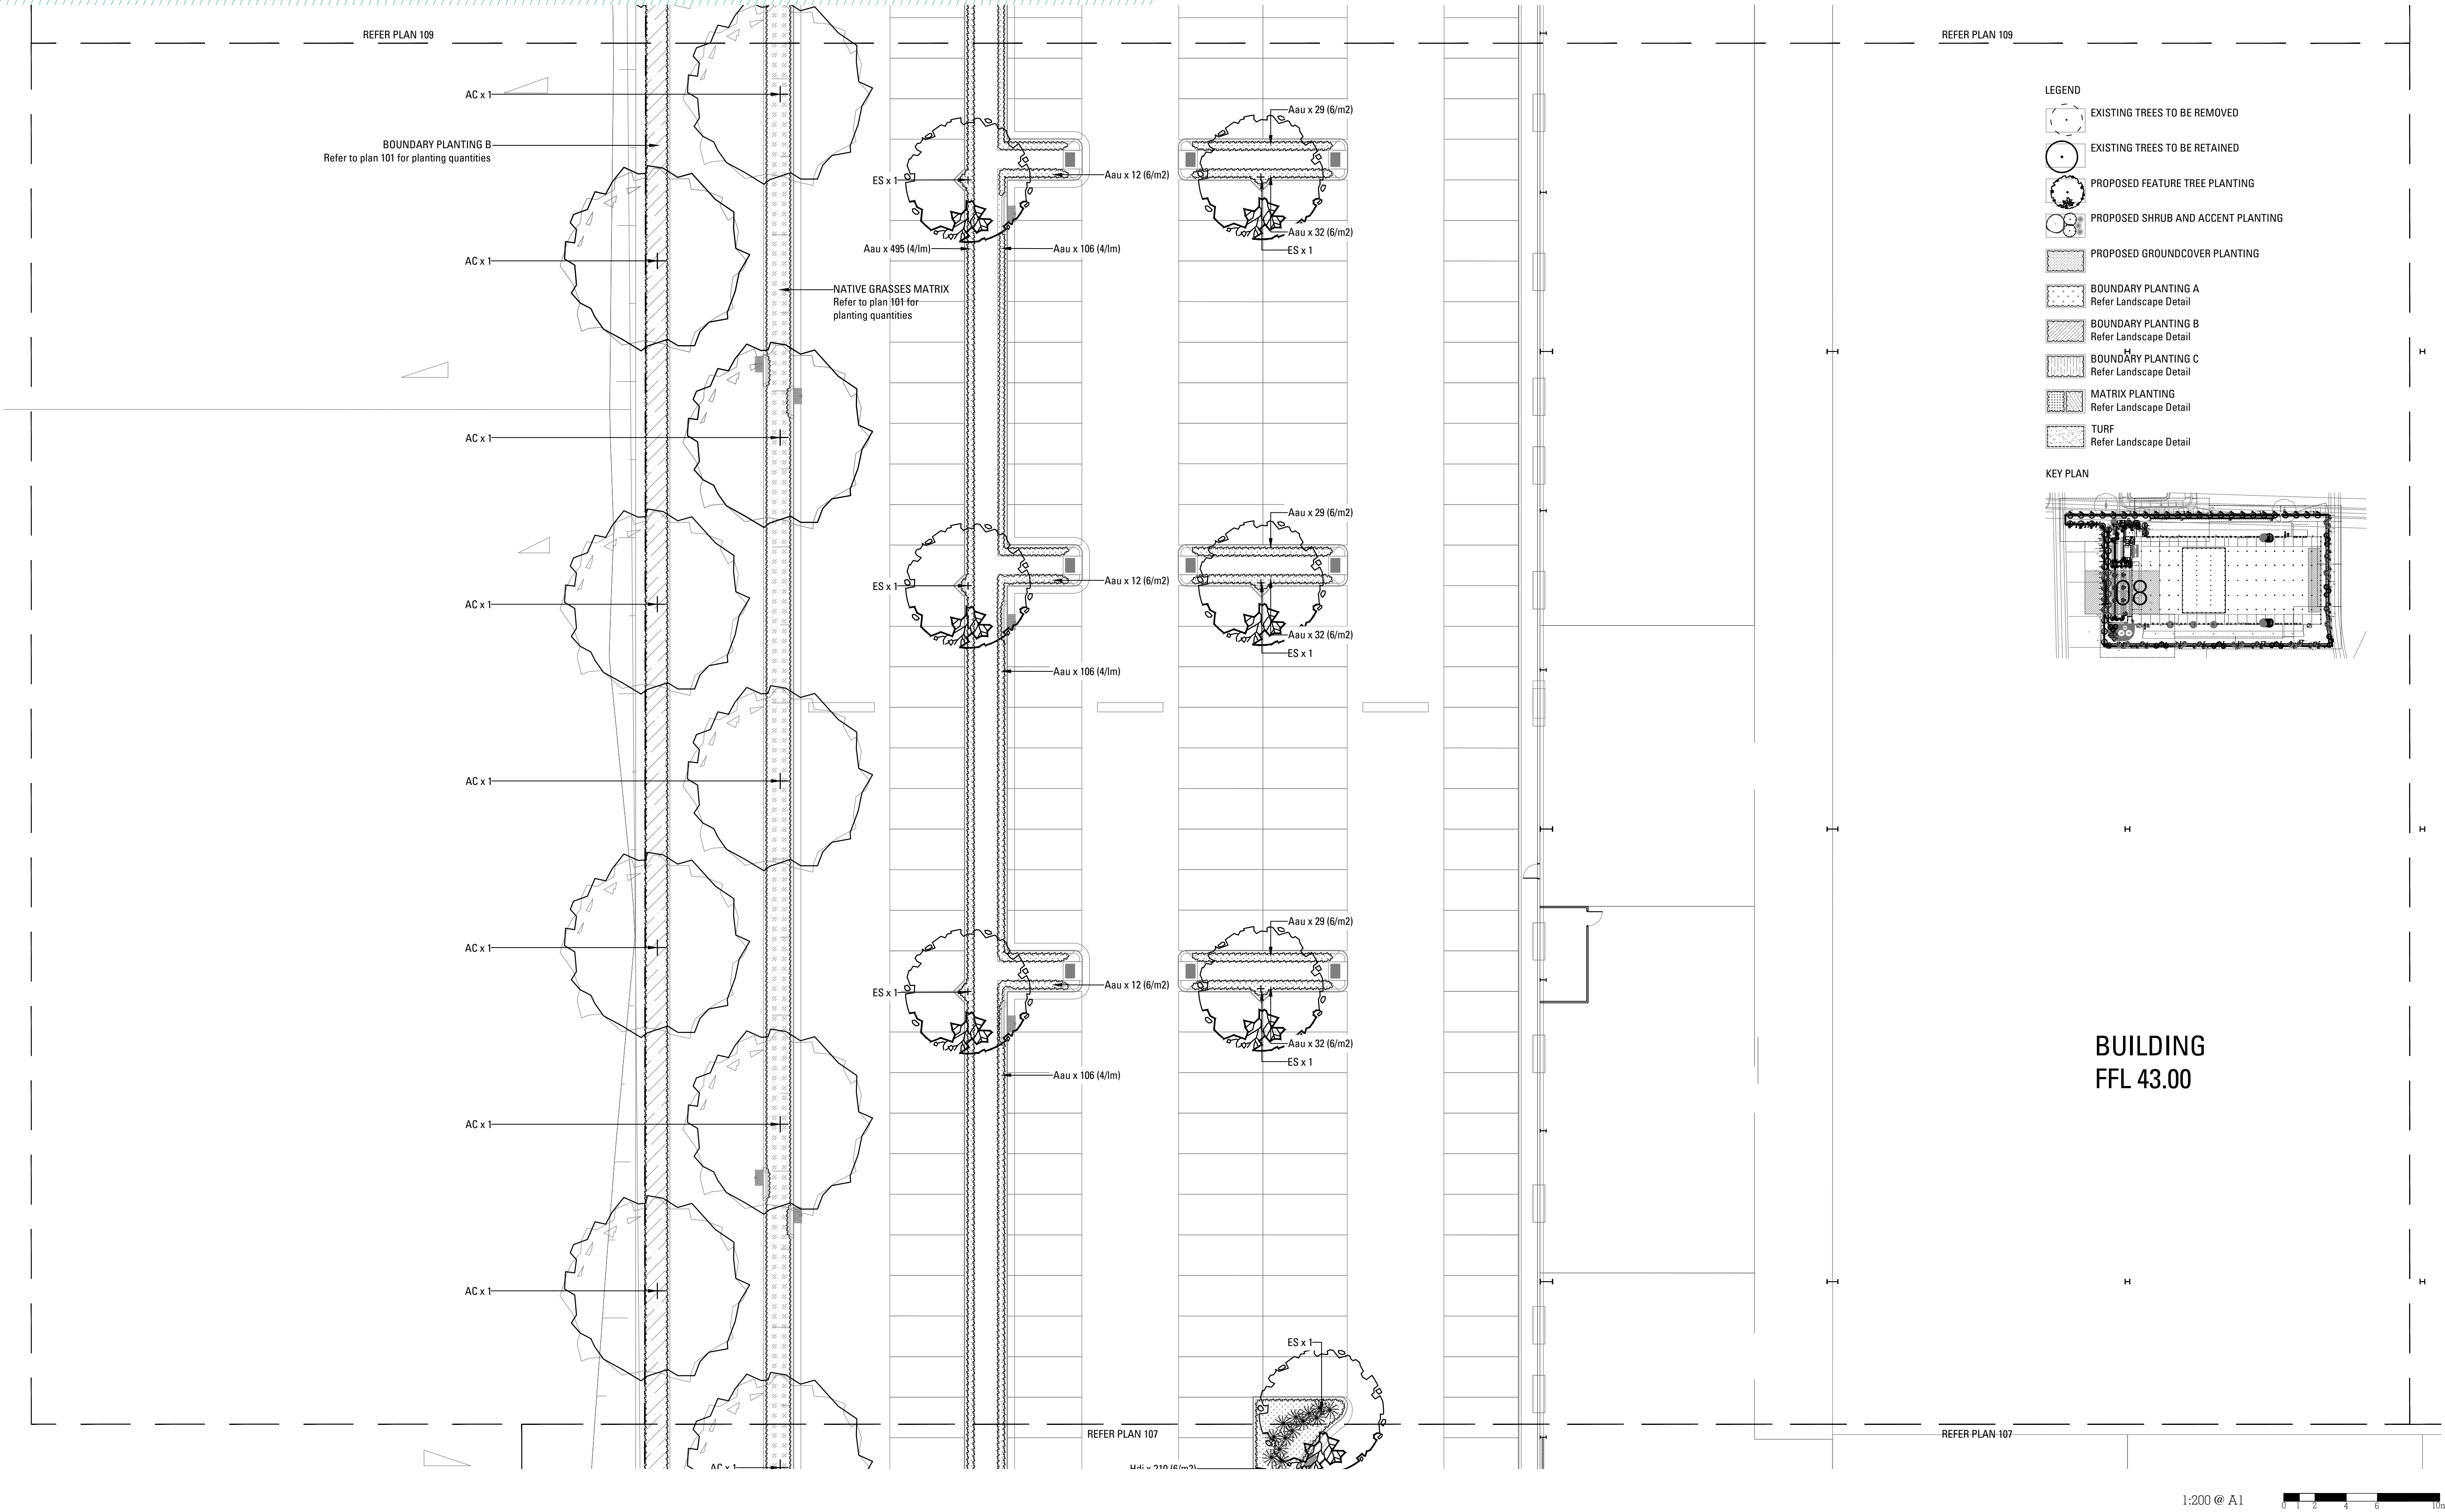


- LEGEND
- EXISTING TREES TO BE REMOVED
 - EXISTING TREES TO BE RETAINED
 - PROPOSED FEATURE TREE PLANTING
 - PROPOSED SHRUB AND ACCENT PLANTING
 - PROPOSED GROUNDCOVER PLANTING
 - BOUNDARY PLANTING A
Refer Landscape Detail
 - BOUNDARY PLANTING B
Refer Landscape Detail
 - BOUNDARY PLANTING C
Refer Landscape Detail
 - MATRIX PLANTING
Refer Landscape Detail
 - TURF
Refer Landscape Detail

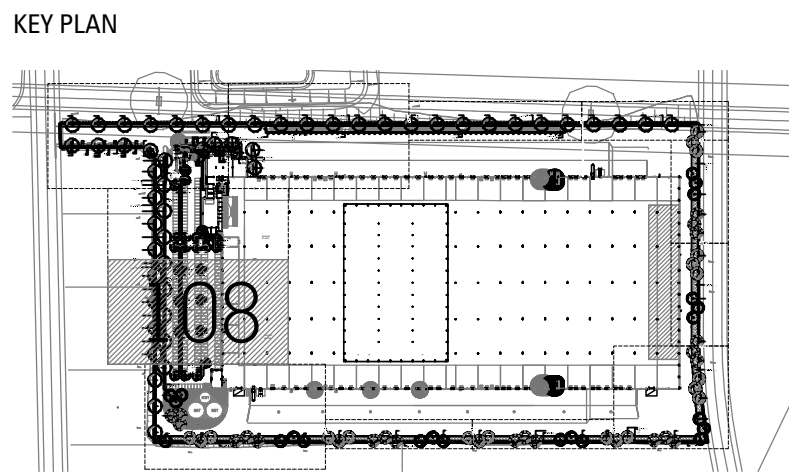

BUILDING
FFL 43.00




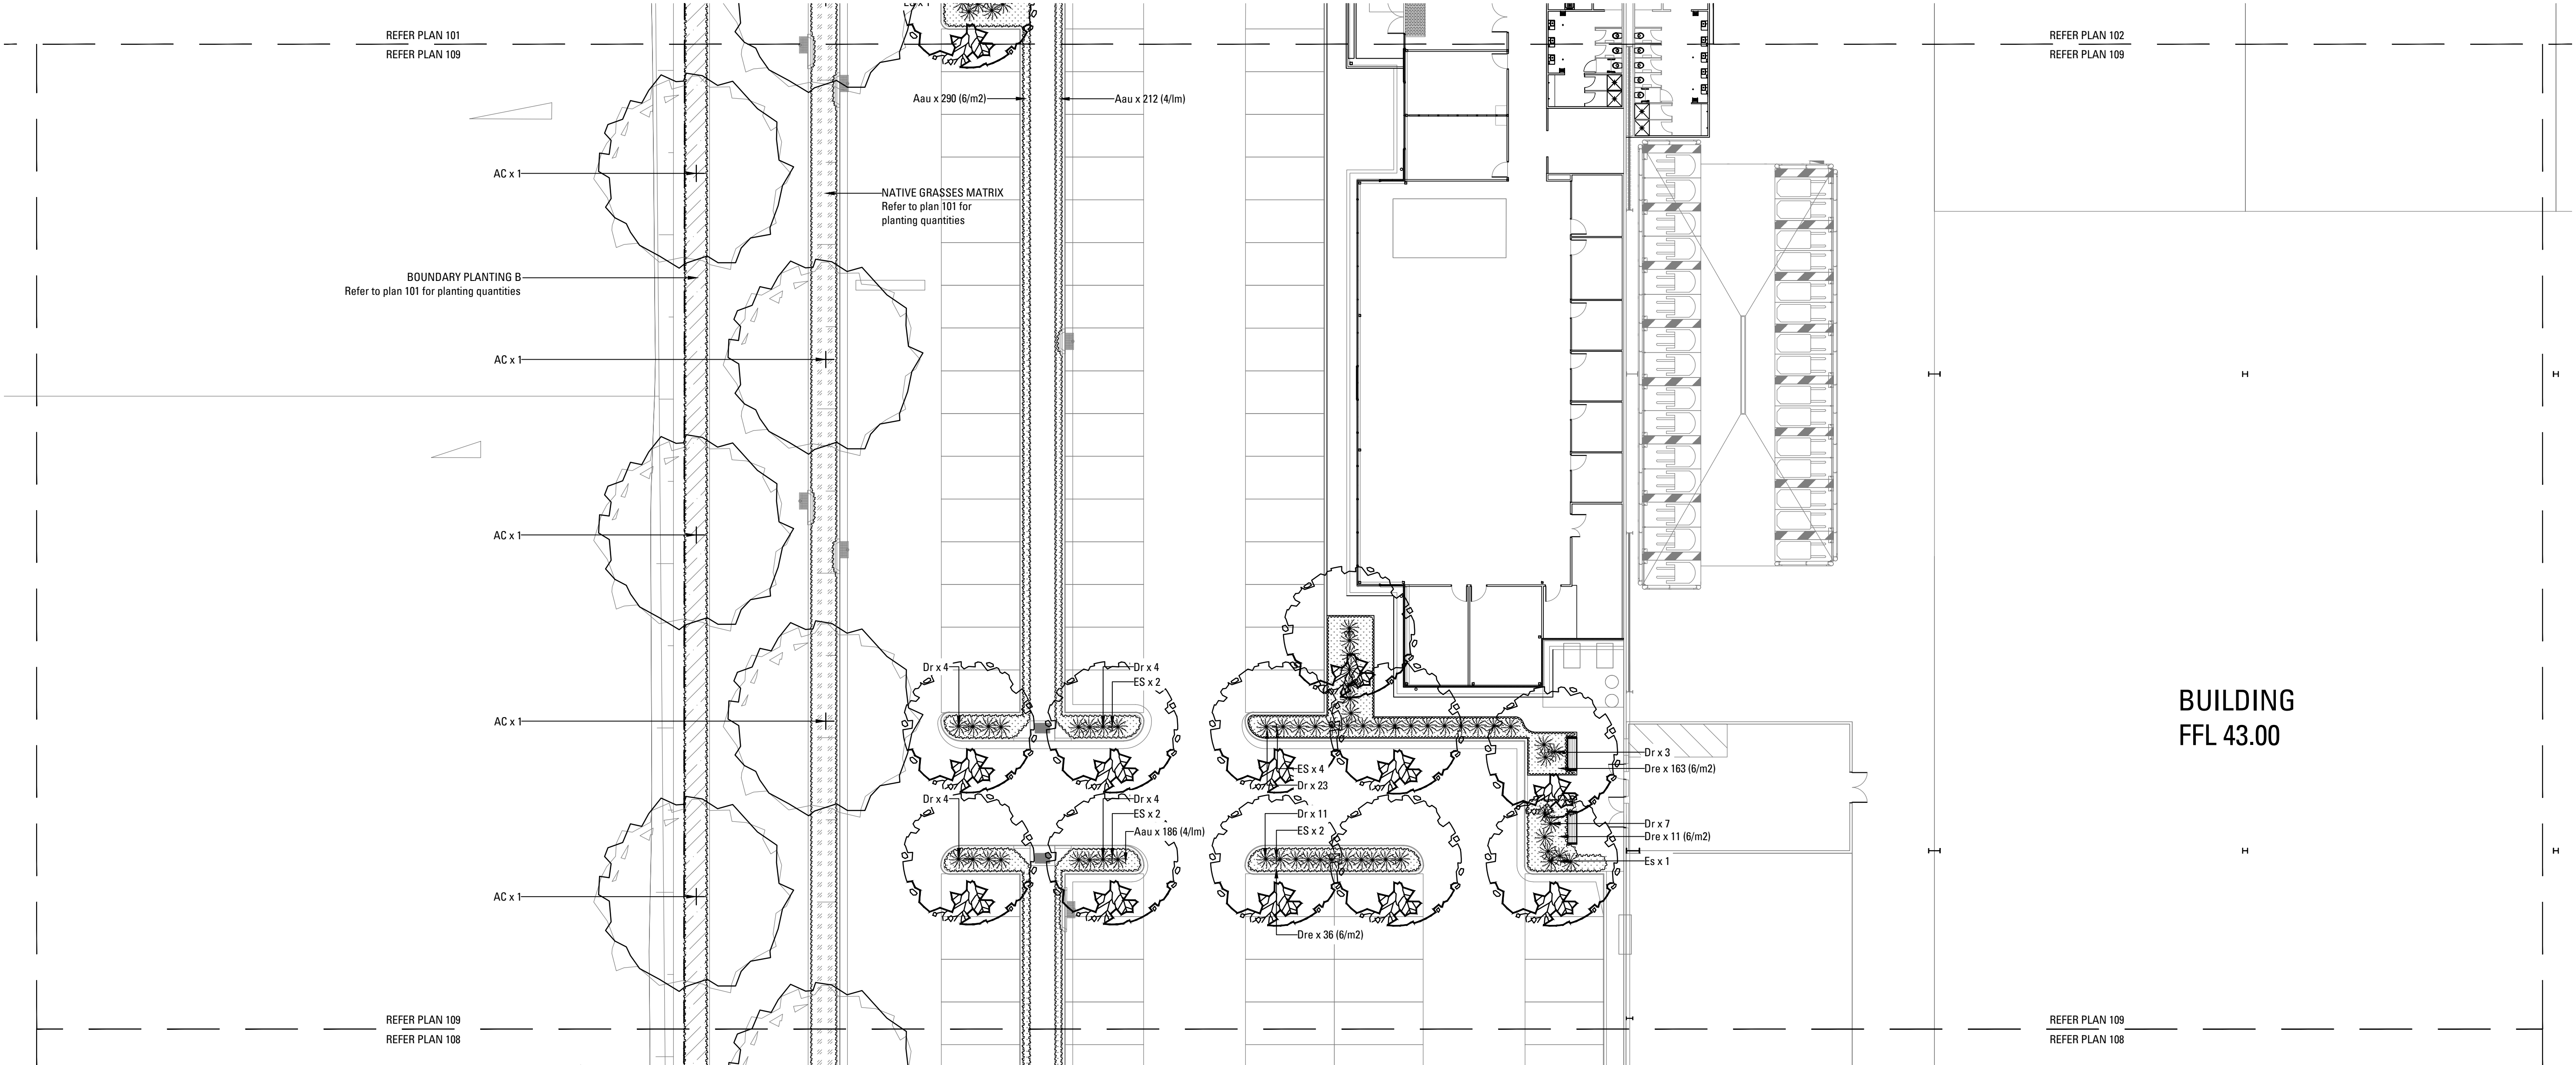


LEGEND


- | | | | |
|--|------------------------------------|--|---|
| | EXISTING TREES TO BE REMOVED | | BOUNDARY PLANTING A
Refer Landscape Detail |
| | EXISTING TREES TO BE RETAINED | | BOUNDARY PLANTING B
Refer Landscape Detail |
| | PROPOSED FEATURE TREE PLANTING | | BOUNDARY PLANTING C
Refer Landscape Detail |
| | PROPOSED SHRUB AND ACCENT PLANTING | | MATRIX PLANTING
Refer Landscape Detail |
| | PROPOSED GROUNDCOVER PLANTING | | TURF
Refer Landscape Detail |

KEY PLAN

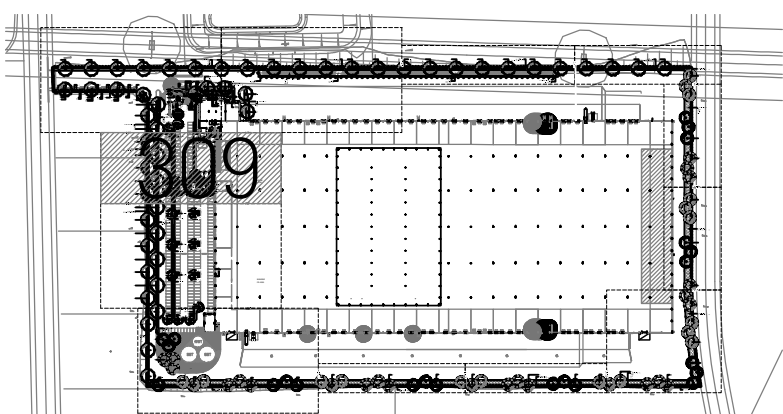


1:200 @ A1



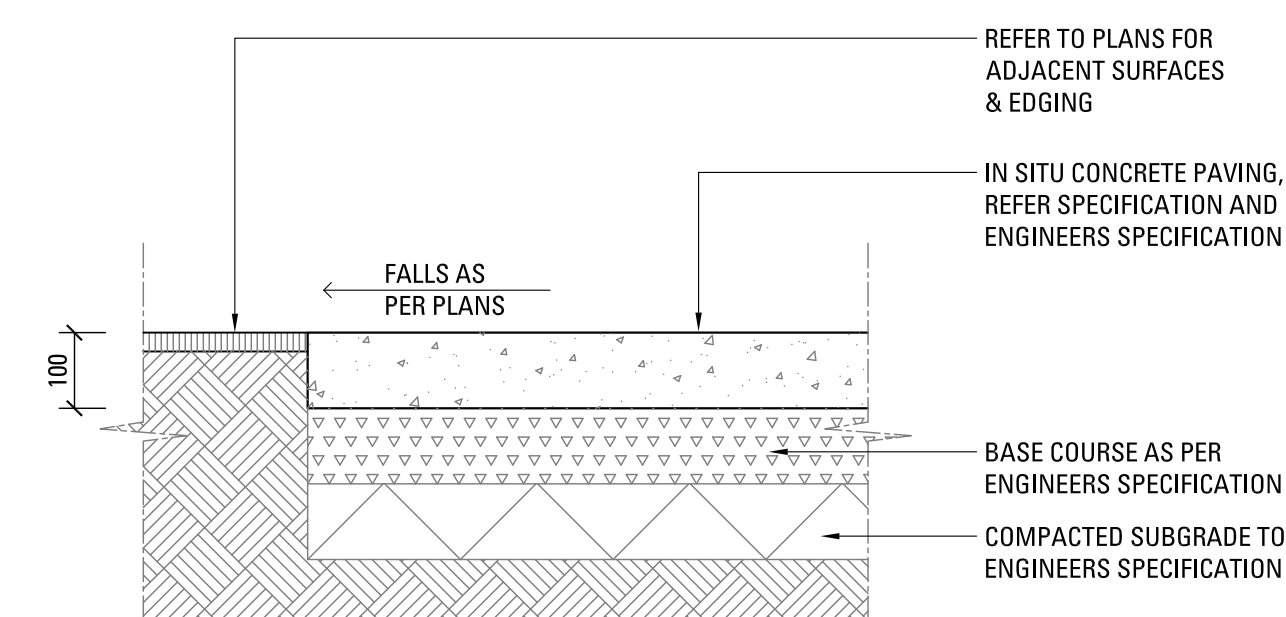


01 INSITU CONCRETE PAVING ON GRADE
SCALE 1:10

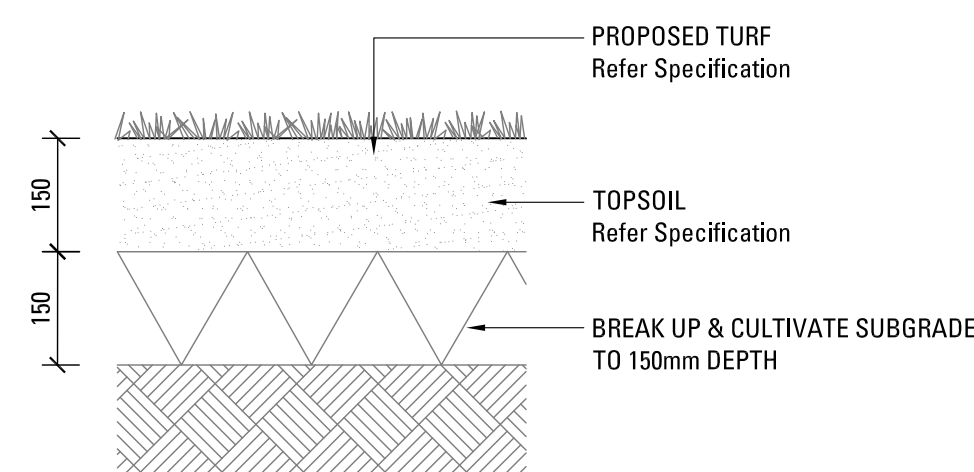


02 TURF ON GRADE
SCALE 1:10





05 TREE PLANTING 75-100L
SCALE 1:20

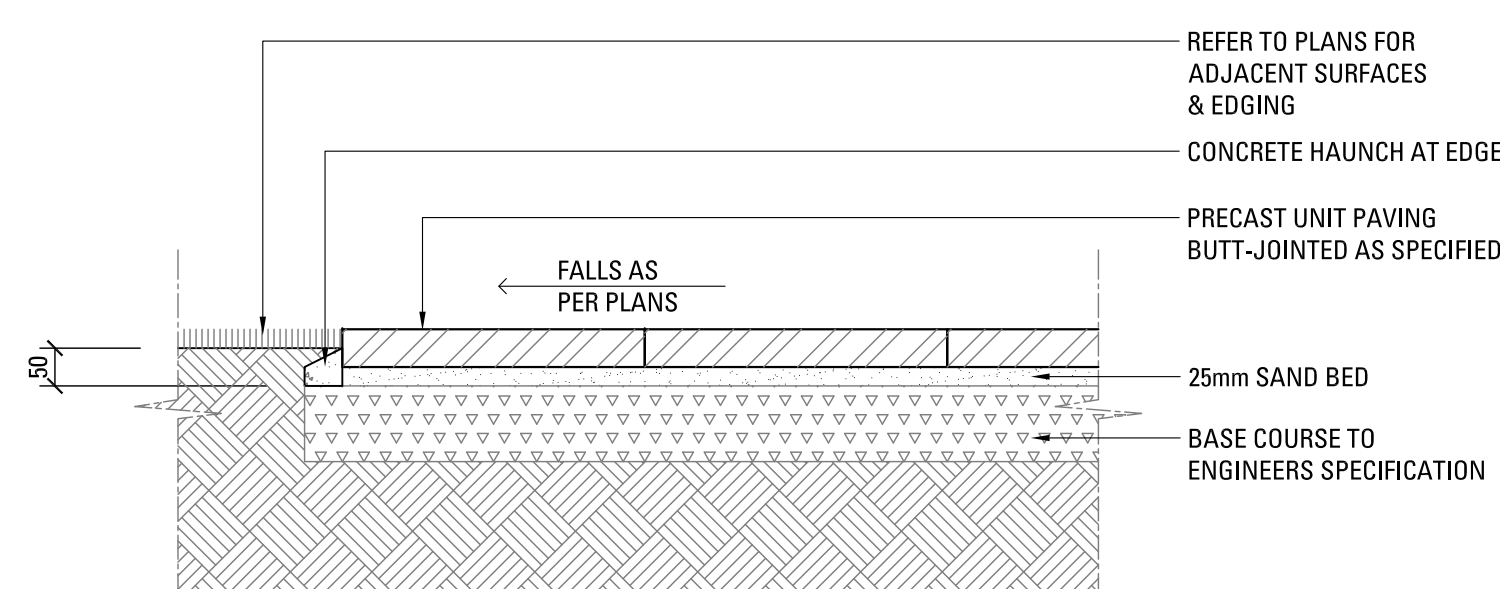

03 PRECAST UNIT PAVERS ON GRADE
SCALE 1:10

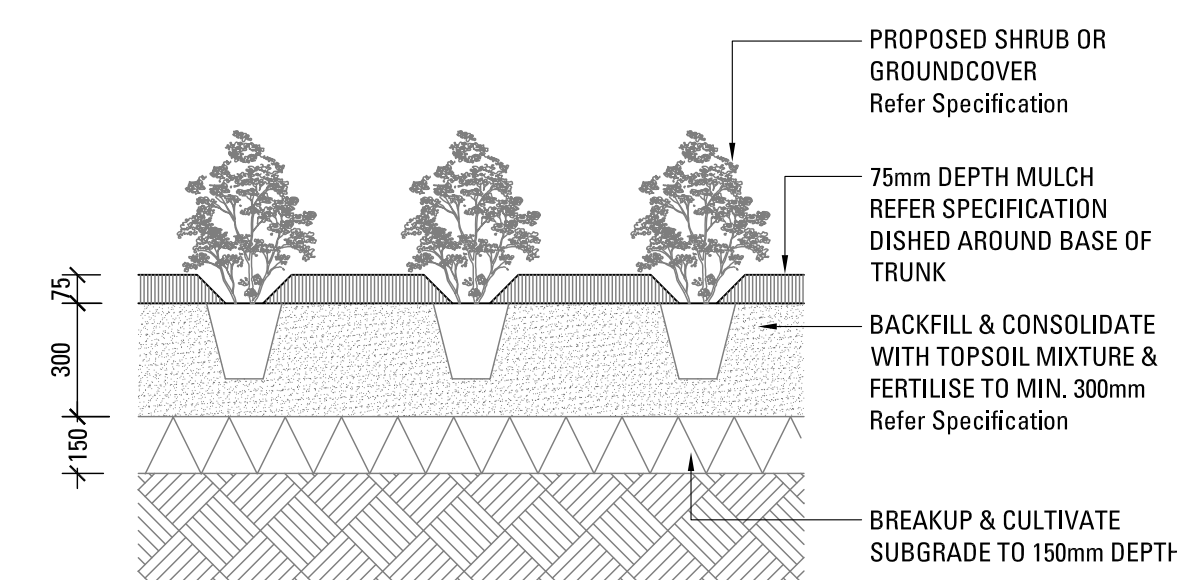


04 SHRUB OR GROUNDCOVER IN PLANTING BED
SCALE 1:20

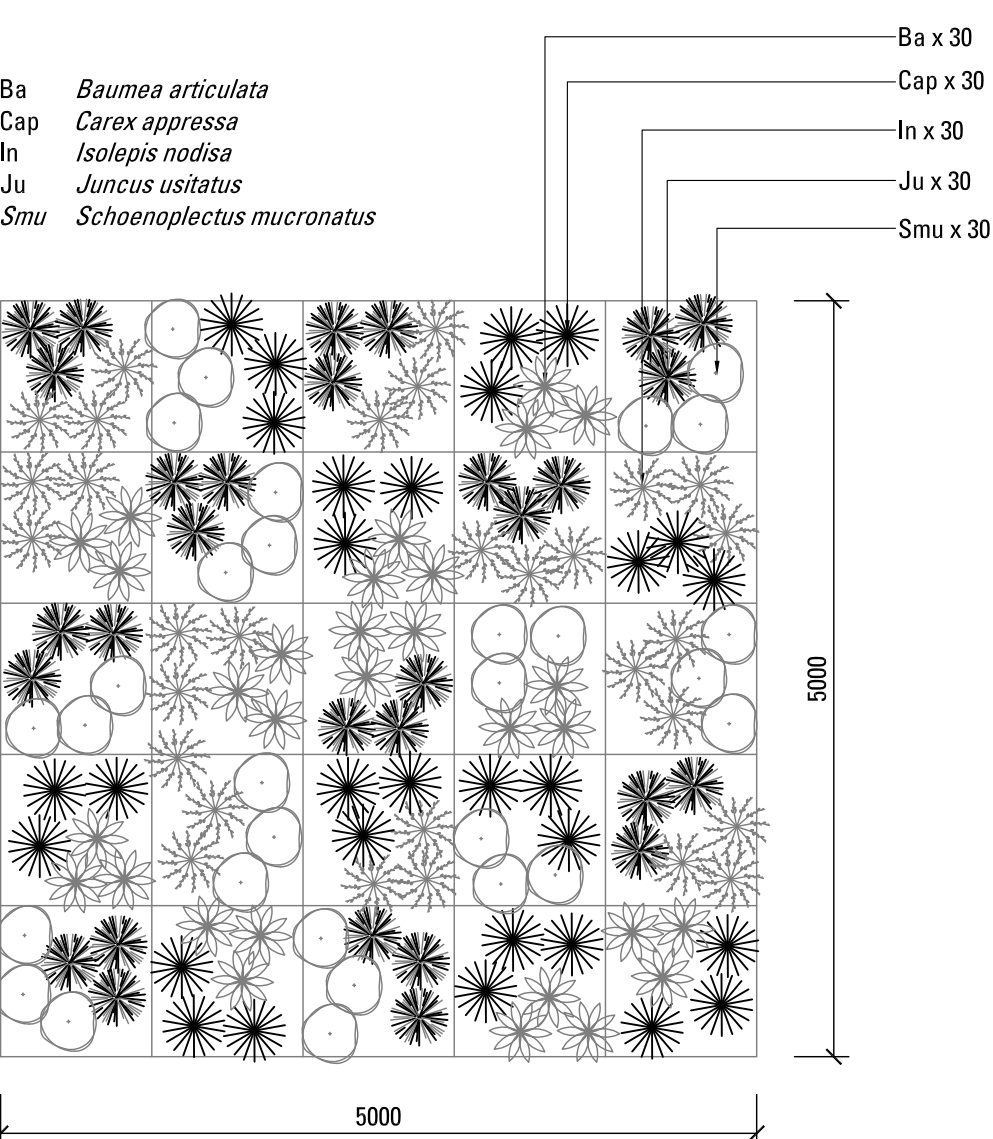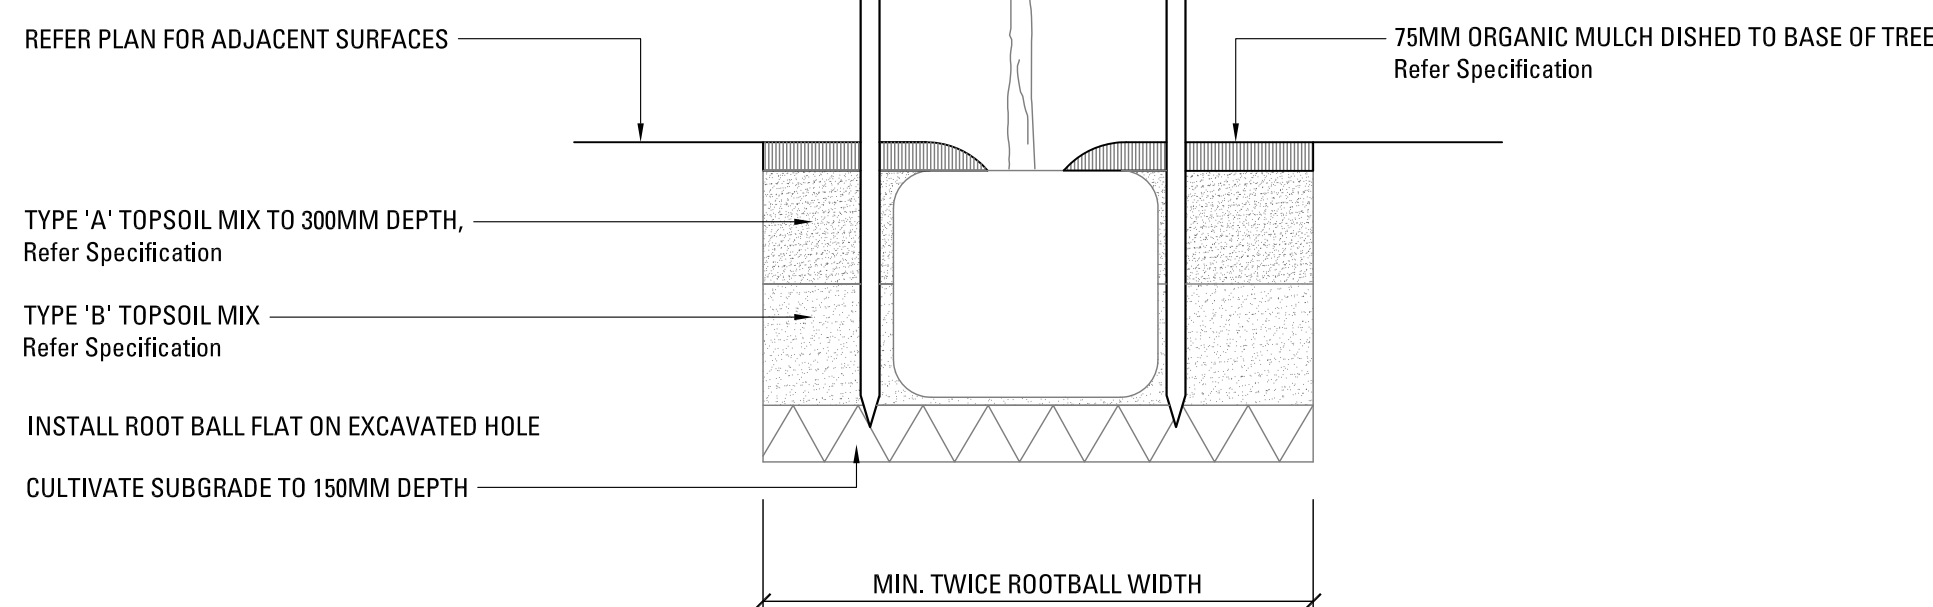


06 BIO SWALE MATRIX - 5m x 5m
SCALE 1:50


NOTE: DETAIL IS INDICATIVE ONLY,
PLANT ALL SPECIES RANDOMLY AT
AM OVERALL RATE OF 6/m²

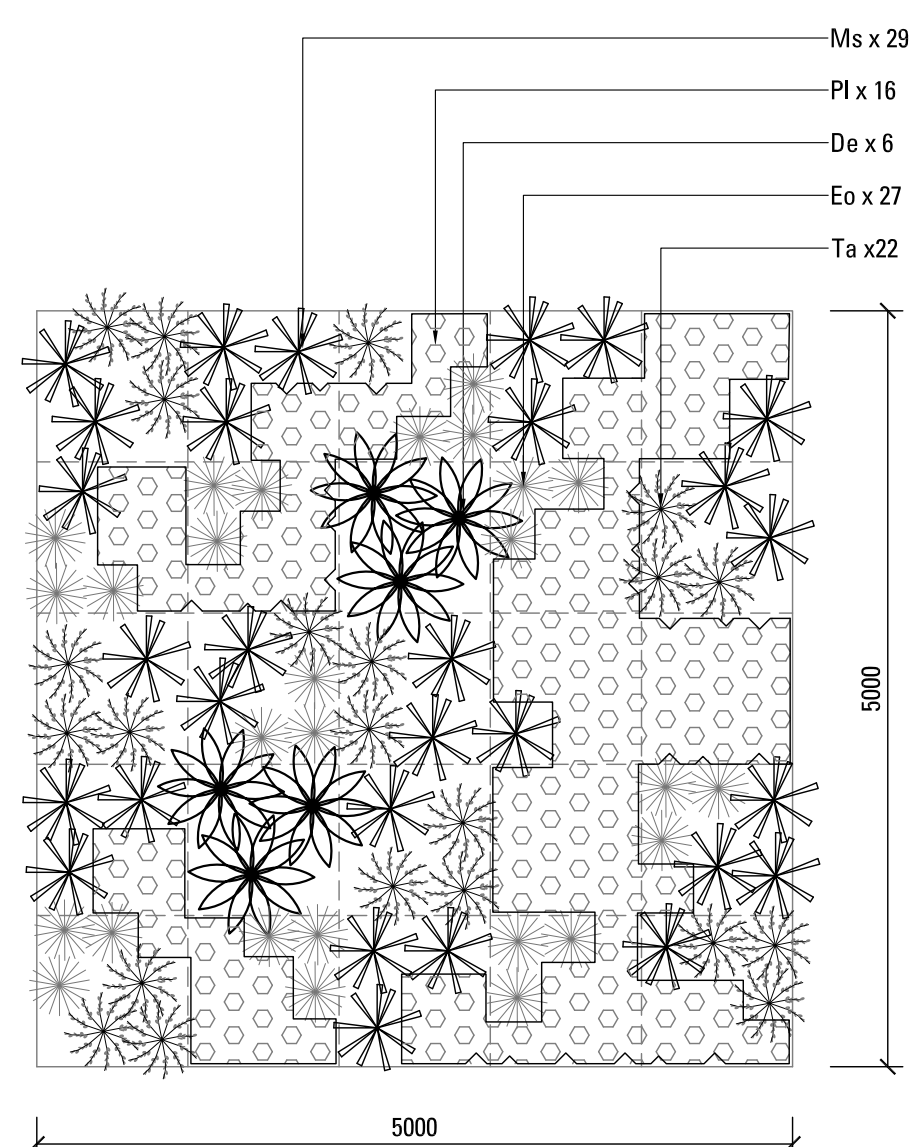


07 NATIVE GRASSES MATRIX
SCALE 1:50

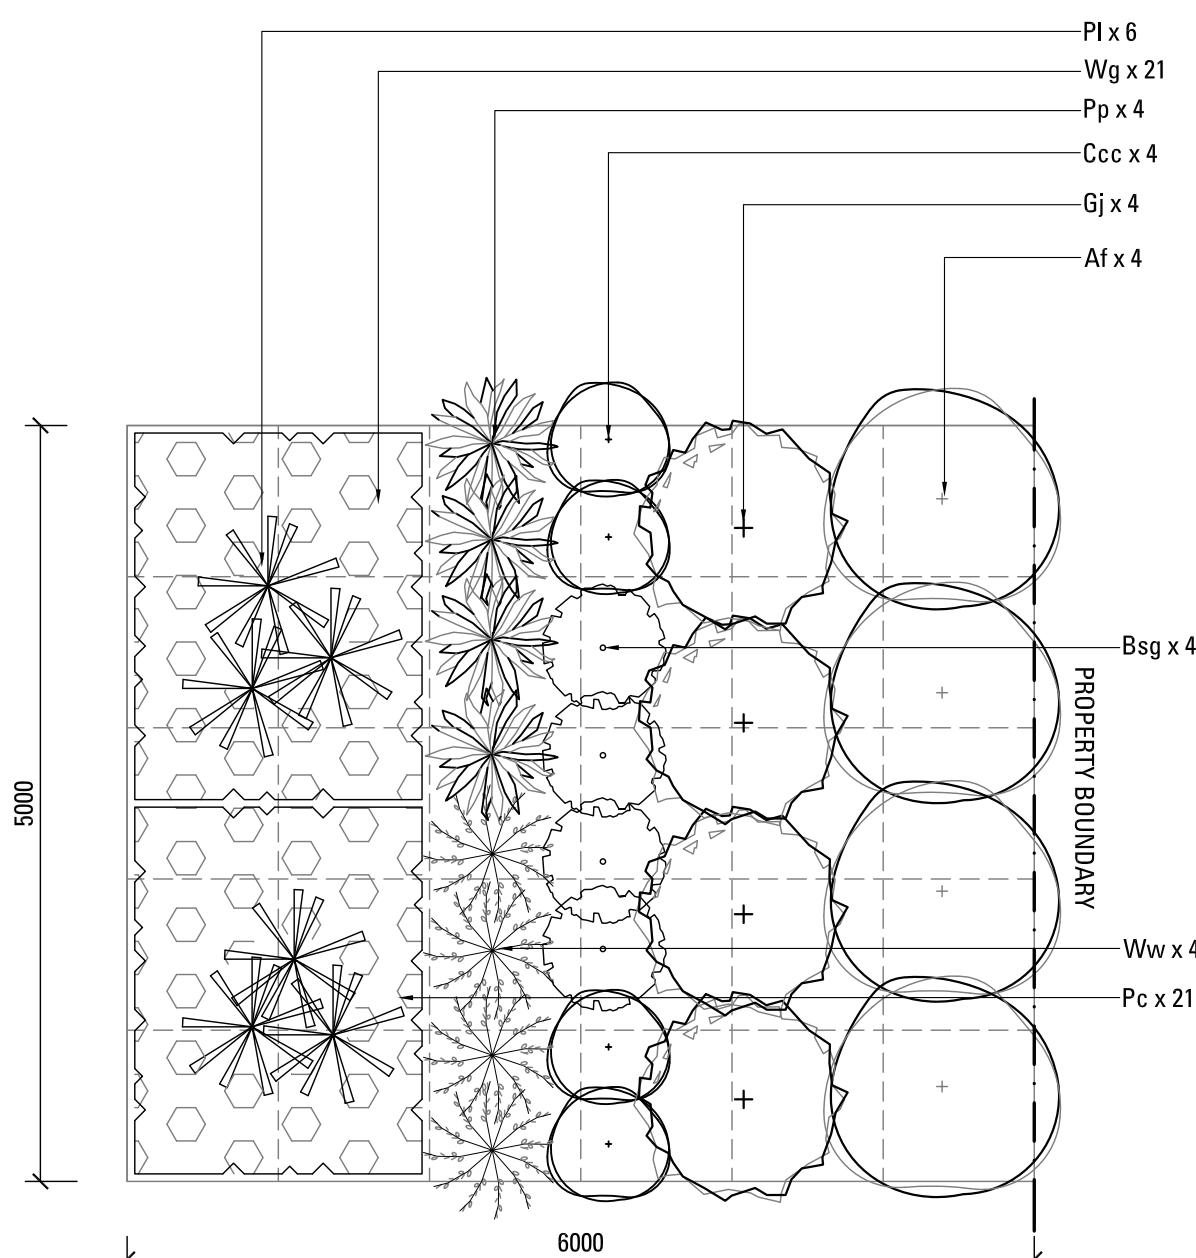

08 BOUNDARY PLANTING A
SCALE 1:50

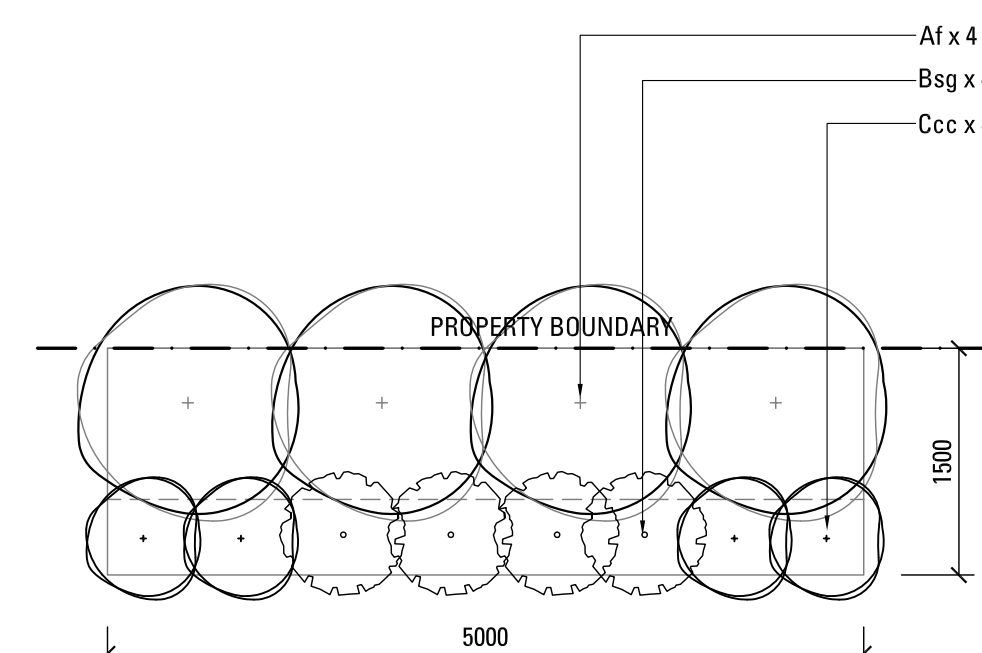

09 BOUNDARY PLANTING B
SCALE 1:50

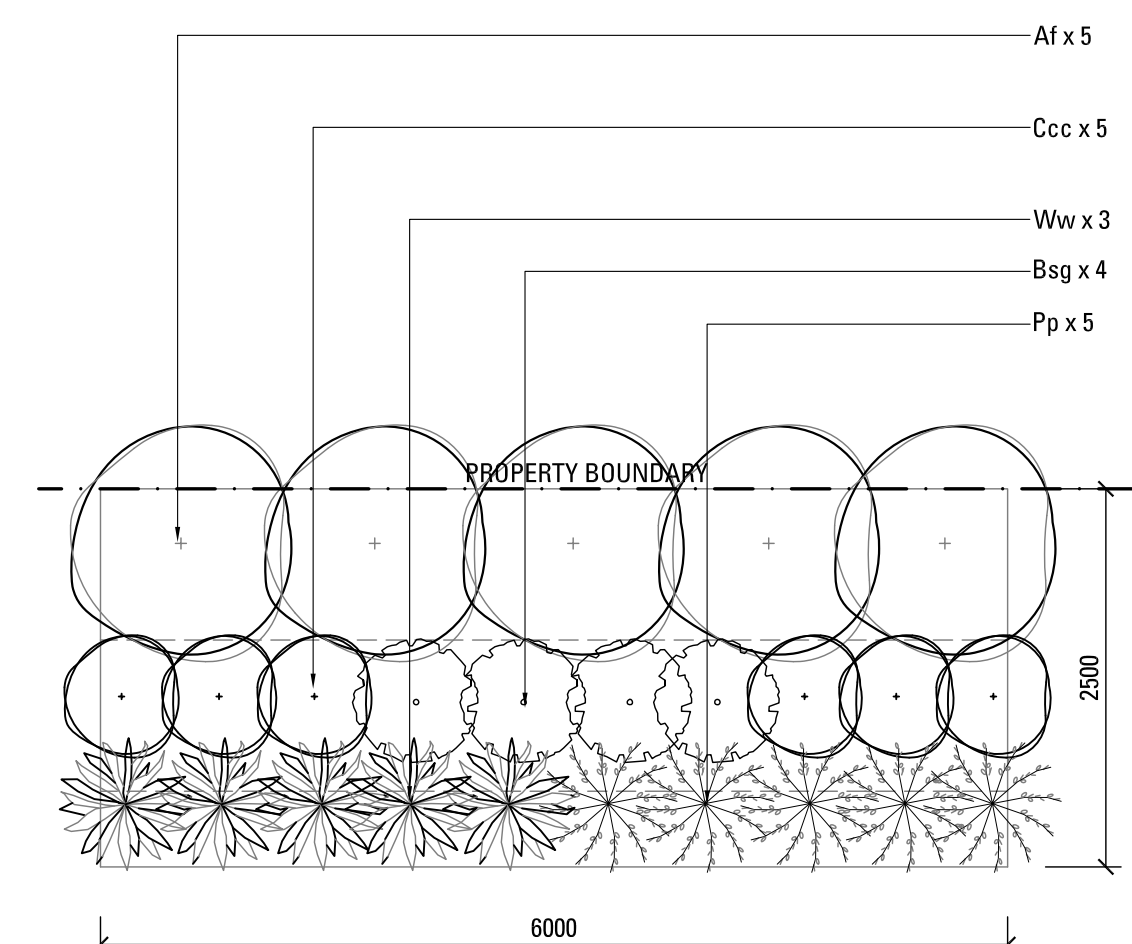

10 BOUNDARY PLANTING C
SCALE 1:50

15-267 - IKEA MFLU Marsden Park PLANT SCHEDULE						
CODE	BOTANIC NAME	COMMON NAME	MATURE SIZE (h x w) (m)	PROPOSED POT SIZE	QUANTITY	LOCAL NATIVE
TREES						
AC	<i>Angophora costata</i>	Smooth-Barked Apple	20 x 10	75L	53	Y
ES	<i>Eucalyptus sclerophylla</i>	Scribbly Gum	10 x 8	75L	47	Y
EP	<i>Eucalyptus punctata</i>	Grey Gum	20 x 10	75L	21	Y
MD	<i>Melaleuca decore</i>	Narrow Leaved Paperbark	15 x 10	75L	21	Y
SHRUBS & ACCENTS						
Af	<i>Acacia falcata</i>	Sickle Wattle	5 x 4	200mm	1209	Y
Abr	<i>Anigozanthus 'Gold Velvet'</i>	Kangaroo Paw	1.5 x 1.5	200mm	13	
Bsg	<i>Banksia spinulosa 'Giant Candles'</i>	Giant Candles Banksia	1.5 x 1	300mm	592	
Ccc	<i>Callistemon 'Captain Cook'</i>	Captain Cook	2 x 1.5	300mm	1209	
Cr	<i>Callistemon 'Red Alert'</i>	Red Alert	2.5 x 1.5	300mm	16	
Co	<i>Cordyline 'Torbay Dazzler'</i>	Cordyline	1.5 x 1.5	200mm	16	
De	<i>Doryanthes excelsa</i>	Gymea Lily	3 x 1.5	200mm	131	
Gj	<i>Grevillea juniperina</i>	Juniper-leaf Grevillea	2 x 1	200mm	610	Y
Pp	<i>Pultenaea parviflora</i>	Sydney Bush Pea	1 x 1	150mm	733	Y
Ww	<i>Westringia 'Wynyabbie Gem'</i>	Wynyabbie Gem	1.5 x 1.5	200mm	97	
GRASSES & RUSHES						
Dr	<i>Danthonia racemosa</i>	Wallaby Grass	1 x 1	150mm	119	Y
Dir	<i>Dianella revoluta 'Little Rev'</i>	Dwarf Flax Lily	0.3 x 0.3	150mm	62	
Eo	<i>Echinopogon ovatus</i>	Hedgehog Grass	0.8 x 0.8	150mm	589	Y
Lmo	<i>Liriope 'Monroe White'</i>	Lilyturf	0.6 x 0.6	200mm	148	
Lmu	<i>Liriope muscari</i>	Lilyturf	0.6 x 0.6	200mm	141	
Ms	<i>Microlasia stipoides var stipoides</i>	Weeping Meadow Grass	1 x 1	200mm	632	Y
Pl	<i>Poa labillardieri 'Eskdale'</i>	Tussock Grass	0.5 x 0.5	150mm	1231	
Ta	<i>Themeda australis</i>	Kangaroo Grass	1 x 1	150mm	480	Y
GROUNDCOVERS & CLIMBERS						
Aau	<i>Ajuga australis</i>	Bugle	0.5 x 0.5	150mm	1793	Y
Dre	<i>Dichondra repens</i>	Kidney Weed	0.3 x 0.5	150mm	398	Y
Hdi	<i>Hibbertia diffusa</i>	Guinea Flower	0.4 x 0.5	200mm	210	Y
Pc	<i>Pratia concolor</i>	Pratia	0.25 x 0.5	150mm	21	Y
Wg	<i>Wahlenbergia gracilis</i>	Australian Bluebell	0.25 x 0.5	150mm	3087	Y
BIO SWALE MATRIX						
Be	<i>Baumea articulata</i>	Jointed Twig Rush	1 x 1	150mm	1530	
Cap	<i>Carex appressa</i>	Swamp Sedge	1 x 1	150mm	1530	
In	<i>Isoplepis nodosa</i>	Knobby Club Rush	1 x 1	150mm	1530	
Ju	<i>Juncus usitatus</i>	Common Rush	1 x 1	150mm	1530	Y
Smu	<i>Schoenoplectus mucronatus</i>	Tall Rush	1 x 1	150mm	1530	

LANDSCAPE SPECIFICATION NOTES

SERVICES
BEFORE LANDSCAPE WORK IS COMMENCED THE LANDSCAPE CONTRACTOR IS TO ESTABLISH THE POSITION OF ALL SERVICE LINES AND ENSURE TREE PLANTING IS CARRIED OUT AT LEAST 3 METRES AWAY FROM THESE SERVICES. SERVICE LIDS, VENTS AND HYDRANTS SHALL BE LEFT EXPOSED AND NOT COVERED BY ANY LANDSCAPE FINISHES (TURFING, PAVING, GARDEN BEDS ETC.) FINISH ADJOINING SURFACES FLUSH WITH PIT LIDS.

ARBORIST MANAGEMENT OF TREE PROTECTION
A QUALIFIED AND APPROVED ARBORIST IS TO BE CONTRACTED TO UNDERTAKE OR MANAGE THE INSTALLATION OF PROTECTIVE FENCING, AND TO UNDERTAKE SUCH MEASURES AS HE DEEMS APPROPRIATE TO PRESERVE THE SUBJECT TREES TO BE RETAINED. THE ARBORIST IS TO BE RETAINED FOR THE ENTIRE CONTRACT PERIOD TO UNDERTAKE ONGOING MANAGEMENT AND REVIEW OF THE TREES.

DRAINAGE CELL AND FILTER FABRIC
FOR ON-SLAB AREAS INSTALL AN APPROVED 'DRAINAGE CELL' PRODUCT TO COMPREHENSIVELY COVER THE BOTTOM OF ALL PLANTERS. OVER DRAINAGE CELL TO ON-SLAB AREAS, A POLYFELT GEOTEXTILE LINING (AS SUPPLIED BY 'POLYFELT TS' OR APPROVED EQUIVALENT) IS TO BE INSTALLED TO COVER THE BOTTOM OF ALL PLANTERS, TURNED UP 300MM AND TAPED TO THE PLANTER SIDES TO ENSURE SOIL MIX DOES NOT ESCAPE INTO DRAINAGE OUTLETS/HOLES. INSTALL MIN. 50MM COARSE RIVER SAND OVER ALL GEOTEXTILE LINING PRIOR TO INSTALLATION OF SOIL MIX.

PLANTING MIXTURE
SHALL BE HOMOGENOUS BLEND OF SOIL AND ADDITIVES IN THE FOLLOWING PROPORTIONS:
EXISTING SITE SOIL IF SUITABLE OR
IMPORTED TOPSOIL 50%
COMPOST 30%
D/W SAND 20%
SOIL TESTING OF EXISTING SITE SOIL IS TO BE UNDERTAKEN TO ASSESS SUITABILITY OF USE AS PLANTING TOPSOIL AND COMPLIANCE WITH AUSTRALIAN STANDARDS.

MULCH APPLICATION
PLACE MULCH TO THE REQUIRED DEPTH, (REFER TO DRAWINGS) CLEAR OF PLANT STEMS, AND RAKE TO AN EVEN SURFACE FINISHING 25MM BELOW ADJOINING LEVELS. ENSURE MULCH IS WATERED IN AND TAMPED DOWN DURING INSTALLATION.

MULCH TYPE
PINE BARK: FROM MATURE TREES, GRADED IN SIZE FROM 15MM TO 30MM, FREE FROM WOOD SLIVERS, DARK BROWN IN COLOUR AND TEXTURE.

COMPOST
SHALL BE WELL ROTTED VEGETATIVE MATERIAL OR ANIMAL MANURE, OR OTHER APPROVED MATERIAL, FREE FROM HARMFUL CHEMICALS, GRASS AND WEED GROWTH AND WITH NEUTRAL PH. PROVIDE A CERTIFICATE OF PROOF OF PH UPON REQUEST.

PLANT MATERIAL
ALL PLANTS SUPPLIED ARE TO CONFORM WITH THOSE SPECIES LISTED IN THE PLANT SCHEDULE ON THE DRAWINGS. GENERALLY PLANTS SHALL BE VIGOROUS, WELL ESTABLISHED, HARDENED OFF, OF GOOD FORM CONSISTENT WITH SPECIES OR VARIETY, NOT SOFT OR FORCED, FREE FROM DISEASE OR INSECT PESTS WITH LARGE HEALTHY ROOT SYSTEMS AND NO EVIDENCE OF HAVING BEEN RESTRICTED OR DAMAGED. TREES SHALL HAVE A LEADING SHOOT. IMMEDIATELY REJECT DRIED OUT, DAMAGED OR UNHEALTHY PLANT MATERIAL BEFORE PLANTING. ALL STOCK IS TO BE CONTAINER GROWN FOR A MINIMUM OF SIX (6) MONTHS PRIOR TO DELIVERY TO SITE

FERTILISER MASS PLANTING AREAS:
FERTILISER SHALL BE 'NUTRICOTE' OR APPROVED EQUIVALENT IN GRANULE FORM INTENDED FOR SLOW RELEASE OF PLANT NUTRIENTS OVER A PERIOD OF APPROXIMATELY NINE MONTHS. THOROUGHLY MIX FERTILISER WITH PLANTING MIXTURE AT THE RECOMMENDED RATE, PRIOR TO INSTALLING PLANTS.

STAKING AND TYING
STAKES SHALL BE STRAIGHT HARDWOOD, FREE FROM KNOTS AND TWISTS, POINTED AT ONE END AND SIZED ACCORDING TO SIZE OF PLANTS TO BE STAKED.
A. 5-15 LITRE SIZE PLANT 1X(1200X25X25MM)
B. 35-75 LITRE SIZE PLANT 2X(1500X38X38MM)
C. 100- GREATER THAN 200LITRE 3X(1800X50X50MM)
TIES SHALL BE 50MM WIDE HESSIAN WEBBING OR APPROVED EQUIVALENT NAILED OR STAPLED TO STAKE. DRIVE STAKES A MINIMUM ONE THIRD OF THEIR LENGTH, AVOIDING DAMAGE TO THE ROOT SYSTEM, ON THE WINDWARD SIDE OF THE PLANT.

IRRIGATION SYSTEM
SUPPLY AN AUTOMATIC WATERING SYSTEM USING 'TORO IRRIGATION SYSTEM' OR SIMILAR APPROVED, WITH MICRO-JET SPRINKLER HEADS AND LOW DENSITY, RUBBER MODIFIED POLYPROPYLENE RETICULATION, TO INCLUDE FILTERS, BENDS JUNCTIONS, ENDS AND OTHER ANCILLARY EQUIPMENT. THE LANDSCAPER SHALL NOMINATE HIS SOURCE OF SUPPLY FOR THE WATERING SYSTEM AND OBTAIN APPROVAL FROM THE SUPERINTENDENT BEFORE PLACING ORDERS FOR EQUIPMENT OR SUPPLY.

A SCHEMATIC PLAN OF THE PROPOSED IRRIGATION SYSTEM IS TO BE PREPARED BY THE CONTRACTOR, SHOWING SOLENOIDS, PIPE DIAMETERS, AND ALL NOZZLE AND TRICKLE ATTACHMENT TYPES (INCLUDING SPRAY/HEAD ANGLE), FOR REVIEW BY THE SUPERINTENDENT PRIOR TO INSTALLATION

THE CONTRACTOR IS TO LIASE WITH THE HYDRAULIC ENGINEER AND COUNCIL AS NECESSARY, TO ENSURE THE THE IRRIGATION SYSTEM CONFORMS WITH ALL THE COUNCIL AND WATER BOARD CODES AND REQUIREMENTS.

PROVIDE AN AUTOMATIC CONTROLLER THAT PROVIDES FOR TWO WEEK SCHEDULING AND HOURLY MULTI-CYCLE OPERATION. THE CONTROLLER SHALL MANUAL OVERRIDE. PROGRAMMING SHALL BE UNDERTAKEN BY THE CONTRACTOR WHO SHALL ADVISE ON THE OPERATION OF THE SYSTEM.

PROVISION OF SECURE HOUSING FOR THE AUTOMATIC IRRIGATION CONTROLLER TO BE LOCATED IN ASSOCIATION WITH THE LANDSCAPE CONTRACTOR AND LOCATION CONFIRMED BY THE SUPERINTENDENT. WIRING TO CONNECT REMOTE SOLENOID LOCATIONS IS TO BE PROVIDED. THE CONTROLLER SHALL BE LOCATED IN A DRY PLACE, PROTECTED FROM THE WEATHER, AND ALL CABLE CONNECTIONS SHALL BE MADE WITH WATERPROOF CONNECTORS.

WATER SUPPLY POINTS TO BE SUPPLIED BY BUILDER.

IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO ENSURE AND GUARANTEE SATISFACTORY OPERATION OF THE IRRIGATION SYSTEM.

AFTER THE SYSTEM HAS BEEN INSTALLED TO THE SATISFACTION OF THE SUPERINTENDENT, THE INSTALLATION SHALL BE TESTED UNDER KNOWN WORKING CONDITIONS. ACCEPTANCE OF THE INSTALLED PLANT AND EQUIPMENT SHALL BE SUBJECT TO THESE BEING SATISFACTORY.

TREATED PINE TIMBER EDGING
TIMBER EDGE: 100 X 25MM CCA TREATED RADIATA PINE TIMBER STAKES: 90 X 50 X 500MM CCA TREATED RADIATA PINE-SHARPENED AT ONE END. INSTALL IN LOCATIONS SHOWN ON THE DRAWINGS FLUSH TO FINISHED SURFACE LEVELS.

LANDSCAPE MAINTENANCE PROGRAM
MAINTENANCE SHALL MEAN THE CARE AND MAINTENANCE OF THE LANDSCAPE WORKS BY ACCEPTED HORTICULTURAL PRACTICE AS RECTIFYING ANY DEFECTS THAT BECOME APPARENT IN THE LANDSCAPE WORKS UNDER NORMAL USE. THIS SHALL INCLUDE, BUT SHALL NOT BE LIMITED TO, WATERING, MOWING, FERTILISING, RESEEDING, RETURNING, WEEDING, PEST AND DISEASE CONTROL, STAKING AND TYING, REPLANTING, CULTIVATION, PRUNING, AERATING, RENOVATING, TOP DRESSING, MAINTAINING THE SITE IN A NEAT AND TIDY CONDITION AS FOLLOWS:-

GENERAL
THE LANDSCAPE CONTRACTOR SHALL MAINTAIN THE LANDSCAPE WORKS FOR THE TERM OF THE MAINTENANCE (OR PLANT ESTABLISHMENT) PERIOD TO THE SATISFACTION OF THE COUNCIL. THE LANDSCAPE CONTRACTOR SHALL ATTEND TO THE SITE ON A WEEKLY BASIS. THE MAINTENANCE PERIOD SHALL COMMENCE AT PRACTICAL COMPLETION AND CONTINUE FOR A PERIOD OF TWENTY SIX (26) WEEKS.

WATERING
GRASS, TREES AND GARDEN AREAS SHALL BE WATERED REGULARLY SO AS TO ENSURE CONTINUOUS HEALTHY GROWTH.

RUBBISH REMOVAL
DURING THE TERM OF THE MAINTENANCE PERIOD THE LANDSCAPE CONTRACTOR SHALL REMOVE RUBBISH THAT MAY OCCUR AND REOCCUR THROUGHOUT THE MAINTENANCE PERIOD. THIS WORK SHALL BE CARRIED OUT REGULARLY SO THAT AT WEEKLY INTERVALS THE AREA MAY BE OBSERVED IN A COMPLETELY CLEAN AND TIDY CONDITION.

REPLACEMENTS
THE LANDSCAPE CONTRACTOR SHALL REPLACE ALL PLANTS THAT ARE MISSING, UNHEALTHY OR DEAD AT THE LANDSCAPE CONTRACTOR'S COST. REPLACEMENTS SHALL BE OF THE SAME SIZE, QUALITY AND SPECIES AS THE PLANT THAT HAS FAILED UNLESS OTHERWISE DIRECTED BY THE LANDSCAPE ARCHITECT. REPLACEMENTS SHALL BE MADE ON A CONTINUING BASIS NOT EXCEEDING TWO (2) WEEKS AFTER THE PLANT HAS DIED OR IS SEEN TO BE MISSING.

STAKES AND TIES
THE LANDSCAPE CONTRACTOR SHALL REPLACE OR ADJUST PLANT STAKES, AND TREE GUARDS AS NECESSARY OR AS DIRECTED BY THE LANDSCAPE ARCHITECT. REMOVE STAKES AND TIES AT THE END OF THE MAINTENANCE PERIOD IF SO DIRECTED.

PRUNING
TREES AND SHRUBS SHALL BE PRUNED AS DIRECTED BY THE LANDSCAPE ARCHITECT. PRUNING WILL BE DIRECTED AT THE MAINTENANCE OF THE DENSE FOLIAGE OR MISCELLANEOUS PRUNING AND BENEFICIAL TO THE CONDITION OF THE PLANTS. ANY DAMAGED GROWTH SHALL BE PRUNED. ALL PRUNED MATERIAL SHALL BE REMOVED FROM THE SITE.

MULCHED SURFACES
ALL MULCHED SURFACES SHALL BE MAINTAINED IN A CLEAN AND TIDY CONDITION AND BE REINSTATED IF NECESSARY TO ENSURE THAT A DEPTH OF 75MM IS MAINTAINED. ENSURE MULCH IS KEPT CLEAR OF PLANT STEMS AT ALL TIMES.

PEST AND DISEASED CONTROL
THE LANDSCAPE CONTRACTOR SHALL SPRAY AGAINST INSECT AND FUNGUS INFESTATION WITH ALL SPRAYING TO BE CARRIED OUT IN ACCORDANCE WITH THE MANUFACTURER'S DIRECTIONS. REPORT ALL INSTANCES OF PESTS AND DISEASES (IMMEDIATELY THAT THEY ARE DETECTED) TO THE LANDSCAPE ARCHITECT.

WEED ERADICATION
ERADICATE WEEDS BY ENVIRONMENTALLY ACCEPTABLE METHODS USING A NON-RESIDUAL GLYPHOSATE HERBICIDE (EG. 'ROUNDUP') IN ANY OF ITS REGISTERED FORMULAE, AT THE RECOMMENDED MAXIMUM RATE. REGULARLY REMOVE BY HAND. WEED GROWTH THAT MAY OCCUR OR RECUR THROUGHOUT GRASSSED, PLANTED AND MULCHED AREAS. REMOVE WEED GROWTH FROM AN AREA 750MM DIAMETER AROUND THE BASE OF TREES IN GRASSSED AREAS. CONTINUE ERADICATION THROUGHOUT THE COURSE OF THE WORKS AND DURING THE MAINTENANCE PERIOD.

SOIL SUBSIDENCE
ANY SOIL SUBSIDENCE OR EROSION WHICH MAY OCCUR AFTER THE SOIL FILLING AND PREPARATION OPERATIONS SHALL BE MADE GOOD BY THE LANDSCAPE CONTRACTOR AT NO COST TO THE CLIENT.