



# DHL Warehouse 1 & 2

Part Lot 1 DP1306448, 1953-2109

Elizabeth Drive, Badgerys Creek

Civil Infrastructure Report

SSD-70817958

DHL Supply Chain (Australia) Pty Ltd

23/10/2024

22-993

## Commercial in Confidence

All intellectual property rights, including copyright, in designs developed and documents created by AT&L remain the property of this company. Any use made of such design or document without the prior written approval of AT&L will constitute an infringement of the rights of the company which reserves all legal rights and remedies in respect of any such infringement.

The information, including any intellectual property, contained in this proposal is confidential and proprietary to the Company. It may only be used by the person to whom it is provided for the stated purpose for which it is provided and must not be imparted to any third person without the prior written approval of the Company. The Company reserves all legal rights and remedies in relation to any infringement of its rights in respect of its confidential information.

This report has been prepared in accordance with the terms and conditions of appointment. AT&L cannot accept any responsibility for any use of or reliance on the contents of this report by any third party.

This report may be based upon information supplied by other consultants and contractors. To the extent that the report incorporates such material, AT&L takes no responsibility for any loss or damage caused by any error or omission arising from reliance on it.

## Document Registration

Document Title	DHL Warehouse 1 & 2 – Civil Infrastructure Report
Document File Name	R02-03-22-993-DHL SSDA2.docx
Section	Civil Engineering
Document Author	Carlo Bartolome

Issue	Description	Date	Author	Checked	Approved
01	Preliminary Issue - Draft	14/10/2022	Carlo Bartolome	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
02	Issue for SSD Submission	20/10/2022	Carlo Bartolome	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
03	Issue for SSD Submission	26/05/2023	Carlo Bartolome / Darren Galia	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
04	Issue for SSD Submission	23/10/2024	Carlo Bartolome / Chris Khant	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
				<input type="checkbox"/>	<input type="checkbox"/>

# Contents

1.	Introduction.....	1
1.1.	Background.....	1
1.2.	Site Description.....	2
1.3.	Planning Approvals Strategy.....	4
1.4.	Project Description.....	4
1.5.	Relationship Between SSD-70316465 and SSD-70817958 .....	5
2.	Compliance with SEARs .....	5
2.1.	SEARs.....	5
3.	Statutory and Development Control Requirements.....	7
3.1.	Statutory Planning Controls.....	7
3.1.1.	Western Sydney Aerotropolis Development Control Plan Phase 2, 2022 .....	7
3.1.2.	Aerotropolis Precinct Plan, 2023 .....	7
3.1.3.	Recognise Country: Guidelines for Development in the Aerotropolis, 2022 .....	7
4.	Site Characteristics .....	7
4.1.	Site Geology.....	7
4.1.1.	Groundwater .....	8
4.1.2.	Salinity and Acid Sulfate Soils .....	8
4.2.	Existing Topography and Catchments .....	8
4.2.1.	Topography .....	8
4.2.2.	Existing Stormwater Drainage Catchments.....	9
4.2.3.	External Stormwater Drainage Catchments .....	9
4.2.4.	Post-Development Stormwater Drainage Catchments .....	9
5.	Bulk Earthworks .....	9
5.1.	Cut and Fill Requirements .....	9
5.2.	Retaining Walls .....	10
5.3.	Batter Design .....	10
6.	Ground and Water Management.....	10
7.	Stormwater Drainage .....	11
7.1.	Stormwater Drainage Design Criteria.....	11
7.2.	Proposed Site Stormwater Drainage.....	11
8.	Stormwater Management Strategy.....	12
8.1.	Stormwater Management Strategy Objectives.....	12
8.2.	Proposed Stormwater Management Measures.....	12
8.2.1.	Regional Wetlands and Bio-retention Basins for Stormwater Treatment.....	13
8.2.2.	Regional Stormwater Harvesting and Reuse Basin .....	13
8.2.3.	Gross Pollutant Traps.....	13
8.2.4.	Stormwater Detention .....	14
8.2.5.	Additional measures to Satisfy the MARV Reduction Requirement .....	14

9. Utility Services.....	15
9.1. Utilities in the vicinity of the site .....	15
9.2. Potable Water .....	15
9.3. Wastewater .....	15
9.4. Recycled Water .....	15
9.5. Electrical .....	15
9.6. Gas .....	16
9.7. Telecommunications.....	16
10. Infrastructure Staging.....	16
APPENDIX A – Civil Engineering Drawings.....	1

## Appendices

### APPENDIX A – Civil Engineering Drawings

## Figures

Figure 1- Location Context Area Plan.....	2
Figure 2 - Site Location Plan .....	3
Figure 3 - DHL Masterplan Site .....	3
Figure 4: Warehouse 03 and 04.....	4
Figure 5: Salinity Mapping.....	8
Figure 6: Wetland and Stormwater Storage Basin Location.....	13

## Tables

Table 1: Planning Secretary's Environmental Assessment Requirements.....	5
Table 2: Summary of Proposed Cut and Fill Volumes Across the Site.....	9
Table 3: Stormwater Management Strategy Objectives .....	12
Table 4: Additional Stormwater Management Measures to Satisfy WSA DCP targets .....	14

# 1. Introduction

---

This report supports a State Significant Development Application (SSDA) (SSD-70817958) submitted to the NSW Department of Planning, Housing and Industry (DPHI) on behalf of DHL Supply Chain (Australia) Pty Ltd (DHL).

The SSDA constitutes a detailed development application (DA) insofar that it is linked to and is consistent with concept plan (SSD-70316465) by seeking consent for the construction and operation of two singular storey industrial buildings for use as a warehouse and logistics facility with 24 hour/ seven day a week operation plus car parking and associated landscaping within part (25 hectares) of Lot 1 in Deposited Plan 1306448 at 1953-2109 Elizabeth Drive, Badgerys Creek known as the DHL Masterplan site.

This SSDA represents the second of two (2) SSDAs proposed by DHL and will apply to the northern half of the DHL Masterplan site, known as “the site” (the Site) refer to Figure 3. Stage 1 relates to the southern half of the DHL Masterplan site, known as the DHL Stage 1 site and is subject to separate SSDA (SSD-70817958).

The project vision is to develop a world class warehouse and logistics facility which is fully integrated with its green infrastructure and Connection to Country. Having been informed by key landscape and Connecting to Country themes, the development of the site can deliver on the objectives that contribute to the Aerotropolis Vision which is to:

- Achieve a landscape led approach and starting with Country- the project has been guided by Cultural Design Principals and local leaders in the Aboriginal community.
- Create a new global gateway which will be a regionally and nationally significant employment area by providing for warehouse and logistics land uses in a highly sought-after location adjacent to the new Western Sydney Airport.
- Design a cool, green new city with a landscape approach that increases urban tree canopy, provides useable open space areas throughout and restores key riparian corridors on the site.
- Transitioning to an Aerotropolis through a sustainable, orderly and transformational development in the Western Sydney Aerotropolis,
- Retaining a green, biodiverse landscape informed by Country and an indigenous lens on maintenance and land management.

## 1.1. Background

The DHL Masterplan site occupies approximately 25-hectares (ha) of the larger 171.84ha site at 1953-2109 Elizabeth Drive, Badgerys Creek. The wider site is currently the subject of an existing SSDA (SSD-70316465).

SSD-70316465: 1953-2109 Elizabeth Drive ‘Burrah Park’

SSD-70316465 is an SSDA which was issued SEARs on the 22 May 2024 and is currently in the process of finalising the application for lodgement following Test of Adequacy with the DPHI in September 2024.

SSD- 70316465 is seeking development consent for a concept plan including future development lots and building footprints. The development also seeks consent for the Stage 1 works which will include bulk earthworks across the site, infrastructure delivery, road access/intersections, internal road construction, civil infrastructure and utilities, stormwater infrastructure works and the construction of three (3) warehouse buildings.

The applicant for SSD-70316465 is the trustee for Burrah Park Prop Trust 1 which is a joint venture entity, with ISPT Core Fund and UniSuper each holding an equal share.

DHL intend to develop part of the site for a logistics facility, the subject of this SSDA. The DHL Masterplan Site is known as Super lot 4a and 4b within the wider concept plan. Super lot 5B to the north of the DHL Logistics Facility SSDA lots have been sold to Canberra Data Centres (CDC) refer to Figure 3.

## 1.2. Site Description

The subject site is located within part of Lot 1 in Deposited Plan 1306448, at 1953-2109 Elizabeth Drive, Badgerys Creek. The site is approximately 25 hectares in size and situated north of the new Western Sydney Airport. It is located within the Penrith local government area (LGA) and is approximately 12.5km from Penrith Central Business District (CBD), 27km from Parramatta CBD, and 47km from Sydney CBD. The site is owned by a trustee for Burrah Park Prop Trust 1 which is a joint venture entity, with ISPT Core Fund and UniSuper each holding an equal share.

The site is currently used for agricultural purposes and is largely cleared of vegetation with areas of dispersed grass and scattered natural and/or planted tree growth. The site contains several farm dams, primarily within the central and southern areas. The location context and aerial plans are depicted in Figure 1 and Figure 2.

A map showing the site location is shown in Figure 1.

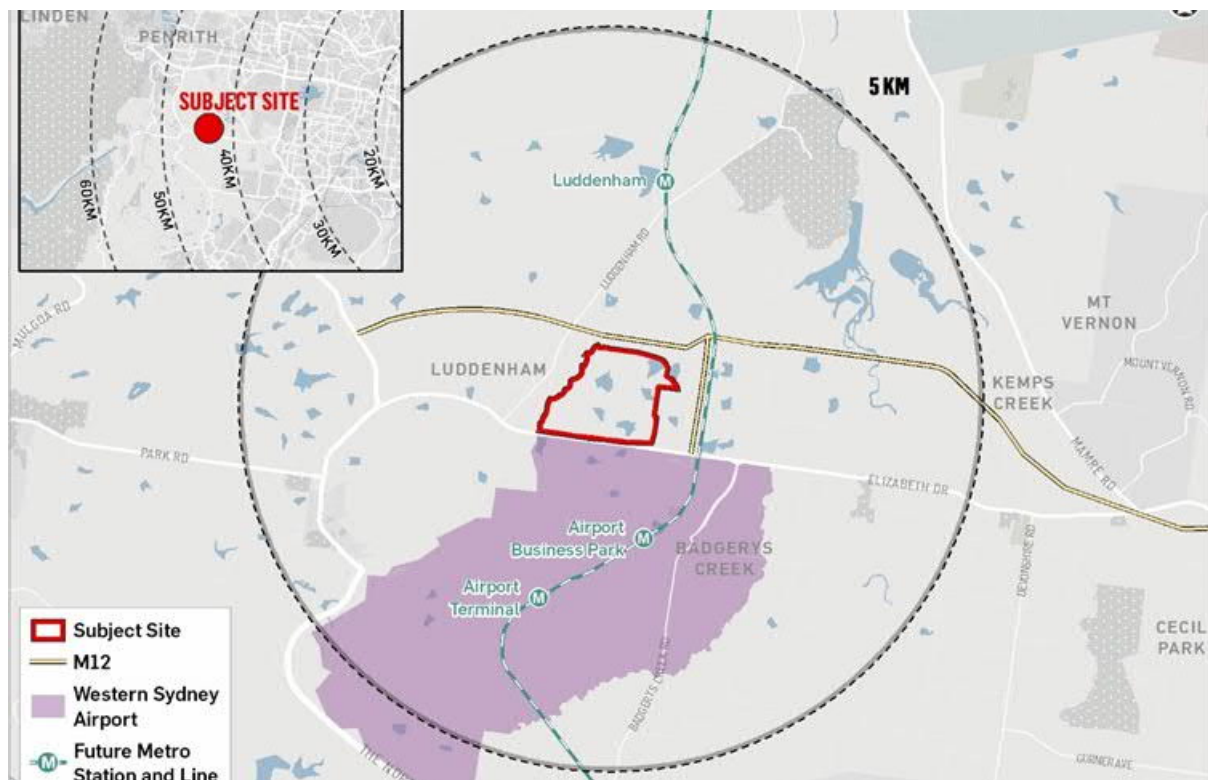


Figure 1- Location Context Area Plan



Figure 2 - Site Location Plan



Figure 3 - DHL Masterplan Site

### 1.3. Planning Approvals Strategy

Development consent is sought under Section 4.12(8) and Division 4.4. of the *Environmental Planning and Assessment Act 1979* (EP&A Act) and Division 5 of the *Environmental Planning and Assessment Regulation 2021* (EP&A Regulation) for the construction and operation of a warehouse and logistics facility (the Project) under Schedule 1 of *State Environmental Planning Policy (Planning Systems) 2021* (Planning Systems SEPP).

### 1.4. Project Description

Specifically, the SSDA seeks consent for:

Staged construction of warehouse buildings for use as a logistics centre with 24 hour/ day, seven days a week operation, comprising the following:

- Construction of two warehouses;
- Building fit out;
- Construction of hardstand, loading and carparking;
- Landscaping works; and
- Signage.

The two warehouses, designated as Warehouse 1 (WH01) and Warehouse 2 (WH02), are located in proposed lots 4.3 and 4.4 respectively within Superlot 4b in the new "Burrah Park" precinct proposed in SSD-70316465. The Site is bound by the proposed Estate Road 4 along the southern boundary, proposed Estate Road 1a along the western boundary, the future CDC site (super lot 5b) on the northern boundary and the vacant land owned by the University of Sydney along the eastern boundary.

Each warehouse has been designed as a completely separable facility with separate entry and exit driveways, stormwater drainage systems, car parks, and other amenities.

A plan of the proposed development is presented in Figure 4.

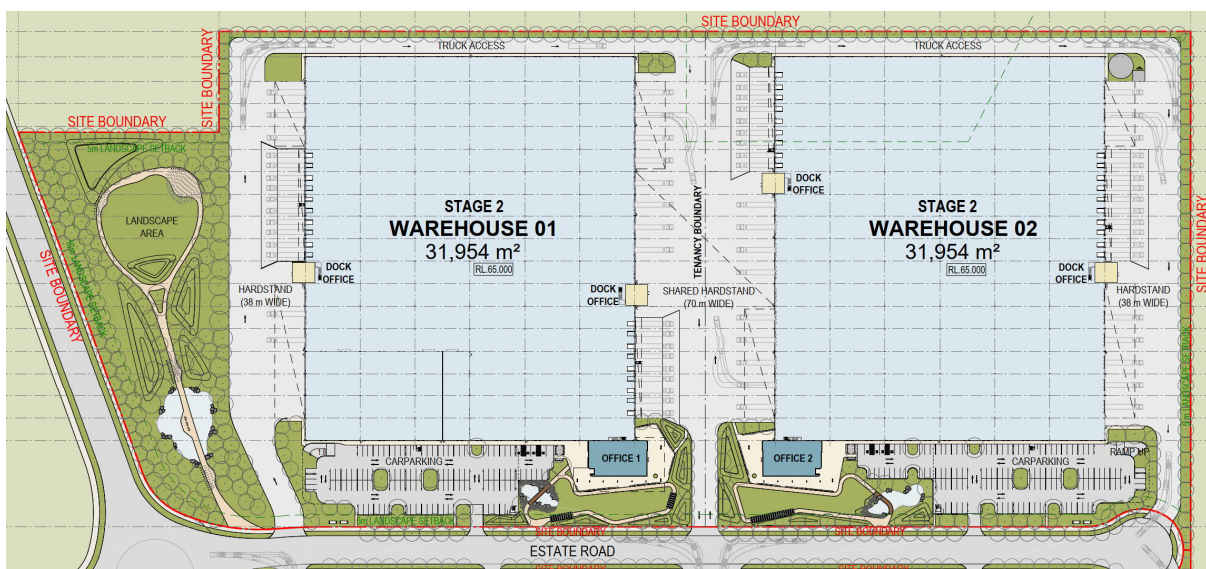


Figure 4: Warehouse 01 and 02

## 1.5. Relationship Between SSD-70316465 and SSD-70817958

The proposed Burrah Park estate development (SSD-70316465) will provide earthworks, road access, lead-in services, stormwater drainage, WSUD systems and other infrastructure, for the DHL detailed application (SSD-70817958). The proposed Estate Road 4 between DHL's WH01 & WH02 and WH03 & WH04 sites will connect DHL's sites with the rest of the Burrah Park estate. The primary access to the DHL site will be through Estate Road 1 which intersects with Elizabeth Drive at its southern end, allowing for all movements in and out of the estate. There is no expectation that the DHL SSDA will be approved in advance of the Burrah Park estate SSDA.

## 2. Compliance with SEARs

### 2.1. SEARs

This report responds to the NSW Planning Secretary's Environmental Assessment Requirements (SEARs) issued by the NSW Department of Planning, Housing and Infrastructure (DPHI) on 22 May 2024. Table 1 below summarises key issues relating to soil and water management that are listed in the SEARs, and where they are addressed in this report.

*Table 1: Planning Secretary's Environmental Assessment Requirements*

Key Issues Listed in the SEARs	Response
Ground and Water Conditions	
Assess potential impacts on soil resources and related infrastructure and riparian lands on and near the site, including erosion, salinity and acid sulfate soils	Refer to Section 6.
Provide a Surface and Groundwater Impact Assessment that assesses potential impacts on: <ul style="list-style-type: none"><li>• Surface water resources (quality and quantity) including related infrastructure, hydrology, dependent ecosystems, drainage lines, downstream assets and watercourses.</li><li>• Groundwater resources in accordance with the Groundwater Guidelines.</li></ul>	Refer to Section 4.1.1 and 6.
Water Management	

Key Issues Listed in the SEARs	Response
<p>Provide an Integrated Water Management Plan for the development that:</p> <ul style="list-style-type: none"> <li>• is prepared in consultation with the local council and any other relevant drainage or water authority.</li> <li>• Outlines the water-related servicing infrastructure required by the development (informed by the anticipated annual and ultimate increase in servicing demand) and evaluates opportunities to reduce water demand (such as recycled water provision).</li> <li>• details the proposed drainage design (stormwater and wastewater) for the site including any on-site detention facilities, water quality management measures and nominated discharge points, on-site sewage management, and measures to treat, reuse or dispose of water.</li> <li>• demonstrates compliance with the local council or other drainage or water authority requirements and avoids adverse impacts.</li> </ul>	<p>Refer to Sections 8.</p>
<p>Where water and drainage infrastructure works are required that would be handed over to the local council, or other drainage or water authority, provide full hydraulic details and detailed plans and specification of proposed works that have been prepared in consultation with, and comply with the relevant standards of, the local council or other drainage or water authority.</p>	<p>The development does not propose to hand over any drainage infrastructure works to the local council or other drainage or water authority.</p>
<p><b>Flood Risk</b></p>	
<p>Identify any flood risk on-site having regard to adopted flood studies, the potential effects of climate change, and any relevant provisions of the <i>NSW Flood Risk Management Manual</i>.</p>	<p>Flood risk and impacts by the development have been assessed as part of the estate developer's Flood Impacts and Risk Assessment report. Refer to the relevant report submitted under SSD-70316465.</p>
<p>Where the development could alter flood behaviour, affect flood risk to the existing community or expose its users to flood risk, provide a flood impact and risk assessment (FIRA) prepared in accordance with the Flood Impact and Risk Assessment – Flood Risk Management Guide LU01.</p>	<p>Flood risk and impacts by the development have been assessed as part of the estate developer's Flood Impacts and Risk Assessment report. Refer to the relevant report submitted under SSD-70316465.</p>
<p>Detail design solutions and operational procedures to mitigate flood risk where required.</p>	<p>Refer to Section 8.1.</p>
<p><b>Infrastructure Requirements and Utilities</b></p>	

Key Issues Listed in the SEARs	Response
<p>In consultation with relevant service providers:</p> <ul style="list-style-type: none"> <li>• assess the impacts of the development on existing utility infrastructure and service provider assets surrounding the site.</li> <li>• identify any infrastructure upgrades required on-site and off-site to facilitate the development and any arrangements to ensure that the upgrades will be implemented on time and be maintained.</li> <li>• provide an infrastructure delivery and staging plan, including a description of how infrastructure requirements would be co-ordinated, funded and delivered to facilitate the development.</li> </ul>	<p>Refer to Section 0 and 10.</p>

### 3. Statutory and Development Control Requirements

---

#### 3.1. Statutory Planning Controls

The proposed development site is subject to the controls outlined within the following planning instruments:

##### 3.1.1. Western Sydney Aerotropolis Development Control Plan Phase 2, 2022

The final version of the *Western Sydney Aerotropolis Development Control Plan Phase 2 (WSA DCP)* was adopted in November 2022. It presents the latest precinct planning principles, objectives, and performance outcomes expected across the various precincts around the Aerotropolis to allow precinct planning and individual lot developments to progress.

##### 3.1.2. Aerotropolis Precinct Plan, 2023

The current version (May 2023) of the Western Sydney Aerotropolis Precinct Plan (Precinct Plan) has been adopted and is in force under the provisions of the Aerotropolis SEPP. The Precinct Plan provides the place-based objectives and requirements to guide developments in the Aerotropolis in a consistent and sustainable manner over time.

##### 3.1.3. Recognise Country: Guidelines for Development in the Aerotropolis, 2022

These guidelines are intended to assist in developing designs that recognise and respect the cultural and heritage values for lands in the Aerotropolis.

### 4. Site Characteristics

---

#### 4.1. Site Geology

A desktop study and geotechnical investigation of the Site was prepared by Douglas Partners. This study identified that the site is underlain by the Bringelly Shale formation. This typically comprising of shale, carbonaceous claystone, laminite, fine to medium grained lithic sandstone and some coal bands and tuff.

#### 4.1.1. Groundwater

According to the 'Detailed Site Investigation for Contamination' report and the 'Report on Salinity Investigation and Preliminary Salinity Management Plan' (June 2021) prepared by Douglas Partners for the Burrah Park estate development, groundwater within the area is expected to be saline and shallow, ranging from 0.7 to 4.3 meters below ground level. Groundwater flows are likely to be very low (typically <1 L/s) owing to the very low permeability of the underlying shale layers. No free groundwater was observed during Douglas Partners' site investigations. However, as noted in Douglas Partners' report, groundwater levels are affected by climatic conditions and soil permeability and will therefore vary over time.

As discussed in Section 5, the estate developer is expected carry out bulk earthworks for the Site and provide level pads suitable for large-scale industrial warehouse development. Further site trimming and detailed excavations shall be carried out by DHL's appointed contractor to prepare the site for construction. It is understood that the estate developer will address groundwater impacts as part of the estate-wide earthworks prior to the Site being turned over to DHL.

#### 4.1.2. Salinity and Acid Sulfate Soils

According to the 'Report on Salinity Investigation and Preliminary Salinity Management Plan' (June 2021) prepared by Douglas Partners for the Burrah Park estate development, the site does not identify "to be within an area or close to an area of an identified risk for acid sulphate soils".

The same report advises that "the site has a moderate to high salinity potential", including the DHL site, as indicated by the green, yellow, red and white coloured areas in *Figure 5*. Further investigations and detailed recommendations on salinity controls will be necessary as part of the soil management strategies for the site to mitigate the levels of salinity, aggressivity and sodicity. These will need to be carried out prior to construction to inform the detailed designs for the development.

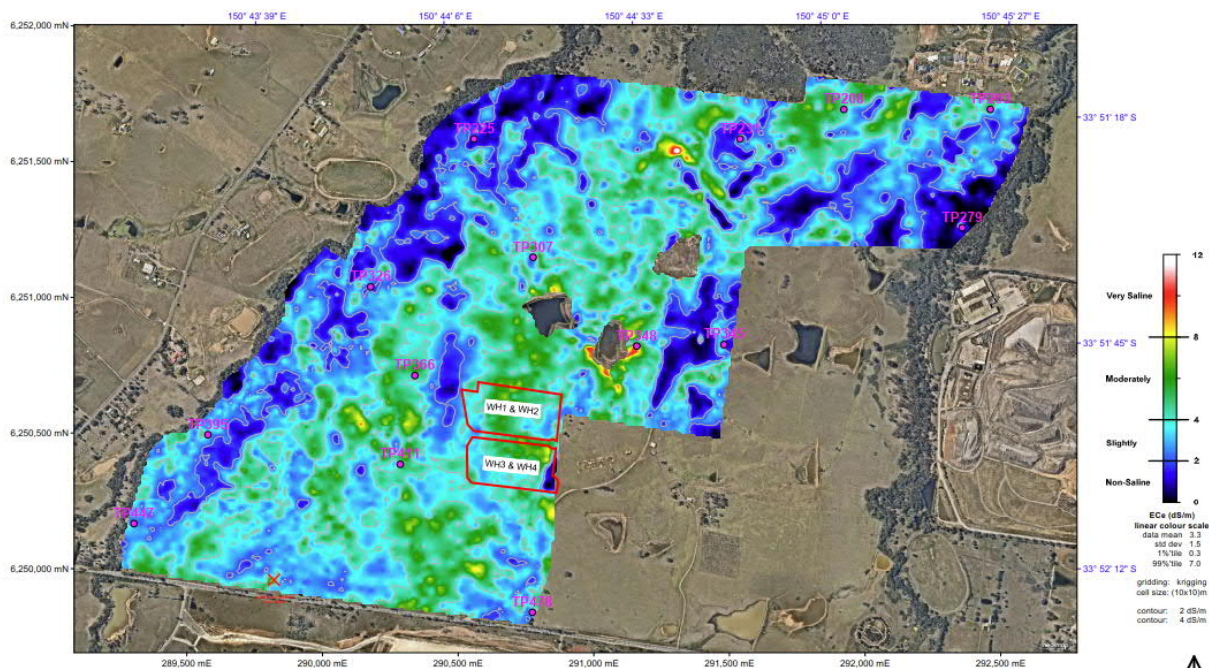


Figure 5: Salinity Mapping

## 4.2. Existing Topography and Catchments

### 4.2.1. Topography

The Site in its existing condition generally grades from east to west towards Oaky Creek and Cosgroves Creek. The site generally has slopes between 2% and 6%, with steeper sections around local gullies.

#### 4.2.2. Existing Stormwater Drainage Catchments

The Site is predominantly pervious, other than some heavily compacted access tracks. A slight ridge crosses the Site diagonally from the south-eastern corner and heading west, splitting the site into two catchments, north and south. The southern catchment drains into a gully and an existing dam to the south of WH04 whilst the northern catchment drains into a gully and an existing dam approximately 100m northwest of the site. However, both dams drain into the same waterway that discharges into Cosgroves Creek.

#### 4.2.3. External Stormwater Drainage Catchments

A portion of the adjacent property to the east drains towards the eastern boundary of WH02. This catchment is approximately 3.36 ha will be diverted by the estate developer northwards along the eastern boundary and ultimately drain into the existing dam north of the Site.

#### 4.2.4. Post-Development Stormwater Drainage Catchments

On completion, Lot 4.3 (WH01) including the main warehouses, truck hardstands, office building, car park building, and the open landscaped area along the western side will drain into the piped drainage system under Estate Road 1a. Lot 4.4 (WH02) will drain into the piped drainage system under Estate Road 4.

## 5. Bulk Earthworks

### 5.1. Cut and Fill Requirements

Bulk earthworks by the estate developer are expected to form level pads for Lots 4.3 and 4.4 suitable for large-scale industrial warehouse development. Further bulk earthworks, site trimming and detailed excavations shall be carried out by DHL's appointed contractor to prepare the site for construction.

The cut and fill requirements have been determined through multiple design iterations and careful consideration of the following:

- Provision for connectivity to the surrounding estate roads, particularly Estate Road 4 which is the main street frontage and driveway connections for the Site.
- Connectivity to and interfaces with adjoining lands, in particular the Sydney University land to the east.
- Minimising the extent of retaining walls fronting proposed estate roads as much as possible.
- Avoiding extensive cut in bedrock sub-surface units.
- Achieving as close as possible to a balance of cut to fill to minimise the volume of material that needs to be imported or exported.
- Provision of a final design solution that addresses water management requirements, including stormwater quantity and quality management, stormwater drainage (major and minor system), flooding and discharges.

Based on the above criteria, the following bulk earthworks pad levels have been determined to be optimal for Lots 4.3 and 4.4.

- Lot 4.3 (WH01) = RL64.40m
- Lot 4.4 (WH02) = RL64.40m

Refer to drawings C2008 in Appendix A for the proposed Cut and Fill Plan. A summary of the estimated cut and fill volumes across the site is presented in *Table 2*.

*Table 2: Summary of Proposed Cut and Fill Volumes Across the Site*

Item	Warehouse 1 & 2 (m <sup>3</sup> )
Stripping of topsoil <sup>1</sup>	0
Excavation of existing farm dams <sup>2</sup>	0

Net cut (excluding topsoil stripping)	-85,900
Net fill	20,230
Balance	-65,670 (Export)

<sup>1</sup> It is assumed that the development will proceed immediately upon formation of the earthworks pads by the estate vendor. Hence, topsoil stripping will not be necessary.

<sup>2</sup> It is assumed that desilting and filling of existing dams within the site will be carried out by the estate vendor.

It is noted that earthworks for both lots are currently generating excess material (export). This volume is subject to change and expected to reduce to near balanced pending further development and optimisation of the estate earthworks and the final pad level provided by the estate developer at the time of handover.

The volume of earthworks to be carried out including the amount of material to be exported or imported for the site is subject to change depending on the estate earthworks pad level provided at the time of handover.

The volumes presented in *Table 2* are based on the current design at the time of SSDA submission. Further detailed design of the infrastructure and on-lot works may alter these volumes. Negative balance indicates net cut and positive balance indicates net fill.

All imported materials will comply with the requirements of the Import Fill Protocol and geotechnical specifications for the development. Topsoil stripping, blending and placement will be undertaken by the estate developer in accordance with the geotechnical engineering specification for the project.

## 5.2. Retaining Walls

Where possible, batter slopes up to 1:4 will be provided to accommodate level changes. Where the provision of batters would exceed slopes of 1:4, retaining walls will be constructed adjacent to the road reserve or boundaries based on the approved civil and earthworks design.

The proposed location and extent of retaining walls are shown on the drawings. The type of wall systems to be used are subject to detailed design in coordination with the architect and landscape architect. These walls will be structurally designed and built to the manufacturers' specifications to suit the required heights and loading. All retaining walls >900mm high will have pedestrian barriers and vehicular safety barriers for walls >600mm high (where necessary) in accordance with the Australian Standards and Austroads Guidelines.

All retaining walls will be constructed on a staged basis and as required to suit the development levels, earthworks and stormwater works.

## 5.3. Batter Design

All batters will be vegetated and stabilised in accordance with Penrith City Council requirements. A typical 1 in 4 batter has been applied to the development, with the maximum localised batter being 1 in 3.

Any temporary batters constructed during the works will be in accordance with recommended maximum batter slopes as per the geotechnical investigation report and ongoing advice from the Level 1 geotechnical engineer. All temporary batters will be stabilised with appropriate methods and vegetated where necessary.

## 6. Ground and Water Management

Potential impacts of the development on soil and water resources, and measures proposed to reduce and how to mitigate these impacts during and after construction are discussed in detail in a separate report prepared by AT&L: "DHL Warehouse 1 & 2, Erosion & Sediment Control Plan, SSD-70817958".

## 7. Stormwater Drainage

---

### 7.1. Stormwater Drainage Design Criteria

Design criteria and requirements for the proposed Site stormwater management are referenced from the following documents:

- *AS 3500.3 – Plumbing and drainage – Stormwater drainage*
- Commonwealth of Australia (Geoscience Australia), *Australian Rainfall and Runoff: A guide to flood estimation*, 2019.
- NSW Department of Planning and Environment (DPE), *Western Sydney Aerotropolis Development Control Plan Phase 2, 2022*.
- *Technical Guidance for Achieving Wianamatta-South Creek Stormwater Management Targets, 2022*
- MUSIC Modelling Toolkit – Wianamatta, 2022.
- Wianamatta-South Creek Stormwater Management Targets, 2022
- Sydney Water, Stormwater Scheme Infrastructure Design Guideline (Draft), 2024

The following documents from Penrith City Council have also been used for reference:

- Penrith City Council, *Design Guidelines for Engineering Works for Subdivisions and Developments*, as amended 20 November 2013.
- Penrith City Council, *Penrith Development Control Plan 2014, Part C3 Water Management*.
- Penrith City Council, *Water Sensitive Urban Design (WSUD) Policy*, December 2013.
- Penrith City Council, *WSUD Technical Guidelines*, Version 4 – October 2020.

### 7.2. Proposed Site Stormwater Drainage

The proposed drainage network within the Site has been designed to safely convey major and minor flows prior to discharging into the external road drainage system which then drains into the estate detention basins to the west of the site and eventually draining into a tributary of Cosgroves Creek. The following criteria have been adopted for the proposed drainage system:

- Major system (pit and pipe network, overland flow paths and channels): 1% AEP
- Minor system (pit and pipe network): minimum 5% AEP and 1% AEP for trapped catchments.

The Time of Concentration for the Site shall be estimated in accordance with the AR&R. All sub-catchments within shall have a minimum time of concentration of five (5) minutes. The rainfall intensities used have been adopted from the Bureau of Meteorology's Design Rainfall Data System (2016).

Stormwater runoff from roofs will be drained directly into DHL's stormwater network. Runoff from pedestrian and vehicle trafficable areas such courtyards, footpaths, access roads and hardstand areas will be drained directly into the Site's piped drainage system before discharging into the external road drainage system. Excess roof runoff will also overflow into the Site's piped drainage system.

All stormwater pipes within the building will be rubber ring jointed uPVC with manufactured bends and fittings. All stormwater pipes in-ground and external to the building will be rubber ring jointed steel reinforced concrete pipes (375mm diameter and larger) and uPVC pipes (300mm diameter and smaller).

Stormwater drainage from the roof and through the building including all connections into the rainwater tanks will be designed by the building hydraulic engineer. Detailed design drawings of the building hydraulics will be made available during submission of documents for Construction Certificate approval.

Stormwater drainage concept plans showing the existing and proposed site stormwater drainage systems are enclosed in Appendix A.

## 8. Stormwater Management Strategy

This section summarises the proposed stormwater quantity and quality management strategy for the Site, including details of the proposed stormwater treatment train and characterisation of water quality at the points of discharge at the Site boundary against relevant water quality criteria.

### 8.1. Stormwater Management Strategy Objectives

The main objectives pertaining to the management of stormwater within the proposed development Site are summarised in *Table 3*.

*Table 3: Stormwater Management Strategy Objectives*

Focus	Objective	Comment
Stormwater quantity management	<ul style="list-style-type: none"> <li>To ensure post-development peak flow rates do not exceed the pre-development peak flow rates for a range of design storm frequencies and durations, up to and including the 1% AEP design event.</li> <li>To limit the Mean Annual Runoff Volume (MARV) at the points of discharge to Cosgrove Creek to no more than 2 ML/ha/year</li> </ul>	<p>This objective is consistent with the Penrith DCP and the WSA DCP.</p> <p>This objective is consistent with the WSA DCP and the Wianamatta-South Creek Technical Guidance.</p>
Stormwater quality management	<ul style="list-style-type: none"> <li>To provide a stormwater treatment train to satisfy pollutant reduction targets outlined in the <i>Technical Guidance for Achieving Wianamatta-South Creek Stormwater Management Targets</i> (NSW DPE, September 2022)</li> </ul>	<p>These targets are significantly higher than those adopted in Penrith City Council's <i>WSUD Technical Guidelines</i>.</p>
Stormwater drainage and flooding	<ul style="list-style-type: none"> <li>To provide a stormwater drainage system that complies with Penrith City Council design guidelines and specifications.</li> <li>Finished Floor Levels (FFL) of proposed buildings within the precinct shall have a minimum 500mm freeboard to 1% AEP overland flows.</li> </ul>	<p>This objective is consistent with the WSA DCP and the Wianamatta-South Creek Technical Guidance.</p> <p>This objective is consistent with the Penrith DCP and the WSA DCP controls for flood planning.</p>

### 8.2. Proposed Stormwater Management Measures


An estate-based design approach has been adopted in the design of stormwater quantity and quality management measures whereby the various components are designed to complement and compensate between the individual lots and the overall estate to achieve the objectives listed in Section 8.1.

A general description of the proposed stormwater treatment train components is presented in the following sections with additional information and details provided in the Civil Engineering Report for SSD-70316465: 1953-2109 Elizabeth Drive 'Burrah Park'.

### 8.2.1. Regional Wetlands and Bio-retention Basins for Stormwater Treatment

Wetlands and bio-retention systems assist in improving urban stormwater quality to help make it fit for non-potable reuse with the additional function of enhancing evaporative losses.

Wetlands and bio-retention basins are proposed by the estate developer as part of the regional stormwater infrastructure to satisfy the Wianamatta-South Creek stormwater management targets for the entire estate. The estate developer has designed Lots 4.3 (WH01) and 4.4 (WH02) to drain into the proposed wetlands and bio-retention basin system (Basin B) located west of the Site, on the western side of Estate Road 1a as shown in *Figure 6* below.

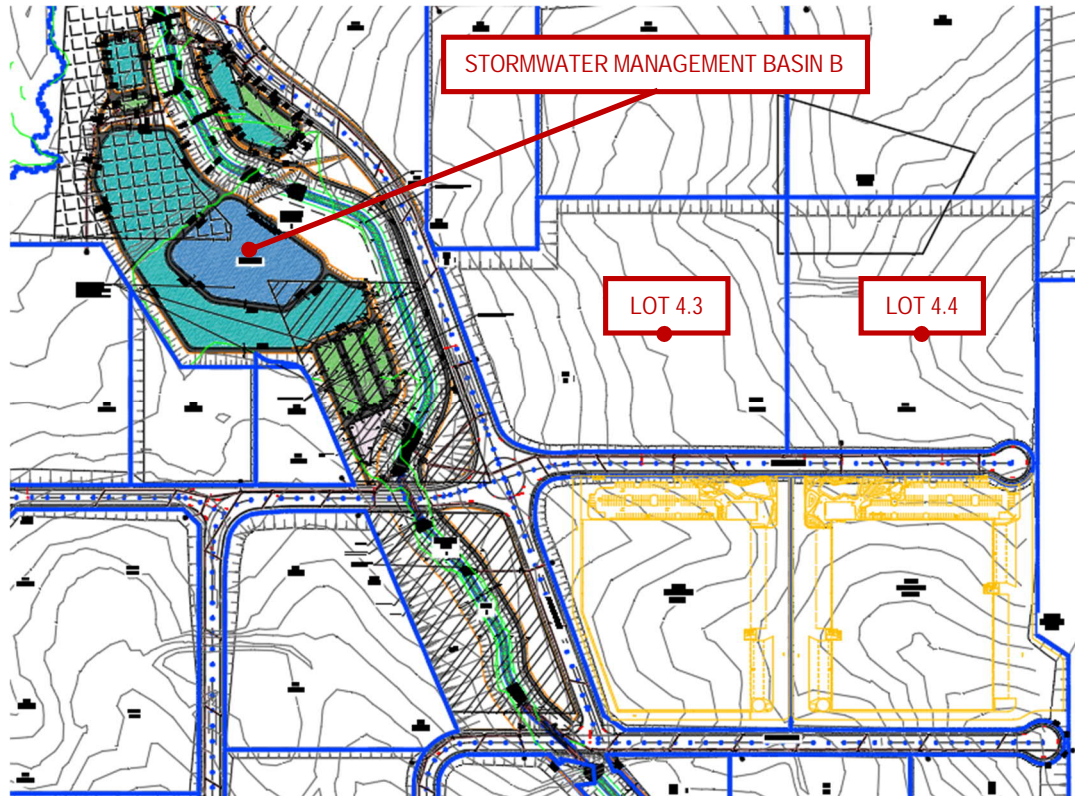

*Figure 6: Wetland and Stormwater Storage Basin Location*

### 8.2.2. Regional Stormwater Harvesting and Reuse Basin

Stormwater harvesting basins are also proposed by the estate developer as a means of reducing the volume of stormwater runoff discharging into the downstream natural waterways. These basins capture and store large quantities of stormwater for re-use and irrigation of residual undeveloped areas in the estate. They are typically located adjacent and downstream of wetlands and bio-retention systems for efficient capture of overflows from the wetlands and bio-retention basins.

Stormwater storage basins are proposed by the estate developer as part of the regional stormwater infrastructure to satisfy the Wianamatta-South Creek stormwater management targets for the entire estate. The estate developer has designed Lots 4.3 (WH01) and 4.4 (WH02) to drain into the proposed stormwater storage basin located west of the Site, on the western side of Estate Road 1a (Basin B) as shown in *Figure 6*.

Basin B has been designed by the estate developer in accordance with the Wianamatta-South Creek technical guide and Sydney Water's Draft Stormwater Scheme Infrastructure Design Guideline. Further details are available with the Civil Engineering Report for SSD-70316465 (Burrah Park).

### 8.2.3. Gross Pollutant Traps

A gross pollutant trap (GPT) is proposed for each lot, within the lot and immediately upstream of the estate road drainage discharge point. GPT's are designed to capture litter, debris, coarse sediment, as well as some oils and greases.

An Ocean Protect OceanSave OS-3300-580-OT GPT (or approved equivalent) is proposed for each of Lots 4.3 (WH01) and 4.4 (WH02). Final GPT sizing and models will be confirmed in the detailed design phase.

#### 8.2.4. Stormwater Detention

The stormwater runoff from the lots and within the road reserve for the overall estate development is proposed to be collected via pits and pipes and connected into the proposed regional wetlands and stormwater storage basins which then overflow into the existing estate watercourses which double as in-line stormwater detention systems.

The estate developer has incorporated dams and embankments across the existing watercourses to temporarily detain stormwater to satisfy the Wianamatta-South Creek stormwater management targets for the entire estate. This stormwater detention system has been designed by the estate developer in accordance with the Wianamatta-South Creek technical guide and Sydney Water's Draft Stormwater Scheme Infrastructure Design Guideline.

The estate developer has designed Lots 4.3 (WH01) and 4.4 (WH02) to drain into the proposed stormwater detention basin located between Estate Road 1a and Basin B as shown in *Figure 6*. OSD systems are therefore not required within the individual DHL lots. Further details are available with the Civil Engineering Report for SSD-70316465 (Burrah Park).

#### 8.2.5. Additional measures to Satisfy the MARV Reduction Requirement

It is understood that the estate developer has designed the regional stormwater infrastructure to adequately comply with the stormwater quantity and quality management objectives outlined in the Wianamatta-South Creek technical guide without the need for additional management measures to be provided across the various lots. However, additional stormwater management measures may still be provided over and above these minimum requirements.

Examples of measures that could be adopted in the Stormwater Management Strategy for the DHL's WH01 and WH02 development are summarised in *Table 4*. The adoption and details for these will be confirmed in detailed design phase.

*Table 4: Additional Stormwater Management Measures*

Additional Measures	Adopted in this Strategy?	Comment
Rainwater reuse	Yes	Recycled water to be used for landscape irrigation and toilet flushing. Details to be provided in detailed design phase
Passive landscape irrigation	Yes	Details to be provided in detailed design phase
Permeable pavements	Where Possible	Heavy duty pavement surrounding warehouse buildings are not suitable for permeable pavements. Permeable pavements may be adopted in exposed on-grade sections of the multi-storey car parks, footpaths and other lightly traffic pavements.
Bioretention	No	Provided in the overall estate development
Wetlands	No	Provided in the overall estate development

## 9. Utility Services

---

### 9.1. Utilities in the vicinity of the site

The estate developer shall provide access and connection points to all utility services at each lot's main street frontage on Estate Road 4 including the following:

- Potable water (Sydney Water Corporation)
- Sewer (Sydney Water Corporation)
- Recycled water (Sydney Water Corporation)
- Electrical (Endeavour Energy)
- Telecommunications (Telstra / NBN)
- Gas (Jemena), if required

All existing utility services within the site shall be demolished and removed as these are not appropriate for the proposed development.

### 9.2. Potable Water

The estate developer is liaising with Sydney Water in relation to the proposed water supply infrastructure that will service the estate and DHL's WH01 and WH02.

It is understood that a potable water supply (assumed 200mm diameter) will be reticulated from the new trunk mains currently under construction in Elizabeth Drive to each lot's main street frontage on Estate Road 4.

### 9.3. Wastewater

The estate developer is liaising with Sydney Water in relation to the proposed sewer infrastructure that will service the estate and DHL's WH01 and WH02.

It is understood that sewer connection (assumed 225mm diameter) will be reticulated along Estate Road 4 to provide connection to WH01 and WH02. This pipe will ultimately connect to the carrier main proposed on the western side of Cosgroves Creek.

### 9.4. Recycled Water

The estate developer has been liaising with Sydney Water in relation to the proposed recycled water supply infrastructure that will service the estate and DHL's WH01 and WH02.

It is understood that a recycled water supply (assumed 150mm diameter) will be reticulated along Estate Road 4 to provide connection to WH01 and WH02.

### 9.5. Electrical

The estate developer has been liaising with Endeavour Energy in relation to electrical supply infrastructure that will service the estate and DHL's WH01 and WH02.

It is understood that 22kV high voltage mains and connection points shall be provided along the proposed Estate Road 4 site frontage to WH01 and WH02 from a new zone substation proposed to be constructed within the estate.

## 9.6. Gas

There are no existing Jemena gas mains located within the vicinity of the Site. The proposed development does not require reticulated gas supply for the Site.

## 9.7. Telecommunications

The estate developer is expected to provide sufficient conduits along the proposed Estate Road 4 site frontage and liaise with telecommunications providers.

# 10. Infrastructure Staging

---

It is expected that all relevant estate infrastructure works including the intersection with Elizabeth Drive, Estate Road 1, Estate Road 1a, Estate Road 4 and the associated utility services lead ins and reticulation shall be in place and operational prior to completion of the DHL development. All estate civil, stormwater and utilities infrastructure shall be delivered by the estate developer.

Construction on both WH01 and WH02 will be carried out concurrently as a single stage development.

## APPENDIX A – Civil Engineering Drawings

---

CIVIL WORKS PACKAGE - DRAWING LIST	
DRAWING No.	WAREHOUSE 1 & 2
22-993-C2000	Lot 4.3 & 4.4 Cover Sheet, Drawing List and Locality Plan
22-993-C2001	Lot 4.3 & 4.4 General Notes
22-993-C2002	Lot 4.3 & 4.4 General Arrangement
22-993-C2005	Lot 4.3 & 4.4 Site Sections
22-993-C2008	Lot 4.3 & 4.4 Bulk Earthworks Cut/Fill Plan
22-993-C2011	Lot 4.3 & 4.4 Siteworks and Stormwater Drainage Plan Sheet 1
22-993-C2012	Lot 4.3 & 4.4 Siteworks and Stormwater Drainage Plan Sheet 2
22-993-C2013	Lot 4.3 & 4.4 Siteworks and Stormwater Drainage Plan Sheet 3
22-993-C2014	Lot 4.3 & 4.4 Siteworks and Stormwater Drainage Plan Sheet 4
22-993-C2015	Lot 4.3 & 4.4 Siteworks and Stormwater Drainage Plan Sheet 5
22-993-C2016	Lot 4.3 & 4.4 Siteworks and Stormwater Drainage Plan Sheet 6
22-993-C2017	Lot 4.3 & 4.4 Siteworks and Stormwater Drainage Plan Sheet 7
22-993-C2018	Lot 4.3 & 4.4 Siteworks and Stormwater Drainage Plan Sheet 8
22-993-C2019	Lot 4.3 & 4.4 Siteworks and Stormwater Drainage Plan Sheet 9
22-993-C2021	Lot 4.3 & 4.4 Stormwater Drainage Details
22-993-C2023	Lot 4.3 & 4.4 Pavement Plan
22-993-C2024	Lot 4.3 & 4.4 Erosion and Sediment Control Plan - Bulk Earthworks Phase
22-993-C2025	Lot 4.3 & 4.4 Erosion and Sediment Control Details – Civil Works Phase
22-993-C2026	Lot 4.3 & 4.4 Erosion and Sediment Control Details – Stabilisation Phase
22-993-C2030	Lot 4.3 & 4.4 Erosion and Sediment Control Details Sheet 1
22-993-C2031	Lot 4.3 & 4.4 Erosion and Sediment Control Details Sheet 2

# BURRA PARK


## ELIZABETH DRIVE, BADGERYS CREEK

### LOT 4.3 & 4.4 (WAREHOUSE 01 & 02)

#### CIVIL WORKS PACKAGE

##### SSD-70817958 DEVELOPMENT APPLICATION

DRAWING LIST	DRAWING TITLE
22-993-C2000	LOT 4.3 & 4.4 (WH 01 & 02) COVER SHEET, DRAWING LIST AND LOCALITY PLAN
22-993-C2001	LOT 4.3 & 4.4 (WH 01 & 02) GENERAL NOTES
22-993-C2002	LOT 4.3 & 4.4 (WH 01 & 02) GENERAL ARRANGEMENT
22-993-C2005	LOT 4.3 & 4.4 (WH 01 & 02) SITE SECTIONS
22-993-C2008	LOT 4.3 & 4.4 (WH 01 & 02) BULK EARTHWORKS CUT/FILL PLAN
22-993-C2011	LOT 4.3 & 4.4 (WH 01 & 02) SITEWORKS AND STORMWATER DRAINAGE PLAN SHEET 1
22-993-C2012	LOT 4.3 & 4.4 (WH 01 & 02) SITEWORKS AND STORMWATER DRAINAGE PLAN SHEET 2
22-993-C2013	LOT 4.3 & 4.4 (WH 01 & 02) SITEWORKS AND STORMWATER DRAINAGE PLAN SHEET 3
22-993-C2014	LOT 4.3 & 4.4 (WH 01 & 02) SITEWORKS AND STORMWATER DRAINAGE PLAN SHEET 4
22-993-C2015	LOT 4.3 & 4.4 (WH 01 & 02) SITEWORKS AND STORMWATER DRAINAGE PLAN SHEET 5
22-993-C2016	LOT 4.3 & 4.4 (WH 01 & 02) SITEWORKS AND STORMWATER DRAINAGE PLAN SHEET 6
22-993-C2017	LOT 4.3 & 4.4 (WH 01 & 02) SITEWORKS AND STORMWATER DRAINAGE PLAN SHEET 7
22-993-C2018	LOT 4.3 & 4.4 (WH 01 & 02) SITEWORKS AND STORMWATER DRAINAGE PLAN SHEET 8
22-993-C2019	LOT 4.3 & 4.4 (WH 01 & 02) SITEWORKS AND STORMWATER DRAINAGE PLAN SHEET 9
22-993-C2021	LOT 4.3 & 4.4 (WH 01 & 02) STORMWATER DRAINAGE DETAILS
22-993-C2023	LOT 4.3 & 4.4 (WH 01 & 02) PAVEMENT PLAN
22-993-C2024	LOT 4.3 & 4.4 (WH 01 & 02) EROSION AND SEDIMENT CONTROL PLAN BULK EARTHWORKS PHASE
22-993-C2025	LOT 4.3 & 4.4 (WH 01 & 02) EROSION AND SEDIMENT CONTROL PLAN CIVIL WORKS PHASE
22-993-C2026	LOT 4.3 & 4.4 (WH 01 & 02) EROSION AND SEDIMENT CONTROL PLAN STABILISATION PHASE
22-993-C2030	LOT 4.3 & 4.4 (WH 01 & 02) EROSION AND SEDIMENT CONTROL DETAILS SHEET 1
22-993-C2031	LOT 4.3 & 4.4 (WH 01 & 02) EROSION AND SEDIMENT CONTROL DETAILS SHEET 2

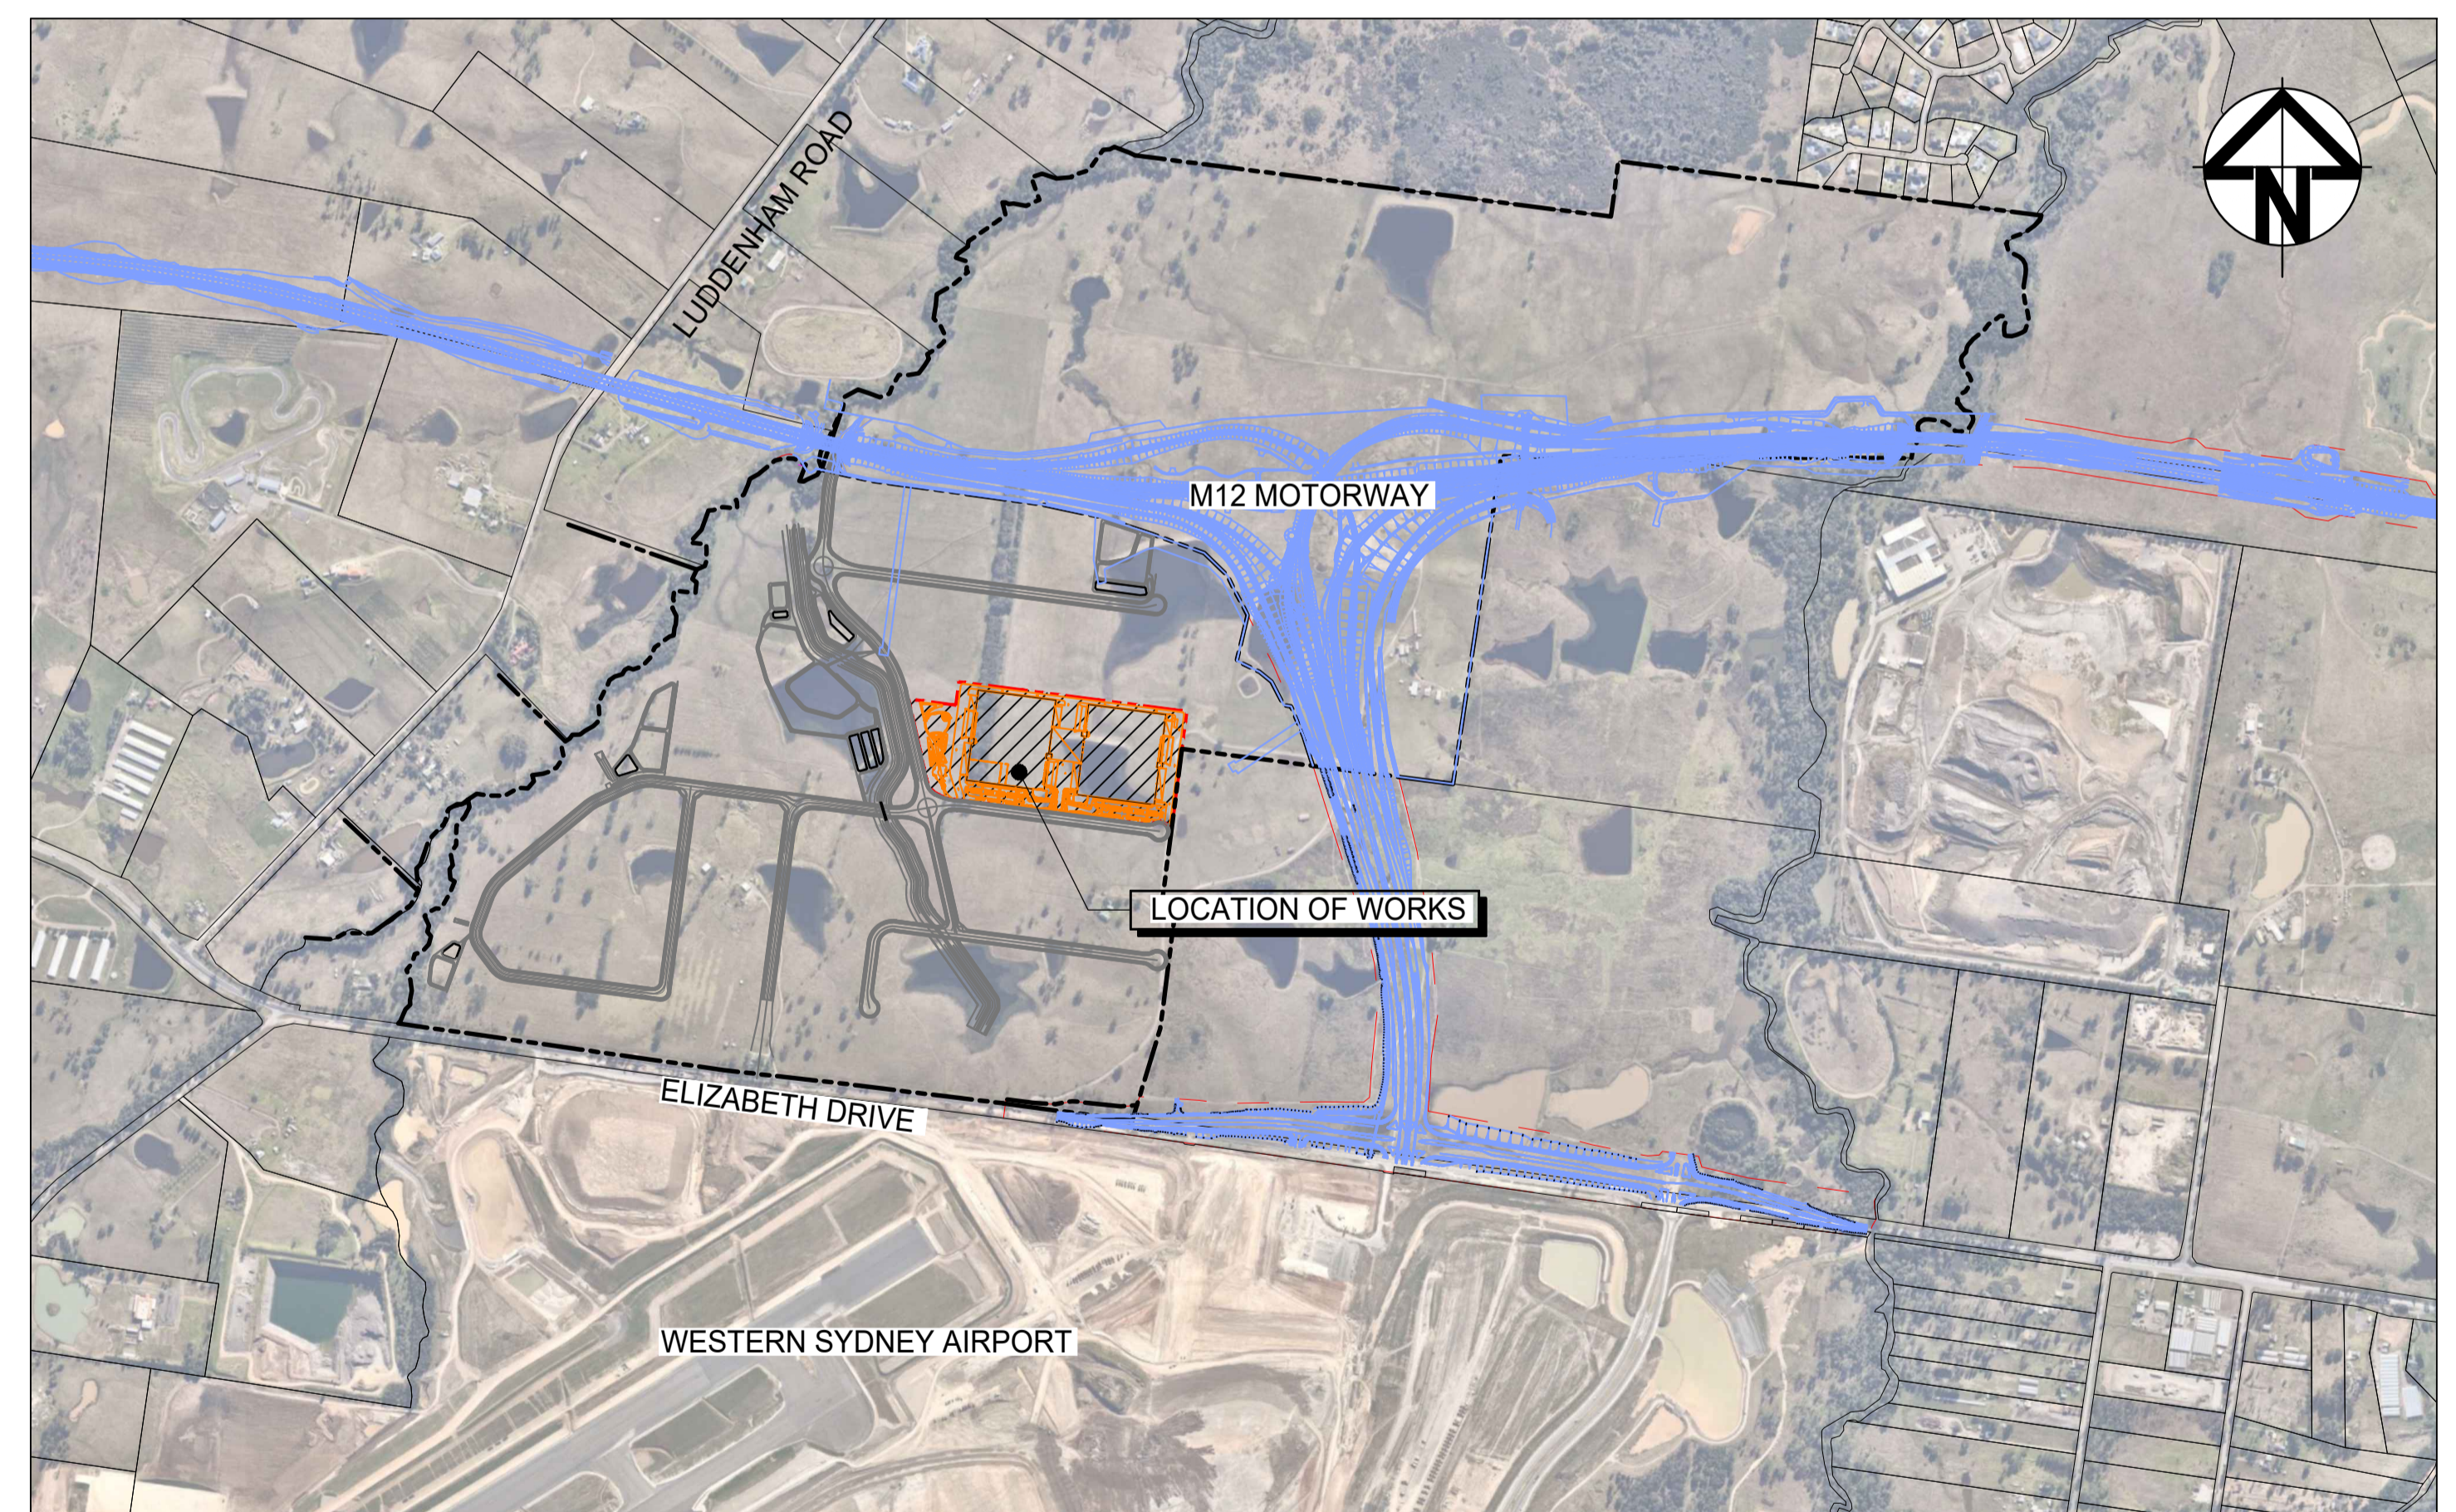

LOCALITY PLAN  
NTS

Issue	Description	Date
D	ISSUED FOR COORDINATION	15-10-24
WIP	ISSUED FOR COORDINATION	09-09-24
C	ISSUED FOR APPROVAL	14-06-23
B	ISSUED FOR COORDINATION	20-04-23
A	ISSUED FOR COORDINATION	22-12-22

THIS DRAWING CANNOT BE COPIED OR REPRODUCED IN ANY FORM OR USED FOR ANY OTHER PURPOSE OTHER THAN THAT ORIGINALLY INTENDED WITHOUT THE WRITTEN PERMISSION OF AT&L

Client



Scales NTS

Grid GDA2020

Height Datum AHD

Drawn CK

Designed CK

Checked CB

Approved




Project

INDUSTRIAL DEVELOPMENT  
BURRA PARK

Title

LOT 4.3 & 4.4 (WH 01 & 02)  
COVER SHEET,  
DRAWING LIST AND  
LOCALITY PLAN

Civil Engineers and Project Managers



Level 7, 153 Walker Street  
North Sydney NSW 2060  
ABN 96 130 882 405  
Tel: 02 9439 1777  
Fax: 02 9923 1055  
www.atl.net.au  
info@atl.net.au

Status

FOR COORDINATION  
NOT FOR CONSTRUCTION

Project - Drawing No.  
22-993-C2000

Issue

A1  
D

## SITWORKS NOTES

- ORIGIN OF LEVELS:- REFER SURVEY NOTES.
- CONTRACTOR MUST VERIFY ALL DIMENSIONS AND EXISTING LEVELS ON SITE PRIOR TO COMMENCEMENT OF WORK. ANY DISCREPANCIES TO BE REPORTED TO AT & L.
- MAKE SMOOTH CONNECTION WITH EXISTING WORKS.
- ALL TRENCH BACKFILL MATERIAL SHALL BE COMPACTED TO THE SAME DENSITY AS THE ADJACENT MATERIAL.
- ALL SERVICE TRENCHES UNDER VEHICULAR PAVEMENTS SHALL BE BACKFILLED WITH SAND TO 300mm ABOVE PIPE. WHERE PIPE IS UNDER PAVEMENTS BACKFILL REMAINDER OF TRENCH TO UNDERSIDE OF PAVEMENT WITH SAND OR APPROVED GRANULAR MATERIAL COMPACTED IN 150mm LAYERS TO MINIMUM 98% MODIFIED MAXIMUM DRY DENSITY IN ACCORDANCE WITH AS 1289 5.2.1. (OR A DENSITY INDEX OF NOT LESS THAN 75)
- PROVIDE 10mm WIDE EXPANSION JOINTS BETWEEN BUILDINGS AND ALL CONCRETE OR UNIT PAVEMENTS.
- ASPHALTIC CONCRETE SHALL CONFORM TO R.M.S SPECIFICATION R116.
- ALL BASECOURSE MATERIAL SHALL BE IGNEOUS ROCK QUARRIED MATERIAL TO COMPLY WITH R.M.S FORM 3051 (UNBOUND), R.M.S FORM 3052 (BOUND) COMPACTED TO MINIMUM 98% MODIFIED DENSITY IN ACCORDANCE WITH AS 1289 5.2.1 FREQUENCY OF COMPACTION TESTING SHALL NOT BE LESS THAN 1 TEST PER 50m OF BASECOURSE MATERIAL PLACED.
- ALL SUB-BASE COURSE MATERIAL SHALL BE IGNEOUS ROCK QUARRIED MATERIAL TO COMPLY WITH R.M.S FORM 3051, 3051.1 AND COMPACTED TO MINIMUM 95% MODIFIED DENSITY IN ACCORDANCE WITH A.S 1289 5.2.1 FREQUENCY OF COMPACTION TESTING SHALL NOT BE LESS THAN 1 TEST PER 50m OF SUB-BASE COURSE MATERIAL PLACED.
- AS AN ALTERNATIVE TO THE USE OF IGNEOUS ROCK AS A SUB-BASE MATERIAL IN (9) A CERTIFIED RECYCLED CONCRETE MATERIAL COMPLYING WITH R.M.S FORM 3051 AND 3051.1 WILL BE CONSIDERED. SUBJECT TO MATERIAL SAMPLES AND APPROPRIATE CERTIFICATIONS BEING PROVIDED TO THE SATISFACTION OF AT & L.
- SHOULD THE CONTRACTOR WISH TO USE A RECYCLED PRODUCT THE CONTRACTOR IS TO SEEK ACCEPTANCE OF THE PRODUCT FROM AT&L. THE PRICE DIFFERENCE BETWEEN AN IGNEOUS PRODUCT AND A RECYCLED PRODUCT SHALL BE CLEARLY INDICATED.
- WHERE NOTED ON THE DRAWINGS THAT WORKS ARE TO BE CARRIED BY OTHERS, (eg. ADJUSTMENT OF SERVICES), THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE CO-ORDINATION OF THESE WORKS.

## SURVEY NOTES

THE EXISTING SITE CONDITIONS SHOWN ON THE FOLLOWING DRAWINGS HAVE BEEN INVESTIGATED BY BOXALL SURVEYORS, BEING REGISTERED SURVEYORS. THE INFORMATION IS SHOWN TO PROVIDE A BASIS FOR DESIGN. AT & L DOES NOT GUARANTEE THE ACCURACY OR COMPLETENESS OF THE SURVEY BASE OR ITS SUITABILITY AS A BASIS FOR CONSTRUCTION DRAWINGS.

SHOULD DISCREPANCIES BE ENCOUNTERED DURING CONSTRUCTION BETWEEN THE SURVEY DATA AND ACTUAL FIELD DATA, CONTACT AT & L.

THE FOLLOWING NOTES HAVE BEEN TAKEN DIRECTLY FROM THE ORIGINAL SURVEY DOCUMENTS.

### NOTES

- THE BOUNDARIES HAVE APPROXIMATELY BEEN SURVEYED IN ACCORDANCE WITH CLAUSE 9 OF THE SURVEYING & SPATIAL INFORMATION REGULATION 2017
- ALL AREAS AND DIMENSIONS HAVE BEEN COMPILED FROM PLANS MADE AVAILABLE BY NSW LAND REGISTRY SERVICES AND ARE SUBJECT TO FINAL SURVEY
- ORIGIN OF COORDINATES HAS BEEN DERIVED USING GPS (GNSS) SURVEY FROM SSM33562
- ORIGIN OF LEVELS ON A.H.D. IS TAKEN FROM SSM33562 R.L. 43.021 (A.H.D.) IN MAMRE ROAD USING GPS (GNSS) SURVEY METHODS.
- CONTOUR INTERVAL 0.5 m
- CONTOURS ARE INDICATIVE ONLY. ONLY SPOT LEVELS SHOULD BE USED FOR CALCULATIONS OF QUANTITIES WITH CAUTION
- NO INVESTIGATION OF UNDERGROUND SERVICES HAS BEEN MADE. SERVICES HAVE BEEN PLOTTED FROM RELEVANT AUTHORITIES INFORMATION AND HAVE NOT BEEN SURVEYED. ALL RELEVANT AUTHORITIES SHOULD BE NOTIFIED PRIOR TO ANY EXCAVATION OR NEAR THE SITE
- 8/ 47 DENOTES TREE SPREAD OF 8m, TRUNK DIAMETER OF 0.4m & APPROX HEIGHT OF 7m
- SHOWS APPROXIMATE POSITION OF ROAD LINEMARKING AND IS INDICATIVE ONLY
- BEARINGS SHOWN ARE MGA (MAP GRID OF AUSTRALIA) ADD APPROX. 1°00' FOR TRUE NORTH



CONTRACTOR SHALL OBTAIN ALL CURRENT SERVICE AUTHORITY PLANS PRIOR TO COMMENCEMENT OF WORK

## STORMWATER DRAINAGE NOTES

### GENERAL NOTES

- STORMWATER DESIGN CRITERIA:  
ANNUAL EXCEEDANCE PROBABILITY:  
MINOR STORM: 5% AEP  
MAJOR STORM: 1% AEP
- PIPES LESS THAN 300 DIA SHALL BE SEWER GRADE uPVC WITH SOLVENT WELDED JOINTS
- ENLARGERS, CONNECTIONS AND JUNCTIONS TO BE PREFABRICATED FITTINGS WHERE PIPES ARE LESS THAN DN300
- ALL INTERNAL WORKS WITHIN PROPERTY BOUNDARIES ARE TO COMPLY WITH THE REQUIREMENTS OF THE CURRENT AS 3500 3.1 AND AS/NZS 3500 3.2.
- ALL STORMWATER DRAINAGE LINES UNDER PROPOSED BUILDING SLABS TO BE uPVC PRESSURE PIPE GRADE 6. ENSURE ALL VERTICALS AND DOWNPIPES ARE uPVC PRESSURE PIPE, GRADE 6 FOR A MIN OF 3.0m IN HEIGHT.
- ALL DRAINAGE LINES TO PROVIDE A 3.0m LENGTH OF DN100 SUBSOIL DRAINAGE PIPE WRAPPED IN FABRIC SOCK, ON THE UPSTREAM SIDE OF EACH PIT. ALLOW FOR SECONDARY SUBSOIL FOR PIPES FOR PIPE GREATER THAN DN25.
- SUBSOIL DRAIN WRAPPED IN APPROVED FILTER SOCK SHALL BE PROVIDED BENEATH ALL KERBLINES WHERE NO DRAINAGE LINES ARE SHOWN ON THE DRAWINGS AND SHALL DISCHARGE INTO DOWNSTREAM PITS.
- WHERE SUBSOIL DRAINS PASS UNDER FLOOR SLABS AND VEHICULAR PAVEMENTS, UNSLOTTED uPVC SEWER GRADE PIPES ARE TO BE USED.
- CARE IS TO BE TAKEN WITH LEVELS OF STORMWATER LINES. GRADES SHOWN ARE NOT TO BE REDUCED WITHOUT APPROVAL FROM AT&L.
- GRATES AND COVERS SHALL CONFORM TO THE CURRENT AS 3996. CLASS D COVER (MINIMUM) SHALL BE PROVIDED IN TRAFFICKED PAVEMENTS WITH CLASS B (MINIMUM) BEING PROVIDED IN NON-TRAFFICKED AREAS.
- AT ALL TIMES DURING CONSTRUCTION OF STORMWATER PITS, THE CONTRACTOR SHALL PROVIDE ADEQUATE SAFETY PROCEDURES TO PREVENT THE POSSIBILITY OF PERSONNEL FALLING DOWN PITS.
- ALL PITS AND PIPES TO BE FOUNDED ON SUITABLE MATERIAL WITH A MINIMUM ALLOWABLE BEARING CAPACITY OF 100kPa UP TO 3.0m DEPTH TO INVERT AND 150kPa FROM 3.0m TO 6.0m DEPTH TO INVERT ONCE EXCAVATED. A CONCRETE BLINDING LAYER (MINIMUM 100mm THICK 25MPa OR DEEPER TO ENSURE MINIMUM SPECIFIED BEARING CAPACITY IS ACHIEVED) MAY BE PROVIDED. CONTRACTOR TO ENGAGE GEOTECHNICAL ENGINEER TO PROVIDE WRITTEN CONFIRMATION.
- ALL EXISTING STORMWATER DRAINAGE LINES AND PITS THAT ARE TO REMAIN ARE TO BE INSPECTED AND CLEANED. DURING THIS PROCESS ANY PART OF THE STORMWATER DRAINAGE SYSTEM THAT WARRANTS REPAIR SHALL BE REPORTED TO THE SUPERINTENDENT/ENGINEER FOR FURTHER DIRECTIONS.
- ALL STORMWATER PITS ARE TO BE CAST IN-SITU IN ACCORDANCE WITH THE STORMWATER DETAILS AND SPECIFICATIONS.
- ALL PITS MUST BE BENCHED AND STREAMLINED TO DIRECT WATER FROM THE INLET PIPE TO THE OUTLET PIPE.

### RIGID & SEMI-RIGID PIPE NOTES

- PIPES 300 DIA. AND LARGER TO BE STEEL REINFORCED CONCRETE CLASS '3' APPROVED SPIGOT AND SOCKET WITH RUBBER RING JOINTS COMPLYING WITH AS/NZS 4088. U.N.O. ALL ROAD CROSSINGS TO BE CLASS '4' U.N.O.
- EQUIVALENT STRENGTH FIBRE REINFORCED CONCRETE PIPES COMPLYING WITH AS 4139 MAY BE USED SUBJECT TO APPROVAL BY AT&L OR THE LOCAL GOVERNMENT AUTHORITY.
- PIPES TO BE INSTALLED WITH TYPE HS3 (ROAD) AND HS2 (LOTS) SUPPORT IN ACCORDANCE WITH THE CURRENT AS/NZS 3725. IN ALL CASES BACKFILL TRENCH WITH SELECT FILL TO 300mm ABOVE PIPE. WHERE PIPE IS UNDER PAVEMENTS BACKFILL REMAINDER OF TRENCH TO UNDERSIDE OF PAVEMENT WITH SAND OR APPROVED GRANULAR MATERIAL COMPACTED IN 150mm LAYERS TO MINIMUM 98% STANDARD MAXIMUM DRY DENSITY IN ACCORDANCE WITH THE CURRENT AS 1289 5.2.1. (OR A DENSITY INDEX OF NOT LESS THAN 75)

### FLEXIBLE PIPE NOTES

- FLEXIBLE PIPES TO COMPLY WITH THE CURRENT AS/NZS 2566.1.
  - PIPES TO BE INSTALLED IN ACCORDANCE WITH THE CURRENT AS/NZS 2566.2. IN ALL CASES BACKFILL TRENCH WITH SAND TO 300mm ABOVE PIPE. WHERE PIPE IS UNDER PAVEMENTS BACKFILL REMAINDER OF TRENCH TO UNDERSIDE OF PAVEMENT WITH SAND OR APPROVED GRANULAR MATERIAL COMPACTED IN 150mm LAYERS TO MINIMUM 98% STANDARD MAXIMUM DRY DENSITY IN ACCORDANCE WITH THE CURRENT AS 1289 5.2.1. (OR A DENSITY INDEX OF NOT LESS THAN 75)
- ### PRECAST CONCRETE PIT NOTES
- PRECAST PITS MAY BE USED WITH THE APPROVAL OF AT&L, THE SUPERINTENDENT, AND THE LOCAL GOVERNMENT AUTHORITY AND SHALL BE INSTALLED TO THE MANUFACTURERS RECOMMENDATIONS
  - ALL PRE-CAST PITS ARE TO BE STRUCTURALLY CERTIFIED TO MEET RELEVANT REQUIREMENTS OF THE CURRENT AS3600 AND AS3996 (2019).
  - PRE-CAST STORMWATER PITS ARE TO BE APPROVED FOR TFNSW CONSTRUCTION (R11) AND ARE TO ARE TO BE DESIGNED AND CUSTOM MADE WITH OPENINGS UP TO A MAXIMUM 50mm OD OF THE STORMWATER PIPES. PITS ARE ALSO TO INCLUDE PENETRATIONS FOR SUBSOIL CONNECTIONS AND DOUBLE STEP-IRONS INSTALLED FOR PITS >0.9m DEEP. DEMOLITION SAWS MAY BE USED PROVIDING A NEAT FULL DEPTH CUT IS APPLIED AND ANY ADDITIONAL PENETRATIONS REQUIRED ARE TO BE CORE DRILLED.
  - SHOP DRAWINGS ARE TO BE PROVIDED FOR REVIEW AND ACCEPTANCE. IT SHOULD BE NOTED THAT THE CONTRACTOR IS TO ENSURE THAT THE STRUCTURAL COMPONENTS OF THE PITS ARE NOT COMPROMISED AND ONLY THE PIPE KNOCKOUTS ARE TO BE REMOVED FOR THE PIPE PENETRATIONS.
  - ALL PRECAST PITS TO BE FOUNDED ON CONCRETE BLINDING LAYER (100MM ON AN EARTH FOUNDATION OR 150mm ON A ROCK FORMATION) WITH A MINIMUM ALLOWABLE BEARING CAPACITY OF 100kPa UP TO 3.0m DEPTH TO INVERT AND 150kPa FROM 3.0m TO 6.0m DEPTH TO INVERT (MINIMUM 100mm THICK 25MPa OR DEEPER TO ENSURE MINIMUM SPECIFIED BEARING CAPACITY IS ACHIEVED). CONTRACTOR TO ENGAGE GEOTECHNICAL ENGINEER TO PROVIDE WRITTEN CONFIRMATION
  - ALL PRE-CAST PIT PENETRATIONS SHALL BE CUT SO THAT IT IS FLUSH WITH THE INTERNAL WALL.

## STORMWATER DRAINAGE NOTES

### (CONTINUED)

- ALL PIPE JOINTING, SPARGING, RENDERING, FILLING OF GAPS TO BE FILLED WITH A HIGH STRENGTH NON-SHRINK GROUT WITH A MINIMUM 40MPa COMPRESSIVE STRENGTH AT 28 DAYS. (LANKO DURABED 702 OR SIMILAR).
- SINGLE UNITS PREFERRED BUT IF REQUIRED MINIMUM RISER DEPTH 600mm PIT INSTALLATION AND JOINTING BETWEEN UNITS SHALL BE UNDERTAKEN IN ACCORDANCE WITH MANUFACTURERS RECOMMENDATIONS.
- ANY DAMAGE TO THE STRUCTURAL INTEGRITY OF THE PRE-CAST PIT WILL BE REPAIRED AND STRUCTURALLY CERTIFIED AT THE CONTRACTORS EXPENSE TO THE SATISFACTION OF THE AT&L SUPERINTENDENT / LOCAL GOVERNMENT AUTHORITY.

## CONCRETE NOTES

- ALL WORKMANSHIP AND MATERIALS SHALL BE IN ACCORDANCE WITH AS 3600 CURRENT EDITION WITH AMENDMENTS, EXCEPT WHERE VARIED BY THE CONTRACT DOCUMENTS.
- CONCRETE QUALITY  
ALL REQUIREMENTS OF THE CURRENT ACSE CONCRETE SPECIFICATION DOCUMENT 1 SHALL APPLY TO THE FORMWORK, REINFORCEMENT AND CONCRETE UNLESS NOTED OTHERWISE.

ELEMENT	AS 3600 F <sub>c</sub> MPa AT 28 DAYS	SPECIFIED SLUMP	NOMINAL AGG. SIZE
VEHICULAR BASE	32	60	20
KERBS, PATHS, AND PITS	25	80	20

- CEMENT TYPE SHALL BE (ACSE SPECIFICATION) TYPE SL

- PROJECT CONTROL TESTING SHALL BE CARRIED OUT IN ACCORDANCE WITH AS 1379.

- NO ADMIXTURES SHALL BE USED IN CONCRETE UNLESS APPROVED IN WRITING BY AT & L.

- CLEAR CONCRETE COVER TO ALL REINFORCEMENT FOR DURABILITY SHALL BE 40mm TOP AND 70mm FOR EXTERNAL EDGES UNLESS NOTED OTHERWISE.

- ALL REINFORCEMENT SHALL BE FIRMLY SUPPORTED ON MILD STEEL PLASTIC TIPPED CHAIRS, PLASTIC CHAIRS OR CONCRETE CHAIRS AT NOT GREATER THAN 1m CENTRES BOTH WAYS. BARS SHALL BE TIED AT ALTERNATE INTERSECTIONS.

- THE FINISHED CONCRETE SHALL BE A DENSE HOMOGENEOUS MASS, COMPLETELY FILLING THE FORMWORK, THOROUGHLY EMBEDDING THE REINFORCEMENT AND FREE OF STONE POCKETS. ALL CONCRETE INCLUDING SLABS ON GROUND AND FOOTINGS SHALL BE COMPACTED AND CURED IN ACCORDANCE WITH R.M.S SPECIFICATION R83.

### REINFORCEMENT SYMBOLS:

- N DENOTES GRADE 450 BARS TO AS 1302 GRADE N  
R DENOTES 230 R HOT ROLLED PLAIN BARS TO AS 1302  
SL DENOTES HARD-DRAWN WIRE REINFORCING FABRIC TO AS 1304


NUMBER OF BARS IN GROUP | BAR GRADE AND TYPE

17 N 20 250

NOMINAL BAR SIZE IN mm | SPACING IN mm

THE FIGURE FOLLOWING THE FABRIC SYMBOL SL IS THE REFERENCE NUMBER FOR FABRIC TO AS 1304.

- FABRIC SHALL BE LAPPED IN ACCORDANCE WITH THE FOLLOWING DETAIL:



## KERBING NOTES

- ALL CONCRETE TO HAVE A MINIMUM COMPRESSIVE STRENGTH OF 25MPa U.N.O IN REINFORCED CONCRETE NOTES.
- ALL KERBS, GUTTERS, DISH DRAINS AND CROSSINGS TO BE CONSTRUCTED ON MIN. 100mm GRANULAR BASECOURSE COMPACTED TO MINIMUM 95% MODIFIED DRY DENSITY (AS 1289 5.2.1).
- EXPANSION JOINTS (E.J) TO BE FORMED FROM 10mm COMPRESSIBLE CORK FILLER BOARD FOR THE FULL DEPTH OF THE SECTION AND CUT TO PROFILE. EXPANSION JOINTS TO BE LOCATED AT DRAINAGE PITS, ON TANGENT POINTS OF CURVES AND ELSEWHERE AT MAX 12m CENTRES EXCEPT FOR INTEGRAL KERBS WHERE THE EXPANSION JOINTS ARE TO MATCH THE JOINT LOCATIONS IN THE SLABS.
- WEAKENED PLANE JOINTS TO BE MIN 3mm WIDE AND LOCATED AT 3m CENTRES EXCEPT FOR INTEGRAL KERBS WHERE THE WEAKENED PLANE JOINTS ARE TO MATCH THE JOINT LOCATIONS IN THE SLABS.
- BROOMED FINISH TO ALL RAMPED AND VEHICULAR CROSSINGS. ALL OTHER KERBING OR DISH DRAINS TO BE STEEL FLOAT FINISHED.
- IN THE REPLACEMENT OF KERB AND GUTTER :- EXISTING ROAD PAVEMENT IS TO BE SAWCUT 900mm U.N.O FROM THE LIP OF GUTTER. UPON COMPLETION OF THE NEW KERB AND GUTTER NEW BASECOURSE AND SURFACE TO BE LAID 900mm WIDE U.N.O.

EXISTING ALLOTMENT DRAINAGE PIPES ARE TO BE BUILT INTO THE NEW KERB AND GUTTER WITH 100mm DIA HOLE.

EXISTING KERB AND GUTTER IS TO BE COMPLETELY REMOVED WHERE NEW KERB AND GUTTER IS SHOWN.

## DEWATERING

ANY DEWATERING WORKS TO BE AS PER THE DEWATERING PROCEDURE AS CONTAINED WITHIN THE CONSTRUCTION ENVIRONMENTAL MANAGEMENT PLAN (CEMP).

## DECOMMISSIONING / DEMOLITION

DEMOLITION OF EXISTING DWELLING TO BE CONDUCTED IN ACCORDANCE WITH THE PROVISIONS OF AS2601-2001 - DEMOLITION OF STRUCTURES BY CONTRACTORS EXPERIENCED IN THIS CLASS OF WORK AND HOLDING REQUIRED CURRENT PERMITS AND LICENSES AS REQUIRED.

EXISTING INTERNALS FENCING, CATTLE YARDS, UTILITIES AND OTHER REDUNDANT STRUCTURES TO BE DEMOLISHED AND REMOVED TO AN APPROVED WASTE MANAGEMENT FACILITY.

DAM DECOMMISSIONING TO BE COMPLETED AS PER THE DAM DECOMMISSIONING PROCEDURE AS CONTAINED WITHIN THE CONSTRUCTION ENVIRONMENTAL MANAGEMENT PLAN (CEMP).

## EMBANKMENT CONSTRUCTION

### SEQUENCE

- STRIP VEGETATION AND TOPSOIL FROM EMBANKMENT AREA AND STOCKPILE TOPSOIL FOR LATER USE. CUT BACK AREA TO FIRM GROUND.
- CONSTRUCT EMBANKMENT IN PRESENCE OF QUALIFIED AND EXPERIENCED GEOTECHNICAL ENGINEER IF NOT ROCK.
- IN THE CASE WHERE THE EMBANKMENT AREAS SLUSH, GROUTING AND DENTAL CONCRETE MAY BE REQUIRED, AS DIRECTED BY A QUALIFIED AND EXPERIENCED GEOTECHNICAL ENGINEER.
- COMPACT CLAY STABILIZED WITH GYPSUM (3% BY DRY MASS, MINIMUM) AS APPROVED BY A QUALIFIED AND EXPERIENCED GEOTECHNICAL ENGINEER INTO THE CUT-OFF TRENCH OF LAYERS NOT EXCEEDING 150mm LOOSE THICKNESS TO A DRY DENSITY EQUIVALENT TO 98% OF THAT DETERMINED BY STANDARD COMPACTION (AS 1289.5.1.1) AND AT A MOISTURE CONTENT OF -2% TO +2% OF OPTIMUM MOISTURE CONTENT.
- GYPSUM STABILIZED NATURAL SOILS EXPOSED IN EMBANKMENT AREA WITH MINIMUM 3% GYPSUM BY DRY MASS AND COMPACT AS FOR #4. ALL TO THE APPROVAL OF A QUALIFIED AND EXPERIENCED GEOTECHNICAL ENGINEER.
- CONSTRUCT BODY OF EMBANKMENT WITH CLAYEY MATERIAL WON FROM SITE. COMPACT THE CLAYEY MATERIAL APPROVED BY A QUALIFIED AND EXPERIENCED GEOTECHNICAL ENGINEER IN LAYERS NOT EXCEEDING 150mm THICKNESS TO A DRY DENSITY EQUIVALENT TO 98% OF THAT DETERMINED BY STANDARD COMPACTION (AS 1289.5.1.1) AND AT A MOISTURE CONTENT OF -2% TO +2% OF OPTIMUM MOISTURE CONTENT. MOST IMPORTANTLY, IF SHRINKAGE CRACKS OCCUR, AS DIRECTED BY A QUALIFIED AND EXPERIENCED GEOTECHNICAL ENGINEER.
- OVERFILL THE EMBANKMENT AND TRIM OFF, SO THAT THE ENTIRE BODY OF THE EMBANKMENT IS COMPACTED.
- TRIM THE EMBANKMENTS BATTERS TO THE OVERFILLED MATERIAL, STABILIZE THE UPSTREAM CLAY BATTERS WITH WELL MIXED GYPSUM (3% BY DRY MASS, MINIMUM) AND COMPACT TO MIN. 98% STD -2% TO +2% OMC.
- PLACE ROCK RIP-RAP AS SHOWN.
- RECOVER TOPSOIL FROM STOCKPILE AND SPREAD OVER EMBANKMENT AND CUT BATTERS (A THIN COVER OF TOPSOIL ONLY HAS BEEN NOMINATED). ONLY LIGHTLY TRACK-ROLL THE TOPSOIL AND THEN LANDSCAPE IN ACCORDANCE WITH THE LANDSCAPE AREA DRAWINGS.
- WATER AND FERTILIZE LANDSCAPE AS REQUIRED BY CLIMATIC CONDITIONS TO ENSURE THE LANDSCAPE IS SUCCESSFUL.
- AT THE COMPLETION OF WORK WRITTEN CONFIRMATION & CERTIFICATION IS TO BE PROVIDED FROM A QUALIFIED & EXPERIENCED GEOTECHNICAL ENGINEER THAT THE EMBANKMENTS HAVE BEEN CONSTRUCTED IN ACCORDANCE WITH THESE DRAWINGS.

## FINISHED SURFACE LEVELS

- ALL FINISHED SURFACE LEVELS ARE ±100mm U.N.O.

## EXISTING UNDERGROUND SERVICES NOTES

THE LOCATIONS OF UNDERGROUND SERVICES SHOWN IN THIS SET OF DRAWINGS HAVE BEEN PLOTTED FROM SURVEY INFORMATION AND SERVICE AUTHORITY INFORMATION. THE SERVICE INFORMATION HAS BEEN PREPARED ONLY TO SHOW THE APPROXIMATE POSITIONS OF ANY KNOWN SERVICES AND MAY NOT BE AS CONSTRUCTED OR ACCURATE.

AT & L CAN NOT GUARANTEE THAT THE SERVICES INFORMATION SHOWN ON THESE DRAWINGS ACCURATELY INDICATES THE PRESENCE OR ABSENCE OF SERVICES OR THEIR LOCATION AND WILL ACCEPT NO LIABILITY FOR INACCURACIES IN THE SERVICES INFORMATION SHOWN FROM ANY CAUSE WHATSOEVER.

CONTRACTORS SHALL TAKE DUE CARE WHEN EXCAVATING ONSITE INCLUDING HAND EXCAVATION WHERE NECESSARY.

CONTRACTORS ARE TO CONTACT THE RELEVANT SERVICE AUTHORITY PRIOR TO COMMENCEMENT OF EXCAVATION WORKS.

CONTRACTORS ARE TO UNDERTAKE A SERVICES SEARCH, PRIOR TO COMMENCEMENT OF WORKS ON SITE. SEARCH RESULTS ARE TO BE KEPT ON SITE AT ALL TIMES.

THIS DRAWING CANNOT BE COPIED OR REPRODUCED IN ANY FORM OR USED FOR ANY OTHER PURPOSE OTHER THAN THAT ORIGINALLY INTENDED WITHOUT THE WRITTEN PERMISSION OF AT&L



Scales	NTS	Drawn	CK
		Designed	CK
Grid	GDA2020	Checked	CB
		Approved	
Height Datum	AHD		



INDUSTRIAL DEVELOPMENT  
BURRA PARK


LOT 4.3 & 4.4 (WH 01 & 02)  
GENERAL NOTES

Civil Engineers and Project Managers  
**at&l**  
Level 7, 153 Walker Street  
North Sydney NSW 2060  
ABN 96 130 882 405  
Tel: 02 9439 1777  
Fax: 02 9923 1055  
www.atl.net.au  
info@atl.net.au


Status  
**FOR COORDINATION  
NOT FOR CONSTRUCTION**

Project - Drawing No.  
**22-993-C2001**

A1  
Issue  
D

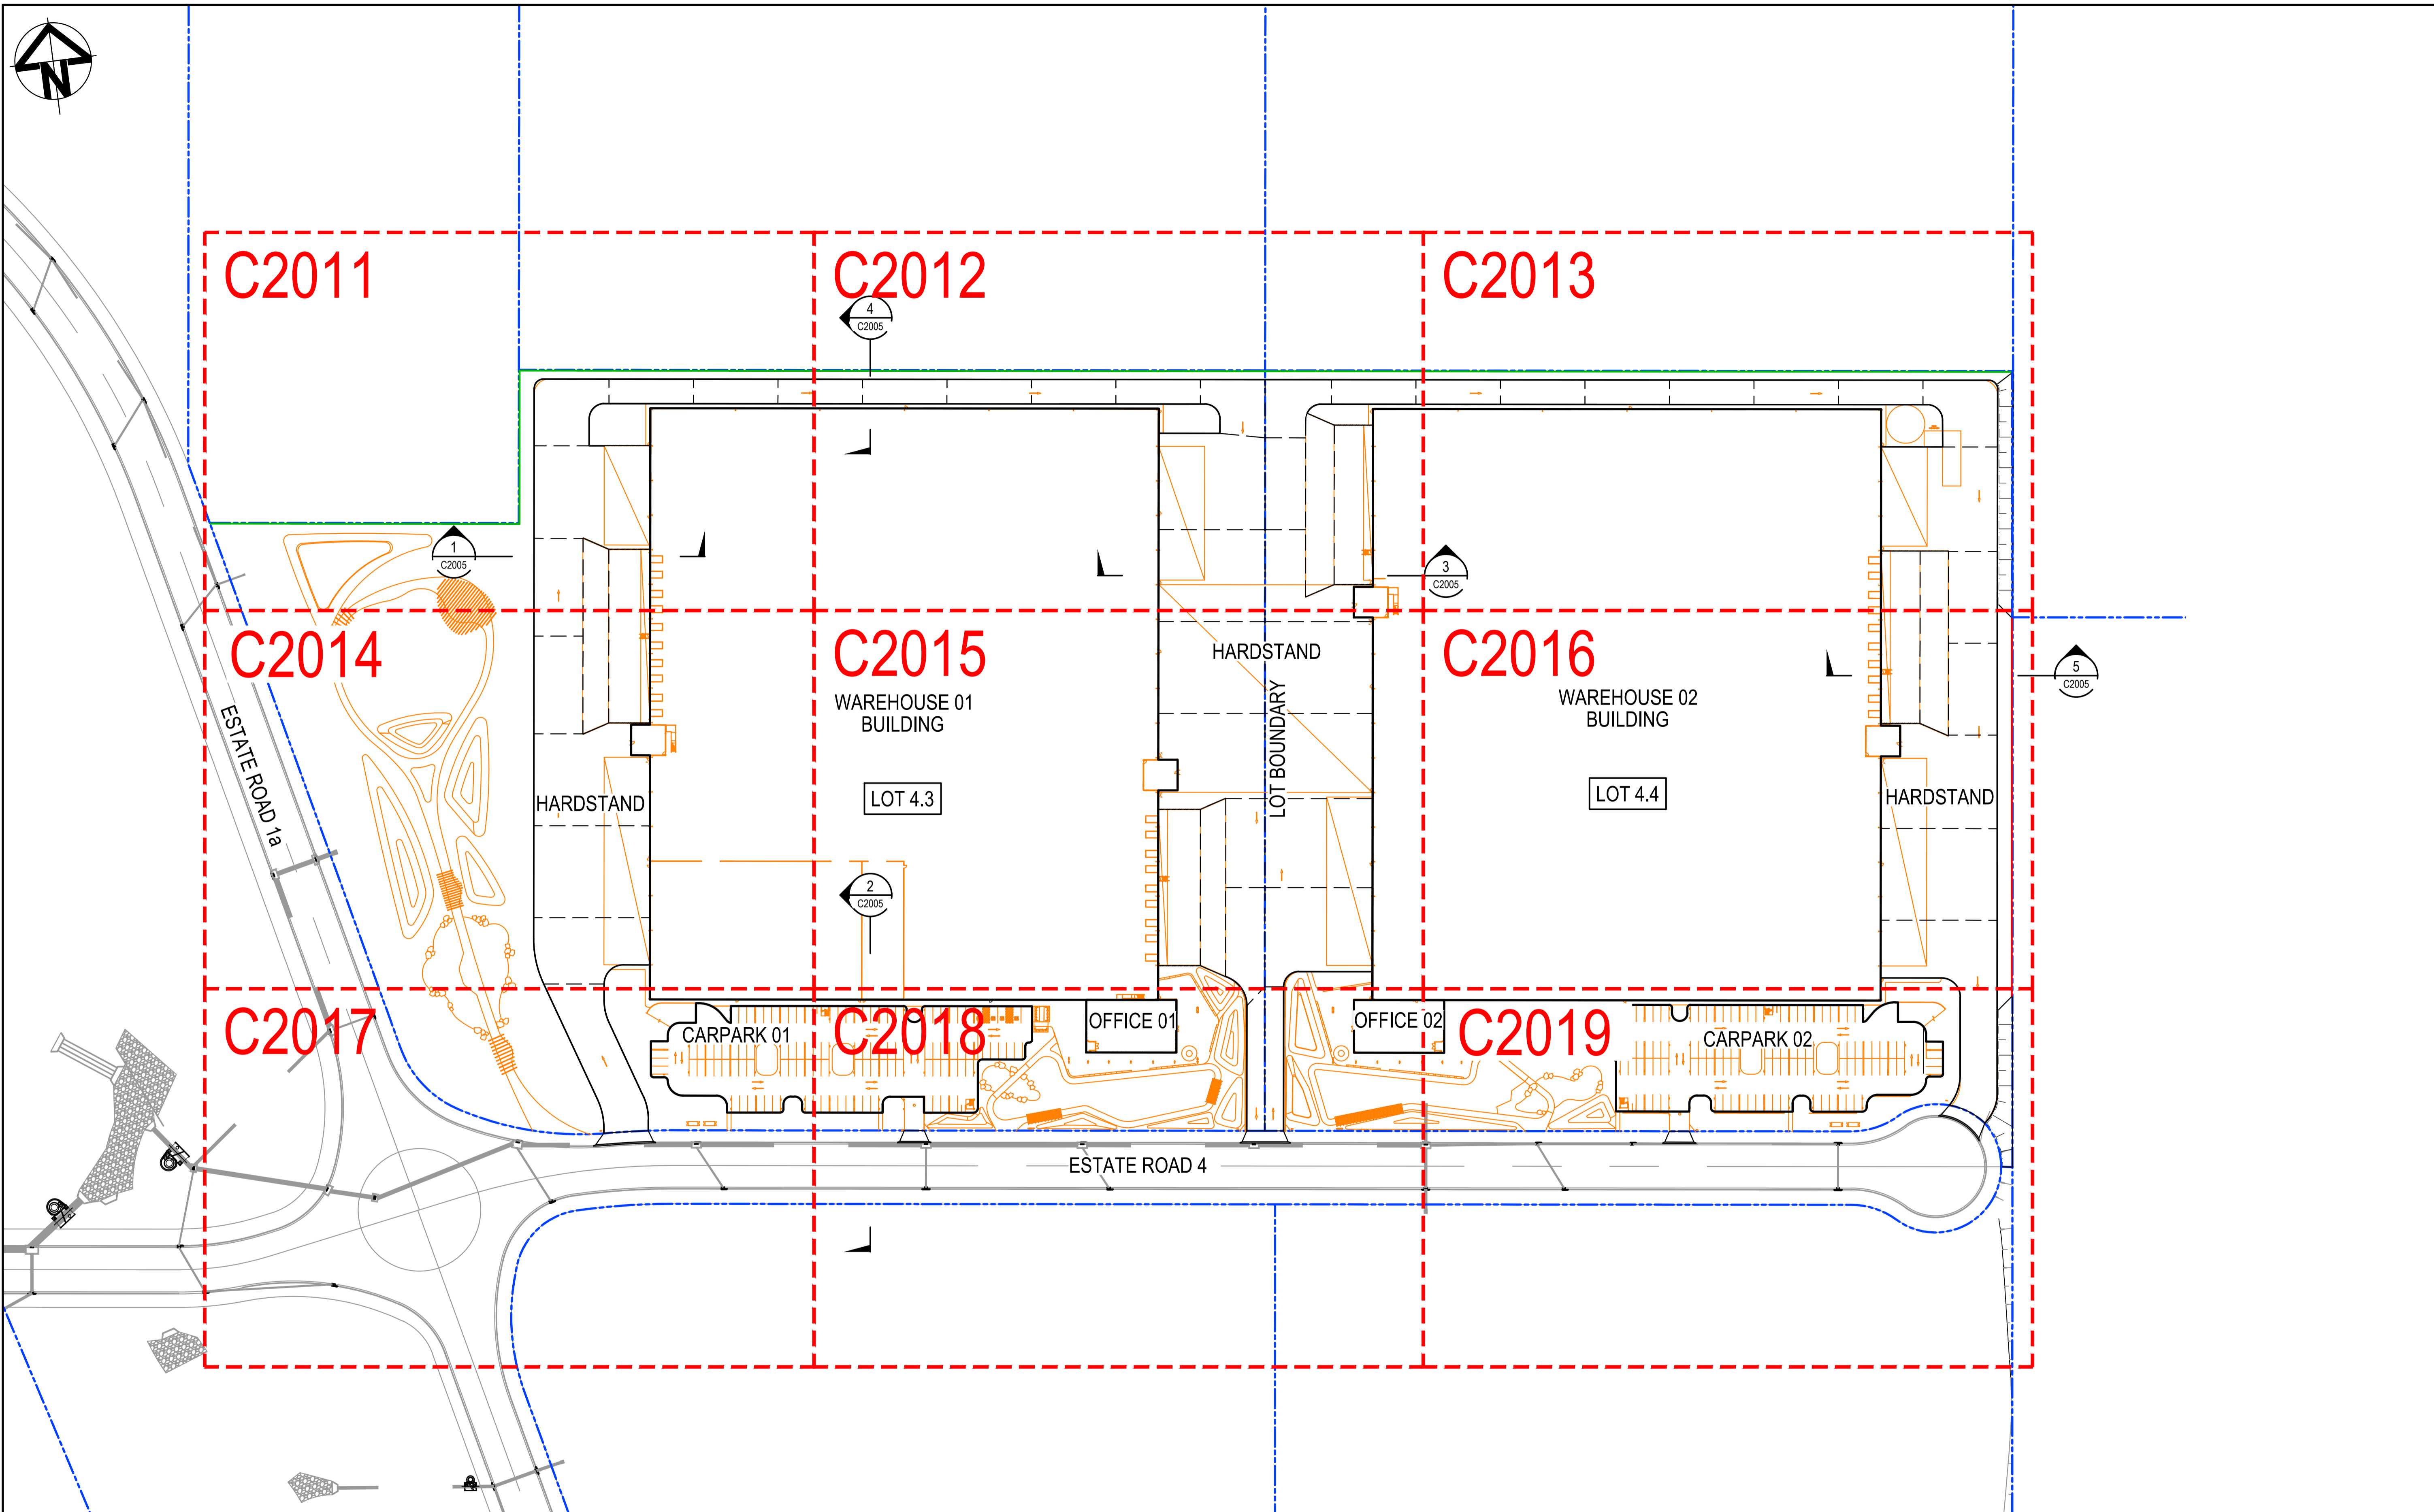

Issue	Description	Date
D	ISSUED FOR COORDINATION	15-10-24
WIP	ISSUED FOR COORDINATION	09-09-24
C	ISSUED FOR APPROVAL	14-06-23
B	ISSUED FOR COORDINATION	20-04-23
A	ISSUED FOR COORDINATION	22-12-22



THIS DRAWING CANNOT BE COPIED OR REPRODUCED IN ANY FORM OR USED FOR ANY OTHER PURPOSE OTHER THAN THAT ORIGINALLY INTENDED WITHOUT THE WRITTEN PERMISSION OF AT&L

Client



Scales	1:1000 @ A1	Drawn	CK
Grid	GDA2020	Designed	CK
Height Datum	AHD	Checked	CB
		Approved	




Project

**INDUSTRIAL DEVELOPMENT  
BURRA PARK**

Title


**LOT 4.3 & 4.4 (WH 01 & 02)  
GENERAL ARRANGEMENT**

Civil Engineers and Project Managers




Level 7, 153 Walker Street  
North Sydney NSW 2060  
ABN 96 130 882 405  
Tel: 02 9439 1777  
Fax: 02 9923 1055  
www.atl.net.au  
info@atl.net.au


Status	<b>FOR COORDINATION NOT FOR CONSTRUCTION</b>	Issue	<b>A1</b>
Project - Drawing No.	<b>22-993-C2002</b>	Issue	<b>D</b>

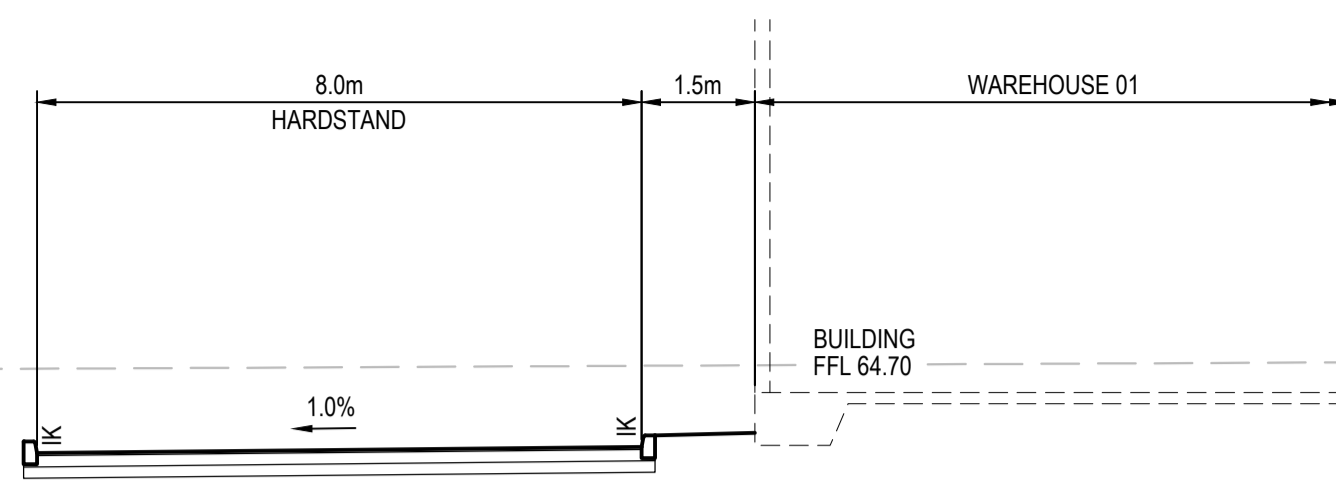


SECTION 4  
1:100

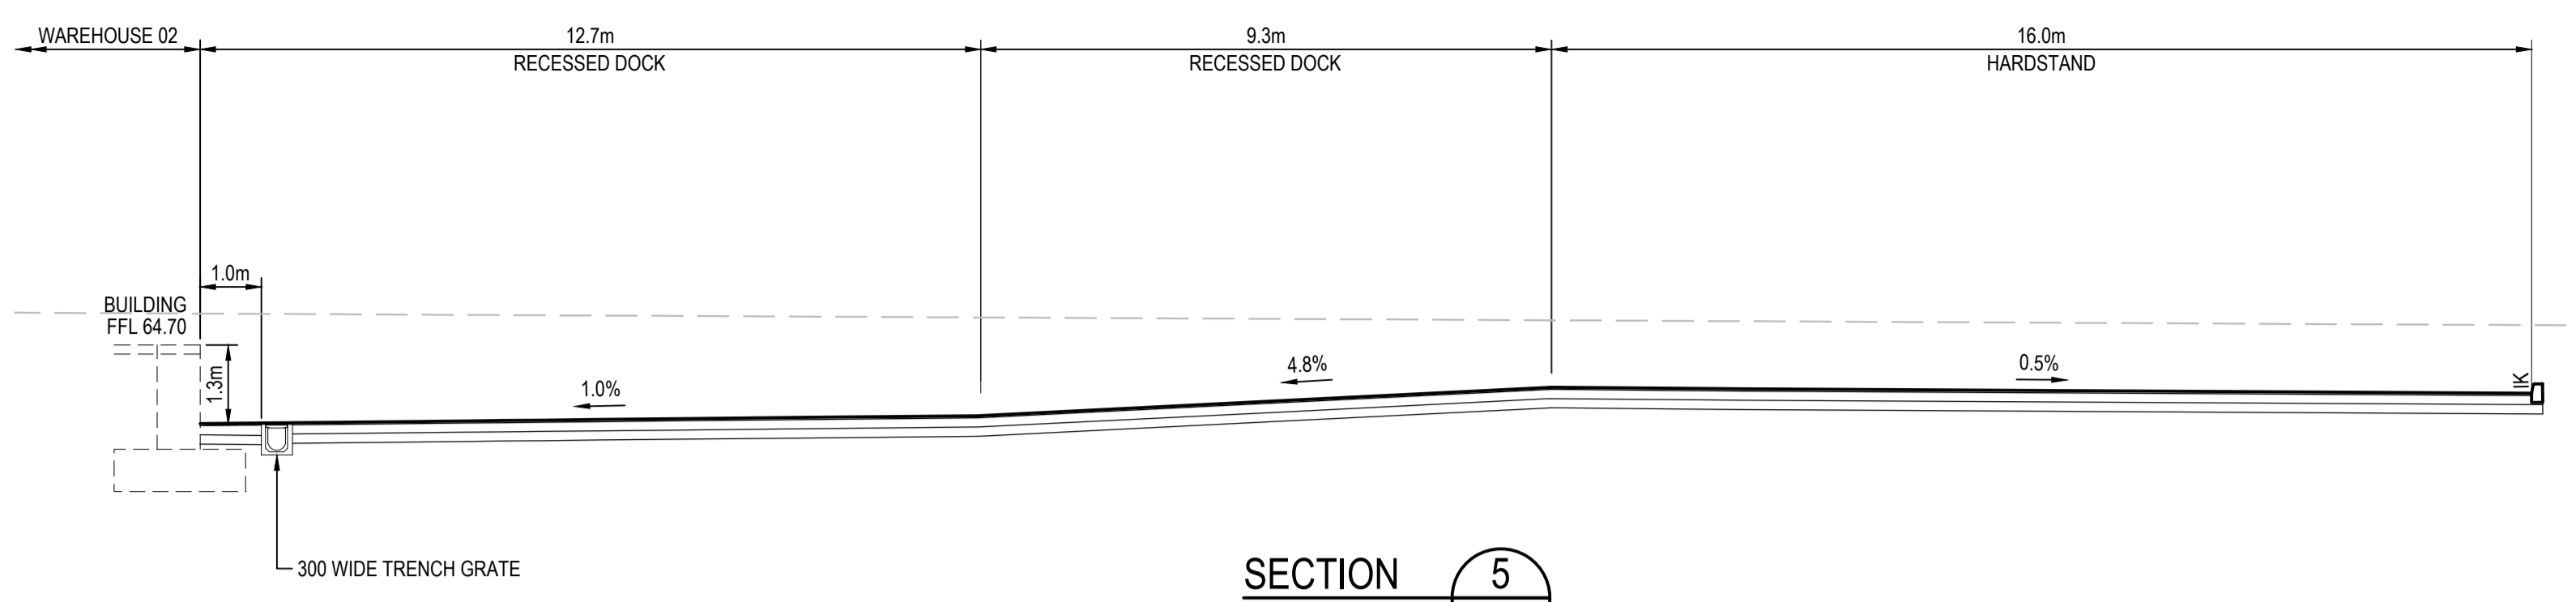


SECTION 5  
1:100

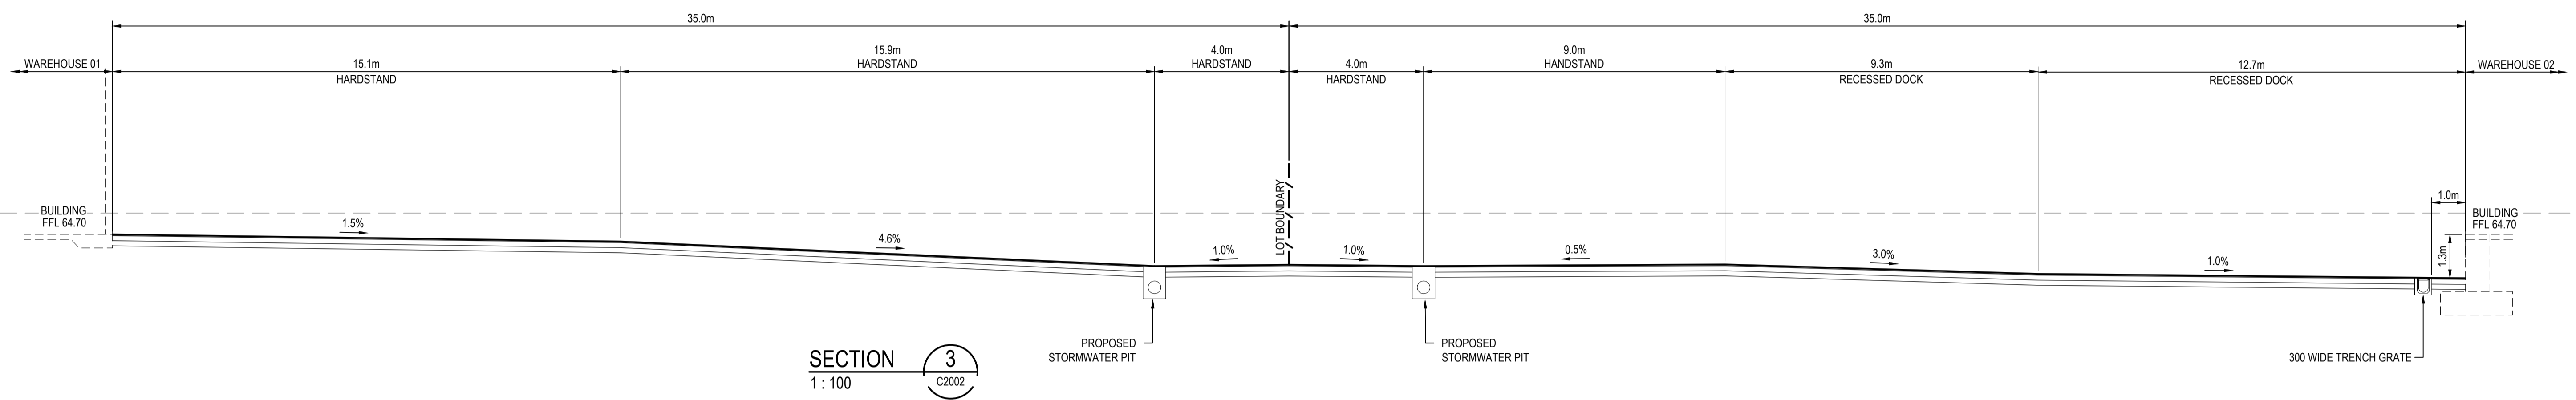

SECTION 3  
1:100

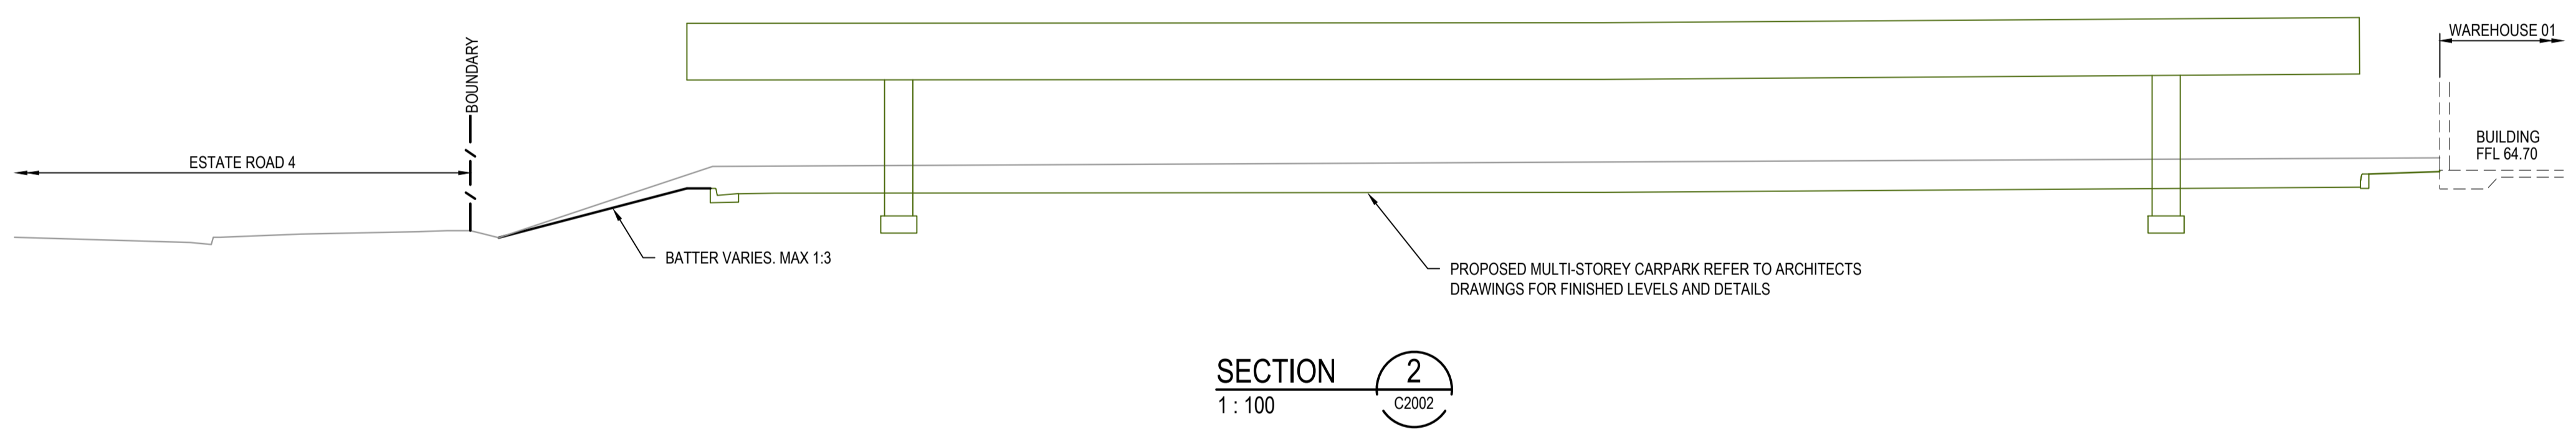


SECTION 2  
1:100

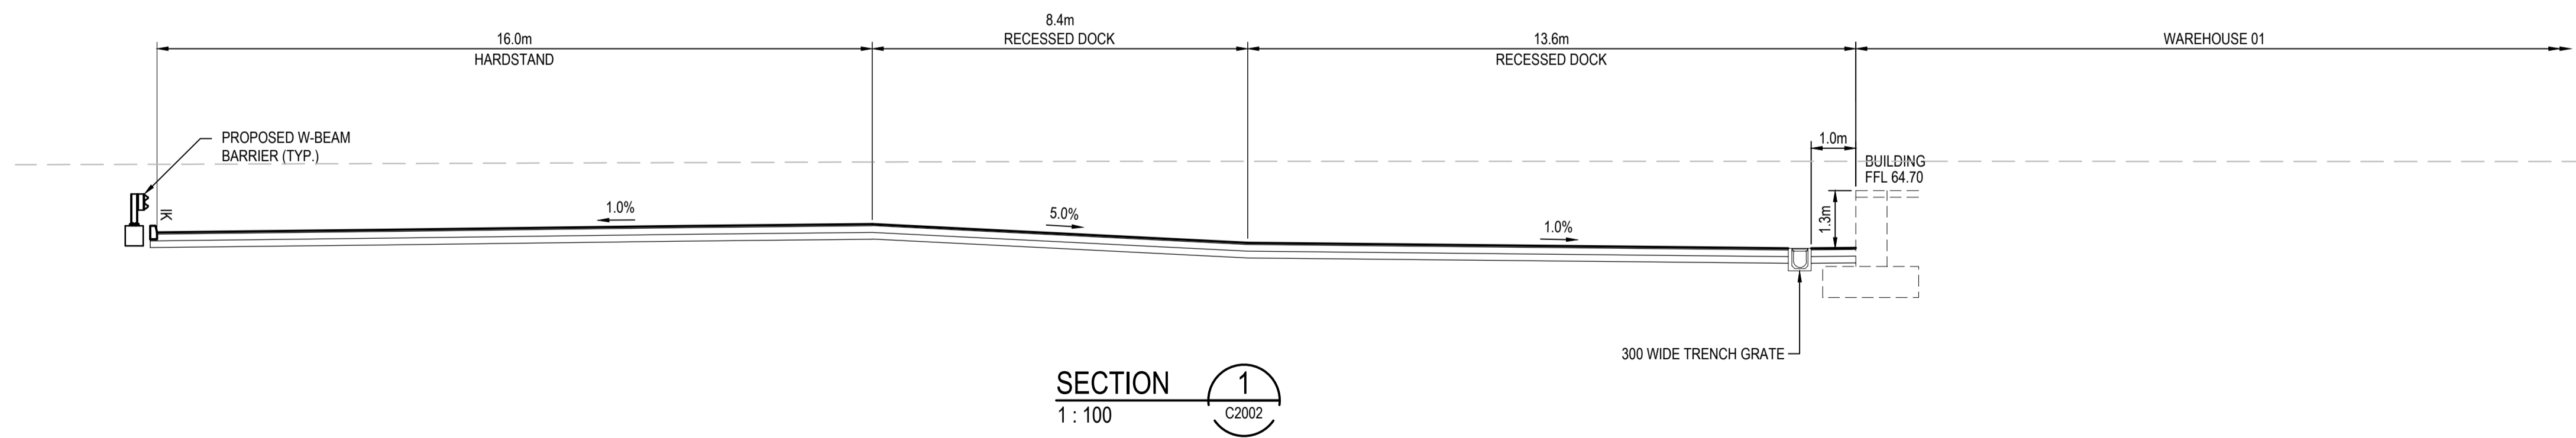

SECTION 1  
1:100

Issue	Description	Date
D	ISSUED FOR COORDINATION	15-10-24
WIP	ISSUED FOR COORDINATION	09-09-24
C	ISSUED FOR APPROVAL	14-06-23
B	ISSUED FOR COORDINATION	20-04-23
A	ISSUED FOR COORDINATION	22-12-22



THIS DRAWING CANNOT BE COPIED OR REPRODUCED IN ANY FORM OR USED FOR ANY OTHER PURPOSE OTHER THAN THAT ORIGINALLY INTENDED WITHOUT THE WRITTEN PERMISSION OF AT&L




Client	DHL	
Scales	1:100 @ A1	
Grid	GDA2020	Drawn: CK
		Designed: CK
Height Datum	AHD	Checked: CB
		Approved:
GDA2020		

Project	INDUSTRIAL DEVELOPMENT BURRA PARK
Title	LOT 4.3 & 4.4 (WH 01 & 02) SITE SECTIONS

Civil Engineers and Project Managers

Level 7, 153 Walker Street  
North Sydney NSW 2060  
ABN 96 130 882 405  
Tel: 02 9439 1777  
Fax: 02 9923 1055  
www.atl.net.au  
info@atl.net.au

Status	FOR COORDINATION NOT FOR CONSTRUCTION	A1
Project - Drawing No.	22-993-C2005	Issue D




- NOTES**
- EARTHWORKS VOLUMES WERE CALCULATED BETWEEN THE DESIGN EARTHWORKS SURFACE AND THE ESTATE VENDOR'S EARTHWORKS SURFACE.
  - IT IS ASSUMED THAT ON-LOT EARTHWORKS WILL COMMENCE IMMEDIATELY AFTER COMPLETION OF THE ESTATE VENDOR'S EARTHWORKS. NO SITE STRIPPING NECESSARY.
  - EARTHWORKS VOLUMES DO NOT TAKE INTO ACCOUNT THE FOLLOWING -
    - BULKING FACTORS
    - REMOVAL AND/OR REMEDIATION OF ANY EXISTING UNCONTROLLED FILL AND FARM DAMS.
    - STORMWATER AND UTILITY TRENCHING
    - PROPOSED RETAINING WALL AND UNDERGROUND TANK EARTHWORKS AND BACKFILL MATERIAL
    - SEDIMENT BASINS
  - ALL LEVELS ARE SUBJECT TO FURTHER COORDINATION WITH THE ESTATE WORKS. ALLOW FOR ±1000mm

**EARTHWORKS VOLUMES**


A	B	C=A+B
NET CUT (cu.m)	NET FILL (cu.m)	BALANCE (cu.m)
-85,900m <sup>3</sup>	20,230m <sup>3</sup>	-65,670m <sup>3</sup> (EXPORT)

**CUT/FILL DEPTH RANGE LEGEND**

Lower_value	Upper_value	Colour
-100	to -4.0	Dark Brown
-4.0	to -3.5	Light Brown
-3.5	to -3.0	Orange
-3.0	to -2.5	Yellow-Green
-2.5	to -2.0	Yellow
-2.0	to -1.5	Light Green
-1.5	to -1.0	Light Blue
-1.0	to -0.5	Light Purple
-0.5	to 0.0	Light Red
0.0	to 0.5	Light Green
0.5	to 1.0	Light Green
1.0	to 1.5	Light Blue
1.5	to 2.0	Light Blue
2.0	to 2.5	Light Cyan
2.5	to 3.0	Light Cyan
3.0	to 3.5	Light Grey
3.5	to 4.0	Light Grey
4.0	to 100	Dark Grey

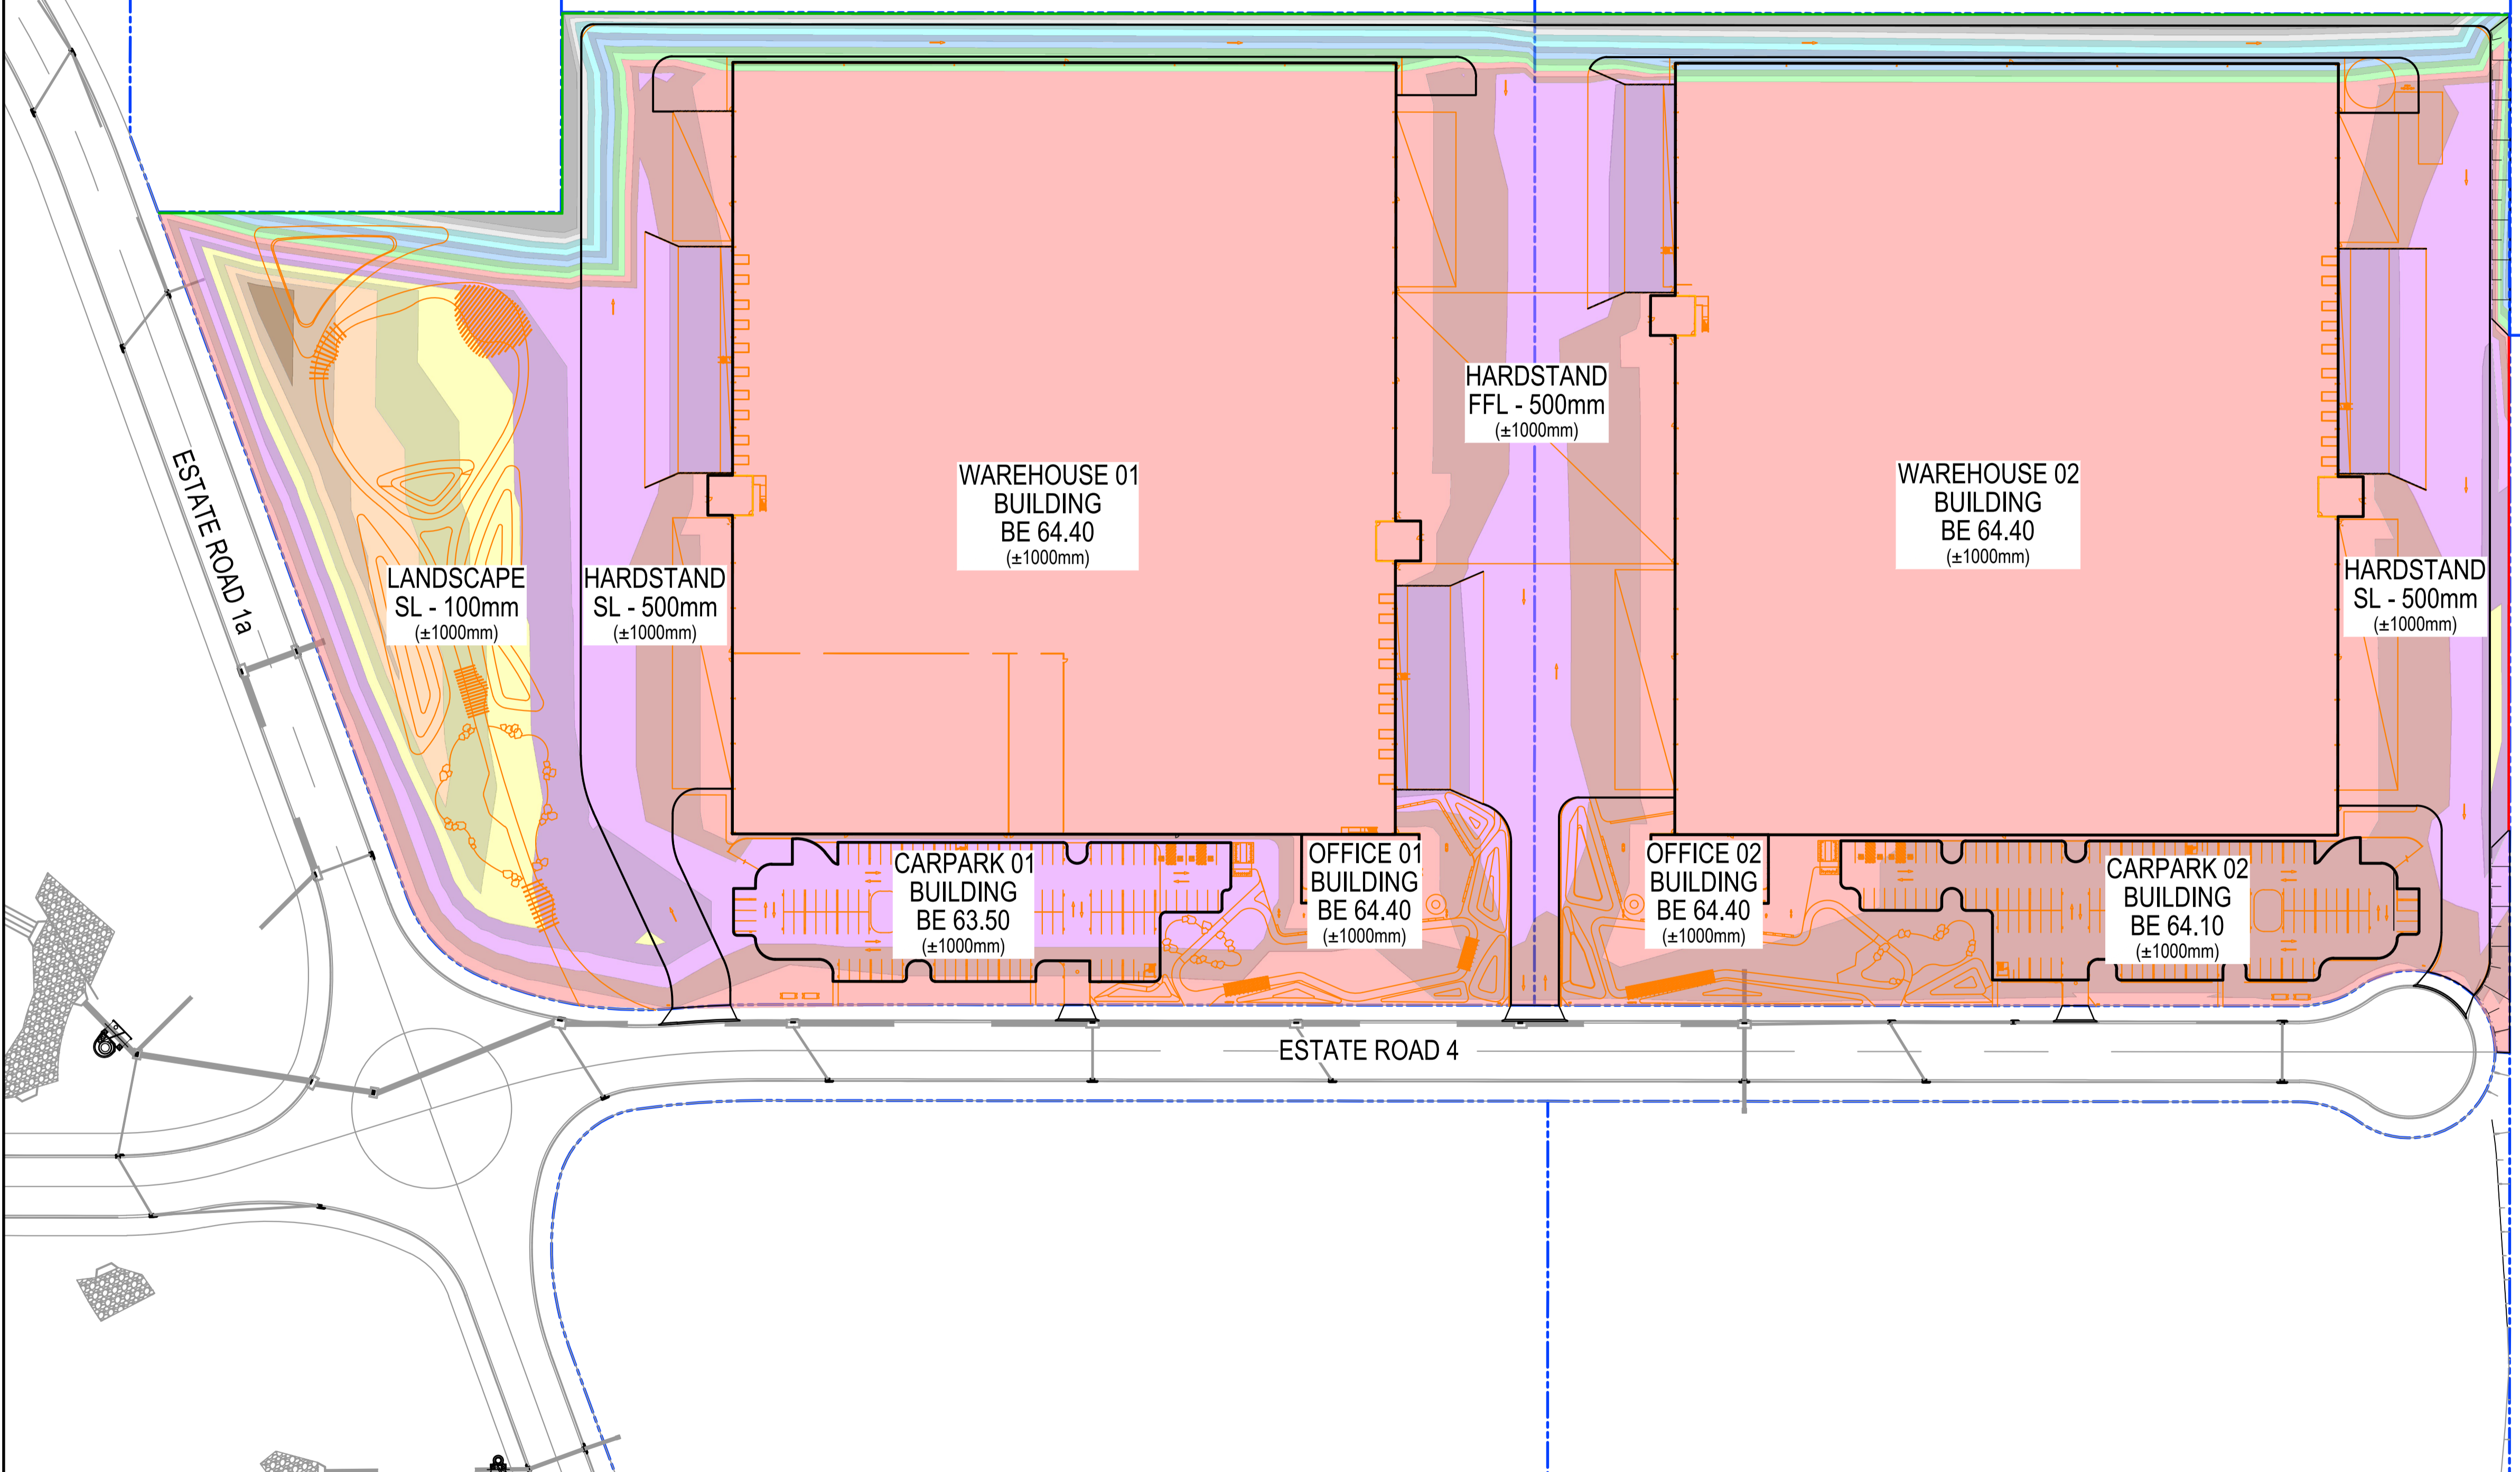

Issue	Description	Date
D	ISSUED FOR COORDINATION	15-10-24
WIP	ISSUED FOR COORDINATION	09-09-24
C	ISSUED FOR APPROVAL	14-06-23
B	ISSUED FOR COORDINATION	20-04-23
A	ISSUED FOR COORDINATION	22-12-22

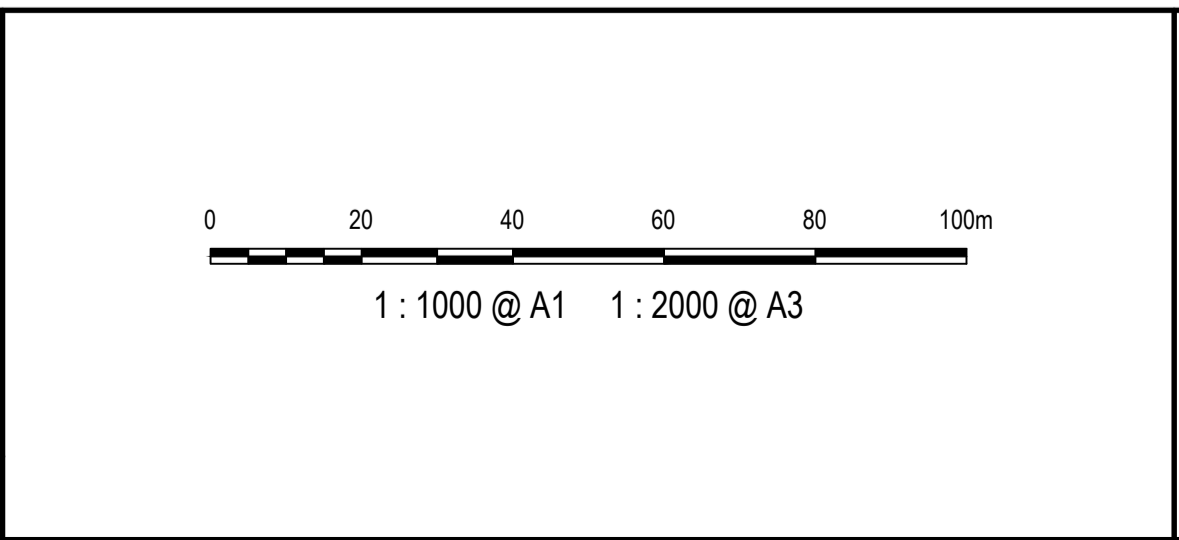

THIS DRAWING CANNOT BE COPIED OR REPRODUCED IN ANY FORM OR USED FOR ANY OTHER PURPOSE OTHER THAN THAT ORIGINALLY INTENDED WITHOUT THE WRITTEN PERMISSION OF AT&L

Client



Scales 1:1000 @ A1

Grid GDA2020

Height Datum AHD

Drawn CK

Designed CK

Checked CB

Approved




Project

INDUSTRIAL DEVELOPMENT BURRA PARK

Title

LOT 4.3 & 4.4 (WH 01 & 02) BULK EARTHWORKS CUT/FILL PLAN

Civil Engineers and Project Managers



Level 7, 153 Walker Street  
North Sydney NSW 2060  
ABN 96 130 882 405  
Tel: 02 9439 1777  
Fax: 02 9923 1055  
www.atl.net.au  
info@atl.net.au

Status

FOR COORDINATION  
NOT FOR CONSTRUCTION

Project - Drawing No.  
22-993-C2008

Issue


D




**LEGEND:**

- EXISTING BOUNDARY
- PROPOSED BOUNDARY
- PROPOSED RETAINING WALL
- 48.20 PROPOSED CONTOUR
- PROPOSED FENCE
- PROPOSED BATTER  
TEMPORARY BATTER 1(V):4(H)  
PERMANENT BATTER 1(V):5(H)  
U.N.O
- PROPOSED FLUSH KERB  
TO PCC SPECIFICATION
- PROPOSED KERB AND GUTTER  
TO PCC SPECIFICATION
- PROPOSED KERB EDGING  
TO PCC SPECIFICATION
- PROPOSED KERB EDGING INTEGRAL TO  
CONCRETE SLAB TO PCC SPECIFICATION
- PROPOSED SLOTTED KERB EDGING  
INTEGRAL TO CONCRETE SLAB TO PCC  
SPECIFICATION
- PROPOSED GRASSED SWALE
- DRIVEWAY CROSSOVER
- PROPOSED KERB RAMP
- PROPOSED STORMWATER  
PIT NUMBER
- PROPOSED STORMWATER  
LABEL
- PROPOSED STORMWATER PIPE
- PROPOSED UPVC ROOF WATER  
DRAINAGE LINE (MAX Ø300mm)
- PROPOSED GRATED DRAIN  
250mm Class 'D' GRATE
- STORMWATER OVERLAND FLOWPATH
- F XX.XX PROPOSED SURFACE LEVEL


- NOTES:**
1. ALL LEVELS SHOWN ARE ± 1000mm
  2. ROOF WATER DOWN PIPE LOCATIONS TO BE CONFIRMED DURING DETAILED DESIGN.
  3. RETAINING WALL LOCATIONS TO BE CONFIRMED DURING DETAILED DESIGN.
  4. VEHICLE TURNING PATHS TO BE CONFIRMED DURING DETAILED DESIGN.
  5. EXTERNAL / SUBDIVISION WORKS BY VENDOR. REFER SSD-19406916.



LOT 5.4  
FFL 59.00  
BEL 58.65

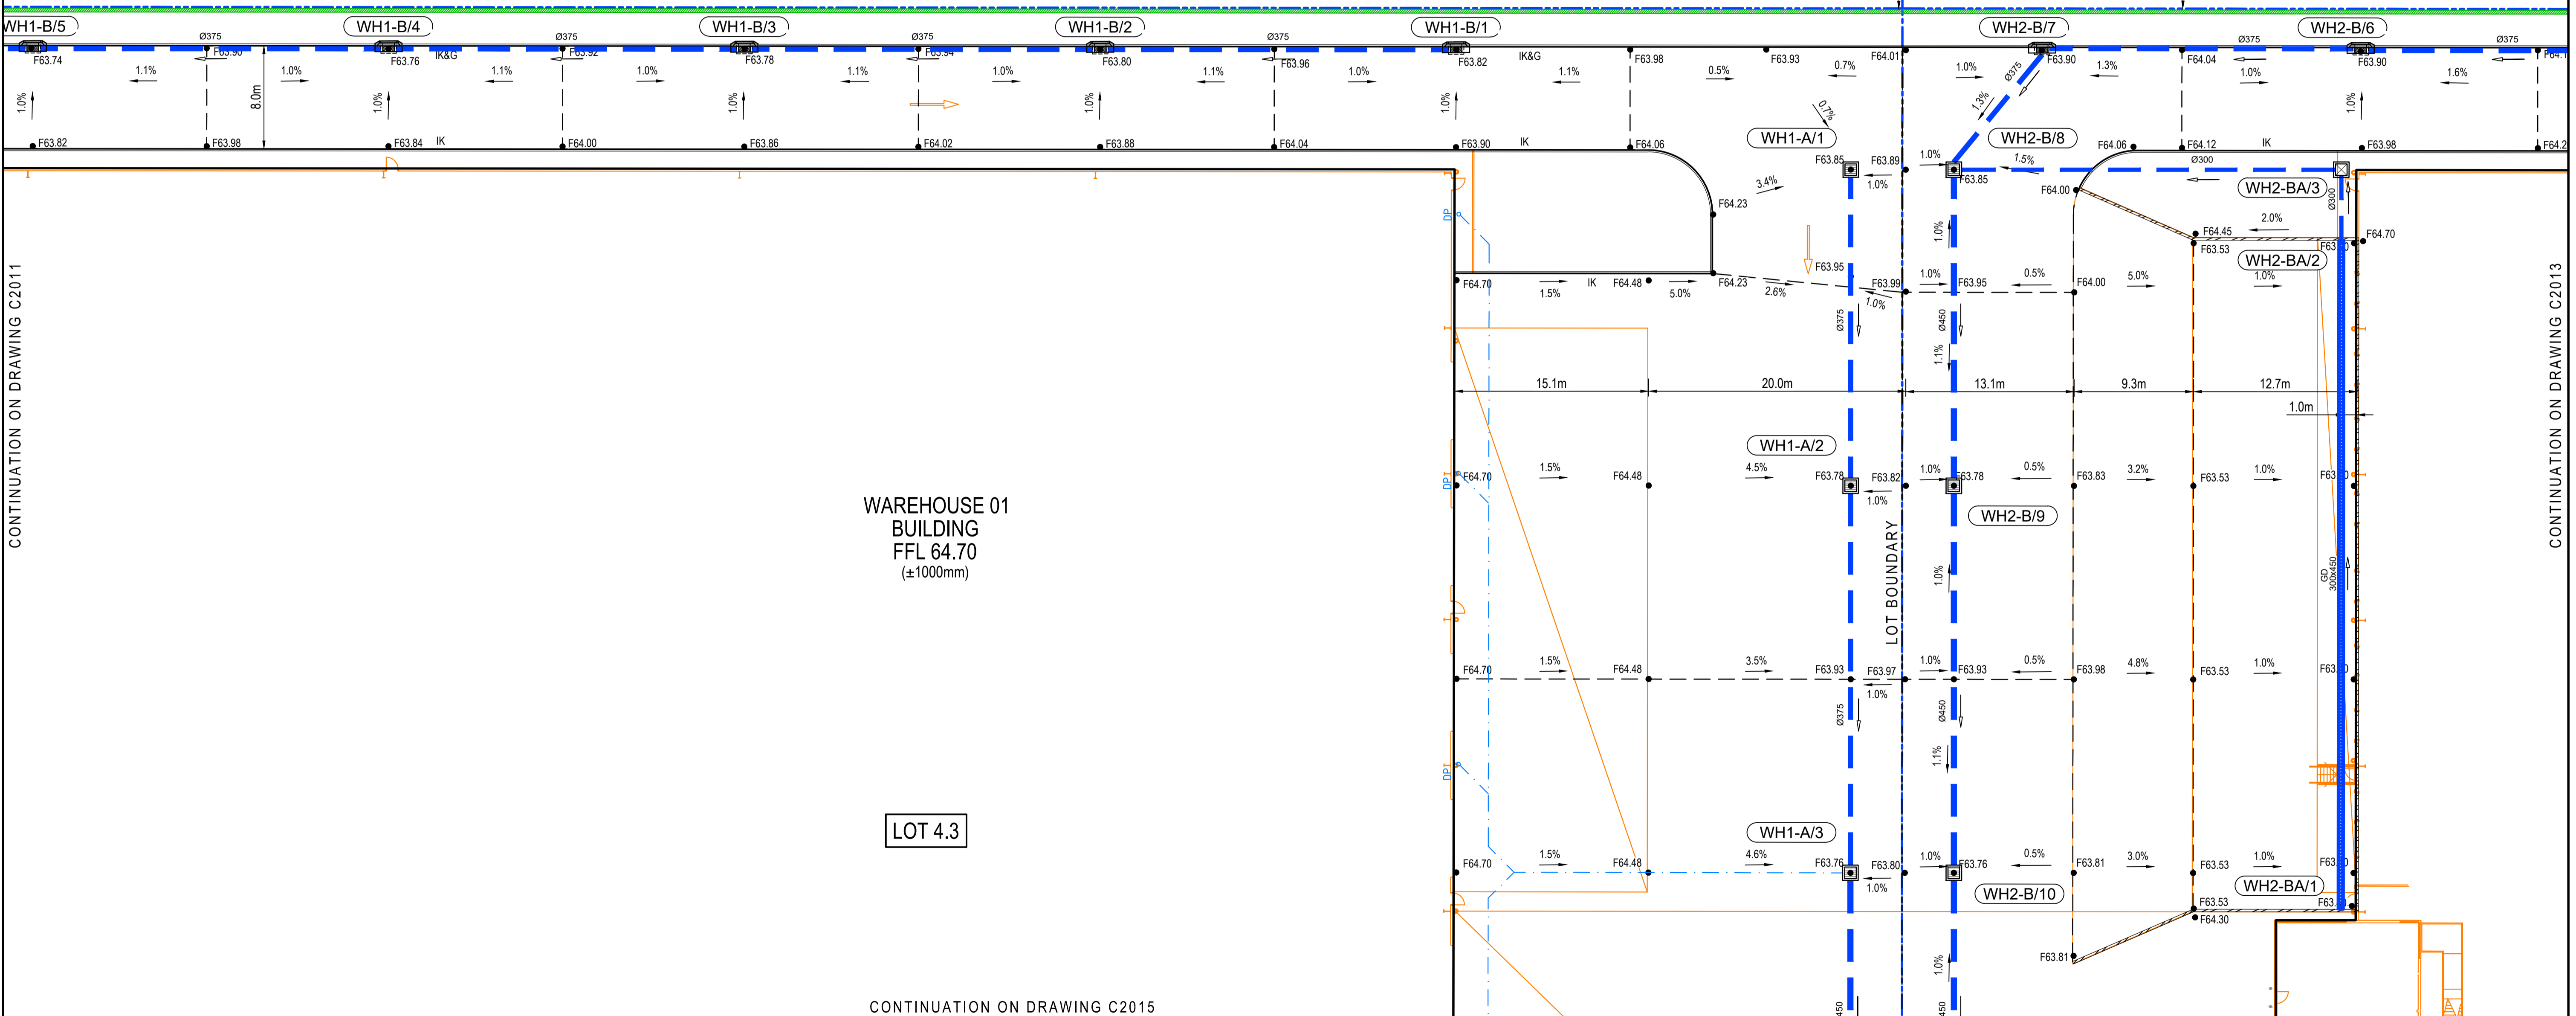

Issue	Description	Date
E	ISSUED FOR COORDINATION	15-10-24
WIP	ISSUED FOR COORDINATION	09-09-24
D	ISSUED FOR APPROVAL	14-06-23
C	ISSUED FOR COORDINATION	20-04-23
B	ISSUED FOR COORDINATION	22-12-22
A	ISSUED FOR COORDINATION	24-11-22

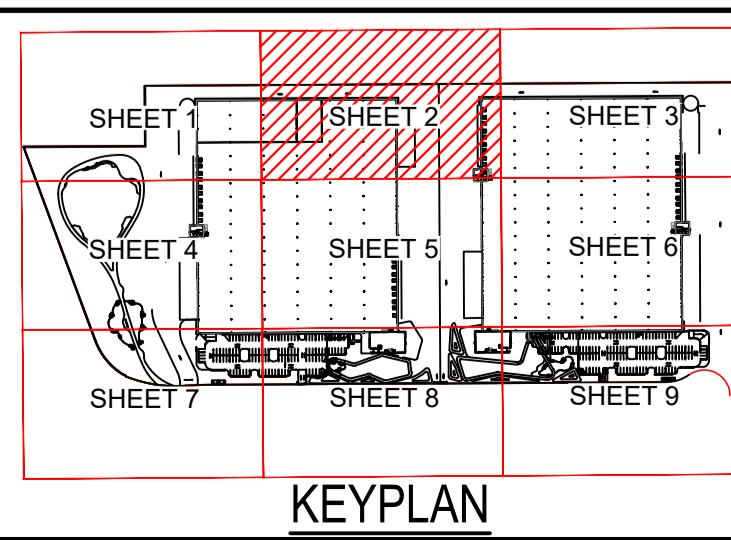

THIS DRAWING CANNOT BE COPIED OR REPRODUCED IN ANY FORM OR USED FOR ANY OTHER PURPOSE OTHER THAN THAT ORIGINALLY INTENDED WITHOUT THE WRITTEN PERMISSION OF AT&L

Client

Scales: 1:250 @ A1

Grid: GDA2020

Height Datum: AHD

1 : 250 @ A1    1 : 500 @ A3

Drawn: CK

Designed: CK

Checked: CB

Approved:

Project: INDUSTRIAL DEVELOPMENT BURRA PARK

Title: LOT 4.3 & 4.4 (WH 01 & 02) SITEWORKS AND STORMWATER DRAINAGE PLAN SHEET 2

Civil Engineers and Project Managers

Level 7, 153 Walker Street  
North Sydney NSW 2060  
ABN 96 130 882 405  
Tel: 02 9439 1777  
Fax: 02 9923 1055  
www.atl.net.au  
info@atl.net.au

Status: FOR COORDINATION NOT FOR CONSTRUCTION


Project - Drawing No. 22-993-C2012

Issue: E

**LEGEND:**


- EXISTING BOUNDARY
- PROPOSED BOUNDARY
- PROPOSED RETAINING WALL
- 48.20 PROPOSED CONTOUR
- PROPOSED FENCE
- PROPOSED BATTER  
TEMPORARY BATTER 1(V):4(H)  
PERMANENT BATTER 1(V):5(H)  
U.N.O
- PROPOSED FLUSH KERB  
TO PCC SPECIFICATION
- PROPOSED KERB AND GUTTER  
TO PCC SPECIFICATION
- PROPOSED KERB EDGING  
TO PCC SPECIFICATION
- PROPOSED KERB EDGING INTEGRAL TO  
CONCRETE SLAB TO PCC SPECIFICATION
- PROPOSED SLOTTED KERB EDGING  
INTEGRAL TO CONCRETE SLAB TO PCC  
SPECIFICATION
- PROPOSED GRASSED SWALE
- DRIVEWAY CROSSOVER
- PROPOSED KERB RAMP
- PROPOSED STORMWATER  
PIT NUMBER
- PROPOSED STORMWATER  
LABEL
- PROPOSED STORMWATER PIPE
- PROPOSED UPVC ROOF WATER  
DRAINAGE LINE (MAX Ø300mm)
- PROPOSED GRATED DRAIN  
250mm Class 'D' GRATE
- STORMWATER OVERLAND FLOWPATH
- F XX.XX PROPOSED SURFACE LEVEL

- NOTES:**
1. ALL LEVELS SHOWN ARE ± 1000mm
  2. ROOF WATER DOWN PIPE LOCATIONS TO BE CONFIRMED DURING DETAILED DESIGN.
  3. RETAINING WALL LOCATIONS TO BE CONFIRMED DURING DETAILED DESIGN.
  4. VEHICLE TURNING PATHS TO BE CONFIRMED DURING DETAILED DESIGN.
  5. EXTERNAL / SUBDIVISION WORKS BY VENDOR. REFER SSD-19406916.



LOT 5.4  
FFL 59.00  
BEL 58.65


LOT 5.5  
FFL 63.60  
BEL 63.25

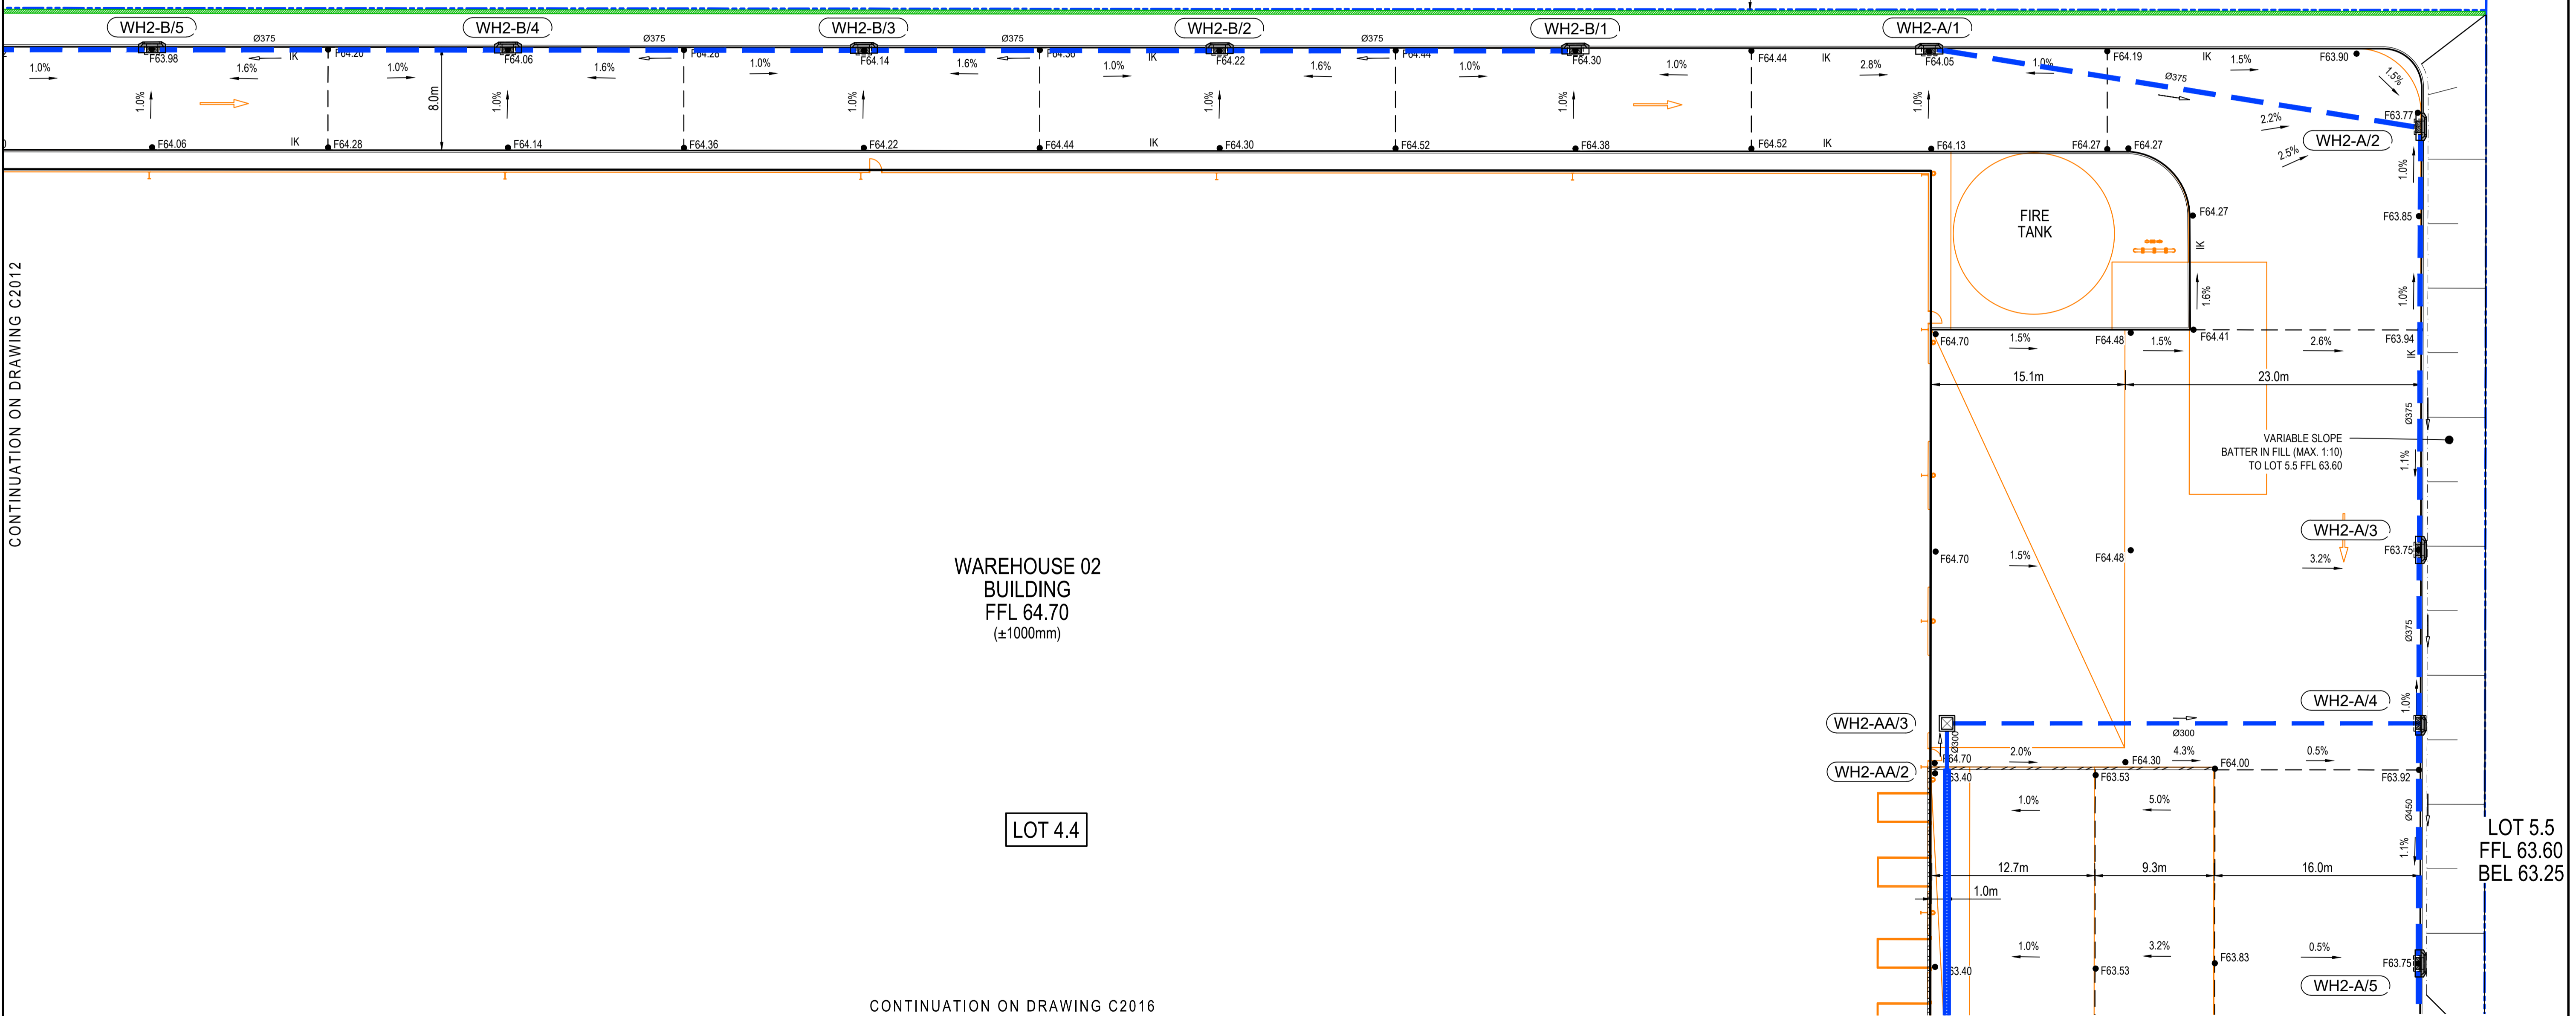

CONTINUATION ON DRAWING C2012

CONTINUATION ON DRAWING C2016

Issue	Description	Date
E	ISSUED FOR COORDINATION	15-10-24
WIP	ISSUED FOR COORDINATION	09-09-24
D	ISSUED FOR APPROVAL	14-06-23
C	ISSUED FOR COORDINATION	20-04-23
B	ISSUED FOR COORDINATION	22-12-22
A	ISSUED FOR COORDINATION	24-11-22

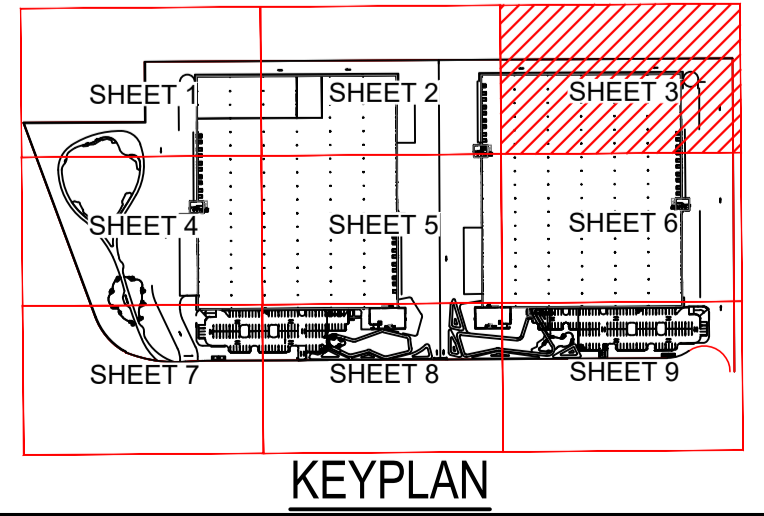

THIS DRAWING CANNOT BE COPIED OR REPRODUCED IN ANY FORM OR USED FOR ANY OTHER PURPOSE OTHER THAN THAT ORIGINALLY INTENDED WITHOUT THE WRITTEN PERMISSION OF AT&L

Client

Scale: 1:250 @ A1

Grid: GDA2020

Height Datum: AHD

1 : 250 @ A1    1 : 500 @ A3

Drawn: CK

Designed: CK

Checked: CB

Approved:

Project: INDUSTRIAL DEVELOPMENT BURRA PARK

Title: LOT 4.3 & 4.4 (WH 01 & 02) SITeworks AND STORMWATER DRAINAGE PLAN SHEET 3


Civil Engineers and Project Managers

Level 7, 153 Walker Street  
North Sydney NSW 2060  
ABN 96 130 882 405  
Tel: 02 9439 1777  
Fax: 02 9923 1055  
www.atl.net.au  
info@atl.net.au


Status: FOR COORDINATION NOT FOR CONSTRUCTION

Project - Drawing No. 22-993-C2013

Issue: A1

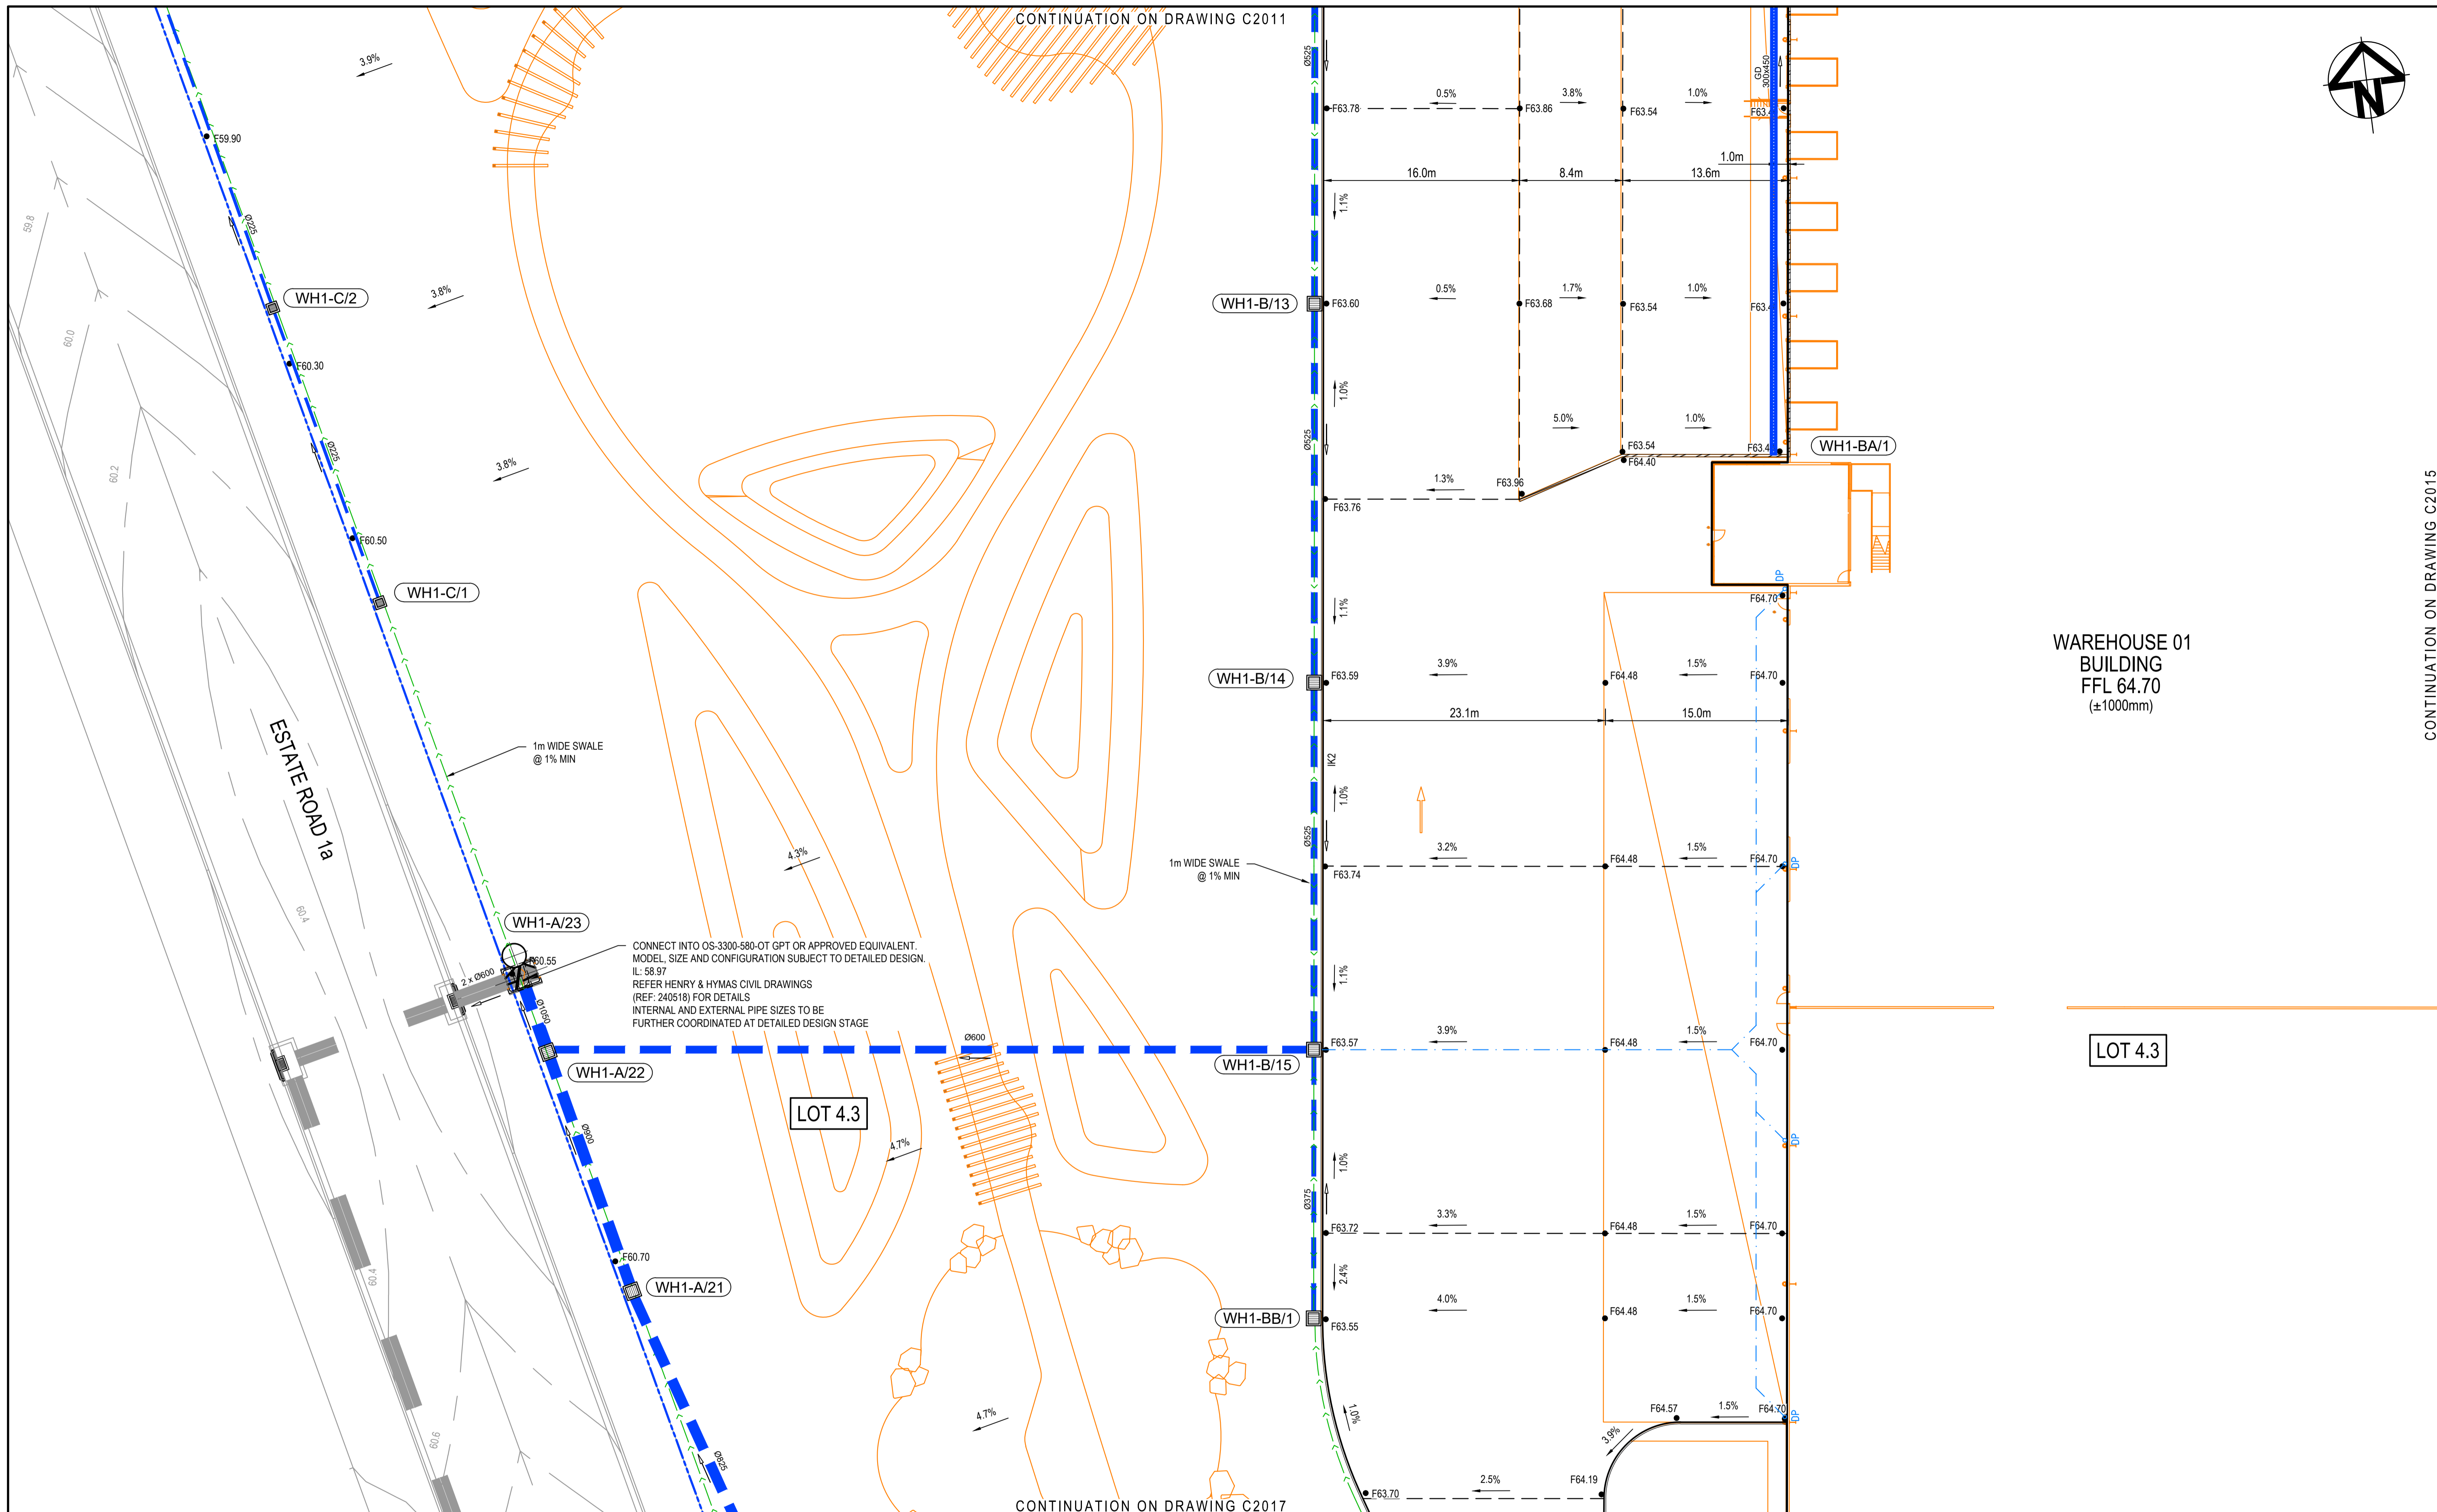

Issue	Description	Date
E	ISSUED FOR COORDINATION	15-10-24
WIP	ISSUED FOR COORDINATION	09-09-24
D	ISSUED FOR APPROVAL	14-06-23
C	ISSUED FOR COORDINATION	20-04-23
B	ISSUED FOR COORDINATION	22-12-22
A	ISSUED FOR COORDINATION	24-11-22

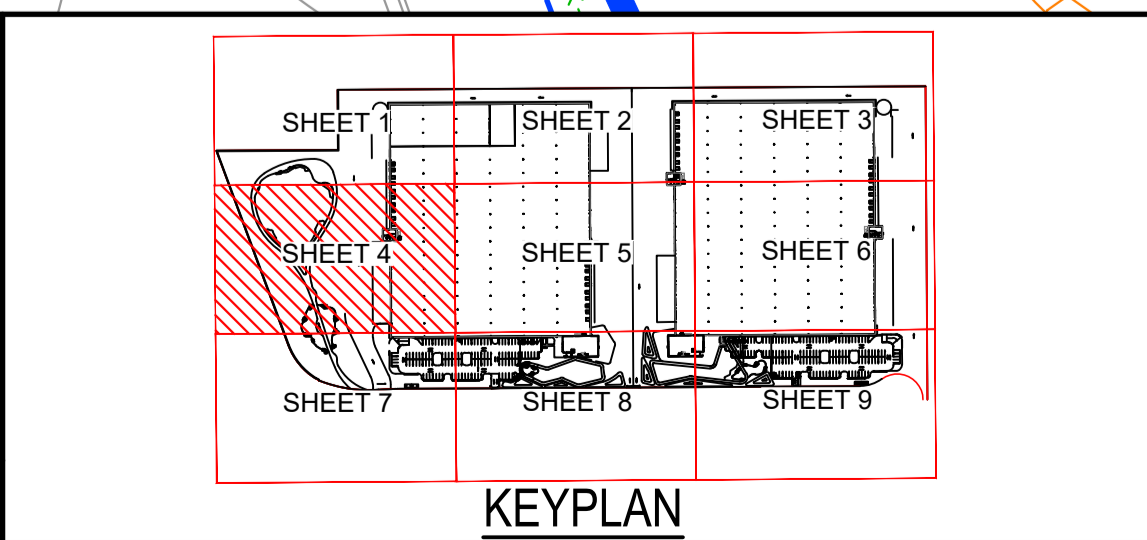

THIS DRAWING CANNOT BE COPIED OR REPRODUCED IN ANY FORM OR USED FOR ANY OTHER PURPOSE OTHER THAN THAT ORIGINALLY INTENDED WITHOUT THE WRITTEN PERMISSION OF AT&L

Client

0 5 10 15 20  
1 : 250 @ A1 1 : 500 @ A3

Scales	1:250 @ A1	Drawn	CK
Grid	GDA2020	Designed	CK
Height Datum	AHD	Checked	CB
		Approved	

Project  
**INDUSTRIAL DEVELOPMENT  
BURRA PARK**

Title  
**LOT 4.3 & 4.4 (WH 01 & 02)  
SITWORKS AND  
STORMWATER DRAINAGE  
PLAN SHEET 4**

Civil Engineers and Project Managers


Level 7, 153 Walker Street  
North Sydney NSW 2060  
ABN 96 130 882 405  
Tel: 02 9439 1777  
Fax: 02 9923 1055  
www.atl.net.au  
info@atl.net.au

Status	<b>FOR COORDINATION NOT FOR CONSTRUCTION</b>	A1
Project - Drawing No.	22-993-C2014	Issue
		E

**LEGEND:**

- EXISTING BOUNDARY
- PROPOSED BOUNDARY
- PROPOSED RETAINING WALL
- 48.20 PROPOSED CONTOUR
- PROPOSED FENCE
- PROPOSED BATTER  
TEMPORARY BATTER 1(V):4(H)  
PERMANENT BATTER 1(V):5(H)  
U.N.O.
- PROPOSED FLUSH KERB  
TO PCC SPECIFICATION
- PROPOSED KERB AND GUTTER  
TO PCC SPECIFICATION
- PROPOSED KERB EDGING  
TO PCC SPECIFICATION
- PROPOSED KERB EDGING INTEGRAL TO  
CONCRETE SLAB TO PCC SPECIFICATION
- PROPOSED SLOTTED KERB EDGING  
INTEGRAL TO CONCRETE SLAB TO PCC  
SPECIFICATION
- PROPOSED GRASSED SWALE
- DRIVEWAY CROSSOVER
- PROPOSED KERB RAMP
- PROPOSED STORMWATER  
PIT NUMBER
- PROPOSED STORMWATER  
LABEL
- PROPOSED STORMWATER PIPE
- PROPOSED UPVC ROOF WATER  
DRAINAGE LINE (MAX Ø300mm)
- PROPOSED GRATED DRAIN  
250mm Class 'D' GRATE
- STORMWATER OVERLAND FLOWPATH
- PROPOSED SURFACE LEVEL


- NOTES:**
1. ALL LEVELS SHOWN ARE ± 1000mm
  2. ROOF WATER DOWN PIPE LOCATIONS TO BE CONFIRMED DURING DETAILED DESIGN.
  3. RETAINING WALL LOCATIONS TO BE CONFIRMED DURING DETAILED DESIGN.
  4. VEHICLE TURNING PATHS TO BE CONFIRMED DURING DETAILED DESIGN.
  5. EXTERNAL / SUBDIVISION WORKS BY VENDOR. REFER SSD-19406916.



CONTINUATION ON DRAWING C2014

WAREHOUSE 01  
BUILDING  
FFL 64.70  
(±1000mm)


LOT 4.3

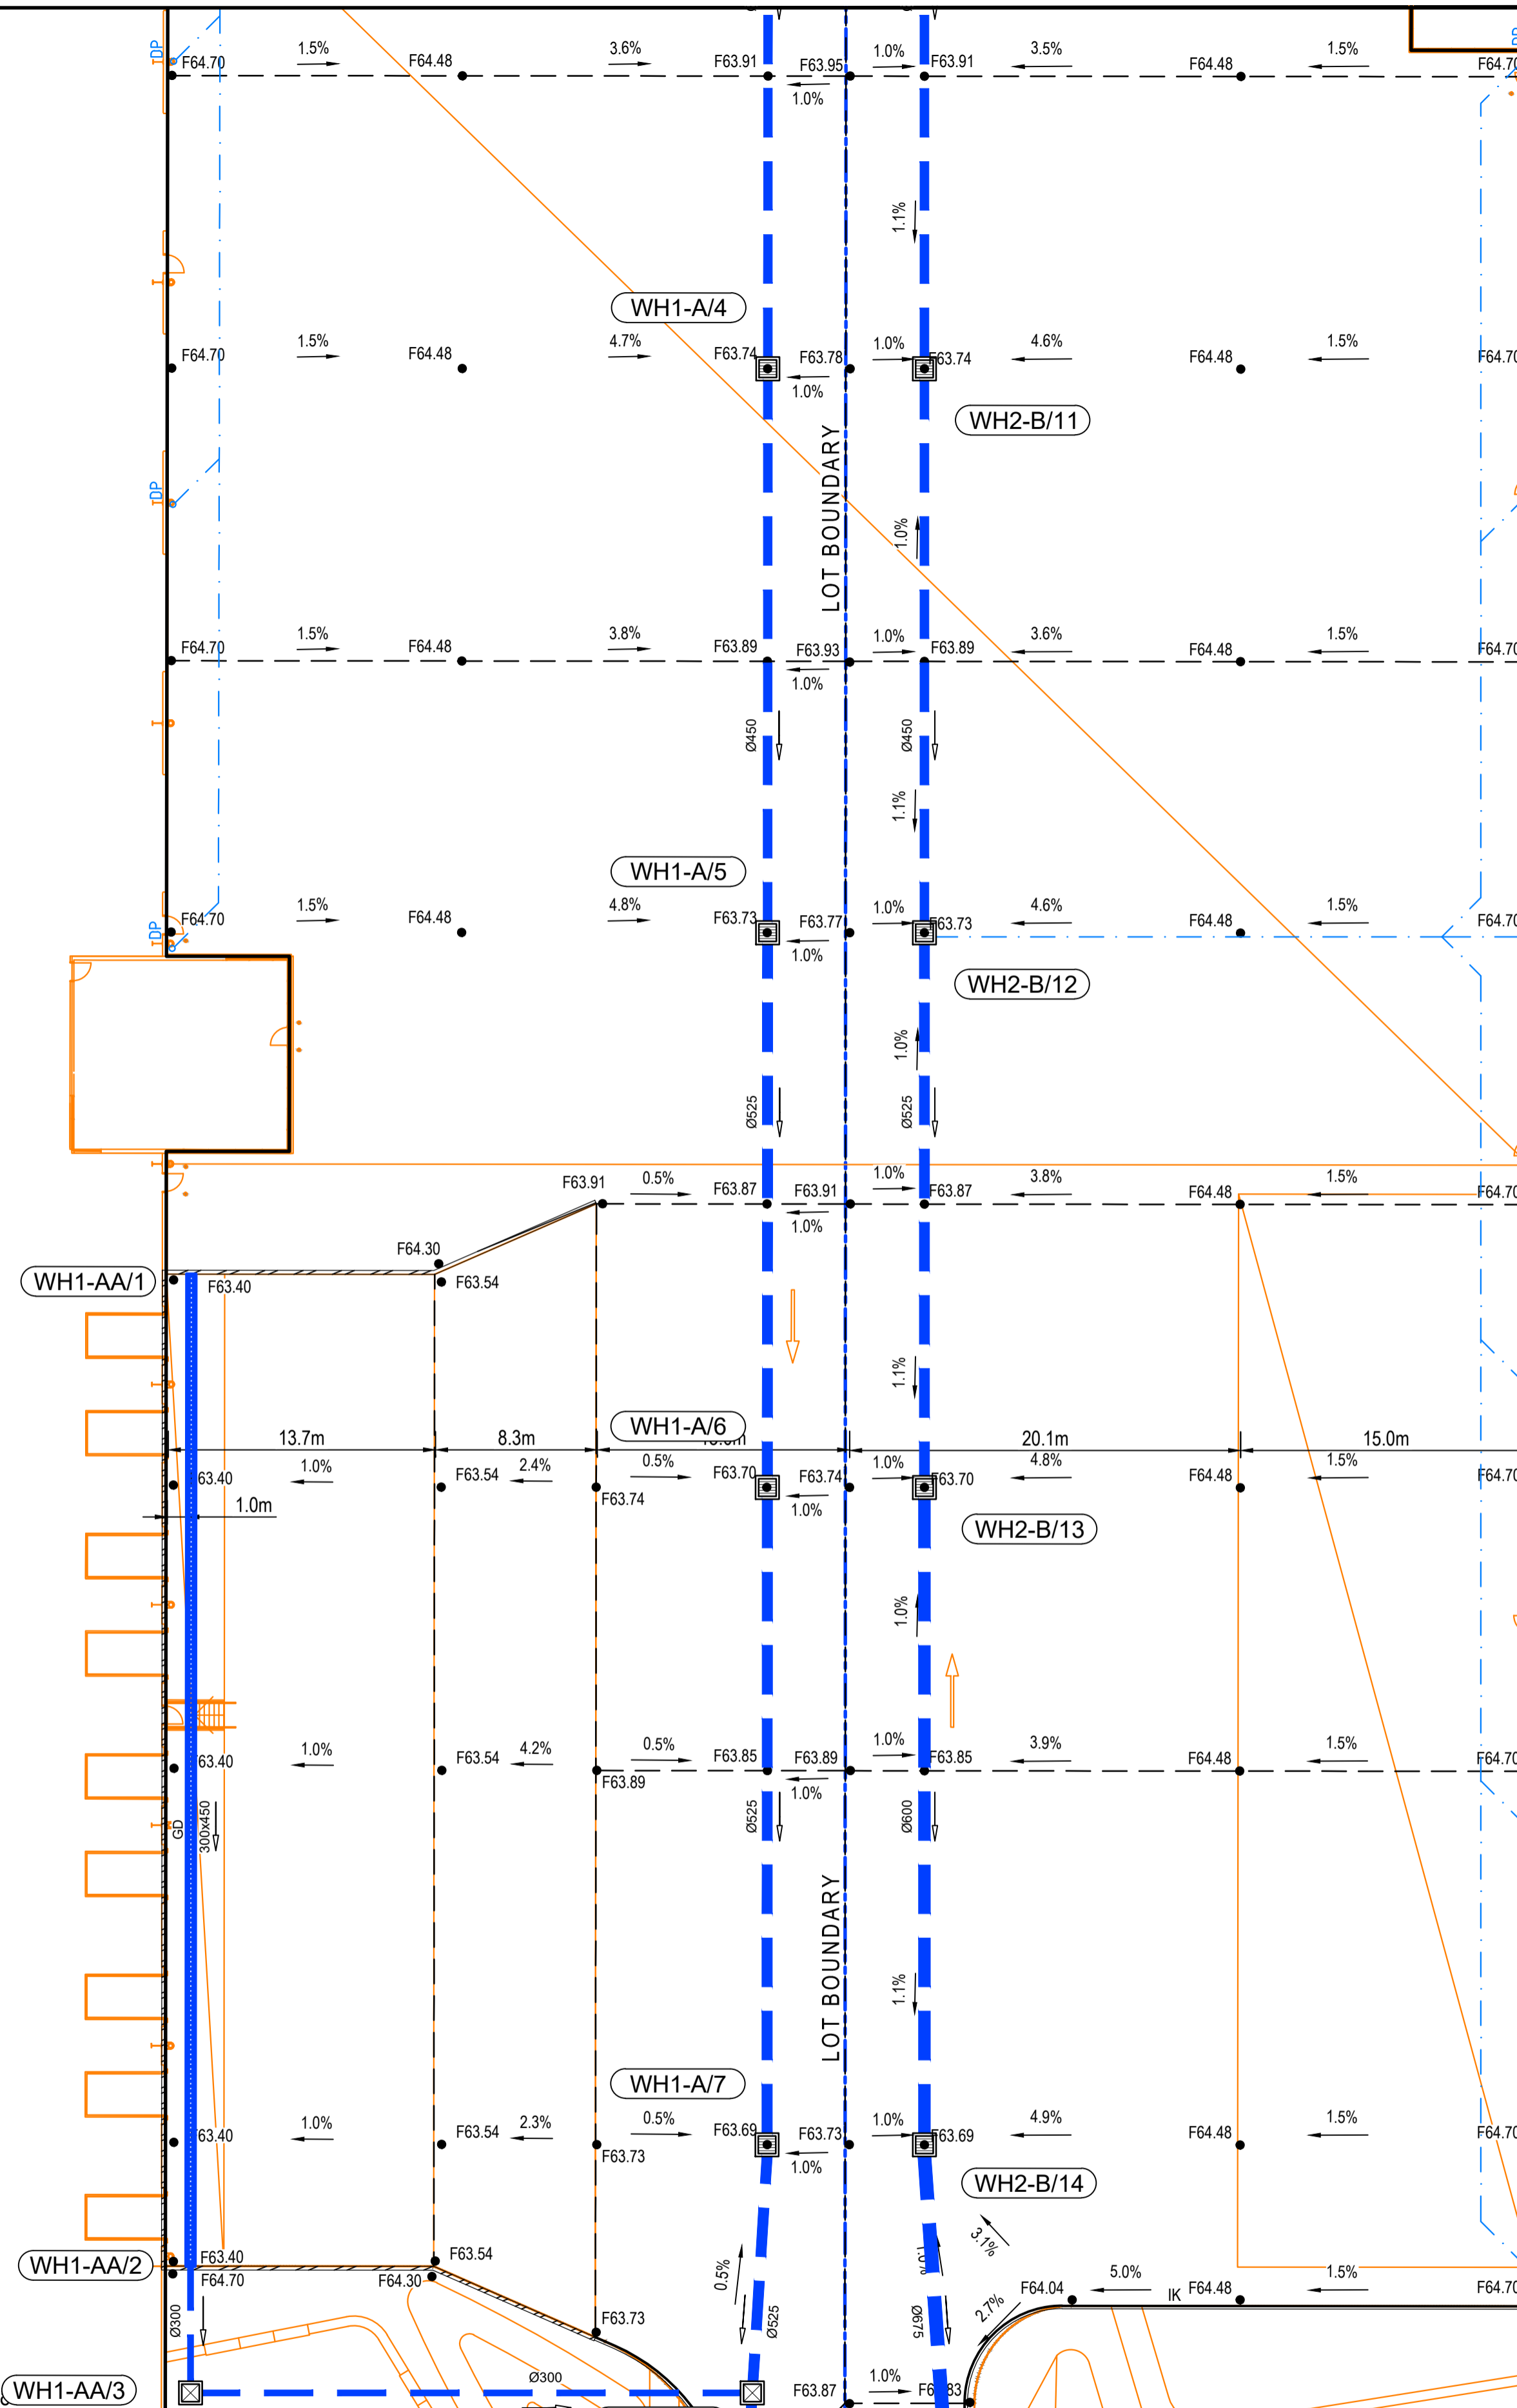

CONTINUATION ON DRAWING C2016

CONTINUATION ON DRAWING C2012

Issue	Description	Date
E	ISSUED FOR COORDINATION	15-10-24
WIP	ISSUED FOR COORDINATION	09-09-24
D	ISSUED FOR APPROVAL	14-06-23
C	ISSUED FOR COORDINATION	20-04-23
B	ISSUED FOR COORDINATION	22-12-22
A	ISSUED FOR COORDINATION	24-11-22

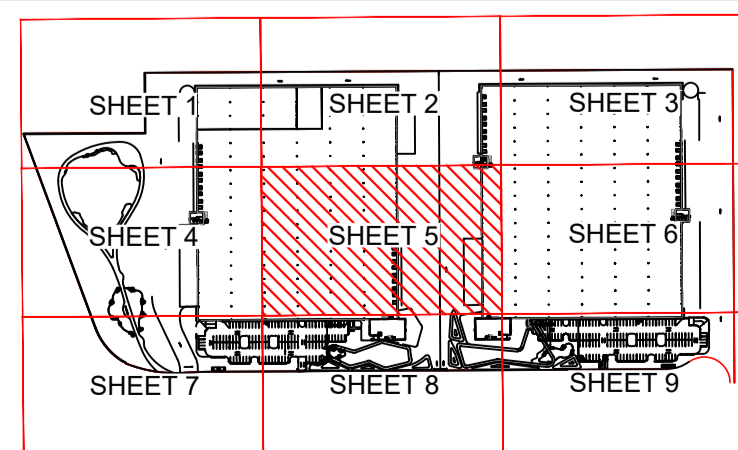

KEYPLAN

THIS DRAWING CANNOT BE COPIED OR REPRODUCED IN ANY FORM OR USED FOR ANY OTHER PURPOSE OTHER THAN THAT ORIGINALLY INTENDED WITHOUT THE WRITTEN PERMISSION OF AT&L



0 5 10 15 20  
1:250 @ A1 1:500 @ A3

Client	Drawn	CK
1:250 @ A1	Designed	CK
Grid GDA2020	Checked	CB
Height Datum AHD	Approved	



Project  
**INDUSTRIAL DEVELOPMENT  
BURRA PARK**

Title  
**LOT 4.3 & 4.4 (WH 01 & 02)  
SITWORKS AND  
STORMWATER DRAINAGE  
PLAN SHEET 5**


Civil Engineers and Project Managers  
**at&l**  
Level 7, 153 Walker Street  
North Sydney NSW 2060  
ABN 96 130 882 405  
Tel: 02 9439 1777  
Fax: 02 9923 1055  
www.atl.net.au  
info@atl.net.au

Status <b>FOR COORDINATION NOT FOR CONSTRUCTION</b>	A1
Project - Drawing No. <b>22-993-C2015</b>	Issue <b>E</b>

**LEGEND:**


- EXISTING BOUNDARY
- PROPOSED BOUNDARY
- PROPOSED RETAINING WALL
- PROPOSED CONTOUR
- PROPOSED FENCE
- PROPOSED BATTER  
TEMPORARY BATTER 1(V):4(H)  
PERMANENT BATTER 1(V):5(H)  
U.N.O.
- PROPOSED FLUSH KERB  
TO PCC SPECIFICATION
- PROPOSED KERB AND GUTTER  
TO PCC SPECIFICATION
- PROPOSED KERB EDGING  
TO PCC SPECIFICATION
- PROPOSED KERB EDGING INTEGRAL TO  
CONCRETE SLAB TO PCC SPECIFICATION
- PROPOSED SLOTTED KERB EDGING  
INTEGRAL TO CONCRETE SLAB TO PCC  
SPECIFICATION
- PROPOSED GRASSED SWALE
- DRIVEWAY CROSSOVER
- PROPOSED KERB RAMP
- PROPOSED STORMWATER  
PIT NUMBER
- PROPOSED STORMWATER  
LABEL
- PROPOSED STORMWATER PIPE
- PROPOSED UPVC ROOF WATER  
DRAINAGE LINE (MAX Ø300mm)
- PROPOSED GRATED DRAIN  
250mm Class 'D' GRATE
- STORMWATER OVERLAND FLOWPATH
- PROPOSED SURFACE LEVEL

- NOTES:**
1. ALL LEVELS SHOWN ARE ± 1000mm
  2. ROOF WATER DOWN PIPE LOCATIONS TO BE CONFIRMED DURING DETAILED DESIGN.
  3. RETAINING WALL LOCATIONS TO BE CONFIRMED DURING DETAILED DESIGN.
  4. VEHICLE TURNING PATHS TO BE CONFIRMED DURING DETAILED DESIGN.
  5. EXTERNAL / SUBDIVISION WORKS BY VENDOR. REFER SSD-19406916.




WAREHOUSE 02  
BUILDING  
FFL 64.70  
(±1000mm)

LOT 4.4

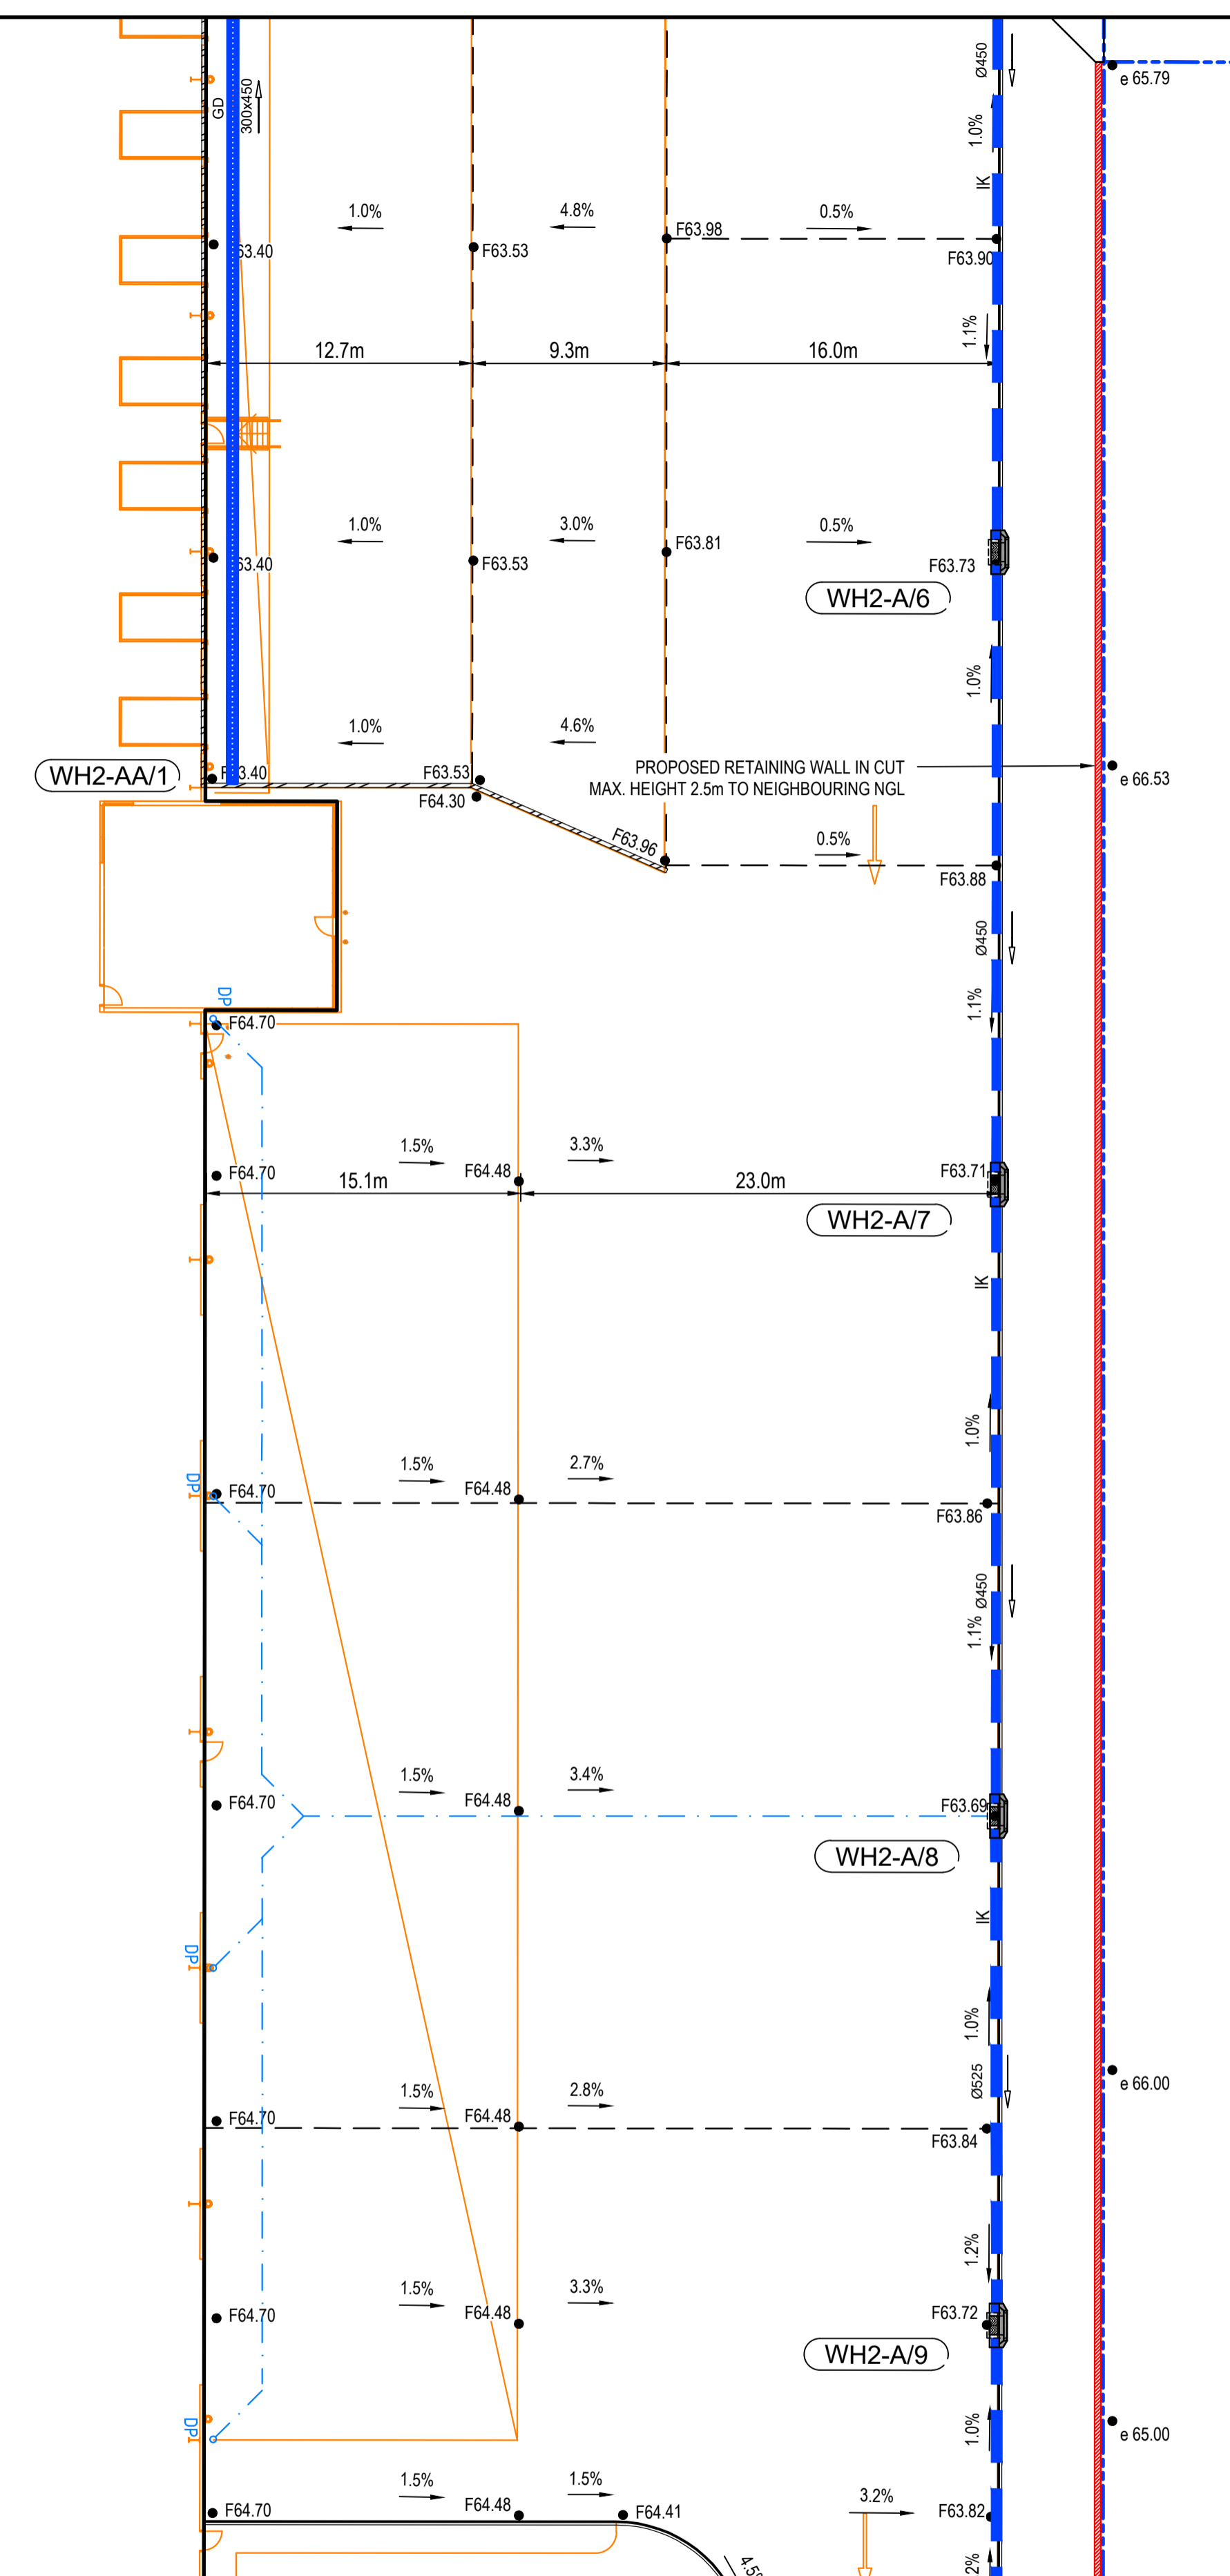

CONTINUATION ON DRAWING C2015

Issue	Description	Date
E	ISSUED FOR COORDINATION	15-10-24
WIP	ISSUED FOR COORDINATION	09-09-24
D	ISSUED FOR APPROVAL	14-06-23
C	ISSUED FOR COORDINATION	20-04-23
B	ISSUED FOR COORDINATION	22-12-22
A	ISSUED FOR COORDINATION	24-11-22

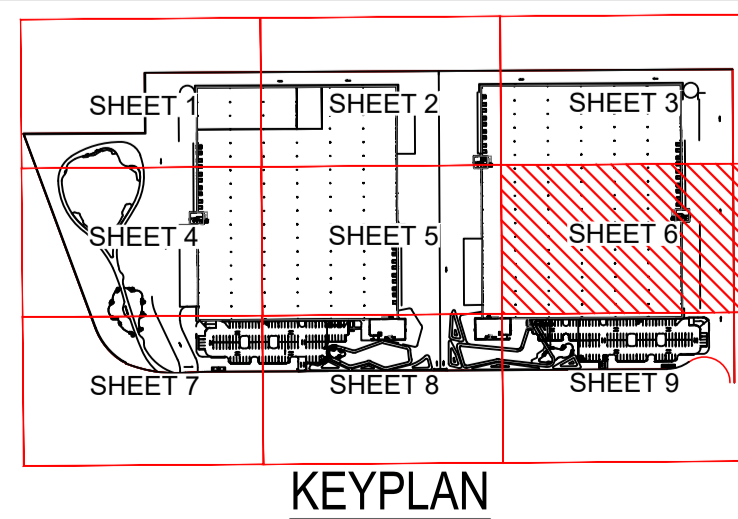

THIS DRAWING CANNOT BE COPIED OR REPRODUCED IN ANY FORM OR USED FOR ANY OTHER PURPOSE OTHER THAN THAT ORIGINALLY INTENDED WITHOUT THE WRITTEN PERMISSION OF AT&L

Client

0 5 10 15 20  
1 : 250 @ A1 1 : 500 @ A3

Scales  
1:250 @ A1

Grid  
GDA2020

Height Datum  
AHD

Project  
**INDUSTRIAL DEVELOPMENT  
BURRA PARK**

Title  
**LOT 4.3 & 4.4 (WH 01 & 02)  
SITWORKS AND  
STORMWATER DRAINAGE  
PLAN SHEET 6**

Civil Engineers and Project Managers

Level 7, 153 Walker Street  
North Sydney NSW 2060  
ABN 96 130 882 405  
Tel: 02 9439 1777  
Fax: 02 9923 1055  
www.atl.net.au  
info@atl.net.au

Status  
**FOR COORDINATION  
NOT FOR CONSTRUCTION**


Project - Drawing No.  
**22-993-C2016**

Issue  
**E**


**LEGEND:**

- EXISTING BOUNDARY
- PROPOSED BOUNDARY
- PROPOSED RETAINING WALL
- 48.20 PROPOSED CONTOUR
- PROPOSED FENCE
- PROPOSED BATTER  
TEMPORARY BATTER 1(V):4(H)  
PERMANENT BATTER 1(V):5(H)  
U.N.O
- PROPOSED FLUSH KERB  
TO PCC SPECIFICATION
- PROPOSED KERB AND GUTTER  
TO PCC SPECIFICATION
- PROPOSED KERB EDGING  
TO PCC SPECIFICATION
- PROPOSED KERB EDGING INTEGRAL TO  
CONCRETE SLAB TO PCC SPECIFICATION
- PROPOSED SLOTTED KERB EDGING  
INTEGRAL TO CONCRETE SLAB TO PCC  
SPECIFICATION
- PROPOSED GRASSED SWALE
- DRIVEWAY CROSSOVER
- PROPOSED KERB RAMP
- PROPOSED STORMWATER  
PIT NUMBER
- PROPOSED STORMWATER  
LABEL
- PROPOSED STORMWATER PIPE
- PROPOSED UPVC ROOF WATER  
DRAINAGE LINE (MAX Ø300mm)
- PROPOSED GRATED DRAIN  
250mm Class 'D' GRATE
- STORMWATER OVERLAND FLOWPATH
- PROPOSED SURFACE LEVEL

- NOTES:**
1. ALL LEVELS SHOWN ARE ± 1000mm
  2. ROOF WATER DOWN PIPE LOCATIONS TO BE CONFIRMED DURING DETAILED DESIGN.
  3. RETAINING WALL LOCATIONS TO BE CONFIRMED DURING DETAILED DESIGN.
  4. VEHICLE TURNING PATHS TO BE CONFIRMED DURING DETAILED DESIGN.
  5. EXTERNAL / SUBDIVISION WORKS BY VENDOR. REFER SSD-19406916.

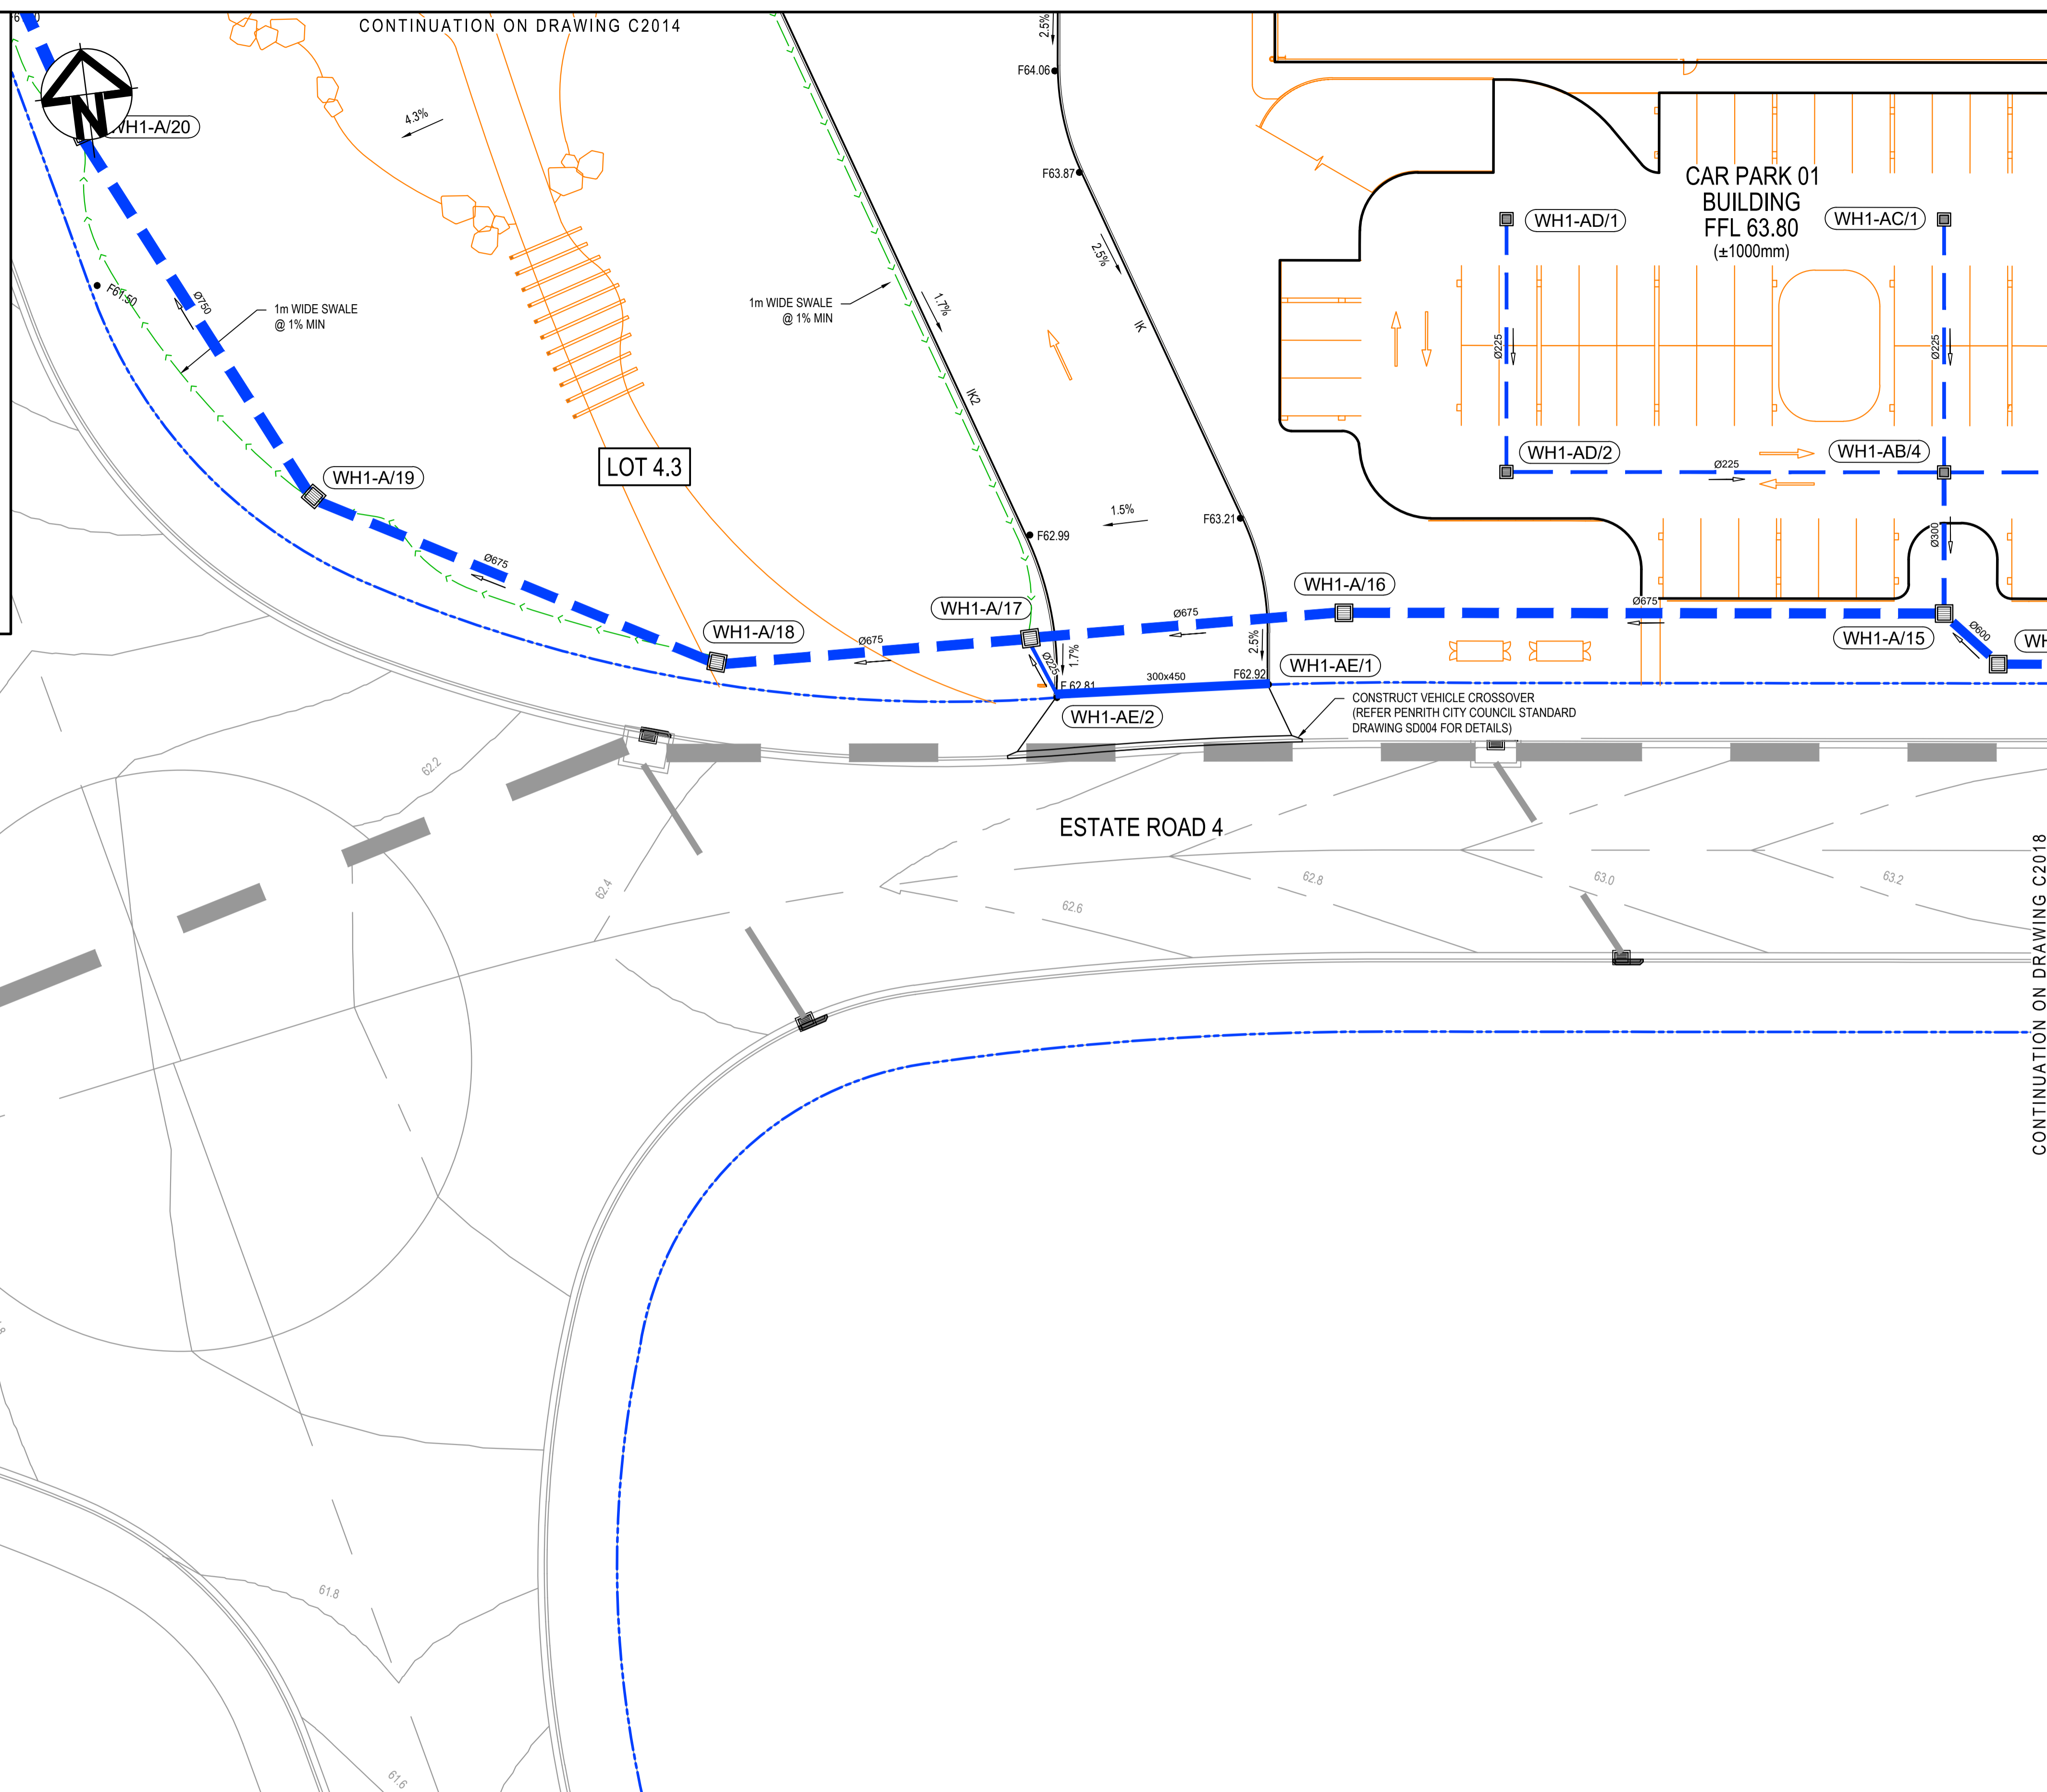

Issue	Description	Date
D	ISSUED FOR COORDINATION	15-10-24
WIP	ISSUED FOR COORDINATION	09-09-24
C	ISSUED FOR APPROVAL	14-06-23
B	ISSUED FOR COORDINATION	20-04-23
A	ISSUED FOR COORDINATION	22-12-22

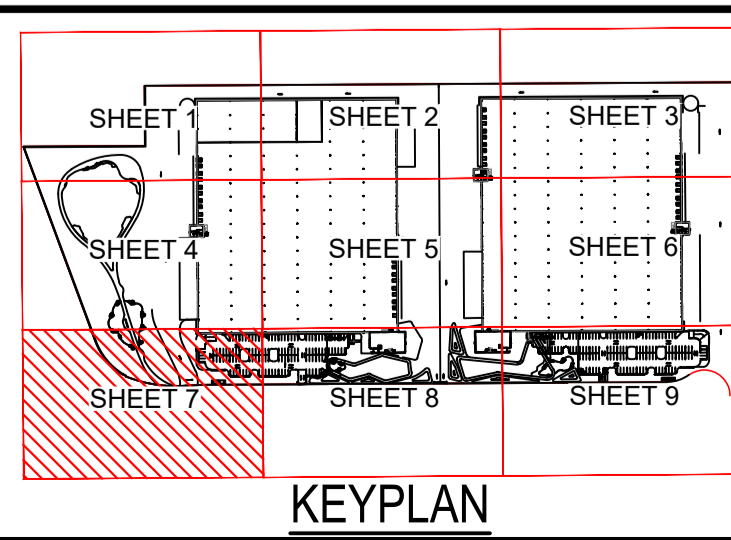

THIS DRAWING CANNOT BE COPIED OR REPRODUCED IN ANY FORM OR USED FOR ANY OTHER PURPOSE OTHER THAN THAT ORIGINALLY INTENDED WITHOUT THE WRITTEN PERMISSION OF AT&L

Client

0 5 10 15 20  
1 : 250 @ A1 1 : 500 @ A3

Scales	1:250 @ A1	Drawn	CK
Grid	GDA2020	Designed	CK
Height Datum	AHD	Checked	CB
		Approved	

Project

**INDUSTRIAL DEVELOPMENT  
BURRA PARK**


Title

**LOT 4.3 & 4.4 (WH 01 & 02)  
SITWORKS AND  
STORMWATER DRAINAGE  
PLAN SHEET 7**

Civil Engineers and Project Managers

Level 7, 153 Walker Street  
North Sydney NSW 2060  
ABN 96 130 882 405  
Tel: 02 9439 1777  
Fax: 02 9923 1055  
www.atl.net.au  
info@atl.net.au

Status	FOR COORDINATION NOT FOR CONSTRUCTION	A1
Project - Drawing No.	22-993-C2017	Issue
		D

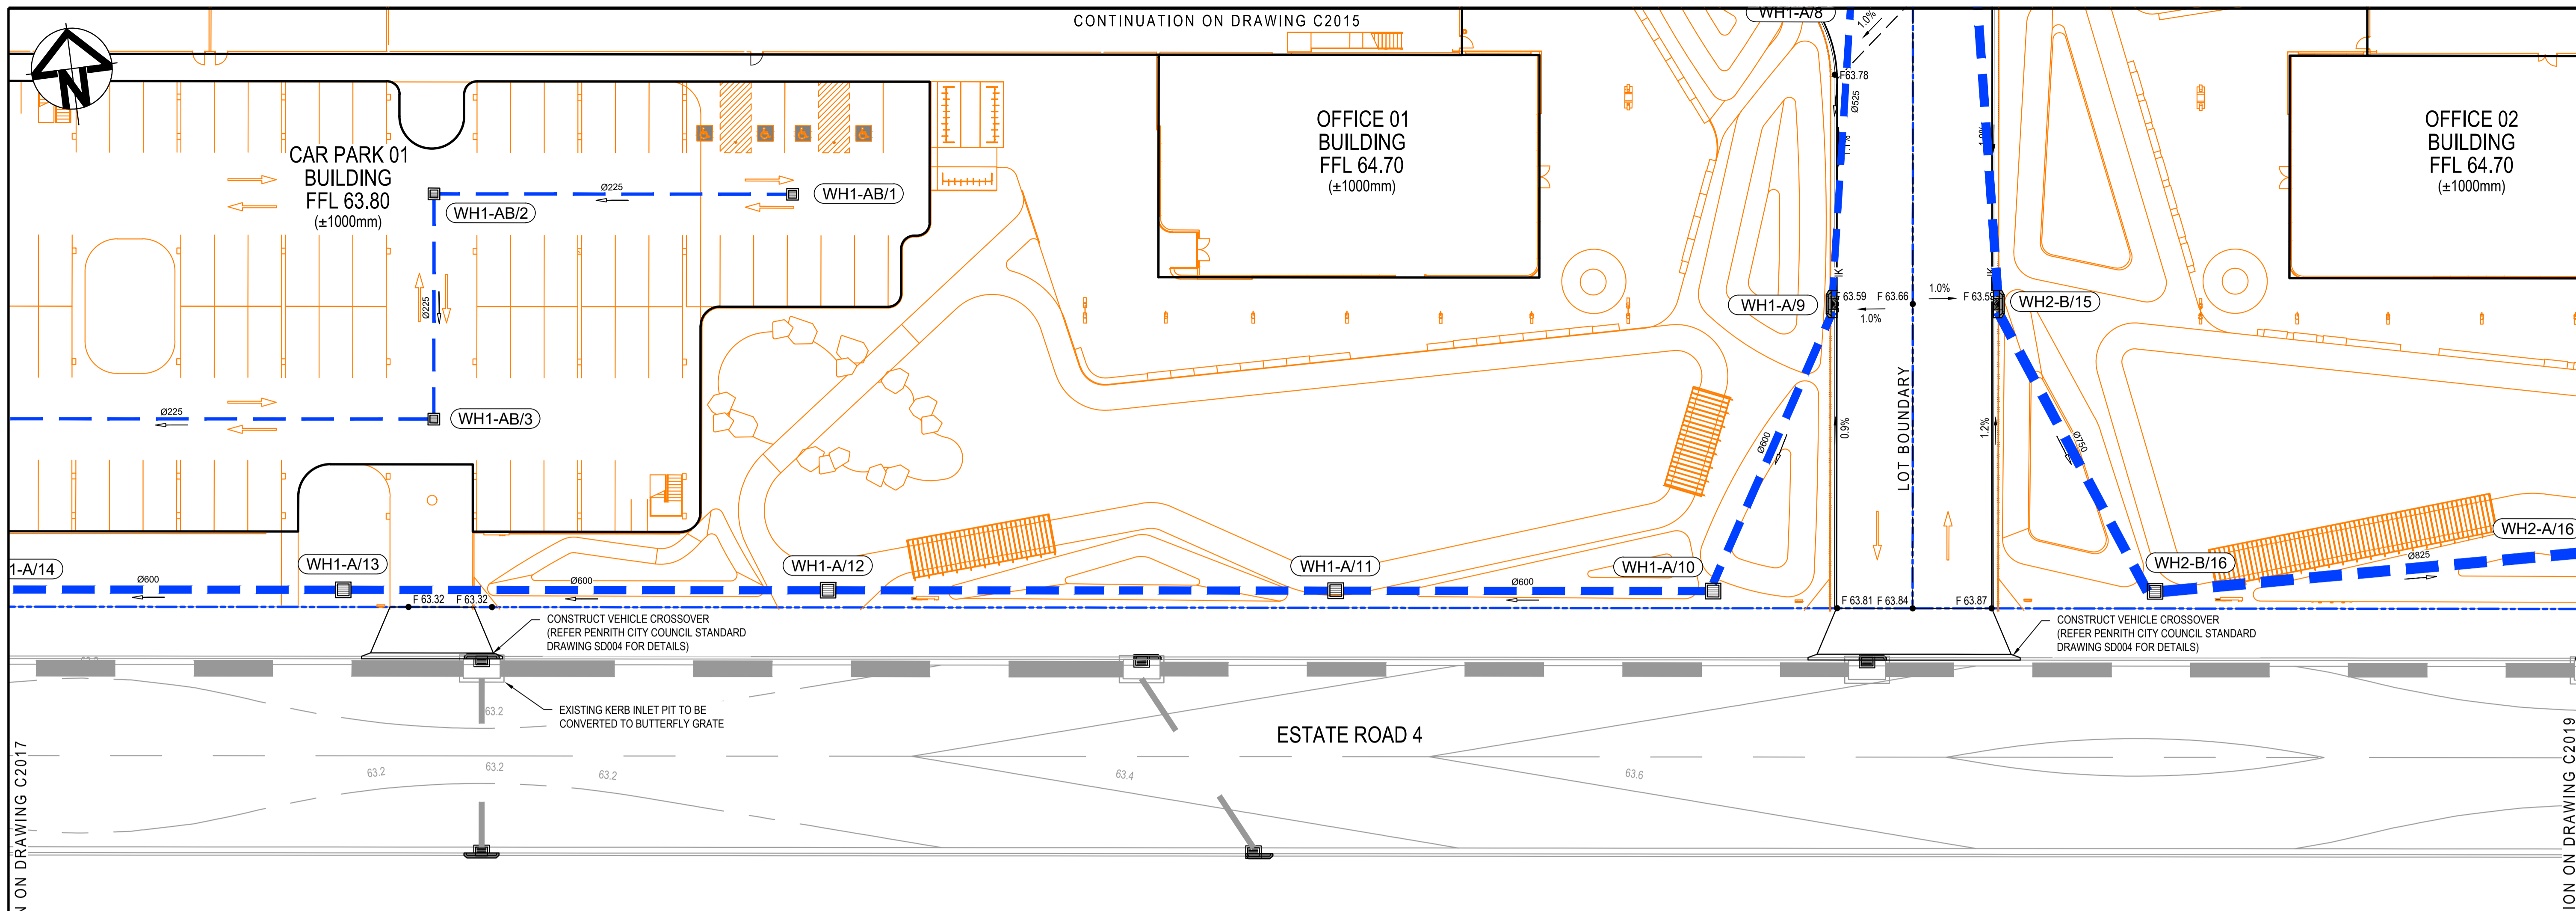

CONTINUATION ON DRAWING C2017

CONTINUATION ON DRAWING C2019


**LEGEND:**

- EXISTING BOUNDARY
- PROPOSED BOUNDARY
- PROPOSED RETAINING WALL
- PROPOSED CONTOUR
- PROPOSED FENCE
- PROPOSED BATTER
- PROPOSED FLUSH KERB
- PROPOSED KERB AND GUTTER
- PROPOSED KERB EDGING
- PROPOSED KERB EDGING INTEGRAL TO CONCRETE SLAB
- PROPOSED SLOTTED KERB EDGING
- PROPOSED GRASSED SWALE
- DRIVEWAY CROSSOVER
- PROPOSED KERB RAMP
- PROPOSED STORMWATER PIT NUMBER
- PROPOSED STORMWATER LABEL
- PROPOSED STORMWATER PIPE
- PROPOSED UPVC ROOF WATER DRAINAGE LINE
- PROPOSED GRATED DRAIN
- STORMWATER OVERLAND FLOWPATH
- PROPOSED SURFACE LEVEL

**NOTES:**

- ALL LEVELS SHOWN ARE ± 1000mm
- ROOF WATER DOWN PIPE LOCATIONS TO BE CONFIRMED DURING DETAILED DESIGN.
- RETAINING WALL LOCATIONS TO BE CONFIRMED DURING DETAILED DESIGN.
- VEHICLE TURNING PATHS TO BE CONFIRMED DURING DETAILED DESIGN.
- EXTERNAL / SUBDIVISION WORKS BY VENDOR, REFER SSD-18406916.

Issue	Description	Date
D	ISSUED FOR COORDINATION	15-10-24
WIP	ISSUED FOR COORDINATION	09-09-24
C	ISSUED FOR APPROVAL	14-06-23
B	ISSUED FOR COORDINATION	20-04-23
A	ISSUED FOR COORDINATION	22-12-22

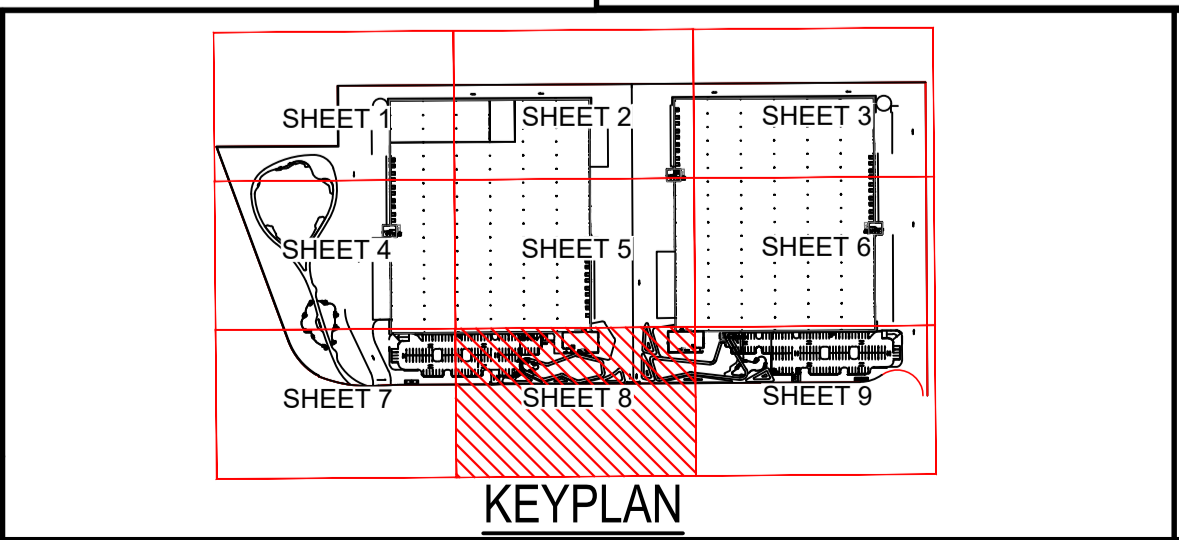

THIS DRAWING CANNOT BE COPIED OR REPRODUCED IN ANY FORM OR USED FOR ANY OTHER PURPOSE OTHER THAN THAT ORIGINALLY INTENDED WITHOUT THE WRITTEN PERMISSION OF AT&L

Client

0 5 10 15 20  
1 : 250 @ A1 1 : 500 @ A3

Scales: 1:250 @ A1

Grid: GDA2020

Height Datum: AHD

Drawn: CK

Designed: CK

Checked: CB

Approved:

Project: INDUSTRIAL DEVELOPMENT BURRA PARK

Title: LOT 4.3 & 4.4 (WH 01 & 02) SITWORKS AND STORMWATER DRAINAGE PLAN SHEET 8


Civil Engineers and Project Managers

Level 7, 153 Walker Street  
North Sydney NSW 2060  
ABN 96 130 882 405  
Tel: 02 9439 1777  
Fax: 02 9923 1055  
www.atl.net.au  
info@atl.net.au

Status: FOR COORDINATION NOT FOR CONSTRUCTION

Project - Drawing No. 22-993-C2018

Issue D

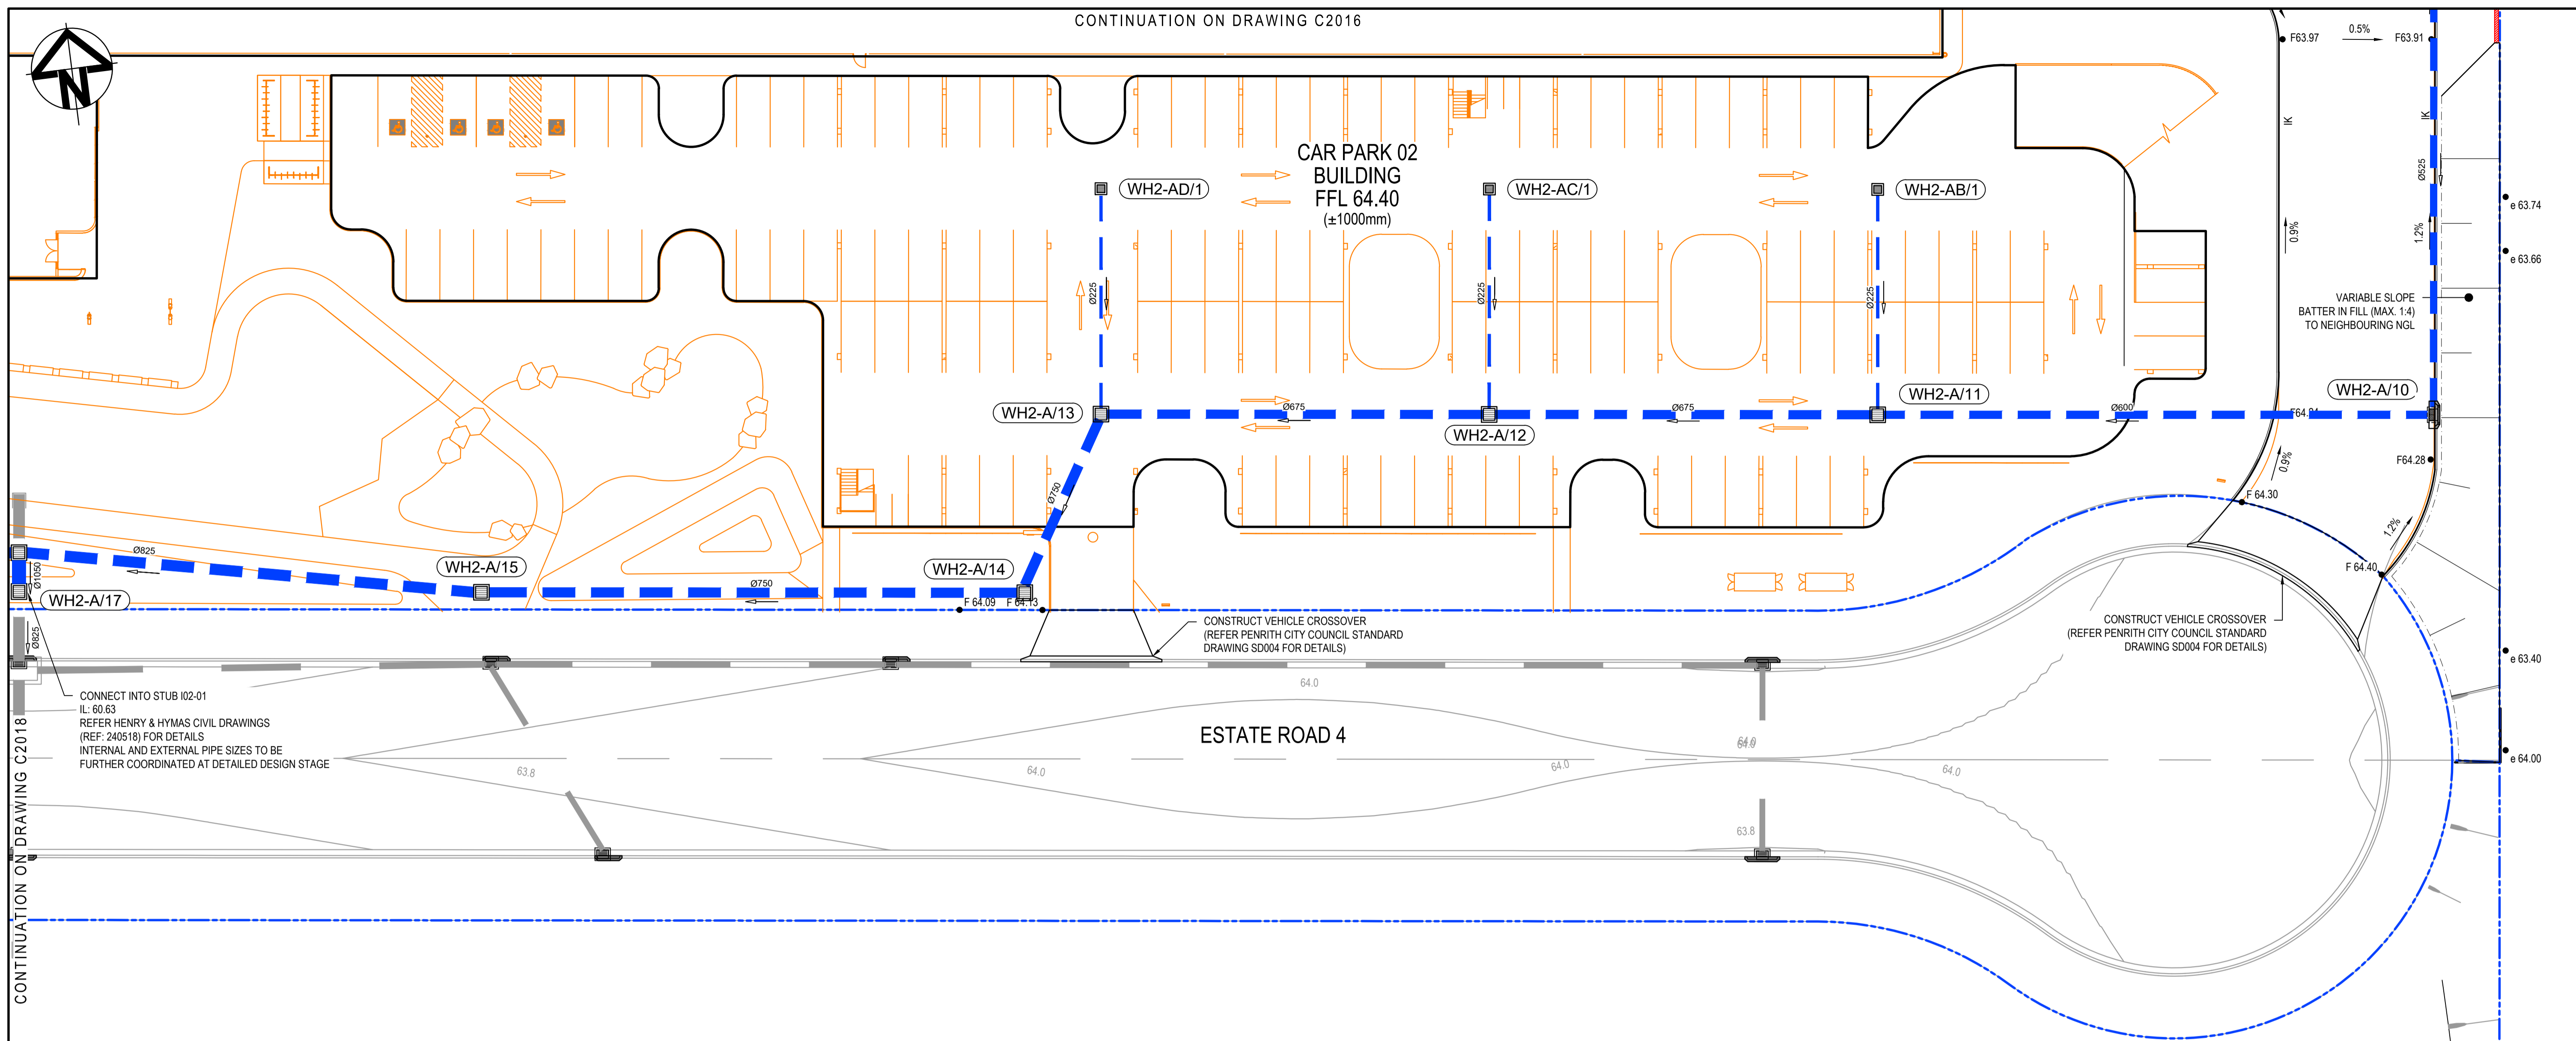


CONTINUATION ON DRAWING C2018

**LEGEND:**

	EXISTING BOUNDARY		PROPOSED GRASSED SWALE
	PROPOSED BOUNDARY		DRIVEWAY CROSSOVER
	PROPOSED RETAINING WALL		PROPOSED KERB RAMP
	PROPOSED CONTOUR		PROPOSED STORMWATER PIT NUMBER
	PROPOSED FENCE		PROPOSED STORMWATER LABEL
	PROPOSED BATTER TEMPORARY BATTER 1(V):4(H) PERMANENT BATTER 1(V):5(H) U.N.O		PROPOSED STORMWATER PIPE
	PROPOSED FLUSH KERB TO PCC SPECIFICATION		PROPOSED UPVC ROOF WATER DRAINAGE LINE (MAX Ø300mm)
	PROPOSED KERB AND GUTTER TO PCC SPECIFICATION		PROPOSED GRATED DRAIN 250mm Class 'D' GRATE
	PROPOSED KERB EDGING TO PCC SPECIFICATION		STORMWATER OVERLAND FLOWPATH
	PROPOSED KERB EDGING INTEGRAL TO CONCRETE SLAB TO PCC SPECIFICATION		PROPOSED SURFACE LEVEL
	PROPOSED SLOTTED KERB EDGING INTEGRAL TO CONCRETE SLAB TO PCC SPECIFICATION		

- NOTES:**
- ALL LEVELS SHOWN ARE ± 1000mm
  - ROOF WATER DOWN PIPE LOCATIONS TO BE CONFIRMED DURING DETAILED DESIGN.
  - RETAINING WALL LOCATIONS TO BE CONFIRMED DURING DETAILED DESIGN.
  - VEHICLE TURNING PATHS TO BE CONFIRMED DURING DETAILED DESIGN.
  - EXTERNAL / SUBDIVISION WORKS BY VENDOR, REFER SSD-18406916.

Issue	Description	Date
D	ISSUED FOR COORDINATION	15-10-24
WIP	ISSUED FOR COORDINATION	09-09-24
C	ISSUED FOR APPROVAL	14-06-23
B	ISSUED FOR COORDINATION	20-04-23
A	ISSUED FOR COORDINATION	22-12-22

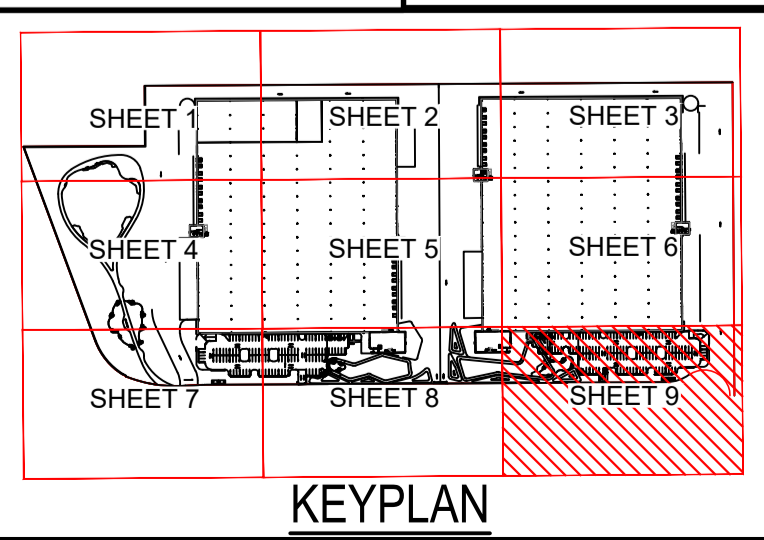

THIS DRAWING CANNOT BE COPIED OR REPRODUCED IN ANY FORM OR USED FOR ANY OTHER PURPOSE OTHER THAN THAT ORIGINALLY INTENDED WITHOUT THE WRITTEN PERMISSION OF AT&L

Client

0 5 10 15 20  
1 : 250 @ A1 1 : 500 @ A3

Scales	1:250 @ A1	Drawn	CK
Grid	GDA2020	Designed	CK
Height Datum	AHD	Checked	CB
		Approved	

Project

**INDUSTRIAL DEVELOPMENT  
BURRA PARK**


Title

**LOT 4.3 & 4.4 (WH 01 & 02)  
SITWORKS AND  
STORMWATER DRAINAGE  
PLAN SHEET 9**


Civil Engineers and Project Managers

Level 7, 153 Walker Street  
North Sydney NSW 2060  
ABN 96 130 882 405  
Tel: 02 9439 1777  
Fax: 02 9923 1055  
www.atl.net.au  
info@atl.net.au


Status	FOR COORDINATION NOT FOR CONSTRUCTION	A1
Project - Drawing No.	22-993-C2019	Issue
		D

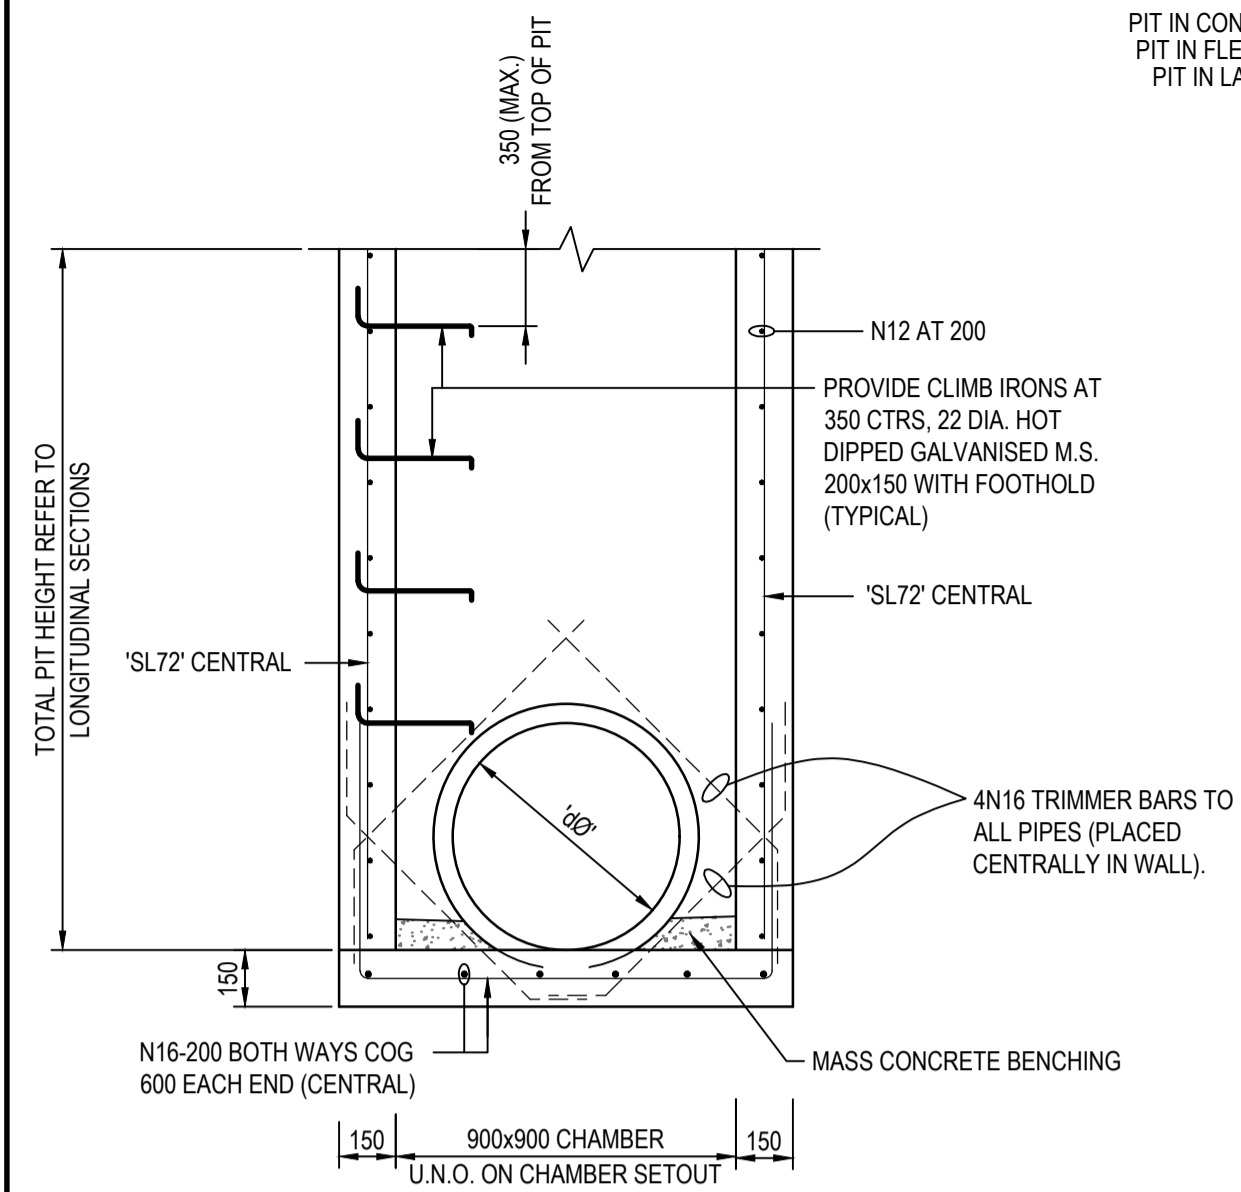

**PIT CHAMBER DETAIL FOR PIPES UP TO 525Ø (TYPE 1)**  
SCALE: 1:20

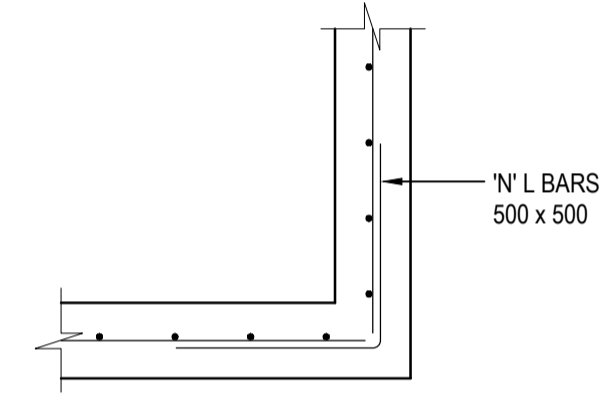


**TYPICAL CORNER DETAIL**  
SCALE: 1:20

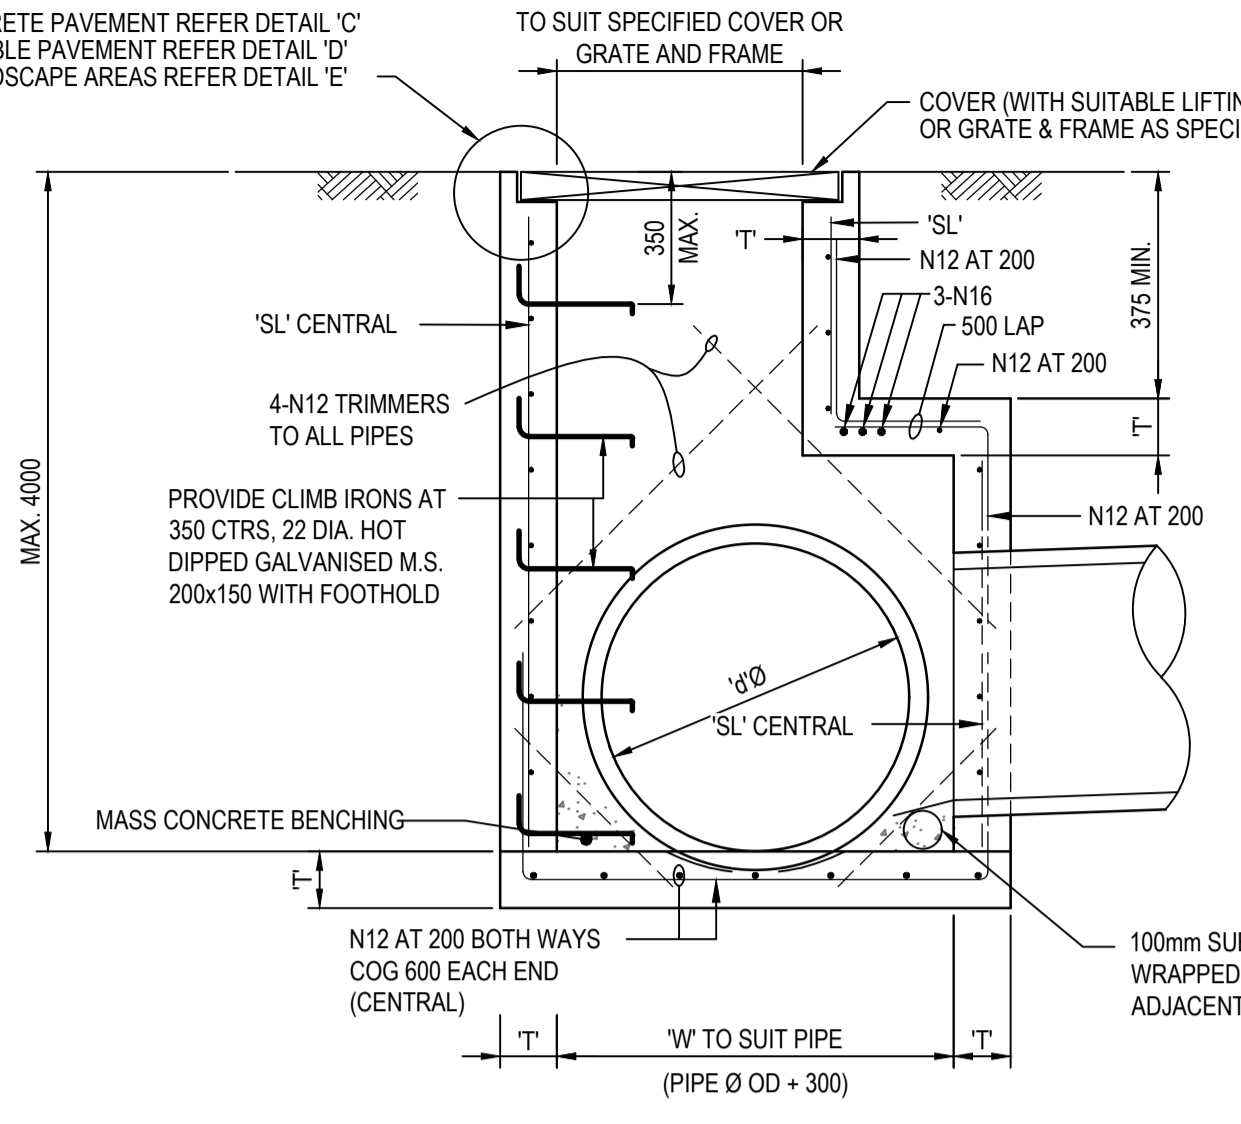


**PIT CHAMBER DETAIL FOR PIPES FROM 600Ø TO 1200Ø TYPE 2 (ENLARGED CHAMBER)**  
SCALE: 1:20

PIPE DIA. 'Ø'	WIDTH 'W' (U.N.O.)	WALL 'T'	FABRIC/COV 'SL'
600	900	150	SL82
675	940	150	SL82
750	1020	150	SL82
825	1100	150	SL82
900	1180	200	SL82
1050	1350	200	SL92
1200	1510	200	SL102


CHAMBER DEPTH EXCEEDING 2m IN HEIGHT CERTIFIED APPROVED BY STRUCTURAL ENGINEER.

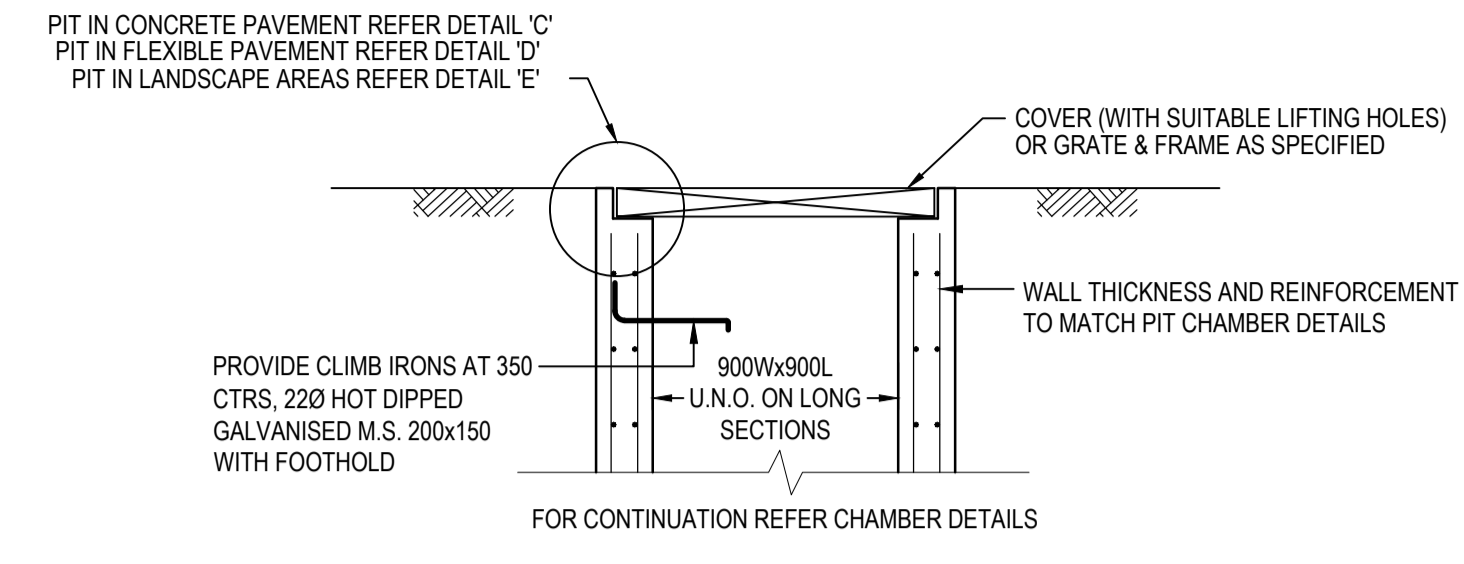

**STANDARD SURFACE INLET OR SEALED JUNCTION PIT**  
SCALE: 1:20

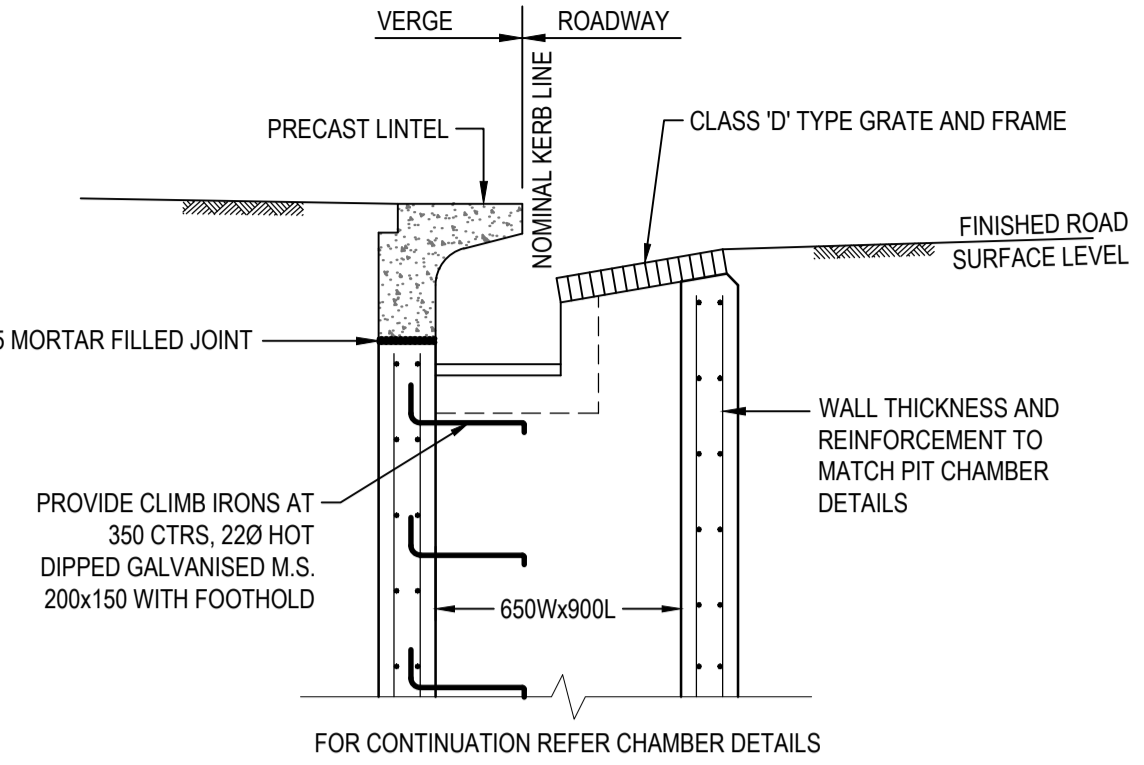


**STANDARD GRATED KERB INLET PIT WITH LINTEL**  
SCALE: 1:20

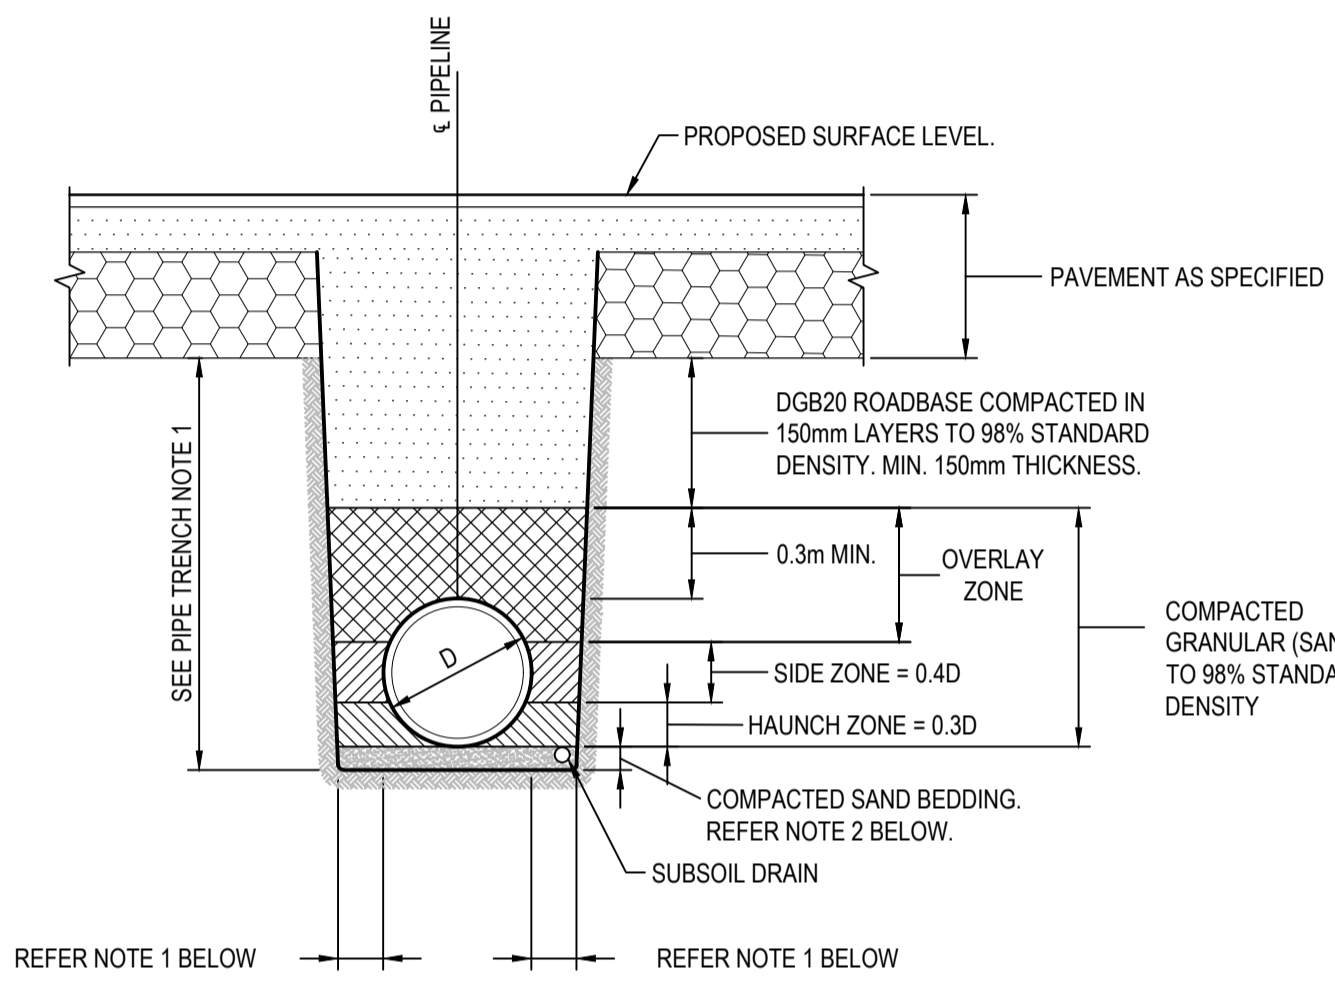


**PIPE TRENCH BELOW PAVEMENT**  
N.T.S.

- NOTE**
1.  $\geq 0.2D$  OR 0.3m (WHICHEVER IS GREATER)
  2. 100mm FOR PIPE DIA.  $\leq 1500$

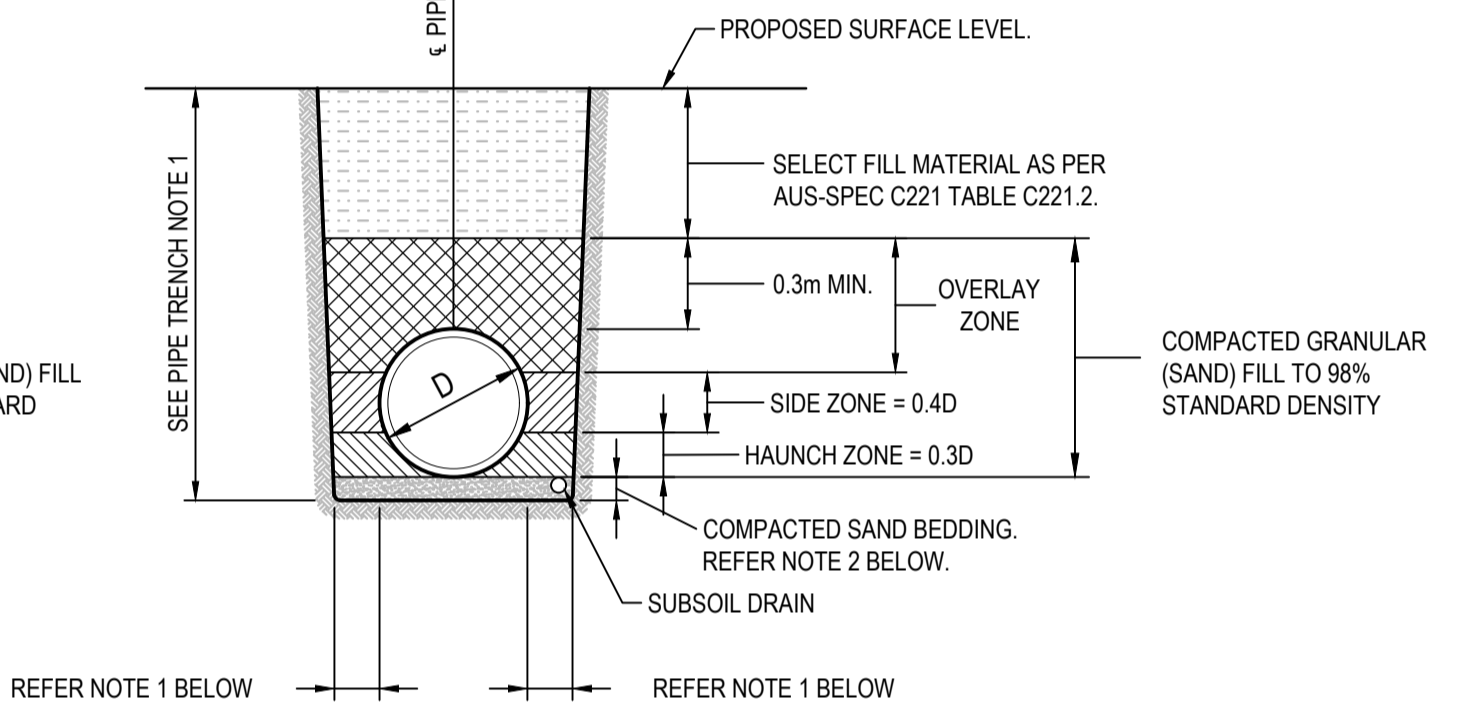


**PIPE TRENCH BELOW LANDSCAPING (HS3)**  
N.T.S.


- NOTE**
1.  $\geq 0.2D$  OR 0.3m (WHICHEVER IS GREATER)
  2. 100mm FOR PIPE DIA.  $\leq 1500$

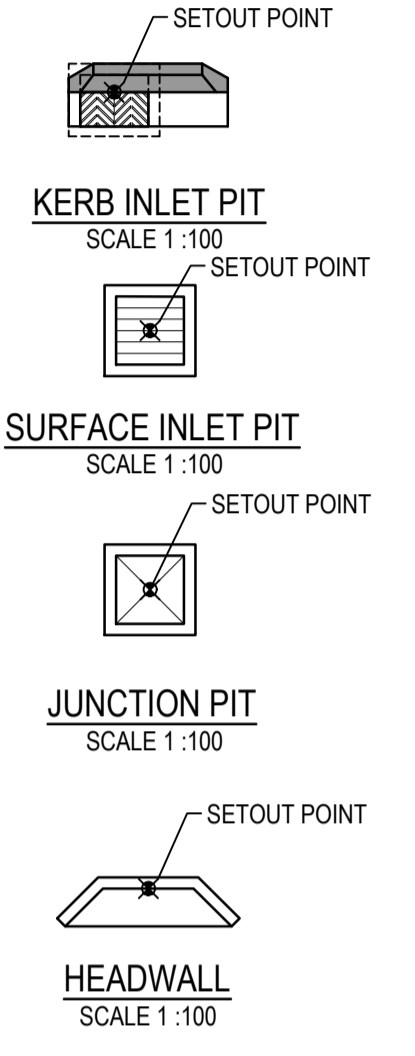


**STORMWATER PIT SETOUT POINTS**  
REFER PIT SETOUT PLANS FOR ENLARGED CHAMBERS

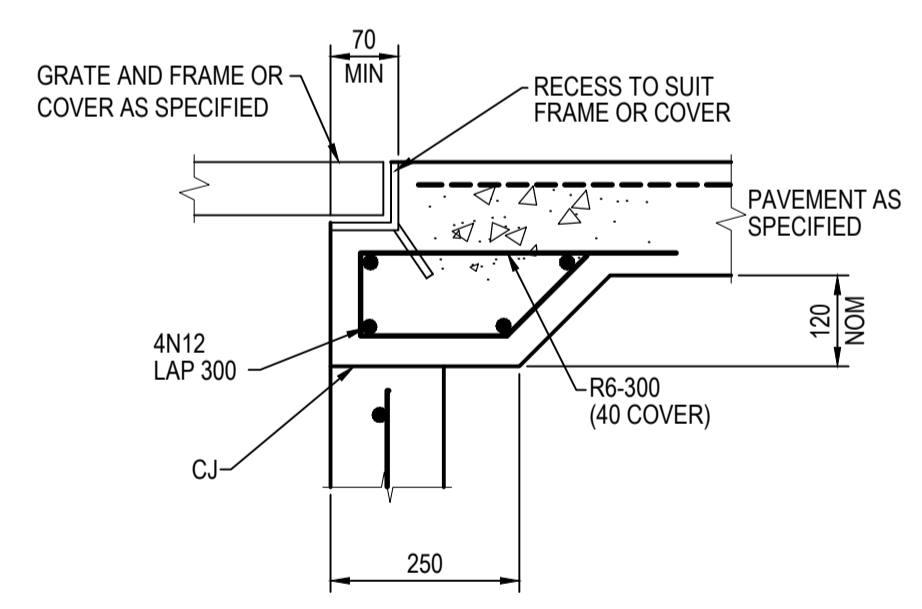

**DETAIL "C"**  
SCALE: 1:10

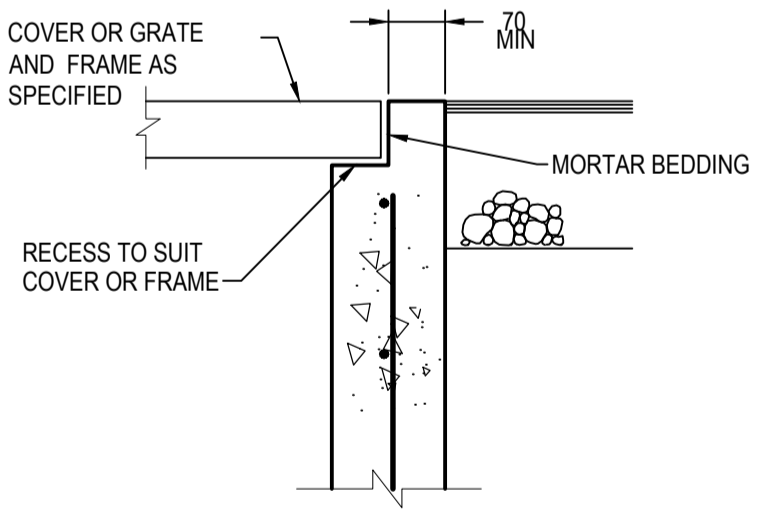

**DETAIL "D"**  
SCALE: 1:10

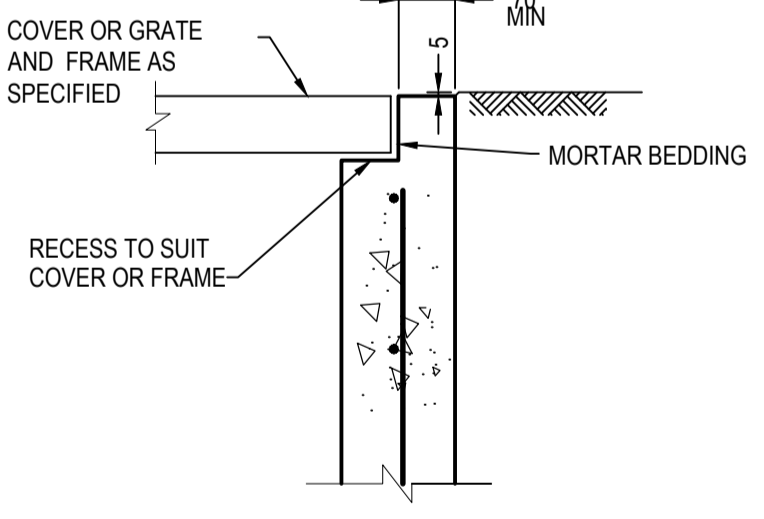

**DETAIL "E"**  
SCALE: 1:10

**PIPE TRENCH NOTES**

1. IN UNDERTAKING TRENCH EXCAVATION, THE CONTRACTOR SHALL PROVIDE ANY SHORING, SHEET PILING OR OTHER STABILISATION OF THE TRENCH NECESSARY TO COMPLY WITH OHS REGULATIONS. THE SIDES ARE NOT TO BE LOADED & SHALL BE KEPT CLEAR OF LOOSE MATERIAL ETC. SAFE ACCESS & EGRESS SHALL BE PROVIDED AT ALL TIMES.
2. THE TRENCH SHALL BE EXCAVATED TO A WIDTH 1.4 TIMES THE EXTERNAL DIAMETER OF THE PIPE, OR TO THE EXTERNAL DIAMETER OF THE PIPE PLUS 300mm ON EACH SIDE, WHICHEVER IS THE GREATER.

**NOTE**

1. STANDARD GULLY PITS REFER TO PENRITH COUNCIL STANDARD DRAWINGS FOR DETAILS
2. FOR INLET SIZE, PIT CHAMBER SIZE AND SETOUT REFER TO STORMWATER LONGITUDINAL SECTIONS.
3. REINFORCING MESH IS TO BE BENT TO LAP 300 AROUND ALL CORNERS. VERTICAL BARS ARE NOT TO BE CUT. ALTERNATELY PROVIDE N12 "L" BARS (500x500) AT 400 VERTICAL CTS.
4. COMPRESSIVE STRENGTH ( $F_c$ ) FOR CAST IN SITU CONCRETE SHALL BE A MINIMUM 32 MPa AT 28 DAYS.
5. TOP OF BENCHING SHALL BE  $\frac{1}{2}$  OF OUTLET PIPE DIAMETER.
6. 100mm SUBSOIL DRAINAGE PIPE 3000 LONG WRAPPED IN FABRIC SOCK TO BE PROVIDED ADJACENT TO INLET PIPES.
7. ALL PITS SHALL BE PROVIDED WITH A LOCKING CLIP.
8. PIT GRATE TO BE 'WELDLOK' GULLY GRATE GG 78-50 OR APPROVED EQUIVALENT.
9. DURING INSTALLATION OF GRATE AND FRAME CONTRACTOR IS TO ENSURE CLEARANCE BETWEEN LINTEL AND OPENED GRATE (REFER TO INSTALLATION TOLERANCE).
10. PROVIDE STEP IRONS AS INDICATED FOR PITS DEEPER THAN 900.
11. N12 AT 200 CENTRALLY PLACED MAY BE USED IN LIEU OF MESH. LAP 500 AT CORNERS
12. MINIMUM REINFORCEMENT COVER TO BE 45mm UNLESS NOTED OTHERWISE
15. CHAMBER DEPTH EXCEEDING 2m IN HEIGHT WILL BE DESIGNED AND APPROVED BY STRUCTURAL ENGINEER
16. CONCRETE STRENGTH: - UNLESS NOTED OTHERWISE

ELEMENT	$f_c$ MPa (28 DAYS)	SLUMP	MAX AGG SIZE	CEMENT TYPE
PITS	32	80mm	20mm	GP

Issue	Description	Date
D	ISSUED FOR COORDINATION	15-10-24
WIP	ISSUED FOR COORDINATION	09-09-24
C	ISSUED FOR APPROVAL	14-06-23
B	ISSUED FOR COORDINATION	20-04-23
A	ISSUED FOR COORDINATION	22-12-22

THIS DRAWING CANNOT BE COPIED OR REPRODUCED IN ANY FORM OR USED FOR ANY OTHER PURPOSE OTHER THAN THAT ORIGINALLY INTENDED WITHOUT THE WRITTEN PERMISSION OF AT&L




Scales	AS SHOWN	
	Grid	GDA2020
	Height Datum	AHD



Client: INDUSTRIAL DEVELOPMENT BURRA PARK  
Project: LOT 4.3 & 4.4 (WH 01 & 02) STORMWATER DRAINAGE DETAILS


Civil Engineers and Project Managers  
**at&l**  
Level 7, 153 Walker Street North Sydney NSW 2060  
ABN 96 130 882 405  
Tel: 02 9439 1777  
Fax: 02 9923 1055  
www.atl.net.au  
info@atl.net.au

Status: FOR COORDINATION NOT FOR CONSTRUCTION  
Project - Drawing No. 22-993-C2021  
Issue D

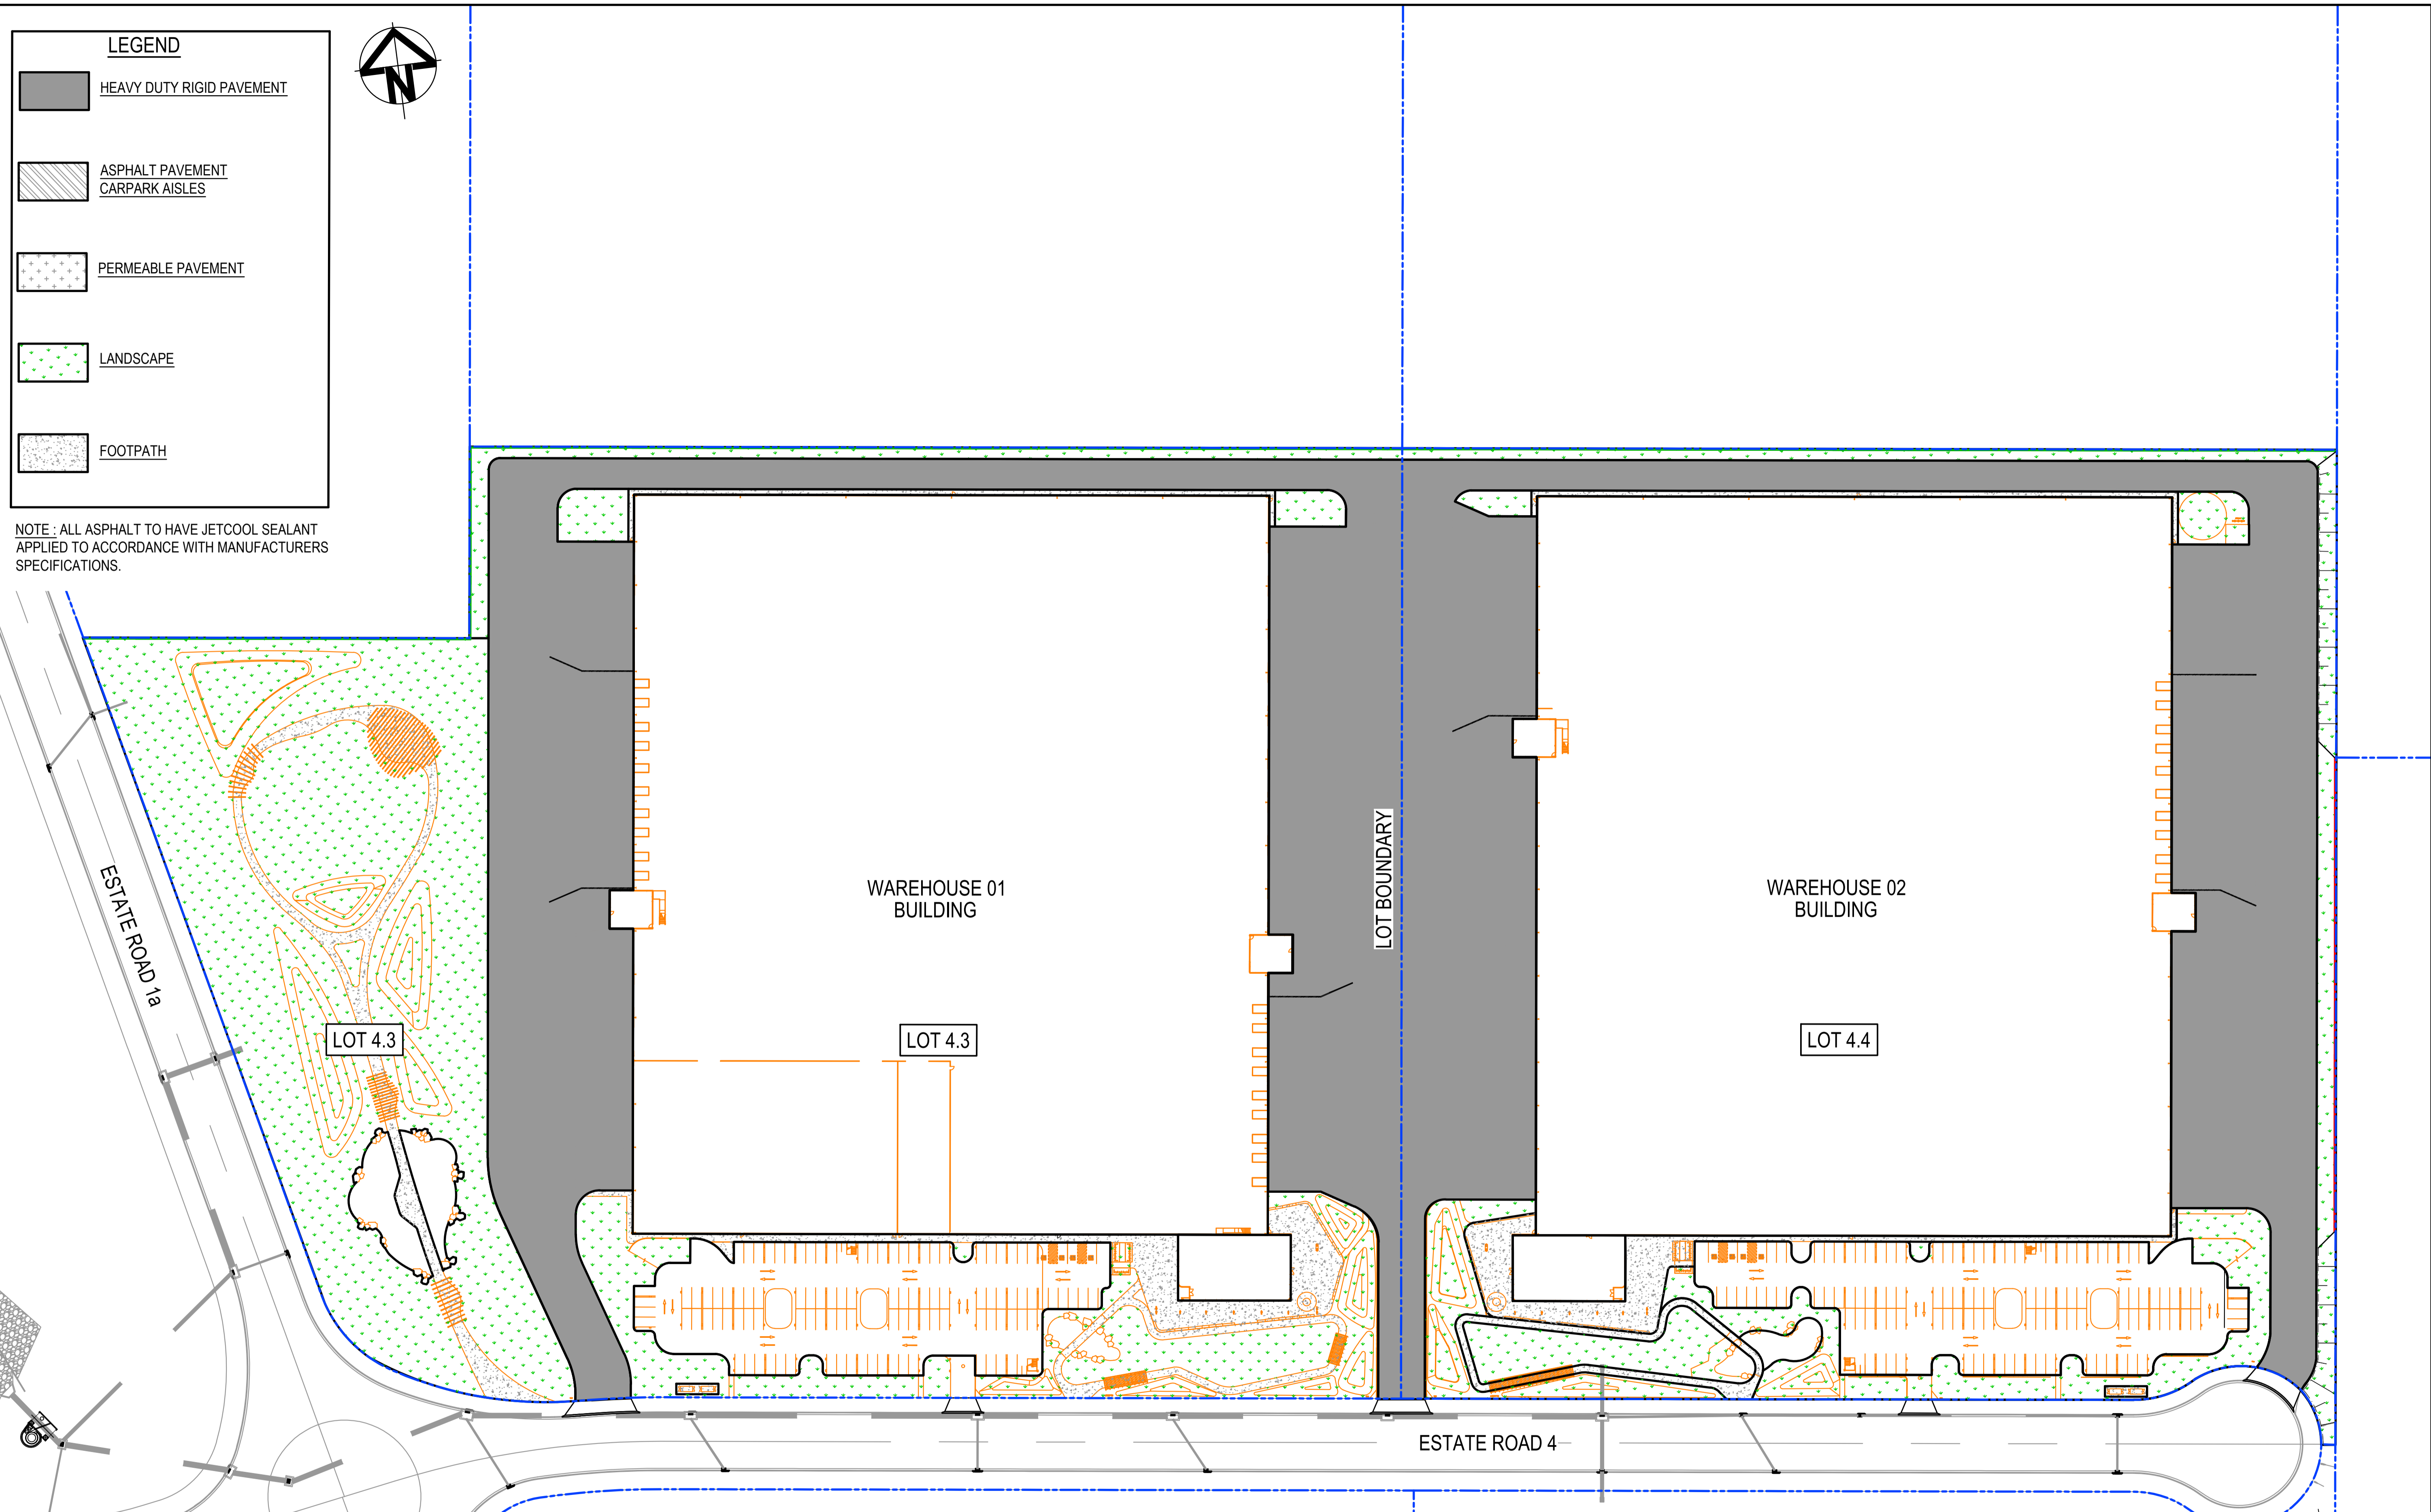

NOTE : ALL ASPHALT TO HAVE JETCOOL SEALANT APPLIED TO ACCORDANCE WITH MANUFACTURERS SPECIFICATIONS.

Issue	Description	Date
D	ISSUED FOR COORDINATION	15-10-24
WIP	ISSUED FOR COORDINATION	09-09-24
C	ISSUED FOR APPROVAL	14-06-23
B	ISSUED FOR COORDINATION	20-04-23
A	ISSUED FOR COORDINATION	22-12-22

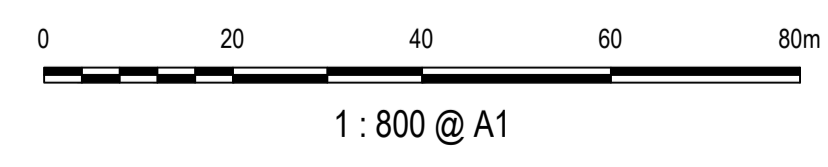

THIS DRAWING CANNOT BE COPIED OR REPRODUCED IN ANY FORM OR USED FOR ANY OTHER PURPOSE OTHER THAN THAT ORIGINALLY INTENDED WITHOUT THE WRITTEN PERMISSION OF AT&L

Client



Scales 1:800 @ A1	Drawn CK
Grid GDA2020	Designed CK
Height Datum AHD	Checked CB
	


Project

**INDUSTRIAL DEVELOPMENT  
BURRA PARK**

Title


**LOT 4.3 & 4.4 (WH 01 & 02)  
PAVEMENT PLAN**

Civil Engineers and Project Managers



Level 7, 153 Walker Street  
North Sydney NSW 2060  
ABN 96 130 882 405  
Tel: 02 9439 1777  
Fax: 02 9923 1055  
www.atl.net.au  
info@atl.net.au


Status	FOR COORDINATION NOT FOR CONSTRUCTION	A1
Project - Drawing No.	22-993-C2023	Issue D

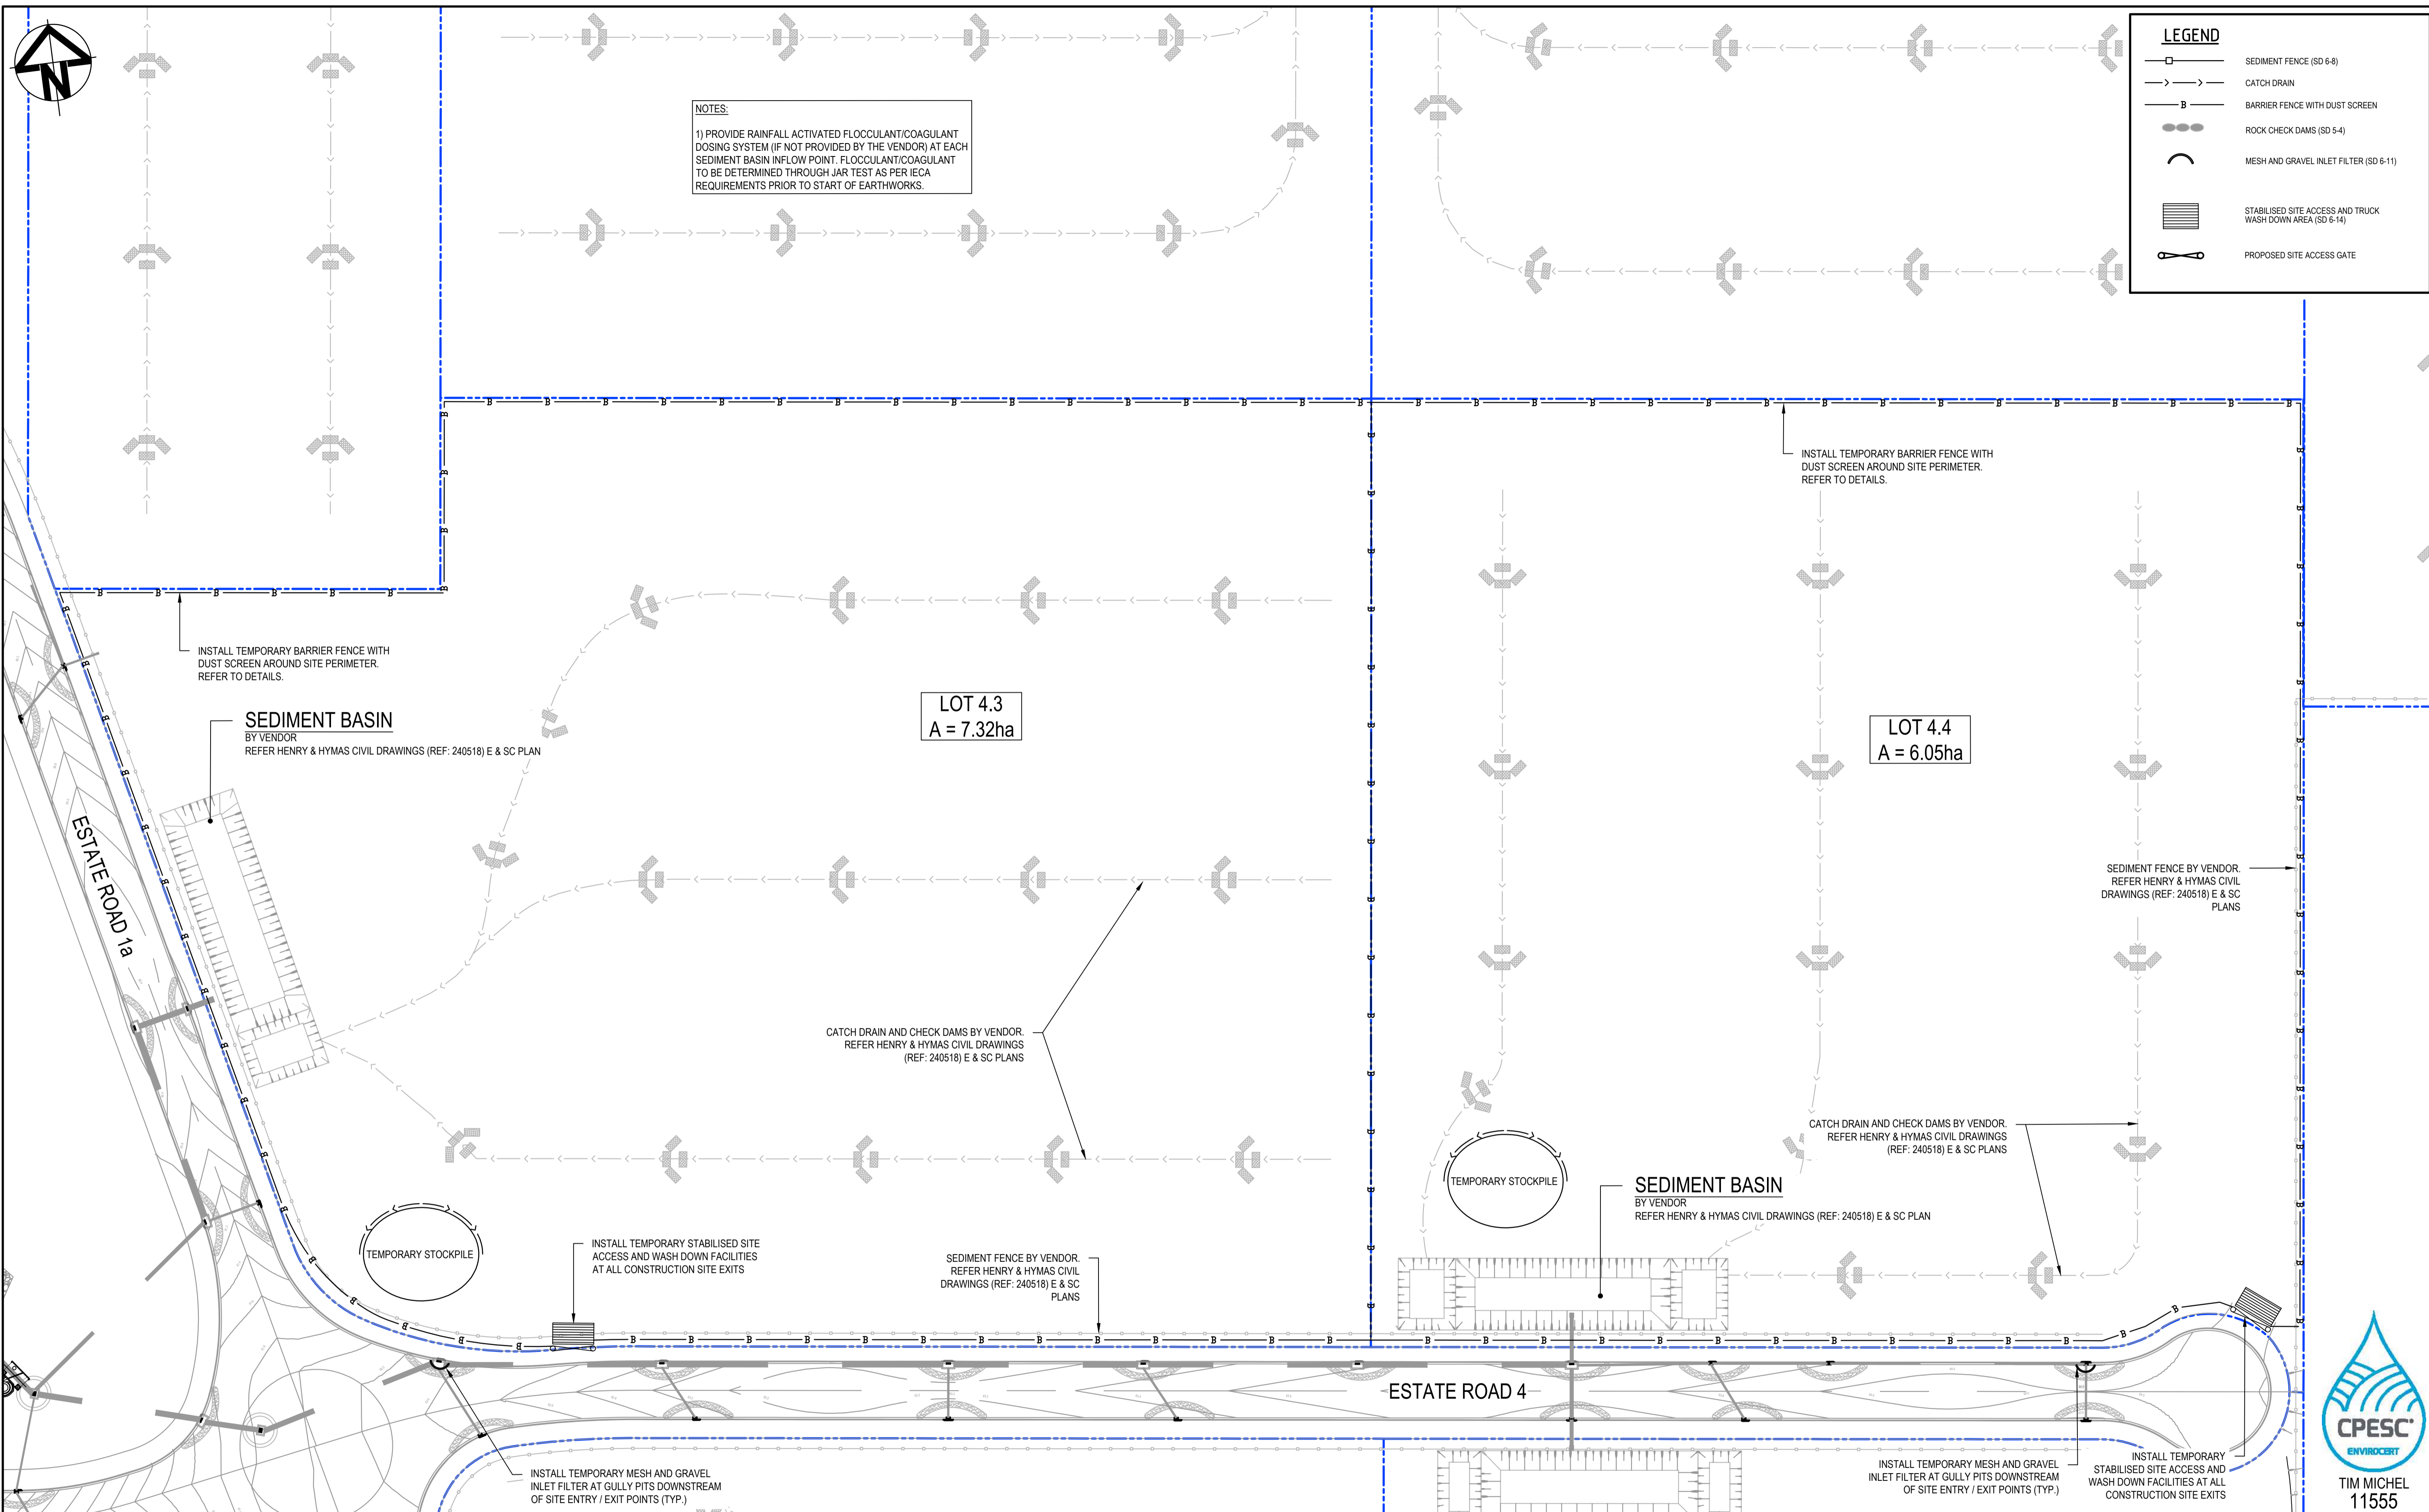

**NOTES:**  
 1) PROVIDE RAINFALL ACTIVATED FLOCCULANT/COAGULANT DOSING SYSTEM (IF NOT PROVIDED BY THE VENDOR) AT EACH SEDIMENT BASIN INFLOW POINT. FLOCCULANT/COAGULANT TO BE DETERMINED THROUGH JAR TEST AS PER IECA REQUIREMENTS PRIOR TO START OF EARTHWORKS.

LEGEND	
	SEDIMENT FENCE (SD 6-8)
	CATCH DRAIN
	BARRIER FENCE WITH DUST SCREEN
	ROCK CHECK DAMS (SD 5-4)
	MESH AND GRAVEL INLET FILTER (SD 6-11)
	STABILISED SITE ACCESS AND TRUCK WASH DOWN AREA (SD 6-14)
	PROPOSED SITE ACCESS GATE

Issue	Description	Date
D	ISSUED FOR COORDINATION	15-10-24
WIP	ISSUED FOR COORDINATION	09-09-24
C	ISSUED FOR APPROVAL	14-06-23
B	ISSUED FOR COORDINATION	20-04-23
A	ISSUED FOR COORDINATION	22-12-22

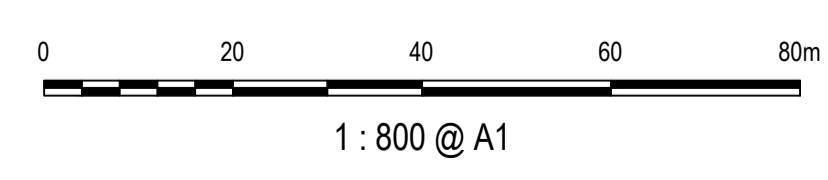

THIS DRAWING CANNOT BE COPIED OR REPRODUCED IN ANY FORM OR USED FOR ANY OTHER PURPOSE OTHER THAN THAT ORIGINALLY INTENDED WITHOUT THE WRITTEN PERMISSION OF AT&L

Client

Scale	1:800 @ A1	Drawn	CK
Grid	GDA2020	Designed	CK
Height Datum	AHD	Checked	CB
		Approved	

Project

**INDUSTRIAL DEVELOPMENT BURRA PARK**

Title

**LOT 4.3 & 4.4 (WH 01 & 02) EROSION AND SEDIMENT CONTROL PLAN BULK EARTHWORKS PHASE**

Civil Engineers and Project Managers

Level 7, 153 Walker Street  
 North Sydney NSW 2060  
 ABN 96 130 882 405  
 Tel: 02 9439 1777  
 Fax: 02 9923 1055  
 www.atl.net.au  
 info@atl.net.au

Status	FOR COORDINATION NOT FOR CONSTRUCTION	A1
Project - Drawing No.	22-993-C2024	Issue
		D

TIM MICHEL  
11555

**NOTES:**

- 1) THE SEDIMENT BASIN MAY BE MODIFIED AND/OR REDUCED ONCE THE ASSESSED SOIL LOSS RATE IS  $\leq 75$  t/ha/yr. ANY MODIFICATION AND/OR REDUCTION MUST BE RE-CERTIFIED BY A CPESC.
- 2) THE SEDIMENT BASIN MAY BE REMOVED ONCE ALL CONSTRUCTION ACTIVITIES ARE COMPLETED AND DISTURBED SURFACES ARE ADEQUATELY STABILISED.
- 3) THE STABILISED SITE ACCESS MUST BE RETAINED UNTIL COMPLETION OF CONSTRUCTION AND PAVING ACTIVITIES.

LEGEND	
	SEDIMENT FENCE (SD 6-8)
	CATCH DRAIN
	BARRIER FENCE WITH DUST SCREEN
	ROCK CHECK DAMS (SD 5-4)
	MESH AND GRAVEL INLET FILTER (SD 6-11)
	GEOTEXTILE INLET (SD 6-12)
	STABILISED SITE ACCESS AND TRUCK WASH DOWN AREA (SD 6-14)
	PROPOSED SITE ACCESS GATE

LOT 4.3  
A = 7.32ha

LOT 4.4  
A = 6.05ha

SEDIMENT BASIN TO BE REMOVED AT COMPLETION OF PAVEMENT WORKS. MODIFY IF NECESSARY WITH SIZING TO SUIT REMAINING DISTURBED SITE. REFER TO NOTES 1 & 2.


INSTALL TEMPORARY GEOTEXTILE INLET FILTERS TO ALL PITS DURING CONSTRUCTION. REPLACE WITH MESH AND GRAVEL INLET FILTERS ONCE SURROUNDING PAVEMENT/TURF IS COMPLETE. (TYP.)

TEMPORARY STOCKPILE TO BE LOCATED TO SITE REQUIREMENTS


CATCH DRAIN AND CHECK DAMS TO BE MODIFIED OR REMOVED AS REQUIRED.

STABILISED SITE ACCESS TO BE REMOVED AT COMPLETION OF PAVEMENT WORKS. REFER TO NOTE 3.

STABILISED SITE ACCESS TO BE REMOVED AT COMPLETION OF PAVEMENT WORKS. REFER TO NOTE 3.

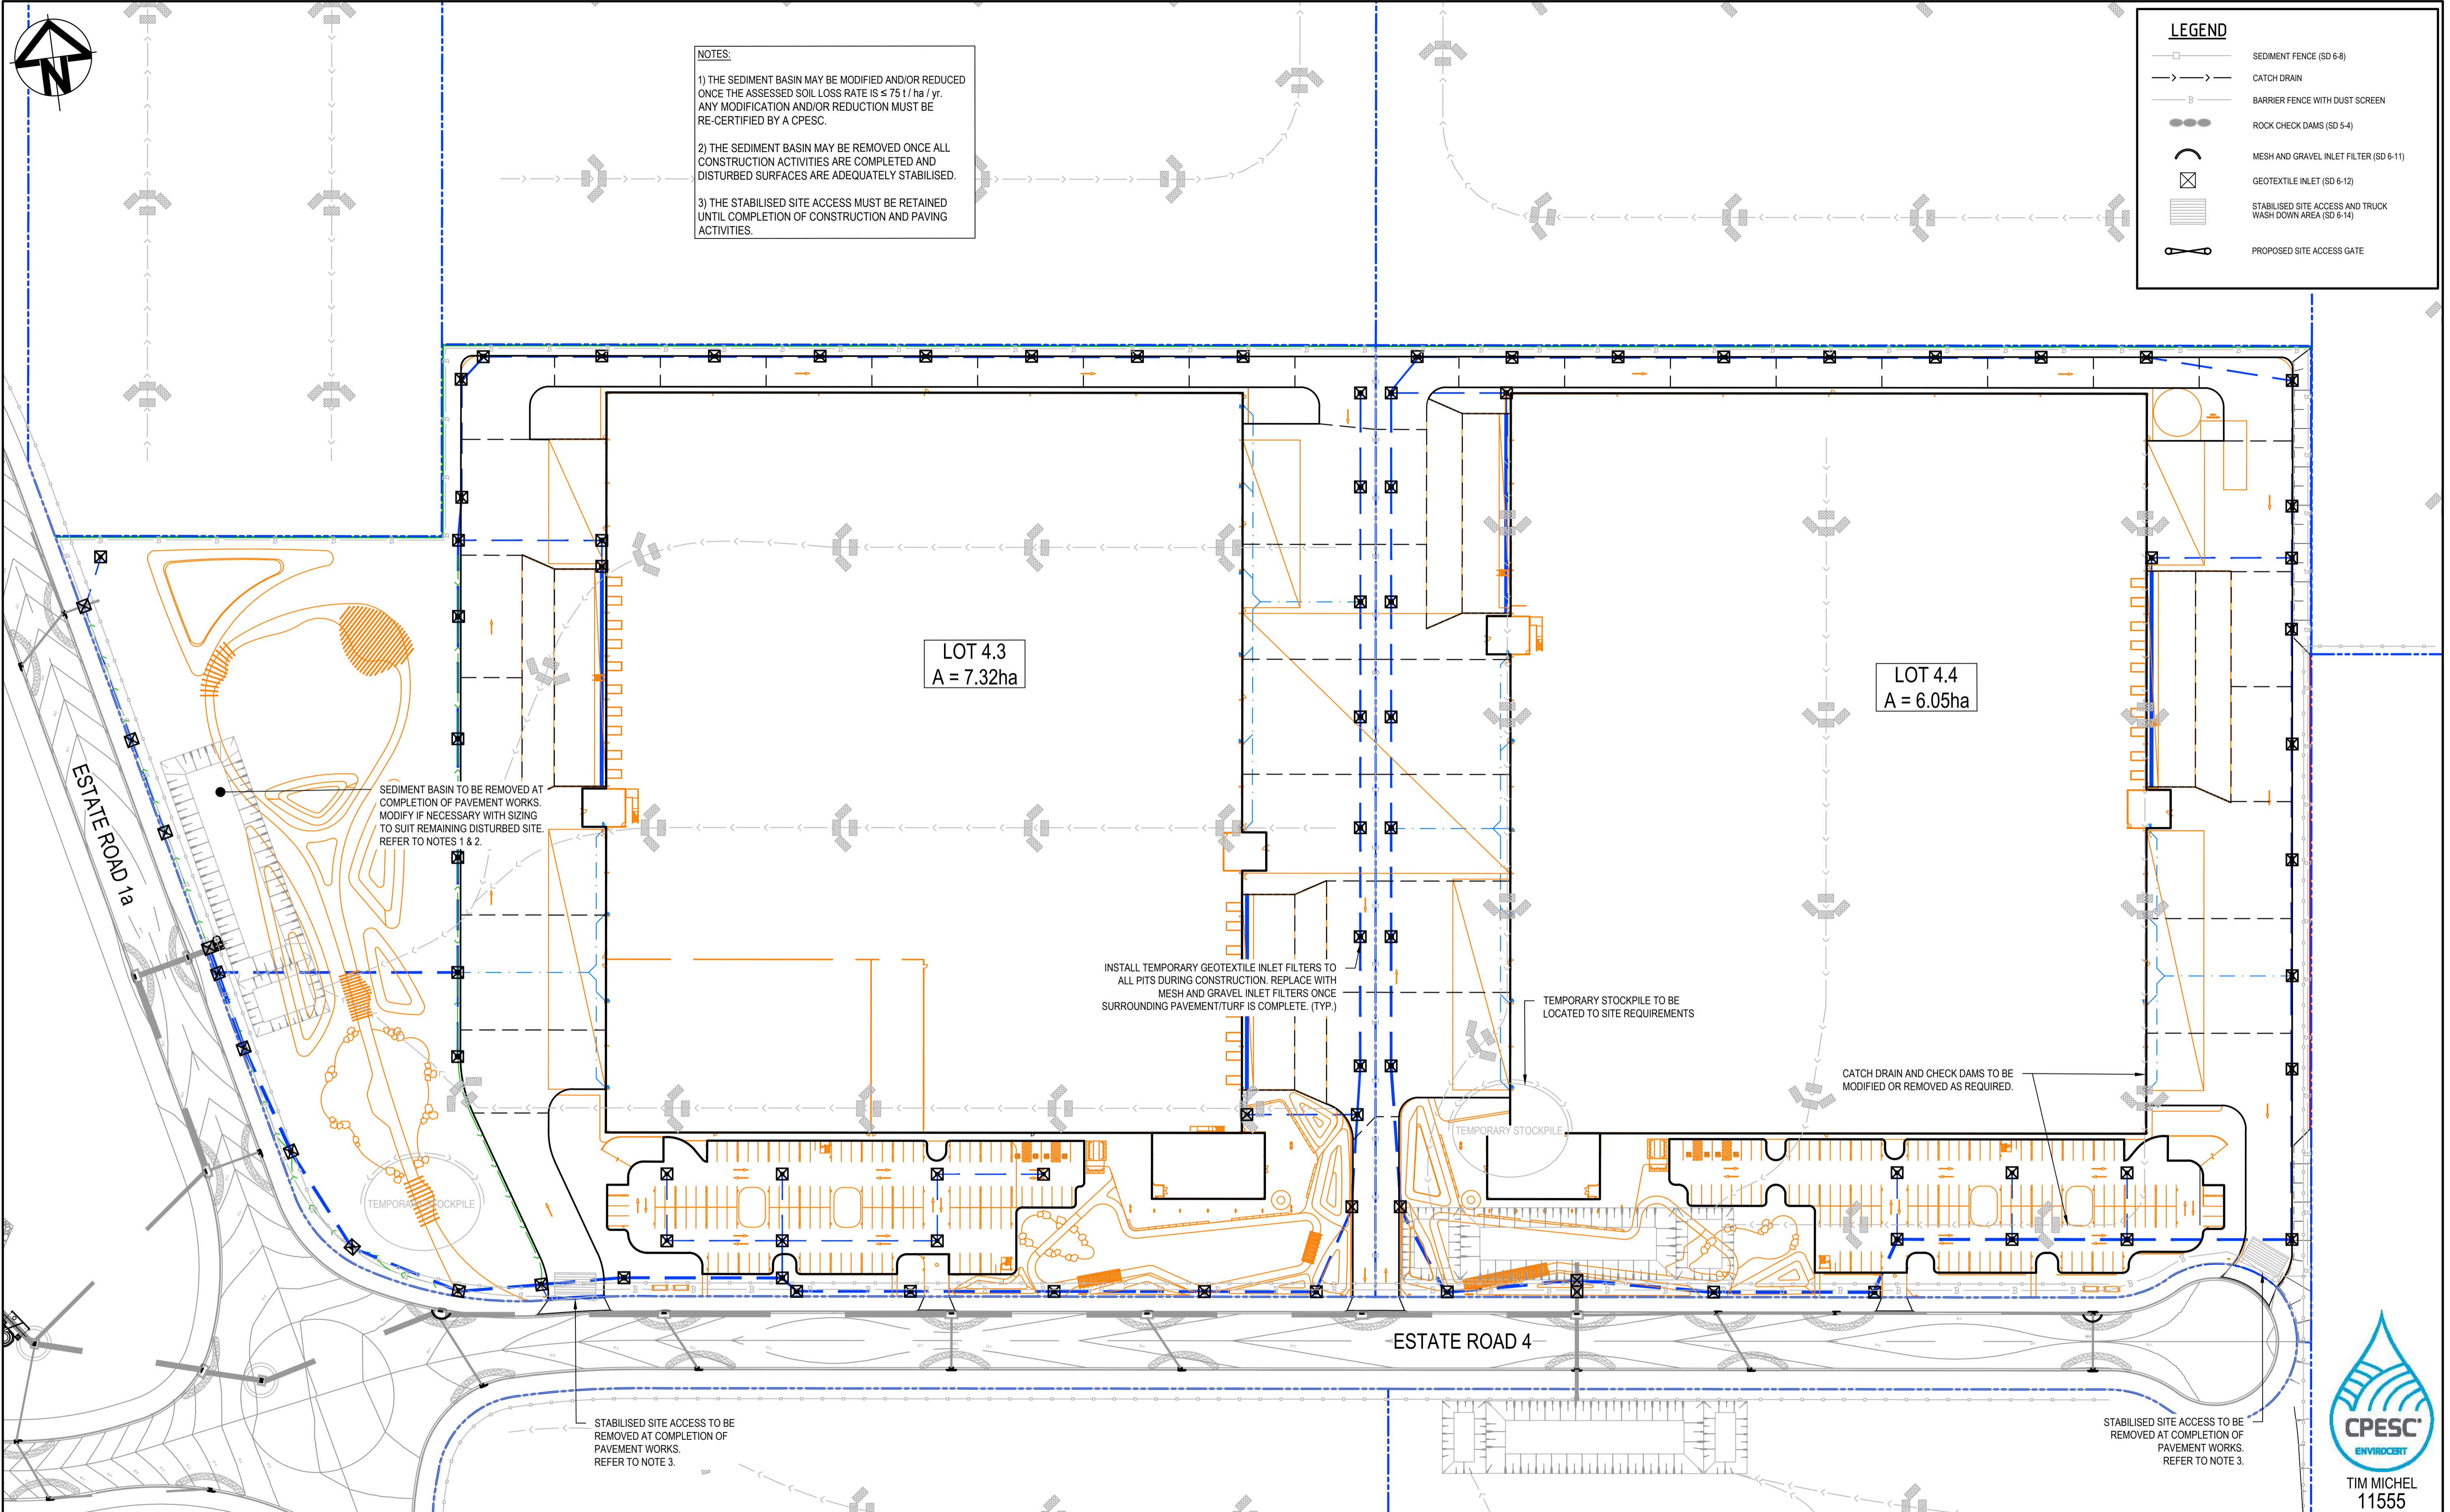

Issue	Description	Date
C	ISSUED FOR COORDINATION	15-10-24
WIP	ISSUED FOR COORDINATION	09-09-24
B	ISSUED FOR APPROVAL	14-06-23
A	ISSUED FOR COORDINATION	20-04-23

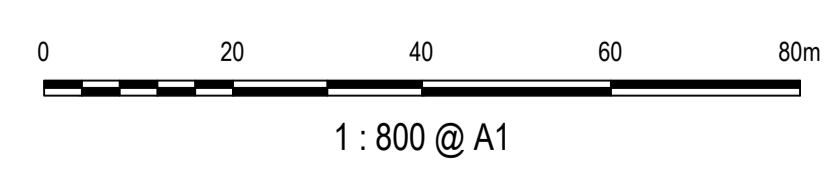

THIS DRAWING CANNOT BE COPIED OR REPRODUCED IN ANY FORM OR USED FOR ANY OTHER PURPOSE OTHER THAN THAT ORIGINALLY INTENDED WITHOUT THE WRITTEN PERMISSION OF AT&L

Client

Scales	1:800 @ A1	Drawn	CK
Grid	GDA2020	Designed	CK
Height Datum	AHD	Checked	CB
		Approved	


Project  
**INDUSTRIAL DEVELOPMENT BURRA PARK**

Title  
**LOT 4.3 & 4.4 (WH 01 & 02) EROSION AND SEDIMENT CONTROL PLAN CIVIL WORKS PHASE**

Civil Engineers and Project Managers

Level 7, 153 Walker Street  
North Sydney NSW 2060  
ABN 96 130 882 405  
Tel: 02 9439 1777  
Fax: 02 9923 1055  
www.atl.net.au  
info@atl.net.au


Status	<b>FOR COORDINATION NOT FOR CONSTRUCTION</b>	A1
Project - Drawing No.	<b>22-993-C2025</b>	Issue
		<b>C</b>




- NOTES:**
- 1) TURF, TREES AND PLANTS TO BE PLANTED AND PROTECTED AS EARLY AS POSSIBLE IN ACCORDANCE WITH THE LANDSCAPE ARCHITECT'S / SUPPLIER'S SPECIFICATIONS.
  - 2) CONTRACTOR TO MAINTAIN ALL TURF AND PLANTING THROUGHOUT THE MAINTENANCE PERIOD IN ACCORDANCE WITH THE LANDSCAPE ARCHITECT'S / SUPPLIER'S SPECIFICATIONS.
  - 3) ALL PAVED SURFACES SHALL BE SWEEPED CLEAN REGULARLY TO PREVENT LITTER AND SEDIMENT FROM ENTERING THE DRAINAGE SYSTEM.
  - 4) TEMPORARY EROSION AND SEDIMENT CONTROL MEASURES MAY BE REMOVED AT COMPLETION OF ALL CONSTRUCTION AND STABILISATION WORKS.
  - 5) LANDSCAPE IRRIGATION SYSTEM TO BE INSTALLED AND OPERATIONAL PRIOR TO PLANTING. IRRIGATION SYSTEM IS TO BE SUPPLIED FROM RAINWATER HARVESTING TANKS WITH AUTOMATIC SWITCH TO RECYCLED WATER SUPPLY SYSTEM WHEN THE TANKS ARE EMPTY.
  - 6) TEMPORARY RAINWATER TANKS TO BE REMOVED WHEN PERMANENT RECYCLED WATER SUPPLY IS AVAILABLE TO THE SITE.

**LEGEND**

- SURFACES TO BE STABILISED WITH TURF/PLANTING. (REFER LANDSCAPE ARCHITECT'S DWGS)
- SURFACES TO BE STABILISED WITH PAVING AND STRUCTURES

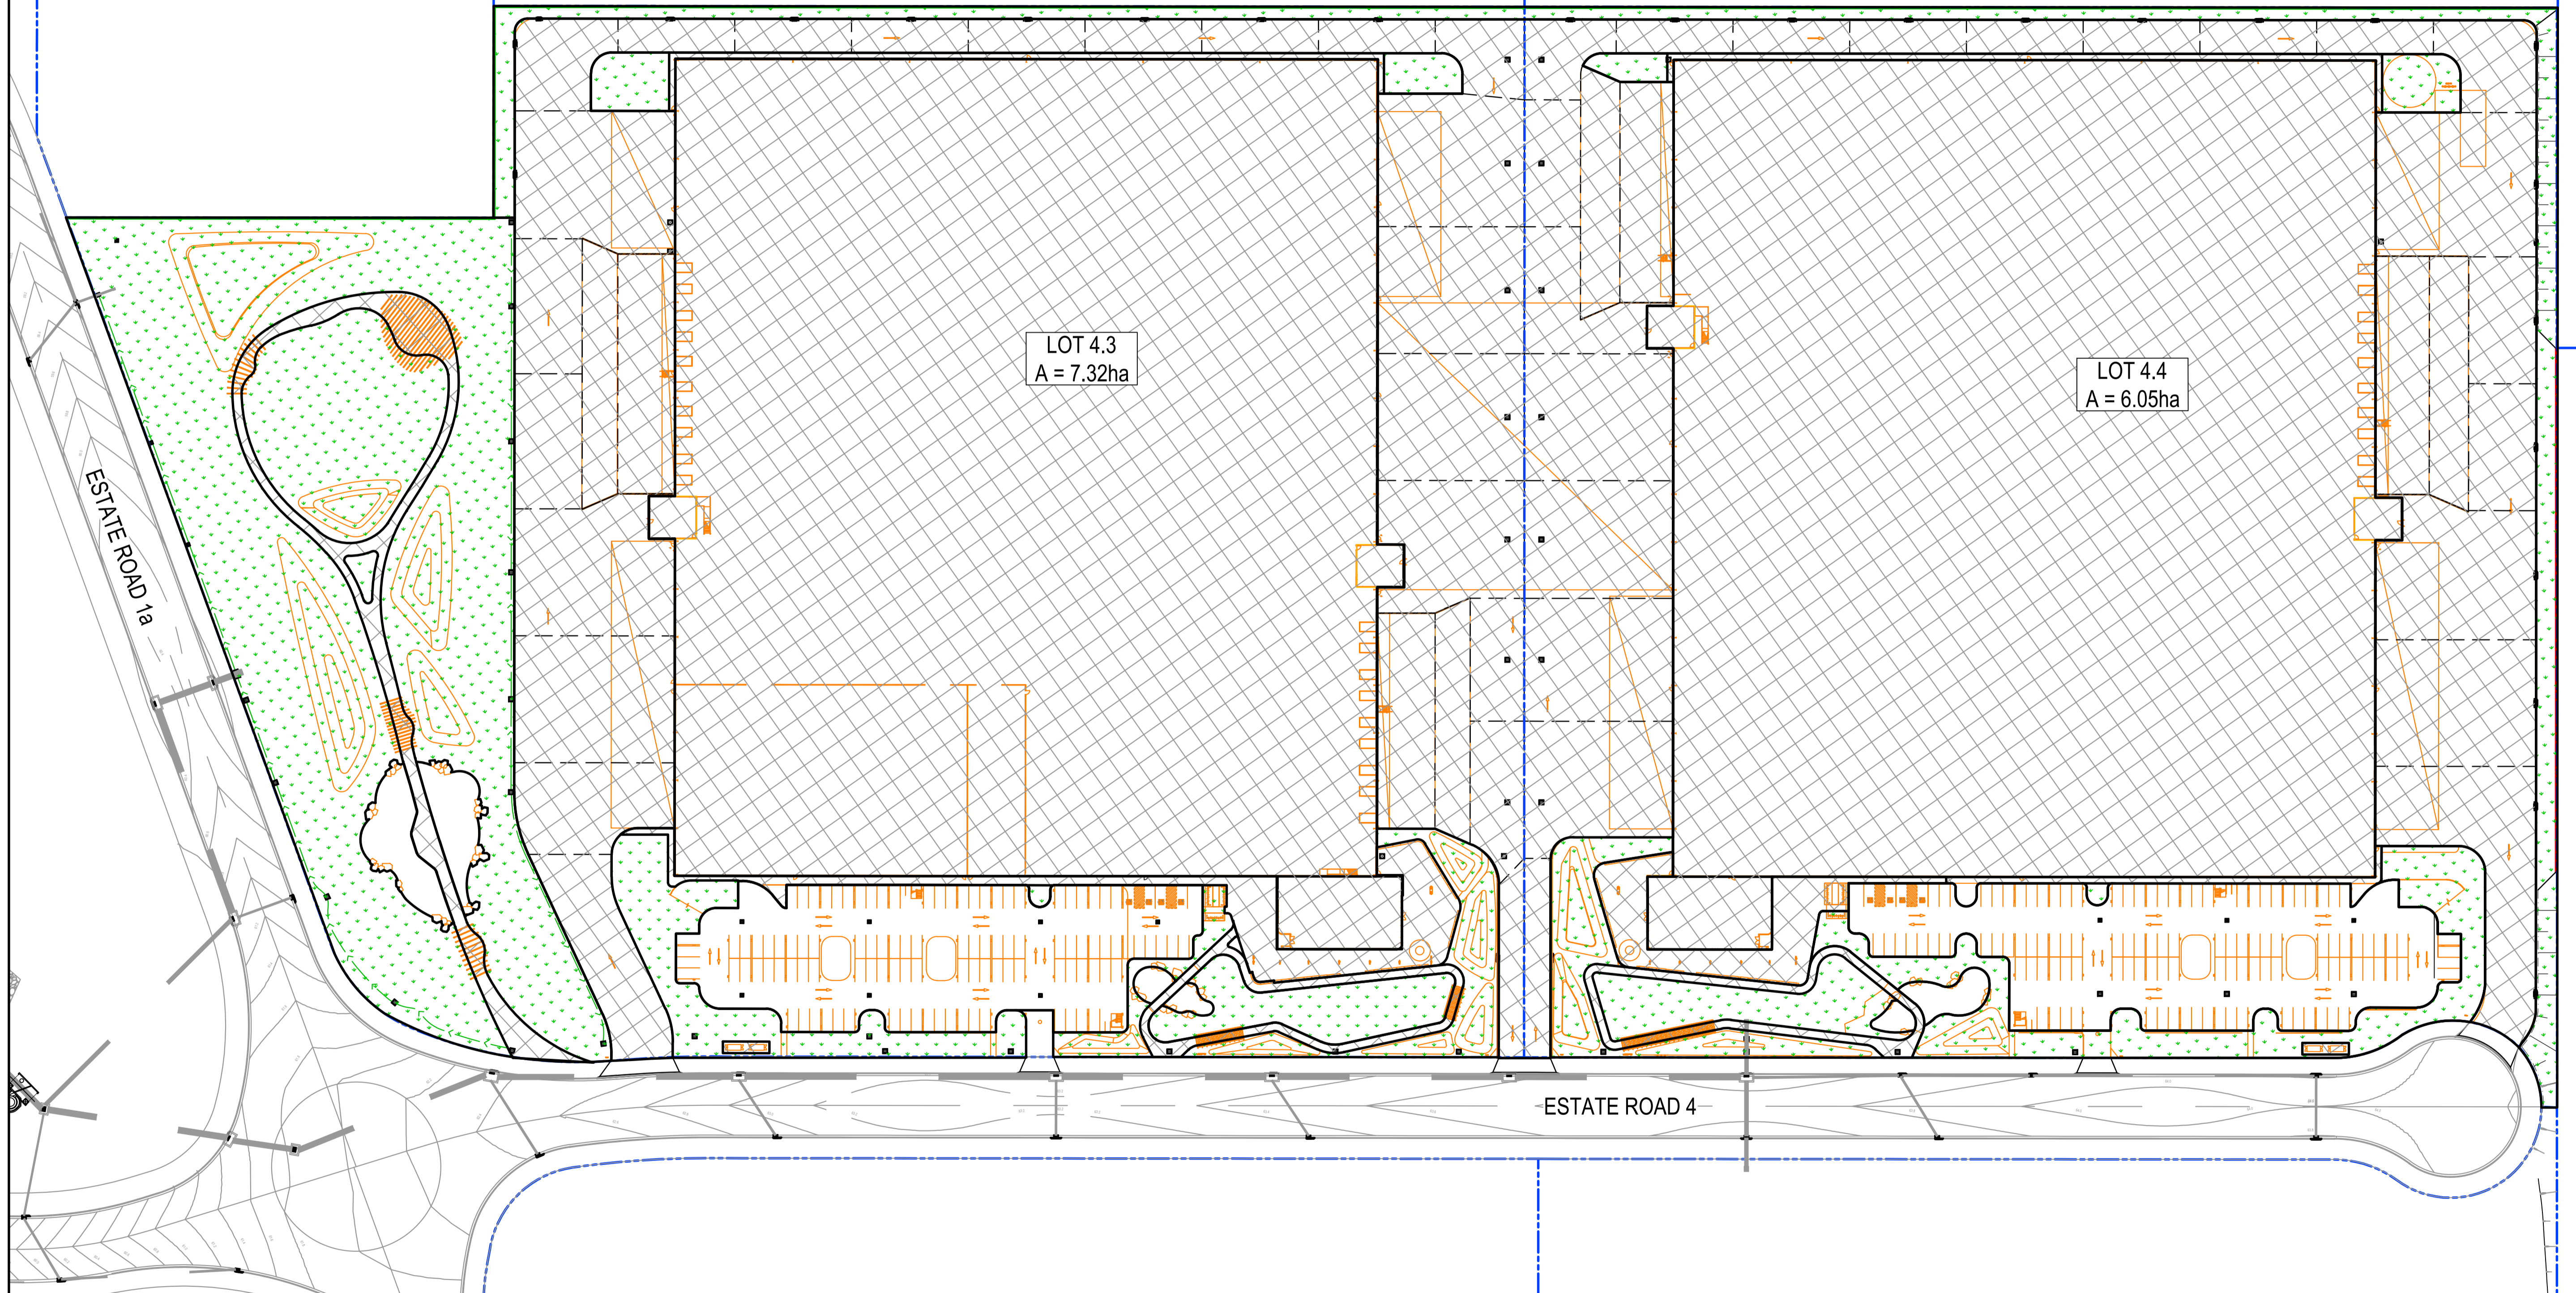

Issue	Description	Date
C	ISSUED FOR COORDINATION	15-10-24
WIP	ISSUED FOR COORDINATION	09-09-24
B	ISSUED FOR APPROVAL	14-06-23
A	ISSUED FOR COORDINATION	20-04-23



THIS DRAWING CANNOT BE COPIED OR REPRODUCED IN ANY FORM OR USED FOR ANY OTHER PURPOSE OTHER THAN THAT ORIGINALLY INTENDED WITHOUT THE WRITTEN PERMISSION OF AT&L

Client

Scales: 1:800 @ A1

Drawn	CK
Designed	CK
Checked	CB
Approved	

Grid: GDA2020

Height Datum: AHD

Project: INDUSTRIAL DEVELOPMENT BURRA PARK

Title: LOT 4.3 & 4.4 (WH 01 & 02) EROSION AND SEDIMENT CONTROL PLAN STABILISATION PHASE

Civil Engineers and Project Managers

Level 7, 153 Walker Street  
North Sydney NSW 2060  
ABN 96 130 882 405  
Tel: 02 9439 1777  
Fax: 02 9923 1055  
www.atl.net.au  
info@atl.net.au

Status: FOR COORDINATION NOT FOR CONSTRUCTION	A1
Project - Drawing No. 22-993-C2026	Issue C

**EROSION AND SEDIMENT CONTROL**

**NOTES**

**GENERAL INSTRUCTIONS**

- THE SITE SUPERINTENDENT/ENGINEER WILL ENSURE THAT ALL SOIL AND WATER MANAGEMENT WORKS ARE LOCATED AS DOCUMENTED.
- ALL WORK SHALL BE GENERALLY CARRIED OUT IN ACCORDANCE WITH
  - LOCAL AUTHORITY REQUIREMENTS
  - STATE REQUIREMENTS
  - LANDCOM'S "MANAGING URBAN STORMWATER, SOILS AND CONSTRUCTION", 4th EDITION, MARCH 2004.
- WHEN STORMWATER PITS ARE CONSTRUCTED, PREVENT SITE RUNOFF ENTERING UNLESS SEDIMENT FENCES ARE ERECTED AROUND PITS.
- CONTRACTOR IS TO ENSURE ALL EROSION & SEDIMENT CONTROL DEVICES ARE MAINTAINED IN GOOD WORKING ORDER AND OPERATE EFFECTIVELY. REPAIRS AND OR MAINTENANCE SHALL BE UNDERTAKEN, AS REQUIRED, PARTICULARLY FOLLOWING STORM EVENTS.

**LAND DISTURBANCE**

- WHERE PRACTICAL, THE SOIL EROSION HAZARD ON THE SITE WILL BE KEPT AS LOW AS POSSIBLE. TO THIS END, WORKS SHOULD BE UNDERTAKEN IN THE FOLLOWING SEQUENCE:
  - INSTALL A WIND FENCE ALONG THE BOUNDARIES AS SHOWN ON PLAN. REFER DETAIL.
  - INSTALL A SEDIMENT FENCE ALONG THE BOUNDARIES AS SHOWN ON PLAN. REFER DETAIL.
  - CONSTRUCT STABILISED CONSTRUCTION ENTRANCE TO LOCATION AS DETERMINED BY SUPERINTENDENT/ENGINEER. REFER DETAIL.
  - INSTALL SEDIMENT BASIN AS SHOWN ON PLANS.
  - INSTALL SEDIMENT TRAPS AS SHOWN ON PLANS.
  - UNDERTAKE SITE DEVELOPMENT WORKS IN ACCORDANCE WITH THE ENGINEERING PLANS. WHERE POSSIBLE, PHASE DEVELOPMENT SO THAT LAND DISTURBANCE IS CONFINED TO AREAS OF WORKABLE SIZE.

**EROSION CONTROL**

- DURING WINDY WEATHER, LARGE, UNPROTECTED AREAS WILL BE KEPT MOIST (NOT WET) BY SPRINKLING WITH WATER TO KEEP DUST UNDER CONTROL.
- FINAL SITE LANDSCAPING WILL BE UNDERTAKEN AS SOON AS POSSIBLE AND WITHIN 20 WORKING DAYS FROM COMPLETION OF CONSTRUCTION ACTIVITIES.

**SEDIMENT CONTROL**


- STOCKPILES WILL NOT BE LOCATED WITHIN 2 METRES OF HAZARD AREAS, INCLUDING LIKELY AREAS OF CONCENTRATED OR HIGH VELOCITY FLOWS SUCH AS WATERWAYS. WHERE THEY ARE BETWEEN 2 AND 5 METRES FROM SUCH AREAS, SPECIAL SEDIMENT CONTROL MEASURES SHOULD BE TAKEN TO MINIMISE POSSIBLE POLLUTION TO DOWNSLOPE WATERS, E.G. THROUGH INSTALLATION OF SEDIMENT FENCING.
- ANY SAND USED IN THE CONCRETE CURING PROCESS (SPREAD OVER THE SURFACE) WILL BE REMOVED AS SOON AS POSSIBLE AND WITHIN 10 WORKING DAYS FROM PLACEMENT.
- WATER WILL BE PREVENTED FROM ENTERING THE PERMANENT DRAINAGE SYSTEM UNLESS IT IS RELATIVELY SEDIMENT FREE, I.E. THE CATCHMENT AREA HAS BEEN PERMANENTLY LANDSCAPED AND/OR ANY LIKELY SEDIMENT HAS BEEN FILTERED THROUGH AN APPROVED STRUCTURE.
- TEMPORARY SOIL AND WATER MANAGEMENT STRUCTURES WILL BE REMOVED ONLY AFTER THE LANDS THEY ARE PROTECTING ARE REHABILITATED.

**OTHER MATTERS**

- ACCEPTABLE RECEPTORS WILL BE PROVIDED FOR CONCRETE AND MORTAR SLURRIES, PAINTS, ACID WASHINGS, LIGHT-WEIGHT WASTE MATERIALS AND LITTER.
- ANY EXISTING TREES WHICH FORM PART OF THE FINAL LANDSCAPING PLAN WILL BE PROTECTED FROM CONSTRUCTION ACTIVITIES BY:
  - PROTECTING THEM WITH BARRIER FENCING OR SIMILAR MATERIALS INSTALLED OUTSIDE THE DRIP LINE
  - ENSURING THAT NOTHING IS NAILED TO THEM
  - PROHIBITING PAVING, GRADING, SEDIMENT WASH OR PLACING OF STOCKPILES WITHIN THE DRIP LINE EXCEPT UNDER THE FOLLOWING CONDITIONS:
    - ENCROACHMENT ONLY OCCURS ON ONE SIDE AND NO CLOSER TO THE TRUNK THAN EITHER 1.5 METRES OR HALF THE DISTANCE BETWEEN THE OUTER EDGE OF THE DRIP LINE AND THE TRUNK, WHICH EVER IS THE GREATER
    - A DRAINAGE SYSTEM THAT ALLOWS AIR AND WATER TO CIRCULATE THROUGH THE ROOT ZONE (E.G. A GRAVEL BED) IS PLACED UNDER ALL FILL LAYERS OF MORE THAN 300 MILLIMETRES DEPTH
    - CARE IS TAKEN NOT TO CUT ROOTS UNNECESSARILY NOR TO COMPACT THE SOIL AROUND THEM.

**STAGING**


SUITABLE EROSION AND SEDIMENT CONTROLS SHALL BE DESIGNED, PROVIDED AND MAINTAINED BY THE CONTRACTOR THROUGHOUT ALL STAGES OF WORKS, INCLUDING AT COMPLETION OF THE BULK EARTHWORKS WHERE SHOWN ON AT&L DRAWINGS OR WHERE DIRECTED BY THE SUPERINTENDENT OR PENRITH CITY COUNCIL'S ENGINEERS. SEDIMENT AND EROSION CONTROLS ARE TO BE DESIGNED AND DOCUMENTED BY A CERTIFIED PROFESSIONAL IN EROSION AND SEDIMENT CONTROL (CPESC) ENGAGED BY THE CONTRACTOR AND APPROVED AS PART OF THE CONSTRUCTION ENVIRONMENTAL MANAGEMENT PLAN PRIOR TO THE COMMENCEMENT OF CONSTRUCTION. SUCH CONTROLS SHALL BE IN ACCORDANCE WITH THE RELEVANT REQUIREMENTS IN THE LATEST VERSION OF THE MANAGING URBAN STORMWATER, SOILS AND CONSTRUCTION GUIDELINE (LANDCOM).

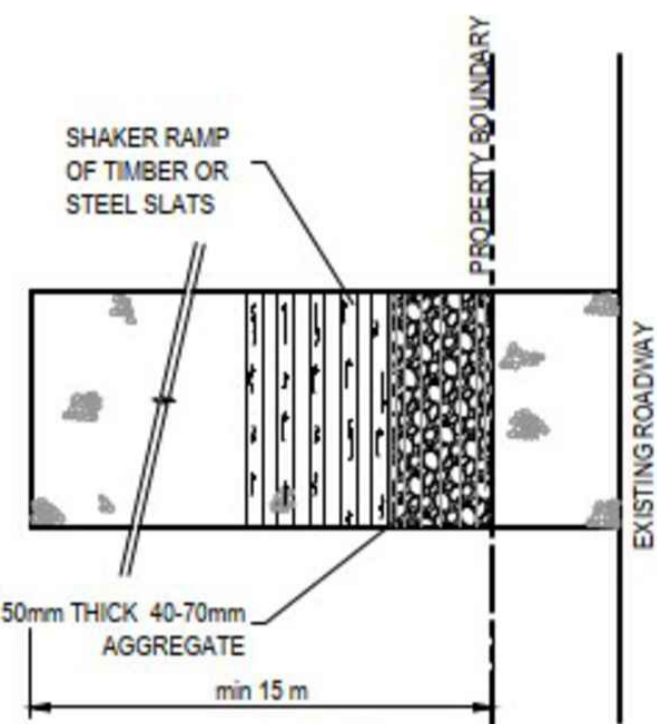


PLAN

**STABILISED SITE ACCESS WITH SHAKER GRID**

N.T.S.

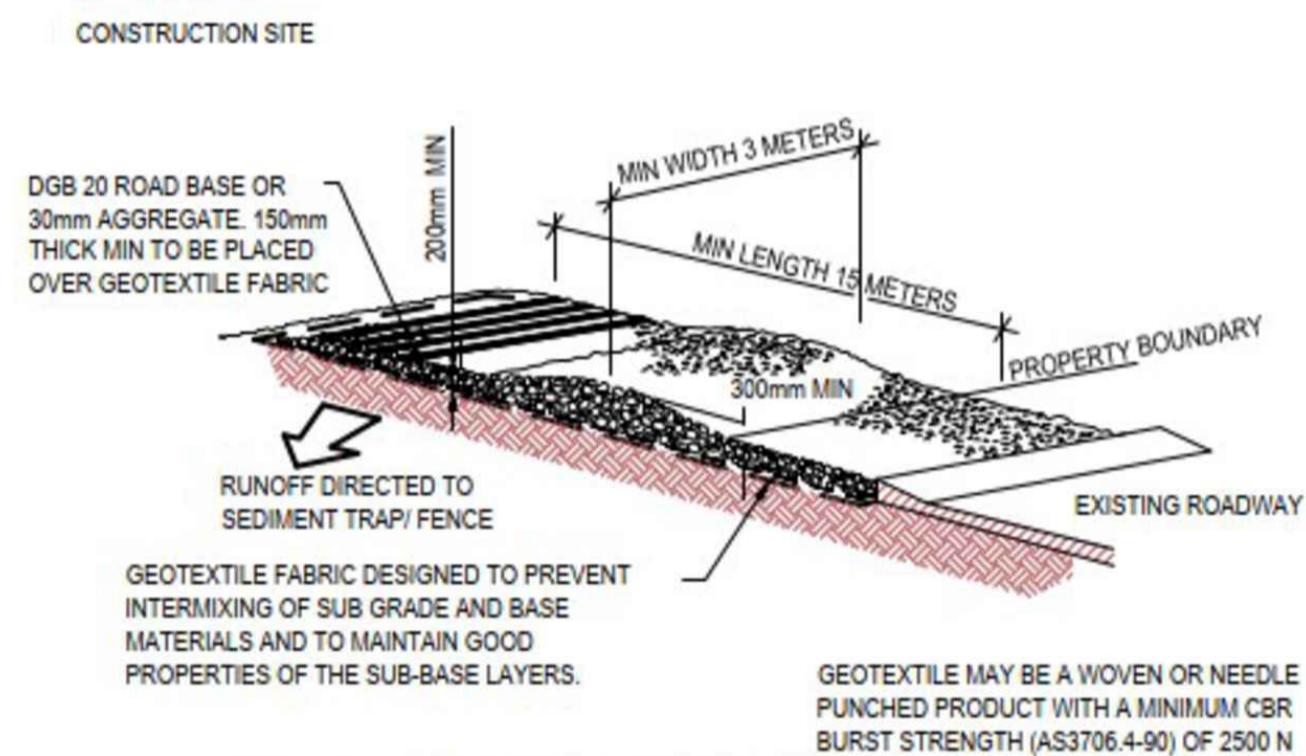

**STABILISED SITE ACCESS WITH SHAKER GRID**

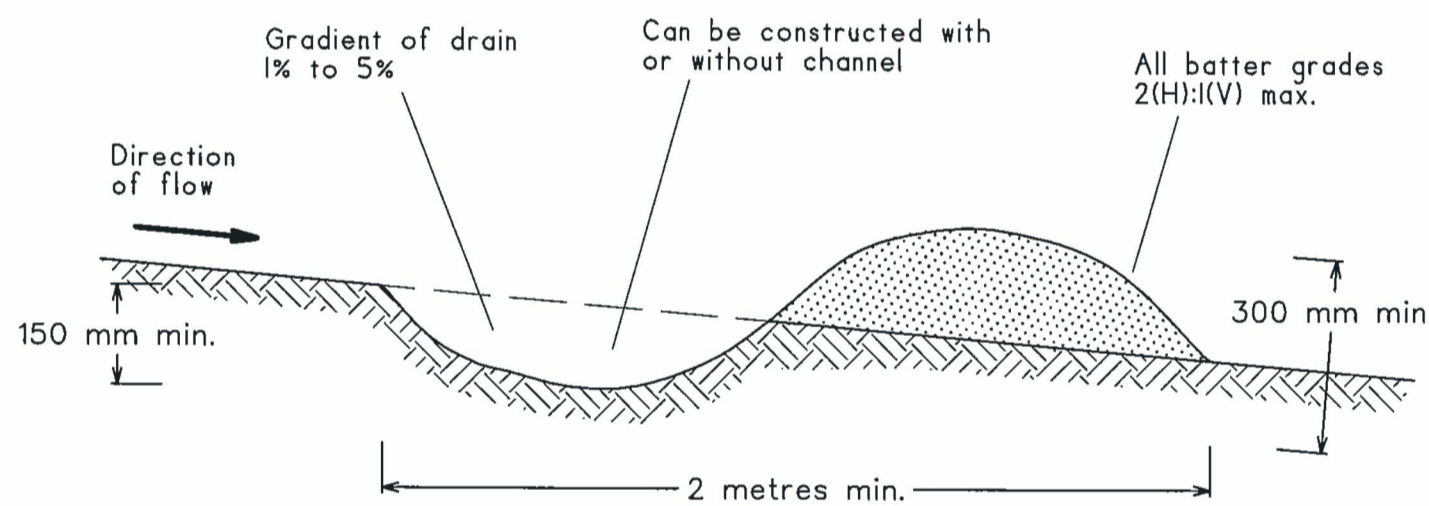


NOTE: Only to be used as temporary bank where maximum upslope length is 80 metres.

**Construction Notes**

- Build with gradients between 1 percent and 5 percent.
- Avoid removing trees and shrubs if possible - work around them.
- Ensure the structures are free of projections or other irregularities that could impede water flow.
- Build the drains with circular, parabolic or trapezoidal cross sections, not V shaped.
- Ensure the banks are properly compacted to prevent failure.
- Complete permanent or temporary stabilisation within 10 days of construction.

**EARTH BANK (LOW FLOW)**

SD 5-5

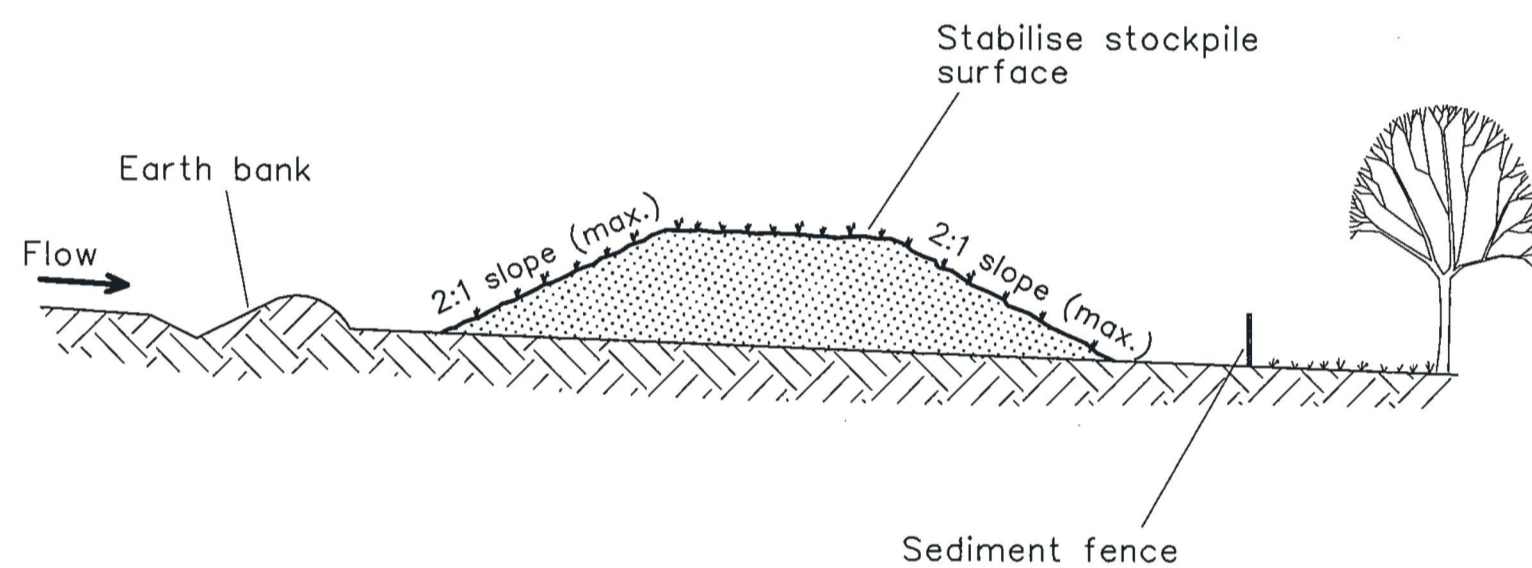


**Construction Notes**

- Place stockpiles more than 2 (preferably 5) metres from existing vegetation, concentrated water flow, roads and hazard areas.
- Construct on the contour as low, flat, elongated mounds.
- Where there is sufficient area, topsoil stockpiles shall be less than 2 metres in height.
- Where they are to be in place for more than 10 days, stabilise following the approved ESCP or SWMP to reduce the C-factor to less than 0.10.
- Construct earth banks (Standard Drawing 5-5) on the upslope side to divert water around stockpiles and sediment fences (Standard Drawing 6-8) 1 to 2 metres downslope.

**STOCKPILES**

SD 4-1

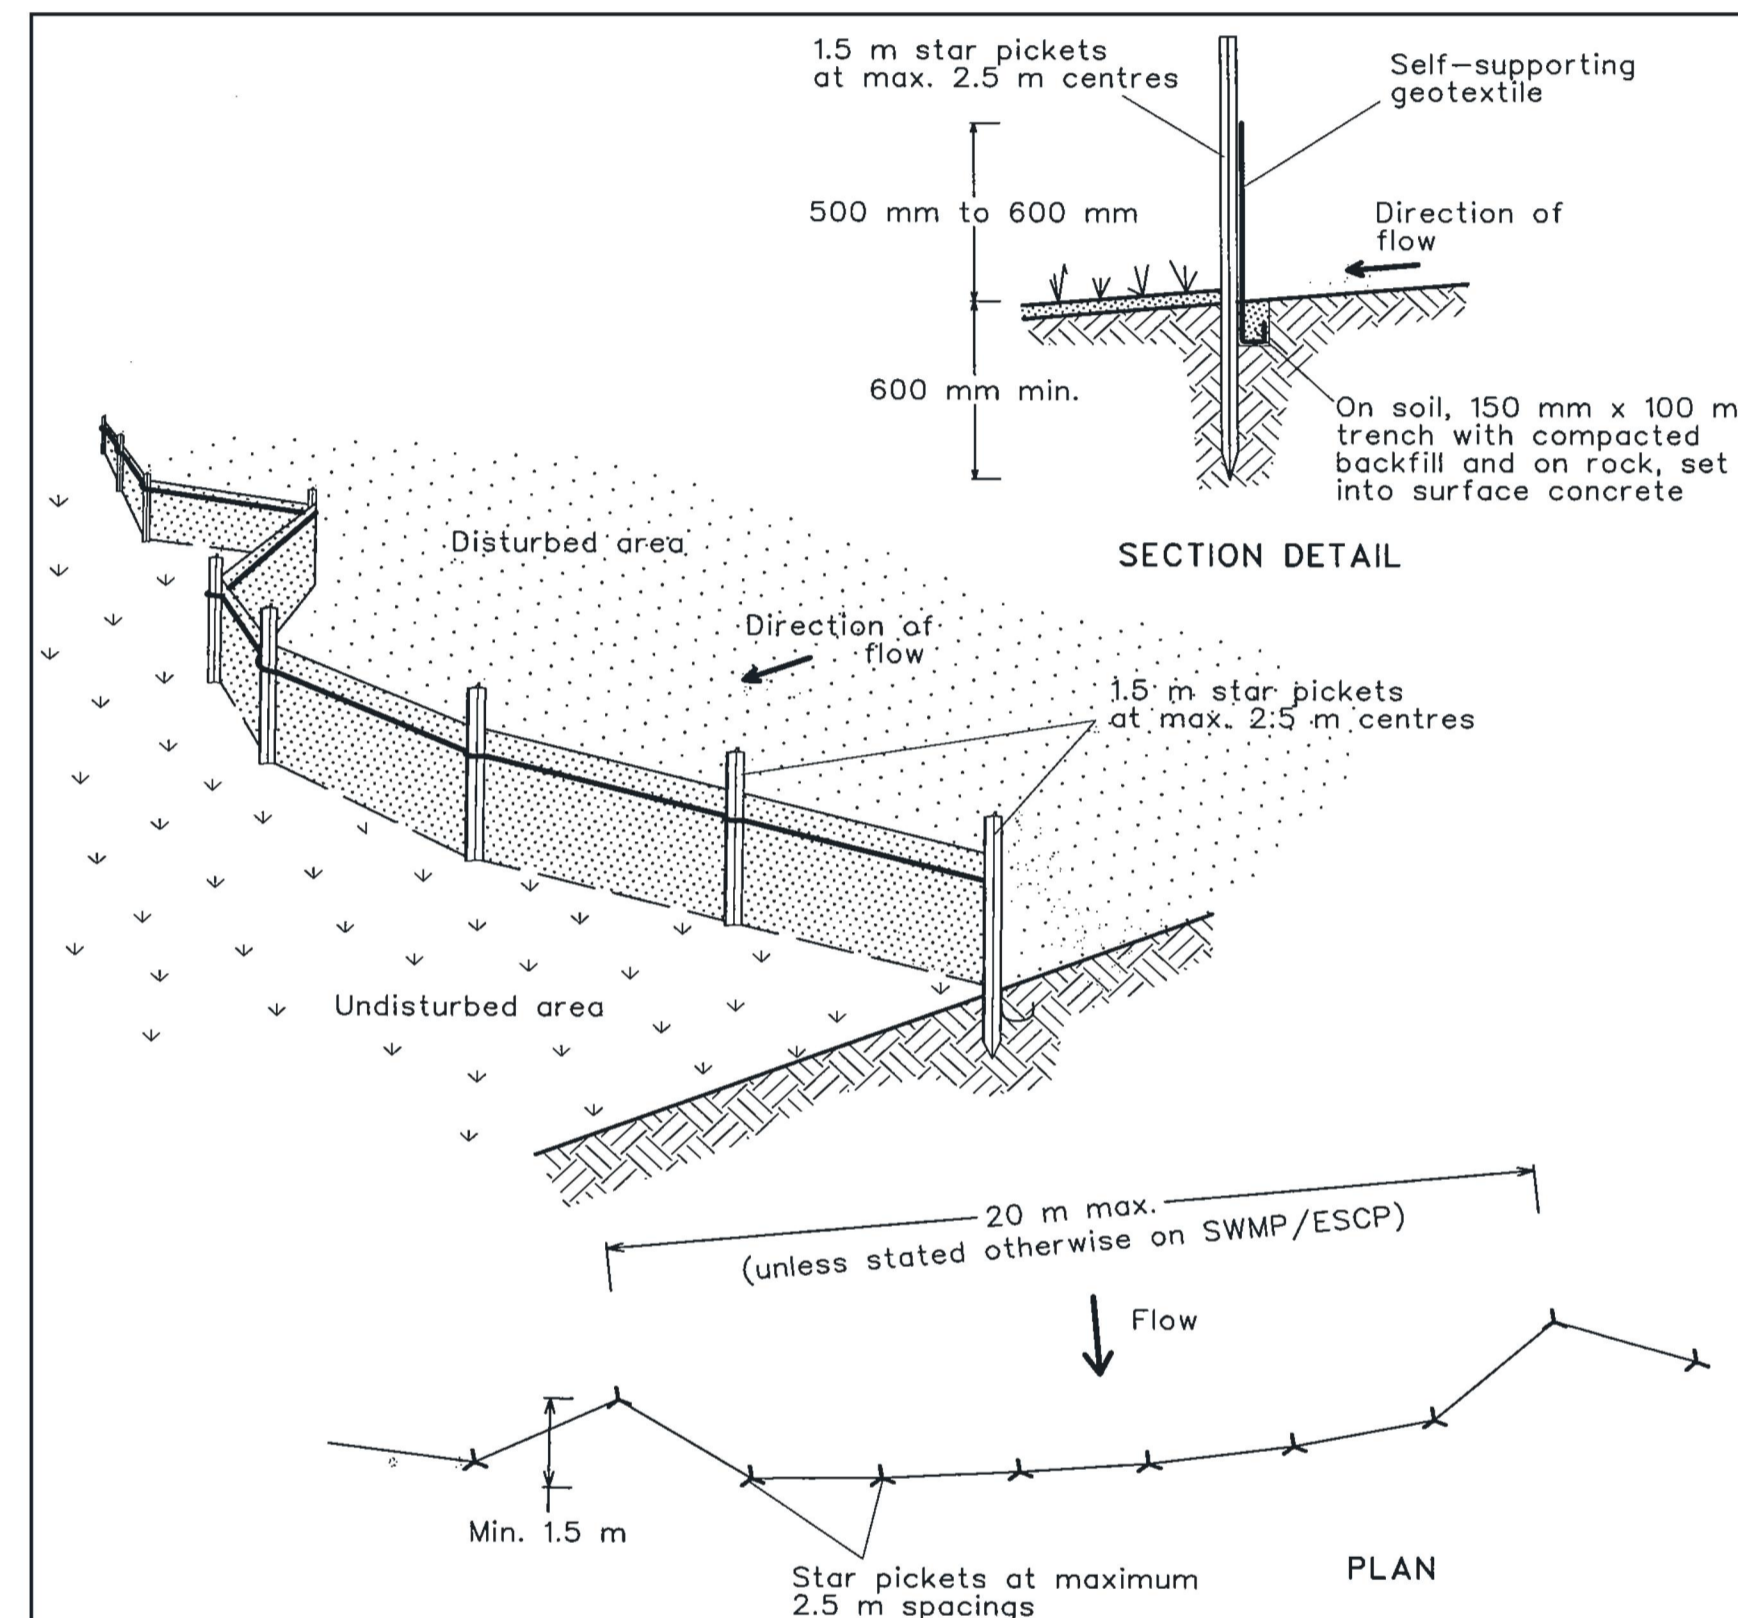

**Construction Notes**

- Construct sediment fences as close as possible to being parallel to the contours of the site, but with small returns as shown in the drawing to limit the catchment area of any one section. The catchment area should be small enough to limit water flow if concentrated at one point to 50 litres per second in the design storm event, usually the 10-year event.
- Cut a 150-mm deep trench along the upslope line of the fence for the bottom of the fabric to be entrenched.
- Drive 1.5 metre long star pickets into ground at 2.5 metre intervals (max) at the downslope edge of the trench. Ensure any star pickets are fitted with safety caps.
- Fix self-supporting geotextile to the upslope side of the posts ensuring it goes to the base of the trench. Fix the geotextile with wire ties or as recommended by the manufacturer. Only use geotextile specifically produced for sediment fencing. The use of shade cloth for this purpose is not satisfactory.
- Join sections of fabric at a support post with a 150-mm overlap.
- Backfill the trench over the base of the fabric and compact it thoroughly over the geotextile.

**SEDIMENT FENCE**

SD 6-8



TIM MICHEL  
11555

Issue	Description	Date
D	ISSUED FOR COORDINATION	15-10-24
WIP	ISSUED FOR COORDINATION	09-09-24
C	ISSUED FOR APPROVAL	14-06-23
B	ISSUED FOR COORDINATION	20-04-23
A	ISSUED FOR COORDINATION	22-12-22

THIS DRAWING CANNOT BE COPIED OR REPRODUCED IN ANY FORM OR USED FOR ANY OTHER PURPOSE OTHER THAN THAT ORIGINALLY INTENDED WITHOUT THE WRITTEN PERMISSION OF AT&L

Client

Scales AS SHOWN

Drawn	CK
Designed	CK
Grid	GDA2020
Checked	CB
Height Datum	AHD
Approved	

Project

**INDUSTRIAL DEVELOPMENT BURRA PARK**

Title

**LOT 4.3 & 4.4 (WH 01 & 02) EROSION AND SEDIMENT CONTROL DETAILS SHEET 1**

Civil Engineers and Project Managers

Level 7, 153 Walker Street  
North Sydney NSW 2060  
ABN 96 130 882 405  
Tel: 02 9439 1777  
Fax: 02 9923 1055  
www.atl.net.au  
info@atl.net.au

Status	FOR COORDINATION NOT FOR CONSTRUCTION	A1
Project - Drawing No.	22-993-C2030	Issue
		D

**EROSION AND SEDIMENT CONTROL**

**NOTES**

**PRELIMINARY BASIN SIZING - TYPE A SEDIMENT BASIN SIZING  
(REFER VENDOR WORKS CIVIL ENGINEERING PLANS BY HENRY & HYMAS FOR DETAILS)**

THE SEDIMENT BASIN SHALL BE CONSTRUCTED ON A RATE PER HECTARE BASIS AND HAS BEEN IN ACCORDANCE WITH THE REQUIREMENTS OF THE INTERNATIONAL EROSION CONTROL ASSOCIATION (IECA) APPENDIX B SEDIMENT DESIGN AND OPERATION (REVISION - JUNE 2018). THE DISTURBED AREA WITHIN THIS CATCHMENT AT ANY ONE TIME SHOULD BE LIMITED TO AN AREA FOR WHICH EACH SEDIMENT BASIN HAS BEEN DESIGNED FOR. IF REQUIRED, EACH BASIN SHALL BE RE-SIZED IN ACCORDANCE WITH THE TABLE ADJACENT.

VALUES PRESENTED IN THE HENRY & HYMAS CIVIL DRAWINGS ARE BASED ON FULL SITE AREA. SUBJECT TO FUTURE DETAIL DESIGN, DISTRIBUTED SITE AREAS (AND THUS BASIN AREAS) MAY CHANGE OR BE DISTRIBUTED TO MULTIPLE BASINS AS SITE CONDITIONS DICTATE. A REVIEW OF SIZING (AND UPSIZING) TO BE UNDERTAKEN DURING DETAILED DESIGN PHASE USING THE INTERNATIONAL EROSION CONTROL ASSOCIATION (IECA) APPENDIX B SEDIMENT DESIGN AND OPERATION (REVISION - JUNE 2018). DETAILED DESIGN OF BASIN TO BE UNDERTAKEN WHEN SITE CONDITIONS, SOIL CONDITIONS AND FINAL CONTRIBUTING CATCHMENTS ARE KNOWN. FURTHERMORE, SITE CONDITIONS MAY VARY FROM THOSE DETAILED ABOVE IN THE TABLE ADJACENT.

JAR TESTING, IN ACCORDANCE WITH SECTION B3 OF THE INTERNATIONAL EROSION CONTROL ASSOCIATION (IECA) APPENDIX B SEDIMENT DESIGN AND OPERATION (REVISION - JUNE 2018) IS REQUIRED IN ORDER TO DETERMINE THE CHEMICAL DOSING RATES OF SEDIMENT. IT IS RECOMMENDED THAT THIS ANALYSIS IS UNDERTAKEN PRIOR TO BASIN CONSTRUCTION AS THE FINDINGS MAY POTENTIALLY IMPACT THE SEDIMENT AND EROSION CONTROL (BASIN SIZING ALSO) ADOPTED. IT SHOULD BE NOTED THAT THE MOST SUITABLE FLOCCULANT AND/OR COAGULANT IS LIKELY TO VARY WITH SOIL TYPE. CONSEQUENTLY, THERE IS A NEED TO REVIEW THE EFFICACY OF CERTAIN PRODUCTS OVER TIME AS SOIL CHARACTERISTICS CHANGE DURING THE VARIOUS STAGES OF CONSTRUCTION.

**BASIN MANAGEMENT**

IN ACCORDANCE WITH THE BLUE BOOK, THE SEDIMENT BASINS WILL BE MANAGED AND MAINTAINED UNTIL THE CONTRIBUTING CATCHMENT UPSTREAM IS COMPLETED AND FULLY STABILISED ON MORE THAN 90% OF THE TOTAL AREA. A GENERIC BASIN MAINTENANCE STRATEGY IS DETAILED BELOW - NOTE THIS STRATEGY WILL NEED TO BE TAILORED TO SITE CONDITIONS AND PARAMETERS:

- AN AUTOMATED SYSTEM OF FLOCCULANT DOSING IS REQUIRED AND A SUITABLE SUPPLY OF FLOCCULANT/COAGULANT, DOSER AND SUPPLY OF FLOCCULANT TO BE PROVIDED ON LEVEL PAD 4MX4M WITHIN 10M OF DOSING POINT. SELECTION OF AUTOMATIC DOSING SYSTEM IS BASED ON-SITE CHARACTERISTIC AND JAR TESTING OF PRODUCTS ON-SITE SPECIFIC TURBID WATER. AUTOMATIC DOSING SYSTEM MUST ACHIEVE PERFORMANCE TARGETS DETAILED BELOW.
- FURTHER DETAILS FOR BASIN MANAGEMENT ARE PROVIDED IN CHAPTER 6 AND APPENDIX E4 OF LONDON'S 'BLUE BOOK'.
- FURTHER DETAILED BASIN MANAGEMENT ARE PROVIDED IN IECA (INTERNATIONAL EROSION CONTROL ASSOCIATION) (2008) APPENDIX B SEDIMENT DESIGN AND OPERATION (REVISION - JUNE 2018), INTERNATIONAL EROSION CONTROL ASSOCIATION AUSTRALASIA.
- BASIN PERFORMANCE REQUIREMENTS AS FOLLOWS: AT LEAST 80% OF THE AVERAGE ANNUAL RUNOFF VOLUME (I.E. 80% HYDROLOGICAL EFFECTIVENESS) TO 50 MG/L TSS OR LESS, AND PH IN THE RANGE 6.5-8.5.
- JAR TESTING IS TO BE UNDERTAKEN TO SELECT THE APPROPRIATE COAGULANTS AND/OR FLOCCULANTS ALONG WITH DETERMINING THEIR OPTIMUM DOSE RATES. JAR TESTING IS TO BE UNDERTAKEN IN ACCORDANCE WITH THE RECOMMENDATIONS AND TESTING PROCEDURE SPECIFIED IN THE CHAPTER 5 OF THE INTERNATIONAL EROSION CONTROL ASSOCIATION (IECA) CHEMICAL COAGULANTS AND FLOCCULANTS FACT SHEET (IECA 2018).
- TYPE A AND B BASINS REQUIRE A FAST ACTING COAGULANT AND FLOCCULANT TO PERFORM BASED ON THE JAR TESTING. A FACTOR OF SAFETY (IN ACCORDANCE WITH ABOVE GUIDELINES) SHOULD BE APPLIED TO ALLOW FOR THE DIFFERENT SETTLING TIMES EXPERIENCED BY BASINS DUES TO DOSING, MIXING, FLOW VELOCITY AND WIND ACTION.
- REFER EROSION AND SEDIMENT CONTROL PLAN (ESCP PLAN) BY HENRY AND HYMAS, REFERENCE 240518.E&SC REV 1.0 FOR GENERIC BASIN MANAGEMENT AND OPERATION DETAILS.

**BASIN MANAGEMENT (CONT.)**

- MAINTENANCE AND OPERATING PROCEDURES REPORT TO BE PREPARED AT DETAIL DESIGN PHASE. REPORT TO INCLUDE THE FOLLOWING:
- DECANT WATER QUALITY OBJECTIVES
- DESCRIPTION OF PROPOSED CHEMICAL TREATMENT OF THE BASIN, INCLUDING MINIMUM JAR TESTING PERFORMANCE REQUIREMENTS
- PERFORMANCE ASSESSMENT PROCEDURES
- GUIDANCE ON CORRECTIVE MEASURES BASED ON WATER QUALITY MONITORING OUTCOMES
- DESCRIPTION OF DE-WATERING TRIGGERS, INCLUDING TRIGGERS FOR TEMPORARY SHUT-OFF OF THE DECANT SYSTEM IN THE EVENT OF POOR WATER QUALITY
- DESCRIPTION OF DE-SILTING TRIGGERS
- DESCRIPTION OF THOSE CIRCUMSTANCES AND/OR WEATHER CONDITIONS THAT WOULD TRIGGER DE-WATERING OF THE BASIN PRIOR TO AN IMMINENT STORM.
- MAINTENANCE PROCEDURES AND PROTOCOLS INCLUDING DE-SILTING METHOD AND FREQUENCIES.

THE LONG TERM GROUND COVER FACTORS FOR THE CONSTRUCTION WORKS IS NOT TO EXCEED THE FOLLOWING LIMITS:

LAND	MAXIMUM C-FACTOR	REMARKS
WATERWAYS AND OTHER AREAS OF CONCENTRATED FLOWS, POST CONSTRUCTION	0.05	APPLIES AFTER TEN WORKING DAYS OF COMPLETION OF FORMATION AND BEFORE CONCENTRATED FLOWS ARE APPLIED. FOOT AND VEHICULAR TRAFFIC IS PROHIBITED IN THIS AREA AND 70% GROUND COVER IS REQUIRED.
STOCKPILES, POST CONSTRUCTION	0.10	APPLIES AFTER TEN WORKING DAYS FROM COMPLETION OF FORMATION. 60% GROUND COVER IS REQUIRED.
ALL LANDS, INCLUDING WATERWAYS AND STOCKPILES, DURING CONSTRUCTION.	0.15	APPLIES AFTER 20 DAYS OF INACTIVITY, EVEN THOUGH WORKS MAY BE INCOMPLETE. 50% GROUND COVER IS REQUIRED.

**REFERENCE PARAMETERS - FOR CALCULATION OF SOIL LOSS  
(NOT USED IN ABOVE CALCULATIONS)**


SEDIMENT BASIN SIZING TYPE D SOILS	
VOLUMETRIC RUNOFF COEFFICIENT, CV	6.4
80TH PERCENTILE 5 DAY TOTAL RAINFALL DEPTH, R	35mm
CATCHMENT AREA, A	VARIES
SETTLING ZONE VOLUME (PER HECTARE) 10 CV A R	124 x A
DISTURBED CATCHMENT AREA	VARIES
R K L S P C	143 x Ls
SEDIMENT ZONE VOLUME (0.17 A (R K L S P C))/1.3	18.7 x Ls
TOTAL SEDIMENT BASIN VOLUME REQUIRED :	REFER ADJACENT TABLE

\* (LANDCOM MANAGING URBAN STORMWATER MANUAL REFERENCE)

2. THE FOLLOWING DESIGN PARAMETERS HAVE BEEN ASSESSED FOR THE SITE:

CONSTRAINT	VALUE	(SOURCE)*
RAINFALL EROSIVITY (R-FACTOR)	2200	APPENDIX B - MAP 10
LENGTH/SLOPE GRADIENT FACTOR, LS	VARIOUS	APPENDIX A - TABLE A1
SOIL ERODIBILITY (K-FACTOR)	0.05	(TABLE C19)
EROSION CONTROL PRACTICE FACTOR (P-FACTOR)	1.3	APPENDIX A - TABLE A2
COVER FACTOR (C-FACTOR)	1.0 (DURING EARTHWORKS)	APPENDIX A - FIGURE A5
CALCULATED SOIL LOSS, A (RUSLE EQUATION)	VARIES	A = R K L S P C
SOIL HYDROLOGIC GROUP	GROUP D	APPENDIX C TABLE 19
85TH PERCENTILE 5-DAY RAINFALL EVENT	35mm	TABLE 6.3A

\* (LANDCOM MANAGING URBAN STORMWATER MANUAL REFERENCE)

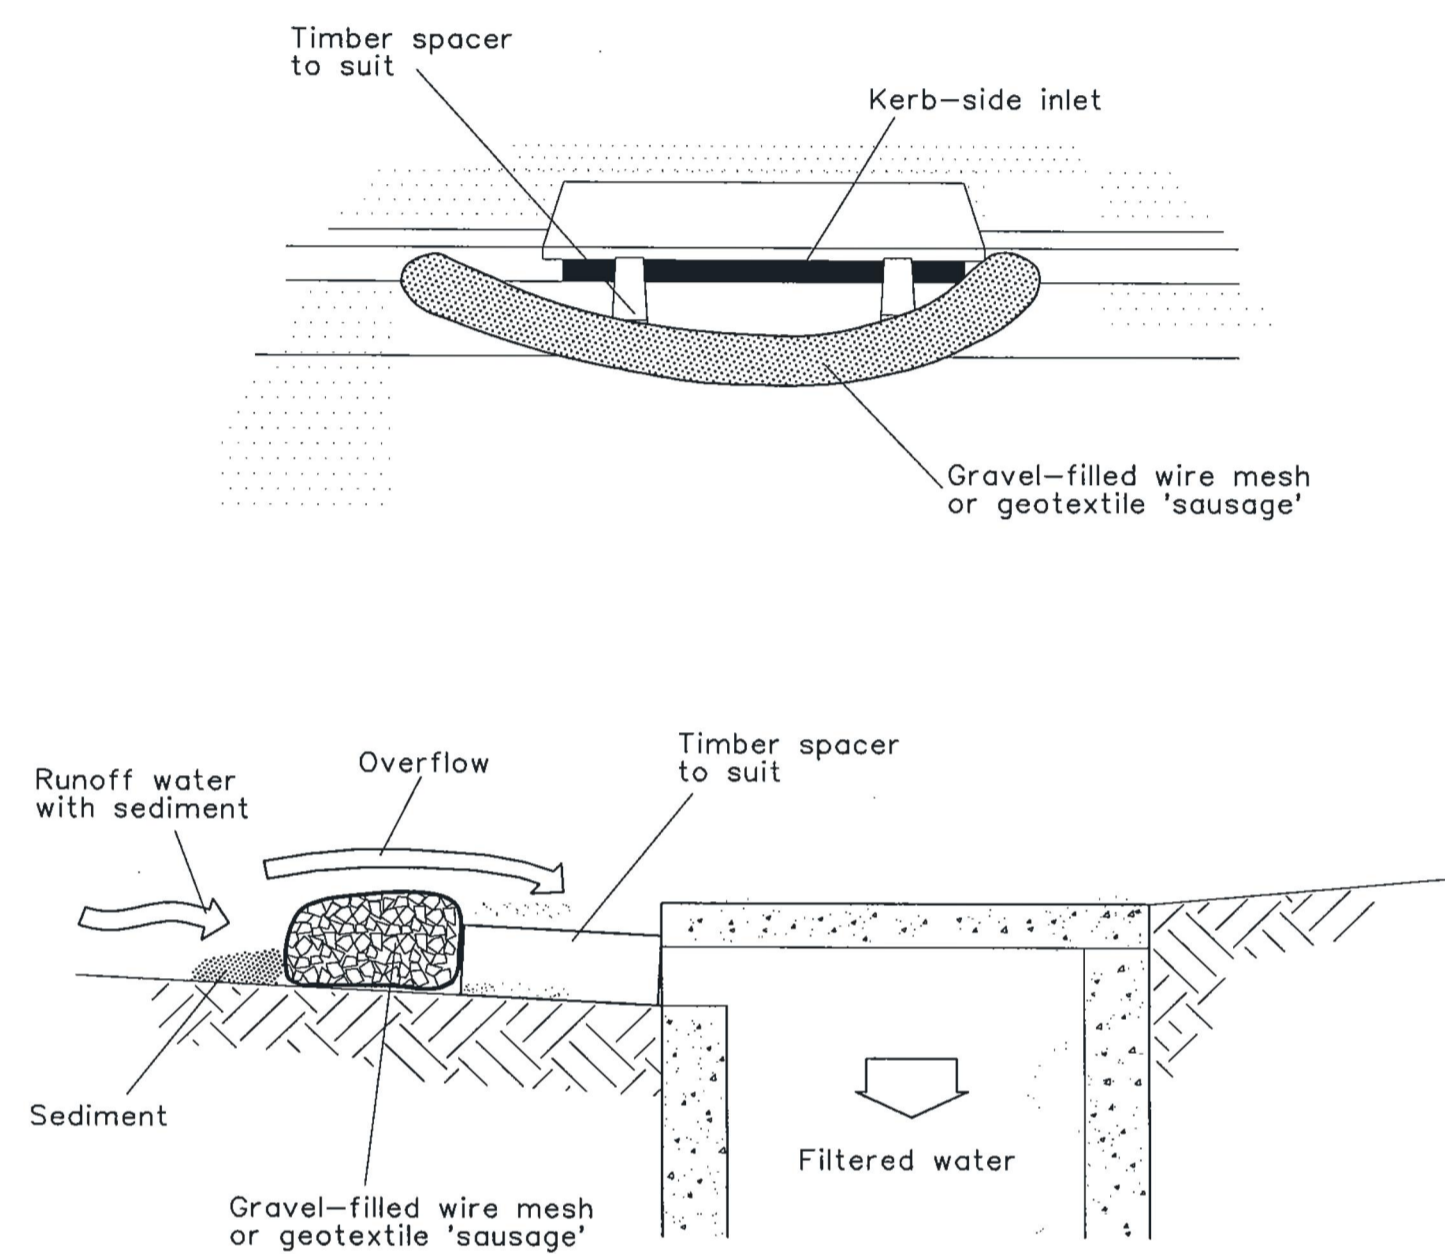


NOTE: This practice only to be used where specified in an approved SWMP/ESCP.

**Construction Notes**

1. Install filters to kerb inlets only at sag points.
2. Fabricate a sleeve made from geotextile or wire mesh longer than the length of the inlet pit and fill it with 25 mm to 50 mm gravel.
3. Form an elliptical cross-section about 150 mm high x 400 mm wide.
4. Place the filter at the opening leaving at least a 100-mm space between it and the kerb inlet. Maintain the opening with spacer blocks.
5. Form a seal with the kerb to prevent sediment bypassing the filter.
6. Sandbags filled with gravel can substitute for the mesh or geotextile providing they are placed so that they firmly abut each other and sediment-laden waters cannot pass between.

**MESH AND GRAVEL INLET FILTER**

**SD 6-11**

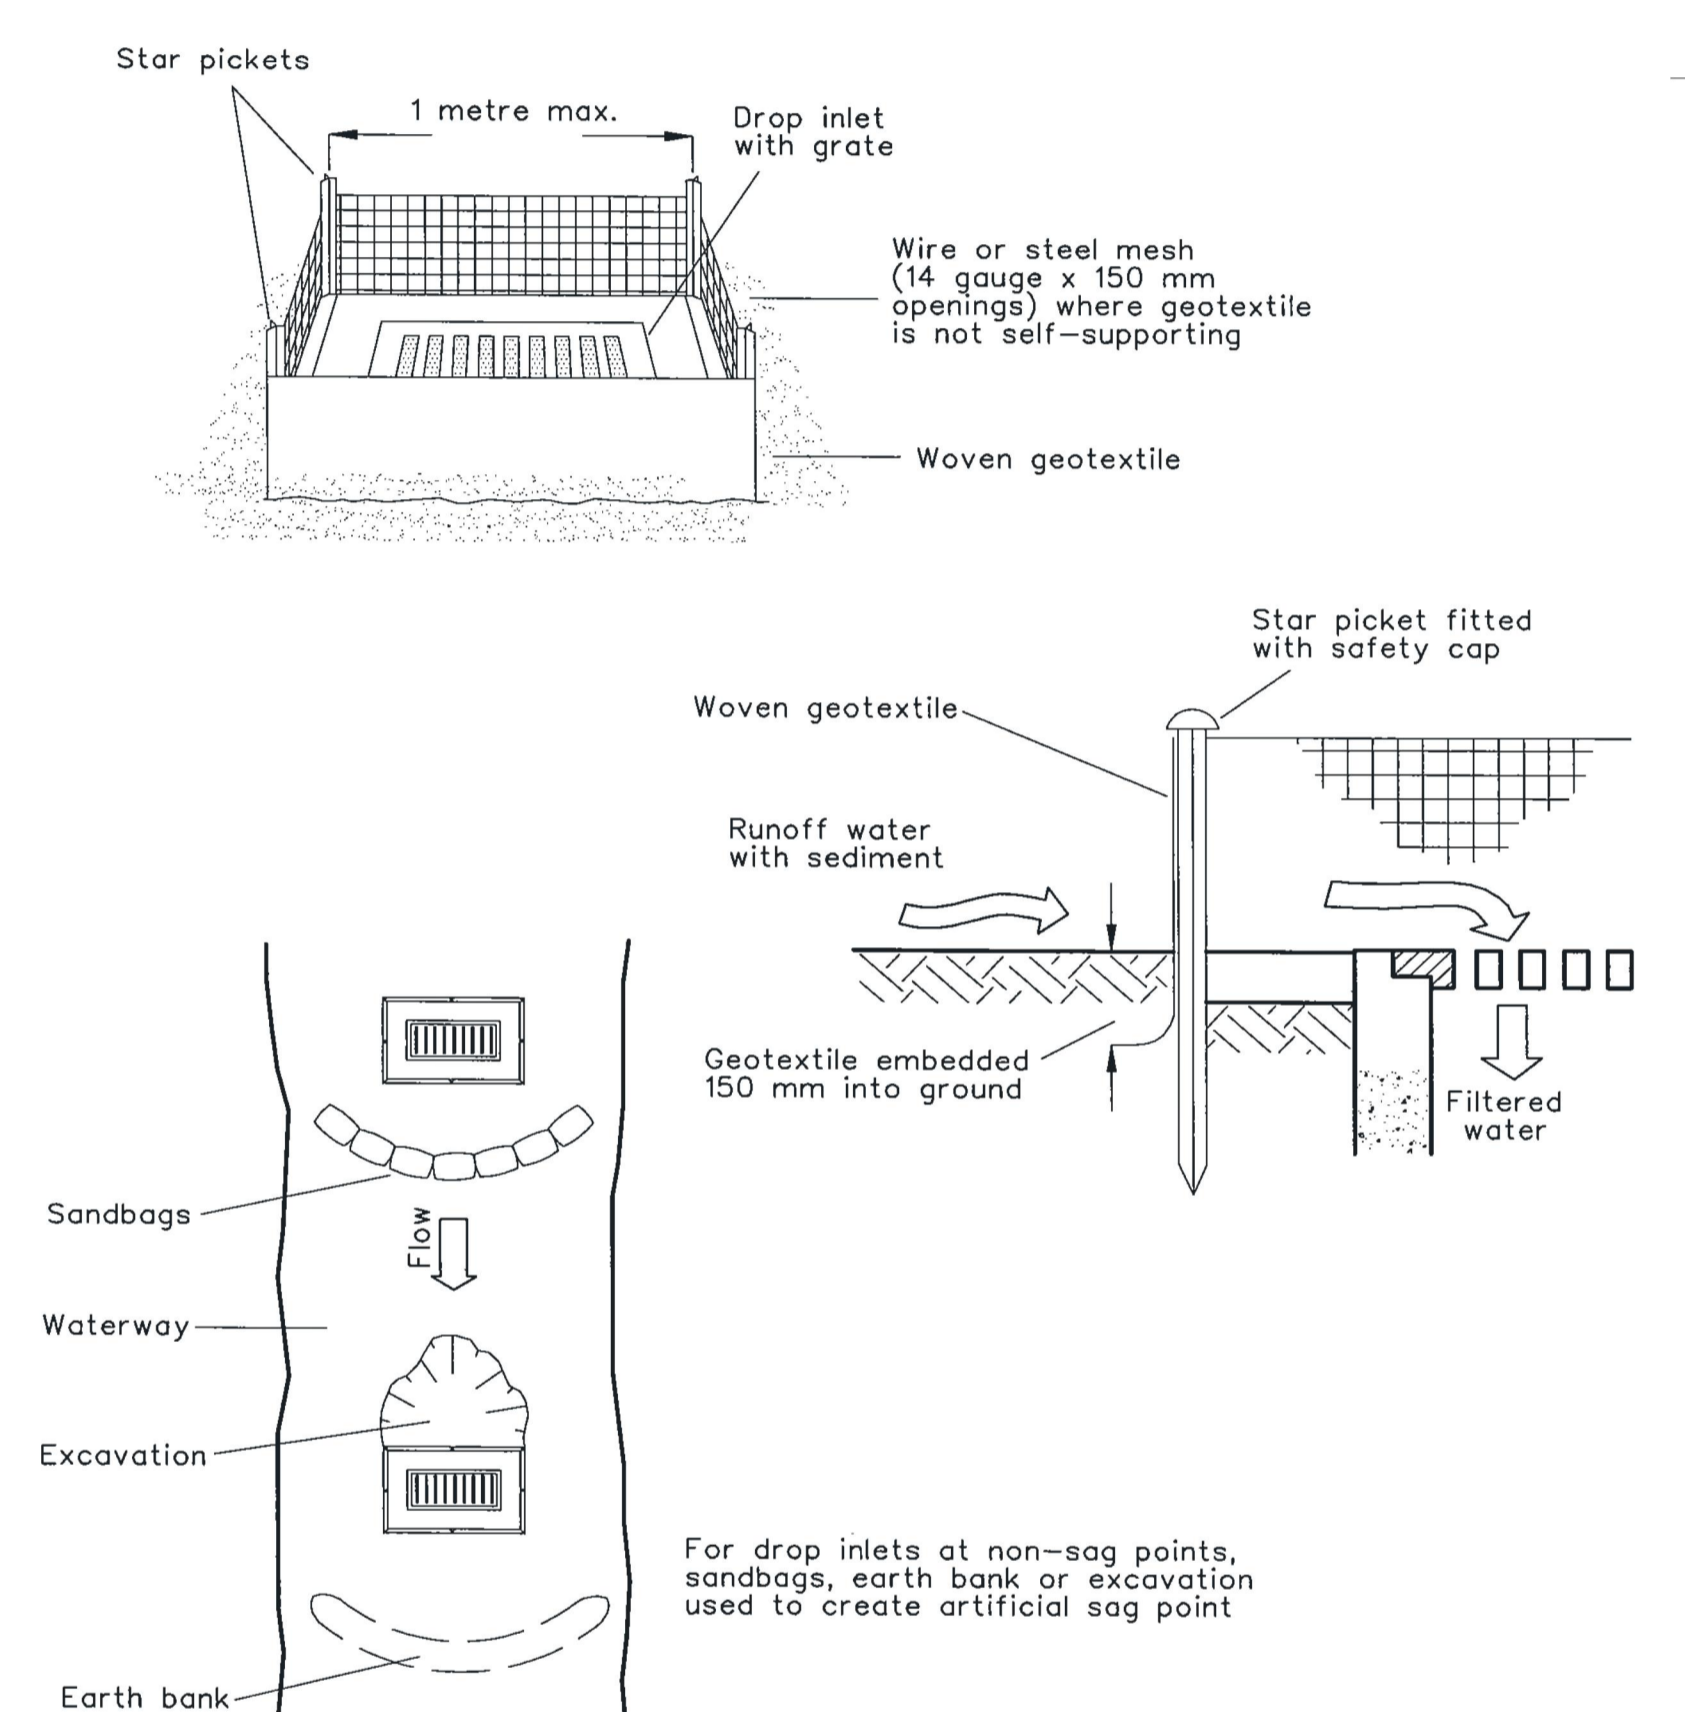

**Construction Notes**

1. Fabricate a sediment barrier made from geotextile or straw bales.
2. Follow Standard Drawing 6-7 and Standard Drawing 6-8 for installation procedures for the straw bales or geofabric. Reduce the picket spacing to 1 metre centres.
3. In waterways, artificial sag points can be created with sandbags or earth banks as shown in the drawing.
4. Do not cover the inlet with geotextile unless the design is adequate to allow for all waters to bypass it.

**GEOTEXTILE INLET FILTER**

**SD 6-12**

Issue	Description	Date
D	ISSUED FOR COORDINATION	15-10-24
WIP	ISSUED FOR COORDINATION	09-09-24
C	ISSUED FOR APPROVAL	14-06-23
B	ISSUED FOR COORDINATION	20-04-23
A	ISSUED FOR COORDINATION	22-12-22

THIS DRAWING CANNOT BE COPIED OR REPRODUCED IN ANY FORM OR USED FOR ANY OTHER PURPOSE OTHER THAN THAT ORIGINALLY INTENDED WITHOUT THE WRITTEN PERMISSION OF AT&L



Client	Scales	Drawn	CK
	AS SHOWN	Designed	CK
	Grid GDA2020	Checked	CB
	Height Datum AHD	Approved	



Project	Title
INDUSTRIAL DEVELOPMENT BURRA PARK	LOT 4.3 & 4.4 (WH 01 & 02) EROSION AND SEDIMENT CONTROL DETAILS SHEET 2

Civil Engineers and Project Managers	
 Level 7, 153 Walker Street North Sydney NSW 2060 ABN 96 130 882 405 Tel: 02 9439 1777 Fax: 02 9923 1055 www.atl.net.au info@atl.net.au	
Status	A1
FOR COORDINATION NOT FOR CONSTRUCTION	
Project - Drawing No.	Issue
22-993-C2031	D



TIM MICHEL  
11555



**SYDNEY**

LEVEL 7  
153 WALKER STREET  
NORTH SYDNEY NSW 2060  
02 9439 1777  
INFO@ATL.NET.AU

**BRISBANE**

SUITE A1 LEVEL 20  
127 CREEK STREET  
BRISBANE QLD 4000  
07 3211 9581  
INFO-QLD@ATL.NET.AU

**MELBOURNE**

7 BENNETT DRIVE  
ALTONA NORTH VIC 3025  
INFO-VIC@ATL.NET.AU

**atl.net.au**