


Appendix F Landscape plans

Prepared by Oculus

February 2016

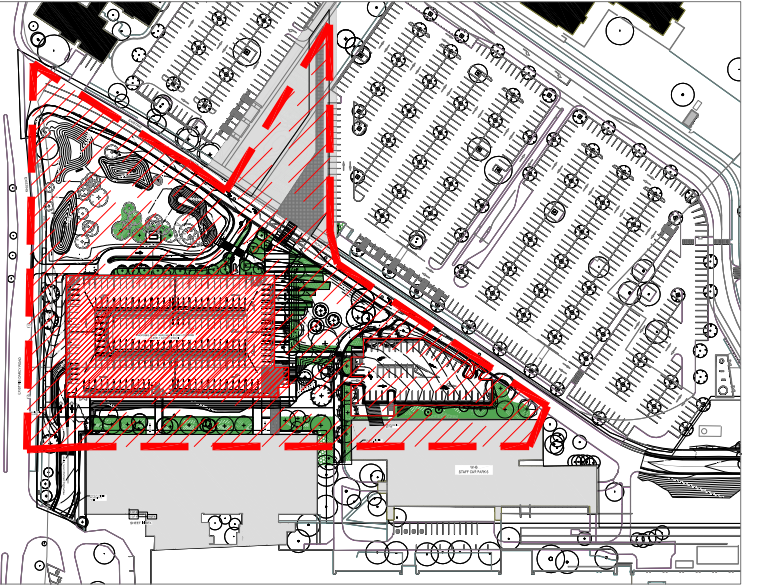

THE WORKS WITHIN THE GREY HATCHED AREA NORTH OF INSTITUTE ROAD WILL BE UNDERTAKEN BY THE EARLY AND ENABLING WORKS CONTRACTOR. THIS WORK DOES NOT FORM PART OF THE MSCP PROJECT. THE RESPECTIVE CONTRACTORS WILL NEED TO MANAGE AND COORDINATE WORKS ALONG THIS INTERFACE



FOR TENDER
NOT FOR CONSTRUCTION

PROJECT MANAGER:

PRICE WATERHOUSE
COOPERS



Darling Park Tower 2
201 Sussex Street
Sydney NSW 2000

P: (02) 8266 0000
F: (02) 8266 9999
www.pwc.com/au

LANDSCAPE ARCHITECT:

OCULUS



Lvl 1, 5 Wilson Street
Newtown NSW 2042

P: (02) 9557 5533
F: (02) 9519 8323
www.oculusinfo.com

DRAWING TITLE:			
PLANTING PLAN			
SCALE:	DOWNS NUMBER:	5335	CHECKED:
1:500			AL
PROJECT NUMBER:	DRAWING NUMBER:	S14-038 MSC-QCII S-DG-202	ISSUE:
		5	

LEGEND

EXTENT OF WORKS

TURF AS SPECIFIED

CONCRETE PAVING

MASS PLANTING

SEAT AS SPCIFIED

EXITING TREE TO BE RETAINED AND PROTECTED

AC Angophora costata

CC Corymbia citriodora "Scentuos"

EM Eucalyptus mannifera

FG Fraxinus griffithii 'Evergreen Ash'

WF Waterhousia floribunda

GA Gordonia axillaris

MQ Melaleuca Quinquenervia

Ac Acasia cognata "limelight"

Dc Dianella caerulea 'Little Jess'

Hv Hardenbergia violacea

Lg Lomandra longifolia

Lt Lomandra longifolia 'Tanika'

Pl Poa labillardieri

Pa Pennisetum alopecuroides

Pt Phormium tenax

Sc Santolina chamaecyparissus

Wf Westringia fruticosa 'Mundi'

Cf Cordyline fruticosa rubra


Lm Liriope muscari

NOTE:
REFER TO PLANT SCHEDULE AND DETAILS

Indicative zone for additional future trees if additional replacement trees are required by the contractor.

PLANT SCHEDULE

WESTMEAD HOSPITAL PLANT SCHEDULE							
Westmead Hospital - Carpark and Other Areas							
Symbol	Botanic Name	Common Name	Mature Height	Spread	Pot size	Spacings	Total
TREES							
AC	Angophora costata	Smooth Barked Apple	10m	9m	75L	As Shown	5
CC	Corymbia citriodora "Scentuos"	Lemon scented gum	30m	10m	75L	As Shown	5
EM	Eucalyptus mannifera	Little Spotty	20m	13m	75L	As Shown	3
FG	Fraxinus griffithii 'Evergreen Ash'	Evergreen Ash	9m	5m	75L	As Shown	16
WF	Waterhousia Floribunda	Weeping Lilli Pilli	12m	9m	75L	As Shown	8
GA	Gordonia axillaris	Fried egg plant	5-8m	3-5m	75L	As Shown	13
MQ	Maleuca quinquenervia	Broadleaf paper bark	10-15m	8m	75L	As Shown	12
SHRUBS, GRASSES AND GROUNDCOVERS							
Ac	Acasia cognata "limelight"	Limelight	1m	1m	200mm	1m	392
Dc	Dianella caerulea 'Little Jess'	Dianella	0.4m	0.4m	200mm	300mm	1892
Hv	Hardenbergia violacea	False Sarsaparilla	0.5m	2m	200mm	1m	629
Lt	Lomandra longifolia 'Tanika'	Lomandra	0.6m	0.65m	200mm	400mm	575
Lg	Lomandra longifolia	Lomandra	0.6m	0.65m	200mm	400mm	1889
Pl	Poa labillardieri	Tussock Grass	0.6m	0.5m	200mm	300mm	3174
Pa	Pennisetum alopecuroides	Swamp foxtail	1-1.5m	1m	200mm	1.5m	1105
Pt	Phormium tenax	New zealand flax	0.90m	0.90m	200mm	900mm	324
Sc	Santolina chamaecyparissus	Cotton lavender	0.9m	0.90m	200mm	900mm	231
Wf	Westringia fruticosa 'Mundi'	Grey Box	0.5m	1.5m	200mm	400mm	1308
Cf	Cordyline fruticosa	Ti plant	1.8m	1m	200mm	400mm	310
Lm	Liriope muscari	Evergreen Giant	0.6m	0.5m	200mm	400mm	882

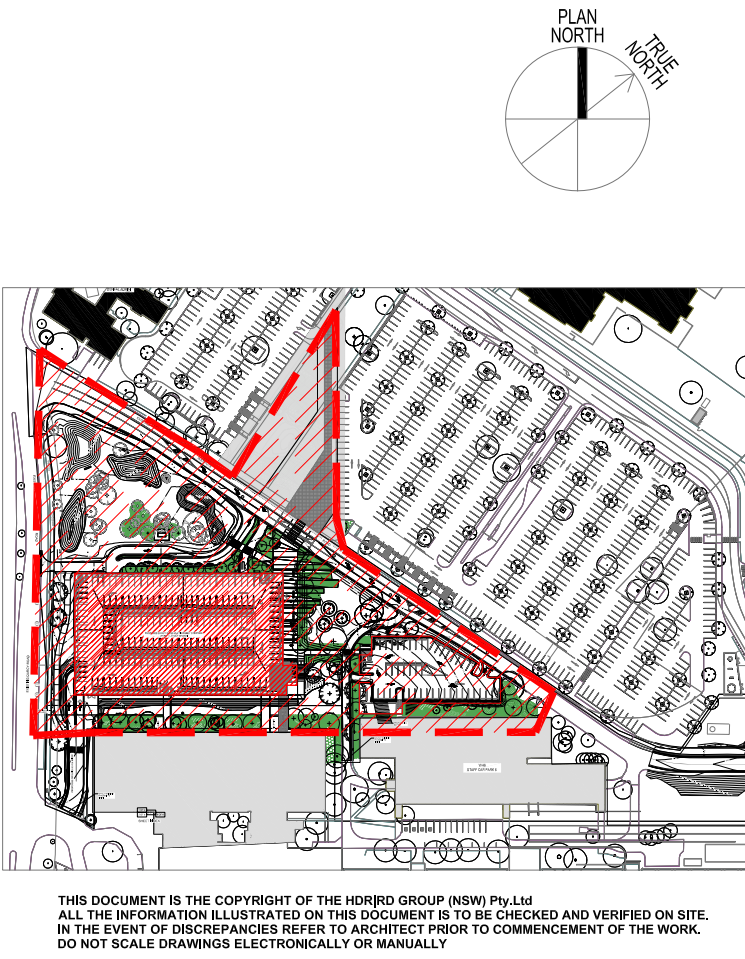

NOTE:
In accordance with tree removal associated with the Stage 1 Early Works (Circa 374 No, confirmed in the Arborist Report), compensatory tree planting has been included as 1 new tree for every 2 existing trees removed. Replacement trees must be 'advanced' size (at least 75L) as required by the Aborist Report. Any alterations to the extent of tree removal associated with the works must be approved by the Principal, and compensatory planting must be adjusted in accordance with the Arborist Report replacement requirements.