Development Consent

Section 4.38 of the Environmental Planning and Assessment Act 1979

As delegate of the Minister for Planning and Public Spaces under delegation executed on 11 October 2017, I I approve the Development Application referred to in Schedule 1, subject to the conditions specified in Schedule 2.

These conditions are required to:

- prevent, minimise, or offset adverse environmental impacts;
- set standards and performance measures for acceptable environmental performance;
- require regular monitoring and reporting; and
- provide for the ongoing environmental management of the development.

Anthea Sargeant

Executive Director

Compliance, Industry and Key Sites

Sydney 2019

The Department has prepared a consolidated version of the consent which is intended to include all modifications to the original determination instrument.

The consolidated version of the consent has been prepared by the Department with all due care. This consolidated version is intended to aid the consent holder by combining all consents relating to the original determination instrument but it does not relieve a consent holder of its obligation to be aware of and fully comply with all consent obligations as they are set out in the legal instruments, including the original determination instrument and all subsequent modification instruments.

SCHEDULE 1

Application Number:

Applicant:

Consent Authority:

Site:

Development:

SSD 7348

Goodman Property Services (Aust) Pty Ltd

Minister for Planning and Public Spaces

Lot 26 DP 1269741

Lot 105 DP 1262310

Lot 107 DP 1262310

A Concept Proposal including:

- concept layout of 4819 warehouse buildings inclusive of dock offices and ancillary offices providing 556,824 square metres of gross lettable area, built over seven development stages;
- concept layout of development lots, internal roads, drainage, landscaping, noise walls, basins and biodiversity offsets; and
- · development controls.

A Stage 1 Development including:

- bulk earthworks across all five stages including retaining walls and noise walls;
- lead in services including but not limited to drainage, power, sewer, water and telecommunications:
- service infrastructure to Precinct 1, including drainage, power, sewer, water and telecommunications;
- construction and operation of three warehouse buildings inclusive of dock offices and ancillary offices in Precinct 1 (1A, 1B and 1C) providing 88,867 square metres of gross lettable area;
- Western North-South Link Road and associated subdivision, basins and drainage;
- estate roads 1, 2, and 6 and 8 and eastern part of road 7;
- landscaping of Stage 1, the western boundary, Western North-South Link Road, estate roads 1, 2, and 6 and 8 and the eastern part of road 7, detention basins and the amenity lot
- subdivision of Stage 1 lots and road infrastructure including the services (substation) lot;
- stormwater drainage infrastructure for Lots 2A and 2B and all basins;
- temporary works to facilitate construction including but not limited to swales, haul road (construction access), landscaping and basins; and

- works including construction of traffic signals at Lenore Drive/Grady Crescent/WNSLR intersection; and
- works within Lot 9 DP1157476 including reconfiguration of car park, relocation of car park access on Lockwood Road, infrastructure, landscaping and all works associated with the WNSLR.

SSD 7348 - Mod 1

SSD 7348 - Mod 2

SSD 7348 - Mod 3

SSD 7348 - Mod 4

SSD 7348 - Mod 5

SSD 7348 - Mod 6

SSD 7348 - Mod 7

SSD 7348 - Mod 8

SSD 7348 - Mod 9

SSD 7348 - Mod 10

SSD 7348 - MOD 11

SSD 7348 - MOD 12

SUMMARY OF MODIFICATIONS

Application Number	Determination Date	Decider	Modification Description
SSD-7348-Mod-1	27 March 2020	Department	Changes to pad levels across the Concept Proposal, amendments to bioretention basins and changes to the biodiversity offset strategy
SSD-7348-Mod-2	21 April 2020	Department	Changes to Stage 1 pad levels, building layouts and the height of Building 1A
SSD-7348-Mod-3	3 April 2020	Department	Changes to the Concept Proposal layout, Stage 2 area and height of Building 2
SSD-7348-Mod-4	24 March 2020	Department	Include an additional lot for construction works for the WNSLR
SSD-7348-Mod-5	5 November 2020	Department	Increase in SLR road reserve and associated reduction in building and landscaping setbacks, amendments to Precinct 1A layout and car parking spaces, quantities of dangerous goods to be stored in Building 1A, setting up an alternative biodiversity offset site, and extension to required completion date for the noise barrier
SSD-7348-Mod-6	10 March 2021	Department	Changes to Concept for Precincts 1 and 2, Increase height of Building 2A, Reduce floor area and amend design of Buildings 1B and 1C, Remove speed limits, Construct Road 8 in Stage 1, Increase Ropes Creek vegetation management area
SSD-7348-Mod-7	7 October 2021	Director	Changes to Precincts 3 and 4 including earthworks, retaining walls, building layouts in Precinct 4 and estate road 7
SSD-7348-Mod-8	10 September 2021	Department	Amendments to architectural plans for Stage 1 Buildings 1A, 1B and 1C.
SSD-7348-Mod-9	8 December 2021	Department	Amendments to the layout of Buildings 2A, 2C and 2D and increased height of Building 2C
SSD-7348-Mod-10	August 2022	Department	Modification to:
			update Precinct 1 signage plans, including façade signage.
SSD-7348-Mod-11	December 2022	Department	Amendment to concept plan
SSD-7348-Mod-12	April 2023	Department	Amendments to Concept Plan

TABLE OF CONTENTS

DEFINITIONS		VIII
SCHEDULE B	CONDITIONS FOR THE CONCEPT PROPOSAL	1
Future Develop	oment Applications	1
Statutory Requ	uirements	1
	ent	
	ent	
	ction	
	ement	
	ergy	
	- 5)	
	CONDITIONS FOR FUTURE DEVELOPMENT APPLICATIONS	
Development (Contributions	6
	Residential Areas	
	/	
	ess and Parkingation	
	anagement	
	ction	
	ement	
	ergy	
	•	
Construction IV	flanagement	8
	ommunication Strategy	
SCHEDULE D	CONDITIONS FOR STAGE 1 DA	10
PART 1 – GENE	RAL CONDITIONS	10
Obligation to M	finimise Harm to the Environment	10
Terms of Cons	sent	10
	ent	
Notification of	Commencement	11
	onsultation	
	oining and Updating Strategies, Plans or Programs	
	Public Infrastructure	
	Vater NSW Infrastructure	
	quacy	
	uuacy	
	ntributions	
	lant and Equipment	
	and Cladding	
	ervices	
· ·	ement	
	nuted Diana	
	cuted Plans	
	Otideiiles	
	RONMENTAL PERFORMANCE CONDITIONS	
	· · · · · · · · · · · · · · · · · · ·	
	-South Link Road (WNSLR)	
	ess and Parking	
•		
Vibration		22
Soils & Water		22

Biodiversity		24
	otection	
Air Quality		25
	eritage	
Historic Heri	itage	27
	d Risk	
	agement	
	on	_
Community	Engagement	29
PART 3 – EN\	/IRONMENTAL MANAGEMENT, REPORTING AND AUDITING	30
Managemer	nt Plan Requirements	30
Construction	n Environmental Management Plan	30
	tal Representative	
Operational	Environmental Management Plan	32
	Strategies, Plans and Programs	
	nd Auditing	
Access to In	formation	
APPENDIX 1	CONCEPT PROPOSAL	35
APPENDIX 2	STAGE 1 DA PLANS	39
APPENDIX 3	WNSLR PLANS	
APPENDIX 4	PLANNING AGREEMENT	
APPENDIX 5	NOISE RECEIVER LOCATIONS	
APPENDIX 6	BIODIVERSITY	95
APPENDIX 7	APPLICANT'S MANAGEMENT AND MITIGATION MEASURES	99
APPENDIX 8	INCIDENT NOTIFICATION AND REPORTING REQUIREMENTS	102

DEFINITIONS

Applicant Goodman Property Services (Aust) Pty Ltd, or any person carrying out any

development to which this consent applies

Biodiversity Covenant

A restriction on the use of land forming part of the Erskine Park Biodiversity Corridor,

as shown on Figure in Appendix 6

Building 1A Warehouse building 1A including high-bay (39 metres) and low-bay (27 metres)

components, located on Lot 1A as described in the EIS and RtS for MOD 2

Bulk earthworks As described in the EIS and RtS

Certifying Authority

A person who is authorised by or under section 6.17 of the EP&A Act to issue Part 6

certificates

CEMP Construction Environmental Management Plan

CAQMP Construction Air Quality Management Plan

Concept Concept layout of 22 warehouse buildings and ancillary offices built over five

Proposal development stages, as described in the EIS and RtS

Conditions of this consent

Conditions contained in Schedules B to D of this document

Consent Authority The relevant consent authority for development in accordance with the EP&A Act

Construction The demolition and removal of buildings or works, the carrying out of works for the

purpose of the development, including bulk earthworks, and erection of buildings and

other infrastructure permitted by this consent

Council Penrith City Council

CTMP Construction Traffic Management Plan

Day The period from 7 am to 6 pm on Monday to Saturday, and 8 am to 6 pm on Sundays

and Public Holidays

Demolition The deconstruction and removal of buildings, sheds and other structures on the site

Department NSW Department of Planning, Industry and Environment

DevelopmentThe development described in the EIS and RtS, including construction and operation of 18 warehouse buildings, offices and associated infrastructure, as modified by the

conditions of this consent and shown on the plans in Appendix 1, Appendix 2 and Appendix 3 and as modified by SSD 7348 MOD 1, SSD 7348 MOD 2, SSD 7348 MOD 3, SSD 7348 MOD 4, SSD 7348 MOD 5, SSD 7348 MOD 6, SSD 7348 MOD 8, SSD-7348-MOD-9, SSD-7348-MOD-10, SSD-7348-MOD-11 and SSD-7348-MOD-12.

DA Development Application submitted in accordance with the EP&A Act

The Environmental Impact Statement titled *Oakdale West Estate*, prepared by Urbis dated November 2017, submitted with the application for consent for the development,

including any additional information provided by the Applicant in support of the

application

ENM Excavated Natural Material

Environment Includes all aspects of the surroundings of humans, whether affecting any human as

an individual or in his or her social groupings

Environmental Representative Protocol

The document of the same title published by the Department

EPA NSW Environment Protection Authority

EP&A Act Environmental Planning and Assessment Act 1979 (NSW)

EP&A Environmental Planning and Assessment Regulation 2000

Regulation

EPBC Act Environment Protection and Biodiversity Conservation Act 1999 (Cth)

EPL Environment Protection Licence under the POEO Act

Erskine Park Biodiversity Corridor

The land described in the Biodiversity Management Plan Erskine Park Employment Area, HLA-Envirosciences, 2006 and shown on Figure in

Appendix 6

Evening The period from 6 pm to 10 pm

Feasible Feasible relates to engineering considerations and what is practical to build

FFMP Flora and Fauna Management Plan

Fibre ready facility As defined in Section 372W of the Telecommunications Act 1997

GLA Gross lettable area **GFA** Gross floor area

Heritage Encompasses both Aboriginal and historic heritage including sites that predate

European settlement, and a shared history since European settlement

An item as defined under the Heritage Act 1977 (NSW), and assessed as Heritage item

> being of local, State and/ or National heritage significance, and/or an Aboriginal Object or Aboriginal Place as defined under the National Parks and Wildlife Act 1974 (NSW), the World Heritage List, or the National Heritage List or Commonwealth Heritage List under the Environment Protection and Biodiversity Conservation Act 1999 (Cth), or anything identified as a heritage

item under the conditions of this consent

Incident An occurrence or set of circumstances that causes or threatens to cause

material harm and which may or may not be or cause a non-compliance

Note: "material harm" is defined in this consent

Land Has the same meaning as the definition of the term in section 1.4 of the EP&A

Act

Landscaping along the western boundary of the Site, included as part of Stage Landscape Bund

1 works as described in the EIS and RTS and shown on Error! Reference

source not found.4 in Appendix 2

LMP Landscape Management Plan

Material harm Is harm that:

> involves actual or potential harm to the health or safety of human beings or to the environment that is not trivial, or

results in actual or potential loss or property damage of an amount, or amounts in aggregate, exceeding \$10,000, (such loss includes the reasonable costs and expenses that would be incurred in taking all reasonable and practicable measures to prevent, mitigate or make good

harm to the environment)

Minister NSW Minister for Planning and Public Spaces (or delegate)

Mitigation Activities associated with reducing the impacts of the development prior to or

during those impacts occurring

Any monitoring required under this consent must be undertaken in accordance Monitoring

with section 9.40 of the EP&A Act

NCC National Construction Code

Night The period from 10 pm to 7 am on Monday to Saturday, and 10 pm to 8 am

on Sundays and Public Holidays

Non-compliance An occurrence, set of circumstances or development that is a breach of this

consent

NRAR NSW Natural Resources Asset Regulator

OEH (former) NSW Office of Environment and Heritage (now Biodiversity and

Conservation of the Department)

OEMP Operational Environmental Management Plan

Operation The use of warehouse buildings for storage and distribution of goods upon

completion of construction

Penrith DCP Penrith Development Control Plan 2014

Planning Agreement titled Oakdale West Estate Planning Agreement, **Planning** between the Minister for Planning and Public Spaces, Goodman Property Agreement

Services (Aust) Pty Ltd and BGMG 11 Pty Limited as trustee for the BGMG 1 Oakdale West Trust, executed on 5 August 2019 and included in Appendix 4

PCA Principal Certifying Authority in accordance with the EP&A Act

Planning Planning Secretary under the EP&A Act, or nominee

Secretary

Protection of the Environment Operations Act 1997 (NSW) **POEO Act** As defined in Dictionary of the Roads Act 1993 (NSW) **Roads Authority**

Means applying judgement in arriving at a decision, taking into account: Reasonable mitigation benefits, costs of mitigation versus benefits provided, community

views, and the nature and extent of potential improvements.

Registered **Aboriginal Parties** Means the Aboriginal persons identified in accordance with the document entitled Aboriginal cultural heritage consultation requirements for proponents 2010 (DECCW)

Rehabilitation The restoration of land disturbed by the development to a good condition, to

ensure it is safe, stable and non-polluting

Relevant Roads Authority

The authority responsible for ownership and maintenance of the applicable

road

(former) NSW Roads and Maritime Services (now TfNSW) **RMS**

The Response to Submissions titled Oakdale West Estate SSDA 15 7348 **RtS**

Response to Submissions prepared by Urbis dated 8 May 2018 and document titled Oakdale West Estate SSDA 15_7348 Response to Matters Raised by the Department of Planning, prepared by Urbis dated 12 October 2018

Sensitive receivers A location where people are likely to work, occupy or reside, including a

dwelling, school, hospital, office or public recreational area

Site The land defined in Appendix 1

SLR (proposed) Southern Link Road as shown in the WSEA SEPP and the Broader

WSEA SLRN Options Refinement Report prepared by AECOM, 2014

SSD 7348 MOD 1 The section 4.55(1A) modification application prepared by Goodman

Property Services (Aust) Pty Ltd titled 'Section 4.55(1A) Modification Application (SSD 7348 MOD 1) Oakdale West Estate - Amendments to Concept Plan and Stage 1 development', dated 16 December 2019.

SSD 7348 MOD 2

The section 4.55(2) modification application prepared by Goodman Property Services (Aust) Pty Ltd titled 'Section 4.55(2) Modification Application (SSD 7348 MOD 2) Oakdale West Estate - Amendments to Concept Plan and Stage 1 development', dated 12 December 2019.

SSD 7348 MOD 3

The section 4.55(1A) modification application prepared by Goodman Property Services (Aust) Pty Ltd titled 'Oakdale West Industrial Estate Concept Plan and Stage 1 Modification (SSD 7348 MOD 1), dated January 2020.

SSD 7348 MOD 4

The section 4.55(1A) modification application prepared by Goodman Property Services (Aust) Pty Ltd titled 'mod 4, SSD 7348 - S4.55(1A) Application to Modify the Consent to Include Works on Lot 9 DP 1157476, dated 17 February 2020.

SSD 7348 MOD 5

The section 4.55(1A) modification application prepared by Urbis, titled Oakdale West Estate SSD 7348, Section 4.55(1A) Modification No. 5 Environmental Assessment Report, dated 23 July 2020

NSW Government Oakdale West Estate x

SSD 7348 MOD 6 The section 4.55(1A) modification application prepared by Keylan Consulting Pty Ltd, titled 'Assessment Report Section 4.55(1A) Modification, SSD 7348 Modification 6', dated 10 February 2021.

SSD 7348 MOD 7 The Section 4.55(1A) modification application prepared by Keylan Consulting Pty Ltd, titled 'Assessment Report Section 4.55(1A)

Modification, SSD 7348 Modification 7', dated July 2021

SSD 7348 MOD 8 The section 4.55(1A) modification application prepared by Goodman

Property Services (Aust) Pty Ltd, titled 'SSD 7348 MOD 8 Oakdale West Stage – S.4.55(1A) Application to Modify Architecture Plans', dated 9

July 2021.

SSD 7348 MOD 9 The Section 4.55(1A) modification application prepared by Goodman

Property Services (Aust) Pty Ltd, titled 'Oakdale West Industrial Estate

SSD 7348 – Modification Application 9', dated 11 November 2021

SSD 7348 MOD 10 The Section 4.55(1A) modification application prepared by Goodman

Property Services (Aust) Pty Ltd, titled 'SSD7348 MOD 10, Oakdale West Stage – s.4.55(1A) Application to Modify Architecture Plans', dated 4 July

2022

SSD 7348 MOD 11 The Section 4.55(1A) modification application prepared by Keylan

Consulting Pty Ltd, titled 'Oakdale West Industrial Estate SSD 7348 Modification Application 11 Compass Drive, Kemps Creek', dated 3

november 2022

SSD 7348 MOD 12

The Section 4.55(1A) modification application prepared by Goodman Pty

Ltd, titled 'SSD 7348 MOD 12, Oakdale West Estate - s4.55(1A)', dated 8

February 2023.

Stage Each component or Stage of works to deliver the Concept Proposal, as shown

on Figure 2 in Appendix 1, or as amended by an approved Staging Plan

under this consent

Stage 1 Bulk earthworks across the Site, construction and operation of three

warehouse buildings (1A, 1B and 1C), the WNSLR and associated infrastructure and construction of the landscape bund along the western boundary of the Site, as described in the EIS and RTS and shown on the plans

in Appendix 2 and Appendix 3

TfNSW Transport for New South Wales
VENM Virgin Excavated Natural Material

Vicinity of the site Bakers Lane, Kemps Creek

WAD Works Authorisation Deed issued by TfNSW (former RMS)

Waste Has the same meaning as the definition of the term in the Dictionary to the

POEO Act

Water Pipelines Two Sydney drinking water pipelines located on land owned by Water NSW

along the northern boundary of the Site

WMP Waste Management Plan

WNSLR Western North-South Link Road as shown in the WSEA SEPP and the plans

in Appendix 3

WSEA Western Sydney Employment Area

WSEA SEPP State Environmental Planning Policy (Western Sydney Employment Area)

2009

WSFL Western Sydney Freight Line corridor as shown in TfNSW Western Sydney

Freight Line Corridor Identification - Consultation, March 2018

A period of 12 consecutive months



SCHEDULE B CONDITIONS FOR THE CONCEPT PROPOSAL

FUTURE DEVELOPMENT APPLICATIONS

- B1. In accordance with section 4.22 of the EP&A Act, each stage of the Concept Proposal (excluding Stage 1) is to be subject to future development applications (DAs). Future DAs are to be consistent with this development consent.
- B2. To avoid any doubt, this Concept Proposal consent does not permit the construction or operation of any Development, except for the Stage 1 DA covered by **Schedule D**.
- B3. This Concept Proposal consent does not approve the building layouts shown on Lots 3A, 3B, 3C, 3D, 3E, 3F, 3G and 4A on Figure 1 in Appendix 1. The location of the buildings on these lots must be assessed by separate DAs, and must satisfy the interface requirements of Conditions C3 and C4.

STATUTORY REQUIREMENTS

B4. The Applicant shall ensure that all licences, permits, and approvals/consents are obtained as required by law and maintained as required throughout the life of the Concept Proposal. No condition of this consent removes the obligation for the Applicant to obtain, renew or comply with such licences, permits or approvals/consents.

TERMS OF CONSENT

- B5. The Applicant shall carry out the Concept Proposal in accordance with the:
 - (a) EIS and RtS;
 - (b) the plans in Appendix 1 and Appendix 2;
 - (c) SSD 7348 MOD 1;
 - (d) the Applicant's Management and Mitigation Measures in Appendix 7; and
 - (e) modifications to this consent.
- B6. If there is any inconsistency between the plans and documents referred to above, the most recent document shall prevail to the extent of the inconsistency. However, the conditions of this consent shall prevail to the extent of any inconsistency.
- B7. The Applicant shall comply with any reasonable requirement(s) of the Planning Secretary arising from the Department's assessment of:
 - (a) any reports, plans or correspondence that are submitted in accordance with this consent;
 - (b) the implementation of any actions or measures contained within these reports, plans or correspondence.

LIMITS OF CONSENT

- B8. This consent lapses five (5) years after the date from which it operates, unless any Stage of the Development has physically commenced on the land to which the consent applies before that date.
- B9. The following limits apply to the Concept Proposal:
 - (a) the maximum GLA for the land uses in the Development shall not exceed the limits in **Table 1**:
 - (b) a minimum 60 metre (m) wide corridor along the northern Site boundary shall not be developed and shall be maintained and preserved for the future WSFL corridor, in accordance with the requirements of TfNSW;
 - (c) the building layouts and footprints shown on Lots 3A, 3B, 3C, 3D, 3E, 3F, 3G and 4A on Figure 1 in Appendix 1, are not approved. The position, layouts and footprints of the buildings on these lots must be assessed by separate DAs, and must satisfy the interface requirements of Conditions C3 and C4;
 - (d) any rooftop mechanical plant on buildings on Lots 2C, 2D, 2E, 3A, 3B, 3C, 3D, 3E, 4A, 4B and 4E are not to be operated during the night-time period;

- (e) forklifts are not to operate during the night-time period on Lots 2C, 2D, 2E and 3B, 3C, 3D, 3E, 4A and 5A; and
- (f) vehicles associated with the Development shall adhere to the following speed limits when using estate roads within the Development:
 - (i) 25 kilometres per hour for heavy vehicles; and
 - (ii) 40 kilometres per hour for light vehicles.
- (g) all traffic associate with operation of the Development shall use the West North South Link Road, and the future SLR, to access the site and shall not use Bakers Lane or Aldington Road

Table 1: GLA Maximum for Concept Proposal

Land Use	Maximum GLA square metres (m²)	
Total Warehousing	529,625	
Total Office	22,770	
Other	4,429	
Total GLA	556,824	

Notes: Other includes but is not limited to the skybridge, gatehouse, dangerous goods store and energy complex in Building 1A.

B10. The Applicant shall ensure the Concept Proposal is consistent with the development controls in **Table 2**:

Table 2: Development Controls

Development Aspect	Control	
Minimum building setbacks from:	,	
Southern Link Road	17.15 m	
Western North-South Link Road	20 m (excluding the Amenity Precinct)	
Local estate Roads	7.5 m	
Western site boundary	40 m	
Southern site boundary	20 m (excluding parking areas)	
Rear boundary setbacks within the estate	5 m	
Side boundary setbacks within the estate	0 m, subject to compliance with fire rating requirements	
Height	15 m	
- Building 1A	39 m	
- Building 2A	18 m	
- Building 2B	28 m	
- Building 2C	22.2 m	
Minimum lot size	5,000 m ²	
Minimum frontage	40 m (excluding cul-de-sacs)	
	35 m minimum lot width at the building line	
Site coverage	Maximum of 65 per cent (excluding awnings)	

Note: Development controls (such as height limits and setbacks) for Lot 3C and Lot 4A will be set by Council on a case-by-case basis for each DA in the Oakdale West Estate

B11. Notwithstanding the controls listed in **Table 2** in Condition B10, no warehouse building in the Concept Proposal, except Building 1A in Precinct 1, Buildings 2A, 2B and 2C in Precinct 2, and Buildings 4B, 4C and 4D shall exceed a ridgeline height of 13.7 m, excluding roof mounted mechanical plant and solar panels.

Note: Development controls, including ridgeline heights for Lot 3C and Lot 4A will be set by Council on a case-by-case basis for each DA in the Oakdale West Estate

- B12. The Applicant shall lodge the proposed revisions to the *Penrith Development Control Plan 2014* (Penrith DCP), in accordance with **Table 2** in Condition B10, with Council within 6 months of the date of this consent.
- B13. The Applicant shall ensure the Concept Proposal provides car parking in accordance with the following rates:
 - (a) 1 space per 300 m² of warehouse GFA;
 - (h) 1 space per 40 m² of office GFA; and
 - (i) 2 spaces for disability parking for every 100 car parking spaces.
- B14. The Applicant shall provide bicycle racks, and amenity and change room facilities for cyclists in accordance with *Planning Guidelines for Walking and Cycling* (December 2004, NSW Department of Infrastructure, Planning and Natural Resources and the Roads and Traffic Authority).

STAGING PLAN

- B15. Prior to the commencement of construction of any stage of the Concept Proposal, the Applicant shall prepare a Staging Plan for the Development, to the satisfaction of the Planning Secretary. The plan shall:
 - (a) be prepared in consultation with Council, utility and service providers and other relevant stakeholders:
 - (b) describe how the implementation of the Concept Proposal, would be staged to ensure it is carried out in an orderly and economic way and minimises construction impacts on adjacent sensitive receivers;
 - show the likely sequence of DAs that will be lodged to develop the Site, with the estimated timing for each Stage and identification of any overlapping construction and operational activities:
 - (d) include concept design for the staged delivery of landscaping, focusing on early implementation of screen planting to minimise the visual impact of subsequent development stages; and
 - (e) include conceptual design for the provision of services, utilities and infrastructure to the Site.

B16. The Applicant must:

- not commence construction of any stage of the Development until the Staging Plan required by Condition B15 is approved by the Planning Secretary; and
- (b) implement the most recent version of the Staging Plan approved by the Planning Secretary.
- B17. The Planning Secretary may require the Applicant to address certain matters identified in the Staging Plan. The Applicant must comply with any such requirements of the Planning Secretary given as part of the Staging Plan approval.

Notes:

 The Applicant may amend the Staging Plan as desired, with the approval of the Planning Secretary.

• The Staging Plan is intended to broadly describe the development sequence for the Site and the delivery of infrastructure for all stages. It is not required to provide detailed design for latter Stages.

NOISE LIMITS

B18. The Applicant shall ensure the Development does not exceed the noise limits in **Table 3** at the receiver locations N1, N2, N3, N4 and N5 shown on the plan in **Appendix 5**.

Table 3: Noise Limits dB(A)

Location	Day	Evening	Night	
	LAeq (15 minute)	LAeq (15 minute)	LAeq (15 minute)	L _{AMax}
N1 Emmaus Village Residential	44	43	41	52
N3 Kemps Creek – nearest residential property	39	39	37	52
N4 & N5 Kemps Creek – other residences	39	39	37	52
N9 to N14	47	42	42	52
N2 Emmaus Catholic College (school)	When in use: 45 Leq (1h)			

Notes:

- 1. Noise generated by the development is to be measured in accordance with the relevant procedures and modifications, including certain meteorological conditions, of the Noise Policy for Industry (EPA, 2017). Refer to the plan in Appendix 2 for the location of residential sensitive receivers.
- 2. or background + 5 dB, whichever is higher.
- B19. The noise limits in **Table 3** do not apply to receiver N3, **N4 and N5** if the Applicant has a Noise Agreement with the relevant landowner to exceed the noise limits, and the Applicant has provided written evidence to the Planning Secretary that an agreement is in place.

BUSHFIRE PROTECTION

- B20. The Applicant shall ensure the Development complies with:
 - (a) the relevant provisions of *Planning for Bushfire Protection 2019*;
 - (b) the construction standards and asset protection zone requirements recommended in the Oakdale Industrial Estate West Bushfire Protection Assessment, prepared by Australian Bushfire Protection Planners Pty Ltd, dated September 2016 and updated 13 January 2020, and the SSD-7348 (MOD 6) Bushfire Hazard Assessment prepared by Blackash Bushfire Consulting, dated 12 November 2020 and SSD-7348 (MOD 7) Bushfire Hazard Assessment prepared by Blackash Bushfire Consulting, dated 27 May 2021; and
 - (c) AS2419.1 2005 Fire Hydrant Installations for firefighting water supply.

TRANSGRID EASEMENT

- B21. The Applicant must:
 - (a) provide safe and unobstructed access for TransGrid plant and personnel to access the transmission towers, lines and easement on the Site, 24 hours a day, 7 days a week;
 - (b) comply with the requirements of TransGrid for any works in the TransGrid easement; and
 - (c) advise TransGrid of any proposed amended or modified encroachment into the easement.

ENDEAVOUR ENERGY

B22. The Applicant must comply with the requirements of Endeavour Energy for the provision of land for a new zone substation as shown on the plans in the RtS.

WATER NSW

- B23. The Applicant must:
 - (a) provide safe and unobstructed access for Water NSW plant and personnel to access the water pipelines corridor adjacent the Site, 24 hours a day, 7 days a week;
 - (b) comply with the requirements of Water NSW for any works adjacent to or over, the water pipelines corridor; and
 - (c) advise Water NSW of any proposed amended or modified encroachment into the water pipelines corridor.

AMENITIES LOT

B24. The amenities lot located north of Estate Road 1, as shown on the plans in **Appendix 1**, must only provide for small-scale local services such as commercial, retail, community facilities and landscaping that service or support the needs of local employment-generating uses.



SCHEDULE C CONDITIONS FOR FUTURE DEVELOPMENT APPLICATIONS

DEVELOPMENT CONTRIBUTIONS

- C1. Future DAs shall identify whether any Development Contributions Plan made by Council (under Section 7.11 of the EP&A Act) applies to that stage of the Concept Proposal (excluding Stage 1).
- C2. Prior to the issue of a Construction Certificate for any stage of the Development, the Applicant shall pay contributions to Council in accordance with the relevant Development Contributions Plan identified in accordance with Condition C1.

INTERFACE WITH RESIDENTIAL AREAS

- C3. Future DAs for warehouses on lots 3A, 3B, 3C, 3D, 3E, 3F, 3G and 4A shall be accompanied by an Urban Design Assessment. The assessment must:
 - (a) be prepared by an independent urban design consultant;
 - (b) be prepared in consultation with Council and the Emmaus Catholic College;
 - (c) detail the key objectives for the interface with the sensitive receivers on the western and southern Site boundaries, including consideration of optimal uses and operational hours;
 - (d) determine the optimal building location and setbacks on the western and southern boundaries, noting the design controls in Condition B10 are the minimum setback requirements;
 - (e) present the optimal design for the building layouts along the western and southern site boundaries with detailed justification for the preferred option;
 - (f) identify appropriate orientations and architectural treatments for the facades facing sensitive receivers; and
 - (g) incorporate noise mitigation into the layout and design of buildings, internal roads, loading docks and parking areas to ensure the Development can meet the noise limits in Condition Error! Reference source not found.
- C4. Prior to the commencement of construction of warehouses or office buildings on lots **3A**, **3B**, **3C**, **3D**, **3E**, **3F**, **3G** and **4A**, the Applicant must obtain approval from the Consent Authority for the preferred design option, including uses, building and loading dock layouts, setbacks, façade treatments and colours.

VISUAL AMENITY

Landscaping

- C5. Future DAs shall be accompanied by a Landscape Assessment. The assessment must:
 - (a) be prepared by a qualified landscape design consultant;
 - (b) be prepared in consultation with Council;
 - (c) describe how the landscaping for the relevant Stage of the Development is consistent with the Staging Plan approved in accordance with Condition B15;
 - (d) describes the landscaping works to be completed as part of the relevant Stage of the Development and details a program for monitoring the success of landscaping works over time:
 - (e) assesses the condition of and adequacy of landscaping completed as part of earlier Stages of the Development, in providing visual screening for adjacent sensitive receivers; and
 - (f) details any additional landscaping or rehabilitation works required to ensure the visual impacts of the Development are minimised for the adjacent sensitive receivers.

Outdoor Lighting

C6. Future DAs must ensure compliance with AS/NZS 1158.3.1:2005 Pedestrian Area (Category P) Lighting and AS/NZS 4282:2019 Control of Obtrusive Effects of Outdoor Lighting.

6

Signage

C7. Future DAs must ensure illuminated signage is oriented away from the sensitive receivers on the western and southern Site boundaries.

Reflectivity

C8. The visible light reflectivity from materials used on the façades and roofs of the warehouses and office buildings shall be designed to minimise glare. A report demonstrating compliance with these requirements must be submitted to the satisfaction of the Certifying Authority for each future warehouse and office building prior to the issue of the relevant Construction Certificate.

TRANSPORT, ACCESS AND PARKING

- C9. Future DAs shall be accompanied by a transport, access and parking assessment. The assessment must:
 - (a) assess the impacts on the safety and capacity of the surrounding road network and access points during construction and operation of the relevant Stage;
 - (b) demonstrate internal roads and car parking complies with relevant Australian Standards and the car parking rates in Condition B13;
 - (c) detail the scope and timing of any required road upgrades to service the relevant Stage;
 and
 - (d) detail measures to promote non-car travel modes, including a Sustainable Travel Plan identifying pedestrian and cyclist facilities to service the relevant Stage of the Development.

NOISE AND VIBRATION

- C10. Future DAs shall be accompanied by a noise and vibration impact assessment. The assessment must:
 - (a) identify the noise and vibration impacts during construction and operation;
 - (b) demonstrate compliance with the noise limits in Condition Error! Reference source not found.:
 - (c) provide an analysis of all external plant and equipment, including but not limited to, forklifts, air conditioners and refrigeration systems;
 - (d) incorporate noise mitigation measures, such as increased building setbacks, building insulation, noise barriers, layout of truck loading areas or source controls, to demonstrate the noise limits in Condition B18 can be achieved;
 - (e) detail the timing to construct the noise walls shown in **Appendix 5**, to ensure noise from operation of the Development does not exceed the noise limits in Condition B18**Error!**Reference source not found.; and
 - (f) recommend mitigation and management measures to be implemented to minimise noise during construction.

STORMWATER MANAGEMENT

- C11. Future DAs shall demonstrate the design of the warehouses, offices and hardstand areas are consistent with (or the latest revision of) the:
 - (a) Civil, Stormwater and Infrastructure Services Report, prepared by At&L, dated October 2018; and
 - (b) Flood Impact Assessment: Oakdale West Estate, prepared by Cardno, dated 27 March 2017.

BUSHFIRE PROTECTION

- C12. The Applicant shall ensure future DAs comply with:
 - (a) the relevant provisions of *Planning for Bushfire Protection 2019*;

7

(b) the construction standards and asset protection zone requirements recommended in the Oakdale Industrial Estate - West Bushfire Protection Assessment, prepared by Australian

Bushfire Protection Planners Pty Ltd, dated September 2016 and updated 13 January 2020, and the SSD-7348 (MOD 6) Bushfire Hazard Assessment prepared by Blackash Bushfire Consulting, dated 12 November 2020 and SSD-7348 (MOD 7) Bushfire Hazard Assessment prepared by Blackash Bushfire Consulting, dated 27 May 2021; and

(c) AS2419.1 – 2005 Fire Hydrant Installations for firefighting water supply.

TRANSGRID EASEMENT

- C13. The Applicant must consult with TransGrid, prior to lodging DAs for Stages 4 and 5 of the Development as shown on **Figure 2** in **Appendix 1**, and any other Stage or road infrastructure that may affect the TransGrid easement. The Applicant must design, construct and operate each Stage of the development in accordance with the reasonable requirements of TransGrid relating to their use of the TransGrid easement.
- C14. The Applicant must consult with TransGrid, prior to lodging DAs for buildings in Stage 5 adjacent to Ropes Creek, to identify and implement any required flood management measures within the transmission line easement.

ENDEAVOUR ENERGY

C15. The Applicant must obtain relevant approvals from Endeavour Energy, prior to the construction of any utility works to service each Stage of the Development.

WATER NSW

C16. The Applicant must consult with Water NSW, prior to lodging DAs for works on Lot 2A adjoining the water pipelines corridor, to identify and implement any requirements of Water NSW for protection of the water pipelines corridor.

WASTE

C17. Future DAs shall include a Waste Management Plan prepared in accordance with the *NSW Waste Classification Guidelines* (DECCW, 2009).

CONSTRUCTION MANAGEMENT

- C18. A Construction Environmental Management Plan (CEMP) shall be submitted to the Consent Authority for each stage of the Concept Proposal prior to the commencement of construction of the relevant stage. The CEMP must:
 - (a) be prepared by a suitably qualified and experienced environmental consultant, or the Environmental Representative appointed for Stage 1 of the Development;
 - (b) be prepared in consultation with relevant Government agencies, infrastructure and utility providers, including but not limited to, TransGrid, Endeavour Energy, Water NSW and TfNSW, where relevant for each stage;
 - (c) detail the construction activities to be undertaken in the relevant Stage of the Development;
 - (d) include detailed procedures for managing the environmental impacts of construction, including stormwater, erosion and sediment controls, dust, noise and traffic management; and
 - (e) detail the roles and responsibilities for environmental management on the Site.

COMMUNITY COMMUNICATION STRATEGY

C19. No later than one month before the commencement of construction of any stage of the Development, a Community Communication Strategy (CCS) must be prepared and submitted to the Planning Secretary for approval.

8

The CCS is to provide mechanisms to facilitate communication between the Applicant, Council and the community (including adjoining affected landowners, schools, businesses, and others directly impacted by Stage 1), during design, construction and operation. The CCS must:

- (a) assign a central contact person to keep the nearby sensitive receivers regularly informed throughout the Development;
- (b) detail the mechanisms for regularly consulting with the local community throughout the Development, such as holding regular meetings to inform the community of the progress of the development and report on environmental monitoring results;
- (c) detail a procedure for consulting with nearby sensitive receivers to schedule high noise generating works, vibration intensive activities or manage traffic disruptions;
- (d) include contact details for key community groups, relevant regulatory authorities, Registered Aboriginal Parties and other interested stakeholders; and
- (e) include a complaints procedure for recording, responding to and managing complaints, including:
 - (i) email, contact telephone number and postal addresses for receiving complaints;
 - (ii) advertising the contact details for complaints before and during operation, via the local newspaper and through onsite signage;
 - (iii) a complaints register to record the date, time and nature of the complaint, details of the complainant and any actions taken to address the complaint; and
 - (iv) procedures for the resolution of any disputes that may arise during the course of the Development.

C20. The Applicant must:

- (a) not commence construction of the relevant stage of the Concept Proposal until the CCS required under Condition C19 has been approved by the Planning Secretary; and
- (b) implement the CCS for each stage of the Concept Proposal and following the completion of operation of the Development.

SCHEDULE D CONDITIONS FOR STAGE 1 DA

PART 1 – GENERAL CONDITIONS

OBLIGATION TO MINIMISE HARM TO THE ENVIRONMENT

D1. In addition to meeting the specific performance measures and criteria in this consent, all reasonable and feasible measures must be implemented to prevent, and if prevention is not reasonable and feasible, minimise, any material harm to the environment that may result from the construction and operation of Stage 1 development, and any rehabilitation required under this consent.

TERMS OF CONSENT

- D2. Stage 1 of the Development may only be carried out:
 - (a) in compliance with the conditions of this consent;
 - (b) in accordance with all written directions of the Planning Secretary;
 - (c) in accordance with the EIS and RTS;
 - (d) in accordance with the plans in Appendix 2 and Appendix 3;
 - (e) in accordance with SSD 7348 MOD 1;
 - in accordance with the Applicant's Management and Mitigation Measures in Appendix 7;
 - (g) in accordance with modifications to this consent.
- D3. Consistent with the requirements in this consent, the Planning Secretary may make written directions to the Applicant in relation to:
 - (a) the content of any strategy, study, system, plan, program, review, audit, notification, report or correspondence submitted under or otherwise made in relation to this consent, including those that are required to be, and have been, approved by the Planning Secretary; and
 - (b) the implementation of any actions or measures contained in any such document referred to in Condition D3(a).
- D4. The conditions of this consent and directions of the Planning Secretary prevail to the extent of any inconsistency, ambiguity or conflict between them and a document listed in Condition D2(c). In the event of an inconsistency, ambiguity or conflict between any of the documents listed in Condition D2(c), the most recent document prevails to the extent of the inconsistency, ambiguity or conflict.

LIMITS OF CONSENT

- D5. This consent lapses five (5) years after the date from which it operates, unless Stage 1 has physically commenced on the land to which the consent applies before that date.
- D6. The following limits apply to Stage 1:
 - (a) the maximum GLA for the land uses shall not exceed the limits in **Table 4**; and
 - (b) a minimum 60 m wide corridor along the northern Site boundary shall not be developed and shall be maintained and preserved for the future WSFL corridor, in accordance with the requirements of TfNSW.
 - (c) all construction traffic associated with the Stage 1 warehouse buildings (Buildings 1A, 1B and 1C) must use the West North South Link Road to access the site.

Table 4: GLA Maximum for Stage 1

Land Use	Maximum GLA (m²)
Total Warehousing	81,286
Total Office	4,151

Other	4,004
Total GLA	89,440

Note: Other includes, but is not limited to, the skybridge, gatehouse, dangerous goods store and energy complex in Building 1A

D7. The Applicant shall ensure Stage 1 is consistent with the development controls in **Table 2**: **Development Controls** in Condition B10.

NOTIFICATION OF COMMENCEMENT

- D8. The date of commencement of each of the following phases of Stage 1 must be notified to the Department in writing, at least one month before that date, or otherwise agreed with the Planning Secretary:
 - (a) construction; and
 - (b) operation.
- D9. If the construction or operation of Stage 1 is to be delivered in sub-stages, the Department must be notified in writing at least one month before the commencement of each sub-stage, of the date of commencement and the works to be carried out in that sub-stage.

EVIDENCE OF CONSULTATION

- D10. Where conditions of this consent require consultation with an identified party, the Applicant must:
 - (a) consult with the relevant party prior to submitting the subject document to the Planning Secretary for approval; and
 - (b) provide details of the consultation undertaken including:
 - i. the outcome of that consultation, matters resolved and unresolved; and
 - ii. details of any disagreement remaining between the party consulted and the Applicant and how the Applicant has addressed the matters not resolved.

STAGING, COMBINING AND UPDATING STRATEGIES, PLANS OR PROGRAMS

- D11. With the approval of the Planning Secretary, the Applicant may:
 - (a) prepare and submit any strategy, plan or program required by this consent on a staged basis (if a clear description is provided as to the specific stage and scope of the development to which the strategy, plan or program applies, the relationship of the stage to any future stages and the trigger for updating the strategy, plan or program);
 - (b) combine any strategy, plan or program required by this consent (if a clear relationship is demonstrated between the strategies, plans or programs that are proposed to be combined); and
 - (c) update any strategy, plan or program required by this consent (to ensure the strategies, plans and programs required under this consent are updated on a regular basis and incorporate additional measures or amendments to improve the environmental performance of the development).
- D12. If the Planning Secretary agrees, a strategy, plan or program may be staged or updated without consultation being undertaken with all parties required to be consulted in the relevant condition in this consent.
- D13. If approved by the Planning Secretary, updated strategies, plans or programs supersede the previous versions of them and must be implemented in accordance with the condition that requires the strategy, plan or program.

PROTECTION OF PUBLIC INFRASTRUCTURE

- D14. Before the commencement of construction of Stage 1, the Applicant must:
 - (a) consult with the relevant owner and provider of services that are likely to be affected, to make suitable arrangements for access to, diversion, protection and support of the affected infrastructure;

- (b) prepare a dilapidation report identifying the condition of all public infrastructure in the vicinity of the Site (including roads, gutters and footpaths); and
- (c) submit a copy of the dilapidation report to the Planning Secretary and Council.
- D15. Unless the Applicant and the applicable authority agree otherwise, the Applicant must:
 - (a) repair, or pay the full costs associated with repairing, any public infrastructure that is damaged by carrying out Stage 1; and
 - (b) relocate, or pay the full costs associated with relocating, any public infrastructure that needs to be relocated as a result of Stage 1.

PROTECTION OF WATER NSW INFRASTRUCTURE

- D16. Before the commencement of construction of Stage 1, the Applicant must:
 - (a) prepare a dilapidation report identifying the condition of all infrastructure within the water pipelines corridor, in the vicinity of the WNSLR bridge crossing;
 - (b) implement all practical measures to protect this infrastructure, as required by Water NSW; and
 - (c) repair, or pay the full costs associated with repairing, any water supply infrastructure that is damaged by carrying out Stage 1.

DEMOLITION

D17. All demolition must be carried out in accordance with *Australian Standard AS 2601-2001 The Demolition of Structures* (Standards Australia, 2001).

STRUCTURAL ADEQUACY

D18. All new buildings and structures, and any alterations or additions to existing buildings and structures, that are part of the development, must be constructed in accordance with the relevant requirements of the National Construction Code (NCC).

Notes:

- Under Part 6 of the EP&A Act, the Applicant is required to obtain construction and occupation certificates for the proposed building works.
- Part 8 of the EP&A Regulation sets out the requirements for the certification of the development.

COMPLIANCE

D19. The Applicant must ensure that all of its employees, contractors (and their sub-contractors) are made aware of, and are instructed to comply with, the conditions of this consent relevant to activities they carry out in respect of Stage 1.

DEVELOPER CONTRIBUTIONS

Planning Agreement

D20. The Applicant shall provide all monetary contributions and/or works-in-kind contributions under Subdivision 2 of Division 7.1 of Part 7 of the EP&A Act, in accordance with the Planning Agreement entered into between the Minister for Planning, Goodman Property Services (Aust) Pty Ltd (the developer) and BGMG 11 Pty Limited as trustee for the BGMG 1 Oakdale West Trust (the landowner) executed on 5 August 2019 and as attached in **Appendix 4**.

OPERATION OF PLANT AND EQUIPMENT

- D21. All plant and equipment used on site, or to monitor the performance of Stage 1 must be:
 - (a) maintained in a proper and efficient condition; and
 - (b) operated in a proper and efficient manner.

EASEMENTS

D22. Within 12 months of commencing operation of Stage 1, or a timing otherwise agreed with Council, an easement under section 88A and/or restriction or public positive covenant under section 88E

of the *Conveyancing Act 1919* (NSW) naming the Council as the prescribed authority, which can only be revoked, varied or modified with the consent of the Council, and provides for a drainage outlet swale from bio-retention basin 1, must be registered on title of Lot 19 DP 1250578.

EXTERNAL WALLS AND CLADDING

- D23. The external walls of all buildings including additions to existing buildings must comply with the relevant requirements of the NCC.
- D24. Before the issue of a Construction Certificate and an Occupation Certificate, the Applicant must provide the Certifying Authority with documented evidence that the products and systems proposed for use or used in the construction of external walls including finishes and claddings such as synthetic or aluminium composite panels comply with the requirements of the NCC.
- D25. The Applicant must provide a copy of the documentation given to the Certifying Authority to the Planning Secretary within seven days after the Certifying Authority accepts it.

UTILITIES AND SERVICES

- D26. Before the construction of any utility works associated with Stage 1, the Applicant must obtain relevant approvals from service providers.
- D27. Before the commencement of operation of Stage 1, the Applicant must obtain a Compliance Certificate for water and sewerage infrastructure servicing Stage 1, under section 73 of the *Sydney Water Act 1994* (NSW).
- D28. Before the issue of a Subdivision or Construction Certificate for Stage 1, the Applicant (whether or not a constitutional corporation) is to provide evidence, satisfactory to the Certifying Authority, that arrangements have been made for the provision of communication facilities to Stage 1.
- D29. The Applicant must demonstrate that the carrier has confirmed in writing they are satisfied that the fibre ready facilities are fit for purpose.

TRANSGRID EASEMENT

- D30. The Applicant must:
 - (a) provide safe and unobstructed access for TransGrid plant and personnel to access the transmission towers, lines and easement on the Site, 24 hours a day, 7 days a week;
 - (b) comply with the requirements of TransGrid for any works in the TransGrid easement on the Site: and
 - (c) advise TransGrid of any proposed amended or modified encroachment into the easement.

WATER NSW

- D31. The Applicant must:
 - (a) comply with the requirements of Water NSW for any works adjacent to, or over, the water pipelines corridor:
 - (b) consult with Water NSW during detailed design of Stage 1 works near the corridor including:
 - (i) design of drainage upgrade works within the corridor;
 - (ii) batters and access tracks;
 - (iii) final bridge design for the WNSLR;
 - (c) obtain from Water NSW, an access consent and construction licence to work within the water pipelines corridor, prior to the commencement of construction;
 - (d) consult with Water NSW during preparation of the CEMP, in accordance with Condition D119, and attend a site visit with Water NSW personnel, prior to finalising the CEMP, to mark the exact works area for the WNSLR bridge crossing; and
 - (e) notify any incidents that affect or could affect the water pipelines corridor to Water NSW on the 24-hour Incident Notification Number **1800 061 069**, as a matter of urgency.

WORKS-AS-EXECUTED PLANS

D32. Before the issue of the final Occupation Certificate for Stage 1, works-as-executed drawings signed by a registered surveyor demonstrating that the stormwater drainage and finished ground levels have been constructed as approved, must be submitted to the PCA.

APPLICABILITY OF GUIDELINES

- D33. References in the conditions of this consent to any guideline, protocol, Australian Standard or policy are to such guidelines, protocols, Standards or policies in the form they are in as at the date of this consent.
- D34. However, consistent with the conditions of this consent and without altering any limits or criteria in this consent, the Planning Secretary may, when issuing directions under this consent in respect of ongoing monitoring and management obligations, require compliance with an updated or revised version of such a guideline, protocol, Standard or policy, or a replacement of them.

ADVISORY NOTES

AN1. All licences, permits, approvals and consents as required by law must be obtained and maintained as required for Stage 1. No condition of this consent removes any obligation to obtain, renew or comply with such licences, permits, approvals and consents.



PART 2 - ENVIRONMENTAL PERFORMANCE CONDITIONS

VISUAL AMENITY

Landscape Management Plan

- D35. Prior to the commencement of construction of Stage 1, the Applicant must prepare a Landscape Management Plan (LMP), to the satisfaction of the Planning Secretary. The plan must form part of the CEMP in accordance with Condition D119 and the OEMP in accordance with Condition D130 and must:
 - (a) be prepared in consultation with Council;
 - (b) detail procedures for the retention of existing native vegetation in the north-western corner of the Site and protection of this vegetation from construction impacts;
 - (c) include visual impact mitigation measures for construction including but not limited to:
 - (i) the location of site sheds, compounds and machinery parking areas, avoiding the western and southern site boundaries, or other locations highly visible from adjacent residential properties;
 - (ii) procedures for progressive grassing of exposed soil, as soon as reasonably practicable after disturbance, focusing on areas where building construction will occur at a later stage; The contractor shall employ the use of a dust supressing polymer agent ideally with a green tint to reduce the visual impact of the exposed building pads & to assist in reducing the dust generated on site.
 - (d) detail the works required to construct the landscape bund along the western boundary of the Site, as shown on Error! Reference source not found.4 in **Appendix 2**, including provision for the landscaping to incorporate mature trees (no less than 75 litre pot size);
 - (e) include a schedule of works which prioritises the construction of the landscape bund along the western boundary of the Site, as shown on **Figure 4** in **Appendix 2**.
 - (f) include a program for implementing the landscape bund as soon as reasonably practicable, and no later than prior to operation of Stage 1;
 - (g) describe the integration of landscaping with fixed elements, including retaining walls and noise walls;
 - (h) describe the monitoring and maintenance procedures to ensure the success of the landscaping works over the life of the Development; and
 - (i) update the LEMP to include modifications to the western bund, bio-retention basin 2/3 and the noise wall approved under MOD 3.

D36. The Applicant must:

- (a) not commence construction of Stage 1 until the LMP is approved by the Planning Secretary.
- (b) must implement the most recent version of the LMP approved by the Planning Secretary; and
- (c) include the monitoring and maintenance procedures contained in the LMP within the OEMP required in accordance with Condition D130.

Landscaping

- D37. The Applicant must complete the landscape bund along the western boundary of the Site as shown on **Figure 4** in **Appendix 2** within six months of commencing any construction including bulk earthworks.
- D38. The Applicant must maintain all landscaping implemented as part of Stage 1, as shown on Error! Reference source not found.4 in **Appendix 2**, for the duration of the Development. If the monitoring carried out as part of Condition D35 indicates that any aspect of the landscaping has not been successful, the Applicant must undertake re-planting and rehabilitation works, as soon as reasonably practicable.

Setbacks

D39. The Applicant must ensure building services including tanks are integrated into the building design and landscaped areas to reduce visibility from public areas, unless otherwise required by an authority or Australian Standard, to be located within the front boundary setback.

Lighting and Security Cameras

- D40. The Applicant must ensure the lighting associated with Stage 1:
 - (a) complies with the latest version of AS 4282-1997 Control of the obtrusive effects of outdoor lighting (Standards Australia, 1997); and
 - (b) is mounted, screened and directed in such a manner that it does not create a nuisance to surrounding properties or the public road network.
- D41. The Applicant must ensure any security cameras installed as part of Stage 1 are directed away from adjacent private properties.

Reflectivity

D42. The visible light reflectivity from building materials used in the facades and roofs of the warehouses and offices must be designed to minimise glare. A report demonstrating compliance with these requirements is to be submitted to the satisfaction of the Certifying Authority prior to the issue of the relevant Construction Certificate.

Signage and Fencing

D43. All signage and fencing must be erected in accordance with the plans at Appendix 1 and Appendix 2, as modified.

Note: This condition does not apply to temporary construction and safety related signage and fencing.

- D43A.Prior to construction of any signage for Stage 1, the Applicant must consult with Council on the final signage strategy.
- D44. All fencing along building frontages must be located behind the landscape setbacks and not along the front boundary. The fencing must be a maximum height of 2.1 metre and be an open style.
- D44A. Notwithstanding the controls listed in Condition D44, the Applicant may construct a 2.4 m high boundary fence between Lots 1A and 1B/1C.
- D45. The Applicant must:
 - (a) remove existing rural fencing along the water pipelines corridor adjacent the site and dispose to an appropriate waste facility licensed to accept the waste;
 - (b) install and maintain temporary security fencing along the water pipelines corridor adjacent the site, for the duration of construction, or until a permanent fence is installed;
 - (c) install permanent 2.4-metre-high fencing along the water pipelines corridor adjacent the site, including the approaches to the WNSLR bridge over the water pipelines corridor and above retaining walls, unless otherwise agreed with Water NSW:
 - install concrete barriers or barrier guard rails (including barriers leading up to bridge structure) to the WNSLR where there is potential for large vehicles to drive over retaining walls and into the water pipelines corridor. Barriers must be rated to withstand impact from B-Double size vehicles; and
 - (e) install cranked throw screens on both sides of the WNSLR bridge crossing the Water NSW water pipeline corridor.
- D45A. Prior to construction of Building 1A, the Applicant must submit a final architectural design for Building 1A detailing building articulation, colour schemes and signage. The Applicant must not commence construction of Building 1A until the final architectural design is approved by the Planning Secretary.

WESTERN NORTH-SOUTH LINK ROAD (WNSLR)

General Requirements

- D46. The Applicant must design and construct the WNSLR in accordance with the requirements of:
 - (a) Council, the PCA and any approval issued under section 138 of the *Roads Act 1993* including the Works Authorisation Deed (WAD);
 - (b) TfNSW for the bridge crossing of the future WSFL; and
 - (c) Water NSW for the bridge crossing of the water pipelines corridor.
- D47. The Applicant must design and construct the intersections of the WNSLR with Estate Road 1 and Lockwood Road to the satisfaction of the relevant roads authority.
- D47A. Prior to the commencement of construction of car park access for Lot 9, DP1157476 (57-87 Lockwood Road, Erskine Park NSW 2759), the Applicant must submit a Section 138 Application (including payment of fees together with any applicable bonds) to Penrith City Council for obtaining a *Roads Act 1993* approval. The Section 138 Application may include but is not limited to the following works:
 - vehicular crossings (including kerb reinstatement of redundant vehicular crossings);
 - road opening for utilities and stormwater (including stormwater connection to Council infrastructure); and
 - road occupancy or road closures.

All works shall be carried out in accordance with the *Roads Act 1993* approval, the development consent including the stamped approved plans, and Penrith City Council's specifications.

Note: contact Penrith City Council's City Works Department on (02) 4732 7777 for further information regarding the application process.

Works at Lenore Drive/Grady Crescent/WNSLR Intersection

- D48. Prior to the commencement of construction of the Lenore Drive/Grady Crescent/WNSLR intersection (the intersection), the Applicant must finalise the detailed design, including a Traffic Signal Plan, for the intersection works. The detailed design must:
 - cut back the median further with a taper in Grady Crescent to accommodate the dual B-Double swept paths turning from WNSLR onto Lenore Drive; and
 - (b) include an angled pedestrian crossing on the south-eastern corner of the intersection so that pedestrians are not confused by the pedestrian lantern on the opposite side of the intersection.
- D49. The Applicant must enter into a WAD for works at the intersection with TfNSW (former RMS). The WAD must be executed prior to the submission of the detailed design required under condition D48 to TfNSW for approval.
- D50. The Applicant must design the proposed traffic control light at the intersection in accordance with Austroads guidelines, RMS Signal Design Manual and Australian Codes of Practice. The traffic control light design must be endorsed by a suitably qualified practitioner whose qualification has been approved by TfNSW (former RMS).
- D51. The Applicant must submit the certified copies of the traffic signal design plans to TfNSW (former RMS) for approval prior to the issue of a Construction Certificate.
- D52. The Applicant must submit a request to TfNSW (former RMS) Network Operations Team to obtain relevant approvals to remove the signalised pedestrian crossing on the eastern leg of the intersection.
- D53. The Applicant must carry out all public utility adjustment/relocation works necessary for the intersection works as required by relevant public utility authorities and/or their agents.
- D54. The Applicant must make a ten (10) year maintenance contribution for the intersection to TfNSW (former RMS).

D55. The intersection works must be carried out at no cost to TfNSW (former RMS).

Pre-Construction

- D56. Prior to the commencement of construction of the WNSLR, the Applicant must:
 - (a) obtain the written consent of the Minister for Planning and Public Spaces under the Biodiversity Covenant, to construct the WNSLR over the Erskine Park Biodiversity Corridor; and
 - (b) provide evidence to the satisfaction of the Planning Secretary, demonstrating the design of the WNSLR and bridge crossings have been agreed with the relevant roads authority, Council. TfNSW and Water NSW.

Consultation

- D57. The Applicant must develop a schedule for consultation with and approval by TfNSW for the construction of the bridge foundations over the future WSFL, including geotechnical and structural certification as required by TfNSW. The schedule must form part of the CEMP required by Condition D119.
- D58. The Applicant must develop a schedule for consultation with and approval by Water NSW for the construction of the bridge over the water pipelines corridor. This schedule must form part of the CEMP required by Condition D119.

Pre-Operation

- D59. Prior to operation of any Stage of the Development, the Applicant must complete construction of the WNSLR to the satisfaction of the relevant roads authority and the PCA.
- D60. Prior to the commencement of operation of the WNSLR, the Applicant must provide works-asexecuted drawings to Water NSW for the WNSLR bridge. The drawings must clearly show any changes to the bridge design or the works adjacent to the water pipelines corridor.
- D61. Prior to the commencement of operation of the WNSLR, the Applicant must design and construct a stormwater management system for the WNSLR. The system must:
 - (a) be designed by a suitably qualified and experienced person(s);
 - (b) be generally in accordance with the conceptual design in the RtS;
 - (c) ensure that the system capacity has been designed in accordance with AUSTROADS guidelines;
 - (d) achieve the pollutant reduction targets specified in RMS's Water Sensitive Urban Design (WSUD) Guidelines (March 2016) and Council's Water Sensitive Urban Design (WSUD) Policy (December 2013); and
 - (e) ensure the outlet structures are designed in accordance with NRAR's *Guidelines for Controlled Activities on Waterfront Land* (May 2018).

Dedication of Infrastructure and Land

- D62. Prior to the completion of construction of the WNSLR, the Applicant must consult with Water NSW regarding land subdivision and stratum arrangements for the acquisition and dedication of Water NSW land to Council for the WNSLR bridge.
- D63. Following completion of construction of the WNSLR to the satisfaction of the relevant roads authority, the Applicant must dedicate the WNSLR and its associated land owned by Water NSW and BGMG 11 Pty Limited as trustee for the BGMG 1 Oakdale West Trust, to the relevant roads authority in accordance with the requirements of the Planning Agreement.
- D64. The Applicant shall retain care, control and ownership of bio-retention basin no. 1 associated with the WNSLR.

18

TRANSPORT, ACCESS AND PARKING

Construction Traffic Management Plan

- D65. Prior to the commencement of construction of Stage 1, the Applicant must prepare a Construction Traffic Management Plan (CTMP) to the satisfaction of the Planning Secretary. The CTMP must form part of the CEMP required by Condition D119 and must:
 - (a) be prepared by a suitably qualified and experienced person(s);
 - (b) be prepared in consultation with Council, Mamre Anglican School, Emmaus Catholic College, Emmaus Catholic Care Village and Trinity Catholic Primary School;
 - (c) detail specific measures to manage construction traffic to avoid school drop off and pick up times (Monday to Friday 8 am 9.30 am and 2.30 pm 4 pm) and Higher School Certificate exam periods, including any temporary infrastructure arrangements and traffic safety measures;
 - (d) detail the measures to be implemented to ensure road safety and network efficiency during construction, including scheduling deliveries of heavy plant and equipment outside of peak periods, or during school holidays where possible;
 - (e) detail heavy vehicle routes, access and parking arrangements;
 - (f) include a Driver Code of Conduct to:
 - i. minimise the impacts of construction on the local and regional road network;
 - ii. minimise conflicts with other road users including the students, staff, visitors and residents of the neighbouring schools and aged care village;
 - iii. minimise road traffic noise, both on Bakers Lane and from construction vehicles on Site; and
 - iv. ensure truck drivers use specified routes and adhere to the speed restrictions on Bakers Lane;
 - (g) include a program to monitor the effectiveness of these measures;
 - (h) detail procedures for early notification to residents and the community (including local schools), of any potential disruptions to routes; and
 - (i) update the CTMP to include modifications to construction traffic management approved under MOD 2 and MOD 3.

D66. The Applicant must:

- (a) not commence construction of Stage 1 until the CTMP required by Condition D65 is approved by the Planning Secretary; and
- (b) implement the most recent version of the CTMP approved by the Planning Secretary for the duration of construction.

Estate Roads and Intersections

- D67. The Applicant must design and construct the internal estate roads and intersections to accommodate the turning path of a B-Double, to the satisfaction of the Relevant Roads Authority.
- D68. Following the issue of a Subdivision Certificate, the estate roads shall be dedicated to the Relevant Roads Authority. Prior to any dedication, the Applicant shall ensure construction of the estate roads has been completed to the satisfaction of the Relevant Roads Authority and measures (such as a performance bond) are in place for any prescribed maintenance period, to the satisfaction of the Relevant Roads Authority.

Operating Conditions

- D69. The Applicant must ensure:
 - (a) internal roads, driveways and parking (including grades, turn paths, sight distance requirements, aisle widths, aisle lengths and parking bay dimensions) are constructed and maintained in accordance with the latest version of AS 2890.1:2004 Parking facilities Off-

street car parking (Standards Australia, 2004) and AS 2890.2:2002 Parking facilities Offstreet commercial vehicle facilities (Standards Australia, 2002);

- (b) parking for Stage 1 is provided in accordance with the EIS and RtS for MOD 5;
- (c) the swept path of the longest vehicle entering and exiting the site, as well as manoeuvrability through the site, is in accordance with the relevant Austroads guidelines;
- (d) Stage 1 does not result in any vehicles queuing on the public road network;
- (e) heavy vehicles associated with Stage 1 are not parked on local roads or footpaths in the vicinity of the Site;
- (f) all vehicles are wholly contained on site before being required to stop;
- (g) all loading and unloading of materials are carried out on Site;
- (h) all trucks entering or leaving the Site with loads have their loads covered and do not track dirt onto the public road network; and
- (i) the proposed turning areas in the car parks are kept clear of any obstacles, including parked cars, at all times.

Operational Traffic Management Plan

D69A The Applicant must prepare an Operational Traffic Management Plan (OTMP) for Stage 1.

The OTMP must form part of the OEMP required by condition D130 and must:

- (a) be prepared by a suitably qualified and experienced expert, in consultation with Council and TfNSW:
- (b) detail the numbers and frequency of truck movements, sizes of trucks, vehicle routes and hours of operation;
- (c) include measures to maintain road safety and network efficiency;
- (d) detail measures to minimise traffic noise, including procedures for receiving and addressing complaints from the community about Stage 1 related traffic and noise;
- (e) include a Driver's Code of Conduct that addresses:
 - (i) travelling speeds and adherence to site-specific speed limits;
 - (ii) procedures to ensure drivers adhere to designated heavy vehicle routes; and
 - (iii) procedures to ensure drivers implement safe driving practices.

D69B The Applicant must:

- (a) not commence operation of Stage 1 until the OTMP required by condition D69A is approved by the Planning Secretary; and
- (b) implement the most recent version of the OTMP approved by the Planning Secretary for the duration of operation.

NOISE

Hours of Work

D70. The Applicant must comply with the hours detailed in **Table 5**, unless otherwise agreed in writing by the Planning Secretary.

Table 5: Hours of Work

Activity	Day	Time
Construction	Monday – Friday Saturday	7 am to 6 pm 8 am to 1 pm
Operation	Monday – Sunday (including public holidays)	24 hours

- D71. Works outside of the hours identified in Condition D70 may be undertaken in the following circumstances:
 - (a) works that are inaudible at the nearest sensitive receivers;
 - (b) works agreed to in writing by the Planning Secretary;
 - (c) for the delivery of materials required outside these hours by the NSW Police Force or other authorities for safety reasons; or
 - (d) where it is required in an emergency to avoid the loss of lives, property or to prevent environmental harm.

Construction Noise Limits

D72. Stage 1 must be constructed with the aim of achieving the construction noise management levels detailed in the *Interim Construction Noise Guideline* (DECC, 2009) (as may be updated or replaced from time to time). All feasible and reasonable noise mitigation measures must be implemented and any activities that could exceed the construction noise management levels must be identified and managed in accordance with the Construction Noise and Vibration Management Plan required by Condition D73.

Construction Noise and Vibration Management Plan

- D73. The Applicant must prepare a Construction Noise and Vibration Management Plan (CNVMP) for Stage 1, to the satisfaction of the Planning Secretary. The CNVMP must form part of a CEMP in accordance with Condition D119 and must:
 - (a) be prepared by a suitably qualified and experienced noise expert;
 - (b) describe procedures for achieving the noise management levels in EPA's *Interim Construction Noise Guideline* (DECC, 2009) (as may be updated or replaced from time to time);
 - (c) describe the measures to be implemented to manage high noise generating works such as piling, in close proximity to sensitive receivers;
 - (d) include strategies to minimise impacts to sensitive receivers, including, where practicable, starting noisy equipment away from sensitive receivers and implementing respite periods;
 - (e) include strategies that have been developed with the sensitive receivers identified in **Appendix 5** for managing high noise generating works;
 - (f) describe the community consultation undertaken to develop the strategies in Condition D73(e);
 - (g) include a monitoring program that:
 - (i) includes a protocol for determining exceedances of the relevant conditions in this approval;
 - (ii) evaluates and reports on the effectiveness of the noise and vibration management measures;
 - (iii) include procedures to relocate, modify, mitigate or stop work to ensure compliance with relevant criteria; and
 - (h) include a complaints management system that would be implemented for the duration of Stage 1.

D74. The Applicant must:

- (a) not commence construction of Stage 1 until the CNVMP required by Condition D73 is approved by the Planning Secretary; and
- (b) implement the most recent version of the CNVMP approved by the Planning Secretary for the duration of construction.

Operational Noise Limits

D75. The Applicant shall undertake operation of Stage 1 in a manner that ensures the Development complies with the noise limits for the Concept Proposal in Condition **Error! Reference source not found.** of this consent.

Noise Barrier

D75A The Applicant must install the noise barriers located on the western boundary, as shown on Figure 6 in Appendix 5, to the satisfaction of the Planning Secretary. The noise barriers must be completed no later than 30 November 2020, unless otherwise agreed by the Planning Secretary.

Noise Verification

- D75(b). A Noise Verification Report must be prepared by a suitably qualified and experienced acoustic consultant and submitted to the satisfaction of the Planning Secretary at the following stages of the development:
 - (a) within three months of commencing operation of any buildings on the site; and
 - (b) two years after commencing operation of any buildings on the site.

D75(c). The Noise Verification Reports required by Condition D75(b) must include:

- (a) an analysis of compliance with the noise limits in Condition B18, undertaken in accordance with the NSW Noise Policy for Industry (EPA 2017) and Australian Standard AS 1055:2018 Acoustics Description and measurement of environmental noise (Australian Standards 2018);
- (b) a detailed maximum noise level event assessment undertaken in accordance with the NSW Noise Policy for Industry (EPA 2017);
- (c) an assessment of the performance and effectiveness of applied noise mitigation measures, including the noise barrier; and
- (d) identification of additional noise control measures to be implemented to address any exceedances of the limits in Condition B18 and details of when these measures would be implemented and how their effectiveness would be measured and reported to the Planning Secretary.

VIBRATION

Vibration Criteria

- D76. Vibration caused by construction works on the site, as measured at any residence or structure outside the site, must be limited to:
 - (e) for structural damage, the latest version of *DIN 4150-3 (1992-02) Structural vibration Effects of vibration on structures* (German Institute for Standardisation, 1999); and
 - (f) for human exposure, the acceptable vibration values set out in the *Environmental Noise Management Assessing Vibration: a technical guideline* (DEC, 2006) (as may be updated or replaced from time to time).
- D77. Vibratory compactors must not be used closer than 30 metres from residential buildings unless vibration monitoring confirms compliance with the vibration criteria specified in Condition D76.
- D78. The limits in Conditions D76 and D77 apply unless otherwise outlined in a CNVMP, approved as part of the CEMP required by Condition D119 of this consent.

SOILS & WATER

Imported Soil

- D79. The Applicant must prepare a Fill Importation Protocol for Stage 1. The protocol must form part of the CEMP required by Condition D119 and must detail the measures to:
 - (a) ensure only VENM, ENM, or other material approved in writing by EPA is brought onto the site;
 - (b) keep accurate records of the volume and type of fill to be used; and

(c) make these records available to the Department upon request.

Erosion and Sediment Control

- D80. The Applicant must prepare an Erosion and Sediment Control Plan for Stage 1, including the WNSLR, to the satisfaction of the Planning Secretary. The Plan must form part of a CEMP in accordance with Condition D119 and must:
 - (a) be prepared by a suitably qualified and experienced person(s);
 - (b) be generally consistent with the Erosion and Sediment Control Plans in the RTS and those prepared by the contractor for each sequence of the works, as approved by the PCA:
 - (c) include detailed erosion and sediment controls developed in accordance with the relevant requirements of *Managing Urban Stormwater: Soils and Construction Volume 1: Blue Book* (Landcom, 2004) guideline; and
 - (d) include procedures for maintaining erosion and sediment controls in efficient working order for the duration of construction, to ensure Stage 1 complies with Condition D82.
- D81. Prior to the commencement of bulk earthworks as part of Stage 1, the Applicant must implement erosion and sediment controls identified by Condition D80 and maintain those controls throughout bulk earthworks and construction, to ensure stormwater flows do not increase in any downstream areas. The Environmental Representative, appointed in accordance with Condition D123, shall make a written statement to the Planning Secretary confirming the erosion and sediment controls are operational, prior to the commencement of bulk earthworks and other construction activities required for Stage 1.

Discharge Limits

D82. Stage 1 must comply with section 120 of the POEO Act, which prohibits the pollution of waters.

Stormwater Management System

- D83. The Applicant must design, construct and operate a stormwater management system for Stage 1 that:
 - (a) is designed by a suitably qualified and experienced person(s);
 - (b) is generally in accordance with the conceptual design in the RtS:
 - (c) is in accordance with applicable Australian Standards;
 - (d) ensures the system capacity is designed in accordance with Australian Rainfall and Runoff (Engineers Australia, 2016), Managing Urban Stormwater: Council Handbook (EPA, 1997) and Stormwater Drainage Specifications for Building Development (Penrith Council, May 2018):
 - (e) ensures peak stormwater flows from the Site do not exceed pre-development flows in any downstream areas for all rainfall events up to and including the 1 in 100-year average recurrence interval (ARI):
 - (f) ensures peak stormwater flows from the Site do not exceed existing flows in the Water NSW drainage lines and water pipelines corridor; and
 - (g) achieves the pollutant reduction targets specified in Council's *Water Sensitive Urban Design (WSUD) Policy,* (December 2013).
- D84. All stormwater drainage infrastructure on the Site, including bio-retention basins, shall remain under the care, control and ownership of the registered proprietor of the lots.
- D85. The Applicant shall create a drainage easement for the outlet swales from the bio-retention basins on the site, in accordance with the requirements of Council and Condition D22.

Groundwater

- D86. If groundwater is intersected during construction of Stage 1, the Applicant must:
 - (a) obtain the necessary water licences or approvals from NRAR; and
 - (b) develop a Groundwater Management Plan (GMP) for the testing, dewatering, storage, movement and treatment of groundwater, to the satisfaction of NRAR.

Waterfront Land

D87. The Applicant must carry out all works on or adjacent to waterfront land in accordance with the Department of Industry *Guidelines for Controlled Activities on Waterfront Lands 2012*.

BIODIVERSITY

Flora and Fauna Management Plan

- D88. The Applicant must prepare a **Terrestrial and Aquatic** Flora and Fauna Management Plan (FFMP) for Stage 1, to the satisfaction of the Planning Secretary. The Plan must form part of a CEMP in accordance with Condition D119 and must:
 - (a) be prepared by a suitably qualified and experienced person(s);
 - (b) describe procedures to manage impacts on biodiversity values during earthworks, clearing and dam decommissioning;
 - (c) include procedures for clearing marking and protecting the areas of vegetation to be retained on the Site, including the mature vegetation in the north-western corner and the Biodiversity Offset Area, established in accordance with Condition D91 adjacent to Ropes Creek; and Riparian Corridor adjacent to Ropes Creek in accordance with the Vegetation Management Plan (VMP) prepared under Condition D91;
 - (d) detail the specific erosion and sediment controls to protect the retained vegetation.

D89. The Applicant must:

- (a) not commence bulk earthworks until the FFMP required by Condition D88 is approved by the Planning Secretary; and
- (b) implement the most recent version of the FFMP approved by the Planning Secretary for the duration of bulk earthworks and construction.

Offsets for Stage 1

D90. Within 12 months of the date of this development consent, or as otherwise agreed with the Planning Secretary, the Applicant must retire 172 173 ecosystem credits to offset the removal of 4.41 4.36 hectares of native vegetation on the Site.

Note: If the Applicant seeks a variation to the offset rules, the Applicant must demonstrate that reasonable steps have been taken to find like-for-like offsets in accordance with Section 10.5.4.2 of the FBA and Appendix A of the OEH's NSW Biodiversity Offsets Policy for Major Projects 2014.

In accordance with Principle 3 of the OEH's NSW Biodiversity Offsets Policy for Major Projects 2014, the Policy does not allow variations to the offset rules to be applied to 'threatened species and ecological communities that are considered nationally significant (listed under the Environmental Protection and Biodiversity Conservation Act 1999)'. These must be offset in a like for like manner.

D91. The Applicant shall establish a Biodiversity Offset Area on the Site, consistent with the area described in the RtS, in accordance with a Biodiversity Stewardship Agreement with the Biodiversity Conservation Trust.

Vegetation Management Plan

D91. Within 12 months of the date of this development consent, or as otherwise agreed with the Planning Secretary, the Applicant must prepare and implement a Vegetation Management Plan (VMP) for the restoration and rehabilitation of 4.2 ha of Riparian Corridor adjacent to Ropes Creek to meet the objectives of the Water Management Act 2000.

Biodiversity Management Action Plan

D92. The Applicant must maintain the Biodiversity Offset Area on the Site in accordance with a Biodiversity Management Action Plan approved by the Biodiversity Conservation Trust.

Offsets for the WNSLR

- D93. Within 12 months of the date of this development consent, or as otherwise agreed with the Planning Secretary, the Applicant must:
 - offset 0.42 ha of vegetation lost in the Erskine Park Biodiversity Corridor as a result of the WNSLR by carrying out planting within the area shown in green edging on Figure in Appendix 6; and
 - (b) plant the area shown in green edging on **Figure** of **Appendix 6** with species similar to those identified for zone 4a, on the south-eastern side of Ropes Creek, in the Biodiversity Management Plan Erskine Park Employment Area (HLA-Envirosciences, 2 May 2006).
- D94. The Applicant shall monitor and maintain the planting for a period of six months to ensure a minimum 85% survival rate of the planting.
- D95. The Applicant must notify the Planning Ministerial Corporation at least one month before the completion of planting to enable the Planning Ministerial Corporation to arrange ongoing maintenance.

Snake Management Measures

D96. Prior to construction of Stage 1, the Applicant must implement snake management measures to limit, to the extent practicable, movement of snakes from the Site into the adjacent school and retirement village on the western boundary of the Site. The measures shall be detailed in the CEMP required by Condition D119 and shall include, but not be limited to, provision of alternative snake habitat on Site, fencing along the western boundary and installation of snake deterrents.

BUSHFIRE PROTECTION

- D97. The Applicant shall ensure Stage 1 complies with:
 - (a) the relevant provisions of Planning for Bushfire Protection 2019;
 - (b) the construction standards and asset protection zone requirements recommended in the Oakdale Industrial Estate - West Bushfire Protection Assessment, prepared by Australian Bushfire Protection Planners Pty Ltd, dated September 2016, and updated 13 January 2020, and the SSD-7348 (MOD 6) Bushfire Hazard Assessment prepared by Blackash Bushfire Consulting, dated 12 November 2020; and
 - (c) AS2419.1 2005 Fire Hydrant Installations for firefighting water supply.

AIR QUALITY

Dust Minimisation

- D98. The Applicant must take all reasonable steps to minimise dust generated during all works authorised by this consent.
- D99. During construction of Stage 1, the Applicant must ensure that:
 - (a) exposed surfaces and stockpiles are suppressed by regular watering;
 - (b) all trucks entering or leaving the Site with loads have their loads covered;
 - (c) trucks associated with Stage 1 do not track dirt onto the public road network;
 - (d) public roads used by these trucks are kept clean; and
 - (e) land stabilisation works are carried out progressively on site to minimise exposed surfaces.

Construction Air Quality Management Plan

- D100. Prior to the commencement of construction of Stage 1, the Applicant must prepare a Construction Air Quality Management Plan (CAQMP) to the satisfaction of the Planning Secretary. The CAQMP must form part of the CEMP required by Condition D119 and must:
 - (a) be prepared by a suitably qualified and experienced person(s);
 - (b) detail and rank all emissions from all construction activities, including particulate emissions;

- (c) describe a program that is capable of evaluating the performance of the construction and determining compliance with key performance indicators;
- (d) identify the control measures that will be implemented for each emission source; and
- (e) nominate the following for each of the proposed controls:
 - (i) key performance indicator;
 - (ii) monitoring method;
 - (iii) location, frequency and duration of monitoring;
 - (iv) record keeping;
 - (v) complaints register;
 - (vi) response procedures; and
 - (vii) compliance monitoring.

D101. The Applicant must:

- (a) not commence construction of Stage 1 until the CAQMP required by Condition D100 is approved by the Planning Secretary; and
- (b) implement the most recent version of the CAQMP approved by the Planning Secretary for the duration of construction.

Odour Management

D102. The Applicant must ensure Stage 1 does not cause or permit the emission of any offensive odour, as defined in the POEO Act.

ABORIGINAL HERITAGE

Statutory Requirements

D103. Prior to the commencement of construction of Stage 1, the Applicant must register identified Aboriginal items or objects on the OEH's Aboriginal Heritage Information Management System (AHIMS) Aboriginal Sites Register.

Archaeological Test Excavation

- D104. Prior to the commencement of construction of Stage 1, the Applicant must undertake archaeological test excavation in the identified area of archaeological sensitivity adjacent to Ropes Creek and the ridgeline immediately to the west, that would be impacted by Stage 1. The test excavation must:
 - (a) be undertaken in accordance with a methodology developed in consultation with registered Aboriginal parties;
 - (b) be undertaken in accordance with the requirements of the Heritage and Community Engagement, Department of Premier and Cabinet (former NSW OEH Heritage Division); and
 - (c) include a report detailing any further work, including archaeological salvage and monitoring, conducted in the presence of Aboriginal stakeholders.
- D105. The Applicant must not commence construction of Stage 1 until the Archaeological Test Excavation Report is provided to the Heritage and Community Engagement, Department of Premier and Cabinet (former NSW OEH Heritage Division) and the Planning Secretary.

Unexpected Finds Protocol

D106. If any item or object of Aboriginal heritage significance is identified on Site:

- (a) all work in the immediate vicinity of the suspected Aboriginal item or object must cease immediately;
- (b) a 10 m wide buffer area around the suspected item or object must be cordoned off; and
- (c) the Biodiversity and Conservation Division of the Department must be contacted immediately.

D107. Work in the immediate vicinity of the Aboriginal item or object may only recommence in accordance with the provisions of Part 6 of the *National Parks and Wildlife Act 1974* (NSW).

HISTORIC HERITAGE

Unexpected Finds Protocol

D108. If any archaeological relics are uncovered during construction of Stage 1, then all works in the immediate vicinity of the relic must cease immediately. Unexpected finds must be evaluated and recorded in accordance the requirements of Department of Premier and Cabinet, Heritage (former NSW OEH Heritage Division).

HAZARDS AND RISK

Dangerous Goods

D109. The storage of dangerous goods in Building 1A must not exceed the quantities provided in Table 6.

Table 6: Maximum	storage	auantities d	of danae	erous aoods

Class	Description	Packing Group	Quantity (kg)
1.4	Explosives	n/a	20,000
2.1	Flammable gas (LPG)	n/a	4125 (7,500 L)
2.1	Flammable gas (LPG) – kitchen	n/a	247.5 (450 L)
2.1	Flammable gas (aerosols)	n/a	70,000
2.2	Non-flammable, non-toxic gas (aerosols)	n/a	25,000
3	Flammable liquids	II & III	300,000
4.1	Flammable solids	III	24,000
5.1	Oxidising agents	HI	25,000
6.1	Toxic substances	II	45,000
8	Corrosive substances	II & III	60,000
9	Miscellaneous Dangerous Goods	III	105,000

D109A

Pre-Construction

- (a) The Applicant must prepare the studies set out under section (b) and (c) below (the pre-construction studies). Construction, other than of preliminary works that are outside the scope of the hazard studies, must not commence until study recommendations have been considered and, where appropriate, acted upon. The Applicant must submit the studies to the Planning Secretary no later than one month prior to the commencement of construction of Building 1A (other than preliminary works), or within such further period as the Planning Secretary may agree.
- (b) A Fire Safety Study for Building 1A. This study must cover the relevant aspects of the Department of Planning's Hazardous Industry Planning Advisory Paper No. 2, 'Fire Safety Study Guidelines' and the New South Wales Government's 'Best Practice Guidelines for Contaminated Water Retention and Treatment Systems'. The study must meet the requirements of Fire and Rescue NSW.
- (c) A Final Hazard Analysis (FHA) of Building 1A, consistent with the Department of Planning's Hazardous Industry Planning Advisory Paper No. 6, 'Hazard Analysis'. The FHA must report:
 - layout of dangerous goods storage area for specific dangerous goods classes; firewall and fire safety requirement between the dangerous goods storage and Energy Complex 2;
 - implementation of all recommendations of the Preliminary Hazard Analysis prepared by RiskCon Engineering dated 24 October 2019
 - · compliance with all relevant standards.

Pre-Commissioning

(a) Prior to commissioning Building 1A, the Applicant must develop and implement the plans and systems set out under subsection (b) to (c) below. The Applicant must

- submit to the Planning Secretary documentation describing the plans and systems no later than two months prior to the commencement of commissioning of Building 1A, or within such further period as the Planning Secretary may agree.
- (b) A comprehensive Emergency Plan and detailed emergency procedures for Building 1A. This plan must include detailed procedures for the safety of all people outside of the project who may be at risk from the project. The plan must be consistent with the Department of Planning's Hazardous Industry Planning Advisory Paper No. 1, 'Emergency Planning'.
- (c) A document setting out a comprehensive Safety Management System, covering all onsite operations and associated transport activities involving hazardous materials. The document must clearly specify all safety related procedures, responsibilities and policies, along with details of mechanisms for ensuring adherence to the procedures. The Safety Management System must be consistent with the Department of Planning's Hazardous Industry Planning Advisory Paper No. 9, 'Safety Management'. Records must be kept on-site and shall be available for inspection by the Planning Secretary upon request.

Pre-startup

Hazard Audit

(a) Twelve months after the commencement of operation of Building 1A and every five years thereafter, or at such intervals as the Planning Secretary may agree, the Applicant must carry out a comprehensive Hazard Audit of Building 1A and within one month of each audit submit a report to the Planning Secretary.

The audits must be carried out at the Applicant's expense by a qualified person or team, independent of the development, and must be consistent with the Department of Planning's Hazardous Industry Planning Advisory Paper No. 5, 'Hazard Audit Guidelines'.

D109B The Applicant must not store more than 1.1 million kilograms of combustible liquid commodities at warehouse Building 1A.

Bunding

D110. The Applicant must store all chemicals, fuels and oils used on Site in appropriately bunded areas in accordance with the requirements of all relevant Australian Standards, and/or EPA's Storing and Handling of Liquids: Environmental Protection – Participants Manual (Department of Environment and Climate Change, 2007).

WASTE MANAGEMENT

Waste Storage

D111. Waste must be secured and maintained within designated waste storage areas at all times and must not leave the Site onto neighbouring public or private properties.

Waste Management Plan

D112. The Applicant must implement the Waste Management Plan (WMP) in the EIS for the duration of construction and operation of Stage 1.

Statutory Requirements

- D113. The Applicant must assess and classify all liquid and non-liquid wastes to be taken off Site in accordance with the latest version of EPA's *Waste Classification Guidelines Part 1: Classifying Waste* (EPA, 2014) and dispose of all wastes to a facility that may lawfully accept the waste.
- D114. Waste generated outside the Site must not be received at the Site for storage, treatment, processing, reprocessing, or disposal.

Pests, Vermin and Noxious Weed Management

D115. The Applicant must:

- (a) implement suitable measures to manage pests, vermin and declared noxious weeds on the Site; and
- (b) inspect the Site on a regular basis to ensure that these measures are working effectively, and that pests, vermin or noxious weeds are not present on Site in sufficient numbers to pose an environmental hazard or cause the loss of amenity in the surrounding area.

Note: For the purposes of this condition, noxious weeds are those species subject to an order declared under the Biosecurity Act 2015 (NSW).

CONTAMINATION

D116. Prior to the commencement of construction of Stage 1, the Applicant must prepare an unexpected finds protocol to ensure that potentially contaminated material is appropriately managed. The procedure must form part of the CEMP in accordance with Condition D119 and must ensure any material identified as contaminated is disposed offsite, with the disposal location and results of testing submitted to the Planning Secretary, prior to its removal from the Site.

COMMUNITY ENGAGEMENT

D117. The Applicant must consult with the community regularly throughout Stage 1, including consultation with the nearby sensitive receivers identified in **Appendix 5**, relevant regulatory authorities, Registered Aboriginal Parties and other interested stakeholders. Community engagement shall be undertaken in accordance with the Community Communication Strategy approved in accordance with Condition C19.



PART 3 - ENVIRONMENTAL MANAGEMENT, REPORTING AND AUDITING

MANAGEMENT PLAN REQUIREMENTS

- D118. Management plans required under this consent must be prepared in accordance with relevant guidelines, and include:
 - (a) details of:
 - (i) the relevant statutory requirements (including any relevant approval, licence or lease conditions);
 - (ii) any relevant limits or performance measures and criteria; and
 - (iii) the specific performance indicators that are proposed to be used to judge the performance of, or guide the implementation of, Stage 1 or any management measures:
 - (b) a description of the measures to be implemented to comply with the relevant statutory requirements, limits, or performance measures and criteria;
 - (c) a program to monitor and report on the:
 - (i) impacts and environmental performance of Stage 1; and
 - (ii) effectiveness of the management measures set out pursuant to paragraph (b) above;
 - a contingency plan to manage any unpredicted impacts and their consequences and to ensure that ongoing impacts reduce to levels below relevant impact assessment criteria as quickly as possible;
 - (e) a program to investigate and implement ways to improve the environmental performance of Stage 1 over time;
 - (f) a protocol for managing and reporting any:
 - (i) incident and any non-compliance (specifically including any exceedance of the impact assessment criteria and performance criteria);
 - (ii) complaint;
 - (iii) failure to comply with statutory requirements; and
 - (g) a protocol for periodic review of the plan.

Note: The Planning Secretary may waive some of these requirements if they are unnecessary or unwarranted for particular management plans.

CONSTRUCTION ENVIRONMENTAL MANAGEMENT PLAN

- D119. The Applicant must prepare a Construction Environmental Management Plan (CEMP) for Stage 1, including the WNSLR, in accordance with the requirements of Condition D118 and to the satisfaction of the Planning Secretary. The Applicant may prepare separate CEMPs for the Stage 1 works and the WNSLR, addressing all relevant requirements of this consent.
- D120. Prior to finalising the CEMP, the Applicant must consult with TfNSW (including the former RMS), Council and Water NSW. The Applicant must also attend a site visit with Water NSW personnel to mark the exact works area for the WNSLR bridge crossing.
- D121. As part of the CEMP required under Condition D119 of this consent, the Applicant must include:
 - (a) detailed procedures for managing bulk earthworks to avoid adverse water quality impacts on Ropes Creek, including, but not limited to:
 - (i) any staging of earthworks to minimise disturbed areas;
 - (ii) limits on the areal extent of earthworks;
 - (iii) progressive grassing of exposed areas, as soon as reasonably practicable, focusing on areas where building construction will occur at a later stage:
 - (b) Landscape Management Plan (LMP) (see Condition D35);

- (c) Construction Traffic Management Plan (CTMP) (see Condition D65);
- (d) Consultation Schedule for TfNSW and Water NSW (see Conditions D57 and D58);
- (e) Construction Noise and Vibration Management Plan (CNVMP) (see Condition D73);
- (f) Fill Importation Protocol (see Condition D79) and Erosion and Sediment Control Plan (see Condition D80);
- (g) Flora and Fauna Management Plan (FFMP) (see Condition D88);
- (h) Snake Management Measures (see Condition D96);
- (i) Construction Air Quality Management Plan (CAQMP) (see Condition D100);
- (j) Unexpected Finds Protocol (see Conditions D106 and D108);
- (k) Unexpected Contamination Protocol (see Condition D116); and
- (I) a Community Consultation and Complaints Handling Procedure.

D122. The Applicant must:

- (a) not commence construction of Stage 1 until the CEMP is approved by the Planning Secretary; and
- (b) carry out the construction of Stage 1 in accordance with the CEMP approved by the Planning Secretary and as revised and approved by the Planning Secretary from time to time.

ENVIRONMENTAL REPRESENTATIVE

- D123. The Applicant must engage an Environmental Representative (ER) to oversee construction of Stage 1. Construction of Stage 1 must not commence until an ER has been approved by the Planning Secretary and engaged by the Applicant.
- D124. The Planning Secretary's approval of an ER must be sought no later than one month before the commencement of construction of Stage 1, or within another timeframe agreed with the Planning Secretary.
- D125. The proposed ER must be a suitably qualified and experienced person who was not involved in the preparation of the EIS or RtS and is independent from the design and construction personnel for Stage 1.
- D126. The Applicant may engage more than one ER for Stage 1, in which case the functions to be exercised by an ER under the terms of this approval may be carried out by any ER that is approved by the Planning Secretary for the purposes of Stage 1.
- D127. For the duration of construction of Stage 1, or as agreed with the Planning Secretary, the approved ER must:
 - (a) receive and respond to communication from the Planning Secretary in relation to the environmental performance of Stage 1;
 - (b) consider and inform the Planning Secretary on matters specified in the terms of this consent;
 - (c) consider and recommend to the Applicant any improvements that may be made to work practices to avoid or minimise adverse impact to the environment and to the community;
 - (d) review the CEMP identified in Condition D119 and any other documents that are identified by the Planning Secretary, to ensure they are consistent with requirements in or under this consent, and if so:
 - (i) make a written statement to this effect before submission of such documents to the Planning Secretary (if those documents are required to be approved by the Planning Secretary); or
 - (ii) make a written statement to this effect before the implementation of such documents (if those documents are required to be submitted to the Planning Secretary/Department for information or are not required to be submitted to the Planning Secretary/Department);

- (e) regularly monitor the implementation of the CEMP, and any other documents identified by the Planning Secretary, to ensure implementation is being carried out in accordance with the document and the terms of this consent:
- (f) as may be requested by the Planning Secretary, help plan, attend or undertake audits of Stage 1 commissioned by the Department including scoping audits, programming audits, briefings, and site visits;
- (g) as may be requested by the Planning Secretary, assist the Department in the resolution of community complaints;
- (h) prepare and submit to the Planning Secretary and other relevant regulatory agencies, for information, an Environmental Representative Monthly Report providing the information set out in the Environmental Representative Protocol under the heading "Environmental Representative Monthly Report must be submitted within seven calendar days following the end of each month for the duration of the ER's engagement, or as otherwise agreed with the Planning Secretary.
- D128. The Applicant must provide the ER with all documentation requested by the ER in order for the ER to perform their functions specified in Condition D127 (including preparation of the ER monthly report), as well as:
 - (a) the complaints register; and
 - (b) a copy of any assessment carried out by the Applicant of whether proposed work is consistent with the consent (which must be provided to the ER before the commencement of the subject work).
- D129. The Planning Secretary may at any time commission an audit of an ER's exercise of its functions under Condition D142. The Applicant must:
 - (a) facilitate and assist the Planning Secretary in any such audit; and
 - (b) make it a term of their engagement of an ER that the ER facilitate and assist the Planning Secretary in any such audit.

OPERATIONAL ENVIRONMENTAL MANAGEMENT PLAN

- D130. The Applicant must prepare an Operational Environmental Management Plan (OEMP) in accordance with the requirements of Condition D118 and to the satisfaction of the Planning Secretary.
- D131. As part of the OEMP required under Condition D130 of this consent, the Applicant must include the following:
 - (a) describe the role, responsibility, authority and accountability of all key personnel involved in the environmental management of operation of Stage 1;
 - (b) describe the procedures that would be implemented to:
 - (i) keep the local community and relevant agencies informed about the operation and environmental performance of Stage 1;
 - (ii) receive, handle, respond to, and record complaints;
 - (iii) resolve any disputes that may arise;
 - (iv) respond to any non-compliance;
 - (v) respond to emergencies; and
 - (c) include the following environmental management plans:
 - (i) Landscape Management Plan (LMP) (see Condition D35);
 - (ii) Flora and Fauna Management Plan (FFMP) (see Condition D88);
 - (iii) Waste Management Plan (WMP) (see Condition D112).
- D132. The Applicant must:

- (a) not commence operation until the OEMP is approved by the Planning Secretary; and
- (b) operate Stage 1 in accordance with the OEMP approved by the Planning Secretary (and as revised and approved by the Planning Secretary from time to time).

REVISION OF STRATEGIES, PLANS AND PROGRAMS

- D133. Within three months of:
 - (a) the submission of a Compliance Report under Condition D141;
 - (b) the submission of an Environmental Representative Monthly Report under Condition D127;
 - (c) the submission of an incident report under Condition D135;
 - (d) the approval of any modification of the conditions of this consent; or
 - (e) the issue of a direction of the Planning Secretary under Condition D2(b) which requires a review,

the strategies, plans and programs required under this consent must be reviewed.

D134. If necessary, to either improve the environmental performance of Stage 1, cater for a modification or comply with a direction, the strategies, plans and programs required under this consent must be revised, to the satisfaction of the Planning Secretary. Where revisions are required, the revised document must be submitted to the Planning Secretary for approval within six weeks of the review.

Note: This is to ensure strategies, plans and programs are updated on a regular basis and to incorporate any recommended measures to improve the environmental performance of Stage 1.

REPORTING AND AUDITING

Incident Notification, Reporting and Response

D135. The Department must be notified in writing to compliance@planning.nsw.gov.au immediately after the Applicant becomes aware of an incident. The notification must identify the development (including the development application number and the name of the development if it has one) and set out the location and nature of the incident. Subsequent notification requirements must be given, and reports submitted in accordance with the requirements set out in **Appendix 8**.

Non-Compliance Notification

- D136. The Department must be notified in writing to compliance@planning.nsw.gov.au within seven (7) days after the Applicant becomes aware of any non-compliance.
- D137. A non-compliance notification must identify the development and the application number for it, set out the condition of consent that the development is non-compliant with, the way in which it does not comply and the reasons for the non-compliance (if known) and what actions have been, or will be, undertaken to address the non-compliance.
- D138. A non-compliance which has been notified as an incident does not need to also be notified as a non-compliance.

Compliance Reporting

- D139. No later than 6 weeks before the date notified for the commencement of construction, a Compliance Monitoring and Reporting Program prepared in accordance with the Compliance Reporting Post Approval Requirements (Department 2018) must be submitted to the Department.
- D140. Compliance Reports of the Development must be carried out in accordance with the Compliance Reporting Post Approval Requirements (Department 2018).
- D141. The Applicant must make each Compliance Report publicly available no later than 60 days after submitting it to the Department and notify the Department in writing at least 7 days before this is done.

Monitoring and Environmental Audits

D142. Any condition of this consent that requires the carrying out of monitoring or an environmental audit, whether directly or by way of a plan, strategy or program, is taken to be a condition requiring monitoring or an environmental audit under Division 9.4 of Part 9 of the EP&A Act. This includes conditions in respect of incident notification, reporting and response, non-compliance notification, compliance reporting and independent auditing.

Note: For the purposes of this condition, as set out in the EP&A Act, "monitoring" is monitoring of the development to provide data on compliance with the consent or on the environmental impact of the development, and an "environmental audit" is a periodic or particular documented evaluation of the development to provide information on compliance with the consent or the environmental management or impact of the development.

ACCESS TO INFORMATION

- D143. At least 48 hours before the commencement of construction until the completion of all works under this consent, the Applicant must:
 - (a) make the following information and documents (as they are obtained or approved) publicly available on its website:
 - (i) the documents referred to in Condition D2 of this consent;
 - (ii) all current statutory approvals for the Development;
 - (iii) all approved strategies, plans and programs required under the conditions of this consent;
 - (iv) the proposed staging plans for the Development if the construction, operation or decommissioning of the Development is to be staged;
 - (v) regular reporting on the environmental performance of the Development in accordance with the reporting requirements in any plans or programs approved under the conditions of this consent;
 - (vi) a comprehensive summary of the monitoring results of the Development, reported in accordance with the specifications in any conditions of this consent, or any approved plans and programs;
 - (vii) a summary of the current stage and progress of the Development;
 - (viii) contact details to enquire about the Development or to make a complaint;
 - (ix) a complaints register, updated monthly;
 - (x) the Compliance Report of the Development;
 - (xi) audit reports prepared as part of any monitoring or environmental audit of the Development and the Applicant's response to the recommendations in any audit report;
 - (xii) any other matter required by the Planning Secretary; and
 - (b) keep such information up to date, to the satisfaction of the Planning Secretary.

APPENDIX 1 CONCEPT PROPOSAL

Table 7: Schedule of Approved Plans – Concept Proposal

	Architectural Plans prepared by SBA Architects				
Drawing	Title	Issue	Date		
OAK MP 02	Estate Masterplan	F	22 November 2022		
OAK MP 03	Western North South Link Road	В	30 July 2020		
OAK MP 05	Precinct 1 Plan	F	30 July 2020		
OAK MP 06	Precinct Plan	С	24 November 2020		
OAK MP 07	Indicative Ultimate Lot Layout	С	2 June 2021		
OAK MP 08	Site Analysis Plan	В	30 July 2020		
OAK MP 11	Building Staging Plan (Indicative)	В	2 June 2021		
OAK MP 12	Signage Precinct 1 Plan	F	2 August 2022		
OAK MP 13	Fire Protection Plan	F	25 November 2020		

	Landscape Plans prepared by Scape Design Landscape Architecture				
Drawing	Title	Issue	Date		
L.SK.000	Cover Sheet	В	8/01/21		
L.SK.100	Landscape Master Plan – OWE MOD 6	В	8/01/21		
L.SK.101	Street Trees & Planting Masterplan	В	8/01/21		
L.SK.102	Planting Schedule – OWE MOD 5	В	8/01/21		
L.SK.200	Landscape Sections – OWE MOD 5	Α	26/10/20		
L.SK.00 - 07, 105, 106, 200, 201 and 202	Landscape Drawing Set – OWE Lots 2A, 2C and 2D	-	23/11/21		

	B1. Civil Plans prepared by AT&L				
Drawing	Title	Issue	Date		
15-272-C0000	Cover Sheet	A11	4-6-21		
15-272-C0001	General Arrangement Master Plan	A15	4-6-21		
15-272-C0002	Existing Site Plan	A14	4-6-21		
15-272-C0003	Precinct Plan	A15	4-6-21		
15-272-C0004	Stage 1 SSD Approval Extents Sheet 1 of 2	A18	4-6-21		
15-272-C0005	Stage 1 SSD Approval Extents Sheet 2 of 2	A13	4-6-21		
15-272-C0006	Cut/Fill Plan	A13	4-6-21		
15-272-C0007	Stormwater Drainage Catchment Plan (Pre-Developed)	A11	4-6-21		
15-272-C0008	Stormwater Drainage Catchment Plan (Developed)	A11	4-6-21		
15-272-C0009	Erosion and Sediment Control Master Plan	A14	4-6-21		
15-272-C0010	Typical Sections Sheet 1	A13	4-6-21		

15-272-C0011	Typical Sections Sheet 2	A11	4-6-21
15-272-C0012	Typical Sections Sheet 3	A12	4-6-21
15-272-C0013	Typical Sections Sheet 4	A10	4-6-21
15-272-C0014	Typical Sections Sheet 5	A1	4-6-21
15-272-C0020	Western North-South Link Road General Arrangement Plan	A12	4-6-21
15-272-C0021	Western North-South Link Road Stormwater Drainage Catchment Plan (Pre-Developed)	A11	4-6-21
15-272-C0022	Western North-South Link Road Stormwater Drainage Catchment Plan (Developed)	A11	4-6-21
15-272-C0023	Western North-South Link Road	A15	4-6-21
	Proposed Land Acquisition Plan		
15-272-C1003	Precinct General Arrangement Plan	A18	4-6-21
15-272-C1004	Typical Site Sections Sheet 1 of 6	A14	4-6-21
15-272-C1005	Typical Site Sections Sheet 2 of 6	A13	4-6-21

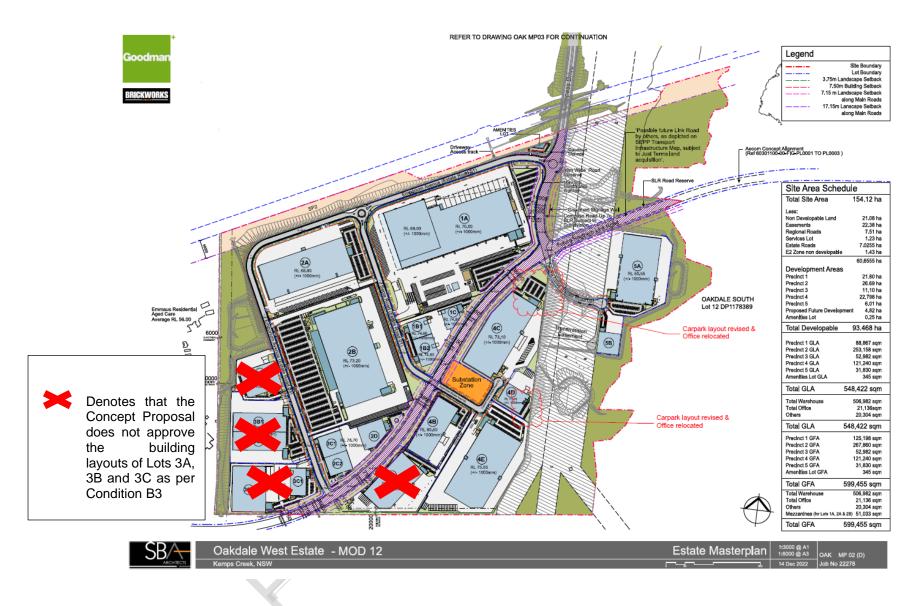


Figure 1: Concept Proposal Layout (MOD 12)



Figure 2: Staging Plan (MOD 11)

APPENDIX 2 STAGE 1 DA PLANS

Table 8: Schedule of Approved Plans – Stage 1 DA

Architectural Plans prepared by SBA Architects				
Drawing	Title	Date		
OAK MP 04 (Z)	SSDA Stage 1 Development – Precinct 1	21 Sept 2018		
OAK MP 05 (Z)	Precinct 1 Plan	21 Sept 2018		
OAK MP 12 (12)	Signage Precinct 1 Plan	21 Sept 2018		
	Building 1A plans prepared by SBA Architects			
OAK 1A DA 10 (H)	Site Plan/Floor Plan	04 May 2018		
OAK 1A DA 11 (C)	Roof Plan	03 April 2017		
OAK 1A DA 12 (C)	Office Plan - Ground Floor	06 Sept 2016		
OAK 1A DA 13 (c)	Office Plan - First Floor	06 Sept 2016		
OAK 1A DA 14 (C)	Elevations Office	06 Sept 2016		
OAK 1A DA 15 (C)	Elevations 1A	03 April 2017		
OAK 1A DA 16 (D)	Sections	4 May 2018		
	Building 1B plans prepared by SBA Architects			
OAK 1B DA 20 (F)	Site Plan/Floor Plan	17 April 2018		
OAK 1B DA 21 (C)	Roof Plan	06 Sept 2016		
OAK 1B DA 22 (B)	Office Plan	06 Sept 2016		
OAK 1B DA 24 (B)	Elevations Office	06 Sept 2016		
OAK 1B DA 25(B)	Elevations 1B	06 Sept 2016		
OAK 1B DA 26 (B)	Sections	06 Sept 2016		
	Building 1C plans prepared by SBA Architects			
OAK 1C DA 30 (H)	Site Plan/Floor Plan	17 April 2018		
OAK 1C DA 31 (C)	Roof Plan	03 April 2017		
OAK 1C DA 32 (B)	Office Plan - Ground Floor	06 Sept 2016		
OAK 1C DA 33 (B)	Office Plan - First Floor	06 Sept 2016		
OAK 1C DA 34 (B)	Elevations Office	06 Sept 2016		
OAK 1C DA 35 (C)	Elevations Sheet 1	03 April 2017		
OAK 1C DA 36 (C)	Elevations Sheet 2	03 Sept 2017		
OAK 1C DA 37 (C)	Sections	03 April 2017		

F	Landscape Plans prepared by Site Image Landscape Architects			
Drawing	Title	Issue	Date	
ELW-101	-	G	11.10.2018	
ELW-102		G	11.10.2018	
ELW-103	- 44	G	11.10.2018	
ELW-104		G	11.10.2018	
ELW-105	-	G	11.10.2018	
ELW-106	-	G	11.10.2018	
ELW-107	-	G	11.10.2018	
ELW-108	-	G	11.10.2018	
ELW-109	-	G	11.10.2018	
ELW-110	-	G	11.10.2018	
ELW-111	-	G	11.10.2018	
ELW-112	-	G	11.10.2018	
ELW-113	-	G	11.10.2018	
ELW-114	-	G	11.10.2018	
WNSLR-101	-	G	11.10.2018	
WNSLR-102	-	G	11.10.2018	
ELW-502	Plant Schedule	G	11.10.2018	
OLW-001	Precinct 1 Landscape Plan	G	11.10.2018	
OLW-501	Planting Palette	G	11-10-	
			2018	

15-272-C0004 Stage 1-SSD Approval Extents Sheet 1 of 2		Civil Plans prepared by AT&L		
15-272-C0005 Stage 1-SSD Approval Extents Sheet 2 of 2	Drawing	Title	Issue	Date
16-272-C0020	15-272-C0004	Stage 1 SSD Approval Extents Sheet 1 of 2	A5	11-10-18
15-272-C0020			A7	24-07-19
15-272-C0020	15-272-C0005	Stage 1 SSD Approval Extents Sheet 2 of 2	A4	21-09-18
16-272-C0020			A6	24-07-19
16-272-C0021 Western North-South Link Road Stormwater Drainage A5 24-07-16	15-272-C0020	Western North-South Link Road General Arrangement Plan		21-09-18
				24-07-19
	15-272-C0021			24-07-19
Catchment Plan (Developed)	15-272-C0022		A3	21-09-18
16-272-C1002			A5	19-07-19
46-272-C4002 Drawing-Liet A6 24-07-45 45-272-C4002 General Notes A6 24-07-45 45-272-C4003 Precinct General Arrangement Plan A8 24-07-15 16-272-C4004 Typical Site Sections Sheet 1 of 6 A4 21-09-18 46-272-C4006 Typical Site Sections Sheet 2 of 6 A4 21-09-18 45-272-C4007 Typical Site Sections Sheet 3 of 6 A4 21-09-18 45-272-C4007 Typical Site Sections Sheet 4 of 6 A3 21-09-18 45-272-C4008 Typical Site Sections Sheet 5 of 6 A3 11-10-18 45-272-C4009 Typical Site Sections Sheet 5 of 6 A4 28-09-18 45-272-C4010 Typical Road Sections A3 21-09-18 46-272-C4010 Typical Road Sections A3 21-09-18 46-272-C4014 Contour Plan A5 20-03-22 45-272-C1014 Bulk Earthworks Cut/Fill Plan A6 20-03-22 45-272-C1016 Earthworks and Stormwater Drainage Plan Sheet 1 of 20 A3 21-09-18 45-272-C1016 Earthworks an	15-272-C0023	Western North-South Link Road Proposed Land Acquisition		24-07-19
46-272-C4002 Drawing-Liet A6 24-07-45 45-272-C4002 General Notes A6 24-07-45 45-272-C4003 Precinct General Arrangement Plan A8 24-07-15 16-272-C4004 Typical Site Sections Sheet 1 of 6 A4 21-09-18 46-272-C4006 Typical Site Sections Sheet 2 of 6 A4 21-09-18 45-272-C4007 Typical Site Sections Sheet 3 of 6 A4 21-09-18 45-272-C4007 Typical Site Sections Sheet 4 of 6 A3 21-09-18 45-272-C4008 Typical Site Sections Sheet 5 of 6 A3 11-10-18 45-272-C4009 Typical Site Sections Sheet 5 of 6 A4 28-09-18 45-272-C4010 Typical Road Sections A3 21-09-18 46-272-C4010 Typical Road Sections A3 21-09-18 46-272-C4014 Contour Plan A5 20-03-22 45-272-C1014 Bulk Earthworks Cut/Fill Plan A6 20-03-22 45-272-C1016 Earthworks and Stormwater Drainage Plan Sheet 1 of 20 A3 21-09-18 45-272-C1016 Earthworks an	15-272-C1000	Cover Sheet	A6	24-07-19
16-272-C1002 General-Netes A6 24-07-15 16-272-C1003 Precinct General Arrangement Plan A8 24-07-15 16-272-C1004 Typical Site Sections Sheet 1 of 6 A4 21-09-16 16-272-C1005 Typical Site Sections Sheet 2 of 6 A4 21-09-16 16-272-C1006 Typical Site Sections Sheet 3 of 6 A4 21-09-16 16-272-C1007 Typical Site Sections Sheet 4 of 6 A3 21-09-16 16-272-C1008 Typical Site Sections Sheet 4 of 6 A3 21-09-16 16-272-C1009 Typical Site Sections Sheet 5 of 6 A3 21-09-16 16-272-C1009 Typical Site Sections Sheet 6 of 6 A4 28-09-16 16-272-C1009 Typical Site Sections Sheet 6 of 6 A4 28-09-16 16-272-C1010 Typical Road Sections A6 20-03-26 16-272-C1010 Typical Road Sections A6 20-03-26 16-272-C1011 Gentour Plan A5 20-03-26 16-272-C1014 Bulk Earthworks Cut/Fill Plan A6 20-03-26 16-272-C1016 Earthworks and Stormwater Drainage Plan Sheet 1 of 20 A3 21-09-16 16-272-C1016 Earthworks and Stormwater Drainage Plan Sheet 2 of 20 A3 21-09-16 16-272-C1010 Earthworks and Stormwater Drainage Plan Sheet 3 of 20 A3 21-09-16 16-272-C1010 Earthworks and Stormwater Drainage Plan Sheet 4 of 20 A3 21-09-16 16-272-C1010 Earthworks and Stormwater Drainage Plan Sheet 5 of 20 A3 21-09-16 16-272-C1010 Earthworks and Stormwater Drainage Plan Sheet 6 of 20 A3 21-09-16 16-272-C1010 Earthworks and Stormwater Drainage Plan Sheet 6 of 20 A3 21-09-16 16-272-C1020 Earthworks and Stormwater Drainage Plan Sheet 6 of 20 A3 21-09-16 16-272-C1021 Earthworks and Stormwater Drainage Plan Sheet 6 of 20 A3 21-09-16 16-272-C1022 Earthworks and Stormwater Drainage Plan Sheet 6 of 20 A3 21-09-16 16-272-C1024 Earthworks and Stormwater Drainage Plan Sheet 6 of 20 A3 21-09-16 16-272-C1024 Earthworks and Stormwater Drainage Plan Sheet 7 of 20 A3 21-09-16 16-272-C1024 Earthworks and Stormwater Drainage Plan Sheet 10 of 20 A3 21-09-16 16-272-C1026 Earthworks and Storm				
15-272-C1003				
16-272-C1004 Typical Site Sections Sheet 1 of 6				
A8				
15-272-C1006	10-2/2-61004	Typical Site Sections Sheet 1 of 6		
Typical Site Sections Sheet 3 of 6	45.070.04005	The street Office Occupies as Object Occupies		
15-272-C1006 Typical Site Sections Sheet 3 of 6	15-2/2-C1005	Typical Site Sections Sheet 2 of 6		
Typical Site Sections Sheet 4 of 6				
15-272-C1007 Typical Site Sections Sheet 4 of 6 A3 21-09-16 15-272-C1008 Typical Site Sections Sheet 5 of 6 A3 11-10-16 15-272-C1009 Typical Site Sections Sheet 6 of 6 A4 28-09-18 15-272-C1010 Typical Road Sections A3 21-09-18 15-272-C1011 Centour Plan A5 20-03-20 15-272-C1014 Bulk Earthworks Cut/Fill Plan A6 20-03-20 15-272-C1015 Earthworks and Stormwater Drainage Plan Sheet 1 of 20 A3 21-09-18 15-272-C1016 Earthworks and Stormwater Drainage Plan Sheet 2 of 20 A3 21-09-18 15-272-C1017 Earthworks and Stormwater Drainage Plan Sheet 3 of 20 A3 21-09-18 15-272-C1018 Earthworks and Stormwater Drainage Plan Sheet 4 of 20 A3 21-09-18 15-272-C1018 Earthworks and Stormwater Drainage Plan Sheet 5 of 20 A3 21-09-18 15-272-C1020 Earthworks and Stormwater Drainage Plan Sheet 5 of 20 A3 21-09-18 15-272-C1021 Earthworks and Stormwater Drainage Plan Sheet 5 of 20 A3 21-09-18 15-272-C1022	15-272-C1006	Typical Site Sections Sheet 3 of 6		
15-272-C1008 Typical Site Sections Sheet 5 of 6 A3 14-10-48				
Typical Site Sections Sheet 5 of 6	15-272-C1007	Typical Site Sections Sheet 4 of 6	A3	21-09-18
15-272-C1009 Typical Site Sections Sheet 6 of 6			A5	24-07-19
15-272-C1009 Typical Site Sections Sheet 6 of 6 A4 28-09-18 A6 20-03-26 20-03-26 20-03-26 20-03-26 A5 21-09-18 A6 20-03-26 20-03-2	15-272-C1008	Typical Site Sections Sheet 5 of 6	A3	11-10-18
15-272-C1010 Typical Road Sections			A6	20-03-20
15-272-C1010 Typical Road Sections	15-272-C1009	Typical Site Sections Sheet 6 of 6	A4	28-09-18
45-272-C1010 Typical Road Sections A3 21-09-18 24-07-19 45-272-C1014 Contour Plan A5 20-03-20 45-272-C1014 Bulk Earthworks Cut/Fill Plan A6 20-03-20 45-272-C1015 Earthworks and Stormwater Drainage Plan Sheet 1 of 20 A3 21-09-18 45-272-C1016 Earthworks and Stormwater Drainage Plan Sheet 2 of 20 A3 21-09-18 45-272-C1017 Earthworks and Stormwater Drainage Plan Sheet 3 of 20 A3 21-09-18 45-272-C1018 Earthworks and Stormwater Drainage Plan Sheet 4 of 20 A3 21-09-18 45-272-C1019 Earthworks and Stormwater Drainage Plan Sheet 5 of 20 A3 21-09-18 45-272-C1020 Earthworks and Stormwater Drainage Plan Sheet 6 of 20 A3 21-09-18 45-272-C1021 Earthworks and Stormwater Drainage Plan Sheet 7 of 20 A3 21-09-18 45-272-C1022 Earthworks and Stormwater Drainage Plan Sheet 8 of 20 A3 21-09-18 45-272-C1023 Earthworks and Stormwater Drainage Plan Sheet 10 of 20 A3 21-09-18 45-272-C1024 Earthworks and Stormwater Drainage Plan Sheet 10 of 20 <td< td=""><td></td><td>,,</td><td>A6</td><td>20-03-20</td></td<>		,,	A6	20-03-20
45-272-C1014 Contour Plan A5 20-03-20 45-272-C1014 Bulk Earthworks Cut/Fill Plan A6 20-03-20 45-272-C1015 Earthworks and Stormwater Drainage Plan Sheet 1 of 20 A3 21-09-18 45-272-C1016 Earthworks and Stormwater Drainage Plan Sheet 2 of 20 A3 21-09-18 45-272-C1017 Earthworks and Stormwater Drainage Plan Sheet 3 of 20 A3 21-09-18 45-272-C1018 Earthworks and Stormwater Drainage Plan Sheet 4 of 20 A3 21-09-18 45-272-C1019 Earthworks and Stormwater Drainage Plan Sheet 5 of 20 A3 21-09-18 45-272-C1020 Earthworks and Stormwater Drainage Plan Sheet 6 of 20 A3 21-09-18 45-272-C1021 Earthworks and Stormwater Drainage Plan Sheet 7 of 20 A3 21-09-18 45-272-C1022 Earthworks and Stormwater Drainage Plan Sheet 8 of 20 A3 21-09-18 45-272-C1023 Earthworks and Stormwater Drainage Plan Sheet 9 of 20 A3 21-09-18 45-272-C1024 Earthworks and Stormwater Drainage Plan Sheet 10 of 20 A3 21-09-18 45-272-C1025 Earthworks and Stormwater Drainage Plan Sheet 10 of 20	15-272-C1010	Typical Road Sections	A3	21-09-18
15-272-C1014 Bulk Earthworks Cut/Fill Plan A6 20-03-20 15-272-C1015 Earthworks and Stormwater Drainage Plan Sheet 1 of 20 A3 21-09-18 15-272-C1016 Earthworks and Stormwater Drainage Plan Sheet 2 of 20 A3 21-09-18 15-272-C1017 Earthworks and Stormwater Drainage Plan Sheet 3 of 20 A3 21-09-18 15-272-C1018 Earthworks and Stormwater Drainage Plan Sheet 4 of 20 A3 21-09-18 15-272-C1019 Earthworks and Stormwater Drainage Plan Sheet 5 of 20 A3 21-09-18 15-272-C1020 Earthworks and Stormwater Drainage Plan Sheet 6 of 20 A3 21-09-18 15-272-C1021 Earthworks and Stormwater Drainage Plan Sheet 7 of 20 A3 21-09-18 15-272-C1022 Earthworks and Stormwater Drainage Plan Sheet 8 of 20 A3 21-09-18 15-272-C1023 Earthworks and Stormwater Drainage Plan Sheet 9 of 20 A3 21-09-18 15-272-C1024 Earthworks and Stormwater Drainage Plan Sheet 10 of 20 A3 21-09-18 15-272-C1025 Earthworks and Stormwater Drainage Plan Sheet 10 of 20 A3 21-09-18 15-272-C1026 Earthworks and Stormwat	15-272-C1011	Contour Plan		
15-272-C1015 Earthworks and Stormwater Drainage Plan Sheet 1 of 20 A3 21-09-16 15-272-C1016 Earthworks and Stormwater Drainage Plan Sheet 2 of 20 A3 21-09-18 15-272-C1017 Earthworks and Stormwater Drainage Plan Sheet 3 of 20 A3 21-09-18 15-272-C1018 Earthworks and Stormwater Drainage Plan Sheet 4 of 20 A3 21-09-18 15-272-C1019 Earthworks and Stormwater Drainage Plan Sheet 5 of 20 A3 21-09-18 15-272-C1020 Earthworks and Stormwater Drainage Plan Sheet 6 of 20 A3 21-09-18 15-272-C1021 Earthworks and Stormwater Drainage Plan Sheet 7 of 20 A3 21-09-18 15-272-C1022 Earthworks and Stormwater Drainage Plan Sheet 7 of 20 A3 21-09-18 15-272-C1023 Earthworks and Stormwater Drainage Plan Sheet 8 of 20 A3 21-09-18 15-272-C1024 Earthworks and Stormwater Drainage Plan Sheet 10 of 20 A3 21-09-18 15-272-C1025 Earthworks and Stormwater Drainage Plan Sheet 11 of 20 A3 21-09-18 15-272-C1026 Earthworks and Stormwater Drainage Plan Sheet 11 of 20 A3 21-09-18 24-07-19 A3				
15-272-C1016 Earthworks and Stormwater Drainage Plan Sheet 2 of 20				
15-272-C1016 Earthworks and Stormwater Drainage Plan Sheet 2 of 20 A3 21-09-18 15-272-C1017 Earthworks and Stormwater Drainage Plan Sheet 3 of 20 A3 21-09-18 15-272-C1018 Earthworks and Stormwater Drainage Plan Sheet 4 of 20 A3 21-09-18 15-272-C1019 Earthworks and Stormwater Drainage Plan Sheet 5 of 20 A3 21-09-18 15-272-C1020 Earthworks and Stormwater Drainage Plan Sheet 6 of 20 A3 21-09-18 15-272-C1021 Earthworks and Stormwater Drainage Plan Sheet 7 of 20 A3 21-09-18 15-272-C1022 Earthworks and Stormwater Drainage Plan Sheet 8 of 20 A3 21-09-18 15-272-C1023 Earthworks and Stormwater Drainage Plan Sheet 9 of 20 A3 21-09-18 15-272-C1024 Earthworks and Stormwater Drainage Plan Sheet 10 of 20 A3 21-09-18 15-272-C1025 Earthworks and Stormwater Drainage Plan Sheet 11 of 20 A3 21-09-18 15-272-C1026 Earthworks and Stormwater Drainage Plan Sheet 11 of 20 A3 21-09-18 15-272-C1026 Earthworks and Stormwater Drainage Plan Sheet 12 of 20 A3 21-09-18	10-212-01010	Lattiworks and Stormwater Drainage Fian Sheet 1 of 20	_	
15-272-C1021 Earthworks and Stormwater Drainage Plan Sheet 3 of 20 A3 21-09-18 A5 24-07-19 A5	15 070 C1016	Forthwarks and Starmwater Prainage Plan Chast 2 of 20		
Earthworks and Stormwater Drainage Plan Sheet 3 of 20	15-2/2-61016	Earthworks and Stormwater Drainage Plan Sheet 2 of 20		
15-272-C1018 Earthworks and Stormwater Drainage Plan Sheet 4 of 20 A3 21-09-18 24-07-19 15-272-C1019 Earthworks and Stormwater Drainage Plan Sheet 5 of 20 A3 21-09-18 24-07-19 24-07-19 A5 24-07-19 24-07-19 Earthworks and Stormwater Drainage Plan Sheet 6 of 20 A3 21-09-18 24-07-19 24-07-19 Earthworks and Stormwater Drainage Plan Sheet 7 of 20 A3 21-09-18 24-07-19 24-07-19 Earthworks and Stormwater Drainage Plan Sheet 8 of 20 A3 21-09-18 24-07-19 24-07-19 24-07-19 Earthworks and Stormwater Drainage Plan Sheet 9 of 20 A3 21-09-18 24-07-19 24-0	45.070.04047			
15-272-C1018 Earthworks and Stormwater Drainage Plan Sheet 4 of 20 A3 21-09-18 15-272-C1019 Earthworks and Stormwater Drainage Plan Sheet 5 of 20 A3 21-09-18 15-272-C1020 Earthworks and Stormwater Drainage Plan Sheet 6 of 20 A3 21-09-18 15-272-C1021 Earthworks and Stormwater Drainage Plan Sheet 7 of 20 A3 21-09-18 15-272-C1022 Earthworks and Stormwater Drainage Plan Sheet 8 of 20 A3 21-09-18 15-272-C1023 Earthworks and Stormwater Drainage Plan Sheet 9 of 20 A3 21-09-18 15-272-C1024 Earthworks and Stormwater Drainage Plan Sheet 10 of 20 A3 21-09-18 15-272-C1025 Earthworks and Stormwater Drainage Plan Sheet 11 of 20 A3 21-09-18 15-272-C1026 Earthworks and Stormwater Drainage Plan Sheet 12 of 20 A3 21-09-18 45-272-C1026 Earthworks and Stormwater Drainage Plan Sheet 12 of 20 A3 21-09-18	15-2/2-C101/	Earthworks and Stormwater Drainage Plan Sheet 3 of 20		
A5 24-07-19				
15-272-C1019 Earthworks and Stormwater Drainage Plan Sheet 5 of 20 A3 21-09-18 A5 15-272-C1020 Earthworks and Stormwater Drainage Plan Sheet 6 of 20 A3 21-09-18 A5 15-272-C1021 Earthworks and Stormwater Drainage Plan Sheet 7 of 20 A3 21-09-18 A5 15-272-C1022 Earthworks and Stormwater Drainage Plan Sheet 8 of 20 A3 21-09-18 A5 15-272-C1023 Earthworks and Stormwater Drainage Plan Sheet 9 of 20 A3 21-09-18 A5 15-272-C1024 Earthworks and Stormwater Drainage Plan Sheet 10 of 20 A3 21-09-18 A5 15-272-C1025 Earthworks and Stormwater Drainage Plan Sheet 11 of 20 A3 21-09-18 A5 15-272-C1026 Earthworks and Stormwater Drainage Plan Sheet 12 of 20 A3 21-09-18 A5 24-07-10 A5-272-C1026 Earthworks and Stormwater Drainage Plan Sheet 12 of 20 A3 21-09-18 A5	15-2/2-C1018	Earthworks and Stormwater Drainage Plan Sheet 4 of 20		
15-272-C1020 Earthworks and Stormwater Drainage Plan Sheet 6 of 20 A3 21-09-18 24-07-19 A5 24-07-19 24-07-19 A5 24-07-19		*		
15-272-C1020 Earthworks and Stormwater Drainage Plan Sheet 6 of 20 A3 21-09-18 24-07-19 15-272-C1021 Earthworks and Stormwater Drainage Plan Sheet 7 of 20 A3 21-09-18 24-07-19 15-272-C1022 Earthworks and Stormwater Drainage Plan Sheet 8 of 20 A3 21-09-18 24-07-19 15-272-C1023 Earthworks and Stormwater Drainage Plan Sheet 9 of 20 A3 21-09-18 24-07-19 15-272-C1024 Earthworks and Stormwater Drainage Plan Sheet 10 of 20 A3 21-09-18 24-07-19 15-272-C1025 Earthworks and Stormwater Drainage Plan Sheet 11 of 20 A3 21-09-18 24-07-19 15-272-C1026 Earthworks and Stormwater Drainage Plan Sheet 12 of 20 A3 21-09-18 24-07-19 15-272-C1026 Earthworks and Stormwater Drainage Plan Sheet 12 of 20 A3 21-09-18 24-07-19	15-272-C1019	Earthworks and Stormwater Drainage Plan Sheet 5 of 20		
A5 24-07-19 15-272-C1021 Earthworks and Stormwater Drainage Plan Sheet 7 of 20 A3 21-09-18 A5 24-07-19 24-07-19 24-07-19 A5 24-07-19 A5 24-07-19 A5 24-07-19 24-07-19 24-07-19 A5 A5 A5 A5 A5 A5 A5 A			A5	24-07-19
15-272-C1021 Earthworks and Stormwater Drainage Plan Sheet 7 of 20 A3 21-09-18 15-272-C1022 Earthworks and Stormwater Drainage Plan Sheet 8 of 20 A3 21-09-18 15-272-C1023 Earthworks and Stormwater Drainage Plan Sheet 9 of 20 A3 21-09-18 15-272-C1024 Earthworks and Stormwater Drainage Plan Sheet 10 of 20 A3 21-09-18 15-272-C1025 Earthworks and Stormwater Drainage Plan Sheet 11 of 20 A3 21-09-18 15-272-C1026 Earthworks and Stormwater Drainage Plan Sheet 12 of 20 A3 21-09-18 24-07-19 A5 24-07-19 A5 21-09-18	15-272-C1020	Earthworks and Stormwater Drainage Plan Sheet 6 of 20		21-09-18
A5 24-07-19 15-272-C1022 Earthworks and Stormwater Drainage Plan Sheet 8 of 20 A3 21-09-18 A5 24-07-19 15-272-C1023 Earthworks and Stormwater Drainage Plan Sheet 9 of 20 A3 21-09-18 A5 24-07-19 15-272-C1024 Earthworks and Stormwater Drainage Plan Sheet 10 of 20 A3 21-09-18 A5 24-07-19 15-272-C1025 Earthworks and Stormwater Drainage Plan Sheet 11 of 20 A3 21-09-18 24-07-19 15-272-C1026 Earthworks and Stormwater Drainage Plan Sheet 12 of 20 A3 21-09-18 21				24-07-19
15-272-C1022 Earthworks and Stormwater Drainage Plan Sheet 8 of 20 A3 21-09-18 15-272-C1023 Earthworks and Stormwater Drainage Plan Sheet 9 of 20 A3 21-09-18 15-272-C1024 Earthworks and Stormwater Drainage Plan Sheet 10 of 20 A3 21-09-18 15-272-C1025 Earthworks and Stormwater Drainage Plan Sheet 11 of 20 A3 21-09-18 15-272-C1026 Earthworks and Stormwater Drainage Plan Sheet 12 of 20 A3 21-09-18 24-07-19 A5 24-07-19 25-272-C1026 Earthworks and Stormwater Drainage Plan Sheet 12 of 20 A3 21-09-18	15-272-C1021	Earthworks and Stormwater Drainage Plan Sheet 7 of 20	A3	21-09-18
15-272-C1022 Earthworks and Stormwater Drainage Plan Sheet 8 of 20 A3 21-09-18 15-272-C1023 Earthworks and Stormwater Drainage Plan Sheet 9 of 20 A3 21-09-18 15-272-C1024 Earthworks and Stormwater Drainage Plan Sheet 10 of 20 A3 21-09-18 15-272-C1025 Earthworks and Stormwater Drainage Plan Sheet 11 of 20 A3 21-09-18 15-272-C1026 Earthworks and Stormwater Drainage Plan Sheet 12 of 20 A3 21-09-18 24-07-19 A5 24-07-19 A5 21-09-18			A5	24-07-19
A5 24-07-19 15-272-C1023 Earthworks and Stormwater Drainage Plan Sheet 9 of 20 A3 21-09-18 24-07-19 15-272-C1024 Earthworks and Stormwater Drainage Plan Sheet 10 of 20 A3 21-09-18 24-07-19 15-272-C1025 Earthworks and Stormwater Drainage Plan Sheet 11 of 20 A3 21-09-18 24-07-19 15-272-C1026 Earthworks and Stormwater Drainage Plan Sheet 12 of 20 A3 21-09-18 21-09-18 2	15-272-C1022	Earthworks and Stormwater Drainage Plan Sheet 8 of 20		21-09-18
15-272-C1023 Earthworks and Stormwater Drainage Plan Sheet 9 of 20 A3 21-09-18 15-272-C1024 Earthworks and Stormwater Drainage Plan Sheet 10 of 20 A3 21-09-18 15-272-C1025 Earthworks and Stormwater Drainage Plan Sheet 11 of 20 A3 21-09-18 15-272-C1026 Earthworks and Stormwater Drainage Plan Sheet 12 of 20 A3 21-09-18 24-07-19 A3 21-09-18 25-272-C1026 Earthworks and Stormwater Drainage Plan Sheet 12 of 20 A3 21-09-18				24-07-19
A5 24-07-19	15-272-C1023	Earthworks and Stormwater Drainage Plan Sheet 9 of 20		21-09-18
15-272-C1024 Earthworks and Stormwater Drainage Plan Sheet 10 of 20 A3 A5 24-07-19 A3 21-09-18 24-07-19 15-272-C1025 Earthworks and Stormwater Drainage Plan Sheet 11 of 20 A3 24-07-19 A3 21-09-18 24-07-19 15-272-C1026 Earthworks and Stormwater Drainage Plan Sheet 12 of 20 A3 21-09-18	.5 0.020	Interest State S		
A5 24-07-19	15-272-C1024	Farthworks and Stormwater Drainage Plan Shoot 10 of 20		
15-272-C1025 Earthworks and Stormwater Drainage Plan Sheet 11 of 20 A3 21-09-18 A5 24-07-19 15-272-C1026 Earthworks and Stormwater Drainage Plan Sheet 12 of 20 A3 21-09-18	10 21 2 0 1027	Latinvolks and Stormwater Drainage Flan Oricet to 9/20		
45 24-07-19 15-272-C1026 Earthworks and Stormwater Drainage Plan Sheet 12 of 20 A3 21-09-18	15_272_C1025	Farthworks and Stormwater Drainage Plan Shoot 11 of 20		
15-272-C1026 Earthworks and Stormwater Drainage Plan Sheet 12 of 20 A3 21-09-18	10-21 2-6 1020	Earthworks and Stormwater Drainage Fidit Stiett 11 01 20		
	4E 272 C4020	Earthworks and Starmwater Drainage Diag Chast 40 - 100	A 2	
	10-212-61026	Earthworks and Stormwater Drainage Plan Sheet 12 of 20	A3 A5	21-09-18 24-07-19

45-272-C1028 Earthworks-and-Stormwater-Drainage-Plan-Sheet-13-61-20				
45-272-C1028 Earthworks-and-Stormwater-Drainage-Plan-Sheet-14-of-20	15-272-C1027	Earthworks and Stormwater Drainage Plan Sheet 13 of 20		
A5				
45-272-C1030 Earthworks and Stormwater Drainage Plan Sheet 16 of 20	15-272-C1028	Earthworks and Stormwater Drainage Plan Sheet 14 of 20		21-09-18
A6				24-07-19
45-272-C1031 Earthworks and Stormwater Drainage Plan Sheet 16-of-20	15-272-C1029	Earthworks and Stormwater Drainage Plan Sheet 15 of 20	A4	04-10-18
15-272-C1032 Earthworke and Stormwater Drainage Plan Sheet 17 of 20			A6	24-07-19
15-272-C1032 Earthworke and Stormwater Drainage Plan Sheet 17 of 20	15-272-C1030	Earthworks and Stormwater Drainage Plan Sheet 16 of 20	A3	21-09-18
45-272-C1032 Earthworks and Stormwater Drainage Plan Sheet 18-0f-20			A5	24-07-19
45-272-C1032 Earthworks and Stormwater Drainage Plan Sheet 18-0f-20	15-272-C1031	Earthworks and Stormwater Drainage Plan Sheet 17 of 20	A3	21-09-18
45-272-C1032 Earthworks and Stormwater Drainage Plan Sheet 18 of 20			_	24-07-19
A5	15-272-C1032	Earthworks and Stormwater Drainage Plan Sheet 18 of 20		
15-272-C1033 Earthworks-and Stormwater Drainage Plan Sheet 19 of 20 A3 21-09-18 A5 24-07-19 A5	10 212 01002	Earthworks and Stoffiwator Brainage Flair Sheet 10 of 20	_	
A5 24-07-19	15-272-C1033	Earthworks and Stormwater Drainage Plan Sheet 10 of 20		
45-272-C1040 Earthworks and Stormwater Drainage Plan Sheet 20-of 20 A3 A5 A5 A5 A5 A5 A5 A5	10 212 01000	Earthworks and Stormwater Brainage Flair Griect 15 of 25	_	
A5 24-07-19 A5 24-07-1	45 070 C4004	Forthwarks and Starmwater Drainage Plan Cheet 20 of 20		
45-272-C1040 Readworks and Stormwater Drainage Plan Sheet 1 of 10 A3 A5 A6 A24-07-19	15-2/2-61034	Earthworks and Stormwater Drainage Plan Sheet 20 of 20		
As 24-07-19 As 24-07-1	45.070.04040	D 1 10 10 11 11 11 11 11		- 1 - 1 - 1
15-272-C1042 Readworks and Stermwater Drainage Plan Sheet 2 of 10	15-2/2-C1040	Roadworks and Stormwater Drainage Plan Sheet 1 of 10		
A6 24-07-19 A7 24-09-18 A8 24-07-19 A9 24-07-1				
15-272-C1042 Roadworks and Stormwater Drainage Plan Sheet 3 of 10 A3 21-09-18 A5 24-07-19	15-272-C1041	Roadworks and Stormwater Drainage Plan Sheet 2 of 10		
15-272-C1043 Roadworks and Stormwater Drainage Plan Sheet 4 of 10 A3 24-09-18 A5 24-07-19 A5-272-C1044 Roadworks and Stormwater Drainage Plan Sheet 5 of 10 A3 24-09-18 A5 24-07-19 A5-272-C1045 Roadworks and Stormwater Drainage Plan Sheet 6 of 10 A3 24-09-18 A5 24-07-19 A5-272-C1046 Roadworks and Stormwater Drainage Plan Sheet 7 of 10 A3 24-09-18 A5 24-07-19 A5-272-C1047 Roadworks and Stormwater Drainage Plan Sheet 8 of 10 A3 24-09-18 A5 24-07-19 A5-272-C1047 Roadworks and Stormwater Drainage Plan Sheet 8 of 10 A3 24-09-18 A5 24-07-19 A5-272-C1048 Roadworks and Stormwater Drainage Plan Sheet 9 of 10 A2 24-09-18 A4 24-07-19 A5-272-C1049 Roadworks and Stormwater Drainage Plan Sheet 10 of 10 A2 24-09-18 A4 24-07-19 A5-272-C1050 Road and Longitudinal Sections Sheet 1 of 5 A3 24-09-18 A5 24-07-19 A5-272-C1052 Road and Longitudinal Sections Sheet 2 of 5 A3 24-09-18 A5 24-07-19 A5-272-C1053 Road and Longitudinal Sections Sheet 3 of 5 A3 24-09-18 A5 24-07-19 A5-272-C1054 Road and Longitudinal Sections Sheet 4 of 5 A3 24-09-18 A5 24-07-19 A5-272-C1058 Road and Longitudinal Sections Sheet 5 of 5 A3 24-09-18 A5 24-07-19 A5-272-C1058 Western Boundary Layout and Sections A4 24-07-19 A5-272-C1058 Bio-Retention Basin No. 3 Detail Plan Sheet 1 of 2 A5 24-07-19 A5-272-C1062 Bio-Retention Basin No. 3 Detail Plan Sheet 2 of 2 A5 24-07-19 A5-272-C1064 Bio-Retention Basin No. 5 Detail Plan Sheet 2 of 2 A3 24-09-18 Bio-Retention Basin No. 6 Detail Plan Sheet 2 of 2 A3 24-09-18 A5 24-07-19 A5-272-C1066 Bio-Retention Basin No. 6 Detail Plan Sheet 2 of 2 A3 24-09-18 A5 24-09-18 A5 24-09-18 A5 24-09-18 Bio-Retention Basin No. 6 Detail Plan Sheet 2 of 2 A5 24-09-18 A5 24-09				_ : 0: :0
45-272-C1043 Roadworks- and Stormwater Drainage Plan Sheet 4 of 10 A3 21-09-18 45-272-C1044 Readworks- and Stormwater Drainage Plan Sheet 5 of 10 A3 21-09-18 45-272-C1045 Roadworks- and Stormwater Drainage Plan Sheet 6 of 10 A3 21-09-18 45-272-C1046 Roadworks- and Stormwater Drainage Plan Sheet 7 of 10 A3 21-09-18 45-272-C1047 Roadworks- and Stormwater Drainage Plan Sheet 8 of 10 A3 21-09-18 45-272-C1048 Roadworks- and Stormwater Drainage Plan Sheet 9 of 10 A2 21-09-18 45-272-C1049 Roadworks- and Stormwater Drainage Plan Sheet 10 of 10 A2 21-09-18 45-272-C1050 Road and Longitudinal Sections Sheet 1 of 5 A3 21-09-18 45-272-C1051 Road and Longitudinal Sections Sheet 2 of 5 A3 21-09-18 45-272-C1052 Road and Longitudinal Sections Sheet 3 of 5 A3 21-09-18 45-272-C1052 Road and Longitudinal Sections Sheet 2 of 5 A3 21-09-18 45-272-C1053 Road and Longitudinal Sections Sheet 3 of 5 A3 21-09-18 45-272-C1058 Western Boundary Layout and Sections	15-272-C1042	Roadworks and Stormwater Drainage Plan Sheet 3 of 10	A3	21-09-18
45-272-C1044 Readworks and Stormwater Drainage Plan Sheet 5 of 10			A5	24-07-19
45-272-C1044 Readworks and Stormwater Drainage Plan Sheet 5 of 10				
45-272-C1044 Readworks and Stormwater Drainage Plan Sheet 5 of 10	15-272-C1043	Roadworks and Stormwater Drainage Plan Sheet 4 of 10	A3	21-09-18
15-272-C1045 Readworks and Stormwater Drainage Plan Sheet 6 of 10 A3 21-09-18			A5	24-07-19
15-272-C1045 Readworks and Stormwater Drainage Plan Sheet 6 of 10 A3 21-09-18	15-272-C1044	Roadworks and Stormwater Drainage Plan Sheet 5 of 10	A3	21-09-18
45-272-C1045 Roadworks and Stormwater Drainage Plan Sheet 6 of 10 A3 21-09-18 45-272-C1046 Roadworks and Stormwater Drainage Plan Sheet 7 of 10 A3 21-09-18 45-272-C1047 Roadworks and Stormwater Drainage Plan Sheet 8 of 10 A3 21-09-18 45-272-C1048 Roadworks and Stormwater Drainage Plan Sheet 9 of 10 A2 21-09-18 45-272-C1049 Roadworks and Stormwater Drainage Plan Sheet 10 of 10 A2 21-09-18 45-272-C1050 Road and Longitudinal Sections Sheet 1 of 5 A3 21-09-18 45-272-C1051 Road and Longitudinal Sections Sheet 2 of 5 A3 21-09-18 45-272-C1052 Road and Longitudinal Sections Sheet 3 of 5 A3 21-09-18 45-272-C1053 Road and Longitudinal Sections Sheet 4 of 5 A3 21-09-18 45-272-C1054 Road and Longitudinal Sections Sheet 5 of 5 A3 21-09-18 45-272-C1058 Western Boundary Layout and Sections A4 24-07-19 45-272-C1058 Western Boundary Layout and Sections A4 24-07-19 45-272-C1062 Bio-Retention Basin No. 3 Detail Plan Sheet 1 of 2 A3 2			A5	24-07-19
15-272-C1046 Roadworks and Stormwater Drainage Plan Sheet 7 of 10	15-272-C1045	Roadworks and Stormwater Drainage Plan Sheet 6 of 10		
45-272-C1046 Roadworks and Stormwater Drainage Plan Sheet 7 of 10 A3 21-09-18 45-272-C1047 Roadworks and Stormwater Drainage Plan Sheet 8 of 10 A3 21-09-18 45-272-C1048 Roadworks and Stormwater Drainage Plan Sheet 9 of 10 A2 21-09-18 45-272-C1049 Roadworks and Stormwater Drainage Plan Sheet 10 of 10 A2 21-09-18 45-272-C1050 Road and Longitudinal Sections Sheet 1 of 5 A3 21-09-18 45-272-C1051 Road and Longitudinal Sections Sheet 2 of 5 A3 21-09-18 45-272-C1052 Road and Longitudinal Sections Sheet 3 of 5 A3 21-09-18 45-272-C1053 Road and Longitudinal Sections Sheet 4 of 5 A3 21-09-18 45-272-C1054 Road and Longitudinal Sections Sheet 5 of 5 A3 21-09-18 45-272-C1054 Road and Longitudinal Sections Sheet 5 of 5 A3 21-09-18 45-272-C1054 Road and Longitudinal Sections Sheet 5 of 5 A3 21-09-18 45-272-C1058 Western Boundary Layout and Sections A4 24-07-19 45-272-C1069 Southern Boundary Layout and Sections A4 24-07-19	10 272 01040	Troddworks and Stormwater Brainage Flair Griect 9 of 10	_	
15-272-C1047 Readworks and Stormwater Drainage Plan Sheet 8 of 10 A3 21-09-18 A5 224-07-19 A5-272-C1048 Readworks and Stormwater Drainage Plan Sheet 9 of 10 A2 21-09-18 A4 224-07-19 A4 224-07-19 A5-272-C1049 Readworks and Stormwater Drainage Plan Sheet 10 of 10 A2 21-09-18 A4 224-07-19 A4 224-07-19 A5-272-C1050 Read and Longitudinal Sections Sheet 1 of 5 A3 21-09-18 A5 224-07-19 A5-272-C1051 Read and Longitudinal Sections Sheet 2 of 5 A3 21-09-18 A5 224-07-19 A5-272-C1052 Read and Longitudinal Sections Sheet 3 of 5 A3 21-09-18 A5 224-07-19 A5-272-C1053 Read and Longitudinal Sections Sheet 4 of 5 A3 21-09-18 A5 224-07-19 A5-272-C1054 Read and Longitudinal Sections Sheet 5 of 5 A3 21-09-18 A5 224-07-19 A5-272-C1054 Read and Longitudinal Sections Sheet 5 of 5 A3 21-09-18 A5 224-07-19 A5-272-C1058 Western Boundary Layout and Sections A4 224-07-19 A5-272-C1059 Southern Boundary Layout and Sections A4 224-07-19 A5-272-C1063 Bio-Retention Basin No. 3 Detail Plan Sheet 1 of 2 A5 224-07-19 A5-272-C1063 Bio-Retention Basin No. 3 Detail Plan Sheet 2 of 2 A2 21-09-18 Bio-Retention Basin No. 5 Detail Plan Sheet 2 of 2 A4 24-07-19 A5-272-C1064 Bio-Retention Basin No. 5 Detail Plan Sheet 1 of 2 A3 224-07-19 A5-272-C1066 Bio-Retention Basin No. 5 Detail Plan Sheet 2 of 2 A3 224-07-19 A5-272-C1066 Bio-Retention Basin No. 5 Detail Plan Sheet 1 of 2 A3 224-07-19 A5-272-C1066 Bio-Retention Basin No. 5 Detail Plan Sheet 1 of 2 A3 224-07-19 A5-272-C1066 Bio-Retention Basin No. 5 Detail Plan Sheet 2 of 2 A3 224-07-19 A5-272-C1066 Bio-Retention Basin No. 6 Detail Plan Sheet 2 of 2 A5 24-07-19 A5-272-C1066 Bio-Retention Basin No. 6 Detail Plan Sheet 2 of 2 A5 24-07-19 A5-272-C1066 Bio-Retention Basin No. 6 Detail Plan Sheet 2 of 2 A5 24-07-19 A5-272-C1066 Bio-Retention Basin No. 6 Detail Plan Sheet 2 of 2 A5 24-07	15-272-C1046	Poadworks and Stormwater Drainage Plan Shoot 7 of 10		
45-272-C1047 Roadworks and Stormwater Drainage Plan Sheet 8 of 10 A3 21-09-18 45-272-C1048 Roadworks and Stormwater Drainage Plan Sheet 9 of 10 A2 21-09-18 45-272-C1049 Roadworks and Stormwater Drainage Plan Sheet 10 of 10 A2 21-09-18 45-272-C1050 Road and Longitudinal Sections Sheet 1 of 5 A3 21-09-18 45-272-C1051 Road and Longitudinal Sections Sheet 2 of 5 A3 21-09-18 45-272-C1052 Road and Longitudinal Sections Sheet 3 of 5 A3 21-09-18 45-272-C1053 Road and Longitudinal Sections Sheet 4 of 5 A3 21-09-18 45-272-C1054 Road and Longitudinal Sections Sheet 5 of 5 A3 21-09-18 45-272-C1058 Road and Longitudinal Sections Sheet 5 of 5 A3 21-09-18 45-272-C1058 Western Boundary Layout and Sections A4 24-07-19 45-272-C1059 Southern Boundary Layout and Sections A4 24-07-19 45-272-C1062 Bio-Retention Basin No. 3 Detail Plan Sheet 1 of 2 A5 24-07-19 45-272-C1064 Bio-Retention Basin No. 5 Detail Plan Sheet 2 of 2 A4 24-07-19 <td>13 212 01040</td> <td>Nodaworks and Stormwater Brainage Flam Sheet 7 of 10</td> <td>_</td> <td></td>	13 212 01040	Nodaworks and Stormwater Brainage Flam Sheet 7 of 10	_	
45-272-C1048 Roadworks and Stormwater Drainage Plan Sheet 9 of 10 A2 A2 A21-09-18 A4 A4 A4 A24-07-19 15-272-C1049 Roadworks and Stormwater Drainage Plan Sheet 10 of 10 A2 A2 A21-09-18 A4 A4 A4 A24-07-19 15-272-C1050 Road and Longitudinal Sections Sheet 1 of 5 A3 A5 A5 A5 A5 A5 A4 A4 A4 A4 A4-7-19 A4 A4 A4-7-19 15-272-C1051 Road and Longitudinal Sections Sheet 2 of 5 A3 A5 A5 A5 A4-07-19 A21-09-18 A5 A5 A5 A4-07-19 15-272-C1052 Road and Longitudinal Sections Sheet 3 of 5 A3 A5 A5 A5 A5 A4-07-19 A4-07-19 15-272-C1053 Road and Longitudinal Sections Sheet 4 of 5 A3 A5	15 272 C1047	Poodwarks and Starmwater Drainage Plan Shoot 9 of 10		
45-272-C1048 Readworks and Stormwater Drainage Plan Sheet 9 of 10 A2 21-09-18 45-272-C1049 Readworks and Stormwater Drainage Plan Sheet 10 of 10 A2 21-09-18 45-272-C1050 Read and Longitudinal Sections Sheet 1 of 5 A3 21-09-18 45-272-C1051 Read and Longitudinal Sections Sheet 2 of 5 A3 21-09-18 45-272-C1052 Read and Longitudinal Sections Sheet 3 of 5 A3 21-09-18 45-272-C1053 Read and Longitudinal Sections Sheet 4 of 5 A3 21-09-18 45-272-C1054 Read and Longitudinal Sections Sheet 5 of 5 A3 21-09-18 45-272-C1054 Read and Longitudinal Sections Sheet 5 of 5 A3 21-09-18 45-272-C1058 Western Boundary Layout and Sections A4 24-07-19 45-272-C1058 Western Boundary Layout and Sections A4 24-07-19 45-272-C1059 Southern Boundary Layout and Sections A4 24-07-19 45-272-C1068 Bio-Retention Basin No. 3 Detail Plan Sheet 1 of 2 A3 21-09-18 45-272-C1063 Bio-Retention Basin No. 5 Detail Plan Sheet 2 of 2 A2 21-09-18	10-212-01041	NOAUWORKS AND STORMWATER DIAMMAYE FIAM SHEEL O OF TO	_	
15-272-C1049 Roadworks and Stormwater Drainage Plan Sheet 10 of 10 A2 21-09-18 A4 24-07-19 15-272-C1050 Road and Longitudinal Sections Sheet 1 of 5 A3 21-09-18 A5 24-07-19 15-272-C1051 Road and Longitudinal Sections Sheet 2 of 5 A3 21-09-18 A5 24-07-19 15-272-C1052 Road and Longitudinal Sections Sheet 3 of 5 A3 21-09-18 A5 24-07-19 15-272-C1053 Road and Longitudinal Sections Sheet 4 of 5 A3 21-09-18 A5 24-07-19 15-272-C1054 Road and Longitudinal Sections Sheet 5 of 5 A3 21-09-18 A5 24-07-19 15-272-C1058 Western Boundary Layout and Sections A4 24-07-19 15-272-C1059 Southern Boundary Layout and Sections A4 24-07-19 15-272-C1062 Bio-Retention Basin No. 3 Detail Plan Sheet 1 of 2 A5 24-07-19 15-272-C1063 Bio-Retention Basin No. 3 Detail Plan Sheet 2 of 2 A2 24-09-18 Bio-Retention Basin 2 and 3 Detail Plan Sheet 2 of 2 A4 24-07-19 15-272-C1064 Bio-Retention Basin No. 5 Detail Plan Sheet 2 of 2 A4 24-07-19 A7 21-09-18 Bio-Retention Basin No. 5 Detail Plan Sheet 2 of 2 A4 24-07-19 A7 21-09-18 Bio-Retention Basin No. 5 Detail Plan Sheet 2 of 2 A3 21-09-18 Bio-Retention Basin No. 5 Detail Plan Sheet 2 of 2 A3 21-09-18 Bio-Retention Basin No. 5 Detail Plan Sheet 2 of 2 A3 21-09-18 Bio-Retention Basin No. 5 Detail Plan Sheet 2 of 2 A3 21-09-18 Bio-Retention Basin No. 5 Detail Plan Sheet 2 of 2 A3 21-09-18 Bio-Retention Basin No. 5 Detail Plan Sheet 2 of 2 A5 24-07-19 A7 21-09-18 Bio-Retention Basin No. 5 Detail Plan Sheet 2 of 2 A6 24-07-19 A7 21-09-18 A7 21-09-18 Bio-Retention Basin No. 5 Detail Plan Sheet 2 of 2 A7 21-09-18 Bio-Retention Basin No. 5 Detail Plan Sheet 2 of 2 A7 21-09-18 Bio-Retention Basin No. 5 Detail Plan Sheet 2 of 2 A7 21-09-18 Bio-Retention Basin No. 5 Detail Plan Sheet 2 of 2 A7 21-09-18 Bio-Retention Basin No. 5 Detail Plan Sheet 2 of 2 A8 21-09-18 A7 21-09-18	45 070 04040	Deadwarks and Chargewater Drainers Dies Cheet 0 of 10		
15-272-C1049 Readworks and Stormwater Drainage Plan Sheet 10 of 10 A2 A4 24-07-19 A2 21-09-18 A4 24-07-19 15-272-C1050 Read and Longitudinal Sections Sheet 1 of 5 A3 21-09-18 A5 24-07-19 15-272-C1051 Read and Longitudinal Sections Sheet 2 of 5 A3 21-09-18 A5 24-07-19 15-272-C1052 Read and Longitudinal Sections Sheet 3 of 5 A3 21-09-18 A5 24-07-19 15-272-C1053 Read and Longitudinal Sections Sheet 4 of 5 A3 21-09-18 A5 24-07-19 15-272-C1054 Read and Longitudinal Sections Sheet 5 of 5 A3 21-09-18 A5 24-07-19 15-272-C1058 Western Boundary Layout and Sections A4 24-07-19 15-272-C1069 Southern Boundary Layout and Sections A4 24-07-19 15-272-C1062 Bio-Retention Basin No. 3 Detail Plan Sheet 1 of 2 A3 21-09-18 Bio-Retention Basin No. 3 Detail Plan Sheet 1 of 2 A5 24-07-19 15-272-C1063 Bio-Retention Basin No. 5 Detail Plan Sheet 2 of 2 A2 21-09-18 Bio-Retention Basin No. 5 Detail Plan Sheet 1 of 2 A3 24-07-19 15-272-C1064 Bio-Retention Basin No. 5 Detail Plan Sheet 1 of 2 A3 24-07-19 15-272-C1065 Bio-Retention Basin No. 5 Detail Plan Sheet 2 of 2 A3 21-09-18 Bio-Retention Basin No. 5 Detail Plan Sheet 2 of 2 A5 24-07-19 15-272-C1066 Bio-Retention Basin No. 6 Detail Plan Sheet 2 of 2 A5 24-07-19 15-272-C1066 Bio-Retention Basin No. 6 Detail Plan Sheet 2 of 2 A5 24-07-19 <td>15-2/2-61048</td> <td>Roadworks and Stormwater Drainage Plan Sheet 9 of 10</td> <td></td> <td></td>	15-2/2-61048	Roadworks and Stormwater Drainage Plan Sheet 9 of 10		
A4 24-07-19	45.070.04040			
15-272-C1050 Road and Longitudinal Sections Sheet 1 of 5 A3 21-09-18 15-272-C1051 Road and Longitudinal Sections Sheet 2 of 5 A3 21-09-18 45-272-C1052 Road and Longitudinal Sections Sheet 3 of 5 A3 21-09-18 45-272-C1053 Road and Longitudinal Sections Sheet 4 of 5 A3 21-09-18 45-272-C1054 Road and Longitudinal Sections Sheet 5 of 5 A3 21-09-18 45-272-C1058 Western Boundary Layout and Sections A4 24-07-19 15-272-C1059 Southern Boundary Layout and Sections A4 24-07-19 15-272-C1062 Bio-Retention Basin No. 3 Detail Plan Sheet 1 of 2 A3 21-09-18 15-272-C1063 Bio-Retention Basin No. 3 Detail Plan Sheet 2 of 2 A2 21-09-18 15-272-C1064 Bio-Retention Basin No. 5 Detail Plan Sheet 2 of 2 A4 24-07-19 15-272-C1065 Bio-Retention Basin No. 5 Detail Plan Sheet 1 of 2 A3 21-09-18 15-272-C1066 Bio-Retention Basin No. 5 Detail Plan Sheet 2 of 2 A3 21-09-18 15-272-C1066 Bio-Retention Basin No. 5 Detail Plan Sheet 2 of 2 A5 24-07-19 <td>15-2/2-C1049</td> <td>Roadworks and Stormwater Drainage Plan Sheet 10 of 10</td> <td></td> <td></td>	15-2/2-C1049	Roadworks and Stormwater Drainage Plan Sheet 10 of 10		
15-272-C1051 Read and Longitudinal Sections Sheet 2 of 5				
15-272-C1051 Road and Longitudinal Sections Sheet 2 of 5 A3 21-09-18 15-272-C1052 Road and Longitudinal Sections Sheet 3 of 5 A3 21-09-18 15-272-C1053 Road and Longitudinal Sections Sheet 4 of 5 A3 21-09-18 15-272-C1054 Road and Longitudinal Sections Sheet 5 of 5 A3 21-09-18 15-272-C1058 Western Boundary Layout and Sections A4 24-07-19 15-272-C1059 Southern Boundary Layout and Sections A4 24-07-19 15-272-C1062 Bio-Retention Basin No. 3 Detail Plan Sheet 1 of 2 A3 21-09-18 15-272-C1063 Bio-Retention Basin No. 3 Detail Plan Sheet 2 of 2 A2 21-09-18 15-272-C1064 Bio-Retention Basin No. 5 Detail Plan Sheet 2 of 2 A4 24-07-19 15-272-C1065 Bio-Retention Basin No. 5 Detail Plan Sheet 1 of 2 A3 21-09-18 15-272-C1066 Bio-Retention Basin No. 5 Detail Plan Sheet 2 of 2 A3 21-09-18 15-272-C1066 Bio-Retention Basin No. 6 Detail Plan Sheet 2 of 2 A5 24-07-19 15-272-C1066 Bio-Retention Basin No. 6 Detail Plan Sheet 2 of 2 A5 24-0	15-272-C1050	Road and Longitudinal Sections Sheet 1 of 5		
15-272-C1052 Road and Longitudinal Sections Sheet 3 of 5 A3 21-09-18 15-272-C1053 Road and Longitudinal Sections Sheet 4 of 5 A3 21-09-18 15-272-C1054 Road and Longitudinal Sections Sheet 5 of 5 A3 21-09-18 15-272-C1058 Western Boundary Layout and Sections A4 24-07-19 15-272-C1059 Southern Boundary Layout and Sections A4 24-07-19 15-272-C1062 Bio-Retention Basin No. 3 Detail Plan Sheet 1 of 2 A3 21-09-18 15-272-C1063 Bio-Retention Basin 2 and 3 Detail Plan Sheet 1 of 2 A5 24-07-19 15-272-C1064 Bio-Retention Basin No. 3 Detail Plan Sheet 2 of 2 A2 21-09-18 15-272-C1064 Bio-Retention Basin No. 5 Detail Plan Sheet 1 of 2 A1 21-09-18 15-272-C1065 Bio-Retention Basin No. 5 Detail Plan Sheet 1 of 2 A3 21-09-18 15-272-C1066 Bio-Retention Basin No. 5 Detail Plan Sheet 2 of 2 A3 21-09-18 15-272-C1066 Bio-Retention Basin No. 6 Detail Plan Sheet 2 of 2 A5 24-07-19 15-272-C1066 Bio-Retention Basin No. 6 Detail Plan Sheet 2 of 2 A5 24-07-19				
15-272-C1052 Road and Longitudinal Sections Sheet 3 of 5 A3 21-09-18 15-272-C1053 Road and Longitudinal Sections Sheet 4 of 5 A3 21-09-18 15-272-C1054 Road and Longitudinal Sections Sheet 5 of 5 A3 21-09-18 15-272-C1054 Road and Longitudinal Sections Sheet 5 of 5 A3 21-09-18 15-272-C1058 Western Boundary Layout and Sections A4 24-07-19 15-272-C1059 Southern Boundary Layout and Sections A4 24-07-19 15-272-C1062 Bio-Retention Basin No. 3 Detail Plan Sheet 1 of 2 A3 21-09-18 Bio-Retention Basin 2 and 3 Detail Plan Sheet 1 of 2 A2 21-09-18 15-272-C1064 Bio-Retention Basin No. 5 Detail Plan Sheet 1 of 2 A4 24-07-19 15-272-C1065 Bio-Retention Basin No. 5 Detail Plan Sheet 1 of 2 A3 21-09-18 15-272-C1066 Bio-Retention Basin No. 5 Detail Plan Sheet 2 of 2 A3 21-09-18 15-272-C1066 Bio-Retention Basin No. 6 Detail Plan A3 21-09-18	15-272-C1051	Road and Longitudinal Sections Sheet 2 of 5	A3	21-09-18
15-272-C1053 Road and Longitudinal Sections Sheet 4 of 5				
15-272-C1053 Road and Longitudinal Sections Sheet 4 of 5 A3 21-09-18 15-272-C1054 Road and Longitudinal Sections Sheet 5 of 5 A3 21-09-18 15-272-C1058 Western Boundary Layout and Sections A4 24-07-19 15-272-C1059 Southern Boundary Layout and Sections A4 24-07-19 15-272-C1062 Bio-Retention Basin No. 3 Detail Plan Sheet 1 of 2 A3 21-09-18 15-272-C1063 Bio-Retention Basin No. 3 Detail Plan Sheet 2 of 2 A2 21-09-18 15-272-C1064 Bio-Retention Basin No. 5 Detail Plan Sheet 2 of 2 A4 24-07-19 15-272-C1065 Bio-Retention Basin A Detail Plan Sheet 1 of 2 A3 21-09-18 15-272-C1066 Bio-Retention Basin No. 5 Detail Plan Sheet 2 of 2 A3 21-09-18 15-272-C1066 Bio-Retention Basin No. 6 Detail Plan Sheet 2 of 2 A5 24-07-19 15-272-C1066 Bio-Retention Basin No. 6 Detail Plan A3 21-09-18	15-272-C1052	Road and Longitudinal Sections Sheet 3 of 5	A3	21-09-18
15-272-C1054 Read and Longitudinal Sections Sheet 5 of 5				24-07-19
15-272-C1054 Road and Longitudinal Sections Sheet 5 of 5 A3 21-09-18 15-272-C1058 Western Boundary Layout and Sections A4 24-07-19 15-272-C1059 Southern Boundary Layout and Sections A4 24-07-19 15-272-C1062 Bio-Retention Basin No. 3 Detail Plan Sheet 1 of 2 A3 21-09-18 15-272-C1063 Bio-Retention Basin No. 3 Detail Plan Sheet 2 of 2 A2 21-09-18 15-272-C1064 Bio-Retention Basin No. 5 Detail Plan Sheet 1 of 2 A4 24-07-19 15-272-C1065 Bio-Retention Basin 4 Detail Plan Sheet 1 of 2 A3 21-09-18 15-272-C1066 Bio-Retention Basin No. 5 Detail Plan Sheet 2 of 2 A3 21-09-18 15-272-C1066 Bio-Retention Basin No. 5 Detail Plan Sheet 2 of 2 A3 21-09-18 15-272-C1066 Bio-Retention Basin No. 6 Detail Plan Sheet 2 of 2 A5 24-07-19	15-272-C1053	Road and Longitudinal Sections Sheet 4 of 5	A3	21-09-18
45-272-C1058 Western Boundary Layout and Sections A4 24-07-19 15-272-C1059 Southern Boundary Layout and Sections A4 24-07-19 15-272-C1062 Bio-Retention Basin No. 3 Detail Plan Sheet 1 of 2 A3 21-09-18 Bio-Retention Basin 2 and 3 Detail Plan Sheet 2 of 2 A2 21-09-18 Bio-Retention Basin No. 3 Detail Plan Sheet 2 of 2 A4 24-07-19 15-272-C1064 Bio-Retention Basin No. 5 Detail Plan Sheet 1 of 2 A4 21-09-18 Bio-Retention Basin 4 Detail Plan Sheet 1 of 2 A3 24-07-19 15-272-C1065 Bio-Retention Basin No. 5 Detail Plan Sheet 2 of 2 A3 21-09-18 Bio-Retention Basin 4 Detail Plan Sheet 2 of 2 A3 21-09-18 Bio-Retention Basin 4 Detail Plan Sheet 2 of 2 A5 24-07-19 15-272-C1066 Bio-Retention Basin No. 6 Detail Plan A3 21-09-18			A5	24-07-19
45-272-C1058 Western Boundary Layout and Sections A4 24-07-19 15-272-C1059 Southern Boundary Layout and Sections A4 24-07-19 15-272-C1062 Bio-Retention Basin No. 3 Detail Plan Sheet 1 of 2 A3 21-09-18 Bio-Retention Basin 2 and 3 Detail Plan Sheet 2 of 2 A2 21-09-18 Bio-Retention Basin No. 3 Detail Plan Sheet 2 of 2 A4 24-07-19 15-272-C1064 Bio-Retention Basin No. 5 Detail Plan Sheet 1 of 2 A4 21-09-18 Bio-Retention Basin 4 Detail Plan Sheet 1 of 2 A3 24-07-19 15-272-C1065 Bio-Retention Basin No. 5 Detail Plan Sheet 2 of 2 A3 21-09-18 Bio-Retention Basin 4 Detail Plan Sheet 2 of 2 A3 21-09-18 Bio-Retention Basin 4 Detail Plan Sheet 2 of 2 A5 24-07-19 15-272-C1066 Bio-Retention Basin No. 6 Detail Plan A3 21-09-18	15-272-C1054	Road and Longitudinal Sections Sheet 5 of 5		21-09-18
45-272-C1058 Western Boundary Layout and Sections A4 24-07-19 15-272-C1059 Southern Boundary Layout and Sections A4 24-07-19 15-272-C1062 Bio-Retention Basin No. 3 Detail Plan Sheet 1 of 2 A3 21-09-18 Bio-Retention Basin 2 and 3 Detail Plan Sheet 2 of 2 A2 21-09-18 Bio-Retention Basin 2 and 3 Detail Plan Sheet 2 of 2 A4 24-07-19 15-272-C1064 Bio-Retention Basin No. 5 Detail Plan Sheet 1 of 2 A1 21-09-18 Bio-Retention Basin 4 Detail Plan Sheet 1 of 2 A3 24-07-19 15-272-C1065 Bio-Retention Basin No. 5 Detail Plan Sheet 2 of 2 A3 21-09-18 15-272-C1066 Bio-Retention Basin 4 Detail Plan Sheet 2 of 2 A5 24-07-19 15-272-C1066 Bio-Retention Basin No. 6 Detail Plan A3 21-09-18				
15-272-C1059 Southern Boundary Layout and Sections A4 24-07-19 15-272-C1062 Bio-Retention Basin No. 3 Detail Plan Sheet 1 of 2 A3 21-09-18 Bio-Retention Basin 2 and 3 Detail Plan Sheet 1 of 2 A5 24-07-19 15-272-C1063 Bio-Retention Basin No. 3 Detail Plan Sheet 2 of 2 A2 21-09-18 Bio-Retention Basin 2 and 3 Detail Plan Sheet 2 of 2 A4 24-07-19 15-272-C1064 Bio-Retention Basin No. 5 Detail Plan Sheet 1 of 2 A1 21-09-18 Bio-Retention Basin 4 Detail Plan Sheet 1 of 2 A3 21-09-18 15-272-C1065 Bio-Retention Basin No. 5 Detail Plan Sheet 2 of 2 A3 21-09-18 15-272-C1066 Bio-Retention Basin No. 6 Detail Plan A3 21-09-18	15-272-C1058	Western Boundary Layout and Sections		
15-272-C1062 Bio-Retention Basin No. 3 Detail Plan Sheet 1 of 2 A3 21-09-18 Bio-Retention Basin 2 and 3 Detail Plan Sheet 1 of 2 A5 24-07-19 15-272-C1063 Bio-Retention Basin No. 3 Detail Plan Sheet 2 of 2 A2 21-09-18 Bio-Retention Basin 2 and 3 Detail Plan Sheet 2 of 2 A4 24-07-19 15-272-C1064 Bio-Retention Basin No. 5 Detail Plan Sheet 1 of 2 A1 21-09-18 Bio-Retention Basin 4 Detail Plan Sheet 1 of 2 A3 24-07-19 15-272-C1065 Bio-Retention Basin No. 5 Detail Plan Sheet 2 of 2 A3 21-09-18 Bio-Retention Basin 4 Detail Plan Sheet 2 of 2 A5 24-07-19 15-272-C1066 Bio-Retention Basin No. 6 Detail Plan A3 21-09-18				
Bio-Retention Basin 2 and 3 Detail Plan Sheet 1 of 2 A5 24-07-19 15-272-C1063 Bio-Retention Basin No. 3 Detail Plan Sheet 2 of 2 A2 21-09-18 Bio-Retention Basin 2 and 3 Detail Plan Sheet 2 of 2 A4 24-07-19 15-272-C1064 Bio-Retention Basin No. 5 Detail Plan Sheet 1 of 2 A1 21-09-18 Bio-Retention Basin 4 Detail Plan Sheet 1 of 2 A3 24-07-19 15-272-C1065 Bio-Retention Basin No. 5 Detail Plan Sheet 2 of 2 A3 21-09-18 Bio-Retention Basin 4 Detail Plan Sheet 2 of 2 A5 24-07-19 15-272-C1066 Bio-Retention Basin No. 6 Detail Plan A3 21-09-18				
15-272-C1063 Bio-Retention Basin No. 3 Detail Plan Sheet 2 of 2 A2 21-09-18 Bio-Retention Basin 2 and 3 Detail Plan Sheet 2 of 2 A4 24-07-19 15-272-C1064 Bio-Retention Basin No. 5 Detail Plan Sheet 1 of 2 A1 21-09-18 Bio-Retention Basin 4 Detail Plan Sheet 1 of 2 A3 24-07-19 15-272-C1065 Bio-Retention Basin No. 5 Detail Plan Sheet 2 of 2 A3 21-09-18 Bio-Retention Basin 4 Detail Plan Sheet 2 of 2 A5 24-07-19 15-272-C1066 Bio-Retention Basin No. 6 Detail Plan A3 21-09-18	10 212 0 1 0 0 2			
Bio-Retention Basin 2 and 3 Detail Plan Sheet 2 of 2 A4 24-07-19 15-272-C1064 Bio-Retention Basin No. 5 Detail Plan Sheet 1 of 2 A1 21-09-18 Bio-Retention Basin 4 Detail Plan Sheet 1 of 2 A3 24-07-19 15-272-C1065 Bio-Retention Basin No. 5 Detail Plan Sheet 2 of 2 A3 21-09-18 Bio-Retention Basin 4 Detail Plan Sheet 2 of 2 A5 24-07-19 15-272-C1066 Bio-Retention Basin No. 6 Detail Plan A3 21-09-18	15_272 C1062			
15-272-C1064 Bio-Retention Basin No. 5 Detail Plan Sheet 1 of 2 Bio-Retention Basin 4 Detail Plan Sheet 1 of 2 A3 A1 21-09-18 24-07-19 15-272-C1065 Bio-Retention Basin No. 5 Detail Plan Sheet 2 of 2 Bio-Retention Basin 4 Detail Plan Sheet 2 of 2 Bio-Retention Basin No. 6 Detail Plan A3 21-09-18 24-07-19 15-272-C1066 Bio-Retention Basin No. 6 Detail Plan A3 21-09-18	10-212-01003			
Bio-Retention Basin 4 Detail Plan Sheet 1 of 2 A3 24-07-19 15-272-C1065 Bio-Retention Basin No. 5 Detail Plan Sheet 2 of 2 A3 21-09-18 Bio-Retention Basin 4 Detail Plan Sheet 2 of 2 A5 24-07-19 15-272-C1066 Bio-Retention Basin No. 6 Detail Plan A3 21-09-18	45.070.04004			
15-272-C1065 Bio-Retention Basin No. 5 Detail Plan Sheet 2 of 2 A3 21-09-18 Bio-Retention Basin 4 Detail Plan Sheet 2 of 2 A5 24-07-19 15-272-C1066 Bio-Retention Basin No. 6 Detail Plan A3 21-09-18	15-2/2-61064			
Bio-Retention Basin 4 Detail Plan Sheet 2 of 2 A5 24-07-19 15-272-C1066 Bio-Retention Basin No. 6 Detail Plan A3 21-09-18	45.070.04555			
15-272-C1066 Bio-Retention Basin No. 6 Detail Plan A3 21-09-18	15-272-C1065			
Bio-Retention Basin 5 Detail Plan A5 24-07-19	15-272-C1066			
		Bio-Retention Basin 5 Detail Plan	A5	24-07-19

15-272-C1068	Stormwater Drainage Catchment Plan (Pre-developed)	A4	24-07-19
15-272-C1069	Stormwater Drainage Catchment Plan (Post-developed)	A 4	24-07-19
15-272-C1070	Retaining Wall General Arrangement Plan	A 4	11-10-18
		A6	24-07-19
15-272-C1071	Retaining Wall Profiles Sheet 1 of 7	A3	21-09-18
		A5	24-07-19
15-272-C1072	Retaining Wall Profiles Sheet 2 of 7	A3	21-09-18
		A5	24-07-19
15-272-C1073	Retaining Wall Profiles Sheet 3 of 7	A3	21-09-18
		A5	24-07-19
15-272-C1074	Retaining Wall Profiles Sheet 4 of 7	A3	21-09-18
		A5	24-07-19
15-272-C1075	Retaining Wall Profiles Sheet 5 of 7	A3	21-09-18
	3	A5	24-07-19
15-272-C1076	Retaining Wall Profiles Sheet 6 of 7	A3	21-09-18
	g a restriction	A5	24-07-19
15-272-C1077	Retaining Wall Profiles Sheet 7 of 7	A2//	21-09-18
		A4	24-07-19
12-272-C1080	Stage 1 Services and Utilities Coordination Plan Sheet 1 of	A3	21-09-18
0.000	6	A5	24-07-19
12-272-C1081	Stage 1 Services and Utilities Coordination Plan Sheet 2 of	A3	21-09-18
.2 2.2 0 1001	6	A5	24-07-19
12-272-C1082	Stage 1 Services and Utilities Coordination Plan Sheet 3 of	A3	21-09-18
12-212-01002	6	A5	24-07-19
12-272-C1083	Stage 1 Services and Utilities Coordination Plan Sheet 4 of	A3	21-09-18
12-212-61003			21-09-18 24-07-19
40.070.04004	6	A5 A3	
12-272-C1084	Stage 1 Services and Utilities Coordination Plan Sheet 5 of	_	21-09-18
40.070.04005	6 Charact Complete and Heliting Contained for Plan Charact Conf	A5	24-07-19
12-272-C1085	Stage 1 Services and Utilities Coordination Plan Sheet 6 of	A3	21-09-18
40.070.04000	F into Taxasil O at a differential Outline Plan	A5	24-07-19
12-272-C1086	Existing Transgrid Overhead Electrical Cables Plan	A5	24-07-19
12-272-C1087	Existing Transgrid Overhead Electrical Cables and Longitudinal Sections	A5	24-07-19
12-272-C1088	Existing Transgrid Overhead Electrical Cables Typical Sections Sheet 1 of 2	A5	24-07-19
12-272-C1089	Existing Transgrid Overhead Electrical Cables Typical Sections Sheet 2 of 2	A5	24-07-19
12-272-C1090	Erosion and Sediment Control Plan Sheet 1 of 7	A3	21-09-18
0.000	and a summing a	A5	24-07-19
12-272-C1091	Erosion and Sediment Control Plan Sheet 2 of 7	A3	21-09-18
	- Sir and Soument Sontion Flan Shoot 2 of 7	A5	24-07-19
12-272-C1092	Erosion and Sediment Control Plan Sheet 3 of 7	A3	21-09-18
	2.55.5 and obtained obtained fair offoct our	A5	24-07-19
12-272-C1093	Erosion and Sediment Control Plan Sheet 4 of 7	A3	21-09-18
12 212 0 1000	Lission and Scannon Control Flan Shock 4 of F	A5	24-07-19
12-272-C1094	Erosion and Sediment Control Plan Sheet 5 of 7	A3	21-09-18
12 21270 1034	Erosion and Ocalment Control Flan Origin V VI F	A5	21-09-10 24-07-19
12-272-C1095	Erosion and Sediment Control Plan Sheet 6 of 7	A3	21-09-18
TE-21 270 1030	Erosion and Ocument Control Flan Oliget 6 to 7	A5	21-09-18 24-07-19
12-272-C1096	Erosion and Sediment Control Plan Sheet 7 of 7		
12-212-6 1090	ETOSION AND SECURION CONTROL PIAN STIEST / OF /	A3	21-09-18
40 070 04007	Freeign and Codiment Control Details	A5	24-07-19
12-272-C1097	Erosion and Sediment Control Details	A1	21-09-18
45.070.00000	Company Among a propert Plan	A4	24-07-19
15-272-C2003	General Arrangement Plan	A3	21-09-18
15-272-C2010	Siteworks and Stormwater Drainage Plan Sheet 1 of 15	A3	21-09-18
15-272-C2011	Siteworks and Stormwater Drainage Plan Sheet 2 of 15	A3	21-09-18
15-272-C2012	Siteworks and Stormwater Drainage Plan Sheet 3 of 15	A3	21-09-18
15-272-C2013	Siteworks and Stormwater Drainage Plan Sheet 4 of 15	A3	21-09-18
15-272-C2014	Siteworks and Stormwater Drainage Plan Sheet 5 of 15	A3	21-09-18

45-272-C2016 Siteworks and Stormwater Drainage Plan Sheet 7 of 15 A3 21-09-15-272-C2017 45-272-C2017 Siteworks and Stormwater Drainage Plan Sheet 8 of 15 A3 21-09-15-272-C2018 45-272-C2018 Siteworks and Stormwater Drainage Plan Sheet 10 of 15 A3 21-09-15-272-C2019 45-272-C2020 Siteworks and Stormwater Drainage Plan Sheet 10 of 15 A3 21-09-15-272-C2021 45-272-C2021 Siteworks and Stormwater Drainage Plan Sheet 12 of 15 A3 21-09-15-272-C2022 45-272-C2022 Siteworks and Stormwater Drainage Plan Sheet 13 of 15 A3 21-09-15-272-C2023 45-272-C2023 Siteworks and Stormwater Drainage Plan Sheet 14 of 15 A3 21-09-15-272-C2024 45-272-C2024 Siteworks and Stormwater Drainage Plan Sheet 14 of 15 A3 21-09-15-272-C2024 45-272-C2024 Pavement Plan A3 21-09-15-272-C2024 45-272-C3003 General Arrangement Plan A3 21-09-15-272-C2004 45-272-C3004 Typical Road Sections A3 21-09-15-272-C2024 45-272-C3024 Roadworks Plan and Longitudinal Section Sheet 2 of 5 A3 21-09-15-272-C2024 45-272-C3024 <th></th> <th></th> <th></th> <th></th>				
45-272-C2017 Siteworks and Stormwater Drainage Plan Sheet 8 of 15 A3 21-09-15-272-C2018 Siteworks and Stormwater Drainage Plan Sheet 9 of 15 A3 21-09-15-272-C2019 Siteworks and Stormwater Drainage Plan Sheet 10 of 15 A3 21-09-15-272-C2020 Siteworks and Stormwater Drainage Plan Sheet 11 of 15 A3 21-09-15-272-C2021 Siteworks and Stormwater Drainage Plan Sheet 12 of 16 A3 21-09-15-272-C2022 Siteworks and Stormwater Drainage Plan Sheet 13 of 15 A3 21-09-15-272-C2023 Siteworks and Stormwater Drainage Plan Sheet 14 of 15 A3 21-09-15-272-C2023 Siteworks and Stormwater Drainage Plan Sheet 14 of 15 A3 21-09-15-272-C2024 Siteworks and Stormwater Drainage Plan Sheet 14 of 15 A3 21-09-15-272-C2024 Siteworks and Stormwater Drainage Plan Sheet 15 of 15 A3 21-09-15-272-C2024 Siteworks and Stormwater Drainage Plan Sheet 15 of 15 A3 21-09-15-272-C2024 Siteworks and Stormwater Drainage Plan Sheet 15 of 15 A3 21-09-15-272-C2024 Siteworks and Stormwater Drainage Plan Sheet 15 of 15 A3 21-09-15-272-C2024 Siteworks and Stormwater Drainage Plan Sheet 15 of 15 A3 21-09-15-272-C2024 Siteworks Plan And Longitudinal Section Sheet 1 of 5 A3 21-09-15-272-C2024 A3 21-09-15-272-C2024 A3 21-09-15-272-C2	15-272-C2015	Siteworks and Stormwater Drainage Plan Sheet 6 of 15	A3	21-09-18
45-272-C2018 Siteworks and Stormwater Drainage Plan Sheet 9 of 15 A3 21-09-2 45-272-C2019 Siteworks and Stormwater Drainage Plan Sheet 10 of 15 A3 21-09-2 45-272-C2020 Siteworks and Stormwater Drainage Plan Sheet 11 of 15 A3 21-09-2 45-272-C2021 Siteworks and Stormwater Drainage Plan Sheet 12 of 15 A3 21-09-2 45-272-C2022 Siteworks and Stormwater Drainage Plan Sheet 13 of 15 A3 21-09-2 45-272-C2023 Siteworks and Stormwater Drainage Plan Sheet 14 of 15 A3 21-09-2 45-272-C2024 Siteworks and Stormwater Drainage Plan Sheet 15 of 15 A3 21-09-2 45-272-C3030 Pavement Plan A3 21-09-2 45-272-C3003 General Arrangement Plan A3 21-09-2 45-272-C3004 Readworks Plan and Longitudinal Section Sheet 1 of 5 A3 21-09-2 45-272-C3021 Readworks Plan and Longitudinal Section Sheet 2 of 5 A3 21-09-2 45-272-C3023 Readworks Plan and Longitudinal Section Sheet 4 of 5 A3 21-09-2 45-272-C3024 Readworks Plan and Longitudinal Section Sheet 5 of 5 A3	15-272-C2016	Siteworks and Stormwater Drainage Plan Sheet 7 of 15	A3	21-09-18
45-272-C2019 Siteworks and Stormwater Drainage Plan Sheet 10 of 15 A3 21-09-2 45-272-C2020 Siteworks and Stormwater Drainage Plan Sheet 11 of 15 A3 21-09-2 45-272-C2021 Siteworks and Stormwater Drainage Plan Sheet 12 of 15 A3 21-09-2 45-272-C2022 Siteworks and Stormwater Drainage Plan Sheet 13 of 15 A3 21-09-2 45-272-C2023 Siteworks and Stormwater Drainage Plan Sheet 14 of 15 A3 21-09-2 45-272-C2024 Siteworks and Stormwater Drainage Plan Sheet 15 of 15 A3 21-09-2 45-272-C3003 Pavement Plan A3 21-09-2 45-272-C3000 Pavement Plan A3 21-09-2 45-272-C3010 Typical Road Sections A3 21-09-2 45-272-C3020 Roadworks Plan and Longitudinal Section Sheet 1 of 5 A3 21-09-2 45-272-C3021 Roadworks Plan and Longitudinal Section Sheet 3 of 6 A3 21-09-2 45-272-C3022 Roadworks Plan and Longitudinal Section Sheet 4 of 5 A3 21-09-2 45-272-C3023 Roadworks Plan and Longitudinal Section Sheet 5 of 5 A3 21-09-2	15-272-C2017	Siteworks and Stormwater Drainage Plan Sheet 8 of 15	A3	21-09-18
45-272-C2020 Siteworks and Stormwater Drainage Plan Sheet 11 of 15 A3 21-09-45-272-C2021 45-272-C2022 Siteworks and Stormwater Drainage Plan Sheet 12 of 15 A3 21-09-45-272-C2022 45-272-C2023 Siteworks and Stormwater Drainage Plan Sheet 13 of 15 A3 21-09-45-272-C2023 45-272-C2024 Siteworks and Stormwater Drainage Plan Sheet 14 of 15 A3 21-09-45-272-C2030 45-272-C2030 Pavement Plan A3 21-09-45-272-C3003 45-272-C3003 General Arrangement Plan A3 21-09-45-272-C3010 45-272-C3020 Roadworks Plan and Longitudinal Section Sheet 1 of 5 A3 21-09-45-272-C3024 45-272-C3021 Roadworks Plan and Longitudinal Section Sheet 2 of 5 A3 21-09-45-272-C3022 45-272-C3022 Roadworks Plan and Longitudinal Section Sheet 4 of 5 A3 21-09-45-272-C3024 45-272-C3024 Roadworks Plan and Longitudinal Section Sheet 5 of 5 A3 21-09-45-272-C3034 45-272-C3030 Roadworks Plan and Longitudinal Section Sheet 5 of 5 A3 21-09-45-272-C3045 45-272-C3050 Stormwater Drainage Plan Sheet 1 of 5 A3 21-09-45-272-C3055 4	15-272-C2018	Siteworks and Stormwater Drainage Plan Sheet 9 of 15	A3	21-09-18
45-272-C2021 Siteworks and Stormwater Drainage Plan Sheet 12 of 15 A3 21-09-2 45-272-C2022 Siteworks and Stormwater Drainage Plan Sheet 13 of 15 A3 21-09-2 45-272-C2023 Siteworks and Stormwater Drainage Plan Sheet 14 of 15 A3 21-09-2 45-272-C2024 Siteworks and Stormwater Drainage Plan Sheet 15 of 15 A3 21-09-2 45-272-C2030 Pavement Plan A3 21-09-2 45-272-C3003 General Arrangement Plan A3 21-09-2 45-272-C3010 Typical Read Sections A3 21-09-2 45-272-C3020 Roadworks Plan and Longitudinal Section Sheet 1 of 5 A3 21-09-2 45-272-C3021 Roadworks Plan and Longitudinal Section Sheet 2 of 5 A3 21-09-2 45-272-C3023 Roadworks Plan and Longitudinal Section Sheet 5 of 5 A3 21-09-2 45-272-C3024 Roadworks Plan and Longitudinal Section Sheet 5 of 5 A3 21-09-2 45-272-C3030 Road Longitudinal Sections A3 21-09-2 45-272-C3050 Stormwater Drainage Plan Sheet 1 of 5 A3 21-09-2 45-272-C3051	15-272-C2019	Siteworks and Stormwater Drainage Plan Sheet 10 of 15	A3	21-09-18
45-272-C2022 Siteworks and Stormwater Drainage Plan Sheet 13 of 15 A3 21-09-2 45-272-C2023 Siteworks and Stormwater Drainage Plan Sheet 14 of 15 A3 21-09-2 45-272-C2024 Siteworks and Stormwater Drainage Plan Sheet 15 of 15 A3 21-09-2 45-272-C2030 Pavement Plan A3 21-09-2 45-272-C3003 General Arrangement Plan A3 21-09-2 45-272-C3010 Typical Road Sections A3 21-09-2 45-272-C3020 Roadworks Plan and Longitudinal Section Sheet 1 of 5 A3 21-09-2 45-272-C3021 Roadworks Plan and Longitudinal Section Sheet 2 of 5 A3 21-09-2 45-272-C3022 Roadworks Plan and Longitudinal Section Sheet 4 of 5 A3 21-09-2 45-272-C3023 Roadworks Plan and Longitudinal Section Sheet 4 of 5 A3 21-09-2 45-272-C30304 Roadworks Plan and Longitudinal Section Sheet 5 of 5 A3 21-09-2 45-272-C30500 Bridge Elevation and Typical Section A4 04-10-2 45-272-C3051 Stormwater Drainage Plan Sheet 1 of 5 A3 21-09-2 45-272-C3053 <td>15-272-C2020</td> <td>Siteworks and Stormwater Drainage Plan Sheet 11 of 15</td> <td>A3</td> <td>21-09-18</td>	15-272-C2020	Siteworks and Stormwater Drainage Plan Sheet 11 of 15	A3	21-09-18
15-272-C2023 Siteworks and Stormwater Drainage Plan Sheet 14 of 15 A3 21-09-15-272-C2024 15-272-C2024 Siteworks and Stormwater Drainage Plan Sheet 15 of 15 A3 21-09-15-272-C2030 15-272-C2030 Pavement Plan A3 21-09-15-272-C3003 15-272-C3001 Typical Road Sections A3 21-09-15-272-C3020 15-272-C3020 Roadworks Plan and Longitudinal Section Sheet 1 of 5 A3 21-09-15-272-C3022 15-272-C3022 Roadworks Plan and Longitudinal Section Sheet 3 of 5 A3 21-09-15-272-C3023 15-272-C3024 Roadworks Plan and Longitudinal Section Sheet 4 of 5 A3 21-09-15-272-C3024 15-272-C3030 Road Longitudinal Sections A3 21-09-15-272-C3030 15-272-C3040 Bridge Elevation and Typical Section A4 04-10-15-272-C3050 15-272-C3051 Stormwater Drainage Plan Sheet 1 of 5 A3 21-09-15-272-C3051 15-272-C3053 Stormwater Drainage Plan Sheet 2 of 5 A3 21-09-15-272-C3053 15-272-C3054 Stormwater Drainage Plan Sheet 3 of 5 A3 21-09-15-272-C3058 15-272-C3058 Stormwater Drainage Plan Sheet 5 of 5	15-272-C2021	Siteworks and Stormwater Drainage Plan Sheet 12 of 15	A3	21-09-18
15-272-C2024 Siteworks and Stormwater Drainage Plan Sheet 15 of 15 A3 21-09-15-272-C2030 15-272-C2030 Pavement Plan A3 21-09-15-272-C3003 15-272-C3001 Typical Road Sections A3 21-09-15-272-C3020 15-272-C3020 Roadworks Plan and Longitudinal Section Sheet 1 of 5 A3 21-09-15-272-C3021 15-272-C3021 Roadworks Plan and Longitudinal Section Sheet 2 of 5 A3 21-09-15-272-C3022 15-272-C3023 Roadworks Plan and Longitudinal Section Sheet 4 of 5 A3 21-09-15-272-C3024 15-272-C3024 Roadworks Plan and Longitudinal Section Sheet 5 of 5 A3 21-09-15-272-C3024 15-272-C3030 Road Longitudinal Sections A3 21-09-15-272-C3030 15-272-C3040 Bridge Elevation and Typical Section A4 04-10-15-272-C3050 15-272-C3050 Stormwater Drainage Plan Sheet 1 of 5 A3 21-09-15-272-C3051 15-272-C3052 Stormwater Drainage Plan Sheet 2 of 5 A3 21-09-15-272-C3053 15-272-C3053 Stormwater Drainage Plan Sheet 5 of 5 A3 21-09-15-272-C3054 15-272-C3064 Stormwater Drainage Plan Sheet 5 of 5	15-272-C2022	Siteworks and Stormwater Drainage Plan Sheet 13 of 15	A3	21-09-18
15-272-C2030 Pavement Plan A3 21-09-15-272-C3003 15-272-C3010 Typical Road Sections A3 21-09-15-272-C3020 15-272-C3020 Roadworks Plan and Longitudinal Section Sheet 1 of 5 A3 21-09-15-272-C3021 15-272-C3021 Roadworks Plan and Longitudinal Section Sheet 2 of 5 A3 21-09-15-272-C3022 15-272-C3022 Roadworks Plan and Longitudinal Section Sheet 3 of 5 A3 21-09-15-272-C3023 15-272-C3024 Roadworks Plan and Longitudinal Section Sheet 4 of 5 A3 21-09-15-272-C3024 15-272-C3030 Road Longitudinal Sections A3 21-09-15-272-C3030 15-272-C3040 Bridge Elevation and Typical Section A4 04-10-15-272-C3050 15-272-C3051 Stormwater Drainage Plan Sheet 1 of 5 A3 21-09-15-272-C3052 15-272-C3052 Stormwater Drainage Plan Sheet 3 of 5 A3 21-09-15-272-C3053 15-272-C3058 Stormwater Drainage Plan Sheet 5 of 5 A3 21-09-15-272-C3058 15-272-C3060 Bio-Retention Basin NO. 1 Detail Plan A3 21-09-15-272-C3070 15-272-C3071 Pavement Plan Sheet 2 of 5 A3 2	15-272-C2023	Siteworks and Stormwater Drainage Plan Sheet 14 of 15	A3	21-09-18
15-272-C3003 General Arrangement Plan A3 24-09-15-272-C3010 15-272-C3010 Typical Road Sections A3 21-09-15-272-C3020 15-272-C3020 Roadworks Plan and Longitudinal Section Sheet 1 of 5 A3 21-09-15-272-C3021 15-272-C3021 Roadworks Plan and Longitudinal Section Sheet 3 of 5 A3 21-09-15-272-C3022 15-272-C3023 Roadworks Plan and Longitudinal Section Sheet 4 of 5 A3 21-09-15-272-C3024 15-272-C3024 Roadworks Plan and Longitudinal Section Sheet 5 of 5 A3 21-09-15-272-C3030 15-272-C3030 Road Longitudinal Sections A3 21-09-15-272-C3030 15-272-C3040 Bridge Elevation and Typical Section A4 04-10-15-272-C3050 15-272-C3051 Stormwater Drainage Plan Sheet 1 of 5 A3 21-09-15-272-C3051 15-272-C3052 Stormwater Drainage Plan Sheet 3 of 5 A3 21-09-15-272-C3053 15-272-C3053 Stormwater Drainage Plan Sheet 4 of 5 A3 21-09-15-272-C3054 15-272-C3058 Stormwater Drainage Plan Sheet 5 of 5 A3 21-09-15-272-C3054 15-272-C3070 Pavement Plan Sheet 1 of 5 A3	15-272-C2024	Siteworks and Stormwater Drainage Plan Sheet 15 of 15		21-09-18
45-272-C3010 Typical Road Sections A3 21-09-15-272-C3020 Roadworks Plan and Longitudinal Section Sheet 1 of 5 A3 21-09-15-272-C3021 Roadworks Plan and Longitudinal Section Sheet 2 of 5 A3 21-09-15-272-C3022 Roadworks Plan and Longitudinal Section Sheet 3 of 5 A3 21-09-15-272-C3023 Roadworks Plan and Longitudinal Section Sheet 4 of 5 A3 21-09-15-272-C3024 Roadworks Plan and Longitudinal Section Sheet 5 of 5 A3 21-09-15-272-C3024 Roadworks Plan and Longitudinal Section Sheet 5 of 5 A3 21-09-15-272-C3034 A3 21-09-15-272-C3034 A3 21-09-15-272-C3034 A3 21-09-15-272-C3034 A4 04-10-15-272-C3054 A3 21-09-15-272-C3054 A3 21	15-272-C2030	Pavement Plan	A3	21-09-18
15-272-C3020 Roadworks Plan and Longitudinal Section Sheet 1 of 5 A3 21-09-15-272-C3024 15-272-C3022 Roadworks Plan and Longitudinal Section Sheet 2 of 5 A3 21-09-15-272-C3022 15-272-C3023 Roadworks Plan and Longitudinal Section Sheet 4 of 5 A3 21-09-15-272-C3024 15-272-C3024 Roadworks Plan and Longitudinal Section Sheet 5 of 5 A3 21-09-15-272-C3030 15-272-C3030 Road Longitudinal Sections A3 21-09-15-272-C3040 15-272-C3040 Bridge Elevation and Typical Section A4 04-10-15-272-C3050 15-272-C3050 Stormwater Drainage Plan Sheet 1 of 5 A3 21-09-15-272-C3052 15-272-C3052 Stormwater Drainage Plan Sheet 3 of 5 A3 21-09-15-272-C3053 15-272-C3053 Stormwater Drainage Plan Sheet 4 of 5 A3 21-09-15-272-C3058 15-272-C3058 Stormwater Drainage Catchment Plan (Post-Developed) A2 21-09-15-272-C3070 15-272-C3070 Pavement Plan Sheet 1 of 5 A3 21-09-15-272-C3071 15-272-C3072 Pavement Plan Sheet 2 of 5 A3 21-09-15-272-C3072	15-272-C3003	General Arrangement Plan	A3	21-09-18
15 272 C3021 Readworks Plan and Longitudinal Section Sheet 2 of 5 A3 21-09-2 15 272 C3022 Readworks Plan and Longitudinal Section Sheet 3 of 5 A3 21-09-2 15 272 C3023 Readworks Plan and Longitudinal Section Sheet 4 of 5 A3 21-09-2 15 272 C3024 Readworks Plan and Longitudinal Section Sheet 5 of 5 A3 21-09-2 15 272 C3030 Read Longitudinal Sections A3 21-09-2 15 272 C3040 Bridge Elevation and Typical Section A4 04-10-2 15 272 C3050 Stormwater Drainage Plan Sheet 1 of 5 A3 21-09-2 15 272 C3051 Stormwater Drainage Plan Sheet 2 of 5 A3 21-09-2 15 272 C3052 Stormwater Drainage Plan Sheet 4 of 5 A3 21-09-2 15 272 C3053 Stormwater Drainage Plan Sheet 5 of 5 A3 21-09-2 15 272 C3058 Stormwater Drainage Catchment Plan (Post-Developed) A2 21-09-2 15 272 C3070 Bio-Retention Basin NO. 1 Detail Plan A3 21-09-2 15 272 C3071 Pavement Plan Sheet 2 of 5 A3 21-09-2 15 272 C3072 Pavem		71		21-09-18
15-272-C3022 Roadworks Plan and Longitudinal Section Sheet 3 of 5 A3 21-09-2 15-272-C3023 Roadworks Plan and Longitudinal Section Sheet 4 of 5 A3 21-09-2 15-272-C3024 Roadworks Plan and Longitudinal Section Sheet 5 of 5 A3 21-09-2 15-272-C3030 Road Longitudinal Sections A3 21-09-2 15-272-C3040 Bridge Elevation and Typical Section A4 04-10-2 15-272-C3050 Stormwater Drainage Plan Sheet 1 of 5 A3 21-09-2 15-272-C3051 Stormwater Drainage Plan Sheet 2 of 5 A3 21-09-2 15-272-C3052 Stormwater Drainage Plan Sheet 4 of 5 A3 21-09-2 15-272-C3053 Stormwater Drainage Plan Sheet 4 of 5 A3 21-09-2 15-272-C3058 Stormwater Drainage Catchment Plan (Post-Developed) A2 21-09-2 15-272-C3060 Bio-Retention Basin NO. 1 Detail Plan A3 21-09-2 15-272-C3071 Pavement Plan Sheet 1 of 5 A3 21-09-2 15-272-C3072 Pavement Plan Sheet 2 of 5 A3 21-09-2	15-272-C3020	Roadworks Plan and Longitudinal Section Sheet 1 of 5	A3	21-09-18
45-272-C3023 Roadworks Plan and Longitudinal Section Sheet 4 of 5 A3 21-09-2 45-272-C3024 Roadworks Plan and Longitudinal Section Sheet 5 of 5 A3 21-09-2 45-272-C3030 Read Longitudinal Sections A3 21-09-2 45-272-C3040 Bridge Elevation and Typical Section A4 04-10-2 45-272-C3050 Stormwater Drainage Plan Sheet 1 of 5 A3 21-09-2 45-272-C3051 Stormwater Drainage Plan Sheet 2 of 5 A3 21-09-2 45-272-C3052 Stormwater Drainage Plan Sheet 4 of 5 A3 21-09-2 45-272-C3053 Stormwater Drainage Plan Sheet 5 of 5 A3 21-09-2 45-272-C3058 Stormwater Drainage Catchment Plan (Post-Developed) A2 21-09-2 45-272-C3060 Bio-Retention Basin NO. 1 Detail Plan A3 21-09-2 45-272-C3070 Pavement Plan Sheet 1 of 5 A3 21-09-2 45-272-C3071 Pavement Plan Sheet 2 of 5 A3 21-09-2 45-272-C3072 Pavement Plan Sheet 3 of 5 A3 21-09-2			A3	21-09-18
45-272-C3024 Roadworks Plan and Longitudinal Section Sheet 5 of 5 A3 21-09-2 45-272-C3030 Road Longitudinal Sections A3 21-09-2 45-272-C3040 Bridge Elevation and Typical Section A4 04-10-2 45-272-C3050 Stormwater Drainage Plan Sheet 1 of 5 A3 21-09-2 45-272-C3051 Stormwater Drainage Plan Sheet 2 of 5 A3 21-09-2 45-272-C3052 Stormwater Drainage Plan Sheet 4 of 5 A3 21-09-2 45-272-C3053 Stormwater Drainage Plan Sheet 5 of 5 A3 21-09-2 45-272-C3054 Stormwater Drainage Catchment Plan (Post-Developed) A2 21-09-2 45-272-C3060 Bio-Retention Basin NO. 1 Detail Plan A3 21-09-2 45-272-C3070 Pavement Plan Sheet 1 of 5 A3 21-09-2 45-272-C3071 Pavement Plan Sheet 2 of 5 A3 21-09-2 45-272-C3072 Pavement Plan Sheet 3 of 5 A3 21-09-2	15-272-C3022	Roadworks Plan and Longitudinal Section Sheet 3 of 5	A3	21-09-18
45-272-C3030 Road Longitudinal Sections A3 21-09-2 15-272-C3040 Bridge Elevation and Typical Section A4 04-10-2 15-272-C3050 Stormwater Drainage Plan Sheet 1 of 5 A3 21-09-2 15-272-C3051 Stormwater Drainage Plan Sheet 2 of 5 A3 21-09-2 15-272-C3052 Stormwater Drainage Plan Sheet 3 of 5 A3 21-09-2 15-272-C3053 Stormwater Drainage Plan Sheet 4 of 5 A3 21-09-2 15-272-C3054 Stormwater Drainage Plan Sheet 5 of 5 A3 21-09-2 15-272-C3058 Stormwater Drainage Catchment Plan (Post-Developed) A2 21-09-2 15-272-C3060 Bio-Retention Basin NO. 1 Detail Plan A3 21-09-2 15-272-C3070 Pavement Plan Sheet 1 of 5 A3 21-09-2 15-272-C3071 Pavement Plan Sheet 2 of 5 A3 21-09-2 15-272-C3072 Pavement Plan Sheet 3 of 5 A3 21-09-2	15-272-C3023	<u> </u>	A3	21-09-18
45-272-C3040 Bridge Elevation and Typical Section A4 04-10-2 45-272-C3050 Stormwater Drainage Plan Sheet 1 of 5 A3 21-09-2 45-272-C3051 Stormwater Drainage Plan Sheet 2 of 5 A3 21-09-2 45-272-C3052 Stormwater Drainage Plan Sheet 3 of 5 A3 21-09-2 45-272-C3053 Stormwater Drainage Plan Sheet 4 of 5 A3 21-09-2 45-272-C3054 Stormwater Drainage Plan Sheet 5 of 5 A3 21-09-2 45-272-C3058 Stormwater Drainage Catchment Plan (Post-Developed) A2 21-09-2 45-272-C3060 Bio-Retention Basin NO. 1 Detail Plan A3 21-09-2 45-272-C3070 Pavement Plan Sheet 1 of 5 A3 21-09-2 45-272-C3071 Pavement Plan Sheet 2 of 5 A3 21-09-2 45-272-C3072 Pavement Plan Sheet 3 of 5 A3 21-09-2	15-272-C3024	Roadworks Plan and Longitudinal Section Sheet 5 of 5	A3	21-09-18
45-272-C3050 Stormwater Drainage Plan Sheet 1 of 5 A3 21-09-2 45-272-C3051 Stormwater Drainage Plan Sheet 2 of 5 A3 21-09-2 45-272-C3052 Stormwater Drainage Plan Sheet 3 of 5 A3 21-09-2 45-272-C3053 Stormwater Drainage Plan Sheet 4 of 5 A3 21-09-2 45-272-C3054 Stormwater Drainage Plan Sheet 5 of 5 A3 21-09-2 45-272-C3058 Stormwater Drainage Catchment Plan (Post-Developed) A2 21-09-2 45-272-C3060 Bio-Retention Basin NO. 1 Detail Plan A3 21-09-2 45-272-C3070 Pavement Plan Sheet 1 of 5 A3 21-09-2 45-272-C3071 Pavement Plan Sheet 2 of 5 A3 21-09-2 45-272-C3072 Pavement Plan Sheet 3 of 5 A3 21-09-2	15-272-C3030		A3	21-09-18
45-272-C3051 Stormwater Drainage Plan Sheet 2 of 5 A3 21-09-2 15-272-C3052 Stormwater Drainage Plan Sheet 3 of 5 A3 21-09-2 15-272-C3053 Stormwater Drainage Plan Sheet 4 of 5 A3 21-09-2 15-272-C3054 Stormwater Drainage Plan Sheet 5 of 5 A3 21-09-2 15-272-C3058 Stormwater Drainage Catchment Plan (Post-Developed) A2 21-09-2 15-272-C3060 Bio-Retention Basin NO. 1 Detail Plan A3 21-09-2 15-272-C3070 Pavement Plan Sheet 1 of 5 A3 21-09-2 15-272-C3071 Pavement Plan Sheet 2 of 5 A3 21-09-2 15-272-C3072 Pavement Plan Sheet 3 of 5 A3 21-09-2	15-272-C3040	Bridge Elevation and Typical Section	A4	04-10-18
45-272-C3052 Stormwater Drainage Plan Sheet 3 of 5 A3 21-09-2 15-272-C3053 Stormwater Drainage Plan Sheet 4 of 5 A3 21-09-2 15-272-C3054 Stormwater Drainage Plan Sheet 5 of 5 A3 21-09-2 15-272-C3058 Stormwater Drainage Catchment Plan (Post-Developed) A2 21-09-2 15-272-C3060 Bio-Retention Basin NO. 1 Detail Plan A3 21-09-2 15-272-C3070 Pavement Plan Sheet 1 of 5 A3 21-09-2 15-272-C3071 Pavement Plan Sheet 2 of 5 A3 21-09-2 15-272-C3072 Pavement Plan Sheet 3 of 5 A3 21-09-2	15-272-C3050		A3	21-09-18
15-272-C3053 Stormwater Drainage Plan Sheet 4 of 5 A3 21-09-2 15-272-C3054 Stormwater Drainage Plan Sheet 5 of 5 A3 21-09-2 15-272-C3058 Stormwater Drainage Catchment Plan (Post-Developed) A2 21-09-2 15-272-C3060 Bio-Retention Basin NO. 1 Detail Plan A3 21-09-2 15-272-C3070 Pavement Plan Sheet 1 of 5 A3 21-09-2 15-272-C3071 Pavement Plan Sheet 2 of 5 A3 21-09-2 15-272-C3072 Pavement Plan Sheet 3 of 5 A3 21-09-2				21-09-18
15-272-C3054 Stormwater Drainage Plan Sheet 5 of 5 A3 21-09-2 15-272-C3058 Stormwater Drainage Catchment Plan (Post-Developed) A2 21-09-2 15-272-C3060 Bio-Retention Basin NO. 1 Detail Plan A3 21-09-2 15-272-C3070 Pavement Plan Sheet 1 of 5 A3 21-09-2 15-272-C3071 Pavement Plan Sheet 2 of 5 A3 21-09-2 15-272-C3072 Pavement Plan Sheet 3 of 5 A3 21-09-2		9		21-09-18
45-272-C3058 Stormwater Drainage Catchment Plan (Post-Developed) A2 21-09-2 45-272-C3060 Bio-Retention Basin NO. 1 Detail Plan A3 21-09-2 45-272-C3070 Pavement Plan Sheet 1 of 5 A3 21-09-2 45-272-C3071 Pavement Plan Sheet 2 of 5 A3 21-09-2 45-272-C3072 Pavement Plan Sheet 3 of 5 A3 21-09-2	15-272-C3053		A3	21-09-18
15-272-C3060 Bio-Retention Basin NO. 1 Detail Plan A3 21-09-2 15-272-C3070 Pavement Plan Sheet 1 of 5 A3 21-09-2 15-272-C3071 Pavement Plan Sheet 2 of 5 A3 21-09-2 15-272-C3072 Pavement Plan Sheet 3 of 5 A3 21-09-2	15-272-C3054			21-09-18
45-272-C3070 Pavement Plan Sheet 1 of 5 A3 21-09-2 45-272-C3071 Pavement Plan Sheet 2 of 5 A3 21-09-2 45-272-C3072 Pavement Plan Sheet 3 of 5 A3 21-09-2	15-272-C3058			21-09-18
15-272-C3071 Pavement Plan Sheet 2 of 5 A3 21-09-2 15-272-C3072 Pavement Plan Sheet 3 of 5 A3 21-09-2	15-272-C3060	Bio-Retention Basin NO. 1 Detail Plan		21-09-18
15-272-C3072 Pavement Plan Sheet 3 of 5 A3 21-09-2	15-272-C3070	Pavement Plan Sheet 1 of 5		21-09-18
		Pavement Plan Sheet 2 of 5		21-09-18
145 272 C2072 Dovoment Dien Shoot 4 of 5 1		Pavement Plan Sheet 3 of 5		21-09-18
	15-272-C3073	Pavement Plan Sheet 4 of 5	A3	21-09-18
10 2 1 2 0 0 0 1 1 2 1 0 0 0 0 0 0 0 0 0				21-09-18
	15-272-C3080			21-09-18
	15-272-C3081	Retaining Wall Sections Sheet 1 of 4		21-09-18
3 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1				21-09-18
is and a second of the second		3		21-09-18
15-272-C3084 Retaining Wall Sections Sheet 4 of 4 A1 21-09-	45 272 C2004	Petaining Wall Sections Shoot 4 of 4	Δ1	21_00_18

Civil Plans prepared by AT&L				
Drawing Title			Date	
15-272-C5006	Typical Road Sections Sheet 1	3	31-01-20	
15-2 7 2-C5018	Bulk Earthworks Cut/Fill Plan Sheet 1	2	31-01-20	
15-272-C5021	Roadworks Plan Sheet 1	4	06-02-20	
15-272-C5022	Roadworks Plan Sheet 2	4	31-01-20	
15-272-C5033	Carpark Adjustment Siteworks Plans	4	31-01-20	
15-272-C5057	Stormwater Drainage Plan Sheet 1	2	31-01-20	
15-272-C5063	Subsurface Drainage Plan Sheet 1	2	31-01-20	
15-272-C5101	Pavement Plan Sheet 1	3	31-01-20	
15-272-C5121	Services and Utilities Coordination Plan Sheet 1	3	06-02-20	
15-272-C5122	Services and Utilities Coordination Plan Sheet 2	4	06-02-20	
15-272-C5131	Road Furniture Plan Sheet 1	3	31-01-20	

Landscape Plans prepared by Scape Design Landscape Architecture			
Drawing	Title	Issue	Date
L.CD.101	Western North South Link Road Landscape Plan Sheet 1	S	14/2/20

L.CD.301	Western North South Link Road Planting & Revegetation	Q	31/1/20
	Schedule		

Table 8A: Schedule of Approved Plans – Stage 1 Development

Architectural Plans prepared by SBA Architects			
Drawing	Title	Issue	Date
OAK-1A-DA-10	Proposed Industrial Facility – Building 1A Site Plan	F	23 June 2021
OAK-1A-DA-11	Proposed Industrial Facility – Building 1A Roof Plan	Α	13 July 2020
OAK-1A-DA-12	Proposed Industrial Facility – Building 1A Office Ground Floor Plan	Q	23 June 2021
OAK-1A-DA-13	Proposed Industrial Facility – Building 1A Office First Floor Plan	Q	23 June 2021
OAK-1A-DA-13A	Proposed Industrial Facility – Building 1A Office Second Floor Plan	Ī	23 June 2021
OAK-1A-DA-14	Proposed Industrial Facility – Building 1A Office Elevations	R	1 February 2022
OAK-1A-DA-15	Proposed Industrial Facility – Building 1A Warehouse Elevations	S	1 February 2022
OAK-1A-DA-18	Proposed Industrial Facility – Building 1A Warehouse Plan	В	28 July 2020
OAK-1A-DA-18A	Proposed Industrial Facility – Building 1A Mezzanine Plan – 1	В	28 July 2020
OAK-1A-DA-18B	Proposed Industrial Facility – Building 1A Mezzanine Plan – 2	В	28 July 2020
OAK-1A-DA-18C	Proposed Industrial Facility – Building 1A Mezzanine Plan – 3	В	28 July 2020
OAK-1A-DA-18D	Proposed Industrial Facility – Building 1A Mezzanine Plan – 4	В	28 July 2020
OAK-1A-DA-18E	Proposed Industrial Facility – Building 1A Mezzanine Plan – 5	В	28 July 2020
OAK-1A-DA-18F	Proposed Industrial Facility – Building 1A Mezzanine Plan – 6	В	28 July 2020
OAK-1A-DA-19	Skybridge Sections & Elevations – Building 1A	М	1 February 2022
OAK-1A-DA-25	Proposed Industrial Facility – Building 1A Energy Complex – 1	Α	13 July 2020
OAK-1A-DA-28	Proposed Industrial Facility – Building 1A Stage 2 – Site Plan	Е	29 July 2020
OAK-1A-DA-29	Proposed Industrial Facility Building 1A - Stage 2 - Elevations	М	1 February 2022
OAK-DA-DA00	Proposed Industrial Facility - Building 1B/1C - Cover page	С	9 June 2021
OAK-DA-DA01	Proposed Industrial Facility - Building 1B/1C – Perspectives – 1B1/1B2	С	9 June 2021
OAK-DA-DA02	Proposed Industrial Facility - Building 1B/1C – Perspectives – Office 1C	С	9 June 2021
OAK-DA-DA30	Proposed Industrial Facility - Building 1B/1C - Site Plan	F	9 June 2021
OAK-DA-DA31	Proposed Industrial Facility - Building 1B/1C - Roof Plan	F	9 June 2021
OAK-DA-DA32	Proposed Industrial Facility - Building 1B/1C - Office Plans 1B1	Е	9 June 2021

OAK-DA-DA33	Proposed Industrial Facility - Building 1B/1C - Office Plans 1B2	F	9 June 2021
OAK-DA-DA33A	Proposed Industrial Facility - Building 1B/1C - Office Plans 1C	F	9 June 2021
OAK-DA-DA34	Proposed Industrial Facility - Building 1B/1C - Elevations - Office 1B	Е	9 June 2021
OAK-DA-D34A	Proposed Industrial Facility - Building 1B/1C - Elevations - Office 1C	Е	9 June 2021
OAK-DA-DA35	Proposed Industrial Facility - Building 1B/1C - Elevations - Warehouse 1B	Е	9 June 2021
OAK-DA-DA36	Proposed Industrial Facility - Building 1B/1C - Elevations - Warehouse 1C	Е	9 June 2021
OAK-DA-DA37	Proposed Industrial Facility - Building 1B/1C – Sections - Warehouse	E	9 June 2021
OAK 1B1C DA 40	Proposed Industrial Facility – Proposed 1B & 1C – Signage Plan	D	9 June 2021

Landscape Plans prepared by Scape Design Landscape Architecture			
Drawing	Title	Revision	Date
L.SK.00	Cover Sheet	S	17/7/20
L.SK.01	Landscape Master Plan	Р	17/7/20
L.SK.02	Planting Plan	M	17/7/20
L.SK.03	Planting Schedule	M	8/7/20
L.SK.04	Character & Materials	N	8/7/20
L.SK.100	Landscape – Plan – Sheet 1	N	17/7/20
L.SK.101	Landscape – Plan – Sheet 2	N	17/7/20
L.SK.102	Landscape – Plan – Sheet 3	0	17/7/20
L.SK.103	Landscape – Plan – Sheet 4	0	17/7/20
L.SK.104	Landscape – Plan – Sheet 5	0	17/7/20
L.SK.105	Landscape – Detailed Plan – Sheet 1	M	17/7/20
L.SK.106	Landscape – Detailed Plan – Sheet 2	M	17/7/20
L.SK.200	Landscape – Sections – Sheet 1	K	8/7/20
L.SK.201	Landscape – Sections – Sheet 2	K	8/7/20
L.SK.202	Landscape – Sections – Sheet 3	K	17/7/20
L.SK.203	Landscape – Sections – Sheet 4	L	17/7/20
L.SK.204	Carpark Details	Н	17/7/20

Civil Plans prepared by AT&L				
Drawing	Title	Revision	Date	
15-272-C1000	Cover Sheet	A10	20-10-20	
15-272-C1001	Drawing List	A10	20-10-20	
15-272-C1002	General Notes	A10	20-10-20	
15-272-C1003	Precinct General Arrangement Plan	A16	20-10-20	
15-272-C1004	Typical Site Sections Sheet 1 of 6	A12	20-10-20	
15-272-C1005	Typical Site Sections Sheet 2 of 6	A11	20-10-20	
15-272-C1006	Typical Site Sections Sheet 3 of 6	A11	20-10-20	
15-272-C1007	Typical Site Sections Sheet 4 of 6	A9	20-10-20	
15-272-C1008	Typical Site Sections Sheet 5 of 6	A9	20-10-20	
15-272-C1009	Typical Site Sections Sheet 6 of 6	A11	20-10-20	
15-272-C1010	Typical Road Sections	A9	20-10-20	
15-272-C1011	Contour Plan	A12	20-10-20	
15-272-C1014	Bulk Earthworks Cut/Fill Plan	A13	20-10-20	

15-272-C1015	Earthworks and Stormwater Drainage Plan Sheet 1 of 20	A10	20-10-20
15-272-C1016	Earthworks and Stormwater Drainage Plan Sheet 2 of 20	A10	20-10-20
15-272-C1017	Earthworks and Stormwater Drainage Plan Sheet 3 of 20	A10	20-10-20
15-272-C1018	Earthworks and Stormwater Drainage Plan Sheet 4 of 20	A10	20-10-20
15-272-C1019	Earthworks and Stormwater Drainage Plan Sheet 5 of 20	A10	20-10-20
15-272-C1020	Earthworks and Stormwater Drainage Plan Sheet 6 of 20	A10	20-10-20
15-272-C1021	Earthworks and Stormwater Drainage Plan Sheet 7 of 20	A10	20-10-20
15-272-C1022	Earthworks and Stormwater Drainage Plan Sheet 8 of 20	A10	20-10-20
15-272-C1023	Earthworks and Stormwater Drainage Plan Sheet 9 of 20	A12	20-10-20
15-272-C1024	Earthworks and Stormwater Drainage Plan Sheet 10 of 20	A12	20-10-20
15-272-C1025	Earthworks and Stormwater Drainage Plan Sheet 11 of 20	A10	20-10-20
15-272-C1026	Earthworks and Stormwater Drainage Plan Sheet 12 of 20	A10	20-10-20
15-272-C1027	Earthworks and Stormwater Drainage Plan Sheet 13 of 20	A10	20-10-20
15-272-C1028	Earthworks and Stormwater Drainage Plan Sheet 14 of 20	A10	20-10-20
15-272-C1029	Earthworks and Stormwater Drainage Plan Sheet 15 of 20	A12	20-10-20
15-272-C1030	Earthworks and Stormwater Drainage Plan Sheet 16 of 20	A12	20-10-20
15-272-C1031	Earthworks and Stormwater Drainage Plan Sheet 17 of 20	A10	20-10-20
15-272-C1032	Earthworks and Stormwater Drainage Plan Sheet 18 of 20	A10	20-10-20
15-272-C1033	Earthworks and Stormwater Drainage Plan Sheet 19 of 20	A10	20-10-20
15-272-C1034	Earthworks and Stormwater Drainage Plan Sheet 20 of 20	A10	20-10-20
15-272-C1040	Roadworks and Stormwater Drainage Plan Sheet 1 of 18	A11	20-10-20
15-272-C1041	Roadworks and Stormwater Drainage Plan Sheet 2 of 18	A12	20-10-20
15-272-C1042	Roadworks and Stormwater Drainage Plan Sheet 3 of 18	A11	20-10-20
15-272-C1043	Roadworks and Stormwater Drainage Plan Sheet 4 of 18	A10	20-10-20
15-272-C1044	Roadworks and Stormwater Drainage Plan Sheet 5 of 18	A10	20-10-20
15-272-C1045	Roadworks and Stormwater Drainage Plan Sheet 6 of 18	A10	20-10-20
15-272-C1046	Roadworks and Stormwater Drainage Plan Sheet 7 of 18	A10	20-10-20
15-272-C1047	Roadworks and Stormwater Drainage Plan Sheet 8 of 18	A10	20-10-20
15-272-C1048	Roadworks and Stormwater Drainage Plan Sheet 9 of 18	A9	20-10-20
15-272-C1049	Roadworks and Stormwater Drainage Plan Sheet 10 of 18	A4	20-10-20
15-272-C1050	Roadworks and Stormwater Drainage Plan Sheet 11 of 18	A4	20-10-20
15-272-C1051	Roadworks and Stormwater Drainage Plan Sheet 12 of 18	A4	20-10-20
15-272-C1052	Roadworks and Stormwater Drainage Plan Sheet 13 of 18	A4	20-10-20
15-272-C1053	Roadworks and Stormwater Drainage Plan Sheet 14 of 18	A4	20-10-20
15-272-C1054	Roadworks and Stormwater Drainage Plan Sheet 15 of 18	A4	20-10-20
15-272-C1055	Roadworks and Stormwater Drainage Plan Sheet 16 of 18	A4	20-10-20
15-272-C1056	Roadworks and Stormwater Drainage Plan Sheet 17 of 18	A1	20-10-20
15-272-C1057	Roadworks and Stormwater Drainage Plan Sheet 18 of 18	A1	20-10-20
15-272-C1060	Road Longitudinal Sections Sheet 1 of 7	A10	20-10-20
15-272-C1061	Road Longitudinal Sections Sheet 2 of 7	A10	20-10-20
15-272-C1062	Road Longitudinal Sections Sheet 3 of 7	A10	20-10-20
15-272-C1063	Road Longitudinal Sections Sheet 4 of 7	A10	20-10-20
15-272-C1064	Road Longitudinal Sections Sheet 5 of 7	A10	20-10-20
15-272-C1065	Road Longitudinal Sections Sheet 6 of 7	A4	20-10-20
15-272-C1066	Road Longitudinal Sections Sheet 7 of 7	A1	20-10-20
15-272-C1070	Western Boundary Layout and Sections	A11	20-10-20
15-272-C1071	Southern Boundary Layout and Sections	A9	20-10-20
15-272-C1080	Bio-Retention Basin 2 and 3 Detail Plan Sheet 1 of 2	A10	20-10-20
15-272-C1081	Bio-Retention Basin 2 and 3 Detail Plan Sheet 2 of 2	A9	20-10-20
15-272-C1082	Bio-Retention Basin 4 Detail Plan Sheet 1 of 2	A8	20-10-20
15-272-C1083	Bio-Retention Basin 4 Detail Plan Sheet 2 of 2	A10	20-10-20
15-272-C1084	Bio-Retention Basin 5 Detail Plan	A10	20-10-20
15-272-C1086	Stormwater Drainage Catchment Plan (Pre-developed)	A9	20-10-20
15-272-C1087	Stormwater Drainage Catchment Plan (Post-developed)	A9	20-10-20
15-272-C1090	Retaining Wall General Arrangement Plan	A13	20-10-20
15-272-C1091	Retaining Wall Profiles Sheet 1 of 9	A11	20-10-20
15-272-C1092	Retaining Wall Profiles Sheet 2 of 9	A10	20-10-20
15-272-C1093	Retaining Wall Profiles Sheet 3 of 9	A10	20-10-20

15-272-C1094	Retaining Wall Profiles Sheet 4 of 9	A10	20-10-20
15-272-C1095	Retaining Wall Profiles Sheet 5 of 9	A12	20-10-20
15-272-C1096	Retaining Wall Profiles Sheet 6 of 9	A11	20-10-20
15-272-C1097	Retaining Wall Profiles Sheet 7 of 9	A9	20-10-20
15-272-C1098	Retaining Wall Profiles Sheet 8 of 9	A9	20-10-20
15-272-C1099	Retaining Wall Profiles Sheet 9 of 9	A1	20-10-20
15-272-C1110	Stage 1 Services and Utilities Coordination Plan Sheet 1 of 6	A9	20-10-20
15-272-C1111	Stage 1 Services and Utilities Coordination Plan Sheet 2 of 6	A10	20-10-20
15-272-C1112	Stage 1 Services and Utilities Coordination Plan Sheet 3 of 6	A10	20-10-20
15-272-C1113	Stage 1 Services and Utilities Coordination Plan Sheet 4 of 6	A12	20-10-20
15-272-C1114	Stage 1 Services and Utilities Coordination Plan Sheet 5 of 6	A10	20-10-20
15-272-C1115	Stage 1 Services and Utilities Coordination Plan Sheet 6 of 6	A9	20-10-20
15-272-C1120	Existing Transgrid Overhead Electrical Cables Plan	A10	20-10-20
15-272-C1121	Existing Transgrid Overhead Electrical Cables and Longitudinal Sections	A9	20-10-20
15-272-C1122	Existing Transgrid Overhead Electrical Cables Typical Sections Sheet 1 of 2	A9	20-10-20
15-272-C1123	Existing Transgrid Overhead Electrical Cables Typical Sections Sheet 2 of 2	A9	20-10-20
15-272-C1130	Erosion and Sediment Control Plan Sheet 1 of 7	A10	20-10-20
15-272-C1131	Erosion and Sediment Control Plan Sheet 2 of 7	A10	20-10-20
15-272-C1132	Erosion and Sediment Control Plan Sheet 3 of 7	A10	20-10-20
15-272-C1133	Erosion and Sediment Control Plan Sheet 4 of 7	A11	20-10-20
15-272-C1134	Erosion and Sediment Control Plan Sheet 5 of 7	A10	20-10-20
15-272-C1135	Erosion and Sediment Control Plan Sheet 6 of 7	A9	20-10-20
15-272-C1136	Erosion and Sediment Control Plan Sheet 7 of 7	A9	20-10-20
15-272-C1137	Erosion and Sediment Control Details	A7	20-10-20
15-272-C2000	Cover Sheet	A9	20-07-20
15-272-C2001	Drawing List	A9	20-07-20
15-272-C2002	General Notes	A9	20-07-20
15-272-C2003	General Arrangement Plan	A14	05-01-21
15-272-C2010	Siteworks and Stormwater Drainage Plan Sheet 1 of 14	A10	20-07-20
15-272-C2011	Siteworks and Stormwater Drainage Plan Sheet 2 of 14	A10	20-07-20
15-272-C2012	Siteworks and Stormwater Drainage Plan Sheet 3 of 14	A11	20-07-20
15-272-C2013	Siteworks and Stormwater Drainage Plan Sheet 4 of 14	A11	20-07-20
15-272-C2014	Siteworks and Stormwater Drainage Plan Sheet 5 of 14	A10	20-07-20
15-272-C2015	Siteworks and Stormwater Drainage Plan Sheet 6 of 14	A10	20-07-20
15-272-C2016	Siteworks and Stormwater Drainage Plan Sheet 7 of 14	A11	20-07-20
15-272-C2017	Siteworks and Stormwater Drainage Plan Sheet 8 of 14	A11	20-07-20
15-272-C2018	Siteworks and Stormwater Drainage Plan Sheet 9 of 14	A11	20-07-20
15-272-C2019	Siteworks and Stormwater Drainage Plan Sheet 10 of 14	A11	20-07-20
15-272-C2019	Siteworks and Stormwater Drainage Plan Sheet 10 of 14	A12	20-07-20
15-272-C2020 15-272-C2021	Siteworks and Stormwater Drainage Plan Sheet 11 of 14 Siteworks and Stormwater Drainage Plan Sheet 12 of 14	A13	05-01-21
_			
15-272-C2022	Siteworks and Stormwater Drainage Plan Sheet 13 of 14 Siteworks and Stormwater Drainage Plan Sheet 14 of 14	A13	05-01-21
15-272-C2023		A12	04-11-20
15-272-C2030	Pavement Plan	A14	05-01-21



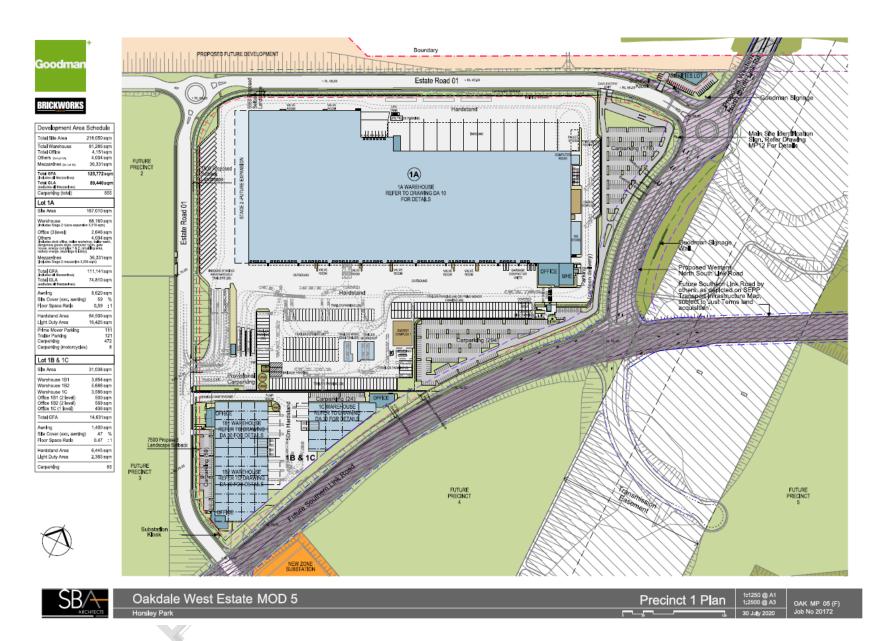


Figure 3: Stage 1 DA Layout

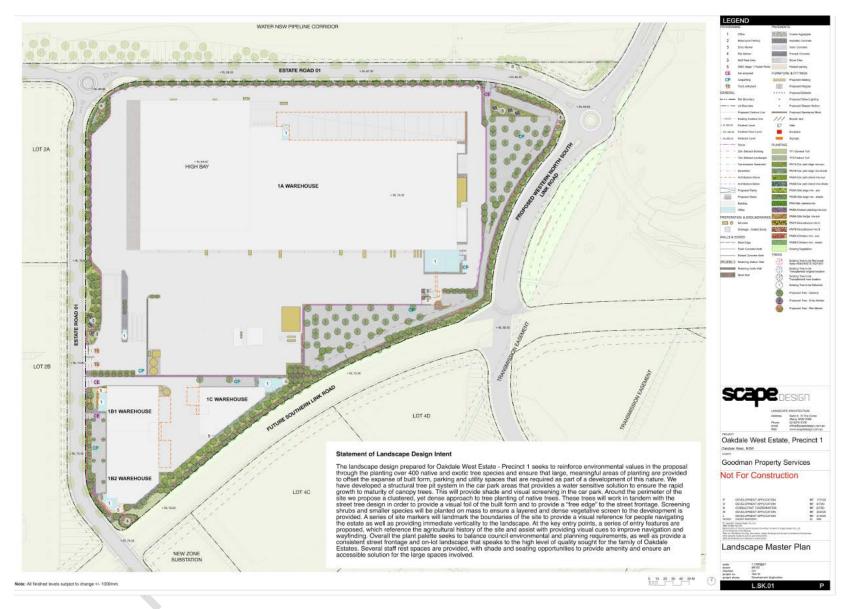


Figure 4: Stage 1 Landscape Plan

APPENDIX 3 WNSLR PLANS



Figure 5: WNSLR

APPENDIX 4 PLANNING AGREEMENT



APPENDIX 5 NOISE RECEIVER LOCATIONS



Figure 6: Sensitive Noise Receivers and Noise Wall Locations

APPENDIX 6 BIODIVERSITY

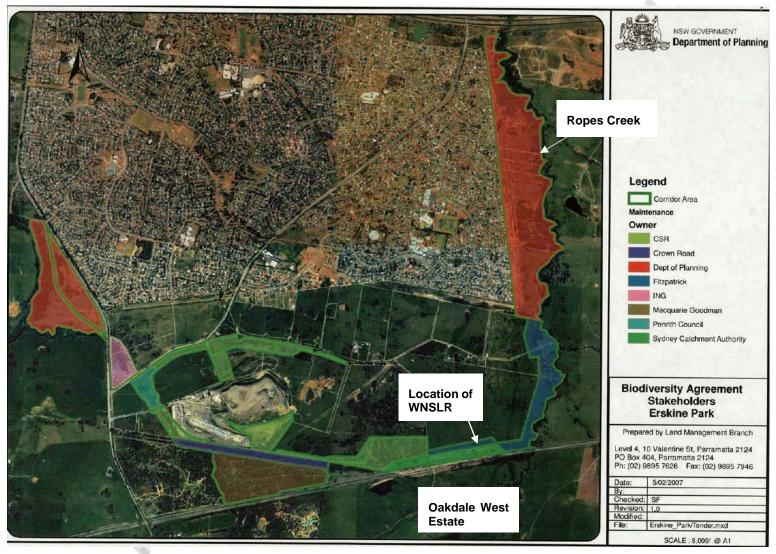


Figure 7: Erskine Park Biodiversity Corridor Land

95

(SSD 7348)



Figure 8: Offsets for WNSLR – Planting Area

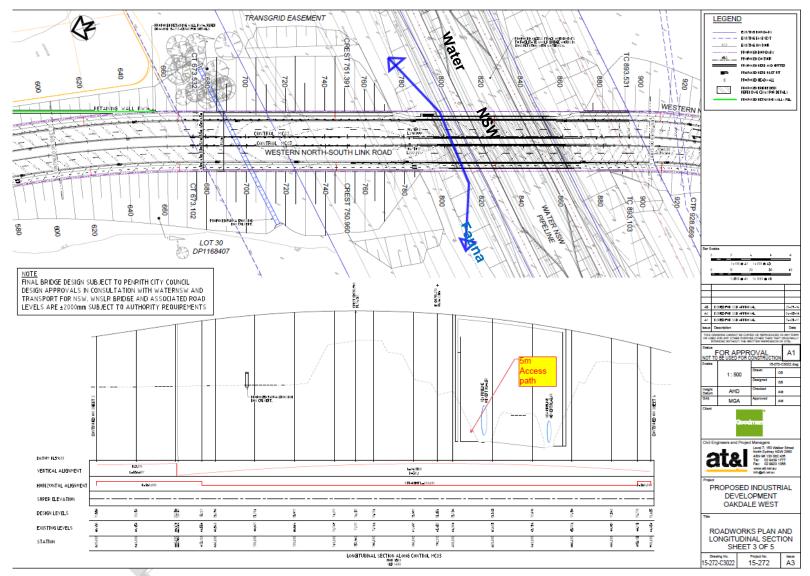


Figure 9: Fauna Passage under WNSLR

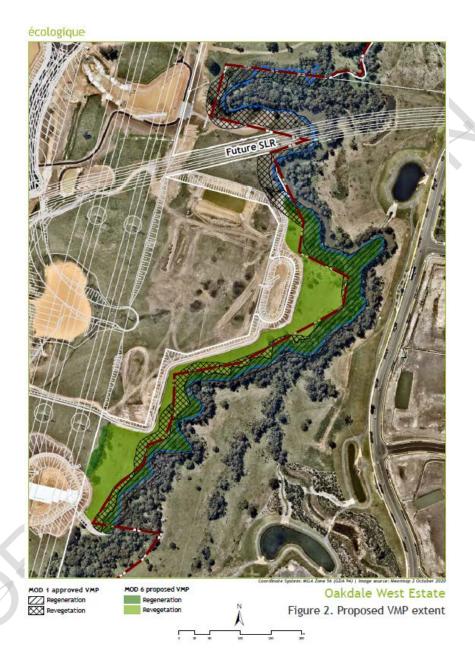


Figure 50: Offsets for Stage 1 - Biodiversity Offset Area (MOD 6)

APPENDIX 7 APPLICANT'S MANAGEMENT AND MITIGATION MEASURES

SUMMARY OF MITIGATION MEASURES

The collective measures required to mitigate the impacts associated with the proposed works are detailed in the table below.

Table 6: Applicant's Mitigation Measures

Issue	SSDA Component	Mitigation and Management
Construction Mana	gement	
General Construction Management	Stage 1 Development	 A CEMP to be prepared for the OWE Stage 1 Development capturing standard and specific management and mitigation measures as described in the SSDA, EIS and supporting technical documents.
Operational Manag	ement	
General Operational Management	Concept Proposal Stage 1 Precinct Development	 An OEMP to be prepared for the OWE capturing standard and specific operational management and mitigation measures as described in the SSDA, EIS and supporting technical documents.
Transport		
Construction Traffic	Stage 1 Development	 Preparation of a CTMP to form part of the CEMP addressing issues such as: Truck haul routes, delivery schedules and curfews; Protocols for the management of construction traffic moving onto and off the site.
Urban Design and	Visual	
Site Layout and Design	Concept Proposal	 Future development of the OWE to proceed in accordance with the approved Development Concept Proposal and DCP.
Development Controls	Concept Proposal	 Design and development controls to be established for the OWE in the form of a DCP to guide future development on the site.
Visual Impact	Concept Proposal/Stage 1 Development	 Design and development controls to be established for the OWE in the form of a DCP to guide future development on the site.
		 Landscaping of key interfaces including the western boundary to minimise visual impact.
Soils and Water		
Water Usage	Stage 1 Development	 Rainwater tanks to be provided for each development site with size determined in accordance with Penrith Council DCP requirements. Irrigation and toilet flushing for development to be plumbed to rainwater tanks.
		Consideration to be given to other possible rainwater reuse opportunities such as for truck washing.
		 Measures and considerations for the minimisation of water use during construction and operation to be incorporated into CEMP and OEMP as relevant.

Issue	SSDA Component	Mitigation and Management
Soils	Stage 1 Development	 Mitigation measures inherent to the civil design of the proposal. Sedimentation and erosion control measures are
		proposed as detailed in the Civil Design and Infrastructure Package and Traffic and Transport Impact Assessment.
Salinity	Stage 1 Development	 A Salinity Management Plan has been prepared for the proposed development.
		 Management measures described in the Salinity Management Plan to be adopted in the CEMP and OEMP as relevant.
Contamination	Stage 1 Development	 Identified areas of potential contamination to be subject to further investigation prior to the development of affected land.
Earthworks	Stage 1 Development	 Civil design achieves appropriate site levels with minimal impact upon hydrology.
		• Import of fill to be managed in accordance with CEMP.
		 Erosion and sediment controls included in the SSDA package.
Mineral Resources	Concept Proposal	 No mitigation required provided that mining activities under the existing mining lease applying to land to the east of the site (ref. ML1636) would not be constrained by the OWE development.
Surface Water	Stage 1 Development	Stormwater issues addressed through design measures incorporated into proposed development.
		 Stormwater management system designed to meet the requirements of Penrith Council's Engineering Works and WSUD guidelines and relevant NOW guidelines.
		 Detailed on-lot stormwater for future stages of the OWE to be designed and assessed under future applications.
Groundwater	Stage 1 Development	 Methods and management of any required dewatering required during construction works to be detailed in the CEMP.
Flooding	Stage 1 Development	 OSD designed to ensure that development does not increase stormwater peak flows in downstream areas for events up to and including 1:100-year ARI.
		 OSD designed to mitigate post-development flows to pre-development flows for peak ARI events.
		• Finished floor levels to have minimum 500mm freeboard to 100-year overland flows.
		 Flood impacts on TransGrid easement would be mitigated through minor compensatory earthworks on the floodplain to convey locally diverted flows. These works are detailed in the civil drawings included in the SSDA package.
Water Quality	Stage 1 Development	Erosion and sediment controls as detailed in SSDA package to be implemented through CEMP.
		 Stormwater to be treated to compliant levels prior to discharge.
		 Gross Pollutant Trap (GPT) to be installed within each development site on the final downstream stormwater pit prior to discharge.

Issue	SSDA Component	Mitigation and Management
		WSUD measures adopted to achieve target reductions for the OWE:
		□ 85% Total Suspended Solids
		□ 60% Total Phosphorus
		□ 45% Total Nitrogen
		□ 90% Gross Pollutants
Infrastructure		
Capacity and Upgrades	Concept Proposal	 Management of issues in respect of infrastructure capacity and upgrades is in the form of design responses described in Section 4.0 of the EIS.
Delivery and Staging	Concept Proposal/Stage 1 Development	 Management of issues in respect of infrastructure capacity and upgrades is in the form of design responses described in Section 4.0 of the EIS.
		 Staging of development of the OWE would be aligned with infrastructure and services delivery.
TransGrid Easement	Concept Proposal/Stage 1 Development	 Further consultation would be undertaken with TransGrid in relation to potential impacts and required mitigation.
Other Environmen	ntal Issues	
Flora and Fauna	Concept Proposal Stage 1 Development	 Preparation of a Flora and Fauna Management Plan for the site to inform the CEMP and OEMP as relevant to manage potential impacts to biodiversity during construction and operation.
		 Retained areas of native vegetation, including the Ropes Creek riparian corridor, will be rehabilitated and/or restored in accordance with the Vegetation Management Plan.
		 Other areas of the site including road batters, embankments and bio-retention basins will be planted with native plant species and turf species as specified in the Landscape Planting Schedule.
		 Ongoing maintenance and management of these areas in accordance with the provisions of both the Vegetation Management Plan and Landscape Management Plan.
Waterways and Riparian Lands		 Restoration and ongoing management of Ropes riparian corridor to be in accordance with the Vegetation Biodiversity Management Action Plan

APPENDIX 8 INCIDENT NOTIFICATION AND REPORTING REQUIREMENTS

WRITTEN INCIDENT NOTIFICATION REQUIREMENTS

- 1. A written incident notification addressing the requirements set out below must be emailed to the Department at the following address: compliance@planning.nsw.gov.au within seven days after the Applicant becomes aware of an incident. Notification is required to be given under this condition even if the Applicant fails to give the notification required under Condition D135 or, having given such notification, subsequently forms the view that an incident has not occurred.
- 2. Written notification of an incident must:
 - a. identify the development and application number;
 - b. provide details of the incident (date, time, location, a brief description of what occurred and why it is classified as an incident);
 - c. identify how the incident was detected;
 - d. identify when the Applicant became aware of the incident;
 - e. identify any actual or potential non-compliance with conditions of consent;
 - f. describe what immediate steps were taken in relation to the incident;
 - g. identify further action(s) that will be taken in relation to the incident; and
 - h. identify a project contact for further communication regarding the incident.

INCIDENT REPORT REQUIREMENTS

- 3. Within 30 days of the date on which the incident occurred or as otherwise agreed to by the Planning Secretary, the Applicant must provide the Planning Secretary and any relevant public authorities (as determined by the Planning Secretary) with a detailed report on the incident addressing all requirements below, and such further reports as may be requested.
- 4. The Incident Report must include:
 - a. a summary of the incident;
 - b. outcomes of an incident investigation, including identification of the cause of the incident;
 - details of the corrective and preventative actions that have been, or will be, implemented to address the incident and prevent recurrence; and
 - d. details of any communication with other stakeholders regarding the incident.