



221-229 Crown St, 216-238 Keira St & 86-90 Burelli St,
Wollongong NSW 2500

Mixed Use

OPERATIONAL WASTE MANAGEMENT PLAN

01/08/2025
Report No. 6335
Revision G

Client

Wollongong Developments No.8 Pty Ltd

Architect

DKO Architecture

<https://dko.com.au/>

REVISION REFERENCE

Revision	Date	Prepared by	Reviewed by	Description
A	03/02/2025	S. Dib	T. McPherson	Draft
B	31/03/2025	T. McPherson	J. Parker	Amendment
C	03/04/2025	T. McPherson	J. Parker	Amendment
D	17/04/2025	T. McPherson	J. Parker	Amendment
E	11/06/2025	T. McPherson	J. Parker	Amendment
F	13/06/2025	T. McPherson	J. Parker	Updated Preamble
G	01/08/2025	T. McPherson	J. Parker	Updated Preamble

The information contained in this document produced by Elephants Foot Consulting (EFC) is solely for the use of the client identified on the cover sheet for the purpose for which it has been prepared for. EFC undertakes no duty, nor accepts any responsibility for any third party who may rely upon this document. Reproduction, publication or distribution of this document without written permission from EFC is strictly prohibited.

TABLE OF CONTENTS

1.0	ACKNOWLEDGEMENT OF COUNTRY	3
2.0	INTRODUCTION	3
2.1	SCOPE OF REPORT	3
2.2	REPORT CONDITIONS	4
3.0	LEGISLATION & GUIDANCE	5
4.0	INTRODUCTION	6
4.1	SITE DESCRIPTION	7
4.2	BACKGROUND	9
4.3	SECRETARY ENVIRONMENTAL ASSESSMENT REQUIREMENTS	9
5.0	RESIDENTIAL WASTE MANAGEMENT	10
5.1	RESIDENTIAL WASTE GENERATION ESTIMATES	10
5.2	RESIDENTIAL BIN SUMMARY	11
5.3	RESIDENTIAL CHUTE DISCHARGE EQUIPMENT SUMMARY	12
5.4	RESIDENTIAL WASTE DISPOSAL PROCEDURES	12
5.4.1	RESIDENTIAL GENERAL WASTE AND RECYCLING DISPOSAL PROCEDURES	12
5.4.2	RESIDENTIAL FOGO DISPOSAL PROCEDURES	13
5.5	RESIDENTIAL BIN COLLECTION PROCEDURES	13
5.6	OTHER RESIDENTIAL WASTE MANAGEMENT CONSIDERATIONS	14
5.6.1	RESIDENTIAL COMMON AREAS	14
5.6.2	LANDSCAPED AREAS AND GARDEN ORGANICS	14
5.6.3	RESIDENTIAL BULKY WASTE PROCEDURES	14
6.0	COMMERCIAL AND RETAIL WASTE MANAGEMENT	15
6.1	COMMERCIAL AND RETAIL WASTE GENERATION ESTIMATES	15
6.2	COMMERCIAL AND RETAIL BIN SUMMARY	16
	RETAIL TENANCIES:	16
	COMMERCIAL OFFICES:	16
6.3	COMMERCIAL AND RETAIL WASTE DISPOSAL PROCEDURES	16
6.4	COMMERCIAL AND RETAIL WASTE COLLECTION PROCEDURES	16
6.5	SUPERMARKET	16
7.0	HOTEL WASTE MANAGEMENT	17
7.1	HOTEL WASTE GENERATION ESTIMATES	17
7.2	HOTEL BIN SUMMARY	17
7.3	HOTEL WASTE DISPOSAL PROCEDURES	18
7.3.1	HOTEL SUITES	18
7.3.2	HOTEL DINING	18
7.3.3	COMMON AREAS	18
7.3.4	LANDSCAPED AREAS AND GARDEN ORGANICS	18

7.4	HOTEL BIN COLLECTION PROCEDURES.....	18
8.0	OTHER WASTE MANAGEMENT CONSIDERATIONS.....	19
8.1.1	WASHROOM FACILITIES.....	19
8.1.2	PRINTING & PHOTOCOPYING ROOMS.....	19
8.1.3	LIQUID WASTE.....	19
8.1.4	PROBLEM WASTE.....	19
9.0	STAKEHOLDER ROLES & RESPONSIBILITIES.....	20
10.0	SOURCE SEPARATION.....	21
11.0	EDUCATION.....	22
11.1	SIGNAGE.....	22
12.0	POLLUTION PREVENTION.....	23
13.0	BIN WASHING.....	23
14.0	BIN MOVING PATHS.....	23
15.0	EQUIPMENT SUMMARY.....	24
16.0	WASTE ROOMS.....	24
17.0	CONSTRUCTION REQUIREMENTS.....	28
17.1	ADDITIONAL CONSIDERATIONS.....	28
18.0	USEFUL CONTACTS.....	29
APPENDIX A:	ARCHITECTURAL PLANS.....	30
APPENDIX: A.1	Basement 1 PLAN.....	31
APPENDIX B:	INSTALLATION EQUIPMENT.....	32
APPENDIX: B.1	TYPICAL SINGLE CHUTE SHAFT & PENETRATION LAYOUT.....	33
APPENDIX: B.2	EXAMPLE RESIDENTIAL LEVEL RECYCLING BIN LAYOUT.....	34
APPENDIX: B.3	TYPICAL LINEAR TRACK SYSTEM FOR 1100L BINS.....	35
APPENDIX: B.4	EXAMPLE CAROUSEL SYSTEM FOR 1100L BINS.....	37
APPENDIX C:	PRIMARY WASTE MANAGEMENT PROVISIONS.....	40
APPENDIX: C.1	TYPICAL BIN SPECIFICATIONS.....	41
APPENDIX: C.2	SIGNAGE FOR WASTE AND RECYCLING BINS.....	43
APPENDIX: C.3	EXAMPLE COLLECTION VEHICLE INFORMATION.....	45
APPENDIX D:	SECONDARY WASTE MANAGEMENT PROVISIONS.....	47
APPENDIX: D.1	EXAMPLE HANDHELD BIN MOVERS.....	48
APPENDIX: D.2	EXAMPLE SEATED BIN MOVERS.....	49
APPENDIX: D.3	EXAMPLE BIN TRAILERS.....	51
APPENDIX: D.4	EXAMPLE BIN TOWING ATTACHMENTS.....	53
APPENDIX: D.5	EXAMPLE BIN LIFTER FOR 240L BINS.....	54
APPENDIX: D.6	EXAMPLE BALER.....	56
APPENDIX: D.7	EXAMPLE SOURCE SEPARATION RECEPTACLES.....	57

LIST OF TABLES

Table 1 Site Description	8
Table 2: Estimated Waste and Recycling Volumes – Residential.....	10
Table 3: Estimated FOGO Volumes – Residential.....	11
Table 4: Chute Discharge Equipment Summary	12
Table 5: Estimated Waste and Recycling Volumes – Retail Tenancies	15
Table 6: Estimated Waste and Recycling Volumes – Commercial Offices.....	15
Table 7: Estimated General Waste and Recycling Volumes – Hotel Suites.....	17
Table 8: Stakeholder Roles and Responsibilities	20
Table 9: Operational Waste Streams.....	21
Table 10: Equipment Summary.....	24
Table 11: Waste Room Areas	25
Table 12: Waste Room Requirements.....	27

GLOSSARY OF ABBREVIATIONS AND TERMS

TERM	DESCRIPTION
<i>Bin-Carting Route</i>	Travel path for transporting bins from their allocated storage location to the nominated collection point
<i>Bin Lifter</i>	A device used to mechanically lift bins for the purpose of emptying them into larger bins and/or compactors.
<i>Bin Mover</i>	Either a handheld device (commonly referred to as a bin tug) or a ride-on device (typically a tractor or Class C vehicle with an attached bin trailer) used to facilitate the movement of bins across long distances or up ramps
<i>Bulk Bins</i>	Containers with a capacity greater than 1100L designed to be collected by a front-loading vehicle
<i>Bulky Waste</i>	Recycling items that are too large to be deposited into bins, including furniture, whitegoods, electronics and mattresses
<i>Chute</i>	A vertical pipe passing from floor to floor of a building with openings at each level for the disposal of general waste, recycling or FOGO.
<i>Chute Discharge</i>	The termination point of a chute whereby the chute offsets deposited general waste, recycling or FOGO into bins
<i>Chute Discharge Room</i>	A room enclosing the termination point of the chute/s, including bins and volume handling equipment that is accessible only to the building caretaker
<i>Collection Area/Point</i>	Designated area or point where bins are loaded onto the collection vehicle for servicing
<i>Compactor</i>	A device used for compressing general waste inside it's bin typically at a ratio of 2:1
<i>Communal Bin Room</i>	A central, shared bin room accessible to all residents or staff to dispose of their waste stream
<i>DA</i>	Development Application
<i>DCP</i>	Development Control Plan
<i>EPA</i>	Environment Protect Authority
<i>FOGO</i>	Food Organics and Garden Organics
<i>General Waste</i>	All non-recyclable and non-hazardous waste that is sent to landfill
<i>HRV</i>	Heavy Rigid Vehicle
<i>L</i>	Litre
<i>LEP</i>	Local Environmental Plan
<i>Mixed Use Development</i>	A development comprising a combination of both residential and commercial units or two or more different land uses within the one development.

<i>Mobile Bins</i>	Containers with a capacity up to and including 1100L designed to be collected by a rear-loading vehicle
<i>Multi-unit Residential Development</i>	Also known as MUD's, residential flat buildings, or apartment blocks, this is a residential development with multiple units that typically share facilities and services such as bins and collections.
<i>Onsite Collection</i>	A collection arrangement whereby all bins are serviced by a collection vehicle within the property boundary, either in the building's basement or at grade and off-street.
<i>Owners Corporation</i>	An organisation or group of persons that is identified by a particular name and that acts, or may act, as an entity
<i>Recycling</i>	Waste stream that combines all recycling, including comingled recycling, paper/cardboard and metals.
<i>Service Bins</i>	Supplementary bins which are provided to residents or staff for use during collection periods either in communal bin rooms or under chutes
<i>Source Separation Receptacles</i>	Communal containers used throughout the development for the day-to-day disposal of different waste streams
<i>Volume Handling Equipment</i>	Equipment which comes in the form of either carousel or linear tracks positioned at the base of the chute/s to mechanically replace full bins with empty bins
<i>Waste Stream</i>	A classification used to describe waste of a particular type (eg. food waste stream)
<i>WHS</i>	Workplace Health and Safety

1.0 ACKNOWLEDGEMENT OF COUNTRY

Elephants Foot Consulting (EFC) acknowledges that every project we work on takes place on First Peoples land. We recognise Aboriginal and Torres Strait Islander People as Traditional Custodians of this land. We pay respect to ancestors and Elders, past and present.

2.0 INTRODUCTION

This Operational Waste Management Plan (OWMP) prepared by T. McPherson on behalf of Wollongong Developments No.8 Pty Ltd ('the Applicant') supports a State Significant Development Application (SSDA) for an Infill Affordable Housing Development, SSD-76440958, for the site at 216-222, 226-238 Keira Street, 86-90 Burelli Street, Lot B Burelli Street, Lot 1 and Lot 2 Burelli Street, 221-261, 269-291 Crown Street, Wollongong (the site).

2.1 SCOPE OF REPORT

This OWMP only applies to the **operational** phase of the proposed development; therefore, the requirements outlined in this OWMP must be implemented during the operational phase of the site and may be subject to review upon further expansion of, and/or changes to the development.

The waste management of the **construction** and **demolition** phases of the development are not addressed in this report. A construction and demolition has been provided separately.

2.2 REPORT CONDITIONS

The purpose of this report is to document an OWMP as part of a development application, which is supplied by EFC with the following limitations:

- Drawings, estimates and information contained in this OWMP have been prepared by analysing the information, plans and documents supplied by the client and third parties including Council and other government agencies. The assumptions based on the information contained in the OWMP is outside the control of EFC,
- The figures presented in the report are an estimate only – the actual amount of waste generated will be dependent on the occupancy rate of the building/s and waste generation intensity as well as the building management's approach to educating residents and tenants regarding waste management operations and responsibilities,
- The building manager will adjust waste management operations as required based on actual waste volumes (e.g. if waste is greater than estimated) and increase the number of bins and collections accordingly,
- The report will not be used to determine or forecast operational costs or prepare any feasibility study or to document any safety or operational procedures,
- The report has been prepared with all due care; however no assurance is made that the OWMP reflects the actual outcome of the proposed waste facilities, services, and operations, and EFC will not be liable for plans or results that are not suitable for purpose due to incorrect or unsuitable information or otherwise,
- EFC offer no warranty or representation of accuracy or reliability of the OWMP unless specifically stated,
- Any manual handling equipment recommended in this OWMP should be provided at the recommendation of the appropriate equipment provider who will assess the correct equipment for supply,
- Design of waste management chute equipment and systems must be approved by the supplier,
- EFC cannot be held accountable for late changes to the design after the OWMP has been submitted to Council,
- EFC will provide specifications and recommendations on bin access and travel paths within the OWMP, however it is the architect's responsibility to ensure the architectural drawings meet these provisions,
- EFC are not required to provide information on collection vehicle swept paths, head heights, internal manoeuvring or loading requirements. It is assumed this information will be provided by a traffic consultant,

Council are subject to changing waste and recycling policies and requirements at their own discretion.

- This OWMP is only finalised once the draft watermark has been removed. If the draft watermark is present, the information in the OWMP is not confirmed.

3.0 LEGISLATION & GUIDANCE

Waste management and resource recovery regulation in Australia is administered by the Australian Constitution, Commonwealth laws, and international agreements. State and territory governments maintain primary responsibility for controlling development and regulating waste. The following legislation has been enacted in New South Wales, and provides the lawful underpinnings of this OWMP.

- NSW Environmental Planning & Assessment Act 1979
- NSW Protection of the Environment Operations Act 1997
- NSW Waste Avoidance & Resource Recovery Act 2001

At the local level, councils or Local Government Areas (LGAs) require OWMPs to be included in new development applications. This OWMP is specifically required by:

- Wollongong Development Control Plan 2009
- Wollongong Local Environmental Plan 2009

The primary purpose of a Development Control Plan (DCP) is to guide the planning process according to the aims of the corresponding local environmental plan (LEP). Under Section 2.10 of the Planning Systems SEPP, DCPs do not apply to State Significant Development and are not a relevant matter for consideration in the assessment of such applications. Notwithstanding, the Wollongong Development Control Plan 2009 has been referred to as a guide for the purposes of this report.

Information provided in this OWMP comes from a wide range of waste management guidance at the local, state, and federal levels. The primary sources of guidance include:

- Wollongong Development Control Plan 2009: Chapter E7 - Waste Management
- NSW Better Practice Guide For Resource Recovery In Residential Developments 2019
- NSW Better Practice Guidelines for Waste Management and Recycling in Commercial and Industrial Facilities 2012
- NSW Waste Avoidance and Resource Recovery (WARR) Strategy 2014-2021
- NSW Waste Classification Guidelines 2014
- Australia's National Waste Policy 2018

4.0 INTRODUCTION

This Operational Waste Management Plan (OWMP) prepared by T. McPherson on behalf of Wollongong Developments No.8 Pty Ltd ('the Applicant') supports a State Significant Development Application (SSDA) for an Infill Affordable Housing Development, SSD-76440958, for the site at 221-291 Crown Street, 216-238 Keira Street and 86-90 Burelli Street, Wollongong (the site).

Specifically, consent is sought for the following development in this SSDA:

- Demolition of existing structures on the site, retention of heritage facades, tree removal and site excavation for new basement.
- Construction of a new mixed-use development consisting of:
 - Four residential towers, ranging from 16 to 38 storeys and comprising 546 apartments including:
 - Approx. 414 market apartments.
 - Approx. 132 affordable apartments.
 - Residential lobbies and podium.
 - Communal open space.
 - A 10-storey commercial office building, an 8-storey hotel comprising 166 rooms, and numerous retail tenancies (including a supermarket) consisting of:
 - 10,009 sqm of commercial GFA.
 - 8,793 sqm of hotel GFA.
 - 3,781 sqm of retail GFA.
 - 1,510 sqm of retail supermarket GFA.
- Car, motorcycle and bicycle parking for residents, workers and visitors across two basement levels, mezzanine, lower ground and levels 1 and 2 including:
 - 774 car parking spaces, including:
 - 547 residential spaces (including accessible spaces).
 - 49 residential visitor spaces.
 - 63 commercial/retail/residential visitor spaces.
 - 25 commercial/retail (staff) spaces.
 - 10 hotel (staff only) spaces.
 - 80 retail (supermarket) spaces.
 - Five (5) loading bays.
 - 320 bicycle parking spaces.
 - 47 motorcycle parking spaces.
- New public open space including a new public plaza.
- Associated landscaping and public domain works.


4.1 SITE DESCRIPTION

The site is situated at 221-291 Crown Street, 216-238 Keira Street and 86-90 Burelli Street, Wollongong, within the Wollongong Local Government Area (LGA). The site forms part of the Wollongong City Centre Precinct, as identified in the Wollongong Local Environmental Plan 2009 (WLEP). It is well located, being approximately 280m from Wollongong Train Station which provides services within Wollongong and to the Sydney CBD. It is adjacent to Wollongong Central shopping centre, a major regional retail hub.

The site has ample access to public open space being less than 50m from MacCabe Park. The site comprises a significant landholding of approximately 13,088m² with frontages to Crown Street, Keira Street, Burelli Street and Atchison Street. The site is owned by Wollongong Developments No.8 Pty Ltd. An aerial of the site is shown in **Figure 1** The site area and legal description is recorded in **Table 1**.

Table 1 Site Description

Legal Description	Address
Lot 1 in DP 112417	216-222 Keira Street
Lot 100 in DP 774957	226-230 Keira Street
Lot 9 in DP 551157	232-234 Keira Street
Lot 8 in DP 546125	236-238 Keira Street
Lot 1 in DP 88455	86 Burelli Street
Lot 4 in DP 17979	
Lot 5 in DP 17979	
Lot 8 in DP 395330	90 Burelli Street
Lot 1 in DP 220513	221-229 Crown Street
Lot 3 in DP 17979	231 Crown Street
Lot 2 in DP 17979	233-235 Crown Street
Lot 1 in DP 17979	
Lot 7 in DP 878243	237-241 Crown Street
Lot 1 in DP 1135333	243-251 Crown Street
Lot 1 in DP 226374	253-259 Crown Street
Lot 1 in DP 183348	
Lot 2 in DP 226374	
Lot 3 in DP 319452	261 Crown Street
Lot 2 in DP 319452	269-271 Crown Street
Lot 1 in DP 319452	
Lot 2 in DP 181570	273-279 Crown Street
Lot 1 in DP 1116034	
Lot 1 in DP 82673	281-291 Crown Street
Lot 1 in DP 117019	
Lot 1 in DP 927806	281-291 Burelli Street
Lot 1 in DP 1198873	
Lot 1 in DP 1087986	

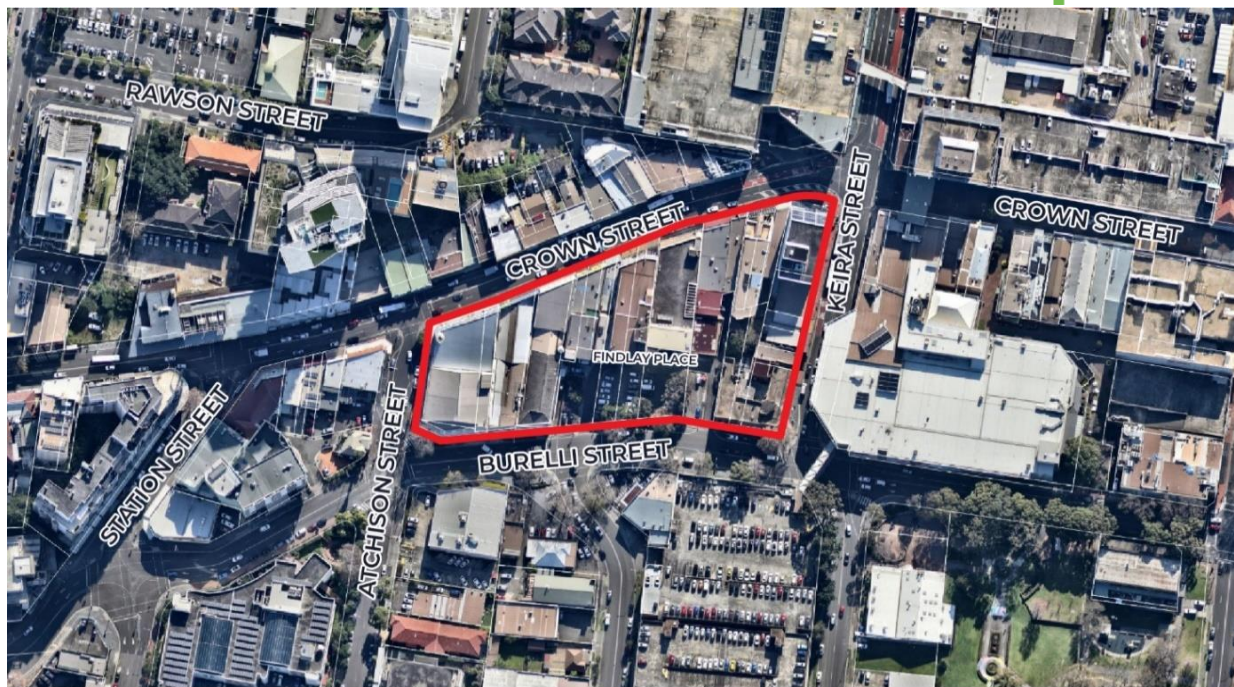

ⓘ NOT TO SCALE

Figure 1 Site aerial

Source: Nearmap, edits by Ethos Urban

4.2 BACKGROUND

An existing consent approved on 12 December 2022 (DA-2021/957) applies to the site. The consent was granted for the demolition of existing structures, retention of heritage facades, tree removal, excavation for basement car parking and construction of a mixed-use development at the street block bound by Crown, Keira, Burelli and Atchison Streets, comprising three (3) residential towers (shop top housing), one (1) commercial building, retail shops, entertainment facilities (cinema, exhibition/performance space) and a wellness centre (pool, gym, and health services).

4.3 SECRETARY ENVIRONMENTAL ASSESSMENT REQUIREMENTS

This report has been prepared to respond to the Secretary's Environmental Assessment Requirements (SEARS) dated 8 October 2024 for SSD-76440958. Specifically, this report has been prepared to respond to those SEARS summarised in the table below.

SEARS Assessment Requirements	Elephant Foots Response
Identify, quality and classify the likely waste systems to be generated during construction and operation.	Sections 5.2 and 6.2.
Provide the measures to be implemented to manage, reuse, recycle and safely dispose of waste.	Sections 5.4 and 6.4.
Identify appropriate servicing arrangements for the site.	Sections 5.5 and 6.5.
If buildings are proposed to be demolished or altered, provide a hazardous materials survey.	This will be provided by others.

5.0 RESIDENTIAL WASTE MANAGEMENT

The following section outlines best practice waste management for the residential component of the development, including waste stream generation estimates and disposal and collection procedures.

5.1 RESIDENTIAL WASTE GENERATION ESTIMATES

The NSW EPA's 'Better Practice Guide for Resource Recovery in Residential Developments (2019)' has been referenced to calculate the total number of bins required for the residential units. Calculations are based on generic general waste, recycling and Food Organics and Garden Organics (FOGO) rates. Actual volumes of general waste, recycling and FOGO generated in operation may differ according to the residents' actual waste management practices.

The following table shows the estimated volume (L) of general waste, recycling and FOGO generated by the residential component of the development.

Table 2: Estimated Waste and Recycling Volumes – Residential

Building/ Core	# Units	General Waste Generation Rate (L/unit/week)	Generated General Waste (L/week)	Compacted Waste 2:1 (L/week)	Recycling Generation Rate (L/unit/week)	Generated Recycling (L/week)
BLD 1	222	120	26640	13320	120	26640
BLD 2.1	55	120	6600	3300	120	6600
BLD 2.2	82	120	9840	4920	120	9840
BLD 2.3	84	120	10080	5040	120	10080
BLD 3	103	120	12360	6180	120	12360
TOTAL	546		65520	32760		65520
Bins & Collections		General Waste Bin Size (L)	1100	1100	Recycling Bin Size (L)	1100
		General Waste Collections per Week	1	1	Recycling Collections per Week	2
		Total General Waste Bins Required	62	32	Total Recycling Bins Required	32
Bins per Building/ Core		Building/ Core	# Bins	# Bins	Building/ Core	# Bins
		BLD 1	25	13	BLD 1	13
		BLD 2.1	6	3	BLD 2.1	3
		BLD 2.2	9	5	BLD 2.2	5
		BLD 2.3	10	5	BLD 2.3	5
		BLD 3	12	6	BLD 3	6

Table 3: Estimated FOGO Volumes – Residential

Building/ Core	# Units	FOGO Waste Generation Rate (L/unit/week)	Generated FOGO Waste (L/week)
BLD 1	222	50	11100
BLD 2.1	55	50	2750
BLD 2.2	82	50	4100
BLD 2.3	84	50	4200
BLD 3	103	50	5150
TOTAL	546		27300
Bins & Collections		FOGO Waste Bin Size (L)	240
		FOGO Waste Collections per Week	1
		Total FOGO Waste Bins Required	27
Bins per Building/ Core		Building/ Core	# Bins
		BLD 1	11
		BLD 2.1	3
		BLD 2.2	4
		BLD 2.3	4
		BLD 3	5

*Twice weekly collections have been discussed by the Council, and has revealed to be permitted to reduce the quantity of recycling bins.

5.2 RESIDENTIAL BIN SUMMARY

Based on the estimated volumes of general waste, recycling and FOGO generated by the residential component of this development, the recommended bin quantities and collection frequencies are as follows:

General Waste:	32 x 1100L bins collected 1 x weekly .	<i>*Compacted 2:1</i>
Recycling:	32 x 1100L bins collected 2 x weekly .	
FOGO:	27 x 240L bins collected 1 x weekly .	

During operation, it is the responsibility of the building manager to monitor the number of bins required for the residential component of the development. General waste, recycling and FOGO volumes may change according to residents' attitudes to waste disposal, building occupancy levels or the development's management.

Any requirements for adjusting the capacity of the waste facilities may be achieved by changing the number of bins, the bin sizes or collection frequencies. Building management will be required to negotiate any changes to bins or collections with the collection service provider.

5.3 RESIDENTIAL CHUTE DISCHARGE EQUIPMENT SUMMARY

It is strongly recommended that the bins and equipment at the base of each chute allows for at least 2 days' worth of general waste generation (however, building 3 would require daily rotation). Based on the estimated general waste volumes generated by each building/core, the following equipment is recommended

Table 4: Chute Discharge Equipment Summary

Volume Handling Equipment			
General Waste			
Tower	Generated General Waste (L/week)	# 1100L Bins Required for 2 days' Capacity	Recommended Chute Discharge Equipment
BLD 1	13320	3.46	3-Bin Linear System
BLD 2.1	3300	0.86	2-Bin Linear System
BLD 2.2	4920	1.28	2-Bin Linear System
BLD 2.3	5040	1.31	2-Bin Linear System
BLD 3	6180	1.61	2-Bin Linear System

The above is a recommendation only and equivalent volume handling equipment may be used subject to equipment supplier's recommendation/review.

*Note: Due to high volume, the equipment at the base of the chute will require extra attention to the monitoring and exchanging of bins.

5.4 RESIDENTIAL WASTE DISPOSAL PROCEDURES

All units will be provided with a storage area capable of holding separate receptacles for general waste, recycling and FOGO. This is typically located within kitchen areas beneath the workbench. This space should be sized to accommodate 40L receptacles (minimum) to account for 2 days' worth of general waste, recycling and 20L for FOGO storage.

5.4.1 RESIDENTIAL GENERAL WASTE AND RECYCLING DISPOSAL PROCEDURES

A single general waste chute will be installed in each building core with access provided to all residents on each residential level. Separate 240L recycling bins will be provided in a compartment adjacent to the general waste chute for the storage of recycling. Residents will be responsible for walking their general waste and recycling to their allocated disposal point and placing their general waste into the general waste chute and recycling into the 240L recycling bin.

Residents will wrap or bag their general waste before placing in the chute. Bagged waste should not exceed 3kg in weight, or 35cm x 35cm x 35cm. Residents will be responsible for loosely placing their recycling into the 240L bins. Recycling should be clean and must not be bagged as soft plastics contaminate recycling.

The general waste will discharge from the chutes into 1100L bins on linear tracks in the chute discharge rooms located on the basement 1 level. General waste is proposed to be compacted into a 2:1 ratio to reduce the quantity of bins. The building manager will monitor bin capacities under the general waste chutes and exchange full bins with empty bins on the track systems when required. Recycling bins on each level will also be monitored by the building caretaker and full bins will be decanted into larger 1100L bins via the aid of a bin lifter.

Full and spare bins will be kept in the residential bin holding room. Refer to Council guidance for the types of materials accepted in the general waste and recycling streams.

5.4.2 RESIDENTIAL FOGO DISPOSAL PROCEDURES

The majority of organics waste generated from multi-unit residential developments comprises of food waste as opposed to garden waste. As such, calculations and management recommendations provided in this report considers that FOGO bins will primarily comprise of food organics.

The residents of each unit will be provided with a kitchen caddy for the separation of FOGO. Food organics must be contained in accordance with Wollongong Council's FOGO collection service procedures (for example a compostable liner). Any clippings from residential units can also be disposed of with the FOGO.

Each building/core will be provided with a communal FOGO bin room which contains 240L bins for FOGO. The residents will be responsible for walking their FOGO down to the communal FOGO bin room and placing it into the bins.

Building management is responsible for ensuring that the communal FOGO bin rooms and FOGO bins are washed down frequently to ensure that hygiene and odour is managed.

5.5 RESIDENTIAL BIN COLLECTION PROCEDURES

Council will be engaged to collect the residential general waste, recycling and FOGO in accordance with Council's collection schedule. This report assumes that waste and FOGO is collected once weekly, and recycling collected twice weekly based on Council advice.

It is understood that a conversation with the Council on the 31st January 2025 permitted the proposal of twice weekly recycling collections, due to the large quantity of recycling bins and maintenance/duration required to service.

Prior to collections, the building manager will be responsible for transporting the bins from chute discharge rooms and each residential level to the allocated collection point located on the basement 1 level. The building manager is also responsible for ensuring that the bins are adequately arranged for an efficient collection.

It is the responsibility of the caretaker to ensure that the loading area is clear of any vehicles or obstructions prior to waste collection. On the day of collection, a Council collection vehicle will enter the site from Burelli Street and park in the loading dock. The building manager will be responsible for ensuring that the collection staff have access to the collection point. The collection staff will exit the vehicle and collect the bins from the bin holding room and return the empty bins once serviced.

Upon completion of servicing, the collection vehicle will exit the site onto Burelli Street in a forward direction. The Building Manager/Caretaker is responsible for returning the bins to their operational location to resume use.

All access and clearances to the collection point must be able to accommodate a 10.24-meter-long rear-loading vehicle per AS2890.2-2002.

5.6 OTHER RESIDENTIAL WASTE MANAGEMENT CONSIDERATIONS

The following sections outline other waste management considerations for the residential components.

5.6.1 RESIDENTIAL COMMON AREAS

Residential common areas will be supplied with suitably branded source separation receptacles where considered appropriate. Receptacles should be placed in convenient locations which are accessible to all residents. The building manager will monitor the capacity of these receptacles and empty the contents into the central collection bins as required.

5.6.2 LANDSCAPED AREAS AND GARDEN ORGANICS

Garden organics generated from surrounding landscaped areas and indoor foliage typically consists of lawn clippings, cuttings, leaves and branches. Garden organics generated from surrounding landscaped areas will be managed and removed from the site by the designated landscaping contractors as they carry out scheduled landscaping maintenance works.

Garden organics generated from within residential units will be managed by the residents and should be disposed of into the FOGO bins.

5.6.3 RESIDENTIAL BULKY WASTE PROCEDURES

An area has been made available for the storage of discarded residential bulky waste items (e.g. whitegoods, furniture, etc.). This room should be located within close proximity of the collection point and must have a minimum doorway width of 1.5m to facilitate the movement of large items in and out of the room.

Wollongong Council requires that size of the Bulky Waste Room provided is proportional to the number of units in the building at a rate of 10m² for the first 40 units then 2m² for every 10 units thereafter as per the *'Better Practice Guide for Waste Management in Multi-Unit Dwellings 2019'*.

Bulky waste storage area: minimum 112m² required.

Residents will need to liaise with building management regarding the transportation of bulky items and the availability of the bulky waste room. It is the caretaker's responsibility to arrange collection dates with Council and coordinate these times with the residents.

On the day of bulky waste collection, a Council collection vehicle will enter the site from Burelli Street and park in the loading dock. Collection staff will collect the bulky waste items from the bulky waste room. Once bulky items have been loaded onto the vehicle, the collection vehicle will exit the site onto Burelli Street in a forward direction.

6.0 COMMERCIAL AND RETAIL WASTE MANAGEMENT

The following section outlines best practice waste management for the commercial and retail components of the development, including waste generation estimates and waste disposal and collection procedures.

6.1 COMMERCIAL AND RETAIL WASTE GENERATION ESTIMATES

The NSW EPA's 'Better Practice Guide for Resource Recovery in Residential Developments (2019)' has been referenced to calculate the total number of bins required for the anticipated tenants. Calculations are based on generic generation rates. Actual volumes of waste and recycling may differ in operation according to the tenants' actual waste management practices. The waste and recycling generation rates have been adapted to reflect litres per 100m² per day.

The following table shows the estimated volume (L) of general waste and recycling that will be generated by the commercial and retail tenants. The total GFA of the retail component has been divided into two to take into account the waste generation of future possible tenancies. It is assumed that retail tenancies will share bins, bin storage facilities and collections.

The following estimates are based on a seven-day operating week for the retail tenancies and a five-day operating week for the commercial offices.

Table 5: Estimated Waste and Recycling Volumes – Retail Tenancies

Tenancy Type	Floor Area (m ²)	General Waste Generation Rate (L/100m ² /day)	Generated General Waste (L/week)	Recycling Generation Rate (L/100m ² /day)	Generated Recycling (L/week)
Takeaway Food Shop	1801.33	80	10087	80	10087
Restaurant/ Eating	1801.33	400	50437	280	35306
Retail: Other Non-Food	1801.33	50	6305	100	12609
TOTAL	5404		66829		58003
Bins & Collections		General Waste Bin Size (L)	1100	Recycling Bin Size (L)	1100
		General Waste Collections per Week	6	Recycling Collections per Week	6
		Total General Waste Bins Required	11	Total Recycling Bins Required	9

Table 6: Estimated Waste and Recycling Volumes – Commercial Offices

Tenancy Type	Floor Area (m ²)	General Waste Generation Rate (L/100m ² /day)	Generated General Waste (L/week)	Recycling Generation Rate (L/100m ² /day)	Generated Recycling (L/week)
Commercial Offices	7256	10	5079	15	7619
TOTAL	7256		5079		7619
Bins & Collections		General Waste Bin Size (L)	1100	Recycling Bin Size (L)	1100
		General Waste Collections per Week	3	Recycling Collections per Week	3
		Total General Waste Bins Required	2	Total Recycling Bins Required	3

6.2 COMMERCIAL AND RETAIL BIN SUMMARY

Based on the estimated waste and recycling volumes generated by the commercial and retail tenancies, the recommended bin quantities and collection frequencies are as follows:

RETAIL TENANCIES:

<u>General Waste:</u>	11 x 1100L bins collected 6 x weekly.
<u>Recycling:</u>	9 x 1100L bins collected 6 x weekly.

COMMERCIAL OFFICES:

<u>General Waste:</u>	2 x 1100L bins collected 3 x weekly.
<u>Recycling:</u>	3 x 1100L bins collected 3 x weekly.

Bin sizes, quantities, and/or collection frequencies may be modified by the building manager once the proposed development is operational. Building management will be required to negotiate any changes to bins or collections with the collection service provider. Seasonal peak periods should also be considered.

6.3 COMMERCIAL AND RETAIL WASTE DISPOSAL PROCEDURES

Each tenancy is responsible for managing the disposal of general waste and recycling within their area. At the end of each trading day, or as needed, designated staff members or contracted cleaners must transport all general waste and recycling to the appropriate retail bin room or commercial bin room. Waste should be placed in the correct collection bins to ensure proper disposal.

6.4 COMMERCIAL AND RETAIL WASTE COLLECTION PROCEDURES

A private waste contractor will be engaged to service the retail and commercial general waste and recycling bins as per an agreed collection schedule. This report assumes the collection frequencies for each component listed in section 6.2.

On each service day, a private waste collection vehicle will access the site via Burelli Street and park in the loading dock. The building caretaker will grant the driver access to either the commercial bin room or retail bin room, as required. After servicing the bins, the collection vehicle will exit the site via Burelli Street, proceeding in a forward direction.

Please note: The collection of commercial and retail bins should occur on separate days from the collection of residential bins to ensure proper segregation of waste streams.

6.5 SUPERMARKET

The supermarket tenant is responsible for developing a separate waste management plan in accordance with their nationwide store policies and procedures. The supermarket tenant will also nominate their preferred waste equipment (e.g., compactors, balers, and/or bins) as part of the design layout of their loading docks.

Waste and recyclables generated by the supermarket are usually stored and managed separately from all other tenancies. In general, it is expected that the supermarket staff will dispose of waste and recyclables near the loading area, and an appointed waste collection contractor will remove the waste from the loading area or waste room on an arranged schedule.

7.0 HOTEL WASTE MANAGEMENT

The following section outlines best practice waste management for the hotel component of the development, including waste stream generation estimates and disposal and collection procedures.

7.1 HOTEL WASTE GENERATION ESTIMATES

The NSW EPA's *Better Practice Guide for Resource Recovery in Residential Developments* (2019) has been referenced to calculate the total number of bins required for the hotel. Calculations are based on generic general waste and recycling rates. Actual volumes of general waste and recycling generated in operation may differ according to the hotels' actual waste management practices.

The following table shows the estimated volume (L) of general waste and recycling generated by the hotel component of the development.

Table 7: Estimated General Waste and Recycling Volumes – Hotel Suites

# Hotel Rooms	General Waste Generation Rate (L/room/day)	Generated General Waste (L/week)	Recycling Generation Rate (L/room/day)	Generated Recycling (L/week)
166	10	11620	5	5810
Bins & Collections	General Waste Bin Size (L)	1100	Recycling Bin Size (L)	1100
	General Waste Bins per Day	1.5	Recycling Bins per Day	0.8
	General Waste Collections per Week	3	Recycling Collections per Week	3
	Total General Waste Bins Required	4	Total Recycling Bins Required	2

7.2 HOTEL BIN SUMMARY

Based on the estimated volumes of general waste and recycling generated by the hotel component of the development, the recommended bin quantities and collection frequencies are as follows:

General Waste: 4 x 1100L bins collected **3 x weekly.**
Recycling: 2 x 1100L bins collected **3 x weekly.**

During operation, it is the responsibility of hotel management to monitor the number of bins required for the hotel. General waste and recycling volumes may change according to guests and staff's attitudes to waste disposal, occupancy levels or the development's management.

Any requirements for adjusting the capacity of the waste facilities may be achieved by changing the number of bins, the bin sizes or collection frequencies. Hotel management will be required to negotiate any changes to bins or collections with the collection service provider.

7.3 HOTEL WASTE DISPOSAL PROCEDURES

7.3.1 HOTEL SUITES

All hotel suites will be supplied with general waste and recycling source separation receptacles suitable for two days' storage capacity. Guests are encouraged to dispose of general waste into the designated general waste receptacle and recycling into the designated recycling receptacle.

On a daily basis hotel cleaners will collect bagged waste and loose recycling from each suite whilst undertaking cleaning duties and transfer items to the central Hotel Bin Room, via the lifts. Refer to Council guidance for the types of materials accepted in the general waste and recycling streams.

7.3.2 HOTEL DINING

Kitchens within the hotel dining areas will be provided with general waste and recycling source separation bins for use during daily operations. Hotel staff will be responsible for monitoring the capacity of bins and transferring bagged waste and loose recycling to the central Hotel Bin Room when required.

7.3.3 COMMON AREAS

Hotel common areas will be supplied with suitably branded source separation receptacles where considered appropriate. Receptacles should be placed in convenient locations which are accessible to guests and staff. Hotel cleaners will monitor the capacity of these receptacles and empty the contents into the central collection bins as required.

7.3.4 LANDSCAPED AREAS AND GARDEN ORGANICS

Garden organics generated from surrounding landscaped areas and indoor foliage typically consists of lawn clippings, cuttings, leaves and branches. Garden organics generated from surrounding landscaped areas will be managed and removed from the site by the designated landscaping contractors as they carry out scheduled landscaping maintenance works.

7.4 HOTEL BIN COLLECTION PROCEDURES

A private waste contractor will be engaged to collect the hotel general waste and recycling to an agreed collection schedule. This report assumes that general waste and recycling will be collected thrice weekly.

On the day of collection, a collection vehicle will enter the site from Burelli Street and park in the loading dock. Hotel Management will be responsible for ensuring that the collection staff have access to the collection point. The collection staff will exit the vehicle and collect the bins from the hotel bin room and return the empty bins once serviced.

Upon completion of servicing, the collection vehicle will exit the site onto Burelli Street in a forward direction. The Building Manager/Caretaker is responsible for returning the bins to their operational location to resume use.

8.0 OTHER WASTE MANAGEMENT CONSIDERATIONS

Based on the types of tenancies anticipated for this development, the following waste management practices are recommended.

8.1.1 WASHROOM FACILITIES

Washroom facilities should be supplied with collection bins for paper towels (if used). Sanitary bins for female restroom facilities must also be arranged with an appropriate contractor.

8.1.2 PRINTING & PHOTOCOPYING ROOMS

It is recommended that rooms designed for printing or photocopying be provided with an area for the interim storage of paper receptacles, as well as separate receptacles for used toner and/or printer cartridges for recycling. The cleaners or nominated staff are responsible for monitoring these receptacles and ensuring that items are collected and recycled by an appropriate contractor.

8.1.3 LIQUID WASTE

Liquid wastes such as cleaning products, chemicals, paints, solvents, and motor and cooking oil will be stored in a secure room and enclosed by a low wall intended to contain any liquid spillage or inundation to other areas. Liquid waste will be drained to a grease trap, in accordance with legislation and the requirements of State government authorities and agencies. Further information can be provided by the Services Consultant.

8.1.4 PROBLEM WASTE

The building manager is responsible for making arrangements for the disposal and recycling of problem waste streams with an appropriate contractor. Problem wastes cannot be placed in the general waste stream as they can have adverse impacts to human health and the environment if disposed of in landfill. Retail and commercial tenants must liaise with the building manager when disposing of problem waste streams.

Problem waste streams include:

- Chemical Waste
- Liquid wastes
- Toner cartridges
- Lightbulbs
- eWaste
- Batteries

9.0 STAKEHOLDER ROLES & RESPONSIBILITIES

The following table outlines the primary roles and responsibilities of the respective stakeholders:

Table 8: Stakeholder Roles and Responsibilities

Roles	Responsibilities
Strata, Body Corporate or Management	• Co-ordinate the waste strategy within the site. • Ensure all waste service providers submit monthly reports on all equipment movements and waste quantities/weights. • Organise internal waste audits/visual assessments on a regular basis. • Purchase any on-going waste management equipment or maintenance of equipment once building is operational; and • Manage any non-compliances/complaints reported through waste audits.
Building Manager or Waste Caretaker and Hotel Management & Cleaners	• Building Manager/Waste Caretaker to maintain and clean chute doors on each level. • Ensure site safety for residents, hotel guests, children, visitors, staff and contractors. • Co-ordinate general waste, recycling and FOGO collections • Clean and transport bins as required. • Organise replacement or maintenance requirements for bins. • Organise, maintain and clean bin storage areas. • Organise bulky waste collections when required. • Investigate and ensure prompt clean-up of illegally dumped waste materials. • Prevent storm water pollution by taking necessary precautions (secure bin rooms, prevent overfilling of bins). • Abide by all relevant WH&S legislation, regulations, and guidelines. • Provide staff/contractors with equipment manuals, training, health and safety procedures, risk assessments, and PPE to control hazards associated with all waste management. • Assess any manual handling risks and prepare a manual handling control plan for bin transfers. • Ensure effective signage, communication and education is provided to occupants, tenants, maintenance staff, and cleaning contractors.
Residents and Retail, Commercial and Hotel Guests/Customers	• Residents shall dispose of all general waste, recycling and FOGO in the allocated chutes and/or bins provided. • Retail, Commercial and Hotel Guests/Customers shall dispose of all general waste and recycling in the allocated receptacles provided. • Ensure adequate separation of general waste and recycling; and • Comply with the provisions of Council and the OWMP.
Retail, Commercial and Hotel Components	• Management co-ordinates own private contractor collections. • Manage general waste and recycling within their tenancy during daily operations. • Correctly separate general waste and recycling streams. • Flatten cardboard within the recycling bin. • If required, arrange for storing used and unused cooking oil in a bunded area, • Organise grease interceptor trap servicing, and • Ensure the suitable storage for chemicals, pesticides and cleaning products waste back of house.
Waste Collection Contractor	• Provide a reliable and appropriate bin collection service. • Provide feedback to building managers/residents regarding contamination of recyclables; and • Work with building managers to customise waste systems where possible.
Gardening/Landscaping Contractor	• Remove all garden organics generated during gardening maintenance activities for recycling at an offsite location.
Developer	• Purchase all equipment required to implement this OWMP prior to the occupation of the building to be provided to the Strata or Body Corporate.

10.0 SOURCE SEPARATION

Better practice waste management includes the avoidance, reuse, and recovery of unwanted items, which can be achieved through source separation. Refer to your local council for a list of accepted materials. Planet Ark can be accessed online to find other facilities that recover unwanted items.

Table 9: Operational Waste Streams

Waste Stream	Description	Typical Destination	Waste Stream Management
General Waste	The remaining portion of the waste stream that is not recovered for re-use, processing, or recycling. May include soft plastics, food scraps, polystyrene, etc.	Landfill	Waste should be bagged before placing in chutes.
Recycling	A mixture of items that are commonly recycled usually segregated through a MRF. Typically include food and beverage containers (e.g. aluminium, glass, steel, hard plastics, cartons). Also included cardboard and paper products.	Resource Recovery Centre	Recycling must not be bagged, and instead should be placed loosely in the designated recycling bins. Bulky cardboard must not be placed in any chute. Cardboard should be flattened before placing in the designated recycling bin.
FOGO	FOGO consists of unwanted or uneaten kitchen scraps that are easily compostable/ biodegradable (e.g. vegetable peels, fruit rinds, coffee grounds) and garden organics including lawn clippings, leaves, pruning's and branches.	Composting Facility	FOGO should be bagged in compostable liners when deposited into the bins and will be collected by Council.
Garden Organics	Garden organics consists of unwanted organic materials that are easily biodegradable and/or compostable (e.g. lawn clippings, branches)	Resource Recovery Centre	Landscape Maintenance Contractors will remove the garden organics from site during scheduled maintenance. Garden organics will be collected in Council or private contractor bins and removed from site.
Electronic Waste	Discarded e-waste, electronic components and materials such as computers, mobile phones, keyboards, etc.	Resource Recovery Centre	Building manager arranges collection for e-waste recycling as needed by residents. Retail/commercial tenants and hotel management arrange for recycling of their own e-waste.
Bulky Waste Items	Items that are too large to place into general rubbish collection. This includes disused and/or broken furniture, mattresses, white goods, etc.	Resource Recovery Centre or Landfill	Residents liaise with building manager to store in Bulky Goods Room. Building manager arranges with Council for removal. Retail/commercial tenants and hotel management are responsible for removal of their own bulky items.
Other	Other recyclable items that require special recovery may include ink cartridges, batteries, chemical waste, fluorescent tubes, etc.	Resource Recovery Facility	Building manager arranges collection by appropriate recycling services when required.

11.0 EDUCATION

Educational material encouraging correct separation of general waste, recycling and FOGO must be provided to each resident, commercial/retail tenant, hotel staff and guest. This should include the correct disposal process for bulky waste such as old furniture, large discarded items, and other materials including electronic and chemical wastes. It is recommended that the building caretaker provide information in multiple languages to support correct behaviours, and to minimise the possibility of chute blockages and contamination in communal bins.

Education and communication must be provided consistently on a regular basis to encourage behaviour change and account for transient building personnel such as new residents, tenants, or cleaning staff. It is also recommended that the owners' corporation website contain information for residents' referral regarding use of the chute. Information should include:

- Directions on using the chute doors;
- Descriptions of items accepted in the general waste, recycling and FOGO streams (refer to Council guidance);
- How to dispose of bulky waste and any other items that are not general waste, recycling or FOGO (refer to Council guidance);
- Residents' obligations to health and safety as well as building management; and
- How to prevent damage or blockages to the chute (example below).

11.1 SIGNAGE

Signage and education are essential components to support best practice waste management including resource recovery, source separation, and diversion of waste from landfill.

Signage should include:

- Clear and correctly labelled bins,
- Instructions for separating and disposing of waste items. Different languages should be considered,
- Locations of, and directions to, the waste storage areas with directional signs, arrows, or lines,
- The identification of all hazards or potential dangers associated with the waste facilities, and
- Emergency contact information should there be issues with the waste systems or services in the building.

The building manager is responsible for waste room signage including safety signage. Appropriate signage must be prominently displayed on doors, walls and above all bins, clearly stating what type of waste or recyclables is to be placed in each bin.

All chute doors on all residential levels will be labelled with signs directing chute operations and use of chute door.

All signage should conform to the relevant Australian Standards.

12.0 POLLUTION PREVENTION

Building management shall be responsible for the following to minimise dispersion of site litter and prevent stormwater pollution to avoid impact to the environment and local amenity:

- Promoting adequate waste disposal into the bins
- Securing all bin rooms (whilst affording access to staff/contractors)
- Prevent overfilling of bins, keep all bin lids closed and bungs leak-free
- Taking action to prevent dumping or unauthorised use of waste areas
- Require collection contractor/s to clean up any spillage when clearing bins

13.0 BIN WASHING

The bins will be cleaned by the building manager periodically to ensure hygiene and minimise odour. Bin washing can occur within the bin rooms, using the room clean down facilities (i.e tap connection and drain). Alternatively, a specialist bin washing contractor can be engaged to clean the bins to an agreed schedule. The specialist bin contractor would collect the bins from the bin holding area and clean the bins with their specialised vehicle.

14.0 BIN MOVING PATHS

The building manager is responsible for the transportation of bins from their designated operational locations to the collection area, returning them once emptied to resume operational use.

Any movement of bins should minimise manual handling where possible, as bins become heavy when full. The building manager must assess manual handling risks and provide any relevant documentation to key personal. The routes along the bin moving path should;

- Allow for a continuous route that is wholly within the property boundary.
- Be free from obstruction and obstacles such as steps and kerbs.
- Be constructed of solid materials with a non-slip surface
- Be A minimum of 300mm wider than the largest bin used onsite.
- If bins are moved manually, the route must not exceed a grade of 1:14.
- If a bin moving device is used, the route cannot exceed the maximum operating grade of the device. This is typically a grade of 1:4, however this will vary depending on the model of bin moving device acquired for the site.

As the distance of the bin moving paths exceeds 10m, a bin moving device will be required to aid the movement of full bins. The developer is responsible for supplying all equipment required for moving bins this includes any bin lifters, bin moving devices and waste transfer bins. This equipment must be new and appropriate for the site. The developer should contact a bin-tug, trailer or tractor consultant to provide equipment recommendations.

Once the site is operational (and the developers is no longer involved) the building proprietors/strata will be responsible for maintaining, repairing and replacing waste management equipment.

Bins may have to be fitted with hitches to enable the simultaneous transportation of multiple bins to the collection area. Council must be informed of any hitch attachments required to be installed on bins.

15.0 EQUIPMENT SUMMARY

Table 10: Equipment Summary

	Part	Qty	Notes
Chutes	Please refer to supplier's information	5	(See APPENDIX: B.1 for Typical Single Chute Layout)
Chute Equipment	General Waste		
	2-bin 1100L bin Linear Track System with Compactor	4	(See APPENDIX: B.3 for Typical Linear System)
	3-bin 1100L bin Linear Track System with Compactor	1	
Other Equipment	Suitable Bin Moving Device	1	(See APPENDIX: D.1 and APPENDIX: D.2 for Typical Bin Movers)
	240L Bin Lifter (to decant 240L recycling bins into 1100L bins for collection)	2	(See APPENDIX: D.5 for Typical Bin Lifter)

16.0 WASTE ROOMS

The areas allocated for waste storage and collection areas are detailed in the table below and are estimates only.

The equipment recommended in the chute discharge rooms is to manage 2 days' worth of estimated general waste from that building core. Therefore, this represents the minimum equipment required in these rooms to satisfy best practice requirements. Additional bins or volume handling equipment can be included in these rooms to increase days of capacity or manual labour required in operation.

Table 11: Waste Room Areas

Level	Waste Room Type	Equipment	Estimated Area Required (m ²)
Basement1	BLD 1 Chute Discharge Room	General waste: 3 x 1100L service bins Recycling: 10 x 1100L Bins Equipment: 1 x 3-bin 1100L Linear System 1 x Bin Lifter (240L)	61
Basement1	BLD 1 FOGO Bin Room	FOGO: 11 x 240L bins	10
Basement1	BLD 2.1 Chute Discharge Room	General waste: 1 x 1100L service bin Equipment: 1 x 2-bin 1100L linear track system	12
Basement1	BLD 2.2 Chute Discharge Room	General waste: 1 x 1100L service bin Equipment: 1 x 2-bin 1100L linear track system	12
Basement1	BLD 2.3 Chute Discharge Room	General waste: 1 x 1100L service bin Equipment: 1 x 2-bin 1100L linear track system	12
Basement1	BLD 2 FOGO Bin Room	FOGO: 11 x 240L bins	10
Basement1	BLD 3 Chute Discharge Room	General waste: 1 x 1100L service bin Equipment: 1 x 2-bin 1100L linear track system	12
Basement1	BLD 3 FOGO Bin Room	FOGO: 5 x 240L bins	5

Basement1	Bin Holding Room	General Waste: 32 x 1100L bins Recycling: 32 x 1100L bins FOGO: 27 x 240L bins 1 x Bin Lifter 1 x Bin Tug	212
Basement1	Residential Bulky Waste Room		112
Basement1	Commercial Bin Room	General Waste: 2 x 1100L bins Recycling: 3 x 1100L bins	15
Basement1	Retail Bin Room	General Waste: 11 x 1100L bins Recycling: 9 x 1100L bins	55
Basement1	Supermarket Bin Room	To Be Decided by Supermarket OWMP	TBD
Basement1	Hotel Bin Room	General Waste: 3 x 1100L bins Recycling: 2 x 1100L bins	18

*Note: Building A generates a substantial volume of recyclables on a daily basis. To accommodate this, provisions have been made for an additional bin lifter and 10 x 1100L bins, enabling a 2-day storage capacity for waste and recycling. This arrangement optimizes waste management operations by minimizing the distance required for decanting 240L bins into the larger 1100L bins, resulting in a more efficient and practical waste management system. An additional bin lifter has also been proposed in the main bin storage room for the remaining buildings.

EFC recommends bins sizes, collection frequencies and/or equipment for best practice waste management at this site, however EFC also acknowledges there are a range of other suitable options that may alter waste room requirements (e.g. floor area, accessibility, head height, etc.). The waste room areas have been calculated based on equipment requirements and/or bin dimensions with an additional 70% of bin GFA factored in for manoeuvrability.

In addition, all doorways and passageways facilitating the movement of bins and/or bulky waste items must be at least 1500mm wide.

The following table provides further waste room requirements.

Table 12: Waste Room Requirements

Waste Room Type	Waste Room Requirements
Chute Discharge Room	• Ceiling clearance height must be a minimum of 3000mm (3100mm with compactor) (subject to penetration location) • The chute penetration must have a minimum 500mm clearance of any service pipes or other overhead obstacles • All chute discharge points should be caged off to ensure the safety of any personnel accessing the waste room • 200mm clearance is required around compaction equipment • Where a chute offset is required, the angle of the offset must not exceed 30 degrees (subject to number of consecutive offset and/or up to 1500mm)
Residential Bin Holding Room and/or Bin Collection Area	• Bins must not be stacked in rows that are more than two bins deep.
Communal FOGO Rooms	• Bins should be arranged so that all bins are accessible. Bins are not to be placed in front of one another or in such a way as to restrict access to the other bins for use. • Rooms must be well ventilated either naturally or mechanically in accordance with AS1668.4.2012 • Cleaning facilities such as hose hock and drainage for odour and hygiene control must be provided. • It is recommended a dustpan and broom is provided in this room for residents to clean up unexpected spillages when using bins.
Bulky Waste Room	• May be a dedicated room or screened area within another waste room • Must be in close proximity to the collection area • Area must also be allocated for the segregation of e-waste, gas bottles, cardboard, etc. • Doorway should be a minimum of 1500mm wide
Retail/ Commercial/ Hotel Bin Room	• In order to ensure staff safety, all bins should be arranged so they can be accessed without moving another bin • Bins must be coordinated with the hinge of the lid facing the back. This is to allow for ideal access to the bin.

17.0 CONSTRUCTION REQUIREMENTS

Waste room construction must comply with the minimum standards as outlined in the *Wollongong Development Control Plan 2009*, in order to minimise odours, deter vermin, protect surrounding areas, and make it a user-friendly and safe area.

The *NSW Better practice guide for resource recovery in residential developments (2019)* also states that better practice bin storage areas should achieve more than the minimum compliance requirements, which are as follows:

- Ensuring BCA compliance, including ventilation. Where required, ventilation system must comply with AS1668.4-2012 The use of ventilation and air conditioning in buildings.
- Ensuring storage areas are well lit (sensor lighting preferred) and have lighting available 24 hours a day.
- Provision of bin washing facilities, including taps for hot and cold water provided through a centralised mixing valve. The taps must be protected from bins and be located where they can be easily accessed even when the area is at bin capacity.
- Floor constructed of concrete at least 75mm thick.
- Floor graded so that any water is directed to a sewer authority approved drainage connection to ensure washing bins and/or waste storage areas do not discharge flow into the stormwater drain.
- Provision of smooth, cleanable and durable floor and wall surfaces that extend up the wall to a height equivalent to any bins held in the area.
- Ensuring ceilings are finished with a smooth-faced non-absorbent material capable of being cleaned.
- All surfaces (walls, ceiling and floors) finished in a light colour.

17.1 ADDITIONAL CONSIDERATIONS

- Waste room floor to be sealed with a two-pack epoxy;
- All corners coved and sealed 1,200mm up, this is to eliminate build-up of dirt;
- Hot and cold water tap height and light switch height of 1.6m;
- Storm water access preventatives (grate);
- All walls painted with light colour and washable paint;
- Equipment electric outlets to be installed 1700mm above finished floor level;
- Optional automatic odour and pest control system installed
- If 660L or 1100L bins are utilised, 2 x 820mm (minimum) double-doors must be used;
- All personnel doors are hinged, lockable and self-closing;
- Conform to the Building Code of Australia, Australian standards and local laws; and
- Childproofing and public/operator safety shall be assessed and ensured
- Waste and recycling rooms must have their own exhaust ventilation system either;
 - Mechanically - exhausting at a rate of 5L/m² floor area, with a minimum rate of 100L/s minimum. Mechanical exhaust systems shall comply with AS1668.4.2012 and not cause any inconvenience, noise or odour problem; or
 - Naturally - permanent, unobstructed, and opening direct to the external air, not less than one-twentieth (1/20) of the floor area.

18.0 USEFUL CONTACTS

EFC does not warrant or make representation for goods or services provided by suppliers.

LOCAL COUNCIL

Wollongong Customer Service Ph: (02) 4227 7111 E: Council@wollongong.nsw.gov.au

PRIVATE WASTE COLLECTION PROVIDER

Capital City Waste Services Ph: 02 9599 9999 E: service@ccws.net.au
 Sydney Waste Ph: 02 8661 0031
 Waste Clear Ph: 1300 525 352 E: admin@wasteclear.com.au

BIN MOVING DEVICE SUPPLIERS

Elephants Foot Equipment Ph: 1300 435 374 E: equipment@elephantsfoot.com.au
 Sitecraft Ph: 1300 363 152 E: sales@sitecraft.com.au

BALER SUPPLIERS

Elephants Foot Equipment Ph: 1300 435 374 E: equipment@elephantsfoot.com.au

ORGANIC DIGESTERS AND DEHYDRATORS

Elephants Foot Equipment Ph: 1300 435 374 E: equipment@elephantsfoot.com.au
 Waste Master Ph: 1800 614 272 E: hello@wastemasterpacific.com.au

COOKING OIL CONTAINERS AND DISPOSAL

Cookers Ph: 1300 882 299 E: info@cookers.com.au
 Auscol Ph: 1800 629 476 E: sales@auscol.com

ODOUR CONTROL

Elephants Foot Equipment Ph: 1300 435 374 E: equipment@elephantsfoot.com.au

SOURCE SEPARATION BINS

Method Recycling Ph: 0499 890 455

BINS AND BIN EQUIPMENT


Elephants Foot Equipment Ph: 1300 435 374 E: equipment@elephantsfoot.com.au
 SULO Ph: 1300 364 388 E: sulosales@pactgroup.com

CHUTES, COMPACTORS AND EDIVERTER SYSTEMS

Elephants Foot Chute Solutions Ph: 1300 435 374 E: chutes@elephantsfoot.com.au

APPENDIX A: ARCHITECTURAL PLANS

APPENDIX: A.1 BASEMENT 1 PLAN

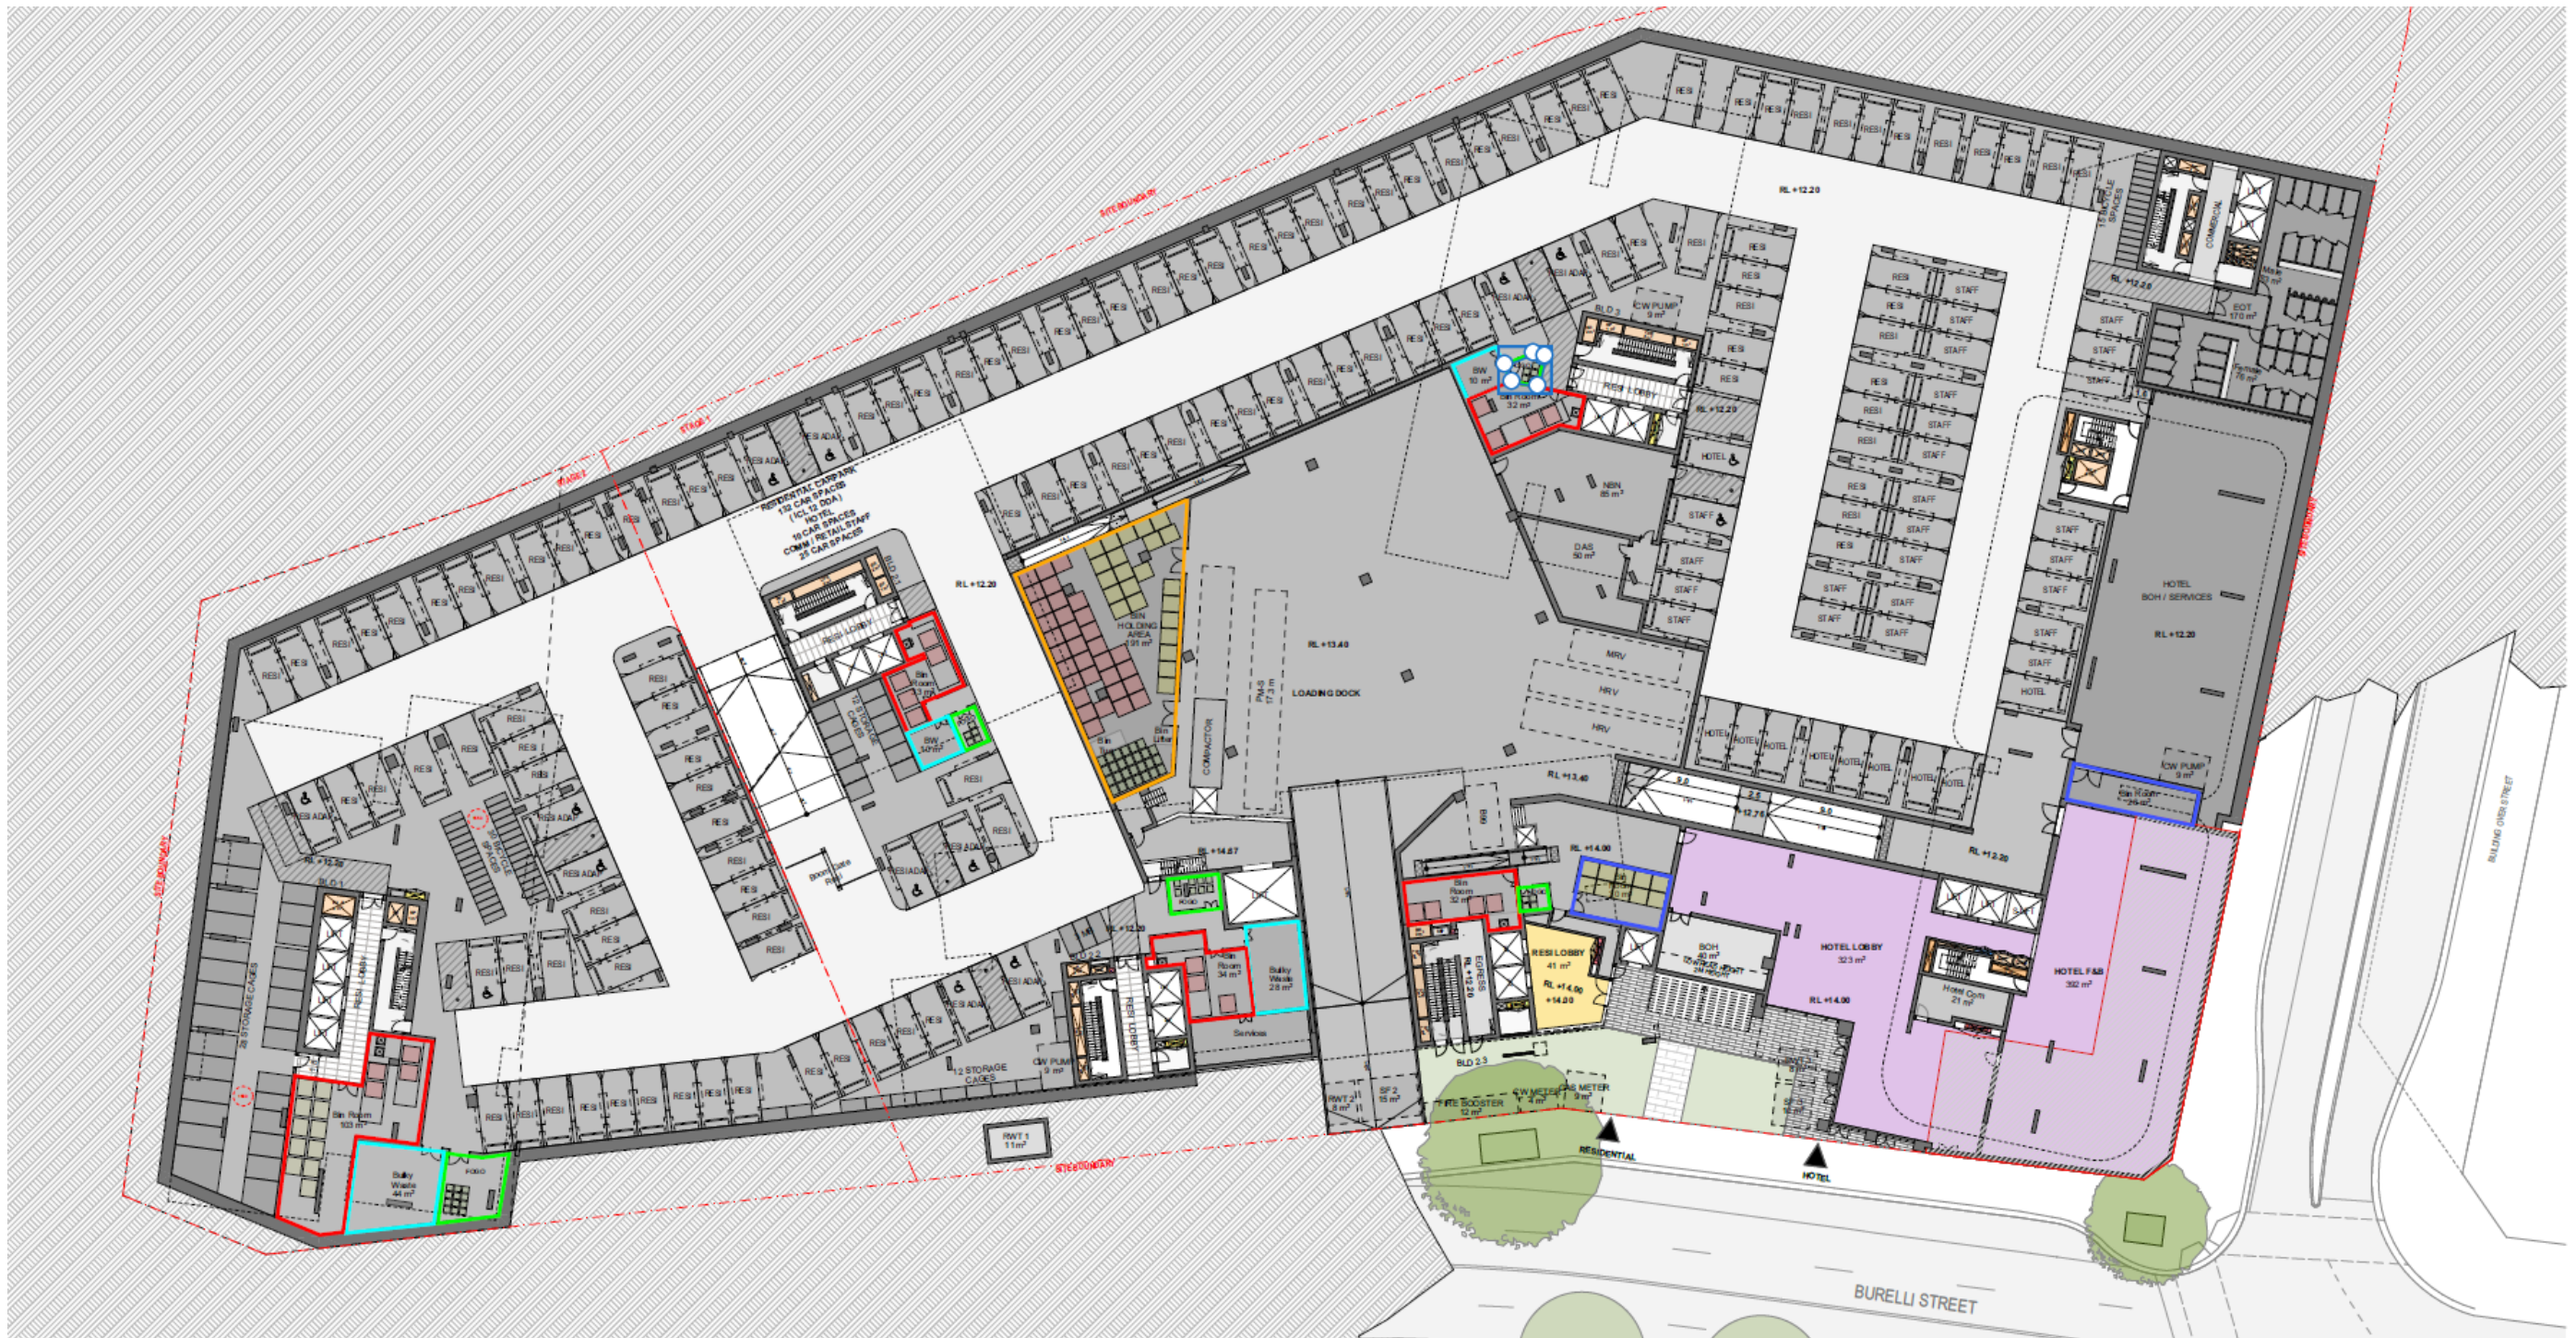

Source: DKO Architecture, Drawing no. DA2001, Rev A, 11.04.2025 - Basement 01.

APPENDIX B: INSTALLATION EQUIPMENT


APPENDIX: B.1 TYPICAL SINGLE CHUTE SHAFT & PENETRATION LAYOUT




Chute Solutions.™
an Australian First Garbage

CHUTE SHAFT & PENETRATION SET-OUT


SINGLE Ø610 STEEL

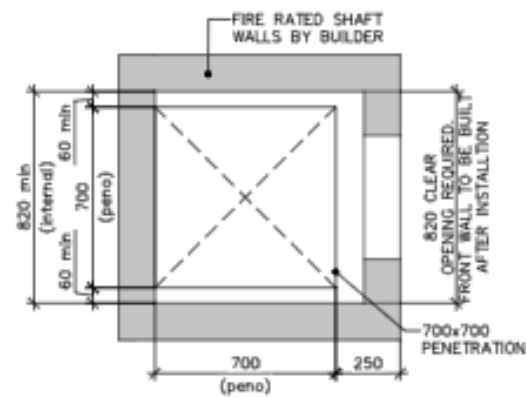


01 SINGLE (610Ø) GALV. STEEL CHUTE PENETRATION SET-OUT

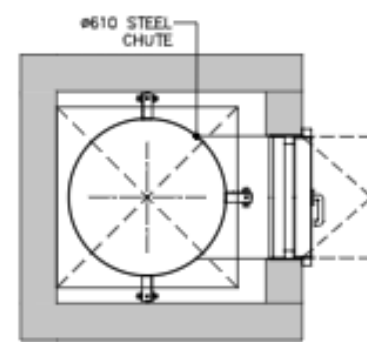


02 SINGLE (610Ø) GALV. STEEL CHUTE LAYOUT

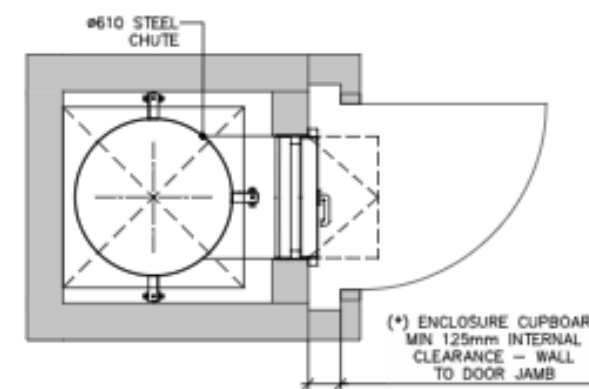


03 SINGLE (610Ø) GALV. STEEL CHUTE LAYOUT with ENCLOSURE CUPBOARD (*)

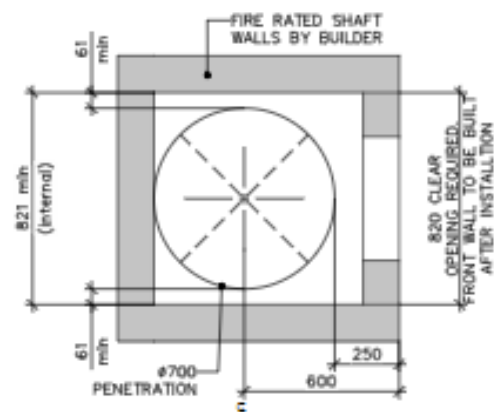


04 SINGLE (610Ø) GALV. STEEL CHUTE WITH CIRCULAR PENETRATION SET-OUT



05 SINGLE (610Ø) GALV. STEEL CHUTE LAYOUT (WITH CIRCULAR PENETRATION)

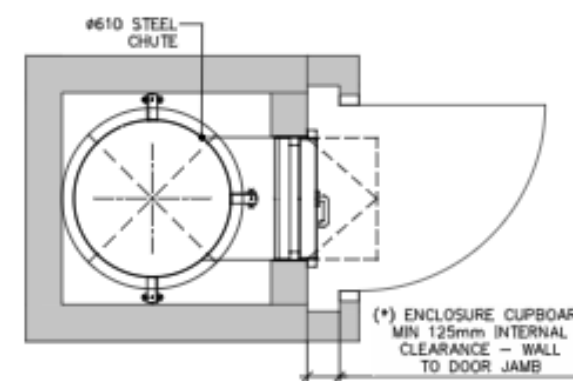

06 SINGLE (610Ø) GALV. STEEL CHUTE LAYOUT with ENCLOSURE CUPBOARD (*)

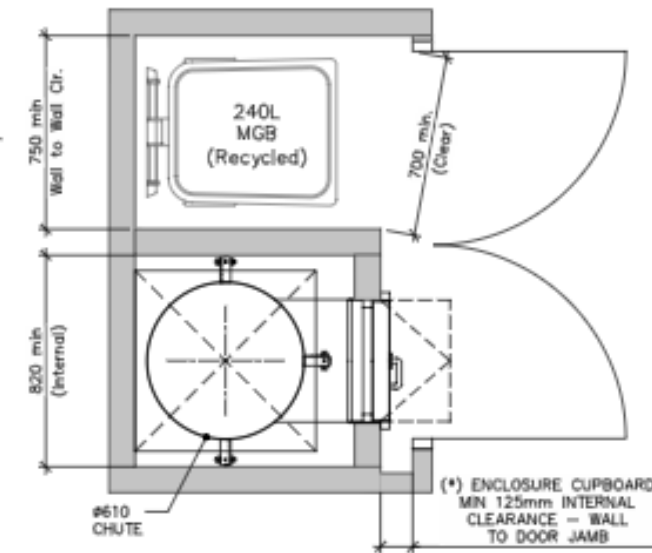

07 TYPICAL (610Ø) GALV. STEEL CHUTE LAYOUT with ENCLOSURE(*) & RECYCLING COMPARTMENT


(*) NOTE: ENCLOSURES ARE RECOMMENDED IF THE CHUTE OPENS DIRECTLY TO A CORRIDOR OR IS NOT LOCATED IN A WASTE ROOM. IF CHUTE ACCESS IS WITHIN A WASTE ROOM THEN THE CUPBOARD ENCLOSURES ARE NOT REQUIRED.

SCALE 1:25 @ A3

Chute Shaft & Peno – Ver 1.2 April 26, 2022

Please Note: This is an example only – please refer to supplier's information and specification.

APPENDIX: B.2 EXAMPLE RESIDENTIAL LEVEL RECYCLING BIN LAYOUT

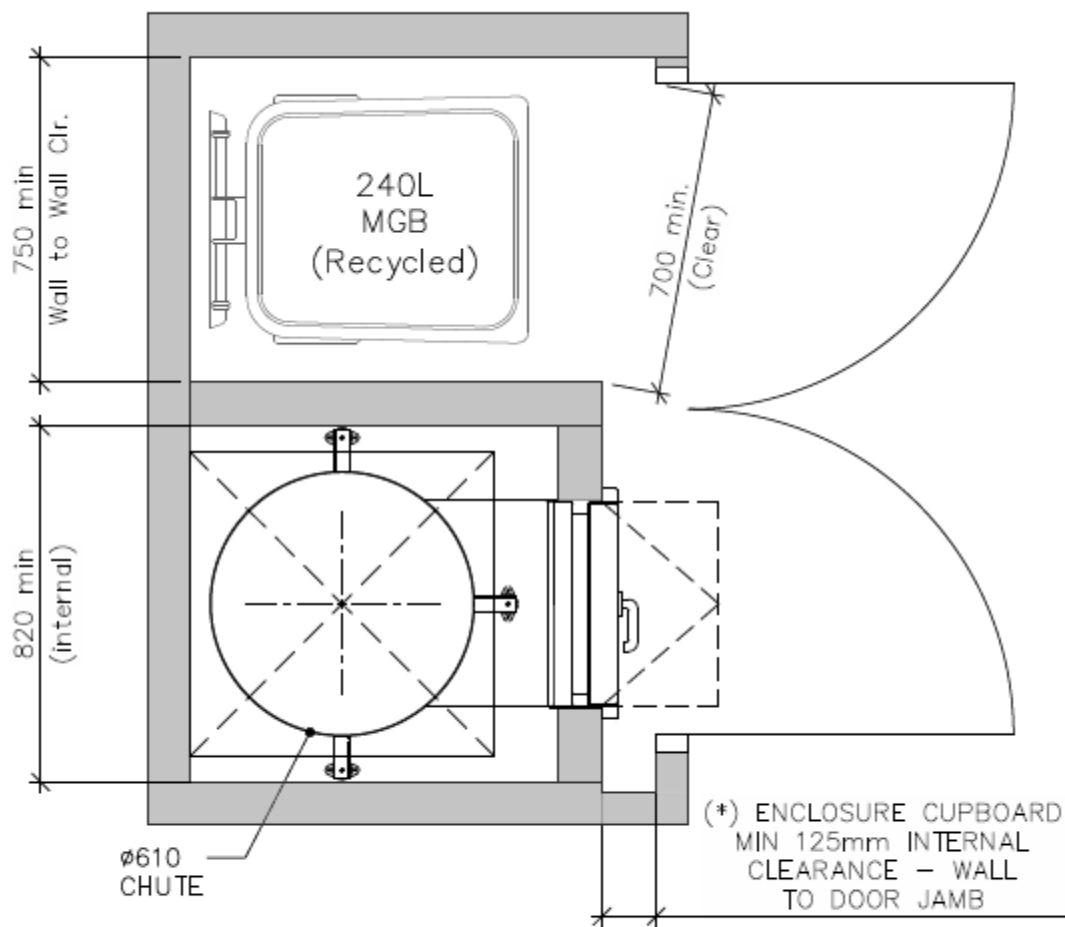

07 TYPICAL (610 ϕ) GALV. STEEL CHUTE LAYOUT
with ENCLOSURE(*) & RECYCLING COMPARTMENT

Please Note: This is an example only – please refer to supplier's information and specification

APPENDIX: B.3 TYPICAL LINEAR TRACK SYSTEM FOR 1100L BINS



ELEPHANTS FOOT
recycling solutions

ELEPHANTS FOOT RECYCLING SOLUTIONS
44-46 GIBSON AVE, PADSTOW NSW 2211
E info@elephantsfoot.com.au W elephantsfoot.com.au
Free Call: 1300 4 ELEPHANT (1300 435 374)

1100 LITRE LINEAR TRACK SYSTEM

PRODUCT INFORMATION

Elephants Foot 1100 Litre bin Linear Track System is a versatile waste handling solution for many types of multi-storey or multi-level developments. The Linear Track System collects waste or recycling being disposed from the floors above through the chute system, discharging the material via a hopper that feeds the bins. Electromechanically driven with automated operation, the system utilises linear motion to automatically change over full bins. Once all the bins are filled, an indicator light will illuminate signifying that the bins are ready for withdrawal and collection. Available with or without compaction unit, our standard 660 litre bin Linear Track System is available in the standard 2 bin option. Our 3 Bin option is available as a special order.



SPECIFICATIONS

System Control	Electric PLC
Power Supply	415 V AC / 10A / 5 PIN
Motor Size (kW)	1.1
Maximum bin load	440 kg
Noise (dBA)	<85
Bin Size (L)	1100
Cycle time (sec)	60
Bin Quantity options	2 or 3

OPTIONAL EXTRAS

- Compaction unit – Please refer to the bin compactor product information sheet for details and specifications
- Enhanced safety add on's – Interlocking barriers, occupancy sensors or safety light curtains (presence sensing light barriers)
- Full bin SMS and email notification
- CMMS and BMS integration
- Extend warranty – Terms and conditions apply

STANDARD FEATURES & BENEFITS

- Simple operation with user friendly controls
- Increased waste servicing efficiency for the development.
- Automatic system control with manual override
- Robust unit construction for long performance life
- Low service and maintain costs
- Rotating flashing beacon (activated during operation)
- Quiet and efficient system operation
- Maximise safety for residents, caretakers and collectors
- Restrained design with minimal moving parts
- Can suit low ceiling clearances
- Floor contact components fully galvanised steel
- Retro fitting options to suit other chutes systems
- Compliant with relevant Building Codes and Standards
- Standard 12 month warranty





1,100 LITRE LINEAR TRACK SYSTEM



No. of Bins	Reference (mm)		
	A	B	C
2	900	3700	5300
3	2100	5940	7550

Available with or without compaction unit, our standard 1100 litre bin Linear Track System is available in the standard 2 bin option. Our 3 Bin option is available as a special order.

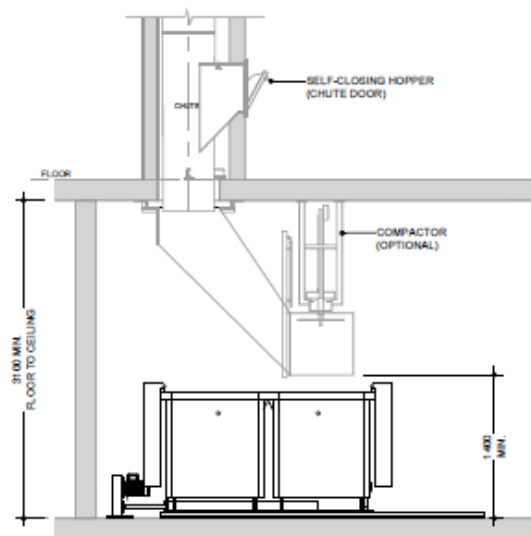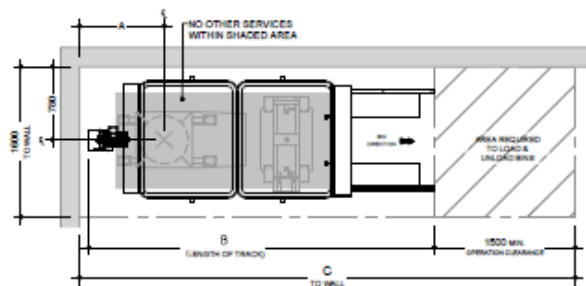

Notes:
Bins not provided by Elephants Foot

Drawings shown are for general information purposes only and provide minimum equipment spatial requirements for waste room design.

These drawings are not intended for site specific use or for construction. Each project is unique and will be designed to suit.

Additional equipment options, systems and configurations are available. For design assessment, information and advice, please contact an Elephants Foot design consultant on 1300 435 374

Please Note: This is an example only – please refer to supplier's information and specification

APPENDIX: B.4 EXAMPLE CAROUSEL SYSTEM FOR 1100L BINS



ELEPHANTS[®] FOOT
recycling solutions

ELEPHANTS FOOT RECYCLING SOLUTIONS
44-46 GIBSON AVE, PADSTOW NSW 2211
E info@elephantsfoot.com.au W elephantsfoot.com.au
Free Call: 1300 4 ELEPHANT (1300 435 374)

1100 LITRE CAROUSEL SYSTEM

PRODUCT INFORMATION

Elephants Foot 1100 Litre bin Carousel System is a versatile waste handling solution for many types of multi-storey or multi-level developments. The Carousel System collects waste or recycling being disposed from the floors above through the chute system, discharging the material via a hopper that feeds the bins positioned on the unit. Electromechanically driven with automated operation, the Carousel System automatically replaces full bins by a revolving circular platform. Once all the bins on the system are filled, an indicator light will illuminate signifying that the bins are ready for withdrawal and collection. Available with or without compaction unit, our standard 660litre bin Carousel System is available in standard 2, 3 or 4 bin options. Our 5 Bin option is available as a special order.



SPECIFICATIONS

System Control	Electric PLC
Power Supply	415 V AC / 10A / 5 PIN
Motor Size (kW)	0.37
Maximum bin load	440 kg
Noise (dBA)	<85
Bin Size (L)	660
Cycle time (sec)	60
Bin Quantity options	2, 3, 4 or 5

STANDARD FEATURES & BENEFITS

- Simple operation with user friendly controls
- Increased waste servicing efficiency for the development.
- Automatic system control with manual override
- Robust unit construction for long performance life
- Low service and maintain costs
- Rotating flashing beacon (activated during operation)
- Quiet and efficient system operation
- Maximise safety for residents, caretakers and collectors
- Restrained design with minimal moving parts
- Can suit low ceiling clearances
- Floor contact components fully galvanised steel
- Retro fitting options to suit other chutes systems
- Compliant with relevant Building Codes and Standards
- Standard 12 month warranty

OPTIONAL EXTRAS




- Compaction unit – Please refer to the bin compactor product information sheet for details and specifications
- Enhanced safety add on's - Interlocking barriers, occupancy sensors or safety light curtains (presence sensing light barriers)
- Full bin SMS and email notification
- CMMS and BMS integration
- Extend warranty – Terms and conditions apply



1,100 LITRE CAROUSEL SYSTEM

No. of Bins	Reference (mm)			
	A	B	C	D
2	650	1700	3200	3350
3	650	1850	3460	3600
4	650	2050	3940	4050

Available with or without compaction unit, our standard 1100 litre bin Carousel System is available in standard 2, 3 or 4 bin options. Our 5 Bin option is available as a special order.

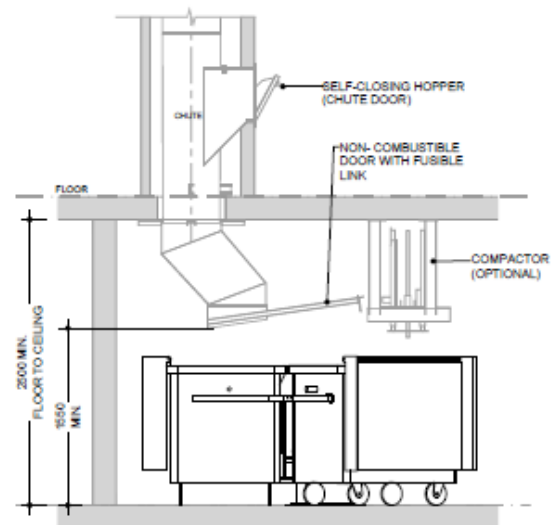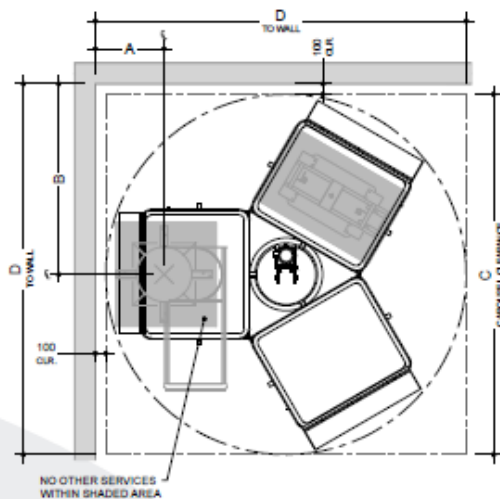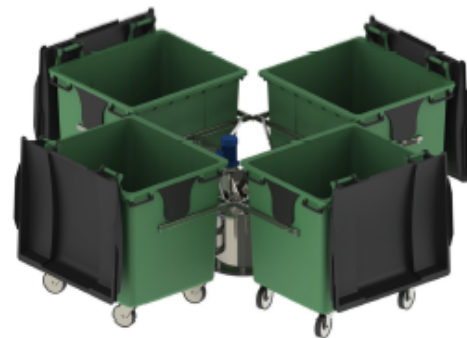

Notes:

Bins not provided by Elephants Foot

Drawings shown are for general information purposes only and provide minimum equipment special requirements for waste room design.

These drawings are not intended for site specific use or for construction. Each project is unique and will be designed to suit.

Additional equipment options, systems and configurations are available. For design assessment, information and advice, please contact an Elephants Foot design consultant on 1300 435 374

Please Note: This is an example only – please refer to supplier's information and specification

APPENDIX C: PRIMARY WASTE MANAGEMENT PROVISIONS

APPENDIX: C.1 TYPICAL BIN SPECIFICATIONS

Mobile bins

Mobile bins come in a variety of sizes and are designed for lifting and emptying by purpose-built equipment.

Mobile bins with capacities of up to 1700L must comply with *AS4123.6-2006 Mobile waste containers* which specifies standard sizes and sets out the colour designations for the bodies and lids of mobile waste containers indicating the type of materials they are used to collect.

The most common bin sizes are provided below, although not all sizes are shown. The dimensions are a guide only and differ slightly between manufacturers. Some bins have flat or domed lids and are used with different lifting devices. Refer to *AS4123.6-2006* for further details.

Table G1.1: Average dimension ranges for two-wheel mobile bins



Bin capacity	80L	120L	140L	240L	360L
Height (mm)	870	940	1065	1080	1100
Depth (mm)	530	530	540	735	820
Width (mm)	450	485	500	580	600
Approximate footprint (m ²)	0.24	0.26–0.33	0.27–0.33	0.41–0.43	0.49
Approximate weight (kg)	8.5	9.5	10.4	15.5	23
Approximate maximum load (kg)	32	48	56	96	Not known

Sources include Sulo, Single Waste, Cleanaway, SUEZ, just wheelie bins and Perth Waste for two-wheel mobile bins

Table G1.2: Average dimension ranges for four-wheel bulk bins



Bin capacity	660L	770L	1100L	1300L	1700L
Height (mm)	1250	1425	1470	1480	1470
Depth (mm)	850	1100	1245	1250	1250
Width (mm)	1370	1370	1370	1770	1770
Approx footprint (m ²)	0.86–1.16	1.51	1.33–1.74	2.21	2.21
Approx weight (kg)	45	Not known	65	Not known	Not known
Approx maximum load (kg)	310	Not known	440	Not known	Not known

Dome or flat lid container

Sources include Sulo, Signal Waste, Cleanaway, SUEZ, Just Wheelie Bins and Perth Waste

Source: *Better Practice Guide For Resource Recovery In Residential Developments 2019*, NSW Environmental Protection Authority

APPENDIX: C.2 SIGNAGE FOR WASTE AND RECYCLING BINS

Waste signs

Signs and educational materials perform several functions including:

- informing residents why it is important to recover resources and protect the environment
- providing clear instructions on how to use the bins and services provided
- alerting people to any dangers or hazards within the bin storage areas.

All waste, recycling and organic bins should be Australian Standard colours and clearly and correctly labelled, such as by a sticker on the lid and/or the body of the bin.

Communal bin storage areas should be clearly signposted with signs outlining how to correctly separate waste into the bins provided. The local council responsible for waste services may be a good source of signs and posters and can advise on what signs are suitable.

Information on who to contact to find out more about the recycling and/or other resource recovery services in the building should also be displayed in communal areas, such as on a noticeboard.

The Planet Ark website also has resources available free of charge for use by businesses and councils. These signs can be found at businessrecycling.com.au/research/signage.cfm

Figure I1.1: Examples of waste wall posters (EPA supplied)



Figure I1.2: Examples of bin lid stickers (EPA supplied)



Source: *Better Practice Guide For Resource Recovery In Residential Developments 2019*, NSW Environmental Protection Authority

Problem waste signs

The EPA has also produced a range of images and signs that can be used for problem wastes, such as fluoro globes and tubes, household and car batteries, e-waste and smoke detectors. To access these resources, contact the NSW EPA. Some examples are shown below.

Figure I2.1: Problem waste signs



Safety signs

The use of safety signs for waste resource recovery rooms must comply with *AS1319 Safety signs for occupational environments*. Safety signs must be used to regulate and control safety related to behaviour, warn of hazards and provide emergency information, including fire protection information. Suitable signs should be decided for each development as required.

Figure I3.1: Example safety signs



Source: *Better Practice Guide For Resource Recovery In Residential Developments 2019*, NSW Environmental Protection Authority

APPENDIX: C.3 EXAMPLE COLLECTION VEHICLE INFORMATION

General

Appropriate heavy rigid vehicle standards should be incorporated into the road and street designs in new developments where onsite collections are proposed. Road and street designs must comply with relevant Acts, regulations, guidelines, and codes administered by Austroads, Standards Australia, NSW Roads and Maritime Services, WorkSafe NSW and any local council traffic requirements.

Applicants and building designers should consult with councils and other relevant authorities before designing new roads or streets and access points for waste collection vehicles to establish specific design requirements.

Table H4.1: Australian Standards for turning circles for medium and heavy rigid class vehicles

Vehicle class	Overall length (m)	Design width (m)	Design turning radius (m)	Swept circle (m)	Clearance (travel) height (m)
Medium rigid vehicle	8.80	2.5	10.0	21.6	4.5
Heavy rigid vehicle	12.5	2.5	12.5	27.8	4.5

Source: *Better Practice Guide For Resource Recovery In Residential Developments 2019*, NSW Environmental Protection Authority

Large collection vehicles

Waste collection vehicles may be side-loading, rear-loading, front-lift-loading, hook or crane lift trucks. Vehicle dimensions vary by collection service, manufacturer, make and model. It is not possible to provide definitive dimensions, so architects and developers should consult with the local council and/or contractors.

The following characteristics represent typical collection vehicles and are provided for guidance only. Reference to *AS2890.2 Parking facilities: off-street commercial vehicle facilities* for detailed requirements, including vehicle dimensions, is recommended.

Table B2.1: Collection vehicle dimensions


Vehicle type	Rear-loading	Side-loading*	Front-lift-loading	Hook truck	Crane truck
Length overall (m)	10.5	9.6	11.8	10.0	10.0
Width overall (m)	2.5	2.5	2.5	3.0	2.5
Travel height (m)	3.9	3.6	4.8	4.7	3.8
Operational height for loading (m)	3.9	4.2	6.5	3.0	8.75
Vehicle tare weight (t)	13.1	11.8	16.7	13.0	13.0
Maximum payload (t)	10.0	10.8	11.0	14.5	9.5
Turning circle (m)	25.0	21.4	25.0	25.0	18

* The maximum reach of a side arm is 3 m.

Sources: JJ Richards, SUEZ, MacDonald Johnson, Cleanaway, Garwood, Ros Roca, Bingo and Edbro. Figures shown represent the maximum dimensions for each vehicle type.

Rear-loading collection vehicles

These vehicles are commonly used for domestic waste collections from MUDs and RFBs and sometimes for recycling. They can be used to collect waste stored in mobile bins or bulk bins, particularly where bins are not presented at the kerbside. They are also used for collecting bulky waste.

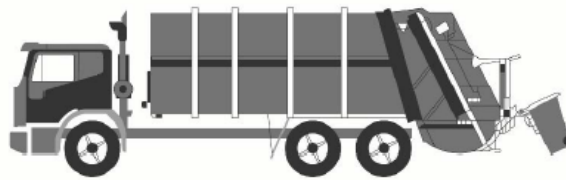

Rear-loading waste collection vehicle

Side-loading collection vehicles

This is the most commonly used vehicle for domestic waste, recycling and organics collections. It is only suitable for collecting mobile bins up to 360L in capacity.



Side-loading waste collection vehicle

Front-lift-loading collection vehicles

These vehicles are commonly used for collecting commercial and industrial waste. They can only collect specially designed front-lift bulk bins and not mobile bins.



Front-lift-loading waste collection vehicle

Small collection vehicles

Typically, councils and their contractors operate with large collection vehicles (heavy rigid class vehicles) because they carry greater payloads and allow for more cost-effective collection services. Some councils, or their contractors, may have smaller collection vehicles in their fleet. Early discussion with the council is important to confirm this, but it should not be assumed that the council will have access to small collection vehicles.

The waste management systems and the location of the collection point should always be designed so that the council can provide the standard domestic waste service.

Source: *Better Practice Guide For Resource Recovery In Residential Developments 2019*, NSW Environmental Protection Authority

APPENDIX D: SECONDARY WASTE MANAGEMENT PROVISIONS

APPENDIX: D.1 EXAMPLE HANDHELD BIN MOVERS

moveXX
smart electric tugs

MOVEXX T2500 BIN MOVER BATTERY ELECTRIC

MoveXX T2500 Tow Tug is an extremely user friendly battery powered mobile towing unit that is ideal for applications where trolleys and rolling objects need to be moved from one place to another simply, efficiently and without physical effort. Some standard features included are: battery indicator, on board battery charger, battery, adjustable handle, dual speed and electric brake.

These units are fitted with an electromagnetic brake system for use on ramps and slopes.

Features

- Electromagnetic brake for use on ramps and slopes
- Adjustable height handle



SPECIFICATION

MODEL	DIMENSIONS (MM)	OPTIONS	PULL - PUSH CAPACITY (KG)	BATTERY
T2500-D	511 (w) x 757 (l)	* Centre mount 2x 240 lt. wheelie bin attachment	2500	AGM batteries 2x 85AH up to 8 hrs continuous operation
TOWING CAPACITY - ON FLAT GROUND (all models)			TOWING CAPACITY - SLOPE (all models)	
Towing up to 4x 660 lt. Wheelie Bin			Towing up to 2x 660 lt. Wheelie Bin Up / Down maximum 25% (1:4 slope)	
Towing up to 4x 1100 lt. Wheelie Bin			Towing up to 1x 1100 lt. Wheelie Bin Up / Down maximum 25% (1:4 slope)	
**Electromagnetic brake for use on ramps and slopes				



Please Note: This is an example only – please contact supplier for specific recommendations.

Source: Sitecraft - www.sitecraft.net.au

APPENDIX: D.2 EXAMPLE SEATED BIN MOVERS



MOTREC MT180 36V BATTERY ELECTRIC BIN MOVER

This hardworking tow device delivers outstanding performance. With its efficient motor and 4,500kg push-pull capacity. The MT180 is ideal for moving bin trailer also narrow enough to fit through most door openings. From its all-steel construction to its all-wheel braking, this tow tractor is built for years of heavy use in total comfort and safety. All this combined with superior AC technology makes short work of tough requests.

Features

- Front & rear brakes
- Pneumatic Tyres
- Comfortable ergonomic adjustable seat
- Complete with headlight, break lights, tailing lights & horn



SPECIFICATION

MODEL	DIMENSIONS (MM)	OPTIONAL EXTRAS	PULL - PUSH CAPACITY (KG)	BATTERY
MT180 36V	760 (w) x 2030 (l) x 1160 (h)	Flashing light on pole Conditional registration kit Cabin includes windscreen Weather Curtains	4500	48V TPPL battery pack, 157AH

TOWING CAPACITY - ON FLAT GROUND / SLOPE (all models) (all models)

Towing up to 5x 660 lt. Wheelie Bin Up / Down maximum 25% (1:4 slope)

Towing up to 4x 1100 lt. Wheelie Bin Up / Down maximum 25% (1:4 slope)



Please Note: This is an example only – please contact supplier for specific recommendations.

Source: Sitecraft - www.sitecraft.net.au

APPENDIX: D.3 EXAMPLE BIN TRAILERS



BIN TRAILER WITH ALUMINUM RAMP

Bin trailer suitable for moving 240lt, 660lt and 1,100lt bins including a 1200mm rear ramp complete with locking latches and gas strut assist. Height draw bar fitted with a jockey wheel large pneumatic tyres with precision bearing hubs



SPECIFICATION

MODEL	DIMENSION (MM)	SUITABLE FOR MOVING	PART NUMBERS	REAR RAMP DIMENSION (MM)
4x Bins Trailer	Internal - 1560 (l) x 1200 (w)	4x 240lt. Wheelie Bin	78811604	1200mm rear ramp complete with positive locking and gas strut assist
	External - 2300 (l) x 1500	2x 660lt. Wheelie Bin		
		1x 1100lt. Wheelie Bin		
6x Bins Trailer	Internal - 2350 (l) x 1200 (w)	6x 240lt. Wheelie Bin	78811065	1200mm rear ramp complete with positive locking and gas strut assist
	External - 3100 (l) x 1500 (w)	3x 660lt. Wheelie Bin		
		2x 1100lt. Wheelie Bin		
8x Bins Trailer	Internal - 3200 (l) x 1200 (w)	8x 240lt. Wheelie Bin	78811066	1200mm rear ramp complete with positive locking and gas strut assist
	External - 3900 (l) x 1500 (w)	4x 660lt. Wheelie Bin		
		3x 1100lt. Wheelie Bin		
10x Bins Trailer	Internal - 3900 (l) x 1200 (w)	10x 240lt. Wheelie Bin	78811067	1200mm rear ramp complete with positive locking and gas strut assist
	External - 4600 (l) x 1500 (w)	5x 660lt. Wheelie Bin		
		4x 1100lt. Wheelie Bin		

OPTIONS

- Full registration
- Upgrade Includes : Lights | Wiring | Suspension | aaa Tyres | Compliance Plate

Please Note: This is an example only – please contact supplier for specific recommendations.

Source: Sitecraft - www.sitecraft.net.au

APPENDIX: D.4 EXAMPLE BIN TOWING ATTACHMENTS



UNIVERSAL BIN TOWING ATTACHMENTS

SUITE 660LT / 1100LT WHEELIE BINS

PARTS & FEATURES

Front Only - Part Number: 78811672

- Suit Sulo & Otto 600lt / 1100lt MGBs
- Spring loaded draw bar folds up
- No drilling of holes in the bin required
- Solidly fixed to the base of the bin using the castor mounting bolts
- Passivated zinc finish for long life
- Correct Rear Fixed or Directional Lock castors should be used

Rear Only - Part Number: 78811673

- Suit Sulo & Otto 600lt / 1100lt MGBs
- No drilling of holes in the bin required
- Solidly fixed to the base of the bin using the castor mounting bolts
- Passivated zinc finish for long life
- Correct Rear Fixed or Directional Lock castors should be used

For Steel Bin Front Only - Part Number: 78811781

- Suit Sulo & Otto 600lt / 1100lt MGBs
- No drilling of holes in the bin required
- Solidly fixed to the base of the bin using the castor mounting bolts
- Passivated zinc finish for long life
- Correct Rear Fixed or Directional Lock castors should be used

Direction Lock : 53191001

- Suit Sulo & Otto 600lt / 1100lt MGBs
- No drilling of holes in the bin required
- Solidly fixed to the base of the bin using the castor mounting bolts
- Passivated zinc finish for long life
- Correct Rear Fixed or Directional Lock castors should be used



Please Note: This is an example only – please contact supplier for specific recommendations.

Source: Sitecraft - www.sitecraft.net.au

APPENDIX: D.5 EXAMPLE BIN LIFTER FOR 240L BINS

versatip

Versatip Bin Tipper – 1500mm Tip



Specifications

Product Code	69121009
Product Name	1500mm Tip – Battery Powered
Capacity (kg)	250
Height (mm)	2085
Length (mm)	1330
Power Source	Battery Powered
Tipping Height (mm)	1500
Width (mm)	990

Please Note: This is an example only – please contact supplier for specific recommendations.

Source: *Elephants Foot Equipment* - www.elephantsfoot.com.au/equipment/

APPENDIX: D.6 EXAMPLE BALER

EF 300

This baler is suitable for premises with substantial waste. It produces an excellent bale of plastic or cardboard. It is an excellent starter machine for mill size bales.

EF300 baler produces bales of cardboard up to 250kg, making it possible to gain revenue on bales. It can be used to bale a range of materials including plastic and cardboard.

Features

- Two hand control for safe bale ejection
- Produces up to 250 kg bale cardboard which can be sold
- Visual bale full indicator informs operator when bale is full
- Automatic cycle saves labour time
- User friendly push button controls
- Robustly constructed for long life
- IP55 rated so machine can be situated outdoors





Specifications	
Dimensions HxWxD	2900x1500x1050
Feed Opening L x H (mm)	1100x500
Weight (Kg)	1900
Cycle Time (sec)	30
Compaction Force (T)	30
Power Supply (V)	415v 3 phase 20A
Motor (kW)	5.5kw
Chamber Height (mm)	1400
BALE DIMENSIONS	
HxWxD (mm):	900x700x1100
Bale Weight (kg):	Up to 250 (cardboard)

Please Note: This is an example only – please contact supplier for specific recommendations.

Source: Elephants Foot Equipment - www.elephantsfoot.com.au/equipment/

APPENDIX: D.7 EXAMPLE SOURCE SEPARATION RECEPTACLES

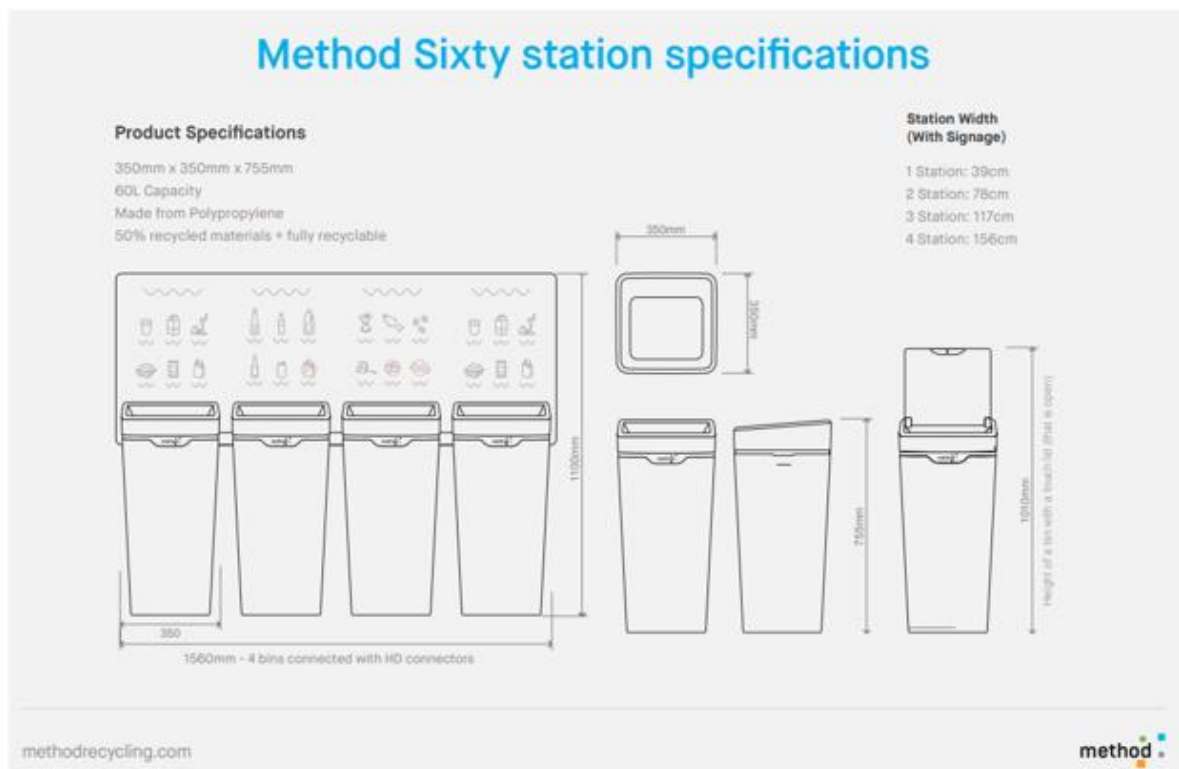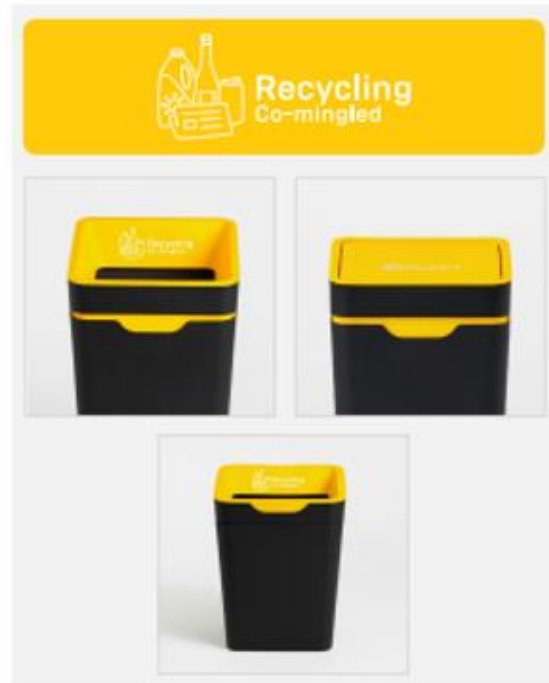

Source: Method Recycling - www.methodrecycling.com