



135 Badgerys Creek Rd, Bradfield
Mixed-Use Development

OPERATIONAL WASTE MANAGEMENT PLAN

17/10/2025
Report No. 6773
Revision H

Client

Bradfield Corporation Pty Ltd

Architect

Plus Architecture

<https://www.plusarchitecture.com.au/>

REVISION REFERENCE

Revision	Date	Prepared by	Reviewed by	Description
A	31/03/2025	M. Bechara	R. Jayaratnam	Draft
B	12/06/2025	M. Bechara	R. Jayaratnam	Amendment
C	4/09/2025	M. Bechara	R. Jayaratnam	Amendment
D	15/09/2025	M. Bechara	R. Jayaratnam	Amendment
E	24/09/2025	M. Bechara	R. Jayaratnam	Amendment
F	25/09/2025	M. Bechara	R. Jayaratnam	Amendment
G	9/10/2025	R. Jayaratnam	J. Parker	Amendment
H	17/10/2025	R. Jayaratnam	J. Parker	Amendment

The information contained in this document produced by Elephants Foot Consulting (EFC) is solely for the use of the client identified on the cover sheet for the purpose for which it has been prepared for. EFC undertakes no duty, nor accepts any responsibility for any third party who may rely upon this document. Reproduction, publication or distribution of this document without written permission from EFC is strictly prohibited.

TABLE OF CONTENTS

1.0	ACKNOWLEDGEMENT OF COUNTRY	3
2.0	INTRODUCTION.....	3
2.1	SCOPE OF REPORT	3
2.2	REPORT CONDITIONS	4
3.0	LEGISLATION & GUIDANCE.....	5
4.0	DEVELOPMENT OVERVIEW.....	6
4.1	SITE LOCATION.....	7
5.0	SECRETARY ENVIRONMENTAL ASSESSMENT REQUIREMENTS (SEARS).....	8
6.0	RESIDENTIAL WASTE MANAGEMENT	9
6.1	RESIDENTIAL WASTE GENERATION ESTIMATES.....	9
6.2	RESIDENTIAL BIN SUMMARY	9
6.3	RESIDENTIAL CHUTE DISCHARGE EQUIPMENT SUMMARY	10
6.4	RESIDENTIAL WASTE DISPOSAL PROCEDURES.....	10
6.4.1	RESIDENTIAL GENERAL WASTE AND RECYCLING DISPOSAL PROCEDURES.....	10
6.4.2	RESIDENTIAL FOGO DISPOSAL PROCEDURES	11
6.5	RESIDENTIAL BIN COLLECTION PROCEDURES	11
6.6	OTHER RESIDENTIAL WASTE MANAGEMENT CONSIDERATIONS	12
6.6.1	RESIDENTIAL COMMON AREAS.....	12
6.6.2	LANDSCAPED AREAS AND GARDEN ORGANICS.....	12
6.6.3	RESIDENTIAL BULKY WASTE PROCEDURES.....	12
7.0	NON-RESIDENTIAL WASTE MANAGEMENT	14
7.1	NON-RESIDENTIAL WASTE GENERATION ESTIMATES.....	14
7.2	NON-RESIDENTIAL BIN SUMMARY	16
7.3	NON-RESIDENTIAL WASTE DISPOSAL PROCEDURES.....	16
	COMMERCIAL, RETAIL, CHILDCARE, GYM, TAVERN AND café.....	16
	MEDICAL	16
	HOTEL	17
7.4	NON-RESIDENTIAL WASTE COLLECTION PROCEDURES.....	18
7.5	OTHER NON-RESIDENTIAL WASTE MANAGEMENT CONSIDERATIONS	19
7.5.1	WASHROOM FACILITIES.....	19
7.5.2	PRINTING & PHOTOCOPYING ROOMS	19
7.5.3	LIQUID WASTE	19
7.5.4	PROBLEM WASTE.....	19
8.0	SUPERMARKET	20
8.1.	ESTIMATED WASTE AND RECYCLING PROVISIONS	20
8.2.	SUPERMARKET WASTE COLLECTION AND DISPOSAL PROVISIONS	20
9.0	STAKEHOLDER ROLES & RESPONSIBILITIES	21

10.0	SOURCE SEPERATION	22
11.0	EDUCATION	24
11.1	SIGNAGE.....	24
12.0	POLLUTION PREVENTION.....	25
13.0	BIN WASHING.....	25
14.0	BIN MOVING PATHS.....	25
15.0	EQUIPMENT SUMMARY	27
16.0	WASTE ROOMS	28
17.0	CONSTRUCTION REQUIRMENTS.....	32
17.1	ADDITIONAL CONSIDERATIONS.....	32
18.0	MITIGATION MEASURES.....	33
19.0	USEFUL CONTACTS.....	34
APPENDIX A:	ARCHITECTURAL PLANS.....	35
APPENDIX: A.1	LOWER GROUND FLOOR PLAN	36
APPENDIX: A.2	GROUND FLOOR PLAN.....	37
APPENDIX B:	INSTALLATION EQUIPMENT	38
APPENDIX: B.1	TYPICAL DUAL CHUTE SHAFT & PENETRATION LAYOUT	39
APPENDIX: B.2	TYPICAL CAROUSEL SYSTEM FOR 1100L BINS	40
APPENDIX: B.3	TYPICAL LINEAR TRACK SYSTEM FOR 1100L MGBS	42
APPENDIX C:	PRIMARY WASTE MANAGEMENT PROVISIONS.....	44
APPENDIX: C.1	TYPICAL BIN SPECIFICATIONS.....	45
APPENDIX: C.2	SIGNAGE FOR WASTE AND RECYCLING BINS.....	46
APPENDIX: C.3	EXAMPLE COLLECTION VEHICLE INFORMATION.....	48
APPENDIX D:	SECONDARY WASTE MANAGEMENT PROVISIONS.....	50
APPENDIX: D.1	EXAMPLE HANDHELD BIN MOVERS	51
APPENDIX: D.2	EXAMPLE SEATED BIN MOVERS	52
APPENDIX: D.3	EXAMPLE BIN TRAILERS	53
APPENDIX: D.4	EXAMPLE BIN LIFTER FOR 240L BINS.....	54
APPENDIX: D.5	EXAMPLE SOURCE SEPARATION RECEPTACLES.....	55
APPENDIX E:	MEDICAL WASTE MANAGEMENT INFORMATION	56
APPENDIX: E.1	EXAMPLE OF MEDICAL WASTE STREAMS and MANAGEMENT	57

TABLE OF FIGURES

Figure 1: Site Aerial Map	7
---------------------------------	---

LIST OF TABLES

Table 1: Estimated Waste and Recycling Volumes – Residential.....	9
Table 2: Chute Discharge Equipment Summary – Buildings B1, B2 and B3 at 2 days' base ..	10
Table 3: Chute Discharge Equipment Summary – Buildings C1 and C2 at 2 days' base	10

Table 4: Estimated Waste and Recycling Volumes – Non-residential – East Side	15
Table 5: Estimated Waste and Recycling Volumes – Retail – West Side	15
Table 6 Storage and Collection Requirements for Medical Waste	17
Table 7 Estimated Waste and Recycling Volumes - Supermarket	20
Table 8: Stakeholder Roles and Responsibilities	21
Table 9: Operational Waste Streams.....	22
Table 10: Equipment Summary	27
Table 11: Waste Room Areas	28
Table 12: Waste Room Requirements.....	30
Table 13 Mitigation Measures	33

GLOSSARY OF ABBREVIATIONS AND TERMS

TERM	DESCRIPTION
<i>Bin Lifter</i>	A device used to mechanically lift bins for the purpose of emptying them into larger bins and/or compactors.
<i>Bin Mover</i>	Either a handheld device (commonly referred to as a bin tug) or a ride-on device (typically a tractor or Class C vehicle with an attached bin trailer) used to facilitate the movement of bins across long distances or up ramps
<i>Bulk Bins</i>	Containers with a capacity greater than 1100L designed to be collected by a front-loading vehicle
<i>Bulky Waste</i>	Recycling items that are too large to be deposited into bins, including furniture, whitegoods, electronics and mattresses
<i>Chute</i>	A vertical pipe passing from floor to floor of a building with openings at each level for the disposal of general waste, recycling or FOGO.
<i>Chute Discharge</i>	The termination point of a chute whereby the chute offsets deposited general waste, recycling or FOGO into bins
<i>Chute Discharge Room</i>	A room enclosing the termination point of the chute/s, including bins and volume handling equipment that is accessible only to the building caretaker
<i>Collection Area/Point</i>	Designated area or point where bins are loaded onto the collection vehicle for servicing
<i>Compactor</i>	A device used for compressing general waste inside it's bin typically at a ratio of 2:1
<i>Communal Bin Room</i>	A central, shared bin room accessible to all residents or staff to dispose of their waste stream
<i>DA</i>	Development Application
<i>DCP</i>	Development Control Plan
<i>EPA</i>	Environment Protect Authority
<i>FOGO</i>	Food Organics and Garden Organics
<i>General Waste</i>	All non-recyclable and non-hazardous waste that is sent to landfill
<i>HRV</i>	Heavy Rigid Vehicle
<i>Kerbside Collection</i>	A collection arrangement whereby bins are presented in a single row along the kerb and serviced by a collection vehicle on the street.
<i>L</i>	Litre
<i>LEP</i>	Local Environmental Plan
<i>Mixed Use Development</i>	A development comprising a combination of both residential and commercial units or two or more different land uses within the one development.

<i>Mobile Bins</i>	Containers with a capacity up to and including 1100L designed to be collected by a rear-loading vehicle
<i>Multi-unit Residential Development</i>	Also known as MUD's, residential flat buildings, or apartment blocks, this is a residential development with multiple units that typically share facilities and services such as bins and collections.
<i>Onsite Collection</i>	A collection arrangement whereby all bins are serviced by a collection vehicle within the property boundary, either in the building's basement or at grade and off-street.
<i>Owners Corporation</i>	An organisation or group of persons that is identified by a particular name and that acts, or may act, as an entity
<i>Recycling</i>	Waste stream that combines all recycling, including comingled recycling, paper/cardboard and metals.
<i>Service Bins</i>	Supplementary bins which are provided to residents or staff for use during collection periods either in communal bin rooms or under chutes
<i>Source Separation Receptacles</i>	Communal containers used throughout the development for the day-to-day disposal of different waste streams
<i>Volume Handling Equipment</i>	Equipment which comes in the form of either carousel or linear tracks positioned at the base of the chute/s to mechanically replace full bins with empty bins
<i>Waste Stream</i>	A classification used to describe waste of a particular type (eg. food waste stream)

1.0 ACKNOWLEDGEMENT OF COUNTRY

Elephants Foot Consulting (EFC) acknowledges that every project we work on takes place on First Peoples land. We recognise Aboriginal and Torres Strait Islander People as Traditional Custodians of this land. We pay respect to ancestors and Elders, past and present.

2.0 INTRODUCTION

This report has been prepared on behalf of the Bradfield Corporation Pty Ltd (the Applicant) by Ruban Jayaratnam. It is submitted to the Department of Planning, Housing and Infrastructure (DPHI) in support of a Concept State Significant Development Application (SSDA) and Stage 1 Early Works on land at 135 Badgerys Creek Road, Bradfield (the site).

Elephants Foot Consulting (EFC) has been engaged to prepare the following Operational Waste Management Plan (OWMP) to satisfy the conditions of the SEARs. Liverpool Council requires for the mixed-use development located at 135 Badgerys Creek Rd, Bradfield NSW.

Robust waste management strategies are required for new developments to support the design and sustainable performance of the building. It is EFC's belief that a successful waste management strategy contains three key objectives:

- i. **Promote responsible source separation** to reduce the amount of waste that goes to landfill by implementing convenient and efficient waste management systems.
- ii. **Ensure adequate waste and recycling provisions and procedures** are established that will cater for potential changes during the operational phase of the development.
- iii. **Comply** with all relevant council codes, policies, and guidelines.

To achieve these objectives, this OWMP identifies and details the following components:

- Waste streams expected to be generated onsite and anticipated volumes;
- Suitable bin sizes and quantities;
- Waste and recycling disposal procedures;
- Bin room size estimations and equipment recommendations; and
- Waste collection strategies, locations and frequencies.

It is vital that this OWMP is integrated into the overall management of the building and is clearly communicated to all relevant stakeholders.

2.1 SCOPE OF REPORT

This OWMP only applies to the **operational** phase of the proposed development; therefore, the requirements outlined in this OWMP must be implemented during the operational phase of the site and may be subject to review upon further expansion of, and/or changes to the development.

The waste management of the **construction** and **demolition** phases of the development are not addressed in this report. A construction and demolition WMP will need to be provided separately.

2.2 REPORT CONDITIONS

The purpose of this report is to document an OWMP as part of a development application, which is supplied by EFC with the following limitations:

- Drawings, estimates and information contained in this OWMP have been prepared by analysing the information, plans and documents supplied by the client and third parties including Council and other government agencies. The assumptions based on the information contained in the OWMP is outside the control of EFC,
- The figures presented in the report are an estimate only – the actual amount of waste generated will be dependent on the occupancy rate of the building/s and waste generation intensity as well as the building management's approach to educating residents and tenants regarding waste management operations and responsibilities,
- The building manager/caretaker will adjust waste management operations as required based on actual waste volumes (e.g. if waste is greater than estimated) and increase the number of bins and collections accordingly,
- The report will not be used to determine or forecast operational costs or prepare any feasibility study or to document any safety or operational procedures,
- The report has been prepared with all due care; however no assurance is made that the OWMP reflects the actual outcome of the proposed waste facilities, services, and operations, and EFC will not be liable for plans or results that are not suitable for purpose due to incorrect or unsuitable information or otherwise,
- EFC offer no warranty or representation of accuracy or reliability of the OWMP unless specifically stated,
- Any manual handling equipment recommended in this OWMP should be provided at the recommendation of the appropriate equipment provider who will assess the correct equipment for supply,
- Design of waste management chute equipment and systems must be approved by the supplier,
- EFC cannot be held accountable for late changes to the design after the OWMP has been submitted to Council,
- EFC will provide specifications and recommendations on bin access and travel paths within the OWMP, however it is the architect's responsibility to ensure the architectural drawings meet these provisions,
- EFC are not required to provide information on collection vehicle swept paths, head heights, internal manoeuvring or loading requirements. It is assumed this information will be provided by a traffic consultant,
- Council are subject to changing waste and recycling policies and requirements at their own discretion.
- This OWMP is only finalised once the draft watermark has been removed. If the draft watermark is present, the information in the OWMP is not confirmed.

3.0 LEGISLATION & GUIDANCE

Waste management and resource recovery regulation in Australia is administered by the Australian Constitution, Commonwealth laws, and international agreements. State and territory governments maintain primary responsibility for controlling development and regulating waste. The following legislation has been enacted in New South Wales and provides the lawful underpinnings of this OWMP.

- NSW Environmental Planning & Assessment Act 1979
- NSW Protection of the Environment Operations Act 1997
- NSW Waste Avoidance & Resource Recovery Act 2001

At the local level, councils or Local Government Areas (LGAs) require OWMPs to be included in new development applications. This OWMP is specifically required by:

- Liverpool Development Control Plan 2015
- Liverpool Local Environmental Plan 2015

The primary purpose of a Development Control Plan (DCP) is to guide the planning process according to the aims of the corresponding local environmental plan (LEP). The DCP must be read in conjunction with the provisions of the relevant LEP.

Information provided in this OWMP comes from a wide range of waste management guidance at the local, state, and federal levels. The primary sources of guidance include:

- Liverpool City Council Waste Management Services Fact Sheet 2016
- NSW Better Practice Guide For Resource Recovery In Residential Developments 2019
- NSW Better Practice Guidelines for Waste Management and Recycling in Commercial and Industrial Facilities 2012
- NSW Waste Avoidance and Resource Recovery (WARR) Strategy 2014-2021
- NSW Waste Classification Guidelines 2014
- Australia's National Waste Policy 2018

4.0 DEVELOPMENT OVERVIEW

The site is located at 135 Badgerys Creek Road, Bradfield and is approximately 2.02ha in area. It is legally described as Lot 7 DP 243457 and is located approximately 250m to the future Bradfield Metro Station and 4km to the Western Sydney Airport. An aerial image of the site is provided in Figure 1.

The site shares a western frontage with Badgerys Creek Road. The eastern boundary of the site adjoins the State government-led Bradfield City Centre which is set to be a vibrant 24/7 global city, driving advancements in industry and will support 10,000 more homes and 20,000 new jobs in Western Sydney.

As defined by the Aerotropolis Precinct Plan, the site is located within the Aerotropolis Core Precinct which is envisioned as an attractive place for workers, residents and visitors. The Aerotropolis Core Precinct will leverage the positive economic impact of the adjacent Western Sydney Airport and Bradfield City Centre. It will attract business hubs, research and development, professional services and creative industries in addition to providing residential development within walking distance of the Bradfield Metro station and proximity to blue and green infrastructure.

The proposed Concept SSDA will seek consent for the proposed land use, gross floor area (GFA), building height, the configuration of the proposed building envelopes and public domain across the site:

- Enabling works including vegetation removal and earthworks;
- The construction of three buildings, comprising:
 - Residential use, including approximately 418 apartment units;
 - Building B1: 78 units, 7 levels
 - Building B2: 52 units, 7 levels
 - Building B3: 38 units, 7 levels
 - Building C1: 130 units, 10 levels
 - Building C2: 120 units, 10 levels
 - Hotel use, including approximately 450 hotel rooms;
 - Medical centre use with a total GFA of 1,824 m²
 - Childcare centre use with a total GFA of 784.25 m² and 95 children
 - Retail tenancies with a total GFA of 1,527 m²
 - Commercial tenancies with a total GFA of 2,158 m²
 - A tavern with a total GFA of 1,290 m²
 - A Gymnasium with a total GFA of 887 m²
 - A Restaurant with a total GFA of 300 m²
 - A Supermarket with a total GFA of 1501 m²
- Construction of two basement structures, including approximately 800 carparking spaces;
- Public domain upgrades, including:
- Construction of an internal road;
- A public plaza;
- Rehabilitation and augmentation of the existing riparian corridor;
- Landscaping embellishments on the ground level and within the built form; and
- Services augmentation as required.

All figures and calculations are based on area schedules as advised by our client and shown on architectural drawings.

4.1 SITE LOCATION

The site is located at 135 Badgerys Creek Rd, Bradfield NSW. as shown in Figure.1 (boundaries are indicative only). The site has frontages to Badgerys Creek Road with vehicular access.

Figure 1: Site Aerial Map



Source: Nearmap / edited by Ethos Urban

5.0 SECRETARY ENVIRONMENTAL ASSESSMENT REQUIREMENTS (SEARS)

Below display the SEARs planning requirements, and the sections of this report where each point is applicable to.

<i>SEARs Request</i>	Elephant Foots Response
Identify, qualify and classify the likely waste systems to be generated during construction and operation.	Sections 6.1, 6.2, 6.3, 6.4, 7.1, 7.2, 7.3, 7.4, 7.5, 10, 15
Provide the measures to be implemented to manage, reuse, recycle and safely dispose of this waste.	Sections 6.4, 7.3, 16
Identify the appropriate servicing arrangements for the site.	Sections 6.5, 7.4
If buildings are proposed to be demolished or altered, provide a hazardous materials survey.	Section 17
Liverpool City Council, Request for Council's Advice on SEARs, 8 January 2025, Section 11 – Waste Provisions	All requirements in section 11 of the LCC requirements are covered in Sections 6, 7, 8, 10, 15, 16 and Appendices A.2 and E.1

6.0 RESIDENTIAL WASTE MANAGEMENT

The following section outlines best practice waste management for the residential component of the development, including waste stream generation estimates and disposal and collection procedures.

6.1 RESIDENTIAL WASTE GENERATION ESTIMATES

The Liverpool City Council Waste Management Services Fact Sheet (2016) and the Council email correspondences have been referenced to calculate the total number of bins required for the residential units. Calculations are based on generic general waste, recycling and Food Organics and Garden Organics (FOGO) rates. Actual volumes of general waste, recycling and FOGO generated in operation may differ according to the residents' actual waste management practices.

The following table shows the estimated volume (L) of general waste, recycling and FOGO generated by the residential component of the development.

Table 1: Estimated Waste and Recycling Volumes – Residential

Building	# Units	General Waste Generation Rate (L/unit/week)	Generated General Waste (L/week)	Recycling Generation Rate (L/unit/week)	Generated Recycling (L/week)	FOGO Waste Generation Rate (L/unit/week)	Generated FOGO Waste (L/week)
B1	78	110	8580	110	8580	25	1950
B2	52	110	5720	110	5720	25	1300
B3	38	110	4180	110	4180	25	950
C1	130	110	14300	110	14300	25	3250
C2	120	110	13200	110	13200	25	3000
TOTAL	418		45980		45980		10450
Bins & Collections	General Waste Bin Size (L)		1100	Recycling Bin Size (L)	1100	FOGO Waste Bin Size (L)	240
	General Waste Collections per Week		1	Recycling Collections per Week	1	FOGO Waste Collections per Week	1
	Total General Waste Bins Required		43	Total Recycling Bins Required	43	Total FOGO Waste Bins Required	46
Bins per Building/ Core	Building/ Core	# Bins		Building/ Core	# Bins	Building/ Core	# Bins
	B1	8		B1	8	B1	9
	B2	6		B2	6	B2	6
	B3	4		B3	4	B3	4
	C1	13		C1	13	C1	14
	C2	12		C2	12	C2	13

Note: An additional bin should be provided for each chute discharge for use during collection periods. These bins are not included in the above figures.

Note: It is strongly recommended bins/equipment at the base of each chute allow for 1-days' worth of waste or recycling generation.

6.2 RESIDENTIAL BIN SUMMARY

Based on the estimated volumes of general waste, recycling and FOGO generated by the residential component of this development, the recommended bin quantities and collection frequencies are as follows:

General Waste: 43 x 1100L bins collected **1 x weekly**
Recycling: 43 x 1100L bins collected **1 x weekly**
FOGO: 46 x 240L bins collected **1 x weekly**

During operation, it is the responsibility of the building manager/caretaker to monitor the number of bins required for the residential component of the development. General waste, recycling and FOGO volumes may change according to residents' attitudes to waste disposal, building occupancy levels or the development's management. Any requirements for adjusting the capacity of the waste facilities may be achieved by changing the number of bins, the bin sizes or collection frequencies. Building management will be required to negotiate any changes to bins or collections with the collection service provider.

6.3 RESIDENTIAL CHUTE DISCHARGE EQUIPMENT SUMMARY

It is strongly recommended that the bins and equipment at the base of each chute allows for at least **2 days' worth** of general waste and recycling generation. Based on the estimated general waste and recycling volumes generated by each building/core, the following equipment is recommended:

Table 2: Chute Discharge Equipment Summary – Buildings B1, B2 and B3 at 2 days' base

Volume Handling Equipment							
General Waste				Recycling			
Building	Generated General Waste (L/week)	# 1100L Bins Required for 2 days' Capacity	Recommended Chute Discharge Equipment	Building	Generated Recycling (L/week)	# 1100L Bins Required for 2 days' Capacity	Recommended Chute Discharge Equipment
Building B1	8580	2.23	3-Bin Linear System	Building B1	8580	2.23	3-Bin Linear System
Building B2	5720	1.49	2-Bin Linear System	Building B2	5720	1.49	2-Bin Linear System
Building B3	4180	1.09	2-Bin Linear System	Building B3	4180	1.09	2-Bin Linear System

Table 3: Chute Discharge Equipment Summary – Buildings C1 and C2 at 2 days' base

Volume Handling Equipment							
General Waste				Recycling			
Building	Generated General Waste (L/week)	# 1100L Bins Required for 2 days' Capacity	Recommended Chute Discharge Equipment	Building	Generated Recycling (L/week)	# 1100L Bins Required for 2 days' Capacity	Recommended Chute Discharge Equipment
Building C1	14300	3.71	4-Bin Carousel System	Building C1	14300	3.71	4-Bin Carousel System
Building C2	13200	3.43	4-Bin Carousel System	Building C2	13200	3.43	4-Bin Carousel System

The above is a recommendation only and equivalent volume handling equipment may be used subject to equipment supplier's recommendation/review.

6.4 RESIDENTIAL WASTE DISPOSAL PROCEDURES

Each residential unit will be provided with a storage area capable of holding separate receptacles for general waste, recycling and FOGO. This is typically located within kitchen areas beneath the workbench. This space should be sized to accommodate 40L receptacles (minimum) to account for 2 days' worth of general waste, recycling and 20L for FOGO storage.

6.4.1 RESIDENTIAL GENERAL WASTE AND RECYCLING DISPOSAL PROCEDURES

Dual chute systems comprising of a single general waste chute and single recycling chute will be installed in each building. Access will be provided to all residents on each residential level.

Residents will be responsible for walking their own general waste and recycling to their allocated disposal point and placing their general waste into the general waste chute and recycling into the recycling chute.

Residents will wrap or bag their general waste before placing in the general waste chute. Bagged waste should not exceed 3kg in weight, or 35cm x 35cm x 35cm. Residents will be responsible for loosely placing their recycling into the recycling chute. Recycling should be clean and must not be bagged as soft plastics contaminate recycling.

Cardboard boxes or large containers should not be disposed of in the recycling chute. These items should be disposed of directly into the collection bins in coordination with the building manager/caretaker.

The general waste and recycling will discharge from the chutes into 1100L bins on linear tracks in the Chute Discharge Rooms of Buildings B1, B2 and B3 (East side) located in Ground Floor Level. The general waste and recycling will discharge from the chutes into 1100L bins on carousels in the Chute Discharge Rooms of Buildings C1 and C2 (West side) located on the Lower Ground Level.

The building manager/caretaker will monitor bin capacities under the dual chute systems and exchange full bins with empty bins on the track systems when required.

Full and spare bins will be kept in the respective Bin Holding Room.

Refer to Council guidance for the types of materials accepted in the general waste and recycling streams.

6.4.2 RESIDENTIAL FOGO DISPOSAL PROCEDURES

The majority of organics waste generated from multi-unit residential developments (MUD's) comprises of food waste as opposed to garden waste. As such, calculations and management recommendations provided in this report considers that FOGO bins will primarily comprise of food organics.

The residents of each unit will be provided with a kitchen caddy for the separation of FOGO. Food organics must be contained in accordance with Liverpool Council's future FOGO collection service procedures (for example a compostable liner). Any clippings from residential units can also be disposed of with the FOGO.

The building will be provided with a Communal FOGO Bin Room which contains 240L bins for FOGO. The residents will be responsible for walking their own FOGO down to the Communal FOGO Bin Room and placing it into the bins.

Building management is responsible for ensuring that the Communal FOGO Bin Room and FOGO bins are washed down frequently to ensure that hygiene and odour is managed.

6.5 RESIDENTIAL BIN COLLECTION PROCEDURES

Council will be engaged to collect the residential general waste, recycling and FOGO in accordance with Council's collection schedule. This report assumes that general waste will be collected weekly, recycling fortnightly and FOGO weekly.

Prior to collections, the building manager/caretaker will be responsible for transporting the bins from Chute Discharge Room to the allocated Bin Holding Room located on the ground level. The building manager/caretaker is also responsible for ensuring that the bins are adequately arranged for an efficient collection. It is recommended that additional 1100L service bins be placed under the chute to collect discharge while the other bins are being serviced.

It is the responsibility of the caretaker to ensure that the loading area is clear of any vehicles or obstructions prior to waste collection.

On the day of collection, a Council collection vehicle will enter the site from Badgerys Creek Road and park in loading dock 1 to collect the residential waste bins of Buildings C1 and C2 (West Side) and then drive to park in loading dock 2 to collect the residential waste bins of Buildings B1, B2 and B3 (East Side). The building manager/caretaker will be responsible for ensuring that the collection staff have access to the collection point. In both loading docks, the collection staff will exit the vehicle and collect the bins from the Bin Holding Rooms and return the empty bins once serviced.

Upon completion of servicing, the collection vehicle will exit the site onto Badgerys Creek Road in a forward direction. The building manager/caretaker is responsible for returning the bins to their operational location to resume use.

All access and clearances to the waste collection point must be able to accommodate a HRV per AS2890.2-2002/ Council's collection vehicle.

6.6 OTHER RESIDENTIAL WASTE MANAGEMENT CONSIDERATIONS

The following sections outline other waste management considerations for the residential components.

6.6.1 RESIDENTIAL COMMON AREAS

Residential common areas will be supplied with suitably branded source separation receptacles where considered appropriate. Receptacles should be placed in convenient locations which are accessible to all residents. The building manager/caretaker will monitor the capacity of these receptacles and empty the contents into the central collection bins as required.

6.6.2 LANDSCAPED AREAS AND GARDEN ORGANICS

Garden organics generated from landscaped areas and indoor foliage typically consists of lawn clippings, cuttings, leaves and branches.

Garden organics generated from landscaped areas will be managed and removed from the site by the designated landscaping contractors as they carry out scheduled landscaping maintenance works.

Garden organics generated from within residential units will be managed by the residents and should be disposed of into the FOGO bins.

6.6.3 RESIDENTIAL BULKY WASTE PROCEDURES

An area will be made available for the storage of discarded residential bulky waste items (e.g. whitegoods, furniture, etc.). This room should be located within close proximity of the

collection point and must have a minimum doorway width of 1.5m to facilitate the movement of large items in and out of the room.

Liverpool Council requires bulk waste storage rooms to be provided for residential buildings at a rate of 6m² per 26 units and an additional 4m² for every 10 units thereafter as per, Liverpool City Council's *Fact Sheet - Waste Management Services for Residential Flat Buildings and Multi Dwelling Housing 2021*.

Based on this rate, the Bulky Waste Rooms required are as follows:

Bulky Waste Room Size – Buildings B1 and B3

$$\begin{aligned} & (\text{Total number of units} - 26) / 10 \times 4 + 6 = \text{m}^2 \text{ of bulky waste room} \\ & = (168 - 26) / 10 \times 4 + 6 \\ & = 142 / 10 \times 4 + 10 \\ & = 14.2 \times 4 + 10 \\ & = 66.8 \text{ m}^2 \end{aligned}$$

bulky waste storage area: minimum 67m²

Bulky Waste Room Size – Buildings C1 and C2

$$\begin{aligned} & (\text{Total number of units} - 26) / 10 \times 4 + 6 = \text{m}^2 \text{ of bulky waste room} \\ & = (242 - 26) / 10 \times 4 + 6 \\ & = 216 / 10 \times 4 + 10 \\ & = 21.6 \times 4 + 10 \\ & = 96.4 \text{ m}^2 \end{aligned}$$

bulky waste storage area: minimum 97m²

Residents will need to liaise with building management regarding the transportation of bulky items and the availability of the Bulky Waste Rooms. It is the caretaker's responsibility to arrange collection dates with Council and coordinate these times with the residents.

On the day of bulky waste collection, a Council collection vehicle will enter the site from Badgerys Creek Road and park in respective the loading dock. Collection staff will collect the bulky waste items from the Bulky Waste Room. Once bulky items have been loaded onto the vehicle, the collection vehicle will exit the site onto Badgerys Creek Road in a forward direction.

7.0 NON-RESIDENTIAL WASTE MANAGEMENT

The following section outlines best practice waste management for the commercial and retail components of the development, including waste generation estimates and waste disposal and collection procedures.

7.1 NON-RESIDENTIAL WASTE GENERATION ESTIMATES

The NSW EPA's *Better Practice Guide for Resource Recovery in Residential Developments* (2019) has been referenced to calculate the total number of bins required for the anticipated tenants. Calculations are based on generic generation rates. Actual volumes of waste and recycling may differ in operation according to the tenants' actual waste management practices. The waste and recycling generation rates from the NSW EPA's *Better Practice Guide for Resource Recovery in Residential Developments* (2019) have been adapted to reflect litres per 100m² per day.

The following table shows the estimated volume (L) of general waste and recycling that will be generated by the commercial and retail tenants.

The following estimates are based on a seven-day operating week.

Table 4: Estimated Waste and Recycling Volumes – Non-residential – East Side

Tenancy Type	Generation Rate	No. of Children	General Waste Generation Rate (L/child/day)	Generated General Waste (L/week)	Recycling Generation Rate (L/child/day)	Generated Recycling (L/week)
Childcare	Childcare	95	5	3325	5	3325
Tenancy Type	Generation Rate	Floor Area (m ²)	General Waste Generation Rate (L/100m ² /day)	Generated General Waste (L/week)	Recycling Generation Rate (L/100m ² /day)	Generated Recycling (L/week)
Medical	Medical*	1824	100	12768	50	6384
Gym	Gymnasiums	887	20	1242	15	931
Hotel	Hotels/Pubs	17035	50	59623	50	59623
Tavern, Restaurant	Restaurants	1500	400	42000	280	29400
Commercial	Offices	2158	10	1511	15	2266
Retail	Retail: other non-food	1527	50	5345	100	10689
TOTAL		24931		125812		112618
Bins & Collections			General Waste Bin Size (L)	1100	Recycling Bin Size (L)	1100
			General Waste Bins per Day	16.3	Recycling Bins per Day	14.6
			General Waste Collections per Week	3	Recycling Collections per Week	3
			Total General Waste Bins Required	39	Total Recycling Bins Required	35

*the medical rate has been adapted to assume 5 consulting rooms per 100m²

Table 5: Estimated Waste and Recycling Volumes – Retail – West Side

Tenancy Type	Generation Rate	Floor Area (m ²)	General Waste Generation Rate (L/100m ² /day)	Generated General Waste (L/week)	Recycling Generation Rate (L/100m ² /day)	Generated Recycling (L/week)
Retail	Retail: other non-food	269	50	942	100	1883
TOTAL		269		942		1883
Bins & Collections			General Waste Bin Size (L)	1100	Recycling Bin Size (L)	1100
			General Waste Bins per Day	0.1	Recycling Bins per Day	0.2
			General Waste Collections per Week	1	Recycling Collections per Week	1
			Total General Waste Bins Required	1	Total Recycling Bins Required	2

7.2 NON-RESIDENTIAL BIN SUMMARY

Based on the estimated waste and recycling volumes generated by the commercial and retail tenancies, the recommended bin quantities and collection frequencies are as follows:

East Side: Buildings A1, B1, B2, and B3

General Waste: 39 x 1100L bins collected **3 x weekly**
Recycling: 35 x 1100L bins collected **3 x weekly**

West Side: Buildings C1

General Waste: 1 x 1100L bins collected **1 x weekly**
Recycling: 2 x 1100L bins collected **1 x weekly**

Bin sizes, quantities, and/or collection frequencies may be modified by the building manager/caretaker once the proposed development is operational. Building management will be required to negotiate any changes to bins or collections with the collection service provider. Seasonal peak periods should also be considered.

7.3 NON-RESIDENTIAL WASTE DISPOSAL PROCEDURES

COMMERCIAL, RETAIL, CHILDCARE, GYM, TAVERN AND CAFÉ

All tenancies will be responsible for their own general waste and recycling disposal procedures within their own vicinity.

On completion of each trading day or as required, nominated staff or contracted cleaners will transport all general waste and recycling to the Waste Bin Room and place into the appropriate collection bins.

MEDICAL

General waste and recycling generated by the medical centre will be disposed of into the bin in the waste bin room alongside the retail and commercial waste.

Medical waste is to be collected by an appointed contractor directly from operational locations within the medical facility. Containers/bins will be replaced at the time of servicing with empty containers/bins.

Medical waste shall remain within the storage areas and only be moved during collections. Collections will be performed by a transporter licensed by the EPA to collect, transport and dispose of the medical waste stream accordingly.

Table 6 includes the storage and collection requirements for any medical waste streams to be generated by the site in operation.

Table 6 Storage and Collection Requirements for Medical Waste

Area	Location
Storage	<p>According to best practice as detailed in Waste Management Association of Australia, Biohazardous Waste Industry Group, <i>Manual for the Management of Biohazardous Waste</i>, 6th edition 2010, storage can be in a dedicated and purpose-built room or dedicated storage area for mobile garbage bins back of house. The appropriate storage will depend on the type of medical waste, volumes and servicing processes. In accordance with NSW Health's <i>Clinical and Related Waste Management for Health Services 2017</i>, Health services must provide an enclosed structure such as a shed, garage, cage or fenced area or separate loading bay to store medical waste. The storage area for anatomical and/or clinical waste may require refrigeration to prevent decomposition of the waste, if this waste stream is not removed on a frequent basis.</p> <p>Any medical waste holding area must:</p> <ul style="list-style-type: none"> • Be located away from food and clean storage areas, • Be inaccessible to the public, • Have a lockable door, • Have rigid impervious flooring, • Allow for regular cleaning, and • Prevent odour and vermin. <p>An EPA licence may be required to store Hazardous Wastes.</p>
Containers	<p>All medical waste must be stored in the correct medical waste container with correct colour coding and labelling in accordance the <i>Australian Dangerous Goods Code Edition 7.3 (ADG Code)</i>.</p> <p>All containers of medical waste to be stored in a secure location.</p>
Spillages	<p>Clean up facilities, spills kits, appropriate drainage and bunding should be provided within the Waste Storage Area.</p> <p>Ensure all necessary equipment required to clean and disinfect the area in case of accidental spillage is easily available and accessible. It is essential that personnel involved in spill management receive education and training in emergency procedures and handling requirements. Spill kits that have been used should be disposed of with the type of waste that has been cleaned up, eg used cytotoxic spill kits should be disposed of with cytotoxic waste.</p>
Mixed waste	Any waste mixed with medical waste must be treated as medical waste
Sharps	Sharps containers should be placed within "arms reach" of where the sharps are generated. Full containers will be sealed and then transported utility rooms/ designated storage area to awaiting collection by contractors.
Collections	<p>It is intended that as per normal practice for these types of facilities, that the appointed contractor will service the medical waste containers/bins from their operational location within the facility and replace them at the same time with empty containers/bins.</p> <p>Medical waste shall remain within the storage areas and only be moved during collections. Collections will be performed by a transporter licensed by the EPA to collect, transport and dispose of the medical waste stream accordingly.</p>

HOTEL

On completion of each trading day or as required, contracted cleaners will transport all general waste and recycling from the hotel rooms to the waste bin room and place into the appropriate collection bins. To guarantee effective waste management and disposal, staff should be informed about the following procedures:

- All general waste should be bagged, and waste bins should be plastic lined;
- Recyclables should not be bagged;

- All bar lounge waste storage is located back of house during operation;
- A suitable storage area needs to be provided and effectively bunded for chemicals, pesticides and cleaning products, if any;
- All flattened cardboard will be collected and removed to the waste room.

7.4 NON-RESIDENTIAL WASTE COLLECTION PROCEDURES

A private waste contractor will be engaged to service the non-residential general waste and recycling bins as per an agreed collection schedule. This report assumes that general waste is collected three times weekly and recycling is collected three times weekly.

On the day of service, a private waste collection vehicle will enter the site from Badgerys Creek Road and park in the loading dock 1 for the collection from Building C1 and then the vehicle will park in the loading dock 2 for the other buildings. The building manager/caretaker will provide the driver with access to the waste bin room. Once the bins are serviced, the collection vehicle will exit the site onto Badgerys Creek Road in a forward direction.

Please note: The collection of non-residential bins should occur on separate days from the collection of residential bins to ensure proper segregation of waste streams.

7.5 OTHER NON-RESIDENTIAL WASTE MANAGEMENT CONSIDERATIONS

Based on the types of tenancies anticipated for this development, the following waste management practices are recommended.

7.5.1 WASHROOM FACILITIES

Washroom facilities should be supplied with collection bins for paper towels (if used). Sanitary bins for female restroom facilities must also be arranged with an appropriate contractor.

7.5.2 PRINTING & PHOTOCOPYING ROOMS

It is recommended that rooms designed for printing or photocopying be provided with an area for the interim storage of paper receptacles, as well as separate receptacles for used toner and/or printer cartridges for recycling. The cleaners or nominated staff are responsible for monitoring these receptacles and ensuring that items are collected and recycled by an appropriate contractor.

7.5.3 LIQUID WASTE

Liquid wastes as such cleaning products, chemicals, paints, solvents, and motor and cooking oil will be stored in a secure room and enclosed by a low wall intended to contain any liquid spillage or inundation to other areas. Liquid waste will be drained to a grease trap, in accordance with legislation and the requirements of State government authorities and agencies. Further information can be provided by the Services Consultant.

7.5.4 PROBLEM WASTE

The building manager/caretaker is responsible for making arrangements for the disposal and recycling of problem waste streams with an appropriate contractor. Problem wastes cannot be placed in the general waste stream as they can have adverse impacts to human health and the environment if disposed of in landfill. Retail and commercial tenants must liaise with the building manager/caretaker when disposing of problem waste streams.

Problem waste streams include:

- Chemical Waste
- Liquid wastes
- Toner cartridges
- Lightbulbs
- eWaste
- Batteries

8.0 SUPERMARKET

The supermarket tenancy is responsible for developing a separate waste management plan in accordance with their nationwide store policies and procedures. The supermarket tenant will also nominate their preferred waste equipment (e.g., compactors, balers, and/or bins) as part of the designing the layout of their loading docks.

Waste and recyclables generated by the supermarket will be stored and managed separately from all other tenancies (commercial/retail, the medical facility, etc.). In general, it is expected that the supermarket staff will dispose of waste and recyclables near the loading area, and an appointed waste collection contractor will remove the waste from the loading area or waste room on an arranged schedule.

8.1. ESTIMATED WASTE AND RECYCLING PROVISIONS

The NSW EPA's *Better Practice Guide for Resource Recovery in Residential Developments (2019)* has been referenced to calculate the estimated garbage and recycling generated by the supermarket tenant. Calculations are based on generic figures; waste generation rates may differ according to the tenants' waste management practice.

The table below estimates the volumes of waste and recyclables likely to be generated by each supermarket. A seven-day operating week is assumed. All figures and calculations are based on the architectural plans.

Table 7 Estimated Waste and Recycling Volumes - Supermarket

Tenancy Name	Generation Rate	Floor Area (m ²)	General Waste Generation Rate (L/100m ² /day)	Generated General Waste (L/week)	Recycling Generation Rate (L/100m ² /day)	Generated Recycling (L/week)
Supermarket	Supermarkets	1501	240	25217	300	31521
<i>Waste Room Areas and Equipments are to be determined by the Supermarket Tenant</i>						

8.2. SUPERMAKET WASTE COLLECTION AND DISPOSAL PROVISIONS

The supermarket will be responsible for back of house waste management throughout daily operations. At the end of the day or as required nominated supermarket staff will transport the waste and recycling to the loading dock and place the items into the correct equipment.

All waste management for the supermarket will be handled in the loading dock area and removed from the loading dock by their appointed waste services provider. This will be outlined in further detail, separately with the Woolworth's waste management plan according to the nationwide store policies and procedures.

To be outlined separately with supermarket's waste management plan according to the nationwide store policies and procedures. All waste collection will occur via the supermarkets dedicated loading dock to collection equipment, bins and other requirements as needed.

9.0 STAKEHOLDER ROLES & RESPONSIBILITIES

The following table outlines the primary roles and responsibilities of the respective stakeholders:

Table 8: Stakeholder Roles and Responsibilities

Roles	Responsibilities
Strata, Body Corporate or Management	<ul style="list-style-type: none"> • Co-ordinate the waste strategy within the site. • Ensure all waste service providers submit monthly reports on all equipment movements and waste quantities/weights. • Organise internal waste audits/visual assessments on a regular basis. • Purchase any on-going waste management equipment or maintenance of equipment once building is operational; and • Manage any non-compliances/complaints reported through waste audits.
Building Manager or Waste Caretaker	<ul style="list-style-type: none"> • Co-ordinate general waste, recycling and FOGO collections • Clean and transport bins as required. • Maintain and clean chute doors on each level. • Organise replacement or maintenance requirements for bins. • Organise, maintain and clean bin storage areas. • Organise bulky waste collections when required. • Investigate and ensure prompt clean-up of illegally dumped waste materials. • Prevent storm water pollution by taking necessary precautions (secure bin rooms, prevent overfilling of bins). • Abide by all relevant WH&S legislation, regulations, and guidelines. • Provide staff/contractors with equipment manuals, training, health and safety procedures, risk assessments, and PPE to control hazards associated with all waste management. • Assess any manual handling risks and prepare a manual handling control plan for bin transfers. • Ensure site safety for residents, children, visitors, staff and contractors; and • Ensure effective signage, communication and education is provided to occupants, tenants, maintenance staff, and cleaning contractors.
Residents	<ul style="list-style-type: none"> • Dispose of all general waste, recycling and FOGO in the allocated chutes and/or bins provided. • Ensure adequate separation of general waste, recycling and FOGO; and • Comply with the provisions of Council and the OWMP.
Non-residential Tenants	<ul style="list-style-type: none"> • Management co-ordinates own private contractor collections. • Manage general waste and recycling within their tenancy during daily operations. • Correctly separate general waste and recycling streams. • Flatten cardboard within the recycling bin. • If required, arrange for storing used and unused cooking oil in a bunded area, • Organise grease interceptor trap servicing, and • Ensure the suitable storage for chemicals, pesticides and cleaning products waste back of house.
Supermarket Tenancies	<ul style="list-style-type: none"> • Manage the back of house storage of generated waste and recycling during daily operation. • Manage own waste equipment and collection services.
Waste Collection Contractor	<ul style="list-style-type: none"> • Provide a reliable and appropriate bin collection service. • Provide feedback to building managers/residents regarding contamination of recyclables; and • Work with building managers/caretakers to customise waste systems where possible.
Gardening/Landscaping Contractor	<ul style="list-style-type: none"> • Remove all garden organics generated during gardening maintenance activities for recycling at an offsite location.

Developer	<ul style="list-style-type: none"> Purchase all equipment required to implement this OWMP prior to the occupation of the building to be provided to the Strata or Body Corporate.
-----------	--

10.0 SOURCE SEPERATION

Better practice waste management includes the avoidance, reuse, and recovery of unwanted items, which can be achieved through source separation. The table below outlines what is typically included in various waste streams and how they can be managed. Refer to your local council for a list of accepted materials. Planet Ark can be accessed online to find other facilities that recover unwanted items.

Table 9: Operational Waste Streams

Waste Stream	Description	Typical Destination	Waste Stream Management
General Waste	The remaining portion of the waste stream that is not recovered for re-use, processing, or recycling. May include soft plastics, food scraps, polystyrene, etc.	Landfill	Waste should be bagged before placing in in designated waste bins.
Recycling	A mixture of items that are commonly recycled usually segregated through a MRF. Typically include food and beverage containers (e.g. aluminium, glass, steel, hard plastics, cartons). Also included cardboard and paper products.	Resource Recovery Centre	<p>Recycling must not be bagged, and instead should be placed loosely in the designated recycling chute.</p> <p>Bulky cardboard must not be placed in any chute. Cardboard should be flattened before placing in the designated cardboard recycling bin.</p>
FOGO	FOGO consists of unwanted or uneaten kitchen scraps that are easily compostable/biodegradable (e.g. vegetable peels, fruit rinds, coffee grounds) and garden organics including lawn clippings, leaves, pruning's and branches.	Composting Facility	FOGO should be bagged in compostable liners when deposited into the chute/s or bins and will be collected by Council.
Garden Organics	Garden organics consists of unwanted organic materials that are easily biodegradable and/or compostable (e.g. lawn clippings, branches)	Resource Recovery Centre	Landscape Maintenance Contractors will remove the garden organics from site during scheduled maintenance.
Secure Documents	Secure documents are printed paper materials that contain sensitive information.	Recycling Facility	<p>Secure documents are placed in allocated secure document bins.</p> <p>Private contractor removes bins from site.</p>
Electronic Waste	Discarded e-waste, electronic components and materials such as computers, mobile phones, keyboards, etc.	Resource Recovery Centre	Building manager/caretaker arranges collection for e-waste recycling as needed by residents.
Bulky Waste Items	Items that are too large to place into general rubbish collection. This includes disused and/or broken furniture, mattresses, white goods, etc.	Resource Recovery Centre or Landfill	Residents liaise with building manager/caretaker to store in Bulky Waste Room. Building manager arranges with Council for removal.

Sanitary Waste	Feminine hygiene waste generated from female bathrooms.	Incineration or Landfill	Sanitary bins are serviced by sanitary waste contractor.
Other	Other recyclable items that require special recovery may include ink cartridges, batteries, chemical waste, fluorescent tubes, etc.	Resource Recovery Facility	Building manager/caretaker arranges collection by appropriate recycling services when required.

11.0 EDUCATION

Educational material encouraging correct separation of general waste, recycling and FOGO must be provided to each resident and commercial/retail tenant. This should include the correct disposal process for bulky waste such as old furniture, large discarded items, and other materials including electronic and chemical wastes. It is recommended that the building manager/caretaker provide information in multiple languages to support correct behaviours, and to minimise the possibility of chute blockages and contamination in communal bins.

Education and communication must be provided consistently on a regular basis to encourage behaviour change and account for transient building personnel such as new residents, tenants, or cleaning staff. It is also recommended that the owners' corporation website contain information for residents' referral regarding use of the chute. Information should include:

- Directions on using the chute doors;
- Descriptions of items accepted in the general waste, recycling and FOGO streams (refer to Council guidance);
- How to dispose of bulky waste and any other items that are not general waste, recycling or FOGO (refer to Council guidance);
- Residents' obligations to health and safety as well as building management; and
- How to prevent damage or blockages to the chute (example below).

11.1 SIGNAGE

Signage and education are essential components to support best practice waste management including resource recovery, source separation, and diversion of waste from landfill.

Signage should include:

- Clear and correctly labelled bins,
- Instructions for separating and disposing of waste items. Different languages should be considered,
- Locations of, and directions to, the waste storage areas with directional signs, arrows, or lines,
- The identification of all hazards or potential dangers associated with the waste facilities, and
- Emergency contact information should there be issues with the waste systems or services in the building.

The building manager is responsible for waste room signage including safety signage. Appropriate signage must be prominently displayed on doors, walls and above all bins, clearly stating what type of waste or recyclables is to be placed in each bin.

All chute doors on all residential levels will be labelled with signs directing chute operations and use of chute door.

All signage should conform to the relevant Australian Standards.

12.0 POLLUTION PREVENTION

Building management shall be responsible for the following to minimise dispersion of site litter and prevent stormwater pollution to avoid impact to the environment and local amenity:

- Promoting adequate waste disposal into the bins
- Securing all bin rooms (whilst affording access to staff/contractors)
- Prevent overfilling of bins, keep all bin lids closed and bungs leak-free
- Taking action to prevent dumping or unauthorised use of waste areas
- Require collection contractor/s to clean up any spillage when clearing bins

13.0 BIN WASHING

The bins will be cleaned by the building manager periodically to ensure hygiene and minimise odour.

Bin washing can occur within the bin rooms, using the room clean down facilities (i.e tap connection and drain). Alternatively, a specialist bin washing contractor can be engaged to clean the bins to an agreed schedule. The specialist bin contractor would collect the bins from the bin holding area and clean the bins with their specialised vehicle.

14.0 BIN MOVING PATHS

The building manager is responsible for the transportation of bins from their designated operational locations to the collection area, returning them once emptied to resume operational use.

Any movement of bins should minimise manual handling where possible, as bins become heavy when full. The building manager must assess manual handling risks and provide any relevant documentation to key personal.

The routes along the bin moving path should;

- Allow for a continuous route that is wholly within the property boundary.
- Be free from obstruction and obstacles such as steps and kerbs.
- Be constructed of solid materials with a non-slip surface
- Be A minimum of 300mm wider than the largest bin used onsite.
- If bins are moved manually, the route must not exceed a grade of 1:14.
- If a bin moving device is used, the route cannot exceed the maximum operating grade of the device. This is typically a grade of 1:4, however this will vary depending on the model of bin moving device acquired for the site.

As the bins are intended to be moved up the vehicle ramp/As the distance of the bin moving paths exceeds 10m, a bin moving device will be required to aid the movement of full bins. The developer is responsible for supplying all equipment required for moving bins this includes any bin lifters, bin moving devices and waste transfer bins. This equipment must be new and appropriate for the site. The developer should contact a bin-tug, trailer or tractor consultant to provide equipment recommendations.

Once the site is operational (and the developers is no longer involved) the building proprietors/strata will be responsible for maintaining, repairing and replacing waste management equipment.

Bins may have to be fitted with hitches to enable the simultaneous transportation of multiple bins to the collection area. Council must be informed of any hitch attachments required to be installed on bins.

15.0 EQUIPMENT SUMMARY

Table 10: Equipment Summary

	Part	Qty	Notes
Chutes	Please refer to supplier's information	5	(See APPENDIX: B.1 for Typical Dual Chute Layout)
Chute Equipment	Waste 2-bin 1100L bins Linear Track System 3-bin 1100L bins Linear Track System 4-bin 1100L bins Carousel System	2 1 2	(See APPENDIX: B.2 for Typical Linear System)
	Recycling 2-bin 1100L MGB Linear Track System 3-bin 1100L MGB Linear Track System 4-bin 1100L bins Carousel System	2 1 2	(See APPENDIX: B.2 for Typical Linear System)
Other Equipment	Suitable Bin Moving Equipment	5	(See APPENDIX: D.1 and APPENDIX: D.2 for Typical bin Movers)

16.0 WASTE ROOMS

The areas allocated for waste storage and collection areas are detailed in the table below and are estimates only.

The equipment recommended in the chute discharge rooms is to manage at least 1 days' worth of estimated general waste and recycling from that building. Therefore, this represents the minimum equipment required in these rooms to satisfy best practice requirements. Additional bins or volume handling equipment can be included in these rooms to increase days of capacity or manual labour required in operation.

Table 11: Waste Room Areas

Level	Waste Room Type	Equipment	Estimated Area Required (m ²)	Actual Area Provided (m ²)
GF	Chute Discharge Room – Building B1	General waste: 1 x 3-1100L bin linear track General waste service bins: 3 x 1100L bins Recycling: 1 x 3-1100L bin linear track Recycling service bins: 3 x 1100L bins	46	48
GF	Chute Discharge Room – Building B2	General waste: 1 x 2-1100L bin linear track General waste service bins: 2 x 1100L bins Recycling: 1 x 2-1100L bin linear track Recycling service bins: 2 x 1100L bins	30	47
GF	FOGO Bin Room – Building B1 and B2	6 x 240L bins (Core B1) 9 x 240L bins (Core B2)	13	22
GF	Chute Discharge Room – Building B3	General waste: 1 x 2-1100L bin linear track General waste service bins: 2 x 1100L bins Recycling: 1 x 2-1100L bin linear track Recycling service bins: 2 x 1100L bins	30	37
GF	FOGO Bin Room – Building B3	4 x 240L bins	4	8
LG	Chute Discharge Room – Building C1	General waste: 1 x 4-1100L bin carousel system General waste service bins: 4 x 1100L Recycling: 1 x 4-1100L bin carousel Recycling service bins: 4 x 1100L bins	77	77
GF	FOGO Bin Room – Building C1	14 x 240L bins	12	13
LG	Chute Discharge Room – Building C2	General waste: 1 x 4-1100L bin carousel system General waste service bins: 4 x 1100L Recycling: 1 x 4-1100L bin carousel Recycling service bins: 4 x 1100L bins	77	77

GF	FOGO Bin Room – Building C2	13 x 240L bins	12	15
GF	Residential Bin Holding Room – East Side	General waste: 18 x 1100L bins Recycling: 18 x 1100L bins FOGO: 19 x 240L bins	121	143
GF	Residential Bin Holding Room – West Side	General waste: 25 x 1100L bins Recycling: 25 x 1100L bins FOGO: 27 x 240L bins	168	168
GF	Bulky Waste Room – East Side		97	97
GF	Bulky Waste Room – West Side		67	67
GF	Non-residential Bin Room – East Side	General waste: 39 x 1100L bins Recycling: 35 x 1100L bins	214	214
GF	Non-residential Bin Room – West Side	General waste: 1 x 1100L bins Recycling: 2 x 1100L bins	15	15
GF	Medical Waste Room	<i>Equipment, bins and area to be determined by medical centre tenant.</i>		

EFC recommends bins sizes, collection frequencies and/or equipment for best practice waste management at this site, however EFC also acknowledges there are a range of other suitable options that may alter waste room requirements (e.g. floor area, accessibility, head height, etc.)

The waste room areas have been calculated based on equipment requirements and/or bin dimensions with an additional 90% of bin GFA factored in for manoeuvrability.

In addition, all doorways and passageways facilitating the movement of bins and/or bulky waste items must be at least 1500mm wide.

The following table provides further waste room requirements.

Table 12: Waste Room Requirements

Waste Room Type	Waste Room Requirements
Chute Discharge Room	<ul style="list-style-type: none"> • Ceiling clearance height must be a minimum of 3000mm (subject to penetration location) • The chute penetration must have a minimum 500mm clearance of any service pipes or other overhead obstacles • All chute discharge points should be caged off to ensure the safety of any personnel accessing the waste room • 200mm clearance is required around compaction equipment • Where a chute offset is required, the angle of the offset must not exceed 30 degrees (subject to number of consecutive offset and/or up to 1500mm)
Residential Bin Holding Room and/or Bin Collection Area	<ul style="list-style-type: none"> • Bins must not be stacked in rows that are more than two bins deep.
Communal FOGO Rooms	<ul style="list-style-type: none"> • Bins should be arranged so that all bins are accessible. Bins are not to be placed in front of one another or in such a way as to restrict access to the other bins for use. • Rooms must be well ventilated either naturally or mechanically in accordance with AS1668.4.2012 • Cleaning facilities such as hose hock and drainage for odour and hygiene control must be provided. • It is recommended a dustpan and broom is provided in this room for residents to clean up unexpected spillages when using bins.
Bulky Waste Room	<ul style="list-style-type: none"> • May be a dedicated room or screened area within another waste room • Must be in close proximity to the collection area • Area must also be allocated for the segregation of e-waste, gas bottles, cardboard, etc. • Doorway should be a minimum of 1500mm wide
Non-residential Bin Room	<ul style="list-style-type: none"> • In order to ensure staff safety, all bins should be arranged so they can be accessed without moving another bin • Bins must be coordinated with the hinge of the lid facing the back. This is to allow for ideal access to the bin.
Medical Bin Room	<p>If a medical waste room is provided with a development, the medical waste room should strive for best practice waste room storage as outlined in Waste Management Association of Australia, Biohazardous Waste Industry Group's Manual for the Management of Biohazardous Waste, 6th edition 2010, which is as follows:</p> <ul style="list-style-type: none"> • Storage area base is an impervious surface surround by a bund appropriate to • contain any spill

	<ul style="list-style-type: none">• All loading/unloading takes place within the bunded area in such a manner to ensure• any spills are appropriately managed• The base and walls of bunded areas are free of gaps or cracks• Where vehicular access to the bunded area is required, bunds are constructed to• prevent them from being damage by vehicles• Signage is posted with the biohazard symbol and other labelling appropriate to the• types of waste stored in that area• The bunded area drains to a sump or sewer to collect spills and wash water.• If any refrigerator facilities are provided, they shall be contained within a secure area.
--	--

17.0 CONSTRUCTION REQUIREMENTS

Waste room construction must comply with the minimum standards as outlined in the *Liverpool Development Control Plan 2008*, in order to minimise odours, deter vermin, protect surrounding areas, and make it a user-friendly and safe area.

The *NSW Better practice guide for resource recovery in residential developments (2019)* also states that better practice bin storage areas should achieve more than the minimum compliance requirements, which are as follows:

- Ensuring BCA compliance, including ventilation. Where required, ventilation system must comply with AS1668.4-2012 The use of ventilation and air conditioning in buildings.
- Ensuring storage areas are well lit (sensor lighting preferred) and have lighting available 24 hours a day.
- Provision of bin washing facilities, including taps for hot and cold water provided through a centralised mixing valve. The taps must be protected from bins and be located where they can be easily accessed even when the area is at bin capacity.
- Floor constructed of concrete at least 75mm thick.
- Floor graded so that any water is directed to a sewer authority approved drainage connection to ensure washing bins and/or waste storage areas do not discharge flow into the stormwater drain.
- Provision of smooth, cleanable and durable floor and wall surfaces that extend up the wall to a height equivalent to any bins held in the area.
- Ensuring ceilings are finished with a smooth-faced non-absorbent material capable of being cleaned.
- All surfaces (walls, ceiling and floors) finished in a light colour.

17.1 ADDITIONAL CONSIDERATIONS

- Waste room floor to be sealed with a two-pack epoxy;
- All corners coved and sealed 1,200mm up, this is to eliminate build-up of dirt;
- Hot and cold water tap height and light switch height of 1.6m;
- Storm water access preventatives (grate);
- All walls painted with light colour and washable paint;
- Equipment electric outlets to be installed 1700mm above finished floor level;
- Optional automatic odour and pest control system installed
- If 660L or 1100L bins are utilised, 2 x 820mm (minimum) double-doors must be used;
- All personnel doors are hinged, lockable and self-closing;
- Conform to the Building Code of Australia, Australian standards and local laws; and
- Childproofing and public/operator safety shall be assessed and ensured
- Waste and recycling rooms must have their own exhaust ventilation system either;
 - Mechanically - exhausting at a rate of 5L/m² floor area, with a minimum rate of 100L/s minimum. Mechanical exhaust systems shall comply with AS1668.4.2012 and not cause any inconvenience, noise or odour problem; or
 - Naturally - permanent, unobstructed, and opening direct to the external air, not less than one-twentieth (1/20) of the floor area.

18.0 MITIGATION MEASURES

Mitigation measures ensure sustainable waste management during the operational phase of the High School. The measures shown in Table 13 would help the School reduce environmental impacts and ensure compliance with goals of the OWMP.

Table 13 Mitigation Measures

ID	Mitigation measure	Relevant section of report
O1	Waste generation rates will be monitored, and bin capacities will be adjusted based on actual data to meet operational needs to ensure waste management remains efficient.	Section 6.1, Section 7.1
O2	Separate bins for general waste, recycling, and e-waste will be provided in designated areas and collected as per the agreed schedule with the waste service provider to ensure higher recycling rates.	Section 6.5, Section 7.4
O3	Source separation bins for different waste streams, including food waste and recyclables, will be strategically located throughout the development to promote waste diversion from the landfill	Section 10
O4	Bins will be regularly cleaned either onsite using bin washing facilities or by engaging specialist contractors to maintain hygiene and minimize odors in waste storage areas.	Section 13
D1	Waste storage areas will be designed and maintained to ensure ease of access, proper ventilation, and compliance with safety standards to provide safety and efficiency for waste storage and collection.	Section 16
D1, C1	Design and construction of waste storage areas shall comply with NSW Better Practice Guide (2019), and relevant standards (e.g., AS1668.4-2012 and BCA). Requirements to include proper ventilation, lighting, smooth and durable surfaces and sewer-approved drainage connections.	Section 17
D1, C1, O1	All designs and requirements included shall comply with the OWMP to avoid adverse impact on the environment	OWMP

19.0 USEFUL CONTACTS

EFC does not warrant or make representation for goods or services provided by suppliers.

LOCAL COUNCIL

Liverpool City Council Customer Service	Ph: (02) 8711 7000	E: lcc@liverpool.nsw.gov.au
--	--------------------	---

PRIVATE WASTE COLLECTION PROVIDER

Capital City Waste Services	Ph: 02 9599 9999	E: service@ccws.net.au
Sydney Waste	Ph: 02 8661 0031	
Waste Clear	Ph: 1300 525 352	E: admin@wasteclear.com.au

BIN MOVING DEVICE SUPPLIERS

Elephants Foot Equipment	Ph: 1300 435 374	E: equipment@elephantsfoot.com.au
Sitecraft	Ph: 1300 363 152	E: sales@sitecraft.com.au

BALER SUPPLIERS

Elephants Foot Equipment	Ph: 1300 435 374	E: equipment@elephantsfoot.com.au
--------------------------	------------------	---

ORGANIC DIGESTERS AND DEHYDRATORS

Elephants Foot Equipment	Ph: 1300 435 374	E: equipment@elephantsfoot.com.au
Waste Master	Ph: 1800 614 272	E: hello@wastemasterpacific.com.au

COOKING OIL CONTAINERS AND DISPOSAL

Cookers	Ph: 1300 882 299	E: info@cookers.com.au
Auscol	Ph: 1800 629 476	E: sales@auscol.com

ODOUR CONTROL

Elephants Foot Equipment	Ph: 1300 435 374	E: equipment@elephantsfoot.com.au
--------------------------	------------------	---

SOURCE SPERATION BINS

Method Recycling	Ph: 0499 890 455
------------------	------------------

BINS AND BIN EQUIPMENT


Elephants Foot Equipment	Ph: 1300 435 374	E: equipment@elephantsfoot.com.au
SULO	Ph: 1300 364 388	E: sulosales@pactgroup.com

CHUTES, COMPACTORS AND EDIVERTER SYSTEMS

Elephants Foot Chute Solutions	Ph: 1300 435 374	E: chutes@elephantsfoot.com.au
--------------------------------	------------------	---

APPENDIX A: ARCHITECTURAL PLANS

APPENDIX: A.1 LOWER GROUND FLOOR PLAN

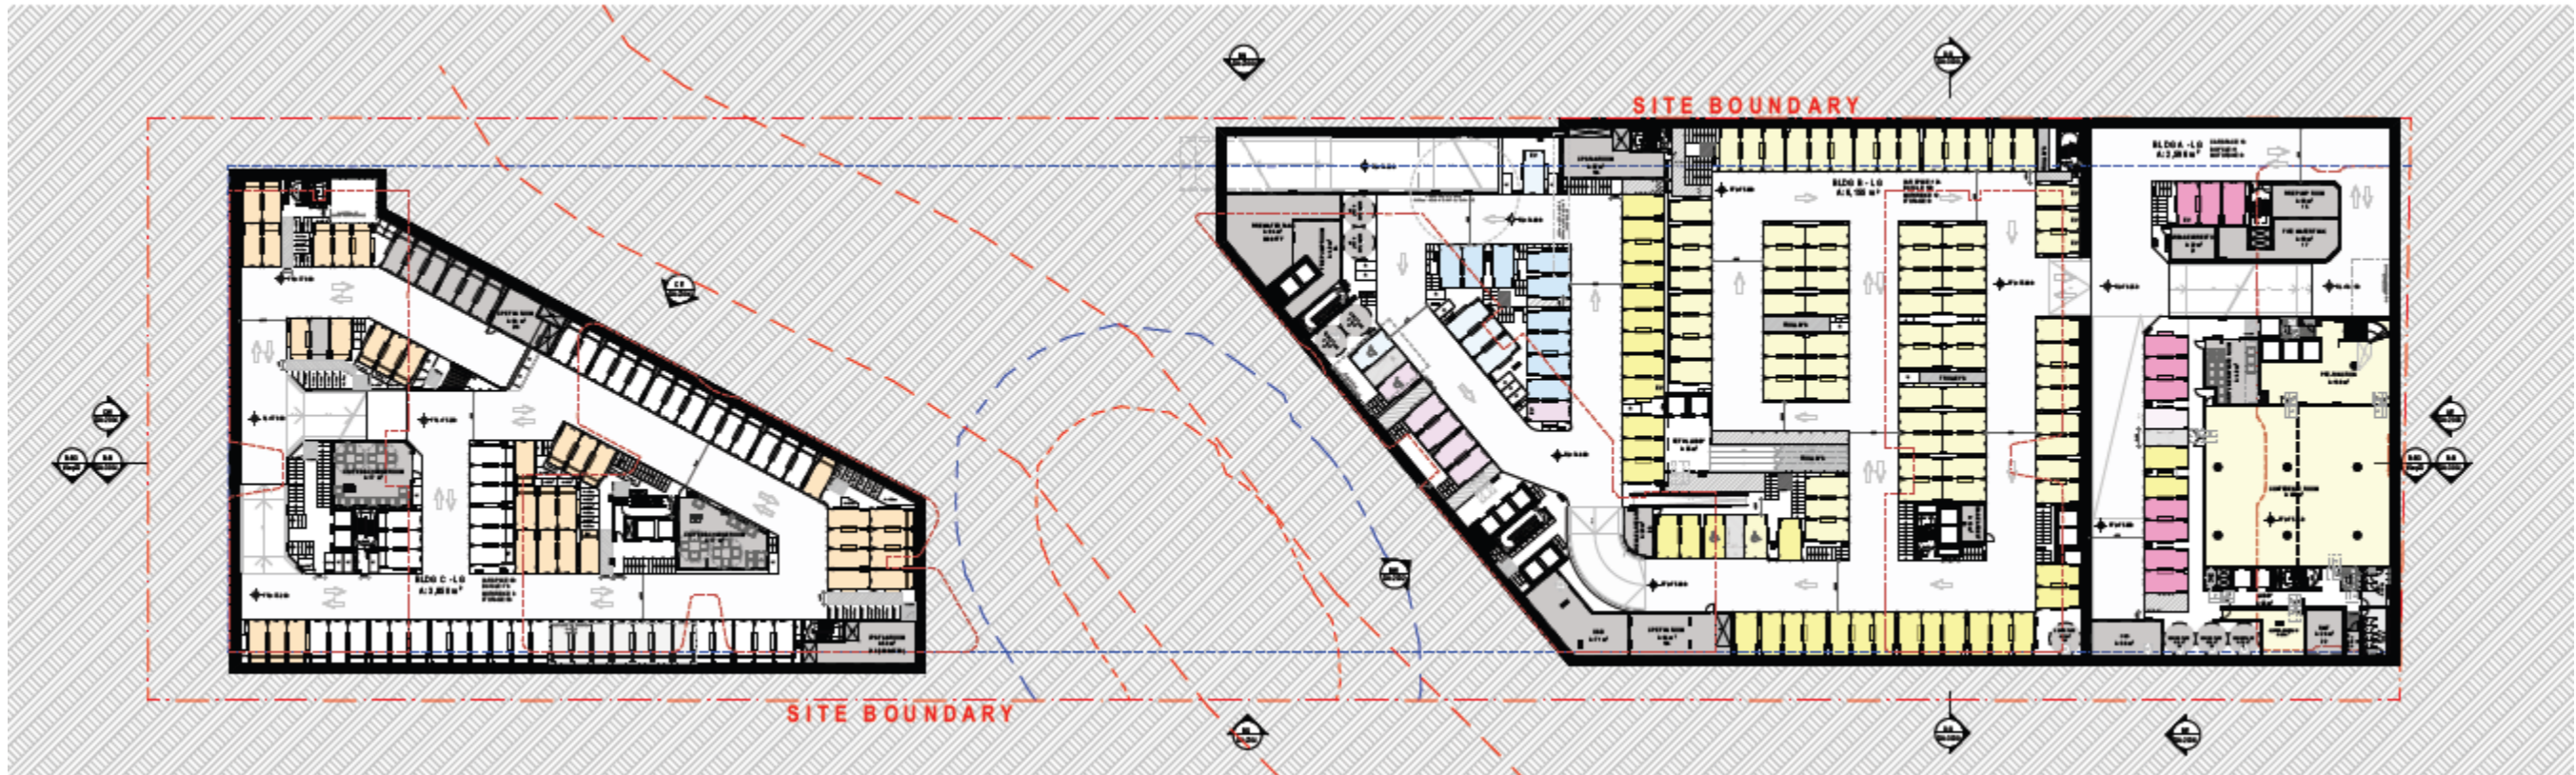

Source: Plus Architecture, Job Number: 20799, Drawing No. DA-10B1, Revision: A, Date: 10/1/25, General Floor Plan LOWER GROUND

APPENDIX: A.2 GROUND FLOOR PLAN




Source: Plus Architecture, Job Number: 20799, Drawing No. DA-1000, Revision: A, Date: 10/1/25, General Floor Plan GROUND

APPENDIX B: INSTALLATION EQUIPMENT


THIS WMP IS NOT FINALISED & CANNOT
BE STAMPED FOR APPROVAL BY COUNCIL




CHUTE SHAFT & PENETRATION SET-OUT DUAL Ø610 STEEL

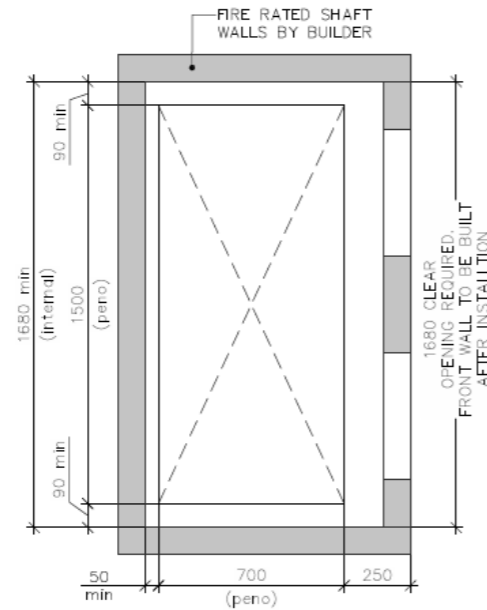


01 DUAL (610Ø) GALV. STEEL CHUTE LAYOUT PENETRATION SET-OUT

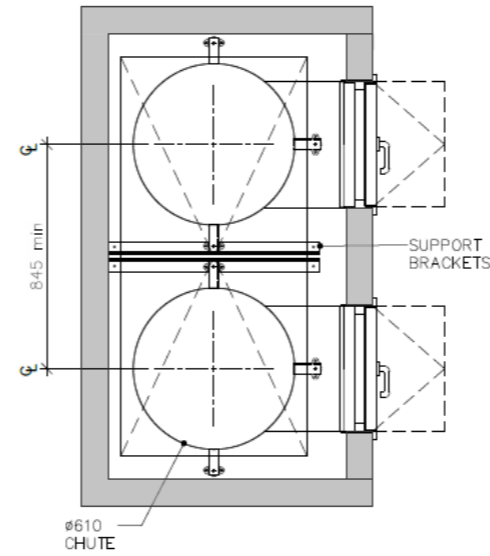


02 DUAL (610Ø) GALV. STEEL CHUTE LAYOUT

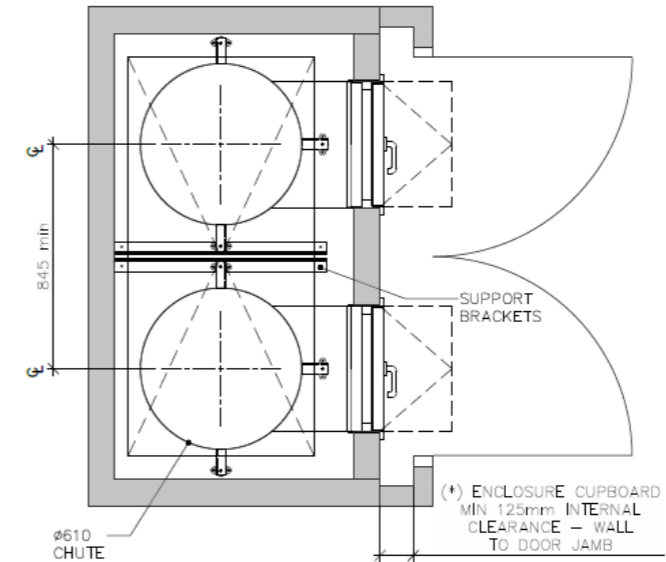


03 DUAL (610Ø) GALV. STEEL CHUTE LAYOUT with ENCLOSURE CUPBOARD (*)

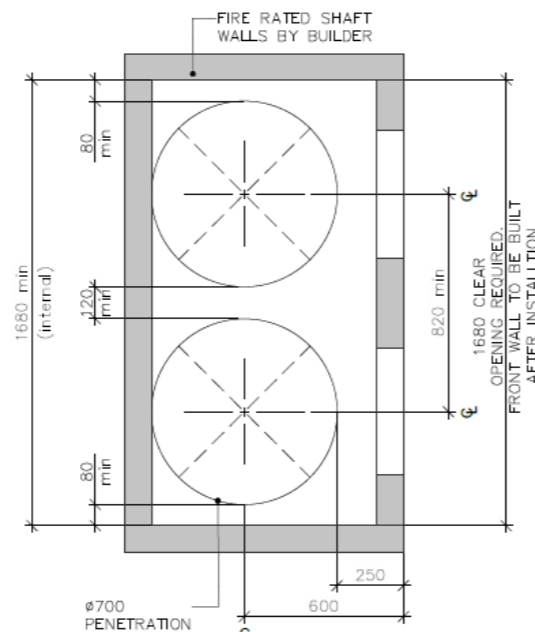

04 DUAL (610Ø) GALV. STEEL CHUTE LAYOUT WITH CIRCULAR PENETRATION SET-OUT

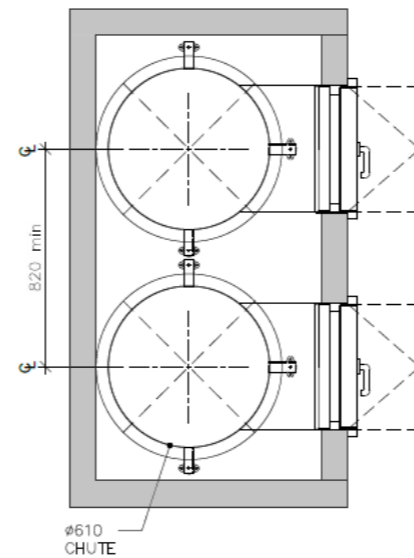

05 DUAL (610Ø) GALV. STEEL CHUTE LAYOUT (W/ CIRCULAR PENETRATION)

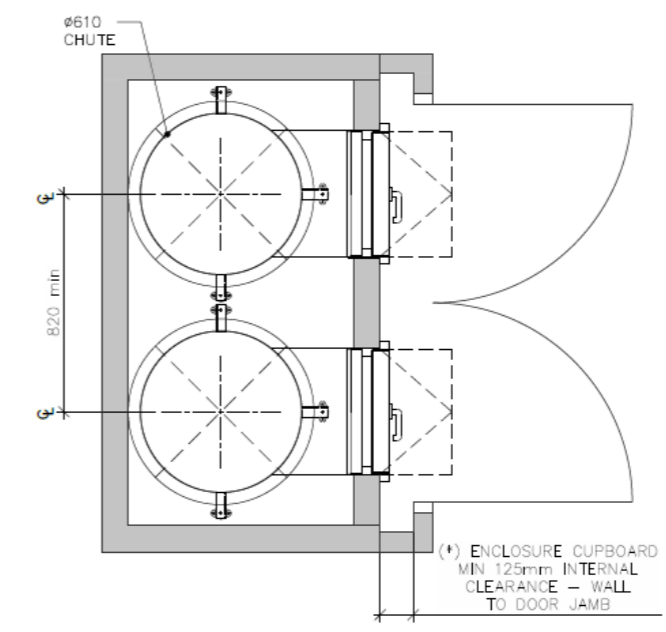

06 DUAL (610Ø) GALV. STEEL CHUTE LAYOUT with ENCLOSURE CUPBOARD (*)

(*) NOTE: ENCLOSURES ARE RECOMMENDED IF THE CHUTE OPENS DIRECTLY TO A CORRIDOR OR IS NOT LOCATED IN A WASTE ROOM. IF CHUTE ACCESS IS WITHIN A WASTE ROOM THEN THE CUPBOARD ENCLOSURES ARE NOT REQUIRED.

SCALE 1:25 @ A3

Please Note: This is an example only – please refer to supplier's information and specification.

APPENDIX: B.2 TYPICAL CAROUSEL SYSTEM FOR 1100L BINS



ELEPHANTS FOOT RECYCLING SOLUTIONS
44-46 GIBSON AVE, PADSTOW NSW 2211
E info@elephantsfoot.com.au W elephantsfoot.com.au
Free Call: 1300 4 ELEPHANT (1300 435 374)

1100 LITRE CAROUSEL SYSTEM

PRODUCT INFORMATION

Elephants Foot 1100 Litre bin Carousel System is a versatile waste handling solution for many types of multi-storey or multi-level developments. The Carousel System collects waste or recycling being disposed from the floors above through the chute system, discharging the material via a hopper that feeds the bins positioned on the unit. Electromechanically driven with automated operation, the Carousel System automatically replaces full bins by a revolving circular platform. Once all the bins on the system are filled, an indicator light will illuminate signifying that the bins are ready for withdrawal and collection. Available with or without compaction unit, our standard 660litre bin Carousel System is available in standard 2, 3 or 4 bin options. Our 5 Bin option is available as a special order.



SPECIFICATIONS

System Control	Electric PLC
Power Supply	415 V AC / 10A / 5 PIN
Motor Size (kW)	0.37
Maximum bin load	440 kg
Noise (dBA)	<85
Bin Size (L)	660
Cycle time (sec)	60
Bin Quantity options	2, 3, 4 or 5

OPTIONAL EXTRAS


- Compaction unit – Please refer to the bin compactor product information sheet for details and specifications
- Enhanced safety add on's - Interlocking barriers, occupancy sensors or safety light curtains (presence sensing light barriers)
- Full bin SMS and email notification
- CMMS and BMS integration
- Extend warranty – Terms and conditions apply

STANDARD FEATURES & BENEFITS

- Simple operation with user friendly controls
- Increased waste servicing efficiency for the development.
- Automatic system control with manual override
- Robust unit construction for long performance life
- Low service and maintain costs
- Rotating flashing beacon (activated during operation)
- Quiet and efficient system operation
- Maximise safety for residents, caretakers and collectors
- Restrained design with minimal moving parts
- Can suit low ceiling clearances
- Floor contact components fully galvanised steel
- Retro fitting options to suit other chutes systems
- Compliant with relevant Building Codes and Standards
- Standard 12 month warranty





1,100 LITRE CAROUSEL SYSTEM

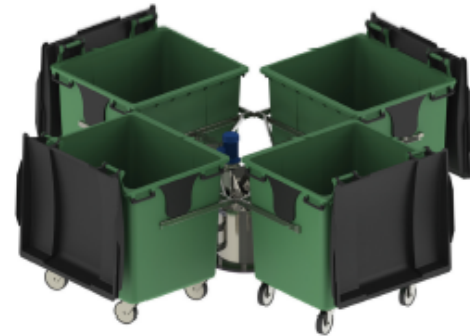

No. of Bins	Reference (mm)			
	A	B	C	D
2	650	1700	3200	3350
3	650	1850	3480	3800
4	650	2050	3940	4050

Available with or without compaction unit, our standard 1100 litre bin Carousel System is available in standard 2, 3 or 4 bin options. Our 5 Bin option is available as a special order.

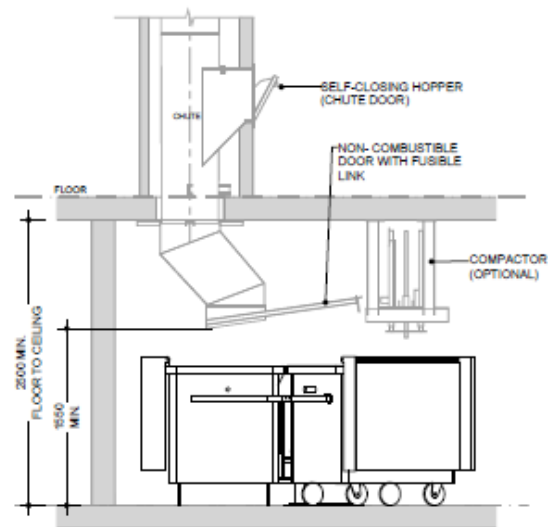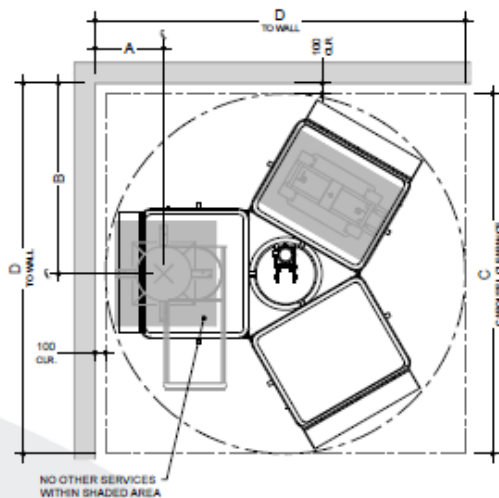

Notes:

Bins not provided by Elephants Foot

Drawings shown are for general information purposes only and provide minimum equipment special requirements for waste room design.

These drawings are not intended for site specific use or for construction. Each project is unique and will be designed to suit.

Additional equipment options, systems and configurations are available. For design assessment, information and advice, please contact an Elephants Foot design consultant on 1300 435 374

Please Note: This is an example only – please refer to supplier's information and specification

APPENDIX: B.3 TYPICAL LINEAR TRACK SYSTEM FOR 1100L MGBS



1100 LITRE LINEAR TRACK SYSTEM

PRODUCT INFORMATION

Elephants Foot 1100 Litre bin Linear Track System is a versatile waste handling solution for many types of multi-storey or multi-level developments. The Linear Track System collects waste or recycling being disposed from the floors above through the chute system, discharging the material via a hopper that feeds the bins. Electromechanically driven with automated operation, the system utilises linear motion to automatically change over full bins. Once all the bins are filled, an indicator light will illuminate signifying that the bins are ready for withdrawal and collection. Available with or without compaction unit, our standard 660 litre bin Linear Track System is available in the standard 2 bin option. Our 3 Bin option is available as a special order.



SPECIFICATIONS

System Control	Electric PLC
Power Supply	415 V AC / 10A / 5 PIN
Motor Size (kW)	1.1
Maximum bin load	440 kg
Noise (dBA)	<85
Bin Size (L)	1100
Cycle time (sec)	60
Bin Quantity options	2 or 3

OPTIONAL EXTRAS

- Compaction unit – Please refer to the bin compactor product information sheet for details and specifications
- Enhanced safety add on's – Interlocking barriers, occupancy sensors or safety light curtains (presence sensing light barriers)
- Full bin SMS and email notification
- CMMS and BMS integration
- Extend warranty – Terms and conditions apply

STANDARD FEATURES & BENEFITS

- Simple operation with user friendly controls
- Increased waste servicing efficiency for the development.
- Automatic system control with manual override
- Robust unit construction for long performance life
- Low service and maintain costs
- Rotating flashing beacon (activated during operation)
- Quiet and efficient system operation
- Maximise safety for residents, caretakers and collectors
- Restrained design with minimal moving parts
- Can suit low ceiling clearances
- Floor contact components fully galvanised steel
- Retro fitting options to suit other chutes systems
- Compliant with relevant Building Codes and Standards
- Standard 12 month warranty





1,100 LITRE LINEAR TRACK SYSTEM



No. of Bins	Reference (mm)		
	A	B	C
2	900	3700	5300
3	2100	5940	7550

Available with or without compaction unit, our standard 1100 litre bin Linear Track System is available in the standard 2 bin option. Our 3 Bin option is available as a special order.

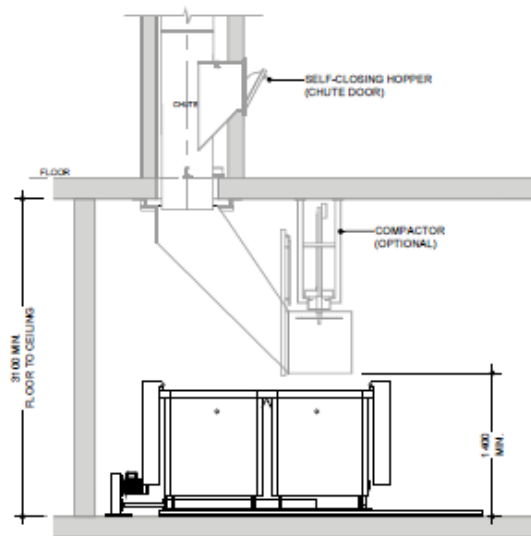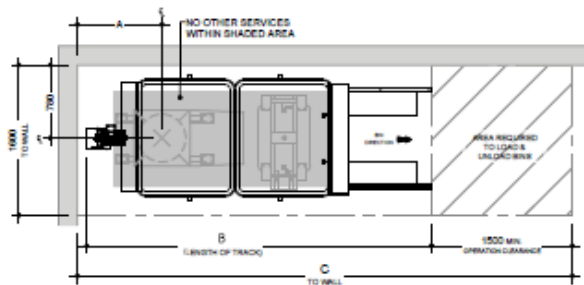

Notes:
Bins not provided by Elephants Foot

Drawings shown are for general information purposes only and provide minimum equipment spacial requirements for waste room design.

These drawings are not intended for site specific use or for construction. Each project is unique and will be designed to suit.

Additional equipment options, systems and configurations are available. For design assessment, information and advice, please contact an Elephants Foot design consultant on 1300 435 374

Please Note: This is an example only – please refer to supplier's information and specification

APPENDIX C: PRIMARY WASTE MANAGEMENT PROVISIONS

APPENDIX: C.1 TYPICAL BIN SPECIFICATIONS


Mobile bins

Mobile bins come in a variety of sizes and are designed for lifting and emptying by purpose-built equipment.

Mobile bins with capacities of up to 1700L must comply with *AS4123.6-2006 Mobile waste containers* which specifies standard sizes and sets out the colour designations for the bodies and lids of mobile waste containers indicating the type of materials they are used to collect.

The most common bin sizes are provided below, although not all sizes are shown. The dimensions are a guide only and differ slightly between manufacturers. Some bins have flat or domed lids and are used with different lifting devices. Refer to *AS4123.6-2006* for further details.

Table G1.1: Average dimension ranges for two-wheel mobile bins




Bin capacity	80L	120L	140L	240L	360L
Height (mm)	870	940	1065	1080	1100
Depth (mm)	530	530	540	735	820
Width (mm)	450	485	500	580	600
Approximate footprint (m ²)	0.24	0.26–0.33	0.27-0.33	0.41–0.43	0.49
Approximate weight (kg)	8.5	9.5	10.4	15.5	23
Approximate maximum load (kg)	32	48	56	96	Not known

Wheelie bin

Sources include Sulo, Single Waste, Cleanaway, SUEZ, just wheelie bins and Perth Waste for two-wheel mobile bins

Table G1.2: Average dimension ranges for four-wheel bulk bins



Bin capacity	660L	770L	1100L	1300L	1700L
Height (mm)	1250	1425	1470	1480	1470
Depth (mm)	850	1100	1245	1250	1250
Width (mm)	1370	1370	1370	1770	1770
Approx footprint (m ²)	0.86–1.16	1.51	1.33–1.74	2.21	2.21
Approx weight (kg)	45	Not known	65	Not known	Not known
Approx maximum load (kg)	310	Not known	440	Not known	Not known

Dome or flat lid container

Sources include Sulo, Signal Waste, Cleanaway, SUEZ, Just Wheelie Bins and Perth Waste

Source: *Better Practice Guide For Resource Recovery In Residential Developments 2019, NSW Environmental Protection Authority*

APPENDIX: C.2 SIGNAGE FOR WASTE AND RECYCLING BINS

Waste signs

Signs and educational materials perform several functions including:

- informing residents why it is important to recover resources and protect the environment
- providing clear instructions on how to use the bins and services provided
- alerting people to any dangers or hazards within the bin storage areas.

All waste, recycling and organic bins should be Australian Standard colours and clearly and correctly labelled, such as by a sticker on the lid and/or the body of the bin.

Communal bin storage areas should be clearly signposted with signs outlining how to correctly separate waste into the bins provided. The local council responsible for waste services may be a good source of signs and posters and can advise on what signs are suitable.

Information on who to contact to find out more about the recycling and/or other resource recovery services in the building should also be displayed in communal areas, such as on a noticeboard.

The Planet Ark website also has resources available free of charge for use by businesses and councils. These signs can be found at businessrecycling.com.au/research/signage.cfm

Figure I1.1: Examples of waste wall posters (EPA supplied)



Figure I1.2: Examples of bin lid stickers (EPA supplied)



Source: *Better Practice Guide For Resource Recovery In Residential Developments 2019*, NSW Environmental Protection Authority

Problem waste signs

The EPA has also produced a range of images and signs that can be used for problem wastes, such as fluoro globes and tubes, household and car batteries, e-waste and smoke detectors. To access these resources, contact the NSW EPA. Some examples are shown below.

Figure I2.1: Problem waste signs



Safety signs

The use of safety signs for waste resource recovery rooms must comply with *AS1319 Safety signs for occupational environments*. Safety signs must be used to regulate and control safety related to behaviour, warn of hazards and provide emergency information, including fire protection information. Suitable signs should be decided for each development as required.

Figure I3.1: Example safety signs



Source: *Better Practice Guide For Resource Recovery In Residential Developments 2019*, NSW Environmental Protection Authority

APPENDIX: C.3 EXAMPLE COLLECTION VEHICLE INFORMATION

General

Appropriate heavy rigid vehicle standards should be incorporated into the road and street designs in new developments where onsite collections are proposed. Road and street designs must comply with relevant Acts, regulations, guidelines, and codes administered by Austroads, Standards Australia, NSW Roads and Maritime Services, WorkSafe NSW and any local council traffic requirements.

Applicants and building designers should consult with councils and other relevant authorities before designing new roads or streets and access points for waste collection vehicles to establish specific design requirements.

Table H4.1: Australian Standards for turning circles for medium and heavy rigid class vehicles

Vehicle class	Overall length (m)	Design width (m)	Design turning radius (m)	Swept circle (m)	Clearance (travel) height (m)
Medium rigid vehicle	8.80	2.5	10.0	21.6	4.5
Heavy rigid vehicle	12.5	2.5	12.5	27.8	4.5

Source: *Better Practice Guide For Resource Recovery In Residential Developments 2019*, NSW Environmental Protection Authority

Large collection vehicles

Waste collection vehicles may be side-loading, rear-loading, front-lift-loading, hook or crane lift trucks. Vehicle dimensions vary by collection service, manufacturer, make and model. It is not possible to provide definitive dimensions, so architects and developers should consult with the local council and/or contractors.

The following characteristics represent typical collection vehicles and are provided for guidance only. Reference to *AS2890.2 Parking facilities: off-street commercial vehicle facilities* for detailed requirements, including vehicle dimensions, is recommended.

Table B2.1: Collection vehicle dimensions


Vehicle type	Rear-loading	Side-loading*	Front-lift-loading	Hook truck	Crane truck
Length overall (m)	10.5	9.6	11.8	10.0	10.0
Width overall (m)	2.5	2.5	2.5	3.0	2.5
Travel height (m)	3.9	3.6	4.8	4.7	3.8
Operational height for loading (m)	3.9	4.2	6.5	3.0	8.75
Vehicle tare weight (t)	13.1	11.8	16.7	13.0	13.0
Maximum payload (t)	10.0	10.8	11.0	14.5	9.5
Turning circle (m)	25.0	21.4	25.0	25.0	18

* The maximum reach of a side arm is 3 m.

Sources: JJ Richards, SUEZ, MacDonald Johnson, Cleanaway, Garwood, Ros Roca, Bingo and Edbro. Figures shown represent the maximum dimensions for each vehicle type.

Rear-loading collection vehicles


These vehicles are commonly used for domestic waste collections from MUDs and RFBs and sometimes for recycling. They can be used to collect waste stored in mobile bins or bulk bins, particularly where bins are not presented at the kerbside. They are also used for collecting bulky waste.



Rear-loading waste collection vehicle

Side-loading collection vehicles

This is the most commonly used vehicle for domestic waste, recycling and organics collections. It is only suitable for collecting mobile bins up to 360L in capacity.

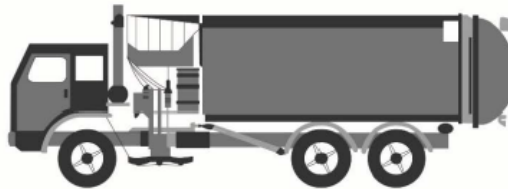

Side-loading waste collection vehicle

Front-lift-loading collection vehicles

These vehicles are commonly used for collecting commercial and industrial waste. They can only collect specially designed front-lift bulk bins and not mobile bins.



Front-lift-loading waste collection vehicle

Small collection vehicles

Typically, councils and their contractors operate with large collection vehicles (heavy rigid class vehicles) because they carry greater payloads and allow for more cost-effective collection services. Some councils, or their contractors, may have smaller collection vehicles in their fleet. Early discussion with the council is important to confirm this, but it should not be assumed that the council will have access to small collection vehicles.

The waste management systems and the location of the collection point should always be designed so that the council can provide the standard domestic waste service.

Source: *Better Practice Guide For Resource Recovery In Residential Developments 2019*, NSW Environmental Protection Authority

APPENDIX D: SECONDARY WASTE MANAGEMENT PROVISIONS

APPENDIX: D.1 EXAMPLE HANDHELD BIN MOVERS

moveXX
smart electric tugs

MOVEXX T2500
BIN MOVER BATTERY ELECTRIC

MoveXX T2500 Tow Tug is an extremely user friendly battery powered mobile towing unit that is ideal for applications where trolleys and rolling objects need to be moved from one place to another simply, efficiently and without physical effort. Some standard features included are: battery indicator, on board battery charger, battery, adjustable handle, dual speed and electric brake.

These units are fitted with an electromagnetic brake system for use on ramps and slopes

Features

- Electromagnetic brake for use on ramps and slopes
- Adjustable height handle



SPECIFICATION				
MODEL	DIMENSIONS (MM)	OPTIONS	PULL - PUSH CAPACITY (KG)	BATTERY
T2500-D	511 (w) x 757 (l)	* Centre mount 2x 240 lt. wheelie bin attachment	2500	AGM batteries 2x 85AH up to 8 hrs continuous operation
TOWING CAPACITY - ON FLAT GROUND (all models)			TOWING CAPACITY - SLOPE (all models)	
Towing up to 4x 660 lt. Wheelie Bin			Towing up to 2x 660 lt. Wheelie Bin Up / Down maximum 25% (1:4 slope)	
Towing up to 4x 1100 lt. Wheelie Bin			Towing up to 1x 1100 lt. Wheelie Bin Up / Down maximum 25% (1:4 slope)	
**Electromagnetic brake for use on ramps and slopes				



Please Note: This is an example only – please contact supplier for specific recommendations.

Source: Sitecraft - www.sitecraft.net.au

APPENDIX: D.2 EXAMPLE SEATED BIN MOVERS



MOTREC MT180

36V BATTERY ELECTRIC BIN MOVER

This hardworking tow device delivers outstanding performance. With its efficient motor and 4,500kg push-pull capacity. The MT180 is ideal for moving bin trailer also narrow enough to fit through most door openings. From its all-steel construction to its all-wheel braking, this tow tractor is built for years of heavy use in total comfort and safety. All this combined with superior AC technology makes short work of tough requests.

Features

- Front & rear brakes
- Pneumatic Tyres
- Comfortable ergonomic adjustable seat
- Complete with headlight, break lights, tailing lights & horn



SPECIFICATION				
MODEL	DIMENSIONS (MM)	OPTIONAL EXTRAS	PULL - PUSH CAPACITY (KG)	BATTERY
MT180 36V	760 (w) x 2030 (l) x 1160 (h)	Flashing light on pole Conditional registration kit Cabin includes windscreen Weather Curtains	4500	48V TPPL battery pack, 157AH
TOWING CAPACITY - ON FLAT GROUND / SLOPE (all models) (all models)				
Towing up to 5x 660 lt. Wheelie Bin Up / Down maximum 25% (1:4 slope)				
Towing up to 4x 1100 lt. Wheelie Bin Up / Down maximum 25% (1:4 slope)				



Please Note: This is an example only – please contact supplier for specific recommendations.

Source: Sitecraft - www.sitecraft.net.au

APPENDIX: D.3 EXAMPLE BIN TRAILERS



BIN TRAILER WITH ALUMINUM RAMP

Bin trailer suitable for moving 240lt, 660lt and 1,100lt bins including a 1200mm rear ramp complete with locking latches and gas strut assist. Height draw bar fitted with a jockey wheel large pneumatic tyres with precision bearing hubs



SPECIFICATION

MODEL	DIMENSION (MM)	SUITABLE FOR MOVING	PART NUMBERS	REAR RAMP DIMENSION (MM)
4x Bins Trailer	Internal - 1560 (l) x 1200 (w)	4x 240lt. Wheelie Bin	78811604	1200mm rear ramp complete with positive locking and gas strut assist
	External - 2300 (l) x 1500	2x 660lt. Wheelie Bin		
		1x 110lt. Wheelie Bin		
6x Bins Trailer	Internal - 2350 (l) x 1200 (w)	6x 240lt. Wheelie Bin	78811065	1200mm rear ramp complete with positive locking and gas strut assist
	External - 3100 (l) x 1500 (w)	3x 660lt. Wheelie Bin		
		2x 1100lt. Wheelie Bin		
8x Bins Trailer	Internal - 3200 (l) x 1200 (w)	8x 240lt. Wheelie Bin	78811066	1200mm rear ramp complete with positive locking and gas strut assist
	External - 3900 (l) x 1500 (w)	4x 660lt. Wheelie Bin		
		3x 1100lt. Wheelie Bin		
10x Bins Trailer	Internal - 3900 (l) x 1200 (w)	10x 240lt. Wheelie Bin	78811067	1200mm rear ramp complete with positive locking and gas strut assist
	External - 4600 (l) x 1500 (w)	5x 660lt. Wheelie Bin		
		4x 1100lt. Wheelie Bin		

OPTIONS

- Full registration
- Upgrade Includes : Lights | Wiring | Suspension | aaa Tyres | Compliance Plate

Please Note: This is an example only – please contact supplier for specific recommendations.

Source: Sitecraft - www.sitecraft.net.au

APPENDIX: D.4 EXAMPLE BIN LIFTER FOR 240L BINS

versatip

Versatip Bin Tipper – 1500mm Tip





Specifications

Product Code	69121009
Product Name	1500mm Tip – Battery Powered
Capacity (kg)	250
Height (mm)	2085
Length (mm)	1330
Power Source	Battery Powered
Tipping Height (mm)	1500
Width (mm)	990

Please Note: This is an example only – please contact supplier for specific recommendations.

Source: Elephants Foot Equipment - www.elephantsfoot.com.au/equipment/

APPENDIX: D.5 EXAMPLE SOURCE SEPARATION RECEPTACLES

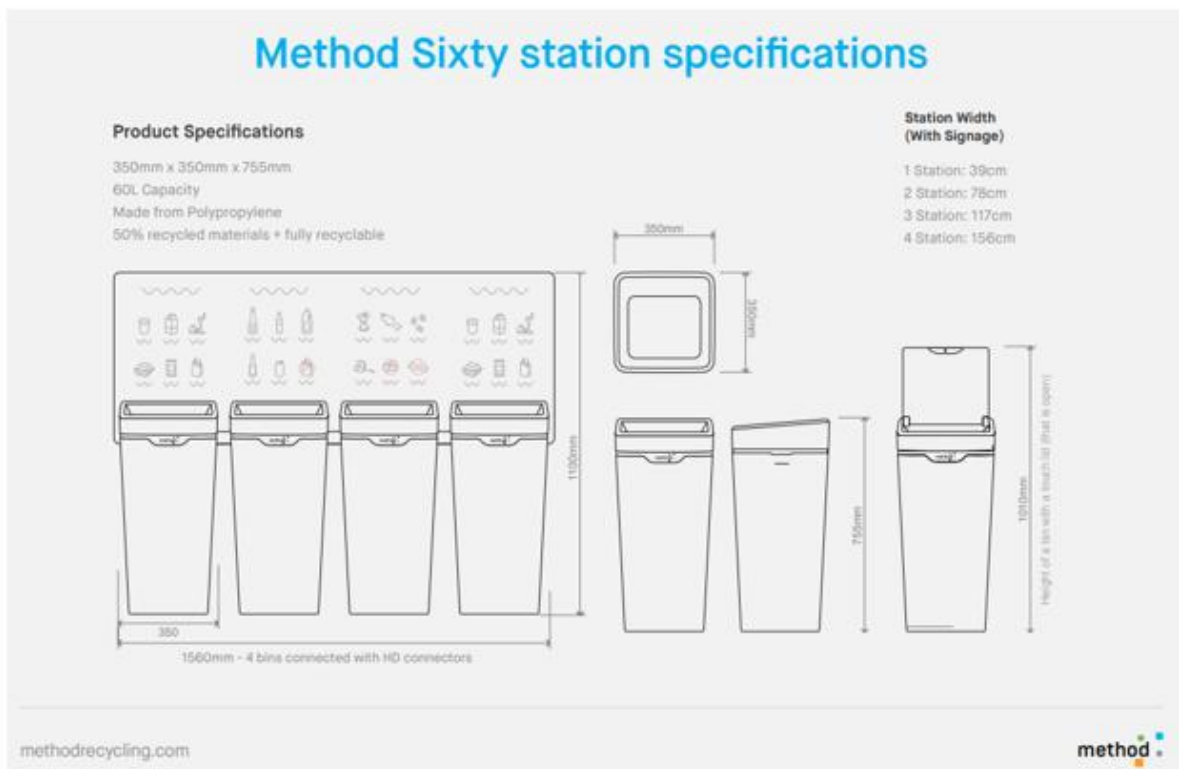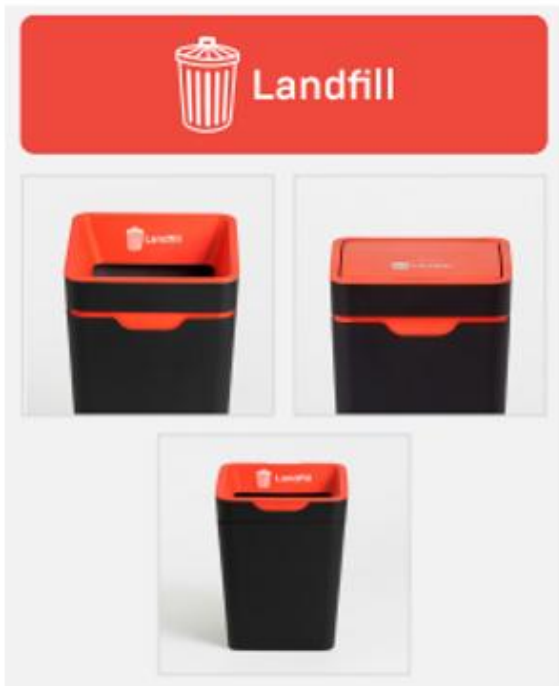




Source: Method Recycling - www.methodrecycling.com

APPENDIX E: MEDICAL WASTE MANAGEMENT INFORMATION

APPENDIX: E.1 EXAMPLE OF MEDICAL WASTE STREAMS AND MANAGEMENT

The following are the various medical waste streams and their storage guidelines as detailed in NSW Health's *Clinical and Related Waste Management for Health Services 2017*.

Medical Waste Stream	Medical Waste Stream Description and Management	Container Example
<p>Sharps Waste</p>	<p>Any clinical object capable of inflicting a penetrating injury which may or may not be contaminated with blood and or body substance. This includes needles, ampoules and any other sharp objects or instruments designed to perform penetrating procedures</p> <p>Sharps container should be located adjacent to the work area where sharps are used. When the sharps residue container is filled to the black line, the container should be sealed and labelled.</p>	
<p>Pharmaceutical Waste</p>	<p>Pharmaceutical waste refers to any waste pharmaceuticals or other chemical substances specified as regulated goods in the Poisons and Therapeutic Goods Act 2008. Includes any substance specified in a Schedule of the Poisons List under the Act, as well as any therapeutic good which is unscheduled.</p> <p>It also includes expired or discarded pharmaceuticals, filters or other material contaminated by pharmaceutical products. Pharmaceutical waste bins must be lockable</p>	
<p>Clinical Waste</p>	<p>Clinical waste with the potential to cause injury, infection or offence:</p> <ul style="list-style-type: none"> • Unrecognisable human tissue (excluding hair, teeth, nails and anatomical waste) • Bulk blood or other body fluids (or body substances) • Material and equipment visibly stained by blood or body fluids (includes incontinence pads and disposable nappies that come from an infectious patient)[3] • Lab specimens, cultures or other waste from lab investigations • Waste from medical or veterinary research • Genetically Modified Organisms (GMOs) <p>For incineration or autoclaving and shredding. Autoclave tape and bag indicators must be used to show autoclaving has been completed. Fluid may be able to be discharged into sewer depending on Liquid Trade Agreement between the health service and water utility All clinical waste once treated by a process acceptable to NSW Health may be reclassified in accordance with the Waste Classification</p>	

<p>Cytotoxic Waste</p>	<p>Material contaminated with residues or preparations containing materials toxic or otherwise harmful to cells. This includes any residual cytotoxic drug or laboratory chemical and any discarded material or clinical waste associated with the preparation or administration or excretion of cytotoxic drugs May include Genetically Modified Organisms (GMOs) or tissues containing GMOs</p> <p>If Cytotoxic waste generated it must be placed within an approved purple cytotoxic bag or container. When this container is full, it is to be placed in a locked purple cytotoxic waste wheelie bin. Once the larger wheelie bin is full, its collection should be organized.</p>	
<p>Radioactive</p>	<p>Waste material, including sharps and clinical waste contaminated with a radioisotope which arises from the medical or research use of radionuclides, e.g. during nuclear medicine, radioimmunoassay and bacteriological procedures, and may be in solid, liquid or gaseous form, and which emits a level of radiation above the level set by regulatory authorities</p> <p>Radioactive material to be stored onsite in appropriate storage area until it decays to below the thresholds of a “radioactive substance” as defined under the Radiation Control Act and Regulation.</p> <p>Handling and storage to comply with a Radiation Management Plan in accordance with the Code of Practice for Radiation Protection in the Medical Applications of Ionizing Radiation (ARPANSA 2008)</p>	
<p>Anatomical Waste</p>	<p>Identifiable human body parts such as limbs, organs, placenta and recognisable or large pathological specimens resulting from investigation or treatment of a patient It does not include deceased bodies</p>	

Please note: Containers shown above are examples only; please refer to supplier information.