

## PEDESTRIAN WIND ENVIRONMENT STUDY

### 9-11 GIBBONS STREET, REDFERN

WE265-01F03(REV0)- WE REPORT

SEPTEMBER 19, 2018

Prepared for:

St George Community Housing

Level 5, 38 Humphreys Lane,  
Hurstville, NSW 2220

## DOCUMENT CONTROL

<b>Date</b>	<b>Revision History</b>	<b>Issued Revision</b>	<b>Prepared By (initials)</b>	<b>Instructed By (initials)</b>	<b>Reviewed &amp; Authorised by (initials)</b>
September 7, 2018	Initial.	0	PT	SWR	HK/TD
September 14, 2018	Updating figures and recommendations	1	PT/HK	SWR	HK

*The work presented in this document was carried out in accordance with the Windtech Consultants Quality Assurance System, which is based on International Standard ISO 9001.*

*This document is issued subject to review and authorisation by the Team Leader noted by the initials printed in the last column above. If no initials appear, this document shall be considered as preliminary or draft only and no reliance shall be placed upon it other than for information to be verified later.*

*This document is prepared for our Client's particular requirements which are based on a specific brief with limitations as agreed to with the Client. It is not intended for and should not be relied upon by a third party and no responsibility is undertaken to any third party without prior consent provided by Windtech Consultants. The information herein should not be reproduced, presented or reviewed except in full. Prior to passing on to a third party, the Client is to fully inform the third party of the specific brief and limitations associated with the commission.*

## EXECUTIVE SUMMARY

---

This report presents the results of a detailed investigation into the wind environment impact of the development located at 9-11 Gibbons Street, Redfern. Testing was performed at Windtech's boundary layer wind tunnel facility. The wind tunnel has a 3.0m wide working section and a fetch length of 14m, and measurements were taken from 16 wind directions at 22.5 degree increments. Testing was carried out using a 1:300 detailed scale model of the development. The effects of nearby buildings and land topography have been accounted for through the use of a proximity model which represents an area with a radius of 375m.

Peak gust and mean wind speeds were measured at selected critical outdoor trafficable locations within and around the subject development. Wind velocity coefficients representing the local wind speeds are derived from the wind tunnel and are combined with a statistical model of the regional wind climate (which accounts for the directional strength and frequency of occurrence of the prevailing regional winds) to provide the equivalent full-scale wind speeds at the site. The wind speed measurements are compared with criteria for pedestrian comfort and safety, based on Gust-Equivalent Mean (GEM) and annual maximum gust winds, respectively.

The model was tested in the wind tunnel without the effect of any forms of wind ameliorating devices such as screens, balustrades, etc., which are not already shown in the architectural drawings. The effect of vegetation was also excluded from the testing. In-principle treatments have been recommended for any area exposed to strong winds.

The results of the study indicate that wind conditions for the majority of trafficable outdoor locations within and around the development will be suitable for their intended uses, or be better than or equivalent to the existing conditions. However, a number of areas will experience strong winds which will exceed the relevant criteria for comfort and/or safety. Suggested in-principle treatments are described as follows:

- Inclusion of two porous or impermeable gates (minimum 3 metres high, maximum porosity 50%) to shield the Private Driveway.
- Inclusion of a chamfer on the south western corner of the building, the size and extent of which can be determined at a more detailed design stage
- Inclusion of a wind screen at the south-western corner of the building at Ground Level, the porosity and extent of which can be determined at a more detailed design stage
- Inclusion of an impermeable high wind screen to be placed along the north-eastern corner of the Residential Communal Open Space on Level 03, the extent of which can be determined at a more detailed design stage
- Inclusion of an impermeable screen to be installed along the perimeter of the Residential Communal Open Space on Level 03

- Inclusion of an awning or canopy above the Level 03 Residential Communal Open Space, the extent of which can be determined at a more detailed design stage
- Retention of the proposed landscaping and timber teepee on the Level 03 Residential Communal Open Space

Note that these treatments are in-principle only, and it is recommended that wind tunnel testing be performed to quantify the size and extent of these treatments in order to optimise the design and ensure suitable conditions for the intended uses are achieved in the abovementioned outdoor trafficable areas.

The Level 17 Residential Communal Open Space satisfies the comfort and safety criteria, therefore it is suitable for its intended use and no further wind amelioration measures are necessary.

Further optional measures which are expected to offer improved amenity include additional evergreen tree planting and/or landscaping along the western exposed frontage of the building, and an extension of the awning that runs above the entry to the retail/commercial area.

## CONTENTS

1	Introduction	1
2	Wind Tunnel Model	2
3	Boundary Layer Wind Profiles at the Site	7
4	Regional Wind Model	10
5	Pedestrian Wind Comfort and Safety	13
	5.1 Measured Wind Speeds	13
	5.2 Wind Speed Criteria Used for This Study	13
	5.3 Layout of Study Points	15
6	Results and Discussion	20
	6.1 Ground Level and Surrounding Areas	20
	6.2 Level 03 Residential Communal Open Space	21
	6.3 Level 17 Residential Communal Open Space	21
	6.4 Private Balconies and Terraces	21
	6.5 General Notes	22
7	References	31
	Appendix A	Published Environmental Criteria
	Appendix B	Data Acquisition
	Appendix C	Directional Plots of Wind Tunnel Results
	Appendix D	Velocity and Turbulence Intensity Profiles

# 1 INTRODUCTION

---

A wind tunnel study has been undertaken to assess wind speeds at selected critical outdoor trafficable areas within and around the subject development. The test procedures followed for this wind tunnel study were based on the guidelines set out in the Australasian Wind Engineering Society Quality Assurance Manual (AWES-QAM-1-2017), ASCE 7-10 (Chapter C31), and CTBUH (2013).

A scale model of the development was prepared, including the surrounding buildings and land topography. Testing was performed at Windtech's boundary layer wind tunnel facility. The wind tunnel has a 3.0m wide working section and a fetch length of 14m, and measurements were taken from 16 wind directions at 22.5 degree increments. The wind tunnel was configured to the appropriate boundary layer wind profile for each wind direction. Wind speeds were measured using Dantec hot-wire probe anemometers, positioned to monitor wind conditions at critical outdoor trafficable areas of the development.


The model was tested in the wind tunnel without the effect of any forms of wind ameliorating devices such as screens, balustrades, etc., which are not already shown in the architectural drawings. The effect of vegetation was also excluded from the testing. The wind speeds measured during testing were combined with a statistical model of the regional wind climate to provide the equivalent full-scale wind speeds at the site. The measured wind speeds were compared against appropriate criteria for pedestrian comfort and safety, and in-principle treatments have been recommended for any area which was exposed to strong winds. These treatments could be in the form of retaining vegetation that is already proposed for the site, or including additional vegetation, screens, awnings, etc. Note however that, in accordance with the AWES Guidelines (2014), only architectural elements or modifications are used to treat winds which represent an exceedance of the existing wind conditions and exceed the safety limit.

## 2 WIND TUNNEL MODEL


---

Wind tunnel testing was carried out using a 1:300 scale model of the development and surroundings. The study model incorporates all necessary architectural features on the façade of the development to ensure an accurate wind flow is achieved around the model, and was constructed using a Computer Aided Manufacturing (CAM) process to ensure that a high level of detail and accuracy is achieved. The effect of nearby buildings and land topography has been accounted for through the use of a proximity model, which represents a radius of 375m from the development site. Photographs of the wind tunnel model are presented in Figures 1. A plan of the proximity model is provided in Figure 2.


The recently approved development at 88 Regent Street has been included in the proposed scenario for the purpose of accurately assessing the wind conditions that will be applicable to the area, once construction is complete.

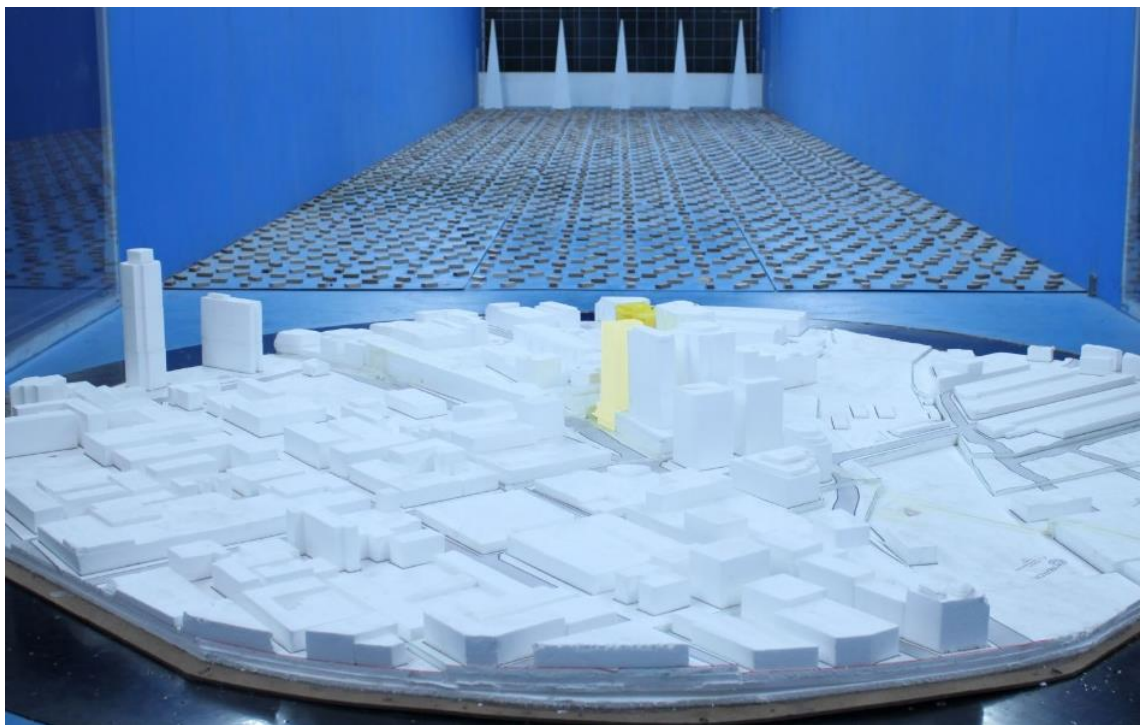


**Figure 1a: Photograph of the Wind Tunnel Model – Proposed Scenario  
(View from the north-east)**

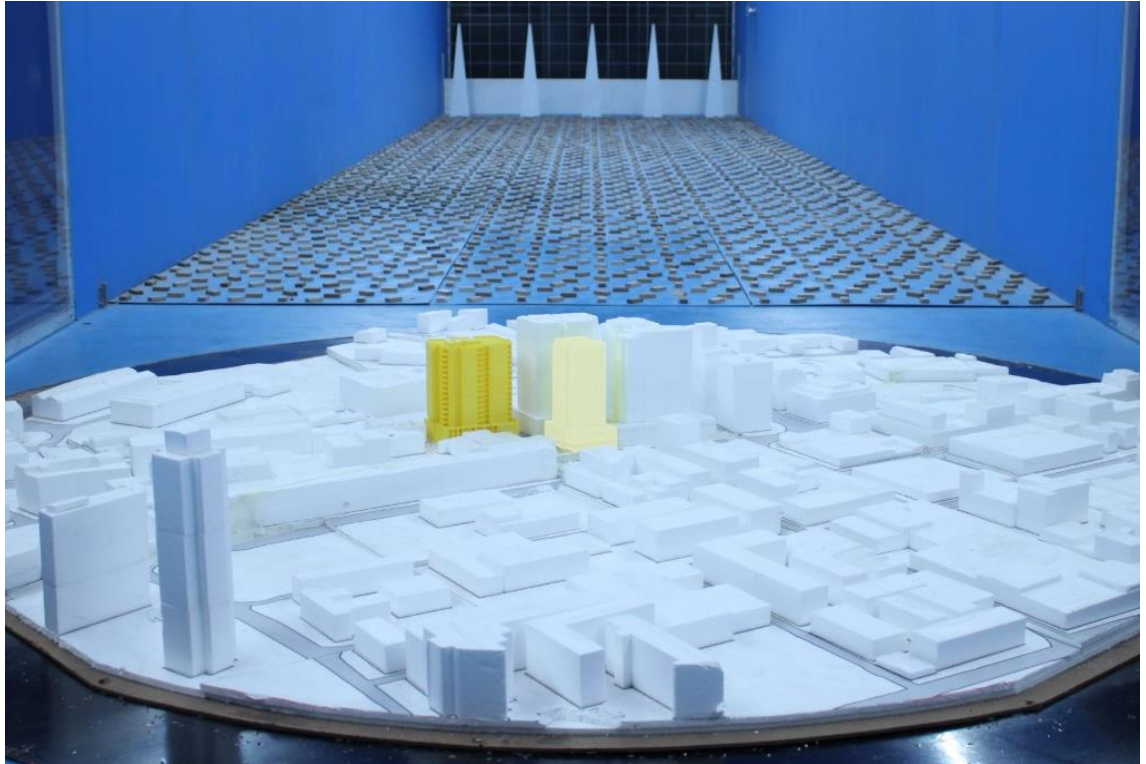

**Figure 1b: Photograph of the Wind Tunnel Model – Proposed Scenario  
(View from the south-east)**

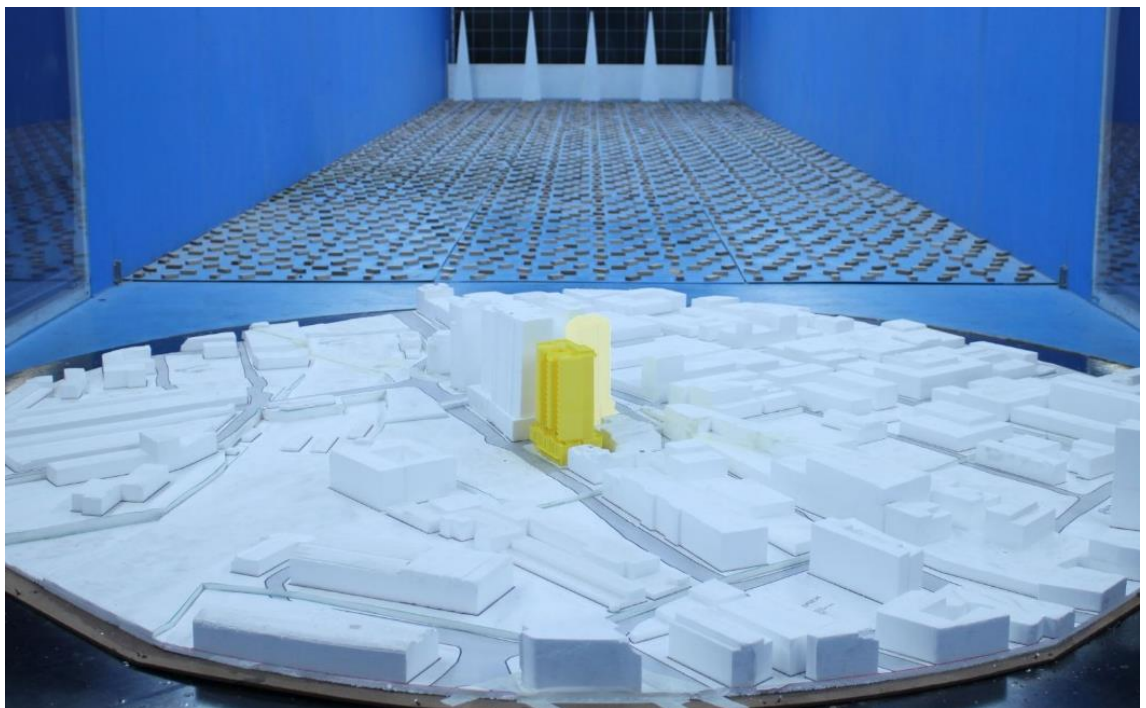

**Figure 1c: Photograph of the Wind Tunnel Model – Proposed Scenario  
(View from the south-west)**

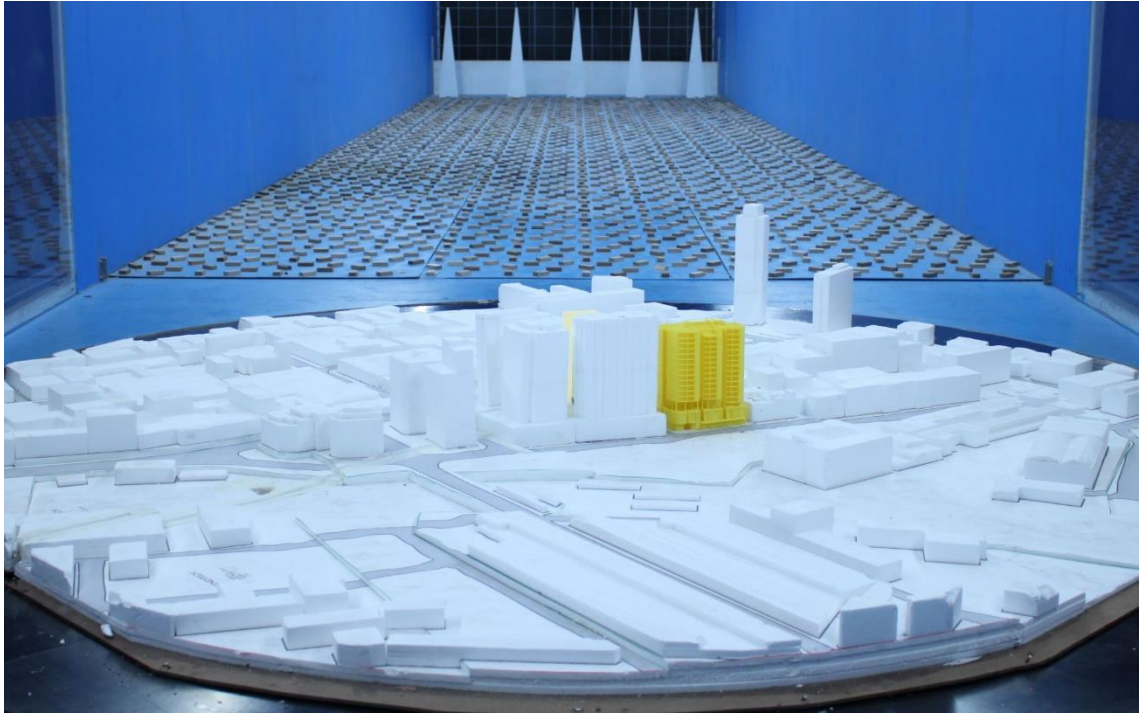

**Figure 1d: Close up photograph of the Wind Tunnel Model – Proposed Scenario  
(View from the north-west)**



**Figure 1e: Close up photograph of the Wind Tunnel Model – Proposed Scenario  
(View from the south-west)**



**Figure 1f: Close up photograph of the Wind Tunnel Model – Existing Scenario  
(View from the south-west)**



**Figure 2: Proximity Model Plan**

### 3 BOUNDARY LAYER WIND PROFILES AT THE SITE

---

The roughness of the surface of the earth has the effect of slowing down the wind near the ground. This effect is observed up to the boundary layer height, which can range between 500m to 3km above the earth's surface depending on the roughness of the surface (ie: oceans, open farmland, etc.). Within this range the prevailing wind forms a boundary layer wind profile.

Various wind codes and standards and other publications classify various types of boundary layer wind flows depending on the surface roughness  $z_0$ . Descriptions of typical boundary layer wind profiles, based on Deaves & Harris (1978), are summarised as follows:

- Flat terrain ( $0.002\text{m} < z_0 < 0.003\text{m}$ ). Examples include inland water bodies such as lakes, dams, rivers, etc., and the open ocean.
- Semi-open terrain ( $0.006\text{m} < z_0 < 0.01\text{m}$ ). Examples include flat deserts and plains.
- Open terrain ( $0.02\text{m} < z_0 < 0.03\text{m}$ ). Examples include grassy fields, semi-flat plains, and open farmland (without buildings or trees).
- Semi-suburban/semi-forest terrain ( $0.06\text{m} < z_0 < 0.1\text{m}$ ). Examples include farmland with scattered trees and buildings and very low-density suburban areas.
- Suburban/forest terrain ( $0.2\text{m} < z_0 < 0.3\text{m}$ ). Examples include suburban areas of towns and areas with dense vegetation such as forests, bushland, etc.
- Semi-urban terrain ( $0.6\text{m} < z_0 < 1.0\text{m}$ ). Examples include centres of small cities, industrial parks, etc.
- Urban terrain ( $2.0\text{m} < z_0 < 3.0\text{m}$ ). Examples include centres of large cities with many high-rise towers, and also areas with many closely-spaced mid-rise buildings.

The boundary layer wind profile does not change instantly due to changes in the terrain roughness. It can take many kilometres (at least 100km) of a constant surface roughness for the boundary layer wind profile to achieve a state of equilibrium. Hence an analysis of the effect of changes in the upwind terrain roughness is necessary to determine an accurate boundary layer wind profile at the development site location.


For this study this has been undertaken based on the method given in AS/NZS1170.2:2011, which uses a "fetch" length of 60 times the study reference height. However, it should be noted that this "fetch" commences *beyond* a "lag distance" area, which has a length of 20 times the study reference height (in accordance with AS/NZS1170.2:2011), so the actual "fetch" of terrain analysed is the area between 20 and 60 times the study reference height away from the site. The proximity model accounts for the effect of the near field topographic effects as well as the influence of the local built forms.

An aerial image showing the surrounding terrain is presented in Figure 3 for a range of 1.8km from the edge of the proximity model used for the wind tunnel study. The resulting mean and gust terrain and height multipliers at the site location are presented in Table 1, referenced to the study reference height (which is approximately half of the height of the subject development since typically we are most interested in the wind effects at the ground plane). Details of the boundary layer wind profiles at the site are combined with the regional wind model (see Section 4) to determine the site wind speeds.

**Table 1: Approaching Boundary Layer Wind Profile Analysis Summary  
(at the study reference height)**

Wind Sector (degrees)	Terrain and Height Multiplier			Turbulence Intensity $I_v$	Equivalent Terrain Category (AS/NZS1170.2:2011 naming convention)
	$k_{tr,T=1hr}$ (hourly)	$k_{tr,T=10min}$ (10min)	$k_{tr,T=3s}$ (3sec)		
0	0.50	0.54	0.94	0.293	3.5
30	0.54	0.58	0.97	0.271	3.3
60	0.54	0.58	0.97	0.269	3.3
90	0.66	0.69	1.06	0.207	2.8
120	0.59	0.63	1.01	0.239	3.1
150	0.50	0.54	0.94	0.291	3.5
180	0.50	0.54	0.94	0.293	3.5
210	0.55	0.59	0.98	0.264	3.3
240	0.61	0.65	1.03	0.225	3.0
270	0.61	0.65	1.03	0.225	3.0
300	0.59	0.63	1.01	0.242	3.1
330	0.57	0.61	0.99	0.253	3.2

For each of the 16 wind directions tested in this study, the approaching boundary layer wind profiles modelled in the wind tunnel closely matched the profiles listed in Table 1. Plots of the boundary layer wind profiles used for the wind tunnel testing are presented in Appendix D of this report.

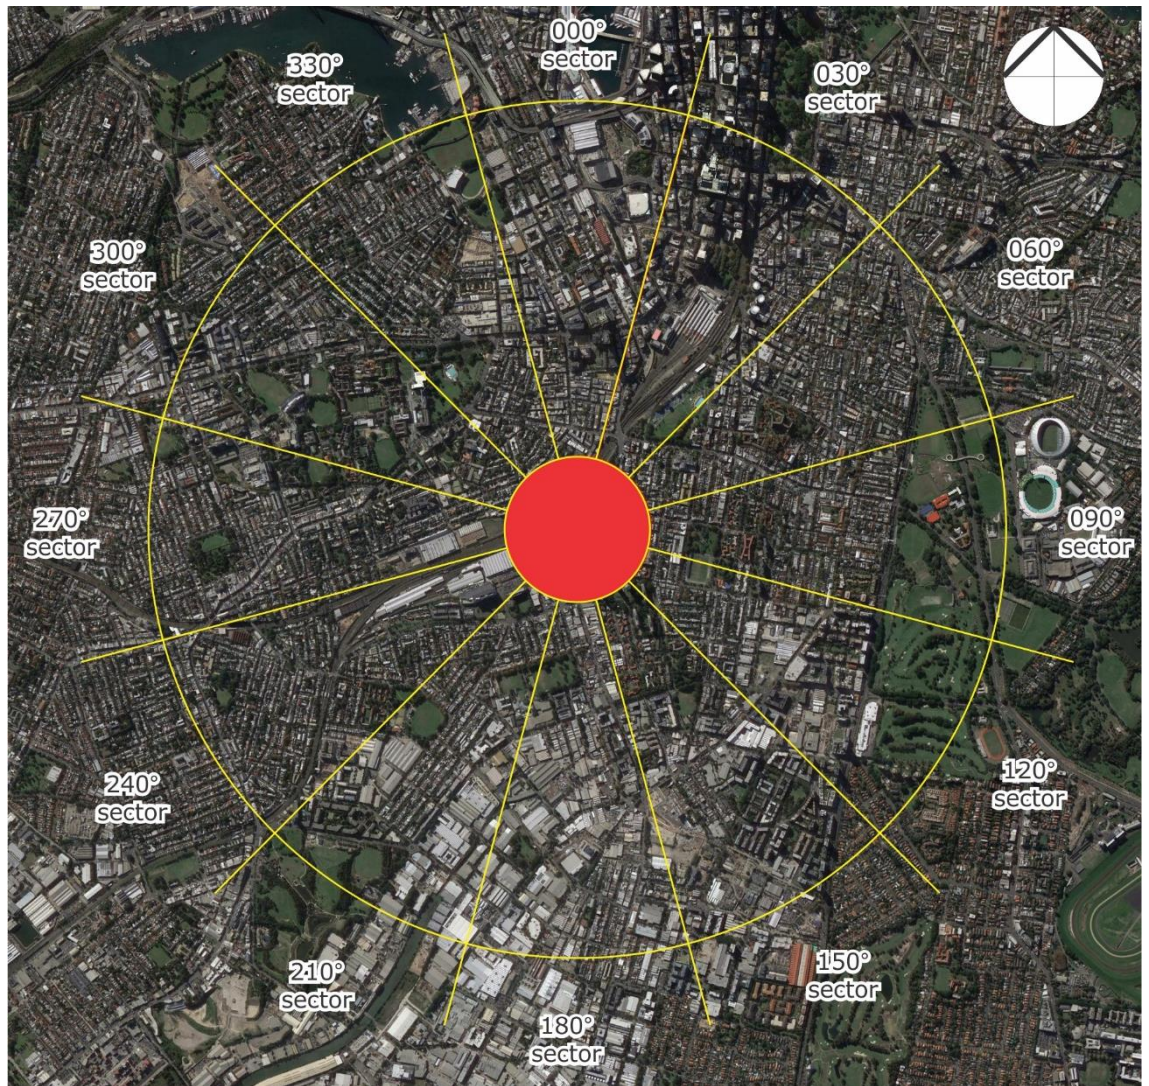

**Figure 3: Aerial Image of the Surrounding Terrain  
(radius of 1.8km from the edge of the proximity model, which is coloured red)**

## 4 REGIONAL WIND MODEL

---


The regional wind model used in this study was determined from an analysis of measured directional mean wind speeds obtained at the meteorological recording station located at Kingsford Smith Airport (Sydney Airport). Data was collected from 1995 to 2016 between 6am to 10pm and corrected so that it represents wind speeds over standard open terrain at a height of 10m above ground for each wind direction. From this analysis, directional probabilities of exceedance and directional wind speeds for the region are determined. The directional wind speeds are summarised in Table 2. The directional wind speeds and corresponding directional frequencies of occurrence are presented in Figure 4.

The data indicates that the southerly winds are by far the most frequent winds for the Sydney region, and are also the strongest. The westerly winds occur most frequently during the winter season for the Sydney region, and although they are typically not as strong as the southerly winds, they are usually a cold wind and hence can be a cause for discomfort for outdoor areas. North-easterly winds occur most frequently occur during the warmer months of the year for the Sydney region, and hence are usually welcomed within outdoor areas since they are typically not as strong as the southerly or westerly winds.

The recurrence intervals examined in this study are for exceedances of 5% (per 90 degree sector) for the pedestrian comfort criteria using Gust-Equivalent Mean (GEM) wind speeds, and annual maximum wind speeds (per 22.5 degree sector) for the pedestrian safety criterion. Note that the 5% probability wind speeds presented in Table 2 are only used for the directional plot presented in Figure 4 and are not used for the integration of the probabilities.

**Table 2: Directional Wind Speeds (m/s)**  
**(hourly means, referenced to 10m above ground in standard open terrain)**

<b>Wind Direction</b>	<b>5% Exceedance</b>	<b>Annual Maximum</b>
N	5.9	9.9
NNE	9.9	12.9
NE	9.7	12.3
ENE	7.5	10.0
E	6.3	9.3
ESE	6.2	9.1
SE	7.0	10.1
SSE	8.5	12.2
S	10.3	13.9
SSW	10.0	14.1
SW	6.9	11.9
WSW	9.3	13.6
W	9.8	14.4
WNW	8.8	14.3
NW	6.7	12.6
NNW	5.5	10.7

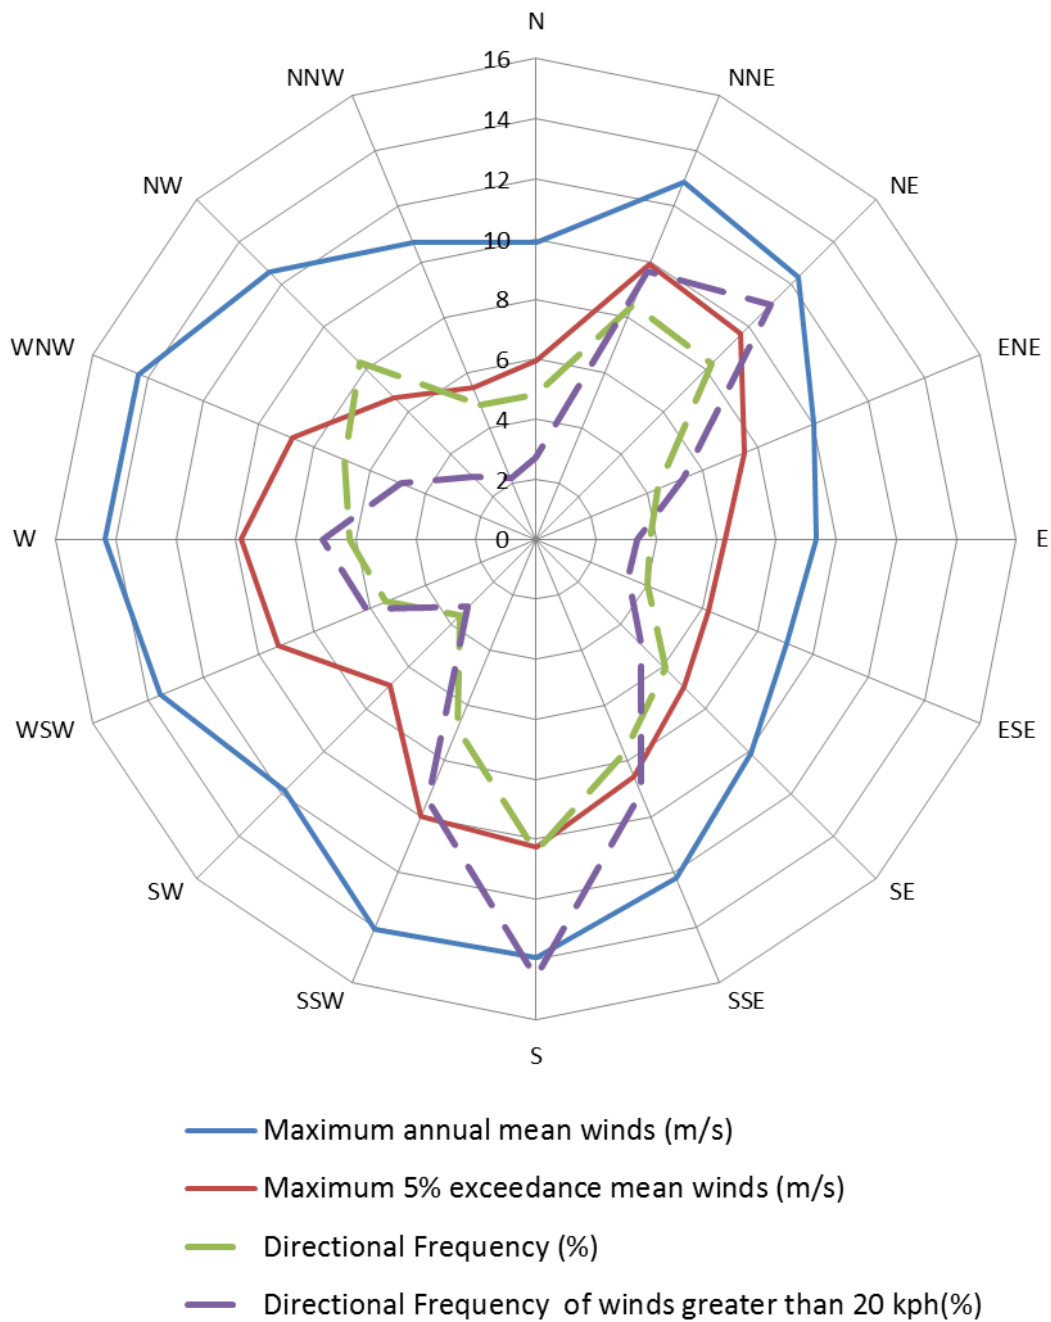

**Figure 4: Annual and 5% Exceedance Hourly Mean Wind Speeds, and Frequencies of Occurrence, for the Sydney Region (referenced to 10m above ground in standard open terrain)**

## **5 PEDESTRIAN WIND COMFORT AND SAFETY**

---

The acceptability of wind conditions of an area is determined by comparing the measured wind speeds against an appropriate criteria. This section outlines how the measured wind speeds were obtained, the criteria considered for the development, as well as the critical trafficable areas that were assessed and their corresponding criteria designation.

### **5.1 Measured Wind Speeds**

Wind speeds were measured using Dantec hot-wire probe anemometers, positioned to monitor wind conditions at critical outdoor trafficable areas of the development. The reference mean free-stream wind speed measured in the wind tunnel, which is at a full-scale height of 200m and measured 3m upstream of the study model.

Measurements were acquired for 16 wind directions at 22.5 degree increments using a sample rate of 1,024Hz. The full methodology of determining the wind speed measurements at the site from the Dantec Hot-wire probe anemometers is provided in Appendix B. Based on the results of the analysis of the boundary layer wind profiles at the site (see Section 3), and incorporating the regional wind model (see Section 4), the data sampling length of the wind tunnel test for each wind direction corresponds to a full-scale sample length ranging between 30 minutes and 1 hour. Research by A.W. Rofail and K.C.S. Kwok (1991) has shown that, in addition to the mean and standard deviation of the wind being stable for sample lengths of 15 minutes or more (full-scale), the peak value determined using the upcrossing method is stable for sample lengths of 30 minutes or more.

### **5.2 Wind Speed Criteria Used for This Study**

For this study, the measured wind conditions for the various critical outdoor trafficable areas around the subject development are compared against the criteria presented in the Draft Sydney Development Control Plan 2012 - Central Sydney Planning Review Amendment, which supersedes the criteria detailed in the City of Sydney Development Control Plan 2012 (SDCP2012).

For pedestrian comfort, the Draft Sydney DCP 2012 requires that the hourly mean wind speed, or Gust-Equivalent Mean (GEM) wind speed (whichever is greater for each wind direction), must not exceed 8m/s for walking, 6m/s for standing, and 4m/s for sitting. These are based on a 5% probability of exceedance.

For pedestrian safety, the Draft Sydney DCP 2012 defines a safety limit criterion of 24m/s, based on an annual maximum 0.5 second gust wind speed, which applies to all areas.

Furthermore, in accordance with the provisions of the Draft Sydney DCP 2012, the existing conditions for the pedestrian footpaths around the site are also analysed as part of this study to determine the impact of the subject development. If it is found that the existing conditions exceed the relevant criteria, then the target wind speed for that area with the inclusion of the proposed development is to at least match the existing site conditions.

In accordance with the provisions of the Draft Sydney DCP 2012, the wind speed assessment is undertaken for winds occurring between 6am and 10pm (AEST).

A more detailed comparison of published criteria for pedestrian wind comfort and safety is provided in Appendix A.

For this study the measured wind conditions of the selected critical outdoor trafficable areas are compared against two sets of criteria; one for pedestrian safety, and one for pedestrian comfort. The safety criterion is applied to the annual maximum gust winds, and the comfort criteria is applied to Gust Equivalent Mean (GEM) winds. In accordance with ASCE (2003), the GEM wind speed is defined as follows:

$$GEM = \max\left(\bar{V}, \frac{\hat{V}}{1.85}\right) \quad (5.1)$$

Where:

$\bar{V}$  is the mean wind speed.

$\hat{V}$  is the gust wind speed.

The criteria considered in this study are summarised in Tables 3 and 4 for pedestrian comfort and safety, respectively. The results of the wind tunnel study are presented in the form of directional plots attached in Appendix C of this report. For each study point there is a plot of the GEM wind speeds using the comfort criteria, and a plot for the annual maximum gust wind speeds using the safety criterion.

**Table 3: Pedestrian Comfort Criteria (Draft Sydney DCP 2012)**

Classification	Description	Maximum 5% Exceedance GEM Wind Speed (m/s)
Sitting	Outdoor areas that involve seating such as parks, dining areas in restaurants, amphitheatres, etc.	4
Standing	Short duration stationary activities (generally less than 1 hour), including window shopping, waiting areas, etc.	6
Walking	For pedestrian thoroughfares, private swimming pools, most communal areas, private balconies and terraces, etc.	8

**Table 4: Pedestrian Safety Criterion (Draft Sydney DCP 2012)**

<b>Classification</b>	<b>Description</b>	<b>Annual Maximum Gust Wind Speed (m/s)</b>
Safety	Safety criterion applies to all trafficable areas.	24

### **5.3 Layout of Study Points**

For this study a total of 31 study point locations were selected for analysis in the wind tunnel. This includes the following:

- 17 study points on Ground floor along the pedestrian footpaths.
- 7 study points on the Level 03 residential communal open space
- 3 study points on the Level 17 residential communal open space
- 4 study points on the surrounding areas around the proposed development site.

The locations of the various study points tested for this study, as well as the target wind speed criteria for the various outdoor trafficable areas of the development, are presented in Figures 5 in the form of marked-up plans. It should be noted that only the most critical outdoor locations of the development have been selected for analysis.


### Target Criteria

City of Sydney DCP in accordance with Draft Sydney DCP 2012 - Central Sydney Planning Review Amendment:

- Wind Comfort Standard for Walking criterion of 8m/s (5% exceedance)
- Safety criterion of 24m/s (gust - 0.1% exceedance) for safety

City of Sydney DCP in accordance with Draft Sydney DCP 2012 - Central Sydney Planning Review Amendment:

- Wind Comfort Standard for Standing criterion of 6m/s (5% exceedance)
- Safety criterion of 24m/s (gust - 0.1% exceedance) for safety.

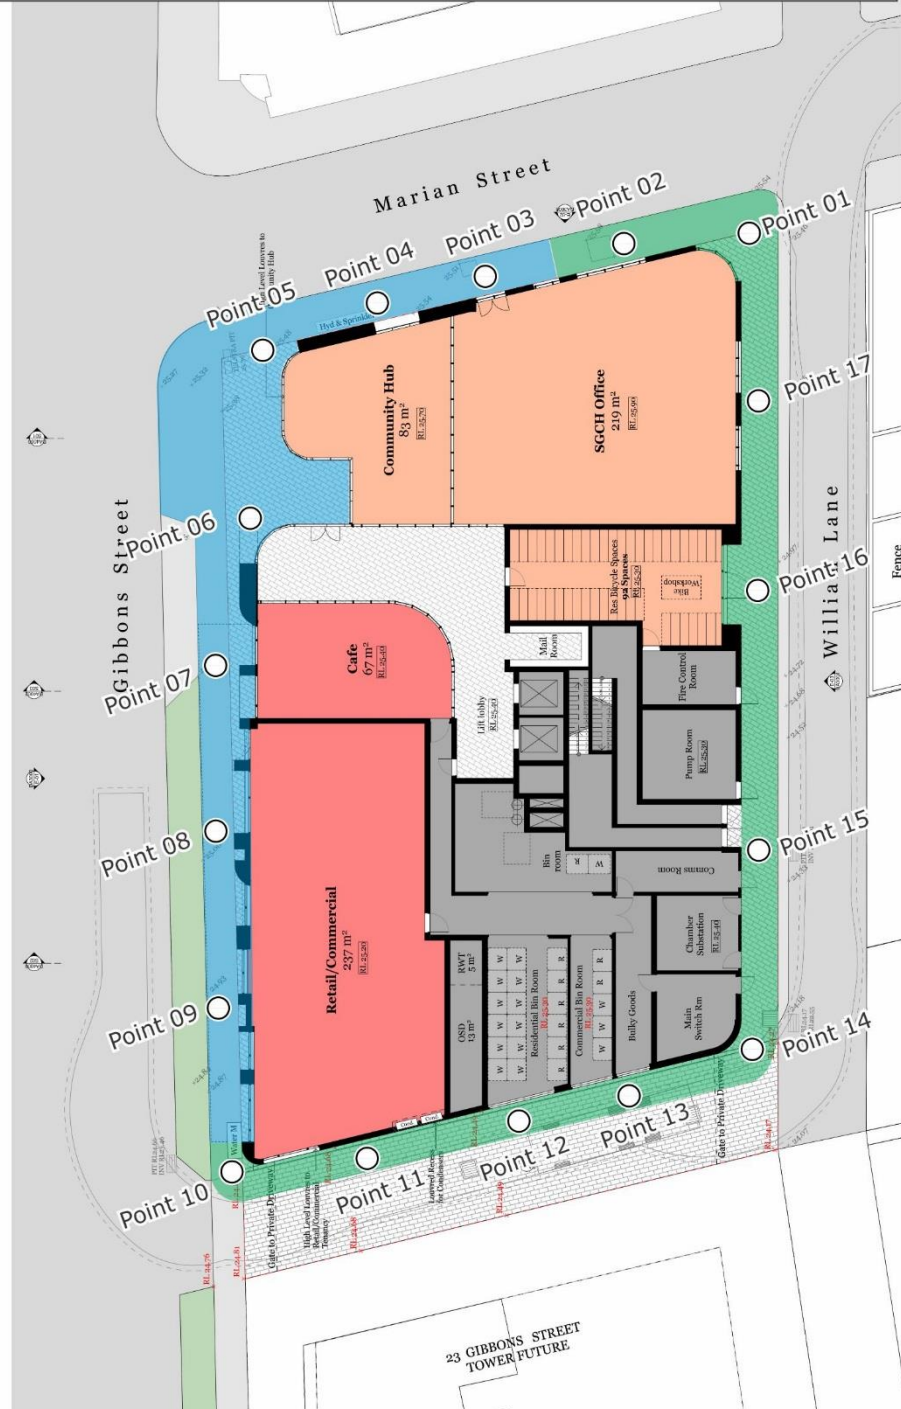

**Figure 5a: Study Point Locations and Target Wind Speed Criteria - Ground Floor**

### Target Criteria

- City of Sydney DCP in accordance with Draft Sydney DCP 2012 - Central Sydney Planning Review Amendment:
- Wind Comfort Standard for Standing criterion of 6m/s (5% exceedance)
  - Safety criterion of 24m/s (gust - 0.1% exceedance) for safety.



**Figure 5b: Study Point Locations and Target Wind Speed Criteria - Level 03 Residential Communal Open Space**

### Target Criteria


- City of Sydney DCP in accordance with Draft Sydney DCP 2012 - Central Sydney Planning Review Amendment:
- Wind Comfort Standard for Standing criterion of 6m/s (5% exceedance)
  - Safety criterion of 24m/s (gust - 0.1% exceedance) for safety.



**Figure 5c: Study Point Locations and Target Wind Speed Criteria - Level 17 Residential Communal Open Space**

**Target Criteria**

- City of Sydney DCP in accordance with Draft Sydney DCP 2012 - Central Sydney Planning Review Amendment:
- Wind Comfort Standard for Walking criterion of 8m/s (5% exceedance)
- Safety criterion of 24m/s (gust - 0.1% exceedance) for safety

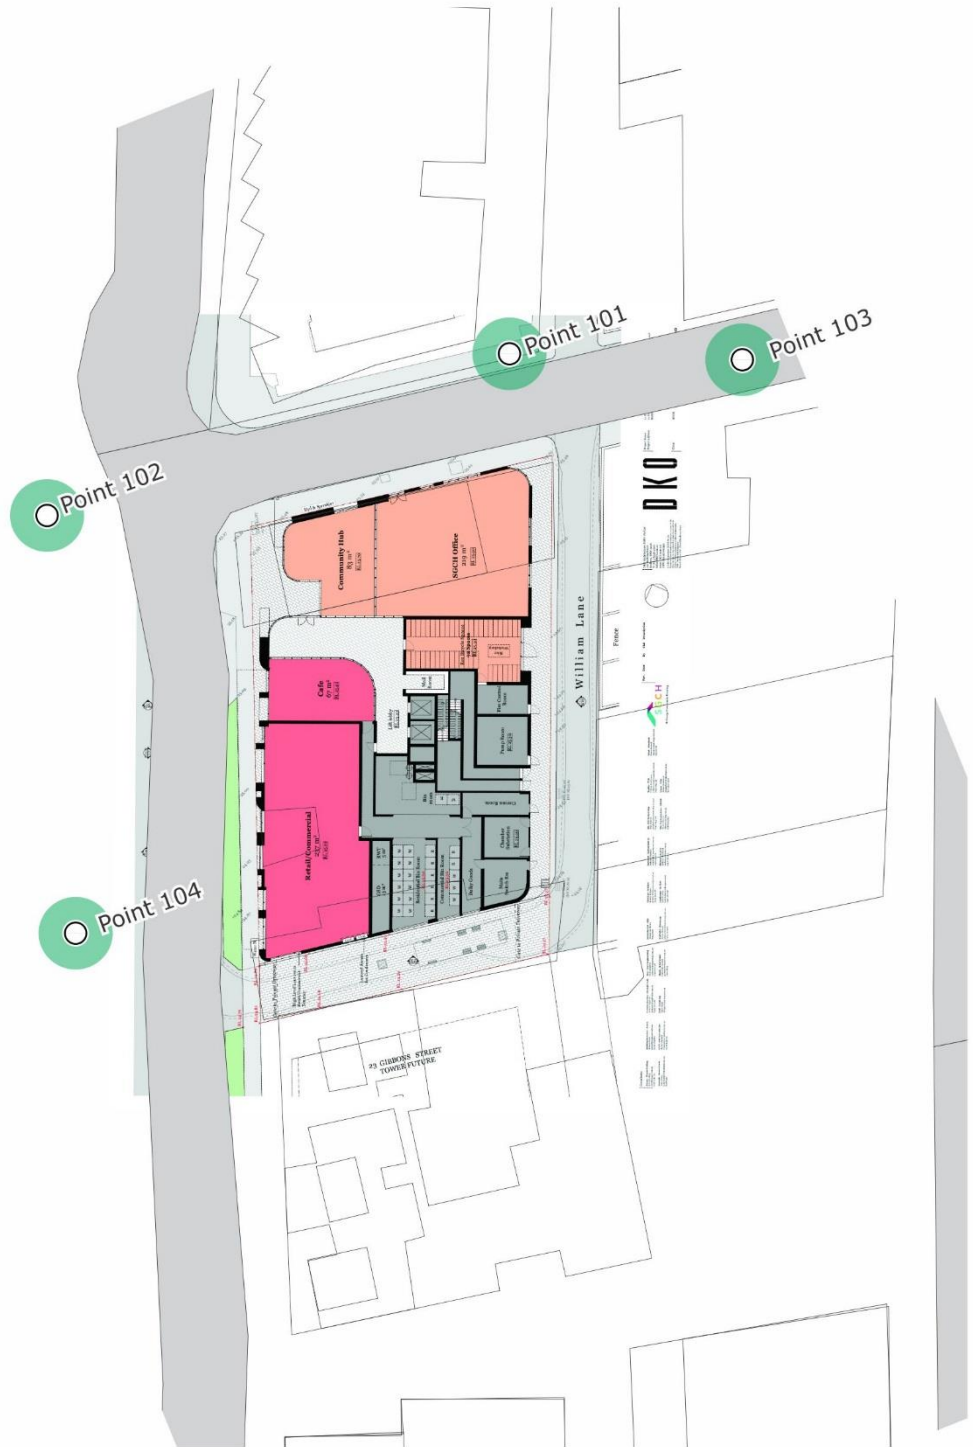

**Figure 5d: Study Point Locations and Target Wind Speed Criteria - Surrounding Points**

## 6 RESULTS AND DISCUSSION

---

The results of the wind tunnel study are presented in the form of directional plots in Appendix C for all study points locations, summarised in Table 5, and shown on marked-up plans in Figures 6. The wind speed criteria that the wind conditions should achieve are also listed in Table 5 for each study point location, as well as in Figures 5.

The results of the study indicate that wind conditions for the majority of trafficable outdoor locations within and around the development will be suitable for their intended uses, or be better than or equivalent to the existing conditions. However, a number of areas will experience strong winds which will exceed the relevant criteria for comfort and/or safety. Suggested in-principle treatments are described as follows:

### 6.1 Ground Level and Surrounding Areas

The Ground Level trafficable areas within and around the site are primarily exposed to southerly and westerly winds. The footpath along Gibbons Street is directly exposed to these winds, while funnelling occurs along Marian Street and the Private Driveway. Corner areas are prone to accelerating winds, some of which exceed safety conditions.

The proposed development has been designed with the following features that improve safety and comfort conditions throughout:

- The awning that runs along Gibbons Street helps to deflect downwash from the façade
- The three-level podium acts to further decelerate downwash from westerly winds
- The rounded corners of the building are effective in reducing corner accelerations

However, based on the wind tunnel analysis, the following in-principle treatment recommendations have been provided to provide suitable conditions, and are described as follows:

- Inclusion of two porous or impermeable gates (minimum height 3 metres, maximum porosity 50%) to shield the Private Driveway, as shown in Figure 7a
- Inclusion of a chamfer on the south western corner of the building, as shown in Figure 7a, the size and extent of which can be determined at a more detailed design stage
- Inclusion of a porous or impermeable wind screen at the south-western corner of the building, as shown in Figure 7a, the size and extent of which can be determined at a more detailed design stage
- Optional: Inclusion of additional evergreen tree planting and/or landscaping to be implemented along the nature strip on the western aspect of the building to further improve conditions, as per Figure 7a

- Optional: Extension of the awning that runs above the entry to the retail/commercial area to further improve conditions, as per Figure 7a

## **6.2 Level 03 Residential Communal Open Space**

The Level 03 Residential Communal Open Space will be affected by westerly wind downwash from the façade and funnelling through the undercover area from westerly winds.

The following in-principle recommendations have been suggested to mitigate these adverse wind effects and provide wind conditions suitable for the intended uses of the Level 03 Residential Communal Open Space.

- Inclusion of a high impermeable wind screen to be placed along the north-eastern corner, as shown in Figure 7b, the extent of which can be determined at a more detailed design stage
- Inclusion of an impermeable screen to be installed along the perimeter of the Residential Communal Open Space on Level 03 as shown in Figure 7b
- Inclusion of an awning or canopy above the Level 03 Residential Communal Open Space in the area under the building indentation, as per figure 7b, the extent of which can be determined at a more detailed design stage
- Retention of the proposed landscaping and timber teepee on the Level 03 Residential Communal Open Space, as per Figure 7b

## **6.3 Level 17 Residential Communal Open Space**

The Level 17 Residential Communal Open Space benefits from shielding by the development. The measured wind conditions are within the established comfort and safety criteria, and the space is therefore suitable for its intended use.

## **6.4 Private Balconies and Terraces**

Wind conditions for the majority of the private balconies of the subject development are expected to be suitable for their intended use. This is due to the shielding provided by the subject and neighbouring buildings, and the effective design of the balconies such as recessing the private balcony areas into the building footprint and the inclusion of full-height blade walls and full-height inter-tenancy screens. The inclusion of the proposed impermeable balustrades along the perimeter of the balconies is expected to further enhance the wind conditions. Hence they are recommended to be retained in the final design of the development.

The south-eastern, north-eastern and north-western corner balconies are expected to be impacted by winds accelerating around the corners. Extended full-height screening is therefore recommended on the southern aspect of the south-eastern corner balconies and terraces, and the northern aspect of the northern-eastern and north-western corner balconies and terraces to mitigate this wind effect.

## 6.5 General Notes

- As a general note, the use of loose glass-tops and light-weight sheets or covers is not suitable on outdoor corner terraces and balconies. Furthermore, lightweight furniture is not recommended unless it is securely attached to the balcony or terrace floor slab.
- For landscaping to be effective as a wind mitigation measure, they should be of a densely foliating, evergreen variety to ensure their effectiveness throughout the year. The planting should be spaced such that the foliage is able to interlock between plants (where possible) to enhance its effectiveness during stronger winds. Tree planting has not been recommended as a treatment where wind conditions exceed the safety limit.
- The recommended in-principle treatments should be further optimised through wind tunnel testing to provide suitable conditions for the outdoor areas tested.




**Figure 6a: Wind Tunnel Results – Ground Floor  
(results shown without treatments applied)**



**Figure 6b: Wind Tunnel Results – Level 03 Residential Communal Open Space (results shown without treatments applied)**



**Figure 6c: Wind Tunnel Results – Level 17 Residential Communal Open Space**

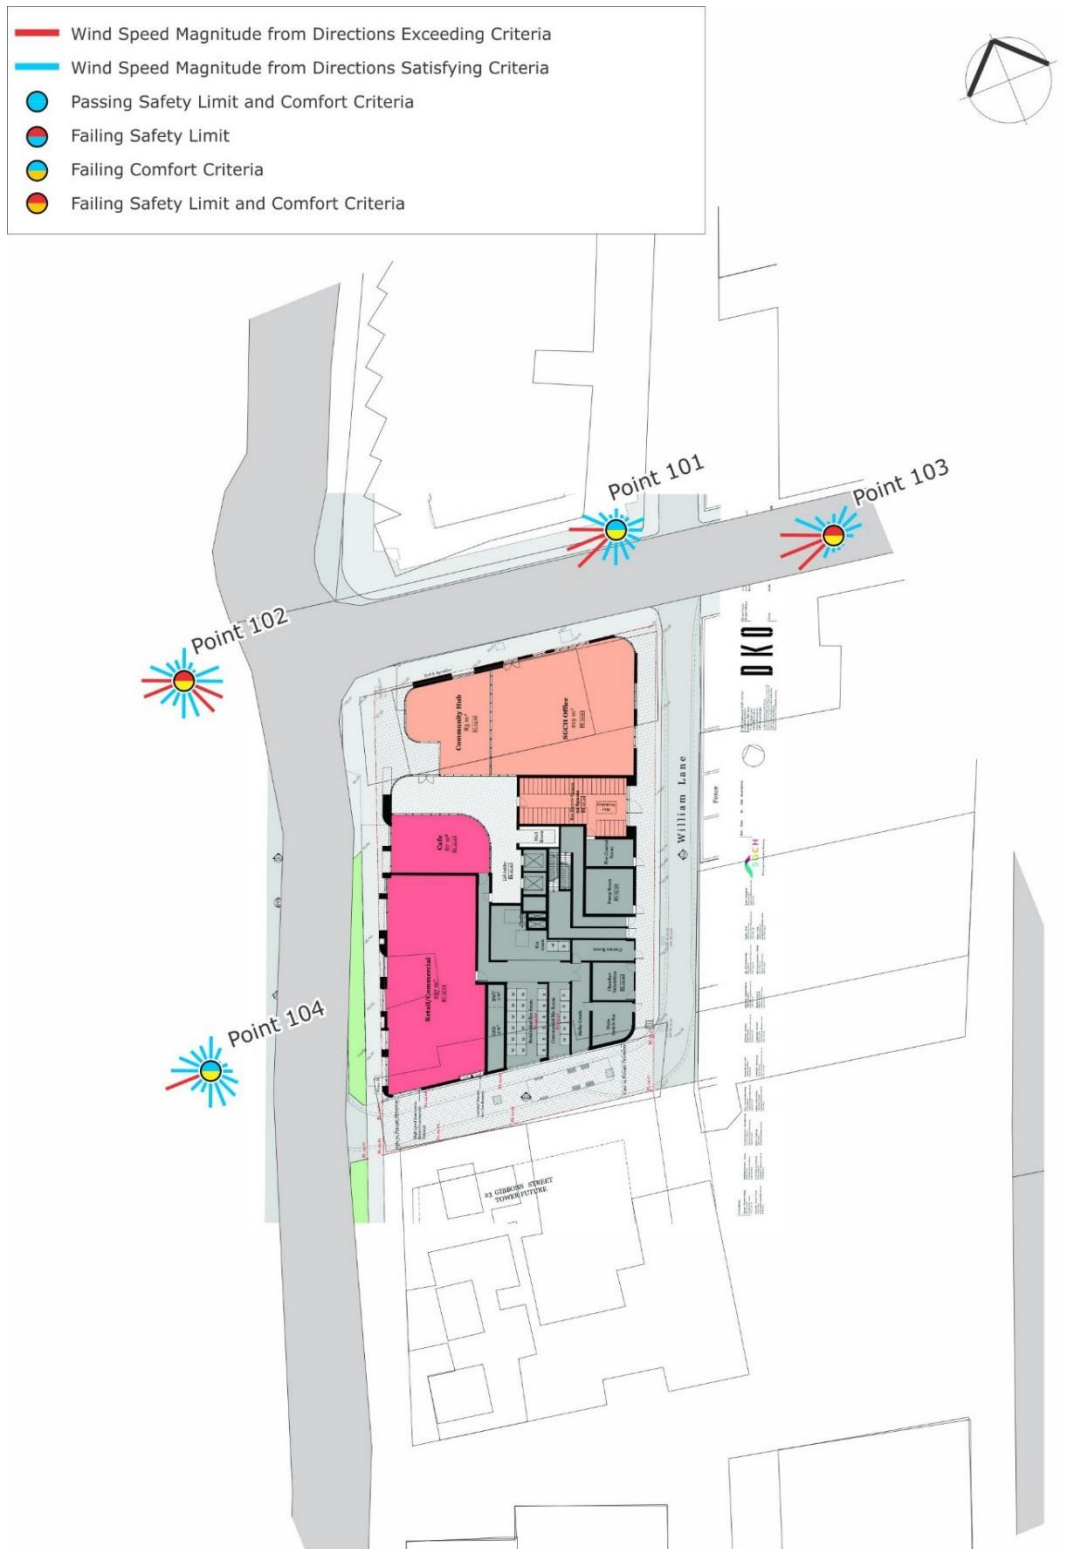

**Figure 6d: Wind Tunnel Results – Surrounding Points**






**Table 5: Wind Tunnel Results Summary**


Study Point	GEM (5% exceedance)			Annual Gust			Final Result	Description of Treatment
	Criterion (m/s)	Results (%)	Grade	Criterion (m/s)	Results (m/s)	Grade		
Point 01	8.0	6%	Fail	24	24	Pass	Fail	Better than or equivalent to Existing Conditions.
Existing		4%	Pass		26	Fail	Fail	
Point 02	8.0	11%	Fail	24	25	Fail	Fail	Better than or equivalent to Existing Conditions.
Existing		8%	Fail		26	Fail	Fail	
Point 03	6.0	21%	Fail	24	23	Pass	Fail	Better than or equivalent to Existing Conditions.
Existing		24%	Fail		34	Fail	Fail	
Point 04	6.0	15%	Fail	24	17	Pass	Fail	Better than or equivalent to Existing Conditions.
Existing		12%	Fail		21	Pass	Fail	
Point 05	6.0	24%	Fail	24	24	Pass	Fail	Better than or equivalent to Existing Conditions.
Existing		26%	Fail		26	Fail	Fail	
Point 06	6.0	10%	Fail	24	23	Pass	Fail	Better than or equivalent to Existing Conditions.
Existing		29%	Fail		37	Fail	Fail	
Point 07	6.0	14%	Fail	24	23	Pass	Fail	Better than or equivalent to Existing Conditions.
Existing		24%	Fail		30	Fail	Fail	
Point 08	6.0	15%	Fail	24	21	Pass	Fail	Better than or equivalent to Existing Conditions.
Existing		11%	Fail		19	Pass	Fail	
Point 09	6.0	14%	Fail	24	21	Pass	Fail	Better than or equivalent to Existing Conditions.
Existing		9%	Fail		21	Pass	Fail	
Point 10	8.0	31%	Fail	24	27	Fail	Fail	Inclusion of chamfer and screen at south-western corner, 3m high porous gates as per Figure 7a
Existing		1%	Pass		20	Pass	Pass	
Point 11	8.0	21%	Fail	24	33	Fail	Fail	Inclusion of chamfer and screen at south-western corner, 3m high porous gates as per Figure 7a
Existing		4%	Pass		22	Pass	Pass	
Point 12	8.0	13%	Fail	24	32	Fail	Fail	Inclusion of chamfer and screen at south-western corner, 3m high porous gates as per Figure 7a
Existing		1%	Pass		22	Pass	Pass	
Point 13	8.0	13%	Fail	24	32	Fail	Fail	Inclusion of chamfer and screen at south-western corner, 3m high porous gates as per Figure 7a
Existing		0%	Pass		7	Pass	Pass	
Point 14	8.0	11%	Fail	24	24	Pass	Fail	Inclusion of 3m high porous gates as per Figure 7a
Existing		5%	Pass		23	Pass	Pass	
Point 15	8.0	5%	Pass	24	21	Pass	Pass	-
Existing		9%	Fail		31	Fail	Fail	
Point 16	8.0	5%	Pass	24	23	Pass	Pass	-
Existing		0%	Pass		15	Pass	Pass	
Point 17	8.0	3%	Pass	24	21	Pass	Pass	-
Existing		3%	Pass		27	Fail	Fail	

Study Point	GEM (5% exceedance)			Annual Gust			Final Result	Description of Treatment
	Criterion (m/s)	Results (%)	Grade	Criterion (m/s)	Results (m/s)	Grade		
Point 18	6.0	17%	Fail	24	27	Fail	Fail	Inclusion of high screen, perimeter screening, landscaping and awning as per Figure 7b
Point 19	6.0	11%	Fail	24	22	Pass	Fail	Inclusion of high screen, perimeter screening, landscaping and awning as per Figure 7b
Point 20	6.0	12%	Fail	24	23	Pass	Fail	Inclusion of high screen, perimeter screening, landscaping and awning as per Figure 7b
Point 21	6.0	13%	Fail	24	27	Fail	Fail	Inclusion of high screen, perimeter screening, landscaping and awning as per Figure 7b
Point 22	6.0	6%	Fail	24	17	Pass	Fail	Inclusion of high screen, perimeter screening, landscaping and awning as per Figure 7b
Point 23	6.0	5%	Pass	24	19	Pass	Pass	-
Point 24	6.0	6%	Fail	24	19	Pass	Fail	Inclusion of high screen, perimeter screening, landscaping and awning as per Figure 7b
Point 25	6.0	1%	Pass	24	14	Pass	Pass	-
Point 26	6.0	1%	Pass	24	13	Pass	Pass	-
Point 27	6.0	0%	Pass	24	12	Pass	Pass	-
Point 101	8.0	11%	Fail	24	24	Pass	Fail	Better than or equivalent to Existing Conditions.
Existing		6%	Fail		26	Fail	Fail	
Point 102	8.0	10%	Fail	24	26	Fail	Fail	Better than or equivalent to Existing Conditions. Existing vegetation expected to mitigate winds
Existing		5%	Pass		26	Fail	Fail	
Point 103	8.0	12%	Fail	24	25	Fail	Fail	Inclusion of high impermeable screen on Level 03 as per Figure 7b
Existing		3%	Pass		21	Pass	Pass	
Point 104	8.0	6%	Fail	24	24	Pass	Fail	Better than or equivalent to Existing Conditions. Existing vegetation expected to mitigate winds
Existing		3%	Pass		22	Pass	Pass	

Note that, for any study points listed in Table 5 with two rows of results data, the second row is for the existing site conditions. The test results shown in Table 5 are without any treatments applied. If treatment is required, the treatment is described in Table 5.

### Treatments Legend

-  Minimum 3m high porous or impermeable gate (max 50% porosity)
-  Porous or impermeable wind screen (max 50% porosity)
-  Chamfered corner within indicated area
-  Optional: extended awning at Level 1 slab
-  Optional: additional densely foliating evergreen landscaping

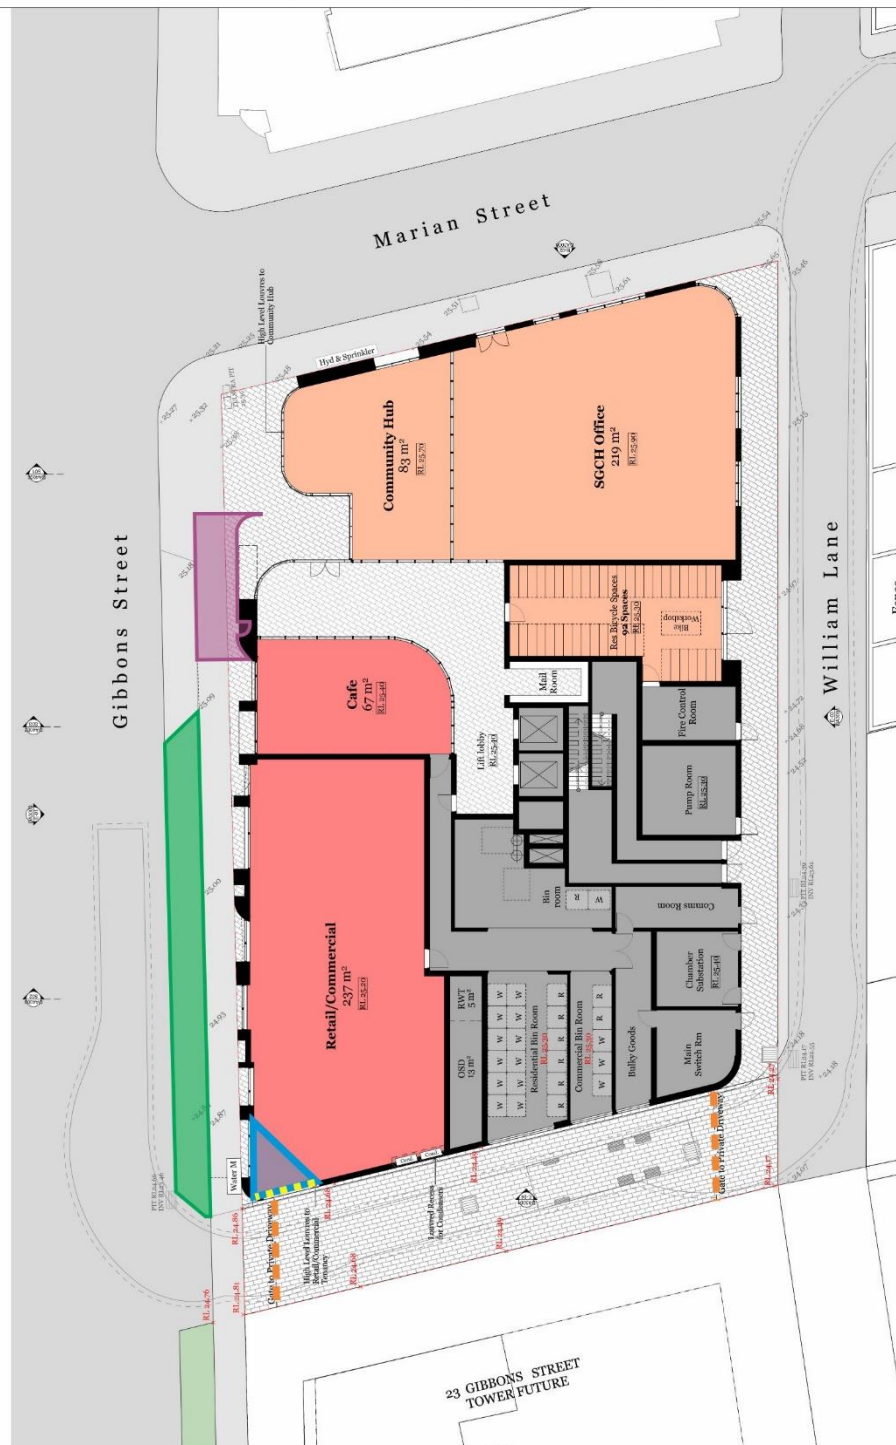

**Figure 7a: Suggested Treatments – Ground Level Plan**

**Treatments Legend**

- High wind screen
- Impermeable perimeter screen
- Horizontal canopy/awning within indicated area to close off gap
- Retention of proposed tepee
- Retention of proposed densely foliating evergreen tree planting with undergrowth
- Retention of proposed densely foliating evergreen landscaping



**Figure 7b: Suggested Treatments – Level 03 Residential Communal Open Space**

## 7 REFERENCES

---

American Society of Civil Engineers (ASCE), 2003, "Outdoor Human Comfort and its Assessment – State of the Art".

American Society of Civil Engineers (ASCE), ASCE-7-10, 2010, "Minimum Design Loads for Buildings and Other Structures".

Australasian Wind Engineering Society (AWES), QAM-1, 2017, "Quality Assurance Manual".

Australasian Wind Engineering Society (AWES), 2014, "Guidelines for Pedestrian Wind Effects Criteria".

Council on Tall Buildings and Urban Habitat (CTBUH), 2013, "Wind tunnel testing of high-rise buildings", CTBUH Technical Guides.

Davenport, A.G., 1972, "An approach to human comfort criteria for environmental conditions". Colloquium on Building Climatology, Stockholm.

Deaves, D.M. and Harris, R.I., 1978, "A mathematical model of the structure of strong winds." Construction Industry and Research Association (U.K), Report 76.

Engineering Science Data Unit, 1982, London, ESDU82026, "Strong Winds in the Atmospheric Boundary Layer, Part 1: Hourly Mean Wind Speeds", with Amendments A to E (issued in 2002).

Engineering Science Data Unit, 1983, London, ESDU83045, "Strong Winds in the Atmospheric Boundary Layer, Part 2: Discrete Gust Speeds", with Amendments A to C (issued in 2002).

Melbourne, W.H., 1978, "Criteria for Environmental Wind Conditions". *Journal of Wind Engineering and Industrial Aerodynamics*, vol. 3, pp241-249.

Rofail, A.W., and Kwok, K.C.S., 1991, "A Reliability Study of Wind Tunnel Results of Cladding Pressures". Proceedings of the 8th International Conference on Wind Engineering, Canada.

Rofail, A.W., 2007, "Comparison of Wind Environment Criteria against Field Observations". 12th International Conference of Wind Engineering, Cairns, Australia.

Standards Australia and Standards New Zealand, AS/NZS 1170.2, 2011, "SAA Wind Loading Standard, Part 2: Wind Actions".

## APPENDIX A PUBLISHED ENVIRONMENTAL CRITERIA

---

## A.1 Wind Effects on People

The acceptability of wind in an area is dependent upon the use of the area. For example, people walking or window-shopping will tolerate higher wind speeds than those seated at an outdoor restaurant. Quantifying wind comfort has been the subject of much research and many researchers, such as A.G. Davenport, T.V. Lawson, W.H. Melbourne, and A.D. Penwarden, have published criteria for pedestrian comfort for pedestrians in outdoor spaces for various types of activities. This section discusses and compares the various published criteria.

### A.1.1 A.D. Penwarden (1973) Criteria for Mean Wind Speeds

A.D. Penwarden (1973) developed a modified version of the Beaufort scale which describes the effects of various wind intensities on people. Table A.1 presents the modified Beaufort scale. Note that the effects listed in this table refers to wind conditions occurring frequently over the averaging time (a probability of occurrence exceeding 5%). Higher ranges of wind speeds can be tolerated for rarer events.

**Table A.1: Summary of Wind Effects on People (A.D. Penwarden, 1973)**

Type of Winds	Beaufort Number	Hourly Mean Wind Speed (m/s)	Effects
Calm	0	0 - 0.25	
Calm, light air	1	0.25 - 1.55	No noticeable wind
Light breeze	2	1.55 - 3.35	Wind felt on face
Gentle breeze	3	3.35 - 5.45	Hair is disturbed, clothing flaps, newspapers difficult to read
Moderate breeze	4	5.45 - 7.95	Raises dust, dry soil and loose paper, hair disarranged
Fresh breeze	5	7.95 - 10.75	Force of wind felt on body, danger of stumbling
Strong breeze	6	10.75 - 13.85	Umbrellas used with difficulty, hair blown straight, difficult to walk steadily, wind noise on ears unpleasant
Near gale	7	13.85 - 17.15	Inconvenience felt when walking
Gale	8	17.15 - 20.75	Generally impedes progress, difficulty balancing in gusts
Strong gale	9	20.75 - 24.45	People blown over

### A.1.2 A.G. Davenport (1972) Criteria for Mean Wind Speeds

A.G. Davenport (1972) also determined a set of criteria in terms of the Beaufort scale and for various return periods. Table A.2 presents a summary of the criteria based on a probability of exceedance of 5%.

**Table A.2: Criteria by A.G. Davenport (1972)**

Classification	Activities	5% exceedance Mean Wind Speed (m/s)
Walking Fast	Acceptable for walking, main public accessways.	7.5 - 10.0
Strolling, Skating	Slow walking, etc.	5.5 - 7.5
Short Exposure Activities	Generally acceptable for walking & short duration stationary activities such as window-shopping, standing or sitting in plazas.	3.5 - 5.5
Long Exposure Activities	Generally acceptable for long duration stationary activities such as in outdoor restaurants & theatres and in parks.	0 - 3.5

### A.1.3 T.V. Lawson (1975) Criteria for Mean Wind Speeds

In 1973, T.V. Lawson, while referring to the Beaufort wind speeds of A.D. Penwarden (1973) (as listed in Table A.1), quoted that a Beaufort 4 wind speed would be acceptable if it is not exceeded for more than 4% of the time, and that a Beaufort 6 wind speed would be unacceptable if it is exceeded more than 2% of the time. Later, in 1975, T.V. Lawson presented a set of criteria very similar to those presented in A.G. Davenport (1972) (as listed in Table A.2). These criteria are presented in Table A.3 and Table A.4 for safety and comfort respectively.

**Table A.3: Safety Criteria by T.V. Lawson (1975)**

Classification	Activities	Annual Mean Wind Speed (m/s)
Safety (all weather areas)	Accessible by the general public.	0 - 15
Safety (fair weather areas)	Private areas, balconies/terraces, etc.	0 - 20

**Table A.4: Comfort Criteria by T.V. Lawson (1975)**

Classification	Activities	5% exceedance Mean Wind Speed (m/s)
Business Walking	Objective Walking from A to B.	8 - 10
Pedestrian Walking	Slow walking, etc.	6 - 8
Short Exposure Activities	Pedestrian standing or sitting for short times.	4 - 6
Long Exposure Activities	Pedestrian sitting for a long duration.	0 - 4

#### A.1.4 W.H. Melbourne (1978) Criteria for Gust Wind Speeds


W.H. Melbourne (1978) introduced a set of criteria for the assessment of environmental wind conditions that were developed for a temperature range of 10oC to 30oC and for people suitably dressed for outdoor conditions. These criteria are presented in Table A.5, and are based on maximum gust wind speeds with a probability of exceedance of once per year.

**Table A.5: Criteria by W.H. Melbourne (1978)**

<b>Classification</b>	<b>Human Activities</b>	<b>Annual Gust Wind Speed (m/s)</b>
Limit for Safety	Completely unacceptable: people likely to get blown over.	23
Marginal	Unacceptable as main public accessways.	16 - 23
Comfortable Walking	Acceptable for walking, main public accessways	13 - 16
Short Exposure Activities	Generally acceptable for walking & short duration stationary activities such as window-shopping, standing or sitting in plazas.	10 - 13
Long Exposure Activities	Generally acceptable for long duration stationary activities such as in outdoor restaurants & theatres and in parks.	0 - 10

#### A.2 Comparison of the Published Wind Speed Criteria

W.H. Melbourne (1978) presented a comparison of the criteria of various researchers on a probabilistic basis. Figure A.1 presents the results of this comparison, and indicates that the criteria of W.H. Melbourne (1978) are comparatively quite conservative. This conclusion was also observed by A.W. Rofail (2007) when undertaking on-site remedial studies. The results of A.W. Rofail (2007) concluded that the criteria by W.H. Melbourne (1978) generally overstates the wind effects in a typical urban setting due to the assumption of a fixed 15% turbulence intensity for all areas. It was observed in A.W. Rofail (2007) that this value tends to be at the lower end of the range of turbulence intensities, and in an urban setting the range of the minimum turbulence intensities is typically in the range of 20% to 60%.

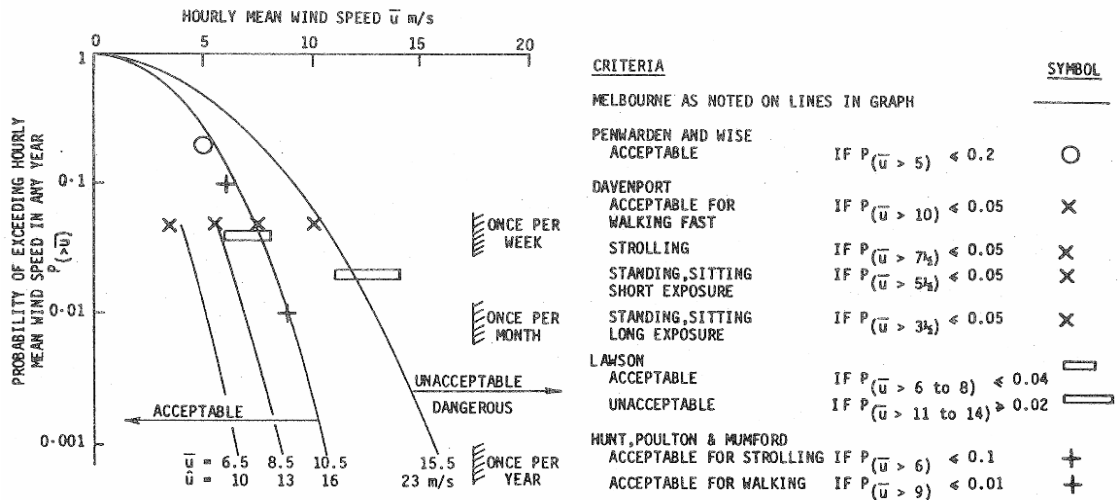

**Figure A.1: Comparison of Various Mean and Gust Wind Environment Criteria, assuming 15% turbulence and a Gust Factor of 1.5 (W.H. Melbourne, 1978)**

### A.3 References relating to Pedestrian Comfort Criteria

Davenport, A.G., 1972, "An approach to human comfort criteria for environmental conditions". Colloquium on Building Climatology, Stockholm.

Davenport, A.G., 1977, "The prediction of risk under wind loading", 2nd International Conference on Structural Safety and Reliability, Munich, Germany, pp511-538.

Lawson, T.V., 1973, "The wind environment of buildings: a logical approach to the establishment of criteria". Bristol University, Department of Aeronautical Engineering.

Lawson, T.V., 1975, "The determination of the wind environment of a building complex before construction". Bristol University, Department of Aeronautical Engineering.

Melbourne, W.H., 1978, "Criteria for Environmental Wind Conditions". Journal of Wind Engineering and Industrial Aerodynamics, vol. 3, pp241-249.

Penwarden, A.D. (1973). "Acceptable Wind Speeds in Towns", Building Science, vol. 8: pp259-267

Penwarden, A.D., Wise A.F.E., 1975, "Wind Environment Around Buildings". Building Research Establishment Report, London.

Rofail, A.W., 2007, "Comparison of Wind Environment Criteria against Field Observations". 12th International Conference of Wind Engineering, Cairns, Australia.

## APPENDIX B DATA ACQUISITION

---

The wind tunnel testing procedures for this study were based on the guidelines set out in the Australasian Wind Engineering Society Quality Assurance Manual (AWES-QAM-1-2017), ASCE 7-10 (Chapter C31), and CTBUH (2013).

The wind speed measurements for the wind tunnel study were acquired as coefficients by Dantec hot-wire anemometers and converted to full-scale wind speeds using details of the regional wind climate obtained from an analysis of directional wind speed recordings from the local meteorological recording station(s).

## **B.1 Measurement of the Velocity Coefficients**

The study model and proximity model were setup within the wind tunnel which was configured to the appropriate boundary layer profile, and the wind velocity measurements were monitored using Dantec hot-wire probe anemometers at selected critical outdoor locations. The anemometers were positioned at each study location at a full-scale height of approximately 1.5m above ground/slab level. The support of the probe was mounted such that the probe wire was vertical as much as possible to ensure that the measured wind speeds are independent of wind direction along the horizontal plane. In addition, care was taken in the alignment of the probe wire and in avoiding wall-heating effects.

Wind speed measurements were made in the wind tunnel for 16 wind directions, at 22.5° increments. The output from the hot-wire probes was obtained using a National Instruments 12-bit data acquisition card. The data was acquired for each wind direction using a sample rate of 1024Hz. The sample length was determined to produce a full-scale sample time that is sufficient for this type of study.

The mean, gust and standard deviation velocity coefficients were measured in the wind tunnel. The gust velocity coefficients were also derived for each wind direction from by the following relation:

$$\hat{C}_V = \bar{C}_V + g \cdot \sigma_{C_V} \quad \text{B.1}$$

Where:

$\hat{C}_V$  is the gust coefficient.

$\bar{C}_V$  is the mean coefficient.

$g$  is the peak factor, taken as 3.0 for a 3s gust and 3.4 for a 0.5s gust.

$\sigma_{C_V}$  is the standard deviation of coefficient measurement.

## B.2 Calculation of the Full-Scale Results

The full-scale results determine if the wind conditions at a study location satisfy the designated criteria of that location. More specifically, the full-scale results need to determine the probability of exceedance of a given wind speed at a study location. To determine the probability of exceedance, the measured velocity coefficients were combined with a statistical model of the local wind climate that relates wind speed to a probability of exceedance. Details of the wind climate model are outlined in Section 4 of the main report.

The statistical model of the wind climate includes the impact of wind directionality as any local variations in wind speed or frequency with wind direction. This is important as the wind directions that produce the highest wind speed events for a region may not coincide with the most wind exposed direction at the site.

The methodology adopted for the derivation of the full-scale results for the maximum gust and the GEM wind speeds are outlined in the following sub-sections.

### B.2.1 Maximum Gust Wind Speeds

The full-scale maximum gust wind speed at each study point location is derived from the measured coefficient using the following relationship:

$$V_{study} = V_{ref,RH} \left( \frac{k_{200m,tr,T=1hr}}{k_{RH,tr,T=1hr}} \right) C_V \quad \text{B.2}$$

Where:

$V_{study}$  is the full-scale wind speed at the study point location, in m/s.

$V_{ref,RH}$  is the full-scale reference wind speed, measured 3m upstream at the study reference height. This value is determined by combining the directional wind speed data for the region (detailed in Section 4) and the upwind terrain and height multipliers for the site (detailed in Section 3).

$k_{200m,tr,T=1hr}$  is the standard deviation of the wind speed.

$k_{RH,tr,T=1hr}$  is the hourly mean terrain and height multiplier at the study reference height (see Section 3).

$C_V$  is the velocity coefficient measurement obtained from the hot-wire anemometer, which is derived from the following relationship:

$$C_V = \frac{C_{V,study}}{C_{V,200m}} \quad \text{B.3}$$

Where:

$C_{V,study}$  is the coefficient measurement obtained from the hot-wire anemometer at the study point location.

$C_{V,200m}$  is the coefficient measurement obtained from the hot-wire anemometer at the free-stream reference location at 200m height upwind of the model in the wind tunnel.

The value of  $V_{ref,RH}$  varies with each prevailing wind direction. Wind directions where there is a high probability that a strong wind will occur have a higher directional wind speed than other directions. To determine the directional wind speeds, a probability level must be assigned for each wind direction. These probability levels are set following the approach used in AS/NZS1170.2:2011, which assumes that the major contributions to the combined probability of exceedance of a typical load effect comes from only two 45 degree sectors.

### B.2.2 Maximum Gust-Equivalent Mean Wind Speeds

The contribution to the probability of exceedance of a specified wind speed (ie: the desired wind speed for pedestrian comfort, as per the criteria) was calculated for each wind direction. These contributions are then combined over all wind directions to calculate the total probability of exceedance of the specified wind speed. To calculate the probability of exceedance for a specified wind speed a statistical wind climate model was used to describe the relationship between directional wind speeds and the probability of exceedance. A detailed description of the methodology is given by T.V. Lawson (1980).

The criteria used in this study is referenced to a probability of exceedance of 5% of a specified wind speed.

## B.3 References relating to Data Acquisition

American Society of Civil Engineers (ASCE), ASCE-7-10, 2010, "Minimum Design Loads for Buildings and Other Structures".

Australasian Wind Engineering Society (AWES), QAM-1, 2017, "Quality Assurance Manual".

Council on Tall Buildings and Urban Habitat (CTBUH), 2013, "Wind tunnel testing of high-rise buildings", CTBUH Technical Guides.

Lawson, T.V., 1980, "Wind Effects on Buildings - Volume 1, Design Applications". Applied Science Publishers Ltd, Ripple Road, Barking, Essex, England.


Standards Australia and Standards New Zealand, AS/NZS 1170.2, 2011, "SAA Wind Loading Standard, Part 2: Wind Actions".

## APPENDIX C DIRECTIONAL PLOTS OF WIND TUNNEL RESULTS

---


## Results for Point 01

### Gust Equivalent Mean (m/s)

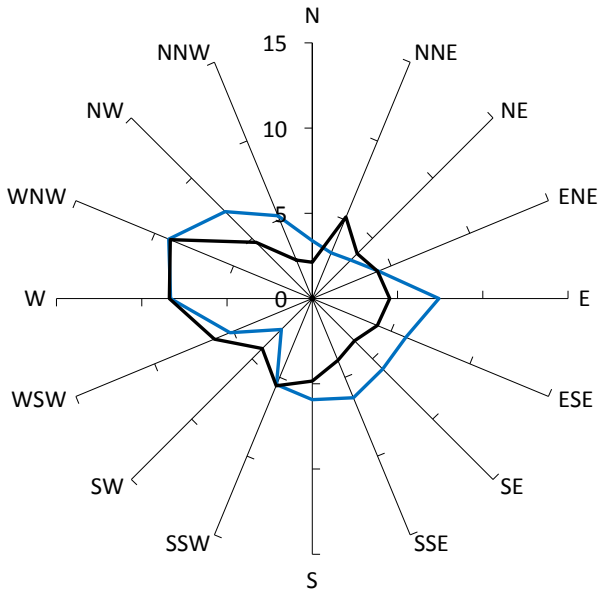

Comfort Criteria: 8m/s with 5% probability of exceedence

### Maximum Gust (m/s)

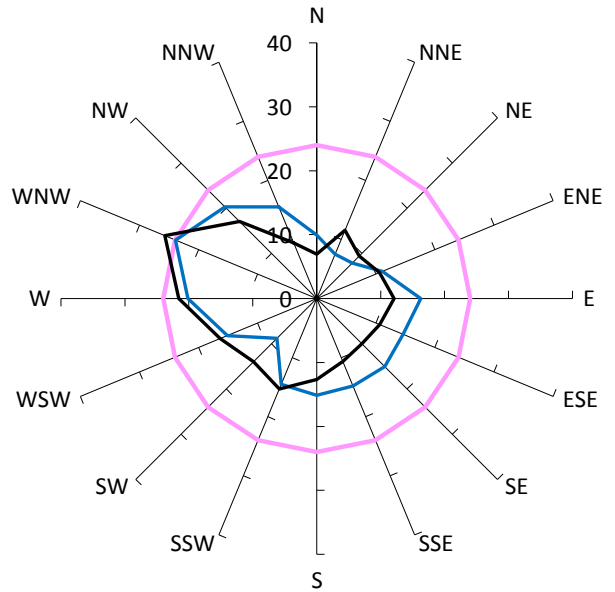

Safety Limit: 24m/s

### Description


GEM Prob of Exceed %

Peak Gust m/s

<span style="color: pink;">—</span> Criterion: Comfortable Walking Activities (8m/s). Safety Limit (24m/s).	5%	24
<span style="color: blue;">—</span> Proposed Case	6%	24
<span style="color: black;">—</span> Existing Case	4%	26
<span style="color: red;">—</span>		
<span style="color: yellow;">—</span>		
<span style="color: lightgreen;">—</span>		
<span style="color: green;">—</span>		
<span style="color: cyan;">—</span>		
<span style="color: purple;">—</span>		


## Results for Point 02

### Gust Equivalent Mean (m/s)

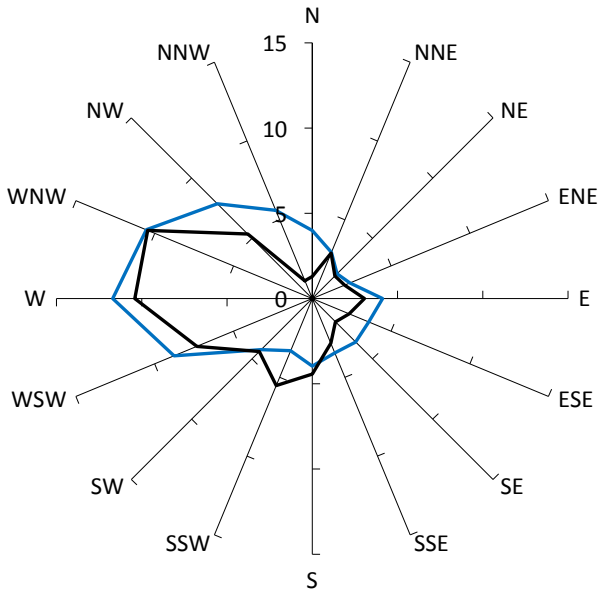

Comfort Criteria: 8m/s with 5% probability of exceedence

### Maximum Gust (m/s)

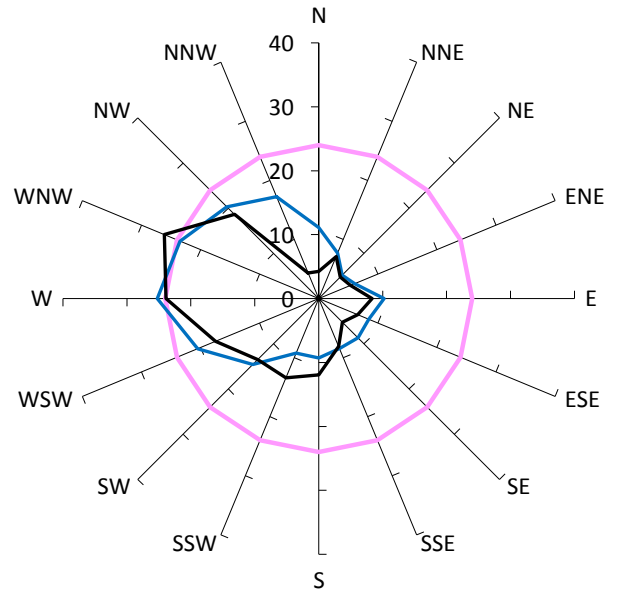

Safety Limit: 24m/s

### Description


GEM Prob of Exceed %

Peak Gust m/s

<span style="color: pink;">—</span> Criterion: Comfortable Walking Activities (8m/s). Safety Limit (24m/s).	5%	24
<span style="color: blue;">—</span> Proposed Case	11%	25
<span style="color: black;">—</span> Existing Case	8%	26
<span style="color: red;">—</span>		
<span style="color: yellow;">—</span>		
<span style="color: lightgreen;">—</span>		
<span style="color: green;">—</span>		
<span style="color: cyan;">—</span>		
<span style="color: purple;">—</span>		


## Results for Point 03

### Gust Equivalent Mean (m/s)

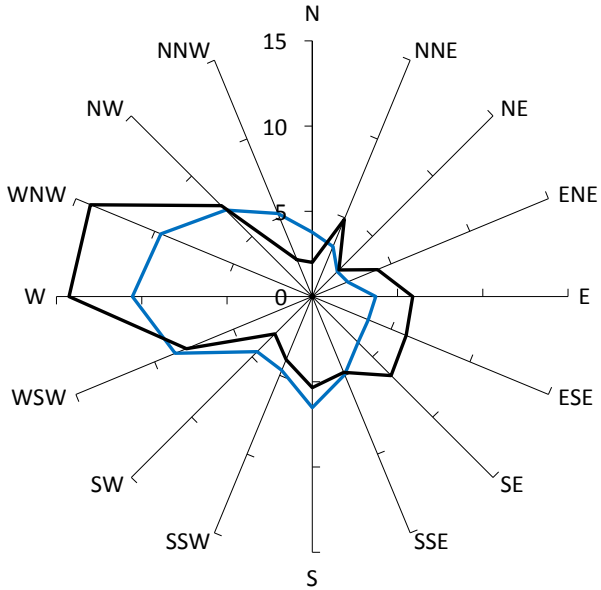

Comfort Criteria: 6m/s with 5% probability of exceedence

### Maximum Gust (m/s)

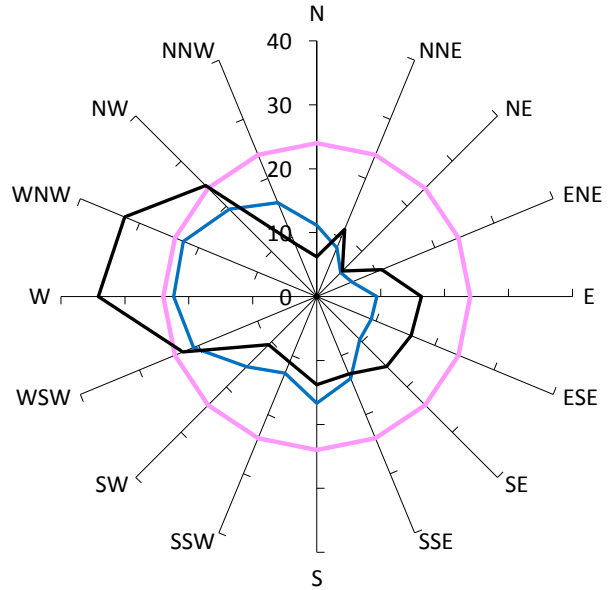

Safety Limit: 24m/s

### Description


GEM Prob of Exceed %

Peak Gust m/s

<span style="color: pink;">—</span> Criterion: Short Exposure Activities (6m/s). Safety Limit (24m/s).	5%	24
<span style="color: blue;">—</span> Proposed Case	21%	23
<span style="color: black;">—</span> Existing Case	24%	34
<span style="color: red;">—</span>		
<span style="color: yellow;">—</span>		
<span style="color: lightgreen;">—</span>		
<span style="color: green;">—</span>		
<span style="color: cyan;">—</span>		
<span style="color: purple;">—</span>		


## Results for Point 04

### Gust Equivalent Mean (m/s)

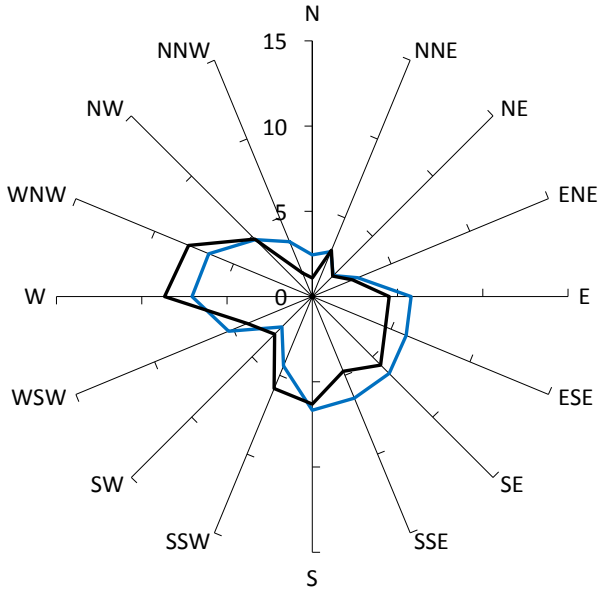

Comfort Criteria: 6m/s with 5% probability of exceedence

### Maximum Gust (m/s)

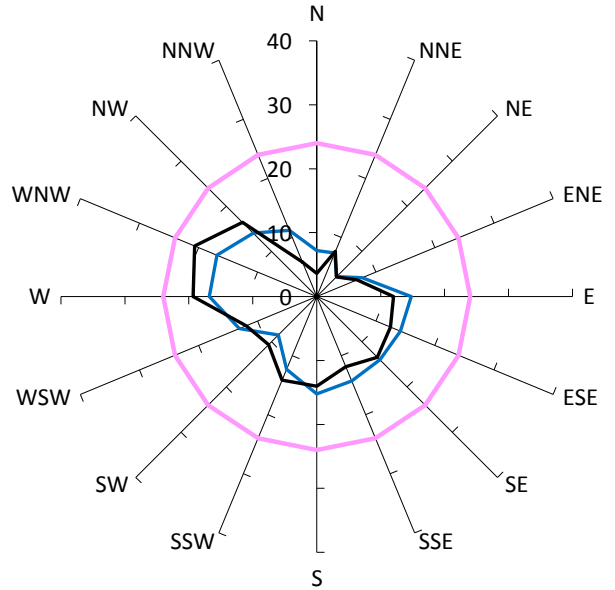

Safety Limit: 24m/s

### Description


GEM Prob of Exceed %

Peak Gust m/s

<span style="color: magenta;">—</span> Criterion: Short Exposure Activities (6m/s). Safety Limit (24m/s).	5%	24
<span style="color: blue;">—</span> Proposed Case	15%	17
<span style="color: black;">—</span> Existing Case	12%	21
<span style="color: red;">—</span>		
<span style="color: yellow;">—</span>		
<span style="color: green;">—</span>		
<span style="color: blue;">—</span>		
<span style="color: purple;">—</span>		


## Results for Point 05

### Gust Equivalent Mean (m/s)

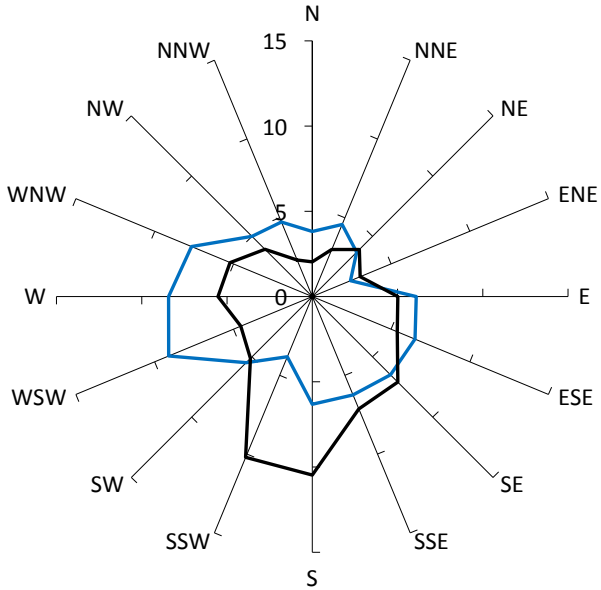

Comfort Criteria: 6m/s with 5% probability of exceedence

### Maximum Gust (m/s)

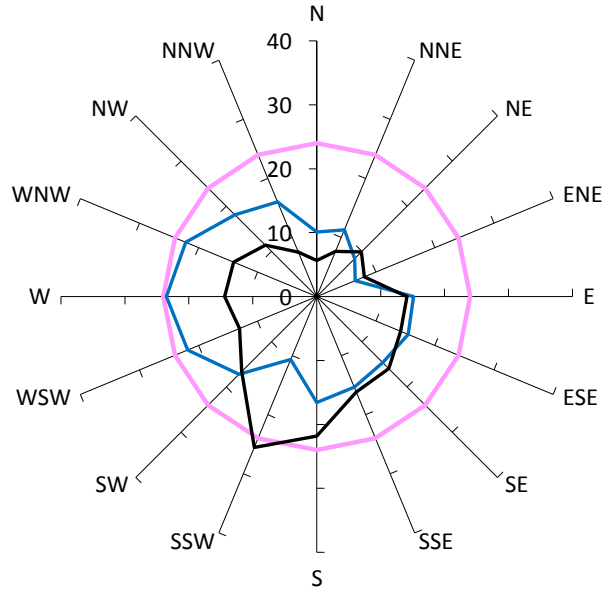

Safety Limit: 24m/s

### Description


GEM Prob of Exceed %

Peak Gust m/s

<span style="color: magenta;">—</span> Criterion: Short Exposure Activities (6m/s). Safety Limit (24m/s).	5%	24
<span style="color: blue;">—</span> Proposed Case	24%	24
<span style="color: black;">—</span> Existing Case	26%	26
<span style="color: red;">—</span>		
<span style="color: yellow;">—</span>		
<span style="color: green;">—</span>		
<span style="color: blue;">—</span>		
<span style="color: purple;">—</span>		


## Results for Point 06

### Gust Equivalent Mean (m/s)

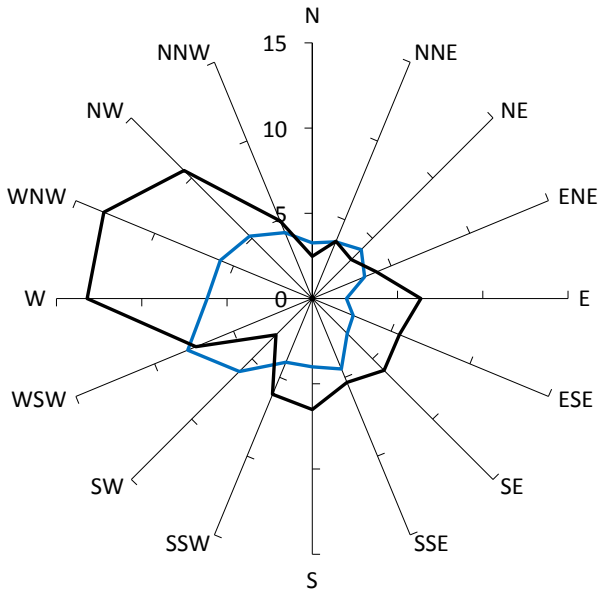

Comfort Criteria: 6m/s with 5% probability of exceedence

### Maximum Gust (m/s)

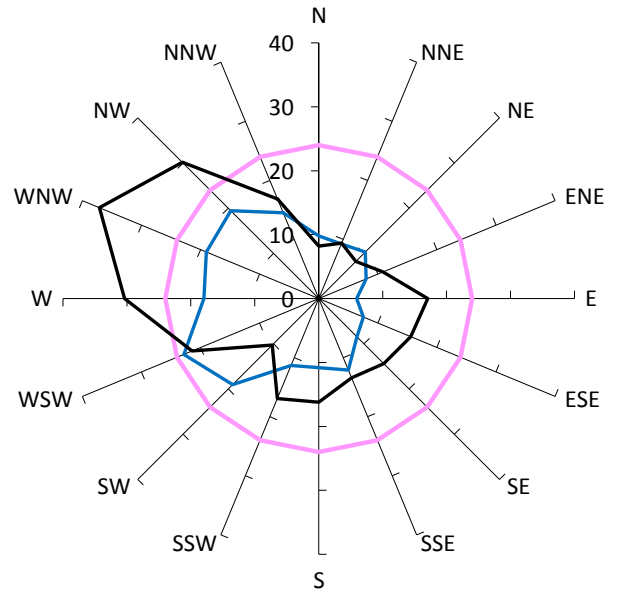

Safety Limit: 24m/s

### Description


GEM Prob of Exceed %

Peak Gust m/s

<span style="color: pink;">—</span> Criterion: Short Exposure Activities (6m/s). Safety Limit (24m/s).	5%	24
<span style="color: blue;">—</span> Proposed Case	10%	23
<span style="color: black;">—</span> Existing Case	29%	37
<span style="color: red;">—</span>		
<span style="color: yellow;">—</span>		
<span style="color: lightgreen;">—</span>		
<span style="color: green;">—</span>		
<span style="color: cyan;">—</span>		
<span style="color: purple;">—</span>		


## Results for Point 07

### Gust Equivalent Mean (m/s)

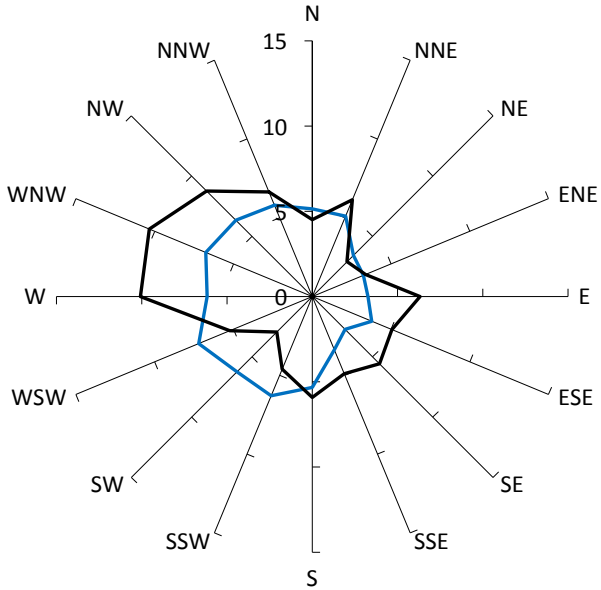

Comfort Criteria: 6m/s with 5% probability of exceedence

### Maximum Gust (m/s)

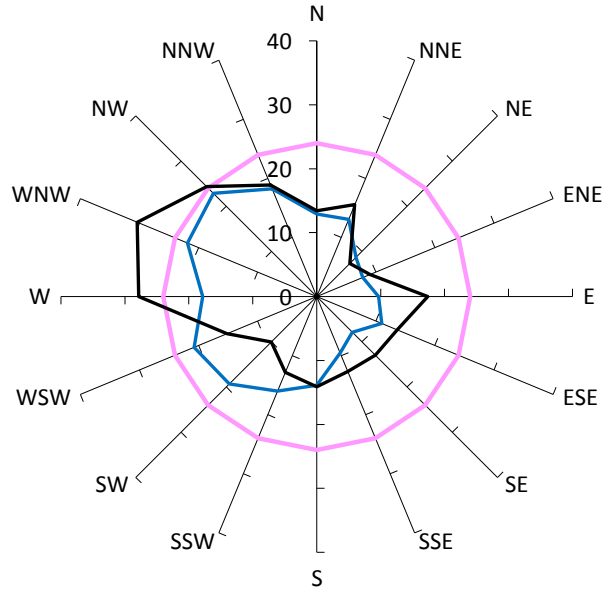

Safety Limit: 24m/s

### Description


GEM Prob of Exceed %

Peak Gust m/s

<span style="color: pink;">—</span> Criterion: Short Exposure Activities (6m/s). Safety Limit (24m/s).	5%	24
<span style="color: blue;">—</span> Proposed Case	14%	23
<span style="color: black;">—</span> Existing Case	24%	30
<span style="color: red;">—</span>		
<span style="color: yellow;">—</span>		
<span style="color: lightgreen;">—</span>		
<span style="color: green;">—</span>		
<span style="color: cyan;">—</span>		
<span style="color: purple;">—</span>		


## Results for Point 08

### Gust Equivalent Mean (m/s)

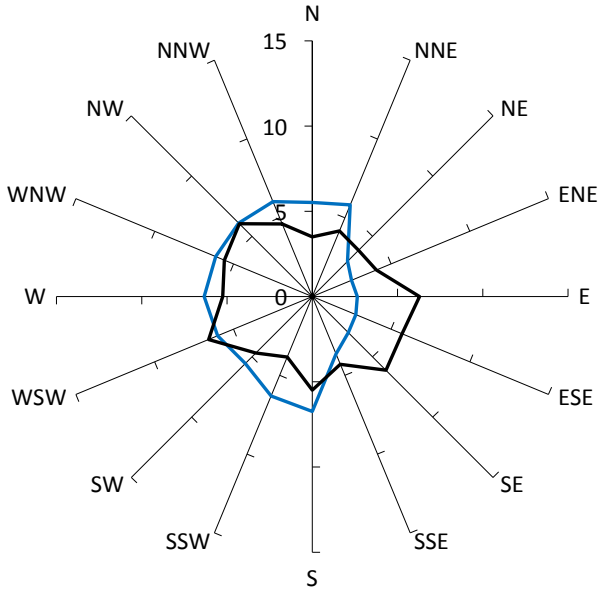

Comfort Criteria: 6m/s with 5% probability of exceedence

### Maximum Gust (m/s)

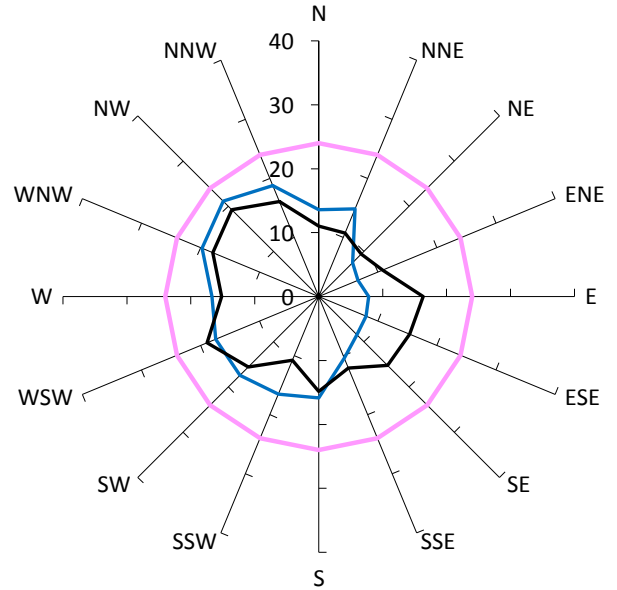

Safety Limit: 24m/s

### Description


GEM Prob of Exceed %

Peak Gust m/s

<span style="color: magenta;">—</span> Criterion: Short Exposure Activities (6m/s). Safety Limit (24m/s).	5%	24
<span style="color: blue;">—</span> Proposed Case	15%	21
<span style="color: black;">—</span> Existing Case	11%	19
<span style="color: red;">—</span>		
<span style="color: yellow;">—</span>		
<span style="color: green;">—</span>		
<span style="color: green;">—</span>		
<span style="color: blue;">—</span>		
<span style="color: purple;">—</span>		


## Results for Point 09

### Gust Equivalent Mean (m/s)

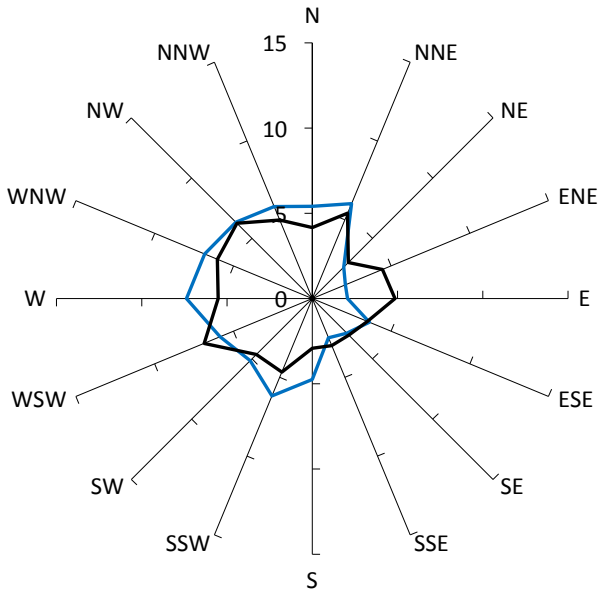

Comfort Criteria: 6m/s with 5% probability of exceedence

### Maximum Gust (m/s)

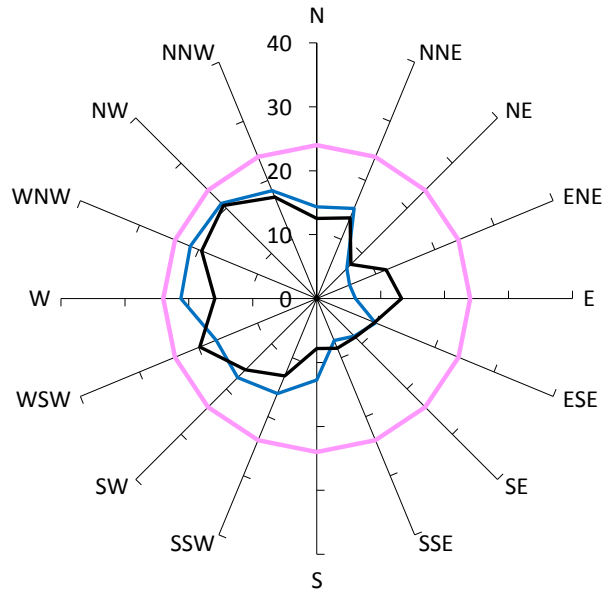

Safety Limit: 24m/s

### Description


GEM Prob of Exceed %

Peak Gust m/s

<span style="color: magenta;">—</span> Criterion: Short Exposure Activities (6m/s). Safety Limit (24m/s).	5%	24
<span style="color: blue;">—</span> Proposed Case	14%	21
<span style="color: black;">—</span> Existing Case	9%	21
<span style="color: red;">—</span>		
<span style="color: yellow;">—</span>		
<span style="color: lightgreen;">—</span>		
<span style="color: green;">—</span>		
<span style="color: cyan;">—</span>		
<span style="color: purple;">—</span>		


## Results for Point 10

**Gust Equivalent Mean (m/s)**

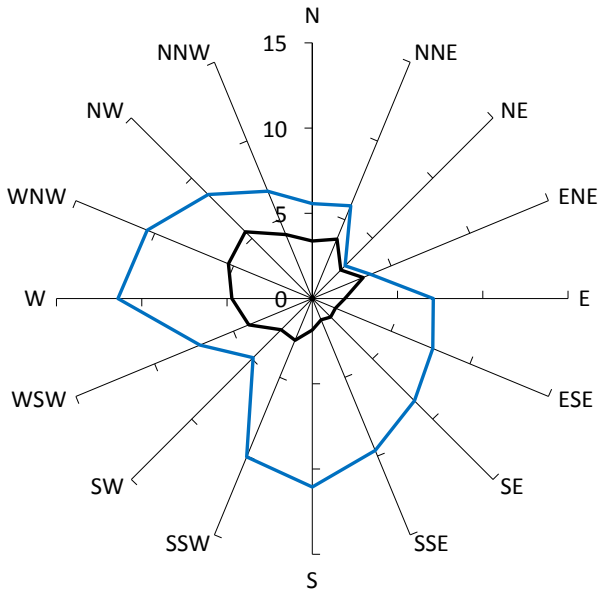

Comfort Criteria: 8m/s with 5% probability of exceedence

**Maximum Gust (m/s)**

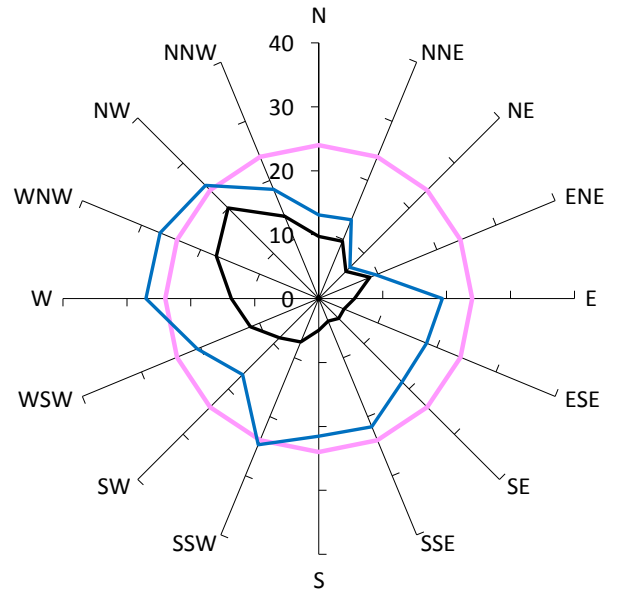

Safety Limit: 24m/s

**Description**


**GEM Prob of Exceed %**

**Peak Gust m/s**

—	Criterion: Comfortable Walking Activities (8m/s). Safety Limit (24m/s).	5%	24
—	Proposed Case	31%	27
—	Existing Case	1%	20
—			
—			
—			
—			
—			
—			


## Results for Point 11

### Gust Equivalent Mean (m/s)

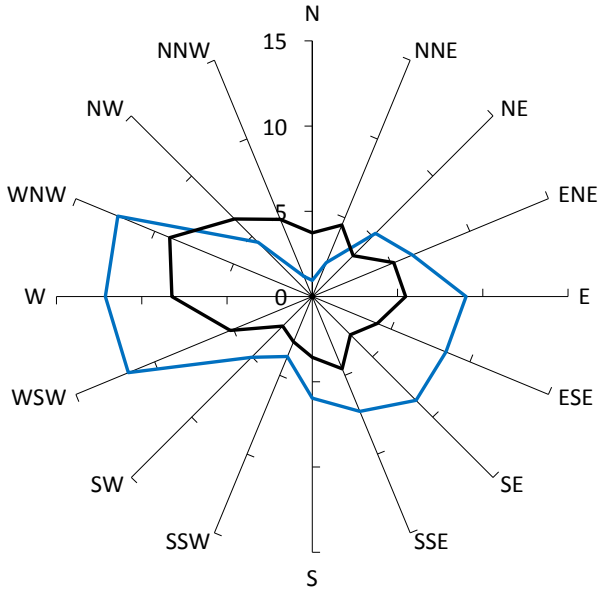

Comfort Criteria: 8m/s with 5% probability of exceedence

### Maximum Gust (m/s)

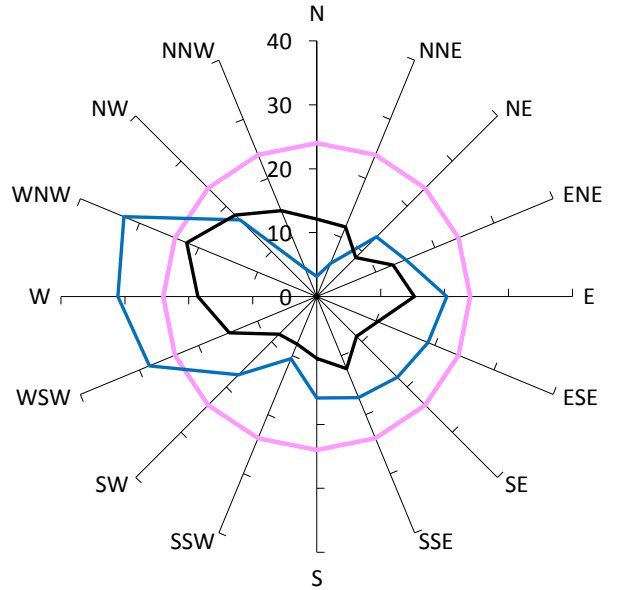

Safety Limit: 24m/s

### Description


GEM Prob of Exceed %

Peak Gust m/s

<span style="color: pink;">—</span> Criterion: Comfortable Walking Activities (8m/s). Safety Limit (24m/s).	5%	24
<span style="color: blue;">—</span> Proposed Case	21%	33
<span style="color: black;">—</span> Existing Case	4%	22
<span style="color: red;">—</span>		
<span style="color: yellow;">—</span>		
<span style="color: lightgreen;">—</span>		
<span style="color: green;">—</span>		
<span style="color: cyan;">—</span>		
<span style="color: purple;">—</span>		


## Results for Point 12

### Gust Equivalent Mean (m/s)

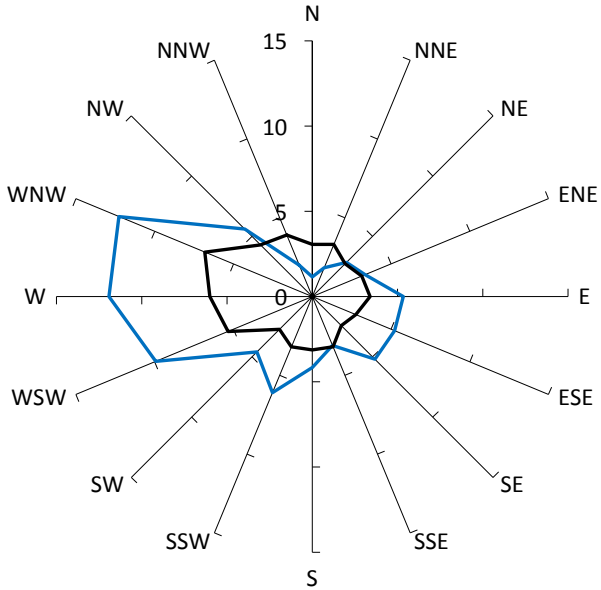

Comfort Criteria: 8m/s with 5% probability of exceedence

### Maximum Gust (m/s)

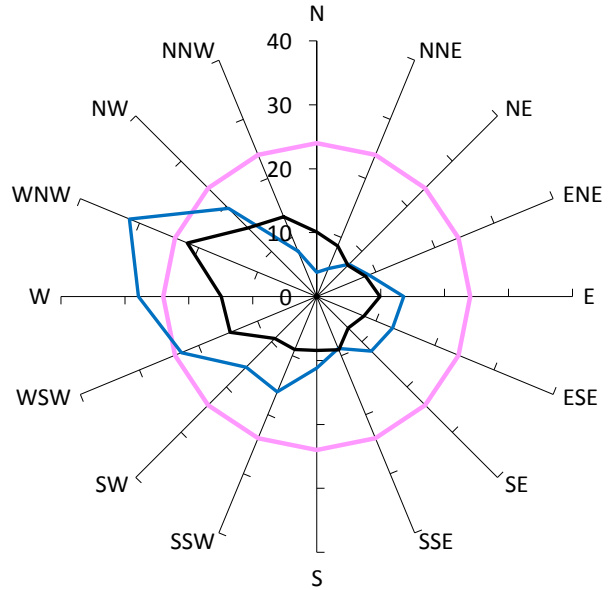

Safety Limit: 24m/s

### Description


GEM Prob of Exceed %

Peak Gust m/s

—	Criterion: Comfortable Walking Activities (8m/s). Safety Limit (24m/s).	5%	24
—	Proposed Case	13%	32
—	Existing Case	1%	22
—			
—			
—			
—			
—			
—			


## Results for Point 13

### Gust Equivalent Mean (m/s)

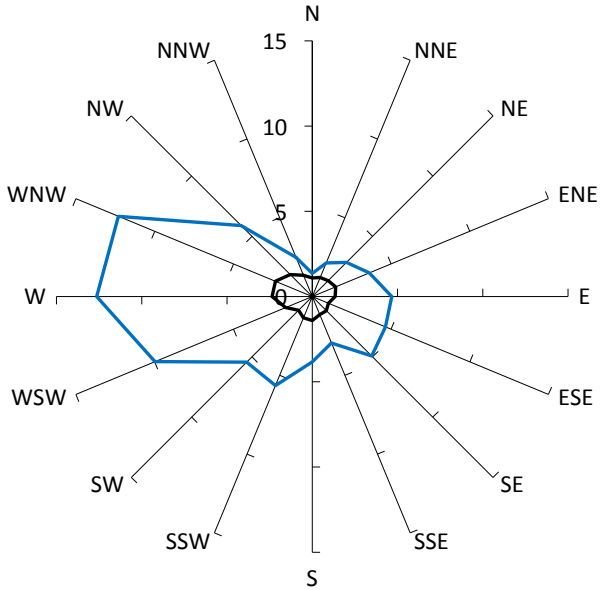

Comfort Criteria: 8m/s with 5% probability of exceedence

### Maximum Gust (m/s)

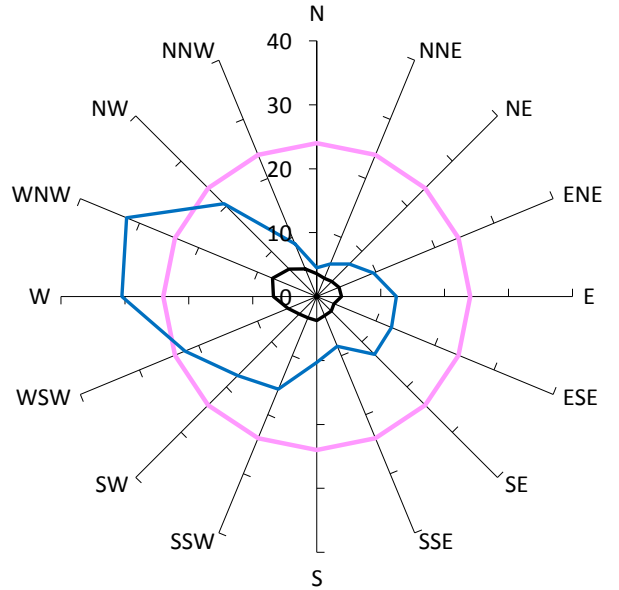

Safety Limit: 24m/s

### Description


GEM Prob of Exceed %

Peak Gust m/s

<span style="color: magenta;">—</span> Criterion: Comfortable Walking Activities (8m/s). Safety Limit (24m/s).	5%	24
<span style="color: blue;">—</span> Proposed Case	13%	32
<span style="color: black;">—</span> Existing Case	0%	7
<span style="color: red;">—</span>		
<span style="color: yellow;">—</span>		
<span style="color: lightgreen;">—</span>		
<span style="color: green;">—</span>		
<span style="color: cyan;">—</span>		
<span style="color: purple;">—</span>		


## Results for Point 14

### Gust Equivalent Mean (m/s)

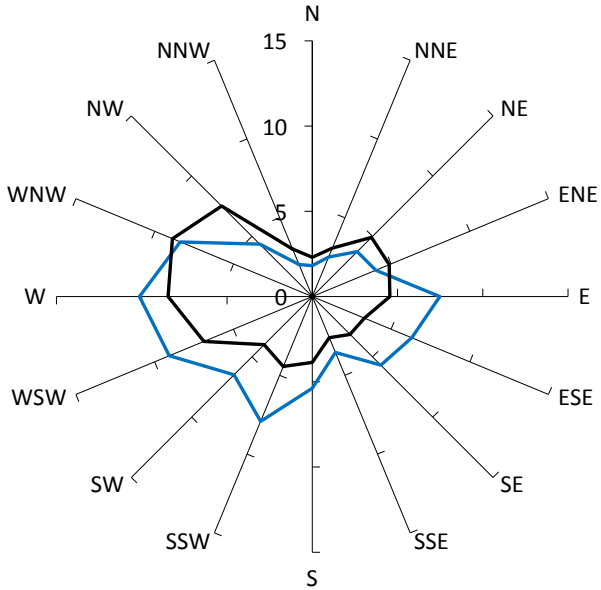

Comfort Criteria: 8m/s with 5% probability of exceedence

### Maximum Gust (m/s)

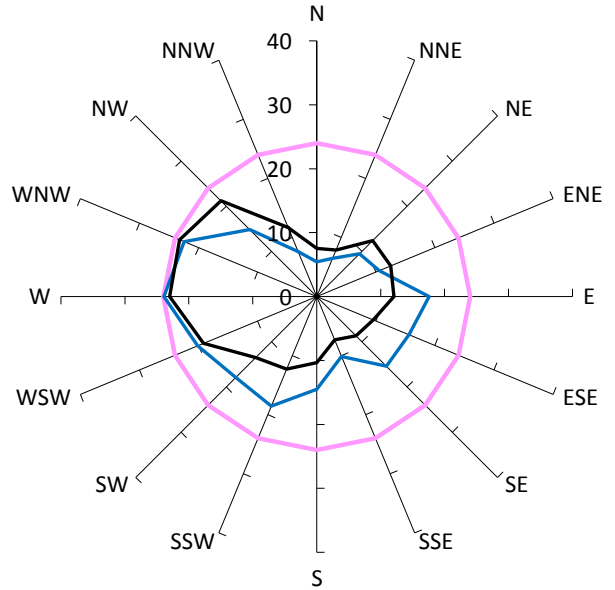

Safety Limit: 24m/s

### Description


GEM Prob of Exceed %

Peak Gust m/s

<span style="color: pink;">—</span> Criterion: Comfortable Walking Activities (8m/s). Safety Limit (24m/s).	5%	24
<span style="color: blue;">—</span> Proposed Case	11%	24
<span style="color: black;">—</span> Existing Case	5%	23
<span style="color: red;">—</span>		
<span style="color: yellow;">—</span>		
<span style="color: green;">—</span>		
<span style="color: green;">—</span>		
<span style="color: blue;">—</span>		
<span style="color: purple;">—</span>		


## Results for Point 15

### Gust Equivalent Mean (m/s)

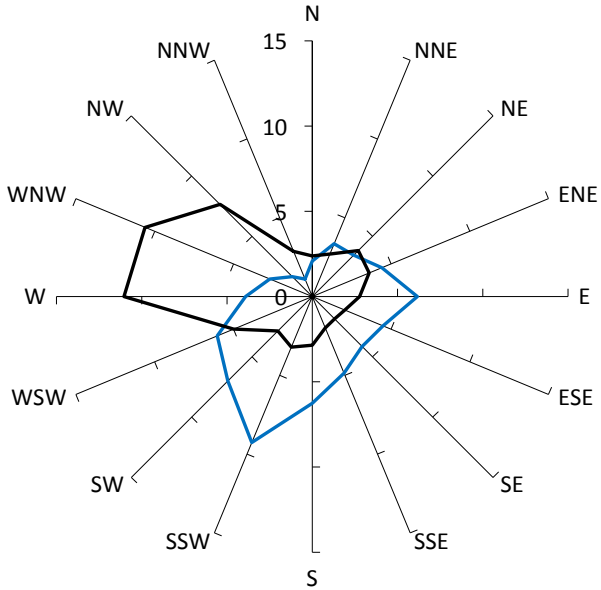

Comfort Criteria: 8m/s with 5% probability of exceedence

### Maximum Gust (m/s)

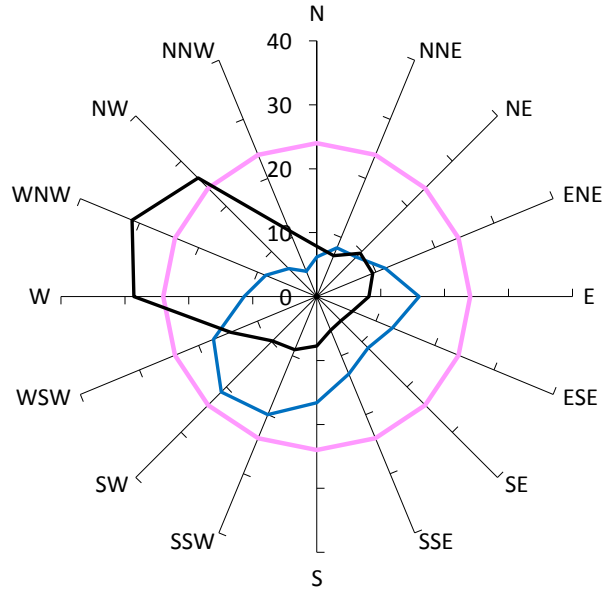

Safety Limit: 24m/s

### Description


GEM Prob of Exceed %

Peak Gust m/s

<span style="color: pink;">—</span> Criterion: Comfortable Walking Activities (8m/s). Safety Limit (24m/s).	5%	24
<span style="color: blue;">—</span> Proposed Case	5%	21
<span style="color: black;">—</span> Existing Case	9%	31
<span style="color: red;">—</span>		
<span style="color: yellow;">—</span>		
<span style="color: lightgreen;">—</span>		
<span style="color: green;">—</span>		
<span style="color: cyan;">—</span>		
<span style="color: purple;">—</span>		


## Results for Point 16

### Gust Equivalent Mean (m/s)

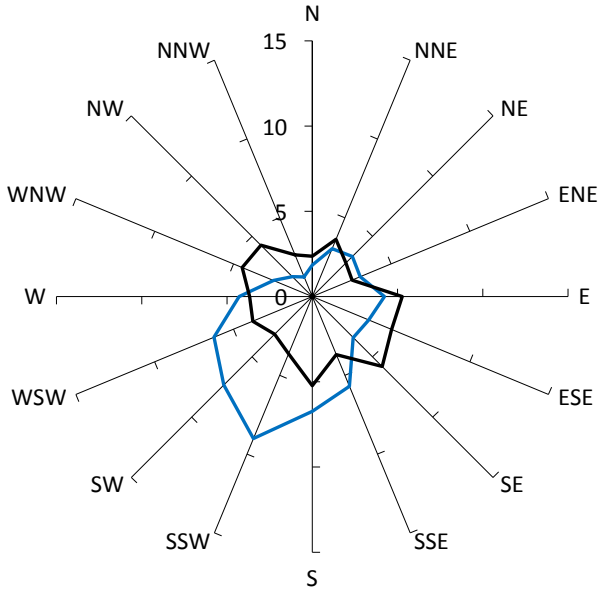

Comfort Criteria: 8m/s with 5% probability of exceedence

### Maximum Gust (m/s)

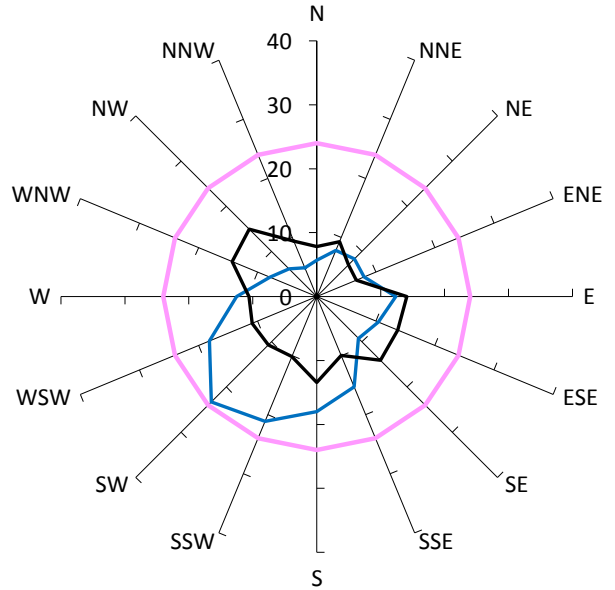

Safety Limit: 24m/s

### Description


GEM Prob of Exceed %

Peak Gust m/s

<span style="color: pink;">—</span> Criterion: Comfortable Walking Activities (8m/s). Safety Limit (24m/s).	5%	24
<span style="color: blue;">—</span> Proposed Case	5%	23
<span style="color: black;">—</span> Existing Case	0%	15
<span style="color: red;">—</span>		
<span style="color: yellow;">—</span>		
<span style="color: lightgreen;">—</span>		
<span style="color: green;">—</span>		
<span style="color: cyan;">—</span>		
<span style="color: purple;">—</span>		


## Results for Point 17

### Gust Equivalent Mean (m/s)

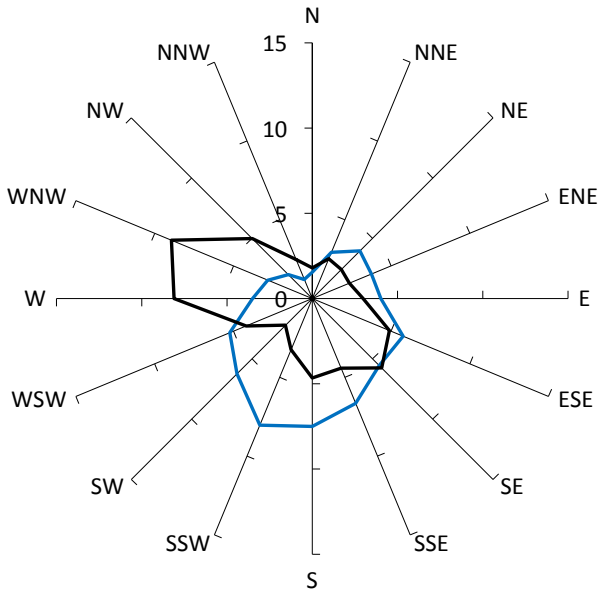

Comfort Criteria: 8m/s with 5% probability of exceedence

### Maximum Gust (m/s)

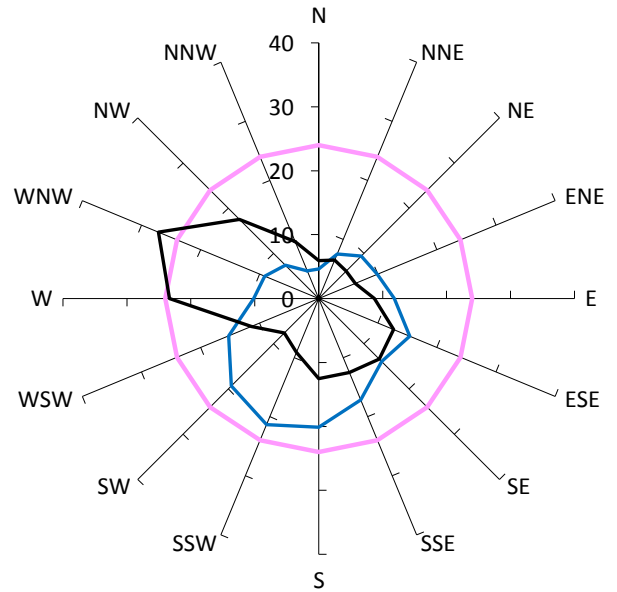

Safety Limit: 24m/s

### Description


GEM Prob of Exceed %

Peak Gust m/s

<span style="color: pink;">—</span> Criterion: Comfortable Walking Activities (8m/s). Safety Limit (24m/s).	5%	24
<span style="color: blue;">—</span> Proposed Case	3%	21
<span style="color: black;">—</span> Existing Case	3%	27
<span style="color: red;">—</span>		
<span style="color: yellow;">—</span>		
<span style="color: lightgreen;">—</span>		
<span style="color: green;">—</span>		
<span style="color: cyan;">—</span>		
<span style="color: purple;">—</span>		


## Results for Point 18

### Gust Equivalent Mean (m/s)

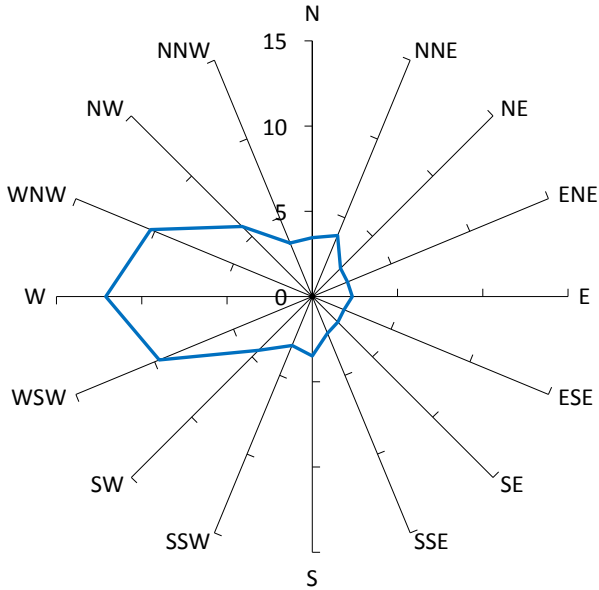

Comfort Criteria: 6m/s with 5% probability of exceedence

### Maximum Gust (m/s)

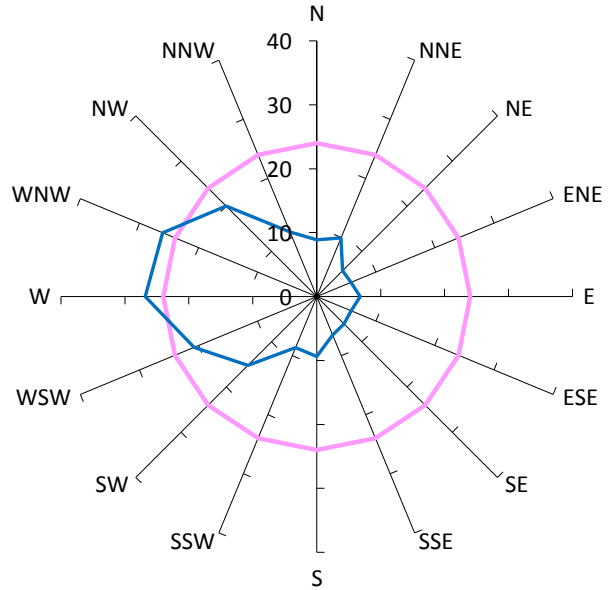

Safety Limit: 24m/s

### Description

GEM Prob of Exceed %

Peak Gust m/s

— Criterion: Short Exposure Activities (6m/s). Safety Limit (24m/s).

5%

24


— Proposed Case

17%

27


## Results for Point 19

### Gust Equivalent Mean (m/s)

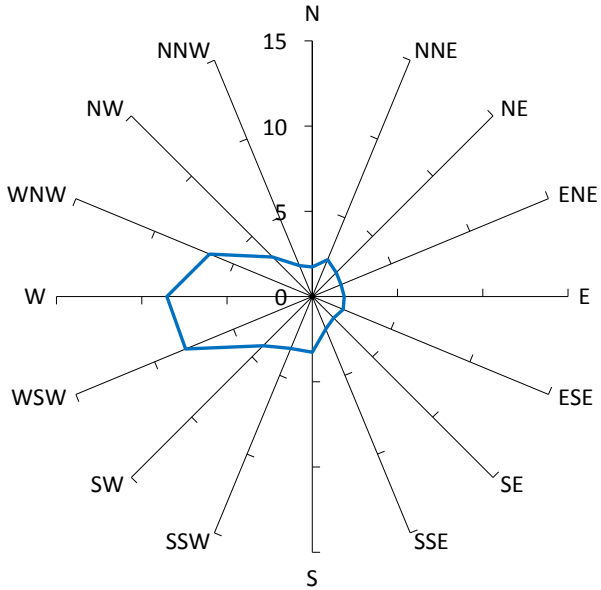

Comfort Criteria: 6m/s with 5% probability of exceedence

### Maximum Gust (m/s)

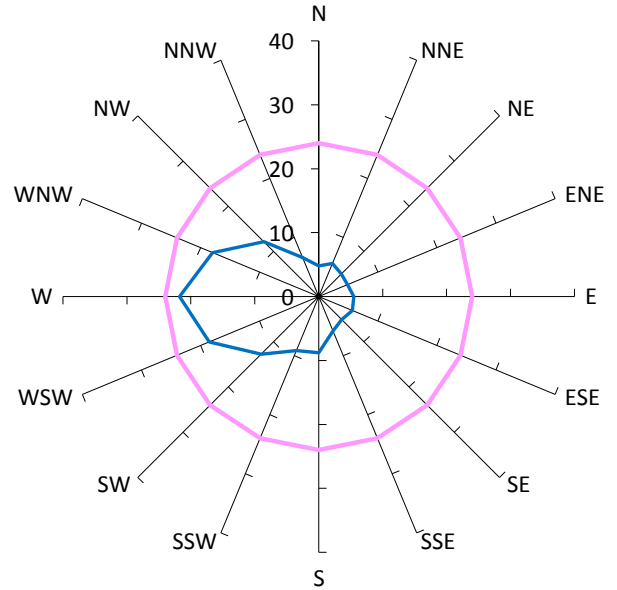

Safety Limit: 24m/s

### Description

GEM Prob of Exceed %

Peak Gust m/s

— Criterion: Short Exposure Activities (6m/s). Safety Limit (24m/s).

5%

24


— Proposed Case

11%

22


## Results for Point 20

### Gust Equivalent Mean (m/s)

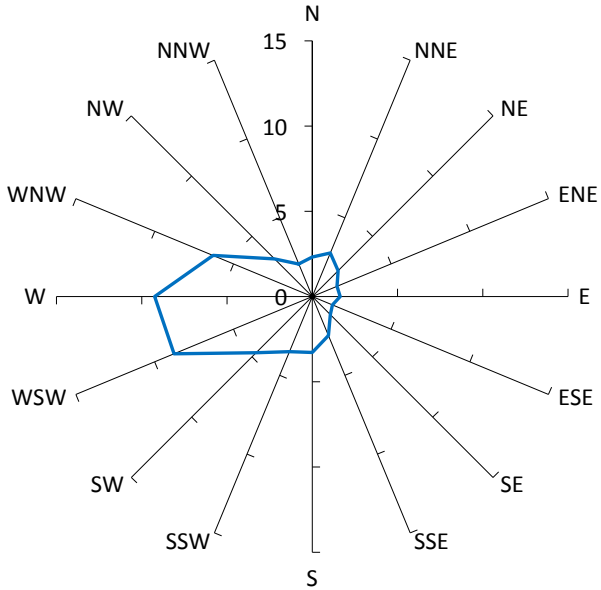

Comfort Criteria: 6m/s with 5% probability of exceedence

### Maximum Gust (m/s)

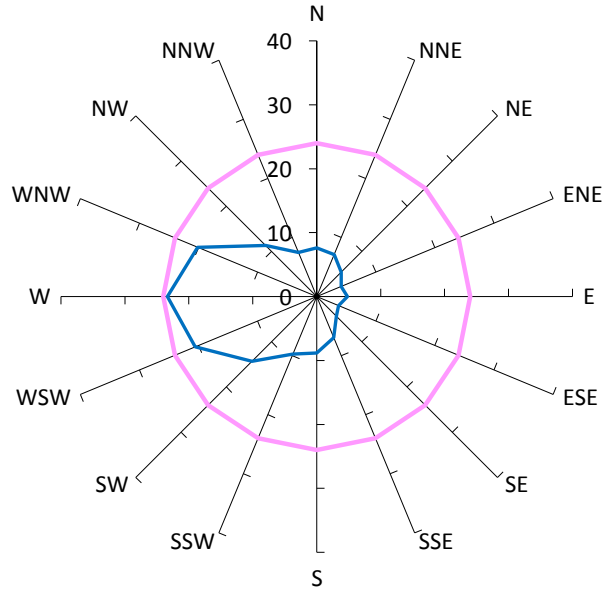

Safety Limit: 24m/s

### Description

GEM Prob of Exceed %

Peak Gust m/s

— Criterion: Short Exposure Activities (6m/s). Safety Limit (24m/s).

5%

24


— Proposed Case

12%

23


## Results for Point 21

### Gust Equivalent Mean (m/s)

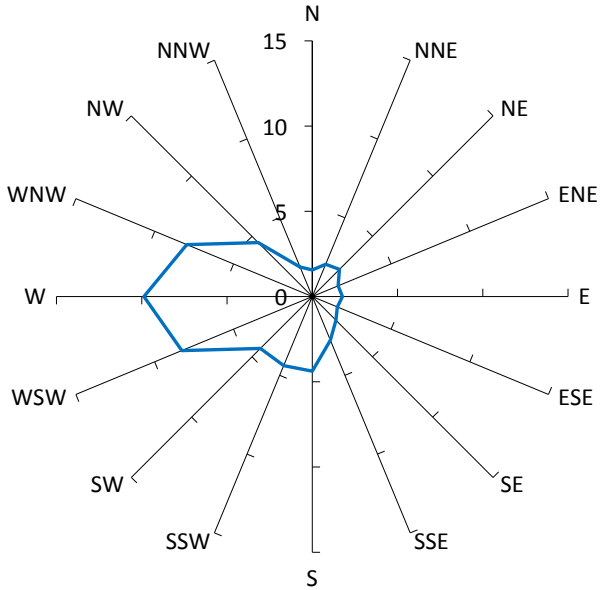

Comfort Criteria: 6m/s with 5% probability of exceedence

### Maximum Gust (m/s)

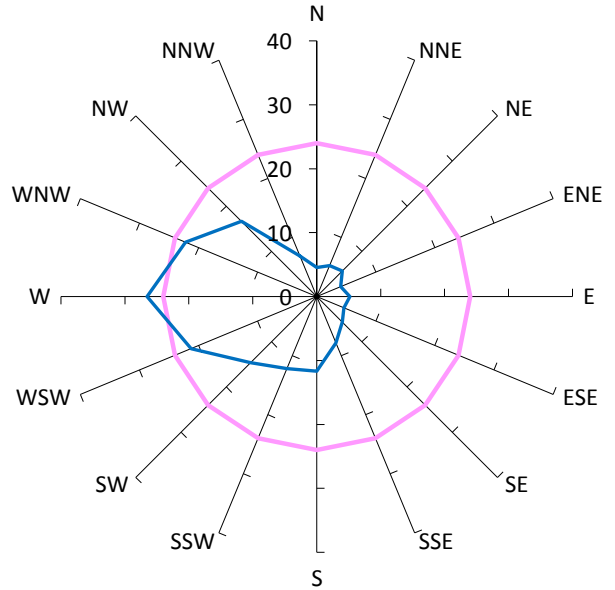

Safety Limit: 24m/s

### Description

GEM Prob of Exceed %

Peak Gust m/s

— Criterion: Short Exposure Activities (6m/s). Safety Limit (24m/s).

5%

24


— Proposed Case

13%

27


## Results for Point 22

### Gust Equivalent Mean (m/s)

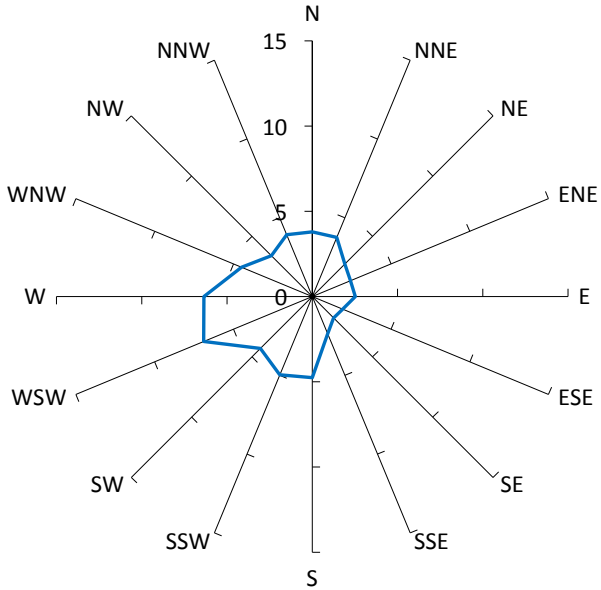

Comfort Criteria: 6m/s with 5% probability of exceedence

### Maximum Gust (m/s)

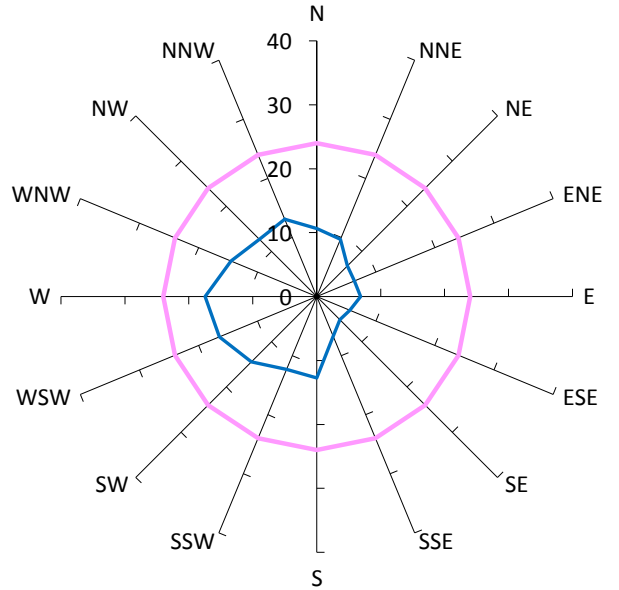

Safety Limit: 24m/s

### Description

GEM Prob of Exceed %

Peak Gust m/s

— Criterion: Short Exposure Activities (6m/s). Safety Limit (24m/s).

5%

24


— Proposed Case

6%

17


## Results for Point 23

### Gust Equivalent Mean (m/s)

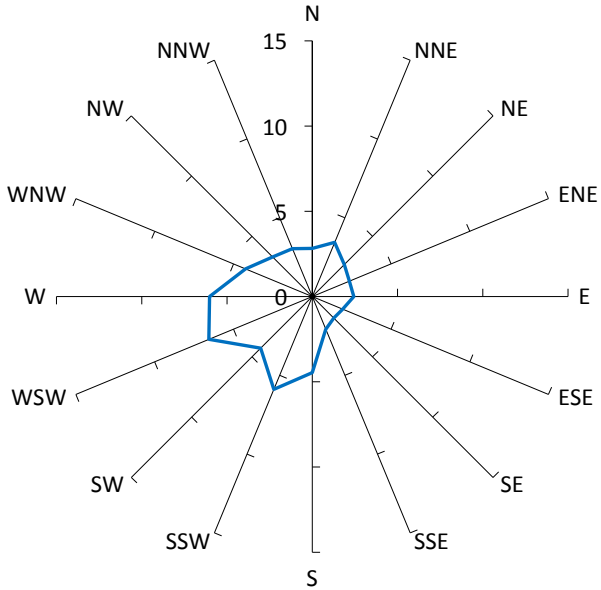

Comfort Criteria: 6m/s with 5% probability of exceedence

### Maximum Gust (m/s)

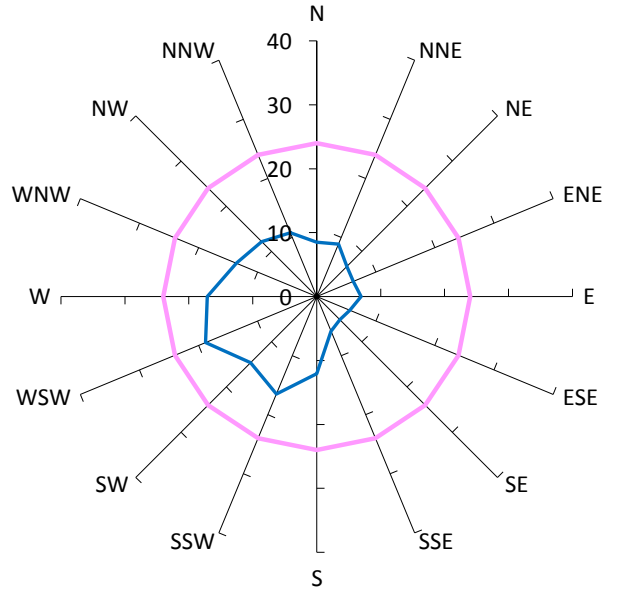

Safety Limit: 24m/s

### Description

GEM Prob of Exceed %

Peak Gust m/s

— Criterion: Short Exposure Activities (6m/s). Safety Limit (24m/s). 5%      24

— Proposed Case 5%      19

—

—

—

—


—

—

—


## Results for Point 24

### Gust Equivalent Mean (m/s)

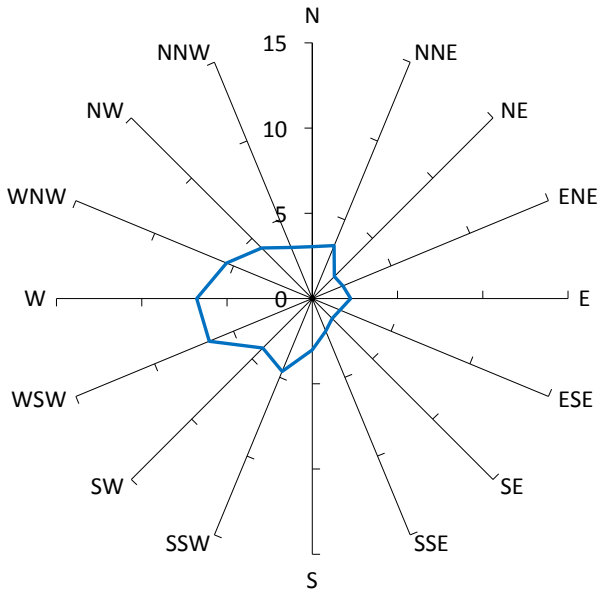

Comfort Criteria: 6m/s with 5% probability of exceedence

### Maximum Gust (m/s)

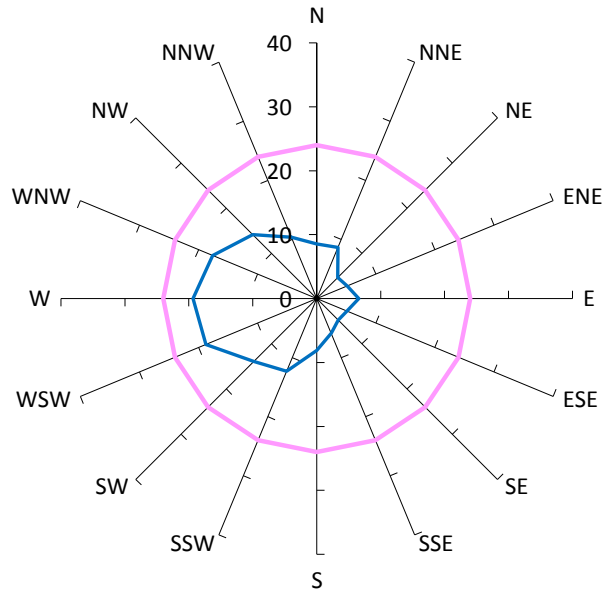

Safety Limit: 24m/s

### Description

GEM Prob of Exceed %

Peak Gust m/s

— Criterion: Short Exposure Activities (6m/s). Safety Limit (24m/s).

5%

24


— Proposed Case

6%

19


## Results for Point 25

### Gust Equivalent Mean (m/s)

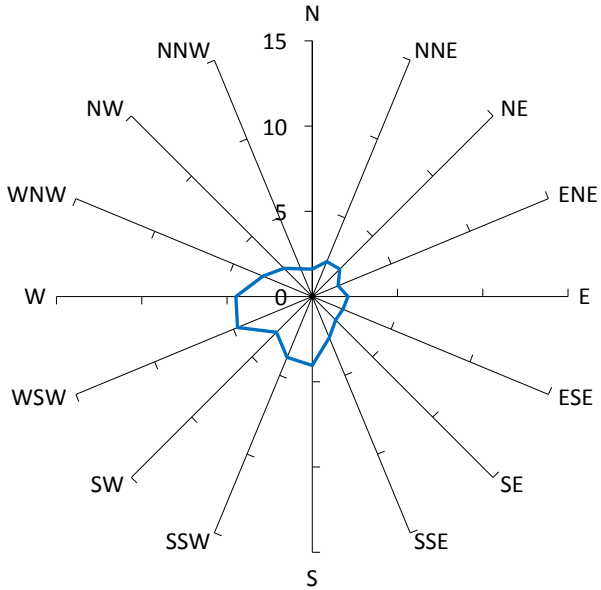

Comfort Criteria: 6m/s with 5% probability of exceedence

### Maximum Gust (m/s)

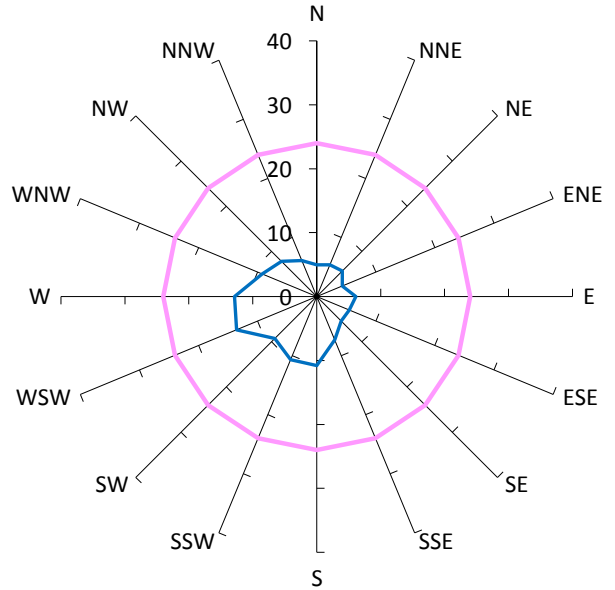

Safety Limit: 24m/s

### Description

GEM Prob of Exceed %

Peak Gust m/s

— Criterion: Short Exposure Activities (6m/s). Safety Limit (24m/s). 5%      24

— Proposed Case 1%      14

—

—

—

—


—

—

—


## Results for Point 26

### Gust Equivalent Mean (m/s)

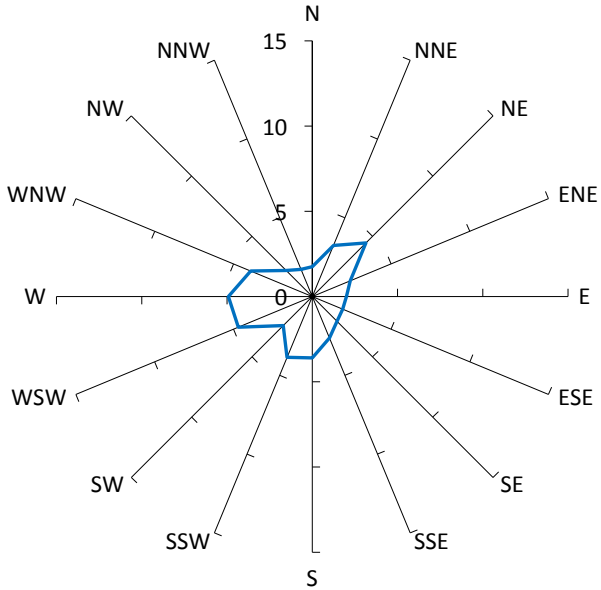

Comfort Criteria: 6m/s with 5% probability of exceedence

### Maximum Gust (m/s)

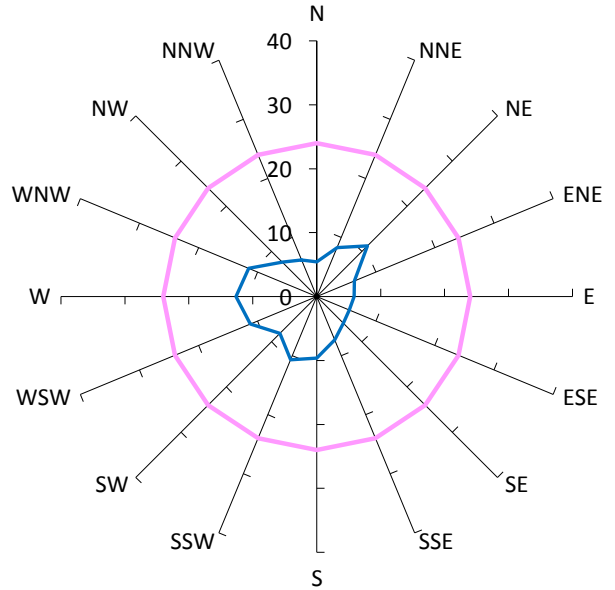

Safety Limit: 24m/s

### Description

GEM Prob of Exceed %

Peak Gust m/s

— Criterion: Short Exposure Activities (6m/s). Safety Limit (24m/s).

5%

24


— Proposed Case

1%

13


## Results for Point 27

### Gust Equivalent Mean (m/s)

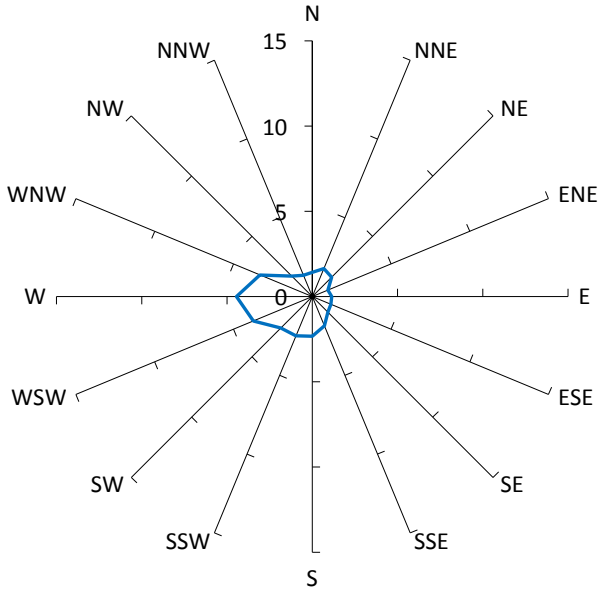

Comfort Criteria: 6m/s with 5% probability of exceedence

### Maximum Gust (m/s)

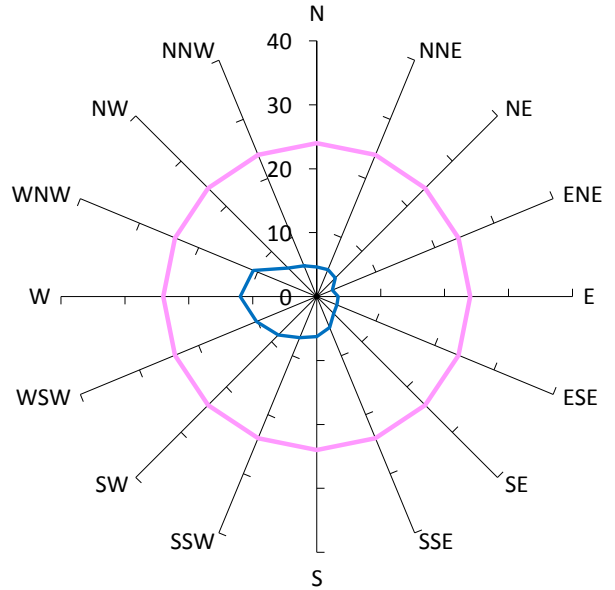

Safety Limit: 24m/s

### Description

GEM Prob of Exceed %

Peak Gust m/s

— Criterion: Short Exposure Activities (6m/s). Safety Limit (24m/s). 5%      24

— Proposed Case 0%      12

—

—

—

—


—

—

—


## Results for Point 101

### Gust Equivalent Mean (m/s)

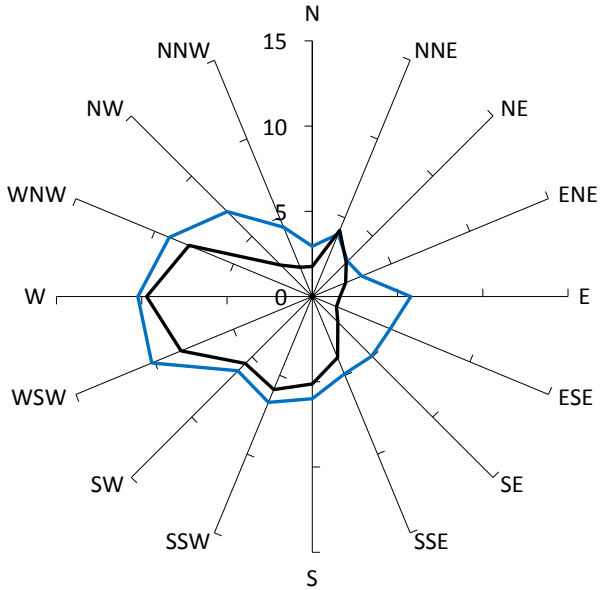

Comfort Criteria: 8m/s with 5% probability of exceedence

### Maximum Gust (m/s)

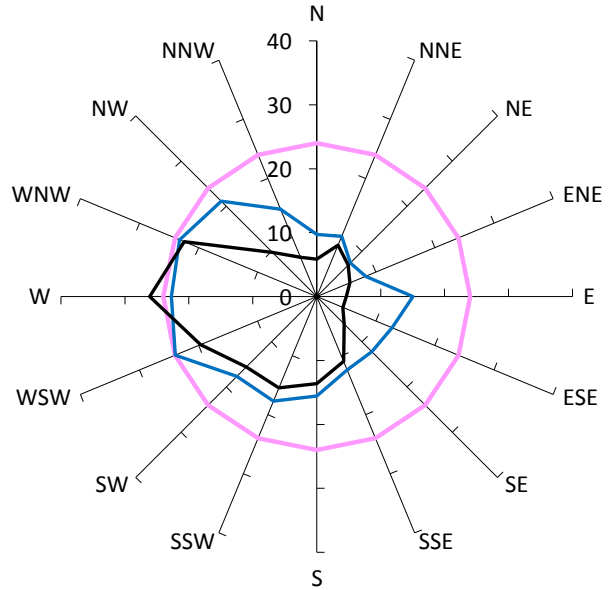

Safety Limit: 24m/s

### Description


GEM Prob of Exceed %

Peak Gust m/s

<span style="color: pink;">—</span> Criterion: Comfortable Walking Activities (8m/s). Safety Limit (24m/s).	5%	24
<span style="color: blue;">—</span> Proposed Case	11%	24
<span style="color: black;">—</span> Existing case	6%	26
<span style="color: red;">—</span>		
<span style="color: yellow;">—</span>		
<span style="color: lightgreen;">—</span>		
<span style="color: green;">—</span>		
<span style="color: cyan;">—</span>		
<span style="color: purple;">—</span>		


## Results for Point 102

### Gust Equivalent Mean (m/s)

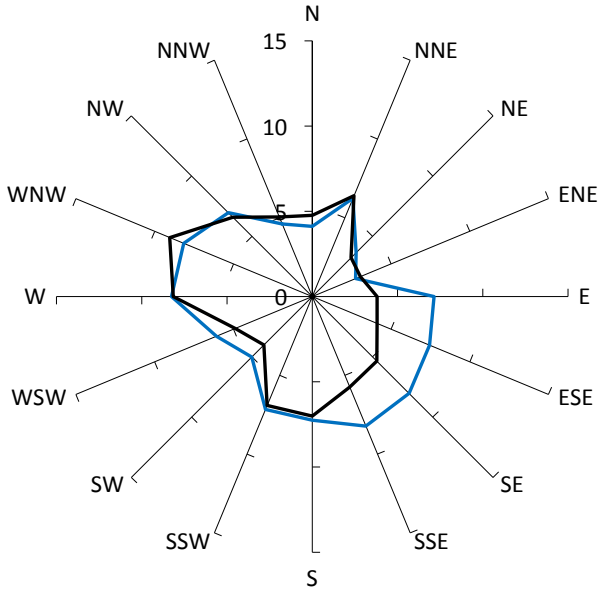

Comfort Criteria: 8m/s with 5% probability of exceedence

### Maximum Gust (m/s)

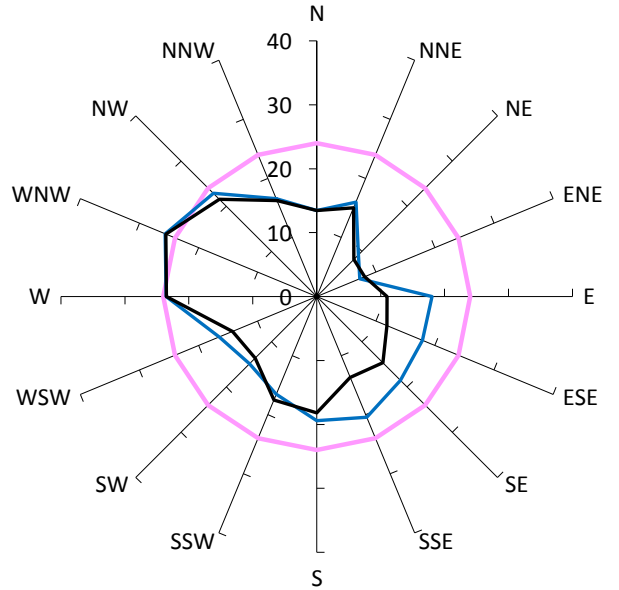

Safety Limit: 24m/s

### Description


GEM Prob of Exceed %

Peak Gust m/s

Criterion: Comfortable Walking Activities (8m/s). Safety Limit (24m/s).	5%	24
Proposed Case	10%	26
Existing case	5%	26


## Results for Point 103

### Gust Equivalent Mean (m/s)

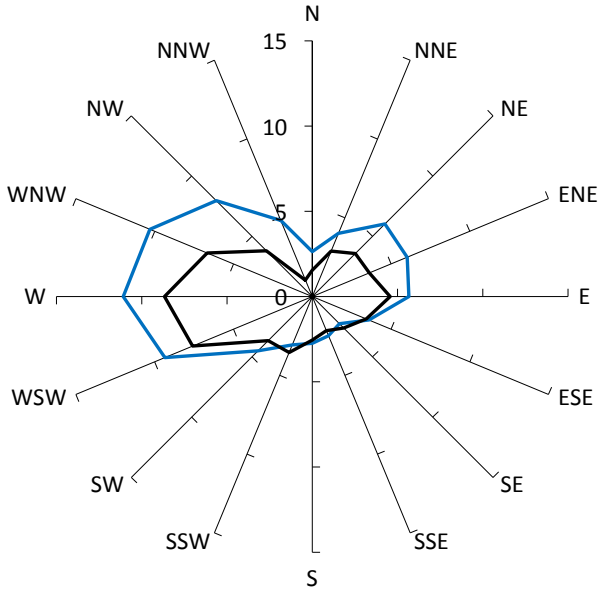

Comfort Criteria: 8m/s with 5% probability of exceedence

### Maximum Gust (m/s)

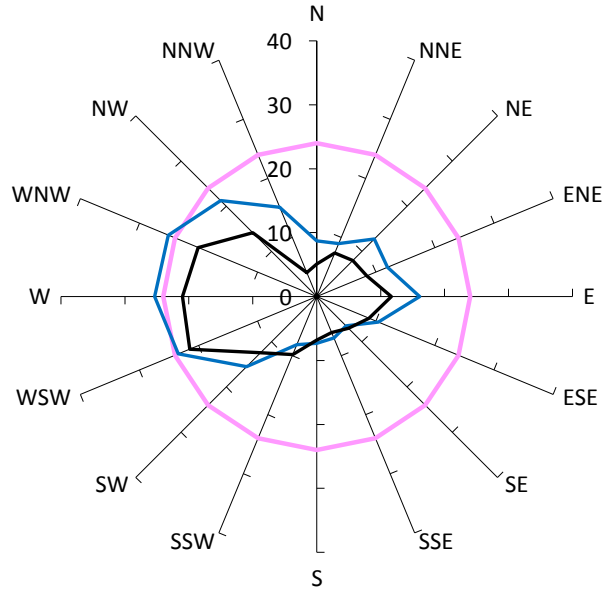

Safety Limit: 24m/s

### Description


GEM Prob of Exceed %

Peak Gust m/s

—	Criterion: Comfortable Walking Activities (8m/s). Safety Limit (24m/s).	5%	24
—	Proposed Case	12%	25
—	Existing case	3%	21
—			
—			
—			
—			
—			
—			


## Results for Point 104

### Gust Equivalent Mean (m/s)

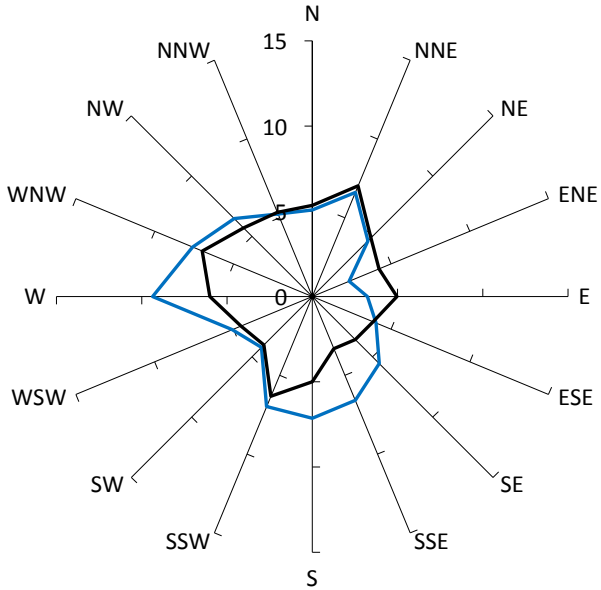

Comfort Criteria: 8m/s with 5% probability of exceedence

### Maximum Gust (m/s)

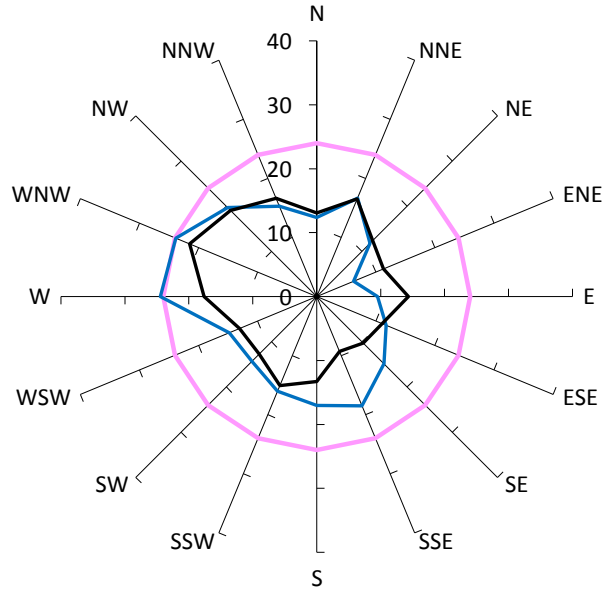

Safety Limit: 24m/s

### Description

GEM Prob of Exceed %


Peak Gust m/s

<span style="color: pink;">—</span> Criterion: Comfortable Walking Activities (8m/s). Safety Limit (24m/s).	5%	24
<span style="color: blue;">—</span> Proposed Case	6%	24
<span style="color: black;">—</span> Existing case	3%	22
<span style="color: red;">—</span>		
<span style="color: yellow;">—</span>		
<span style="color: green;">—</span>		
<span style="color: green;">—</span>		
<span style="color: blue;">—</span>		
<span style="color: purple;">—</span>		

## APPENDIX D VELOCITY AND TURBULENCE INTENSITY PROFILES

---

**Mean Velocity and Turbulence Intensity for Suburban/Forest Terrain ( $0.2m < z_0 < 0.3m$ ) (TC3) at a 1:300 Scale**

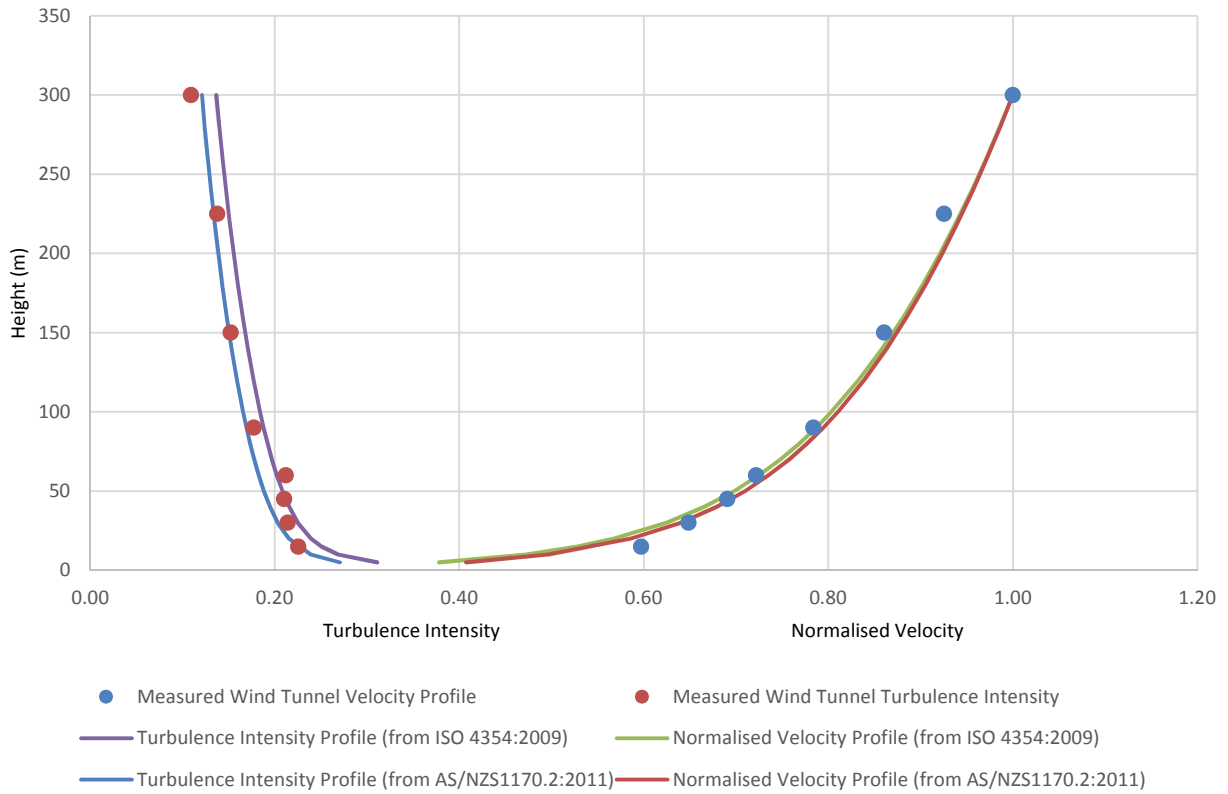

**Longitudinal Spectra Density for Suburban/Forest Terrain ( $0.2m < z_0 < 0.3m$ ) (TC3) at a 1:300 Scale**

