

3 Brookhollow Avenue Norwest Arboricultural Impact Assessment

Prepared for Green Square DC



Document Tracking

Project Name	3 Brookhollow Avenue Norwest, NSW 2153 Arboricultural Impact Assessment
Project Number	AIA13/10/2024
Prepared by	Alex de Jong – AQF Level 5 Arborist
Reviewed by	Robert de Jong – AQF Level 5 Arborist
Status	Final
Version	v23
Last saved on	27/05/2026

This report should be cited as 'Arbor Express 3 Brookhollow Avenue Norwest, NSW 2153 Arboricultural Impact Assessment prepared for Green Square DC'

ACKNOWLEDGEMENTS

This document has been prepared by Arbor Express Pty Ltd with support from Green Square DC

Disclaimer

I do not assume responsibility for liability associated with the tree on/or adjacent to this project site, the future demise and/or any damage which may result therefrom. They take care to obtain all information from reliable sources. All data has been verified insofar as possible; however, the consultant can neither guarantee nor be responsible for the accuracy of information provided by others. I cannot be held responsible for any consequences as result of work carried out outside specifications, not in compliance with Australian Standards or by inappropriately qualified staff. If further investigations such as, aerial, drill and root tests are recommended, the report shall not be considered final until all investigations have been completed as further defects may be found. I have made every effort to accurately identify the current tree health and hazards. Results may or may not correlate to actual tree structural integrity. There are many factors that may contribute to limb or total tree failure, not all these symptoms are visible. There can be hidden defects that may result in a failure even though it would seem that other, more obvious defects would be the likely cause of failure. All standing trees have an element of unpredictable risk. The inspection was limited to a visual ground examination of the tree, without aerial inspections and below ground excavations. The assessments are limited and do not include specialized analysis. No internal diagnostics, aerial inspection and pathology test were conducted. Sketches, diagrams, graphs and photographs in this report, being intended as visual aids, are not necessarily to scale.

Table of Contents

1.	Introduction	5
2.	Method	6
3.	Tree Schedule	9
4.	Arboricultural Impact Assessment / Tree Removal and Retention Plan	109
5.	Development Footprint.....	116
6.	Security Camera Layout	118
7.	Stormwater Plan.....	120
8.	Tree Protection Plan	121
9.	Recommendations	124
10.	Construction Hold Points for Tree Protection	126
11.	References.....	127
	Appendix A: Glossary of Terms.....	128
	Appendix B: Retention Value	130
	Appendix C: Safe Useful Life Expectancy (SULE)	131
	Appendix D: Tree Protection Guidelines	133
	Appendix E: Encroachment into the Tree Protection Zones	136

Abbreviations

Abbreviation	Description
AE	Arbor Express
AIA	Arboricultural Impact Assessment
AQF	Australian Qualifications Framework
AS	Australian Standards
C	Canopy
DAB	Diameter Above Buttress
DBH	Diameter at Breast Height
H	Height
m	Metre
mm	Millimetre
NDE	Non-Destructive Excavation
NO	Number
NSW	New South Wales
SRZ	Structural Root Zone
TPP	Tree Protection Plan
TPZ	Tree Protection Zone
VTA	Visual Tree Assessment

1. Introduction

This AIA has been prepared for Green Square DC in relation to a proposed development at 3 Brookhollow Avenue, Norwest NSW, 2153. The address of the subject site is in Table 1 and mapped in Figure 1. The purpose of this report is to:


- Identify the trees within the site and adjacent surrounding area that are likely to be affected by the proposed development.
- Undertake a visual tree assessment of the subject trees.
- Assess the current overall health and condition of the subject trees.
- Evaluate the retention value of the subject trees.
- Identify trees to be removed, retained or transplanted.
- Determine the likely impacts of trees to be retained.
- Recommend tree protection measures to minimise the impacts to retained trees.
- Preparation of a tree protection plan for trees to be retained (if applicable).

Features of the subject site are tabulated below.

Table 1: Development site

Criteria	Description
Street address	3 Brookhollow Avenue Norwest, NSW 2153
Local government area	The Hills Shire Council
Land zoning	SP4: Enterprise
Biodiversity values map	The site is not in a high biodiversity area
10/50 entitlement	The site does not have a 10/50 entitlement

Figure 1: Location 3 Brookhollow Avenue Norwest, NSW 2153

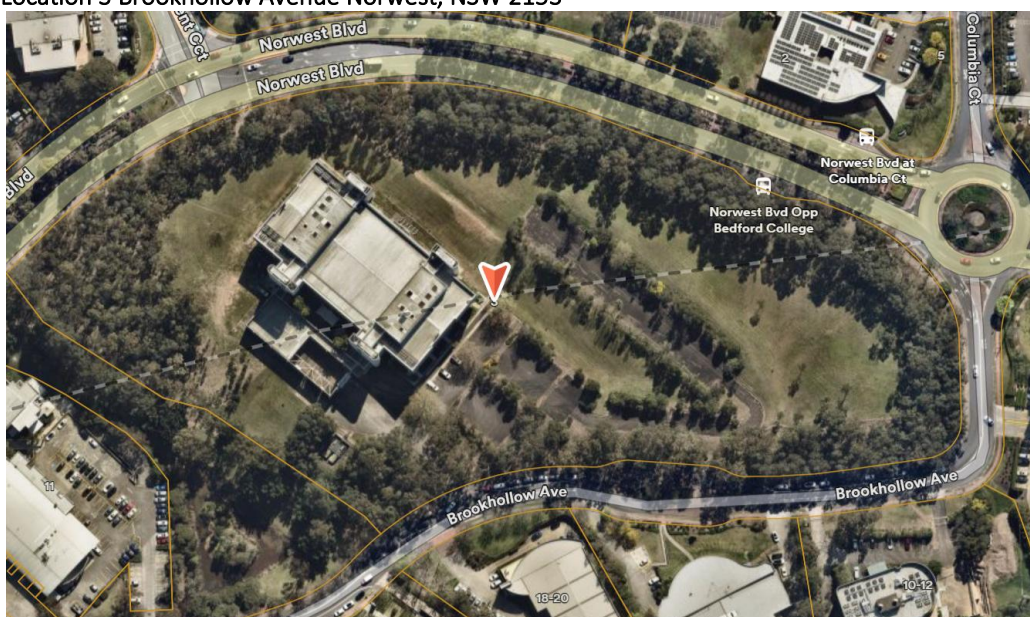

2. Method

Visual Tree Assessment

The subject trees were assessed in accordance with a stage one visual tree assessment (VTA) as formulated by Mattheck and Breloer (1994)¹, and practices consistent with modern arboriculture.

A total of 928 subject trees were inspected between 7 October 2024, 17 October 2024, 11 September 2025 and 16 September 2025, 30 Jan 2026, 18 Feb 2026.

The following limitations apply to this methodology:

- Trees were inspected from ground level.
- These assessments did not include aerial (climbing) inspections, soil sampling, or root excavations.
- The canopy spread was measured either by estimation or pacing, and the longest span was recorded.
- The height of each tree was estimated.
- Trees were inspected within limits of site access.
- No aerial inspections or root mapping was undertaken.
- Trees located on adjacent properties or in restricted areas were not fully visually inspected, so any defects or abnormalities may not have been documented.
- Tree identification relied on broad taxonomical features visible from ground level at the time of inspection.

Retention Values

The retention value is the value of retaining a tree or group of trees and is assessed based on a blend of environmental, cultural, physical, and social factors.

- **High:** These trees are deemed worthy of preservation, and their retention should be prioritized. Proposed site designs and the positioning of buildings and infrastructure should take into account the Tree Protection Zones (TPZs) to mitigate any negative effects. Additionally, the extent of the canopy, especially concerning high-rise development, should be taken into consideration. Significantly pruning the trees to accommodate building envelopes or temporary scaffolding is typically not acceptable.
- **Medium:** Retaining these trees is desirable. They should be preserved as part of any proposed development, if feasible. However, these trees are considered less crucial for retention. If their removal becomes necessary, replacement planting should be contemplated in alignment with the Council's Tree Replacement Policy to offset any loss of amenity.
- **Low:** These trees lack significant ecological, heritage, or amenity value, or such values are greatly diminished due to their Safe Useful Life Expectancy (SULE). Therefore, these trees should not be viewed as hindrances to the future development of the site.
- **Very Low:** These trees are regarded as potentially hazardous, very poor specimens, or may even qualify as environmental or noxious weeds. Consequently, their removal is recommended irrespective of any proposed development considerations.


¹ VTA is an internationally recognised practice in the visual assessment of trees as formulated by Mattheck & Breloer (1994). Principle explanations and illustrations are contained within the publication, Field Guide for Visual Tree Assessment by Mattheck, C., and Breloer, H. Arboricultural Journal, Vol 18 pp 1-23 (1994).

Protection Zones

Tree Protection Zone (TPZ): The Tree Protection Zone (TPZ) is fundamental for safeguarding trees on development sites. It encompasses both the root and crown spread, creating a protected space free from construction disturbances to preserve the tree's health and viability. The TPZ is calculated from the NRZ which is $NRZ = DSH \times 12$

Structural Root Zone (SRZ): The Structural Root Zone (SRZ) defines the space essential for maintaining tree stability, often requiring a larger area to sustain the tree's health. Calculating the SRZ becomes necessary when substantial encroachment into a Tree Protection Zone (TPZ) is proposed. Further analysis through root investigations can provide valuable insights into the extent of these roots.

Figure 2: Tree Protection Zone and Structural Root Zone

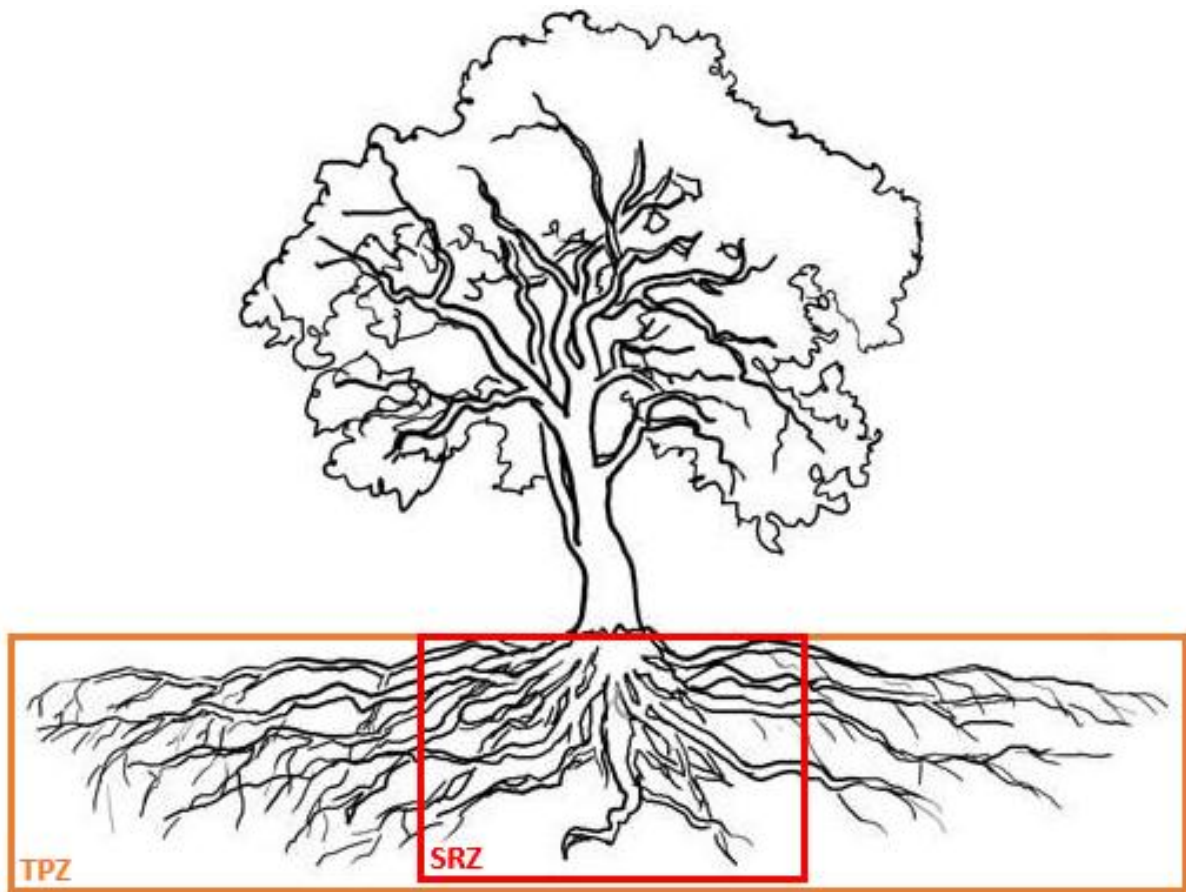


Impact Assessment

Development activities should be undertaken outside of Tree Protection Zones as much as possible. However, it's recognized that complete avoidance is not always feasible, and some encroachment within these zones may occur due to various reasons. Australian Standard AS 4970-2025, "*Protection of trees on development sites*," offers guidelines for managing such encroachments without necessitating extensive tree management and protection measures. Encroachment parameters are categorized as follows:

- **Minor TPZ Encroachment:**
The proposed encroachment is considered minor as it affects less than or equal to 10% of the area of the Tree Protection Zone's (TPZ) and is located outside the Structural Root Zone (SRZ), and there have been no recent encroachments into the TPZ. Based on these conditions, it is generally unlikely that there will be a significant impact on the health, structure, or longevity of the tree. Tree protection measures should still be implemented during site works. To avoid a net loss of soil volume and area, the area of encroachment should be offset by incorporating an equivalent area into the TPZ, unless otherwise demonstrated by the project arborist that the tree will remain viable.
- **Moderate TPZ Encroachment:**
A moderate encroachment is defined as one that affects more than 10% but less than or equal to 20% of the TPZ area and is located outside the SRZ. In such cases, an arborist must be engaged to assess the likely impacts and undertake any necessary investigations to determine the tree's ability to remain viable. These investigations may involve suitable design modifications or construction controls as part of a Tree Protection Plan (TPP) and Tree Protection Specification (TPS). As with minor encroachments, the area of soil and volume lost to the encroachment should be compensated by incorporating an equivalent area into the TPZ, unless the project arborist demonstrates otherwise.
- **Major TPZ Encroachment:**
An encroachment is classified as major if it affects more than 20% of the TPZ area or is located within the SRZ. In such instances, an arborist must be engaged to assess the impact, explore alternative design solutions with the design team, or demonstrate that the tree can remain viable. A more detailed investigation is required, potentially including root mapping, soil analysis, review of site history, literature comparison, and examples of similar cases. A comprehensive TPP should be prepared to support the retention of the tree. As with lesser encroachments, the lost area should be offset within the TPZ unless the arborist determines that the tree will remain viable without this compensation.

Figure 3: Tree Protection Zone Encroachments

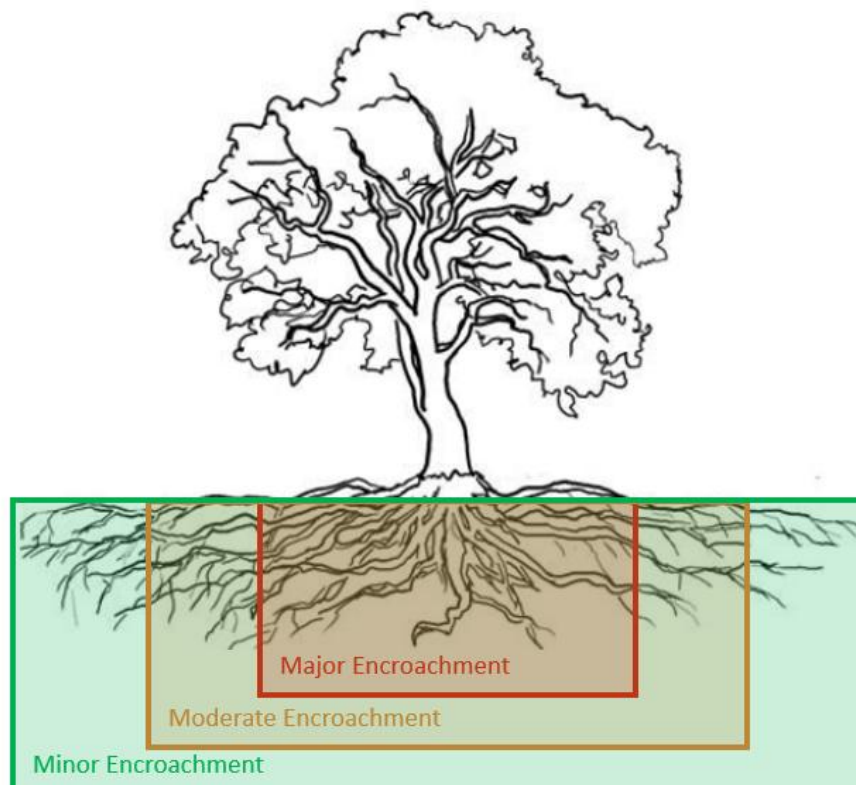

3. Tree Schedule

Tree #	Botanical Name (Common Name)	DBH (mm)	DAB (mm)	TPZ SRZ (m)	TPZ Encroachment	SULE	Retention Value	Action
1	<i>Corymbia citriodora</i> (Lemon-scented gum)	350	500	4.2 2.5	8.50%	2A	High	Retain
2	<i>Corymbia citriodora</i> (Lemon-scented gum)	130	190	2 1.6	0.00%	3A	Moderate	Retain
3	<i>Corymbia citriodora</i> (Lemon-scented gum)	160	280	2 1.6	0.00%	2A	High	Retain
4	<i>Corymbia citriodora</i> (Lemon-scented gum)	300	390	3.6 2.2	0.00%	2A	High	Retain
5	<i>Eucalyptus sideroxylon</i> (Ironbark)	360	420	4.3 2.3	0.00%	2A	Moderate	Retain
6	<i>Corymbia citriodora</i> (Lemon-scented gum)	100	130	2 1.5	0.00%	2A	Moderate	Retain
7	<i>Eucalyptus sideroxylon</i> (Ironbark)	260	330	3.1 2.1	0.00%	2A	Moderate	Remove
8	<i>Corymbia citriodora</i> (Lemon-scented gum)	560	620	6.7 2.7	100.00%	2A	Moderate	Remove
9	<i>Corymbia citriodora</i> (Lemon-scented gum)	230	310	2.8 2	100.00%	2A	Moderate	Remove
10	<i>Corymbia citriodora</i> (Lemon-scented gum)	350	460	4.2 2.4	100.00%	2A	Moderate	Remove
11	<i>Corymbia citriodora</i>	170	220	2	100.00%	2A	Moderate	Remove

	(Lemon-scented gum)			1.8				
12	<i>Corymbia citriodora</i> (Lemon-scented gum)	500	830	6 3.1	100.00%	2A	Moderate	Remove
13	<i>Platanus orientalis</i> (Oriental plane)	210	260	2.5 1.9	0.00%	2A	Moderate	Retain
14	<i>Corymbia citriodora</i> (Lemon-scented gum)	300	430	3.6 2.3	100.00%	2A	Moderate	Remove
15	<i>Corymbia citriodora</i> (Lemon-scented gum)	330	420	4 2.3	100.00%	2A	Moderate	Remove
16	<i>Corymbia citriodora</i> (Lemon-scented gum)	370	550	4.4 2.6	25.60%	2A	Moderate	Remove
17	<i>Platanus orientalis</i> (Oriental plane)	650	740	7.8 2.9	100.00%	2A	Moderate	Remove
18	<i>Corymbia citriodora</i> (Lemon-scented gum)	150	180	2 1.6	7.90%	3A	Moderate	Retain
19	<i>Corymbia citriodora</i> (Lemon-scented gum)	140	200	2 1.7	9.50%	2A	Moderate	Remove
20	<i>Melaleuca quinquenervia</i> (Paperbark)	200	270	2.4 1.9	0.00%	3A	Low	Remove
21	<i>Melaleuca quinquenervia</i> (Paperbark)	Multi-stem	350	Approx. 2.7 2.1	0.00%	3A	Low	Remove
22	<i>Eucalyptus saligna</i> (Sydney blue gum)	230	350	2.8 2.1	0.00%	3A	Moderate	Remove
23	<i>Melaleuca quinquenervia</i> (Paperbark)	230	330	2.8 2.1	0.00%	2A	Moderate	Remove
24		50	250	2.5	0.00%	3A	Moderate	Remove

	<i>Melaleuca quinquenervia</i> (Paperbark)	100 180		1.8				
25	<i>Corymbia citriodora</i> (Lemon-scented gum)	170	250	2 1.8	0.00%	2A	Moderate	Remove
26	<i>Eucalyptus punctata</i> (Grey Gum)	280	350	3.4 2.1	0.00%	3A	Moderate	Remove
27	<i>Melaleuca quinquenervia</i> (Paperbark)	590	780	7.1 3	0.00%	3A	Moderate	Remove
28	<i>Eucalyptus punctata</i> (Grey Gum)	Multi-stem	270	Approx. 2.5 1.9	0.00%	2A	Moderate	Remove
29	<i>Eucalyptus punctata</i> (Grey Gum)	590	980	7.1 3.3	0.00%	2A	Moderate	Remove
30	<i>Eucalyptus punctata</i> (Grey Gum)	480	540	5.8 2.6	0.00%	2A	Moderate	Remove
31	<i>Eucalyptus punctata</i> (Grey Gum)	450	640	5.4 2.7	0.00%	2A	Moderate	Retain
32	<i>Eucalyptus punctata</i> (Grey Gum)	130	210	2 1.7	0.00%	2A	Moderate	Remove
33	<i>Eucalyptus punctata</i> (Grey Gum)	230	300	2.8 2	0.00%	2A	Moderate	Remove
34	<i>Melaleuca quinquenervia</i> (Paperbark)	60 170 180	300	3.1 2	0.00%	3A	Moderate	Remove
35	<i>Eucalyptus saligna</i> (Sydney blue gum)	240 240	380	4.1 2.2	0.00%	3A	Moderate	Remove
36		100	380	4.2	0.00%	3A	Moderate	Remove

	<i>Melaleuca quinquenervia</i> (Paperbark)	340		2.2				
37	<i>Melaleuca quinquenervia</i> (Paperbark)	140 200 240	420	4.1 2.3	0.00%	3A	Low	Remove
38	<i>Melaleuca quinquenervia</i> (Paperbark)	120 200	530	2.8 2.5	0.00%	3A	Moderate	Remove
39	<i>Platanus orientalis</i> (Oriental plane)	190	250	2.3 1.8	0.00%	2A	Moderate	Remove
40	<i>Melaleuca quinquenervia</i> (Paperbark)	Multi-stem	490	Approx. 3.1 2.5	15.20%	3A	Low	Remove
41	<i>Melaleuca quinquenervia</i> (Paperbark)	140	210	2 1.7	22.30%	3A	Moderate	Remove
42	<i>Platanus orientalis</i> (Oriental plane)	400	470	4.8 2.4	38.90%	3A	Moderate	Remove
43	<i>Platanus orientalis</i> (Oriental plane)	180 710	710	8.8 2.9	59.80%	3A	Moderate	Remove
44	<i>Corymbia citriodora</i> (Lemon-scented gum)	300	370	3.6 2.2	15.90%	3A	Low	Remove
45	<i>Melaleuca quinquenervia</i> (Paperbark)	250	350	3 2.1	100%	3A	Moderate	Remove - Early earthwork
46	<i>Melaleuca quinquenervia</i> (Paperbark)	90 160 160	300	2.9 1	100%	3A	Moderate	Remove - Early earthwork
47	<i>Melaleuca quinquenervia</i> (Paperbark)	110 120 160	270	2.7 1.9	100%	3A	Moderate	Remove - Early earthwork

48	<i>Melaleuca quinquenervia</i> (Paperbark)	Multi-stem	550	Approx. 3.2 2.6	100%	3A	Moderate	Remove - Early earthwork
49	<i>Melaleuca quinquenervia</i> (Paperbark)	Multi-stem	320	Approx. 2.7 2.1	100%	2A	Moderate	Remove - Early earthwork
50	<i>Melaleuca quinquenervia</i> (Paperbark)	180 230 270	490	4.8 2.5	100%	3A	Moderate	Remove - Early earthwork
51	<i>Corymbia citriodora</i> (Lemon-scented gum)	180	200	2.2 1.7	100%	3A	Low	Remove - Early earthwork
52	<i>Platanus orientalis</i> (Oriental plane)	300	350	3.6 2.1	100%	2A	Moderate	Remove - Early earthwork
53	<i>Corymbia citriodora</i> (Lemon-scented gum)	Multi-stem	320	Approx. 2.7 2.1	100%	3A	Moderate	Remove - Early earthwork
54	Dead	370	460	4.4 2.4	100%	4A	Low	Remove - Early earthwork
55	<i>Eucalyptus sp</i>	170 210	300	3.2 2	100%	3A	Moderate	Remove - Early earthwork
56	<i>Melaleuca quinquenervia</i> (Paperbark)	130 200	290	2.9 2	100%	3A	Low	Remove - Early earthwork
57	<i>Platanus orientalis</i> (Oriental plane)	160 220	380	3.3 2.2	100%	2A	Moderate	Remove - Early earthwork
58	<i>Eucalyptus sp</i>	180	320	2.2 2.1	100%	3A	Moderate	Remove - Early earthwork
59	<i>Platanus orientalis</i>	190	250	2.3	100%	2A	Moderate	Remove - Early earthwork

	(Oriental plane)			1.8				
60	<i>Melaleuca quinquenervia</i> (Paperbark)	150 210	280	3.1 1.9	100%	3A	Moderate	Remove - Early earthwork
61	<i>Platanus orientalis</i> (Oriental plane)	140 150 170 170	500	3.8 2.5	100%	2A	Moderate	Remove - Early earthwork
62	<i>Melaleuca quinquenervia</i> (Paperbark)	140 200	300	2.9 2	100%	3A	Moderate	Remove - Early earthwork
63	<i>Platanus orientalis</i> (Oriental plane)	Multi-stem	450	Approx. 3 2.4	100%	2A	Moderate	Remove - Early earthwork
64	<i>Melaleuca quinquenervia</i> (Paperbark)	90 100 120	170	2.2 1.6	100%	3A	Low	Remove - Early earthwork
65	<i>Platanus orientalis</i> (Oriental plane)	50 80 170	350	2.3 2.1	100%	2A	Moderate	Remove - Early earthwork
66	<i>Melaleuca quinquenervia</i> (Paperbark)	70 90 120	250	2 1.8	100%	3A	Low	Remove - Early earthwork
67	<i>Melaleuca quinquenervia</i> (Paperbark)	120 180	310	2.6 2	100%	3A	Low	Remove - Early earthwork
68	<i>Melaleuca quinquenervia</i> (Paperbark)	Multi-stem	370	Approx. 2.8 2.2	100%	2A	Moderate	Remove - Early earthwork
69	<i>Eucalyptus sp</i>	340	480	4.1	100%	3A	Moderate	Remove - Early earthwork

				2.4				
70	<i>Melaleuca quinquenervia</i> (Paperbark)	230 230	460	3.9 2.4	100%	2A	Moderate	Remove - Early earthwork
71	<i>Melaleuca quinquenervia</i> (Paperbark)	70 110 120 180 200	360	3.9 2.2	100%	3A	Moderate	Remove - Early earthwork
72	<i>Melaleuca quinquenervia</i> (Paperbark)	Multi-stem	380	Approx. 2.8 2.2	100%	3A	Moderate	Remove - Early earthwork
73	<i>Platanus orientalis</i> (Oriental plane)	Multi-stem	270	Approx. 2.5 1.9	100%	3A	Moderate	Remove - Early earthwork
74	Dead	350	470	4.2 2.4	100%	4A	Low	Remove - Early earthwork
75	<i>Pittosporum undulatum</i> (Australian cheesewood)	70 90 210	230	2.9 1.8	100%	2A	Moderate	Remove - Early earthwork
76	<i>Melaleuca quinquenervia</i> (Paperbark)	280	380	3.4 2.2	100%	2A	Moderate	Remove - Early earthwork
77	<i>Melaleuca quinquenervia</i> (Paperbark)	130 130 150	280	2.7 1.9	100%	2A	Moderate	Remove - Early earthwork
78	<i>Melaleuca quinquenervia</i> (Paperbark)	130 130 190	340	3.2 2.1	100%	3A	Moderate	Remove - Early earthwork

79	<i>Melaleuca quinquenervia</i> (Paperbark)	160 160 210	310	3.7 2	100%	3A	Moderate	Remove - Early earthwork
80	<i>Corymbia citriodora</i> (Lemon-scented gum)	270	340	3.2 2.1	100%	3A	Moderate	Remove - Early earthwork
81	<i>Corymbia citriodora</i> (Lemon-scented gum)	160	220	2 1.8	100%	3A	Moderate	Remove - Early earthwork
82	<i>Corymbia citriodora</i> (Lemon-scented gum)	180	250	2.2 1.8	100%	3A	Moderate	Remove - Early earthwork
83	<i>Melaleuca quinquenervia</i> (Paperbark)	Multi-stem	360	Approx. 2.8 2.2	100%	3A	Moderate	Remove - Early earthwork
84	<i>Melaleuca quinquenervia</i> (Paperbark)	100 110	260	2 1.9	100%	3A	Low	Remove - Early earthwork
85	<i>Corymbia citriodora</i> (Lemon-scented gum)	210 210	490	3.6 2.5	100%	3A	Moderate	Remove - Early earthwork
86	<i>Jacaranda mimosifolia</i> (Jacaranda)	Multi-stem	440	Approx. 2.9 2.3	100%	3A	Moderate	Remove - Early earthwork
87	<i>Melaleuca quinquenervia</i> (Paperbark)	120 160 160 220	550	4.1 2.6	100%	4A	Low	Remove - Early earthwork
88	<i>Melaleuca quinquenervia</i> (Paperbark)	110 130 180	270	3 1.9	100%	3A	Moderate	Remove - Early earthwork
89		200	490	4	100%	3A	Low	Remove - Early earthwork

	<i>Melaleuca quinquenervia</i> (Paperbark)	270		2.5				
90	<i>Platanus orientalis</i> (Oriental plane)	Multi-stem	500	Approx. 3.1 2.5	100%	2A	Moderate	Remove - Early earthwork
91	<i>Melaleuca quinquenervia</i> (Paperbark)	Multi-stem	390	Approx. 2.8 2.2	100%	3A	Moderate	Remove - Early earthwork
92	<i>Melia azedarach</i> (Chinaberry tree)	220	270	2.6 1.9	100%	3A	Moderate	Remove - Early earthwork
93	<i>Corymbia citriodora</i> (Lemon-scented gum)	320	350	3.8 2.1	100%	3A	Moderate	Remove - Early earthwork
94	<i>Corymbia citriodora</i> (Lemon-scented gum)	220	290	2.6 2	100%	3A	Moderate	Remove - Early earthwork
95	<i>Melaleuca quinquenervia</i> (Paperbark)	Multi-stem	320	Approx. 2.7 2.1	100%	2A	Moderate	Remove - Early earthwork
96	<i>Melaleuca quinquenervia</i> (Paperbark)	150 200	360	3 2.2	100%	2A	Moderate	Remove - Early earthwork
97	<i>Corymbia citriodora</i> (Lemon-scented gum)	40 60 110	170	2 1.6	100%	3A	Low	Remove - Early earthwork
98	Dead	120 300	480	3.9 2.4	100%	4A	Low	Remove - Early earthwork
99	<i>Melaleuca quinquenervia</i> (Paperbark)	140 200 200	370	3.8 2.2	100%	3A	Moderate	Remove - Early earthwork
100	<i>Platanus orientalis</i>	230	280	2.8	100%	2A	Moderate	Remove - Early earthwork

	(Oriental plane)			1.9				
101	Dead	60 60 90 140	420	2.2 2.3	100%	4A	Low	Remove - Early earthwork
102	<i>Melaleuca quinquenervia</i> (Paperbark)	Multi-stem	380	Approx. 2.8 2.2	100%	3A	Moderate	Remove - Early earthwork
103	<i>Melaleuca quinquenervia</i> (Paperbark)	110	500	2 2.5	100%	2A	Moderate	Remove - Early earthwork
104	<i>Melaleuca quinquenervia</i> (Paperbark)	210	330	2.5 2.1	100%	2A	Moderate	Remove - Early earthwork
105	<i>Melaleuca quinquenervia</i> (Paperbark)	80 100 150 260	380	3.9 2.2	100%	2A	Moderate	Remove - Early earthwork
106	<i>Melaleuca quinquenervia</i> (Paperbark)	Multi-stem	330	Approx. 2.7 2.1	100%	2A	Moderate	Remove - Early earthwork
107	<i>Melaleuca quinquenervia</i> (Paperbark)	100 140 140 220	360	3.7 2.2	100%	2A	Moderate	Remove - Early earthwork
108	<i>Melaleuca quinquenervia</i> (Paperbark)	90 150 210	290	3.3 2	100%	3A	Moderate	Remove - Early earthwork
109		180	600	4.8	100%	2A	Moderate	Remove - Early earthwork

	<i>Melaleuca quinquenervia</i> (Paperbark)	190 200 230		2.7				
110	<i>Melaleuca quinquenervia</i> (Paperbark)	Multi-stem	380	Approx. 2.8 2.2	100.00%	3A	Moderate	Remove - Early earthwork
111	<i>Eucalyptus saligna</i> (Sydney blue gum)	160	240	2 1.8	0.00%	2A	High	Retain
112	<i>Eucalyptus saligna</i> (Sydney blue gum)	180	260	2.2 1.9	0.00%	2A	High	Retain
113	<i>Eucalyptus saligna</i> (Sydney blue gum)	210	270	2.5 1.9	0.00%	2A	High	Retain
114	<i>Eucalyptus saligna</i> (Sydney blue gum)	210	280	2.5 1.9	0.00%	2A	High	Retain
115	<i>Eucalyptus saligna</i> (Sydney blue gum)	300	240	3.6 2.5	0.00%	2A	High	Retain
116	<i>Eucalyptus saligna</i> (Sydney blue gum)	310	370	3.7 2.2	0.00%	2A	High	Retain
117	<i>Eucalyptus saligna</i> (Sydney blue gum)	350	580	4.2 2.6	0.00%	2A	High	Retain
118	<i>Eucalyptus sideroxylon</i> (Ironbark)	170	200	2 1.7	0.00%	3A	Moderate	Retain
119	<i>Eucalyptus sideroxylon</i> (Ironbark)	130 160	350	2.5 2.1	0.00%	3A	Moderate	Retain
120	<i>Eucalyptus saligna</i> (Sydney blue gum)	270	370	3.2 2.2	0.00%	3A	Moderate	Retain
121	<i>Eucalyptus saligna</i>	430	610	5.2	0.00%	3A	Moderate	Retain

	(Sydney blue gum)			2.7				
122	<i>Eucalyptus saligna</i> (Sydney blue gum)	170	290	2 2	0.00%	2A	High	Retain
123	Exotic	50 80 110 130	450	2.3 2.4	0.00%	2A	Moderate	Retain
124	<i>Eucalyptus saligna</i> (Sydney blue gum)	220	260	2.6 1.9	0.00%	2A	High	Retain
125	<i>Eucalyptus saligna</i> (Sydney blue gum)	300	440	3.6 2.3	0.00%	2A	Moderate	Retain
126	<i>Eucalyptus saligna</i> (Sydney blue gum)	220	270	2.6 1.9	0.00%	2A	High	Retain
127	<i>Eucalyptus punctata</i> (Grey Gum)	270	330	3.2 2.1	0.00%	2A	High	Retain
128	<i>Eucalyptus sideroxylon</i> (Ironbark)	200	240	2.4 1.8	0.00%	3A	Moderate	Retain
129	<i>Eucalyptus saligna</i> (Sydney blue gum)	280	420	3.4 2.3	0.00%	2A	Moderate	Retain
130	<i>Eucalyptus saligna</i> (Sydney blue gum)	180	250	2.2 1.8	0.00%	3A	Moderate	Retain
131	<i>Eucalyptus sideroxylon</i> (Ironbark)	330	360	4 2.2	0.00%	2A	Moderate	Retain
132	<i>Eucalyptus saligna</i> (Sydney blue gum)	60 80 120 160	380	2.7 2.2	0.00%	2A	Moderate	Retain

133	<i>Eucalyptus saligna</i> (Sydney blue gum)	170	210	2 1.7	0.00%	2A	Moderate	Retain
134	<i>Eucalyptus saligna</i> (Sydney blue gum)	340	460	4.1 2.4	0.00%	2A	High	Retain
135	<i>Eucalyptus sideroxylon</i> (Ironbark)	130	190	2 1.6	0.00%	3A	Moderate	Retain
136	<i>Eucalyptus sideroxylon</i> (Ironbark)	210	310	2.5 2	0.00%	3A	Moderate	Retain
137	<i>Eucalyptus saligna</i> (Sydney blue gum)	170	210	2 1.7	0.00%	3A	Moderate	Retain
138	<i>Eucalyptus saligna</i> (Sydney blue gum)	80 80 100 110	430	2.2 2.3	0.00%	2A	Moderate	Retain
139	<i>Eucalyptus sideroxylon</i> (Ironbark)	200	260	2.4 1.9	0.00%	2A	Moderate	Retain
140	<i>Eucalyptus sideroxylon</i> (Ironbark)	160	190	2 1.6	0.00%	3A	Moderate	Retain
141	Exotic	130	150	2 1.5	0.00%	3A	Moderate	Retain
142	<i>Eucalyptus punctata</i> (Grey Gum)	270	350	3.2 2.1	0.00%	3A	Moderate	Retain
143	<i>Eucalyptus punctata</i> (Grey Gum)	130	200	2 1.7	0.00%	2A	Moderate	Retain
144	<i>Eucalyptus punctata</i> (Grey Gum)	210	320	2.5 2.1	0.00%	2A	Moderate	Retain
145	<i>Eucalyptus saligna</i>	280	300	3.4	0.00%	3A	Moderate	Retain

	(Sydney blue gum			2				
146	<i>Eucalyptus saligna</i> (Sydney blue gum	210	360	2.5 2.2	0.00%	3A	Moderate	Retain
147	<i>Eucalyptus sideroxylon</i> (Ironbark)	120 210	450	2.9 2.4	0.00%	3A	Moderate	Retain
148	<i>Eucalyptus sideroxylon</i> (Ironbark)	330	390	4 2.2	0.00%	2A	Moderate	Retain
149	<i>Eucalyptus saligna</i> (Sydney blue gum	250	290	3 2	0.00%	2A	Moderate	Retain
150	<i>Eucalyptus saligna</i> (Sydney blue gum	220	300	2.6 2	0.00%	2A	Moderate	Retain
151	<i>Eucalyptus sideroxylon</i> (Ironbark)	150	210	2 1.7	0.00%	2A	Moderate	Retain
152	Exotic	200	250	2.4 1.8	0.00%	2A	Moderate	Retain
153	<i>Casuarina cunninghamiana</i> (River sheoak)	160	280	2 1.9	0.00%	2A	Moderate	Retain
154	<i>Eucalyptus punctata</i> (Grey Gum)	150	260	2 1.9	0.00%	2A	Moderate	Retain
155	<i>Eucalyptus punctata</i> (Grey Gum)	410	410	4.9 2.3	0.00%	2A	Moderate	Retain
156	<i>Eucalyptus punctata</i> (Grey Gum)	180	180	2 1.6	0.00%	3A	Moderate	Retain
157	<i>Eucalyptus sideroxylon</i> (Ironbark)	200	200	2.4 1.7	0.00%	2A	Moderate	Retain
158	<i>Eucalyptus sideroxylon</i> (Ironbark)	260	260	3.1 1.9	0.00%	3A	Moderate	Retain

159	<i>Eucalyptus sideroxylon</i> (Ironbark)	300	300	3.6 2	0.00%	3A	Moderate	Retain
160	<i>Eucalyptus punctata</i> (Grey Gum)	360	360	4.3 2.2	0.00%	3A	Moderate	Retain
161	<i>Eucalyptus sideroxylon</i> (Ironbark)	220	220	2.6 1.8	0.00%	3A	Moderate	Retain
162	<i>Eucalyptus punctata</i> (Grey Gum)	220	220	2.6 1.8	0.00%	3A	Moderate	Retain
163	<i>Eucalyptus sideroxylon</i> (Ironbark)	330	330	4 2.1	0.00%	3A	Moderate	Retain
164	<i>Eucalyptus punctata</i> (Grey Gum)	220	220	2.6 1.8	0.00%	2A	Moderate	Retain
165	<i>Eucalyptus punctata</i> (Grey Gum)	300	300	3.6 2	0.00%	2A	Moderate	Retain
166	<i>Eucalyptus saligna</i> (Sydney blue gum)	320	440	3.8 2.3	0.00%	3A	Moderate	Retain
167	<i>Eucalyptus punctata</i> (Grey Gum)	310	470	3.7 2.4	0.00%	3A	Moderate	Retain
168	<i>Eucalyptus saligna</i> (Sydney blue gum)	90 190	340	2.5 2.1	0.00%	2A	Moderate	Retain
169	<i>Eucalyptus punctata</i> (Grey Gum)	310	370	3.7 2.2	0.00%	2A	Moderate	Retain
170	<i>Eucalyptus punctata</i> (Grey Gum)	490	700	5.9 2.8	0.00%	2A	Moderate	Retain
171	<i>Eucalyptus saligna</i> (Sydney blue gum)	150	210	2 1.7	0.00%	3A	Moderate	Retain
172	<i>Eucalyptus punctata</i> (Grey Gum)	300	410	3.6	0.00%	3A	Moderate	Retain

				2.3				
173	<i>Eucalyptus sideroxylon</i> (Ironbark)	320	400	3.8 2.3	0.00%	3A	Moderate	Retain
174	<i>Eucalyptus punctata</i> (Grey Gum)	220	230	2.6 1.8	0.00%	3A	Moderate	Retain
175	<i>Eucalyptus punctata</i> (Grey Gum)	120 160	240	2.4 1.8	0.00%	3A	Moderate	Retain
176	<i>Eucalyptus punctata</i> (Grey Gum)	210	310	2.5 2	0.00%	3A	Moderate	Retain
177	<i>Eucalyptus sideroxylon</i> (Ironbark)	200	250	2.4 1.8	0.00%	3A	Moderate	Retain
178	<i>Eucalyptus punctata</i> (Grey Gum)	340	420	4.1 2.3	0.00%	2A	Moderate	Retain
179	<i>Eucalyptus saligna</i> (Sydney blue gum)	460	500	5.5 2.5	0.00%	2A	Moderate	Retain
180	<i>Eucalyptus saligna</i> (Sydney blue gum)	240	310	2.9 2	0.00%	2A	Moderate	Retain
181	<i>Eucalyptus punctata</i> (Grey Gum)	230	320	2.8 2.1	0.00%	2A	Moderate	Retain
182	<i>Eucalyptus punctata</i> (Grey Gum)	310	380	3.7 2.2	0.00%	2A	Moderate	Retain
183	<i>Eucalyptus sideroxylon</i> (Ironbark)	260	320	3.1 2.1	0.00%	3A	Moderate	Retain
184	<i>Eucalyptus punctata</i> (Grey Gum)	200	250	2.4 1.8	0.00%	2A	Moderate	Retain
185	<i>Eucalyptus punctata</i> (Grey Gum)	320	390	3.8 2.2	0.00%	2A	Moderate	Retain

186	<i>Eucalyptus punctata</i> (Grey Gum)	110	150	2 1.5	0.00%	2A	Moderate	Retain
187	<i>Eucalyptus sideroxylon</i> (Ironbark)	130	170	2 1.6	0.00%	3A	Moderate	Retain
188	<i>Eucalyptus sideroxylon</i> (Ironbark)	150	200	2 1.7	0.00%	2A	Moderate	Retain
189	<i>Eucalyptus robusta</i> (Swamp mahogany)	340	430	4.1 2.3	100.00%	2A	Moderate	Remove
190	<i>Casuarina cunninghamiana</i> (River sheoak)	160	230	2 1.8	100.00%	2A	Moderate	Remove
191	<i>Casuarina cunninghamiana</i> (River sheoak)	180	270	2.2 1.9	100.00%	2A	Moderate	Remove
192	<i>Casuarina cunninghamiana</i> (River sheoak)	220	300	2.6 2	100.00%	2A	Moderate	Remove
193	<i>Casuarina cunninghamiana</i> (River sheoak)	110 180	210	2.5 1.7	100.00%	2A	Moderate	Remove
194	<i>Eucalyptus robusta</i> (Swamp mahogany)	270	300	3.2 2	100.00%	2A	Moderate	Remove
195	<i>Eucalyptus robusta</i> (Swamp mahogany)	260	310	3.1 2	21.90%	2A	Moderate	Remove
196	<i>Casuarina cunninghamiana</i> (River sheoak)	240	160	2.9 1.5	18.60%	3A	Moderate	Remove
197	<i>Casuarina cunninghamiana</i> (River sheoak)	130	210	2 1.7	22.50%	2A	Moderate	Remove
198	<i>Casuarina cunninghamiana</i> (River sheoak)	200	220	2.4 1.8	0.00%	2A	Moderate	Retain
199	<i>Casuarina cunninghamiana</i>	120	150	2	0.00%	2A	Moderate	Retain

	(River sheoak)			1.5				
200	<i>Casuarina cunninghamiana</i> (River sheoak)	130	190	2 1.6	0.00%	2A	Moderate	Retain
201	<i>Casuarina cunninghamiana</i> (River sheoak)	170	230	2 1.8	0.00%	2A	Moderate	Retain
202	<i>Casuarina cunninghamiana</i> (River sheoak)	100	130	2 1.5	0.00%	3A	Moderate	Retain
203	<i>Casuarina cunninghamiana</i> (River sheoak)	420	550	5 2.6	0.00%	2A	Moderate	Retain
204	<i>Casuarina cunninghamiana</i> (River sheoak)	220	320	2.6 2.1	0.00%	2A	Moderate	Remove
205	<i>Casuarina cunninghamiana</i> (River sheoak)	360	450	4.3 2.4	0.00%	2A	Moderate	Remove
206	<i>Casuarina cunninghamiana</i> (River sheoak)	140	190	2 1.6	0.00%	2A	Moderate	Retain
207	<i>Casuarina cunninghamiana</i> (River sheoak)	150	190	2 1.6	0.00%	2A	Moderate	Remove
208	<i>Casuarina cunninghamiana</i> (River sheoak)	240	280	2.9 1.9	0.00%	2A	Moderate	Remove
209	<i>Casuarina cunninghamiana</i> (River sheoak)	310	340	3.7 2.1	0.00%	2A	Moderate	Remove
210	<i>Casuarina cunninghamiana</i> (River sheoak)	250	320	3 2.1	0.00%	2A	Moderate	Remove
211	<i>Casuarina cunninghamiana</i> (River sheoak)	160	230	2 1.8	0.00%	2A	Moderate	Remove
212	<i>Casuarina cunninghamiana</i> (River sheoak)	230	330	2.8 2.1	0.00%	3A	Moderate	Remove

213	<i>Eucalyptus punctata</i> (Grey Gum)	180	230	2.2 1.8	0.00%	2A	Moderate	Remove
214	<i>Casuarina cunninghamiana</i> (River sheoak)	170	220	2.2 1.8	0.00%	2A	Moderate	Remove
215	<i>Casuarina cunninghamiana</i> (River sheoak)	130	200	2 1.7	0.00%	3A	Moderate	Remove
216	<i>Casuarina cunninghamiana</i> (River sheoak)	100	190	2 1.6	0.00%	3A	Moderate	Remove
217	<i>Casuarina cunninghamiana</i> (River sheoak)	150	210	2 1.7	0.00%	3A	Moderate	Remove
218	<i>Casuarina cunninghamiana</i> (River sheoak)	230	300	2.8 2	0.00%	2A	Moderate	Remove
219	<i>Eucalyptus punctata</i> (Grey Gum)	180	220	2.2 1.8	0.00%	3A	Moderate	Remove
220	<i>Casuarina cunninghamiana</i> (River sheoak)	170	220	2 1.8	0.00%	2A	Moderate	Remove
221	<i>Eucalyptus punctata</i> (Grey Gum)	230	270	2.8 1.9	0.00%	2A	Moderate	Remove
222	<i>Eucalyptus punctata</i> (Grey Gum)	150	170	2 1.6	0.00%	2A	Moderate	Remove
223	<i>Eucalyptus robusta</i> (Swamp mahogany)	210	250	2.5 1.8	0.00%	2A	Moderate	Remove
224	<i>Corymbia citriodora</i> (Lemon-scented gum)	70 120 150	330	2.4 2.1	0.00%	2A	Moderate	Remove
225	<i>Corymbia citriodora</i> (Lemon-scented gum)	120	130	2 1.5	0.00%	2A	Moderate	Remove

226	<i>Corymbia citriodora</i> (Lemon-scented gum)	480	560	5.8 2.6	25.10%	2A	Moderate	Remove
227	<i>Corymbia citriodora</i> (Lemon-scented gum)	260	360	3.1 2.2	0.00%	2A	Moderate	Remove
228	<i>Corymbia citriodora</i> (Lemon-scented gum)	240	360	2.9 2.2	0.00%	2A	Moderate	Remove
229	<i>Eucalyptus sideroxylon</i> (Ironbark)	270 290	490	4.8 2.5	0.00%	2A	Moderate	Remove
230	<i>Corymbia citriodora</i> (Lemon-scented gum)	110	170	2 1.6	0.00%	2A	Moderate	Remove
231	<i>Corymbia citriodora</i> (Lemon-scented gum)	130	200	2 1.7	0.00%	2A	Moderate	Remove
232	<i>Eucalyptus sideroxylon</i> (Ironbark)	160	230	2 1.8	0.00%	3A	Moderate	Remove
233	<i>Eucalyptus sideroxylon</i> (Ironbark)	180	230	2.2 1.8	0.00%	3A	Moderate	Retain
234	<i>Corymbia citriodora</i> (Lemon-scented gum)	230	290	2.8 2	0.00%	2A	Moderate	Retain
235	<i>Corymbia citriodora</i> (Lemon-scented gum)	310	330	3.7 2.1	0.00%	3A	Moderate	Retain
236	<i>Eucalyptus punctata</i> (Grey Gum)	220	260	2.6 1.9	0.00%	2A	Moderate	Retain
237	<i>Eucalyptus punctata</i> (Grey Gum)	340	410	4.1 2.3	0.00%	2A	Moderate	Retain
238	Dead	260	270	3.1 1.9	0.00%	4A	Low	Retain
239	<i>Fraxinus angustifolia</i>	390	400	4.7	0.00%	2A	Moderate	Retain

	(Narrow-leaved ash)			2.3				
240	<i>Eucalyptus punctata</i> (Grey Gum)	200	360	2.4 2.2	0.00%	3A	Moderate	Retain
241	<i>Eucalyptus saligna</i> (Sydney blue gum)	240	320	2.9 2.1	0.00%	2A	Moderate	Retain
242	<i>Eucalyptus punctata</i> (Grey Gum)	220	320	2.6 2.1	0.00%	2A	Moderate	Retain
243	<i>Eucalyptus punctata</i> (Grey Gum)	480	500	5.8 2.5	0.00%	2A	Moderate	Retain
244	Exotic	340	440	4.1 2.3	0.00%	2A	Moderate	Retain
245	<i>Ficus macrocarpa</i> (Curtain fig)	320	390	3.8 2.2	0.00%	2A	Moderate	Retain
246	<i>Casuarina cunninghamiana</i> (River sheoak)	240	340	3 2.1	0.00%	2A	Moderate	Retain
247	Dead	160	220	2 1.8	0.00%	4A	Low	Retain
248	<i>Casuarina cunninghamiana</i> (River sheoak)	260	360	3.1 2.2	0.00%	2A	Moderate	Retain
249	<i>Casuarina cunninghamiana</i> (River sheoak)	170	250	2 1.8	0.00%	3A	Moderate	Retain
250	<i>Casuarina cunninghamiana</i> (River sheoak)	250	320	3 2.1	0.00%	2A	Moderate	Retain
251	<i>Casuarina cunninghamiana</i> (River sheoak)	240	320	2.9 2.1	0.00%	2A	Moderate	Retain
252	<i>Casuarina cunninghamiana</i> (River sheoak)	200	260	2.4 1.9	0.00%	2A	Moderate	Retain

253	<i>Casuarina cunninghamiana</i> (River sheoak)	160	190	2 1.6	0.00%	3A	Moderate	Retain
254	<i>Casuarina cunninghamiana</i> (River sheoak)	270	380	3.2 2.2	0.00%	2A	Moderate	Remove
255	<i>Casuarina cunninghamiana</i> (River sheoak)	150	230	2 1.8	0.00%	2A	Moderate	Remove
256	Dead	160	220	2 1.8	0.00%	4A	Low	Remove
257	<i>Casuarina cunninghamiana</i> (River sheoak)	210	310	2.5 2	0.00%	2A	Moderate	Retain
258	<i>Casuarina cunninghamiana</i> (River sheoak)	170	230	2 1.8	0.00%	2A	Moderate	Retain
259	<i>Casuarina cunninghamiana</i> (River sheoak)	210	290	2.5 2	0.00%	2A	Moderate	Retain
260	<i>Casuarina cunninghamiana</i> (River sheoak)	180	230	2.2 1.8	0.00%	2A	Moderate	Retain
261	<i>Casuarina cunninghamiana</i> (River sheoak)	160	240	2 1.8	0.00%	2A	Moderate	Remove
262	<i>Casuarina cunninghamiana</i> (River sheoak)	200	280	2.4 1.9	0.00%	2A	Moderate	Remove
263	<i>Casuarina cunninghamiana</i> (River sheoak)	330	500	4 2.5	0.00%	2A	Moderate	Remove
264	<i>Casuarina cunninghamiana</i> (River sheoak)	190	250	2.3 1.8	0.00%	2A	Moderate	Retain
265	<i>Casuarina cunninghamiana</i> (River sheoak)	220	280	2.6 1.9	0.00%	2A	Moderate	Retain
266	<i>Eucalyptus punctata</i> (Grey Gum)	500	660	6	0.00%	2A	Moderate	Retain

				2.8				
267	<i>Casuarina cunninghamiana</i> (River sheoak)	110 70	170	2 1.6	0.00%	2A	Moderate	Retain
268	<i>Eucalyptus punctata</i> (Grey Gum)	230	330	2.8 2.1	0.00%	2A	Moderate	Retain
269	<i>Casuarina cunninghamiana</i> (River sheoak)	120	180	2 1.6	0.00%	3A	Moderate	Retain
270	<i>Eucalyptus punctata</i> (Grey Gum)	190	220	2.3 1.8	0.00%	2A	Moderate	Retain
271	<i>Eucalyptus sideroxylon</i> (Ironbark)	340	370	4.1 2.2	0.00%	2A	Moderate	Remove
272	<i>Eucalyptus punctata</i> (Grey Gum)	170	200	2 1.7	0.00%	2A	Moderate	Remove
273	<i>Eucalyptus saligna</i> (Sydney blue gum)	480	500	5.8 2.5	0.00%	3A	Moderate	Remove
274	<i>Eucalyptus saligna</i> (Sydney blue gum)	140 190 220	430	3.9 2.3	0.00%	2A	Moderate	Remove
275	<i>Eucalyptus punctata</i> (Grey Gum)	290	350	3.5 2.1	0.00%	2A	Moderate	Remove
276	<i>Eucalyptus sideroxylon</i> (Ironbark)	170	210	2 1.7	0.00%	3A	Moderate	Remove
277	<i>Eucalyptus punctata</i> (Grey Gum)	270	380	3.2 2.2	0.00%	3A	Moderate	Remove
278	<i>Eucalyptus sideroxylon</i> (Ironbark)	240	280	2.9 1.9	0.00%	2A	Moderate	Remove
279	<i>Eucalyptus punctata</i> (Grey Gum)	160	240	2	0.00%	2A	Moderate	Remove

				1.8				
280	<i>Eucalyptus sideroxylon</i> (Ironbark)	150	180	2 1.6	0.00%	2A	Moderate	Remove
281	<i>Eucalyptus punctata</i> (Grey Gum)	180	240	2.2 1.8	0.00%	2A	Moderate	Remove
282	Exotic	340	380	4.1 2.2	0.00%	2A	Moderate	Retain
283	<i>Eucalyptus sideroxylon</i> (Ironbark)	290	300	3.5 2	0.00%	3A	Moderate	Retain
284	<i>Eucalyptus sideroxylon</i> (Ironbark)	230	300	2.8 2	0.00%	3A	Moderate	Retain
285	<i>Eucalyptus sideroxylon</i> (Ironbark)	150	200	2 1.7	100% - Located within the footprint	2A	Moderate	Remove
286	<i>Eucalyptus sideroxylon</i> (Ironbark)	270	330	3.2 2.1	100% - Located within the footprint	3A	Moderate	Remove
287	<i>Eucalyptus punctata</i> (Grey Gum)	260	360	3.1 2.2	100% - Located within the footprint	2A	Moderate	Remove
288	<i>Eucalyptus saligna</i> (Sydney blue gum)	320	400	3.8 2.3	100% - Located within the footprint	2A	Moderate	Remove
289	<i>Eucalyptus sideroxylon</i> (Ironbark)	340	410	4.1 2.3	0.00%	2A	Moderate	Retain
290	<i>Eucalyptus punctata</i> (Grey Gum)	120	170	2 1.6	0.00%	2A	Moderate	Retain
291	<i>Eucalyptus punctata</i> (Grey Gum)	210	220	2.5 1.8	0.00%	3A	Moderate	Retain

292	<i>Eucalyptus punctata</i> (Grey Gum)	220	310	2.6 2	0.00%	2A	Moderate	Retain
293	<i>Eucalyptus punctata</i> (Grey Gum)	110	190	2 1.6	0.00%	2A	Moderate	Retain
294	<i>Eucalyptus punctata</i> (Grey Gum)	400	440	4.8 2.3	0.00%	2A	Moderate	Retain
295	<i>Eucalyptus punctata</i> (Grey Gum)	200	320	2.4 2.1	0.00%	2A	Moderate	Retain
296	<i>Eucalyptus punctata</i> (Grey Gum)	150	210	2 1.7	0.00%	2A	Moderate	Retain
297	<i>Eucalyptus punctata</i> (Grey Gum)	200	250	2.4 1.8	0.00%	2A	Moderate	Retain
298	<i>Eucalyptus punctata</i> (Grey Gum)	130	160	2 1.5	0.00%	2A	Moderate	Retain
299	<i>Eucalyptus sideroxylon</i> (Ironbark)	160	180	2 1.6	0.00%	3A	Moderate	Retain
300	<i>Eucalyptus punctata</i> (Grey Gum)	130	220	2 1.8	0.00%	2A	Moderate	Retain
301	<i>Eucalyptus punctata</i> (Grey Gum)	240	340	2.9 2.1	0.00%	2A	Moderate	Retain
302	<i>Eucalyptus punctata</i> (Grey Gum)	50	100	2 1.5	0.00%	2A	Moderate	Retain
303	<i>Eucalyptus punctata</i> (Grey Gum)	200	240	2.4 1.8	0.00%	2A	Moderate	Retain
304	<i>Eucalyptus punctata</i> (Grey Gum)	170	200	2 1.7	0.00%	2A	Moderate	Retain
305	<i>Corymbia citriodora</i>	200	220	2.4	0.00%	2A	Moderate	Retain

	(Lemon-scented gum)			1.8				
306	<i>Corymbia citriodora</i> (Lemon-scented gum)	160	200	2 1.7	0.00%	3A	Moderate	Retain
307	<i>Eucalyptus punctata</i> (Grey Gum)	280	360	3.4 2.2	0.00%	3A	Moderate	Retain
308	<i>Eucalyptus punctata</i> (Grey Gum)	200	270	2.4 1.9	0.00%	3A	Moderate	Retain
309	<i>Eucalyptus punctata</i> (Grey Gum)	200	260	2.4 1.9	0.00%	2A	Moderate	Retain
310	<i>Corymbia citriodora</i> (Lemon-scented gum)	160 160	350	2.7 2.1	0.00%	3A	Moderate	Retain
311	<i>Eucalyptus sideroxylon</i> (Ironbark)	180	200	2.2 1.7	0.00%	3A	Moderate	Retain
312	<i>Eucalyptus punctata</i> (Grey Gum)	160	180	2 1.6	0.00%	2A	Moderate	Retain
313	<i>Eucalyptus punctata</i> (Grey Gum)	280	340	3.4 2.1	0.00%	2A	Moderate	Retain
314	<i>Eucalyptus punctata</i> (Grey Gum)	220	250	2.6 1.8	0.00%	2A	Moderate	Retain
315	<i>Eucalyptus punctata</i> (Grey Gum)	240	280	2.9 1.9	0.00%	2A	Moderate	Retain
316	<i>Eucalyptus punctata</i> (Grey Gum)	140 160	400	2.6 2.3	0.00%	3A	Moderate	Retain
317	<i>Eucalyptus punctata</i> (Grey Gum)	160	220	2 1.8	0.00%	2A	Moderate	Retain
318	<i>Eucalyptus punctata</i> (Grey Gum)	220	280	2.6 1.9	0.00%	2A	Moderate	Retain

319	<i>Eucalyptus punctata</i> (Grey Gum)	280	320	3.4 2.1	0.00%	2A	Moderate	Retain
320	<i>Eucalyptus punctata</i> (Grey Gum)	220	280	2.6 1.9	0.00%	2A	Moderate	Retain
321	<i>Eucalyptus punctata</i> (Grey Gum)	320	380	3.8 2.2	0.00%	2A	Moderate	Retain
322	Dead	140	160	2 1.5	0.00%	4A	Low	Retain
323	<i>Eucalyptus sideroxylon</i> (Ironbark)	240	300	2.9 2	0.00%	3A	Moderate	Retain
324	<i>Eucalyptus punctata</i> (Grey Gum)	160 180 150	360	3.4 2.17	100.00%	2A	Moderate	Remove
325	<i>Eucalyptus punctata</i> (Grey Gum)	220	290	2.6 2.05	0.00%	3A	Moderate	Remove due to security fence
326	<i>Eucalyptus punctata</i> (Grey Gum)	200	200	2.4 1.86	0.00%	2A	Moderate	Remove due to security fence
327	<i>Eucalyptus sideroxylon</i> (Ironbark)	160 70	260	2.1 1.99	5.80%	3A	Moderate	Retain
328	<i>Casuarina cunninghamiana</i> (River sheoak)	130	160	2 1.75	0.00%	2A	Moderate	Retain
329	<i>Eucalyptus sideroxylon</i> (Ironbark)	300	360	3.6 2.17	0.00%	2A	Moderate	Retain
330	<i>Eucalyptus punctata</i> (Grey Gum)	170	180	2 1.81	0.00%	2A	Moderate	Retain
331	<i>Eucalyptus punctata</i> (Grey Gum)	290	390	3.5 2.22	0.00%	2A	Moderate	Retain

332	<i>Eucalyptus punctata</i> (Grey Gum)	140	180	2 1.81	0.00%	2A	Moderate	Retain
333	<i>Eucalyptus punctata</i> (Grey Gum)	250	310	3 2.09	0.00%	2A	Moderate	Retain
334	<i>Eucalyptus punctata</i> (Grey Gum)	220	330	2.64 2.12	0.00%	2A	Moderate	Retain
335	<i>Eucalyptus punctata</i> (Grey Gum)	280	380	3.36 2.21	100.00%	2A	Moderate	Remove
336	<i>Eucalyptus sideroxylon</i> (Ironbark)	320	370	3.84 2.19	100.00%	3A	Moderate	Remove
337	<i>Eucalyptus punctata</i> (Grey Gum)	300	400	3.6 2.24	100.00%	2A	Moderate	Remove
338	<i>Eucalyptus punctata</i> (Grey Gum)	320	370	3.84 2.19	100.00%	3A	Moderate	Remove
339	<i>Eucalyptus sideroxylon</i> (Ironbark)	180	200	2.16 1.86	100.00%	3A	Moderate	Remove
340	<i>Casuarina cunninghamiana</i> (River sheoak)	220	380	2.64 2.21	100.00%	3A	Moderate	Remove
341	<i>Eucalyptus sideroxylon</i> (Ironbark)	200	230	2.4 1.93	100.00%	3A	Moderate	Remove
342	<i>Eucalyptus sideroxylon</i> (Ironbark)	240	270	2.88 2.01	100.00%	3A	Moderate	Remove
343	<i>Casuarina cunninghamiana</i> (River sheoak)	160	170	2 1.78	100.00%	2A	Moderate	Remove
344	<i>Eucalyptus punctata</i> (Grey Gum)	290	320	3.48 2.11	100.00%	2A	Moderate	Remove
345	<i>Eucalyptus sideroxylon</i> (Ironbark)	220	240	2.64	100.00%	3A	Moderate	Remove

				1.95				
346	<i>Eucalyptus punctata</i> (Grey Gum)	160 80 100 110	380	2.8 2.21	25.60%	3A	Moderate	Remove

Tree #	Botanical Name (Common Name)	Height (m)	Canopy (m)	DBH (mm)	DAB (mm)	TPZ (m)	SRZ (m)	TPZ Encroachment	SULE	Retention Value	Action	Notes
347	<i>Eucalyptus paniculata</i> (Grey Ironbark)	4	4	179	200	2	1.68	N/A	1B	Moderate	Retain	Fair heath and structural condition, multi stem (combined DBH)
348	<i>Eucalyptus paniculata</i> (Grey Ironbark)	12	6	310	320	3.72	2.05	N/A	1B	Moderate	Retain	Fair heath and structural condition
349	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	5	3	100	110	2	1.5	N/A	2A	Moderate	Retain	Fair heath and structural condition
350	Dead Tree	8	1	780	270	9.36	1.91	N/A	4A	Low	Remove - Stage 2	Poor health or structural condition
351	<i>Eucalyptus paniculata</i> (Grey Ironbark)	14	6	240	250	2.88	1.85	N/A	1B	Moderate	Retain	Fair heath and structural condition
352	<i>Eucalyptus paniculata</i> (Grey Ironbark)	10	4	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition
353	<i>Eucalyptus paniculata</i> (Grey Ironbark)	14	5	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition

354	<i>Eucalyptus paniculata</i> (Grey Ironbark)	12	4	180	190	2.16	1.65	N/A	1B	Moderate	Retain	Fair heath and structural condition
355	<i>Eucalyptus paniculata</i> (Grey Ironbark)	9	4	180	190	2.16	1.65	N/A	1B	Moderate	Retain	Fair heath and structural condition
356	<i>Eucalyptus paniculata</i> (Grey Ironbark)	13	6	230	240	2.76	1.82	N/A	1B	Moderate	Retain	Fair heath and structural condition
357	<i>Eucalyptus paniculata</i> (Grey Ironbark)	12	5	160	170	2	1.57	N/A	1B	Moderate	Retain	Fair heath and structural condition
358	<i>Eucalyptus paniculata</i> (Grey Ironbark)	12	4	160	170	2	1.57	N/A	1B	Moderate	Retain	Fair heath and structural condition
359	<i>Eucalyptus paniculata</i> (Grey Ironbark)	10	5	205	200	2.5	1.68	N/A	1B	Moderate	Retain	Fair heath and structural condition, multi stem (combined DBH)
360	<i>Eucalyptus paniculata</i> (Grey Ironbark)	10	5	170	180	2.04	1.61	N/A	1B	Moderate	Retain	Fair heath and structural condition
361	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	14	7	380	400	4.56	2.25	N/A	1B	Moderate	Retain	Fair heath and structural condition

362	<i>Eucalyptus paniculata</i> (Grey Ironbark)	13	6	370	380	4.44	2.2	100% - Located within the footprint	1B	Moderate	Remove - early earth work	Fair heath and structural condition
363	<i>Eucalyptus paniculata</i> (Grey Ironbark)	6	4	210	210	2.52	1.72	100% - Located within the footprint	1B	Moderate	Remove - early earth work	Fair heath and structural condition
364	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	8	2	110	120	2	1.5	100% - Located within the footprint	1B	Moderate	Remove - early earth work	Fair heath and structural condition
365	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	8	3	140	150	2	1.5	100% - Located within the footprint	1B	Moderate	Remove - early earth work	Fair heath and structural condition
366	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	12	6	290	300	3.48	2	100% - Located within the footprint	1B	Moderate	Remove - early earth work	Fair heath and structural condition
367	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	12	3	130	140	2	1.5	100% - Located within the footprint	1B	Moderate	Remove - early earth work	Fair heath and structural condition
368	<i>Eucalyptus paniculata</i> (Grey Ironbark)	11	6	190	200	2.28	1.68	100% - Located within the footprint	1B	Moderate	Remove - substation	Fair heath and structural condition
369	<i>Eucalyptus paniculata</i> (Grey Ironbark)	11	5	270	280	3.24	1.94	100% - Located within the footprint	1B	Moderate	Remove - substation	Fair heath and structural condition
370	<i>Eucalyptus paniculata</i> (Grey Ironbark)	13	6	200	210	2.4	1.72	100% - Located within the footprint	1B	Moderate	Remove - substation	Fair heath and structural condition

371	<i>Eucalyptus paniculata</i> (Grey Ironbark)	13	5	180	190	2.16	1.65	100% - Located within the footprint	1B	Moderate	Remove - substation	Fair heath and structural condition
372	<i>Eucalyptus paniculata</i> (Grey Ironbark)	13	4	230	240	2.76	1.82	100% - Located within the footprint	1B	Moderate	Remove - substation	Fair heath and structural condition
373	<i>Eucalyptus paniculata</i> (Grey Ironbark)	10	4	140	150	2	1.5	100% - Located within the footprint	1B	Moderate	Remove - substation	Fair heath and structural condition
374	<i>Allocasuarina torulosa</i> (Forest Sheoak)	12	4	180	190	2.16	1.65	100% - Located within the footprint	1B	Moderate	Remove - substation	Fair heath and structural condition
375	<i>Eucalyptus paniculata</i> (Grey Ironbark)	7	3	130	140	2	1.5	100% - Located within the footprint	1B	Moderate	Remove - early earth work	Fair heath and structural condition
376	<i>Eucalyptus paniculata</i> (Grey Ironbark)	14	7	290	300	3.48	2	100% - Located within the footprint	1B	Moderate	Remove - early earth work	Fair heath and structural condition
377	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	13	4	210	220	2.52	1.75	100% - Located within the footprint	1B	Moderate	Remove - early earth work	Fair heath and structural condition
378	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	6	4	260	290	3.12	1.97	100% - Located within the footprint	1B	Moderate	Remove - early earth work	Fair heath and structural condition
379	<i>Eucalyptus paniculata</i> (Grey Ironbark)	10	4	150	170	2	1.57	100% - Located within the footprint	2D	Moderate	Remove - early earth work	Fair heath and structural condition

380	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	14	8	310	320	3.72	2.05	100% - Located within the footprint	1B	Moderate	Remove - early earth work	Fair heath and structural condition
381	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	10	4	210	220	2.52	1.75	100% - Located within the footprint	1B	Moderate	Remove - substation	Fair heath and structural condition
382	<i>Eucalyptus paniculata</i> (Grey Ironbark)	7	3	140	150	2	1.5	100% - Located within the footprint	2D	Moderate	Remove - substation	Fair heath and structural condition
383	<i>Eucalyptus paniculata</i> (Grey Ironbark)	9	3	150	160	2	1.53	100% - Located within the footprint	2D	Moderate	Remove - substation	Fair heath and structural condition
384	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	14	6	270	280	3.24	1.94	100% - Located within the footprint	1B	Moderate	Remove - substation	Fair heath and structural condition
385	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	14	6	220	230	2.64	1.79	100% - Located within the footprint	1B	Moderate	Remove - substation	Fair heath and structural condition
386	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	12	6	210	220	2.52	1.75	100% - Located within the footprint	1B	Moderate	Remove - substation	Fair heath and structural condition
387	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	7	3	150	160	2	1.53	100% - Located within the footprint	2D	Moderate	Remove - substation	Fair heath and structural condition
388	<i>Eucalyptus paniculata</i> (Grey Ironbark)	10	4	170	180	2.04	1.61	100% - Located within the footprint	2D	Moderate	Remove - substation	Fair heath and structural condition

389	<i>Eucalyptus paniculata</i> (Grey Ironbark)	14	6	250	260	3	1.88	100% - Located within the footprint	1B	Moderate	Remove - substation	Fair heath and structural condition
390	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	13	4	200	210	2.4	1.72	100% - Located within the footprint	1B	Moderate	Remove - substation	Fair heath and structural condition
391	<i>Eucalyptus paniculata</i> (Grey Ironbark)	11	5	190	200	2.28	1.68	100% - Located within the footprint	1B	Moderate	Remove - substation	Fair heath and structural condition
392	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	7	4	290	300	3.48	2	100% - Located within the footprint	1B	Moderate	Remove - substation	Fair heath and structural condition
393	<i>Eucalyptus paniculata</i> (Grey Ironbark)	11	5	269	300	3.2	2	100% - Located within the footprint	1B	Moderate	Remove - substation	Fair heath and structural condition, multi stem (combined DBH)
394	<i>Eucalyptus paniculata</i> (Grey Ironbark)	6	3	150	160	2	1.53	100% - Located within the footprint	1B	Moderate	Remove - substation	Fair heath and structural condition
395	Dead Tree	7	1	170	180	2.04	1.61	100% - Located within the footprint	4A	Low	Remove - substation	Fair heath and structural condition
396	<i>Eucalyptus paniculata</i> (Grey Ironbark)	10	6	200	210	2.4	1.72	100% - Located within the footprint	1B	Moderate	Remove - early earth work	Poor health or structural condition

397	<i>Eucalyptus paniculata</i> (Grey Ironbark)	14	6	200	210	2.4	1.72	100% - Located within the footprint	1B	Moderate	Remove - early earth work	Fair heath and structural condition
398	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	14	5	190	100	2.28	1.5	100% - Located within the footprint	1B	Moderate	Remove - early earth work	Fair heath and structural condition
399	<i>Eucalyptus paniculata</i> (Grey Ironbark)	7	3	120	130	2	1.5	100% - Located within the footprint	1B	Moderate	Remove - early earth work	Fair heath and structural condition
400	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	11	5	210	220	2.52	1.75	100% - Located within the footprint	1B	Moderate	Remove - substation	Fair heath and structural condition
401	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	12	4	260	270	3.12	1.91	N/A	3D	Low	Retain	Poor health or structural condition
402	<i>Eucalyptus paniculata</i> (Grey Ironbark)	9	3	140	150	2	1.5	N/A	1B	Moderate	Retain	Fair heath and structural condition
403	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	8	4	250	260	3	1.88	N/A	1B	Moderate	Retain	Fair heath and structural condition
404	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	8	3	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition
405	<i>Eucalyptus paniculata</i> (Grey Ironbark)	10	4	220	230	2.64	1.79	N/A	1B	Moderate	Retain	Fair heath and structural condition

406	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	12	6	220	230	2.64	1.79	100% - Located within the footprint	1B	Moderate	Remove - early earth work	Fair heath and structural condition
407	<i>Eucalyptus paniculata</i> (Grey Ironbark)	12	6	290	300	3.48	2	100% - Located within the footprint	1B	Moderate	Remove - early earth work	Fair heath and structural condition
408	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	13	6	220	230	2.64	1.79	100% - Located within the footprint	1B	Moderate	Remove - early earth work	Fair heath and structural condition
409	<i>Eucalyptus paniculata</i> (Grey Ironbark)	12	4	180	190	2.16	1.65	100% - Located within the footprint	1B	Moderate	Remove - substation	Fair heath and structural condition
410	<i>Eucalyptus paniculata</i> (Grey Ironbark)	7	4	150	160	2	1.53	100% - Located within the footprint	1B	Moderate	Remove - substation	Fair heath and structural condition
411	<i>Eucalyptus paniculata</i> (Grey Ironbark)	15	10	470	480	5.64	2.43	100% - Located within the footprint	1B	Moderate	Remove - substation	Fair heath and structural condition
412	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	13	6	240	250	2.88	1.85	100% - Located within the footprint	3D	Low	Remove - early earth work	Fair heath and structural condition
413	<i>Eucalyptus paniculata</i> (Grey Ironbark)	8	2	120	130	2	1.5	100% - Located within the footprint	1B	Moderate	Remove - early earth work	Fair heath and structural condition
414	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	15	8	410	420	4.92	2.3	100% - Located within the footprint	1B	Moderate	Remove - early earth work	Fair heath and structural condition

415	<i>Eucalyptus paniculata</i> (Grey Ironbark)	8	3	160	170	2	1.57	100% - Located within the footprint	1B	Moderate	Remove - early earth work	Fair heath and structural condition
416	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	7	3	150	160	2	1.53	100% - Located within the footprint	1B	Moderate	Remove - early earth work	Fair heath and structural condition
417	<i>Eucalyptus paniculata</i> (Grey Ironbark)	7	2	130	140	2	1.5	100% - Located within the footprint	1B	Moderate	Remove - early earth work	Fair heath and structural condition
418	<i>Eucalyptus paniculata</i> (Grey Ironbark)	7	2	110	120	2	1.5	N/A	1B	Moderate	Retain	Fair heath and structural condition
419	<i>Allocasuarina torulosa</i> (Forest Sheoak)	6	3	130	140	2	1.5	N/A	1B	Moderate	Retain	Fair heath and structural condition
420	<i>Eucalyptus paniculata</i> (Grey Ironbark)	13	6	304	430	3.6	2.32	N/A	1B	Moderate	Retain	Fair heath and structural condition, multi stem (combined DBH)
421	<i>Eucalyptus paniculata</i> (Grey Ironbark)	10	4	210	220	2.52	1.75	N/A	1B	Moderate	Retain	Fair heath and structural condition
422	<i>Eucalyptus paniculata</i> (Grey Ironbark)	8	3	190	200	2.28	1.68	N/A	1B	Moderate	Retain	Fair heath and structural condition

423	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	8	3	170	180	2.04	1.61	N/A	1B	Moderate	Retain	Fair heath and structural condition
424	<i>Eucalyptus paniculata</i> (Grey Ironbark)	6	2	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition
425	<i>Eucalyptus paniculata</i> (Grey Ironbark)	9	6	270	280	3.24	1.94	N/A	1B	Moderate	Retain	Fair heath and structural condition
426	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	12	7	280	290	3.36	1.97	N/A	1B	Moderate	Retain	Fair heath and structural condition
427	<i>Eucalyptus paniculata</i> (Grey Ironbark)	8	3	130	140	2	1.5	N/A	1B	Moderate	Retain	Fair heath and structural condition
428	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	8	3	135	250	2	1.85	N/A	1B	Moderate	Retain	Fair heath and structural condition, multi stem (combined DBH)
429	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	11	6	350	310	4.2	2.02	100% - Located within the footprint	1B	Moderate	Remove - early earth work	Fair heath and structural condition
430	<i>Allocasuarina torulosa</i> (Forest Sheoak)	6	4	220	230	2.64	1.79	100% - Located within the footprint	1B	Moderate	Remove - early earth work	Fair heath and structural condition

431	<i>Eucalyptus paniculata</i> (Grey Ironbark)	6	3	180	190	2.16	1.65	100% - Located within the footprint	1B	Moderate	Remove - early earth work	Fair heath and structural condition
432	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	8	2	194	240	2.3	1.82	100% - Located within the footprint	1B	Moderate	Remove - early earth work	Poor health or structural condition, multi stem (combined DBH)
433	<i>Eucalyptus paniculata</i> (Grey Ironbark)	10	3	210	222	2.52	1.76	N/A	3D	Low	Retain	Fair heath and structural condition
434	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	12	5	220	230	2.64	1.79	N/A	1B	Moderate	Retain	Fair heath and structural condition
435	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	12	6	300	310	3.6	2.02	N/A	1B	Moderate	Retain	Fair heath and structural condition
436	<i>Eucalyptus paniculata</i> (Grey Ironbark)	13	6	340	350	4.08	2.13	N/A	1B	Moderate	Retain	Fair heath and structural condition
437	<i>Eucalyptus paniculata</i> (Grey Ironbark)	7	3	150	140	2	1.5	N/A	1B	Moderate	Retain	Fair heath and structural condition, multi stem (combined DBH)
438	<i>Eucalyptus paniculata</i> (Grey Ironbark)	13	6	380	390	4.56	2.23	N/A	1B	Moderate	Retain	Fair heath and structural condition

439	<i>Eucalyptus paniculata</i> (Grey Ironbark)	11	3	180	190	2.16	1.65	N/A	1B	Moderate	Retain	Fair heath and structural condition
440	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	10	4	210	220	2.52	1.75	N/A	1B	Moderate	Retain	Fair heath and structural condition
441	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	11	4	200	210	2.4	1.72	N/A	1B	Moderate	Retain	Fair heath and structural condition
442	<i>Eucalyptus paniculata</i> (Grey Ironbark)	12	5	270	280	3.24	1.94	N/A	1B	Moderate	Retain	Fair heath and structural condition
443	<i>Eucalyptus paniculata</i> (Grey Ironbark)	11	5	190	200	2.28	1.68	N/A	1B	Moderate	Retain	Fair heath and structural condition
444	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	11	5	220	230	2.64	1.79	N/A	1B	Moderate	Retain	Fair heath and structural condition
445	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	12	5	170	180	2.04	1.61	N/A	1B	Moderate	Retain	Fair heath and structural condition
446	<i>Eucalyptus paniculata</i> (Grey Ironbark)	12	5	230	240	2.76	1.82	100% - Located within the footprint	1B	Moderate	Remove - early earth work	Fair heath and structural condition
447	<i>Eucalyptus paniculata</i> (Grey Ironbark)	11	5	210	220	2.52	1.75	N/A	1B	Moderate	Retain	Fair heath and structural condition

448	<i>Eucalyptus paniculata</i> (Grey Ironbark)	8	3	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition
449	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	12	6	270	280	3.24	1.94	N/A	1B	Moderate	Retain	Fair heath and structural condition
450	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	10	5	180	190	2.16	1.65	N/A	1B	Moderate	Retain	Fair heath and structural condition
451	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	10	4	180	190	2.16	1.65	N/A	1B	Moderate	Retain	Fair heath and structural condition
452	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	12	6	310	320	3.72	2.05	N/A	1B	Moderate	Retain	Fair heath and structural condition
453	<i>Eucalyptus paniculata</i> (Grey Ironbark)	8	3	160	170	2	1.57	N/A	1B	Moderate	Retain	Fair heath and structural condition
454	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	8	2	200	200	2.4	1.68	N/A	1B	Moderate	Retain	Fair heath and structural condition
455	<i>Eucalyptus paniculata</i> (Grey Ironbark)	11	5	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition
456	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	12	4	200	230	2.4	1.79	N/A	1B	Moderate	Retain	Fair heath and structural condition

457	<i>Eucalyptus paniculata</i> (Grey Ironbark)	12	6	230	240	2.76	1.82	N/A	1B	Moderate	Retain	Fair heath and structural condition
458	<i>Eucalyptus paniculata</i> (Grey Ironbark)	11	4	190	200	2.28	1.68	N/A	1B	Moderate	Retain	Fair heath and structural condition
459	<i>Eucalyptus paniculata</i> (Grey Ironbark)	11	4	160	170	2	1.57	N/A	1B	Moderate	Retain	Fair heath and structural condition
460	<i>Eucalyptus paniculata</i> (Grey Ironbark)	8	3	140	150	2	1.5	N/A	1B	Moderate	Retain	Fair heath and structural condition
461	<i>Eucalyptus paniculata</i> (Grey Ironbark)	7	3	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition
462	<i>Eucalyptus paniculata</i> (Grey Ironbark)	13	6	260	270	3.12	1.91	100% - Located within the footprint	1B	Moderate	Remove - early earth work	Fair heath and structural condition
463	<i>Eucalyptus paniculata</i> (Grey Ironbark)	8	3	160	170	2	1.57	100% - Located within the footprint	1B	Moderate	Remove - early earth work	Fair heath and structural condition
464	<i>Eucalyptus paniculata</i> (Grey Ironbark)	11	5	260	270	3.12	1.91	N/A	1B	Moderate	Retain	Fair heath and structural condition
465	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	12	5	270	280	3.24	1.94	N/A	1B	Moderate	Retain	Fair heath and structural condition

466	<i>Eucalyptus paniculata</i> (Grey Ironbark)	10	5	340	350	4.08	2.13	N/A	3D	Low	Remove - early earth work	Poor health or structural condition
467	<i>Eucalyptus paniculata</i> (Grey Ironbark)	11	4	200	210	2.4	1.72	N/A	1B	Moderate	Retain	Fair heath and structural condition
468	<i>Eucalyptus paniculata</i> (Grey Ironbark)	9	3	130	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition
469	<i>Eucalyptus paniculata</i> (Grey Ironbark)	9	3	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition
470	<i>Eucalyptus paniculata</i> (Grey Ironbark)	9	3	170	180	2.04	1.61	N/A	1B	Moderate	Retain	Fair heath and structural condition
471	<i>Eucalyptus paniculata</i> (Grey Ironbark)	9	3	180	190	2.16	1.65	N/A	1B	Moderate	Retain	Fair heath and structural condition
472	<i>Eucalyptus paniculata</i> (Grey Ironbark)	9	4	180	190	2.16	1.65	N/A	1B	Moderate	Retain	Fair heath and structural condition
473	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	12	7	450	460	5.4	2.39	N/A	1B	Moderate	Retain	Fair heath and structural condition
474	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	9	3	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition

475	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	11	6	220	230	2.64	1.79	N/A	1B	Moderate	Retain	Fair heath and structural condition
476	Dead Tree	9	4	310	320	3.72	2.05	N/A	4A	Low	Remove - Stage 2	Dead
477	<i>Eucalyptus paniculata</i> (Grey Ironbark)	9	3	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition
478	<i>Eucalyptus paniculata</i> (Grey Ironbark)	6	3	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition
479	<i>Eucalyptus paniculata</i> (Grey Ironbark)	9	3	130	140	2	1.5	N/A	1B	Moderate	Retain	Fair heath and structural condition
480	<i>Eucalyptus paniculata</i> (Grey Ironbark)	7	3	230	240	2.76	1.82	N/A	1B	Moderate	Retain	Fair heath and structural condition
481	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	11	6	300	320	3.6	2.05	N/A	1B	Moderate	Retain	Fair heath and structural condition
482	<i>Eucalyptus paniculata</i> (Grey Ironbark)	6	2	100	110	2	1.5	N/A	1B	Moderate	Retain	Fair heath and structural condition
483	<i>Eucalyptus paniculata</i> (Grey Ironbark)	9	4	219	250	2.6	1.85	N/A	1B	Moderate	Retain	Fair heath and structural condition, multi stem (combined DBH)

484	<i>Eucalyptus paniculata</i> (Grey Ironbark)	8	4	217	280	2.6	1.94	N/A	1B	Moderate	Retain	Fair heath and structural condition, multi stem (combined DBH)
485	<i>Eucalyptus paniculata</i> (Grey Ironbark)	9	3	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition
486	<i>Eucalyptus paniculata</i> (Grey Ironbark)	7	3	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition
487	<i>Eucalyptus paniculata</i> (Grey Ironbark)	12	4	180	190	2.16	1.65	N/A	1B	Moderate	Retain	Fair heath and structural condition
488	<i>Eucalyptus paniculata</i> (Grey Ironbark)	11	5	180	190	2.16	1.65	N/A	1B	Moderate	Retain	Fair heath and structural condition
489	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	12	5	320	330	3.84	2.08	N/A	1B	Moderate	Retain	Fair heath and structural condition
490	<i>Eucalyptus paniculata</i> (Grey Ironbark)	13	7	330	340	3.96	2.1	N/A	1B	Moderate	Retain	Fair heath and structural condition
491	<i>Eucalyptus paniculata</i> (Grey Ironbark)	13	4	200	210	2.4	1.72	N/A	1B	Moderate	Retain	Fair heath and structural condition

492	<i>Eucalyptus paniculata</i> (Grey Ironbark)	13	4	160	170	2	1.57	N/A	1B	Moderate	Retain	Fair heath and structural condition
493	<i>Eucalyptus paniculata</i> (Grey Ironbark)	11	3	140	150	2	1.5	N/A	2D	Moderate	Retain	Fair heath and structural condition
494	<i>Eucalyptus paniculata</i> (Grey Ironbark)	10	3	140	150	2	1.5	N/A	1B	Moderate	Retain	Fair heath and structural condition
495	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	9	3	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition
496	<i>Eucalyptus paniculata</i> (Grey Ironbark)	10	4	190	200	2.28	1.68	N/A	1B	Moderate	Retain	Fair heath and structural condition
497	<i>Eucalyptus paniculata</i> (Grey Ironbark)	10	4	220	230	2.64	1.79	N/A	1B	Moderate	Retain	Fair heath and structural condition
498	<i>Angophora floribunda</i> (Rough-barked Apple)	12	4	170	180	2.04	1.61	N/A	1B	Moderate	Retain	Fair heath and structural condition
499	<i>Eucalyptus paniculata</i> (Grey Ironbark)	12	4	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition
500	<i>Eucalyptus paniculata</i> (Grey Ironbark)	7	3	120	130	2	1.5	N/A	1B	Moderate	Retain	Fair heath and structural condition

501	<i>Eucalyptus paniculata</i> (Grey Ironbark)	11	4	170	180	2.04	1.61	N/A	1B	Moderate	Retain	Fair heath and structural condition
502	<i>Eucalyptus paniculata</i> (Grey Ironbark)	12	4	193	230	2.3	1.79	N/A	1B	Moderate	Retain	Fair heath and structural condition, multi stem (combined DBH)
503	<i>Eucalyptus paniculata</i> (Grey Ironbark)	8	2	130	140	2	1.5	N/A	1B	Moderate	Retain	Fair heath and structural condition
504	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	9	3	200	210	2.4	1.72	N/A	1B	Moderate	Retain	Fair heath and structural condition
505	<i>Eucalyptus paniculata</i> (Grey Ironbark)	9	3	200	210	2.4	1.72	N/A	1B	Moderate	Retain	Fair heath and structural condition
506	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	9	4	160	170	2	1.57	N/A	1B	Moderate	Retain	Fair heath and structural condition
507	<i>Eucalyptus paniculata</i> (Grey Ironbark)	8	3	230	240	2.76	1.82	N/A	1B	Moderate	Retain	Fair heath and structural condition
508	<i>Eucalyptus paniculata</i> (Grey Ironbark)	9	3	188	230	2.3	1.79	N/A	1B	Moderate	Retain	Fair heath and structural condition, multi stem (combined DBH)

509	<i>Eucalyptus paniculata</i> (Grey Ironbark)	10	3	140	150	2	1.5	N/A	1B	Moderate	Retain	Fair heath and structural condition
510	<i>Eucalyptus paniculata</i> (Grey Ironbark)	9	5	160	120	2	1.5	N/A	1B	Moderate	Retain	Fair heath and structural condition
511	<i>Eucalyptus paniculata</i> (Grey Ironbark)	8	3	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition
512	<i>Eucalyptus paniculata</i> (Grey Ironbark)	11	4	290	300	3.48	2	N/A	1B	Moderate	Retain	Fair heath and structural condition
513	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	12	5	280	290	3.36	1.97	N/A	1B	Moderate	Retain	Fair heath and structural condition
514	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	13	5	300	310	3.6	2.02	4.7% - Minor encroachment	1B	Moderate	Retain	Fair heath and structural condition
515	<i>Angophora floribunda</i> (Rough-barked Apple)	11	3	170	180	2.04	1.61	N/A	1B	Moderate	Retain	Fair heath and structural condition
516	<i>Eucalyptus paniculata</i> (Grey Ironbark)	7	3	170	180	2.04	1.61	N/A	1B	Moderate	Remove - early earth work	Fair heath and structural condition
517	<i>Eucalyptus paniculata</i> (Grey Ironbark)	12	5	300	310	3.6	2.02	N/A	1B	Moderate	Retain	Fair heath and structural condition

518	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	14	8	450	460	5.4	2.39	N/A	1B	Moderate	Retain	Fair heath and structural condition
519	<i>Eucalyptus paniculata</i> (Grey Ironbark)	6	3	120	130	2	1.5	N/A	1B	Moderate	Retain	Fair heath and structural condition
520	<i>Eucalyptus paniculata</i> (Grey Ironbark)	8	3	200	210	2.4	1.72	N/A	1B	Moderate	Retain	Fair heath and structural condition, multi stem (combined DBH)
521	<i>Eucalyptus paniculata</i> (Grey Ironbark)	9	2	150	160	2	1.53	N/A	4C	Low	Remove - Stage 2	Poor health or structural condition
522	<i>Eucalyptus paniculata</i> (Grey Ironbark)	5	3	100	110	2	1.5	N/A	1B	Moderate	Retain	Fair heath and structural condition
523	<i>Eucalyptus paniculata</i> (Grey Ironbark)	13	7	361	210	4.3	1.72	N/A	1B	Moderate	Retain	Fair heath and structural condition, multi stem (combined DBH)
524	<i>Eucalyptus paniculata</i> (Grey Ironbark)	12	4	190	200	2.28	1.68	N/A	1B	Moderate	Retain	Fair heath and structural condition
525	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	10	4	170	180	2.04	1.61	N/A	1B	Moderate	Retain	Fair heath and structural condition

526	<i>Eucalyptus paniculata</i> (Grey Ironbark)	9	3	190	240	2.3	1.82	N/A	1B	Moderate	Retain	Fair health and structural condition, multi stem (combined DBH)
527	<i>Eucalyptus paniculata</i> (Grey Ironbark)	12	5	180	190	2.16	1.65	N/A	1B	Moderate	Retain	Fair health and structural condition
528	<i>Eucalyptus paniculata</i> (Grey Ironbark)	8	3	184	250	2.2	1.85	N/A	1B	Moderate	Retain	Fair health and structural condition, multi stem (combined DBH)
529	<i>Eucalyptus paniculata</i> (Grey Ironbark)	10	5	290	410	3.5	2.28	7.9% - Minor encroachment	1B	Moderate	Retain	Fair health and structural condition, multi stem (combined DBH)
530	Dead Tree	8	2	160	170	2	1.57	N/A	4A	Low	Remove - Stage 2	Poor health or structural condition
531	<i>Eucalyptus paniculata</i> (Grey Ironbark)	8	5	280	290	3.36	1.97	15.1% - Moderate encroachment with structural root zone encroachment	1B	Moderate	Remove - early earth work	Fair health and structural condition

532	<i>Eucalyptus paniculata</i> (Grey Ironbark)	7	3	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition
533	<i>Eucalyptus paniculata</i> (Grey Ironbark)	10	4	219	250	2.6	1.85	N/A	1B	Moderate	Retain	Fair heath and structural condition, multi stem (combined DBH)
534	<i>Eucalyptus paniculata</i> (Grey Ironbark)	11	3	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition
535	<i>Eucalyptus paniculata</i> (Grey Ironbark)	11	4	230	230	2.76	1.79	N/A	1B	Moderate	Retain	Fair heath and structural condition
536	<i>Eucalyptus paniculata</i> (Grey Ironbark)	10	4	200	210	2.4	1.72	N/A	1B	Moderate	Retain	Fair heath and structural condition
537	<i>Eucalyptus paniculata</i> (Grey Ironbark)	9	4	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition
538	<i>Eucalyptus paniculata</i> (Grey Ironbark)	6	3	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition
539	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	13	6	340	350	4.08	2.13	N/A	1B	Moderate	Retain	Fair heath and structural condition

540	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	11	4	300	310	3.6	2.02	N/A	1B	Moderate	Retain	Fair heath and structural condition
541	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	10	4	230	240	2.76	1.82	N/A	1B	Moderate	Retain	Fair heath and structural condition
542	<i>Eucalyptus paniculata</i> (Grey Ironbark)	10	3	180	190	2.16	1.65	N/A	1B	Moderate	Retain	Fair heath and structural condition
543	<i>Eucalyptus paniculata</i> (Grey Ironbark)	7	4	156	280	2	1.94	N/A	1B	Moderate	Retain	Fair heath and structural condition, multi stem (combined DBH)
544	<i>Eucalyptus paniculata</i> (Grey Ironbark)	9	2	140	150	2	1.5	N/A	1B	Moderate	Retain	Fair heath and structural condition
545	<i>Eucalyptus paniculata</i> (Grey Ironbark)	14	5	305	360	3.7	2.15	N/A	1B	Moderate	Retain	Fair heath and structural condition, multi stem (combined DBH)
546	<i>Eucalyptus sideroxylon</i> (Red Ironbark)	12	5	300	310	3.6	2.02	N/A	1B	Moderate	Retain	Fair heath and structural condition

547	<i>Eucalyptus paniculata</i> (Grey Ironbark)	9	4	179	200	2.1	1.68	N/A	1B	Moderate	Retain	Fair heath and structural condition, multi stem (combined DBH)
548	<i>Eucalyptus sideroxylon</i> (Red Ironbark)	10	4	310	320	3.72	2.05	N/A	1B	Moderate	Retain	Fair heath and structural condition
549	<i>Eucalyptus sideroxylon</i> (Red Ironbark)	6	3	290	300	3.48	2	N/A	3D	Moderate	Retain	Fair heath and structural condition
550	<i>Corymbia maculata</i> (Spotted Gum)	10	6	219	300	2.6	2	N/A	1B	Moderate	Retain	Fair heath and structural condition, multi stem (combined DBH)
551	<i>Eucalyptus sideroxylon</i> (Red Ironbark)	11	4	230	240	2.76	1.82	N/A	1B	Moderate	Retain	Fair heath and structural condition
552	<i>Eucalyptus sideroxylon</i> (Red Ironbark)	12	6	387	500	4.6	2.47	N/A	1B	Moderate	Retain	Fair heath and structural condition, multi stem (combined DBH)
553	<i>Lophostemon confertus</i> (Brush Box)	5	3	300	310	3.6	2.02	N/A	1B	Moderate	Retain	Fair heath and structural condition

554	<i>Eucalyptus paniculata</i> (Grey Ironbark)	10	4	200	210	2.4	1.72	N/A	1B	Moderate	Retain	Fair heath and structural condition
555	<i>Eucalyptus sideroxylon</i> (Red Ironbark)	11	5	200	210	2.4	1.72	N/A	3D	Moderate	Retain	Fair heath and structural condition
556	<i>Corymbia citriodora</i> (Lemon-scented Gum)	12	7	200	210	2.4	1.72	N/A	1B	Moderate	Retain	Fair heath and structural condition
557	<i>Angophora costata</i> (Smooth-barked Apple)	9	3	130	140	2	1.5	N/A	1B	Moderate	Retain	Fair heath and structural condition
558	<i>Eucalyptus paniculata</i> (Grey Ironbark)	11	3	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition
559	<i>Angophora costata</i> (Smooth-barked Apple)	10	5	200	210	2.4	1.72	N/A	1B	Moderate	Retain	Fair heath and structural condition
560	<i>Eucalyptus paniculata</i> (Grey Ironbark)	12	4	160	170	2	1.57	N/A	1B	Moderate	Retain	Fair heath and structural condition
561	<i>Angophora costata</i> (Smooth-barked Apple)	12	6	320	460	3.8	2.39	N/A	1B	Moderate	Retain	Fair heath and structural condition, multi stem (combined DBH)

562	<i>Eucalyptus paniculata</i> (Grey Ironbark)	7	4	180	200	2.2	1.68	N/A	1B	Moderate	Retain	Fair heath and structural condition, multi stem (combined DBH)
563	<i>Corymbia citriodora</i> (Lemon-scented Gum)	10	5	200	210	2.4	1.72	N/A	1B	Moderate	Retain	Fair heath and structural condition
564	<i>Eucalyptus sideroxylon</i> (Red Ironbark)	6	3	180	190	2.16	1.65	N/A	1B	Moderate	Retain	Fair heath and structural condition
565	<i>Eucalyptus sideroxylon</i> (Red Ironbark)	9	4	250	260	3	1.88	N/A	1B	Moderate	Retain	Fair heath and structural condition
566	<i>Eucalyptus sideroxylon</i> (Red Ironbark)	8	3	200	210	2.4	1.72	N/A	1B	Moderate	Retain	Fair heath and structural condition
567	<i>Eucalyptus sideroxylon</i> (Red Ironbark)	11	4	260	270	3.12	1.91	N/A	1B	Moderate	Retain	Fair heath and structural condition
568	<i>Eucalyptus sideroxylon</i> (Red Ironbark)	7	3	160	170	2	1.57	30.1% – Major encroachment	1B	Moderate	Remove - Stage 2	Fair heath and structural condition
569	<i>Eucalyptus sideroxylon</i> (Red Ironbark)	8	4	191	230	2.3	1.79	N/A	1B	Moderate	Retain	Fair heath and structural condition, multi stem (combined DBH)

570	<i>Corymbia citriodora</i> (Lemon-scented Gum)	12	6	220	230	2.64	1.79	N/A	1B	Moderate	Retain	Fair heath and structural condition
571	<i>Eucalyptus sideroxylon</i> (Red Ironbark)	7	3	200	210	2.4	1.72	N/A	1B	Moderate	Retain	Fair heath and structural condition
572	<i>Eucalyptus sideroxylon</i> (Red Ironbark)	7	4	210	220	2.52	1.75	N/A	1B	Moderate	Retain	Fair heath and structural condition
573	<i>Eucalyptus crebra</i> (Narrow-leaved Ironbark)	11	5	400	430	4.8	2.32	N/A	3D	Moderate	Retain	Fair heath and structural condition
574	<i>Eucalyptus sideroxylon</i> (Red Ironbark)	10	6	450	460	5.4	2.39	N/A	1B	Moderate	Retain	Fair heath and structural condition
575	<i>Eucalyptus sideroxylon</i> (Red Ironbark)	9	4	220	230	2.64	1.79	N/A	1B	Moderate	Retain	Fair heath and structural condition
576	<i>Corymbia citriodora</i> (Lemon-scented Gum)	9	4	180	190	2.16	1.65	100% - Located within the footprint	1B	Moderate	Remove - Stage 2 Fence	Fair heath and structural condition
577	<i>Eucalyptus sideroxylon</i> (Red Ironbark)	12	4	200	210	2.4	1.72	100% - Located within the footprint	1B	Moderate	Remove - Stage 2 Fence	Fair heath and structural condition
578	<i>Eucalyptus sideroxylon</i> (Red Ironbark)	8	5	160	170	2	1.57	N/A	1B	Moderate	Retain	Fair heath and structural condition

579	<i>Corymbia citriodora</i> (Lemon-scented Gum)	14	8	310	320	3.72	2.05	100% - Located within the footprint	1B	Moderate	Remove - Stage 2 Fence	Fair heath and structural condition
580	<i>Eucalyptus paniculata</i> (Grey Ironbark)	8	3	140	150	2	1.5	100% - Located within the footprint	1B	Moderate	Remove - Stage 2 Fence	Fair heath and structural condition
581	<i>Corymbia citriodora</i> (Lemon-scented Gum)	8	3	166	300	2	2	100% - Located within the footprint	1B	Moderate	Remove - Stage 2 Fence	Fair heath and structural condition, multi stem (combined DBH)
582	<i>Eucalyptus paniculata</i> (Grey Ironbark)	10	5	200	210	2.4	1.72	100% - Located within the footprint	1B	Moderate	Remove - Stage 2 Fence	Fair heath and structural condition
583	<i>Corymbia citriodora</i> (Lemon-scented Gum)	12	7	310	320	3.72	2.05	N/A	1B	Moderate	Retain	Fair heath and structural condition
584	<i>Eucalyptus paniculata</i> (Grey Ironbark)	8	3	150	160	2	1.53	100% - Located within the footprint	1B	Moderate	Remove - Stage 2 Fence	Fair heath and structural condition
585	<i>Eucalyptus paniculata</i> (Grey Ironbark)	11	5	300	310	3.6	2.02	100% - Located within the footprint	1B	Moderate	Remove - Stage 2 Fence	Fair heath and structural condition
586	<i>Corymbia maculata</i> (Spotted Gum)	9	4	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition

587	<i>Corymbia maculata</i> (Spotted Gum)	8	3	160	170	2	1.57	N/A	1B	Moderate	Retain	Fair heath and structural condition
588	<i>Eucalyptus sideroxylon</i> (Red Ironbark)	8	3	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition
589	<i>Eucalyptus sideroxylon</i> (Red Ironbark)	6	3	290	300	3.48	2	N/A	1B	Moderate	Retain	Fair heath and structural condition
590	<i>Eucalyptus sideroxylon</i> (Red Ironbark)	6	3	300	360	3.6	2.15	N/A	1B	Moderate	Retain	Fair heath and structural condition
591	<i>Eucalyptus sideroxylon</i> (Red Ironbark)	10	5	290	300	3.48	2	N/A	1B	Moderate	Retain	Fair heath and structural condition
592	<i>Eucalyptus sideroxylon</i> (Red Ironbark)	10	5	370	380	4.44	2.2	N/A	1B	Moderate	Retain	Fair heath and structural condition
593	<i>Eucalyptus sideroxylon</i> (Red Ironbark)	12	6	470	480	5.64	2.43	N/A	1B	Moderate	Retain	Fair heath and structural condition
594	<i>Corymbia citriodora</i> (Lemon-scented Gum)	9	3	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition
595	<i>Eucalyptus paniculata</i> (Grey Ironbark)	8	3	160	170	2	1.57	N/A	1B	Moderate	Retain	Fair heath and structural condition

596	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	11	5	320	330	3.84	2.08	100% - Located within the footprint	1B	Moderate	Remove - Stage 2 Fence	Fair heath and structural condition
597	<i>Eucalyptus paniculata</i> (Grey Ironbark)	13	6	300	310	3.6	2.02	100% - Located within the footprint	1B	Moderate	Remove - Stage 2 Fence	Fair heath and structural condition
598	<i>Eucalyptus paniculata</i> (Grey Ironbark)	12	4	210	220	2.52	1.75	N/A	1B	Moderate	Retain	Fair heath and structural condition
599	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	9	4	200	210	2.4	1.72	100% - Located within the footprint	1B	Moderate	Remove - Stage 2 Fence	Fair heath and structural condition
600	<i>Eucalyptus paniculata</i> (Grey Ironbark)	5	2	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition
601	<i>Eucalyptus paniculata</i> (Grey Ironbark)	6	3	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition
602	<i>Corymbia citriodora</i> (Lemon-scented Gum)	9	4	190	200	2.28	1.68	N/A	1B	Moderate	Retain	Fair heath and structural condition
603	<i>Angophora costata</i> (Smooth-barked Apple)	10	4	200	210	2.4	1.72	N/A	1B	Moderate	Retain	Fair heath and structural condition

604	<i>Corymbia citriodora</i> (Lemon-scented Gum)	13	7	424	590	5.1	2.65	N/A	1B	Moderate	Retain	Fair heath and structural condition, multi stem (combined DBH)
605	<i>Eucalyptus sideroxylon</i> (Red Ironbark)	9	4	160	170	2	1.57	N/A	1B	Moderate	Retain	Fair heath and structural condition
606	<i>Eucalyptus paniculata</i> (Grey Ironbark)	7	3	160	170	2	1.57	N/A	1B	Moderate	Retain	Fair heath and structural condition
607	<i>Eucalyptus paniculata</i> (Grey Ironbark)	7	3	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition
608	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	11	5	310	320	3.72	2.05	N/A	1B	Moderate	Retain	Fair heath and structural condition
609	<i>Eucalyptus paniculata</i> (Grey Ironbark)	8	3	150	160	2	1.53	100% - Located within the footprint	1B	Moderate	Remove - Stage 2 Fence	Fair heath and structural condition
610	<i>Eucalyptus paniculata</i> (Grey Ironbark)	10	7	310	350	3.7	2.13	100% - Located within the footprint	1B	Moderate	Remove - Stage 2 Fence	Fair heath and structural condition, multi stem (combined DBH)
611	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	13	6	420	410	5.04	2.28	N/A	1B	Moderate	Retain	Fair heath and structural condition

612	<i>Eucalyptus paniculata</i> (Grey Ironbark)	9	3	150	160	2	1.53	N/A	3D	Moderate	Retain	Fair heath and structural condition
613	<i>Eucalyptus paniculata</i> (Grey Ironbark)	8	3	200	210	2.4	1.72	N/A	1B	Moderate	Retain	Fair heath and structural condition
614	<i>Eucalyptus paniculata</i> (Grey Ironbark)	8	3	170	180	2.04	1.61	N/A	1B	Moderate	Retain	Fair heath and structural condition
615	<i>Eucalyptus paniculata</i> (Grey Ironbark)	11	4	160	170	2	1.57	N/A	1B	Moderate	Retain	Fair heath and structural condition
616	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	9	4	260	270	3.12	1.91	N/A	1B	Moderate	Retain	Fair heath and structural condition
617	<i>Eucalyptus paniculata</i> (Grey Ironbark)	8	3	189	250	2.3	1.85	N/A	1B	Moderate	Retain	Fair heath and structural condition, multi stem (combined DBH)
618	<i>Eucalyptus paniculata</i> (Grey Ironbark)	7	4	227	300	2.7	2	N/A	1B	Moderate	Retain	Fair heath and structural condition, multi stem (combined DBH)

619	<i>Eucalyptus paniculata</i> (Grey Ironbark)	12	6	403	480	4.8	2.43	N/A	1B	Moderate	Retain	Fair heath and structural condition, multi stem (combined DBH)
620	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	9	4	200	210	2.4	1.72	N/A	1B	Moderate	Retain	Fair heath and structural condition
621	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	9	3	200	220	2.4	1.75	N/A	3D	Moderate	Retain	Fair heath and structural condition
622	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	13	6	270	310	3.2	2.02	100% - Located within the footprint	1B	Moderate	Remove - Stage 2 Fence	Fair heath and structural condition, multi stem (combined DBH)
623	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	11	6	366	330	4.4	2.08	N/A	3D	Moderate	Retain	Fair heath and structural condition, multi stem (combined DBH)
624	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	10	4	160	170	2	1.57	N/A	1B	Moderate	Retain	Fair heath and structural condition
625	<i>Eucalyptus paniculata</i> (Grey Ironbark)	6	3	170	180	2.04	1.61	N/A	1B	Moderate	Retain	Fair heath and structural condition

626	<i>Eucalyptus paniculata</i> (Grey Ironbark)	7	3	180	160	2.16	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition
627	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	10	3	210	220	2.52	1.75	100% - Located within the footprint	1B	Moderate	Remove - Stage 2 Fence	Fair heath and structural condition
628	<i>Eucalyptus paniculata</i> (Grey Ironbark)	12	6	250	270	3	1.91	100% - Located within the footprint	1B	Moderate	Remove - Stage 2 Fence	Fair heath and structural condition
629	<i>Eucalyptus paniculata</i> (Grey Ironbark)	11	4	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition
630	<i>Eucalyptus paniculata</i> (Grey Ironbark)	11	4	200	210	2.4	1.72	N/A	1B	Moderate	Retain	Fair heath and structural condition
631	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	13	5	290	210	3.48	1.72	N/A	1B	Moderate	Retain	Fair heath and structural condition
632	<i>Eucalyptus paniculata</i> (Grey Ironbark)	9	4	180	210	2.16	1.72	N/A	1B	Moderate	Retain	Fair heath and structural condition
633	<i>Eucalyptus paniculata</i> (Grey Ironbark)	9	4	170	210	2.04	1.72	N/A	1B	Moderate	Retain	Fair heath and structural condition
634	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	12	5	200	210	2.4	1.72	N/A	1B	Moderate	Retain	Fair heath and structural condition

635	<i>Eucalyptus paniculata</i> (Grey Ironbark)	7	3	150	210	2	1.72	N/A	1B	Moderate	Retain	Fair heath and structural condition
636	<i>Eucalyptus paniculata</i> (Grey Ironbark)	9	4	200	210	2.4	1.72	N/A	1B	Moderate	Retain	Fair heath and structural condition
637	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	12	5	280	210	3.36	1.72	N/A	1B	Moderate	Retain	Fair heath and structural condition
638	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	11	4	160	210	2	1.72	N/A	1B	Moderate	Retain	Fair heath and structural condition
639	<i>Eucalyptus paniculata</i> (Grey Ironbark)	13	6	300	210	3.6	1.72	N/A	1B	Moderate	Retain	Fair heath and structural condition
640	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	13	7	330	210	3.96	1.72	N/A	1B	Moderate	Retain	Fair heath and structural condition
641	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	10	5	160	210	2	1.72	N/A	1B	Moderate	Retain	Fair heath and structural condition
642	<i>Eucalyptus paniculata</i> (Grey Ironbark)	9	3	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition
643	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	7	3	280	290	3.36	1.97	N/A	1B	Moderate	Retain	Fair heath and structural condition

644	<i>Eucalyptus paniculata</i> (Grey Ironbark)	11	4	150	160	2	1.53	100% - Located within the footprint	1B	Moderate	Remove - Stage 2 Fence	Fair heath and structural condition
645	<i>Eucalyptus paniculata</i> (Grey Ironbark)	7	3	250	260	3	1.88	100% - Located within the footprint	1B	Moderate	Remove - Stage 2 Fence	Fair heath and structural condition
646	<i>Eucalyptus paniculata</i> (Grey Ironbark)	8	3	200	210	2.4	1.72	N/A	1B	Moderate	Retain	Fair heath and structural condition
647	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	11	4	250	260	3	1.88	N/A	1B	Moderate	Retain	Fair heath and structural condition
648	<i>Eucalyptus paniculata</i> (Grey Ironbark)	11	4	189	250	2.3	1.85	N/A	1B	Moderate	Retain	Fair heath and structural condition, multi stem (combined DBH)
649	<i>Eucalyptus paniculata</i> (Grey Ironbark)	6	3	150	110	2	1.5	N/A	1B	Moderate	Retain	Fair heath and structural condition
650	<i>Eucalyptus paniculata</i> (Grey Ironbark)	7	4	150	100	2	1.5	N/A	1B	Moderate	Retain	Fair heath and structural condition
651	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	12	6	420	430	5.04	2.32	100% - Located within the footprint	1B	Moderate	Remove - Stage 2 Fence	Fair heath and structural condition

652	<i>Eucalyptus sideroxylon</i> (Red Ironbark)	9	5	200	210	2.4	1.72	N/A	1B	Moderate	Retain	Fair heath and structural condition
653	<i>Eucalyptus paniculata</i> (Grey Ironbark)	10	4	250	260	3	1.88	N/A	1B	Moderate	Retain	Fair heath and structural condition
654	<i>Eucalyptus paniculata</i> (Grey Ironbark)	9	6	316	480	3.8	2.43	100% - Located within the footprint	1B	Moderate	Remove - Stage 2	Fair heath and structural condition, multi stem (combined DBH)
655	<i>Eucalyptus paniculata</i> (Grey Ironbark)	8	3	210	220	2.52	1.75	N/A	1B	Moderate	Retain	Fair heath and structural condition
656	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	12	5	300	310	3.6	2.02	100% - Located within the footprint	1B	Moderate	Remove - Stage 2 Fence	Fair heath and structural condition
657	<i>Eucalyptus paniculata</i> (Grey Ironbark)	7	3	200	210	2.4	1.72	N/A	1B	Moderate	Retain	Fair heath and structural condition
658	<i>Eucalyptus paniculata</i> (Grey Ironbark)	13	5	300	310	3.6	2.02	N/A	1B	Moderate	Retain	Fair heath and structural condition
659	<i>Eucalyptus paniculata</i> (Grey Ironbark)	13	6	300	310	3.6	2.02	N/A	1B	Moderate	Retain	Fair heath and structural condition

660	<i>Eucalyptus paniculata</i> (Grey Ironbark)	12	5	200	210	2.4	1.72	N/A	1B	Moderate	Retain	Fair heath and structural condition
661	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	12	5	250	260	3	1.88	N/A	1B	Moderate	Retain	Fair heath and structural condition
662	<i>Eucalyptus paniculata</i> (Grey Ironbark)	7	2	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition
663	<i>Eucalyptus paniculata</i> (Grey Ironbark)	7	2	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition
664	<i>Eucalyptus paniculata</i> (Grey Ironbark)	10	3	170	180	2.04	1.61	N/A	1B	Moderate	Retain	Fair heath and structural condition
665	<i>Eucalyptus paniculata</i> (Grey Ironbark)	9	3	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition
666	<i>Eucalyptus paniculata</i> (Grey Ironbark)	8	3	170	180	2.04	1.61	N/A	1B	Moderate	Retain	Fair heath and structural condition
667	<i>Eucalyptus paniculata</i> (Grey Ironbark)	7	3	130	140	2	1.5	N/A	1B	Moderate	Retain	Fair heath and structural condition
668	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	11	3	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition

669	<i>Eucalyptus paniculata</i> (Grey Ironbark)	13	7	400	410	4.8	2.28	100% - Located within the footprint	1B	Moderate	Remove - Stage 2 Fence	Fair heath and structural condition
670	<i>Eucalyptus paniculata</i> (Grey Ironbark)	13	7	500	510	6	2.49	N/A	1B	Moderate	Retain	Fair heath and structural condition
671	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	12	6	310	320	3.72	2.05	N/A	1B	Moderate	Retain	Fair heath and structural condition
672	<i>Eucalyptus paniculata</i> (Grey Ironbark)	10	5	220	230	2.64	1.79	N/A	1B	Moderate	Retain	Fair heath and structural condition
673	<i>Eucalyptus paniculata</i> (Grey Ironbark)	10	4	180	190	2.16	1.65	N/A	1B	Moderate	Retain	Fair heath and structural condition
674	<i>Angophora floribunda</i> (Rough-barked Apple)	6	2	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition
675	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	11	5	250	260	3	1.88	N/A	1B	Moderate	Retain	Fair heath and structural condition
676	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	11	5	310	320	3.72	2.05	N/A	1B	Moderate	Retain	Fair heath and structural condition
677	<i>Eucalyptus paniculata</i> (Grey Ironbark)	10	4	160	170	2	1.57	N/A	1B	Moderate	Retain	Fair heath and structural condition

678	<i>Eucalyptus paniculata</i> (Grey Ironbark)	10	5	200	210	2.4	1.72	N/A	1B	Moderate	Retain	Fair heath and structural condition
679	<i>Eucalyptus paniculata</i> (Grey Ironbark)	12	5	300	310	3.6	2.02	N/A	1B	Moderate	Retain	Fair heath and structural condition
680	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	14	6	360	370	4.32	2.18	N/A	1B	Moderate	Retain	Fair heath and structural condition
681	<i>Eucalyptus paniculata</i> (Grey Ironbark)	9	3	210	220	2.52	1.75	N/A	1B	Moderate	Retain	Fair heath and structural condition
682	<i>Eucalyptus paniculata</i> (Grey Ironbark)	12	4	270	280	3.24	1.94	N/A	1B	Moderate	Retain	Fair heath and structural condition
683	<i>Eucalyptus paniculata</i> (Grey Ironbark)	7	3	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition
684	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	11	4	300	310	3.6	2.02	N/A	1B	Moderate	Retain	Fair heath and structural condition
685	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	11	4	250	260	3	1.88	N/A	1B	Moderate	Retain	Fair heath and structural condition
686	<i>Eucalyptus paniculata</i> (Grey Ironbark)	13	5	250	260	3	1.88	N/A	1B	Moderate	Retain	Fair heath and structural condition

687	<i>Eucalyptus paniculata</i> (Grey Ironbark)	12	3	160	170	2	1.57	N/A	1B	Moderate	Retain	Fair heath and structural condition
688	<i>Eucalyptus paniculata</i> (Grey Ironbark)	11	3	160	170	2	1.57	N/A	1B	Moderate	Retain	Fair heath and structural condition
689	<i>Eucalyptus paniculata</i> (Grey Ironbark)	8	3	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition
690	<i>Eucalyptus paniculata</i> (Grey Ironbark)	13	5	250	260	3	1.88	N/A	1B	Moderate	Retain	Fair heath and structural condition
691	<i>Eucalyptus paniculata</i> (Grey Ironbark)	12	4	200	210	2.4	1.72	N/A	1B	Moderate	Retain	Fair heath and structural condition
692	<i>Eucalyptus paniculata</i> (Grey Ironbark)	12	4	300	310	3.6	2.02	N/A	1B	Moderate	Retain	Fair heath and structural condition
693	<i>Eucalyptus paniculata</i> (Grey Ironbark)	7	3	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition
694	<i>Eucalyptus paniculata</i> (Grey Ironbark)	7	3	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition
695	<i>Eucalyptus paniculata</i> (Grey Ironbark)	13	5	270	280	3.24	1.94	N/A	1B	Moderate	Retain	Fair heath and structural condition

696	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	9	3	250	260	3	1.88	N/A	1B	Moderate	Retain	Fair heath and structural condition
697	<i>Eucalyptus paniculata</i> (Grey Ironbark)	8	3	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition
698	<i>Eucalyptus paniculata</i> (Grey Ironbark)	13	5	240	250	2.88	1.85	N/A	2D	Moderate	Retain	Fair heath and structural condition
699	<i>Eucalyptus paniculata</i> (Grey Ironbark)	9	4	192	230	2.3	1.79	N/A	1B	Moderate	Retain	Fair heath and structural condition, multi stem (combined DBH)
700	<i>Eucalyptus paniculata</i> (Grey Ironbark)	9	4	197	260	2.4	1.88	N/A	1B	Moderate	Retain	Fair heath and structural condition, multi stem (combined DBH)
701	<i>Eucalyptus paniculata</i> (Grey Ironbark)	8	3	212	260	2.5	1.88	N/A	1B	Moderate	Retain	Fair heath and structural condition, multi stem (combined DBH)
702	<i>Eucalyptus paniculata</i> (Grey Ironbark)	10	4	200	210	2.4	1.72	N/A	1B	Moderate	Retain	Fair heath and structural condition

703	<i>Eucalyptus paniculata</i> (Grey Ironbark)	6	3	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition
704	<i>Eucalyptus paniculata</i> (Grey Ironbark)	8	5	249	160	3	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition, multi stem (combined DBH)
705	<i>Eucalyptus paniculata</i> (Grey Ironbark)	9	4	170	180	2.04	1.61	N/A	1B	Moderate	Retain	Fair heath and structural condition
706	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	11	5	290	300	3.48	2	N/A	1B	Moderate	Retain	Fair heath and structural condition
707	<i>Eucalyptus paniculata</i> (Grey Ironbark)	8	4	170	180	2.04	1.61	N/A	1B	Moderate	Retain	Fair heath and structural condition
708	<i>Eucalyptus paniculata</i> (Grey Ironbark)	9	4	160	170	2	1.57	N/A	1B	Moderate	Retain	Fair heath and structural condition
709	<i>Angophora floribunda</i> (Rough-barked Apple)	7	4	222	300	2.7	2	N/A	1B	Moderate	Retain	Fair heath and structural condition, multi stem (combined DBH)
710	<i>Eucalyptus paniculata</i> (Grey Ironbark)	14	5	280	290	3.36	1.97	N/A	1B	Moderate	Retain	Fair heath and structural condition

711	<i>Eucalyptus paniculata</i> (Grey Ironbark)	12	6	200	210	2.4	1.72	N/A	1B	Moderate	Retain	Fair heath and structural condition
712	<i>Eucalyptus sideroxylon</i> (Red Ironbark)	12	3	270	280	3.24	1.94	N/A	1B	Moderate	Retain	Fair heath and structural condition
713	<i>Eucalyptus paniculata</i> (Grey Ironbark)	11	5	300	310	3.6	2.02	N/A	3D	Moderate	Retain	Fair heath and structural condition
714	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	13	5	270	280	3.24	1.94	N/A	1B	Moderate	Retain	Fair heath and structural condition
715	<i>Eucalyptus paniculata</i> (Grey Ironbark)	8	3	180	190	2.16	1.65	N/A	3D	Moderate	Retain	Fair heath and structural condition
716	<i>Eucalyptus paniculata</i> (Grey Ironbark)	10	5	200	210	2.4	1.72	N/A	1B	Moderate	Retain	Fair heath and structural condition
717	<i>Eucalyptus paniculata</i> (Grey Ironbark)	11	5	180	190	2.16	1.65	N/A	1B	Moderate	Retain	Fair heath and structural condition
718	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	13	7	450	460	5.4	2.39	N/A	1B	Moderate	Retain	Fair heath and structural condition
719	<i>Eucalyptus paniculata</i> (Grey Ironbark)	10	4	210	220	2.52	1.75	N/A	1B	Moderate	Retain	Fair heath and structural condition

720	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	10	4	250	260	3	1.88	N/A	1B	Moderate	Retain	Fair heath and structural condition
721	<i>Eucalyptus paniculata</i> (Grey Ironbark)	11	4	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition
722	<i>Eucalyptus paniculata</i> (Grey Ironbark)	9	3	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition
723	<i>Eucalyptus paniculata</i> (Grey Ironbark)	12	5	160	170	2	1.57	N/A	1B	Moderate	Retain	Fair heath and structural condition
724	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	10	6	335	460	4	2.39	N/A	1B	Moderate	Retain	Fair heath and structural condition, multi stem (combined DBH)
725	<i>Eucalyptus paniculata</i> (Grey Ironbark)	8	3	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition
726	<i>Eucalyptus paniculata</i> (Grey Ironbark)	9	3	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition
727	<i>Eucalyptus paniculata</i> (Grey Ironbark)	11	5	353	430	4.2	2.32	N/A	1B	Moderate	Retain	Fair heath and structural condition, multi stem (combined DBH)

728	<i>Eucalyptus paniculata</i> (Grey Ironbark)	13	5	280	290	3.36	1.97	N/A	1B	Moderate	Retain	Fair heath and structural condition
729	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	8	3	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition
730	<i>Eucalyptus paniculata</i> (Grey Ironbark)	13	5	250	260	3	1.88	N/A	1B	Moderate	Retain	Fair heath and structural condition
731	<i>Eucalyptus paniculata</i> (Grey Ironbark)	7	3	280	230	3.36	1.79	N/A	1B	Moderate	Retain	Fair heath and structural condition
732	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	11	5	330	340	3.96	2.1	N/A	1B	Moderate	Retain	Fair heath and structural condition
733	<i>Eucalyptus paniculata</i> (Grey Ironbark)	8	3	180	190	2.16	1.65	100% - Located within the footprint	1B	Moderate	Remove - Stage 2 Fence	Fair heath and structural condition
734	<i>Eucalyptus paniculata</i> (Grey Ironbark)	8	4	170	180	2.04	1.61	N/A	1B	Moderate	Retain	Fair heath and structural condition
735	<i>Acacia binervia</i> (Coastal Myall)	9	3	170	180	2.04	1.61	N/A	1B	Moderate	Retain	Fair heath and structural condition
736	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	13	7	480	430	5.76	2.32	N/A	1B	Moderate	Retain	Fair heath and structural condition

737	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	9	5	300	310	3.6	2.02	N/A	1B	Moderate	Retain	Fair heath and structural condition
738	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	8	3	160	170	2	1.57	N/A	1B	Moderate	Retain	Fair heath and structural condition
739	<i>Eucalyptus paniculata</i> (Grey Ironbark)	9	4	170	180	2.04	1.61	N/A	1B	Moderate	Retain	Fair heath and structural condition
740	<i>Eucalyptus paniculata</i> (Grey Ironbark)	5	3	140	150	2	1.5	N/A	1B	Moderate	Retain	Fair heath and structural condition
741	<i>Eucalyptus paniculata</i> (Grey Ironbark)	12	6	210	220	2.52	1.75	N/A	1B	Moderate	Retain	Fair heath and structural condition
742	<i>Eucalyptus paniculata</i> (Grey Ironbark)	12	5	280	290	3.36	1.97	N/A	1B	Moderate	Retain	Fair heath and structural condition
743	<i>Eucalyptus paniculata</i> (Grey Ironbark)	13	5	300	310	3.6	2.02	N/A	1B	Moderate	Retain	Fair heath and structural condition
744	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	12	6	300	310	3.6	2.02	N/A	1B	Moderate	Retain	Fair heath and structural condition
745	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	12	4	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition

746	<i>Eucalyptus paniculata</i> (Grey Ironbark)	8	3	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition
747	<i>Eucalyptus paniculata</i> (Grey Ironbark)	13	5	260	270	3.12	1.91	N/A	1B	Moderate	Retain	Fair heath and structural condition
748	<i>Eucalyptus paniculata</i> (Grey Ironbark)	14	7	280	290	3.36	1.97	N/A	1B	Moderate	Retain	Fair heath and structural condition
749	<i>Eucalyptus paniculata</i> (Grey Ironbark)	13	7	230	280	2.76	1.94	N/A	1B	Moderate	Retain	Fair heath and structural condition
750	<i>Eucalyptus paniculata</i> (Grey Ironbark)	12	5	210	220	2.52	1.75	N/A	1B	Moderate	Retain	Fair heath and structural condition
751	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	13	6	300	310	3.6	2.02	N/A	1B	Moderate	Retain	Fair heath and structural condition
752	<i>Eucalyptus microcarpa</i> (Grey Box)	10	4	160	170	2	1.57	N/A	1B	Moderate	Retain	Fair heath and structural condition
753	<i>Eucalyptus paniculata</i> (Grey Ironbark)	10	6	230	240	2.76	1.82	N/A	1B	Moderate	Retain	Fair heath and structural condition
754	<i>Eucalyptus sideroxylon</i> (Red Ironbark)	12	5	240	250	2.88	1.85	N/A	1B	Moderate	Retain	Fair heath and structural condition

755	<i>Eucalyptus paniculata</i> (Grey Ironbark)	8	3	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition
756	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	13	4	250	260	3	1.88	N/A	3D	Moderate	Retain	Fair heath and structural condition
757	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	9	5	250	260	3	1.88	100% - Located within the footprint	1B	Moderate	Remove - Stage 2 Fence	Fair heath and structural condition
758	<i>Eucalyptus paniculata</i> (Grey Ironbark)	13	7	377	360	4.5	2.15	100% - Located within the footprint	1B	Moderate	Remove - Stage 2 Fence	Fair heath and structural condition, multi stem (combined DBH)
759	<i>Eucalyptus paniculata</i> (Grey Ironbark)	11	5	192	280	2.3	1.94	N/A	1B	Moderate	Retain	Fair heath and structural condition, multi stem (combined DBH)
760	<i>Eucalyptus paniculata</i> (Grey Ironbark)	11	4	160	170	2	1.57	N/A	1B	Moderate	Retain	Fair heath and structural condition
761	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	12	6	310	320	3.72	2.05	N/A	1B	Moderate	Retain	Fair heath and structural condition

762	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	8	4	335	450	4	2.37	N/A	1B	Moderate	Retain	Fair heath and structural condition, multi stem (combined DBH)
763	<i>Eucalyptus paniculata</i> (Grey Ironbark)	12	5	200	210	2.4	1.72	N/A	1B	Moderate	Retain	Fair heath and structural condition
764	<i>Eucalyptus paniculata</i> (Grey Ironbark)	11	4	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition
765	<i>Eucalyptus paniculata</i> (Grey Ironbark)	12	4	200	210	2.4	1.72	N/A	1B	Moderate	Retain	Fair heath and structural condition
766	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	7	3	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition
767	<i>Eucalyptus paniculata</i> (Grey Ironbark)	9	4	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition
768	<i>Eucalyptus paniculata</i> (Grey Ironbark)	12	7	349	460	4.2	2.39	N/A	1B	Moderate	Retain	Fair heath and structural condition, multi stem (combined DBH)
769	<i>Eucalyptus paniculata</i> (Grey Ironbark)	10	5	250	260	3	1.88	100% - Located within the footprint	1B	Moderate	Remove - Stage 2 Fence	Fair heath and structural condition

770	<i>Eucalyptus paniculata</i> (Grey Ironbark)	8	4	250	260	3	1.88	100% - Located within the footprint	1B	Moderate	Remove - Stage 2 Fence	Fair heath and structural condition
771	<i>Allocasuarina torulosa</i> (Forest Sheoak)	6	3	228	260	2.7	1.88	100% - Located within the footprint	1B	Moderate	Remove - Stage 2 Fence	Fair heath and structural condition, multi stem (combined DBH)
772	<i>Eucalyptus paniculata</i> (Grey Ironbark)	8	4	170	180	2.04	1.61	N/A	1B	Moderate	Retain	Fair heath and structural condition
773	<i>Eucalyptus paniculata</i> (Grey Ironbark)	11	3	160	170	2	1.57	N/A	1B	Moderate	Retain	Fair heath and structural condition
774	<i>Eucalyptus paniculata</i> (Grey Ironbark)	8	3	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition
775	<i>Eucalyptus paniculata</i> (Grey Ironbark)	12	5	300	310	3.6	2.02	100% - Located within the footprint	1B	Moderate	Remove - Stage 2 Fence	Fair heath and structural condition
776	<i>Eucalyptus paniculata</i> (Grey Ironbark)	10	4	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition
777	<i>Eucalyptus paniculata</i> (Grey Ironbark)	9	3	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition

778	<i>Eucalyptus paniculata</i> (Grey Ironbark)	8	2	170	200	2	1.68	N/A	1B	Moderate	Retain	Fair heath and structural condition, multi stem (combined DBH)
779	<i>Eucalyptus paniculata</i> (Grey Ironbark)	10	3	170	180	2.04	1.61	N/A	1B	Moderate	Retain	Fair heath and structural condition
780	Dead Tree	5	2	160	170	2	1.57	100% - Located within the footprint	4A	Low	Remove - Stage 2	Fair heath and structural condition
781	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	13	5	300	310	3.6	2.02	N/A	1B	Moderate	Retain	Fair heath and structural condition
782	<i>Eucalyptus paniculata</i> (Grey Ironbark)	9	4	200	210	2.4	1.72	N/A	1B	Moderate	Retain	Fair heath and structural condition
783	<i>Eucalyptus paniculata</i> (Grey Ironbark)	10	4	280	290	3.36	1.97	N/A	1B	Moderate	Retain	Fair heath and structural condition
784	<i>Eucalyptus paniculata</i> (Grey Ironbark)	7	3	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition
785	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	11	5	210	220	2.52	1.75	N/A	1B	Moderate	Retain	Fair heath and structural condition

786	<i>Eucalyptus paniculata</i> (Grey Ironbark)	12	5	291	330	3.5	2.08	100% - Located within the footprint	1B	Moderate	Remove - Stage 2 Fence	Fair heath and structural condition, multi stem (combined DBH)
787	<i>Eucalyptus paniculata</i> (Grey Ironbark)	13	6	241	350	2.9	2.13	100% - Located within the footprint	1B	Moderate	Remove - Stage 2 Fence	Fair heath and structural condition, multi stem (combined DBH)
788	<i>Eucalyptus paniculata</i> (Grey Ironbark)	13	5	350	360	4.2	2.15	100% - Located within the footprint	1B	Moderate	Remove - Stage 2 Fence	Fair heath and structural condition
789	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	13	4	170	180	2.04	1.61	N/A	1B	Moderate	Retain	Fair heath and structural condition
790	<i>Eucalyptus paniculata</i> (Grey Ironbark)	11	4	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition
791	<i>Eucalyptus paniculata</i> (Grey Ironbark)	12	5	200	210	2.4	1.72	N/A	1B	Moderate	Retain	Fair heath and structural condition
792	<i>Eucalyptus paniculata</i> (Grey Ironbark)	12	5	220	230	2.64	1.79	N/A	1B	Moderate	Retain	Fair heath and structural condition
793	<i>Eucalyptus paniculata</i> (Grey Ironbark)	9	4	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition

794	<i>Eucalyptus paniculata</i> (Grey Ironbark)	7	3	170	180	2.04	1.61	N/A	1B	Moderate	Retain	Fair heath and structural condition
795	<i>Eucalyptus paniculata</i> (Grey Ironbark)	11	6	310	320	3.72	2.05	N/A	1B	Moderate	Retain	Fair heath and structural condition
796	<i>Eucalyptus paniculata</i> (Grey Ironbark)	8	3	170	180	2.04	1.61	N/A	1B	Moderate	Retain	Fair heath and structural condition
797	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	8	3	250	260	3	1.88	N/A	1B	Moderate	Retain	Fair heath and structural condition
798	<i>Eucalyptus paniculata</i> (Grey Ironbark)	7	3	140	150	2	1.5	N/A	1B	Moderate	Retain	Fair heath and structural condition
799	<i>Acacia binervia</i> (Coastal Myall)	6	2	130	140	2	1.5	N/A	1B	Moderate	Retain	Fair heath and structural condition
800	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	13	5	290	300	3.48	2	100% - Located within the footprint	1B	Moderate	Remove - Stage 2 Fence	Fair heath and structural condition
801	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	7	3	290	140	3.48	1.5	N/A	1B	Moderate	Retain	Fair heath and structural condition
802	<i>Eucalyptus paniculata</i> (Grey Ironbark)	10	3	200	210	2.4	1.72	100% - Located within the footprint	1B	Moderate	Remove - Stage 2 Fence	Fair heath and structural condition

803	<i>Eucalyptus paniculata</i> (Grey Ironbark)	7	3	230	240	2.76	1.82	100% - Located within the footprint	1B	Moderate	Remove - Stage 2 Fence	Fair heath and structural condition
804	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	10	3	160	170	2	1.57	100% - Located within the footprint	1B	Moderate	Remove - Stage 2 Fence	Fair heath and structural condition
805	<i>Eucalyptus paniculata</i> (Grey Ironbark)	7	3	140	150	2	1.5	100% - Located within the footprint	1B	Moderate	Remove - Stage 2 Fence	Fair heath and structural condition
806	<i>Eucalyptus paniculata</i> (Grey Ironbark)	7	3	200	210	2.4	1.72	100% - Located within the footprint	1B	Moderate	Remove - Stage 2 Fence	Fair heath and structural condition
807	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	11	3	230	240	2.76	1.82	100% - Located within the footprint	1B	Moderate	Remove - Stage 2 Fence	Fair heath and structural condition
808	<i>Eucalyptus paniculata</i> (Grey Ironbark)	9	4	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition
809	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	9	3	219	320	2.6	2.05	N/A	1B	Moderate	Retain	Fair heath and structural condition, multi stem (combined DBH)
810	<i>Eucalyptus paniculata</i> (Grey Ironbark)	9	3	198	290	2.4	1.97	N/A	1B	Moderate	Retain	Fair heath and structural condition, multi stem (combined DBH)

811	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	12	3	170	180	2.04	1.61	100% - Located within the footprint	1B	Moderate	Remove - Stage 2 Fence	Fair heath and structural condition
812	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	7	3	290	300	3.48	2	100% - Located within the footprint	1B	Moderate	Remove - Stage 2 Fence	Fair heath and structural condition
813	<i>Eucalyptus paniculata</i> (Grey Ironbark)	10	2	160	170	2	1.57	100% - Located within the footprint	1B	Moderate	Remove - Stage 2 Fence	Fair heath and structural condition
814	<i>Eucalyptus paniculata</i> (Grey Ironbark)	9	2	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition
815	<i>Eucalyptus paniculata</i> (Grey Ironbark)	8	3	220	230	2.64	1.79	N/A	1B	Moderate	Retain	Fair heath and structural condition
816	<i>Eucalyptus paniculata</i> (Grey Ironbark)	11	5	212	230	2.5	1.79	N/A	1B	Moderate	Retain	Fair heath and structural condition, multi stem (combined DBH)
817	<i>Eucalyptus paniculata</i> (Grey Ironbark)	10	2	200	210	2.4	1.72	100% - Located within the footprint	1B	Moderate	Remove - Stage 2 Fence	Fair heath and structural condition
818	<i>Eucalyptus paniculata</i> (Grey Ironbark)	13	6	410	460	4.9	2.39	100% - Located within the footprint	1B	Moderate	Remove - Stage 2 Fence	Fair heath and structural condition, multi stem (combined DBH)

819	<i>Eucalyptus paniculata</i> (Grey Ironbark)	7	3	130	140	2	1.5	N/A	1B	Moderate	Retain	Fair heath and structural condition
820	<i>Eucalyptus paniculata</i> (Grey Ironbark)	10	2	140	150	2	1.5	N/A	1B	Moderate	Retain	Fair heath and structural condition
821	<i>Eucalyptus paniculata</i> (Grey Ironbark)	10	2	160	170	2	1.57	N/A	1B	Moderate	Retain	Fair heath and structural condition
822	<i>Eucalyptus paniculata</i> (Grey Ironbark)	11	3	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition
823	<i>Eucalyptus paniculata</i> (Grey Ironbark)	12	3	210	220	2.52	1.75	N/A	1B	Moderate	Retain	Fair heath and structural condition
824	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	13	4	180	190	2.16	1.65	100% - Located within the footprint	3D	Moderate	Remove - Stage 2	Fair heath and structural condition
825	<i>Eucalyptus paniculata</i> (Grey Ironbark)	10	3	210	220	2.52	1.75	N/A	1B	Moderate	Retain	Fair heath and structural condition
826	<i>Eucalyptus paniculata</i> (Grey Ironbark)	10	4	200	210	2.4	1.72	N/A	1B	Moderate	Retain	Fair heath and structural condition
827	<i>Eucalyptus sideroxylon</i> (Red Ironbark)	10	4	270	280	3.24	1.94	N/A	1B	Moderate	Retain	Fair heath and structural condition

828	<i>Eucalyptus paniculata</i> (Grey Ironbark)	13	5	130	100	2	1.5	N/A	1B	Moderate	Retain	Fair heath and structural condition, multi stem (combined DBH)
829	<i>Eucalyptus paniculata</i> (Grey Ironbark)	11	3	140	150	2	1.5	N/A	1B	Moderate	Retain	Fair heath and structural condition
830	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	9	3	190	200	2.28	1.68	N/A	1B	Moderate	Retain	Fair heath and structural condition
831	<i>Eucalyptus sideroxylon</i> (Red Ironbark)	11	4	260	270	3.12	1.91	100% - Located within the footprint	1B	Moderate	Remove - Stage 2 Fence	Fair heath and structural condition
832	<i>Eucalyptus sideroxylon</i> (Red Ironbark)	11	3	310	320	3.72	2.05	N/A	1B	Moderate	Retain	Fair heath and structural condition
833	<i>Eucalyptus paniculata</i> (Grey Ironbark)	12	3	300	310	3.6	2.02	N/A	1B	Moderate	Retain	Fair heath and structural condition
834	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	12	3	270	280	3.24	1.94	100% - Located within the footprint	1B	Moderate	Remove - Stage 2 Fence	Fair heath and structural condition
835	<i>Eucalyptus paniculata</i> (Grey Ironbark)	8	3	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition

836	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	11	5	290	300	3.48	2	N/A	1B	Moderate	Retain	Fair heath and structural condition
837	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	7	2	140	150	2	1.5	N/A	1B	Moderate	Retain	Fair heath and structural condition
838	<i>Eucalyptus paniculata</i> (Grey Ironbark)	11	3	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition
839	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	9	3	160	170	2	1.57	N/A	3D	Moderate	Retain	Fair heath and structural condition
840	<i>Eucalyptus paniculata</i> (Grey Ironbark)	9	3	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition
841	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	14	5	300	310	3.6	2.02	N/A	1B	Moderate	Retain	Fair heath and structural condition
842	<i>Eucalyptus paniculata</i> (Grey Ironbark)	8	3	140	150	2	1.5	N/A	1B	Moderate	Retain	Fair heath and structural condition
843	<i>Eucalyptus paniculata</i> (Grey Ironbark)	7	3	130	140	2	1.5	N/A	1B	Moderate	Retain	Fair heath and structural condition
844	<i>Eucalyptus paniculata</i> (Grey Ironbark)	11	3	180	190	2.16	1.65	N/A	1B	Moderate	Retain	Fair heath and structural condition

845	<i>Eucalyptus paniculata</i> (Grey Ironbark)	9	3	160	170	2	1.57	N/A	1B	Moderate	Retain	Fair heath and structural condition
846	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	13	5	410	420	4.92	2.3	N/A	1B	Low	Retain	Poor health or structural condition
847	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	4	3	220	230	2.64	1.79	N/A	1B	Moderate	Retain	Fair heath and structural condition
848	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	12	5	310	320	3.72	2.05	N/A	1B	Moderate	Retain	Fair heath and structural condition
849	<i>Eucalyptus paniculata</i> (Grey Ironbark)	6	2	130	180	2	1.61	N/A	1B	Moderate	Retain	Fair heath and structural condition
850	<i>Eucalyptus paniculata</i> (Grey Ironbark)	6	2	120	150	2	1.5	N/A	1B	Moderate	Retain	Fair heath and structural condition
851	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	9	2	200	210	2.4	1.72	100% - Located within the footprint	1B	Moderate	Remove - Stage 2 Fence	Fair heath and structural condition
852	<i>Eucalyptus paniculata</i> (Grey Ironbark)	13	4	310	320	3.72	2.05	100% - Located within the footprint	1B	Moderate	Remove - Stage 2 Fence	Fair heath and structural condition

853	<i>Eucalyptus paniculata</i> (Grey Ironbark)	13	5	403	490	4.8	2.45	100% - Located within the footprint	1B	Moderate	Remove - Stage 2 Fence	Fair heath and structural condition, multi stem (combined DBH)
854	Dead Tree	8	2	150	160	2	1.53	N/A	4A	Low	Remove - Stage 2	Poor health or structural condition
855	<i>Eucalyptus paniculata</i> (Grey Ironbark)	6	2	150	160	2	1.53	N/A	1B	Moderate	Retain	Fair heath and structural condition
856	<i>Eucalyptus paniculata</i> (Grey Ironbark)	7	3	140	150	2	1.5	N/A	1B	Moderate	Retain	Fair heath and structural condition
857	<i>Eucalyptus paniculata</i> (Grey Ironbark)	6	2	200	180	2.4	1.61	N/A	1B	Moderate	Retain	Fair heath and structural condition
858	<i>Angophora floribunda</i> (Rough-barked Apple)	10	4	310	320	3.72	2.05	100% - Located within the footprint	2D	Moderate	Remove - Stage 2 Fence	Fair heath and structural condition
859	<i>Angophora floribunda</i> (Rough-barked Apple)	11	4	260	270	3.12	1.91	100% - Located within the footprint	2D	Moderate	Remove - Stage 2 Fence	Fair heath and structural condition
860	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	9	6	240	250	2.88	1.85	N/A	2D	Moderate	Retain	Fair heath and structural condition

861	<i>Corymbia maculata</i> (Spotted Gum)	11	6	276	270	3.3	1.91	N/A	2D	Moderate	Retain	Fair heath and structural condition, multi stem (combined DBH)
862	<i>Angophora floribunda</i> (Rough-barked Apple)	7	3	157	230	2	1.79	N/A	2D	Moderate	Retain	Fair heath and structural condition, multi stem (combined DBH)
863	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	13	5	460	470	5.52	2.41	N/A	2D	Moderate	Retain	Fair heath and structural condition
864	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	13	4	280	290	3.36	1.97	N/A	2D	Moderate	Retain	Fair heath and structural condition
865	<i>Angophora floribunda</i> (Rough-barked Apple)	10	5	340	480	4.1	2.43	N/A	2D	Moderate	Retain	Fair heath and structural condition, multi stem (combined DBH)
866	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	6	2	148	190	2	1.65	N/A	2D	Moderate	Retain	Fair heath and structural condition, multi stem (combined DBH)

867	<i>Angophora floribunda</i> (Rough-barked Apple)	6	2	160	170	2	1.57	N/A	2D	Moderate	Retain	Fair heath and structural condition
868	<i>Eucalyptus paniculata</i> (Grey Ironbark)	6	2	190	200	2.28	1.68	N/A	2D	Moderate	Retain	Fair heath and structural condition
869	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	13	7	610	620	7.32	2.71	N/A	2D	Moderate	Retain	Fair heath and structural condition
870	<i>Eucalyptus paniculata</i> (Grey Ironbark)	5	2	140	150	2	1.5	N/A	1B	Moderate	Retain	Fair heath and structural condition
871	<i>Corymbia maculata</i> (Spotted Gum)	14	6	310	320	3.72	2.05	N/A	2D	Moderate	Retain	Fair heath and structural condition
872	<i>Corymbia maculata</i> (Spotted Gum)	11	5	300	310	3.6	2.02	N/A	2D	Moderate	Retain	Fair heath and structural condition
873	<i>Angophora floribunda</i> (Rough-barked Apple)	10	4	280	260	3.36	1.88	N/A	2D	Moderate	Retain	Fair heath and structural condition
874	<i>Angophora floribunda</i> (Rough-barked Apple)	8	3	180	190	2.16	1.65	N/A	1B	Moderate	Retain	Fair heath and structural condition
875	<i>Corymbia maculata</i> (Spotted Gum)	14	6	460	470	5.52	2.41	N/A	2D	Moderate	Retain	Fair heath and structural condition

876	<i>Corymbia maculata</i> (Spotted Gum)	14	5	410	420	4.92	2.3	N/A	2D	Moderate	Retain	Fair heath and structural condition
877	<i>Corymbia maculata</i> (Spotted Gum)	12	4	290	300	3.48	2	N/A	2D	Moderate	Retain	Fair heath and structural condition
878	<i>Corymbia maculata</i> (Spotted Gum)	13	5	270	280	3.24	1.94	N/A	2D	Moderate	Retain	Fair heath and structural condition
879	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	7	3	170	180	2.04	1.61	N/A	2D	Moderate	Retain	Fair heath and structural condition
880	<i>Corymbia maculata</i> (Spotted Gum)	10	6	310	320	3.72	2.05	N/A	2D	Moderate	Retain	Fair heath and structural condition
881	<i>Angophora floribunda</i> (Rough-barked Apple)	7	3	250	260	3	1.88	N/A	2D	Moderate	Retain	Fair heath and structural condition
882	<i>Angophora floribunda</i> (Rough-barked Apple)	7	2	140	180	2	1.61	N/A	2D	Moderate	Retain	Fair heath and structural condition
883	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	9	5	270	280	3.24	1.94	N/A	2D	Moderate	Retain	Fair heath and structural condition
884	<i>Angophora floribunda</i> (Rough-barked Apple)	9	4	200	210	2.4	1.72	N/A	2D	Moderate	Retain	Fair heath and structural condition

885	<i>Angophora floribunda</i> (Rough-barked Apple)	8	4	219	270	2.6	1.91	N/A	2D	Moderate	Retain	Fair heath and structural condition, multi stem (combined DBH)
886	<i>Angophora floribunda</i> (Rough-barked Apple)	9	4	260	270	3.12	1.91	N/A	2D	Moderate	Retain	Fair heath and structural condition
887	<i>Angophora floribunda</i> (Rough-barked Apple)	11	6	310	320	3.72	2.05	N/A	2D	Moderate	Retain	Fair heath and structural condition
888	<i>Angophora floribunda</i> (Rough-barked Apple)	13	5	312	430	3.7	2.32	N/A	2D	Moderate	Retain	Fair heath and structural condition, multi stem (combined DBH)
889	<i>Angophora floribunda</i> (Rough-barked Apple)	10	3	150	160	2	1.53	100% - Located within the footprint	4A	Low	Remove - Stage 2	Poor health or structural condition
890	<i>Angophora floribunda</i> (Rough-barked Apple)	13	5	400	410	4.8	2.28	N/A	2D	Moderate	Retain	Fair heath and structural condition
891	<i>Angophora floribunda</i> (Rough-barked Apple)	7	2	270	260	3.24	1.88	N/A	2D	Moderate	Retain	Fair heath and structural condition
892	<i>Eucalyptus paniculata</i> (Grey Ironbark)	5	2	100	110	2	1.5	100% - Located within the footprint	3D	Low	Remove - early earth work	Poor health or structural condition


893	<i>Angophora floribunda</i> (Rough-barked Apple)	6	3	140	150	2	1.5	100% - Located within the footprint	1B	Moderate	Remove - early earth work	Fair heath and structural condition
894	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	6	3	220	230	2.64	1.79	100% - Located within the footprint	1B	Moderate	Remove - early earth work	Fair heath and structural condition
895	<i>Eucalyptus paniculata</i> (Grey Ironbark)	7	3	150	160	2	1.53	100% - Located within the footprint	2D	Low	Remove - substation	Fair heath and structural condition
896	<i>Eucalyptus paniculata</i> (Grey Ironbark)	8	3	150	160	2	1.53	100% - Located within the footprint	2D	Low	Remove - substation	Fair heath and structural condition
897	<i>Eucalyptus paniculata</i> (Grey Ironbark)	10	3	360	320	4.32	2.05	100% - Located within the footprint	1B	Moderate	Remove - substation	Fair heath and structural condition
898	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	8	2	150	160	2	1.53	22.4% – Major encroachment	2D	Low	Remove - substation	Fair heath and structural condition
899	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	8	3	190	200	2.28	1.68	14.5% – Moderate encroachment with structural root zone encroachment	2D	Low	Remove - substation	Fair heath and structural condition
900	<i>Eucalyptus paniculata</i> (Grey Ironbark)	7	3	150	160	2	1.53	100% - Located within the footprint	3D	Low	Remove - substation	Poor health or structural condition


901	<i>Corymbia citriodora</i> (Lemon-scented Gum)	8	2	120	130	2	1.5	100% - Located within the footprint	2D	Low	Remove - substation	Fair heath and structural condition
902	<i>Eucalyptus paniculata</i> (Grey Ironbark)	7	3	210	220	2.52	1.75	100% - Located within the footprint	2D	Moderate	Remove - substation	Fair heath and structural condition
903	<i>Eucalyptus paniculata</i> (Grey Ironbark)	6	3	192	300	2.3	2	100% - Located within the footprint	2D	Low	Remove - substation	Fair heath and structural condition, multi stem (combined DBH)
904	<i>Eucalyptus paniculata</i> (Grey Ironbark)	6	3	130	140	2	1.5	100% - Located within the footprint	2D	Low	Remove - substation	Fair heath and structural condition
905	<i>Eucalyptus paniculata</i> (Grey Ironbark)	6	3	120	130	2	1.5	100% - Located within the footprint	2D	Low	Remove - early earth work	Fair heath and structural condition
906	<i>Corymbia citriodora</i> (Lemon-scented Gum)	6	3	156	130	2	1.5	100% - Located within the footprint	2D	Low	Remove - early earth work	Fair heath and structural condition, multi stem (combined DBH)
907	<i>Eucalyptus paniculata</i> (Grey Ironbark)	7	3	180	190	2.16	1.65	100% - Located within the footprint	1B	Moderate	Remove - early earth work	Fair heath and structural condition
908	<i>Eucalyptus paniculata</i> (Grey Ironbark)	5	2	220	230	2.64	1.79	100% - Located within the footprint	1B	Moderate	Remove - early earth work	Fair heath and structural condition

909	<i>Eucalyptus paniculata</i> (Grey Ironbark)	5	2	140	150	2	1.5	100% - Located within the footprint	3D	Low	Remove - early earth work	Fair heath and structural condition
910	<i>Eucalyptus paniculata</i> (Grey Ironbark)	11	4	160	170	2	1.57	100% - Located within the footprint	1B	Moderate	Remove - early earth work	Fair heath and structural condition
911	<i>Eucalyptus paniculata</i> (Grey Ironbark)	10	3	150	160	2.00	1.53	N/A	2D	Low	Retain	Fair heath and structural condition
912	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	11	4	130	140	2.00	1.50	100% - Located within the footprint	2D	Low	Remove	Fair heath and structural condition, multi stem (combined DBH)
913	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	10	3	140	150	2.00	1.50	100% - Located within the footprint	2D	Low	Remove	Fair heath and structural condition
914	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	12	6	310	320	3.72	2.05	100% - Located within the footprint	2D	Moderate	Remove	Fair heath and structural condition
915	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	13	6	480	500	5.76	2.47	100% - Located within the footprint	3D	Low	Remove	Poor heath and structural condition, multi stem (combined DBH), Fungal fruiting bodies
916	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	11	5	260	270	3.12	1.91	100% - Located within the footprint	2D	Moderate	Remove	Fair heath and structural condition
917	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	10	6	419	580	5.03	2.63	100% - Located within the footprint	2D	Moderate	Remove	Fair heath and structural condition

918	<i>Eucalyptus paniculata</i> (Grey Ironbark)	11	4	170	180	2.04	1.61	N/A	2D	Moderate	Retain	Fair heath and structural condition
919	<i>Eucalyptus paniculata</i> (Grey Ironbark)	11	4	200	210	2.40	1.72	N/A	2D	Moderate	Retain	Fair heath and structural condition
920	<i>Eucalyptus paniculata</i> (Grey Ironbark)	8	3	190	200	2.28	1.68	N/A	2D	Moderate	Retain	Fair heath and structural condition
921	<i>Eucalyptus paniculata</i> (Grey Ironbark)	10	4	200	210	2.40	1.72	N/A	2D	Moderate	Retain	Fair heath and structural condition, multi stem (combined DBH)
922	<i>Eucalyptus paniculata</i> (Grey Ironbark)	12	4	240	250	2.88	1.85	N/A	2D	Moderate	Retain	Fair heath and structural condition
923	<i>Eucalyptus tereticornis</i> (Forest Red Gum)	10	4	256	320	3.07	2.05	N/A	2D	Moderate	Retain	Fair heath and structural condition
924	<i>Eucalyptus paniculata</i> (Grey Ironbark)	10	4	170	180	2.04	1.61	N/A	2D	Moderate	Retain	Fair heath and structural condition, multi stem (combined DBH)
925	<i>Eucalyptus paniculata</i> (Grey Ironbark)	11	3	150	160	2.00	1.53	N/A	2D	Moderate	Retain	Fair heath and structural condition
926	<i>Eucalyptus paniculata</i> (Grey Ironbark)	11	3	170	180	2.04	1.61	N/A	2D	Moderate	Retain	Fair heath and structural condition

927	<i>Eucalyptus paniculata</i> (Grey Ironbark)	11	3	130	140	2.00	1.50	N/A	2D	Moderate	Retain	Fair heath and structural condition
928	<i>Eucalyptus paniculata</i> (Grey Ironbark)	14	4	210	220	2.50	1.80	100% - Located within the footprint	2D	Moderate	Remove	Remove due to security fence

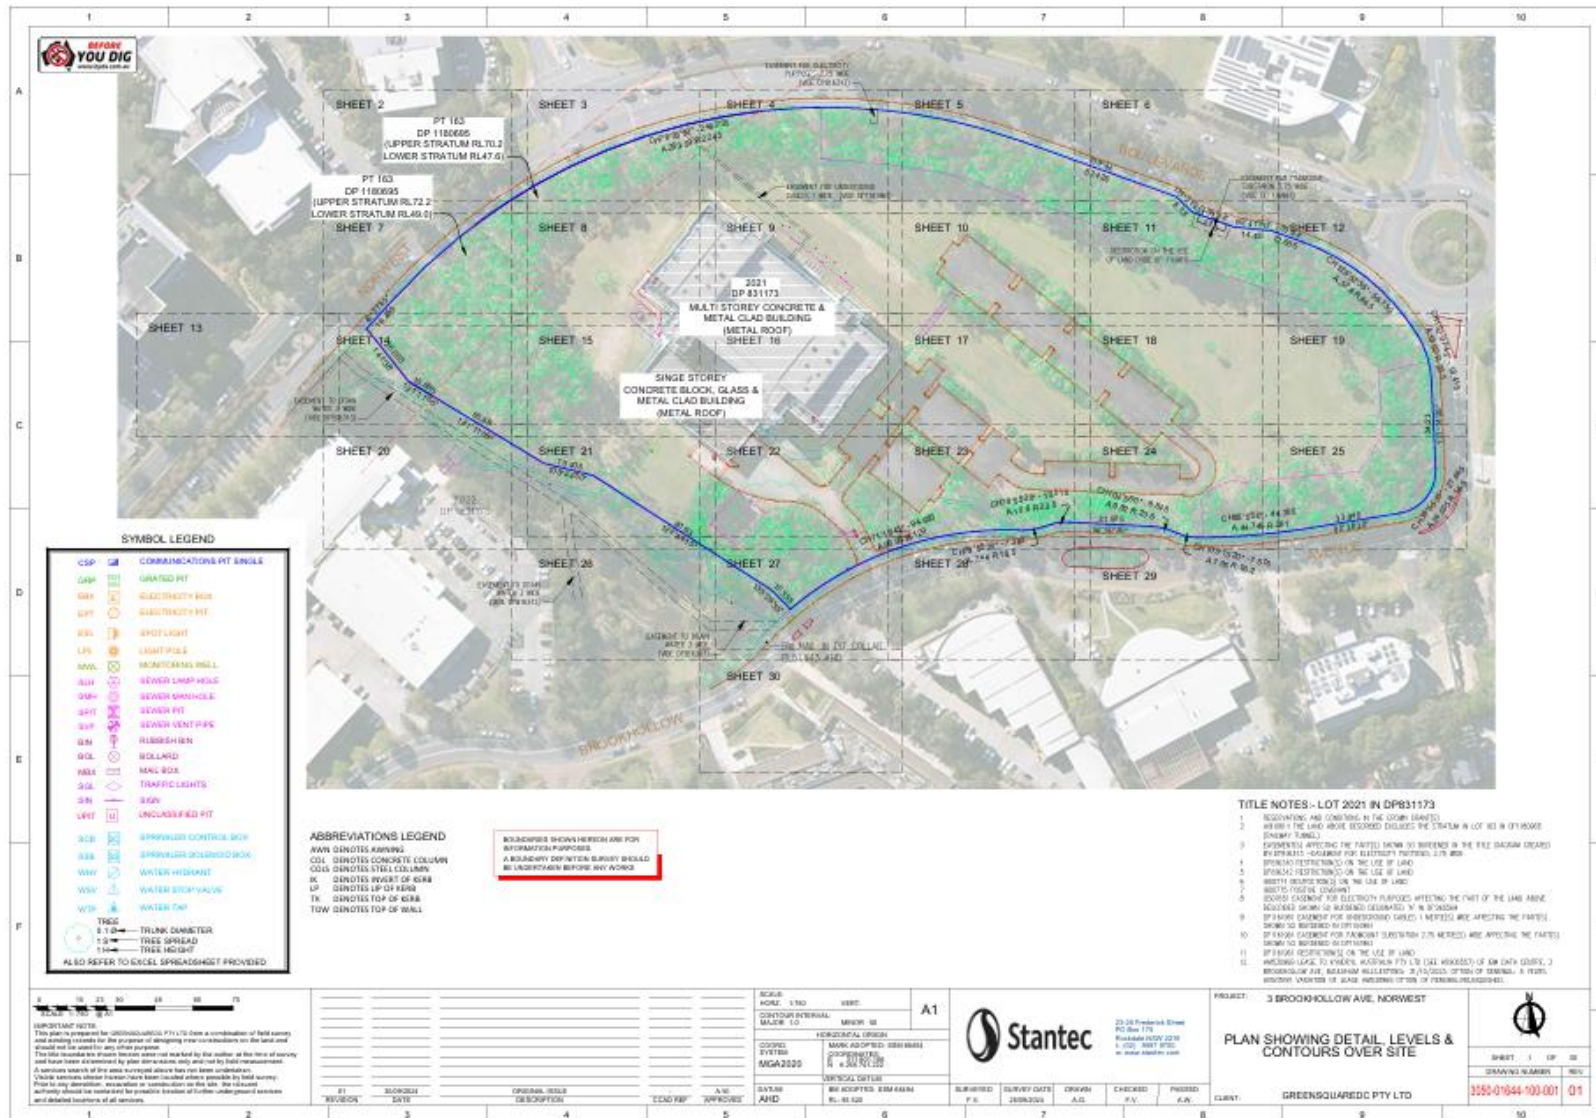

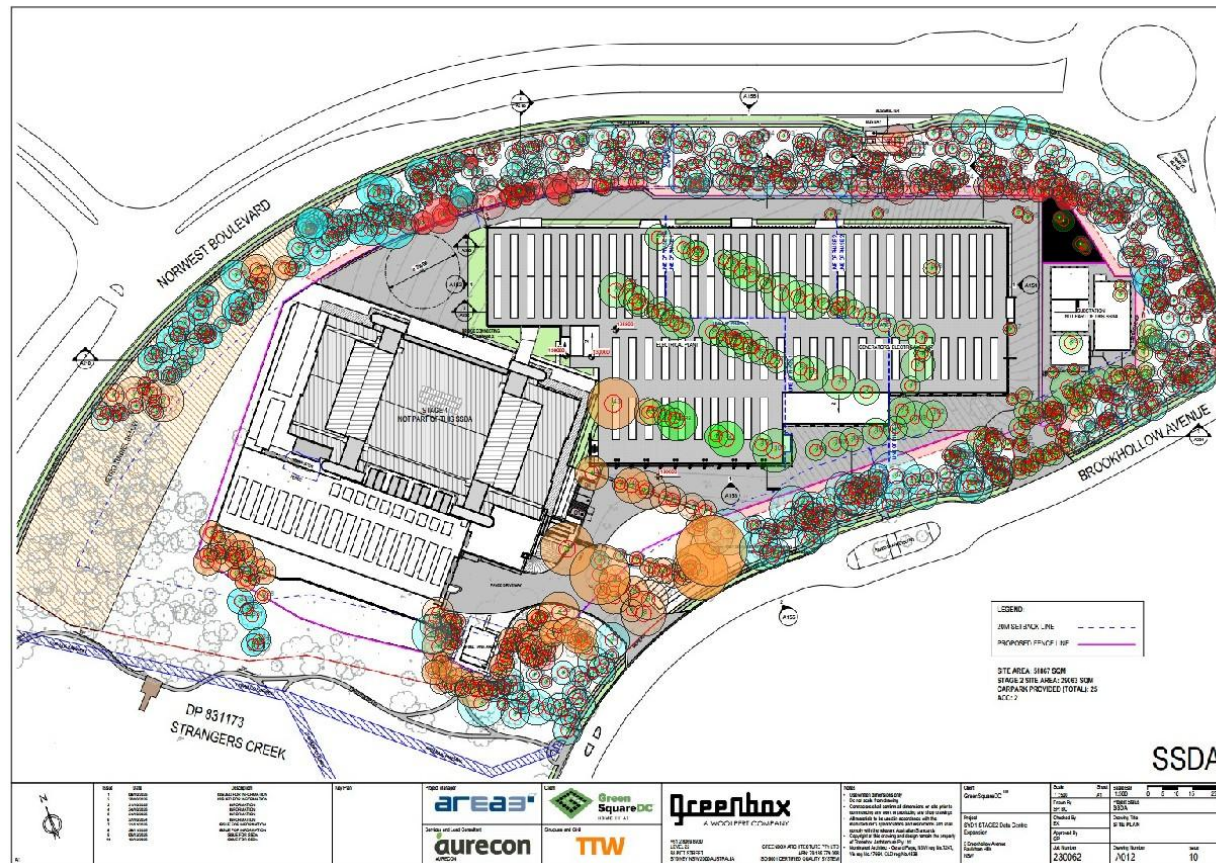

Legend – Site plan

Tree to be retained

Tree to be removed in stage 2



Tree to be removed in stage 1



Tree to be removed in substation and early earthwork plan





Legend – Stage 1

Tree to be retained



Tree to be removed in stage 2



Tree to be removed in stage 1



Tree to be removed in substation and early earthwork plan



Arbor Express



Legend – Early earth work and substation

Tree to be retained



Tree to be removed in stage 2




Tree to be removed in stage 1



Tree to be removed in substation and early earthwork plan



Arbor Express

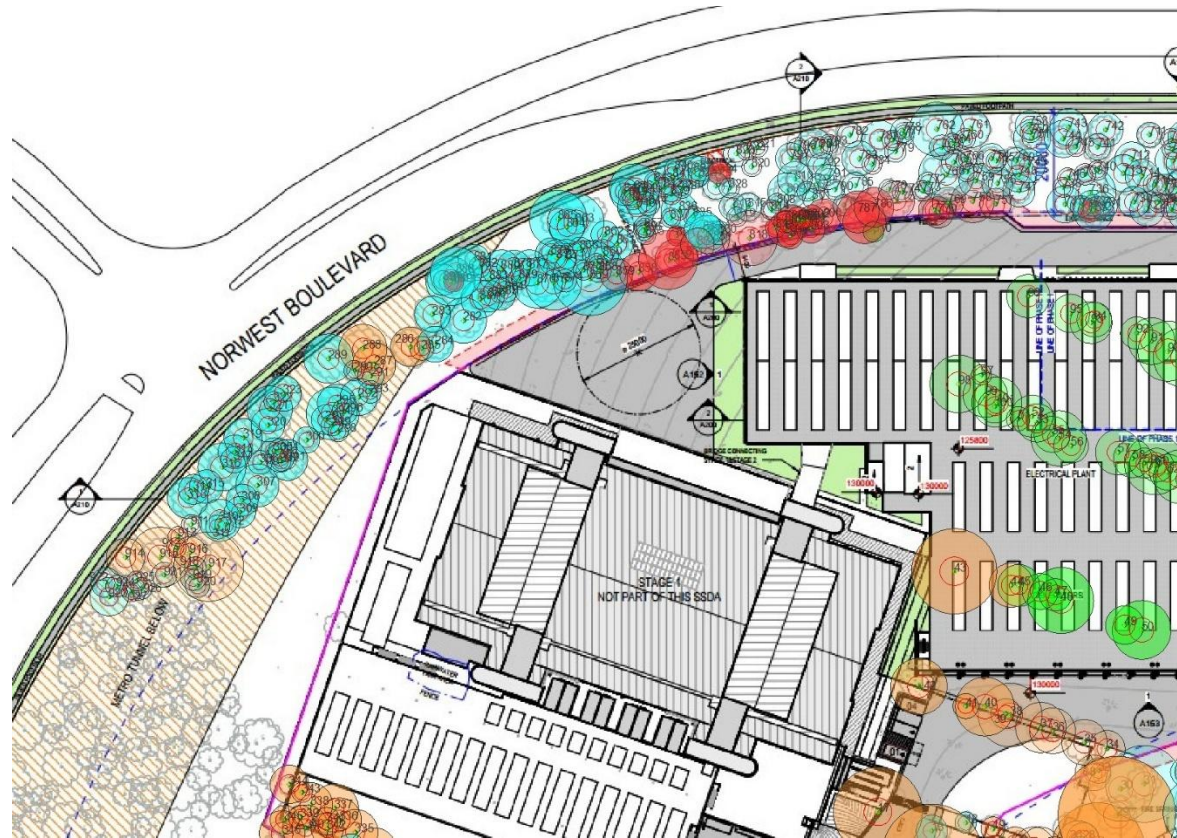

Legend

Tree to be retained



Tree to be removed in stage 2



Tree to be removed in stage 1



Tree to be removed in substation and early earthwork plan





Legend

Tree to be retained



Tree to be removed in stage 2




Tree to be removed in stage 1



Tree to be removed in substation and early earthwork plan



Arbor Express

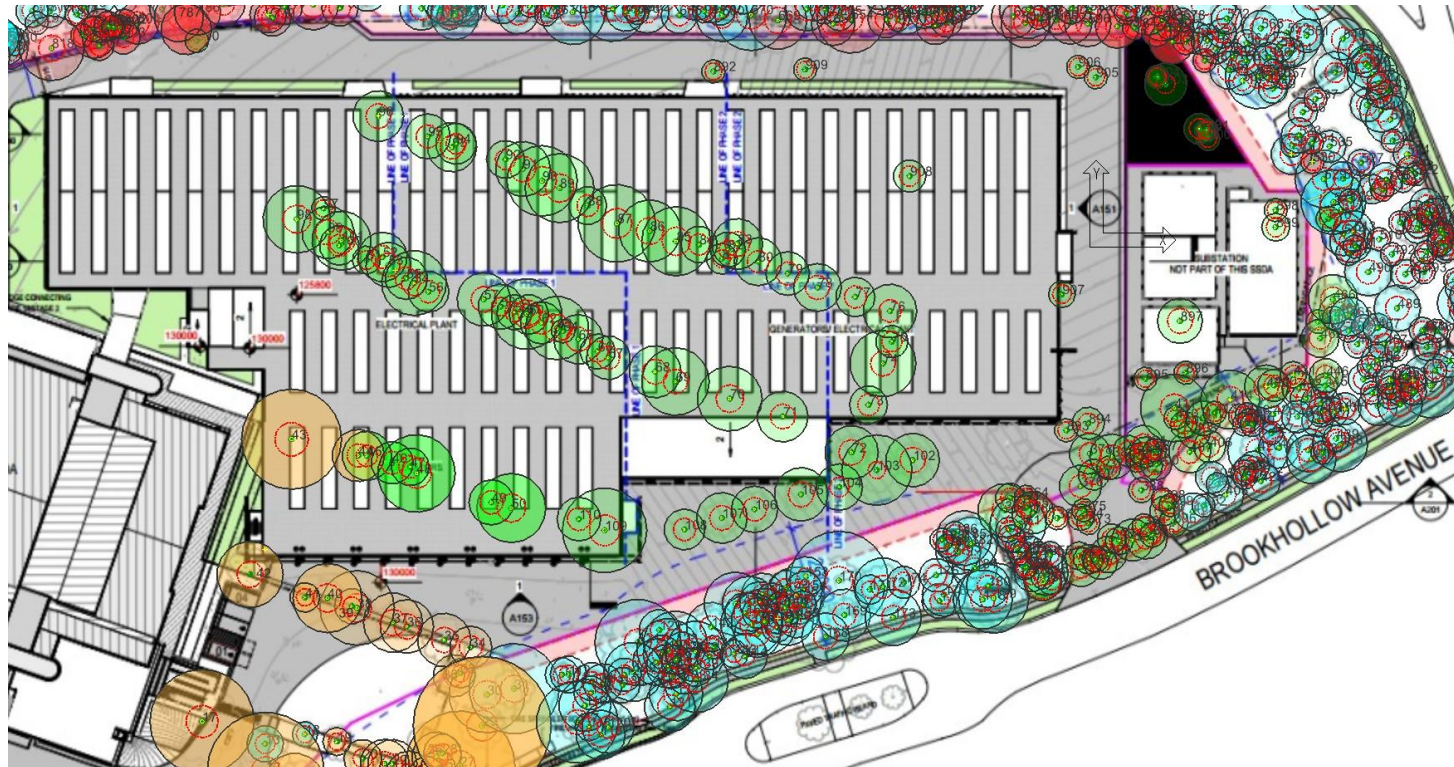

Legend

Tree to be retained



Tree to be removed in stage 2



Tree to be removed in stage 1





Tree to be removed in substation and early earthwork plan




Arbor Express

5. Development Footprint – Stage 1

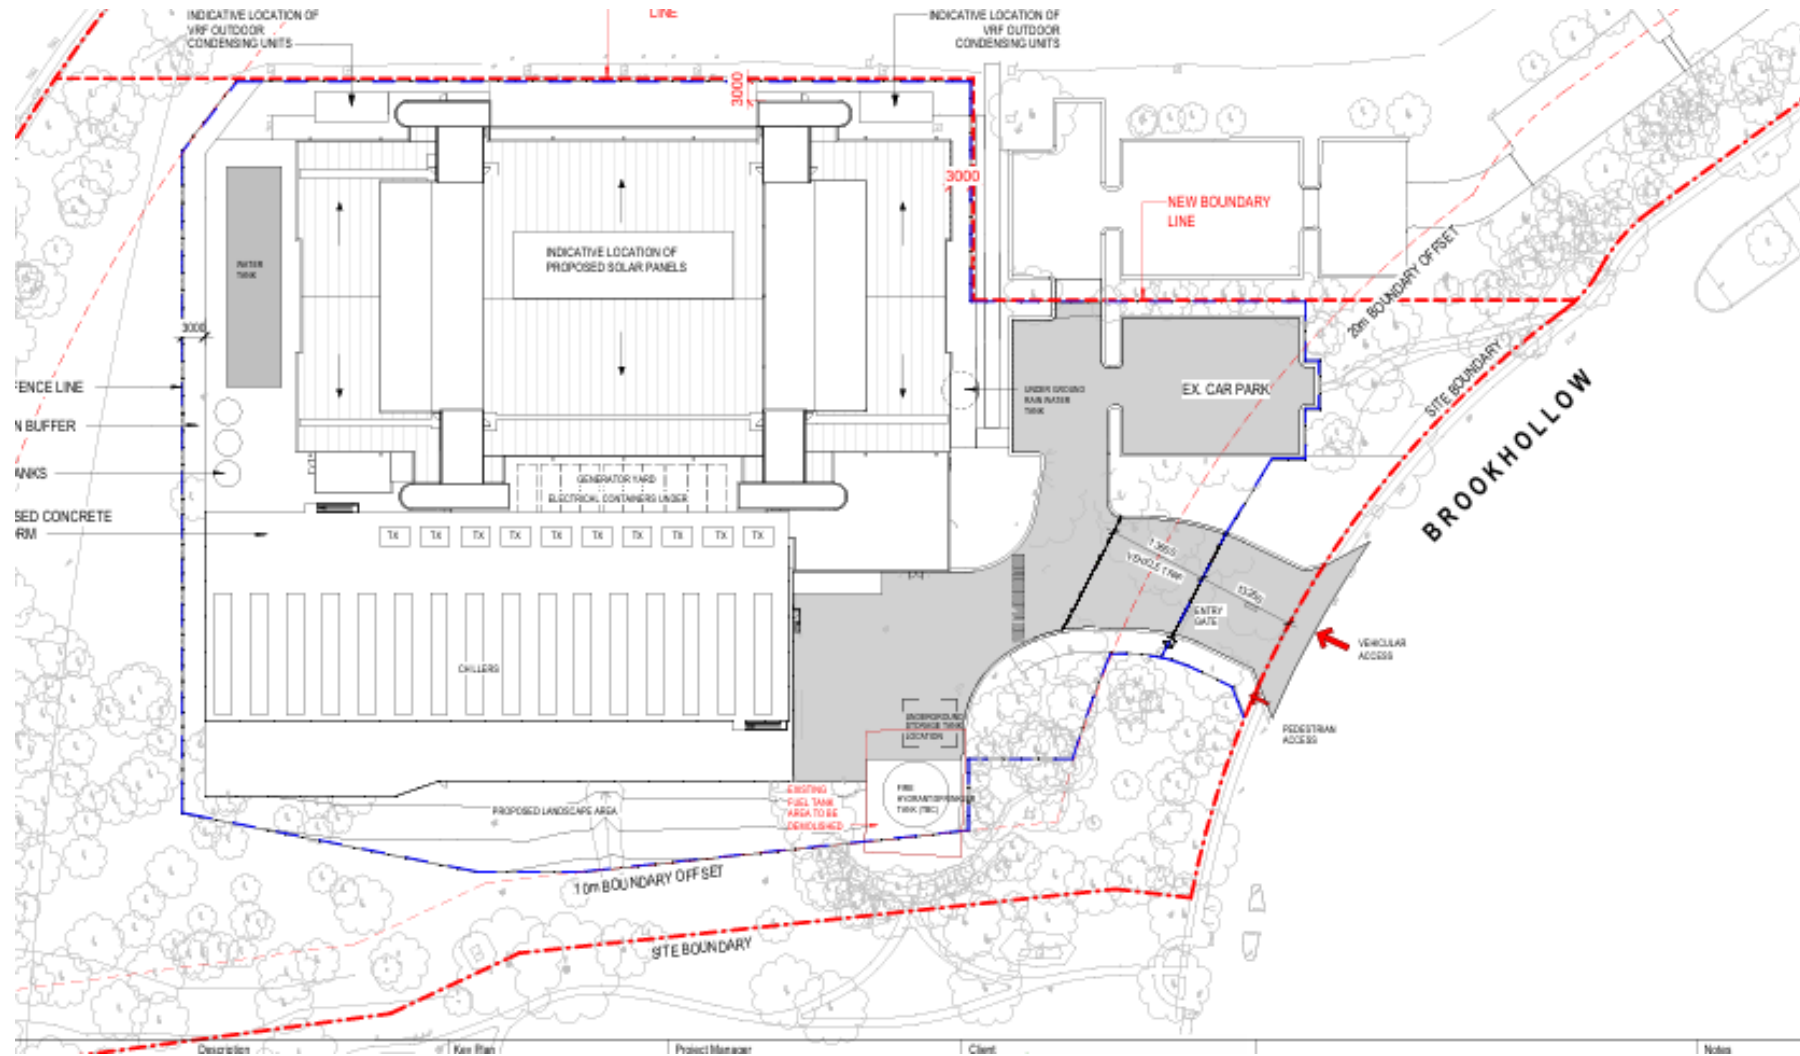

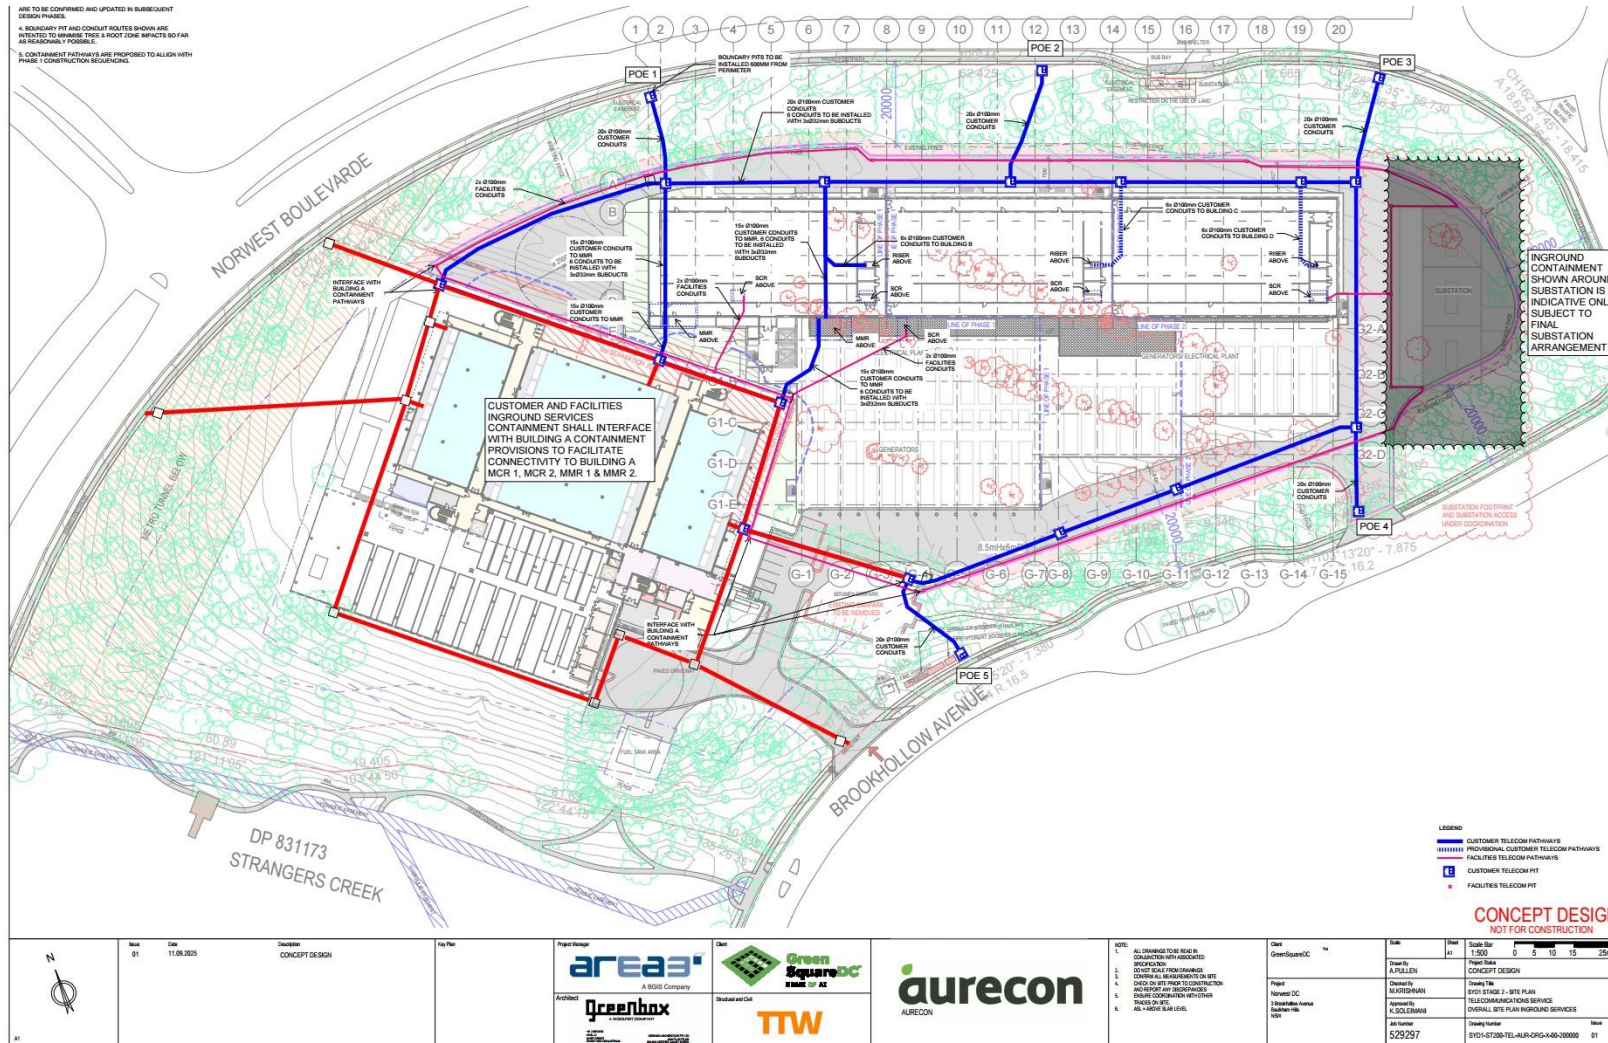

6. Security Camera Layout – Stage 2

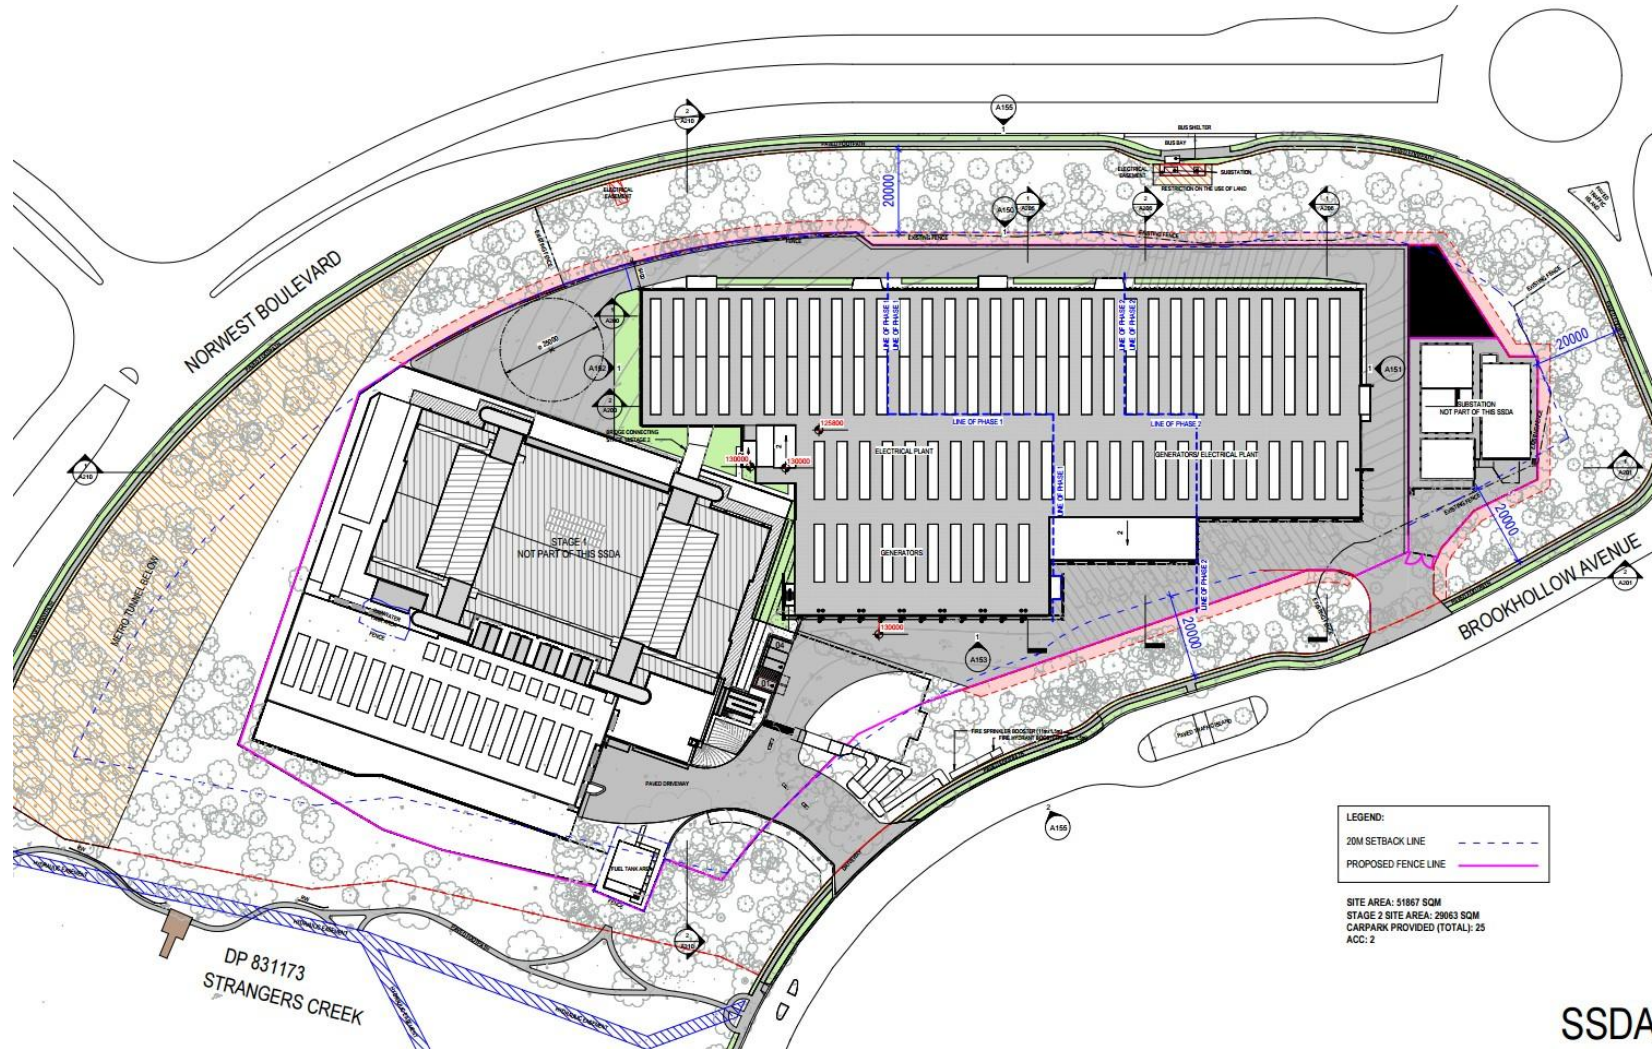

Commentary from Control Risk Regarding the Perimeter Tree Clearance and Security Considerations

In accordance with best practices for data center security, particularly for hyperscale facilities, maintaining a minimum clearance of 3000mm between perimeter fencing and any vegetation is considered essential. Trees located within close proximity to the fence line pose significant security risks. They may serve as concealment points for unauthorised persons or objects, and can also provide climbing aids for potential intruders attempting to access the facility from the outside. Additionally, individuals who have gained entry may exploit nearby vegetation as cover for sabotage, or to conceal items intended for removal from the site.

This 3000mm standoff distance has emerged as a critical industry standard for data center perimeter design to mitigate these risks. The space enhances visibility and prevents natural cover from being used to compromise the site's physical security.


Furthermore, vegetation in close proximity to fencing adversely affects the performance of perimeter intrusion detection systems (PIDS), particularly fibre-based fence-mounted systems. Movement of tree limbs against the fence frequently causes nuisance alarms, which can lead to operational disruption and reduce the effectiveness of the system. Intrusion detection solutions typically rely on coordinated surveillance via fixed or PTZ cameras, and trees located within 3000mm of the fence line may obstruct camera fields of view, further impairing the system's capability to detect and validate intrusions.

To address these concerns, camera poles are typically installed within the 3000mm buffer zone, positioned at 1500mm from the fence line on the secure side. This ensures symmetrical coverage and clear lines of sight on either side of the pole. The buffer zone allows for real-time monitoring of activity near the fence line, improving early detection of suspicious behaviour such as ladder placement or perimeter tampering from the public side of the fence.


This clearance not only supports operational effectiveness of the intrusion detection system but also forms a vital component of the overall physical security strategy for hyperscale data centers.

7. Stormwater Plan – Stage 2


This drawing is copyright and is the property of TTV
and must not be used without authorisation.
THIS DRAWING IS TO BE READ IN CONJUNCTION
WITH ALL RELEVANT NOTES AND LEGENDS

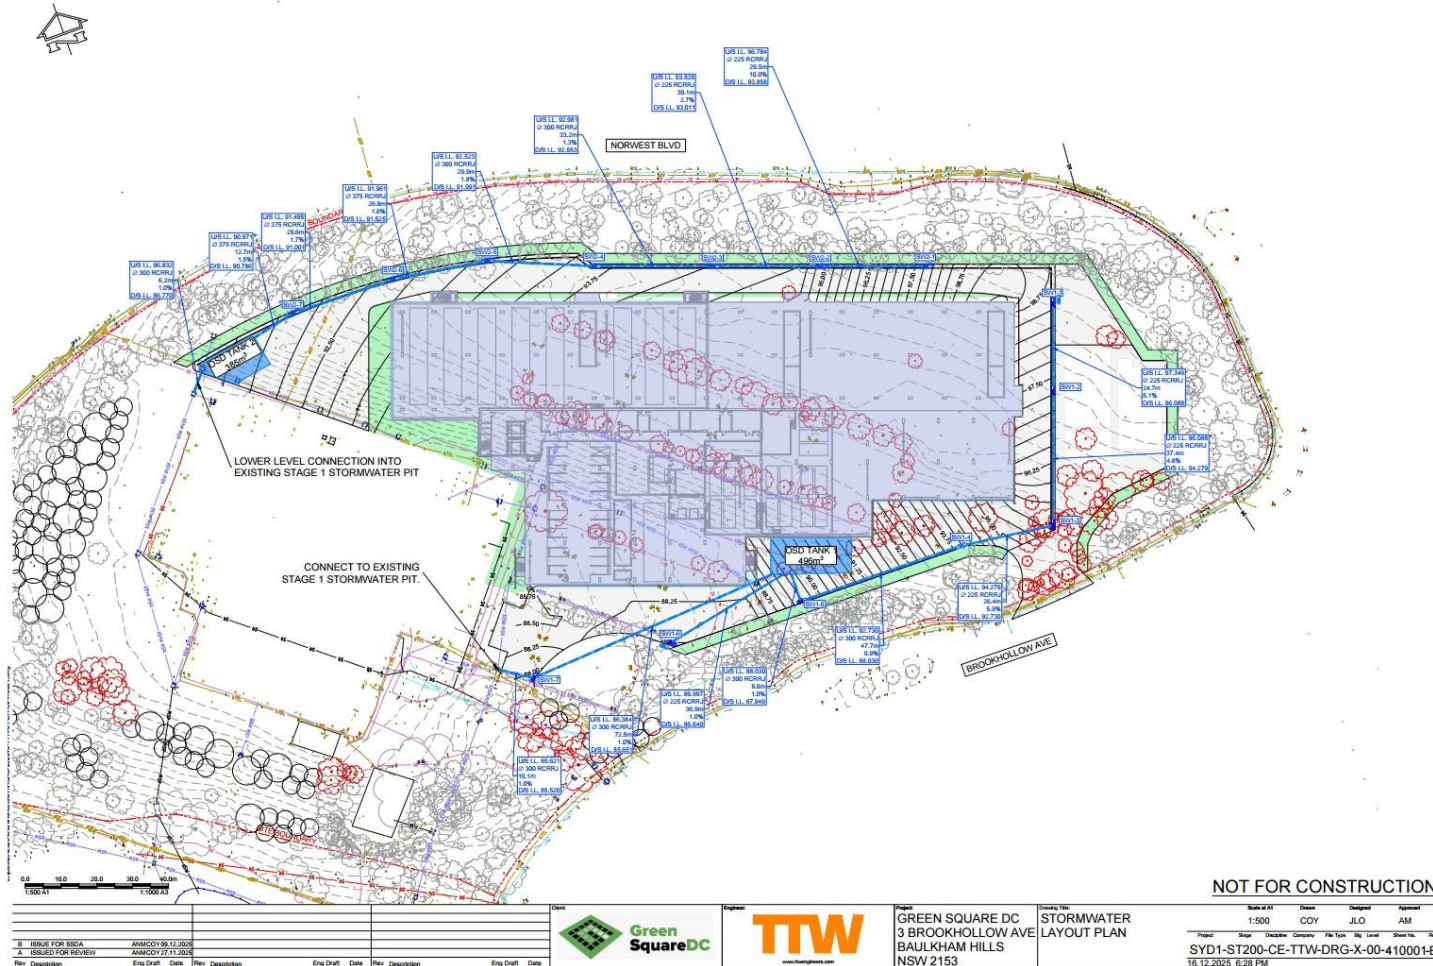

8. Substation Design Plan

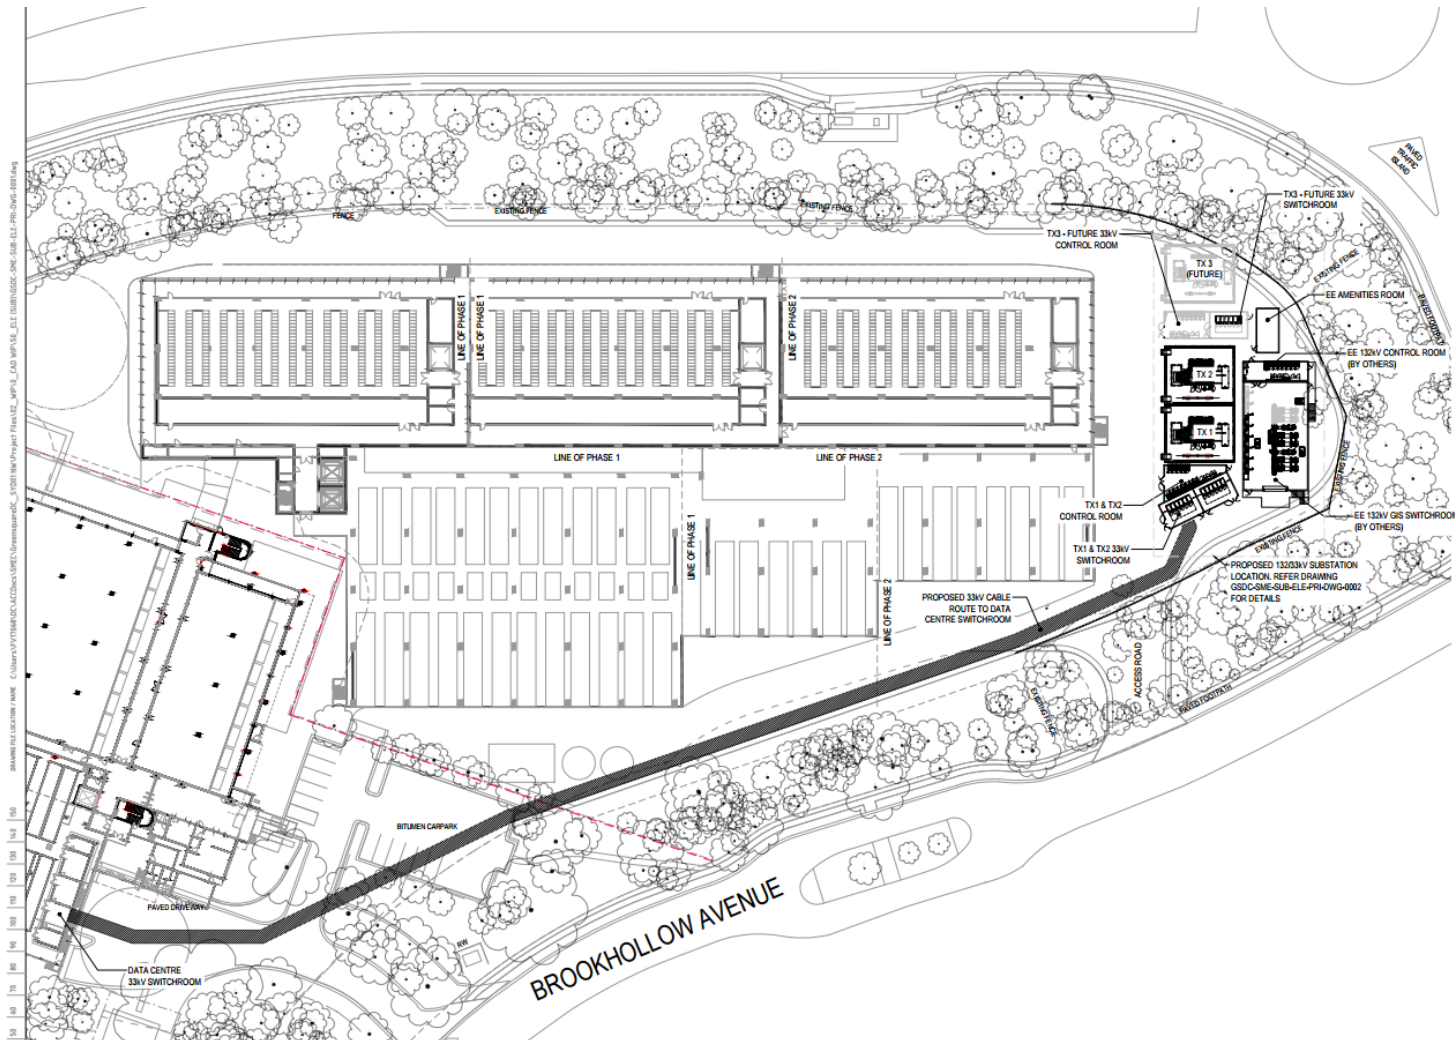


9. Tree Protection Plan

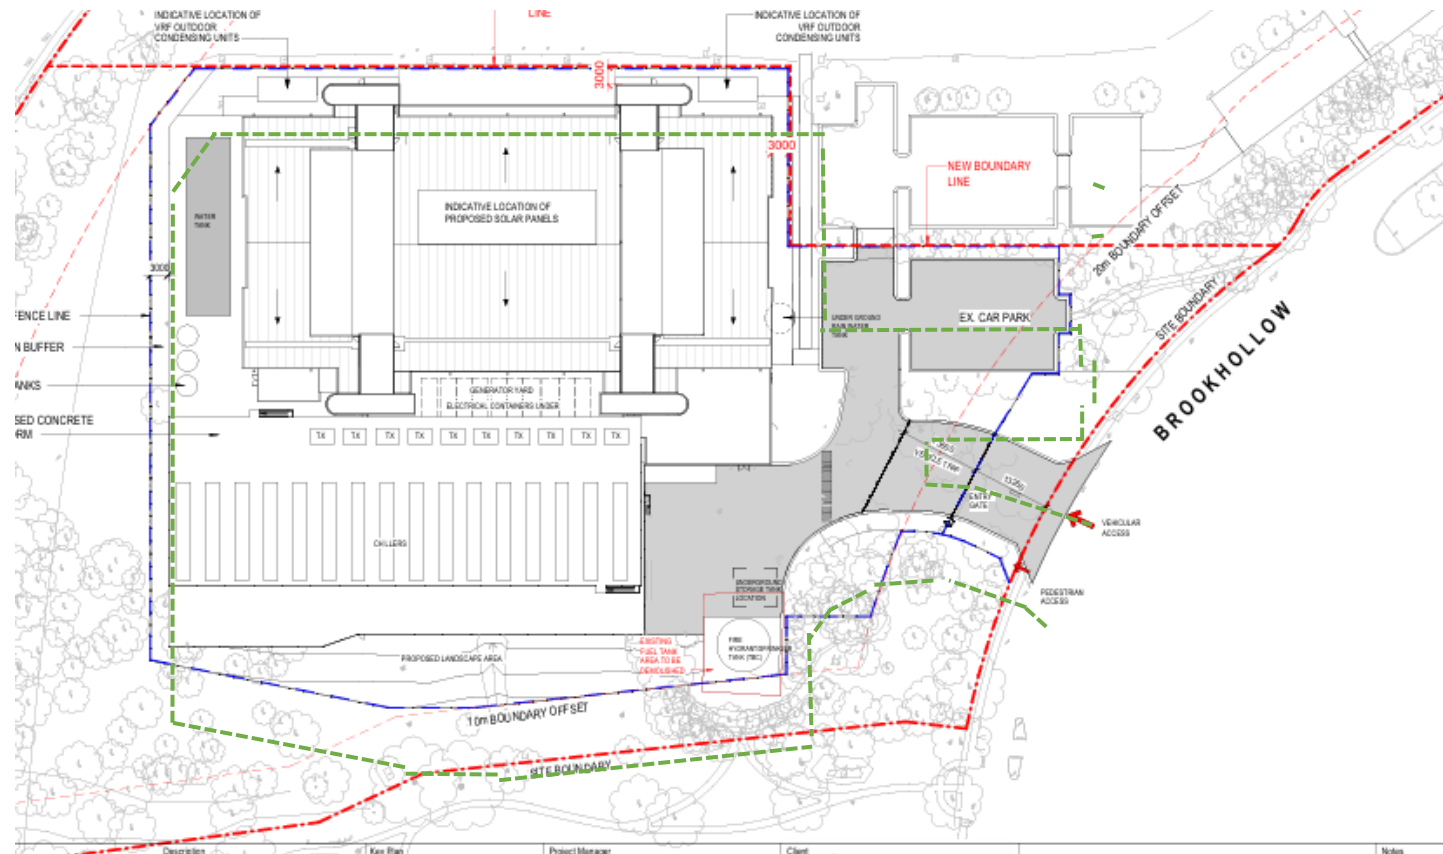

Legend – Stage 1

Tree Protection Fencing - - - - -

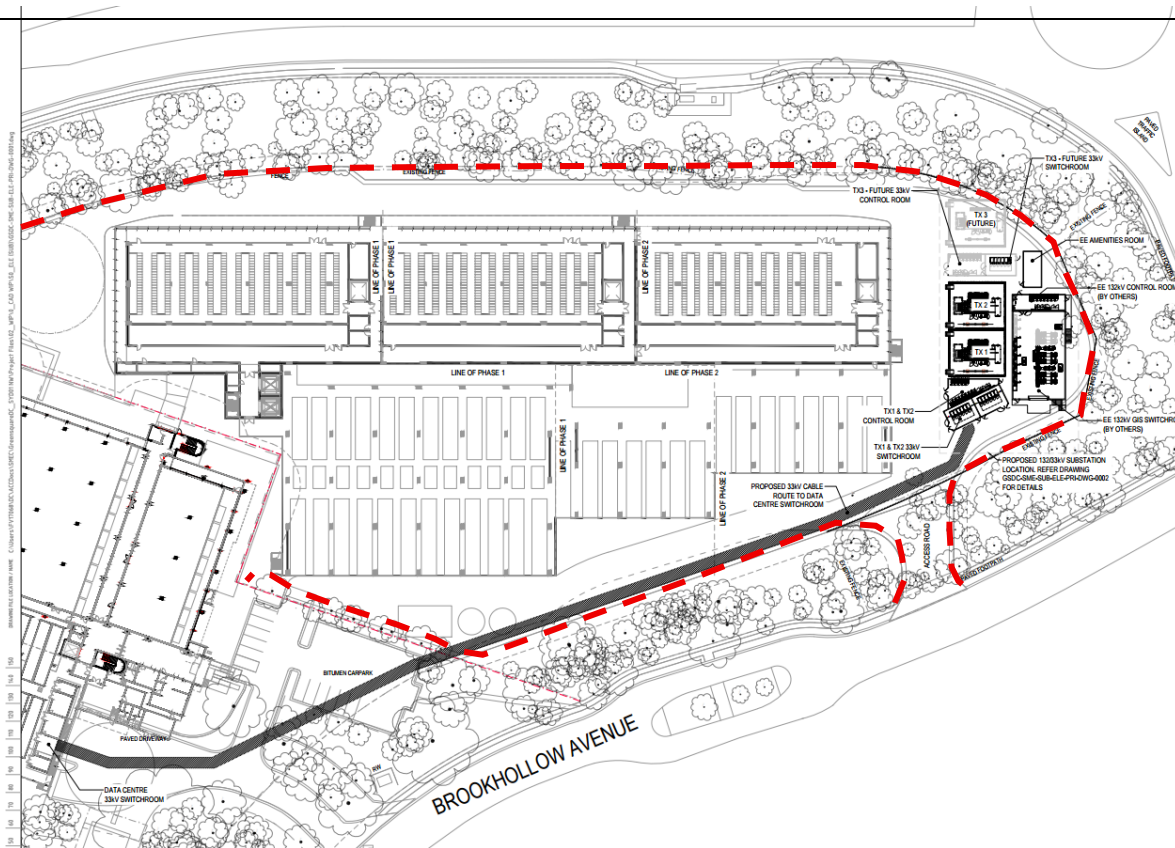

Legend – Stage 2

Tree Protection Fencing - - - - -

10. Recommendations

Tree Protection

A total of 607 individual trees surveyed are proposed for retention. The following mitigation measures will be required:

- Tree protection fencing is required around the TPZs (where viable) of retained trees including the 607 surveyed. The tree protection fencing will simply need to exist as an exclusion zone between the development footprint and the retained trees.
- All trees to be retained must be protected in accordance with AS 4970-2009, details of which are included in Appendix D.
- No over-excavation, battering, or benching shall be undertaken beyond the footprint of any structure unless approved by the Project Arborist.
- To mitigate potential impacts on surrounding trees during the construction of the 2.0m-wide drainage easement as outlined in the stormwater plan, it is recommended that all excavation works be carried out using non-destructive digging (NDD) techniques. This approach will help avoid damage to tree roots within proximity to the works. All excavation activities must be supervised by an AQF Level 5 Arborist to ensure that the vitality and structural stability of the nearby retained trees are not compromised. No additional impacts to other retained trees are anticipated as a result of the proposed stormwater works.
- The proposed substation design includes the a 33kV cable route to Data Centre Switchroom which is not certain if it requires excavation. If yes, some retained trees may need to be removed or NDD needs to be performed to avoid major impact to the existing tree roots.

Tree Removal – Stage 2

A total of 60 trees have been recommended to be removed which consists of 7 Low retention value trees and 53 moderate retention value trees. The trees have been proposed to be removed due to the following:

- 54 trees are located within the footprint of the development and must be removed for the development to proceed. This consists of 2 low retention value trees and 52 moderate retention value trees.
- 1 tree have a major encroachment from the proposed development of over 10%. These trees have been recommended for removal to accommodate the proposed development due to the major TPZ encroachment and root loss. This consists of 1 low retention value trees.
- 5 trees are required to be removed due to the poor health and structural condition. This includes 5 low retention value trees.

Tree Removal – Stage 1, early earthwork/substation, Stage 2

A total of 321 trees has been recommended to be removed which consists of 44 Low retention value trees and 277 moderate retention value trees. The trees have been proposed to be removed due to the following:

- 232 trees are located within the footprint of the development and must be removed for the development to proceed.
- 15 trees have either major encroachment or moderate encroachment with structural root zone encroachment by the proposed development.
- 74 trees are showing no or minor encroachment from the proposed development, they are proposed to be removed because of their health or structural condition, and the direct conflict with the security fence and camera clearance area.

Development stage	Stage 1	Substation/ early earth work	Stage 2
Number of trees to be removed	115	146	60

The estimated green waste produced from tree removal will be approximately 200 tonnes.

The existing canopy coverage before development is approximately 23000m².

The proposed canopy coverage after development is approximately 16000m², around 30% canopy coverage loss after the development.

11. Construction Hold Points for Tree Protection

Project Arborist

Below is a sequence of hold points requiring project arborist certification throughout the development process. It provides a list of hold points that must be checked and certified. All certifications must be provided in written format upon completion of the development. The final certification must include details of any instructions for remediation undertaken during the development. The principle contractor should be responsible for implementation of all tree protection requirements.

Hold Point	Stage	Date Completed and Signature of Project Arborist Responsible
Project Arborist to hold pre construction site meeting with principle contractor to discuss methods and importance of tree protection measures and resolve any issues in relation to feasibility of tree protection requirements that may arise. Project Arborist to mark all trees approved for removal under DA consent.	Prior to development work commencing	
Project Arborist to assess and certify that tree protection has been installed in accordance with AS 4970-2009 prior to works commencing at site.	Prior to development work commencing	
In accordance with AS 4970-2009 the Project Arborist should carryout regular site inspections to ensure works are carried out in accordance with the recommendations. Site inspections are recommended on a quarterly frequency.	On-going through the development	
The removal of existing structures inside the TPZ of any tree to be retained, such as the existing buildings and hard surfaces must be supervised by the Project Arborist.	Demolition	
Project Arborist to supervise all manual excavations and root pruning inside the TPZ of any tree to be retained. Project Arborist to approve all pruning of roots greater than 30mm inside TPZ. All root pruning of roots greater than 30mm in diameter must be carried out by an AQF level 5 Arborist.	Construction	
Project Arborist to certify that all underground services including storm water inside TPZ of any tree to be retained have been installed in accordance with AS 4970-2009.	Construction	
Project Arborist to approve relocation of tree protection for landscaping. All landscaping works within the TPZ of trees to be retained are to be undertaken in consultation with the Project Arborist to minimise the impact to trees.	Construction / Landscape	
After all demolition, construction and landscaping works are complete the Project Arborist should assess that the subject trees have been retained in the same condition and vigour. If changes to condition are identified the project Arborist should provide recommendations for remediation.	Upon completion of the development	

12. References

- Barrell, J. 2001. 'SULE: Its use and status into the new millennium', in *Management of mature trees, Proceedings of the 4th NAAA Tree Management Seminar*, NAAA, Sydney.
- Brooker M.I.H, Kleinig D.A. 2006. *Field Guide to Eucalypts*. Volume 1, South-eastern Australia, 3rd ed
Blooming Books, Melbourne
- Draper, B. and Richards, P., 2009. *Dictionary for Managing Trees in Urban Environments*, Institute of Australian Consulting Arboriculturists (IACA), CSIRO Publishing, Collingwood, Victoria, Australia.
- Harris, R.W., Matheny, N.P., and Clark, J.R., 1999. *Arboriculture: integrated management of landscape trees, shrubs, and vines*, Prentice Hall, Upper Saddle River, New Jersey.
- Mattheck, C. and Breloer, H. 1994. 'Field Guide for Visual Tree Assessment' *Arboricultural Journal*, Vol 18 pp 1-23.
- Mattheck, C. 2007. *Updated Field Guide for Visual Tree Assessment*. Karlsruhe: Forschungszentrum Karlsruhe. IACA 2010.
- Robinson L, 2003. *Field Guide to the Native Plants of Sydney*, 3rd ed, Kangaroo Press, East Roseville NSW
- Standards Australia 2003. *Composition, Soil and Mulches, AS 4454 (2003)*, Standards Australia, Sydney.
- Standards Australia 2007. *Australian Standard: Pruning of amenity trees, AS 4373 (2007)*, Standards Australia, Sydney.
- Standards Australia 2009. *Australian Standard: Protection of trees on development sites, AS 4970 (2009)*. Standards Australia, Sydney.

Appendix A: Glossary of Terms

Abiotic - Pertaining to non-living agents, e.g. environmental factors.

Anchorage - The system whereby a tree is fixed within the soil, involving cohesion between roots and soil and the development of a branched system of roots which withstands wind and gravitational forces transmitted from the aerial parts of the tree.

Branch:

- Primary. A first order branch arising from a stem.
- Lateral. A second order branch, subordinate to a primary branch or stem and bearing sub-lateral branches.
- Sub-lateral. A third order branch, subordinate to a lateral or primary branch, or stem and usually bearing only twigs.

Branch collar - A visible swelling formed at the base of a branch whose diameter growth has been disproportionately slow compared to that of the parent stem; a term sometimes applied also to the pattern of growth of the cells of the parent stem around the branch base.

Cambium - Layer of dividing cells producing xylem (woody) tissue internally and phloem (bark) tissue externally.

Canker - A persistent lesion formed by the death of bark and cambium due to colonisation by fungi or bacteria.

Compartmentalisation - The confinement of disease, decay or other dysfunction within an anatomically discrete region of plant tissue, due to passive and/or active defences operating at the boundaries of the affected region.

Condition - An indication of the physiological condition of the tree. Where the term 'condition' is used in a report, it should not be taken as an indication of the stability of the tree.

Crown/Canopy - The main foliage bearing section of the tree.

Crown lifting - The removal of limbs and small branches to a specified height above ground level.

Crown reduction/shaping - A specified reduction in crown size whilst preserving, as far as possible, the natural tree shape.

DAB (Diameter Above Buttress) - Trunk diameter measured above the root buttress.

Defect - In relation to tree hazards, any feature of a tree which detracts from the uniform distribution of mechanical stress, or which makes the tree mechanically unsuited to its environment.

Dieback - The death of parts of a woody plant, starting at shoot-tips or root-tips.

Disease - A malfunction in or destruction of tissues within a living organism, usually excluding mechanical damage; in trees, usually caused by pathogenic micro-organisms.

DBH (Diameter at Breast Height) - Stem diameter measured at a height of 1.4 metres or the nearest measurable point. Where measurement at a height of 1.4 metres is not possible, another height may be specified.

Deadwood - Branch or stem wood bearing no live tissues. Retention of deadwood provides valuable habitat for a wide range of species and seldom represents a threat to the health of the tree. Removal of deadwood can result in the ingress of decay to otherwise sound tissues and climbing operations to access deadwood can cause significant damage to a tree. Removal of deadwood is generally recommended only where it represents an unacceptable level of hazard.

Epicormic shoot - A shoot having developed from a dormant or adventitious bud and not having developed from a first year shoot.

Heartwood/false-heartwood - The dead central wood that has become dysfunctional as part of the aging processes and being distinct from the sapwood.

Included bark (ingrown bark) - Bark of adjacent parts of a tree (usually forks, acutely joined branches or basal flutes) which is in face-to-face contact.

Lions tailing - A term applied to a branch of a tree that has few if any side-branches except at its end and is thus liable to snap due to end- loading.

Occlusion - The process whereby a wound is progressively closed by the formation of new wood and bark around it.

Pruning - The removal or cutting back of twigs or branches, sometimes applied to twigs or small branches only, but often used to describe most activities involving the cutting of trees or shrubs.

Reactive Growth/Reaction Wood - Production of woody tissue in response to altered mechanical loading; often in response to internal defect or decay and associated strength loss (cf. adaptive growth).

Ring-barking - The removal of a ring of bark and phloem around the circumference of a stem or branch, normally resulting in an inability to transport photosynthetic assimilates below the area of damage. Almost inevitably results in the eventual death of the affected stem or branch above the damage.

Stress - In plant physiology, a condition under which one or more physiological functions are not operating within their optimum range, for example due to lack of water, inadequate nutrition or extremes of temperature.

SRZ (Structural Root Zone) - The area around the base of the tree required for the tree's stability in the ground.

Topping - In arboriculture, the removal of the crown of a tree, or of a major proportion of it.

TPZ (Tree Protection Zone) - A specified area above and below ground and at a given distance from the trunk set aside for the protection of a tree's roots and crown to provide for the viability and stability of a tree to be retained where it is potentially subject to damage by development.

Veteran tree - Tree that, by recognised criteria, shows features of biological, cultural or aesthetic value that are characteristic of, but not exclusive to, individuals surviving beyond the typical age range for the species concerned. These characteristics might typically include a large girth, signs of crown retrenchment and hollowing of the stem.

Vigour - The expression of carbohydrate expenditure to growth (in trees).

Appendix B: Retention Value

Evaluating Sustainability and Landscape Significance to Determine Retention Value	
Retention Value	Criteria and Categories
High	These trees are considered to be worthy of preservation. As such, careful consideration should be given to their retention as a priority. Proposed site design and placement of buildings and infrastructure should consider the TPZ to minimize any adverse impact. In addition to TPZs, the extent of the canopy should also be considered, particularly in relation to a high-rise development. Significant pruning of the trees to accommodate the building envelope or temporary scaffolding is generally not acceptable.
Moderate	The retention of these trees is desirable. These trees should be retained as part of any proposed development, if possible; however, these trees are considered to be less critical for retention. If these trees must be removed, replacement planting should be considered in accordance with Council's Tree Replacement Policy to compensate for loss of amenity.
Low	These trees are not considered to be worthy of any special measures to ensure their preservation, due to current health, condition or suitability. They do not have any special ecological, heritage or amenity value, or these values are substantially diminished due to their SULE. These trees should not be considered as a constraint to future development of the site.
Very Low	These trees are considered to be potentially hazardous or very poor specimens or may be environmental or noxious weeds. The removal of these trees is therefore recommended regardless of the implications of any proposed development.

Appendix C: Safe Useful Life Expectancy (SULE)

	1 LONG SULE	2 MEDIUM SULE	3 SHORT SULE	4 REMOVALS	5 MOVED OR REPLACED
	Long: appeared to be retainable at the time of assessment for over 40 years with an acceptable degree of risk, assuming reasonable maintenance.	Medium: appeared to be retainable at the time of assessment for 15 to 40 years with an acceptable degree of risk, assuming reasonable maintenance.	Short: appeared to be retainable at the time of assessment for 5 to 15 years with an acceptable degree of risk, assuming reasonable maintenance.	Removal: trees which should be removed within the next 5 years.	Moved or Replaced: Trees which can be readily moved or replaced.
A	Structurally sound trees located in positions that can accommodate future growth.	Trees that may only live between 15 and 40 more years.	Trees that may only live between 5 and 15 more years.	Dead, dying, suppressed or declining trees through disease or inhospitable conditions.	Small trees less than 5 metres (m) in height.
B	Trees that could be made suitable for long-term retention by remedial tree care.	Trees that may live for more than 40 years but would be removed for safety or nuisance reasons.	Trees that may live for more than 15 years but would be removed for safety or nuisance reasons.	Dangerous trees through damage, structural defect, instability or recent toss of adjacent trees.	Young trees less than 15 years old but over 5m in height.
C	Trees of special significance for historical, commemorative or rarity reasons that would warrant extraordinary efforts to secure their long term retention.	Trees that may live for more than 40 years but should be removed to prevent interference with more suitable individuals or to provide space for new planting.	Trees that may live for more than 15 years but should be removed to prevent interference with more suitable individuals or to provide space for new planting.	Dangerous trees through structural defects including cavities, decay, included bark, wounds or poor form.	Trees that have been regularly pruned to artificially control growth'.
D		Trees that could be made suitable for retention in the medium term by remedial tree care.	Trees that require substantial remedial tree care and are only suitable for retention in the short term.	Damaged trees that are clearly not safe to retain.	
E				Trees that may live for more than 5 years but should be removed to prevent interference with more suitable individuals or to	

	1 LONG SULE	2 MEDIUM SULE	3 SHORT SULE	4 REMOVALS	5 MOVED OR REPLACED
				provide space for new planting.	
F				Trees that are damaging or may cause damage to existing structures within 5 years.	
G				Trees that will become dangerous after removal of other trees for the reasons given in A) to F).	


Appendix D: Tree Protection Guidelines

The following tree protection guidelines must be implemented during the construction period if no tree specific recommendations are detailed.

Tree Protection Zone Establishment

Prior to the introduction of any machinery or materials onto the site, and before initiating any works such as bulk earthworks, fencing should be installed. Once in place, any alterations or removal of protective fencing must receive approval from the project arborist. Access to the TPZ must be restricted by securing it appropriately. The establishment and management of the Tree Protection Zone should adhere to the following guidelines:

- 1) Specify the trees within and around the subject allotment that are slated for preservation and protection during the development process. This could involve trees on neighboring properties as well as street trees.
- 2) The Tree Protection Zone radius should align with the calculation specified in the Individual Tree Data and Imagery.
- 3) Please locate and mark the alignment of protective fencing. This alignment may differ from the actual TPZ radius, taking into account areas where acceptable encroachment is permitted (determined in consultation with the project arborist) and site access needs. Protective fencing is necessary only within the subject allotment, assuming appropriate boundary fencing is already installed.
- 4) Set up protective fencing as depicted in the accompanying image. Adhere to the relevant fencing requirements outlined in AS 4687 for temporary fencing and hoardings. Additionally, affix shade cloth or a similar material to mitigate the transfer of dust, particulate matter, and liquids into the protected area.

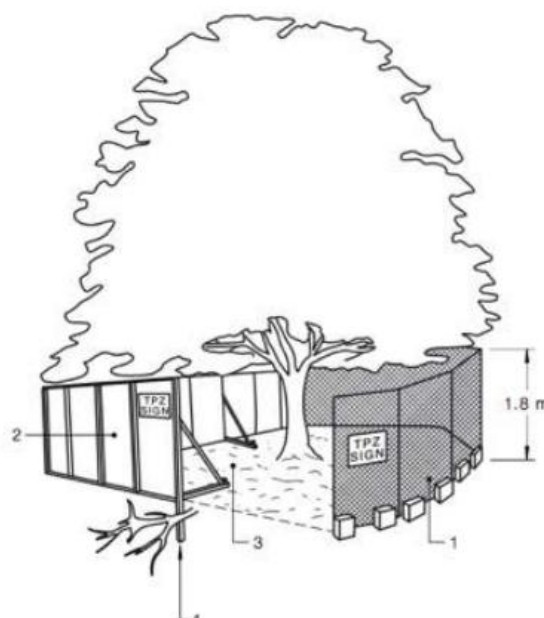

Legend:

1. Chain wire mesh panels with shade cloth (if required) attached, held in place with concrete feet.
2. Alternative plywood or wooden palling fence panels. This fencing material also prevents building materials or soil entering the TPZ.
3. Mulch installation across surface of TPZ (at the discretion of the Project Arborist). No excavation construction activity, grade changes, surface treatment or storage of materials of any kind is permitted within the TPZ.
4. Bracing is permissible within the TPZ. Installation of supports should avoid damaging roots.

Protection when works within the tree protection zone is required


If the fencing has been reduced from the full TPZ radius to accommodate vehicle or machinery access, it's crucial to implement heavy-duty ground protection and trunk protection. This measure is essential to support the passage of vehicles like excavators, cranes, pier drilling machinery, hydro-excavation trucks, and other necessary equipment.

The heavy-duty ground protection includes:

- 1) A layer of geotextile fabric on top of the natural ground.
- 2) Cover the geotextile with a 100mm thick layer of organic mulch.
- 3) Install ground protection on top of the organic mulch (Bog mat or timber battens)

Trunk protection will include protection to the trunk and branches of trees as shown below. A minimum height of 2m is recommended.

- 1) Install breathable padding or hessian around the trunk of the tree.
- 2) Install closely spaced timber battens around the trunk, with the top edge protecting the trunk/bark by the padding/hessian. Secure with strapping

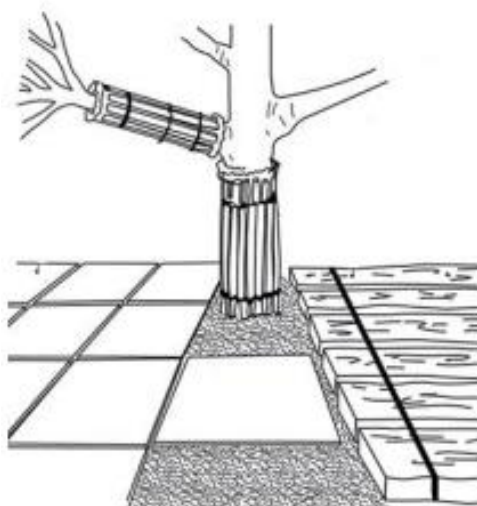
**Notes:**

1. For trunk and branch protection use boards and padding that will prevent damage to bark. Boards are to be strapped to trees, not nailed or screwed.
2. Rumble boards should be of a suitable thickness to prevent soil compaction and root damage.





Underground Services

Whenever feasible, route all underground services away from the TPZ. If installing underground services within the TPZ becomes unavoidable, utilize non-intrusive methods such as horizontal directional drilling (HDD), non-destructive excavation (NDE) techniques like hydro-vacuum or Air Spade, or manually excavated trenches. Ensure that horizontal drilling or boring is carried out at a depth of at least 600 mm below grade. It's important to note that trenching for services is classified as "excavation." The project arborist should assess the potential impacts of drilling and bore pits on retained trees.

Example of a Tree Protection Sign

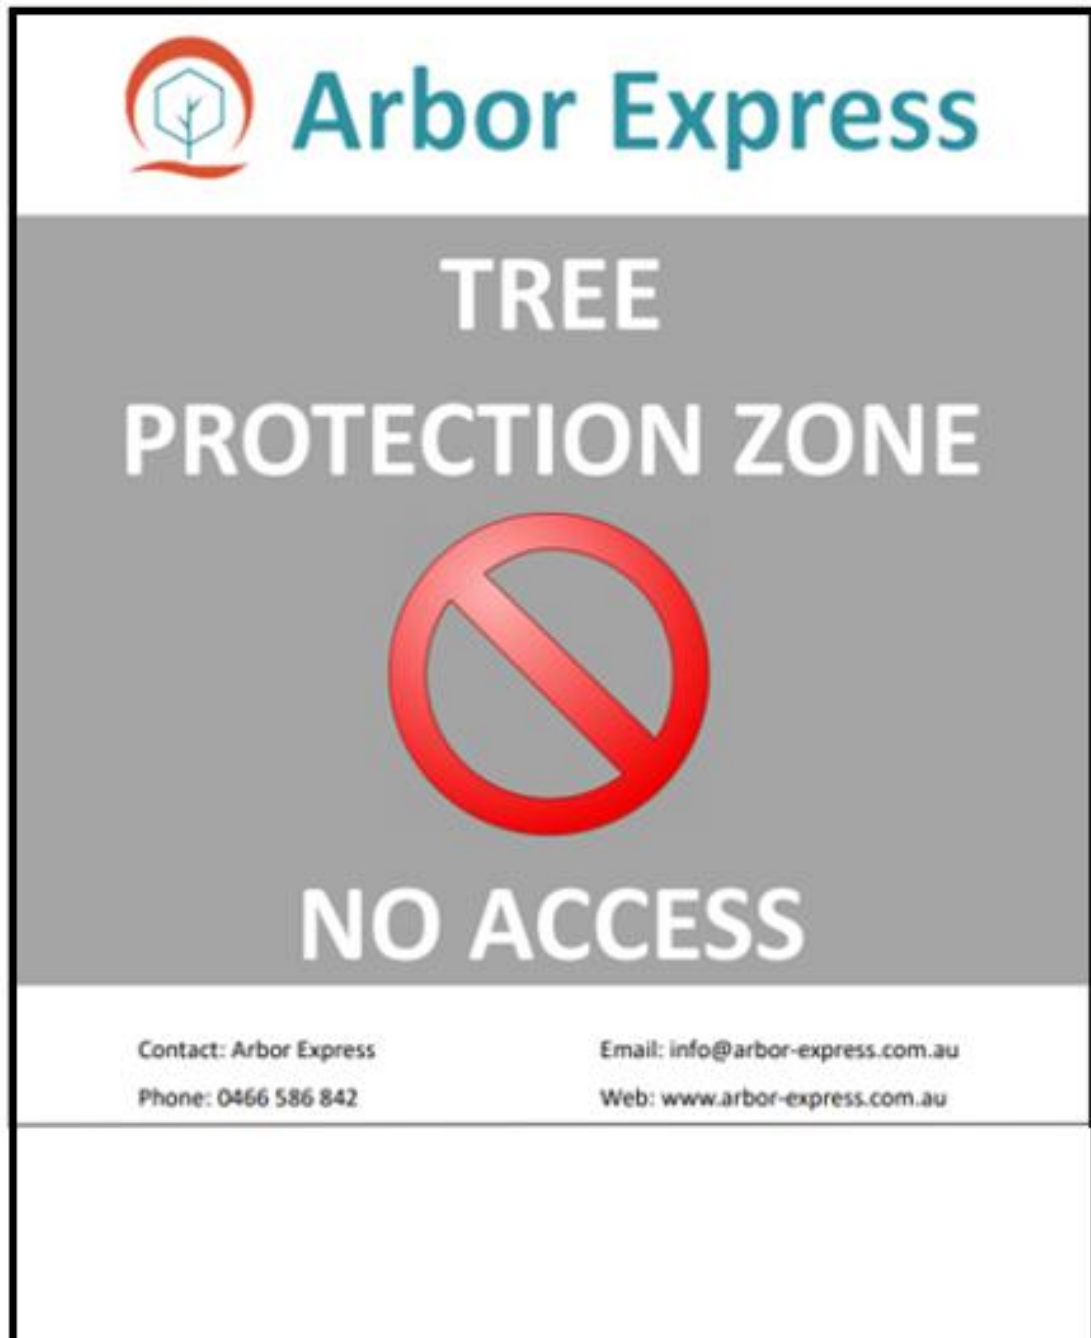

Appendix E: Encroachment into the Tree Protection Zones

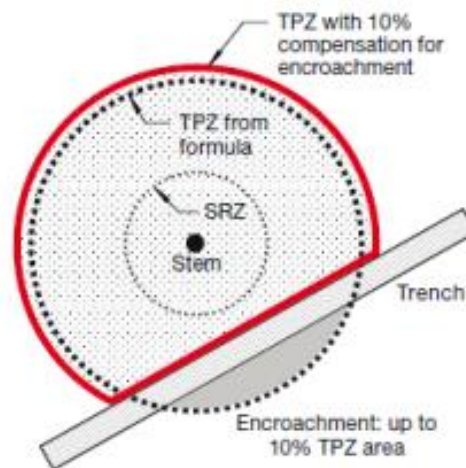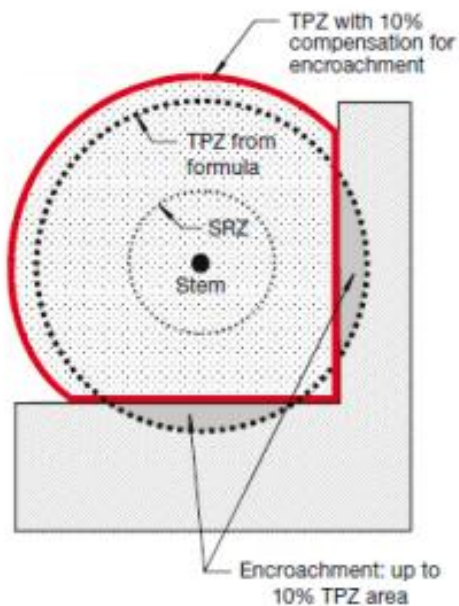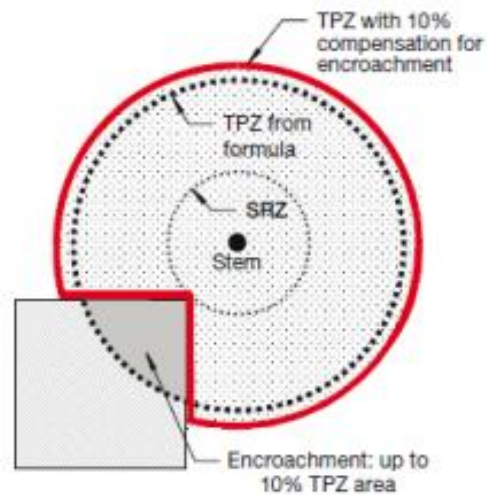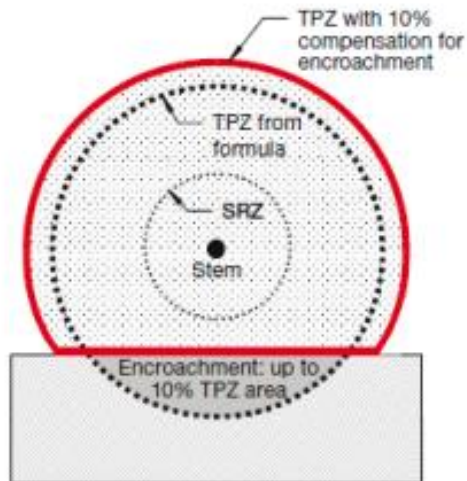



Locations

- Sydney
- NSW South Coast (Wollongong to Bega)
- NSW Central Coast (Gosford to Newcastle)
- Southern Highlands
- Blue Mountains
- Canberra and Queanbeyan
- Regional NSW

Services

- Arborist Reports for Developments
- Tree Root Mapping
- Project Arborist
- Tree Health and Safety Assessments
- Tree Structural Testing (Resistograph)
- Flora & Fauna Assessments and Project Ecologist
- Vegetation Management Plans

Contact Us

- 0466 586 842
- Info@arbor-express.com.au