
153 – 157 Walker Street, North Sydney

Ecologically Sustainable Development Report

Project No.	P01748
Revision	02
Issued	31 st July 2025
Client	Freecity

E-LAB Consulting

Where science and engineering inspire design.



ISSUE AND REVISION RECORD

DESIGN FINALISATION

Revision	Date	Comments	Engineer	Reviewer
01	16.06.2025	Draft DA Issue	AM/NA	AK
02	24.06.2025	Final (For TOA)	TK/NA	AK
03	31.07.2025	Minor update - Final (For TOA)	TK/NA	AK
04				

Confidentiality:

This document contains commercial information which has been prepared exclusively for the use by The Principal. The document in entirety is confidential. No information contained in this document may be released in part or whole to any third party without the approval of the Author or The Principal.

Authorised by:

Authorised by:



Alex Kobler
Director, Sustainability
E-LAB Consulting



TABLE OF CONTENTS

ISSUE AND REVISION RECORD	2
TABLE OF CONTENTS	3
1 EXECUTIVE SUMMARY	4
2 INTRODUCTION	5
2.1 SITE OVERVIEW	5
2.2 DEVELOPMENT OVERVIEW	6
3 SUSTAINABILITY FRAMEWORKS	7
3.1 NORTH SYDNEY DEVELOPMENT CONTROL PLAN (DCP) 2013	7
3.2 STATE ENVIRONMENTAL PLANNING POLICY - SUSTAINABLE BUILDINGS (SEPP) 2022	7
3.3 SECRETARY'S ENVIRONMENTAL ASSESSMENT REQUIREMENTS (SEARS)	9
3.4 NABERS ENERGY AND WATER (HOTEL)	10
3.5 NABERS EMBODIED EMISSIONS REPORTING	10
3.6 PERFORMANCE STANDARDS FOR NET ZERO READY ENERGY BUILDINGS	11
4 SUSTAINABLE DESIGN RESPONSE	12
4.1 OVERALL STRATEGY	ERROR! BOOKMARK NOT DEFINED.
4.2 EPA PRINCIPLES	12
4.3 ENERGY CONSUMPTION	13
4.4 WATER CONSUMPTION	14
4.5 MATERIALS	15
4.6 WASTE MANAGEMENT	16
4.7 COMFORT AND QUALITY	16
4.8 SUSTAINABLE TRANSPORT	17
4.9 RENEWABLE ENERGY	17
4.10 BIOPHILIC DESIGN	17
4.11 SECTION J	18
4.12 HEAT ISLAND MITIGATION	19
4.13 NSW NET ZERO GOAL	19
5 BASIX COMPLIANCE	21
6 SUMMARY	24
APPENDIX A – BASIX REPORT – TBC	25



1 EXECUTIVE SUMMARY

E-LAB Consulting has been commissioned by Freecity to prepare this report in accordance with the technical requirements of the Secretary's Environmental Assessment Requirements (SEARs), and in support of the State Significant Development Application (SSD-82599709) for the proposed development at 153 - 157 Walker Street, North Sydney.

This report presents a summary of the ESD strategies proposed and commitments made for the development. Freecity is aiming to deliver a high-quality residential-led mixed-use development outcome for the site that demonstrates a strong commitment to sustainability in its design, construction, and operation.

As part of its commitment to sustainability, the development has committed to the following:

- 4-star NABERS Energy rating for Hotel spaces
- 3-star NABERS Water rating for Hotel spaces
- Achieving the BASIX benchmarks in line with State Environmental Planning Policy - Sustainable Buildings (SEPP) 2022 requirements for mid/high-rise residential building:
 - **BASIX Energy 62%**
 - **BASIX Water 40%**
- Exceeding compliance requirements for NCC/BCA Section J 2022 (or NCC 2025 as appropriate), including a performance façade and shading devices
- Fossil-fuel free design to allow for carbon neutrality by 2035
- On-site renewable energy generation through spatial provision for rooftop solar photovoltaics (PV)
- Following a range of sustainability initiatives across the site spanning energy efficiency, water efficiency, indoor environment quality, waste management and comfort
- Implementing mitigation strategies in response to climate change and the Urban Heat Island Effect.

The strategies and initiatives presented in this report demonstrate a strong commitment to sustainability in line with industry best-practice and SEARS requirements and are to be further developed during subsequent stages of the project.



2 INTRODUCTION

2.1 SITE OVERVIEW

The project is located at 153 – 157 Walker Street, North Sydney NSW, within the North Sydney Council area. The development is positioned within a high-density commercial and residential precinct, with direct access to key transport routes and urban amenities. It is surrounded by office buildings, apartment complexes, and retail establishments, contributing to the vibrant character of North Sydney’s central business district.

The site benefits from excellent connectivity, with North Sydney Train Station and multiple bus services providing convenient access to the broader Sydney metropolitan area. Nearby amenities include Greenwood Plaza, North Sydney Oval, and a range of dining and retail options along Walker Street and Miller Street. Additionally, the site is close to recreational and green spaces such as St Leonards Park and Waverton Park, offering outdoor amenities within an urban setting.

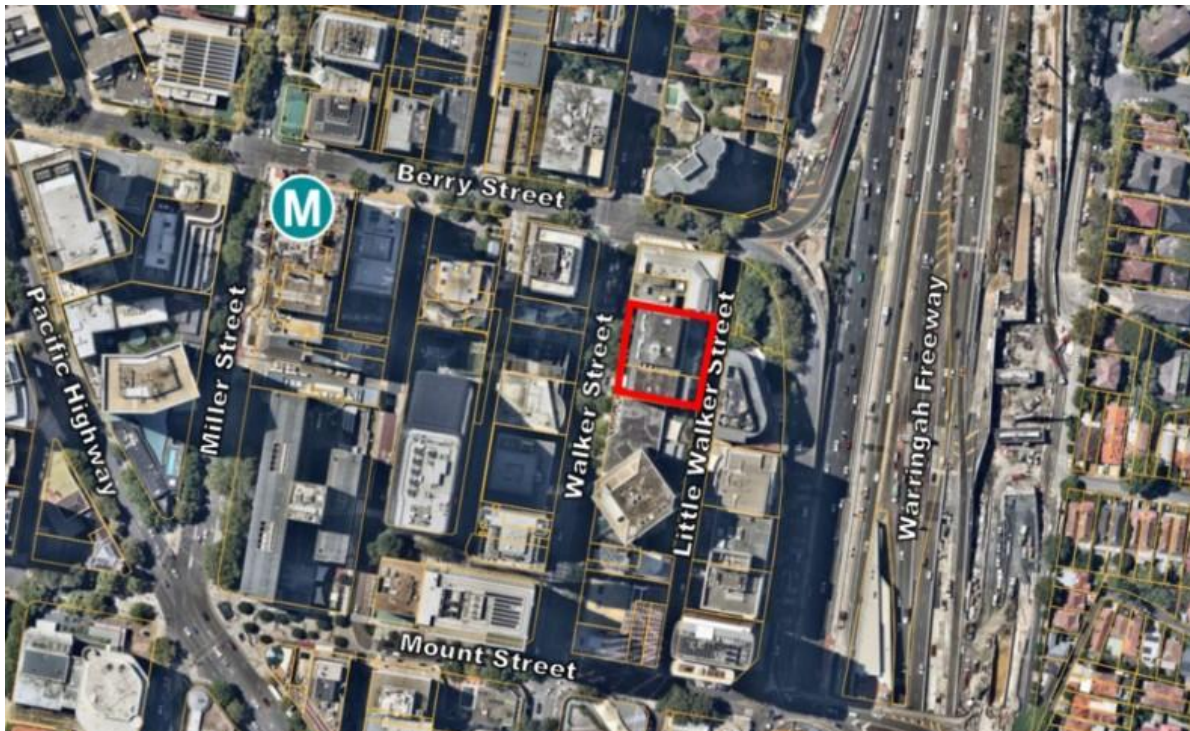


Figure 1 Aerial View of the site

2.2 DEVELOPMENT OVERVIEW

The subject application seeks consent for the demolition of existing commercial office buildings at the site, including site excavations, tree removal and other preparatory works, and the construction of a mixed-use redevelopment at 153 – 157 Walker Street, North Sydney.

Development comprising of:

- Construction of a new fifty-one (51) storey mixed-use tower, which will accommodate:
 - Residential apartments, including a build-to-rent housing component.
 - Nine (9) affordable housing apartments equating to 3% of the total dwellings proposed.
 - A hotel that will be operated by one entity with a central management structure.
 - Ancillary lounge and wellness facilities.
 - Retail floorspace at ground level.
- Eleven (11) basement levels with car parking facilities and plant rooms to service the proposed development.
- One (1) loading zone at the Lower Ground Level.
- Vehicle access from Little Walker Street.
- Associated building plant, utilities and service connections.



Figure 2 Site Location. Architectus

3 SUSTAINABILITY FRAMEWORKS

The 153 – 157 Walker Street, North Sydney development’s sustainability outcomes are influenced & aligned by the following key frameworks:

- North Sydney Development Control Plan 2013. Although this does not technically apply to State Significant Development, it has been considered insofar as relevant to this proposal.
- State Environmental Planning Policy - Sustainable Buildings (SEPP) 2022.
- Compliance with NCC/BCA Section J 2022 (or NCC 2025 as appropriate).
- SEARS Conditions for the Development.\

3.1 NORTH SYDNEY DEVELOPMENT CONTROL PLAN (DCP) 2013

The North Sydney DCP 2013 outlines the sustainable development objectives new developments in the North Sydney Council LGA must consider. The following listed objectives are specific objectives from the DCP and is not limited to the following list:

- To minimise energy use through passive building design and energy efficient systems.
- To minimise potable water, use by installing water efficient fixtures.
- To minimise waste and promote the reuse and recycling of materials.
- To allow for adequate sunlight and daylight access for residential developments to enhance occupant comfort and well-being.
- To minimize stormwater runoff, maintain or improve stormwater quality.
- To prioritize the protection and enhancement of existing natural habitats, integrating green spaces and native landscaping to support and promote local biodiversity.

The above-listed objectives have been considered insofar as relevant to the scope of this SSDA, which is not technically required to implement the North Sydney DCP 2013 under the Environmental Planning and Assessment Act 1979.

3.2 STATE ENVIRONMENTAL PLANNING POLICY - SUSTAINABLE BUILDINGS (SEPP) 2022

NSW has whole-of-economy targets to reduce greenhouse gas emissions by 50 per cent by 2030 compared to 2005 levels, and net zero emissions by 2050. Achieving these targets will require all new and existing buildings in NSW to be operating at net zero well before 2050. Energy efficiency, conserving potable water and improving thermal performance are also high priorities.

The NSW Government has introduced the State Environmental Planning Policy (Sustainable Buildings) 2022 to ensure new and renovated buildings are sustainable and resilient for future climate and bring NSW towards net zero emissions. This policy covers each component of the proposed development.

3.2.1 NSW Residential Buildings

The Building Sustainability Index (BASIX) is a legislative requirement for all residential dwelling types within NSW to assess the potential performance of certain residential buildings against a range of sustainability indices including thermal comfort, water, embodied emission and energy.

BASIX sets water and greenhouse gas reduction targets relative to the NSW average benchmark for per person potable water consumption & greenhouse gas emissions within the residential sector. It also sets the minimum performance levels for thermal comfort of the dwelling and the embodied carbon emissions that are attributable to building materials.



The new targets are sets into place from October 2023 that increased the standards according to the State Environmental Planning Policy – Sustainable Buildings (SEPP) 2022.

The residential component of this project is committed to meet requirements in line with the State Environmental Planning Policy – Sustainable Buildings (SEPP) 2022 at the time of delivery:

BENCHMARK	REQUIREMENT
Thermal Performance Benchmark	Required to achieve: <ul style="list-style-type: none"> • Individual dwellings: Heating: 34.4, Cooling: 21.4, Total: 38.0 • Average all dwellings: Heating: 28.1, Cooling: 20.0, Total: 30.0
Energy Benchmark	Required to achieve 61% reduction in energy consumption of whole development through energy efficient design.
Materials Index	Required to estimate the volume of different materials used in the construction and applying the emissions factors for the materials.
Water Benchmark	Required to achieve 40% reduction in water consumption of whole development through water efficient design.

3.2.2 NSW Non-residential Development

General Sustainability - the assessment of general performance for the non-residential component of the development includes both the hotel and the ground-level retail floorspace, reporting on key sustainability metrics and operational aspects including:

- The minimisation of waste from associated demolition and construction, including by the choice and reuse of building materials,
- A reduction in peak demand for electricity, including through the use of energy efficient technology,
- A reduction in the reliance on artificial lighting and mechanical heating and cooling through passive design,
- The generation and storage of renewable energy,
- The metering and monitoring of energy consumption,
- The minimisation of consumption of potable water,

Embodied Emissions Reporting – needs to be completed in relation to this project under the State Environmental Planning Policy – Sustainable Buildings (SEPP) 2022. This reporting is to disclose, at the SSDA lodgement and Construction Certificate stages, the quantities of materials and associated emissions that will be attributable to the proposed development. Describe how embodied emissions are minimised (by re-used or recycled content and low emissions construction technologies).

Embodied Emissions Reporting is provided at the time of SSDA and will be further detailed at Construction Certificate stage in accordance with the State Environmental planning Policy – Sustainable Buildings (SEPP) 2022. This includes disclosure of material quantities and associated embodied carbon emissions. The report is required to outline strategies for minimising embodied emissions through the use of reused and recycled content, as well as low-emissions construction technologies.



3.2.3 NSW Large Non-residential Development (Hotel with over 100+ rooms)

This section specifically relates to the hotel component of the development only, which comprises a total of 164 rooms and is therefore classified as a large non-residential development under NSW planning guidelines. Sustainability goals for the hotel are:

- Minimises the use of on-site fossil fuels, as part of the goal of achieving net zero emissions in New South Wales by 2050.
- The hotel areas of the building will be targeting **4 Star NABERS Energy** and **3 Star NABERS Water** ratings as per the State Environmental Planning Policy – Sustainable Buildings (SEPP) 2022 requirements.

3.3 SECRETARY’S ENVIRONMENTAL ASSESSMENT REQUIREMENTS (SEARS)

This report outlines how the development will address the SEARs as part of the Environmental Impact Statement. These are:

- Identify how ESD principles (as defined in section 193 of the EP&A Regulation) are incorporated in the design and ongoing operation of the development.
- Demonstrate how the development will meet or exceed the relevant industry recognised building sustainability and environmental performance standards.
- Demonstrate how the development minimises greenhouse gas emissions (reflecting the Government’s goal of net zero emissions by 2050) and consumption of energy, water (including water sensitive urban design) and material resources.

	SEARS	Project Response
	Identify how ESD principles (as defined in section 193 of the EP&A Regulation) are incorporated in the design and ongoing operation of the development.	See section 2.1.1
9	Demonstrate how the development will meet or exceed the relevant industry building sustainability and environmental performance standards.	See section 3.7
	Demonstrate how the development minimises greenhouse gas emissions (reflecting the Government’s goal of net zero emissions by 2050) and consumption of energy, water (including water sensitive urban design) and material resources.	See sections 3.1, 3.2, 3.4 & the Net Zero Statement prepared as part of this SSDA.



3.4 NABERS Energy and Water (Hotel)

For compliance with the State Environmental Planning Policy – Sustainable Buildings (SEPP) 2022, large commercial developments that must obtain a NABERS Energy and Water rating include hotel with over 100 rooms.

Thus, the hotel component of this development is required to achieve the following NABERS Energy and Water ratings:

- 4-star NABERS energy rating and
- 3-star NABERS water rating.

The proposed strategy to achieve these ratings are as follows:

To meet the energy and water standard application requirements, the development must identify preferred Section J energy reporting pathway, effective water-saving measures and submit **NABERS Energy and NABERS Agreement to Rate** with development application.




3.5 NABERS Embodied Emissions Reporting

For compliance with the State Environmental Planning Policy – Sustainable Buildings (SEPP) 2022, reporting of the embodied emissions of non-residential components are required. Disclosure of embodied emissions will be via the NABERS Embodied Emissions Material Form.

In alignment with best practice, we've identified the key initiatives to help reduce the embodied emissions of the development:

- Use salvaged and/or recycled materials
- Optimise systems for material efficiency
- Specify low carbon concrete
- Specify materials that naturally sequester carbon
- Specify materials manufactured with renewable energy
- Design for durability
- Get to know the supply chain for your specified project.

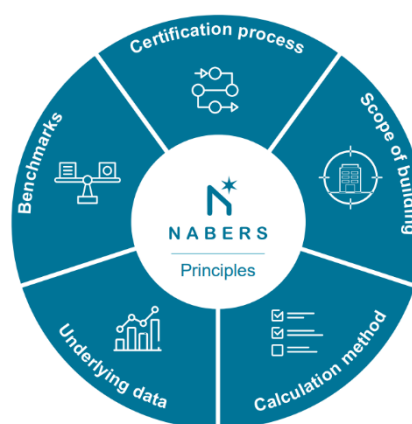

3.6 Performance Standards for Net Zero Ready Energy Buildings

In alignment with best practice, the development’s commitment to sustainability, the project proposes to be ready for net zero carbon emissions.

A Net Zero Statement has been prepared to address the relevant requirements under the State Environmental Planning Policy – Sustainable Buildings (SEPP) 2022, Section 3.4, and as defined under Section 35C of the Environmental Planning and Assessment Regulation 2021 (EP&A). It is intended to address the SEPP requirement of achieving net zero operational greenhouse gas emissions by 2035.

In addition, the following strategies are proposed:

- Reducing energy loads and usage;
- On-site renewable energy through a large photovoltaic array; and
- Eliminating gas to remove fossil fuel consumption and prepare for a decarbonised grid.
- Committing to become Carbon Neutral in operation by 2035 under ESR’s sustainability strategy



4 SUSTAINABLE DESIGN RESPONSE

4.1 EPA PRINCIPLES

The proposed development will follow the industry best-practice sustainability principals throughout the development. This includes the design, construction, and operational elements of the project. The key overarching principals are aligned with the definition of Ecologically Sustainable Development as defined in clause 7(4) of Schedule 2 of the Environmental Planning and Assessment Regulation 2021. These include:

The Precautionary Principle:

Philosophy: Where there are threats of serious or irreversible damage, lack of full scientific certainty should not be used as a reason for postponing measures to prevent environmental degradation.

Project Response: The project is committed to incorporating elements to minimise impacts on the environment, as outlined below in this section of this report. A commitment to improvement on minimum benchmarks demonstrates the development's commitment to sustainability.

The Principle of Inter-generational Equity:

Philosophy: The present generation should ensure that the health, diversity, and productivity of the environment is maintained or enhanced for the benefit of future generations.

Project Response: The project is committed to making careful and thoughtful selections throughout the design process to enhance sustainability, reduce environmental impact, and promote long-term resilience. The design team will address key elements such as energy (including spatial provision for solar panels on the roof level of the tower form), potable water, and material consumption to do what is within the project's control to achieve an equitable design outcome at the site that supports the environmental aspirations of generations to come.

The Principle of the conservation of biological diversity and ecological integrity:

Philosophy: Conservation of biological diversity and ecological integrity should be a fundamental consideration

Project Response: The project is committed to incorporating biophilic design elements that reflect the natural profile of the local area. Further reference should be made to the Landscape Design Plans that have been prepared by Architectus. Rainwater and stormwater will be managed in line with industry best practice. As outlined in the Stormwater Management Plan Report, an on-site detention (OSD) tank is not required in relation to this project.

Principles relating to improved valuation, pricing, and incentive mechanisms:

Philosophy: Environmental factors should be included in the valuation of assets and services. The users of goods and services should pay prices based on the full life cycle costs of providing goods and service.

Project Response: The project will target a construction waste diversion target of 75%, as outlined within the accompanying Construction Waste Management Plan that has been prepared by Elephants Foot, as well as developed specific project waste management strategies. These combine to ensure the project pays for the waste and damage it creates. Further, it is designed to be low-energy, including dedicated space on the tower roof for solar and incorporates low-water consumption measures, which provides an incentive for residents through lower utility bills.

Please note that the Construction Waste Management Plan that has been prepared to accompany this SSDA is preliminary and has been prepared to support the assessment of the project. A detailed CWMP will be provided prior to CC.

The Principle of Waste Minimisation:

Philosophy: All reasonable and practicable measures should be taken to minimise the generation of waste and its discharge into the environment.



Project Response: The project will target a construction waste diversion target of 75%, as well as developed specific project waste management strategies. Construction materials are chosen to be low impact in their manufacture, including best practice PVC and FSC/PeFC timber throughout where possible. This impacts waste both created by the site, as well as upstream and downstream waste categories.

The above principles are addressed by 5 key themes, being **Sea, Land, Water, Air and People**. These 5 key themes are centred around reducing harm as far as practicable across the practice of buildings and infrastructure, both in their construction and operation.

4.2 ENERGY CONSUMPTION

The energy efficiency strategy generally follows the energy efficiency pyramid of the design below. In the first instance demand for Greenhouse Gasses should be reduced. Consideration should be to remove the need for energy to be consumed where possible. Beyond this, energy can be more efficient, through efficient lighting, mechanical systems and appropriate services.

Once the system has reduced all available energy-consuming elements and made the remaining systems as efficient as possible, renewable energy sources will be considered. If space allows on the roof, PV will be installed. Only after all of the above major steps have been completed should offsets be used to close the gap and achieve neutrality.


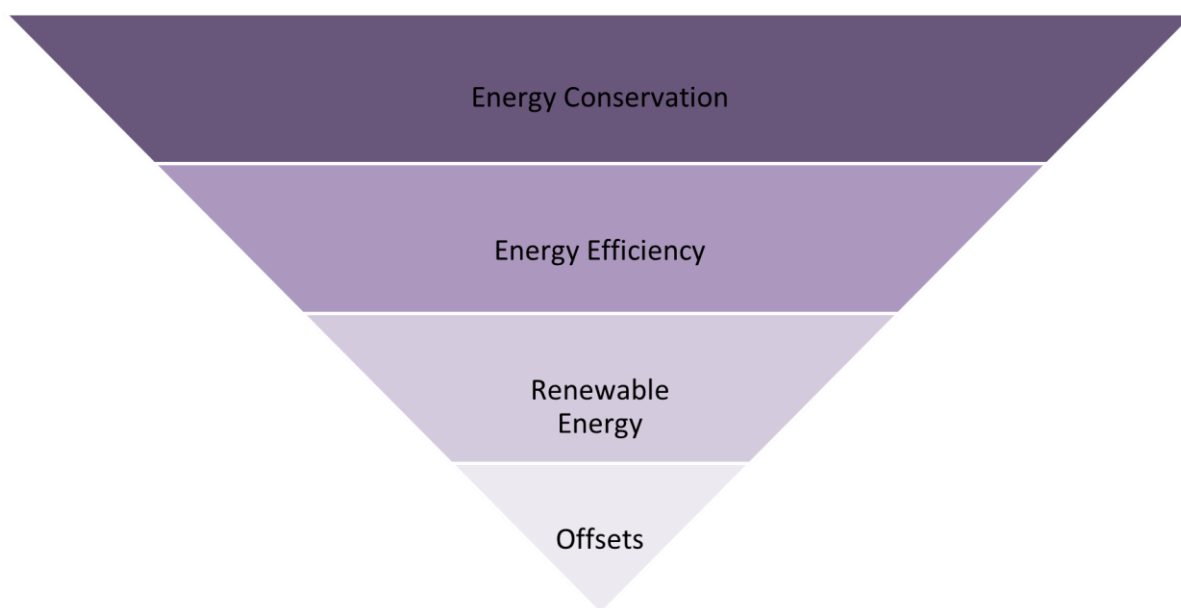


Figure 2 Hierarchy of Design - Energy Efficiency

To achieve the above, the following initiatives are proposed:



Renewable Energy – The roof area provides an excellent opportunity for installation of a solar photovoltaic system. The sizeable system will generate renewable electricity to offset grid use and minimise stress on the grid at peak times. PV will be installed at a rate that maximises the coverage of the non-trafficable roof area. The detailed design specifications and final placement of the photovoltaic panels will be confirmed prior to the commencement of construction. This approach is considered standard and acceptable at this stage of the project lifecycle, particularly for developments of this scale and complexity.





Full Electrification – The building has been designed to omit the use of fossil fuel derived energy sources on-site such as gas for DHW and heating to enable operational net zero carbon emissions.



Efficient Lighting Systems – High efficiency LED lighting throughout, including in common areas and with efficiency controls. Controls will include motion sensors, time clocks and zoned switching which will help reduce consumption of energy. Lighting power density to be at least 10% below Section J of the NCC.



Controls, Energy Metering and Monitoring – Energy meters and monitoring systems will be provided to comply with NCC 2022 Section J Part J8 and NABERS sub-metering, validation and coverage requirements.



Facade – Envelope – The balance between daylight access and solar heat gains will be a priority of the design team to ensure occupant comfort and energy performance are maximized. The proposed performance of glazed elements will subject to ongoing design considerations and BASIX & J1V3 modelling. Proper sealing of the envelope through leading construction practices and verification methods will also be considered to ensure undesirable bulk-air flow is minimized.



Hot Water – Hot water should be provided by energy efficient heat pump systems. These systems are highly efficient which will allow occupants to utilise systems often with reduced energy consumption.



Appliances & Equipment – Apartment appliances and equipment will be selected with high energy rating to ensure reduced consumption which will be in line with BASIX energy targets requirements.

For the hotel, appliances in rooms such as TV's and fridges and centralised equipment within kitchens, bars and staff areas will be specified with a high energy performance label.

Additionally, site will be fully electric with no gas combustion for ovens and cooktops allowing for operational net zero.



Low Emission Transportation – To encourage low-emission transport alternatives bicycle parking and ancillary end-of-trip facilities as applicable shall be provided. Pedestrian access to nearby public transport networks such as bus and rail will be maximised. A preliminary Green Travel Plan has been provided within the Transport Impact Assessment for this SSDA.

4.3 WATER CONSUMPTION

To achieve responsible water consumption and water sensitive urban design, best-practice water-saving initiatives will need to be implemented throughout the project. The development's design is deliberately working to reduce potable water consumption in the first instance by reducing water use.

The following initiatives will be explored to achieve the potable water targets:



Sanitary Fixtures – By implementing low-flow water fixtures throughout the development, the consumption will be significantly reduced. All sanitary fixtures are to be provided with the minimum WELS ratings identified below:

Taps – 6 Star WELS

Toilets – 4 Star WELS

Showers – 4 Star WELS (<=6 L/min)

Refer to the BASIX report for further details on residential water consumption measures.

Landscape Irrigation – Efficient irrigation systems will be considered, including underground surface drip systems, moisture sensors, and the use of native plants in the landscaping plan. Native plants have evolved to thrive in the Australian environment and are typically more resilient than their exotic counterparts. They typically require less water and are more likely to survive the predicted increase in extreme drought conditions due to climate change. Native vegetation also stores a significant amount of carbon, helping to mitigate climate change. The project is targeting a 70% native planting palette.

WSUD & Stormwater Management – A Stormwater Management Report has been developed for the site considering the impacts of future flood predictions under climate projects and in-line with council planning requirements. Stormwater quality (pollutant loading) and volume discharged from site are key considerations in future design stages to ensure the development has minimal environmental impact on local waterways and ecology compared to the pre-development baseline.



4.4 MATERIALS

In line with the principals of sustainability outlined in the EPA, the project will have a significant focus on materiality. The scope of consideration includes the following action items within the project response:

- **Construction Waste** – 75% of construction and demolition waste is to be diverted from landfill. This diverts and ensures reuse or recycling of a high portion of site waste.
- **Low VOC and Low Formaldehyde Materials** – paints, adhesives, sealants, floor coverings, carpets and engineered wood will be selected appropriately to provide a healthier and low-impact environment. Such efforts provide a cleaner and better environment for all. Additionally, the project will aim to utilise ultra-low VOC paints.
- **Best-Practice PVC** – cables, pipes, flooring, and blinds will be selected and specified to be Best Practice PVC. This ensures upstream performance will be met and has significant benefit for the overall environment during the construction process.
- **Best Practice Steel** – Where possible, steel will come from a sustainable steel manufacturer, who has an action plan. Steel supplied will aim to have energy reducing processes in manufacturing and recycled content.
- **Sustainable Products** – Where possible, products selected for the project will be sustainable which are verified through recycled content, re-use, environmental product declarations, certifications and more. This will ensure reduced toxicity and improve environmental quality while reducing waste.



4.5 WASTE MANAGEMENT

4.5.1 CONSTRUCTION WASTE

Construction and demolition waste are becoming much easier to recycle as the traditional landfill evolves into waste recovery centres, which are able to recycle the majority of all construction and demolition waste. A Draft Construction & Demolition Waste Management Plan has been developed for the project. The development will achieve a minimum of 80% recycling for the construction and demolition waste produced. Construction waste will be managed through contractual requirements outlining the target recycling rate.

4.5.2 OPERATIONAL WASTE

Operational waste which involves the waste produced in the day-to-day operations can also be minimised through effective sorting methods. A Draft Operational Waste Management Plan has been developed for the project. The two bins likely to receive the most use will be the garbage and paper recycling. It is important to provide accessible bins in many areas and locate the types of bins in the areas where the particular waste stream is likely to arise. A waste management plan has been developed to appropriately size and allocate resources for recycling and general waste. General waste comingled and at least one other waste stream will be collected.

4.6 COMFORT AND QUALITY

To ensure the best quality for occupants and visitors inside the space, the following key initiatives will be committed to by the principal:

- **Visual Comfort** – Maximising high-quality light into the living spaces, with high amenity views.
- **Indoor Air Quality** – Ventilation to be easily cleaned and elimination of pollutants to improve air quality within internal spaces.
- **Acoustic Excellence** – Designing the building layout to be protected from noise from external sources. The residential component is positioned above the podium to enhance acoustic separation. Delicate material selection, acoustic attenuation, and designing the shape of the building and openings accordingly achieves the performance. High-performance glazing specifications will be implemented to further manage street-level noise emissions.
- **Thermal Comfort** – Appropriate mix of vernacular design, overhangs, adaptive comfort and high levels of insulation in the roof and facades.
- **Lighting Comfort** – Use of high colour rendering index (CRI > 80) LED lighting throughout the entire development. Low-glare lighting with baffles or louvres to limit UGR.
- **Biophilic Design** – Natural elements that reflect the context of the site as an indoor link between Walker Street and Doris Fitton Park.
- **Accessibility** – Ensure that the building is accessible to people of all abilities, in accordance with AS 1428, with features such as ramps.
- **Safety and Security** – Prioritise building safety and security measures to provide a sense of comfort and protection for occupants.
- **Natural Materials** – Where practical, use natural and sustainable building materials that are non-toxic and promote a healthy indoor environment.
- **User-Friendly Technology** – Integrate user-friendly technology that enhances occupant comfort and convenience, such as smart lighting and temperature control systems.

The above combine to ensure the development is responsible, efficient, beautiful, and in the best interest of not just the developers, but the residents as well.



4.7 SUSTAINABLE TRANSPORT

The adoption of sustainable transport methods is encouraged by building designs which provide appropriate facilities for occupants and visitors. Site proximity to major transport infrastructure also lends itself to building occupants adopting and utilising sustainable methods of transport.

The development is located within the North Sydney CBD and benefits from immediate proximity to Victoria Cross, North Sydney Station and high-frequency bus services that are routed through the locale.

The development is located within close proximity to amenities such as:

- Grocery stores including Woolworths and Coles
- Abundant dining and café options
- Banks
- Newsagents and post office
- Existing Childcare facility to the immediate south of the site
- North Sydney Public School, Wenora Girls School, Shore Senior School, Sydney Church of England Grammar School, Cameragal Montessori School, St Mary's Primary School
- Medical centres, chemists and hospitals
- Local parks and green spaces

The proximity to essential amenities will significantly reduce residents, guests and staff reliance on private vehicle use.

A preliminary Green Travel Plan has been provided within the Transport Impact Assessment for this SSDA. The building design supports sustainable transport and reduced car dependency, in line with the Green Travel Plan (GTP), through the following measures:

- Publicly Accessible Car Share Spaces: Designated car share parking spaces are provided within the building's basement, facilitating access to shared vehicles for residents and the wider community.
- Bicycle Parking Facilities: Secure bicycle parking is available for residents, staff, and visitors, meeting the minimum requirements specified in the North Sydney Development Control Plan (DCP).
- End-of-Trip Facilities: The building includes amenities such as showers, lockers, and change rooms for staff, supporting cycling and walking as viable commuting options.
- Enhanced Pedestrian Access: The design ensures pedestrian connectivity from Walker Street and Miller Street, encouraging walking as a primary mode of transport.

4.8 RENEWABLE ENERGY

Photovoltaic (PV) renewable energy enables the development to have production of emissions-free electricity directly at the location of usage and reduce energy and environmental impacts of project.

4.9 BIOPHILIC DESIGN

Until relatively recently in human history, people had constant interaction with living things and their natural surroundings. Biophilia, or the idea that humans have an affinity towards the natural world, is an emerging field that aims to address our psychological need to be around life and life-like processes. Exposure to views and images of nature can help to speed up healing and recovery time, boost positive feelings and reduce negative ones. Interior environments that are cold, sterile and devoid of life, on the other hand, can diminish our experience, mood and happiness.



4.10 SECTION J

The proposed retail/commercial area of the development will be subject to compliance with Section J under the NCC 2022 code. This code places strict environmental performance requirements on the building envelope and services within the building.

The project will demonstrate compliance via verification method J1V3 – verification using a reference building (energy modelling). The design of the building fabric will need to demonstrate compliance with this clause through dynamic modelling of the building against a reference case.



4.11 HEAT ISLAND MITIGATION

The proposed development should undertake a risk assessment of the potential impacts of climate change (such as flooding, extended periods of high temperature, rising utility infrastructure costs etc.) and include adaptive design responses which specifically address identified risks deemed to be of high or extreme significance. Doing so will improve the development's ability to respond to the impacts of climate change and improve operational resiliency.

The site is identified as experiencing a moderate level of urban heat island impact compared to its surroundings. The site's baseline heatwave temperature experiences peaks approximately **5.11°C** above the baseline, as defined by the NSW government for Urban Heat Island Effect (<https://www.seed.nsw.gov.au/>).

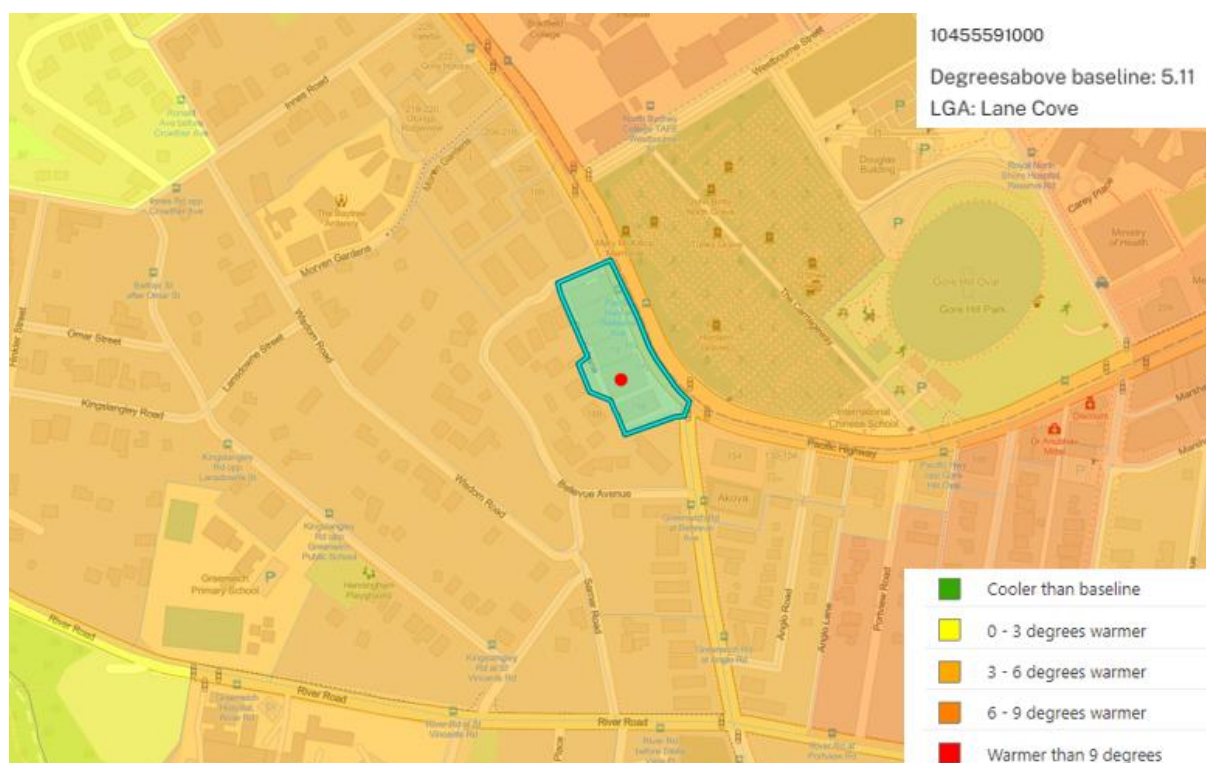


Figure 3: Urban Heat Island Effect at the site (Source: SEED Database, 2016)

To minimise the urban heat island effect and provide a more comfortable environment for occupants, the development can implement the following initiatives:

- Retention and additional planting of trees providing tree canopy.
- Outdoor communal spaces with landscaping, gardens and lawns to provide additional vegetation.
- Light coloured materials selected for roofs and facades where possible.
- Introduction of architectural elements and shading where possible.

4.12 NSW NET ZERO GOAL

The development is actively aiming to adhere to the Government's goal of net zero emissions by 2050 through a range of strategies discussed above. The approach to minimising greenhouse gas emissions should always follow a reduction first – outcomes-based approach to decarbonisation which in turn will provide an approach to net zero emissions. This approach generally involves:

- Avoid: Identify carbon intensive activities and sources that can be avoided or eliminated from the development.
- Reduce: Reduce the carbon intensity of activities and sources through improved technology or process.



- Transition: Transition to renewable electricity.

Following this structure the development will incorporate a range of strategies to minimise greenhouse gas emissions which involves:

- Elimination of gas combustion on site allowing the development to be fully electric. This will allow the development to be net zero ready for when the grid transitions or potential to run fully on renewable energy in the near future.
- HVAC systems to be considered with low impact refrigerant plants and equipment to reduce emissions to the atmosphere.
- Energy consumption reduction through passive design elements. These include architectural shading and projection elements allowing shading and reduced heat transfer through glazing, cross-ventilation introduced for natural cooling and additionally, naturally ventilated corridors and circulation spaces to reduce the need for mechanical ventilation and air-conditioning.
- High performing façade designs involving bespoke glazing and insulation selection allowing for apartments to be 7 Star NatHERS rated which in turn reduces energy consumed for heating and cooling of spaces.
- Efficient lighting systems and selections will reduce the consumption of energy through time clocks, zone switching, occupant sensor and more. Additional BMS controls for metering and monitoring will allow for active consumption monitoring allowing the development to adapt and implement strategies to reduce energy consumption during operation.

Renewable energy systems will be provided where feasible and will be coordinated with services design



5 BASIX COMPLIANCE

The Building Sustainability Index (BASIX) is a legislative requirement for all residential dwelling types within NSW to assess the potential performance of certain residential buildings against a range of sustainability indices including thermal comfort, water, embodied emission and energy.

BASIX sets water and greenhouse gas reduction targets relative to the NSW average benchmark for per person potable water consumption & greenhouse gas emissions within the residential sector. It also sets the minimum performance levels for thermal comfort of the dwelling and embodied emission of materials.

The new targets are sets into place from October 2023 that increased the standards according to State Environmental Planning Policy – Sustainable Buildings (SEPP) 2022.





The project is committed to meet requirements in line with the State Environmental Planning Policy – Sustainable Buildings (SEPP) 2022 at the time of delivery:

- **Thermal Performance Standards:** Required to achieve minimum 7 NatHERS Star average rating for whole development and minimum 6 NatHERS star individual apartments.
- **Energy Standards:** Required to achieve minimum 60% reduction in energy consumption of whole development through energy efficient design.
- **Materials Index:** Required to estimate the volume of different materials used in the construction and applying the emissions factors for the materials.
- **Water Standards:** Required to achieve 40% reduction in water consumption of whole development through water efficient design.

5.1.1 BASIX ENERGY TARGET




The project aims to achieve the minimum **BASIX Energy target of 61%**, which fulfills the minimum legislative requirement. To ensure prudent energy consumption, the project will incorporate top-tier energy-saving practices. The following strategies will be considered to attain energy targets:

	<p>BASIX Energy Target of 60% - In line with council targets and new the State Environmental Planning Policy – Sustainable Buildings (SEPP) 2022 the development is targeting an Energy target of 61% reduction compared to an equivalent development.</p>
	<p>Thermally-Efficient Construction – Insulation through the roof, walls and floor, with proper sealing to reduce bulk airflow. Light-coloured materials will be used to reflect solar heat gains. Delicate consideration will be given to the height of the windows, shading and overall window-to-wall ratio.</p> <p>Provide air movement through ceiling fans in bedrooms.</p>
	<p>Electrification – no gas will be used on site, enabling the development to be ‘net zero ready’ and allow the benefits of decarbonisation of the grid to be realised.</p>
	<p>Energy Efficient Appliances – energy efficient appliances such as electric cooktops and dryers will be provided to reduce operational energy consumption.</p>
	<p>Efficient Lighting Systems – high efficiency LED and fluorescent lighting in common areas with efficiency controls to meet the stringent requirements of NCC 2022 Section J. Controls will include motion sensors, time clocks and zoned switching.</p>

	<p>Renewable Energy – The roof area provides a good opportunity for installation of a solar photovoltaic system. This will generate renewable electricity to offset grid use and minimise stress on the grid at peak times. Design team will maximise the PV system size, however the exact size of the system will be further developed, taking into consideration roof design, spatial allowance and building demand.</p>
	<p>Lift – Lifts to be provided with regenerative braking.</p>
	<p>Controls, energy metering and monitoring – energy meters and monitoring systems will be provided to comply with NCC 2022 Section J Part J9 requirements. Exhaust fans will be connected to light switches to ensure they do not run when not required.</p>
	<p>Hot water is to be provided by energy efficient heat pump systems. These systems provide an output three times their input energy and can be run off the solar PV system to reduce the operational carbon of the development.</p>

5.1.2 BASIX WATER TARGET

The project will target minimum **BASIX Water target of 40%**, meeting the minimum legislative requirement. To achieve responsible water consumption, the best practice water-saving initiatives will need to be implemented throughout the project. The following initiatives will be explored to achieve the potable water targets:

	<p>Sanitary Fixtures - By implementing low-flow water fixtures, the consumption associated with apartments will be significantly reduced. All sanitary fixtures are to be provided to the WELS ratings identified below:</p> <ul style="list-style-type: none"> ▪ Taps – 6 Star WELS ▪ Toilets – 4 Star WELS ▪ Showers – 4 Star WELS (<=6 L/min)
	<p>Landscape Irrigation - Efficient irrigation systems will be considered, including underground surface drip systems, moisture sensors, and the use of native plants in the landscaping plan. Natives have evolved to thrive in the Australian environment and are typically more resilient than their exotic counterparts. Native vegetation also stores a significant amount of carbon, mitigating the impacts of climate change.</p>
	<p>Water Efficient Appliances – water efficient appliances with low-flow and High WELS ratings will be provided to reduce potable water consumption.</p>

5.1.3 MATERIALS INDEX

Material Index commitment involves sourcing and utilizing construction materials that have a lower environmental impact, thereby reducing the carbon footprint associated with the project's construction and operation. This approach aligns seamlessly with the principles of the State Environmental Planning Policy – Sustainable Buildings (SEPP) 2022 SEPP 2022, demonstrating the development's dedication to sustainable construction practices. In line with the principals of the State Environmental Planning Policy – Sustainable



Buildings (SEPP) 2022 for BASIX, the project will have a significant focus on materiality to reduce the embodied emission.



6 SUMMARY

This report summarises the sustainability targets and commitments for the new proposed development located at 153 – 157 Walker Street North Sydney, NSW 2060. The requirements for sustainability have been coordinated with the design team to allow the development to achieve a high level of sustainable practice across the entire development.

As part of its commitment to sustainability, the development has committed to the following:


- 4-star NABERS Energy rating for Hotel
- 3-star NABERS Water rating for Hotel
- Achieving the BASIX benchmarks in line with the State Environmental Planning Policy – Sustainable Buildings (SEPP) 2022 requirements for mid/high-rise residential building:
 - **BASIX Energy 62%**
 - **BASIX Water 40%**
- Exceeding compliance requirements for NCC/BCA Section J 2022 (or NCC 2025 as appropriate), including a performance façade and shading devices
- Fossil-fuel free design to allow for carbon neutrality by 2035.
- Maximise on-site renewable energy
- Following a range of sustainability initiatives across the site spanning **energy efficiency, water efficiency, indoor environment quality, waste management and comfort.**
- Provision of Heat Island Mitigation measures

The strategies and initiatives presented in this report demonstrate the project’s commitment to sustainability in line with industry best-practice and are to be further developed during subsequent stages of the project and confirmed before a Construction Certificate is issued.



APPENDIX A – BASIX REPORT – TBC



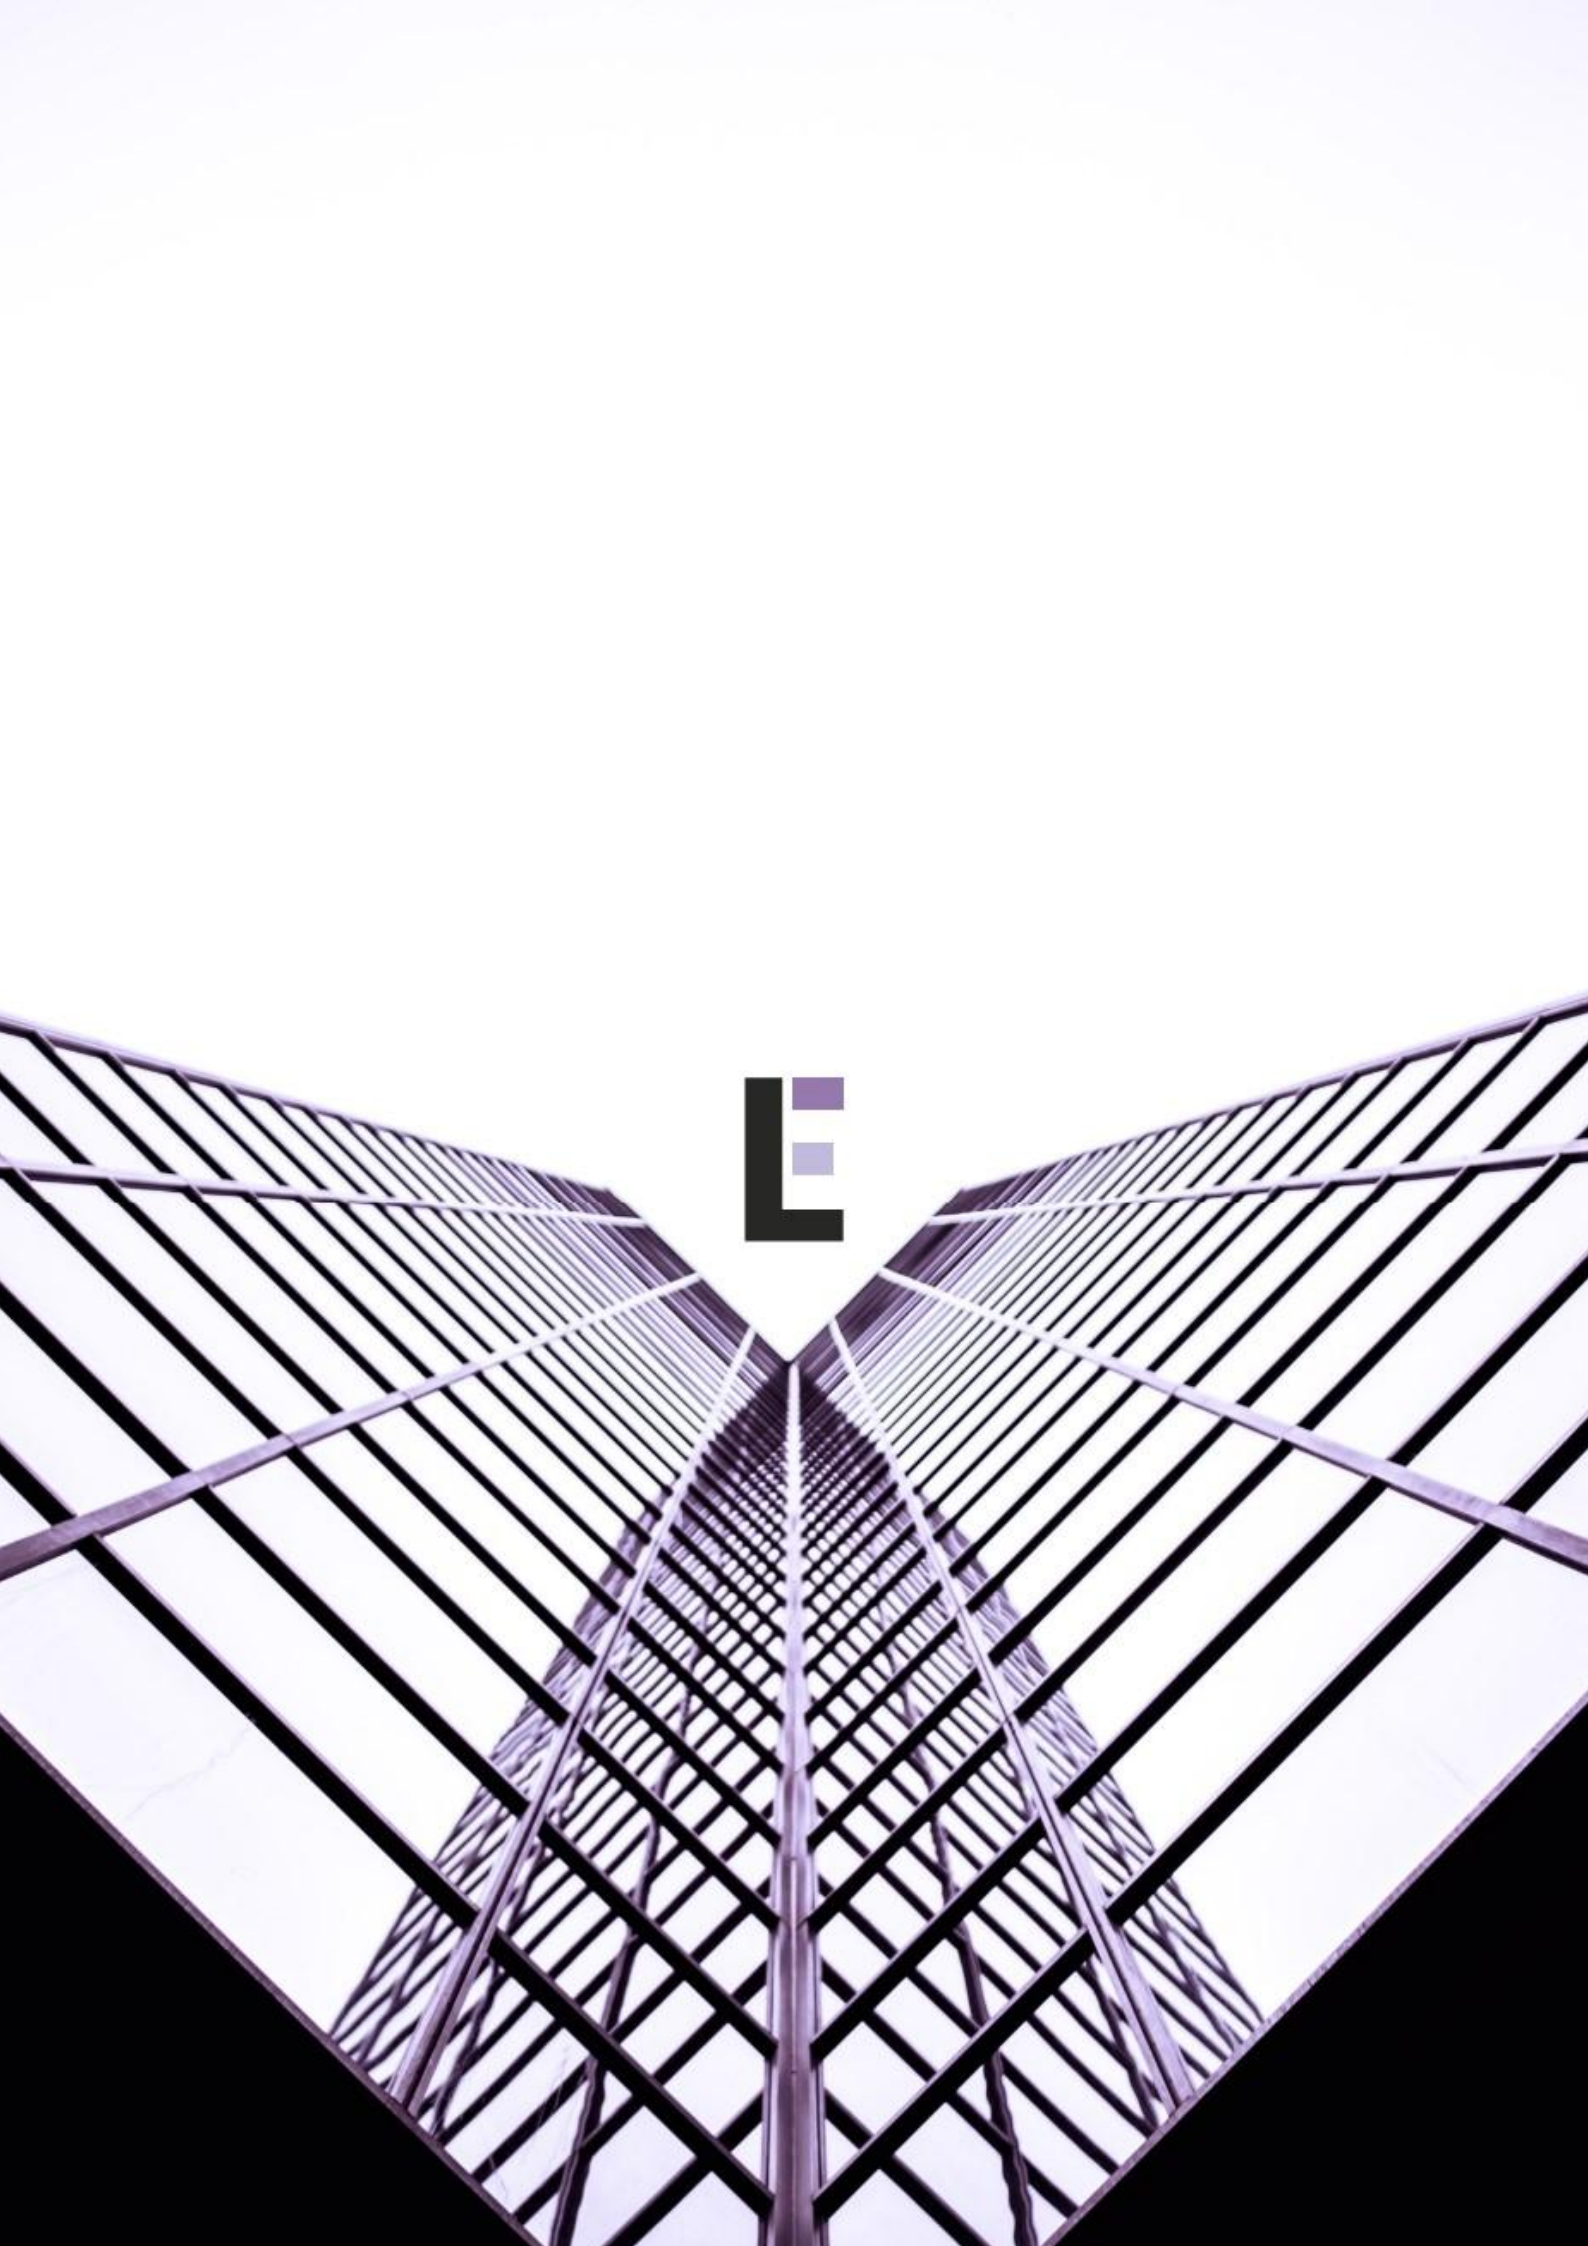

E