



4–8 Bells Boulevard, Kingscliff NSW
Mixed Use Development

OPERATIONAL WASTE MANAGEMENT PLAN

10/12/2025
Report No. 708060
Revision D

Client

Bells Boulevard Pty Ltd

Architect

SJB Architects

<https://sjb.com.au/>

REVISION REFERENCE

Revision	Date	Prepared by	Reviewed by	Description
A	29/09/2025	S. Semaan	M. Cuevas	Draft
B	21/11/2025	M. Cuevas	J. Parker	Updated Plans
C	04/12/2025	M. Cuevas	J. Parker	Updated plans
D	10/12/2025	M. Cuevas	J. Parker	Final

The information contained in this document produced by Elephants Foot Consulting (EFC) is solely for the use of the client identified on the cover sheet for the purpose for which it has been prepared for. EFC undertakes no duty, nor accepts any responsibility for any third party who may rely upon this document. Reproduction, publication or distribution of this document without written permission from EFC is strictly prohibited.

TABLE OF CONTENTS

1.0	INTRODUCTION	3
2.0	REPORT CONDITIONS.....	4
3.0	LEGISLATION & GUIDANCE.....	5
4.0	SITE DESCRIPTION	6
5.0	MITIGATION MEASURES	7
6.0	RESIDENTIAL WASTE MANAGEMENT	8
6.1	RESIDENTIAL WASTE GENERATION ESTIMATES.....	8
6.2	RESIDENTIAL BIN SUMMARY	9
6.3	RESIDENTIAL CHUTE DISCHARGE EQUIPMENT SUMMARY	10
6.4	RESIDENTIAL WASTE DISPOSAL PROCEDURES.....	10
6.4.1	RESIDENTIAL GENERAL WASTE AND RECYCLING DISPOSAL PROCEDURES.....	10
6.4.2	RESIDENTIAL FOGO DISPOSAL PROCEDURES	11
6.5	RESIDENTIAL BIN COLLECTION PROCEDURES	11
6.6	OTHER RESIDENTIAL WASTE MANAGEMENT CONSIDERATIONS	12
6.6.1	RESIDENTIAL COMMON AREAS.....	12
6.6.2	LANDSCAPED AREAS AND GARDEN ORGANICS.....	12
6.6.3	RESIDENTIAL BULKY WASTE PROCEDURES.....	12
7.0	RETAIL WASTE MANAGEMENT	14
7.1	RETAIL WASTE GENERATION ESTIMATES.....	14
7.2	RETAIL BIN SUMMARY	15
7.3	RETAIL WASTE DISPOSAL PROCEDURES.....	15
7.4	RETAIL WASTE COLLECTION PROCEDURES.....	15
7.5	OTHER RETAIL WASTE MANAGEMENT CONSIDERATIONS	15
7.5.1	WASHROOM FACILITIES.....	15
7.5.2	PRINTING & PHOTOCOPYING ROOMS	15
7.5.3	LIQUID WASTE	16
7.5.4	PROBLEM WASTE.....	16
8.0	STAKEHOLDER ROLES & RESPONSIBILITIES	17
9.0	SOURCE SEPARATION	18
10.0	EDUCATION	19
10.1	SIGNAGE.....	19
11.0	POLLUTION PREVENTION.....	20
12.0	BIN WASHING.....	20
13.0	BIN MOVING PATHS.....	20
14.0	EQUIPMENT SUMMARY	21
15.0	WASTE ROOMS	22
16.0	CONSTRUCTION REQUIREMENTS.....	24

16.1	ADDITIONAL CONSIDERATIONS.....	24
17.0	USEFUL CONTACTS.....	25
APPENDIX A:	ARCHITECTURAL PLANS.....	26
APPENDIX: A.1	LEVEL 1 -CHUTE DISPLAY + 240L BIN.....	27
APPENDIX: A.1	GROUND FLOOR PLAN-BIN COLLECTION ROOM	28
APPENDIX: A.2	BASEMENT 1-WASTE ROOMS.....	29
APPENDIX B:	INSTALLATION EQUIPMENT	30
APPENDIX: B.1	TYPICAL SINGLE CHUTE SHAFT & PENETRATION LAYOUT	31
APPENDIX: B.2	EXAMPLE RESIDENTIAL LEVEL RECYCLING BIN LAYOUT	32
APPENDIX: B.3	TYPICAL CAROUSEL SYSTEM FOR 240L BINS	33
APPENDIX C:	PRIMARY WASTE MANAGEMENT PROVISIONS.....	35
APPENDIX: C.1	TYPICAL BIN SPECIFICATIONS.....	36
APPENDIX: C.2	SIGNAGE FOR WASTE AND RECYCLING BINS.....	37
APPENDIX D:	SECONDARY WASTE MANAGEMENT PROVISIONS.....	39
APPENDIX: D.1	EXAMPLE HANDHELD BIN MOVERS	40
APPENDIX: D.2	EXAMPLE SEATED BIN MOVERS	41
APPENDIX: D.3	EXAMPLE BIN TRAILERS	42
APPENDIX: D.4	EXAMPLE BIN TOWING ATTACHMENTS	43
APPENDIX: D.5	EXAMPLE SOURCE SEPARATION RECEPTACLES	44

TABLE OF FIGURES

Figure 1	Aerial view of the site, outlined in red (Source: Gyde).....	6
Figure 2	Site context plan (Source SJB)	7

LIST OF TABLES

Table 1–	SEARs Requirements	3
Table 2:	Mitigation Measures	7
Table 3:	Estimated Waste and FOGO Volumes – Residential	8
Table 4:	Estimated Recycling Volumes.....	9
Table 5:	Chute Discharge Equipment Summary	10
Table 6:	Estimated Waste and Recycling Volumes –Retail.....	14
Table 7:	Stakeholder Roles and Responsibilities	17
Table 8:	Operational Waste Streams.....	18
Table 9:	Equipment Summary.....	21
Table 10:	Waste Room Areas	22
Table 11:	Waste Room Requirements.....	23

GLOSSARY OF ABBREVIATIONS AND TERMS

TERM	DESCRIPTION
<i>Bin-Carting Route</i>	Travel path for transporting bins from their allocated storage location to the nominated collection point
<i>Bin Hoist</i>	A device used for lifting or lowering bins between different levels
<i>Bin Lifter</i>	A device used to mechanically lift bins for the purpose of emptying them into larger bins and/or compactors.
<i>Bin Mover</i>	Either a handheld device (commonly referred to as a bin tug) or a ride-on device (typically a tractor or Class C vehicle with an attached bin trailer) used to facilitate the movement of bins across long distances or up ramps
<i>Bulk Bins</i>	Containers with a capacity greater than 1100L designed to be collected by a front-loading vehicle
<i>Bulky Waste</i>	Recycling items that are too large to be deposited into bins, including furniture, whitegoods, electronics and mattresses
<i>Chute</i>	A vertical pipe passing from floor to floor of a building with openings at each level for the disposal of general waste, recycling or FOGO.
<i>Chute Discharge</i>	The termination point of a chute whereby the chute offsets deposited general waste, recycling or FOGO into bins
<i>Chute Discharge Room</i>	A room enclosing the termination point of the chute/s, including bins and volume handling equipment that is accessible only to the building caretaker
<i>Collection Area/Point</i>	Designated area or point where bins are loaded onto the collection vehicle for servicing
<i>Compactor</i>	A device used for compressing general waste inside it's bin typically at a ratio of 2:1
<i>Communal Bin Room</i>	A central, shared bin room accessible to all residents or staff to dispose of their waste stream
<i>DA</i>	Development Application
<i>DCP</i>	Development Control Plan
<i>eDiverter</i>	A single chute fitted with a diversion system to allow two separate waste streams (typically general waste and recycling) to be disposed of concurrently.
<i>EPA</i>	Environment Protect Authority
<i>FOGO</i>	Food Organics and Garden Organics
<i>General Waste</i>	All non-recyclable and non-hazardous waste that is sent to landfill
<i>HRV</i>	Heavy Rigid Vehicle
<i>L</i>	Litre
<i>LEP</i>	Local Environmental Plan

<i>Mixed Use Development</i>	A development comprising a combination of both residential and commercial units or two or more different land uses within the one development.
<i>Mobile Bins</i>	Containers with a capacity up to and including 1100L designed to be collected by a rear-loading vehicle
<i>Multi-unit Residential Development</i>	Also known as MUD's, residential flat buildings, or apartment blocks, this is a residential development with multiple units that typically share facilities and services such as bins and collections.
<i>MRV</i>	Medium Rigid Vehicle
<i>Onsite Collection</i>	A collection arrangement whereby all bins are serviced by a collection vehicle within the property boundary, either in the building's basement or at grade and off-street.
<i>Owners Corporation</i>	An organisation or group of persons that is identified by a particular name and that acts, or may act, as an entity
<i>Recycling</i>	Waste stream that combines all recycling, including comingled recycling, paper/cardboard and metals.
<i>Ro-Ro Compactor Unit</i>	A large, portable compactor unit which is collected and serviced by a hook lift vehicle
<i>Service Bins</i>	Supplementary bins which are provided to residents or staff for use during collection periods either in communal bin rooms or under chutes
<i>Source Separation Receptacles</i>	Communal containers used throughout the development for the day-to-day disposal of different waste streams
<i>SRV</i>	Small Rigid Vehicle
<i>Volume Handling Equipment</i>	Equipment which comes in the form of either carousel or linear tracks positioned at the base of the chute/s to mechanically replace full bins with empty bins
<i>Waste Stream</i>	A classification used to describe waste of a particular type (eg. food waste stream)
<i>WHS</i>	Workplace Health and Safety

1.0 INTRODUCTION

This **Operational Waste Management Plan (OWMP)** accompanies an Environmental Impact Statement (EIS) pursuant to Part 4 of the *Environmental Planning and Assessment Act 1979* (EP&A Act), in support of a State Significant Development Application (SSDA) and concurrent planning proposal (PP) for the construction of the proposed development at 4-8 Bells Boulevard, Kingscliff, reference SSD-83069459.

The proposed development seeks development consent for a new mixed use building at 4-8 Bells Boulevard, Kingscliff. The proposal will include the following works:

- Construction of a five-storey mixed-use development with ground level retail fronting Bells Boulevard and Gunnamatta Avenue and ground level residential units, with residential units contained on levels 1-4 (inclusive),
- A total of 69 residential units of which 2 will be affordable housing units. These affordable housing units are to be retained as such for 15 years and managed by a registered Community Housing Provider,
- Excavation for two basement levels of carparking with 184 carparking spaces and associated services,
- Removal of 24 trees on site, and
- Landscaping and a communal open space network with a focus on wellness including a rooftop pool, indoor communal space and ground level outdoor communal open space designed around a central lawn.

This report addresses the Secretary's Environmental Assessment Requirements (SEARs) issued for the project, notably

Table 1 – SEARs Requirements

Item	Description of Requirement	Section Reference
17	• Provide the measures to be implemented to manage, reuse, recycle and safely dispose of waste in accordance with any council waste management requirements. • Identify appropriately sited waste storage areas, collection access paths/roads, and appropriate servicing arrangements for the site. • Address comments raised by Tweed Shire Council at Appendix A.	Sections 6.1, 6.2, 6.3, 6.4, 7.1, 7.2 and 7.3 identify the waste streams, provide the waste estimations and waste disposal procedures for the residential and retail components. The Tweed Development Control Plan 2008 – Section A15: Waste Minimisation and Management has been referenced to calculate the waste generated for the site. Sections 6.5, 7.4 describe the waste collections for the residential and retail components in the development's operation stage. See Table 10 for the waste rooms areas and Appendix A.2 and A.3. The turntable has been removed from the arrangement. The loading dock allows for a private waste vehicle entering the site and collect the bins from the bin holding room. (See APPENDIX A.3)

2.0 REPORT CONDITIONS

The purpose of this report is to document an OWMP as part of a development application, which is supplied by EFC with the following limitations:

- Drawings, estimates and information contained in this OWMP have been prepared by analysing the information, plans and documents supplied by the client and third parties including Council and other government agencies. The assumptions based on the information contained in the OWMP is outside the control of EFC,
- The figures presented in the report are an estimate only – the actual amount of waste generated will be dependent on the occupancy rate of the building/s and waste generation intensity as well as the building management's approach to educating residents and tenants regarding waste management operations and responsibilities,
- The building manager will adjust waste management operations as required based on actual waste volumes (e.g. if waste is greater than estimated) and increase the number of bins and collections accordingly,
- The report will not be used to determine or forecast operational costs or prepare any feasibility study or to document any safety or operational procedures,
- The report has been prepared with all due care; however no assurance is made that the OWMP reflects the actual outcome of the proposed waste facilities, services, and operations, and EFC will not be liable for plans or results that are not suitable for purpose due to incorrect or unsuitable information or otherwise,
- EFC offer no warranty or representation of accuracy or reliability of the OWMP unless specifically stated,
- Any manual handling equipment recommended in this OWMP should be provided at the recommendation of the appropriate equipment provider who will assess the correct equipment for supply,
- Design of waste management chute equipment and systems must be approved by the supplier,
- EFC cannot be held accountable for late changes to the design after the OWMP has been submitted to Council,
- EFC will provide specifications and recommendations on bin access and travel paths within the OWMP, however it is the architect's responsibility to ensure the architectural drawings meet these provisions,
- EFC are not required to provide information on collection vehicle swept paths, head heights, internal manoeuvring or loading requirements. It is assumed this information will be provided by a traffic consultant,
- Council are subject to changing waste and recycling policies and requirements at their own discretion.
- This OWMP is only finalised once the draft watermark has been removed. If the draft watermark is present, the information in the OWMP is not confirmed.

3.0 LEGISLATION & GUIDANCE

Waste management and resource recovery regulation in Australia is administered by the Australian Constitution, Commonwealth laws, and international agreements. State and territory governments maintain primary responsibility for controlling development and regulating waste. The following legislation has been enacted in New South Wales, and provides the lawful underpinnings of this OWMP.

- NSW Environmental Planning & Assessment Act 1979
- NSW Protection of the Environment Operations Act 1997
- NSW Waste Avoidance & Resource Recovery Act 2001

At the local level, councils or Local Government Areas (LGAs) require OWMPs to be included in new development applications. This OWMP is specifically required by:

- Tweed Development Control Plan 2008
- Tweed Local Environmental Plan 2014

The primary purpose of a Development Control Plan (DCP) is to guide the planning process according to the aims of the corresponding local environmental plan (LEP). The DCP must be read in conjunction with the provisions of the relevant LEP.

Information provided in this OWMP comes from a wide range of waste management guidance at the local, state, and federal levels. The primary sources of guidance include:

- Tweed Shire Council's Toward Zero Waste Strategy 2021
- Tweed Development Control Plan 2008 – Section A15: Waste Minimisation and Management
- NSW Better Practice Guide for Resource Recovery in Residential Developments 2019
- NSW Better Practice Guidelines for Waste Management and Recycling in Commercial and Industrial Facilities 2012
- NSW Waste Avoidance and Resource Recovery (WARR) Strategy 2014-2021
- NSW Waste and Sustainable Materials Strategy 2041
- NSW Waste Classification Guidelines 2014
- Australia's National Waste Policy 2018

4.0 SITE DESCRIPTION

The site is located at 4-8 Bells Boulevard, Kingscliff and is located in the Tweed Shire Local Government Area. The site is legally known as Lot 2 DP131098.

An aerial view of the site (outlined in red) is located below:

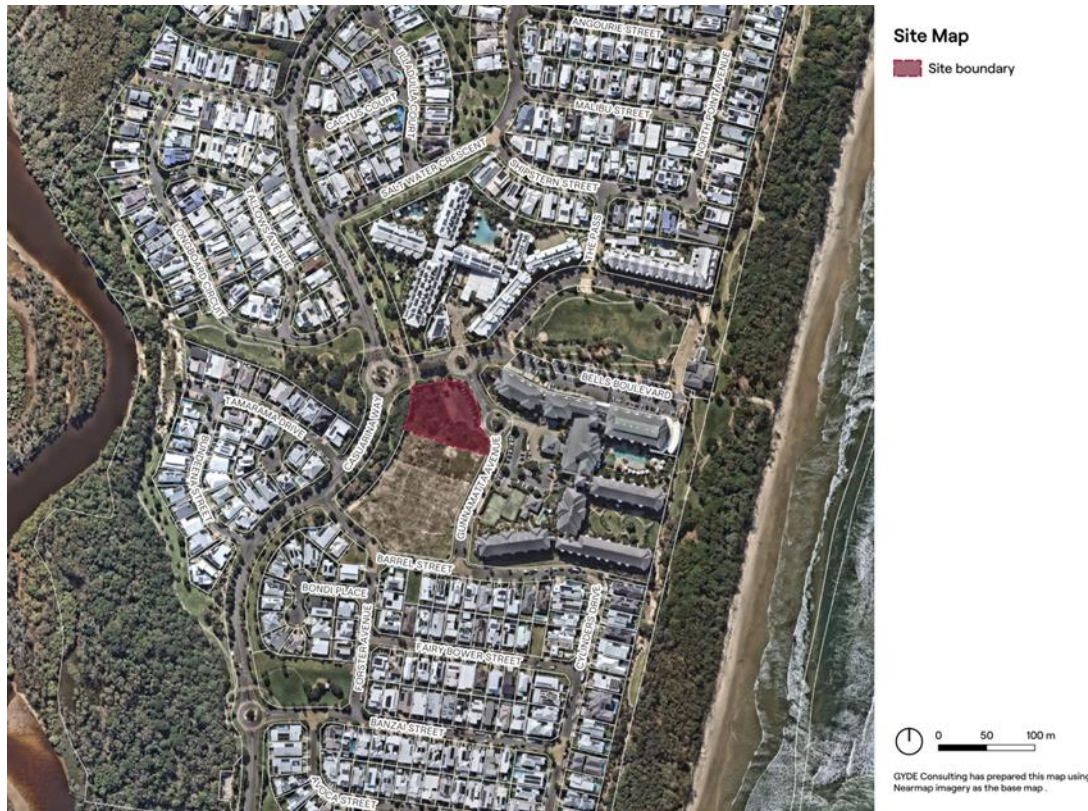


Figure 1 Aerial view of the site, outlined in red (Source: Gyde)

The site has an approximate area of 4,450sqm and is currently vacant of any structures. An informal bitumen sealed carpark containing 27 spaces is located in the north east part of the site, which is enforced by way of a restriction on the existing title of the land.

The centre of the site is clear of vegetation, with any vegetation located along the street frontages or abutting the western boundary. A public reserve runs along the site's western boundary containing a concrete footpath and extensive vegetation.

The site is relatively level around the street frontages, with levels ranging between RL 9.85m at Gunnamatta Avenue to RL 10.39m at the corner of Bells Boulevard and Casuarina Way. The rear of the site has been excavated to the lowest point of RL 7.15m.

The site is located on the gateway to a part of Kingscliff known as 'the Salt Precinct'. This part of the Salt Precinct is centred around the Salt Central Park, which is bordered by two major tourism developments, those being the Peppers and Mantra resorts. Salt Central Park is activated by a retail precinct with shops, cafes and restaurants known as Salt Village.



Figure 2 Site context plan (Source SJB)

5.0 MITIGATION MEASURES

Table 2: Mitigation Measures

Mitigation Name	Number/	When is Mitigation Measure to be complied with	Mitigation Measure	Action/responsible
Recycling and Reuse		Operation	Provide recycling bins to recover valuable materials from waste.	Action Retail tenants will dispose of their recycling into the bins provided. Residents will dispose their commingled recycling into the 360L bins on each level.
Food Organics and Garden Organics		Operation	Provide FOGO bins to help divert organic waste from landfills.	Action Residents will dispose of their FOGO into the bins provided within the residential FOGO room. This could include food scraps, garden clippings, and other biodegradable materials. Retail tenants will dispose of their FOGO into the 240L FOGO bins provided in the Retail Bin Room.
Education		Operation	Educational material encouraging correct separation of general waste, recycling and FOGO must be provided to each worker, resident and tenant.	Building operator provide information in multiple languages to support correct behaviours, and to minimise the possibility of chute blockages and contamination in communal bins. The building operator will ensure everyone is aware of the importance of waste minimisation and how to dispose of waste correctly. Signage will be provided in the chute rooms and bin rooms.

Mitigation Name	Number/	When is Mitigation Measure to be complied with	Mitigation Measure	Action/responsible
Policy and Regulation Compliance		Operation	Regularly review and update waste management plans to comply with environmental regulations.	Regularly review the policies to ensure they remain in line with evolving environmental regulations, and best practices.

6.0 RESIDENTIAL WASTE MANAGEMENT

The following section outlines best practice waste management for the residential component of the development, including waste stream generation estimates and disposal and collection procedures.

6.1 RESIDENTIAL WASTE GENERATION ESTIMATES

The Tweed Development Control Plan 2008 has been referenced to calculate the total number of general waste and recycling bins while the NSW EPA's Better Practice Guide for Resource Recovery in Residential Developments (2019) has been referenced to calculate the total number of FOGO bins. Calculations are based on generic general waste, recycling and Food Organics and Garden Organics (FOGO) rates. Actual volumes of general waste, recycling and FOGO generated in operation may differ according to the residents' actual waste management practices.

The following table shows the estimated volume (L) of general waste, recycling and FOGO generated by the residential component of the development.

Table 3: Estimated Waste and FOGO Volumes – Residential

Building/ Core	# Units	General Waste Generation Rate (L/unit/week)	Generated General Waste (L/week)	FOGO Waste Generation Rate (L/unit/week)	Generated FOGO Waste (L/week)
Core A	33	80	2640	25	825
Core B	36	80	2880	25	900
TOTAL	69		5520		1725
Bins & Collections		General Waste Bin Size (L)	240	FOGO Waste Bin Size (L)	240
		General Waste Collections per Week	1	FOGO Waste Collections per Week	1
		Total General Waste Bins Required	23	Total FOGO Waste Bins Required	8
Bins per Building/ Core		Building/ Core	# Bins	Building/ Core	# Bins
		Core A	11	Core A	4
		Core B	12	Core B	4

Note: An additional bin should be provided for each chute discharge for use during collection periods. These bins are not included in the above figures.

Note: It is strongly recommended bins/equipment at the base of each chute allow for 2-days' worth of waste generation.

Note: At the time of writing, Council do not have an active FOGO collection service. Provision for FOGO bins at this development have been included to account for a future FOGO collection service.

Table 4: Estimated Recycling Volumes

Core	Level	# Units	Recycling Generation Rate (L/unit/week)	Generated Recycling (L/week)	Recycling Bins per Week	Recycling Collections per Week	Total Recycling Bins Required
A	G	5	40	200	1	1	1
	1	8	40	320	1	1	1
	2	8	40	320	1	1	1
	3	7	40	280	1	1	1
	4	5	40	200	1	1	1
B	G	2	40	80	1	1	1
	1	10	40	400	2	1	2
	2	10	40	400	2	1	2
	3	9	40	360	1	1	1
	4	5	40	200	1	1	1
TOTAL		69		2560	11		11

6.2 RESIDENTIAL BIN SUMMARY

Based on the estimated volumes of general waste, recycling and FOGO generated by the residential component of this development, the recommended bin quantities and collection frequencies are as follows:

General Waste: 23 x 240L bins collected **1 x weekly**

Recycling: 11 x 360L bins collected **1 x weekly**

FOGO: 8 x 240L bins collected **1 x weekly**

During operation, it is the responsibility of the building manager to monitor the number of bins required for the residential component of the development. General waste, recycling and FOGO volumes may change according to residents' attitudes to waste disposal, building occupancy levels or the development's management. Any requirements for adjusting the capacity of the waste facilities may be achieved by changing the number of bins, the bin sizes or collection frequencies. Building management will be required to negotiate any changes to bins or collections with the collection service provider.

6.3 RESIDENTIAL CHUTE DISCHARGE EQUIPMENT SUMMARY

It is strongly recommended that the bins and equipment at the base of each chute allows for at least 2 days' worth of general waste generation. Based on the estimated general waste volumes generated by each building/core, the following equipment is recommended:

Table 5: Chute Discharge Equipment Summary

Volume Handling Equipment			
General Waste			
Core	Generated General Waste (L/week)	# 240L Bins Required for 2 days' Capacity	Recommended Chute Discharge Equipment
A	2640	3.14	4-Bin Carousel System
B	2880	3.43	4-Bin Carousel System

The above is a recommendation only and equivalent volume handling equipment may be used subject to equipment supplier's recommendation/review.

6.4 RESIDENTIAL WASTE DISPOSAL PROCEDURES

All units will be provided with a storage area capable of holding separate receptacles for general waste, recycling and FOGO. This is typically located within kitchen areas beneath the workbench. This space should be sized to accommodate 40L receptacles (minimum) to account for 2 days' worth of general waste, recycling and 20L for FOGO storage.

6.4.1 RESIDENTIAL GENERAL WASTE AND RECYCLING DISPOSAL PROCEDURES

A single general waste chutes will be installed in each building core with access provided to all residents on each residential level. Separate 360L recycling bins will be provided in a compartment adjacent to the general waste chute for the storage of recycling.

Residents will be responsible for walking their general waste and recycling to their allocated disposal point and placing their general waste into the general waste chute and recycling into the 240L recycling bin.

Residents will wrap or bag their general waste before placing in the chute. Bagged waste should not exceed 3kg in weight, or 35cm x 35cm x 35cm. Residents will be responsible for loosely placing their recycling into the 360L bins. Recycling should be clean and must not be bagged as soft plastics contaminate recycling.

The general waste will be discharged from the chute into 240L bins on carousel systems in the Chute Discharge Rooms in Basement 1.

The building manager will monitor bin capacities under the general waste chute and exchange full bins with empty bins on the track systems when required. Recycling bins on each level will also be monitored by the building caretaker and full bins will be exchanged with empty bins as required.

Full and spare bins will be kept in the Residential Bin Holding Room.

Refer to Council guidance for the types of materials accepted in the general waste and recycling streams.

6.4.2 RESIDENTIAL FOGO DISPOSAL PROCEDURES

The majority of organics waste generated from multi-unit residential developments comprises of food waste as opposed to garden waste. As such, calculations and management recommendations provided in this report considers that FOGO bins will primarily comprise of food organics.

The residents of each unit will be provided with a kitchen caddy for the separation of FOGO. Food organics must be contained in accordance with Tweed Shire Council's future FOGO collection service procedures (for example a compostable liner). Any plant clippings from residential units can also be disposed of with the FOGO.

Each building core will be provided with a Communal FOGO Bin Room which contains 240L bins for FOGO. The residents will be responsible for walking their FOGO down to the Communal FOGO Bin Room in the basement 1 and placing it into the bins.

Building management is responsible for ensuring that the Communal FOGO Bin Room and FOGO bins are washed down frequently to ensure that hygiene and odour is managed.

6.5 RESIDENTIAL BIN COLLECTION PROCEDURES

A private waste contractor will be engaged to collect the residential general waste, recycling and FOGO. This report assumes that general waste, recycling and FOGO will be collected weekly.

Prior to collections, the Building Manager/Caretaker will be responsible for transporting the bins from the Communal FOGO Bin Rooms, Chute Discharge Rooms with the aid of a bin tug. The building Manager/Caretaker will also be responsible for transporting the bins from each residential level to the Residential Bin Holding Room (Collection Point) located on the ground level. The Building Manager/Caretaker is also responsible for ensuring that the bins are adequately arranged for an efficient collection. It is recommended that an additional 240L service bin be placed under the chute to collect discharge while the other bins are being serviced.

It is the responsibility of the caretaker to ensure that the loading area is clear of any vehicles or obstructions prior to waste collection.

On the day of collection, a private waste collection vehicle will enter the site from Gunnamatta Avenue and park in the loading dock. The Building Manager/Caretaker will be responsible for ensuring that the collection staff have access to the Residential Bin Holding Room. The collection staff will exit the vehicle and collect the bins from the Residential Bin Holding Room (Collection Point) and return the empty bins once serviced.

Upon completion of servicing, the collection vehicle will exit the site onto Gunnamatta Avenue in a forward direction. The Building Manager/Caretaker is responsible for returning the bins to their operational location to resume use.

6.6 OTHER RESIDENTIAL WASTE MANAGEMENT CONSIDERATIONS

The following sections outline other waste management considerations for the residential components.

6.6.1 RESIDENTIAL COMMON AREAS

Residential common areas will be supplied with suitably branded source separation receptacles where considered appropriate. Receptacles should be placed in convenient locations which are accessible to all residents. The building manager will monitor the capacity of these receptacles and empty the contents into the central collection bins as required.

6.6.2 LANDSCAPED AREAS AND GARDEN ORGANICS

Garden organics generated from surrounding landscaped areas and indoor foliage typically consists of lawn clippings, cuttings, leaves and branches.

Garden organics generated from surrounding landscaped areas will be managed and removed from the site by the designated landscaping contractors as they carry out scheduled landscaping maintenance works.

Garden organics generated from within residential units will be managed by the residents and should be disposed of into the FOGO bins.

6.6.3 RESIDENTIAL BULKY WASTE PROCEDURES

An area will be made available for the storage of discarded residential bulky waste items (e.g. whitegoods, furniture, etc.). This room should be located within close proximity of the collection point and must have a minimum doorway width of 1.5m to facilitate the movement of large items in and out of the room.

The bulky waste room has been calculated in accordance with The NSW EPA's '*Better Practice Guidelines for Resource Recovery in Residential Developments 2019*'. This requires 10m² for up to 40 units, and 2m² for every additional 10 units after that to the nearest whole number.

Based on this rate, the Bulky Waste Room required for the residential component of the building is as follows;

Bulky Waste Room Size

$$\begin{aligned}
 &(\text{Total number of units} - 40) / 10 \times 2 + 10 = \text{m}^2 \text{ of bulky waste room} \\
 &= (69 - 40) / 10 \times 2 + 10 \\
 &= 29 / 10 \times 2 + 10 \\
 &= 2.9 \times 2 + 10 \\
 &= 5.8 + 10 \\
 &= 15.8
 \end{aligned}$$

bulky waste storage area: minimum 16m²

Residents will need to liaise with building management regarding the transportation of bulky items and the availability of the Bulky Waste Room. It is the caretaker's responsibility to arrange collection dates with the private contractor and coordinate these times with the residents.

Prior to bulky waste collections, the Building Manager/Caretaker will transport the bulky waste items from the Residential Bulky Waste Room in the Basement 1 to the Residential Bin Holding Room (Collection Point) located on the ground level.

On the day of bulky waste collection, a private collection vehicle will enter the site from Gunnamatta Avenue and park in the loading bay. Collection staff will collect the bulky waste items from the Holding Room on the Ground Floor. Once bulky items have been loaded onto the vehicle, the collection vehicle will exit the site onto Gunnamatta Avenue in a forward direction.

7.0 RETAIL WASTE MANAGEMENT

The following section outlines best practice waste management for the retail components of the development, including waste generation estimates and waste disposal and collection procedures.

7.1 RETAIL WASTE GENERATION ESTIMATES

The Tweed Development Control Plan 2008 has been referenced to calculate the total number of bins required for the anticipated tenants. Calculations are based on generic generation rates. Actual volumes of waste, recycling, and food waste may differ in operation according to the tenants' actual waste management practices. The waste rates for the Wellness Centre are taken from the NSW EPA's Better Practice Guide for Resource Recovery in Residential Developments (2019).

It is assumed that retail tenancies will share bins, bin storage facilities and collections. The following estimates are based on a seven-day operating week.

Table 6: Estimated Waste and Recycling Volumes –Retail

Tenancy Name	Waste Generation Rate Type	Floor Area (m ²)	General Waste Generation Rate (L/100m ² /day)	Generated General Waste (L/week)	Recycling Generation Rate (L/100m ² /day)	Generated Recycling (L/week)	Food Waste Generation Rate (L/100m ² /day)	Generated Food Waste (L/week)
Retail	Shops Greater than 100m ² Floor Area	425	50	1488	50	1488	12.5	372
Retail	General Retailing	248	50	868	50	868	N/A	N/A
Wellness	Gym	215	20	301	15	226	N/A	N/A
TOTAL		888		2657		2581		372
Bins & Collections			General Waste Bin Size (L)	1100	Recycling Bin Size (L)	1100	Food Waste Bin Size (L)	240
			General Waste Bins per Day	0.3	Recycling Bins per Day	0.3	Food Waste Bins per Day	0.2
			General Waste Collections per Week	2	Recycling Collections per Week	2	Food Waste Collections per Week	1
			Total General Waste Bins Required	2	Total Recycling Bins Required	2	Total Food Waste Bins Required	2

7.2 RETAIL BIN SUMMARY

Based on the estimated waste and recycling volumes generated the retail tenancies, the recommended bin quantities and collection frequencies are as follows:

<u>General Waste:</u>	2 x 1100L bins collected weekly
<u>Recycling:</u>	2 x 1100L bins collected weekly
<u>FOGO:</u>	2 x 240L bins collected weekly

Bin sizes, quantities, and/or collection frequencies may be modified by the building manager once the proposed development is operational. Building management will be required to negotiate any changes to bins or collections with the collection service provider. Seasonal peak periods should also be considered.

7.3 RETAIL WASTE DISPOSAL PROCEDURES

All tenancies will be responsible for their general waste and recycling disposal procedures within their vicinity.

On completion of each trading day or as required, nominated staff or contracted cleaners will transport all general waste and recycling to the Retail Bin Room in the basement 1 and place into the appropriate collection bins.

7.4 RETAIL WASTE COLLECTION PROCEDURES

A private waste contractor will be engaged to service the retail general waste and recycling bins as per an agreed collection schedule. This report assumes that general waste is collected three times weekly and recycling is collected three times weekly.

On the day of service, a private waste collection vehicle will enter the site from Gunnamatta Avenue and park in the loading bay. The building caretaker will provide the driver with access to the Retail Bin Room. Once the bins are serviced, the collection vehicle will exit the site onto Gunnamatta Avenue in a forward direction.

Please note: The collection of commercial/retail bins should occur on separate days from the collection of residential bins to ensure proper segregation of waste streams.

7.5 OTHER RETAIL WASTE MANAGEMENT CONSIDERATIONS

Based on the types of tenancies anticipated for this development, the following waste management practices are recommended.

7.5.1 WASHROOM FACILITIES

Washroom facilities should be supplied with collection bins for paper towels (if used). Sanitary bins for female restroom facilities must also be arranged with an appropriate contractor.

7.5.2 PRINTING & PHOTOCOPYING ROOMS

It is recommended that rooms designed for printing or photocopying be provided with an area for the interim storage of paper receptacles, as well as separate receptacles for used toner and/or printer cartridges for recycling. The cleaners or nominated staff are responsible for monitoring these receptacles and ensuring that items are collected and recycled by an appropriate contractor.

7.5.3 LIQUID WASTE

Liquid wastes such as cleaning products, chemicals, paints, solvents, and motor and cooking oil will be stored in a secure room and enclosed by a low wall intended to contain any liquid spillage or inundation to other areas. Liquid waste will be drained to a grease trap, in accordance with legislation and the requirements of State government authorities and agencies. Further information can be provided by the Services Consultant.

7.5.4 PROBLEM WASTE

The building manager is responsible for making arrangements for the disposal and recycling of problem waste streams with an appropriate contractor. Problem wastes cannot be placed in the general waste stream as they can have adverse impacts to human health and the environment if disposed of in landfill. Retail and commercial tenants must liaise with the building manager when disposing of problem waste streams.

Problem waste streams include:

- Chemical Waste
- Liquid wastes
- Toner cartridges
- Lightbulbs
- eWaste
- Batteries

8.0 STAKEHOLDER ROLES & RESPONSIBILITIES

The following table outlines the primary roles and responsibilities of the respective stakeholders:

Table 7: Stakeholder Roles and Responsibilities

Roles	Responsibilities
Strata, Body Corporate or Management	- Co-ordinate the waste strategy within the site. - Ensure all waste service providers submit monthly reports on all equipment movements and waste quantities/weights. - Organise internal waste audits/visual assessments on a regular basis. - Purchase any on-going waste management equipment or maintenance of equipment once building is operational; and - Manage any non-compliances/complaints reported through waste audits.
Building Manager or Waste Caretaker	- Co-ordinate general waste, recycling and FOGO collections - Clean and transport bins as required. - Maintain and clean chute doors on each level. - Organise replacement or maintenance requirements for bins. - Organise, maintain and clean bin storage areas. - Organise bulky waste collections when required. - Investigate and ensure prompt clean-up of illegally dumped waste materials. - Prevent storm water pollution by taking necessary precautions (secure bin rooms, prevent overfilling of bins). - Abide by all relevant WH&S legislation, regulations, and guidelines. - Provide staff/contractors with equipment manuals, training, health and safety procedures, risk assessments, and PPE to control hazards associated with all waste management. - Assess any manual handling risks and prepare a manual handling control plan for bin transfers. - Ensure site safety for residents, children, visitors, staff and contractors; and - Ensure effective signage, communication and education is provided to occupants, tenants, maintenance staff, and cleaning contractors.
Residents	- Dispose of all general waste, recycling and FOGO in the allocated chutes and/or bins provided. - Ensure adequate separation of general waste, recycling and FOGO; and - Comply with the provisions of Council and the OWMP.
Retail Tenants	- Management co-ordinates own private contractor collections. - Manage general waste and recycling within their tenancy during daily operations. - Correctly separate general waste and recycling streams. - Flatten cardboard within the recycling bin. - If required, arrange for storing used and unused cooking oil in a bunded area, - Organise grease interceptor trap servicing, and - Ensure the suitable storage for chemicals, pesticides and cleaning products waste back of house.
Waste Collection Contractor	- Provide a reliable and appropriate bin collection service. - Provide feedback to building managers/residents regarding contamination of recyclables; and - Work with building managers to customise waste systems where possible.
Gardening/Landscaping Contractor	Remove all garden organics generated during gardening maintenance activities for recycling at an offsite location.
Developer	Purchase all equipment required to implement this OWMP prior to the occupation of the building to be provided to the Strata or Body Corporate.

9.0 SOURCE SEPARATION

Better practice waste management includes the avoidance, reuse, and recovery of unwanted items, which can be achieved through source separation. Refer to your local council for a list of accepted materials. Planet Ark can be accessed online to find other facilities that recover unwanted items.

Table 8: Operational Waste Streams

Waste Stream	Description	Typical Destination	Waste Stream Management
General Waste	The remaining portion of the waste stream that is not recovered for re-use, processing, or recycling. May include soft plastics, food scraps, polystyrene, etc.	Landfill	Waste should be bagged before placing in chutes.
Recycling	A mixture of items that are commonly recycled usually segregated through a MRF. Typically include food and beverage containers (e.g. aluminium, glass, steel, hard plastics, cartons). Also included cardboard and paper products.	Resource Recovery Centre	Recycling must not be bagged, and instead should be placed loosely in the designated recycling bins. Bulky cardboard must not be placed in any chute. Cardboard should be flattened before placing in the designated recycling bin.
FOGO	FOGO consists of unwanted or uneaten kitchen scraps that are easily compostable/biodegradable (e.g. vegetable peels, fruit rinds, coffee grounds) and garden organics including lawn clippings, leaves, pruning's and branches.	Composting Facility	FOGO should be bagged in compostable liners when deposited into the bins and will be collected by a private contractor.
Electronic Waste	Discarded e-waste, electronic components and materials such as computers, mobile phones, keyboards, etc.	Resource Recovery Centre	Building manager arranges collection for e-waste recycling as needed by residents. Retail tenants arrange for recycling of their e-waste.
Bulky Waste Items	Items that are too large to place into general rubbish collection. This includes disused and/or broken furniture, mattresses, white goods, etc.	Resource Recovery Centre or Landfill	Residents liaise with building manager to store in Bulky Goods Room. Building manager arranges with private contractor for removal. Retail tenants are responsible for removal of their bulky items.
Sanitary Waste	Feminine hygiene waste generated from female bathrooms.	Incineration or Landfill	Sanitary bins are serviced by sanitary waste contractor.
Other	Other recyclable items that require special recovery may include ink cartridges, batteries, chemical waste, fluorescent tubes, etc.	Resource Recovery Facility	Building manager arranges collection by appropriate recycling services when required.

10.0 EDUCATION

Educational material encouraging correct separation of general waste, recycling and FOGO must be provided to each resident and retail tenant. This should include the correct disposal process for bulky waste such as old furniture, large discarded items, and other materials including electronic and chemical wastes. It is recommended that the building caretaker provide information in multiple languages to support correct behaviours, and to minimise the possibility of chute blockages and contamination in communal bins.

Education and communication must be provided consistently on a regular basis to encourage behaviour change and account for transient building personnel such as new residents, tenants, or cleaning staff. It is also recommended that the owners' corporation website contain information for residents' referral regarding use of the chute. Information should include:

- Directions on using the chute doors;
- Descriptions of items accepted in the general waste, recycling and FOGO streams (refer to Council guidance);
- How to dispose of bulky waste and any other items that are not general waste, recycling or FOGO (refer to Council guidance);
- Residents' obligations to health and safety as well as building management; and
- How to prevent damage or blockages to the chute (example below).

10.1 SIGNAGE

Signage and education are essential components to support best practice waste management including resource recovery, source separation, and diversion of waste from landfill.

Signage should include:

- Clear and correctly labelled bins,
- Instructions for separating and disposing of waste items. Different languages should be considered,
- Locations of, and directions to, the waste storage areas with directional signs, arrows, or lines,
- The identification of all hazards or potential dangers associated with the waste facilities, and
- Emergency contact information should there be issues with the waste systems or services in the building.

The building manager is responsible for waste room signage including safety signage. Appropriate signage must be prominently displayed on doors, walls and above all bins, clearly stating what type of waste or recyclables is to be placed in each bin.

All chute doors on all residential levels will be labelled with signs directing chute operations and use of chute door.

All signage should conform to the relevant Australian Standards.

11.0 POLLUTION PREVENTION

Building management shall be responsible for the following to minimise dispersion of site litter and prevent stormwater pollution to avoid impact to the environment and local amenity:

- Promoting adequate waste disposal into the bins
- Securing all bin rooms (whilst affording access to staff/contractors)
- Prevent overfilling of bins, keep all bin lids closed and bungs leak-free
- Taking action to prevent dumping or unauthorised use of waste areas
- Require collection contractor/s to clean up any spillage when clearing bins

12.0 BIN WASHING

The bins will be cleaned by the building manager periodically to ensure hygiene and minimise odour.

Bin washing can occur within the bin rooms, using the room clean down facilities (i.e., tap connection and drain). Alternatively, a specialist bin washing contractor can be engaged to clean the bins to an agreed schedule. The specialist bin contractor would collect the bins from the bin holding area and clean the bins with their specialised vehicle.

13.0 BIN MOVING PATHS

The building manager is responsible for the transportation of bins from their designated operational locations to the collection area, returning them once emptied to resume operational use.

Any movement of bins should minimise manual handling where possible, as bins become heavy when full. The building manager must assess manual handling risks and provide any relevant documentation to key personal.

The routes along the bin moving path should;

- Allow for a continuous route that is wholly within the property boundary.
- Be free from obstruction and obstacles such as steps and kerbs.
- Be constructed of solid materials with a non-slip surface
- Be A minimum of 300mm wider than the largest bin used onsite.
- If bins are moved manually, the route must not exceed a grade of 1:14.
- If a bin moving device is used, the route cannot exceed the maximum operating grade of the device. This is typically a grade of 1:4, however this will vary depending on the model of bin moving device acquired for the site.

As the distance of the bin moving paths exceeds 10m, a bin moving device will be required to aid the movement of full bins. The developer is responsible for supplying all equipment required for moving bins this includes any bin lifters, bin moving devices and waste transfer bins. This equipment must be new and appropriate for the site. The developer should contact a bin-tug, trailer or tractor consultant to provide equipment recommendations.

Once the site is operational (and the developers is no longer involved) the building proprietors/strata will be responsible for maintaining, repairing and replacing waste management equipment. Bins may have to be fitted with hitches to enable the simultaneous transportation of multiple bins to the collection area.

14.0 EQUIPMENT SUMMARY

Table 9: Equipment Summary

	Part	Qty	Notes
Chutes	Please refer to supplier's information	2	(See APPENDIX: B.1 for Typical Single Chute Layout)
Chute Equipment	General Waste 4-bin 240L Bin Carousel System	2	(See APPENDIX: B.3 for Typical Carousel)
Other Equipment	Suitable Bin Moving Device	1	(See APPENDIX: D.1 and APPENDIX: D.2 for Typical Bin Movers)

15.0 WASTE ROOMS

The areas allocated for waste storage and collection areas are detailed in the table below and are estimates only.

The equipment recommended in the chute discharge rooms is to manage 2 days' worth of estimated general waste from that building core. Therefore, this represents the minimum equipment required in these rooms to satisfy best practice requirements. Additional bins or volume handling equipment can be included in these rooms to increase days of capacity or manual labour required in operation.

Table 10: Waste Room Areas

Level	Waste Room Type	Equipment	Estimated Area Required (m ²)	Actual Area Provided (m ²)
Basement 1	Chute Discharge Room A	4-bin 240L bin Carousel System (General Waste)	>8	8
Basement 1	Communal FOGO Bin Room A	4 x 240L bin (FOGO)	>5	5
Basement 1	Chute Discharge Room B	4-bin 240L bin Carousel System (General Waste)	>8	8
Basement 1	Communal FOGO Bin Room B	4 x 240L bin (FOGO)	>5	5
Ground Floor	Residential Bin Holding Room (Collection Point)	General Waste: 23 x 240L bins Recycling: 11 x 360L bins FOGO: 8 x 240L bins	>42	65
Basement 1	Residential Bulky Waste Room		>16	21
Basement 1	Bin Tug Storage	Bin tug	4	12
Basement 1	Retail Bin Room	General Waste: 2 x 1100L bins Recycling: 2 x 1100L bins FOGO: 2 x 240L bins	>12	16

EFC recommends bins sizes, collection frequencies and/or equipment for best practice waste management at this site, however EFC also acknowledges there are a range of other suitable options that may alter waste room requirements (e.g., floor area, accessibility, head height, etc.)

The waste room areas have been calculated based on equipment requirements and/or bin dimensions with an additional 70% of bin GFA factored in for manoeuvrability. In addition, all doorways and passageways facilitating the movement of bins and/or bulky waste items must be at least 1500mm wide.

The following table provides further waste room requirements.

Table 11: Waste Room Requirements

Waste Room Type	Waste Room Requirements
Chute Discharge Room	• Ceiling clearance height must be a minimum of 3000mm (subject to penetration location) • The chute penetration must have a minimum 500mm clearance of any service pipes or other overhead obstacles • All chute discharge points should be caged off to ensure the safety of any personnel accessing the waste room • 200mm clearance is required around compaction equipment • Where a chute offset is required, the angle of the offset must not exceed 30 degrees (subject to number of consecutive offset and/or up to 1500mm)
Residential Bin Holding Room and/or Bin Collection Area	• Bins must not be stacked in rows that are more than two bins deep.
Communal FOGO Rooms	• Bins should be arranged so that all bins are accessible. Bins are not to be placed in front of one another or in such a way as to restrict access to the other bins for use. • Rooms must be well ventilated either naturally or mechanically in accordance with AS1668.4.2012 • Cleaning facilities such as hose cock and drainage for odour and hygiene control must be provided. • It is recommended a dustpan and broom is provided in this room for residents to clean up unexpected spillages when using bins.
Bulky Waste Room	• May be a dedicated room or screened area within another waste room • Must be in close proximity to the collection area • Area must also be allocated for the segregation of e-waste, gas bottles, cardboard, etc. • Doorway should be a minimum of 1500mm wide
Retail Bin Room	• In order to ensure staff safety, all bins should be arranged so they can be accessed without moving another bin • Bins must be coordinated with the hinge of the lid facing the back. This is to allow for ideal access to the bin.

16.0 CONSTRUCTION REQUIREMENTS

Waste room construction must comply with the minimum standards as outlined in the *Tweed Development Control Plan 2008*, in order to minimise odours, deter vermin, protect surrounding areas, and make it a user-friendly and safe area.

The *NSW Better practice guide for resource recovery in residential developments (2019)* also states that better practice bin storage areas should achieve more than the minimum compliance requirements, which are as follows:

- Ensuring BCA compliance, including ventilation. Where required, ventilation system must comply with AS1668.4-2012 The use of ventilation and air conditioning in buildings.
- Ensuring storage areas are well lit (sensor lighting preferred) and have lighting available 24 hours a day.
- Provision of bin washing facilities, including taps for hot and cold water provided through a centralised mixing valve. The taps must be protected from bins and be located where they can be easily accessed even when the area is at bin capacity.
- Floor constructed of concrete at least 75mm thick.
- Floor graded so that any water is directed to a sewer authority approved drainage connection to ensure washing bins and/or waste storage areas do not discharge flow into the stormwater drain.
- Provision of smooth, cleanable and durable floor and wall surfaces that extend up the wall to a height equivalent to any bins held in the area.
- Ensuring ceilings are finished with a smooth-faced non-absorbent material capable of being cleaned.
- All surfaces (walls, ceiling and floors) finished in a light colour.

16.1 ADDITIONAL CONSIDERATIONS

- Waste room floor to be sealed with a two-pack epoxy;
- All corners coved and sealed 1,200mm up, this is to eliminate build-up of dirt;
- Hot and cold water tap height and light switch height of 1.6m;
- Storm water access preventatives (grate);
- All walls painted with light colour and washable paint;
- Equipment electric outlets to be installed 1700mm above finished floor level;
- Optional automatic odour and pest control system installed
- If 660L or 1100L bins are utilised, 2 x 820mm (minimum) double-doors must be used;
- All personnel doors are hinged, lockable and self-closing;
- Conform to the Building Code of Australia, Australian standards and local laws; and
- Childproofing and public/operator safety shall be assessed and ensured
- Waste and recycling rooms must have their own exhaust ventilation system either;
 - Mechanically - exhausting at a rate of 5L/m² floor area, with a minimum rate of 100L/s minimum. Mechanical exhaust systems shall comply with AS1668.4.2012 and not cause any inconvenience, noise or odour problem; or
 - Naturally - permanent, unobstructed, and opening direct to the external air, not less than one-twentieth (1/20) of the floor area.

17.0 USEFUL CONTACTS

EFC does not warrant or make representation for goods or services provided by suppliers.

LOCAL COUNCIL

Tweed Shire Customer Service Ph: (02) 6670 2400 E: tsc@tweed.nsw.gov.au

PRIVATE WASTE COLLECTION PROVIDER

Capital City Waste Services Ph: 02 9599 9999 E: service@ccws.net.au
 Sydney Waste Ph: 02 8661 0031
 Waste Clear Ph: 1300 525 352 E: admin@wasteclear.com.au

BIN MOVING DEVICE SUPPLIERS

Elephants Foot Equipment Ph: 1300 435 374 E: equipment@elephantsfoot.com.au
 Sitecraft Ph: 1300 363 152 E: sales@sitecraft.com.au

BALER SUPPLIERS

Elephants Foot Equipment Ph: 1300 435 374 E: equipment@elephantsfoot.com.au

ORGANIC DIGESTERS AND DEHYDRATORS

Elephants Foot Equipment Ph: 1300 435 374 E: equipment@elephantsfoot.com.au
 Waste Master Ph: 1800 614 272 E: hello@wastemasterpacific.com.au

COOKING OIL CONTAINERS AND DISPOSAL

Cookers Ph: 1300 882 299 E: info@cookers.com.au
 Auscol Ph: 1800 629 476 E: sales@auscol.com

ODOUR CONTROL

Elephants Foot Equipment Ph: 1300 435 374 E: equipment@elephantsfoot.com.au

SOURCE SPERATION BINS

Method Recycling Ph: 0499 890 455

BINS AND BIN EQUIPMENT

Elephants Foot Equipment Ph: 1300 435 374 E: equipment@elephantsfoot.com.au
 SULO Ph: 1300 364 388 E: sulosales@pactgroup.com

CHUTES, COMPACTORS AND EDIVERTER SYSTEMS

Elephants Foot Chute Solutions Ph: 1300 435 374 E: chutes@elephantsfoot.com.au


APPENDIX A: ARCHITECTURAL PLANS

APPENDIX: A.1 LEVEL 1 -CHUTE DISPLAY + 240L BIN



Source: SJB Architects, Level 1, Mixed Use Development, Project #6906, Drawing Number DA-1004, Revision A, 28/11/2025

APPENDIX: A.1 GROUND FLOOR PLAN-BIN COLLECTION ROOM

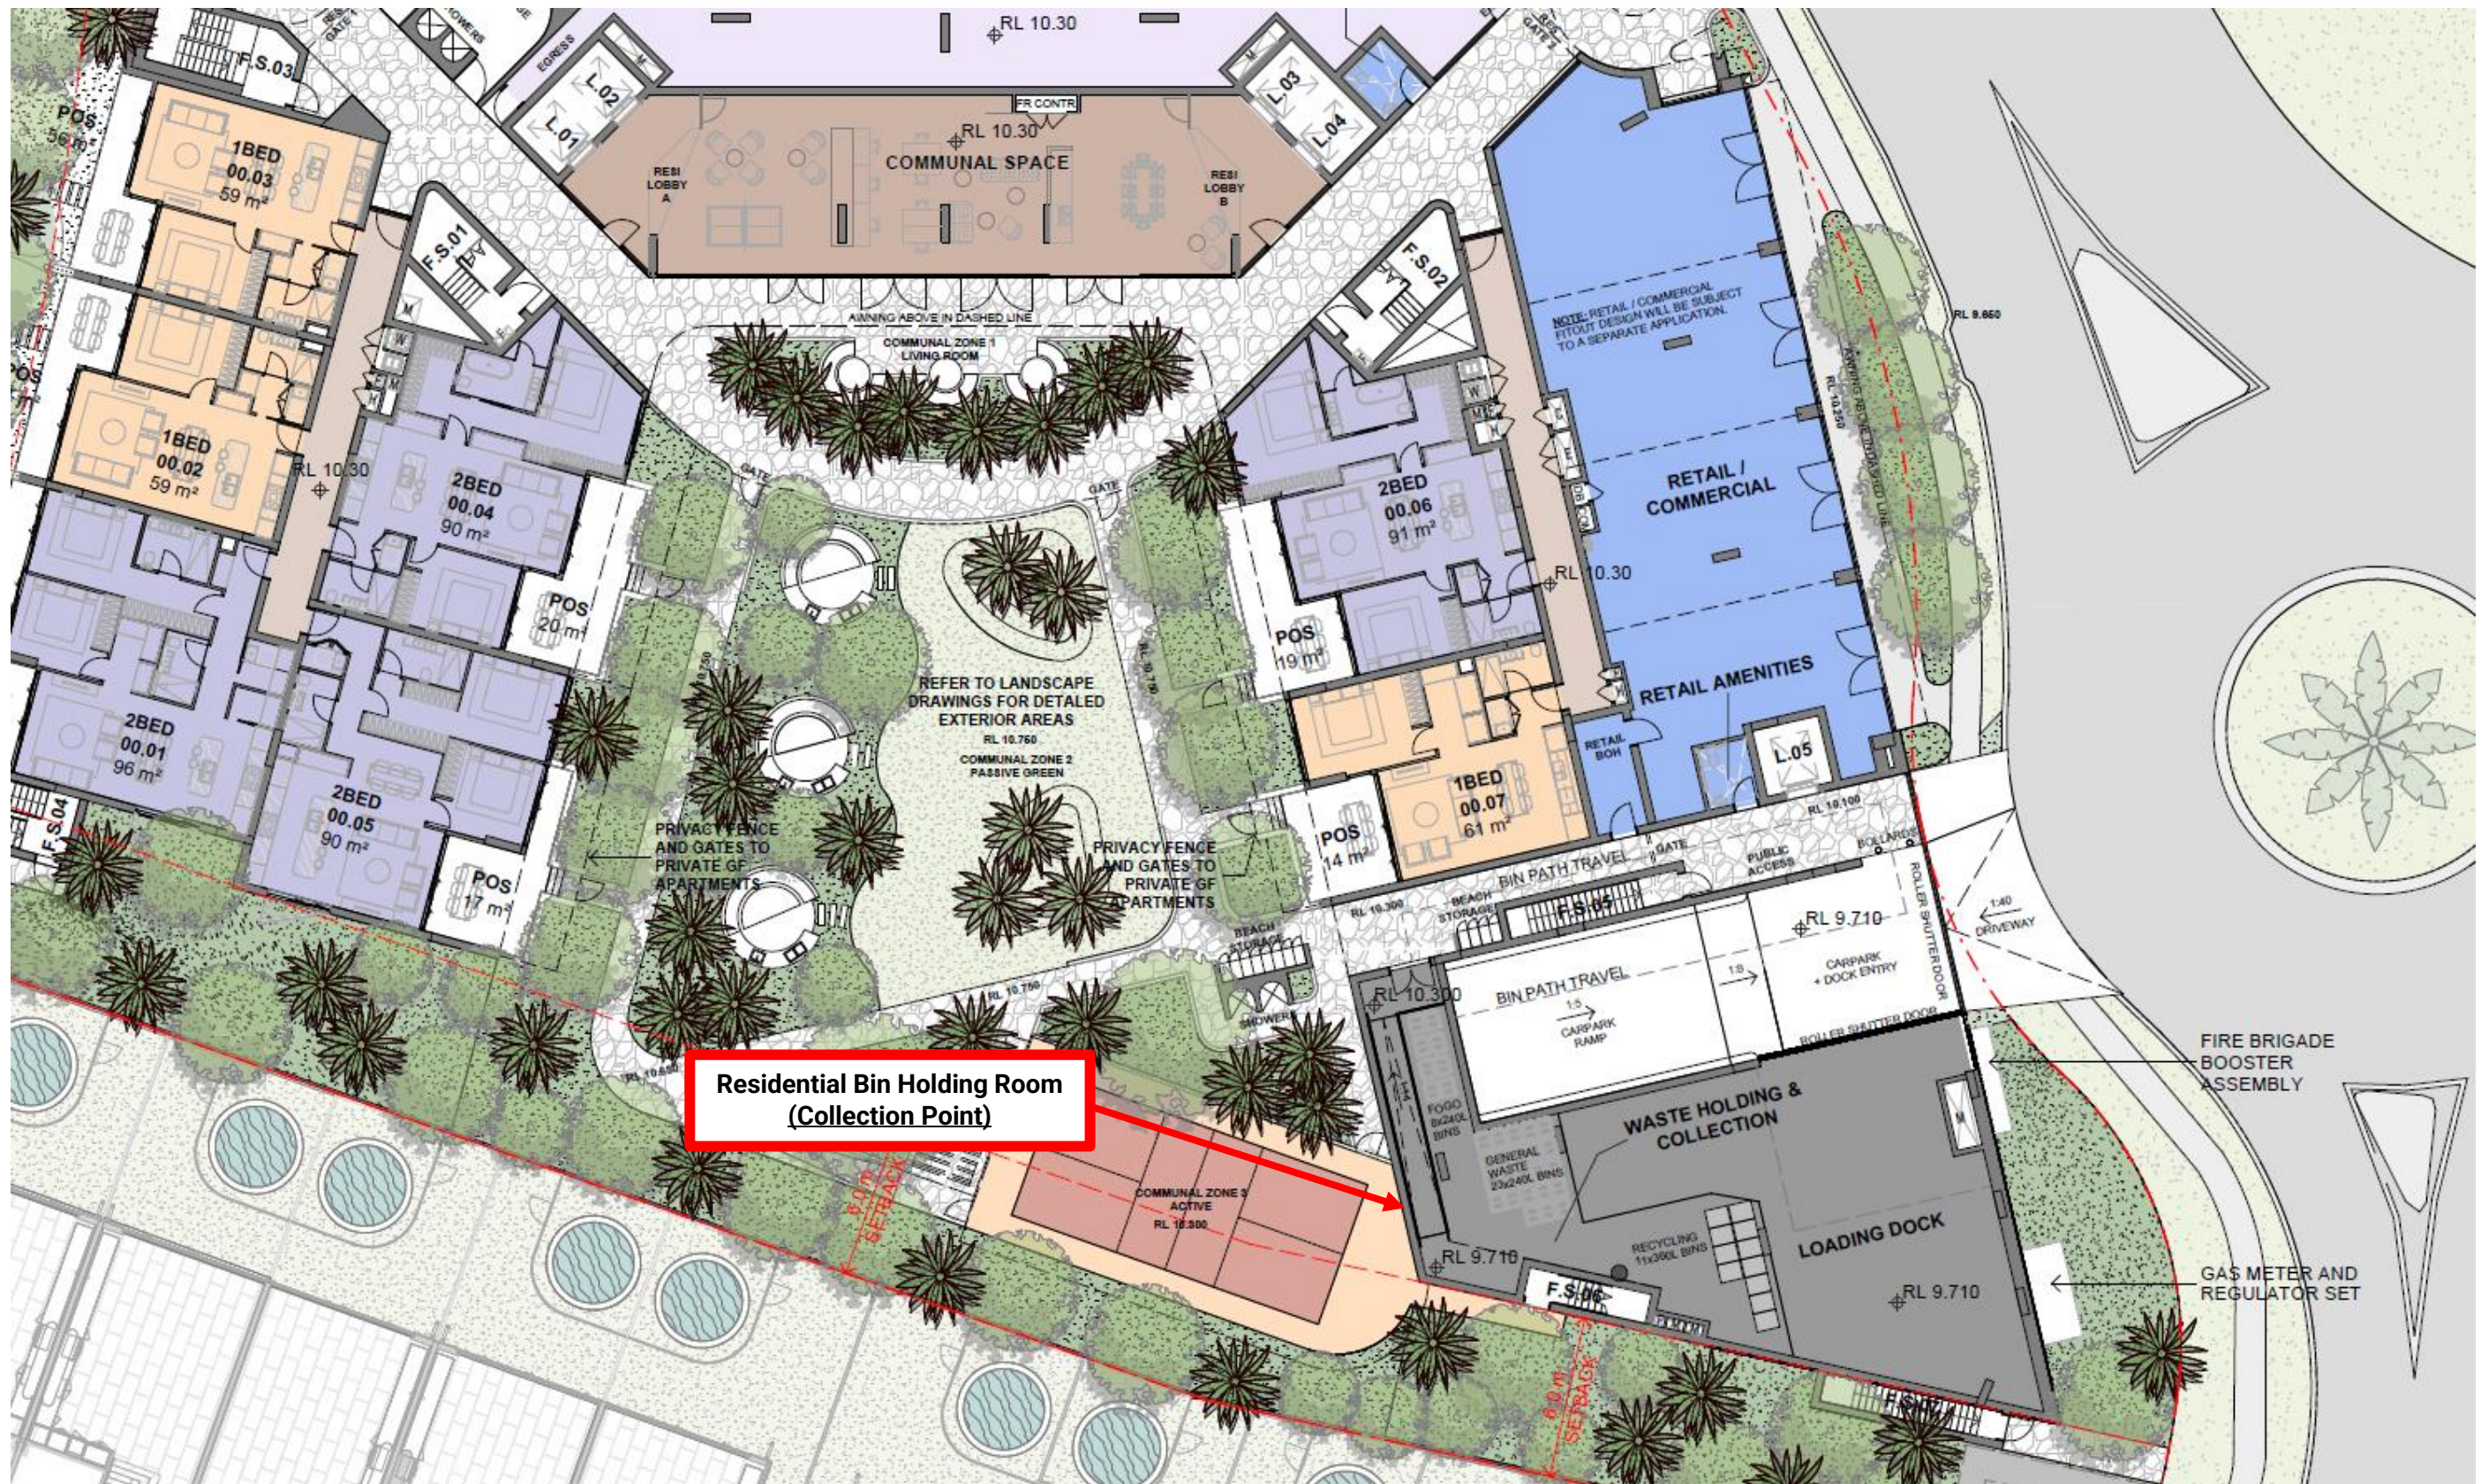

Source: SJB Architects, Ground Floor Plan, Mixed Use Development, Project #6906, Drawing Number DA-1003, Revision A, 28/11/2025

APPENDIX: A.2 BASEMENT 1-WASTE ROOMS



Source: SJB Architects, Basement 1 Plan, Mixed Use Development, Project #6906, Drawing Number: DA-1002, Revision A, 28/11/2025

APPENDIX B: INSTALLATION EQUIPMENT


APPENDIX: B.1 TYPICAL SINGLE CHUTE SHAFT & PENETRATION LAYOUT




Chute Solutions.™
an Australian First Group company

CHUTE SHAFT & PENETRATION SET-OUT


SINGLE Ø610 STEEL

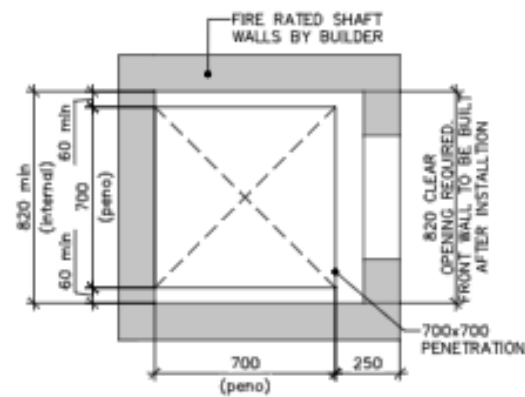


01 SINGLE (610Ø) GALV. STEEL CHUTE PENETRATION SET-OUT

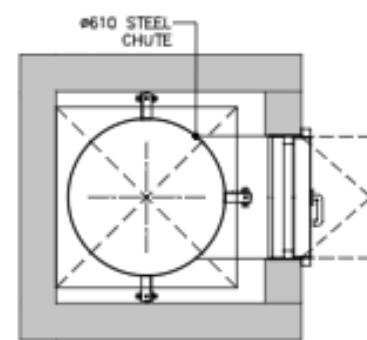


02 SINGLE (610Ø) GALV. STEEL CHUTE LAYOUT

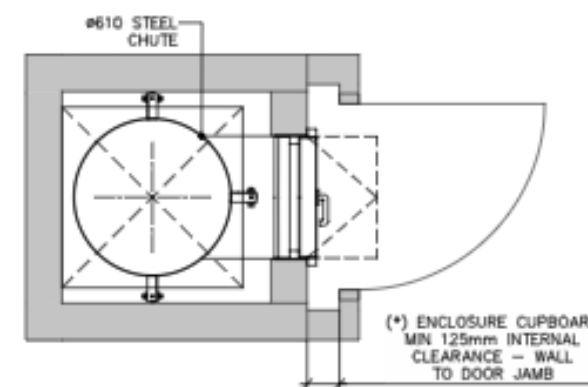


03 SINGLE (610Ø) GALV. STEEL CHUTE LAYOUT with ENCLOSURE CUPBOARD (*)

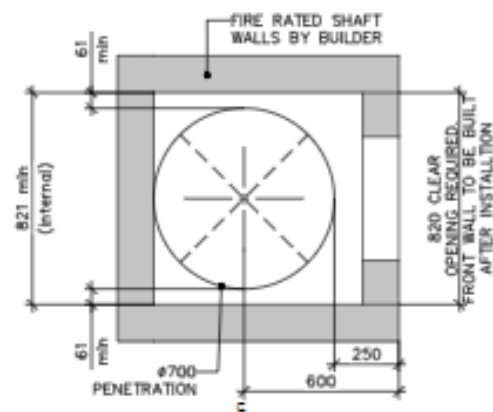


04 SINGLE (610Ø) GALV. STEEL CHUTE WITH CIRCULAR PENETRATION SET-OUT

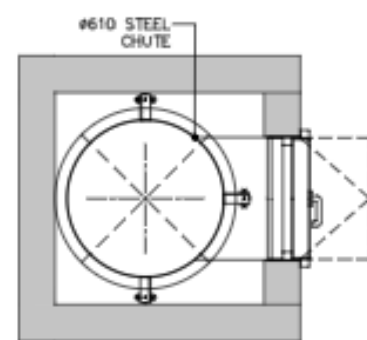

05 SINGLE (610Ø) GALV. STEEL CHUTE LAYOUT (WITH CIRCULAR PENETRATION)

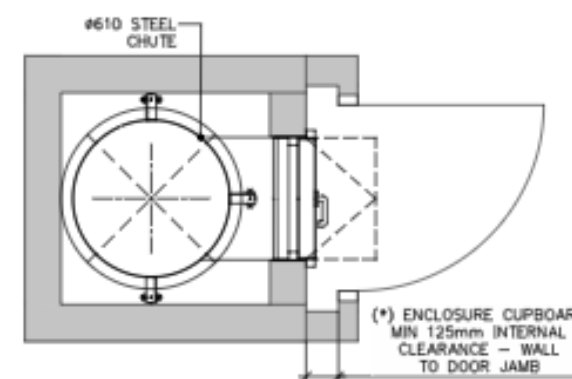

06 SINGLE (610Ø) GALV. STEEL CHUTE LAYOUT with ENCLOSURE CUPBOARD (*)

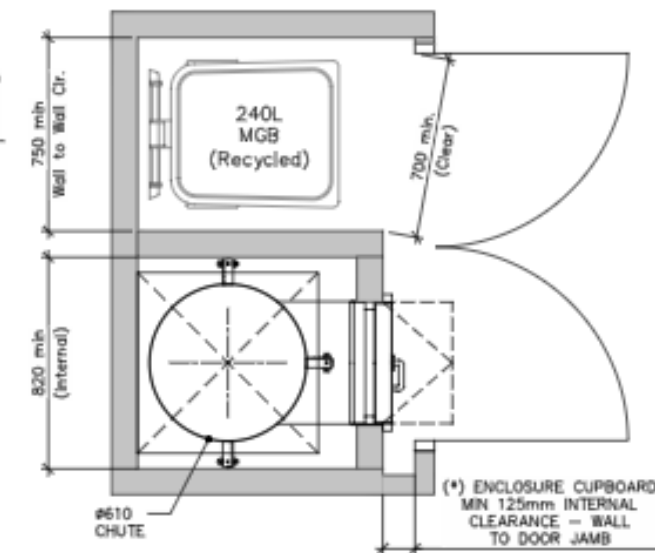

07 TYPICAL (610Ø) GALV. STEEL CHUTE LAYOUT with ENCLOSURE(*) & RECYCLING COMPARTMENT


(*) NOTE: ENCLOSURES ARE RECOMMENDED IF THE CHUTE OPENS DIRECTLY TO A CORRIDOR OR IS NOT LOCATED IN A WASTE ROOM. IF CHUTE ACCESS IS WITHIN A WASTE ROOM THEN THE CUPBOARD ENCLOSURES ARE NOT REQUIRED.

SCALE 1:25 @ A3

Chute Shaft & Peno – Ver 1.2 April 26, 2022

Please Note: This is an example only – please refer to supplier's information and specification.

APPENDIX: B.2 EXAMPLE RESIDENTIAL LEVEL RECYCLING BIN LAYOUT

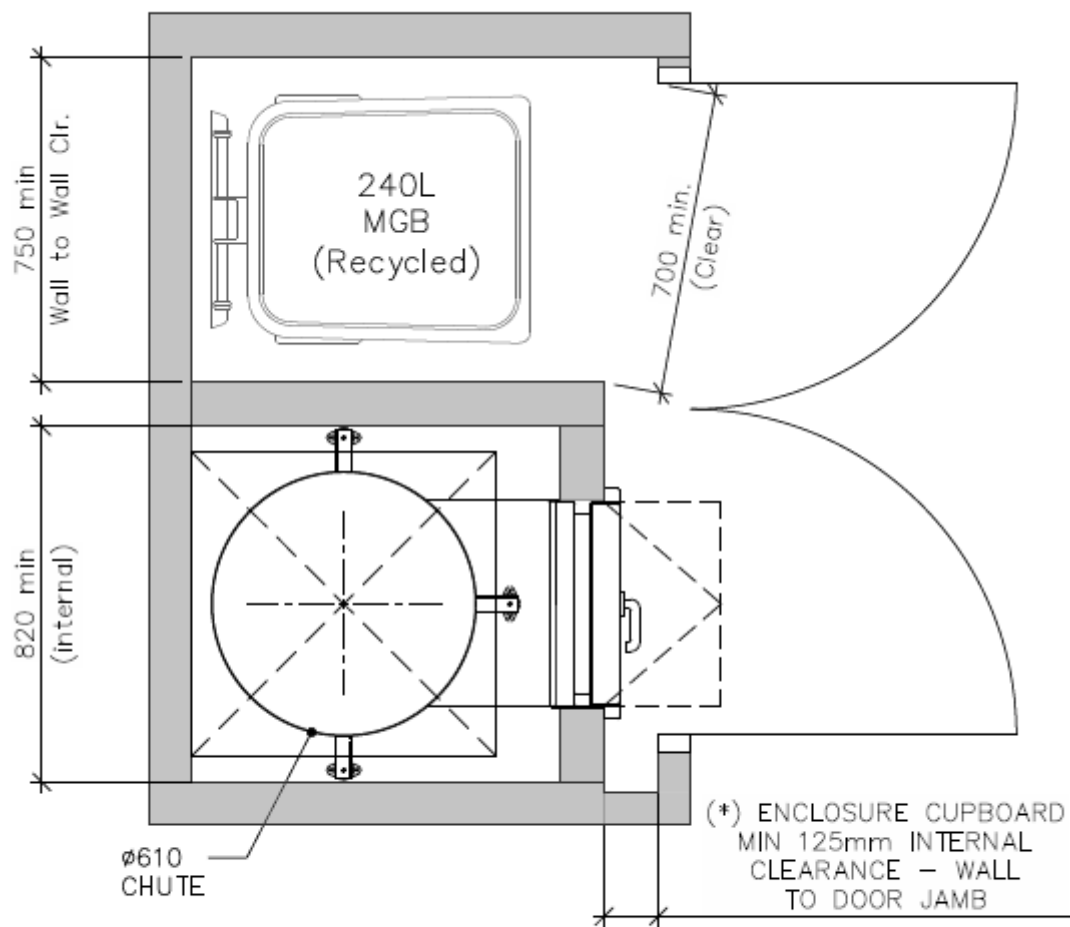

07 TYPICAL (610 ϕ) GALV. STEEL CHUTE LAYOUT
with ENCLOSURE(*) & RECYCLING COMPARTMENT

Please Note: This is an example only – please refer to supplier's information and specification

APPENDIX: B.3 TYPICAL CAROUSEL SYSTEM FOR 240L BINS



240 LITRE CAROUSEL SYSTEM

PRODUCT INFORMATION

Elephants Foot 240 litre bin Carousel System is a versatile waste handling solution for many types of multi-storey or multi-level developments. The Carousel System collects waste or recycling being disposed from the floors above through the chute system, discharging the material via a hopper that feeds the bins positioned on the unit. Electromechanically driven with automated operation, the Carousel System automatically replaces full bins by a revolving circular platform. Once all the bins on the system are filled, an indicator light will illuminate signifying that the bins are ready for withdrawal and collection. Available with or without compaction unit, our standard 240 litre bin Carousel System is available in 4 or 5 bin options.



SPECIFICATIONS

System Control	Electric PLC
Power Supply	415 V AC / 10A / 5 PIN
Motor Size (kW)	0.37
Maximum bin load	96 kg
Noise (dBA)	<85
Bin Size (L)	240
Cycle time (sec)	60
Bin Quantity options	4 or 5

OPTIONAL EXTRAS


- Compaction unit – Please refer to the bin compactor product information sheet for details and specifications
- Enhanced safety add on's – Interlocking barriers, occupancy sensors or safety light curtains (presence sensing light barriers)
- Full bin SMS and email notification
- CMMS and BMS integration
- Extend warranty – Terms and conditions apply

STANDARD FEATURES & BENEFITS

- Simple operation with user friendly controls
- Increased waste servicing efficiency for the development
- Automatic system control with manual override
- Robust unit construction for long performance life
- Low service and maintain costs
- Rotating flashing beacon (activated during operation)
- Quiet and efficient system operation
- Maximise safety for residents, caretakers and collectors
- Restrained design with minimal moving parts
- Can suit low ceiling clearances
- Floor contact components fully galvanised steel
- Retro fitting options to suit other chutes systems
- Compliant with relevant Building Codes and Standards
- Standard 12 month warranty





240 LITRE CAROUSEL SYSTEM

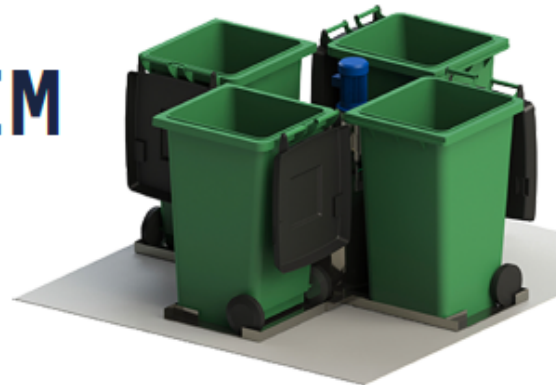

No. of Bins	Reference (mm)			
	A	B	C	D
4	750	500	2020	2200
5	900	600	2460	2600

Available with or without compaction unit, our standard 240 litre bin Carousel System is available in 4 or 5 bin options.

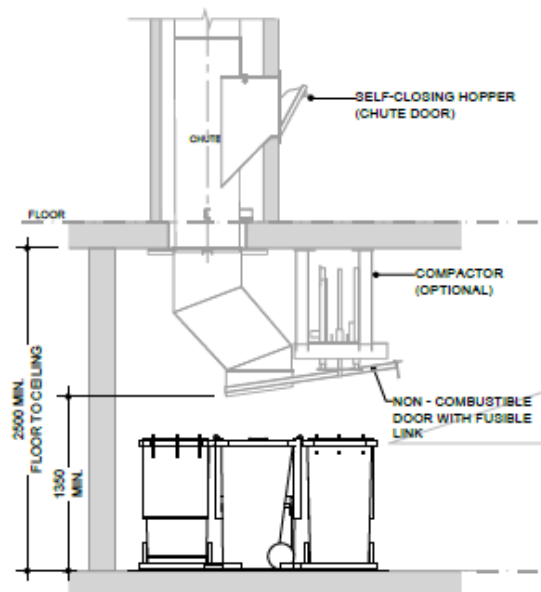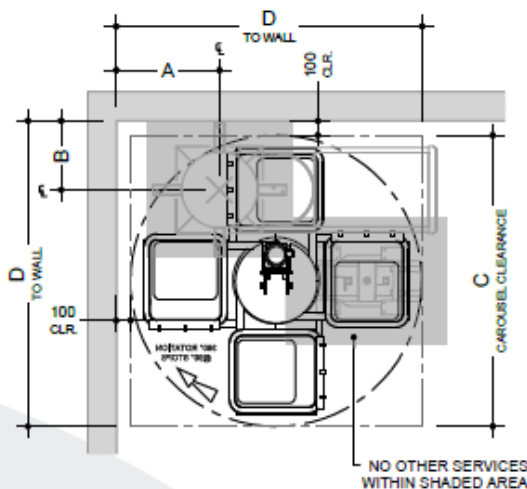

Notes:

Bins not provided by Elephants Foot

Drawings shown are for general information purposes only and provide minimum equipment spacial requirements for waste room design.

These drawings are not intended for site specific use or for construction. Each project is unique and will be designed to suit.

Additional equipment options, systems and configurations are available. For design assessment, information and advice, please contact an Elephants Foot design consultant on 1300 435 374

Please Note: This is an example only – please refer to supplier's information and specification

APPENDIX C: PRIMARY WASTE MANAGEMENT PROVISIONS

APPENDIX: C.1 TYPICAL BIN SPECIFICATIONS

Mobile bins

Mobile bins come in a variety of sizes and are designed for lifting and emptying by purpose-built equipment.

Mobile bins with capacities of up to 1700L must comply with *AS4123.6-2006 Mobile waste containers* which specifies standard sizes and sets out the colour designations for the bodies and lids of mobile waste containers indicating the type of materials they are used to collect.

The most common bin sizes are provided below, although not all sizes are shown. The dimensions are a guide only and differ slightly between manufacturers. Some bins have flat or domed lids and are used with different lifting devices. Refer to *AS4123.6-2006* for further details.

Table G1.1: Average dimension ranges for two-wheel mobile bins



Bin capacity	80L	120L	140L	240L	360L
Height (mm)	870	940	1065	1080	1100
Depth (mm)	530	530	540	735	820
Width (mm)	450	485	500	580	600
Approximate footprint (m ²)	0.24	0.26–0.33	0.27–0.33	0.41–0.43	0.49
Approximate weight (kg)	8.5	9.5	10.4	15.5	23
Approximate maximum load (kg)	32	48	56	96	Not known

Wheelie bin

Sources include Sulo, Single Waste, Cleanaway, SUEZ, just wheelie bins and Perth Waste for two-wheel mobile bins

Table G1.2: Average dimension ranges for four-wheel bulk bins



Bin capacity	660L	770L	1100L	1300L	1700L
Height (mm)	1250	1425	1470	1480	1470
Depth (mm)	850	1100	1245	1250	1250
Width (mm)	1370	1370	1370	1770	1770
Approx footprint (m ²)	0.86–1.16	1.51	1.33–1.74	2.21	2.21
Approx weight (kg)	45	Not known	65	Not known	Not known
Approx maximum load (kg)	310	Not known	440	Not known	Not known

Dome or flat lid container

Sources include Sulo, Signal Waste, Cleanaway, SUEZ, Just Wheelie Bins and Perth Waste

Source: *Better Practice Guide For Resource Recovery In Residential Developments 2019*, NSW Environmental Protection Authority

APPENDIX: C.2 SIGNAGE FOR WASTE AND RECYCLING BINS

Waste signs

Signs and educational materials perform several functions including:

- informing residents why it is important to recover resources and protect the environment
- providing clear instructions on how to use the bins and services provided
- alerting people to any dangers or hazards within the bin storage areas.

All waste, recycling and organic bins should be Australian Standard colours and clearly and correctly labelled, such as by a sticker on the lid and/or the body of the bin.

Communal bin storage areas should be clearly signposted with signs outlining how to correctly separate waste into the bins provided. The local council responsible for waste services may be a good source of signs and posters and can advise on what signs are suitable.

Information on who to contact to find out more about the recycling and/or other resource recovery services in the building should also be displayed in communal areas, such as on a noticeboard.

The Planet Ark website also has resources available free of charge for use by businesses and councils. These signs can be found at businessrecycling.com.au/research/signage.cfm

Figure I1.1: Examples of waste wall posters (EPA supplied)



Figure I1.2: Examples of bin lid stickers (EPA supplied)



Source: *Better Practice Guide For Resource Recovery In Residential Developments 2019*, NSW Environmental Protection Authority

Problem waste signs

The EPA has also produced a range of images and signs that can be used for problem wastes, such as fluoro globes and tubes, household and car batteries, e-waste and smoke detectors. To access these resources, contact the NSW EPA. Some examples are shown below.

Figure I2.1: Problem waste signs



Safety signs

The use of safety signs for waste resource recovery rooms must comply with *AS1319 Safety signs for occupational environments*. Safety signs must be used to regulate and control safety related to behaviour, warn of hazards and provide emergency information, including fire protection information. Suitable signs should be decided for each development as required.

Figure I3.1: Example safety signs



Source: *Better Practice Guide For Resource Recovery In Residential Developments 2019*, NSW Environmental Protection Authority

APPENDIX D: SECONDARY WASTE MANAGEMENT PROVISIONS

APPENDIX: D.1 EXAMPLE HANDHELD BIN MOVERS

movexx
smart electric tugs

MOVEXX T2500 BIN MOVER BATTERY ELECTRIC

Movexx T2500 Tow Tug is an extremely user friendly battery powered mobile towing unit that is ideal for applications where trolleys and rolling objects need to be moved from one place to another simply, efficiently and without physical effort. Some standard features included are: battery indicator, on board battery charger, battery, adjustable handle, dual speed and electric brake.

These units are fitted with an electromagnetic brake system for use on ramps and slopes.

Features

- Electromagnetic brake for use on ramps and slopes
- Adjustable height handle



SPECIFICATION				
MODEL	DIMENSIONS (MM)	OPTIONS	PULL - PUSH CAPACITY (KG)	BATTERY
T2500-D	511 (w) x 757 (l)	* Centre mount 2x 240 lt. wheelie bin attachment	2500	AGM batteries 2x 85AH up to 8 hrs continuous operation
TOWING CAPACITY - ON FLAT GROUND (all models)			TOWING CAPACITY - SLOPE (all models)	
Towing up to 4x 660 lt. Wheelie Bin			Towing up to 2x 660 lt. Wheelie Bin Up / Down maximum 25% (1:4 slope)	
Towing up to 4x 1100 lt. Wheelie Bin			Towing up to 1x 1100 lt. Wheelie Bin Up / Down maximum 25% (1:4 slope)	
**Electromagnetic brake for use on ramps and slopes				



Please Note: This is an example only – please contact supplier for specific recommendations.

Source: Sitecraft - www.sitecraft.net.au

APPENDIX: D.2 EXAMPLE SEATED BIN MOVERS



MOTREC MT180 36V BATTERY ELECTRIC BIN MOVER

This hardworking tow device delivers outstanding performance. With its efficient motor and 4,500kg push-pull capacity. The MT180 is ideal for moving bin trailer also narrow enough to fit through most door openings. From its all-steel construction to its all-wheel braking, this tow tractor is built for years of heavy use in total comfort and safety. All this combined with superior AC technology makes short work of tough requests.

Features

- Front & rear brakes
- Pneumatic Tyres
- Comfortable ergonomic adjustable seat
- Complete with headlight, break lights, tailing lights & horn



SPECIFICATION

MODEL	DIMENSIONS (MM)	OPTIONAL EXTRAS	PULL - PUSH CAPACITY (KG)	BATTERY
MT180 36V	760 (w) x 2030 (l) x 1160 (h)	Flashing light on pole Conditional registration kit Cabin includes windscreen Weather Curtains	4500	48v TPPL battery pack, 157AH

TOWING CAPACITY - ON FLAT GROUND / SLOPE (all models) (all models)

Towing up to 5x 660 lt. Wheelie Bin Up / Down maximum 25% (1:4 slope)

Towing up to 4x 1100 lt. Wheelie Bin Up / Down maximum 25% (1:4 slope)



Please Note: This is an example only – please contact supplier for specific recommendations.

Source: Sitecraft - www.sitecraft.net.au

APPENDIX: D.3 EXAMPLE BIN TRAILERS



BIN TRAILER WITH ALUMINUM RAMP

Bin trailer suitable for moving 240lt, 660lt and 1,100lt bins including a 1200mm rear ramp complete with locking latches and gas strut assist. Height draw bar fitted with a jockey wheel large pneumatic tyres with precision bearing hubs



SPECIFICATION

MODEL	DIMENSION (MM)	SUITABLE FOR MOVING	PART NUMBERS	REAR RAMP DIMENSION (MM)
4x Bins Trailer	Internal - 1560 (l) x 1200 (w)	4x 240lt. Wheelie Bin	78811604	1200mm rear ramp complete with positive locking and gas strut assist
	External - 2300 (l) x 1500	2x 660lt. Wheelie Bin		
		1x 1100lt. Wheelie Bin		
6x Bins Trailer	Internal - 2350 (l) x 1200 (w)	6x 240lt. Wheelie Bin	78811065	1200mm rear ramp complete with positive locking and gas strut assist
	External - 3100 (l) x 1500 (w)	3x 660lt. Wheelie Bin		
		2x 1100lt. Wheelie Bin		
8x Bins Trailer	Internal - 3200 (l) x 1200 (w)	8x 240lt. Wheelie Bin	78811066	1200mm rear ramp complete with positive locking and gas strut assist
	External - 3900 (l) x 1500 (w)	4x 660lt. Wheelie Bin		
		3x 1100lt. Wheelie Bin		
10x Bins Trailer	Internal - 3900 (l) x 1200 (w)	10x 240lt. Wheelie Bin	78811067	1200mm rear ramp complete with positive locking and gas strut assist
	External - 4600 (l) x 1500 (w)	5x 660lt. Wheelie Bin		
		4x 1100lt. Wheelie Bin		

OPTIONS

- Full registration
- Upgrade Includes : Lights | Wiring | Suspension | aaa Tyres | Compliance Plate

Please Note: This is an example only – please contact supplier for specific recommendations.

Source: Sitecraft - www.sitecraft.net.au

APPENDIX: D.4 EXAMPLE BIN TOWING ATTACHMENTS



UNIVERSAL BIN TOWING ATTACHMENTS SUITE 660LT / 1100LT WHEELIE BINS

PARTS & FEATURES

Front Only - Part Number: 78811672

- Suit Sulo & Otto 600lt / 1100lt MGBs
- Spring loaded draw bar folds up
- No drilling of holes in the bin required
- Solidly fixed to the base of the bin using the castor mounting bolts
- Passivated zinc finish for long life
- Correct Rear Fixed or Directional Lock castors should be used

Rear Only - Part Number: 78811673

- Suit Sulo & Otto 600lt / 1100lt MGBs
- No drilling of holes in the bin required
- Solidly fixed to the base of the bin using the castor mounting bolts
- Passivated zinc finish for long life
- Correct Rear Fixed or Directional Lock castors should be used

For Steel Bin Front Only - Part Number: 78811781

- Suit Sulo & Otto 600lt / 1100lt MGBs
- No drilling of holes in the bin required
- Solidly fixed to the base of the bin using the castor mounting bolts
- Passivated zinc finish for long life
- Correct Rear Fixed or Directional Lock castors should be used

Direction Lock : 53191001



- Suit Sulo & Otto 600lt / 1100lt MGBs
- No drilling of holes in the bin required
- Solidly fixed to the base of the bin using the castor mounting bolts
- Passivated zinc finish for long life
- Correct Rear Fixed or Directional Lock castors should be used



Please Note: This is an example only – please contact supplier for specific recommendations.

Source: Sitecraft - www.sitecraft.net.au

APPENDIX: D.5 EXAMPLE SOURCE SEPARATION RECEPTACLES

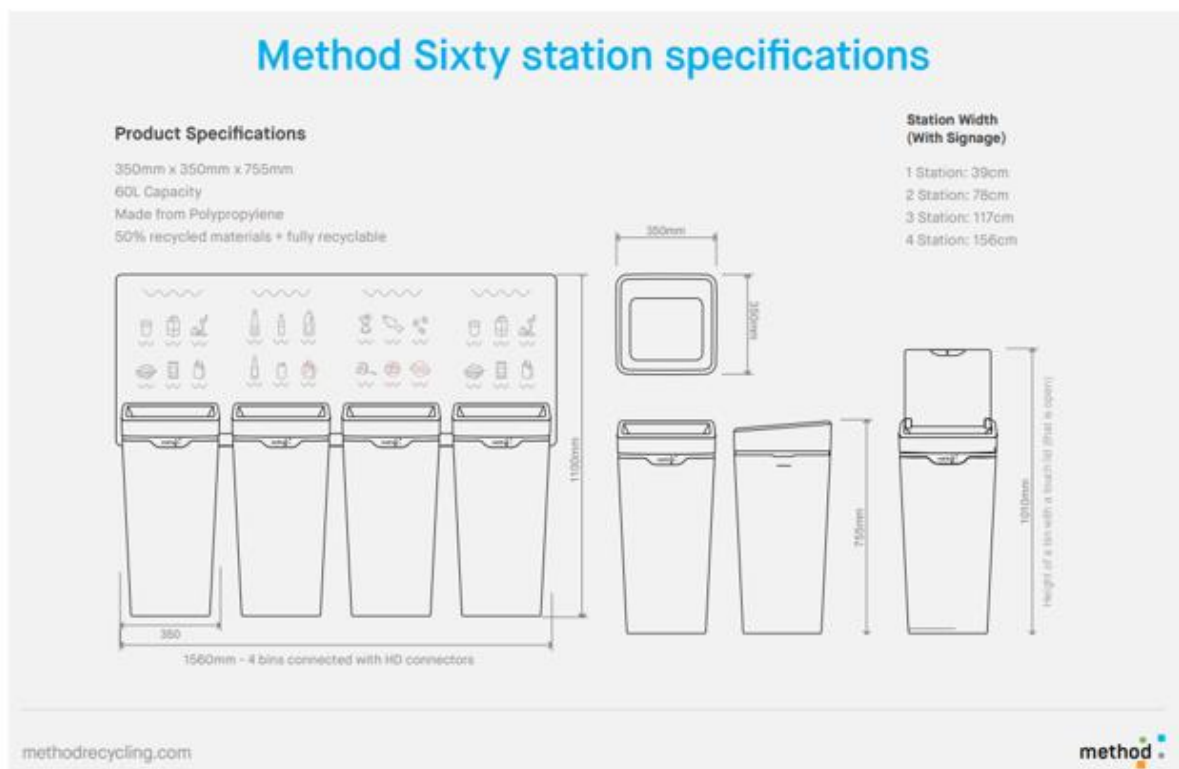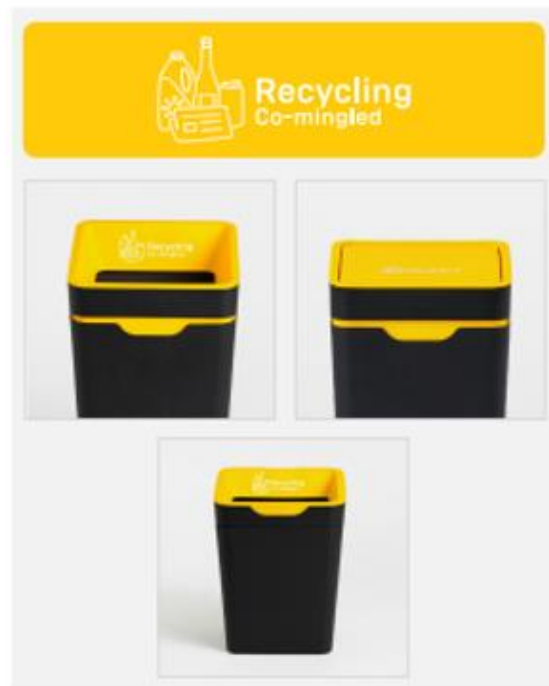

Source: Method Recycling - www.methodrecycling.com