


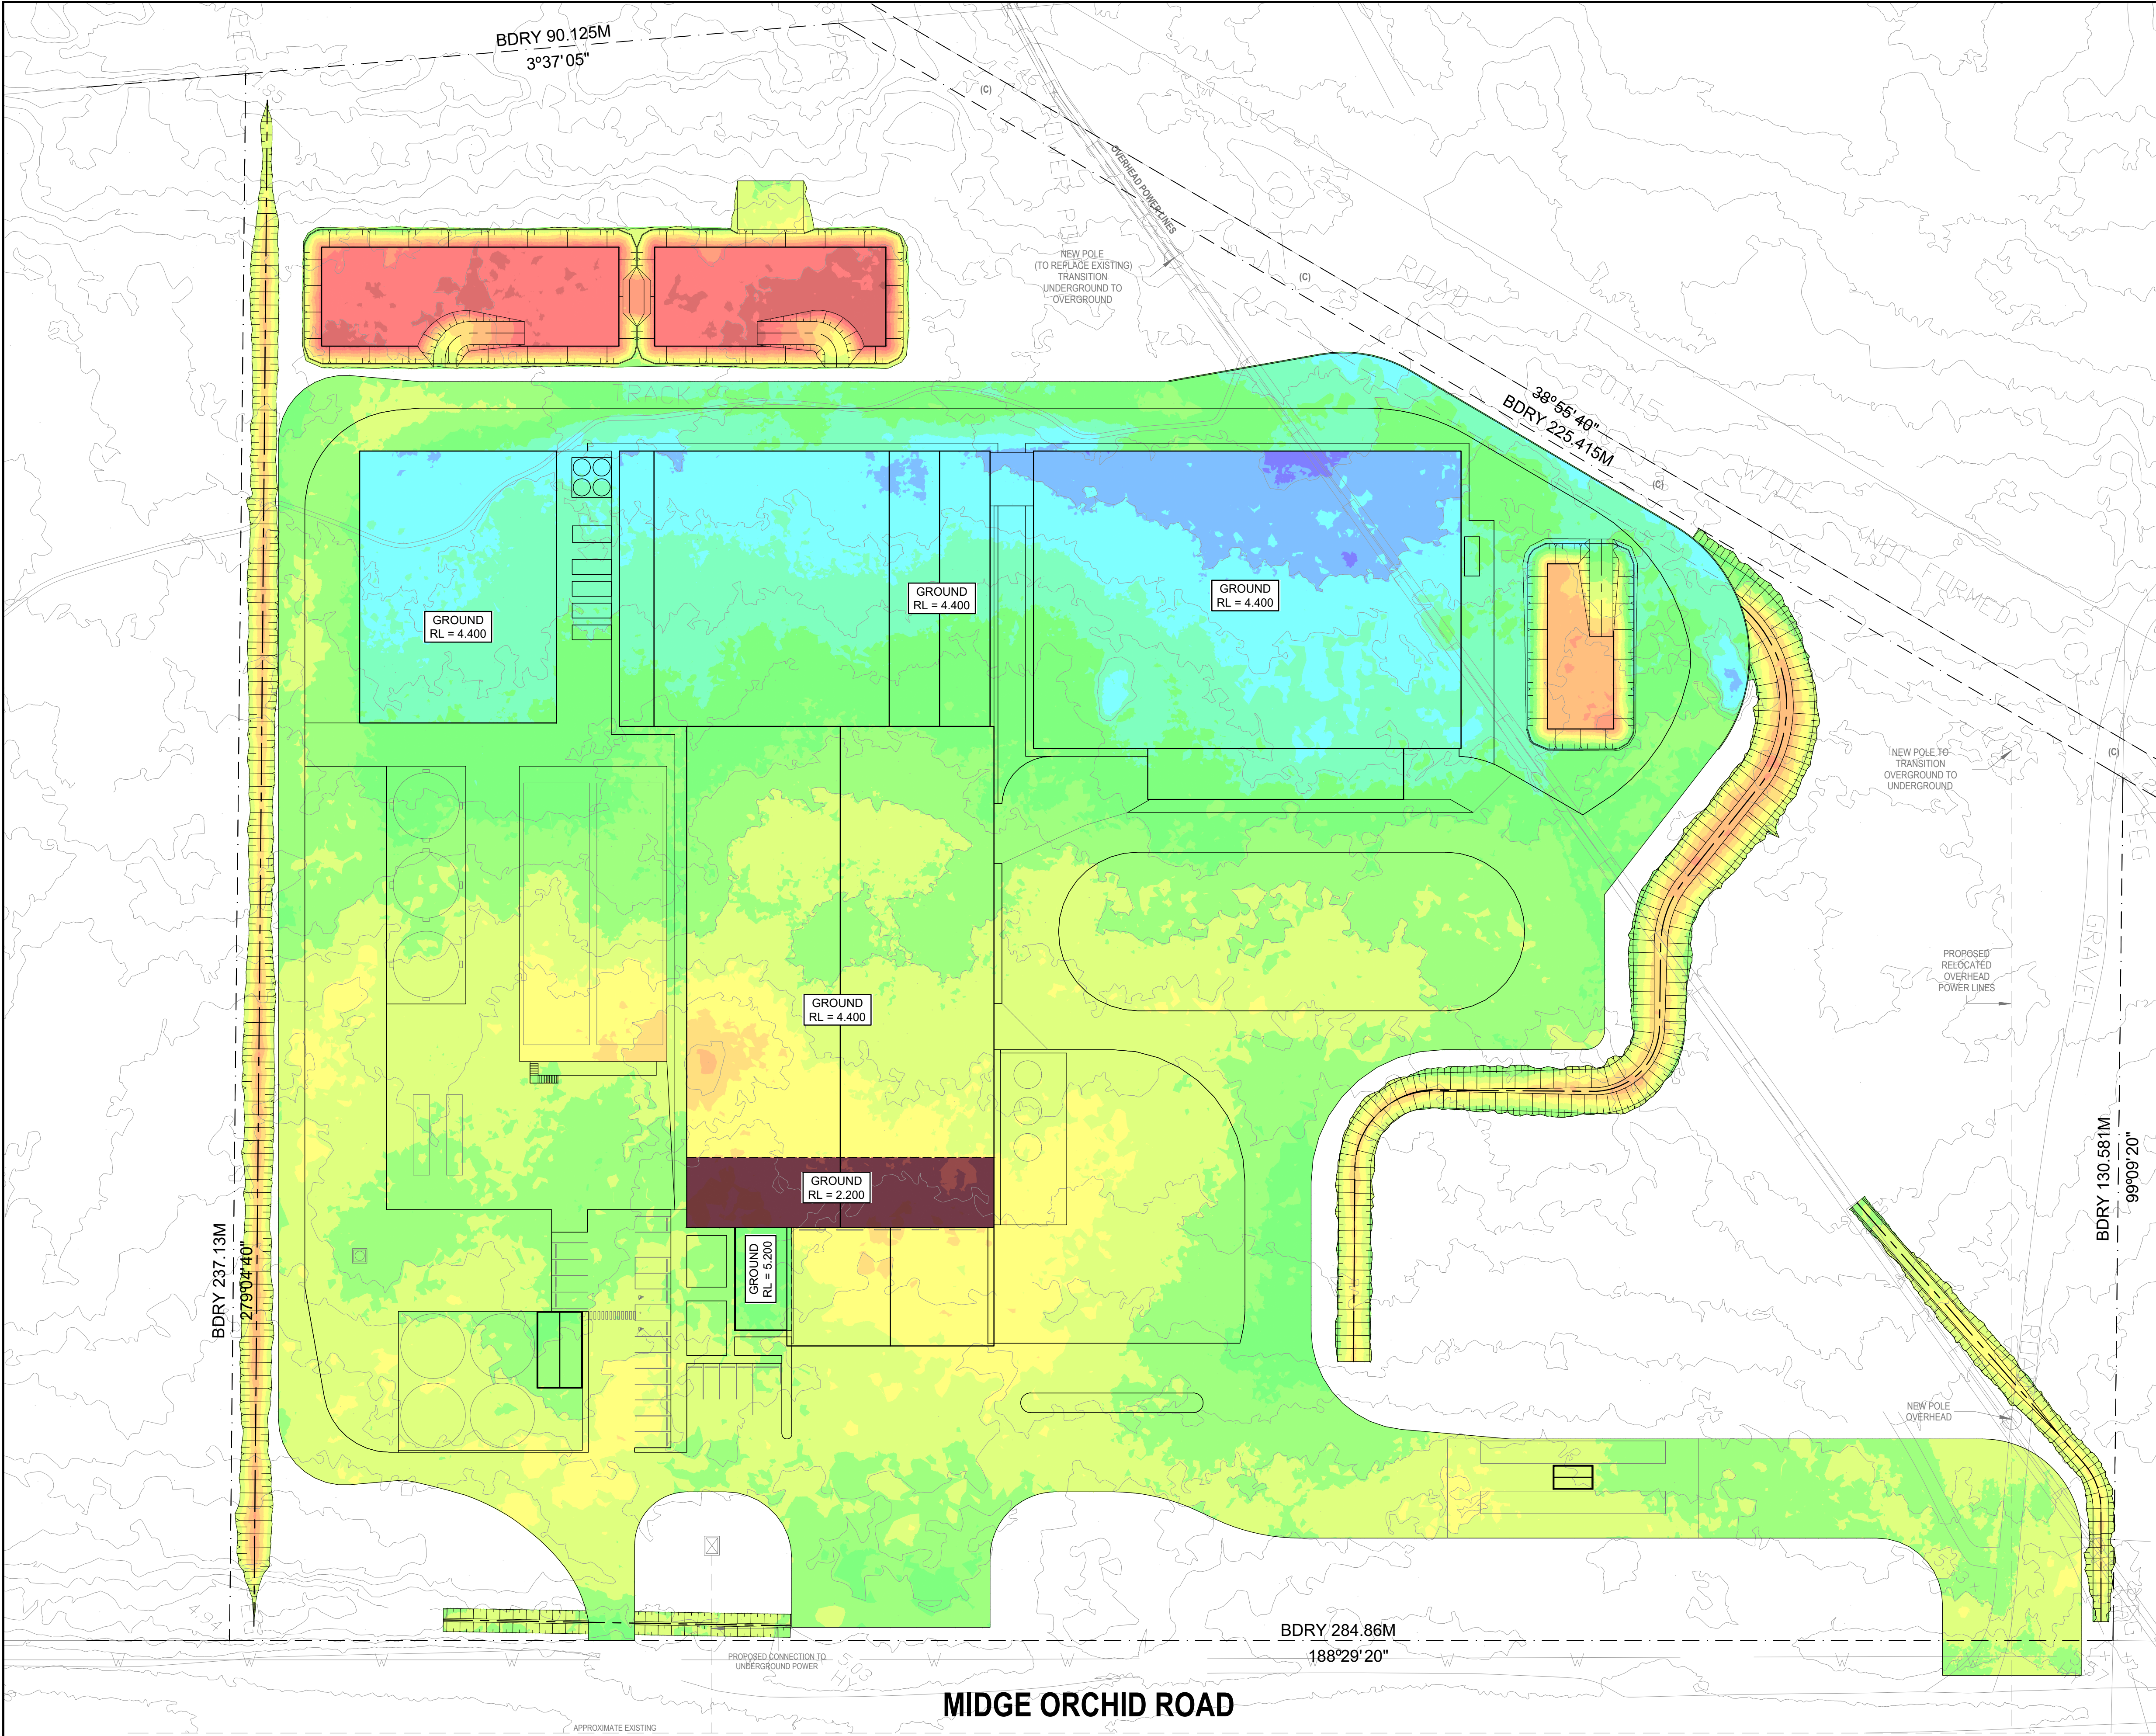

BULK EARTHWORKS PLAN
1:500

EARTHWORKS VOLUME TABLE				
	LOWER VALUE	UPPER VALUE	CUT VOLUME (m³)	FILL VOLUME (m³)
	-3.000	-2.750	2.6	-
	-2.750	-2.500	65.9	-
	-2.500	-2.250	122.8	-
	-2.250	-2.000	123.4	-
	-2.000	-1.750	123.5	-
	-1.750	-1.500	141.8	-
	-1.500	-1.250	336.5	-
	-1.250	-1.000	439.3	-
	-1.000	-0.750	533.0	-
	-0.750	-0.500	708.9	-
	-0.500	-0.250	1159.1	-
	-0.250	0.000	2877.9	-
	0.000	0.250	-	4092.6
	0.250	0.500	-	2488.3
	0.500	0.750	-	1386.8
	0.750	1.000	-	522.7
	1.000	1.250	-	84.3
	1.250	1.500	-	1.7

BULK EXCAVATON SUMMARY

TOTAL CUT = 6633.439 m³
TOTAL FILL = 8576.360 m³
BALANCE = 1942.921 m³ (FILL)

- NOTE:
- NO ALLOWANCE FOR STRIPPING AND REPLACEMENT OF TOPSOIL
 - NO ALLOWANCE FOR EXCAVATION OF DRAINAGE TRENCHES, STRUCTURAL FOUNDATIONS AND DRIVEWAY/EXTERNAL PAVEMENTS
 - NO ALLOWANCE FOR ANY UNSUITABLE MATERIAL FOUND ANYWHERE ON SITE.

NOTE: DO NOT SCALE OFF DRAWINGS. REFER TO ARCHITECTURAL PLANS. VERIFY DIMENSIONS ON SITE

A	20.01.26	ISSUED FOR APPROVAL	B.D.C.
REV	DATE	DESCRIPTION	BY

COPYRIGHT
All rights reserved.
These drawings, plans and specifications and the copyright are the property of Engineering Studio and must not be used, reproduced or copied wholly or in part without the written permission of Engineering Studio.



Phone: (02) 8020 2960
Email: info@engineeringstudio.com.au
Web: www.engineeringstudio.com.au
Postal Address
Suite 215-216, 25-27 Solent Cct,
Norwest NSW 2153

PROPOSED DEVELOPMENT
AT 48 MIDGE ORCHID ROAD, DARAWANK
FOR NALG

BULK EARTHWORKS PLAN

JOB NUMBER:	DWG NUMBER:	ORIGINAL SIZE:
251042	C03.01	A1
DESIGNED BY:	DATE:	
B.C.	DECEMBER 2025	
DRAWN BY:	SCALE:	
B.D.C.	1:200 U.N.O.	