



Borehole No.
101
 2 / 2

CORED BOREHOLE LOG

Client: HEALTH INFRASTRUCTURE
Project: PROPOSED HOSPITAL REDEVELOPMENT
Location: 130 GOLDSMITH STREET, GOULBURN, NSW

Job No.: 30116V2 **Core Size:** NMLC **R.L. Surface:** ~652.4 m
Date: 22/8/17 **Inclination:** VERTICAL **Datum:** AHD
Plant Type: JK205 **Bearing:** N/A **Logged/Checked By:** A.B./F.V.

Water Loss/Level	Barrel Lift	RL (m AHD)	Depth (m)	Graphic Log	CORE DESCRIPTION Rock Type, grain characteristics, colour, structure, minor components.	Weathering	Strength	POINT LOAD STRENGTH INDEX I _s (50)	DEFECT DETAILS				
									DEFECT SPACING (mm)	DESCRIPTION Type, inclination, thickness, planarity, roughness, coating.			
								EL-0.03 VL-0.1 L-0.3 M-1 H-3 VH-10 EH	500 300 100 80 60 40	Specific General			
					START CORING AT 4.33m								
			648		SANDSTONE: tuffaceous, fine to coarse grained gravel, light brown.	SW	L			(4.36m) XWS, 0°, 8 mm.t (4.43m) HEALED JOINT, 60°, P (4.47m) J, 50°, P, R (4.51m) J, 70°, P, S, IS (4.54m) J, 30°, P, R (4.57m) J, 30°, P, R (4.59m) FRAGMENTED ZONE, 0°, 40 mm.t (4.68m) J, 60°, P, S, IS (4.70m) J, 80°, P, S, IS (4.81m) Be, 0°, P, S (5.00m) J, 20°, P, S (5.02m) J, 40°, P, S, IS (5.09m) XWS, 10°, 5 mm.t (5.19m) J, 40 - 60°, Un, R (5.24m) J, 40°, P, S, IS (5.31m) J, 90°, P, S, IS (5.32m) J, 40°, P, S, IS (5.38m) J, 40°, P, R, IS (5.41m) J, 0°, P, R (5.45m) J, 50°, P, R (5.50m) J, 50°, P, R (5.60m) J, 60°, P, R (5.70m) J, 40°, P, S (5.80m) J, 40°, P, S (5.81m) J, 0°, P, S (5.87m) J, 20°, P, S, IS (5.90m) J, 40°, P, S, IS (5.95m) J, 60°, P, S, IS (6.04m) J, 80°, P, R (6.07m) J, 50°, P, S, IS (6.11m) J, 70°, P, S, IS (6.26m) J, 40°, P, S (6.30m) Be, 0°, P, S (6.46m) J, 60°, P, S (6.65m) J, 60°, P, S, IS (6.71m) Jx2, 60°, P, R, IS (6.84m) CS, 0°, 2 mm.t (6.95m) J, 60°, P, S (7.09m) J, 50°, P, R (7.15m) J, 30°, P, R, IS (7.21m) J, 20°, P, R, IS (7.28m) J, 80°, P, R, IS (7.40m) J, 20°, P, S, IS (7.43m) J, 20°, P, S, IS (7.50m) J, 60°, P, R, IS (7.62m) XWS, 0° (7.74m) J, 30°, P, R, IS (7.80m) J, 80°, P, S, IS (7.92m) J, 70°, P, S, IS			
			5										(8.11m) J, 90°, P, S, IS (8.28m) J, 80°, P, S, IS (8.42m) J, 80°, P, S, IS (8.50m) J, 40°, P, S, IS (8.57m) J, 60°, P, S, IS
			647										
			6										
			646										
			7							M			
			645										
			8										
			644										
			9					END OF BOREHOLE AT 8.92 m					
			643										
			10										
			642										

JK_LIB_CURRENT - V8.00.GLB Log J & K CORED BOREHOLE - MASTER_30116V2 GOULBURN.GPJ <-DrawingFile> 22/09/2017 15:22 Produced by gINT Professional. Developed by Daigel



Borehole No.
102
 1 / 2

BOREHOLE LOG

Client: HEALTH INFRASTRUCTURE
Project: PROPOSED HOSPITAL REDEVELOPMENT
Location: 130 GOLDSMITH STREET, GOULBURN, NSW

Job No.: 30116V2 **Method:** SPIRAL AUGER **R.L. Surface:** ~651.1 m
Date: 22/8/17 **Datum:** AHD
Plant Type: JK205 **Logged/Checked By:** A.B./F.V.

Groundwater Record	SAMPLES				Field Tests	RL (m AHD)	Depth (m)	Graphic Log	Unified Classification	DESCRIPTION	Moisture Condition/ Weathering	Strength/ Rel Density	Hand Penetrometer Readings (kPa)	Remarks
	ES	U50	DB	DS										
DRY ON COMPLETION OF AUGERING					N = 8 6,5,3	651	[Cross-hatched pattern]	CH	FILL: Silty clay, medium plasticity, dark brown, trace of roots.	MC>PL	(VSt - H)		GRASS COVER APPEARS MODERATELY COMPACTED HIGH 'TC' BIT RESISTANCE	
						650			FILL: Silty sand, fine to coarse grained, with fine to medium grained igneous gravel, trace of clay and brick fragments.	M				
					N=SPT 7/ 50mm REFUSAL	649	[Diagonal hatched pattern]		SILTY CLAY: high plasticity, light brown.	MC>PL			RESIDUAL	
					N > 9 14,9/ 50mm REFUSAL	648	[Dotted pattern]		SANDSTONE: tuffaceous, fine to coarse grained, light brown and orange brown, with silty clay seams and low strength seams.	XW	EL		VERY LOW RESISTANCE	
						647				XW - DW	EL - VL			
						646			SANDSTONE: tuffaceous, fine to coarse grained, brown, with ferruginous bands.	DW	L - M		LOW RESISTANCE	
													HIGH RESISTANCE	
						645			REFER TO CORED BOREHOLE LOG					

JK_LIB_CURRENT - V8.00.GLB Log J & K AUGERHOLE - MASTER 30116V2 GOULBURN.GPJ <<DrawingFiles>> 22/09/2017 15:22 Produced by gINT Professional. Developed by Datigel



Borehole No.
102
 2 / 2

CORED BOREHOLE LOG

Client: HEALTH INFRASTRUCTURE
Project: PROPOSED HOSPITAL REDEVELOPMENT
Location: 130 GOLDSMITH STREET, GOULBURN, NSW

Job No.: 30116V2 **Core Size:** NMLC **R.L. Surface:** ~651.1 m
Date: 22/8/17 **Inclination:** VERTICAL **Datum:** AHD
Plant Type: JK205 **Bearing:** N/A **Logged/Checked By:** A.B./F.V.

Water Loss Level Barrel Lift	RL (m AHD)	Depth (m)	Graphic Log	CORE DESCRIPTION Rock Type, grain characteristics, colour, structure, minor components.	Weathering	Strength	POINT LOAD STRENGTH INDEX I _s (50)	DEFECT DETAILS	
								DEFECT SPACING (mm)	DESCRIPTION Type, inclination, thickness, planarity, roughness, coating.
	646			START CORING AT 5.85m					
	645	6		CORE LOSS 1.25m					
100% RETURN	644	7		SANDSTONE: tuffaceous, fine to coarse grained, brown and light brown, with iron indurated bands.	DW	M			(7.16m) J, 40°, P, S (7.22m) J, 40°, P, S (7.30m) J, 40°, P, S (7.35m) J, 50°, P, S (7.40m) J, 90°, P, S (7.47m) XWS, 0°, 10 mm.t (7.58m) XWS, 0°, 10 mm.t (7.65m) J, 90°, P, R (7.70m) XWS, 0°, 8 mm.t (7.72m) J, 40°, P, S (7.76m) J, 0-40°, Un, R, IS (7.83m) J, 90°, P, S (7.90m) J, 60°, P, R (7.93m) XWS, 0°, 10 mm.t (8.00m) J, 60°, P, S, IS (8.07m) FRAGMENTED ZONE, 0°, 50 mm.t (8.10m) J, 90°, P, S, IS (8.23m) Be, 0°, P, R (8.30m) J, 30°, P, S (8.37m) J, 40°, P, S, IS (8.40m) J, 60°, P, S, IS (8.45m) XWS, 0°, 10 mm.t (8.49m) CS, 0°, 3 mm.t (8.58m) J, 60°, P, S, IS (8.65m) J, 40°, P, R, IS (8.69m) XWS, 0°, 20 mm.t (8.73m) J, 30°, P, R, IS (8.81m) XWS, 0°, 10 mm.t
	643	8							
	642	9		END OF BOREHOLE AT 8.82 m					
	641	10							
	640	11							

JK_LIB_CURRENT - V8.00.GLB Log J & K CORED BOREHOLE - MASTER 30116V2 GOULBURN.GPJ <-DrawingFile> 22/09/2017 15:22 Produced by gINT Professional. Developed by Daigel



Borehole No.
103
 1 / 2

BOREHOLE LOG

Client: HEALTH INFRASTRUCTURE
Project: PROPOSED HOSPITAL REDEVELOPMENT
Location: 130 GOLDSMITH STREET, GOULBURN, NSW

Job No.: 30116V2 **Method:** SPIRAL AUGER **R.L. Surface:** ~655.5 m
Date: 23/8/17 **Datum:** AHD
Plant Type: JK205 **Logged/Checked By:** A.B./F.V.

Groundwater Record	SAMPLES				Field Tests	RL (m AHD)	Depth (m)	Graphic Log	Unified Classification	DESCRIPTION	Moisture Condition/ Weathering	Strength/ Rel Density	Hand Penetrometer Readings (kPa)	Remarks
	ES	U50	DB	DS										
DRY ON COMPLETION OF AUGERING (Vertical bar with black segments)						655			FILL: Silty clay, medium plasticity, dark brown, trace of roots.	MC-PL				
					N = 32 9,16,16	655	1	CL	GRAVELLY CLAY: medium plasticity, light grey, fine to coarse grained ferruginous gravel.	MC<PL	H		TOO FRIABLE FOR HP TESTING	
					N = 20 6,9,11	654	2	CH	SILTY CLAY: high plasticity, light brown.	MC-PL		>600 >600 >600		
						653	3		SANDSTONE: tuffaceous, fine to coarse grained, light brown and light grey.	XW	EL		VERY LOW 'TC' BIT RESISTANCE	
						653	3		as above, but light brown and orange brown.	XW - DW	EL - VL			
						650	5							
						650				DW	L		LOW RESISTANCE	
						649	6		REFER TO CORED BOREHOLE LOG					

JK_LIB_CURRENT - V8.00.GLB Log J & K AUGERHOLE - MASTER 30116V2 GOULBURN.GPJ <-DrawingFiles> 22/09/2017 15:22 Produced by gINT Professional. Developed by Datagel



Borehole No.
103
 2 / 2

CORED BOREHOLE LOG

Client: HEALTH INFRASTRUCTURE
Project: PROPOSED HOSPITAL REDEVELOPMENT
Location: 130 GOLDSMITH STREET, GOULBURN, NSW

Job No.: 30116V2 **Core Size:** NMLC **R.L. Surface:** ~655.5 m
Date: 23/8/17 **Inclination:** VERTICAL **Datum:** AHD
Plant Type: JK205 **Bearing:** N/A **Logged/Checked By:** A.B./F.V.

Water Loss/Level Barrel Lift	RL (m AHD)	Depth (m)	Graphic Log	CORE DESCRIPTION Rock Type, grain characteristics, colour, structure, minor components.	Weathering	Strength	POINT LOAD STRENGTH INDEX I _s (50)	DEFECT DETAILS	
								DEFECT SPACING (mm)	DESCRIPTION Type, inclination, thickness, planarity, roughness, coating.
	650			START CORING AT 5.92m					
100% RETURN	649	6		SANDSTONE: tuffaceous, fine to coarse grained, orange brown.	DW	L			(6.02m) J, 90°, P, R, IS (6.10m) Be, 0°, P, R (6.17m) Be, 0°, P, R, IS (6.27m) Be, 0°, P, R, IS (6.43m) Be, 0°, P, R, IS (6.50m) J, 60°, P, R (6.61m) J, 80°, P, R, IS (6.76m) J, 30°, P, R, IS
80% RETURN	648	7		CLAYSTONE: light grey.	XW - DW	EL - VL			(7.33m) J, 40°, P, S, IS (7.42m) J, 70°, P, S (7.47m) J, 20°, P, S (7.49m) Be, 0°, P, S (7.54m) J, 60°, P, S (7.61m) J, 30°, P, S, IS (7.66m) J, 90°, P, R (7.71m) XWS, 0°, 5 mm.t
	647	8		CORE LOSS 0.07m CLAYSTONE: light grey. CORE LOSS 0.84m	DW	M - H			(8.50m) NOTE: DEFECTS NOT INDIVIDUALLY DESCRIBED BETWEEN 7.81 AND 9.33m ARE GENERALLY JOINTS, 40-90°. P, S, IS CAUSING FRACTURING OF CORE
	646	9		CLAYSTONE: light brown.	DW	H			
	645	10		END OF BOREHOLE AT 9.33 m	XW	EL			
	644	11							

JK_LIB_CURRENT - V8.00.GLB Log J & K CORED BOREHOLE - MASTER 30116V2 GOULBURN.GPJ <-DrawingFile> 22/09/2017 15:22 Produced by gINT Professional. Developed by Daigel



Borehole No.
104
 1 / 2

BOREHOLE LOG

Client: HEALTH INFRASTRUCTURE
Project: PROPOSED HOSPITAL REDEVELOPMENT
Location: 130 GOLDSMITH STREET, GOULBURN, NSW

Job No.: 30116V2 **Method:** SPIRAL AUGER **R.L. Surface:** ~653.1 m
Date: 23/8/17 **Datum:** AHD
Plant Type: JK205 **Logged/Checked By:** A.B./F.V.

Groundwater Record	SAMPLES				Field Tests	RL (m AHD)	Depth (m)	Graphic Log	Unified Classification	DESCRIPTION	Moisture Condition/ Weathering	Strength/ Rel Density	Hand Penetrometer Readings (kPa)	Remarks	
	ES	U50	DB	DS											
DRY ON COMPLETION OF AUGERING					N=SPT 5/ 20mm REFUSAL	653			CONCRETE: 110mm.t CL	FILL: Sand, fine to coarse grained, yellow brown. GRAVELLY CLAY: medium plasticity, brown, trace of fine to medium grained mudstone gravel. CLAYSTONE: light brown.	M MC~PL DW			POSSIBLY FILL MODERATE 'TC' BIT RESISTANCE	
						652	1								
							651	2							
						650	3			REFER TO CORED BOREHOLE LOG					
						649	4								
						648	5								
						647	6								

JK_LIB_CURRENT - V8.00.GLB Log J & K AUGERHOLE - MASTER 30116V2 GOULBURN.GPJ <<DrawingFiles>> 22/09/2017 15:22 Produced by gINT Professional. Developed by Datgel



Borehole No.
104
 2 / 2

CORED BOREHOLE LOG

Client: HEALTH INFRASTRUCTURE
Project: PROPOSED HOSPITAL REDEVELOPMENT
Location: 130 GOLDSMITH STREET, GOULBURN, NSW

Job No.: 30116V2 **Core Size:** NMLC **R.L. Surface:** ~653.1 m
Date: 23/8/17 **Inclination:** VERTICAL **Datum:** AHD
Plant Type: JK205 **Bearing:** N/A **Logged/Checked By:** A.B./F.V.

Water Loss/Level	Barrel Lift	RL (m AHD)	Depth (m)	Graphic Log	CORE DESCRIPTION Rock Type, grain characteristics, colour, structure, minor components.	Weathering	Strength	POINT LOAD STRENGTH INDEX I _s (50)	DEFECT DETAILS	
									DEFECT SPACING (mm)	DESCRIPTION Type, inclination, thickness, planarity, roughness, coating.
		651			START CORING AT 2.83m					
		650	3		CLAYSTONE: light brown.	SW	H			(2.84m) J, 30°, P, S, CLAY COATED (2.90m) J, 50°, P, S, IS (3.08m) J, 60°, P, S, CLAY COATED (3.10m) J, 10°, P, S, IS (3.15m) J, 80°, P, S (3.19m) CS, 0°, 30 mm.t (3.24m) J, 90°, P, S, IS (3.43m) J, 30°, P, S, IS
		649	4							(3.73m) J, 90°, P, S, IS (3.75m) J, 30°, P, S, IS (3.92m) J, 80°, P, S (3.97m) J, 40°, P, S (4.01m) J, 40°, P, S (4.04m) J, 40°, P, S, IS (4.12m) J, 90°, P, S, IS (4.20m) J, 10°, P, S, CLAY COATED (4.23m) J, 80°, P, S (4.28m) J, 90°, P, S, CLAY COATED (4.32m) FRAGMENTED ZONE, 0°, 50 mm.t (4.42m) J, 60°, CLAY COATED (4.46m) Be, 0°, P, R (4.53m) J, 20°, P, R (4.68m) J, 20°, P, S, IS
		648	5		as above, but with sandstone, fine grained, dark brown, cross bedded at 30°. CLAYSTONE: light brown.					(5.02m) J, 90°, P, S (5.09m) J, 30°, P, S (5.13m) J, 20°, P, S (5.23m) J, 20°, P, S, IS
		647	6							(5.43m) J, 20°, P, S, IS (5.49m) Be, 0°, P, S, IS (5.57m) J, 60°, P, S (5.68m) Be, 0°, P, R, IS (5.75m) J, 40°, P, S (5.84m) J, 30°, P, S, IS
		646	7		END OF BOREHOLE AT 6.81 m					(6.06m) J, 70°, P, R, IS (6.09m) J, 30°, P, R, IS (6.15m) Be, 0°, P, R, IS (6.19m) J, 80°, P, S, IS (6.31m) J, 30°, P, R (6.46m) J, 20°, P, S, IS (6.54m) Be, 0°, P, R (6.70m) XWS, 0°, 3 mm.t (6.75m) Jx2, 80°, P, S
		645	8							

JK_LIB_CURRENT - V8.00.GLB Log J & K CORED BOREHOLE - MASTER 30116V2 GOULBURN.GPJ <-DrawingFile>> 22/09/2017 15:22 Produced by gINT Professional. Developed by Daigel



Borehole No.
105
 1 / 1

BOREHOLE LOG

Client: HEALTH INFRASTRUCTURE
Project: PROPOSED HOSPITAL REDEVELOPMENT
Location: 130 GOLDSMITH STREET, GOULBURN, NSW

Job No.: 30116V2 **Method:** SPIRAL AUGER **R.L. Surface:** ~656.4 m
Date: 24/8/17 **Datum:** AHD
Plant Type: JK205 **Logged/Checked By:** A.B./F.V.

Groundwater Record	SAMPLES				Field Tests	RL (m AHD)	Depth (m)	Graphic Log	Unified Classification	DESCRIPTION	Moisture Condition/ Weathering	Strength/ Rel Density	Hand Penetrometer Readings (kPa)	Remarks	
	ES	U50	DB	DS											
DRY ON COMPLETION OF AUGERING						656			CH	ASPHALT SEAL SPRAY: 3mm.t over FILL: Silty clay, low plasticity, brown, with fine grained sand, trace of fine to medium grained igneous gravel. SILTY CLAY: high plasticity, dark brown.	MC<PL				
					N = 6 3,3,3					as above, but light brown.	MC>PL	VSt	380 450 460	RESIDUAL	
						655						H			
					N = 26 4,8,18										
						654					SANDSTONE: tuffaceous, fine to coarse grained, light brown, with ferruginous inclusions.	XW	EL	410 480	
											as above, but with low strength bands.	XW - DW	EL - VL		VERY LOW 'TC' BIT RESISTANCE
					653						DW	VL			
										END OF BOREHOLE AT 3.00 m					
						652									
						651									
						650									

JK_LIB_CURRENT - V8.00.GLB Log J & K AUGERHOLE - MASTER 30116V2 GOULBURN.GPJ <<DrawingFiles>> 22/09/2017 15:23 Produced by gINT Professional. Developed by Datagel



Borehole No.
106
 1 / 1

BOREHOLE LOG

Client: HEALTH INFRASTRUCTURE
Project: PROPOSED HOSPITAL REDEVELOPMENT
Location: 130 GOLDSMITH STREET, GOULBURN, NSW

Job No.: 30116V2 **Method:** SPIRAL AUGER **R.L. Surface:** ~657 m
Date: 24/8/17 **Datum:** AHD
Plant Type: JK205 **Logged/Checked By:** A.B./F.V.

Groundwater Record	SAMPLES				Field Tests	RL (m AHD)	Depth (m)	Graphic Log	Unified Classification	DESCRIPTION	Moisture Condition/ Weathering	Strength/ Rel Density	Hand Penetrometer Readings (kPa)	Remarks	
	ES	U50	DB	DS											
DRY ON COMPLETION									CH	FILL: Gravelly sand, fine to coarse grained, yellow brown, fine to coarse grained igneous gravel. SILTY CLAY: high plasticity, light brown mottled red brown.	M MC~PL	H	>600 >600 >600	RESIDUAL	
						656	1			CLAYSTONE: light brown and light grey.	XW - DW DW	EL - VL M			
						655	2					H		MODERATE TO HIGH 'TC' BIT RESISTANCE	
										END OF BOREHOLE AT 2.40 m					'TC' BIT REFUSAL
						654	3								
						653	4								
					652	5									
					651	6									

JK_LIB_CURRENT - V8.00.GLB Log J & K AUGERHOLE - MASTER 30116V2 GOULBURN.GPJ <<DrawingFiles>> 22/09/2017 15:23 Produced by gINT Professional. Developed by Datgel



Borehole No.
107
 1 / 1

BOREHOLE LOG

Client: HEALTH INFRASTRUCTURE
Project: PROPOSED HOSPITAL REDEVELOPMENT
Location: 130 GOLDSMITH STREET, GOULBURN, NSW

Job No.: 30116V2 **Method:** SPIRAL AUGER **R.L. Surface:** ~657.6 m
Date: 24/8/17 **Datum:** AHD
Plant Type: JK205 **Logged/Checked By:** A.B./F.V.

Groundwater Record	SAMPLES				Field Tests	RL (m AHD)	Depth (m)	Graphic Log	Unified Classification	DESCRIPTION	Moisture Condition/ Weathering	Strength/ Rel Density	Hand Penetrometer Readings (kPa)	Remarks
	ES	U50	DB	DS										
DRY ON COMPLETION & AFTER 5 HRS														GRASS COVER
					N > 15 7,15/ 150mm REFUSAL	657	1	GC	CLAYEY GRAVEL: fine to coarse grained, ferruginous gravel, silty clay, low plasticity, light brown.	MC<PL	D	MD - D		RESIDUAL
					N = 21 5,9,12	656	2	CL	GRAVELLY CLAY: medium to high plasticity, light brown, fine to coarse grained mudstone gravel, trace of medium to coarse grained quartz gravel.	MC<PL	H		>600 >600	
						655	3		CLAYSTONE/SILTSTONE: light brown and light grey.	DW	L			LOW 'TC' BIT RESISTANCE
						654	4							
						653	5		SILTSTONE: light grey.					
					652	6								
					651				END OF BOREHOLE AT 6.00 m					

JK_LIB_CURRENT - V8.00.GLB Log J & K AUGERHOLE - MASTER 30116V2 GOULBURN.GPJ <-DrawingFiles> 22/09/2017 15:23 Produced by gINT Professional. Developed by Datgel



Borehole No.
108
 1 / 1

BOREHOLE LOG

Client: HEALTH INFRASTRUCTURE
Project: PROPOSED HOSPITAL REDEVELOPMENT
Location: 130 GOLDSMITH STREET, GOULBURN, NSW

Job No.: 30116V2 **Method:** SPIRAL AUGER **R.L. Surface:** ~657.9 m
Date: 24/8/17 **Datum:** AHD
Plant Type: JK205 **Logged/Checked By:** A.B./F.V.

Groundwater Record	SAMPLES				Field Tests	RL (m AHD)	Depth (m)	Graphic Log	Unified Classification	DESCRIPTION	Moisture Condition/ Weathering	Strength/ Rel Density	Hand Penetrometer Readings (kPa)	Remarks
	ES	U50	DB	DS										
DRY ON COMPLETION OF AUGERING									ASPHALT SEAL SPRAY: 5mm.t over FILL: Gravelly sand, fine to coarse grained, light brown, with fine grained igneous gravel, trace of ash and slag.	M				
					N = 5 1,2,3	657	1	CL	SILTY CLAY: low plasticity, brown, with fine grained ferruginous gravel.	MC<PL	St	120	POSSIBLY FILL ?	
					N = 7 3,3,4	656	2	CH	SILTY CLAY: high plasticity, light brown.	MC>PL	VSt	300 310 270	RESIDUAL	
						655	3		CLAYSTONE/SILTSTONE: light brown and light grey.	DW	L H		LOW 'TC' BIT RESISTANCE	
						654	4		END OF BOREHOLE AT 3.00 m					
						653	5							
						652	6							
						651								

JK_LIB_CURRENT - V8.00.GLB Log J & K AUGERHOLE - MASTER 30116V2 GOULBURN.GPJ <<DrawingFiles>> 22/09/2017 15:23 Produced by gINT Professional. Developed by Datagel



Borehole No.
109
 1 / 1

BOREHOLE LOG

Client: HEALTH INFRASTRUCTURE
Project: PROPOSED HOSPITAL REDEVELOPMENT
Location: 130 GOLDSMITH STREET, GOULBURN, NSW

Job No.: 30116V2 **Method:** SPIRAL AUGER **R.L. Surface:** ~652.6 m
Date: 24/8/17 **Datum:** AHD
Plant Type: JK205 **Logged/Checked By:** A.B./F.V.

Groundwater Record	SAMPLES				Field Tests	RL (m AHD)	Depth (m)	Graphic Log	Unified Classification	DESCRIPTION	Moisture Condition/ Weathering	Strength/ Rel Density	Hand Penetrometer Readings (kPa)	Remarks	
	ES	U50	DB	DS											
DRY ON COMPLETION					N = 7 3,3,4	652	1		CL	ASPHALTIC CONCRETE: 30mm.t FILL: Gravelly clay, low plasticity, light brown, fine to medium grained igneous gravel, with fine to medium grained sand.	MC<PL				
									CH	SILTY CLAY: medium plasticity, brown, trace of fine grained ironstone gravel.	MC>PL	St	110 180	POSSIBLY FILL	
													H		RESIDUAL
														H	
					651				SILTSTONE: orange brown.	DW					
						2			END OF BOREHOLE AT 1.90 m						
						650									
						3									
						649									
						4									
						648									
						5									
						647									
						6									
						646									

JK_LIB_CURRENT - V8.00.GLB Log J & K AUGERHOLE - MASTER 30116V2 GOULBURN.GPJ <<DrawingFiles>> 22/09/2017 15:23 Produced by gINT Professional. Developed by Datgel



Borehole No.
110
 1 / 1

BOREHOLE LOG

Client: HEALTH INFRASTRUCTURE
Project: PROPOSED HOSPITAL REDEVELOPMENT
Location: 130 GOLDSMITH STREET, GOULBURN, NSW

Job No.: 30116V2 **Method:** SPIRAL AUGER **R.L. Surface:** ~651.5 m
Date: 24/8/17 **Datum:** AHD
Plant Type: JK205 **Logged/Checked By:** A.B./F.V.

Groundwater Record	SAMPLES				Field Tests	RL (m AHD)	Depth (m)	Graphic Log	Unified Classification	DESCRIPTION	Moisture Condition/ Weathering	Strength/ Rel Density	Hand Penetrometer Readings (kPa)	Remarks
	ES	U50	DB	DS										
DRY ON COMPLETION					N = 3 1,2,1	651	1			FILL: Silty sand, fine to coarse grained, dark grey and brown, with fine grained igneous gravel, trace of ash, slag and clay.	M			GRASS COVER APPEARS POORLY COMPACTED
					N = 18 0,8,10	650	2		-	SANDSTONE: fine grained, blue grey and light brown.	XW	EL		SPT SUNK 0.15m UNDER HAMMER WEIGHT
						649					DW	L		MODERATE 'TC' BIT RESISTANCE
						648	3			END OF BOREHOLE AT 3.00 m				
						647	4							
						646	5							
						645	6							

JK_LIB_CURRENT - V8.00.GLB Log J & K AUGERHOLE - MASTER 30116V2 GOULBURN.GPJ <<DrawingFiles>> 22/09/2017 15:23 Produced by gINT Professional. Developed by Datgel



Borehole No.
111
 1 / 1

BOREHOLE LOG

Client: HEALTH INFRASTRUCTURE
Project: PROPOSED HOSPITAL REDEVELOPMENT
Location: 130 GOLDSMITH STREET, GOULBURN, NSW

Job No.: 30116V2 **Method:** SPIRAL AUGER **R.L. Surface:** ~649.7 m
Date: 24/8/17 **Datum:** AHD
Plant Type: JK205 **Logged/Checked By:** A.B./F.V.

Groundwater Record	SAMPLES				Field Tests	RL (m AHD)	Depth (m)	Graphic Log	Unified Classification	DESCRIPTION	Moisture Condition/ Weathering	Strength/ Rel Density	Hand Penetrometer Readings (kPa)	Remarks
	ES	U50	DB	DS										
DRY ON COMPLETION 					N > 8 4.8/ 60mm REFUSAL	649	1		GC	ASPHALT SPRAY SEAL: 5mm.t over FILL: Gravel, fine to coarse grained, dark grey, with fine grained sand. FILL: Silty sand, fine to medium grained, grey brown, with fine to coarse grained sandstone, igneous and ironstone gravel, trace of ash and silty clay nodules.	D			APPEARS MODERATELY COMPACTED
					N > 12/ 50mm REFUSAL	648	2		GC	CLAYEY GRAVEL: fine to medium grained ferruginous gravel, light brown, low plasticity silty clay.	D	MD - D		
						647	3			SANDSTONE: tuffaceous, fine to coarse grained, orange brown.	XW	EL		
						646	4			CLAYSTONE: light brown.	DW	M		LOW TO MODERATE 'TC' BIT RESISTANCE
						645	5					H		HIGH RESISTANCE
						644	6				END OF BOREHOLE AT 6.00 m			
					643									

JK_LIB_CURRENT - V8.00.GLB Log J & K AUGERHOLE - MASTER 30116V2 GOULBURN.GPJ <<DrawingFiles>> 22/09/2017 15:23 Produced by gINT Professional. Developed by Datigel



Borehole No.
112
 1 / 1

BOREHOLE LOG

Client: HEALTH INFRASTRUCTURE
Project: PROPOSED HOSPITAL REDEVELOPMENT
Location: 130 GOLDSMITH STREET, GOULBURN, NSW

Job No.: 30116V2 **Method:** HAND AUGER **R.L. Surface:** ~653.3 m
Date: 24/8/17 **Datum:** AHD
Plant Type: **Logged/Checked By:** A.B./F.V.

Groundwater Record	SAMPLES				Field Tests	RL (m AHD)	Depth (m)	Graphic Log	Unified Classification	DESCRIPTION	Moisture Condition/ Weathering	Strength/ Rel Density	Hand Penetrometer Readings (kPa)	Remarks
	ES	U50	DB	DS										
DRY ON COMPLETION					REFER TO DCP TEST RESULTS	653			-	CONCRETE: 340mm.t				12mm DIA. REINFORCMENT, 290mm TOP COVER
									-	MUDSTONE COBBLE FILL: Silty clay, high plasticity, light brown, with fine to medium grained mudstone gravel.				APPEARS POORLY COMPACTED
										VOID END OF BOREHOLE AT 0.92 m				HAND AUGER REFUSAL
						652	1							
						651	2							
						650	3							
						649	4							
						648	5							
						647	6							

JK_LIB_CURRENT - V8.00.GLB Log J & K AUGERHOLE - MASTER 30116V2 GOULBURN.GPJ <<DrawingFiles>> 22/09/2017 15:23 Produced by gINT Professional. Developed by Datgel

EXPLANATORY NOTES – ENVIRONMENTAL LOGS

INTRODUCTION

These notes have been provided to supplement the environmental report with regards to drilling and field logging. Not all notes are necessarily relevant to all reports. Where geotechnical borehole logs are utilised for environmental purpose, reference should also be made to the explanatory notes included in the geotechnical report. Environmental logs are not suitable for geotechnical purposes.

The ground is a product of continuing natural and manmade processes and therefore exhibits a variety of characteristics and properties which vary from place to place and can change with time. Environmental studies involve gathering and assimilating limited facts about these characteristics and properties in order to understand the ground on a particular site under certain conditions. These conditions are directly relevant only to the ground at the place where, and time when, the investigation was carried out.

DESCRIPTION AND CLASSIFICATION METHODS

The methods of description and classification of soils and rocks used in this report are based on Australian Standard 1726, the SAA Site Investigation Code. In general, descriptions cover the following properties – soil or rock type, colour, structure, strength or density, and inclusions. Identification and classification of soil and rock involves judgement and the Company infers accuracy only to the extent that is common in current geotechnical practice.

Soil types are described according to the predominating particle size and behaviour as set out in the attached Unified Soil Classification Table qualified by the grading of other particles present (e.g. sandy clay) as set out below (note that unless stated in the report, the soil classification is based on a qualitative field assessment, not laboratory testing):

Soil Classification	Particle Size
Clay	less than 0.002mm
Silt	0.002 to 0.075mm
Sand	0.075 to 2mm
Gravel	2 to 60mm

Non-cohesive soils are classified on the basis of relative density, generally from the results of Standard Penetration Test (SPT) as below:

Relative Density	SPT 'N' Value (blows/300mm)
Very loose	less than 4
Loose	4 – 10
Medium dense	10 – 30
Dense	30 – 50
Very Dense	greater than 50

Cohesive soils are classified on the basis of strength (consistency) either by use of hand penetrometer, laboratory testing or engineering examination. The strength terms are defined as shown in the following table:

Classification	Unconfined Compressive Strength kPa
Very Soft	less than 25
Soft	25 – 50
Firm	50 – 100
Stiff	100 – 200
Very Stiff	200 – 400
Hard	Greater than 400
Friable	Strength not attainable – soil crumbles

Rock types are classified by their geological names, together with descriptive terms regarding weathering, strength, defects, etc. Where relevant, further information regarding rock classification is given in the text of the report. In the Sydney Basin, 'Shale' is used to describe thinly bedded to laminated siltstone.

DRILLING OR EXCAVATION METHODS

The following is a brief summary of drilling and excavation methods currently adopted by the Company, and some comments on their use and application. All except test pits and hand auger drilling require the use of a mechanical drilling rig.

Test Pits: These are normally excavated with a backhoe or a tracked excavator, allowing close examination of the in-situ soils if it is safe to descend into the pit. The depth of penetration is limited to approximately 3m for a backhoe and up to 6m for an excavator. Limitations of test pits include problems associated with disturbance and difficulty of reinstatement; and the consequent effects on nearby structures. Care must be taken if construction is to be carried out near test pit locations to either properly re-compact the backfill during construction, or to design and construct the structure so as not to be adversely affected by poorly compacted backfill at the test pit location.

Hand Auger Drilling: A borehole of 50mm to 100mm diameter is advanced by manually operated equipment. Premature refusal of the hand augers can occur on a variety of materials such as fill, hard clay, gravel or ironstone, and does not necessarily indicate rock level.

Continuous Spiral Flight Augers: The borehole is advanced using 75mm to 115mm diameter continuous spiral flight augers, which are withdrawn at intervals to allow sampling and in-situ testing. This is a relatively economical means of drilling in clays and in sands above the water table. Samples are returned to the surface by the flights or may be collected after withdrawal of the auger flights, but they can be very disturbed and layers may become mixed. Information from the auger sampling (as distinct from specific sampling by SPTs or undisturbed samples) is of relatively lower reliability due to mixing or softening of samples by groundwater, or uncertainties as to the original depth of the samples. Augering below the groundwater table is of even lesser reliability than augering above the water table.

Rock Augering: Use can be made of a Tungsten Carbide (TC) bit for auger drilling into rock to indicate rock quality and continuity by variation in drilling resistance and from examination of recovered rock fragments. This method of investigation is quick and relatively inexpensive but provides only an indication of the likely rock strength and predicted values may be in error by a strength order. Where rock strengths may have a significant impact on construction feasibility or costs, then further investigation by means of cored boreholes may be warranted.

Wash Boring: The borehole is usually advanced by a rotary bit, with water being pumped down the drill rods and returned up the annulus, carrying the drill cuttings. Only major changes in stratification can be determined from the cuttings, together with some information from "feel" and rate of penetration.

Mud Stabilised Drilling: Either Wash Boring or Continuous Core Drilling can use drilling mud as a circulating fluid to stabilise the borehole. The term 'mud' encompasses a range of products ranging from bentonite to polymers such as Revert or Biogel. The mud tends to mask the cuttings and reliable identification is only possible from intermittent intact sampling (e.g. from SPT and U50 samples) or from rock coring, etc.

Continuous Core Drilling: A continuous core sample is obtained using a diamond tipped core barrel. Provided full core recovery is achieved (which is not always possible in very low strength rocks and granular soils), this technique provides a very reliable (but relatively expensive) method of investigation. In rocks, an NMLC triple tube core barrel, which gives a core of about 50mm diameter, is usually used with water flush. The length of core recovered is compared to the length drilled and any length not recovered is shown as CORE LOSS. The locations of losses are determined on site by the supervising engineer; where the location is uncertain, the loss is placed at the top end of the drill run.

Standard Penetration Tests: Standard Penetration Tests (SPT) are used mainly in non-cohesive soils, but can also be used in cohesive soils as a means of indicating density or strength and also of obtaining a relatively undisturbed sample. The test procedure is described in Australian Standard 1289, "Methods of Testing Soils for Engineering Purposes" – Test F3.1.

The test is carried out in a borehole by driving a 50mm diameter split sample tube with a tapered shoe, under the impact of a 63kg hammer with a free fall of 760mm. It is normal for the tube to be driven in three successive 150mm increments and the 'N' value is taken as the number of blows for the last 300mm. In dense sands, very hard clays or weak rock, the full 450mm penetration may not be practicable and the test is discontinued.

The test results are reported in the following form:

- In the case where full penetration is obtained with successive blow counts for each 150mm of, say, 4, 6 and 7 blows, as: $N = 13 (4, 6, 7)$
- In a case where the test is discontinued short of full penetration, say after 15 blows for the first 150mm and 30 blows for the next 40mm, as: $N > 30 (15, 30/40\text{mm})$

The results of the test can be related empirically to the engineering properties of the soil. Occasionally, the drop hammer is used to drive 50mm diameter thin walled sample tubes (U50) in clays. In such circumstances, the test results are shown on the borehole logs in brackets.

A modification to the SPT test is where the same driving system is used with a solid 60 tipped steel cone of the same diameter as the SPT hollow sampler. The solid cone can be continuously driven for some distance in soft clays or loose sands, or may be used where damage would otherwise occur to the SPT. The results of this Solid Cone Penetration Test (SCPT) are shown as "Nc" on the borehole logs, together with the number of blows per 150mm penetration.

LOGS

The borehole or test pit logs presented herein are an interpretation of the subsurface conditions, and their reliability will depend to some extent on the frequency of sampling and the method of drilling or excavation. Ideally, continuous undisturbed sampling or core drilling will enable the most reliable assessment, but is not always practicable or possible to justify on economic grounds. In any case, the boreholes or test pits represent only a very small sample of the total subsurface conditions.

The attached explanatory notes define the terms and symbols used in preparation of the logs.

Interpretation of the information shown on the logs, and its application to design and construction, should therefore take into account the spacing of boreholes or test pits, the method of drilling or excavation, the frequency of sampling and testing and the possibility of other than "straight line"

variations between the boreholes or test pits. Subsurface conditions between boreholes or test pits may vary significantly from conditions encountered at the borehole or test pit locations.

GROUNDWATER

Where groundwater levels are measured in boreholes, there are several potential problems:

- Although groundwater may be present, in low permeability soils it may enter the hole slowly or perhaps not at all during the time it is left open;
- A localised perched water table may lead to an erroneous indication of the true water table;
- Water table levels will vary from time to time with seasons or recent weather changes and may not be the same at the time of construction; and
- The use of water or mud as a drilling fluid will mask any groundwater inflow. Water has to be blown out of the hole and drilling mud must be washed out of the hole or 'reverted' chemically if water observations are to be made.

More reliable measurements can be made by installing standpipes which are read after stabilising at intervals ranging from several days to perhaps weeks for low permeability soils. Piezometers, sealed in a particular stratum, may be advisable in low permeability soils or where there may be interference from perched water tables or surface water.

FILL

The presence of fill materials can often be determined only by the inclusion of foreign objects (e.g. bricks, concrete, plastic, slag/ash, steel etc) or by distinctly unusual colour, texture or fabric. Identification of the extent of fill materials will also depend on investigation methods and frequency. Where natural soils similar to those at the site are used for fill, it may be difficult with limited testing and sampling to reliably determine the extent of the fill.

The presence of fill materials is usually regarded with caution as the possible variation in density, strength and material type is much greater than with natural soil deposits. If the volume and quality of fill is of importance to a project, then frequent test pit excavations are preferable to boreholes

LABORATORY TESTING

Laboratory testing has not been undertaken to confirm the soil classifications and rocks strengths indicated on the environmental logs unless noted in the report.

SITE ANOMALIES


In the event that conditions encountered on site during construction appear to vary from those which were expected from the information contained in the report, EIS should be notified immediately.

GRAPHIC LOG SYMBOLS FOR SOIL AND ROCKS

SOIL	ROCK	DEFECTS AND INCLUSIONS
FILL	CONGLOMERATE	CLAY SEAM
TOPSOIL	SANDSTONE	SHEARED OR CRUSHED SEAM
CLAY (CL, CH)	SHALE	BRECCIATED OR SHATTERED SEAM/ZONE
SILT (ML, MH)	SILTSTONE, MUDSTONE, CLAYSTONE	IRONSTONE GRAVEL
SAND (SP, SW)	LIMESTONE	ORGANIC MATERIAL
GRAVEL (GP, GW)	PHYLLITE, SCHIST	OTHER MATERIALS
SANDY CLAY (CL, CH)	TUFF	CONCRETE
SILTY CLAY (CL, CH)	GRANITE, GABBRO	BITUMINOUS CONCRETE, COAL
CLAYEY SAND (SC)	DOLERITE, DIORITE	COLLUVIUM
SILTY SAND (SM)	BASALT, ANDESITE	
GRAVELLY CLAY (CL, CH)	QUARTZITE	
CLAYEY GRAVEL (GC)		
SANDY SILT (ML)		
PEAT AND ORGANIC SOILS		

Field Identification Procedures (Excluding particles larger than 75 µm and basing fractions on estimated weights)				Group Symbols &	Typical Names	Information Required for Describing Soils	Laboratory Classification Criteria			
Coarse-grained soils More than half of material is larger than 75 µm sieve size ^b More than half of coarse fraction is larger than 4 mm sieve size	Gravels More than half of coarse fraction is larger than 4 mm sieve size	Clean gravels (little or no fines)	Wide range in grain size and substantial amounts of all intermediate particle sizes	GW	Well graded gravels, gravel-sand mixtures, little or no fines	Give typical name; indicate approximate percentages of sand and gravel; maximum size; angularity, surface condition, and hardness of the coarse grains; local or geologic name and other pertinent descriptive information; and symbols in parentheses For undisturbed soils add information on stratification, degree of compactness, cementation, moisture conditions and drainage characteristics Example: <i>Silty sand</i> , gravelly; about 20% hard, angular gravel particles 12 mm maximum size; rounded and subangular sand grains coarse to fine, about 15% non-plastic fines with low dry strength; well compacted and moist in place; alluvial sand; (<i>SM</i>)	$C_U = \frac{D_{60}}{D_{10}} \text{ Greater than } 4$ $C_C = \frac{(D_{30})^2}{D_{10} \times D_{60}} \text{ Between } 1 \text{ and } 3$			
			Predominantly one size or a range of sizes with some intermediate sizes missing	GP	Poorly graded gravels, gravel-sand mixtures, little or no fines			Not meeting all gradation requirements for <i>GW</i> Atterberg limits below "A" line, or <i>PI</i> less than 4 Atterberg limits above "A" line, with <i>PI</i> greater than 7		
		Gravels with fines (appreciable amount of fines)	Nonplastic fines (for identification procedures see <i>ML</i> below)	GM	Silty gravels, poorly graded gravel-sand-silt mixtures					
			Plastic fines (for identification procedures, see <i>CL</i> below)	GC	Clayey gravels, poorly graded gravel-sand-clay mixtures					
	Sands More than half of coarse fraction is smaller than 4 mm sieve size	Clean sands (little or no fines)	Wide range in grain sizes and substantial amounts of all intermediate particle sizes	SW	Well graded sands, gravelly sands, little or no fines		$C_U = \frac{D_{60}}{D_{10}} \text{ Greater than } 6$ $C_C = \frac{(D_{30})^2}{D_{10} \times D_{60}} \text{ Between } 1 \text{ and } 3$			
			Predominantly one size or a range of sizes with some intermediate sizes missing	SP	Poorly graded sands, gravelly sands, little or no fines			Not meeting all gradation requirements for <i>SW</i> Atterberg limits below "A" line or <i>PI</i> less than 5 Atterberg limits below "A" line with <i>PI</i> greater than 7		
		Sands with fines (appreciable amount of fines)	Nonplastic fines (for identification procedures, see <i>ML</i> below)	SM	Silty sands, poorly graded sand-silt mixtures					
			Plastic fines (for identification procedures, see <i>CL</i> below)	SC	Clayey sands, poorly graded sand-clay mixtures					
Fine-grained soils More than half of material is smaller than 75 µm sieve size (The 75 µm sieve size is about the smallest particle visible to naked eye)	Identification Procedures on Fraction Smaller than 380 µm Sieve Size									
	Silt and clays liquid limit less than 50	Dry Strength (crushing characteristics)	Dilatancy (reaction to shaking)	Toughness (consistency near plastic limit)	None to slight	Quick to slow	None	<i>ML</i>	Inorganic silts and very fine sands, rock flour, silty or clayey fine sands with slight plasticity	Give typical name; indicate degree and character of plasticity, amount and maximum size of coarse grains; colour in wet condition, odour if any, local or geologic name, and other pertinent descriptive information, and symbol in parentheses For undisturbed soils add information on structure, stratification, consistency in undisturbed and remoulded states, moisture and drainage conditions Example: <i>Clayey silt</i> , brown; slightly plastic; small percentage of fine sand; numerous vertical root holes; firm and dry in place; loess; (<i>ML</i>)
					Medium to high	None to very slow	Medium	<i>CL</i>	Inorganic clays of low to medium plasticity, gravelly clays, sandy clays, silty clays, lean clays	
		Slight to medium	Slow	Slight	<i>OL</i>	Organic silts and organic silt-clays of low plasticity				
		Slight to medium	Slow to none	Slight to medium	<i>MH</i>	Inorganic silts, micaceous or diatomaceous fine sandy or silty soils, elastic silts				
		High to very high	None	High	<i>CH</i>	Inorganic clays of high plasticity, fat clays				
		Medium to high	None to very slow	Slight to medium	<i>OH</i>	Organic clays of medium to high plasticity				
	Silt and clays liquid limit greater than 50	Readily identified by colour, odour, spongy feel and frequently by fibrous texture			<i>Pt</i>	Peat and other highly organic soils				

Determine percentages of gravel and sand from grain size curve
Depending on percentage of fines (fraction smaller than 75 µm sieve size) coarse grained soils are classified as follows:
Less than 5% GW, GP, SW, SP
More than 5% to 12% GM, GC, SM, SC
Borderline cases requiring use of dual symbols

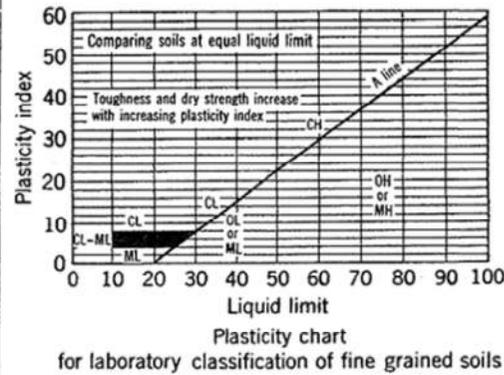

Note: 1 Soils possessing characteristics of two groups are designated by combinations of group symbols (eg. GW-GC, well graded gravel-sand mixture with clay fines).
2 Soils with liquid limits of the order of 35 to 50 may be visually classified as being of medium plasticity.

LOG SYMBOLS

LOG COLUMN	SYMBOL	DEFINITION	
Groundwater Record		Standing water level. Time delay following completion of drilling may be shown.	
		Extent of borehole collapse shortly after drilling.	
		Groundwater seepage into borehole or excavation noted during drilling or excavation.	
Samples	ES	Soil sample taken over depth indicated, for environmental analysis.	
	U50	Undisturbed 50mm diameter tube sample taken over depth indicated.	
	DB	Bulk disturbed sample taken over depth indicated.	
	DS	Small disturbed bag sample taken over depth indicated.	
	ASB	Soil sample taken over depth indicated, for asbestos screening.	
	ASS	Soil sample taken over depth indicated, for acid sulfate soil analysis.	
	SAL	Soil sample taken over depth indicated, for salinity analysis.	
Field Tests	N = 17 4, 7, 10	Standard Penetration Test (SPT) performed between depths indicated by lines. Individual show blows per 150mm penetration. 'R' as noted below.	
	N _c =	5	Solid Cone Penetration Test (SCPT) performed between depths indicated by lines. Individual figures show blows per 150mm penetration for 60 degree solid cone driven by SPT hammer. 'R' refers to apparent hammer refusal within the corresponding 150mm depth increment.
		7	
		3 R	
VNS = 25 PID = 100	Vane shear reading in kPa of Undrained Shear Strength. Photoionisation detector reading in ppm (Soil sample heads pace test).		
Moisture (Cohesive Soils) (Cohesionless)	MC > PL	Moisture content estimated to be greater than plastic limit.	
	MC ≈ PL	Moisture content estimated to be approximately equal to plastic limit.	
	MC < PL	Moisture content estimated to be less than plastic limit.	
	D	DRY – Runs freely through fingers.	
	M	MOIST – Does not run freely but no free water visible on soil surface.	
	W	WET – Free water visible on soil surface.	
Strength (Consistency) Cohesive Soils	VS	VERY SOFT – Unconfined compressive strength less than 25kPa	
	S	SOFT – Unconfined compressive strength 25-50kPa	
	F	FIRM – Unconfined compressive strength 50-100kPa	
	St	STIFF – Unconfined compressive strength 100- 200kPa	
	VSt	VERY STIFF – Unconfined compressive strength 200- 400kPa	
	H	HARD – Unconfined compressive strength greater than 400kPa	
	()	Bracketed symbol indicates estimated consistency based on tactile examination or other tests.	
Density Index/ Relative Density (Cohesionless Soils)	VL	Density Index (ID) Range (%) Very Loose < 15	
	L	Loose 15-35	
	MD	Medium Dense 35-65	
	D	Dense 65-85	
	VD	Very Dense > 85	
	()	Bracketed symbol indicates estimated density based on ease of drilling or other tests.	
Hand Penetrometer Readings	300	Numbers indicate individual test results in kPa on representative undisturbed material unless noted otherwise	
	250		
Remarks	'V' bit	Hardened steel 'V' shaped bit.	
	'TC' bit	Tungsten carbide wing bit.	
	T ₆₀	Penetration of auger string in mm under static load of rig applied by drill head hydraulics without rotation of augers.	

LOG SYMBOLS CONTINUED

ROCK STRENGTH

Rock strength is defined by the Point Load Strength Index (Is 50) and refers to the strength of the rock substance in the bedding. The test procedure is described by the International Journal of Rock Mechanics, Mining and Geomechanics Abstract Volume 22, No 2, 1985.

TERM	SYMBOL	Is (50) MPa	FIELD GUIDE
Extremely Low:	EL	0.03	Easily remoulded by hand to a material with soil properties.
Very Low:	VL		May be crumbled in the hand. Sandstone is "sugary" and friable.
Low:	L	0.1	A piece of core 150 mm long x 50mm dia. may be broken by hand and easily scored with a knife. Sharp edges of core may be friable and break during handling.
Medium Strength:	M	0.3	A piece of core 150 mm long x 50mm dia. can be broken by hand with difficulty. Readily scored with knife.
High:	H	1	A piece of core 150 mm long x 50mm dia. core cannot be broken by hand, can be slightly scratched or scored with knife; rock rings under hammer.
Very High:	VH	3	A piece of core 150 mm long x 50mm dia. may be broken with hand-held pick after more than one blow. Cannot be scratched with pen knife; rock rings under hammer.
Extremely High:	EH	10	A piece of core 150 mm long x 50mm dia. is very difficult to break with hand-held hammer. Rings when struck with a hammer.

ROCK STRENGTH

ABBREVIATION	DESCRIPTION	NOTES
Be	Bedding Plane Parting	Defect orientations measured relative to the normal to (i.e. relative to horizontal for vertical holes)
CS	Clay Seam	
J	Joint	
P	Planar	
Un	Undulating	
S	Smooth	
R	Rough	
IS	Iron stained	
XWS	Extremely Weathered Seam	
Cr	Crushed Seam	
60t	Thickness of defect in millimetres	

Appendix C: Laboratory Reports & COC Documents

SAMPLE RECEIPT ADVICE

Client Details	
Client	Environmental Investigation Services
Attention	K Taylor, A Billingham

Sample Login Details	
Your Reference	E30116K, Goulburn
Envirolab Reference	161238
Date Sample Received	02/02/2017
Date Instructions Received	02/02/2017
Date Results Expected to be Reported	09/02/2017

Sample Condition	
Samples received in appropriate condition for analysis	YES
No. of Samples Provided	26 soils
Turnaround Time Requested	Standard
Temperature on receipt (°C)	12.1
Cooling Method	Ice
Sampling Date Provided	YES

Comments
Samples will be held for 1 month for water samples and 2 months for soil samples from date of receipt of samples

Please direct any queries to:

Aileen Hie	Jacinta Hurst
Phone: 02 9910 6200	Phone: 02 9910 6200
Fax: 02 9910 6201	Fax: 02 9910 6201
Email: ahie@envirolabservices.com.au	Email: jhurst@envirolabservices.com.au

Sample and Testing Details on following page

Sample Id	VTRH(C6-C10)/BTEXN in Soil	svTRH (C10-C40) in Soil	PAHs in Soil	Organochlorine Pesticides in soil	Organophosphorus Pesticides	PCBs in Soil	Acid Extractable metals in soil	Asbestos ID - soils	On Hold
BH1-0.1-0.2	✓	✓	✓	✓	✓	✓	✓	✓	
BH1-0.5-0.95									✓
BH1-1.5-1.95	✓	✓	✓				✓		
BH2-0.1-0.2	✓	✓	✓	✓	✓	✓	✓	✓	
BH2-0.7-0.95	✓	✓	✓				✓		
BH3-0.1-0.2	✓	✓	✓	✓	✓	✓	✓	✓	
BH3-0.5-0.95	✓	✓	✓				✓		
BH4-0-0.2	✓	✓	✓	✓	✓	✓	✓	✓	
BH4-0.5-0.95	✓	✓	✓				✓		
BH5-0.2-0.4	✓	✓	✓	✓	✓	✓	✓	✓	
BH5-1.25-1.35	✓	✓	✓				✓		
BH6-0-0.15	✓	✓	✓	✓	✓	✓	✓	✓	
BH6-0.2-0.3									✓
BH6-0.5-0.75	✓	✓	✓				✓		
BH7-0-0.15	✓	✓	✓	✓	✓	✓	✓	✓	
BH7-0.2-0.3									✓
BH7-0.5-0.65	✓	✓	✓				✓		
BH8-0-0.15	✓	✓	✓	✓	✓	✓	✓	✓	
BH8-1.0-1.2									✓
BH8-2.0-2.2	✓	✓	✓				✓		
BH9-0-0.2	✓	✓	✓	✓	✓	✓	✓	✓	
BH9-0.5-0.7	✓	✓	✓				✓		
DUPKT1	✓	✓	✓				✓		
TB	✓								
BH7 (EXTRA)-0.2-0.3									✓
BH8-0.4-0.6									✓

The '✓' indicates the testing you have requested. **THIS IS NOT A REPORT OF THE RESULTS.**

SAMPLE AND CHAIN OF CUSTODY FORM



TO: ENVIROLAB SERVICES PTY LTD 12 ASHLEY STREET CHATSWOOD NSW 2067 P: (02) 99106200 F: (02) 99106201 Attention: Aileen	EIS Job Number: E30116K Date Results Required: STANDARD Page: 1 of 1	FROM: ENVIRONMENTAL INVESTIGATION SERVICES REAR OF 115 WICKS ROAD MACQUARIE PARK, NSW 2113 P: 02-9888 5000 F: 02-9888 5001 Attention: ktaylor@jkgroup.net.au
---	--	--

Location: Goulburn Sampler: K.Taylor & A.Billingham	Sample Preserved in Esky on Ice Tests Required
--	---

Date Sampled	Lab Ref:	Sample Number	Depth (m)	Sample Container	PID	Sample Description	Combo 6a	Combo 3	BTEX											
3/1	1	BH1	0.1-0.2	G, A	0	Fill	X													
	2	↓	0.5-0.95	GA		Fill														
	3	↓	1.5-1.95	G		Nat		X												
	4	BH2	0.1-0.2	GA		fill	X													
	5	↓	0.7-0.95	G		Nat		X												
	6	BH3	0.1-0.2	GA		fill	X													
	7	↓	0.5-0.95	G		Nat		X												
	8	BH4	0-0.2	GA		fill	X													
	9	↓	0.5-0.95	G		Nat		X												
	10	BH5	0.2-0.4	GA		fill	X													
	11	↓	1.25-1.35	G	↓	Nat		X												
	12	BH6	0-0.15	GA	0.8	fill	X													
	13	↓	0.2-0.3	GA	0	Nat														
	14	↓	0.5-0.75	G	0	Nat		X												
	15	BH7	0-0.15	GA	1.1	fill	X													
	16	↓	0.2-0.3	GA	0	fill														
	17	↓	0.5-0.65	G	0	Nat		X												
	18	BH8	0-0.15	GA	0.5	fill	X													
	19	↓	1.0-1.2	GA	0	fill														
	20	↓	2.0-2.2	G	0	Nat		X												
	21	BH9	0-0.2	GA	0.6	fill	X													
	22	↓	0.5-0.7	G	0	Nat.		X												
	23	DUPKT1	-	G	-	fill		X												
	24	TB	-	G	-	Sand.			X											

EnviroLab Services
 12 Ashley St
 Chatswood NSW 2067
 Ph: (02) 9910 6200
 Job No: 161238
 Date Received: 2/2/17
 Time Received: 17:50
 Received by: R
 Temp: Cool/Ambient
 Cooling: Ice/Icepack
 Security: Intact/Broken/None

Remarks (comments/detection limits required):	Sample Containers: G - 250mg Glass Jar A - Ziplock Asbestos Bag P - Plastic Bag
--	---

Relinquished By: extra	Date:	Time: 17:50	Received By: PR	Date: 3/2/17
----------------------------------	--------------	-----------------------	---------------------------	------------------------

25 BH 7 0.2 - 0.3 (doesn't match jar/sai)
 26 BH 8 0.4 - 0.6
 - BH



12 Ashley Street, Chatswood, NSW 2067
tel: +61 2 9910 6200

email: sydney@envirolab.com.au
envirolab.com.au

Envirolab Services Pty Ltd - Sydney | ABN 37 112 535 645

CERTIFICATE OF ANALYSIS

161238

Client:

Environmental Investigation Services

PO Box 976
North Ryde BC
NSW 1670

Attention: K Taylor, A Billingham

Sample log in details:

Your Reference:	<u>E30116K, Goulburn</u>
No. of samples:	26 soils
Date samples received / completed instructions received	02/02/17 / 02/02/17

Analysis Details:

Please refer to the following pages for results, methodology summary and quality control data. Samples were analysed as received from the client. Results relate specifically to the samples as received. Results are reported on a dry weight basis for solids and on an as received basis for other matrices.

Please refer to the last page of this report for any comments relating to the results.

Report Details:

Date results requested by: / Issue Date:	9/02/17 / 9/02/17
Date of Preliminary Report:	Not Issued

NATA accreditation number 2901. This document shall not be reproduced except in full.

Accredited for compliance with ISO/IEC 17025 - Testing **Tests not covered by NATA are denoted with *.**

Results Approved By:

David Springer
General Manager

Envirolab Reference: 161238
Revision No: R 00



vTRH(C6-C10)/BTEXN in Soil Our Reference: Your Reference	UNITS ----- -	161238-1 BH1	161238-3 BH1	161238-4 BH2	161238-5 BH2	161238-6 BH3
Depth	-----	0.1-0.2	1.5-1.95	0.1-0.2	0.7-0.95	0.1-0.2
Date Sampled		31/01/2017	31/01/2017	31/01/2017	31/01/2017	31/01/2017
Type of sample		Soil	Soil	Soil	Soil	Soil
Date extracted	-	06/02/2017	06/02/2017	06/02/2017	06/02/2017	06/02/2017
Date analysed	-	07/02/2017	07/02/2017	07/02/2017	07/02/2017	07/02/2017
TRHC ₆ - C ₉	mg/kg	<25	<25	<25	<25	<25
TRHC ₆ - C ₁₀	mg/kg	<25	<25	<25	<25	<25
vTPHC ₆ - C ₁₀ less BTEX (F1)	mg/kg	<25	<25	<25	<25	<25
Benzene	mg/kg	<0.2	<0.2	<0.2	<0.2	<0.2
Toluene	mg/kg	<0.5	<0.5	<0.5	<0.5	<0.5
Ethylbenzene	mg/kg	<1	<1	<1	<1	<1
m+p-xylene	mg/kg	<2	<2	<2	<2	<2
o-Xylene	mg/kg	<1	<1	<1	<1	<1
Total +ve Xylenes	mg/kg	<1	<1	<1	<1	<1
naphthalene	mg/kg	<1	<1	<1	<1	<1
Surrogate aaa-Trifluorotoluene	%	95	94	94	70	97

vTRH(C6-C10)/BTEXN in Soil Our Reference: Your Reference	UNITS ----- -	161238-7 BH3	161238-8 BH4	161238-9 BH4	161238-10 BH5	161238-11 BH5
Depth	-----	0.5-0.95	0-0.2	0.5-0.95	0.2-0.4	1.25-1.35
Date Sampled		31/01/2017	31/01/2017	31/01/2017	31/01/2017	31/01/2017
Type of sample		Soil	Soil	Soil	Soil	Soil
Date extracted	-	06/02/2017	06/02/2017	06/02/2017	06/02/2017	06/02/2017
Date analysed	-	07/02/2017	07/02/2017	07/02/2017	07/02/2017	07/02/2017
TRHC ₆ - C ₉	mg/kg	<25	<25	<25	<25	<25
TRHC ₆ - C ₁₀	mg/kg	<25	<25	<25	<25	<25
vTPHC ₆ - C ₁₀ less BTEX (F1)	mg/kg	<25	<25	<25	<25	<25
Benzene	mg/kg	<0.2	<0.2	<0.2	<0.2	<0.2
Toluene	mg/kg	<0.5	<0.5	<0.5	<0.5	<0.5
Ethylbenzene	mg/kg	<1	<1	<1	<1	<1
m+p-xylene	mg/kg	<2	<2	<2	<2	<2
o-Xylene	mg/kg	<1	<1	<1	<1	<1
Total +ve Xylenes	mg/kg	<1	<1	<1	<1	<1
naphthalene	mg/kg	<1	<1	<1	<1	<1
Surrogate aaa-Trifluorotoluene	%	92	96	91	96	88

vTRH(C6-C10)/BTEXn in Soil Our Reference: Your Reference	UNITS ----- -	161238-12 BH6	161238-14 BH6	161238-15 BH7	161238-17 BH7	161238-18 BH8
Depth	-----	0-0.15	0.5-0.75	0-0.15	0.5-0.65	0-0.15
Date Sampled		31/01/2017	31/01/2017	31/01/2017	31/01/2017	31/01/2017
Type of sample		Soil	Soil	Soil	Soil	Soil
Date extracted	-	06/02/2017	06/02/2017	06/02/2017	06/02/2017	06/02/2017
Date analysed	-	07/02/2017	07/02/2017	07/02/2017	07/02/2017	07/02/2017
TRHC ₆ - C ₉	mg/kg	<25	<25	<25	<25	<25
TRHC ₆ - C ₁₀	mg/kg	<25	<25	<25	<25	<25
vTPHC ₆ - C ₁₀ less BTEX (F1)	mg/kg	<25	<25	<25	<25	<25
Benzene	mg/kg	<0.2	<0.2	<0.2	<0.2	<0.2
Toluene	mg/kg	<0.5	<0.5	<0.5	<0.5	<0.5
Ethylbenzene	mg/kg	<1	<1	<1	<1	<1
m+p-xylene	mg/kg	<2	<2	<2	<2	<2
o-Xylene	mg/kg	<1	<1	<1	<1	<1
Total +ve Xylenes	mg/kg	<1	<1	<1	<1	<1
naphthalene	mg/kg	<1	<1	<1	<1	<1
Surrogate aaa-Trifluorotoluene	%	97	97	86	83	87

vTRH(C6-C10)/BTEXn in Soil Our Reference: Your Reference	UNITS ----- -	161238-20 BH8	161238-21 BH9	161238-22 BH9	161238-23 DUPKT1	161238-24 TB
Depth	-----	2.0-2.2	0-0.2	0.5-0.7	-	-
Date Sampled		31/01/2017	31/01/2017	31/01/2017	31/01/2017	31/01/2017
Type of sample		Soil	Soil	Soil	Soil	Soil
Date extracted	-	06/02/2017	06/02/2017	06/02/2017	06/02/2017	06/02/2017
Date analysed	-	07/02/2017	07/02/2017	07/02/2017	07/02/2017	07/02/2017
TRHC ₆ - C ₉	mg/kg	<25	<25	<25	<25	<25
TRHC ₆ - C ₁₀	mg/kg	<25	<25	<25	<25	<25
vTPHC ₆ - C ₁₀ less BTEX (F1)	mg/kg	<25	<25	<25	<25	<25
Benzene	mg/kg	<0.2	<0.2	<0.2	<0.2	<0.2
Toluene	mg/kg	<0.5	<0.5	<0.5	<0.5	<0.5
Ethylbenzene	mg/kg	<1	<1	<1	<1	<1
m+p-xylene	mg/kg	<2	<2	<2	<2	<2
o-Xylene	mg/kg	<1	<1	<1	<1	<1
Total +ve Xylenes	mg/kg	<1	<1	<1	<1	<1
naphthalene	mg/kg	<1	<1	<1	<1	<1
Surrogate aaa-Trifluorotoluene	%	84	90	89	92	92

svTRH (C10-C40) in Soil Our Reference: Your Reference	UNITS ----- -	161238-1 BH1	161238-3 BH1	161238-4 BH2	161238-5 BH2	161238-6 BH3
Depth	-----	0.1-0.2	1.5-1.95	0.1-0.2	0.7-0.95	0.1-0.2
Date Sampled		31/01/2017	31/01/2017	31/01/2017	31/01/2017	31/01/2017
Type of sample		Soil	Soil	Soil	Soil	Soil
Date extracted	-	06/02/2017	06/02/2017	06/02/2017	06/02/2017	06/02/2017
Date analysed	-	08/02/2017	08/02/2017	08/02/2017	08/02/2017	08/02/2017
TRHC ₁₀ - C ₁₄	mg/kg	<50	<50	<50	<50	<50
TRHC ₁₅ - C ₂₈	mg/kg	<100	<100	<100	<100	<100
TRHC ₂₉ - C ₃₆	mg/kg	<100	<100	<100	<100	<100
TRH>C ₁₀ -C ₁₆	mg/kg	<50	<50	<50	<50	<50
TRH>C ₁₀ - C ₁₆ less Naphthalene (F2)	mg/kg	<50	<50	<50	<50	<50
TRH>C ₁₆ -C ₃₄	mg/kg	<100	<100	<100	<100	<100
TRH>C ₃₄ -C ₄₀	mg/kg	<100	<100	<100	<100	<100
Total +ve TRH (>C ₁₀ -C ₄₀)	mg/kg	<50	<50	<50	<50	<50
Surrogate o-Terphenyl	%	108	108	105	103	104

svTRH (C10-C40) in Soil Our Reference: Your Reference	UNITS ----- -	161238-7 BH3	161238-8 BH4	161238-9 BH4	161238-10 BH5	161238-11 BH5
Depth	-----	0.5-0.95	0-0.2	0.5-0.95	0.2-0.4	1.25-1.35
Date Sampled		31/01/2017	31/01/2017	31/01/2017	31/01/2017	31/01/2017
Type of sample		Soil	Soil	Soil	Soil	Soil
Date extracted	-	06/02/2017	06/02/2017	06/02/2017	06/02/2017	06/02/2017
Date analysed	-	08/02/2017	08/02/2017	08/02/2017	08/02/2017	08/02/2017
TRHC ₁₀ - C ₁₄	mg/kg	<50	<50	<50	<50	<50
TRHC ₁₅ - C ₂₈	mg/kg	<100	<100	<100	<100	<100
TRHC ₂₉ - C ₃₆	mg/kg	<100	<100	<100	<100	<100
TRH>C ₁₀ -C ₁₆	mg/kg	<50	<50	<50	<50	<50
TRH>C ₁₀ - C ₁₆ less Naphthalene (F2)	mg/kg	<50	<50	<50	<50	<50
TRH>C ₁₆ -C ₃₄	mg/kg	<100	<100	<100	<100	<100
TRH>C ₃₄ -C ₄₀	mg/kg	<100	<100	<100	<100	<100
Total +ve TRH (>C ₁₀ -C ₄₀)	mg/kg	<50	<50	<50	<50	<50
Surrogate o-Terphenyl	%	106	103	103	102	101

Client Reference: E30116K, Goulburn

svTRH (C10-C40) in Soil Our Reference: Your Reference	UNITS ----- -	161238-12 BH6	161238-14 BH6	161238-15 BH7	161238-17 BH7	161238-18 BH8
Depth	-----	0-0.15	0.5-0.75	0-0.15	0.5-0.65	0-0.15
Date Sampled		31/01/2017	31/01/2017	31/01/2017	31/01/2017	31/01/2017
Type of sample		Soil	Soil	Soil	Soil	Soil
Date extracted	-	06/02/2017	06/02/2017	06/02/2017	06/02/2017	06/02/2017
Date analysed	-	08/02/2017	08/02/2017	08/02/2017	08/02/2017	08/02/2017
TRHC ₁₀ - C ₁₄	mg/kg	<50	<50	<50	<50	<50
TRHC ₁₅ - C ₂₈	mg/kg	<100	<100	<100	<100	<100
TRHC ₂₉ - C ₃₆	mg/kg	<100	<100	110	<100	<100
TRH>C ₁₀ -C ₁₆	mg/kg	<50	<50	<50	<50	<50
TRH>C ₁₀ - C ₁₆ less Naphthalene (F2)	mg/kg	<50	<50	<50	<50	<50
TRH>C ₁₆ -C ₃₄	mg/kg	<100	<100	110	<100	<100
TRH>C ₃₄ -C ₄₀	mg/kg	<100	<100	<100	<100	<100
Total +ve TRH (>C ₁₀ -C ₄₀)	mg/kg	<50	<50	110	<50	<50
Surrogate o-Terphenyl	%	101	99	106	103	102

svTRH (C10-C40) in Soil Our Reference: Your Reference	UNITS ----- -	161238-20 BH8	161238-21 BH9	161238-22 BH9	161238-23 DUPKT1
Depth	-----	2.0-2.2	0-0.2	0.5-0.7	-
Date Sampled		31/01/2017	31/01/2017	31/01/2017	31/01/2017
Type of sample		Soil	Soil	Soil	Soil
Date extracted	-	06/02/2017	06/02/2017	06/02/2017	06/02/2017
Date analysed	-	08/02/2017	08/02/2017	08/02/2017	08/02/2017
TRHC ₁₀ - C ₁₄	mg/kg	<50	<50	<50	<50
TRHC ₁₅ - C ₂₈	mg/kg	<100	<100	<100	<100
TRHC ₂₉ - C ₃₆	mg/kg	<100	<100	<100	<100
TRH>C ₁₀ -C ₁₆	mg/kg	<50	<50	<50	<50
TRH>C ₁₀ - C ₁₆ less Naphthalene (F2)	mg/kg	<50	<50	<50	<50
TRH>C ₁₆ -C ₃₄	mg/kg	<100	<100	<100	<100
TRH>C ₃₄ -C ₄₀	mg/kg	<100	<100	<100	<100
Total +ve TRH (>C ₁₀ -C ₄₀)	mg/kg	<50	<50	<50	<50
Surrogate o-Terphenyl	%	101	100	103	102

PAHs in Soil Our Reference: Your Reference	UNITS ----- -	161238-1 BH1	161238-3 BH1	161238-4 BH2	161238-5 BH2	161238-6 BH3
Depth	-----	0.1-0.2	1.5-1.95	0.1-0.2	0.7-0.95	0.1-0.2
Date Sampled		31/01/2017	31/01/2017	31/01/2017	31/01/2017	31/01/2017
Type of sample		Soil	Soil	Soil	Soil	Soil
Date extracted	-	06/02/2017	06/02/2017	06/02/2017	06/02/2017	06/02/2017
Date analysed	-	07/02/2017	07/02/2017	07/02/2017	07/02/2017	07/02/2017
Naphthalene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Acenaphthylene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Acenaphthene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Fluorene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Phenanthrene	mg/kg	<0.1	<0.1	<0.1	<0.1	0.1
Anthracene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Fluoranthene	mg/kg	<0.1	<0.1	<0.1	<0.1	0.3
Pyrene	mg/kg	<0.1	<0.1	<0.1	<0.1	0.3
Benzo(a)anthracene	mg/kg	<0.1	<0.1	<0.1	<0.1	0.2
Chrysene	mg/kg	<0.1	<0.1	<0.1	<0.1	0.2
Benzo(b,j+k)fluoranthene	mg/kg	<0.2	<0.2	<0.2	<0.2	0.3
Benzo(a)pyrene	mg/kg	<0.05	<0.05	<0.05	<0.05	0.2
Indeno(1,2,3-c,d)pyrene	mg/kg	<0.1	<0.1	<0.1	<0.1	0.1
Dibenzo(a,h)anthracene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Benzo(g,h,i)perylene	mg/kg	<0.1	<0.1	<0.1	<0.1	0.1
Benzo(a)pyrene TEQ calc (zero)	mg/kg	<0.5	<0.5	<0.5	<0.5	<0.5
Benzo(a)pyrene TEQ calc(half)	mg/kg	<0.5	<0.5	<0.5	<0.5	<0.5
Benzo(a)pyrene TEQ calc(PQL)	mg/kg	<0.5	<0.5	<0.5	<0.5	<0.5
Total +ve PAH's	mg/kg	<0.05	<0.05	<0.05	<0.05	1.9
Surrogate p-Terphenyl-d14	%	101	101	96	105	94

PAHs in Soil Our Reference: Your Reference	UNITS ----- -	161238-7 BH3	161238-8 BH4	161238-9 BH4	161238-10 BH5	161238-11 BH5
Depth	-----	0.5-0.95	0-0.2	0.5-0.95	0.2-0.4	1.25-1.35
Date Sampled		31/01/2017	31/01/2017	31/01/2017	31/01/2017	31/01/2017
Type of sample		Soil	Soil	Soil	Soil	Soil
Date extracted	-	06/02/2017	06/02/2017	06/02/2017	06/02/2017	06/02/2017
Date analysed	-	07/02/2017	07/02/2017	07/02/2017	07/02/2017	07/02/2017
Naphthalene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Acenaphthylene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Acenaphthene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Fluorene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Phenanthrene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Anthracene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Fluoranthene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Pyrene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Benzo(a)anthracene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Chrysene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Benzo(b,j+k)fluoranthene	mg/kg	<0.2	<0.2	<0.2	<0.2	<0.2
Benzo(a)pyrene	mg/kg	<0.05	<0.05	<0.05	<0.05	<0.05
Indeno(1,2,3-c,d)pyrene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Dibenzo(a,h)anthracene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Benzo(g,h,i)perylene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Benzo(a)pyrene TEQ calc (zero)	mg/kg	<0.5	<0.5	<0.5	<0.5	<0.5
Benzo(a)pyrene TEQ calc(half)	mg/kg	<0.5	<0.5	<0.5	<0.5	<0.5
Benzo(a)pyrene TEQ calc(PQL)	mg/kg	<0.5	<0.5	<0.5	<0.5	<0.5
Total +ve PAH's	mg/kg	<0.05	<0.05	<0.05	<0.05	<0.05
Surrogate p-Terphenyl-d14	%	103	94	96	92	109

PAHs in Soil Our Reference: Your Reference	UNITS ----- -	161238-12 BH6	161238-14 BH6	161238-15 BH7	161238-17 BH7	161238-18 BH8
Depth	-----	0-0.15	0.5-0.75	0-0.15	0.5-0.65	0-0.15
Date Sampled		31/01/2017	31/01/2017	31/01/2017	31/01/2017	31/01/2017
Type of sample		Soil	Soil	Soil	Soil	Soil
Date extracted	-	06/02/2017	06/02/2017	06/02/2017	06/02/2017	06/02/2017
Date analysed	-	07/02/2017	07/02/2017	07/02/2017	07/02/2017	07/02/2017
Naphthalene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Acenaphthylene	mg/kg	<0.1	<0.1	0.2	<0.1	<0.1
Acenaphthene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Fluorene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Phenanthrene	mg/kg	<0.1	<0.1	0.2	0.1	0.2
Anthracene	mg/kg	<0.1	<0.1	0.1	<0.1	<0.1
Fluoranthene	mg/kg	<0.1	<0.1	0.5	0.2	0.3
Pyrene	mg/kg	<0.1	<0.1	0.6	0.2	0.4
Benzo(a)anthracene	mg/kg	<0.1	<0.1	0.3	<0.1	0.2
Chrysene	mg/kg	<0.1	<0.1	0.3	0.1	0.2
Benzo(b,j+k)fluoranthene	mg/kg	<0.2	<0.2	0.5	<0.2	0.3
Benzo(a)pyrene	mg/kg	<0.05	<0.05	0.3	0.06	0.1
Indeno(1,2,3-c,d)pyrene	mg/kg	<0.1	<0.1	0.2	<0.1	<0.1
Dibenzo(a,h)anthracene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Benzo(g,h,i)perylene	mg/kg	<0.1	<0.1	0.2	<0.1	0.1
Benzo(a)pyrene TEQ calc (zero)	mg/kg	<0.5	<0.5	<0.5	<0.5	<0.5
Benzo(a)pyrene TEQ calc(half)	mg/kg	<0.5	<0.5	<0.5	<0.5	<0.5
Benzo(a)pyrene TEQ calc(PQL)	mg/kg	<0.5	<0.5	<0.5	<0.5	<0.5
Total +ve PAH's	mg/kg	<0.05	<0.05	3.4	0.67	1.8
Surrogate <i>p</i> -Terphenyl-d14	%	92	98	103	99	100

PAHs in Soil Our Reference: Your Reference	UNITS ----- -	161238-20 BH8	161238-21 BH9	161238-22 BH9	161238-23 DUPKT1
Depth	-----	2.0-2.2	0-0.2	0.5-0.7	-
Date Sampled		31/01/2017	31/01/2017	31/01/2017	31/01/2017
Type of sample		Soil	Soil	Soil	Soil
Date extracted	-	06/02/2017	06/02/2017	06/02/2017	06/02/2017
Date analysed	-	07/02/2017	07/02/2017	07/02/2017	07/02/2017
Naphthalene	mg/kg	<0.1	<0.1	<0.1	<0.1
Acenaphthylene	mg/kg	<0.1	0.2	<0.1	<0.1
Acenaphthene	mg/kg	<0.1	<0.1	<0.1	<0.1
Fluorene	mg/kg	<0.1	<0.1	<0.1	<0.1
Phenanthrene	mg/kg	<0.1	0.3	<0.1	<0.1
Anthracene	mg/kg	<0.1	0.2	<0.1	<0.1
Fluoranthene	mg/kg	<0.1	0.8	<0.1	<0.1
Pyrene	mg/kg	<0.1	0.8	<0.1	<0.1
Benzo(a)anthracene	mg/kg	<0.1	0.3	<0.1	<0.1
Chrysene	mg/kg	<0.1	0.4	<0.1	<0.1
Benzo(b,j+k)fluoranthene	mg/kg	<0.2	0.7	<0.2	<0.2
Benzo(a)pyrene	mg/kg	<0.05	0.4	<0.05	<0.05
Indeno(1,2,3-c,d)pyrene	mg/kg	<0.1	0.2	<0.1	<0.1
Dibenzo(a,h)anthracene	mg/kg	<0.1	<0.1	<0.1	<0.1
Benzo(g,h,i)perylene	mg/kg	<0.1	0.2	<0.1	<0.1
Benzo(a)pyrene TEQ calc (zero)	mg/kg	<0.5	0.5	<0.5	<0.5
Benzo(a)pyrene TEQ calc(half)	mg/kg	<0.5	0.5	<0.5	<0.5
Benzo(a)pyrene TEQ calc(PQL)	mg/kg	<0.5	0.5	<0.5	<0.5
Total +ve PAH's	mg/kg	<0.05	4.5	<0.05	<0.05
Surrogate p-Terphenyl-d14	%	105	97	96	92

Organochlorine Pesticides in soil	UNITS	161238-1	161238-4	161238-6	161238-8	161238-10
Our Reference:	-----	BH1	BH2	BH3	BH4	BH5
Your Reference	-					
Depth	-----	0.1-0.2	0.1-0.2	0.1-0.2	0-0.2	0.2-0.4
Date Sampled		31/01/2017	31/01/2017	31/01/2017	31/01/2017	31/01/2017
Type of sample		Soil	Soil	Soil	Soil	Soil
Date extracted	-	06/02/2017	06/02/2017	06/02/2017	06/02/2017	06/02/2017
Date analysed	-	08/02/2017	08/02/2017	08/02/2017	08/02/2017	08/02/2017
HCB	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
alpha-BHC	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
gamma-BHC	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
beta-BHC	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Heptachlor	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
delta-BHC	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Aldrin	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Heptachlor Epoxide	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
gamma-Chlordane	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
alpha-chlordane	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Endosulfan I	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
pp-DDE	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Dieldrin	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Endrin	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
pp-DDD	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Endosulfan II	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
pp-DDT	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Endrin Aldehyde	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Endosulfan Sulphate	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Methoxychlor	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Total+ve DDT+DDD+DDE	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Surrogate TCMX	%	118	114	115	117	112

Organochlorine Pesticides in soil	UNITS	161238-12	161238-15	161238-18	161238-21
Our Reference:	-----	BH6	BH7	BH8	BH9
Your Reference	-				
Depth	-----	0-0.15	0-0.15	0-0.15	0-0.2
Date Sampled		31/01/2017	31/01/2017	31/01/2017	31/01/2017
Type of sample		Soil	Soil	Soil	Soil
Date extracted	-	06/02/2017	06/02/2017	06/02/2017	06/02/2017
Date analysed	-	08/02/2017	08/02/2017	08/02/2017	08/02/2017
HCB	mg/kg	<0.1	<0.1	<0.1	<0.1
alpha-BHC	mg/kg	<0.1	<0.1	<0.1	<0.1
gamma-BHC	mg/kg	<0.1	<0.1	<0.1	<0.1
beta-BHC	mg/kg	<0.1	<0.1	<0.1	<0.1
Heptachlor	mg/kg	<0.1	<0.1	<0.1	<0.1
delta-BHC	mg/kg	<0.1	<0.1	<0.1	<0.1
Aldrin	mg/kg	<0.1	<0.1	<0.1	<0.1
Heptachlor Epoxide	mg/kg	<0.1	<0.1	<0.1	<0.1
gamma-Chlordane	mg/kg	<0.1	<0.1	<0.1	<0.1
alpha-chlordane	mg/kg	<0.1	<0.1	<0.1	<0.1
Endosulfan I	mg/kg	<0.1	<0.1	<0.1	<0.1
pp-DDE	mg/kg	<0.1	<0.1	<0.1	<0.1
Dieldrin	mg/kg	<0.1	<0.1	<0.1	<0.1
Endrin	mg/kg	<0.1	<0.1	<0.1	<0.1
pp-DDD	mg/kg	<0.1	<0.1	<0.1	<0.1
Endosulfan II	mg/kg	<0.1	<0.1	<0.1	<0.1
pp-DDT	mg/kg	<0.1	<0.1	<0.1	<0.1
Endrin Aldehyde	mg/kg	<0.1	<0.1	<0.1	<0.1
Endosulfan Sulphate	mg/kg	<0.1	<0.1	<0.1	<0.1
Methoxychlor	mg/kg	<0.1	<0.1	<0.1	<0.1
Total +ve DDT+DDD+DDE	mg/kg	<0.1	<0.1	<0.1	<0.1
Surrogate TCMX	%	109	113	113	108

Organophosphorus Pesticides	UNITS	161238-1	161238-4	161238-6	161238-8	161238-10
Our Reference:	-----	BH1	BH2	BH3	BH4	BH5
Your Reference	-					
Depth	-----	0.1-0.2	0.1-0.2	0.1-0.2	0-0.2	0.2-0.4
Date Sampled		31/01/2017	31/01/2017	31/01/2017	31/01/2017	31/01/2017
Type of sample		Soil	Soil	Soil	Soil	Soil
Date extracted	-	06/02/2017	06/02/2017	06/02/2017	06/02/2017	06/02/2017
Date analysed	-	08/02/2017	08/02/2017	08/02/2017	08/02/2017	08/02/2017
Azinphos-methyl (Guthion)	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Bromophos-ethyl	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Chlorpyriphos	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Chlorpyriphos-methyl	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Diazinon	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Dichlorvos	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Dimethoate	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Ethion	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Fenitrothion	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Malathion	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Parathion	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Ronnel	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Surrogate TCMX	%	118	114	115	117	112

Organophosphorus Pesticides	UNITS	161238-12	161238-15	161238-18	161238-21
Our Reference:	-----	BH6	BH7	BH8	BH9
Your Reference	-				
Depth	-----	0-0.15	0-0.15	0-0.15	0-0.2
Date Sampled		31/01/2017	31/01/2017	31/01/2017	31/01/2017
Type of sample		Soil	Soil	Soil	Soil
Date extracted	-	06/02/2017	06/02/2017	06/02/2017	06/02/2017
Date analysed	-	08/02/2017	08/02/2017	08/02/2017	08/02/2017
Azinphos-methyl (Guthion)	mg/kg	<0.1	<0.1	<0.1	<0.1
Bromophos-ethyl	mg/kg	<0.1	<0.1	<0.1	<0.1
Chlorpyriphos	mg/kg	<0.1	<0.1	<0.1	<0.1
Chlorpyriphos-methyl	mg/kg	<0.1	<0.1	<0.1	<0.1
Diazinon	mg/kg	<0.1	<0.1	<0.1	<0.1
Dichlorvos	mg/kg	<0.1	<0.1	<0.1	<0.1
Dimethoate	mg/kg	<0.1	<0.1	<0.1	<0.1
Ethion	mg/kg	<0.1	<0.1	<0.1	<0.1
Fenitrothion	mg/kg	<0.1	<0.1	<0.1	<0.1
Malathion	mg/kg	<0.1	<0.1	<0.1	<0.1
Parathion	mg/kg	<0.1	<0.1	<0.1	<0.1
Ronnel	mg/kg	<0.1	<0.1	<0.1	<0.1
Surrogate TCMX	%	109	113	113	108

Client Reference: E30116K, Goulburn

PCBs in Soil Our Reference: Your Reference	UNITS ----- -	161238-1 BH1	161238-4 BH2	161238-6 BH3	161238-8 BH4	161238-10 BH5
Depth	-----	0.1-0.2	0.1-0.2	0.1-0.2	0-0.2	0.2-0.4
Date Sampled		31/01/2017	31/01/2017	31/01/2017	31/01/2017	31/01/2017
Type of sample		Soil	Soil	Soil	Soil	Soil
Date extracted	-	06/02/2017	06/02/2017	06/02/2017	06/02/2017	06/02/2017
Date analysed	-	08/02/2017	08/02/2017	08/02/2017	08/02/2017	08/02/2017
Aroclor 1016	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Aroclor 1221	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Aroclor 1232	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Aroclor 1242	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Aroclor 1248	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Aroclor 1254	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Aroclor 1260	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Total +ve PCBs (1016-1260)	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Surrogate TCLMX	%	118	114	115	117	112

PCBs in Soil Our Reference: Your Reference	UNITS ----- -	161238-12 BH6	161238-15 BH7	161238-18 BH8	161238-21 BH9
Depth	-----	0-0.15	0-0.15	0-0.15	0-0.2
Date Sampled		31/01/2017	31/01/2017	31/01/2017	31/01/2017
Type of sample		Soil	Soil	Soil	Soil
Date extracted	-	06/02/2017	06/02/2017	06/02/2017	06/02/2017
Date analysed	-	08/02/2017	08/02/2017	08/02/2017	08/02/2017
Aroclor 1016	mg/kg	<0.1	<0.1	<0.1	<0.1
Aroclor 1221	mg/kg	<0.1	<0.1	<0.1	<0.1
Aroclor 1232	mg/kg	<0.1	<0.1	<0.1	<0.1
Aroclor 1242	mg/kg	<0.1	<0.1	<0.1	<0.1
Aroclor 1248	mg/kg	<0.1	<0.1	<0.1	<0.1
Aroclor 1254	mg/kg	<0.1	<0.1	<0.1	<0.1
Aroclor 1260	mg/kg	<0.1	<0.1	<0.1	<0.1
Total +ve PCBs (1016-1260)	mg/kg	<0.1	<0.1	<0.1	<0.1
Surrogate TCLMX	%	109	113	113	108

Client Reference: E30116K, Goulburn

Acid Extractable metals in soil Our Reference: Your Reference	UNITS ----- -	161238-1 BH1	161238-3 BH1	161238-4 BH2	161238-5 BH2	161238-6 BH3
Depth	-----	0.1-0.2	1.5-1.95	0.1-0.2	0.7-0.95	0.1-0.2
Date Sampled		31/01/2017	31/01/2017	31/01/2017	31/01/2017	31/01/2017
Type of sample		Soil	Soil	Soil	Soil	Soil
Date prepared	-	06/02/2017	06/02/2017	06/02/2017	06/02/2017	06/02/2017
Date analysed	-	06/02/2017	06/02/2017	06/02/2017	06/02/2017	06/02/2017
Arsenic	mg/kg	11	4	16	5	29
Cadmium	mg/kg	<0.4	<0.4	<0.4	<0.4	<0.4
Chromium	mg/kg	9	58	5	94	37
Copper	mg/kg	76	35	48	20	12
Lead	mg/kg	4	8	3	18	65
Mercury	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Nickel	mg/kg	3	34	2	24	9
Zinc	mg/kg	1	51	2	14	40

Acid Extractable metals in soil Our Reference: Your Reference	UNITS ----- -	161238-7 BH3	161238-8 BH4	161238-9 BH4	161238-10 BH5	161238-11 BH5
Depth	-----	0.5-0.95	0-0.2	0.5-0.95	0.2-0.4	1.25-1.35
Date Sampled		31/01/2017	31/01/2017	31/01/2017	31/01/2017	31/01/2017
Type of sample		Soil	Soil	Soil	Soil	Soil
Date prepared	-	06/02/2017	06/02/2017	06/02/2017	06/02/2017	06/02/2017
Date analysed	-	06/02/2017	06/02/2017	06/02/2017	06/02/2017	06/02/2017
Arsenic	mg/kg	7	26	4	19	5
Cadmium	mg/kg	<0.4	<0.4	<0.4	<0.4	<0.4
Chromium	mg/kg	38	39	28	7	56
Copper	mg/kg	15	56	18	89	32
Lead	mg/kg	7	54	10	3	10
Mercury	mg/kg	<0.1	0.2	<0.1	<0.1	<0.1
Nickel	mg/kg	12	15	9	1	29
Zinc	mg/kg	12	120	18	2	35

Client Reference: E30116K, Goulburn

Acid Extractable metals in soil Our Reference: Your Reference	UNITS ----- -	161238-12 BH6	161238-14 BH6	161238-15 BH7	161238-17 BH7	161238-18 BH8
Depth	-----	0-0.15	0.5-0.75	0-0.15	0.5-0.65	0-0.15
Date Sampled		31/01/2017	31/01/2017	31/01/2017	31/01/2017	31/01/2017
Type of sample		Soil	Soil	Soil	Soil	Soil
Date prepared	-	06/02/2017	06/02/2017	06/02/2017	06/02/2017	06/02/2017
Date analysed	-	06/02/2017	06/02/2017	06/02/2017	06/02/2017	06/02/2017
Arsenic	mg/kg	34	8	5	<4	13
Cadmium	mg/kg	<0.4	<0.4	<0.4	<0.4	<0.4
Chromium	mg/kg	40	28	27	68	42
Copper	mg/kg	37	18	17	12	21
Lead	mg/kg	36	13	37	21	20
Mercury	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Nickel	mg/kg	21	8	9	10	8
Zinc	mg/kg	74	17	93	16	13

Acid Extractable metals in soil Our Reference: Your Reference	UNITS ----- -	161238-20 BH8	161238-21 BH9	161238-22 BH9	161238-23 DUPKT1	161238-27 BH9 - [TRIPLICATE]
Depth	-----	2.0-2.2	0-0.2	0.5-0.7	-	0.5-0.7
Date Sampled		31/01/2017	31/01/2017	31/01/2017	31/01/2017	31/01/2017
Type of sample		Soil	Soil	Soil	Soil	Soil
Date prepared	-	06/02/2017	06/02/2017	06/02/2017	06/02/2017	06/02/2017
Date analysed	-	06/02/2017	06/02/2017	06/02/2017	06/02/2017	06/02/2017
Arsenic	mg/kg	<4	<4	<4	15	<4
Cadmium	mg/kg	<0.4	<0.4	<0.4	<0.4	<0.4
Chromium	mg/kg	55	46	58	7	33
Copper	mg/kg	20	17	26	40	15
Lead	mg/kg	9	23	10	5	5
Mercury	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Nickel	mg/kg	25	16	26	2	16
Zinc	mg/kg	21	18	17	3	10

Client Reference: E30116K, Goulburn

Moisture Our Reference: Your Reference	UNITS ----- -	161238-1 BH1	161238-3 BH1	161238-4 BH2	161238-5 BH2	161238-6 BH3
Depth Date Sampled Type of sample	----- -----	0.1-0.2 31/01/2017 Soil	1.5-1.95 31/01/2017 Soil	0.1-0.2 31/01/2017 Soil	0.7-0.95 31/01/2017 Soil	0.1-0.2 31/01/2017 Soil
Date prepared	-	06/02/2017	06/02/2017	06/02/2017	06/02/2017	06/02/2017
Date analysed	-	07/02/2017	07/02/2017	07/02/2017	07/02/2017	07/02/2017
Moisture	%	5.5	23	4.5	18	6.1

Moisture Our Reference: Your Reference	UNITS ----- -	161238-7 BH3	161238-8 BH4	161238-9 BH4	161238-10 BH5	161238-11 BH5
Depth Date Sampled Type of sample	----- -----	0.5-0.95 31/01/2017 Soil	0-0.2 31/01/2017 Soil	0.5-0.95 31/01/2017 Soil	0.2-0.4 31/01/2017 Soil	1.25-1.35 31/01/2017 Soil
Date prepared	-	06/02/2017	06/02/2017	06/02/2017	06/02/2017	06/02/2017
Date analysed	-	07/02/2017	07/02/2017	07/02/2017	07/02/2017	07/02/2017
Moisture	%	15	8.8	24	6.1	21

Moisture Our Reference: Your Reference	UNITS ----- -	161238-12 BH6	161238-14 BH6	161238-15 BH7	161238-17 BH7	161238-18 BH8
Depth Date Sampled Type of sample	----- -----	0-0.15 31/01/2017 Soil	0.5-0.75 31/01/2017 Soil	0-0.15 31/01/2017 Soil	0.5-0.65 31/01/2017 Soil	0-0.15 31/01/2017 Soil
Date prepared	-	06/02/2017	06/02/2017	06/02/2017	06/02/2017	06/02/2017
Date analysed	-	07/02/2017	07/02/2017	07/02/2017	07/02/2017	07/02/2017
Moisture	%	7.5	12	5.8	5.9	6.8

Moisture Our Reference: Your Reference	UNITS ----- -	161238-20 BH8	161238-21 BH9	161238-22 BH9	161238-23 DUPKT1
Depth Date Sampled Type of sample	----- -----	2.0-2.2 31/01/2017 Soil	0-0.2 31/01/2017 Soil	0.5-0.7 31/01/2017 Soil	- 31/01/2017 Soil
Date prepared	-	06/02/2017	06/02/2017	06/02/2017	06/02/2017
Date analysed	-	07/02/2017	07/02/2017	07/02/2017	07/02/2017
Moisture	%	22	14	20	3.8

Client Reference: E30116K, Goulburn

Asbestos ID - soils Our Reference: Your Reference	UNITS ----- -	161238-1 BH1	161238-4 BH2	161238-6 BH3	161238-8 BH4	161238-10 BH5
Depth	-----	0.1-0.2	0.1-0.2	0.1-0.2	0-0.2	0.2-0.4
Date Sampled		31/01/2017	31/01/2017	31/01/2017	31/01/2017	31/01/2017
Type of sample		Soil	Soil	Soil	Soil	Soil
Date analysed	-	7/02/2017	7/02/2017	7/02/2017	7/02/2017	7/02/2017
Sample mass tested	g	Approx. 40g	Approx. 35g	Approx. 30g	Approx. 35g	Approx. 35g
Sample Description	-	Beige coarse-grained soil & rocks	Beige coarse-grained soil & rocks	Brown coarse-grained soil & rocks	Brown coarse-grained soil & rocks	Brown coarse-grained soil & rocks
Asbestos ID in soil	-	No asbestos detected at reporting limit of 0.1g/kg Organic fibres detected	No asbestos detected at reporting limit of 0.1g/kg Organic fibres detected	No asbestos detected at reporting limit of 0.1g/kg Organic fibres detected	No asbestos detected at reporting limit of 0.1g/kg Organic fibres detected	No asbestos detected at reporting limit of 0.1g/kg Organic fibres detected
Trace Analysis	-	No asbestos detected				

Asbestos ID - soils Our Reference: Your Reference	UNITS ----- -	161238-12 BH6	161238-15 BH7	161238-18 BH8	161238-21 BH9
Depth	-----	0-0.15	0-0.15	0-0.15	0-0.2
Date Sampled		31/01/2017	31/01/2017	31/01/2017	31/01/2017
Type of sample		Soil	Soil	Soil	Soil
Date analysed	-	7/02/2017	7/02/2017	7/02/2017	7/02/2017
Sample mass tested	g	Approx. 30g	Approx. 30g	Approx. 30g	Approx. 25g
Sample Description	-	Brown coarse-grained soil & rocks			
Asbestos ID in soil	-	No asbestos detected at reporting limit of 0.1g/kg Organic fibres detected	No asbestos detected at reporting limit of 0.1g/kg Organic fibres detected	No asbestos detected at reporting limit of 0.1g/kg Organic fibres detected	No asbestos detected at reporting limit of 0.1g/kg Organic fibres detected
Trace Analysis	-	No asbestos detected	No asbestos detected	No asbestos detected	No asbestos detected

MethodID	Methodology Summary
Org-016	Soil samples are extracted with methanol and spiked into water prior to analysing by purge and trap GC-MS. Water samples are analysed directly by purge and trap GC-MS. F1 = (C6-C10)-BTEX as per NEPM B1 Guideline on Investigation Levels for Soil and Groundwater.
Org-016	Soil samples are extracted with methanol and spiked into water prior to analysing by purge and trap GC-MS. Water samples are analysed directly by purge and trap GC-MS. F1 = (C6-C10)-BTEX as per NEPM B1 Guideline on Investigation Levels for Soil and Groundwater. Note, the Total +ve Xylene PQL is reflective of the lowest individual PQL and is therefore "Total +ve Xylenes" is simply a sum of the positive individual Xylenes.
Org-014	Soil samples are extracted with methanol and spiked into water prior to analysing by purge and trap GC-MS.
Org-003	Soil samples are extracted with Dichloromethane/Acetone and waters with Dichloromethane and analysed by GC-FID. F2 = (>C10-C16)-Naphthalene as per NEPM B1 Guideline on Investigation Levels for Soil and Groundwater (HSLs Tables 1A (3, 4)). Note Naphthalene is determined from the VOC analysis.
Org-003	Soil samples are extracted with Dichloromethane/Acetone and waters with Dichloromethane and analysed by GC-FID. F2 = (>C10-C16)-Naphthalene as per NEPM B1 Guideline on Investigation Levels for Soil and Groundwater (HSLs Tables 1A (3, 4)). Note Naphthalene is determined from the VOC analysis. Note, the Total +ve TRH PQL is reflective of the lowest individual PQL and is therefore "Total +ve TRH" is simply a sum of the positive individual TRH fractions (>C10-C40).
Org-012	Soil samples are extracted with Dichloromethane/Acetone and waters with Dichloromethane and analysed by GC-MS. Benzo(a)pyrene TEQ as per NEPM B1 Guideline on Investigation Levels for Soil and Groundwater - 2013. For soil results:- 1. 'TEQ PQL' values are assuming all contributing PAHs reported as <PQL are actually at the PQL. This is the most conservative approach and can give false positive TEQs given that PAHs that contribute to the TEQ calculation may not be present. 2. 'TEQ zero' values are assuming all contributing PAHs reported as <PQL are zero. This is the least conservative approach and is more susceptible to false negative TEQs when PAHs that contribute to the TEQ calculation are present but below PQL. 3. 'TEQ half PQL' values are assuming all contributing PAHs reported as <PQL are half the stipulated PQL. Hence a mid-point between the most and least conservative approaches above. Note, the Total +ve PAHs PQL is reflective of the lowest individual PQL and is therefore " Total +ve PAHs" is simply a sum of the positive individual PAHs.
Org-005	Soil samples are extracted with dichloromethane/acetone and waters with dichloromethane and analysed by GC with dual ECD's.
Org-005	Soil samples are extracted with dichloromethane/acetone and waters with dichloromethane and analysed by GC with dual ECD's. Note, the Total +ve reported DDD+DDE+DDT PQL is reflective of the lowest individual PQL and is therefore simply a sum of the positive individually report DDD+DDE+DDT.
Org-008	Soil samples are extracted with dichloromethane/acetone and waters with dichloromethane and analysed by GC with dual ECD's.
Org-006	Soil samples are extracted with dichloromethane/acetone and waters with dichloromethane and analysed by GC-ECD.
Org-006	Soil samples are extracted with dichloromethane/acetone and waters with dichloromethane and analysed by GC-ECD. Note, the Total +ve PCBs PQL is reflective of the lowest individual PQL and is therefore " Total +ve PCBs" is simply a sum of the positive individual PCBs.

Method ID	Methodology Summary
Metals-020	Determination of various metals by ICP-AES.
Metals-021	Determination of Mercury by Cold Vapour AAS.
Inorg-008	Moisture content determined by heating at 105+/-5 °C for a minimum of 12 hours.
ASB-001	Asbestos ID - Qualitative identification of asbestos in bulk samples using Polarised Light Microscopy and Dispersion Staining Techniques including Synthetic Mineral Fibre and Organic Fibre as per Australian Standard 4964-2004.

Client Reference: E30116K, Goulburn

QUALITYCONTROL	UNITS	PQL	METHOD	Blank	Duplicate Sm#	Duplicate results	Spike Sm#	Spike % Recovery
vTRH(C6-C10)/BTEXN in Soil						Base II Duplicate II %RPD		
Date extracted	-			06/02/2017	161238-1	06/02/2017 06/02/2017	LCS-10	06/02/2017
Date analysed	-			07/02/2017	161238-1	07/02/2017 07/02/2017	LCS-10	07/02/2017
TRHC ₆ - C ₉	mg/kg	25	Org-016	<25	161238-1	<25 <25	LCS-10	116%
TRHC ₆ - C ₁₀	mg/kg	25	Org-016	<25	161238-1	<25 <25	LCS-10	116%
Benzene	mg/kg	0.2	Org-016	<0.2	161238-1	<0.2 <0.2	LCS-10	117%
Toluene	mg/kg	0.5	Org-016	<0.5	161238-1	<0.5 <0.5	LCS-10	115%
Ethylbenzene	mg/kg	1	Org-016	<1	161238-1	<1 <1	LCS-10	116%
m+p-xylene	mg/kg	2	Org-016	<2	161238-1	<2 <2	LCS-10	116%
o-Xylene	mg/kg	1	Org-016	<1	161238-1	<1 <1	LCS-10	116%
naphthalene	mg/kg	1	Org-014	<1	161238-1	<1 <1	[NR]	[NR]
Surrogate aaa-Trifluorotoluene	%		Org-016	100	161238-1	95 96 RPD: 1	LCS-10	103%
QUALITYCONTROL	UNITS	PQL	METHOD	Blank	Duplicate Sm#	Duplicate results	Spike Sm#	Spike % Recovery
svTRH(C10-C40) in Soil						Base II Duplicate II %RPD		
Date extracted	-			06/02/2017	161238-1	06/02/2017 06/02/2017	LCS-10	06/02/2017
Date analysed	-			08/02/2017	161238-1	08/02/2017 08/02/2017	LCS-10	08/02/2017
TRHC ₁₀ - C ₁₄	mg/kg	50	Org-003	<50	161238-1	<50 <50	LCS-10	116%
TRHC ₁₅ - C ₂₈	mg/kg	100	Org-003	<100	161238-1	<100 <100	LCS-10	129%
TRHC ₂₈ - C ₃₆	mg/kg	100	Org-003	<100	161238-1	<100 <100	LCS-10	121%
TRH>C ₁₀ -C ₁₆	mg/kg	50	Org-003	<50	161238-1	<50 <50	LCS-10	116%
TRH>C ₁₆ -C ₃₄	mg/kg	100	Org-003	<100	161238-1	<100 <100	LCS-10	129%
TRH>C ₃₄ -C ₄₀	mg/kg	100	Org-003	<100	161238-1	<100 <100	LCS-10	121%
Surrogate o-Terphenyl	%		Org-003	102	161238-1	108 105 RPD: 3	LCS-10	116%
QUALITYCONTROL	UNITS	PQL	METHOD	Blank	Duplicate Sm#	Duplicate results	Spike Sm#	Spike % Recovery
PAHs in Soil						Base II Duplicate II %RPD		
Date extracted	-			06/02/2017	161238-1	06/02/2017 06/02/2017	LCS-10	06/02/2017
Date analysed	-			07/02/2017	161238-1	07/02/2017 07/02/2017	LCS-10	07/02/2017
Naphthalene	mg/kg	0.1	Org-012	<0.1	161238-1	<0.1 <0.1	LCS-10	102%
Acenaphthylene	mg/kg	0.1	Org-012	<0.1	161238-1	<0.1 <0.1	[NR]	[NR]
Acenaphthene	mg/kg	0.1	Org-012	<0.1	161238-1	<0.1 <0.1	[NR]	[NR]
Fluorene	mg/kg	0.1	Org-012	<0.1	161238-1	<0.1 <0.1	LCS-10	100%
Phenanthrene	mg/kg	0.1	Org-012	<0.1	161238-1	<0.1 <0.1	LCS-10	114%
Anthracene	mg/kg	0.1	Org-012	<0.1	161238-1	<0.1 <0.1	[NR]	[NR]
Fluoranthene	mg/kg	0.1	Org-012	<0.1	161238-1	<0.1 <0.1	LCS-10	106%
Pyrene	mg/kg	0.1	Org-012	<0.1	161238-1	<0.1 <0.1	LCS-10	107%
Benzo(a)anthracene	mg/kg	0.1	Org-012	<0.1	161238-1	<0.1 <0.1	[NR]	[NR]
Chrysene	mg/kg	0.1	Org-012	<0.1	161238-1	<0.1 <0.1	LCS-10	103%
Benzo(b,j+k)fluoranthene	mg/kg	0.2	Org-012	<0.2	161238-1	<0.2 <0.2	[NR]	[NR]

Client Reference: E30116K, Goulburn

QUALITYCONTROL	UNITS	PQL	METHOD	Blank	Duplicate Sm#	Duplicate results	Spike Sm#	Spike % Recovery
PAHs in Soil						Base II Duplicate II %RPD		
Benzo(a)pyrene	mg/kg	0.05	Org-012	<0.05	161238-1	<0.05 <0.05	LCS-10	97%
Indeno(1,2,3-c,d)pyrene	mg/kg	0.1	Org-012	<0.1	161238-1	<0.1 <0.1	[NR]	[NR]
Dibenzo(a,h)anthracene	mg/kg	0.1	Org-012	<0.1	161238-1	<0.1 <0.1	[NR]	[NR]
Benzo(g,h,i)perylene	mg/kg	0.1	Org-012	<0.1	161238-1	<0.1 <0.1	[NR]	[NR]
Surrogate p-Terphenyl-d14	%		Org-012	104	161238-1	101 91 RPD: 10	LCS-10	122%
QUALITYCONTROL	UNITS	PQL	METHOD	Blank	Duplicate Sm#	Duplicate results	Spike Sm#	Spike % Recovery
Organochlorine Pesticides in soil						Base II Duplicate II %RPD		
Date extracted	-			06/02/2017	161238-1	06/02/2017 06/02/2017	LCS-10	06/02/2017
Date analysed	-			08/02/2017	161238-1	08/02/2017 08/02/2017	LCS-10	08/02/2017
HCB	mg/kg	0.1	Org-005	<0.1	161238-1	<0.1 <0.1	[NR]	[NR]
alpha-BHC	mg/kg	0.1	Org-005	<0.1	161238-1	<0.1 <0.1	LCS-10	100%
gamma-BHC	mg/kg	0.1	Org-005	<0.1	161238-1	<0.1 <0.1	[NR]	[NR]
beta-BHC	mg/kg	0.1	Org-005	<0.1	161238-1	<0.1 <0.1	LCS-10	113%
Heptachlor	mg/kg	0.1	Org-005	<0.1	161238-1	<0.1 <0.1	LCS-10	105%
delta-BHC	mg/kg	0.1	Org-005	<0.1	161238-1	<0.1 <0.1	[NR]	[NR]
Aldrin	mg/kg	0.1	Org-005	<0.1	161238-1	<0.1 <0.1	LCS-10	109%
Heptachlor Epoxide	mg/kg	0.1	Org-005	<0.1	161238-1	<0.1 <0.1	LCS-10	113%
gamma-Chlordane	mg/kg	0.1	Org-005	<0.1	161238-1	<0.1 <0.1	[NR]	[NR]
alpha-chlordane	mg/kg	0.1	Org-005	<0.1	161238-1	<0.1 <0.1	[NR]	[NR]
Endosulfan I	mg/kg	0.1	Org-005	<0.1	161238-1	<0.1 <0.1	[NR]	[NR]
pp-DDE	mg/kg	0.1	Org-005	<0.1	161238-1	<0.1 <0.1	LCS-10	117%
Dieldrin	mg/kg	0.1	Org-005	<0.1	161238-1	<0.1 <0.1	LCS-10	123%
Endrin	mg/kg	0.1	Org-005	<0.1	161238-1	<0.1 <0.1	LCS-10	121%
pp-DDD	mg/kg	0.1	Org-005	<0.1	161238-1	<0.1 <0.1	LCS-10	102%
Endosulfan II	mg/kg	0.1	Org-005	<0.1	161238-1	<0.1 <0.1	[NR]	[NR]
pp-DDT	mg/kg	0.1	Org-005	<0.1	161238-1	<0.1 <0.1	[NR]	[NR]
Endrin Aldehyde	mg/kg	0.1	Org-005	<0.1	161238-1	<0.1 <0.1	[NR]	[NR]
Endosulfan Sulphate	mg/kg	0.1	Org-005	<0.1	161238-1	<0.1 <0.1	LCS-10	78%
Methoxychlor	mg/kg	0.1	Org-005	<0.1	161238-1	<0.1 <0.1	[NR]	[NR]
Surrogate TCMX	%		Org-005	113	161238-1	118 114 RPD: 3	LCS-10	100%

Client Reference: E30116K, Goulburn

QUALITYCONTROL	UNITS	PQL	METHOD	Blank	Duplicate Sm#	Duplicate results	Spike Sm#	Spike % Recovery
Organophosphorus Pesticides						Base II Duplicate II %RPD		
Date extracted	-			06/02/2017	161238-1	06/02/2017 06/02/2017	LCS-10	06/02/2017
Date analysed	-			08/02/2017	161238-1	08/02/2017 08/02/2017	LCS-10	08/02/2017
Azinphos-methyl (Guthion)	mg/kg	0.1	Org-008	<0.1	161238-1	<0.1 <0.1	[NR]	[NR]
Bromophos-ethyl	mg/kg	0.1	Org-008	<0.1	161238-1	<0.1 <0.1	[NR]	[NR]
Chlorpyrifos	mg/kg	0.1	Org-008	<0.1	161238-1	<0.1 <0.1	LCS-10	112%
Chlorpyrifos-methyl	mg/kg	0.1	Org-008	<0.1	161238-1	<0.1 <0.1	[NR]	[NR]
Diazinon	mg/kg	0.1	Org-008	<0.1	161238-1	<0.1 <0.1	[NR]	[NR]
Dichlorvos	mg/kg	0.1	Org-008	<0.1	161238-1	<0.1 <0.1	LCS-10	77%
Dimethoate	mg/kg	0.1	Org-008	<0.1	161238-1	<0.1 <0.1	[NR]	[NR]
Ethion	mg/kg	0.1	Org-008	<0.1	161238-1	<0.1 <0.1	LCS-10	94%
Fenitrothion	mg/kg	0.1	Org-008	<0.1	161238-1	<0.1 <0.1	LCS-10	105%
Malathion	mg/kg	0.1	Org-008	<0.1	161238-1	<0.1 <0.1	LCS-10	79%
Parathion	mg/kg	0.1	Org-008	<0.1	161238-1	<0.1 <0.1	LCS-10	109%
Ronnel	mg/kg	0.1	Org-008	<0.1	161238-1	<0.1 <0.1	LCS-10	120%
Surrogate TCMX	%		Org-008	113	161238-1	118 114 RPD: 3	LCS-10	114%
QUALITYCONTROL	UNITS	PQL	METHOD	Blank	Duplicate Sm#	Duplicate results	Spike Sm#	Spike % Recovery
PCBs in Soil						Base II Duplicate II %RPD		
Date extracted	-			06/02/2017	161238-1	06/02/2017 06/02/2017	LCS-10	06/02/2017
Date analysed	-			08/02/2017	161238-1	08/02/2017 08/02/2017	LCS-10	08/02/2017
Aroclor 1016	mg/kg	0.1	Org-006	<0.1	161238-1	<0.1 <0.1	[NR]	[NR]
Aroclor 1221	mg/kg	0.1	Org-006	<0.1	161238-1	<0.1 <0.1	[NR]	[NR]
Aroclor 1232	mg/kg	0.1	Org-006	<0.1	161238-1	<0.1 <0.1	[NR]	[NR]
Aroclor 1242	mg/kg	0.1	Org-006	<0.1	161238-1	<0.1 <0.1	[NR]	[NR]
Aroclor 1248	mg/kg	0.1	Org-006	<0.1	161238-1	<0.1 <0.1	[NR]	[NR]
Aroclor 1254	mg/kg	0.1	Org-006	<0.1	161238-1	<0.1 <0.1	LCS-10	122%
Aroclor 1260	mg/kg	0.1	Org-006	<0.1	161238-1	<0.1 <0.1	[NR]	[NR]
Surrogate TCLMX	%		Org-006	113	161238-1	118 114 RPD: 3	LCS-10	114%

Client Reference: E30116K, Goulburn

QUALITYCONTROL	UNITS	PQL	METHOD	Blank	Duplicate Sm#	Duplicate results	Spike Sm#	Spike % Recovery
Acid Extractable metals in soil						Base Duplicate %RPD		
Date prepared	-			06/02/2017	161238-1	06/02/2017 06/02/2017	LCS-10	06/02/2017
Date analysed	-			06/02/2017	161238-1	06/02/2017 06/02/2017	LCS-10	06/02/2017
Arsenic	mg/kg	4	Metals-020	<4	161238-1	11 17 RPD: 43	LCS-10	101%
Cadmium	mg/kg	0.4	Metals-020	<0.4	161238-1	<0.4 <0.4	LCS-10	94%
Chromium	mg/kg	1	Metals-020	<1	161238-1	9 13 RPD: 36	LCS-10	100%
Copper	mg/kg	1	Metals-020	<1	161238-1	76 110 RPD: 37	LCS-10	99%
Lead	mg/kg	1	Metals-020	<1	161238-1	4 4 RPD: 0	LCS-10	95%
Mercury	mg/kg	0.1	Metals-021	<0.1	161238-1	<0.1 <0.1	LCS-10	91%
Nickel	mg/kg	1	Metals-020	<1	161238-1	3 3 RPD: 0	LCS-10	90%
Zinc	mg/kg	1	Metals-020	<1	161238-1	1 2 RPD: 67	LCS-10	91%

QUALITYCONTROL vTRH(C6-C10)/BTEXNin Soil	UNITS	Dup. Sm#	Duplicate Base + Duplicate + %RPD	Spike Sm#	Spike % Recovery
Date extracted	-	161238-22	06/02/2017 06/02/2017	161238-4	06/02/2017
Date analysed	-	161238-22	07/02/2017 07/02/2017	161238-4	07/02/2017
TRHC ₆ - C ₉	mg/kg	161238-22	<25 <25	161238-4	119%
TRHC ₆ - C ₁₀	mg/kg	161238-22	<25 <25	161238-4	119%
Benzene	mg/kg	161238-22	<0.2 <0.2	161238-4	119%
Toluene	mg/kg	161238-22	<0.5 <0.5	161238-4	118%
Ethylbenzene	mg/kg	161238-22	<1 <1	161238-4	118%
m+p-xylene	mg/kg	161238-22	<2 <2	161238-4	119%
o-Xylene	mg/kg	161238-22	<1 <1	161238-4	118%
naphthalene	mg/kg	161238-22	<1 <1	[NR]	[NR]
Surrogate aaa-Trifluorotoluene	%	161238-22	89 84 RPD: 6	161238-4	98%

QUALITYCONTROL svTRH (C10-C40) in Soil	UNITS	Dup. Sm#	Duplicate Base + Duplicate + %RPD	Spike Sm#	Spike % Recovery
Date extracted	-	161238-22	06/02/2017 06/02/2017	161238-4	06/02/2017
Date analysed	-	161238-22	08/02/2017 08/02/2017	161238-4	08/02/2017
TRHC ₁₀ - C ₁₄	mg/kg	161238-22	<50 <50	161238-4	128%
TRHC ₁₅ - C ₂₈	mg/kg	161238-22	<100 <100	161238-4	128%
TRHC ₂₉ - C ₃₆	mg/kg	161238-22	<100 <100	161238-4	74%
TRH>C ₁₀ -C ₁₆	mg/kg	161238-22	<50 <50	161238-4	128%
TRH>C ₁₆ -C ₃₄	mg/kg	161238-22	<100 <100	161238-4	128%
TRH>C ₃₄ -C ₄₀	mg/kg	161238-22	<100 <100	161238-4	74%
Surrogate o-Terphenyl	%	161238-22	103 106 RPD: 3	161238-4	105%

Client Reference: E30116K, Goulburn

QUALITYCONTROL PAHs in Soil	UNITS	Dup. Sm#	Duplicate Base + Duplicate + %RPD	Spike Sm#	Spike % Recovery
Date extracted	-	161238-22	06/02/2017 06/02/2017	161238-4	06/02/2017
Date analysed	-	161238-22	07/02/2017 07/02/2017	161238-4	07/02/2017
Naphthalene	mg/kg	161238-22	<0.1 <0.1	161238-4	99%
Acenaphthylene	mg/kg	161238-22	<0.1 <0.1	[NR]	[NR]
Acenaphthene	mg/kg	161238-22	<0.1 <0.1	[NR]	[NR]
Fluorene	mg/kg	161238-22	<0.1 <0.1	161238-4	102%
Phenanthrene	mg/kg	161238-22	<0.1 <0.1	161238-4	102%
Anthracene	mg/kg	161238-22	<0.1 <0.1	[NR]	[NR]
Fluoranthene	mg/kg	161238-22	<0.1 <0.1	161238-4	99%
Pyrene	mg/kg	161238-22	<0.1 <0.1	161238-4	104%
Benzo(a)anthracene	mg/kg	161238-22	<0.1 <0.1	[NR]	[NR]
Chrysene	mg/kg	161238-22	<0.1 <0.1	161238-4	95%
Benzo(b,j+k)fluoranthene	mg/kg	161238-22	<0.2 <0.2	[NR]	[NR]
Benzo(a)pyrene	mg/kg	161238-22	<0.05 <0.05	161238-4	98%
Indeno(1,2,3-c,d)pyrene	mg/kg	161238-22	<0.1 <0.1	[NR]	[NR]
Dibenzo(a,h)anthracene	mg/kg	161238-22	<0.1 <0.1	[NR]	[NR]
Benzo(g,h,i)perylene	mg/kg	161238-22	<0.1 <0.1	[NR]	[NR]
Surrogate p-Terphenyl-d14	%	161238-22	96 98 RPD: 2	161238-4	123%
QUALITYCONTROL Organochlorine Pesticides in soil	UNITS	Dup. Sm#	Duplicate Base + Duplicate + %RPD	Spike Sm#	Spike % Recovery
Date extracted	-	[NT]	[NT]	161238-4	06/02/2017
Date analysed	-	[NT]	[NT]	161238-4	08/02/2017
HCB	mg/kg	[NT]	[NT]	[NR]	[NR]
alpha-BHC	mg/kg	[NT]	[NT]	161238-4	101%
gamma-BHC	mg/kg	[NT]	[NT]	[NR]	[NR]
beta-BHC	mg/kg	[NT]	[NT]	161238-4	118%
Heptachlor	mg/kg	[NT]	[NT]	161238-4	109%
delta-BHC	mg/kg	[NT]	[NT]	[NR]	[NR]
Aldrin	mg/kg	[NT]	[NT]	161238-4	116%
Heptachlor Epoxide	mg/kg	[NT]	[NT]	161238-4	118%
gamma-Chlordane	mg/kg	[NT]	[NT]	[NR]	[NR]
alpha-chlordane	mg/kg	[NT]	[NT]	[NR]	[NR]
Endosulfan I	mg/kg	[NT]	[NT]	[NR]	[NR]
pp-DDE	mg/kg	[NT]	[NT]	161238-4	125%
Dieldrin	mg/kg	[NT]	[NT]	161238-4	129%
Endrin	mg/kg	[NT]	[NT]	161238-4	131%
pp-DDD	mg/kg	[NT]	[NT]	161238-4	100%
Endosulfan II	mg/kg	[NT]	[NT]	[NR]	[NR]
pp-DDT	mg/kg	[NT]	[NT]	[NR]	[NR]
Endrin Aldehyde	mg/kg	[NT]	[NT]	[NR]	[NR]
Endosulfan Sulphate	mg/kg	[NT]	[NT]	161238-4	71%

Client Reference: E30116K, Goulburn

QUALITYCONTROL Organochlorine Pesticides in soil	UNITS	Dup. Sm#	Duplicate Base + Duplicate + %RPD	Spike Sm#	Spike % Recovery
Methoxychlor	mg/kg	[NT]	[NT]	[NR]	[NR]
Surrogate TCMX	%	[NT]	[NT]	161238-4	106%
QUALITYCONTROL Organophosphorus Pesticides	UNITS	Dup. Sm#	Duplicate Base + Duplicate + %RPD	Spike Sm#	Spike % Recovery
Date extracted	-	[NT]	[NT]	161238-4	06/02/2017
Date analysed	-	[NT]	[NT]	161238-4	08/02/2017
Azinphos-methyl (Guthion)	mg/kg	[NT]	[NT]	[NR]	[NR]
Bromophos-ethyl	mg/kg	[NT]	[NT]	[NR]	[NR]
Chlorpyriphos	mg/kg	[NT]	[NT]	161238-4	114%
Chlorpyriphos-methyl	mg/kg	[NT]	[NT]	[NR]	[NR]
Diazinon	mg/kg	[NT]	[NT]	[NR]	[NR]
Dichlorvos	mg/kg	[NT]	[NT]	161238-4	79%
Dimethoate	mg/kg	[NT]	[NT]	[NR]	[NR]
Ethion	mg/kg	[NT]	[NT]	161238-4	114%
Fenitrothion	mg/kg	[NT]	[NT]	161238-4	112%
Malathion	mg/kg	[NT]	[NT]	161238-4	68%
Parathion	mg/kg	[NT]	[NT]	161238-4	109%
Ronnel	mg/kg	[NT]	[NT]	161238-4	125%
Surrogate TCMX	%	[NT]	[NT]	161238-4	115%
QUALITYCONTROL PCBs in Soil	UNITS	Dup. Sm#	Duplicate Base + Duplicate + %RPD	Spike Sm#	Spike % Recovery
Date extracted	-	[NT]	[NT]	161238-4	06/02/2017
Date analysed	-	[NT]	[NT]	161238-4	08/02/2017
Aroclor 1016	mg/kg	[NT]	[NT]	[NR]	[NR]
Aroclor 1221	mg/kg	[NT]	[NT]	[NR]	[NR]
Aroclor 1232	mg/kg	[NT]	[NT]	[NR]	[NR]
Aroclor 1242	mg/kg	[NT]	[NT]	[NR]	[NR]
Aroclor 1248	mg/kg	[NT]	[NT]	[NR]	[NR]
Aroclor 1254	mg/kg	[NT]	[NT]	161238-4	133%
Aroclor 1260	mg/kg	[NT]	[NT]	[NR]	[NR]
Surrogate TCLMX	%	[NT]	[NT]	161238-4	115%

Client Reference: E30116K, Goulburn

QUALITY CONTROL Acid Extractable metals in soil	UNITS	Dup. Sm#	Duplicate Base + Duplicate + %RPD	Spike Sm#	Spike % Recovery
Date prepared	-	161238-22	06/02/2017 06/02/2017	161238-4	06/02/2017
Date analysed	-	161238-22	06/02/2017 06/02/2017	161238-4	06/02/2017
Arsenic	mg/kg	161238-22	<4 <4	161238-4	97%
Cadmium	mg/kg	161238-22	<0.4 <0.4	161238-4	100%
Chromium	mg/kg	161238-22	58 37 RPD: 44	161238-4	101%
Copper	mg/kg	161238-22	26 17 RPD: 42	161238-4	85%
Lead	mg/kg	161238-22	10 6 RPD: 50	161238-4	99%
Mercury	mg/kg	161238-22	<0.1 <0.1	161238-4	82%
Nickel	mg/kg	161238-22	26 17 RPD: 42	161238-4	97%
Zinc	mg/kg	161238-22	17 12 RPD: 34	161238-4	95%

Report Comments:

Asbestos: A portion of the supplied sample was sub-sampled for asbestos analysis according to Envirolab procedures. We cannot guarantee that this sub-sample is indicative of the entire sample. Envirolab recommends supplying 40-50g of sample in its own container.

Note: Samples 161238-1, 4, 6, 8, 10, 12, 15, 18, 21 were sub-sampled from jars provided by the client.

Acid Extractable Metals in Soil: The laboratory RPD acceptance criteria has been exceeded for 161238-22 for Pb. Therefore a triplicate result has been issued as laboratory sample number 161238-27.

Asbestos ID was analysed by Approved Identifier: Lucy Zhu
Asbestos ID was authorised by Approved Signatory: Paul Ching

INS: Insufficient sample for this test
NR: Test not required
<: Less than

PQL: Practical Quantitation Limit
RPD: Relative Percent Difference
>: Greater than

NT: Not tested
NA: Test not required
LCS: Laboratory Control Sample

Quality Control Definitions

Blank: This is the component of the analytical signal which is not derived from the sample but from reagents, glassware etc, can be determined by processing solvents and reagents in exactly the same manner as for samples.

Duplicate: This is the complete duplicate analysis of a sample from the process batch. If possible, the sample selected should be one where the analyte concentration is easily measurable.

Matrix Spike: A portion of the sample is spiked with a known concentration of target analyte. The purpose of the matrix spike is to monitor the performance of the analytical method used and to determine whether matrix interferences exist.

LCS (Laboratory Control Sample): This comprises either a standard reference material or a control matrix (such as a blank sand or water) fortified with analytes representative of the analyte class. It is simply a check sample.

Surrogate Spike: Surrogates are known additions to each sample, blank, matrix spike and LCS in a batch, of compounds which are similar to the analyte of interest, however are not expected to be found in real samples.

Laboratory Acceptance Criteria

Duplicate sample and matrix spike recoveries may not be reported on smaller jobs, however, were analysed at a frequency to meet or exceed NEPM requirements. All samples are tested in batches of 20. The duplicate sample RPD and matrix spike recoveries for the batch were within the laboratory acceptance criteria.

Filters, swabs, wipes, tubes and badges will not have duplicate data as the whole sample is generally extracted during sample extraction.

Spikes for Physical and Aggregate Tests are not applicable.

For VOCs in water samples, three vials are required for duplicate or spike analysis.

Duplicates: <5xPQL - any RPD is acceptable; >5xPQL - 0-50% RPD is acceptable.

Matrix Spikes, LCS and Surrogate recoveries: Generally 70-130% for inorganics/metals; 60-140% for organics (+/-50% surrogates) and 10-140% for labile SVOCs (including labile surrogates), ultra trace organics and speciated phenols is acceptable.

In circumstances where no duplicate and/or sample spike has been reported at 1 in 10 and/or 1 in 20 samples respectively, the sample volume submitted was insufficient in order to satisfy laboratory QA/QC protocols.

When samples are received where certain analytes are outside of recommended technical holding times (THTs), the analysis has proceeded. Where analytes are on the verge of breaching THTs, every effort will be made to analyse within the THT or as soon as practicable.

Where sampling dates are not provided, Envirolab are not in a position to comment on the validity of the analysis where recommended technical holding times may have been breached.

Measurement Uncertainty estimates are available for most tests upon request.

SAMPLE RECEIPT ADVICE

Client Details

Client	Environmental Investigation Services
Attention	Katrina Taylor

Sample Login Details

Your reference	E30116K, Goulburn
Envirolab Reference	174265
Date Sample Received	25/08/2017
Date Instructions Received	25/08/2017
Date Results Expected to be Reported	01/09/2017

Sample Condition

Samples received in appropriate condition for analysis	YES
No. of Samples Provided	39 Soils
Turnaround Time Requested	Standard
Temperature on Receipt (°C)	14.3
Cooling Method	Ice Pack
Sampling Date Provided	YES

Comments

Nil

Please direct any queries to:

Aileen Hie

Phone: 02 9910 6200
Fax: 02 9910 6201
Email: ahie@envirolab.com.au

Jacinta Hurst

Phone: 02 9910 6200
Fax: 02 9910 6201
Email: jhurst@envirolab.com.au

Analysis Underway, details on the following page:



Sample ID	VTRH(C6-C10)/BTEXN in Soil	svTRH (C10-C40) in Soil	PAHs in Soil	Organochlorine Pesticides in soil	Organophosphorus Pesticides	PCBs in Soil	Acid Extractable metals in soil	Asbestos ID - soils	On Hold
BHA-0-0.1									✓
BHA-0.4-0.5	✓	✓	✓	✓	✓	✓	✓	✓	
BHA-0.6-0.7									✓
BHA-0.8-0.9	✓	✓	✓				✓		
BHB-0.0-0.2	✓	✓	✓	✓	✓	✓	✓	✓	
BHB-0.7-1.0	✓	✓	✓				✓		
BHC-0.1-0.2	✓	✓	✓	✓	✓	✓	✓	✓	
BHC-0.8-1.0									✓
BHD-0.0-0.1	✓	✓	✓	✓	✓	✓	✓	✓	
BHD-0.5-0.2	✓	✓	✓	✓	✓	✓	✓	✓	
BHE-0.0-0.1	✓	✓	✓	✓	✓	✓	✓	✓	
BHE-0.1-0.2									✓
BHE-0.4-0.5	✓	✓	✓				✓		
TBS1	✓								
TP101-0.0-0.1	✓	✓	✓				✓	✓	
TP101-0.14-0.2	✓	✓	✓				✓		
BH102-0.0-0.1	✓	✓	✓				✓	✓	
BH102-0.9-1.0	✓	✓	✓				✓		
BH103-0.0-0.1	✓	✓	✓				✓	✓	
BH103-0.9-1.0	✓	✓	✓				✓		
BH104-0.2-0.3	✓	✓	✓				✓	✓	
BH105-0.0-0.1	✓	✓	✓				✓	✓	
BH105-0.9-1.0	✓	✓	✓				✓		
BH106-0.0-0.1	✓	✓	✓				✓	✓	
BH106-0.9-1.0	✓	✓	✓				✓		
BH107-0.0-0.1	✓	✓	✓				✓	✓	
BH107-0.9-1.0	✓	✓	✓				✓		
BH108-0.01-0.1	✓	✓	✓				✓	✓	
BH108-1.4-1.5	✓	✓	✓				✓		
BH109-0.05-0.15	✓	✓	✓				✓	✓	
BH109-1.0-1.1	✓	✓	✓				✓		
BH110-0.0-0.1	✓	✓	✓				✓	✓	



Sample ID	VTRH(C6-C10)/BTEXN in Soil	svTRH (C10-C40) in Soil	PAHs in Soil	Organochlorine Pesticides in soil	Organophosphorus Pesticides	PCBs in Soil	Acid Extractable metals in soil	Asbestos ID - soils	On Hold
BH110-0.9-1.0	✓	✓	✓				✓	✓	
BH110-1.8-2.0	✓	✓	✓				✓		
BH111-0.05-0.1	✓	✓	✓				✓	✓	
BH111-0.9-1.0	✓	✓	✓				✓	✓	
BH111-1.8-2.0	✓	✓	✓				✓		
BH112-0.38-0.5	✓	✓	✓				✓		
DUPAS1	✓	✓	✓				✓		

The '✓' indicates the testing you have requested. **THIS IS NOT A REPORT OF THE RESULTS.**

Additional Info

Sample storage - Waters are routinely disposed of approximately 1 month and soils approximately 2 months from receipt.

Requests for longer term sample storage must be received in writing.

SAMPLE AND CHAIN OF CUSTODY FORM




TO: ENVIROLAB SERVICES PTY LTD 12 ASHLEY STREET CHATSWOOD NSW 2067 P: (02) 99106200 F: (02) 99106201 Attention: Aileen	EIS Job E30116K Number: Date Results STANDARD Required: Page: 1 of 2	FROM: ENVIRONMENTAL INVESTIGATION SERVICES REAR OF 115 WICKS ROAD MACQUARIE PARK, NSW 2113 P: 02-9888 5000 F: 02-9888 5001 Attention: ktaylor@jkgroup.net.au
---	---	--

Location: Goulburn	Sample Preserved in Esky on Ice
--------------------	---------------------------------

Sampler: A. Billingham / A. Smith	Tests Required
-----------------------------------	----------------

Date Sampled	Lab Ref:	Sample Number	Depth (m)	Sample Container	PID	Sample Description	Combo 3a	Combo 6a	Combo 3	BTEX							
21/8	1	BHA	0-0.1	GA	0	fill catch side											
	2	↓	0.4-0.5	GA	0	fill silty clay		X									
	3	↓	0.6-0.7	GA	0	f. silty clay											
	4	↓	0.8-0.9	GA	0	f. silty clay			X								
	5	BHB	0-0.2	GA	0	f. silty clay		X									
	6	↓	0.7-1.0	GA	0	f. silty clay			X								
	7	BHC	0.1-0.2	GA	0	f. Ash		X									
	8	↓	0.8-1.0	GA	0	f. Ash											
	9	BHD	0.0-0.1	GA	0	f. silty sand		X									
	10	↓	0.5-0.2	GA	0	f. Ash		X									
	11	BHE	0-0.1	GA	0	f. silty sand		X									
	12	↓	0.1-0.2	GA	0	f. Ash											
↓	13	↓	0.4-0.5	GA	0	f. silty clay			X								
	14	TBS ¹	—	G	0	Sand				X							
24/8	15	TP101	0-0.1	GA	0	f. silty sand	X										
	16	↓	0.14-0.2	GA	0	f. silty sand			X								
22/8		BH01	0.7-0.9	GA	0	f. silty clay	X										
		↓	0.9-1.0	GA	0	crinoid	X										
	17	BH102	0-0.1	GA	0	f. silty clay	X										
↓	18	↓	0.9-1.0	G	0	crinoid			X								
23/8	19	BH103	0-0.1	GA	0	f. silty clay	X										
	20	↓	0.9-1.0	G	0	crinoid			X								
	21	BH10A	0.2-0.3	GA	0	crinoid	X										

Broken in transit



Job No: 174265
 Date Received: 25/8/17
 Time Received: 16:30
 Received by: [Signature] 14.30
 Temp: Cool/Ambient
 Cooling: Ice/icepack
 Security: Intact/Broken/None

Remarks (comments/detection limits required): See page 2.	Sample Containers: G - 250mg Glass Jar A - Ziplock Asbestos Bag P - Plastic Bag
--	--

Relinquished By: [Signature]	Date: 25/8	Time:	Received By:	Date:
------------------------------	------------	-------	--------------	-------

SAMPLE AND CHAIN OF CUSTODY FORM

TO: ENVIROLAB SERVICES PTY LTD 12 ASHLEY STREET CHATSWOOD NSW 2067 P: (02) 99106200 F: (02) 99106201 Attention: Aileen	EIS Job E30116K Number: Date Results STANDARD Required: Page: 2 of 2	FROM: ENVIRONMENTAL INVESTIGATION SERVICES REAR OF 115 WICKS ROAD MACQUARIE PARK, NSW 2113 P: 02-9888 5000 F: 02-9888 5001 Attention: ktaylor@ikgroup.net.au
---	---	--



Location:		Sample Preserved in Esky on Ice																	
Sampler:		Tests Required																	
Date Sampled	Lab Ref:	Sample Number	Depth (m)	Sample Container	PID	Sample Description	Combo 3a	Combo 6a	Combo 3	BTEX									
24/8/17	22	BH105	0-0.1	GA	0	f.Silty clay	X												
	23	↓	0.9-1.0	G	0	Silty clay			X										
	24	BH106	0-0.1	GA	0	f.Coarsely	X												
	25	↓	0.9-1.0	G	0	Mudstone			X										
	26	BH107	0-0.1	GA	0	f.Fine	X												
	27	↓	0.9-1.0	G	0	Claystone			X										
	28	BH108	0.01-0.1	GA	0	f.Coarsely	X												
	29	↓	1.4-1.5	G	0	Silty clay			X										
	30	BH109	0.05-0.15	GA	0	f.Coarsely	X												
	31	↓	1.0-1.1	G	0	Silty clay			X										
	32	BH110	0-0.1	GA	0	f.Silty sand	X												
	33	↓	0.9-1.0	GA	0	f.Silty sand	X												
	34	↓	1.8-2.0	G	0	Sandstone			X										
	35	BH111	0.05-0.1	GA	0	f.Gravel	X												
	36	↓	0.9-1.0	GA	0	f.Silty sand	X												
	37	↓	1.8-2.0	G	0	Algal crust			X										
	38	BH112	0.38-0.5	G	0	Mudstone			X										
	39	DUPA1	—	G	—	Fill			X										
	40	DUPA1	—	G	—	Fill			X										

Remarks (comments/detection limits required): *Please send DUPA1 to Melb EnviroLab		Sample Containers: G - 250mg Glass Jar A - Ziplock Asbestos Bag P - Plastic Bag	
Relinquished By:	Date: 25/8	Time: 16:30	Received By: EIS Rebecca RW Date: 25/8/17



CERTIFICATE OF ANALYSIS 174265

Client Details

Client	Environmental Investigation Services
Attention	Katrina Taylor
Address	PO Box 976, North Ryde BC, NSW, 1670

Sample Details

Your Reference	<u>E30116K, Goulburn</u>
Number of Samples	39 Soils
Date samples received	25/08/2017
Date completed instructions received	25/08/2017

Analysis Details

Please refer to the following pages for results, methodology summary and quality control data.
Samples were analysed as received from the client. Results relate specifically to the samples as received.
Results are reported on a dry weight basis for solids and on an as received basis for other matrices.
Please refer to the last page of this report for any comments relating to the results.

Report Details

Date results requested by	01/09/2017
Date of Issue	01/09/2017

NATA Accreditation Number 2901. This document shall not be reproduced except in full.
Accredited for compliance with ISO/IEC 17025 - Testing. **Tests not covered by NATA are denoted with ***

Asbestos Approved By

Analysed by Asbestos Approved Identifier: Lucy Zhu
Authorised by Asbestos Approved Signatory: Lulu Scott

Results Approved By

Jeremy Faircloth, Organics Supervisor
Leon Ow, Chemist
Lulu Scott, Asbestos Supervisor
Nancy Zhang, Assistant Lab Manager
Steven Luong, Chemist

Authorised By

David Springer, General Manager

vTRH(C6-C10)/BTEXN in Soil						
Our Reference		174265-2	174265-4	174265-5	174265-6	174265-7
Your Reference	UNITS	BHA	BHA	BHB	BHB	BHC
Depth		0.4-0.5	0.8-0.9	0.0-0.2	0.7-1.0	0.1-0.2
Date Sampled		22/08/2017	22/08/2017	22/08/2017	22/08/2017	22/08/2017
Type of sample		Soil	Soil	Soil	Soil	Soil
Date extracted	-	29/08/2017	29/08/2017	29/08/2017	29/08/2017	29/08/2017
Date analysed	-	30/08/2017	30/08/2017	30/08/2017	30/08/2017	30/08/2017
TRH C ₆ - C ₉	mg/kg	<25	<25	<25	<25	<25
TRH C ₆ - C ₁₀	mg/kg	<25	<25	<25	<25	<25
vTPH C ₆ - C ₁₀ less BTEX (F1)	mg/kg	<25	<25	<25	<25	<25
Benzene	mg/kg	<0.2	<0.2	<0.2	<0.2	<0.2
Toluene	mg/kg	<0.5	<0.5	<0.5	<0.5	<0.5
Ethylbenzene	mg/kg	<1	<1	<1	<1	<1
m+p-xylene	mg/kg	<2	<2	<2	<2	<2
o-Xylene	mg/kg	<1	<1	<1	<1	<1
Total +ve Xylenes	mg/kg	<1	<1	<1	<1	<1
naphthalene	mg/kg	<1	<1	<1	<1	<1
Surrogate aaa-Trifluorotoluene	%	114	110	113	110	98

vTRH(C6-C10)/BTEXN in Soil						
Our Reference		174265-9	174265-10	174265-11	174265-13	174265-14
Your Reference	UNITS	BHD	BHD	BHE	BHE	TBS1
Depth		0.0-0.1	0.5-0.2	0.0-0.1	0.4-0.5	-
Date Sampled		22/08/2017	22/08/2017	22/08/2017	22/08/2017	22/08/2017
Type of sample		Soil	Soil	Soil	Soil	Soil
Date extracted	-	29/08/2017	29/08/2017	29/08/2017	29/08/2017	29/08/2017
Date analysed	-	30/08/2017	30/08/2017	30/08/2017	30/08/2017	30/08/2017
TRH C ₆ - C ₉	mg/kg	<25	<25	<25	<25	[NA]
TRH C ₆ - C ₁₀	mg/kg	<25	<25	<25	<25	[NA]
vTPH C ₆ - C ₁₀ less BTEX (F1)	mg/kg	<25	<25	<25	<25	[NA]
Benzene	mg/kg	<0.2	<0.2	<0.2	<0.2	<0.2
Toluene	mg/kg	<0.5	<0.5	<0.5	<0.5	<0.5
Ethylbenzene	mg/kg	<1	<1	<1	<1	<1
m+p-xylene	mg/kg	<2	<2	<2	<2	<2
o-Xylene	mg/kg	<1	<1	<1	<1	<1
Total +ve Xylenes	mg/kg	<1	<1	<1	<1	[NA]
naphthalene	mg/kg	<1	<1	<1	<1	[NA]
Surrogate aaa-Trifluorotoluene	%	106	101	98	115	117

vTRH(C6-C10)/BTEXN in Soil						
Our Reference		174265-15	174265-16	174265-17	174265-18	174265-19
Your Reference	UNITS	TP101	TP101	BH102	BH102	BH103
Depth		0.0-0.1	0.14-0.2	0.0-0.1	0.9-1.0	0.0-0.1
Date Sampled		21/08/2017	21/08/2017	22/08/2017	22/08/2017	23/08/2017
Type of sample		Soil	Soil	Soil	Soil	Soil
Date extracted	-	29/08/2017	29/08/2017	29/08/2017	29/08/2017	29/08/2017
Date analysed	-	30/08/2017	30/08/2017	30/08/2017	30/08/2017	30/08/2017
TRH C ₆ - C ₉	mg/kg	<25	<25	<25	<25	<25
TRH C ₆ - C ₁₀	mg/kg	<25	<25	<25	<25	<25
vTPH C ₆ - C ₁₀ less BTEX (F1)	mg/kg	<25	<25	<25	<25	<25
Benzene	mg/kg	<0.2	<0.2	<0.2	<0.2	<0.2
Toluene	mg/kg	<0.5	<0.5	<0.5	<0.5	<0.5
Ethylbenzene	mg/kg	<1	<1	<1	<1	<1
m+p-xylene	mg/kg	<2	<2	<2	<2	<2
o-Xylene	mg/kg	<1	<1	<1	<1	<1
Total +ve Xylenes	mg/kg	<1	<1	<1	<1	<1
naphthalene	mg/kg	<1	<1	<1	<1	<1
Surrogate aaa-Trifluorotoluene	%	107	114	111	117	117

vTRH(C6-C10)/BTEXN in Soil						
Our Reference		174265-20	174265-21	174265-22	174265-23	174265-24
Your Reference	UNITS	BH103	BH104	BH105	BH105	BH106
Depth		0.9-1.0	0.2-0.3	0.0-0.1	0.9-1.0	0.0-0.1
Date Sampled		23/08/2017	23/08/2017	24/08/2017	24/08/2017	24/08/2017
Type of sample		Soil	Soil	Soil	Soil	Soil
Date extracted	-	29/08/2017	29/08/2017	29/08/2017	29/08/2017	29/08/2017
Date analysed	-	30/08/2017	30/08/2017	30/08/2017	30/08/2017	30/08/2017
TRH C ₆ - C ₉	mg/kg	<25	<25	<25	<25	<25
TRH C ₆ - C ₁₀	mg/kg	<25	<25	<25	<25	<25
vTPH C ₆ - C ₁₀ less BTEX (F1)	mg/kg	<25	<25	<25	<25	<25
Benzene	mg/kg	<0.2	<0.2	<0.2	<0.2	<0.2
Toluene	mg/kg	<0.5	<0.5	<0.5	<0.5	<0.5
Ethylbenzene	mg/kg	<1	<1	<1	<1	<1
m+p-xylene	mg/kg	<2	<2	<2	<2	<2
o-Xylene	mg/kg	<1	<1	<1	<1	<1
Total +ve Xylenes	mg/kg	<1	<1	<1	<1	<1
naphthalene	mg/kg	<1	<1	<1	<1	<1
Surrogate aaa-Trifluorotoluene	%	117	106	116	111	113

vTRH(C6-C10)/BTEXN in Soil						
Our Reference		174265-25	174265-26	174265-27	174265-28	174265-29
Your Reference	UNITS	BH106	BH107	BH107	BH108	BH108
Depth		0.9-1.0	0.0-0.1	0.9-1.0	0.01-0.1	1.4-1.5
Date Sampled		24/08/2017	24/08/2017	24/08/2017	24/08/2017	24/08/2017
Type of sample		Soil	Soil	Soil	Soil	Soil
Date extracted	-	29/08/2017	29/08/2017	29/08/2017	29/08/2017	29/08/2017
Date analysed	-	30/08/2017	30/08/2017	30/08/2017	30/08/2017	30/08/2017
TRH C ₆ - C ₉	mg/kg	<25	<25	<25	<25	<25
TRH C ₆ - C ₁₀	mg/kg	<25	<25	<25	<25	<25
vTPH C ₆ - C ₁₀ less BTEX (F1)	mg/kg	<25	<25	<25	<25	<25
Benzene	mg/kg	<0.2	<0.2	<0.2	<0.2	<0.2
Toluene	mg/kg	<0.5	<0.5	<0.5	<0.5	<0.5
Ethylbenzene	mg/kg	<1	<1	<1	<1	<1
m+p-xylene	mg/kg	<2	<2	<2	<2	<2
o-Xylene	mg/kg	<1	<1	<1	<1	<1
Total +ve Xylenes	mg/kg	<1	<1	<1	<1	<1
naphthalene	mg/kg	<1	<1	<1	<1	<1
Surrogate aaa-Trifluorotoluene	%	122	107	117	116	115

vTRH(C6-C10)/BTEXN in Soil						
Our Reference		174265-30	174265-31	174265-32	174265-33	174265-34
Your Reference	UNITS	BH109	BH109	BH110	BH110	BH110
Depth		0.05-0.15	1.0-1.1	0.0-0.1	0.9-1.0	1.8-2.0
Date Sampled		24/08/2017	24/08/2017	24/08/2017	24/08/2017	24/08/2017
Type of sample		Soil	Soil	Soil	Soil	Soil
Date extracted	-	29/08/2017	29/08/2017	29/08/2017	29/08/2017	29/08/2017
Date analysed	-	30/08/2017	30/08/2017	30/08/2017	30/08/2017	30/08/2017
TRH C ₆ - C ₉	mg/kg	<25	<25	<25	<25	<25
TRH C ₆ - C ₁₀	mg/kg	<25	<25	<25	<25	<25
vTPH C ₆ - C ₁₀ less BTEX (F1)	mg/kg	<25	<25	<25	<25	<25
Benzene	mg/kg	<0.2	<0.2	<0.2	<0.2	<0.2
Toluene	mg/kg	<0.5	<0.5	<0.5	<0.5	<0.5
Ethylbenzene	mg/kg	<1	<1	<1	<1	<1
m+p-xylene	mg/kg	<2	<2	<2	<2	<2
o-Xylene	mg/kg	<1	<1	<1	<1	<1
Total +ve Xylenes	mg/kg	<1	<1	<1	<1	<1
naphthalene	mg/kg	<1	<1	<1	<1	<1
Surrogate aaa-Trifluorotoluene	%	111	111	115	106	117

vTRH(C6-C10)/BTEXN in Soil						
Our Reference		174265-35	174265-36	174265-37	174265-38	174265-39
Your Reference	UNITS	BH111	BH111	BH111	BH112	DUPAS1
Depth		0.05-0.1	0.9-1.0	1.8-2.0	0.38-0.5	-
Date Sampled		24/08/2017	24/08/2017	24/08/2017	24/08/2017	24/08/2017
Type of sample		Soil	Soil	Soil	Soil	Soil
Date extracted	-	29/08/2017	29/08/2017	29/08/2017	29/08/2017	29/08/2017
Date analysed	-	30/08/2017	30/08/2017	30/08/2017	30/08/2017	30/08/2017
TRH C ₆ - C ₉	mg/kg	<25	<25	<25	<25	<25
TRH C ₆ - C ₁₀	mg/kg	<25	<25	<25	<25	<25
vTPH C ₆ - C ₁₀ less BTEX (F1)	mg/kg	<25	<25	<25	<25	<25
Benzene	mg/kg	<0.2	<0.2	<0.2	<0.2	<0.2
Toluene	mg/kg	<0.5	<0.5	<0.5	<0.5	<0.5
Ethylbenzene	mg/kg	<1	<1	<1	<1	<1
m+p-xylene	mg/kg	<2	<2	<2	<2	<2
o-Xylene	mg/kg	<1	<1	<1	<1	<1
Total +ve Xylenes	mg/kg	<1	<1	<1	<1	<1
naphthalene	mg/kg	<1	<1	<1	<1	<1
Surrogate aaa-Trifluorotoluene	%	118	110	114	114	100

svTRH (C10-C40) in Soil						
Our Reference		174265-2	174265-4	174265-5	174265-6	174265-7
Your Reference	UNITS	BHA	BHA	BHB	BHB	BHC
Depth		0.4-0.5	0.8-0.9	0.0-0.2	0.7-1.0	0.1-0.2
Date Sampled		22/08/2017	22/08/2017	22/08/2017	22/08/2017	22/08/2017
Type of sample		Soil	Soil	Soil	Soil	Soil
Date extracted	-	29/08/2017	29/08/2017	29/08/2017	29/08/2017	29/08/2017
Date analysed	-	30/08/2017	30/08/2017	30/08/2017	30/08/2017	30/08/2017
TRH C ₁₀ - C ₁₄	mg/kg	<50	<50	<50	<50	<50
TRH C ₁₅ - C ₂₈	mg/kg	<100	<100	150	<100	<100
TRH C ₂₉ - C ₃₆	mg/kg	<100	<100	120	<100	<100
TRH >C ₁₀ -C ₁₆	mg/kg	<50	<50	<50	<50	<50
TRH >C ₁₀ - C ₁₆ less Naphthalene (F2)	mg/kg	<50	<50	<50	<50	<50
TRH >C ₁₆ -C ₃₄	mg/kg	<100	<100	230	110	<100
TRH >C ₃₄ -C ₄₀	mg/kg	<100	<100	<100	<100	<100
Total +ve TRH (>C10-C40)	mg/kg	<50	<50	230	110	<50
Surrogate o-Terphenyl	%	102	103	80	112	93

svTRH (C10-C40) in Soil						
Our Reference		174265-9	174265-10	174265-11	174265-13	174265-15
Your Reference	UNITS	BHD	BHD	BHE	BHE	TP101
Depth		0.0-0.1	0.5-0.2	0.0-0.1	0.4-0.5	0.0-0.1
Date Sampled		22/08/2017	22/08/2017	22/08/2017	22/08/2017	21/08/2017
Type of sample		Soil	Soil	Soil	Soil	Soil
Date extracted	-	29/08/2017	29/08/2017	29/08/2017	29/08/2017	29/08/2017
Date analysed	-	30/08/2017	30/08/2017	29/08/2017	29/08/2017	29/08/2017
TRH C ₁₀ - C ₁₄	mg/kg	<50	<50	<50	<50	<50
TRH C ₁₅ - C ₂₈	mg/kg	<100	<100	<100	<100	<100
TRH C ₂₉ - C ₃₆	mg/kg	<100	<100	<100	<100	<100
TRH >C ₁₀ -C ₁₆	mg/kg	<50	<50	<50	<50	<50
TRH >C ₁₀ - C ₁₆ less Naphthalene (F2)	mg/kg	<50	<50	<50	<50	<50
TRH >C ₁₆ -C ₃₄	mg/kg	<100	<100	<100	<100	<100
TRH >C ₃₄ -C ₄₀	mg/kg	<100	<100	<100	<100	<100
Total +ve TRH (>C10-C40)	mg/kg	<50	<50	<50	<50	<50
Surrogate o-Terphenyl	%	95	102	87	89	102

svTRH (C10-C40) in Soil						
Our Reference		174265-16	174265-17	174265-18	174265-19	174265-20
Your Reference	UNITS	TP101	BH102	BH102	BH103	BH103
Depth		0.14-0.2	0.0-0.1	0.9-1.0	0.0-0.1	0.9-1.0
Date Sampled		21/08/2017	22/08/2017	22/08/2017	23/08/2017	23/08/2017
Type of sample		Soil	Soil	Soil	Soil	Soil
Date extracted	-	29/08/2017	29/08/2017	29/08/2017	29/08/2017	29/08/2017
Date analysed	-	29/08/2017	29/08/2017	29/08/2017	29/08/2017	29/08/2017
TRH C ₁₀ - C ₁₄	mg/kg	<50	<50	<50	<50	<50
TRH C ₁₅ - C ₂₈	mg/kg	<100	<100	<100	<100	<100
TRH C ₂₉ - C ₃₆	mg/kg	<100	<100	<100	<100	<100
TRH >C ₁₀ -C ₁₆	mg/kg	<50	<50	<50	<50	<50
TRH >C ₁₀ - C ₁₆ less Naphthalene (F2)	mg/kg	<50	<50	<50	<50	<50
TRH >C ₁₆ -C ₃₄	mg/kg	<100	<100	<100	<100	<100
TRH >C ₃₄ -C ₄₀	mg/kg	<100	<100	<100	<100	<100
Total +ve TRH (>C10-C40)	mg/kg	<50	<50	<50	<50	<50
Surrogate o-Terphenyl	%	89	99	91	98	98

svTRH (C10-C40) in Soil						
Our Reference		174265-21	174265-22	174265-23	174265-24	174265-25
Your Reference	UNITS	BH104	BH105	BH105	BH106	BH106
Depth		0.2-0.3	0.0-0.1	0.9-1.0	0.0-0.1	0.9-1.0
Date Sampled		23/08/2017	24/08/2017	24/08/2017	24/08/2017	24/08/2017
Type of sample		Soil	Soil	Soil	Soil	Soil
Date extracted	-	29/08/2017	29/08/2017	29/08/2017	29/08/2017	29/08/2017
Date analysed	-	29/08/2017	29/08/2017	29/08/2017	29/08/2017	29/08/2017
TRH C ₁₀ - C ₁₄	mg/kg	<50	<50	<50	<50	<50
TRH C ₁₅ - C ₂₈	mg/kg	<100	<100	<100	<100	<100
TRH C ₂₉ - C ₃₆	mg/kg	<100	<100	<100	<100	<100
TRH >C ₁₀ -C ₁₆	mg/kg	<50	<50	<50	<50	<50
TRH >C ₁₀ - C ₁₆ less Naphthalene (F2)	mg/kg	<50	<50	<50	<50	<50
TRH >C ₁₆ -C ₃₄	mg/kg	<100	<100	<100	<100	<100
TRH >C ₃₄ -C ₄₀	mg/kg	<100	<100	<100	<100	<100
Total +ve TRH (>C10-C40)	mg/kg	<50	<50	<50	<50	<50
Surrogate o-Terphenyl	%	89	89	89	86	85

svTRH (C10-C40) in Soil						
Our Reference		174265-26	174265-27	174265-28	174265-29	174265-30
Your Reference	UNITS	BH107	BH107	BH108	BH108	BH109
Depth		0.0-0.1	0.9-1.0	0.01-0.1	1.4-1.5	0.05-0.15
Date Sampled		24/08/2017	24/08/2017	24/08/2017	24/08/2017	24/08/2017
Type of sample		Soil	Soil	Soil	Soil	Soil
Date extracted	-	29/08/2017	29/08/2017	29/08/2017	29/08/2017	29/08/2017
Date analysed	-	29/08/2017	29/08/2017	29/08/2017	29/08/2017	30/08/2017
TRH C ₁₀ - C ₁₄	mg/kg	<50	<50	<50	<50	<50
TRH C ₁₅ - C ₂₈	mg/kg	<100	<100	<100	<100	<100
TRH C ₂₉ - C ₃₆	mg/kg	<100	<100	<100	<100	<100
TRH >C ₁₀ -C ₁₆	mg/kg	<50	<50	<50	<50	<50
TRH >C ₁₀ - C ₁₆ less Naphthalene (F2)	mg/kg	<50	<50	<50	<50	<50
TRH >C ₁₆ -C ₃₄	mg/kg	<100	<100	<100	<100	<100
TRH >C ₃₄ -C ₄₀	mg/kg	<100	<100	<100	<100	<100
Total +ve TRH (>C10-C40)	mg/kg	<50	<50	<50	<50	<50
Surrogate o-Terphenyl	%	89	91	87	87	87

svTRH (C10-C40) in Soil						
Our Reference		174265-31	174265-32	174265-33	174265-34	174265-35
Your Reference	UNITS	BH109	BH110	BH110	BH110	BH111
Depth		1.0-1.1	0.0-0.1	0.9-1.0	1.8-2.0	0.05-0.1
Date Sampled		24/08/2017	24/08/2017	24/08/2017	24/08/2017	24/08/2017
Type of sample		Soil	Soil	Soil	Soil	Soil
Date extracted	-	29/08/2017	29/08/2017	29/08/2017	29/08/2017	29/08/2017
Date analysed	-	30/08/2017	30/08/2017	30/08/2017	30/08/2017	30/08/2017
TRH C ₁₀ - C ₁₄	mg/kg	<50	<50	<50	<50	<50
TRH C ₁₅ - C ₂₈	mg/kg	<100	<100	<100	<100	<100
TRH C ₂₉ - C ₃₆	mg/kg	<100	<100	<100	<100	<100
TRH >C ₁₀ -C ₁₆	mg/kg	<50	<50	<50	<50	<50
TRH >C ₁₀ - C ₁₆ less Naphthalene (F2)	mg/kg	<50	<50	<50	<50	<50
TRH >C ₁₆ -C ₃₄	mg/kg	<100	<100	<100	<100	<100
TRH >C ₃₄ -C ₄₀	mg/kg	<100	<100	<100	<100	<100
Total +ve TRH (>C10-C40)	mg/kg	<50	<50	<50	<50	<50
Surrogate o-Terphenyl	%	95	88	88	87	87

svTRH (C10-C40) in Soil					
Our Reference		174265-36	174265-37	174265-38	174265-39
Your Reference	UNITS	BH111	BH111	BH112	DUPAS1
Depth		0.9-1.0	1.8-2.0	0.38-0.5	-
Date Sampled		24/08/2017	24/08/2017	24/08/2017	24/08/2017
Type of sample		Soil	Soil	Soil	Soil
Date extracted	-	29/08/2017	29/08/2017	29/08/2017	29/08/2017
Date analysed	-	30/08/2017	30/08/2017	30/08/2017	30/08/2017
TRH C ₁₀ - C ₁₄	mg/kg	<50	<50	<50	<50
TRH C ₁₅ - C ₂₈	mg/kg	<100	<100	<100	130
TRH C ₂₉ - C ₃₆	mg/kg	<100	<100	<100	120
TRH >C ₁₀ -C ₁₆	mg/kg	<50	<50	<50	<50
TRH >C ₁₀ - C ₁₆ less Naphthalene (F2)	mg/kg	<50	<50	<50	<50
TRH >C ₁₆ -C ₃₄	mg/kg	<100	<100	<100	210
TRH >C ₃₄ -C ₄₀	mg/kg	<100	<100	<100	<100
Total +ve TRH (>C ₁₀ -C ₄₀)	mg/kg	<50	<50	<50	210
Surrogate o-Terphenyl	%	87	89	95	82

PAHs in Soil						
Our Reference		174265-2	174265-4	174265-5	174265-6	174265-7
Your Reference	UNITS	BHA	BHA	BHB	BHB	BHC
Depth		0.4-0.5	0.8-0.9	0.0-0.2	0.7-1.0	0.1-0.2
Date Sampled		22/08/2017	22/08/2017	22/08/2017	22/08/2017	22/08/2017
Type of sample		Soil	Soil	Soil	Soil	Soil
Date extracted	-	29/08/2017	29/08/2017	29/08/2017	29/08/2017	29/08/2017
Date analysed	-	30/08/2017	29/08/2017	29/08/2017	29/08/2017	29/08/2017
Naphthalene	mg/kg	<0.1	<0.1	0.7	0.2	<0.1
Acenaphthylene	mg/kg	0.4	<0.1	7.0	1.2	<0.1
Acenaphthene	mg/kg	<0.1	<0.1	0.2	<0.1	<0.1
Fluorene	mg/kg	0.2	<0.1	0.9	0.2	<0.1
Phenanthrene	mg/kg	2.5	<0.1	22	4.6	<0.1
Anthracene	mg/kg	0.8	<0.1	5.1	1.4	<0.1
Fluoranthene	mg/kg	3.0	<0.1	40	7.4	<0.1
Pyrene	mg/kg	3.1	<0.1	43	7.9	<0.1
Benzo(a)anthracene	mg/kg	1.3	<0.1	22	3.8	<0.1
Chrysene	mg/kg	1.2	<0.1	17	3.1	<0.1
Benzo(b,j+k)fluoranthene	mg/kg	2	<0.2	30	5.4	<0.2
Benzo(a)pyrene	mg/kg	1.3	<0.05	21	3.7	<0.05
Indeno(1,2,3-c,d)pyrene	mg/kg	0.6	<0.1	11	1.8	<0.1
Dibenzo(a,h)anthracene	mg/kg	0.2	<0.1	3.3	0.5	<0.1
Benzo(g,h,i)perylene	mg/kg	0.7	<0.1	14	2.2	<0.1
Benzo(a)pyrene TEQ calc (zero)	mg/kg	1.8	<0.5	31	5.3	<0.5
Benzo(a)pyrene TEQ calc(half)	mg/kg	1.8	<0.5	31	5.3	<0.5
Benzo(a)pyrene TEQ calc(PQL)	mg/kg	1.8	<0.5	31	5.3	<0.5
Total +ve PAH's	mg/kg	17	<0.05	240	43	<0.05
Surrogate <i>p</i> -Terphenyl-d14	%	93	104	94	94	78

PAHs in Soil						
Our Reference		174265-9	174265-10	174265-11	174265-13	174265-15
Your Reference	UNITS	BHD	BHD	BHE	BHE	TP101
Depth		0.0-0.1	0.5-0.2	0.0-0.1	0.4-0.5	0.0-0.1
Date Sampled		22/08/2017	22/08/2017	22/08/2017	22/08/2017	21/08/2017
Type of sample		Soil	Soil	Soil	Soil	Soil
Date extracted	-	29/08/2017	29/08/2017	29/08/2017	29/08/2017	29/08/2017
Date analysed	-	29/08/2017	29/08/2017	29/08/2017	29/08/2017	29/08/2017
Naphthalene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Acenaphthylene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Acenaphthene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Fluorene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Phenanthrene	mg/kg	0.4	0.2	<0.1	<0.1	0.1
Anthracene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Fluoranthene	mg/kg	0.2	0.3	<0.1	<0.1	0.2
Pyrene	mg/kg	0.2	0.2	<0.1	<0.1	0.2
Benzo(a)anthracene	mg/kg	0.1	0.1	<0.1	<0.1	0.1
Chrysene	mg/kg	0.2	0.2	<0.1	<0.1	0.1
Benzo(b,j+k)fluoranthene	mg/kg	0.2	0.3	<0.2	<0.2	0.2
Benzo(a)pyrene	mg/kg	0.08	0.1	<0.05	<0.05	0.1
Indeno(1,2,3-c,d)pyrene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Dibenzo(a,h)anthracene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Benzo(g,h,i)perylene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Benzo(a)pyrene TEQ calc (zero)	mg/kg	<0.5	<0.5	<0.5	<0.5	<0.5
Benzo(a)pyrene TEQ calc(half)	mg/kg	<0.5	<0.5	<0.5	<0.5	<0.5
Benzo(a)pyrene TEQ calc(PQL)	mg/kg	<0.5	<0.5	<0.5	<0.5	<0.5
Total +ve PAH's	mg/kg	1.4	1.4	<0.05	<0.05	1.1
Surrogate p-Terphenyl-d14	%	95	96	95	92	98

PAHs in Soil						
Our Reference		174265-16	174265-17	174265-18	174265-19	174265-20
Your Reference	UNITS	TP101	BH102	BH102	BH103	BH103
Depth		0.14-0.2	0.0-0.1	0.9-1.0	0.0-0.1	0.9-1.0
Date Sampled		21/08/2017	22/08/2017	22/08/2017	23/08/2017	23/08/2017
Type of sample		Soil	Soil	Soil	Soil	Soil
Date extracted	-	29/08/2017	29/08/2017	29/08/2017	29/08/2017	29/08/2017
Date analysed	-	29/08/2017	29/08/2017	29/08/2017	29/08/2017	29/08/2017
Naphthalene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Acenaphthylene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Acenaphthene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Fluorene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Phenanthrene	mg/kg	<0.1	<0.1	0.1	0.1	<0.1
Anthracene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Fluoranthene	mg/kg	<0.1	0.2	0.2	0.3	<0.1
Pyrene	mg/kg	<0.1	0.2	0.2	0.3	<0.1
Benzo(a)anthracene	mg/kg	<0.1	<0.1	<0.1	0.1	<0.1
Chrysene	mg/kg	<0.1	<0.1	<0.1	0.2	<0.1
Benzo(b,j+k)fluoranthene	mg/kg	<0.2	<0.2	<0.2	0.3	<0.2
Benzo(a)pyrene	mg/kg	<0.05	0.06	0.05	0.1	<0.05
Indeno(1,2,3-c,d)pyrene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Dibenzo(a,h)anthracene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Benzo(g,h,i)perylene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Benzo(a)pyrene TEQ calc (zero)	mg/kg	<0.5	<0.5	<0.5	<0.5	<0.5
Benzo(a)pyrene TEQ calc(half)	mg/kg	<0.5	<0.5	<0.5	<0.5	<0.5
Benzo(a)pyrene TEQ calc(PQL)	mg/kg	<0.5	<0.5	<0.5	<0.5	<0.5
Total +ve PAH's	mg/kg	<0.05	0.4	0.5	1.4	<0.05
Surrogate p-Terphenyl-d14	%	97	89	93	88	100

PAHs in Soil						
Our Reference		174265-21	174265-22	174265-23	174265-24	174265-25
Your Reference	UNITS	BH104	BH105	BH105	BH106	BH106
Depth		0.2-0.3	0.0-0.1	0.9-1.0	0.0-0.1	0.9-1.0
Date Sampled		23/08/2017	24/08/2017	24/08/2017	24/08/2017	24/08/2017
Type of sample		Soil	Soil	Soil	Soil	Soil
Date extracted	-	29/08/2017	29/08/2017	29/08/2017	29/08/2017	29/08/2017
Date analysed	-	29/08/2017	29/08/2017	29/08/2017	29/08/2017	30/08/2017
Naphthalene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Acenaphthylene	mg/kg	<0.1	0.1	<0.1	<0.1	<0.1
Acenaphthene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Fluorene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Phenanthrene	mg/kg	<0.1	<0.1	<0.1	0.2	<0.1
Anthracene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Fluoranthene	mg/kg	<0.1	0.3	0.3	0.4	<0.1
Pyrene	mg/kg	<0.1	0.5	0.4	0.5	<0.1
Benzo(a)anthracene	mg/kg	<0.1	0.4	0.3	0.3	<0.1
Chrysene	mg/kg	<0.1	0.3	0.2	0.3	<0.1
Benzo(b,j+k)fluoranthene	mg/kg	<0.2	0.7	0.5	0.5	<0.2
Benzo(a)pyrene	mg/kg	<0.05	0.4	0.3	0.3	<0.05
Indeno(1,2,3-c,d)pyrene	mg/kg	<0.1	0.2	0.2	0.2	<0.1
Dibenzo(a,h)anthracene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Benzo(g,h,i)perylene	mg/kg	<0.1	0.3	0.2	0.2	<0.1
Benzo(a)pyrene TEQ calc (zero)	mg/kg	<0.5	0.6	<0.5	<0.5	<0.5
Benzo(a)pyrene TEQ calc(half)	mg/kg	<0.5	0.6	<0.5	<0.5	<0.5
Benzo(a)pyrene TEQ calc(PQL)	mg/kg	<0.5	0.6	<0.5	<0.5	<0.5
Total +ve PAH's	mg/kg	<0.05	3.2	2.3	2.8	<0.05
Surrogate p-Terphenyl-d14	%	96	96	101	91	92

PAHs in Soil						
Our Reference		174265-26	174265-27	174265-28	174265-29	174265-30
Your Reference	UNITS	BH107	BH107	BH108	BH108	BH109
Depth		0.0-0.1	0.9-1.0	0.01-0.1	1.4-1.5	0.05-0.15
Date Sampled		24/08/2017	24/08/2017	24/08/2017	24/08/2017	24/08/2017
Type of sample		Soil	Soil	Soil	Soil	Soil
Date extracted	-	29/08/2017	29/08/2017	29/08/2017	29/08/2017	29/08/2017
Date analysed	-	30/08/2017	30/08/2017	30/08/2017	30/08/2017	30/08/2017
Naphthalene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Acenaphthylene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Acenaphthene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Fluorene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Phenanthrene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Anthracene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Fluoranthene	mg/kg	0.1	<0.1	0.1	<0.1	<0.1
Pyrene	mg/kg	0.1	<0.1	0.1	<0.1	<0.1
Benzo(a)anthracene	mg/kg	<0.1	<0.1	0.1	<0.1	<0.1
Chrysene	mg/kg	<0.1	<0.1	0.1	<0.1	<0.1
Benzo(b,j+k)fluoranthene	mg/kg	<0.2	<0.2	0.2	<0.2	<0.2
Benzo(a)pyrene	mg/kg	0.07	<0.05	0.1	<0.05	<0.05
Indeno(1,2,3-c,d)pyrene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Dibenzo(a,h)anthracene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Benzo(g,h,i)perylene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Benzo(a)pyrene TEQ calc (zero)	mg/kg	<0.5	<0.5	<0.5	<0.5	<0.5
Benzo(a)pyrene TEQ calc(half)	mg/kg	<0.5	<0.5	<0.5	<0.5	<0.5
Benzo(a)pyrene TEQ calc(PQL)	mg/kg	<0.5	<0.5	<0.5	<0.5	<0.5
Total +ve PAH's	mg/kg	0.4	<0.05	0.81	<0.05	<0.05
Surrogate p-Terphenyl-d14	%	92	91	98	92	94

PAHs in Soil						
Our Reference		174265-31	174265-32	174265-33	174265-34	174265-35
Your Reference	UNITS	BH109	BH110	BH110	BH110	BH111
Depth		1.0-1.1	0.0-0.1	0.9-1.0	1.8-2.0	0.05-0.1
Date Sampled		24/08/2017	24/08/2017	24/08/2017	24/08/2017	24/08/2017
Type of sample		Soil	Soil	Soil	Soil	Soil
Date extracted	-	29/08/2017	29/08/2017	29/08/2017	29/08/2017	29/08/2017
Date analysed	-	30/08/2017	30/08/2017	30/08/2017	30/08/2017	30/08/2017
Naphthalene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Acenaphthylene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Acenaphthene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Fluorene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Phenanthrene	mg/kg	0.1	0.2	0.3	<0.1	<0.1
Anthracene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Fluoranthene	mg/kg	0.2	0.3	0.3	<0.1	<0.1
Pyrene	mg/kg	0.2	0.2	0.4	<0.1	<0.1
Benzo(a)anthracene	mg/kg	0.1	0.1	0.2	<0.1	<0.1
Chrysene	mg/kg	0.2	0.2	0.2	<0.1	<0.1
Benzo(b,j+k)fluoranthene	mg/kg	0.2	0.2	0.2	<0.2	<0.2
Benzo(a)pyrene	mg/kg	0.09	0.1	0.1	<0.05	<0.05
Indeno(1,2,3-c,d)pyrene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Dibenzo(a,h)anthracene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Benzo(g,h,i)perylene	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Benzo(a)pyrene TEQ calc (zero)	mg/kg	<0.5	<0.5	<0.5	<0.5	<0.5
Benzo(a)pyrene TEQ calc(half)	mg/kg	<0.5	<0.5	<0.5	<0.5	<0.5
Benzo(a)pyrene TEQ calc(PQL)	mg/kg	<0.5	<0.5	<0.5	<0.5	<0.5
Total +ve PAH's	mg/kg	1.1	1.4	1.7	<0.05	<0.05
Surrogate p-Terphenyl-d14	%	97	92	92	97	96

PAHs in Soil					
Our Reference		174265-36	174265-37	174265-38	174265-39
Your Reference	UNITS	BH111	BH111	BH112	DUPAS1
Depth		0.9-1.0	1.8-2.0	0.38-0.5	-
Date Sampled		24/08/2017	24/08/2017	24/08/2017	24/08/2017
Type of sample		Soil	Soil	Soil	Soil
Date extracted	-	29/08/2017	29/08/2017	29/08/2017	29/08/2017
Date analysed	-	30/08/2017	30/08/2017	30/08/2017	30/08/2017
Naphthalene	mg/kg	<0.1	<0.1	<0.1	0.3
Acenaphthylene	mg/kg	<0.1	<0.1	<0.1	4.0
Acenaphthene	mg/kg	<0.1	<0.1	<0.1	0.3
Fluorene	mg/kg	<0.1	<0.1	<0.1	1.4
Phenanthrene	mg/kg	0.1	<0.1	<0.1	22
Anthracene	mg/kg	<0.1	<0.1	<0.1	4.0
Fluoranthene	mg/kg	0.1	<0.1	<0.1	24
Pyrene	mg/kg	0.1	<0.1	<0.1	24
Benzo(a)anthracene	mg/kg	<0.1	<0.1	<0.1	11
Chrysene	mg/kg	<0.1	<0.1	<0.1	8.3
Benzo(b,j+k)fluoranthene	mg/kg	<0.2	<0.2	<0.2	14
Benzo(a)pyrene	mg/kg	<0.05	<0.05	<0.05	9.6
Indeno(1,2,3-c,d)pyrene	mg/kg	<0.1	<0.1	<0.1	4.1
Dibenzo(a,h)anthracene	mg/kg	<0.1	<0.1	<0.1	1.1
Benzo(g,h,i)perylene	mg/kg	<0.1	<0.1	<0.1	4.9
Benzo(a)pyrene TEQ calc (zero)	mg/kg	<0.5	<0.5	<0.5	14
Benzo(a)pyrene TEQ calc(half)	mg/kg	<0.5	<0.5	<0.5	14
Benzo(a)pyrene TEQ calc(PQL)	mg/kg	<0.5	<0.5	<0.5	14
Total +ve PAH's	mg/kg	0.4	<0.05	<0.05	130
Surrogate <i>p</i> -Terphenyl-d14	%	93	98	89	97

Organochlorine Pesticides in soil						
Our Reference		174265-2	174265-5	174265-7	174265-9	174265-10
Your Reference	UNITS	BHA	BHB	BHC	BHD	BHD
Depth		0.4-0.5	0.0-0.2	0.1-0.2	0.0-0.1	0.5-0.2
Date Sampled		22/08/2017	22/08/2017	22/08/2017	22/08/2017	22/08/2017
Type of sample		Soil	Soil	Soil	Soil	Soil
Date extracted	-	29/08/2017	29/08/2017	29/08/2017	29/08/2017	29/08/2017
Date analysed	-	29/08/2017	29/08/2017	29/08/2017	29/08/2017	29/08/2017
HCB	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
alpha-BHC	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
gamma-BHC	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
beta-BHC	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Heptachlor	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
delta-BHC	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Aldrin	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Heptachlor Epoxide	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
gamma-Chlordane	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
alpha-chlordane	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Endosulfan I	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
pp-DDE	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Dieldrin	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Endrin	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
pp-DDD	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Endosulfan II	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
pp-DDT	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Endrin Aldehyde	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Endosulfan Sulphate	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Methoxychlor	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Total +ve DDT+DDD+DDE	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Surrogate TCMX	%	98	106	98	95	97

Organochlorine Pesticides in soil		
Our Reference		174265-11
Your Reference	UNITS	BHE
Depth		0.0-0.1
Date Sampled		22/08/2017
Type of sample		Soil
Date extracted	-	29/08/2017
Date analysed	-	29/08/2017
HCB	mg/kg	<0.1
alpha-BHC	mg/kg	<0.1
gamma-BHC	mg/kg	<0.1
beta-BHC	mg/kg	<0.1
Heptachlor	mg/kg	<0.1
delta-BHC	mg/kg	<0.1
Aldrin	mg/kg	<0.1
Heptachlor Epoxide	mg/kg	<0.1
gamma-Chlordane	mg/kg	<0.1
alpha-chlordane	mg/kg	<0.1
Endosulfan I	mg/kg	<0.1
pp-DDE	mg/kg	<0.1
Dieldrin	mg/kg	<0.1
Endrin	mg/kg	<0.1
pp-DDD	mg/kg	<0.1
Endosulfan II	mg/kg	<0.1
pp-DDT	mg/kg	<0.1
Endrin Aldehyde	mg/kg	<0.1
Endosulfan Sulphate	mg/kg	<0.1
Methoxychlor	mg/kg	<0.1
Total +ve DDT+DDD+DDE	mg/kg	<0.1
Surrogate TCMX	%	95

Organophosphorus Pesticides						
Our Reference		174265-2	174265-5	174265-7	174265-9	174265-10
Your Reference	UNITS	BHA	BHB	BHC	BHD	BHD
Depth		0.4-0.5	0.0-0.2	0.1-0.2	0.0-0.1	0.5-0.2
Date Sampled		22/08/2017	22/08/2017	22/08/2017	22/08/2017	22/08/2017
Type of sample		Soil	Soil	Soil	Soil	Soil
Date extracted	-	29/08/2017	29/08/2017	29/08/2017	29/08/2017	29/08/2017
Date analysed	-	29/08/2017	29/08/2017	29/08/2017	29/08/2017	29/08/2017
Azinphos-methyl (Guthion)	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Bromophos-ethyl	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Chlorpyrifos	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Chlorpyrifos-methyl	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Diazinon	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Dichlorvos	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Dimethoate	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Ethion	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Fenitrothion	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Malathion	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Parathion	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Ronnel	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Surrogate TCMX	%	98	106	98	95	97

Organophosphorus Pesticides		
Our Reference		174265-11
Your Reference	UNITS	BHE
Depth		0.0-0.1
Date Sampled		22/08/2017
Type of sample		Soil
Date extracted	-	29/08/2017
Date analysed	-	29/08/2017
Azinphos-methyl (Guthion)	mg/kg	<0.1
Bromophos-ethyl	mg/kg	<0.1
Chlorpyrifos	mg/kg	<0.1
Chlorpyrifos-methyl	mg/kg	<0.1
Diazinon	mg/kg	<0.1
Dichlorvos	mg/kg	<0.1
Dimethoate	mg/kg	<0.1
Ethion	mg/kg	<0.1
Fenitrothion	mg/kg	<0.1
Malathion	mg/kg	<0.1
Parathion	mg/kg	<0.1
Ronnel	mg/kg	<0.1
Surrogate TCMX	%	95

PCBs in Soil						
Our Reference		174265-2	174265-5	174265-7	174265-9	174265-10
Your Reference	UNITS	BHA	BHB	BHC	BHD	BHD
Depth		0.4-0.5	0.0-0.2	0.1-0.2	0.0-0.1	0.5-0.2
Date Sampled		22/08/2017	22/08/2017	22/08/2017	22/08/2017	22/08/2017
Type of sample		Soil	Soil	Soil	Soil	Soil
Date extracted	-	29/08/2017	29/08/2017	29/08/2017	29/08/2017	29/08/2017
Date analysed	-	29/08/2017	29/08/2017	29/08/2017	29/08/2017	29/08/2017
Aroclor 1016	mg/kg	<0.1	<0.5	<0.1	<0.5	<0.1
Aroclor 1221	mg/kg	<0.1	<0.5	<0.1	<0.5	<0.1
Aroclor 1232	mg/kg	<0.1	<0.5	<0.1	<0.5	<0.1
Aroclor 1242	mg/kg	<0.1	<0.5	<0.1	<0.5	<0.1
Aroclor 1248	mg/kg	<0.1	<0.5	<0.1	<0.5	<0.1
Aroclor 1254	mg/kg	<0.1	<0.5	<0.1	<0.5	<0.1
Aroclor 1260	mg/kg	<0.1	<0.5	<0.1	<0.5	<0.1
Total +ve PCBs (1016-1260)	mg/kg	<0.1	<0.5	<0.1	<0.5	<0.1
Surrogate TCLMX	%	98	106	98	95	97

PCBs in Soil		
Our Reference		174265-11
Your Reference	UNITS	BHE
Depth		0.0-0.1
Date Sampled		22/08/2017
Type of sample		Soil
Date extracted	-	29/08/2017
Date analysed	-	29/08/2017
Aroclor 1016	mg/kg	<0.1
Aroclor 1221	mg/kg	<0.1
Aroclor 1232	mg/kg	<0.1
Aroclor 1242	mg/kg	<0.1
Aroclor 1248	mg/kg	<0.1
Aroclor 1254	mg/kg	<0.1
Aroclor 1260	mg/kg	<0.1
Total +ve PCBs (1016-1260)	mg/kg	<0.1
Surrogate TCLMX	%	95

Acid Extractable metals in soil						
Our Reference		174265-2	174265-4	174265-5	174265-6	174265-7
Your Reference	UNITS	BHA	BHA	BHB	BHB	BHC
Depth		0.4-0.5	0.8-0.9	0.0-0.2	0.7-1.0	0.1-0.2
Date Sampled		22/08/2017	22/08/2017	22/08/2017	22/08/2017	22/08/2017
Type of sample		Soil	Soil	Soil	Soil	Soil
Date prepared	-	29/08/2017	29/08/2017	29/08/2017	29/08/2017	29/08/2017
Date analysed	-	29/08/2017	29/08/2017	29/08/2017	29/08/2017	29/08/2017
Arsenic	mg/kg	5	7	140	23	<4
Cadmium	mg/kg	<0.4	<0.4	<0.4	<0.4	<0.4
Chromium	mg/kg	37	42	60	43	7
Copper	mg/kg	17	23	29	22	7
Lead	mg/kg	71	9	42	26	2
Mercury	mg/kg	0.2	<0.1	0.5	0.2	<0.1
Nickel	mg/kg	11	17	24	12	13
Zinc	mg/kg	66	17	67	30	8

Acid Extractable metals in soil						
Our Reference		174265-9	174265-10	174265-11	174265-13	174265-15
Your Reference	UNITS	BHD	BHD	BHE	BHE	TP101
Depth		0.0-0.1	0.5-0.2	0.0-0.1	0.4-0.5	0.0-0.1
Date Sampled		22/08/2017	22/08/2017	22/08/2017	22/08/2017	21/08/2017
Type of sample		Soil	Soil	Soil	Soil	Soil
Date prepared	-	29/08/2017	29/08/2017	29/08/2017	29/08/2017	29/08/2017
Date analysed	-	29/08/2017	29/08/2017	29/08/2017	29/08/2017	29/08/2017
Arsenic	mg/kg	9	21	<4	10	7
Cadmium	mg/kg	4.3	1	<0.4	<0.4	<0.4
Chromium	mg/kg	17	22	59	120	28
Copper	mg/kg	130	110	10	26	81
Lead	mg/kg	210	200	12	34	220
Mercury	mg/kg	0.2	0.4	<0.1	<0.1	0.3
Nickel	mg/kg	13	23	9	32	13
Zinc	mg/kg	360	170	25	44	280

Acid Extractable metals in soil						
Our Reference		174265-16	174265-17	174265-18	174265-19	174265-20
Your Reference	UNITS	TP101	BH102	BH102	BH103	BH103
Depth		0.14-0.2	0.0-0.1	0.9-1.0	0.0-0.1	0.9-1.0
Date Sampled		21/08/2017	22/08/2017	22/08/2017	23/08/2017	23/08/2017
Type of sample		Soil	Soil	Soil	Soil	Soil
Date prepared	-	29/08/2017	29/08/2017	29/08/2017	29/08/2017	29/08/2017
Date analysed	-	29/08/2017	29/08/2017	29/08/2017	29/08/2017	29/08/2017
Arsenic	mg/kg	8	7	13	110	16
Cadmium	mg/kg	<0.4	<0.4	<0.4	<0.4	<0.4
Chromium	mg/kg	77	43	24	45	99
Copper	mg/kg	25	15	28	13	25
Lead	mg/kg	34	38	160	45	40
Mercury	mg/kg	0.3	<0.1	<0.1	<0.1	<0.1
Nickel	mg/kg	31	16	6	10	19
Zinc	mg/kg	26	25	130	37	10

Acid Extractable metals in soil						
Our Reference		174265-21	174265-22	174265-23	174265-24	174265-25
Your Reference	UNITS	BH104	BH105	BH105	BH106	BH106
Depth		0.2-0.3	0.0-0.1	0.9-1.0	0.0-0.1	0.9-1.0
Date Sampled		23/08/2017	24/08/2017	24/08/2017	24/08/2017	24/08/2017
Type of sample		Soil	Soil	Soil	Soil	Soil
Date prepared	-	29/08/2017	29/08/2017	29/08/2017	29/08/2017	29/08/2017
Date analysed	-	29/08/2017	29/08/2017	29/08/2017	29/08/2017	29/08/2017
Arsenic	mg/kg	5	4	<4	150	<4
Cadmium	mg/kg	<0.4	<0.4	<0.4	<0.4	<0.4
Chromium	mg/kg	36	37	63	41	14
Copper	mg/kg	18	12	33	23	21
Lead	mg/kg	18	24	15	33	8
Mercury	mg/kg	<0.1	<0.1	<0.1	<0.1	<0.1
Nickel	mg/kg	15	11	33	15	20
Zinc	mg/kg	28	26	29	31	29

Acid Extractable metals in soil						
Our Reference		174265-26	174265-27	174265-28	174265-29	174265-30
Your Reference	UNITS	BH107	BH107	BH108	BH108	BH109
Depth		0.0-0.1	0.9-1.0	0.01-0.1	1.4-1.5	0.05-0.15
Date Sampled		24/08/2017	24/08/2017	24/08/2017	24/08/2017	24/08/2017
Type of sample		Soil	Soil	Soil	Soil	Soil
Date prepared	-	29/08/2017	29/08/2017	29/08/2017	29/08/2017	29/08/2017
Date analysed	-	29/08/2017	29/08/2017	29/08/2017	29/08/2017	29/08/2017
Arsenic	mg/kg	<4	11	7	4	32
Cadmium	mg/kg	<0.4	<0.4	<0.4	<0.4	<0.4
Chromium	mg/kg	22	69	8	39	13
Copper	mg/kg	15	23	48	20	50
Lead	mg/kg	110	34	28	17	54
Mercury	mg/kg	0.1	<0.1	0.2	<0.1	<0.1
Nickel	mg/kg	8	14	3	16	3
Zinc	mg/kg	67	13	32	26	6

Acid Extractable metals in soil						
Our Reference		174265-31	174265-32	174265-33	174265-34	174265-35
Your Reference	UNITS	BH109	BH110	BH110	BH110	BH111
Depth		1.0-1.1	0.0-0.1	0.9-1.0	1.8-2.0	0.05-0.1
Date Sampled		24/08/2017	24/08/2017	24/08/2017	24/08/2017	24/08/2017
Type of sample		Soil	Soil	Soil	Soil	Soil
Date prepared	-	29/08/2017	29/08/2017	29/08/2017	29/08/2017	29/08/2017
Date analysed	-	29/08/2017	29/08/2017	29/08/2017	29/08/2017	29/08/2017
Arsenic	mg/kg	<4	11	11	7	12
Cadmium	mg/kg	<0.4	<0.4	1	<0.4	<0.4
Chromium	mg/kg	24	20	23	17	6
Copper	mg/kg	14	54	110	27	77
Lead	mg/kg	9	70	390	32	8
Mercury	mg/kg	<0.1	<0.1	1.4	0.9	<0.1
Nickel	mg/kg	11	10	17	26	5
Zinc	mg/kg	15	330	530	130	6

Acid Extractable metals in soil						
Our Reference		174265-36	174265-37	174265-38	174265-39	174265-40
Your Reference	UNITS	BH111	BH111	BH112	DUPAS1	BHD - [TRIPLICATE]
Depth		0.9-1.0	1.8-2.0	0.38-0.5	-	0.0-0.1
Date Sampled		24/08/2017	24/08/2017	24/08/2017	24/08/2017	22/08/2017
Type of sample		Soil	Soil	Soil	Soil	Soil
Date prepared	-	29/08/2017	29/08/2017	29/08/2017	29/08/2017	29/08/2017
Date analysed	-	29/08/2017	29/08/2017	29/08/2017	29/08/2017	29/08/2017
Arsenic	mg/kg	6	11	5	14	12
Cadmium	mg/kg	<0.4	<0.4	<0.4	<0.4	4.6
Chromium	mg/kg	32	130	25	51	20
Copper	mg/kg	39	35	20	23	140
Lead	mg/kg	110	18	20	140	810
Mercury	mg/kg	0.2	<0.1	<0.1	0.2	0.2
Nickel	mg/kg	21	55	14	16	12
Zinc	mg/kg	180	46	45	140	410

Moisture						
Our Reference		174265-2	174265-4	174265-5	174265-6	174265-7
Your Reference	UNITS	BHA	BHA	BHB	BHB	BHC
Depth		0.4-0.5	0.8-0.9	0.0-0.2	0.7-1.0	0.1-0.2
Date Sampled		22/08/2017	22/08/2017	22/08/2017	22/08/2017	22/08/2017
Type of sample		Soil	Soil	Soil	Soil	Soil
Date prepared	-	29/08/2017	29/08/2017	29/08/2017	29/08/2017	29/08/2017
Date analysed	-	30/08/2017	30/08/2017	30/08/2017	30/08/2017	30/08/2017
Moisture	%	9.4	19	15	18	21

Moisture						
Our Reference		174265-9	174265-10	174265-11	174265-13	174265-15
Your Reference	UNITS	BHD	BHD	BHE	BHE	TP101
Depth		0.0-0.1	0.5-0.2	0.0-0.1	0.4-0.5	0.0-0.1
Date Sampled		22/08/2017	22/08/2017	22/08/2017	22/08/2017	21/08/2017
Type of sample		Soil	Soil	Soil	Soil	Soil
Date prepared	-	29/08/2017	29/08/2017	29/08/2017	29/08/2017	29/08/2017
Date analysed	-	30/08/2017	30/08/2017	30/08/2017	30/08/2017	30/08/2017
Moisture	%	19	16	17	16	22

Moisture						
Our Reference		174265-16	174265-17	174265-18	174265-19	174265-20
Your Reference	UNITS	TP101	BH102	BH102	BH103	BH103
Depth		0.14-0.2	0.0-0.1	0.9-1.0	0.0-0.1	0.9-1.0
Date Sampled		21/08/2017	22/08/2017	22/08/2017	23/08/2017	23/08/2017
Type of sample		Soil	Soil	Soil	Soil	Soil
Date prepared	-	29/08/2017	29/08/2017	29/08/2017	29/08/2017	29/08/2017
Date analysed	-	30/08/2017	30/08/2017	30/08/2017	30/08/2017	30/08/2017
Moisture	%	15	19	4.7	13	7.7

Moisture						
Our Reference		174265-21	174265-22	174265-23	174265-24	174265-25
Your Reference	UNITS	BH104	BH105	BH105	BH106	BH106
Depth		0.2-0.3	0.0-0.1	0.9-1.0	0.0-0.1	0.9-1.0
Date Sampled		23/08/2017	24/08/2017	24/08/2017	24/08/2017	24/08/2017
Type of sample		Soil	Soil	Soil	Soil	Soil
Date prepared	-	29/08/2017	29/08/2017	29/08/2017	29/08/2017	29/08/2017
Date analysed	-	30/08/2017	30/08/2017	30/08/2017	30/08/2017	30/08/2017
Moisture	%	9.4	8.1	22	4.8	13

Moisture						
Our Reference		174265-26	174265-27	174265-28	174265-29	174265-30
Your Reference	UNITS	BH107	BH107	BH108	BH108	BH109
Depth		0.0-0.1	0.9-1.0	0.01-0.1	1.4-1.5	0.05-0.15
Date Sampled		24/08/2017	24/08/2017	24/08/2017	24/08/2017	24/08/2017
Type of sample		Soil	Soil	Soil	Soil	Soil
Date prepared	-	29/08/2017	29/08/2017	29/08/2017	29/08/2017	29/08/2017
Date analysed	-	30/08/2017	30/08/2017	30/08/2017	30/08/2017	30/08/2017
Moisture	%	11	8.4	7.3	23	8.1

Moisture						
Our Reference		174265-31	174265-32	174265-33	174265-34	174265-35
Your Reference	UNITS	BH109	BH110	BH110	BH110	BH111
Depth		1.0-1.1	0.0-0.1	0.9-1.0	1.8-2.0	0.05-0.1
Date Sampled		24/08/2017	24/08/2017	24/08/2017	24/08/2017	24/08/2017
Type of sample		Soil	Soil	Soil	Soil	Soil
Date prepared	-	29/08/2017	29/08/2017	29/08/2017	29/08/2017	29/08/2017
Date analysed	-	30/08/2017	30/08/2017	30/08/2017	30/08/2017	30/08/2017
Moisture	%	19	17	20	14	5.2

Moisture					
Our Reference		174265-36	174265-37	174265-38	174265-39
Your Reference	UNITS	BH111	BH111	BH112	DUPAS1
Depth		0.9-1.0	1.8-2.0	0.38-0.5	-
Date Sampled		24/08/2017	24/08/2017	24/08/2017	24/08/2017
Type of sample		Soil	Soil	Soil	Soil
Date prepared	-	29/08/2017	29/08/2017	29/08/2017	29/08/2017
Date analysed	-	30/08/2017	30/08/2017	30/08/2017	30/08/2017
Moisture	%	10	11	21	11

Asbestos ID - soils						
Our Reference		174265-2	174265-5	174265-7	174265-9	174265-10
Your Reference	UNITS	BHA	BHB	BHC	BHD	BHD
Depth		0.4-0.5	0.0-0.2	0.1-0.2	0.0-0.1	0.5-0.2
Date Sampled		22/08/2017	22/08/2017	22/08/2017	22/08/2017	22/08/2017
Type of sample		Soil	Soil	Soil	Soil	Soil
Date analysed	-	30/08/2017	30/08/2017	30/08/2017	30/08/2017	30/08/2017
Sample mass tested	g	Approx. 35g	Approx. 30g	Approx. 20g	Approx. 40g	Approx. 25g
Sample Description	-	Brown coarse-grained soil & rocks	Brown coarse-grained soil & rocks	Grey coarse-grained soil & rocks	Brown coarse-grained soil & rocks	Brown coarse-grained soil & rocks
Asbestos ID in soil	-	No asbestos detected at reporting limit of 0.1g/kg	No asbestos detected at reporting limit of 0.1g/kg	No asbestos detected at reporting limit of 0.1g/kg	No asbestos detected at reporting limit of 0.1g/kg	No asbestos detected at reporting limit of 0.1g/kg
		Organic fibres detected				
Trace Analysis	-	No asbestos detected				

Asbestos ID - soils						
Our Reference		174265-11	174265-15	174265-17	174265-19	174265-21
Your Reference	UNITS	BHE	TP101	BH102	BH103	BH104
Depth		0.0-0.1	0.0-0.1	0.0-0.1	0.0-0.1	0.2-0.3
Date Sampled		22/08/2017	21/08/2017	22/08/2017	23/08/2017	23/08/2017
Type of sample		Soil	Soil	Soil	Soil	Soil
Date analysed	-	30/08/2017	30/08/2017	30/08/2017	30/08/2017	30/08/2017
Sample mass tested	g	Approx. 20g	Approx. 20g	Approx. 30g	Approx. 30g	Approx. 30g
Sample Description	-	Brown coarse-grained soil & rocks	Brown sandy soil	Brown coarse-grained soil & rocks	Brown coarse-grained soil & rocks	Brown coarse-grained soil & rocks
Asbestos ID in soil	-	No asbestos detected at reporting limit of 0.1g/kg	No asbestos detected at reporting limit of 0.1g/kg	No asbestos detected at reporting limit of 0.1g/kg	No asbestos detected at reporting limit of 0.1g/kg	No asbestos detected at reporting limit of 0.1g/kg
		Organic fibres detected				
Trace Analysis	-	No asbestos detected				

Asbestos ID - soils						
Our Reference		174265-22	174265-24	174265-26	174265-28	174265-30
Your Reference	UNITS	BH105	BH106	BH107	BH108	BH109
Depth		0.0-0.1	0.0-0.1	0.0-0.1	0.01-0.1	0.05-0.15
Date Sampled		24/08/2017	24/08/2017	24/08/2017	24/08/2017	24/08/2017
Type of sample		Soil	Soil	Soil	Soil	Soil
Date analysed	-	30/08/2017	30/08/2017	30/08/2017	30/08/2017	30/08/2017
Sample mass tested	g	Approx. 40g	Approx. 35g	Approx. 25g	Approx. 40g	Approx. 40g
Sample Description	-	Brown coarse-grained soil & rocks				
Asbestos ID in soil	-	No asbestos detected at reporting limit of 0.1g/kg Organic fibres detected	No asbestos detected at reporting limit of 0.1g/kg Organic fibres detected	No asbestos detected at reporting limit of 0.1g/kg Organic fibres detected	No asbestos detected at reporting limit of 0.1g/kg Organic fibres detected	No asbestos detected at reporting limit of 0.1g/kg Organic fibres detected
Trace Analysis	-	No asbestos detected				

Asbestos ID - soils					
Our Reference		174265-32	174265-33	174265-35	174265-36
Your Reference	UNITS	BH110	BH110	BH111	BH111
Depth		0.0-0.1	0.9-1.0	0.05-0.1	0.9-1.0
Date Sampled		24/08/2017	24/08/2017	24/08/2017	24/08/2017
Type of sample		Soil	Soil	Soil	Soil
Date analysed	-	30/08/2017	30/08/2017	30/08/2017	30/08/2017
Sample mass tested	g	Approx. 20g	Approx. 15g	Approx. 35g	Approx. 45g
Sample Description	-	Brown coarse-grained soil & rocks			
Asbestos ID in soil	-	No asbestos detected at reporting limit of 0.1g/kg Organic fibres detected	No asbestos detected at reporting limit of 0.1g/kg Organic fibres detected	No asbestos detected at reporting limit of 0.1g/kg Organic fibres detected	No asbestos detected at reporting limit of 0.1g/kg Organic fibres detected
Trace Analysis	-	No asbestos detected	No asbestos detected	No asbestos detected	No asbestos detected

Method ID	Methodology Summary
ASB-001	Asbestos ID - Qualitative identification of asbestos in bulk samples using Polarised Light Microscopy and Dispersion Staining Techniques including Synthetic Mineral Fibre and Organic Fibre as per Australian Standard 4964-2004.
Inorg-008	Moisture content determined by heating at 105+/-5 °C for a minimum of 12 hours.
Metals-020	Determination of various metals by ICP-AES.
Metals-021	Determination of Mercury by Cold Vapour AAS.
Org-003	Soil samples are extracted with Dichloromethane/Acetone and waters with Dichloromethane and analysed by GC-FID. F2 = (>C10-C16)-Naphthalene as per NEPM B1 Guideline on Investigation Levels for Soil and Groundwater (HSLs Tables 1A (3, 4)). Note Naphthalene is determined from the VOC analysis.
Org-003	Soil samples are extracted with Dichloromethane/Acetone and waters with Dichloromethane and analysed by GC-FID. F2 = (>C10-C16)-Naphthalene as per NEPM B1 Guideline on Investigation Levels for Soil and Groundwater (HSLs Tables 1A (3, 4)). Note Naphthalene is determined from the VOC analysis. Note, the Total +ve TRH PQL is reflective of the lowest individual PQL and is therefore "Total +ve TRH" is simply a sum of the positive individual TRH fractions (>C10-C40).
Org-005	Soil samples are extracted with dichloromethane/acetone and waters with dichloromethane and analysed by GC with dual ECD's.
Org-005	Soil samples are extracted with dichloromethane/acetone and waters with dichloromethane and analysed by GC with dual ECD's. Note, the Total +ve reported DDD+DDE+DDT PQL is reflective of the lowest individual PQL and is therefore simply a sum of the positive individually report DDD+DDE+DDT.
Org-006	Soil samples are extracted with dichloromethane/acetone and waters with dichloromethane and analysed by GC-ECD.
Org-006	Soil samples are extracted with dichloromethane/acetone and waters with dichloromethane and analysed by GC-ECD. Note, the Total +ve PCBs PQL is reflective of the lowest individual PQL and is therefore "Total +ve PCBs" is simply a sum of the positive individual PCBs.
Org-008	Soil samples are extracted with dichloromethane/acetone and waters with dichloromethane and analysed by GC with dual ECD's.

Method ID	Methodology Summary
Org-012	<p>Soil samples are extracted with Dichloromethane/Acetone and waters with Dichloromethane and analysed by GC-MS. Benzo(a)pyrene TEQ as per NEPM B1 Guideline on Investigation Levels for Soil and Groundwater - 2013.</p> <p>For soil results:-</p> <ol style="list-style-type: none"> 1. 'EQ PQL' values are assuming all contributing PAHs reported as <PQL are actually at the PQL. This is the most conservative approach and can give false positive TEQs given that PAHs that contribute to the TEQ calculation may not be present. 2. 'EQ zero' values are assuming all contributing PAHs reported as <PQL are zero. This is the least conservative approach and is more susceptible to false negative TEQs when PAHs that contribute to the TEQ calculation are present but below PQL. 3. 'EQ half PQL' values are assuming all contributing PAHs reported as <PQL are half the stipulated PQL. Hence a mid-point between the most and least conservative approaches above. <p>Note, the Total +ve PAHs PQL is reflective of the lowest individual PQL and is therefore "Total +ve PAHs" is simply a sum of the positive individual PAHs.</p>
Org-014	<p>Soil samples are extracted with methanol and spiked into water prior to analysing by purge and trap GC-MS.</p>
Org-016	<p>Soil samples are extracted with methanol and spiked into water prior to analysing by purge and trap GC-MS. Water samples are analysed directly by purge and trap GC-MS. F1 = (C6-C10)-BTEX as per NEPM B1 Guideline on Investigation Levels for Soil and Groundwater.</p>
Org-016	<p>Soil samples are extracted with methanol and spiked into water prior to analysing by purge and trap GC-MS. Water samples are analysed directly by purge and trap GC-MS. F1 = (C6-C10)-BTEX as per NEPM B1 Guideline on Investigation Levels for Soil and Groundwater.</p> <p>Note, the Total +ve Xylene PQL is reflective of the lowest individual PQL and is therefore "Total +ve Xylenes" is simply a sum of the positive individual Xylenes.</p>

Client Reference: E30116K, Goulburn

QUALITY CONTROL: vTRH(C6-C10)/BTEXN in Soil				Duplicate				Spike Recovery %		
Test Description	Units	PQL	Method	Blank	#	Base	Dup.	RPD	LCS-2	174265-5
Date extracted	-			29/08/2017	2	29/08/2017	29/08/2017		29/08/2017	29/08/2017
Date analysed	-			30/08/2017	2	30/08/2017	30/08/2017		30/08/2017	30/08/2017
TRH C ₆ - C ₉	mg/kg	25	Org-016	<25	2	<25	<25	0	94	88
TRH C ₆ - C ₁₀	mg/kg	25	Org-016	<25	2	<25	<25	0	94	88
Benzene	mg/kg	0.2	Org-016	<0.2	2	<0.2	<0.2	0	93	86
Toluene	mg/kg	0.5	Org-016	<0.5	2	<0.5	<0.5	0	98	86
Ethylbenzene	mg/kg	1	Org-016	<1	2	<1	<1	0	99	92
m+p-xylene	mg/kg	2	Org-016	<2	2	<2	<2	0	97	87
o-Xylene	mg/kg	1	Org-016	<1	2	<1	<1	0	96	85
naphthalene	mg/kg	1	Org-014	<1	2	<1	<1	0	[NT]	[NT]
Surrogate aaa-Trifluorotoluene	%		Org-016	120	2	114	114	0	114	109

QUALITY CONTROL: vTRH(C6-C10)/BTEXN in Soil				Duplicate				Spike Recovery %		
Test Description	Units	PQL	Method	Blank	#	Base	Dup.	RPD	LCS-3	174265-27
Date extracted	-			[NT]	15	29/08/2017	29/08/2017		29/08/2017	29/08/2017
Date analysed	-			[NT]	15	30/08/2017	30/08/2017		30/08/2017	30/08/2017
TRH C ₆ - C ₉	mg/kg	25	Org-016	[NT]	15	<25	<25	0	94	99
TRH C ₆ - C ₁₀	mg/kg	25	Org-016	[NT]	15	<25	<25	0	94	99
Benzene	mg/kg	0.2	Org-016	[NT]	15	<0.2	<0.2	0	90	96
Toluene	mg/kg	0.5	Org-016	[NT]	15	<0.5	<0.5	0	87	92
Ethylbenzene	mg/kg	1	Org-016	[NT]	15	<1	<1	0	99	102
m+p-xylene	mg/kg	2	Org-016	[NT]	15	<2	<2	0	98	102
o-Xylene	mg/kg	1	Org-016	[NT]	15	<1	<1	0	97	102
naphthalene	mg/kg	1	Org-014	[NT]	15	<1	<1	0	[NT]	[NT]
Surrogate aaa-Trifluorotoluene	%		Org-016	[NT]	15	107	103	4	114	118

QUALITY CONTROL: vTRH(C6-C10)/BTEXN in Soil				Duplicate				Spike Recovery %		
Test Description	Units	PQL	Method	Blank	#	Base	Dup.	RPD	[NT]	[NT]
Date extracted	-			[NT]	25	29/08/2017	29/08/2017		[NT]	[NT]
Date analysed	-			[NT]	25	30/08/2017	30/08/2017		[NT]	[NT]
TRH C ₆ - C ₉	mg/kg	25	Org-016	[NT]	25	<25	<25	0	[NT]	[NT]
TRH C ₆ - C ₁₀	mg/kg	25	Org-016	[NT]	25	<25	<25	0	[NT]	[NT]
Benzene	mg/kg	0.2	Org-016	[NT]	25	<0.2	<0.2	0	[NT]	[NT]
Toluene	mg/kg	0.5	Org-016	[NT]	25	<0.5	<0.5	0	[NT]	[NT]
Ethylbenzene	mg/kg	1	Org-016	[NT]	25	<1	<1	0	[NT]	[NT]
m+p-xylene	mg/kg	2	Org-016	[NT]	25	<2	<2	0	[NT]	[NT]
o-Xylene	mg/kg	1	Org-016	[NT]	25	<1	<1	0	[NT]	[NT]
naphthalene	mg/kg	1	Org-014	[NT]	25	<1	<1	0	[NT]	[NT]
Surrogate aaa-Trifluorotoluene	%		Org-016	[NT]	25	122	106	14	[NT]	[NT]

Client Reference: E30116K, Goulburn

QUALITY CONTROL: vTRH(C6-C10)/BTEXN in Soil					Duplicate			Spike Recovery %		
Test Description	Units	PQL	Method	Blank	#	Base	Dup.	RPD	[NT]	[NT]
Date extracted	-			[NT]	35	29/08/2017	29/08/2017		[NT]	[NT]
Date analysed	-			[NT]	35	30/08/2017	30/08/2017		[NT]	[NT]
TRH C ₆ - C ₉	mg/kg	25	Org-016	[NT]	35	<25	<25	0	[NT]	[NT]
TRH C ₆ - C ₁₀	mg/kg	25	Org-016	[NT]	35	<25	<25	0	[NT]	[NT]
Benzene	mg/kg	0.2	Org-016	[NT]	35	<0.2	<0.2	0	[NT]	[NT]
Toluene	mg/kg	0.5	Org-016	[NT]	35	<0.5	<0.5	0	[NT]	[NT]
Ethylbenzene	mg/kg	1	Org-016	[NT]	35	<1	<1	0	[NT]	[NT]
m+p-xylene	mg/kg	2	Org-016	[NT]	35	<2	<2	0	[NT]	[NT]
o-Xylene	mg/kg	1	Org-016	[NT]	35	<1	<1	0	[NT]	[NT]
naphthalene	mg/kg	1	Org-014	[NT]	35	<1	<1	0	[NT]	[NT]
Surrogate aaa-Trifluorotoluene	%		Org-016	[NT]	35	118	118	0	[NT]	[NT]

Client Reference: E30116K, Goulburn

QUALITY CONTROL: svTRH (C10-C40) in Soil					Duplicate			Spike Recovery %		
Test Description	Units	PQL	Method	Blank	#	Base	Dup.	RPD	LCS-2	174265-5
Date extracted	-			29/08/2017	2	29/08/2017	29/08/2017		29/08/2017	29/08/2017
Date analysed	-			30/08/2017	2	30/08/2017	30/08/2017		30/08/2017	30/08/2017
TRH C ₁₀ - C ₁₄	mg/kg	50	Org-003	<50	2	<50	<50	0	103	122
TRH C ₁₅ - C ₂₈	mg/kg	100	Org-003	<100	2	<100	<100	0	107	89
TRH C ₂₉ - C ₃₆	mg/kg	100	Org-003	<100	2	<100	<100	0	76	#
TRH >C ₁₀ -C ₁₆	mg/kg	50	Org-003	<50	2	<50	<50	0	103	122
TRH >C ₁₆ -C ₃₄	mg/kg	100	Org-003	<100	2	<100	<100	0	107	89
TRH >C ₃₄ -C ₄₀	mg/kg	100	Org-003	<100	2	<100	<100	0	76	#
Surrogate o-Terphenyl	%		Org-003	79	2	102	94	8	94	112

QUALITY CONTROL: svTRH (C10-C40) in Soil					Duplicate			Spike Recovery %		
Test Description	Units	PQL	Method	Blank	#	Base	Dup.	RPD	LCS-3	174265-27
Date extracted	-			[NT]	15	29/08/2017	29/08/2017		29/08/2017	29/08/2017
Date analysed	-			[NT]	15	29/08/2017	29/08/2017		30/08/2017	29/08/2017
TRH C ₁₀ - C ₁₄	mg/kg	50	Org-003	[NT]	15	<50	<50	0	93	95
TRH C ₁₅ - C ₂₈	mg/kg	100	Org-003	[NT]	15	<100	<100	0	98	99
TRH C ₂₉ - C ₃₆	mg/kg	100	Org-003	[NT]	15	<100	<100	0	91	89
TRH >C ₁₀ -C ₁₆	mg/kg	50	Org-003	[NT]	15	<50	<50	0	93	95
TRH >C ₁₆ -C ₃₄	mg/kg	100	Org-003	[NT]	15	<100	<100	0	98	99
TRH >C ₃₄ -C ₄₀	mg/kg	100	Org-003	[NT]	15	<100	<100	0	91	89
Surrogate o-Terphenyl	%		Org-003	[NT]	15	102	91	11	80	91

QUALITY CONTROL: svTRH (C10-C40) in Soil					Duplicate			Spike Recovery %		
Test Description	Units	PQL	Method	Blank	#	Base	Dup.	RPD	[NT]	[NT]
Date extracted	-			[NT]	25	29/08/2017	29/08/2017		[NT]	[NT]
Date analysed	-			[NT]	25	29/08/2017	29/08/2017		[NT]	[NT]
TRH C ₁₀ - C ₁₄	mg/kg	50	Org-003	[NT]	25	<50	<50	0	[NT]	[NT]
TRH C ₁₅ - C ₂₈	mg/kg	100	Org-003	[NT]	25	<100	<100	0	[NT]	[NT]
TRH C ₂₉ - C ₃₆	mg/kg	100	Org-003	[NT]	25	<100	<100	0	[NT]	[NT]
TRH >C ₁₀ -C ₁₆	mg/kg	50	Org-003	[NT]	25	<50	<50	0	[NT]	[NT]
TRH >C ₁₆ -C ₃₄	mg/kg	100	Org-003	[NT]	25	<100	<100	0	[NT]	[NT]
TRH >C ₃₄ -C ₄₀	mg/kg	100	Org-003	[NT]	25	<100	<100	0	[NT]	[NT]
Surrogate o-Terphenyl	%		Org-003	[NT]	25	85	85	0	[NT]	[NT]

Client Reference: E30116K, Goulburn

QUALITY CONTROL: svTRH (C10-C40) in Soil					Duplicate			Spike Recovery %		
Test Description	Units	PQL	Method	Blank	#	Base	Dup.	RPD	[NT]	[NT]
Date extracted	-			[NT]	35	29/08/2017	29/08/2017		[NT]	[NT]
Date analysed	-			[NT]	35	30/08/2017	30/08/2017		[NT]	[NT]
TRH C ₁₀ - C ₁₄	mg/kg	50	Org-003	[NT]	35	<50	<50	0	[NT]	[NT]
TRH C ₁₅ - C ₂₈	mg/kg	100	Org-003	[NT]	35	<100	<100	0	[NT]	[NT]
TRH C ₂₉ - C ₃₆	mg/kg	100	Org-003	[NT]	35	<100	<100	0	[NT]	[NT]
TRH >C ₁₀ -C ₁₆	mg/kg	50	Org-003	[NT]	35	<50	<50	0	[NT]	[NT]
TRH >C ₁₆ -C ₃₄	mg/kg	100	Org-003	[NT]	35	<100	<100	0	[NT]	[NT]
TRH >C ₃₄ -C ₄₀	mg/kg	100	Org-003	[NT]	35	<100	<100	0	[NT]	[NT]
Surrogate o-Terphenyl	%		Org-003	[NT]	35	87	98	12	[NT]	[NT]

Client Reference: E30116K, Goulburn

QUALITY CONTROL: PAHs in Soil				Duplicate				Spike Recovery %		
Test Description	Units	PQL	Method	Blank	#	Base	Dup.	RPD	LCS-2	174265-5
Date extracted	-			29/08/2017	2	29/08/2017	29/08/2017		29/08/2017	29/08/2017
Date analysed	-			30/08/2017	2	30/08/2017	30/08/2017		29/08/2017	29/08/2017
Naphthalene	mg/kg	0.1	Org-012	<0.1	2	<0.1	<0.1	0	101	83
Acenaphthylene	mg/kg	0.1	Org-012	<0.1	2	0.4	0.2	67	[NT]	[NT]
Acenaphthene	mg/kg	0.1	Org-012	<0.1	2	<0.1	<0.1	0	[NT]	[NT]
Fluorene	mg/kg	0.1	Org-012	<0.1	2	0.2	<0.1	67	104	101
Phenanthrene	mg/kg	0.1	Org-012	<0.1	2	2.5	1.1	78	109	#
Anthracene	mg/kg	0.1	Org-012	<0.1	2	0.8	0.4	67	[NT]	[NT]
Fluoranthene	mg/kg	0.1	Org-012	<0.1	2	3.0	1.9	45	108	#
Pyrene	mg/kg	0.1	Org-012	<0.1	2	3.1	2.0	43	111	#
Benzo(a)anthracene	mg/kg	0.1	Org-012	<0.1	2	1.3	1.0	26	[NT]	[NT]
Chrysene	mg/kg	0.1	Org-012	<0.1	2	1.2	0.9	29	109	#
Benzo(b,j+k)fluoranthene	mg/kg	0.2	Org-012	<0.2	2	2	2	0	[NT]	[NT]
Benzo(a)pyrene	mg/kg	0.05	Org-012	<0.05	2	1.3	1.0	26	113	#
Indeno(1,2,3-c,d)pyrene	mg/kg	0.1	Org-012	<0.1	2	0.6	0.5	18	[NT]	[NT]
Dibenzo(a,h)anthracene	mg/kg	0.1	Org-012	<0.1	2	0.2	0.1	67	[NT]	[NT]
Benzo(g,h,i)perylene	mg/kg	0.1	Org-012	<0.1	2	0.7	0.6	15	[NT]	[NT]
Surrogate p-Terphenyl-d14	%		Org-012	100	2	93	91	2	116	106

QUALITY CONTROL: PAHs in Soil				Duplicate				Spike Recovery %		
Test Description	Units	PQL	Method	Blank	#	Base	Dup.	RPD	LCS-3	174265-27
Date extracted	-			[NT]	15	29/08/2017	29/08/2017		29/08/2017	29/08/2017
Date analysed	-			[NT]	15	29/08/2017	29/08/2017		30/08/2017	30/08/2017
Naphthalene	mg/kg	0.1	Org-012	[NT]	15	<0.1	<0.1	0	95	93
Acenaphthylene	mg/kg	0.1	Org-012	[NT]	15	<0.1	<0.1	0	[NT]	[NT]
Acenaphthene	mg/kg	0.1	Org-012	[NT]	15	<0.1	<0.1	0	[NT]	[NT]
Fluorene	mg/kg	0.1	Org-012	[NT]	15	<0.1	<0.1	0	105	104
Phenanthrene	mg/kg	0.1	Org-012	[NT]	15	0.1	0.1	0	106	104
Anthracene	mg/kg	0.1	Org-012	[NT]	15	<0.1	<0.1	0	[NT]	[NT]
Fluoranthene	mg/kg	0.1	Org-012	[NT]	15	0.2	0.3	40	102	99
Pyrene	mg/kg	0.1	Org-012	[NT]	15	0.2	0.3	40	107	104
Benzo(a)anthracene	mg/kg	0.1	Org-012	[NT]	15	0.1	0.2	67	[NT]	[NT]
Chrysene	mg/kg	0.1	Org-012	[NT]	15	0.1	0.1	0	102	99
Benzo(b,j+k)fluoranthene	mg/kg	0.2	Org-012	[NT]	15	0.2	0.2	0	[NT]	[NT]
Benzo(a)pyrene	mg/kg	0.05	Org-012	[NT]	15	0.1	0.1	0	94	84
Indeno(1,2,3-c,d)pyrene	mg/kg	0.1	Org-012	[NT]	15	<0.1	<0.1	0	[NT]	[NT]
Dibenzo(a,h)anthracene	mg/kg	0.1	Org-012	[NT]	15	<0.1	<0.1	0	[NT]	[NT]
Benzo(g,h,i)perylene	mg/kg	0.1	Org-012	[NT]	15	<0.1	0.1	0	[NT]	[NT]
Surrogate p-Terphenyl-d14	%		Org-012	[NT]	15	98	99	1	110	109

Client Reference: E30116K, Goulburn

QUALITY CONTROL: PAHs in Soil					Duplicate			Spike Recovery %		
Test Description	Units	PQL	Method	Blank	#	Base	Dup.	RPD	[NT]	[NT]
Date extracted	-			[NT]	25	29/08/2017	29/08/2017		[NT]	[NT]
Date analysed	-			[NT]	25	30/08/2017	30/08/2017		[NT]	[NT]
Naphthalene	mg/kg	0.1	Org-012	[NT]	25	<0.1	<0.1	0	[NT]	[NT]
Acenaphthylene	mg/kg	0.1	Org-012	[NT]	25	<0.1	<0.1	0	[NT]	[NT]
Acenaphthene	mg/kg	0.1	Org-012	[NT]	25	<0.1	<0.1	0	[NT]	[NT]
Fluorene	mg/kg	0.1	Org-012	[NT]	25	<0.1	<0.1	0	[NT]	[NT]
Phenanthrene	mg/kg	0.1	Org-012	[NT]	25	<0.1	<0.1	0	[NT]	[NT]
Anthracene	mg/kg	0.1	Org-012	[NT]	25	<0.1	<0.1	0	[NT]	[NT]
Fluoranthene	mg/kg	0.1	Org-012	[NT]	25	<0.1	<0.1	0	[NT]	[NT]
Pyrene	mg/kg	0.1	Org-012	[NT]	25	<0.1	<0.1	0	[NT]	[NT]
Benzo(a)anthracene	mg/kg	0.1	Org-012	[NT]	25	<0.1	<0.1	0	[NT]	[NT]
Chrysene	mg/kg	0.1	Org-012	[NT]	25	<0.1	<0.1	0	[NT]	[NT]
Benzo(b,j+k)fluoranthene	mg/kg	0.2	Org-012	[NT]	25	<0.2	<0.2	0	[NT]	[NT]
Benzo(a)pyrene	mg/kg	0.05	Org-012	[NT]	25	<0.05	<0.05	0	[NT]	[NT]
Indeno(1,2,3-c,d)pyrene	mg/kg	0.1	Org-012	[NT]	25	<0.1	<0.1	0	[NT]	[NT]
Dibenzo(a,h)anthracene	mg/kg	0.1	Org-012	[NT]	25	<0.1	<0.1	0	[NT]	[NT]
Benzo(g,h,i)perylene	mg/kg	0.1	Org-012	[NT]	25	<0.1	<0.1	0	[NT]	[NT]
Surrogate p-Terphenyl-d14	%		Org-012	[NT]	25	92	96	4	[NT]	[NT]

QUALITY CONTROL: PAHs in Soil					Duplicate			Spike Recovery %		
Test Description	Units	PQL	Method	Blank	#	Base	Dup.	RPD	[NT]	[NT]
Date extracted	-			[NT]	35	29/08/2017	29/08/2017		[NT]	[NT]
Date analysed	-			[NT]	35	30/08/2017	30/08/2017		[NT]	[NT]
Naphthalene	mg/kg	0.1	Org-012	[NT]	35	<0.1	<0.1	0	[NT]	[NT]
Acenaphthylene	mg/kg	0.1	Org-012	[NT]	35	<0.1	<0.1	0	[NT]	[NT]
Acenaphthene	mg/kg	0.1	Org-012	[NT]	35	<0.1	<0.1	0	[NT]	[NT]
Fluorene	mg/kg	0.1	Org-012	[NT]	35	<0.1	<0.1	0	[NT]	[NT]
Phenanthrene	mg/kg	0.1	Org-012	[NT]	35	<0.1	<0.1	0	[NT]	[NT]
Anthracene	mg/kg	0.1	Org-012	[NT]	35	<0.1	<0.1	0	[NT]	[NT]
Fluoranthene	mg/kg	0.1	Org-012	[NT]	35	<0.1	<0.1	0	[NT]	[NT]
Pyrene	mg/kg	0.1	Org-012	[NT]	35	<0.1	<0.1	0	[NT]	[NT]
Benzo(a)anthracene	mg/kg	0.1	Org-012	[NT]	35	<0.1	<0.1	0	[NT]	[NT]
Chrysene	mg/kg	0.1	Org-012	[NT]	35	<0.1	<0.1	0	[NT]	[NT]
Benzo(b,j+k)fluoranthene	mg/kg	0.2	Org-012	[NT]	35	<0.2	<0.2	0	[NT]	[NT]
Benzo(a)pyrene	mg/kg	0.05	Org-012	[NT]	35	<0.05	<0.05	0	[NT]	[NT]
Indeno(1,2,3-c,d)pyrene	mg/kg	0.1	Org-012	[NT]	35	<0.1	<0.1	0	[NT]	[NT]
Dibenzo(a,h)anthracene	mg/kg	0.1	Org-012	[NT]	35	<0.1	<0.1	0	[NT]	[NT]
Benzo(g,h,i)perylene	mg/kg	0.1	Org-012	[NT]	35	<0.1	<0.1	0	[NT]	[NT]
Surrogate p-Terphenyl-d14	%		Org-012	[NT]	35	96	95	1	[NT]	[NT]

Client Reference: E30116K, Goulburn

QUALITY CONTROL: PAHs in Soil				Duplicate				Spike Recovery %		
Test Description	Units	PQL	Method	Blank	#	Base	Dup.	RPD	[NT]	[NT]
Date extracted	-			[NT]	5	29/08/2017	31/08/2017		[NT]	[NT]
Date analysed	-			[NT]	5	29/08/2017	31/08/2017		[NT]	[NT]
Naphthalene	mg/kg	0.1	Org-012	[NT]	5	0.7	0.1	150	[NT]	[NT]
Acenaphthylene	mg/kg	0.1	Org-012	[NT]	5	7.0	0.9	154	[NT]	[NT]
Acenaphthene	mg/kg	0.1	Org-012	[NT]	5	0.2	<0.1	67	[NT]	[NT]
Fluorene	mg/kg	0.1	Org-012	[NT]	5	0.9	0.2	127	[NT]	[NT]
Phenanthrene	mg/kg	0.1	Org-012	[NT]	5	22	6.0	114	[NT]	[NT]
Anthracene	mg/kg	0.1	Org-012	[NT]	5	5.1	1.0	134	[NT]	[NT]
Fluoranthene	mg/kg	0.1	Org-012	[NT]	5	40	12	108	[NT]	[NT]
Pyrene	mg/kg	0.1	Org-012	[NT]	5	43	13	107	[NT]	[NT]
Benzo(a)anthracene	mg/kg	0.1	Org-012	[NT]	5	22	6.2	112	[NT]	[NT]
Chrysene	mg/kg	0.1	Org-012	[NT]	5	17	5.3	105	[NT]	[NT]
Benzo(b,j+k)fluoranthene	mg/kg	0.2	Org-012	[NT]	5	30	9.5	104	[NT]	[NT]
Benzo(a)pyrene	mg/kg	0.05	Org-012	[NT]	5	21	6.4	107	[NT]	[NT]
Indeno(1,2,3-c,d)pyrene	mg/kg	0.1	Org-012	[NT]	5	11	3.1	112	[NT]	[NT]
Dibenzo(a,h)anthracene	mg/kg	0.1	Org-012	[NT]	5	3.3	0.8	122	[NT]	[NT]
Benzo(g,h,i)perylene	mg/kg	0.1	Org-012	[NT]	5	14	3.9	113	[NT]	[NT]
Surrogate p-Terphenyl-d14	%		Org-012	[NT]	5	94	93	1	[NT]	[NT]

QUALITY CONTROL: PAHs in Soil				Duplicate				Spike Recovery %		
Test Description	Units	PQL	Method	Blank	#	Base	Dup.	RPD	[NT]	[NT]
Date extracted	-			[NT]	39	29/08/2017	31/08/2017		[NT]	[NT]
Date analysed	-			[NT]	39	30/08/2017	31/08/2017		[NT]	[NT]
Naphthalene	mg/kg	0.1	Org-012	[NT]	39	0.3	<0.1	100	[NT]	[NT]
Acenaphthylene	mg/kg	0.1	Org-012	[NT]	39	4.0	0.1	190	[NT]	[NT]
Acenaphthene	mg/kg	0.1	Org-012	[NT]	39	0.3	<0.1	100	[NT]	[NT]
Fluorene	mg/kg	0.1	Org-012	[NT]	39	1.4	<0.1	173	[NT]	[NT]
Phenanthrene	mg/kg	0.1	Org-012	[NT]	39	22	1.1	181	[NT]	[NT]
Anthracene	mg/kg	0.1	Org-012	[NT]	39	4.0	0.2	181	[NT]	[NT]
Fluoranthene	mg/kg	0.1	Org-012	[NT]	39	24	2.0	169	[NT]	[NT]
Pyrene	mg/kg	0.1	Org-012	[NT]	39	24	2.1	168	[NT]	[NT]
Benzo(a)anthracene	mg/kg	0.1	Org-012	[NT]	39	11	1	167	[NT]	[NT]
Chrysene	mg/kg	0.1	Org-012	[NT]	39	8.3	0.9	161	[NT]	[NT]
Benzo(b,j+k)fluoranthene	mg/kg	0.2	Org-012	[NT]	39	14	2	150	[NT]	[NT]
Benzo(a)pyrene	mg/kg	0.05	Org-012	[NT]	39	9.6	1.0	162	[NT]	[NT]
Indeno(1,2,3-c,d)pyrene	mg/kg	0.1	Org-012	[NT]	39	4.1	0.5	157	[NT]	[NT]
Dibenzo(a,h)anthracene	mg/kg	0.1	Org-012	[NT]	39	1.1	0.1	167	[NT]	[NT]
Benzo(g,h,i)perylene	mg/kg	0.1	Org-012	[NT]	39	4.9	0.6	156	[NT]	[NT]
Surrogate p-Terphenyl-d14	%		Org-012	[NT]	39	97	89	9	[NT]	[NT]

Client Reference: E30116K, Goulburn

QUALITY CONTROL: Organochlorine Pesticides in soil				Duplicate				Spike Recovery %		
Test Description	Units	PQL	Method	Blank	#	Base	Dup.	RPD	LCS-2	174265-5
Date extracted	-			29/08/2017	2	29/08/2017	29/08/2017		29/08/2017	29/08/2017
Date analysed	-			29/08/2017	2	29/08/2017	29/08/2017		29/08/2017	29/08/2017
HCB	mg/kg	0.1	Org-005	<0.1	2	<0.1	<0.1	0	[NT]	[NT]
alpha-BHC	mg/kg	0.1	Org-005	<0.1	2	<0.1	<0.1	0	83	85
gamma-BHC	mg/kg	0.1	Org-005	<0.1	2	<0.1	<0.1	0	[NT]	[NT]
beta-BHC	mg/kg	0.1	Org-005	<0.1	2	<0.1	<0.1	0	97	101
Heptachlor	mg/kg	0.1	Org-005	<0.1	2	<0.1	<0.1	0	85	92
delta-BHC	mg/kg	0.1	Org-005	<0.1	2	<0.1	<0.1	0	[NT]	[NT]
Aldrin	mg/kg	0.1	Org-005	<0.1	2	<0.1	<0.1	0	98	105
Heptachlor Epoxide	mg/kg	0.1	Org-005	<0.1	2	<0.1	<0.1	0	90	95
gamma-Chlordane	mg/kg	0.1	Org-005	<0.1	2	<0.1	<0.1	0	[NT]	[NT]
alpha-chlordane	mg/kg	0.1	Org-005	<0.1	2	<0.1	<0.1	0	[NT]	[NT]
Endosulfan I	mg/kg	0.1	Org-005	<0.1	2	<0.1	<0.1	0	[NT]	[NT]
pp-DDE	mg/kg	0.1	Org-005	<0.1	2	<0.1	<0.1	0	101	109
Dieldrin	mg/kg	0.1	Org-005	<0.1	2	<0.1	<0.1	0	99	105
Endrin	mg/kg	0.1	Org-005	<0.1	2	<0.1	<0.1	0	79	87
pp-DDD	mg/kg	0.1	Org-005	<0.1	2	<0.1	<0.1	0	97	109
Endosulfan II	mg/kg	0.1	Org-005	<0.1	2	<0.1	<0.1	0	[NT]	[NT]
pp-DDT	mg/kg	0.1	Org-005	<0.1	2	<0.1	<0.1	0	[NT]	[NT]
Endrin Aldehyde	mg/kg	0.1	Org-005	<0.1	2	<0.1	<0.1	0	[NT]	[NT]
Endosulfan Sulphate	mg/kg	0.1	Org-005	<0.1	2	<0.1	<0.1	0	75	69
Methoxychlor	mg/kg	0.1	Org-005	<0.1	2	<0.1	<0.1	0	[NT]	[NT]
Surrogate TCMX	%		Org-005	99	2	98	99	1	105	114

Client Reference: E30116K, Goulburn

QUALITY CONTROL: Organophosphorus Pesticides				Duplicate				Spike Recovery %		
Test Description	Units	PQL	Method	Blank	#	Base	Dup.	RPD	LCS-2	174265-5
Date extracted	-			29/08/2017	2	29/08/2017	29/08/2017		29/08/2017	29/08/2017
Date analysed	-			29/08/2017	2	29/08/2017	29/08/2017		29/08/2017	29/08/2017
Azinphos-methyl (Guthion)	mg/kg	0.1	Org-008	<0.1	2	<0.1	<0.1	0	[NT]	77
Bromophos-ethyl	mg/kg	0.1	Org-008	<0.1	2	<0.1	<0.1	0	[NT]	[NT]
Chlorpyriphos	mg/kg	0.1	Org-008	<0.1	2	<0.1	<0.1	0	81	78
Chlorpyriphos-methyl	mg/kg	0.1	Org-008	<0.1	2	<0.1	<0.1	0	[NT]	[NT]
Diazinon	mg/kg	0.1	Org-008	<0.1	2	<0.1	<0.1	0	[NT]	[NT]
Dichlorvos	mg/kg	0.1	Org-008	<0.1	2	<0.1	<0.1	0	106	114
Dimethoate	mg/kg	0.1	Org-008	<0.1	2	<0.1	<0.1	0	[NT]	[NT]
Ethion	mg/kg	0.1	Org-008	<0.1	2	<0.1	<0.1	0	82	105
Fenitrothion	mg/kg	0.1	Org-008	<0.1	2	<0.1	<0.1	0	82	139
Malathion	mg/kg	0.1	Org-008	<0.1	2	<0.1	<0.1	0	75	91
Parathion	mg/kg	0.1	Org-008	<0.1	2	<0.1	<0.1	0	84	[NT]
Ronnel	mg/kg	0.1	Org-008	<0.1	2	<0.1	<0.1	0	91	87
Surrogate TCMX	%		Org-008	99	2	98	99	1	98	99

Client Reference: E30116K, Goulburn

QUALITY CONTROL: PCBs in Soil				Duplicate				Spike Recovery %		
Test Description	Units	PQL	Method	Blank	#	Base	Dup.	RPD	LCS-2	174265-5
Date extracted	-			29/08/2017	2	29/08/2017	29/08/2017		29/08/2017	29/08/2017
Date analysed	-			29/08/2017	2	29/08/2017	29/08/2017		29/08/2017	29/08/2017
Aroclor 1016	mg/kg	0.1	Org-006	<0.1	2	<0.1	<0.1	0	[NT]	[NT]
Aroclor 1221	mg/kg	0.1	Org-006	<0.1	2	<0.1	<0.1	0	[NT]	[NT]
Aroclor 1232	mg/kg	0.1	Org-006	<0.1	2	<0.1	<0.1	0	[NT]	[NT]
Aroclor 1242	mg/kg	0.1	Org-006	<0.1	2	<0.1	<0.1	0	[NT]	[NT]
Aroclor 1248	mg/kg	0.1	Org-006	<0.1	2	<0.1	<0.1	0	[NT]	[NT]
Aroclor 1254	mg/kg	0.1	Org-006	<0.1	2	<0.1	<0.1	0	122	121
Aroclor 1260	mg/kg	0.1	Org-006	<0.1	2	<0.1	<0.1	0	[NT]	[NT]
Surrogate TCLMX	%		Org-006	99	2	98	99	1	98	99

Client Reference: E30116K, Goulburn

QUALITY CONTROL: Acid Extractable metals in soil				Duplicate				Spike Recovery %		
Test Description	Units	PQL	Method	Blank	#	Base	Dup.	RPD	LCS-2	174265-5
Date prepared	-			29/08/2017	2	29/08/2017	29/08/2017		29/08/2017	29/08/2017
Date analysed	-			29/08/2017	2	29/08/2017	29/08/2017		29/08/2017	29/08/2017
Arsenic	mg/kg	4	Metals-020	<4	2	5	6	18	107	72
Cadmium	mg/kg	0.4	Metals-020	<0.4	2	<0.4	<0.4	0	105	92
Chromium	mg/kg	1	Metals-020	<1	2	37	49	28	106	103
Copper	mg/kg	1	Metals-020	<1	2	17	17	0	108	101
Lead	mg/kg	1	Metals-020	<1	2	71	75	5	101	95
Mercury	mg/kg	0.1	Metals-021	<0.1	2	0.2	0.2	0	100	84
Nickel	mg/kg	1	Metals-020	<1	2	11	11	0	100	75
Zinc	mg/kg	1	Metals-020	<1	2	66	75	13	101	106

QUALITY CONTROL: Acid Extractable metals in soil				Duplicate				Spike Recovery %		
Test Description	Units	PQL	Method	Blank	#	Base	Dup.	RPD	LCS-3	174265-27
Date prepared	-			[NT]	15	29/08/2017	29/08/2017		29/08/2017	29/08/2017
Date analysed	-			[NT]	15	29/08/2017	29/08/2017		29/08/2017	29/08/2017
Arsenic	mg/kg	4	Metals-020	[NT]	15	7	8	13	106	73
Cadmium	mg/kg	0.4	Metals-020	[NT]	15	<0.4	<0.4	0	103	88
Chromium	mg/kg	1	Metals-020	[NT]	15	28	43	42	106	72
Copper	mg/kg	1	Metals-020	[NT]	15	81	89	9	107	93
Lead	mg/kg	1	Metals-020	[NT]	15	220	160	32	101	95
Mercury	mg/kg	0.1	Metals-021	[NT]	15	0.3	0.6	67	98	95
Nickel	mg/kg	1	Metals-020	[NT]	15	13	14	7	100	83
Zinc	mg/kg	1	Metals-020	[NT]	15	280	290	4	101	83

QUALITY CONTROL: Acid Extractable metals in soil				Duplicate				Spike Recovery %		
Test Description	Units	PQL	Method	Blank	#	Base	Dup.	RPD	[NT]	[NT]
Date prepared	-			[NT]	25	29/08/2017	29/08/2017		[NT]	[NT]
Date analysed	-			[NT]	25	29/08/2017	29/08/2017		[NT]	[NT]
Arsenic	mg/kg	4	Metals-020	[NT]	25	<4	4	0	[NT]	[NT]
Cadmium	mg/kg	0.4	Metals-020	[NT]	25	<0.4	<0.4	0	[NT]	[NT]
Chromium	mg/kg	1	Metals-020	[NT]	25	14	15	7	[NT]	[NT]
Copper	mg/kg	1	Metals-020	[NT]	25	21	20	5	[NT]	[NT]
Lead	mg/kg	1	Metals-020	[NT]	25	8	8	0	[NT]	[NT]
Mercury	mg/kg	0.1	Metals-021	[NT]	25	<0.1	<0.1	0	[NT]	[NT]
Nickel	mg/kg	1	Metals-020	[NT]	25	20	19	5	[NT]	[NT]
Zinc	mg/kg	1	Metals-020	[NT]	25	29	29	0	[NT]	[NT]

Client Reference: E30116K, Goulburn

QUALITY CONTROL: Acid Extractable metals in soil				Duplicate				Spike Recovery %		
Test Description	Units	PQL	Method	Blank	#	Base	Dup.	RPD	[NT]	[NT]
Date prepared	-			[NT]	35	29/08/2017	29/08/2017		[NT]	[NT]
Date analysed	-			[NT]	35	29/08/2017	29/08/2017		[NT]	[NT]
Arsenic	mg/kg	4	Metals-020	[NT]	35	12	20	50	[NT]	[NT]
Cadmium	mg/kg	0.4	Metals-020	[NT]	35	<0.4	<0.4	0	[NT]	[NT]
Chromium	mg/kg	1	Metals-020	[NT]	35	6	6	0	[NT]	[NT]
Copper	mg/kg	1	Metals-020	[NT]	35	77	80	4	[NT]	[NT]
Lead	mg/kg	1	Metals-020	[NT]	35	8	7	13	[NT]	[NT]
Mercury	mg/kg	0.1	Metals-021	[NT]	35	<0.1	<0.1	0	[NT]	[NT]
Nickel	mg/kg	1	Metals-020	[NT]	35	5	6	18	[NT]	[NT]
Zinc	mg/kg	1	Metals-020	[NT]	35	6	7	15	[NT]	[NT]

QUALITY CONTROL: Acid Extractable metals in soil				Duplicate				Spike Recovery %		
Test Description	Units	PQL	Method	Blank	#	Base	Dup.	RPD	[NT]	[NT]
Date prepared	-			[NT]	9	29/08/2017	29/08/2017		[NT]	[NT]
Date analysed	-			[NT]	9	29/08/2017	29/08/2017		[NT]	[NT]
Arsenic	mg/kg	4	Metals-020	[NT]	9	9	9	0	[NT]	[NT]
Cadmium	mg/kg	0.4	Metals-020	[NT]	9	4.3	5.0	15	[NT]	[NT]
Chromium	mg/kg	1	Metals-020	[NT]	9	17	18	6	[NT]	[NT]
Copper	mg/kg	1	Metals-020	[NT]	9	130	390	100	[NT]	[NT]
Lead	mg/kg	1	Metals-020	[NT]	9	210	250	17	[NT]	[NT]
Mercury	mg/kg	0.1	Metals-021	[NT]	9	0.2	0.2	0	[NT]	[NT]
Nickel	mg/kg	1	Metals-020	[NT]	9	13	11	17	[NT]	[NT]
Zinc	mg/kg	1	Metals-020	[NT]	9	360	350	3	[NT]	[NT]

Result Definitions

NT	Not tested
NA	Test not required
INS	Insufficient sample for this test
PQL	Practical Quantitation Limit
<	Less than
>	Greater than
RPD	Relative Percent Difference
LCS	Laboratory Control Sample
NS	Not specified
NEPM	National Environmental Protection Measure
NR	Not Reported

Quality Control Definitions

Blank	This is the component of the analytical signal which is not derived from the sample but from reagents, glassware etc, can be determined by processing solvents and reagents in exactly the same manner as for samples.
Duplicate	This is the complete duplicate analysis of a sample from the process batch. If possible, the sample selected should be one where the analyte concentration is easily measurable.
Matrix Spike	A portion of the sample is spiked with a known concentration of target analyte. The purpose of the matrix spike is to monitor the performance of the analytical method used and to determine whether matrix interferences exist.
LCS (Laboratory Control Sample)	This comprises either a standard reference material or a control matrix (such as a blank sand or water) fortified with analytes representative of the analyte class. It is simply a check sample.
Surrogate Spike	Surrogates are known additions to each sample, blank, matrix spike and LCS in a batch, of compounds which are similar to the analyte of interest, however are not expected to be found in real samples.

Australian Drinking Water Guidelines recommend that Thermotolerant Coliform, Faecal Enterococci, & E.Coli levels are less than 1cfu/100mL. The recommended maximums are taken from "Australian Drinking Water Guidelines", published by NHMRC & ARMC 2011.

Laboratory Acceptance Criteria

Duplicate sample and matrix spike recoveries may not be reported on smaller jobs, however, were analysed at a frequency to meet or exceed NEPM requirements. All samples are tested in batches of 20. The duplicate sample RPD and matrix spike recoveries for the batch were within the laboratory acceptance criteria.

Filters, swabs, wipes, tubes and badges will not have duplicate data as the whole sample is generally extracted during sample extraction.

Spikes for Physical and Aggregate Tests are not applicable.

For VOCs in water samples, three vials are required for duplicate or spike analysis.

Duplicates: <5xPQL - any RPD is acceptable; >5xPQL - 0-50% RPD is acceptable.

Matrix Spikes, LCS and Surrogate recoveries: Generally 70-130% for inorganics/metals; 60-140% for organics (+/-50% surrogates) and 10-140% for labile SVOCs (including labile surrogates), ultra trace organics and speciated phenols is acceptable.

In circumstances where no duplicate and/or sample spike has been reported at 1 in 10 and/or 1 in 20 samples respectively, the sample volume submitted was insufficient in order to satisfy laboratory QA/QC protocols.

When samples are received where certain analytes are outside of recommended technical holding times (THTs), the analysis has proceeded. Where analytes are on the verge of breaching THTs, every effort will be made to analyse within the THT or as soon as practicable.

Where sampling dates are not provided, Envirolab are not in a position to comment on the validity of the analysis where recommended technical holding times may have been breached.

Measurement Uncertainty estimates are available for most tests upon request.

Report Comments

Asbestos: A portion of the supplied sample was sub-sampled for asbestos analysis according to Envirolab procedures. We cannot guarantee that this sub-sample is indicative of the entire sample. Envirolab recommends supplying 40-50g of sample in its own container.

Note: Samples 174265-24 & 32 were sub-sampled from jars provided by the client.

Asbestos: Excessive sample volume was provided for asbestos analysis. A portion of the supplied sample was sub-sampled according to Envirolab procedures. We cannot guarantee that this sub-sample is indicative of the entire sample. Envirolab recommends supplying 40-50g (50mL) of sample in its own container as per AS4964-2004.

Note: Samples 174265-2 & 28 were sub-sampled from bags provided by the client.

TRH Soil C10-C40 NEPM (Sample 5ms) - # Percent recovery is not possible to report as the high concentration of analytes in the sample/s have caused interference.

PAHs in Soil (Sample 5ms) - # Percent recovery is not possible to report as the high concentration of analytes in the sample/s have caused interference.

Samples 2/5/39: The RPD for duplicate results is accepted due to the non homogenous nature of the sample/s.

Acid Extractable Metals in Soil: The laboratory RPD acceptance criteria has been exceeded for 174265-9 for Cu. Therefore a triplicate result has been issued as laboratory sample number 174265-40.

PCBs in Soil - PQL has been raised due to interference from analytes (other than those being tested) in the sample/s.



Envirolab Services Pty Ltd
ABN 37 112 535 645
12 Ashley St Chatswood NSW 2067
ph 02 9910 6200 fax 02 9910 6201
customerservice@envirolab.com.au
www.envirolab.com.au

CERTIFICATE OF ANALYSIS 174265-A

Client Details

Client	Environmental Investigation Services
Attention	Katrina Taylor
Address	PO Box 976, North Ryde BC, NSW, 1670

Sample Details

Your Reference	<u>E30116K, Goulburn</u>
Number of Samples	Additional testing
Date samples received	25/08/2017
Date completed instructions received	07/09/2017

Analysis Details

Please refer to the following pages for results, methodology summary and quality control data.
Samples were analysed as received from the client. Results relate specifically to the samples as received.
Results are reported on a dry weight basis for solids and on an as received basis for other matrices.

Report Details

Date results requested by	14/09/2017
Date of Issue	14/09/2017
NATA Accreditation Number 2901. This document shall not be reproduced except in full.	
Accredited for compliance with ISO/IEC 17025 - Testing. Tests not covered by NATA are denoted with *	

Results Approved By

Giovanni Agosti, Group Technical Manager
Jeremy Faircloth, Organics Supervisor

Authorised By

David Springer, General Manager

PAHs in TCLP (USEPA 1311)				
Our Reference		174265-A-2	174265-A-5	174265-A-6
Your Reference	UNITS	BHA	BHB	BHB
Depth		0.4-0.5	0.0-0.2	0.7-1.0
Date Sampled		22/08/2017	22/08/2017	22/08/2017
Type of sample		Soil	Soil	Soil
Date extracted	-	12/09/2017	12/09/2017	12/09/2017
Date analysed	-	12/09/2017	12/09/2017	12/09/2017
Naphthalene in TCLP	mg/L	<0.001	<0.001	<0.001
Acenaphthylene in TCLP	mg/L	<0.001	<0.001	<0.001
Acenaphthene in TCLP	mg/L	<0.001	<0.001	<0.001
Fluorene in TCLP	mg/L	<0.001	<0.001	<0.001
Phenanthrene in TCLP	mg/L	<0.001	0.001	<0.001
Anthracene in TCLP	mg/L	<0.001	<0.001	<0.001
Fluoranthene in TCLP	mg/L	<0.001	0.002	<0.001
Pyrene in TCLP	mg/L	<0.001	0.002	<0.001
Benzo(a)anthracene in TCLP	mg/L	<0.001	0.001	<0.001
Chrysene in TCLP	mg/L	<0.001	<0.001	<0.001
Benzo(bjk)fluoranthene in TCLP	mg/L	<0.002	<0.002	<0.002
Benzo(a)pyrene in TCLP	mg/L	<0.001	<0.001	<0.001
Indeno(1,2,3-c,d)pyrene - TCLP	mg/L	<0.001	<0.001	<0.001
Dibenzo(a,h)anthracene in TCLP	mg/L	<0.001	<0.001	<0.001
Benzo(g,h,i)perylene in TCLP	mg/L	<0.001	<0.001	<0.001
Total +ve PAH's	mg/L	NIL (+)VE	0.0050	NIL (+)VE
Surrogate <i>p</i> -Terphenyl-d14	%	116	122	125

Metals in TCLP USEPA1311						
Our Reference		174265-A-2	174265-A-5	174265-A-6	174265-A-9	174265-A-10
Your Reference	UNITS	BHA	BHB	BHB	BHD	BHD
Depth		0.4-0.5	0.0-0.2	0.7-1.0	0.0-0.1	0.5-0.7
Date Sampled		22/08/2017	22/08/2017	22/08/2017	22/08/2017	22/08/2017
Type of sample		Soil	Soil	Soil	Soil	Soil
Date extracted	-	11/09/2017	13/09/2017	11/09/2017	13/09/2017	13/09/2017
Date analysed	-	12/09/2017	13/09/2017	12/09/2017	13/09/2017	13/09/2017
pH of soil for fluid# determ.	pH units	8.4	8.8	8.7	8.4	8.2
pH of soil TCLP (after HCl)	pH units	1.7	1.7	1.7	1.7	1.7
Extraction fluid used	-	1	1	1	1	1
pH of final Leachate	pH units	5.0	5.0	5.0	5.0	5.0
Arsenic in TCLP	mg/L	[NA]	<0.05	[NA]	[NA]	[NA]
Lead in TCLP	mg/L	[NA]	[NA]	[NA]	0.05	<0.03

Metals in TCLP USEPA1311						
Our Reference		174265-A-13	174265-A-15	174265-A-18	174265-A-19	174265-A-24
Your Reference	UNITS	BHE	TP101	BH102	BH103	BH106
Depth		0.4-0.5	0.0-0.1	0.9-1.0	0.0-0.1	0.0-0.1
Date Sampled		22/08/2017	21/08/2017	22/08/2017	23/08/2017	24/08/2017
Type of sample		Soil	Soil	Soil	Soil	Soil
Date extracted	-	13/09/2017	13/09/2017	13/09/2017	13/09/2017	13/09/2017
Date analysed	-	13/09/2017	13/09/2017	13/09/2017	13/09/2017	13/09/2017
pH of soil for fluid# determ.	pH units	7.9	7.7	9.5	9.0	8.9
pH of soil TCLP (after HCl)	pH units	1.7	1.7	1.7	1.7	1.7
Extraction fluid used	-	1	1	1	1	1
pH of final Leachate	pH units	4.9	5.4	5.0	5.0	5.0
Arsenic in TCLP	mg/L	[NA]	[NA]	[NA]	0.2	0.09
Chromium in TCLP	mg/L	<0.01	[NA]	[NA]	[NA]	[NA]
Lead in TCLP	mg/L	[NA]	<0.03	0.60	[NA]	[NA]

Metals in TCLP USEPA1311					
Our Reference		174265-A-26	174265-A-33	174265-A-36	174265-A-37
Your Reference	UNITS	BH107	BH110	BH111	BH111
Depth		0.0-0.1	0.9-1.0	0.9-1.0	1.8-2.0
Date Sampled		24/08/2017	24/08/2017	24/08/2017	24/08/2017
Type of sample		Soil	Soil	Soil	Soil
Date extracted	-	13/09/2017	13/09/2017	13/09/2017	13/09/2017
Date analysed	-	13/09/2017	13/09/2017	13/09/2017	13/09/2017
pH of soil for fluid# determ.	pH units	8.6	8.7	9.3	9.2
pH of soil TCLP (after HCl)	pH units	1.8	1.7	1.7	1.7
Extraction fluid used	-	1	1	1	1
pH of final Leachate	pH units	5.0	5.2	5.2	5.0
Chromium in TCLP	mg/L	[NA]	[NA]	[NA]	<0.01
Lead in TCLP	mg/L	0.04	0.07	0.04	[NA]
Nickel in TCLP	mg/L	[NA]	[NA]	[NA]	<0.02

Method ID	Methodology Summary
EXTRACT.7	Toxicity Characteristic Leaching Procedure (TCLP) using Zero Headspace Extraction (zHE) using AS4439 and USEPA 1311.
Inorg-001	pH - Measured using pH meter and electrode in accordance with APHA latest edition, 4500-H+. Please note that the results for water analyses are indicative only, as analysis outside of the APHA storage times.
Inorg-004	Toxicity Characteristic Leaching Procedure (TCLP) using in house method INORG-004.
Metals-020 ICP-AES	Determination of various metals by ICP-AES.
Org-012	Soil samples are extracted with Dichloromethane/Acetone and waters with Dichloromethane and analysed by GC-MS.
Org-012	Leachates are extracted with Dichloromethane and analysed by GC-MS.
Org-012	Soil samples are extracted with Dichloromethane/Acetone and waters with Dichloromethane and analysed by GC-MS. Benzo(a)pyrene TEQ as per NEPM B1 Guideline on Investigation Levels for Soil and Groundwater - 2013.

Client Reference: E30116K, Goulburn

QUALITY CONTROL: PAHs in TCLP (USEPA 1311)				Duplicate				Spike Recovery %		
Test Description	Units	PQL	Method	Blank	#	Base	Dup.	RPD	LCS-W2	[NT]
Date extracted	-			12/09/2017	[NT]	[NT]	[NT]	[NT]	12/09/2017	[NT]
Date analysed	-			12/09/2017	[NT]	[NT]	[NT]	[NT]	12/09/2017	[NT]
Naphthalene in TCLP	mg/L	0.001	Org-012	<0.001	[NT]	[NT]	[NT]	[NT]	82	[NT]
Acenaphthylene in TCLP	mg/L	0.001	Org-012	<0.001	[NT]	[NT]	[NT]	[NT]	[NT]	[NT]
Acenaphthene in TCLP	mg/L	0.001	Org-012	<0.001	[NT]	[NT]	[NT]	[NT]	[NT]	[NT]
Fluorene in TCLP	mg/L	0.001	Org-012	<0.001	[NT]	[NT]	[NT]	[NT]	107	[NT]
Phenanthrene in TCLP	mg/L	0.001	Org-012	<0.001	[NT]	[NT]	[NT]	[NT]	99	[NT]
Anthracene in TCLP	mg/L	0.001	Org-012	<0.001	[NT]	[NT]	[NT]	[NT]	[NT]	[NT]
Fluoranthene in TCLP	mg/L	0.001	Org-012	<0.001	[NT]	[NT]	[NT]	[NT]	102	[NT]
Pyrene in TCLP	mg/L	0.001	Org-012	<0.001	[NT]	[NT]	[NT]	[NT]	102	[NT]
Benzo(a)anthracene in TCLP	mg/L	0.001	Org-012	<0.001	[NT]	[NT]	[NT]	[NT]	[NT]	[NT]
Chrysene in TCLP	mg/L	0.001	Org-012	<0.001	[NT]	[NT]	[NT]	[NT]	110	[NT]
Benzo(bjk)fluoranthene in TCLP	mg/L	0.002	Org-012	<0.002	[NT]	[NT]	[NT]	[NT]	[NT]	[NT]
Benzo(a)pyrene in TCLP	mg/L	0.001	Org-012	<0.001	[NT]	[NT]	[NT]	[NT]	109	[NT]
Indeno(1,2,3-c,d)pyrene - TCLP	mg/L	0.001	Org-012	<0.001	[NT]	[NT]	[NT]	[NT]	[NT]	[NT]
Dibenzo(a,h)anthracene in TCLP	mg/L	0.001	Org-012	<0.001	[NT]	[NT]	[NT]	[NT]	[NT]	[NT]
Benzo(g,h,i)perylene in TCLP	mg/L	0.001	Org-012	<0.001	[NT]	[NT]	[NT]	[NT]	[NT]	[NT]
Surrogate p-Terphenyl-d14	%		Org-012	122	[NT]	[NT]	[NT]	[NT]	106	[NT]

Client Reference: E30116K, Goulburn

QUALITY CONTROL: Metals in TCLP USEPA1311							Duplicate		Spike Recovery %	
Test Description	Units	PQL	Method	Blank	#	Base	Dup.	RPD	LCS-W1	174265-A-9
Date extracted	-			13/09/2017	5	13/09/2017	13/09/2017		13/09/2017	13/09/2017
Date analysed	-			13/09/2017	5	13/09/2017	13/09/2017		13/09/2017	13/09/2017
Arsenic in TCLP	mg/L	0.05	Metals-020 ICP-AES	<0.05	5	<0.05	<0.05	0	106	102
Chromium in TCLP	mg/L	0.01	Metals-020 ICP-AES	<0.01	[NT]	[NT]	[NT]	[NT]	103	98
Lead in TCLP	mg/L	0.03	Metals-020 ICP-AES	<0.03	36	0.04	0.04	0	101	96
Nickel in TCLP	mg/L	0.02	Metals-020 ICP-AES	<0.02	[NT]	[NT]	[NT]	[NT]	101	97

QUALITY CONTROL: Metals in TCLP USEPA1311							Duplicate		Spike Recovery %	
Test Description	Units	PQL	Method	Blank	#	Base	Dup.	RPD	[NT]	[NT]
Date extracted	-			[NT]	36	13/09/2017	13/09/2017		[NT]	[NT]
Date analysed	-			[NT]	36	13/09/2017	13/09/2017		[NT]	[NT]

Result Definitions

NT	Not tested
NA	Test not required
INS	Insufficient sample for this test
PQL	Practical Quantitation Limit
<	Less than
>	Greater than
RPD	Relative Percent Difference
LCS	Laboratory Control Sample
NS	Not specified
NEPM	National Environmental Protection Measure
NR	Not Reported

Quality Control Definitions

Blank	This is the component of the analytical signal which is not derived from the sample but from reagents, glassware etc, can be determined by processing solvents and reagents in exactly the same manner as for samples.
Duplicate	This is the complete duplicate analysis of a sample from the process batch. If possible, the sample selected should be one where the analyte concentration is easily measurable.
Matrix Spike	A portion of the sample is spiked with a known concentration of target analyte. The purpose of the matrix spike is to monitor the performance of the analytical method used and to determine whether matrix interferences exist.
LCS (Laboratory Control Sample)	This comprises either a standard reference material or a control matrix (such as a blank sand or water) fortified with analytes representative of the analyte class. It is simply a check sample.
Surrogate Spike	Surrogates are known additions to each sample, blank, matrix spike and LCS in a batch, of compounds which are similar to the analyte of interest, however are not expected to be found in real samples.

Australian Drinking Water Guidelines recommend that Thermotolerant Coliform, Faecal Enterococci, & E.Coli levels are less than 1cfu/100mL. The recommended maximums are taken from "Australian Drinking Water Guidelines", published by NHMRC & ARMC 2011.

Laboratory Acceptance Criteria

Duplicate sample and matrix spike recoveries may not be reported on smaller jobs, however, were analysed at a frequency to meet or exceed NEPM requirements. All samples are tested in batches of 20. The duplicate sample RPD and matrix spike recoveries for the batch were within the laboratory acceptance criteria.

Filters, swabs, wipes, tubes and badges will not have duplicate data as the whole sample is generally extracted during sample extraction.

Spikes for Physical and Aggregate Tests are not applicable.

For VOCs in water samples, three vials are required for duplicate or spike analysis.

Duplicates: <5xPQL - any RPD is acceptable; >5xPQL - 0-50% RPD is acceptable.

Matrix Spikes, LCS and Surrogate recoveries: Generally 70-130% for inorganics/metals; 60-140% for organics (+/-50% surrogates) and 10-140% for labile SVOCs (including labile surrogates), ultra trace organics and speciated phenols is acceptable.

In circumstances where no duplicate and/or sample spike has been reported at 1 in 10 and/or 1 in 20 samples respectively, the sample volume submitted was insufficient in order to satisfy laboratory QA/QC protocols.

When samples are received where certain analytes are outside of recommended technical holding times (THTs), the analysis has proceeded. Where analytes are on the verge of breaching THTs, every effort will be made to analyse within the THT or as soon as practicable.

Where sampling dates are not provided, Envirolab are not in a position to comment on the validity of the analysis where recommended technical holding times may have been breached.

Measurement Uncertainty estimates are available for most tests upon request.

Simon Song

From: Katrina Taylor <KTaylor@jkgroup.net.au>
Sent: Thursday, 7 September 2017 11:12 AM
To: Simon Song
Subject: Envirolab report 174265 - TCLP analysis

Morning Simon,

A(nother) TCLP analysis request for the samples as marked below. Standard turnaround is fine thanks.

Sample	Arsenic	Chromium	Lead	Nickel	PAHs
BH A (0.4-0.5)					X
BH B (0.0-0.2)	X				X
BH B (0.0-1.0)					X
BH D (0.0-0.1)			X		
BH D (0.5-0.7)			X		
BH E (0.4-0.5)		X			
TP101 (0.0-0.1)			X		
BH102 (0.9-1.0)			X		
BH103 (0.0-0.1)	X				
BH106 (0.0-0.1)	X				
BH107 (0.0-0.1)			X		
BH110 (0.9-1.0)			X		
BH111 (0.9-1.0)			X		
BH111 (1.8-2.0)		X		X	

174265 A
[Handwritten signature]

Envirolab report ref: 174265

Thanks!

Regards,

Katrina Taylor
Environmental Scientist

T: +612 9888 5000

F: +612 9888 5001

KTaylor@jkgroup.net.au

www.jkgroup.net.au



ENVIRONMENTAL INVESTIGATION SERVICES

CONSULTING ENVIRONMENTAL ENGINEERS AND SCIENTISTS

PO Box 976, North Ryde BC NSW 1670

115 Wicks Rd, Macquarie Park NSW 2113

This email and any attachments are confidential and may be privileged in which case neither is intended to be waived. If you have received this message in error, please notify us and remove it from your system. It is your responsibility to check any attachments for viruses and defects before opening or sending them on. At the Company's discretion we may send a paper copy for confirmation. In the event of any discrepancy between paper and electronic versions the paper version is to take precedence.

SAMPLE RECEIPT ADVICE

Client Details	
Client	Environmental Investigation Services
Attention	K.Taylor

Sample Login Details	
Your Reference	E30116K - Goulburn
Envirolab Reference	11635
Date Sample Received	29/08/2017
Date Instructions Received	29/08/2017
Date Results Expected to be Reported	04/09/2017

Sample Condition	
Samples received in appropriate condition for analysis	YES
No. of Samples Provided	1 Soil
Turnaround Time Requested	Standard
Temperature on receipt (°C)	11.8C
Cooling Method	Ice Pack
Sampling Date Provided	YES

Comments
Samples will be held for 1 month for water samples and 2 months for soil samples from date of receipt of samples

Please direct any queries to:

Pamela Adams	Analisa Mathrick
Phone: 03 9763 2500	Phone: 03 9763 2500
Fax: 03 9763 2633	Fax: 03 9763 2633
Email: padams@envirolab.com.au	Email: amathrick@envirolab.com.au

Sample and Testing Details on following page



A division of Envirolab Group



Envirolab Services Pty Ltd - Melbourne
ABN 37 112 535 645 -02
1 Dalmore Drive, Scoresby, VIC 3179 Australia
PH +613 9763 2500 Fax +613 9763 2633
melbourne@envirolab.com.au
www.envirolab.com.au

<i>Sample Id</i>	<i>VTRH(C6-C10)/BTEXN in Soil</i>	<i>TRH Soil C10-C40 NEPM</i>	<i>PAHs in Soil</i>	<i>Acid Extractable metals in soil</i>
DUPAB1	✓	✓	✓	✓

CERTIFICATE OF ANALYSIS**11635****Client:****Environmental Investigation Services**PO Box 976
North Ryde BC
NSW 1670**Attention:** K.Taylor**Sample log in details:**

Your Reference:	<u>E30116K - Goulburn</u>
No. of samples:	1 Soil
Date samples received / completed instructions received	29/08/2017 / 29/08/2017

Analysis Details:

Please refer to the following pages for results, methodology summary and quality control data. Samples were analysed as received from the client. Results relate specifically to the samples as received. Results are reported on a dry weight basis for solids and on an as received basis for other matrices.

Please refer to the last page of this report for any comments relating to the results.

Report Details:

Date results requested by: / Issue Date:	4/09/17 / 4/09/17
Date of Preliminary Report:	Not Issued

NATA accreditation number 2901. This document shall not be reproduced except in full.

Accredited for compliance with ISO/IEC 17025 - Testing **Tests not covered by NATA are denoted with *.****Results Approved By:**Pamela Adams
Laboratory ManagerEnvirolab Reference: 11635
Revision No: R 00

vTRH(C6-C10)/BTEX in Soil		
Our Reference:	UNITS	11635-1
Your Reference	-----	DUPAB1
Date Sampled	-----	24/08/2017
Type of sample		Soil
Date extracted	-	31/08/2017
Date analysed	-	01/09/2017
vTRHC ₆ - C ₉	mg/kg	<25
vTRHC ₆ - C ₁₀	mg/kg	<25
TRHC ₆ - C ₁₀ less BTEX (F1)	mg/kg	<25
Benzene	mg/kg	<0.2
Toluene	mg/kg	<0.5
Ethylbenzene	mg/kg	<1
m+p-xylene	mg/kg	<2
o-Xylene	mg/kg	<1
Naphthalene	mg/kg	<1
Total +ve Xylenes	mg/kg	<1
Surrogate aaa-Trifluorotoluene	%	82

TRHSoilC10-C40NEPM		
Our Reference:	UNITS	11635-1
Your Reference	-----	DUPAB1
Date Sampled	-----	24/08/2017
Type of sample		Soil
Date extracted	-	31/08/2017
Date analysed	-	01/09/2017
TRHC ₁₀ - C ₁₄	mg/kg	<50
TRHC ₁₅ - C ₂₈	mg/kg	<100
TRHC ₂₉ - C ₃₆	mg/kg	<100
Total +ve TRH (C10-C36)	mg/kg	<50
TRH>C ₁₀ -C ₁₆	mg/kg	<50
TRH>C ₁₀ - C ₁₆ less Naphthalene (F2)	mg/kg	<50
TRH>C ₁₆ -C ₃₄	mg/kg	<100
TRH>C ₃₄ -C ₄₀	mg/kg	<100
Total +ve TRH (>C10-C40)	mg/kg	<50
Surrogate o-Terphenyl	%	86

PAHs in Soil Our Reference: Your Reference Date Sampled Type of sample	UNITS ----- -----	11635-1 DUPAB1 24/08/2017 Soil
Date extracted	-	31/08/2017
Date analysed	-	02/09/2017
Naphthalene	mg/kg	<0.1
Acenaphthylene	mg/kg	<0.1
Acenaphthene	mg/kg	<0.1
Fluorene	mg/kg	<0.1
Phenanthrene	mg/kg	0.2
Anthracene	mg/kg	<0.1
Fluoranthene	mg/kg	0.4
Pyrene	mg/kg	0.4
Benzo(a)anthracene	mg/kg	0.3
Chrysene	mg/kg	0.2
Benzo(b,j&k)fluoranthene	mg/kg	0.4
Benzo(a)pyrene	mg/kg	0.19
Indeno(1,2,3-c,d)pyrene	mg/kg	<0.1
Dibenzo(a,h)anthracene	mg/kg	<0.1
Benzo(g,h,i)perylene	mg/kg	0.1
Total +ve PAH's	mg/kg	2.3
Benzo(a)pyrene TEQ calc (Zero)	mg/kg	<0.5
Benzo(a)pyrene TEQ calc (Half)	mg/kg	<0.5
Benzo(a)pyrene TEQ calc (PQL)	mg/kg	<0.5
Surrogate p-Terphenyl-d14	%	94

Acid Extractable metals in soil		
Our Reference:	UNITS	11635-1
Your Reference	-----	DUPAB1
Date Sampled	-----	24/08/2017
Type of sample		Soil
Date digested	-	31/08/2017
Date analysed	-	01/09/2017
Arsenic	mg/kg	5
Cadmium	mg/kg	<0.4
Chromium	mg/kg	25
Copper	mg/kg	72
Lead	mg/kg	170
Mercury	mg/kg	0.4
Nickel	mg/kg	15
Zinc	mg/kg	230

Moisture		
Our Reference:	UNITS	11635-1
Your Reference	-----	DUPAB1
Date Sampled	-----	24/08/2017
Type of sample		Soil
Date prepared	-	31/08/2017
Date analysed	-	01/09/2017
Moisture	%	22

MethodID	Methodology Summary
Org-016	Soil samples are extracted with methanol and spiked into water prior to analysing by purge and trap GC-MS. Water samples are analysed directly by purge and trap GC-MS. F1 = (C6-C10)-BTEX as per NEPM B1 Guideline on Investigation Levels for Soil and Groundwater. Note, the Total +ve Xylene PQL is reflective of the lowest individual PQL and is therefore "Total +ve Xylenes" is simply a sum of the positive individual Xylenes.
Org-014	Soil samples are extracted with methanol and spiked into water prior to analysing by purge and trap GC-MS.
Org-003	Soil samples are extracted with Dichloromethane/Acetone and waters with Dichloromethane and analysed by GC-FID. F2 = (>C10-C16)-Naphthalene as per NEPM B1 Guideline on Investigation Levels for Soil and Groundwater (HSLs Tables 1A (3, 4)). Note Naphthalene is determined from the VOC analysis. Note, the Total +ve TRH PQL is reflective of the lowest individual PQL and is therefore "Total +ve TRH" is simply a sum of the positive individual TRH fractions (>C10-C40).
Org-012	Soil samples are extracted with Dichloromethane/Acetone and waters with Dichloromethane and analysed by GC-MS. Benzo(a)pyrene TEQ as per NEPM B1 Guideline on Investigation Levels for Soil and Groundwater - 2013. For soil results:- 1. 'TEQ PQL' values are assuming all contributing PAHs reported as <PQL are actually at the PQL. This is the most conservative approach and can give false positive TEQs given that PAHs that contribute to the TEQ calculation may not be present. 2. 'TEQ zero' values are assuming all contributing PAHs reported as <PQL are zero. This is the least conservative approach and is more susceptible to false negative TEQs when PAHs that contribute to the TEQ calculation are present but below PQL. 3. 'TEQ half PQL' values are assuming all contributing PAHs reported as <PQL are half the stipulated PQL. Hence a mid-point between the most and least conservative approaches above. Note, the Total +ve PAHs PQL is reflective of the lowest individual PQL and is therefore " Total +ve PAHs" is simply a sum of the positive individual PAHs.
Metals-020 ICP-AES	Determination of various metals by ICP-AES.
Metals-021 CV-AAS	Determination of Mercury by Cold Vapour AAS.
Inorg-008	Moisture content determined by heating at 105 deg C for a minimum of 12 hours.

Client Reference: E30116K - Goulburn

QUALITYCONTROL	UNITS	PQL	METHOD	Blank	Duplicate Sm#	Duplicate results	Spike Sm#	Spike % Recovery
vTRH(C6-C10)/BTEXN in Soil						Base II Duplicate II %RPD		
Date extracted	-			31/08/2017	[NT]	[NT]	LCS-1	31/08/2017
Date analysed	-			01/09/2017	[NT]	[NT]	LCS-1	01/09/2017
vTRHC ₆ - C ₉	mg/kg	25	Org-016	<25	[NT]	[NT]	LCS-1	92%
vTRHC ₆ - C ₁₀	mg/kg	25	Org-016	<25	[NT]	[NT]	LCS-1	92%
Benzene	mg/kg	0.2	Org-016	<0.2	[NT]	[NT]	LCS-1	93%
Toluene	mg/kg	0.5	Org-016	<0.5	[NT]	[NT]	LCS-1	93%
Ethylbenzene	mg/kg	1	Org-016	<1	[NT]	[NT]	LCS-1	95%
m+p-xylene	mg/kg	2	Org-016	<2	[NT]	[NT]	LCS-1	89%
o-Xylene	mg/kg	1	Org-016	<1	[NT]	[NT]	LCS-1	97%
Naphthalene	mg/kg	1	Org-014	<1	[NT]	[NT]	[NR]	[NR]
Surrogate aaa-Trifluorotoluene	%		Org-016	86	[NT]	[NT]	LCS-1	90%
QUALITYCONTROL	UNITS	PQL	METHOD	Blank	Duplicate Sm#	Duplicate results	Spike Sm#	Spike % Recovery
TRHSoilC10-C40NEPM						Base II Duplicate II %RPD		
Date extracted	-			31/08/2017	[NT]	[NT]	LCS-1	31/08/2017
Date analysed	-			31/08/2017	[NT]	[NT]	LCS-1	31/08/2017
TRHC ₁₀ - C ₁₄	mg/kg	50	Org-003	<50	[NT]	[NT]	LCS-1	85%
TRHC ₁₅ - C ₂₈	mg/kg	100	Org-003	<100	[NT]	[NT]	LCS-1	86%
TRHC ₂₈ - C ₃₆	mg/kg	100	Org-003	<100	[NT]	[NT]	LCS-1	80%
TRH>C ₁₀ -C ₁₆	mg/kg	50	Org-003	<50	[NT]	[NT]	LCS-1	85%
TRH>C ₁₆ -C ₃₄	mg/kg	100	Org-003	<100	[NT]	[NT]	LCS-1	86%
TRH>C ₃₄ -C ₄₀	mg/kg	100	Org-003	<100	[NT]	[NT]	LCS-1	80%
Surrogate o-Terphenyl	%		Org-003	84	[NT]	[NT]	LCS-1	77%
QUALITYCONTROL	UNITS	PQL	METHOD	Blank	Duplicate Sm#	Duplicate results	Spike Sm#	Spike % Recovery
PAHs in Soil						Base II Duplicate II %RPD		
Date extracted	-			31/08/2017	[NT]	[NT]	LCS-1	31/08/2017
Date analysed	-			02/09/2017	[NT]	[NT]	LCS-1	02/09/2017
Naphthalene	mg/kg	0.1	Org-012	<0.1	[NT]	[NT]	LCS-1	86%
Acenaphthylene	mg/kg	0.1	Org-012	<0.1	[NT]	[NT]	LCS-1	84%
Acenaphthene	mg/kg	0.1	Org-012	<0.1	[NT]	[NT]	[NR]	[NR]
Fluorene	mg/kg	0.1	Org-012	<0.1	[NT]	[NT]	LCS-1	90%
Phenanthrene	mg/kg	0.1	Org-012	<0.1	[NT]	[NT]	LCS-1	86%
Anthracene	mg/kg	0.1	Org-012	<0.1	[NT]	[NT]	[NR]	[NR]
Fluoranthene	mg/kg	0.1	Org-012	<0.1	[NT]	[NT]	LCS-1	82%
Pyrene	mg/kg	0.1	Org-012	<0.1	[NT]	[NT]	LCS-1	84%
Benzo(a)anthracene	mg/kg	0.1	Org-012	<0.1	[NT]	[NT]	[NR]	[NR]
Chrysene	mg/kg	0.1	Org-012	<0.1	[NT]	[NT]	LCS-1	112%

Client Reference: E30116K - Goulburn

QUALITYCONTROL	UNITS	PQL	METHOD	Blank	Duplicate Sm#	Duplicate results	Spike Sm#	Spike % Recovery
PAHs in Soil						Base II Duplicate II %RPD		
Benzo (b,j&k)fluoranthene	mg/kg	0.2	Org-012	<0.2	[NT]	[NT]	[NR]	[NR]
Benzo(a)pyrene	mg/kg	0.05	Org-012	<0.05	[NT]	[NT]	LCS-1	76%
Indeno(1,2,3-c,d)pyrene	mg/kg	0.1	Org-012	<0.1	[NT]	[NT]	[NR]	[NR]
Dibenzo(a,h)anthracene	mg/kg	0.1	Org-012	<0.1	[NT]	[NT]	[NR]	[NR]
Benzo(g,h,i)perylene	mg/kg	0.1	Org-012	<0.1	[NT]	[NT]	[NR]	[NR]
Surrogate p-Terphenyl-d14	%		Org-012	88	[NT]	[NT]	LCS-1	94%
QUALITYCONTROL	UNITS	PQL	METHOD	Blank	Duplicate Sm#	Duplicate results	Spike Sm#	Spike % Recovery
Acid Extractable metals in soil						Base II Duplicate II %RPD		
Date digested	-			31/08/2017	[NT]	[NT]	LCS-1	31/08/2017
Date analysed	-			01/09/2017	[NT]	[NT]	LCS-1	01/09/2017
Arsenic	mg/kg	4	Metals-020 ICP-AES	<4	[NT]	[NT]	LCS-1	96%
Cadmium	mg/kg	0.4	Metals-020 ICP-AES	<0.4	[NT]	[NT]	LCS-1	104%
Chromium	mg/kg	1	Metals-020 ICP-AES	<1	[NT]	[NT]	LCS-1	102%
Copper	mg/kg	1	Metals-020 ICP-AES	<1	[NT]	[NT]	LCS-1	98%
Lead	mg/kg	1	Metals-020 ICP-AES	<1	[NT]	[NT]	LCS-1	98%
Mercury	mg/kg	0.1	Metals-021 CV-AAS	<0.1	[NT]	[NT]	LCS-1	100%
Nickel	mg/kg	1	Metals-020 ICP-AES	<1	[NT]	[NT]	LCS-1	99%
Zinc	mg/kg	1	Metals-020 ICP-AES	<1	[NT]	[NT]	LCS-1	98%

QUALITY CONTROL	UNITS	PQL	METHOD	Blank
Moisture				
Date prepared	-			[NT]
Date analysed	-			[NT]
Moisture	%	0.1	Inorg-008	[NT]

Report Comments:

Asbestos ID was analysed by Approved Identifier: Not applicable for this job
Asbestos ID was authorised by Approved Signatory: Not applicable for this job

INS: Insufficient sample for this test
NR: Test not required
<: Less than

PQL: Practical Quantitation Limit
RPD: Relative Percent Difference
>: Greater than

NT: Not tested
NA: Test not required
LCS: Laboratory Control Sample

Quality Control Definitions

Blank: This is the component of the analytical signal which is not derived from the sample but from reagents, glassware etc, can be determined by processing solvents and reagents in exactly the same manner as for samples.

Duplicate: This is the complete duplicate analysis of a sample from the process batch. If possible, the sample selected should be one where the analyte concentration is easily measurable.

Matrix Spike: A portion of the sample is spiked with a known concentration of target analyte. The purpose of the matrix spike is to monitor the performance of the analytical method used and to determine whether matrix interferences exist.

LCS (Laboratory Control Sample): This comprises either a standard reference material or a control matrix (such as a blank sand or water) fortified with analytes representative of the analyte class. It is simply a check sample.

Surrogate Spike: Surrogates are known additions to each sample, blank, matrix spike and LCS in a batch, of compounds which are similar to the analyte of interest, however are not expected to be found in real samples.

Laboratory Acceptance Criteria

Duplicate sample and matrix spike recoveries may not be reported on smaller jobs, however, were analysed at a frequency to meet or exceed NEPM requirements. All samples are tested in batches of 20. The duplicate sample RPD and matrix spike recoveries for the batch were within the laboratory acceptance criteria.

Filters, swabs, wipes, tubes and badges will not have duplicate data as the whole sample is generally extracted during sample extraction.

Spikes for Physical and Aggregate Tests are not applicable.

For VOCs in water samples, three vials are required for duplicate or spike analysis.

Duplicates: <5xPQL - any RPD is acceptable; >5xPQL - 0-50% RPD is acceptable.

Matrix Spikes, LCS and Surrogate recoveries: Generally 70-130% for inorganics/metals; 60-140% for organics (+/-50% surrogates) and 10-140% for labile SVOCs (including labile surrogates), ultra trace organics and speciated phenols is acceptable.

In circumstances where no duplicate and/or sample spike has been reported at 1 in 10 and/or 1 in 20 samples respectively, the sample volume submitted was insufficient in order to satisfy laboratory QA/QC protocols.

When samples are received where certain analytes are outside of recommended technical holding times (THTs), the analysis has proceeded. Where analytes are on the verge of breaching THTs, every effort will be made to analyse within the THT or as soon as practicable.

Where sampling dates are not provided, Envirolab are not in a position to comment on the validity of the analysis where recommended technical holding times may have been breached.

Measurement Uncertainty estimates are available for most tests upon request.

SAMPLE AND CHAIN OF CUSTODY FORM

TO:
 ENVIROLA9 SERVICES PTY LTD
 12 ASHLEY STREET
 CHATSWOOD NSW 2087
 P: (02) 98109200
 F: (02) 99106201
 Attention: Alleen

EIS Job E3011BK
Number:
Date Results STANOARO
Required:
Page: 2 of 2

FROM:
 ENVIRONMENTAL
 INVESTIGATION
 SERVICES
 REAR OF 115 WICKS ROAD
 MACQUARIE PARK, NSW 2113
 P: 02-9899 5000 F: 02-9899 5001
 Attention: ktaylor@ikgroup.net.au



Location:		Goulburn					Sample Preserved in Esky on Ice													
Sampler:		A. Billingham					Tests Required													
Date Sampled	Lab Ref:	Sample Number	Depth (m)	Sample Container	PIO	Sample Description	Combo 3e	Combo 6a	Combo #3	BTEX										
24/8/17	22	BH105	0-0.1	GA	0	F Silty clay	X													
	23	↓	0.9-1.0	G	0	Silty clay			X											
	24	BH106	0-0.1	GA	0	F Coarse silty	X													
	25	↓	0.9-1.0	G	0	Mudstone			X											
	26	BH107	0-0.1	GA	0	F Topsoil	X													
	27	↓	0.9-1.0	G	0	Claystone			X											
	28	BH108	0.01-0.1	GA	0	F Coarse silty	X													
	29	↓	1.4-1.5	G	0	Silty clay			X											
	30	BH109	0.05-0.15	GA	0	F Coarse silty	X													
	31	↓	1.0-1.1	G	0	Silty clay			X											
	32	BH110	0-0.1	GA	0	F Silty sand	X													
	33	↓	0.9-1.0	GA	0	F Silty sand	X													
	34	↓	1.8-2.0	G	0	Sandstone			X											
	35	BH111	0.05-0.1	GA	0	F Gravel	X													
	36	↓	0.9-1.0	GA	0	F Silty sand	X													
	37	↓	1.8-2.0	G	0	Claystone			X											
	38	BH112	0.38-0.5	G	0	Mudstone			X											
	39	DUPABI	—	G	—	Fill			X											
	40	DUPABI	—	G	—	Fill			X											

EnviroLab Services
 11635
 29/8/17
 Time Received: 10:30
 Temp: 11.8°C
 Cooling: Ice pack
 Security: Intact/Broken/None

Remarks (comments/detection limits required):
 Please send DUPABI to Melb EnviroLab

Sample Containers:
 G - 250mg Glass Jar
 A - Ziplock Asbestos Bag
 P - Plastic Bag

Relinquished by: [Signature] **Date:** 25/8 **Time:** 16:30 **Received By:** EIS Rebecca [Signature] **Date:** 25/8/17

Relin: ELS JACK EMBLEN
 28.08.17 11:45
 [Signature]

SAMPLE AND CHAIN OF CUSTODY FORM

TO: ENVIRDLAB SERVICES PTY LTD 12 ASHLEY STREET CHATSWOOD NSW 2067 P: (02) 99108200 F: (02) 99108201 Attention: Aileen	EIS Job E30118K Number: Date Results STANDARD Required: Page: 1 of 2	FROM: ENVIRONMENTAL INVESTIGATION SERVICES REAR OF 115 WICKS ROAD MACQUARIE PARK, NSW 2113 P: 02-9888 5000 F: 02-9888 5001 Attention: ktaylor@ikgroup.net.au
---	---	--



Location:		Goulburn		Sample Preserved in Esky on Ice														
Sampler:		A. Billingham / A. Smith		Tests Required														
Date Sampled	Lab Ref:	Sample Number	Depth (m)	Sample Container	PID	Sample Description	Combo 3a	Combo 6a	Combo 3	BTEX	Asbestos							
22/8	1	BHA	0-0.1	GA	0	Fil. Asbestos												
	2		0.4-0.5	GA	0	Fil. Asbestos		X										
	3		0.6-0.7	GA	0	Fil. Asbestos												
	4		0.8-0.9	GA	0	Fil. Asbestos			X									
	5	BHB	0-0.2	GA	0	Fil. Asbestos		X										
	6		0.7-1.0	GA	0	Fil. Asbestos			X									
	7	BHC	0.1-0.2	GA	0	F. Ash		X										
	8		0.8-1.0	GA	0	F. Ash												
	9	BHD	0.0-0.1	GA	0	F. Silty sand			X									
	10		0.5-0.2	GA	0	F. Ash			X									
	11	BHE	0-0.1	CA	0	F. Silty sand		X										
	12		0.1-0.2	CA	0	F. Ash												
	13		0.4-0.5	CA	0	F. Silty clay			X									
	14	TBS		C	0	Sand				X								
22/8	15	TP101	0-0.1	CA	0	F. Silty Sand	X											
	16		0.14-0.2	CA	0	F. Silty Sand			X									
22/8		BH101	0.7-0.7	GA	0	F. Silty clay	X											
		BH101	0.9-1.0	G	0	Asbestos	X											
	17	BH102	0-0.1	GA	0	F. Silty clay	X											
	18		0.9-1.0	G	0	Asbestos			X									
23/8	19	BH103	0-0.1	GA	0	F. Silty clay	X											
	20		0.9-1.0	G	0	Asbestos			X									
	21	BH104	0.2-0.3	GA	0	Asbestos	X											

Broken in transit

EnviroLab Services
 12 Ashley St
 Chatswood NSW 2067
 Ph: (02) 9910 6200

Job No: 174265
 Date Received: 25/8/17
 Time Received: 16:30
 Received by: [Signature] 14-30
 Temp: Cool/Ambient
 Cooling: Ice/Inspack
 Security: Intact/Broken/None

Remarks (comments/detection limits required): See page 2.		Sample Containers: G - 250mg Glass Jar A - Ziplock Asbestos Bag P - Plastic Bag	
Relinquished by: [Signature]	Date: 25/8	Time:	Received By:
		Date:	

Relin: ELS JACK EMBLEN
 28.08.17 11:45

[Signature]

Appendix D: Report Explanatory Notes

STANDARD SAMPLING PROCEDURE (SSP)

These protocols specify the basic procedures to be used when sampling soils or groundwater for environmental site assessments undertaken by EIS.

The purpose of these protocols is to provide standard methods for: sampling, decontamination procedures for sampling equipment, sample preservation, sample storage and sample handling. Deviations from these procedures must be recorded.

Soil Sampling

- Prepare a borehole/test pit log or made a note of the sample description for stockpiles.
- Layout sampling equipment on clean plastic sheeting to prevent direct contact with ground surface. The work area should be at a distance from the drill rig/excavator such that the machine can operate in a safe manner.
- Ensure all sampling equipment has been decontaminated prior to use.
- Remove any surface debris from the immediate area of the sampling location.
- Collect samples and place in glass jar with a Teflon seal. This should be undertaken as quickly as possible to prevent the loss of any volatiles. If possible, fill the glass jars completely.
- Collect samples for asbestos analysis and place in a zip-lock plastic bag.
- Label the sampling containers with the EIS job number, sample location (eg. BH1), sampling depth interval and date. If more than one sample container is used, this should also be indicated (eg. 2 = Sample jar 1 of 2 jars).
- Photoionisation detector (PID) screening of volatile organic compounds (VOCs) should be undertaken on samples using the soil sample headspace method. Headspace measurements are taken following equilibration of the headspace gasses in partly filled zip-lock plastic bags. PID headspace data is recorded on the borehole/test pit log and the chain of custody forms.
- Record the lithology of the sample and sample depth on the borehole/test pit log generally in accordance with AS1726-1993¹⁹.
- Store the sample in a sample container cooled with ice or chill packs. On completion of the sampling the sample container should be delivered to the lab immediately or stored in the refrigerator prior to delivery to the lab. All samples are preserved in accordance with the standards outlined in the report.
- Check for the presence of groundwater after completion of each borehole using an electronic dip metre or water whistle. Boreholes should be left open until the end of fieldwork. All groundwater levels in the boreholes should be rechecked on the completion of the fieldwork.
- Backfill the boreholes/test pits with the excavation cuttings or clean sand prior to leaving the site.

Decontamination Procedures for Soil Sampling Equipment

- All sampling equipment should be decontaminated between every sampling location. This excludes single use PVC tubing used for push tubes etc. Equipment and materials required for the decontamination include:
 - Phosphate free detergent (Decon 90);
 - Potable water;
 - Stiff brushes; and
 - Plastic sheets.

¹⁹ Standards Australia, (1993), *Geotechnical Site Investigations*. (AS1726-1993)

- Ensure the decontamination materials are clean prior to proceeding with the decontamination.
- Fill both buckets with clean potable water and add phosphate free detergent to one bucket.
- In the bucket containing the detergent, scrub the sampling equipment until all the material attached to the equipment has been removed.
- Rinse sampling equipment in the bucket containing potable water.
- Place cleaned equipment on clean plastic sheets.

If all materials are not removed by this procedure, high-pressure water cleaning is recommended. If any equipment is not completely decontaminated by both these processes, then the equipment should not be used until it has been thoroughly cleaned.

Groundwater Sampling

Groundwater samples are more sensitive to contamination than soil samples and therefore adherence to this protocol is particularly important to obtain reliable, reproducible results. The recommendations detailed in AS/NZS 5667.1:1998 are considered to form a minimum standard.

The basis of this protocol is to maintain the security of the borehole and obtain accurate and representative groundwater samples. The following procedure should be used for collection of groundwater samples from previously installed groundwater monitoring wells.

- After monitoring well installation, at least three bore volumes should be pumped from the monitoring wells (well development) to remove any water introduced during the drilling process and/or the water that is disturbed during installation of the monitoring well. This should be completed prior to purging and sampling.
- Groundwater monitoring wells should then be left to recharge for at least three days before purging and sampling. Prior to purging or sampling, the condition of each well should be observed and any anomalies recorded on the field data sheets. The following information should be noted: the condition of the well, noting any signs of damage, tampering or complete destruction; the condition and operation of the well lock; the condition of the protective casing and the cement footing (raised or cracked); and, the presence of water between protective casing and well.
- Take the groundwater level from the collar of the piezometer/monitoring well using an electronic dip meter. The collar level should be taken (if required) during the site visit using a dumpy level and staff.
- Purging and sampling of piezometers/monitoring wells is done on the same site visit when using micro-purge (or other low flow) techniques.
- Layout and organize all equipment associated with groundwater sampling in a location where they will not interfere with the sampling procedure and will not pose a risk of contaminating samples. Equipment generally required includes:
 - Micropore filtration system or Stericup single-use filters (for heavy metals samples);
 - Filter paper for Micropore filtration system; Bucket with volume increments;
 - Sample containers: teflon bottles with 1 ml nitric acid, 75mL glass vials with 1 mL hydrochloric acid, 1 L amber glass bottles;
 - Bucket with volume increments;
 - Flow cell;
 - pH/EC/Eh/T meters;
 - Plastic drums used for transportation of purged water;
 - Esky and ice;
 - Nitrile gloves;
 - Distilled water (for cleaning);
 - Electronic dip meter;

- Low flow pump pack and associated tubing; and
- Groundwater sampling forms.
- If single-use steripur filtration is not used, clean the Micropore filtration system thoroughly with distilled water prior to use and between each sample. Filter paper should be changed between samples. 0.45um filter paper should be placed below the glass fibre filter paper in the filtration system.
- Ensure all non-disposable sampling equipment is decontaminated or that new disposable equipment is available prior to any work commencing at a new location. The procedure for decontamination of groundwater equipment is outlined at the end of this section.
- Disposable gloves should be used whenever samples are taken to protect the sampler and to assist in avoidance of contamination.
- Groundwater samples are obtained from the monitoring wells using low flow/micro-purge sampling equipment to reduce the disturbance of the water column and loss of volatiles.
- During pumping to purge the well, the pH, temperature, conductivity, dissolved oxygen, redox potential and groundwater levels are monitored (where possible) using calibrated field instruments to assess the development of steady state conditions. Steady state conditions are generally considered to have been achieved when the difference in the pH measurements was less than 0.2 units and the difference in conductivity was less than 10%.
- All measurements are recorded on specific data sheets.
- Once steady state conditions are considered to have been achieved, groundwater samples are obtained directly from the pump tubing and placed in appropriate glass bottles, BTEX vials or plastic bottles.
- All samples are preserved in accordance with water sampling requirements detailed in the NEPM 2013 and placed in an insulated container with ice. Groundwater samples are preserved by immediate storage in an insulated sample container with ice as outlined in the report text.
- Record the sample on the appropriate log in accordance with AS1726:1993. At the end of each water sampling complete a chain of custody form.

Decontamination Procedures for Groundwater Sampling Equipment

- All equipment associated with the groundwater sampling procedure (other than single-use items) should be decontaminated between every sampling location.
- The following equipment and materials are required for the decontamination procedure:
 - Phosphate free detergent;
 - Potable water;
 - Distilled water; and
 - Plastic Sheets or bulk bags (plastic bags).
- Fill one bucket with clean potable water and phosphate free detergent, and one bucket with distilled water.
- Flush potable water and detergent through pump head. Wash sampling equipment and pump head using brushes in the bucket containing detergent until all materials attached to the equipment are removed.
- Flush pump head with distilled water.
- Change water and detergent solution after each sampling location.
- Rinse sampling equipment in the bucket containing distilled water.
- Place cleaned equipment on clean plastic sheets.
- If all materials are not removed by this procedure that equipment should not be used until it has been thoroughly cleaned

QA/QC DEFINITIONS

The QA/QC terms used in this report are defined below. The definitions are in accordance with US EPA publication SW-846, entitled *Test Methods for Evaluating Solid Waste, Physical/Chemical Methods* (1994²⁰) methods and those described in *Environmental Sampling and Analysis, A Practical Guide*, (H. Keith 1991²¹).

Practical Quantitation Limit (PQL), Limit of Reporting (LOR) & Estimated Quantitation Limit (EQL)

These terms all refer to the concentration above which results can be expressed with a minimum 95% confidence level. The laboratory reporting limits are generally set at ten times the standard deviation for the Method Detection limit (MDL) for each specific analyte. For the purposes of this report the LOR, PQL, and EQL are considered to be equivalent.

When assessing laboratory data it should be borne in mind that values at or near the PQL have two important limitations.

“The uncertainty of the measurement value can approach, and even equal, the reported value. Secondly, confirmation of the analytes reported is virtually impossible unless identification uses highly selective methods. These issues diminish when reliably measurable amounts of analytes are present. Accordingly, legal and regulatory actions should be limited to data at or above the reliable detection limit” Keith 1991.

Precision

The degree to which data generated from repeated measurements differ from one another due to random errors. Precision is measured using the standard deviation or Relative Percent Difference (RPD). Acceptable targets for precision in this report will be less than 50% RPD for concentrations greater than ten times the PQL, less than 75% RPD for concentrations between five and ten times the PQL and less than 100% RPD for concentrations that are less than five times the PQL.

Accuracy

Accuracy is a measure of the agreement between an experimental result and the true value of the parameter being measured. The assessment of accuracy for an analysis can be achieved through the analysis of known reference materials or assessed by the analysis of surrogates, field blanks, trip spikes and matrix spikes.

The proximity of an averaged result to the true value, where all random errors have been statistically removed. Accuracy is measured by percent recovery. Acceptable limits for accuracy generally lie between 70% to 130% recoveries. Certain laboratory methods may allow for values that lie outside these limits.

Representativeness

Representativeness expresses the degree to which sample data accurately and precisely represents a characteristic of a population, parameter variations at a sampling point, or an environmental condition. Representativeness is primarily dependent upon the design and implementation of the sampling program. Representativeness of the data is partially ensured by the avoidance of contamination, adherence to sample handling and analysis protocols and use of proper chain-of-custody and documentation procedures.

²⁰ US EPA, (1994), *SW-846: Test Methods for Evaluating Solid Waste, Physical/Chemical Methods*. (US EPA SW-846)

²¹ Keith., H, (1991), *Environmental Sampling and Analysis, A Practical Guide*.

Completeness

Completeness is a measure of the number of valid measurements in a data set compared to the total number of measurements made and overall performance against DQIs. The following information is assessed for completeness:

- Chain-of-custody forms; Sample receipt form;
- All sample results reported; All blank data reported;
- All laboratory duplicate and RPDs calculated;
- All surrogate spike data reported;
- All matrix spike and lab control spike (LCS) data reported and RPDs calculated;
- Spike recovery acceptable limits reported; and
- NATA stamp on reports.

Comparability

Comparability is the evaluation of the similarity of conditions (eg. sample depth, sample homogeneity) under which separate sets of data are produced. Data comparability checks include a bias assessment that may arise from the following sources:

- Collection and analysis of samples by different personnel; Use of different techniques;
- Collection and analysis by the same personnel using the same methods but at different times; and
- Spatial and temporal changes (due to environmental dynamics).

Blanks

The purpose of laboratory and field blanks is to check for artifacts and interferences that may arise during sampling and analysis.

Matrix Spikes

Samples are spiked with laboratory grade standards to detect interactive effects between the sample matrix and the analytes being measured. Matrix Spikes are reported as a percent recovery and are prepared for 1 in every 20 samples. Sample batches that contain less than 20 samples may be reported with a Matrix Spike from another batch. The percent recovery is calculated using the formula below. Acceptable recovery limits are 70% to 130%.

$$\frac{(\text{Spike Sample Result} - \text{Sample Result}) \times 100}{\text{Concentration of Spike Added}}$$

Surrogate Spikes

Samples are spiked with a known concentration of compounds that are chemically related to the analyte being investigated but unlikely to be detected in the environment. The purpose of the Surrogate Spikes is to check the accuracy of the analytical technique. Surrogate Spikes are reported as percent recovery.

Duplicates

Laboratory duplicates measure precision, expressed as Relative Percent Difference. Duplicates are prepared from a single field sample and analysed as two separate extraction procedures in the laboratory. The RPD is calculated using the formula where D1 is the sample concentration and D2 is the duplicate sample concentration:

$$\frac{(D1 - D2) \times 100}{\{(D1 + D2)/2\}}$$