


Waste Management Plan

Project: Goulburn Hospital and Health Service Redevelopment

Job No: SC124

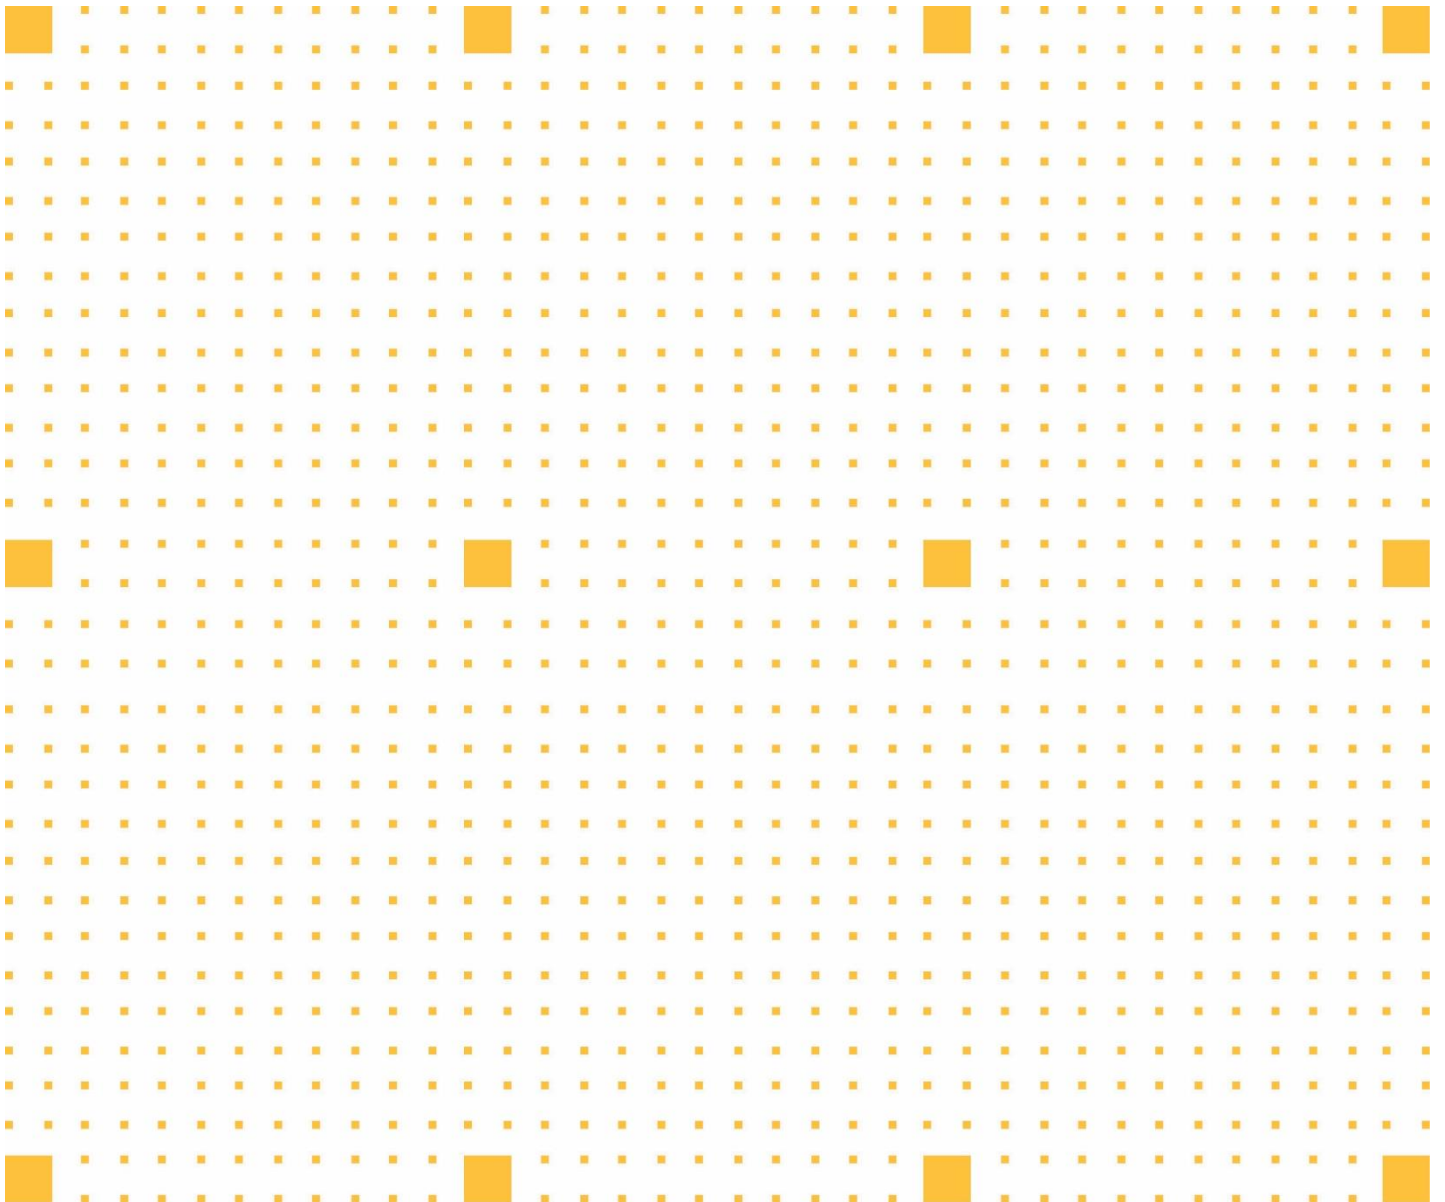

Rev: 2 – July 2020

—

Uncontrolled Document in Hard Copy

Copies shall not be made without the written permission of Hansen Yuncken Project Manager

Contents

1	Document Information	3
1.1	Review and Approval	3
1.2	Document Control	3
2	Definitions.....	4
3	Commitment & Policy.....	5
3.1	Purpose	5
3.2	Scope of Works.....	5
3.3	Objectives.....	5
4	Construction Waste.....	6
4.1	General Waste Management Strategies	6
4.1.1	Reducing Organic Waste.....	7
4.1.2	Reducing solid waste.....	7
4.1.3	Reducing liquid waste.....	7
4.1.4	Waste Minimisation	8
4.1.5	Site Bin System	Error! Bookmark not defined.
4.1.6	Packaging.....	9
4.1.7	Waste Quantities:	10
4.1.8	Waste Management	10
4.1.9	Training and Consultation.....	11
4.1.10	Measure of Performance	11
4.1.11	Monitoring.....	11
4.1.12	Corrective Actions	11
4.1.13	Disposal.....	11
5	Waste Management Details.....	12

1 Document Information

1.1 Review and Approval

Position	Name	Sign	Date
Review			
Project Manager	Rhys Collum		
Senior Contracts Administrator	Aimee Zhang		
Contracts Administrator	Jacob Paino		
Site Manager	Noel Redmond		
Foreman	Nick Butler		
Safety Coordinator	Mark Masek		
Senior Project Engineer	Dean Katsikaros		
Site Engineer	Anthony Dreizi		
Site Engineer	Courtney Bell		
Services Manager	Luke French		
Services Engineer / Coordinator	Ben Hilder		
Approval			
Construction Manager	Dean Marcon		
HSE Manager	Pater Fay		

1.2 Document Control

Revision	Description	Issued by	Issue date
1	Project set up - Goulburn Hospital and Health Service Redevelopment	DK	November 2019
2	Project team update and update of Section 5 in line with Aquas Environmental Audit actions (AQ1268.1 dated 17/3/20) and Section 4 in line with OFI-02 detailed within Compliance Report No. 01.	DK	July 2020

2 Definitions

The following definitions and abbreviations have been used in this Waste Management Plan. Further definitions and abbreviations are provided in referenced procedures and plans.

EPA	Environmental Protection Authority
HY	Hansen Yuncken
WMP	Waste Management Plan (this document)

3 Commitment & Policy

3.1 Purpose

To manage the construction waste including the re – use, recycle and dispose of all excavated material and other wastes generated on construction site.

This plan applies to the lawful disposal of construction materials on “The Project” development during the construction period.

3.2 Scope of Works

The design finalisation and construction of a new Acute Clinical Services Building, connections into the existing adjacent hospital facility, car parks and external works.

3.3 Objectives

The objectives of this plan are:

- Waste minimisation and resource recovery –
 - To avoid waste through design and ordering correct material quantities.
 - To encourage improved environmental outcomes through increased source separation of materials.
 - To ensure more efficient management of waste and recyclable materials.
 - To maximise reuse and recycling of building construction materials, household generated waste and industrial commercial waste.
- Access – to ensure waste systems are easy to use and that collection vehicles are able to access buildings to remove waste safely and easily;
- Safety – to ensure safe practices for storage, handling and collection of waste and recycling;
- Pollution prevention – to prevent stormwater pollution that may occur as a result of poor waste storage and management practices;
- Ecologically Sustainable Development (ESD) – to promote the principles of ESD through resource recovery and recycling leading to a reduction in the consumption of finite natural resources;
- Hygiene – to ensure health and amenity for residents, visitors and workers in the Goulburn; and
- Noise minimisation – to minimise noise during use by residents and collection of waste and recyclables.

4 Construction Waste

During construction it is anticipated that a variety of waste will be generated consistent with project scope and size. The major waste streams to be expected from the project are:

- Excavation:
 - General Spoil/Fill – landfill
 - Natural Material (VENM/ENM) – Recyclable
- Construction:
 - Concrete – Recyclable
 - Plastics – Recyclable
 - Timber – Recyclable
 - Glass – Recyclable
 - Metal – Recyclable
 - Tiles – Recyclable
 - General Waste – landfill

Hansen Yuncken's goal for building waste management is primarily the reduction of waste generated during construction activities. Waste reduction is the responsibility of all trades on site, as it relates to materials procurement, handling, storage and use. Waste generated during construction will be reused (where possible), recycled or disposed to landfill.

In the case of excavation and general spoil/fill and natural material, all material will be tested and classified in accordance with the 'Waste Classification Guidelines' set out by the EPA. Pending classification, appropriate measures for the disposal of excavation waste will be implemented in line with the provisions detailed within the Environmental Management Plan.

4.1 General Waste Management Strategies

Waste management activities are to be in accordance with:

- "Hansen Yuncken" Project Environmental Management plan

The main goal in construction will be to reduce the total volume of waste produced, which is to be achieved by effective materials procurement, management and supply.

"Hansen Yuncken" shall focus on minimising waste by implementing the following:

4.1.1 Reducing Organic Waste

Organic waste consists of the following:

- Pruning and clippings
- Vegetation clearance
- Tree trunks and large branches from land clearance
- Weeds, leaf litter, mulch

To counter the amount of organic waste that will be encountered, it shall be chipped, mulched, composted and reused on site or sent to an off-site compost facility wherever possible.

4.1.2 Reducing solid waste

Solid waste consists of the following:

- Packaging from site materials
- Excess materials, unused products
- Soil from excavations
- Sediment retained in sediment traps

To counter the amount of solid waste that will be encountered, HY shall endeavour to:

- Buy materials with minimum packaging.
- Not over-order.
- Stockpile and reuse it on site.
- Recycle it off site or return to the supplier

4.1.3 Reducing liquid waste Liquid waste can consist of the following:

- Site clean up
- Wash down areas
- Brick/tile /concrete cutting waste
- Dust control waste

To counter liquid waste, HY shall only discharge clean water into the stormwater. Where possible HY shall avoid generating any dirty water and when encountered, shall attempt to use such grey water for irrigation or as a means of suppressing dust.

HY shall also ensure that any waste stored for reuse, recycling or disposal cannot be washed or blown away.

4.1.4 Waste Minimisation

Major subcontractors will be encouraged to submit waste minimisation details including the following:

- Practical measures associated with their works to prevent waste entering the site
- Waste resulting from their work which can be recycled are to be actively managed as part of their waste reduction plan
- Alternative products containing recycled materials that could be utilised in their works which conform and meet the design specification
- Ordering the right quantities of materials and prefabrication of materials where possible
- Minimising site disturbance and to limit unnecessary excavation
- Careful sourcing separation of off-cuts to facilitate re-use, resale or efficient recycling

In order to reduce waste on site during the construction stage, all HY personnel and sub-contractors will be instructed to perform the following:

- Order materials to size
- Don't over-order
- Order pre-cut or prefabricated materials (where appropriate)
- Reduce packaging at source—buy materials with minimal packaging
- Separate reusable or recyclable materials from waste
- No rubbish is to be buried or burned on sit
- A designated concrete wash down area will be established on site for concrete trucks and pumps. Such an area will be adequately signed and designed so that any excess drainage from the area will be contained within the site boundaries
- Bins to be inspected regularly

4.1.5 Site Bin System

A site waste bin system will be achieved through the use of sealed bins for putrescible waste, separate portable bins for recyclable materials and non-recyclable waste materials.

Additional bins will be provided where practical to further separate waste between different recyclable materials.

Materials collected for recycling include:

- Glass
- Concrete, bricks and tiles
- Timber
- Aluminium
- Steel and other metals
- Plastic
- Plasterboard
- Paper, cardboard

The subcontractors will be responsible for the daily cleaning of their respective work areas and for placing all their waste in the nominated waste bins.

4.1.6 Packaging

All suppliers of building materials will be encouraged to nominate packaging minimisation and reuse initiatives. Bulk handling and reusable transport containers will be encouraged.

4.1.7 Waste Quantities:

The quantity of potential waste material is estimated by:

- Quantifying materials for the project
- Applying waste margins allowed in ordering materials
- Copying these amounts of waste into the waste management plan.

Normal waste percentages applicable to our work include:

- Timber 5 - 7%
- Plasterboard 5 - 15%
- Concrete 3%
- Bricks / Blocks 5%
- Tiles 5 – 10%

Conversion to volume of waste materials:

- Timber 0.5 tonne per m³
- Concrete 2.4 tonne per m³
- Bricks / Blocks 1.0 tonne per m³
- Tiles 0.75 tonne per m³
- Steel 2- 4 tonne per m³

4.1.8 Waste Management

Waste will be separated and / or stored onsite for re-use and recycling – where applicable.

Site operations will ensure minimal waste creation and maximum reuse and recycling by:

- Staff training
- Employment of a specialised waste Management contractor
- Recycled materials used in construction
- Waste management requirements stipulated in sub-contracts
- On-going checks by site supervisors
- Separate area or bins set aside for sorted waste
- Clear signage of waste areas.

4.1.9 Training and Consultation

Waste minimisation will be part of the site environmental awareness program that will be incorporated into the site induction program.

The responsibility to ensure that waste materials go into the correct bins will be with everyone on site.

4.1.10 Measure of Performance

A waste management contractor shall be involved in the project to ensure effective planning for waste management.

The Waste Management Contractor will coordinate waste recycling, measurement, recovery and disposal. HY shall ensure 80% or more (by mass) of all construction waste generated on this project is reused or recycled.

4.1.11 Monitoring

The Waste Management Contractor will be responsible for providing monthly reports to the Site Manager. These reports will measure the number and size of bins, waste type in each bin, total tonnage / cubic metres generated and total tonnage / cubic metres recycled.

Waste reports will be collated and uploaded onto HYway via BIM360 Field monthly waste reports. Cumulative summaries of generated waste and recycling statistics are readily available and auditable.

Regular project audits shall be conducted to ensure their compliance with this plan, standards and the contract.

4.1.12 Corrective Actions

Where a subcontractor has caused a bin to be contaminated unduly, the Site Manager will be advised, by a non-conformance report procedure. All corrective actions taken by the subcontractor shall be monitored and recorded against the non-conformance procedure, all of which shall be at the cost of the offending subcontractor.

4.1.13 Disposal

Dispose of waste to landfill will be as a last resort only. Landfill sites or waste transfer stations will require correct handling for dusty or hazardous waste and offer discounts for sorted wastes such as brick, metal and timber.

Records of disposals shall be kept on site. Any disposal of waste that is deemed hazardous shall be disposed of by approved EPA hazardous disposal unit

5 Waste Management Details

Waste Management Details					
Materials On-Site			Destination		
			Reuse & Recycling		Disposal
Type of Materials	Est. Vol. (m3) Total incl. Waste	Est. Wt. (t) Total incl. Waste	ON-SITE Specify proposed reuse or on-site recycling methods	OFF-SITE Specify contractor and recycling outlet	Specify contractor and landfill site
Excavated Materials	1,750	2,975	GSW will be retained on site with VENM/ENM being exported.	N/A	Contractor - Hi-Quality Waste Management Pty Ltd Disposal Location - Minda Landfill, Oallen Ford Road, Windellama NSW 2580
Garden Organics	N/A	N/A	N/A	N/A	N/A
Concrete	3,000	7,200	Concrete to be crushed and utilised as ballast material where possible.	Contractor – AJ & BM Wybrow Disposal Location – 27 Hetherington Street, Goulburn NSW 2580	N/A – All concrete waste will be recycled.

Waste Management Details					
Materials On-Site			Destination		
			Reuse & Recycling		Disposal
Type of Materials	Est. Vol. (m3) Total incl. Waste	Est. Wt. (t) Total incl. Waste	ON-SITE Specify proposed reuse or on-site recycling methods	OFF-SITE Specify contractor and recycling outlet	Specify contractor and landfill site
Steel Reinforcement	3,000	9,000	N/A	Contractor – Fast Skips Recycling Pty Ltd. Disposal Location - Lot 2 Collins Rd, Moss Vale NSW 2577	N/A – All steel reinforcement waste will be recycled.
Concrete Blocks	1,500	3,000	N/A	Contractor – Fast Skips Recycling Pty Ltd. Disposal Location - Lot 2 Collins Rd, Moss Vale NSW 2577	N/A – All concrete block waste will be recycled.
Timber	200	100	N/A	Contractor – Fast Skips Recycling Pty Ltd. Disposal Location - Lot 2 Collins Rd, Moss Vale NSW 2577	N/A – All timber waste will be recycled.
Plasterboard	2,000	1,000	N/A	TBC	TBC
Hebel	N/A	N/A	N/A	N/A	N/A

Waste Management Details					
Materials On-Site			Destination		
			Reuse & Recycling		Disposal
Type of Materials	Est. Vol. (m3) Total incl. Waste	Est. Wt. (t) Total incl. Waste	ON-SITE Specify proposed reuse or on-site recycling methods	OFF-SITE Specify contractor and recycling outlet	Specify contractor and landfill site
Structural Steel	17	50	N/A	Contractor – Fast Skips Recycling Pty Ltd. Disposal Location - Lot 2 Collins Rd, Moss Vale NSW 2577	N/A – All structural steel reinforcement waste will be recycled.
Aluminium	TBC	TBC	N/A	TBC	TBC
Steel Pipework	TBC	TBC	N/A	TBC	TBC
Copper	TBC	TBC	N/A	TBC	TBC
Metals - Other	2,000	1,500	N/A	TBC	TBC
Ceramic Tiles	300	225	N/A	Re-processed into recycled products (such fill recycled soil, sand, aggregates, road base) by crushing and screening	TBC