



Budawang School
17 Croobyar Rd Milton NSW

OPERATIONAL WASTE MANAGEMENT PLAN

16/04/2021
Report No. SO814
Revision F

Client

Schools Infrastructure NSW

<https://www.schoolinfrastructure.nsw.gov.au/>

Architect

SJA

<https://sja.com.au/>

ELEPHANTS FOOT RECYCLING SOLUTIONS • ABN 70 001 378 294
44-46 Gibson Ave Padstow NSW 2211
www.elephantsfoot.com.au

T +612 9780 3500 • F +612 9707 2588
E wmp@elephantsfoot.com.au

REVISION REFERENCE

Revision	Date	Prepared by	Reviewed by	Description
A	14/12/2020	H Wilkes	A Armstrong	Draft
B	13/01/2021	H Wilkes	A Armstrong	Amendment
C	19/01/2021	H Wilkes	A Armstrong	Amendment
D	15/02/2021	H Wilkes	A Armstrong	Amendment
E	2/03/2021	H Wilkes	A Armstrong	Final
F	16/04/2021	H Wilkes	A Armstrong	Amendment

The information contained in this document produced by Elephants Foot Recycling Solutions (EFRS) is solely for the use of the client identified on the cover sheet for the purpose for which it has been prepared for. EFRS undertakes no duty, nor accepts any responsibility for any third party who may rely upon this document. Reproduction, publication or distribution of this document without written permission from EFRS is strictly prohibited.

TABLE OF CONTENTS

TABLE OF FIGURES.....	iv
LIST OF TABLES.....	iv
GLOSSARY OF ABBREVIATIONS AND TERMS	i
INTRODUCTION	2
SCOPE OF REPORT	2
REPORT CONDITIONS.....	3
LEGISLATION & GUIDANCE	4
SHOALHAVEN CITY COUNCIL OBJECTIVES.....	4
DEVELOPMENT OVERVIEW.....	5
SITE LOCATION.....	5
WASTE MANAGEMENT.....	6
WASTE GENERATION ESTIMATES.....	6
BIN SUMMARY.....	6
WASTE MANAGEMENT PROCEDURES	7
WASTE COLLECTION PROCEDURES.....	7
OTHER WASTE MANAGEMENT CONSIDERATIONS.....	7
KITCHENS, OFFICE TEA ROOMS AND FOOD PREPARATION AREAS	7
BATHROOMS	8
PRINTING & PHOTOCOPYING AREAS.....	8
LIQUID WASTE	8
PROBLEM WASTE	8
STAKEHOLDER ROLES & RESPONSIBILITIES.....	9
SOURCE SEPARATION.....	10
EDUCATION.....	11
SIGNAGE.....	11
POLLUTION PREVENTION.....	11
WASTE ROOMS.....	12
BIN MOVING PATHS.....	12
CONSTRUCTION REQUIREMENTS.....	13
ADDITIONAL CONSIDERATIONS.....	13
USEFUL CONTACTS	14
APPENDIX A: ARCHITECTURAL PLANS	15
APPENDIX A.1 GROUND FLOOR PLAN – WASTE FACILITIES	16
APPENDIX A.1 WASTE AREA LAYOUT	17
APPENDIX B CALCULATIONS FOR WASTE GENERATION RATES	18
APPENDIX C: PRIMARY WASTE MANAGEMENT PROVISIONS	19
APPENDIX C.1 TYPICAL BIN SPECIFICATIONS	20

APPENDIX C.2 SIGNAGE FOR WASTE & RECYCLING BINS	21
APPENDIX C.3 TYPICAL COLLECTION VEHICLE INFORMATION	23

TABLE OF FIGURES

Figure 1. Site Location	5
-------------------------------	---

LIST OF TABLES

Table 1: Estimated Waste and Recycling Volumes	6
Table 2: Stakeholder Roles and Responsibilities.....	9
Table 3: Operational Waste Streams	10
Table 4: Waste Room Areas	12
Table 5: Waste Room Requirements	12

GLOSSARY OF ABBREVIATIONS AND TERMS

TERM	DESCRIPTION
<i>Baler</i>	A device that compresses waste into a mould to form bales which may be self-supporting or retained in shape by strapping
<i>Bin-carting Route</i>	Travel route for transferring bins from the storage area to a nominated collection point
<i>Collection Area/Point</i>	The identified position or area where general waste or recyclables are loaded onto the collection vehicle
<i>Compactor</i>	A machine for compressing waste into disposable or reusable containers
<i>Composter</i>	A container/machine used for composting specific food scraps
<i>Crate</i>	A plastic box used for the collection of recyclable materials
<i>DA</i>	Development Application
<i>DCP</i>	Development Control Plan
<i>EPA</i>	Environmental Protection Authority
<i>HRV</i>	Heavy Rigid Vehicle described by AS 2890.2-2002 Parking facilities – Off-street commercial vehicle facilities
<i>L</i>	Litre(s)
<i>LEP</i>	Local Environmental Plans guide planning decisions for local government areas
<i>Liquid Waste</i>	Non-hazardous liquid waste generated by commercial premises that must be connected to sewer or collected for treatment and disposal by a liquid waste contractor (including grease trap waste)
<i>Mixed Use Development</i>	A development comprised of two or more different uses
<i>Mobile Garbage Bin(s) (MGB)</i>	A waste container generally constructed of plastic with wheels with a capacity in litres of 120, 240, 360, 660, 1000 or 1100
<i>MRV</i>	Medium Rigid Vehicle described by AS 2890.2-2002 Parking facilities – Off-street commercial vehicle facilities
<i>Onsite Collection</i>	When the collection vehicle enters the property and services the development within the property boundary from a designated loading area
<i>Owners Corporation</i>	An organisation or group of persons that is identified by a particular name and acts, or may act, as an entity
<i>SRV</i>	Small Rigid Vehicle described by AS 2890.2-2002 Parking facilities – Off-street commercial vehicle facilities
<i>WHS</i>	Workplace Health and Safety
<i>Wheel-in wheel-out service</i>	A type of waste collection service offered by local councils where the council waste collection personnel enter the premises to collect the bins and returns them to the property

INTRODUCTION

Elephants Foot Recycling Solutions (EFRS) has been engaged to prepare the following waste management plan for the operational management of waste generated by the school development located at 17 Croobyar rd Milton NSW.

Waste management strategies and audits are required for new developments in order to support the design and sustainable performance of the building. It is EFRS's belief that a successful waste management strategy contains three key objectives:

- i. **Promote responsible source separation** to reduce the amount of waste that goes to landfill by implementing convenient and efficient waste management systems.
- ii. **Ensure adequate waste provisions and robust procedures** that will cater for potential changes during the operational phase of the development.
- iii. **Comply** with all relevant council codes, policies, and guidelines.

To achieve these objectives, this operational waste management plan (OWMP) identifies the different waste streams likely to be generated during the operational phase of the development, as well as how the waste will be handled and disposed, details of bin sizes/quantities and waste rooms, descriptions of the proposed waste management equipment used, and information on waste collection points and frequencies.

It is essential that this OWMP is integrated into the overall management of the building and is clearly communicated to all relevant stakeholders.

SCOPE OF REPORT

This operational waste management plan (OWMP) only applies to the **operational** phase of the proposed development; therefore, the requirements outlined in this OWMP must be implemented during the operational phase of the site and may be subject to review upon further expansion of, and/or changes to the development.

The waste management of the **construction** and **demolition** phases of the development are not addressed in this report. A construction and demolition WMP will be provided in a separate report.

REPORT CONDITIONS

The purpose of this report is to document an OWMP as part of a development application, which is supplied by EFRS with the following limitations:

- Drawings, estimates and information contained in this OWMP have been prepared by analysing the information, plans and documents supplied by the client and third parties including Council and other government agencies. The assumptions based on the information contained in the OWMP is outside the control of EFRS,
- The figures presented in the report are an estimate only – the actual amount of waste generated will be dependent on the occupancy rate of the building/s and waste generation intensity as well as the building management's approach to educating students and staff regarding waste management operations and responsibilities,
- The building manager will adjust waste management operations as required based on actual waste volumes (e.g. if waste is greater than estimated) and increase the number of bins and collections accordingly,
- The report will not be used to determine or forecast operational costs or prepare any feasibility study or to document any safety or operational procedures,
- The report has been prepared with all due care; however no assurance is made that the OWMP reflects the actual outcome of the proposed waste facilities, services, and operations, and EFRS will not be liable for plans or results that are not suitable for purpose due to incorrect or unsuitable information or otherwise,
- EFRS offer no warranty or representation of accuracy or reliability of the OWMP unless specifically stated,
- Any manual handling equipment recommended in this OWMP should be provided at the recommendation of the appropriate equipment provider who will assess the correct equipment for supply,
- Design of waste management equipment and systems must be approved by the supplier,
- EFRS cannot be held accountable for late changes to the design after the OWMP has been submitted to Council,
- EFRS will provide specifications and recommendations on bin access and travel paths within the OWMP, however it is the architect's responsibility to ensure the architectural drawings meet these provisions,
- EFRS are not required to provide information on collection vehicle swept paths, head heights, internal manoeuvring or loading requirements. It is assumed this information will be provided by a traffic consultant,
- Council are subject to changing waste and recycling policies and requirements at their own discretion.

This OWMP is only finalised once the Draft Watermark has been removed. If the Draft Watermark is present, the information in the OWMP is not confirmed.

LEGISLATION & GUIDANCE

Waste management and resource recovery regulation in Australia is administered by the Australian Constitution, Commonwealth laws, and international agreements. State and territory governments maintain primary responsibility for controlling development and regulating waste. The following legislation has been enacted in New South Wales, and provides the lawful underpinnings of this OWMP.

- NSW Environmental Planning & Assessment Act 1979
- NSW Protection of the Environment Operations Act 1997
- NSW Waste Avoidance & Resource Recovery Act 2001

At the local level, councils or Local Government Areas (LGAs) require OWMPs to be included in new development applications. This OWMP is specifically required by:

- Shoalhaven Development Control Plan 2014
- Shoalhaven Local Environmental Plan 2014

The primary purpose of a development control plan (DCP) is to guide development according to the aims of the corresponding local environmental plan (LEP). The DCP must be read in conjunction with the provisions of the relevant LEP.

Information provided in this OWMP comes from a wide range of waste management guidance at the local, state, and federal levels. The primary sources of guidance include:

- NSW Better Practice Guidelines for Waste Management and Recycling in Commercial and Industrial Facilities 2012
- NSW Better practice guide for resource recovery in residential developments 2019
- NSW Waste Avoidance and Resource Recovery (WARR) Strategy 2014-2021
- NSW Waste Classification Guidelines 2014
- Australia's National Waste Policy 2018

SHOALHAVEN CITY COUNCIL OBJECTIVES

Shoalhaven City Council considers waste management to be highly important for the protection and enhancement of both the natural and built environments. A such, Council aims to:

- i. Reduce the amount of waste generated and the demand for landfill disposal.
- ii. Maximise recovery, reuse and recycling of building/construction materials, household generated waste and industrial/commercial waste.
- iii. Provide on-going management for waste handling and recovery on site (at the source).
- iv. Provide guidelines on the preparation of waste management plans, matters for assessment, and the reduction and handling of waste.
- v. Encourage the use of materials made from recycled products and materials that can be recycled and reused.
- vi. Achieve source separation and improve design and location standards, which complement waste collection and management services, offered by Council and/or private service providers.
- vii. Encourage building designs and construction techniques which will maximise future resource recovery.
- viii. Assist in achieving Federal and State Government recovery targets and directive outcomes.
- ix. Minimise the overall environmental impacts and foster the principles of ecologically sustainable development.

DEVELOPMENT OVERVIEW

The proposed development falls under the LGA of Shoalhaven City Council, and consists of:


- Relocation of the Budawang Public School to 17 Croobyar rd Milton NSW. The school has
 - Facilities for 80 students and 34 staff
 - School facilities including Hydrotherapy building, multi-purpose hall + Life Skills building, Library, staff and admin building, and Homebase building.

All figures and calculations are based on area schedules as advised by our client and shown on architectural drawings.

SITE LOCATION

The site is located at 17 Croobyar Rd Milton , as shown in Figure.1. The site has frontages to Croobyar rd with vehicle access via Croobyar rd.

Figure 1. Site Location

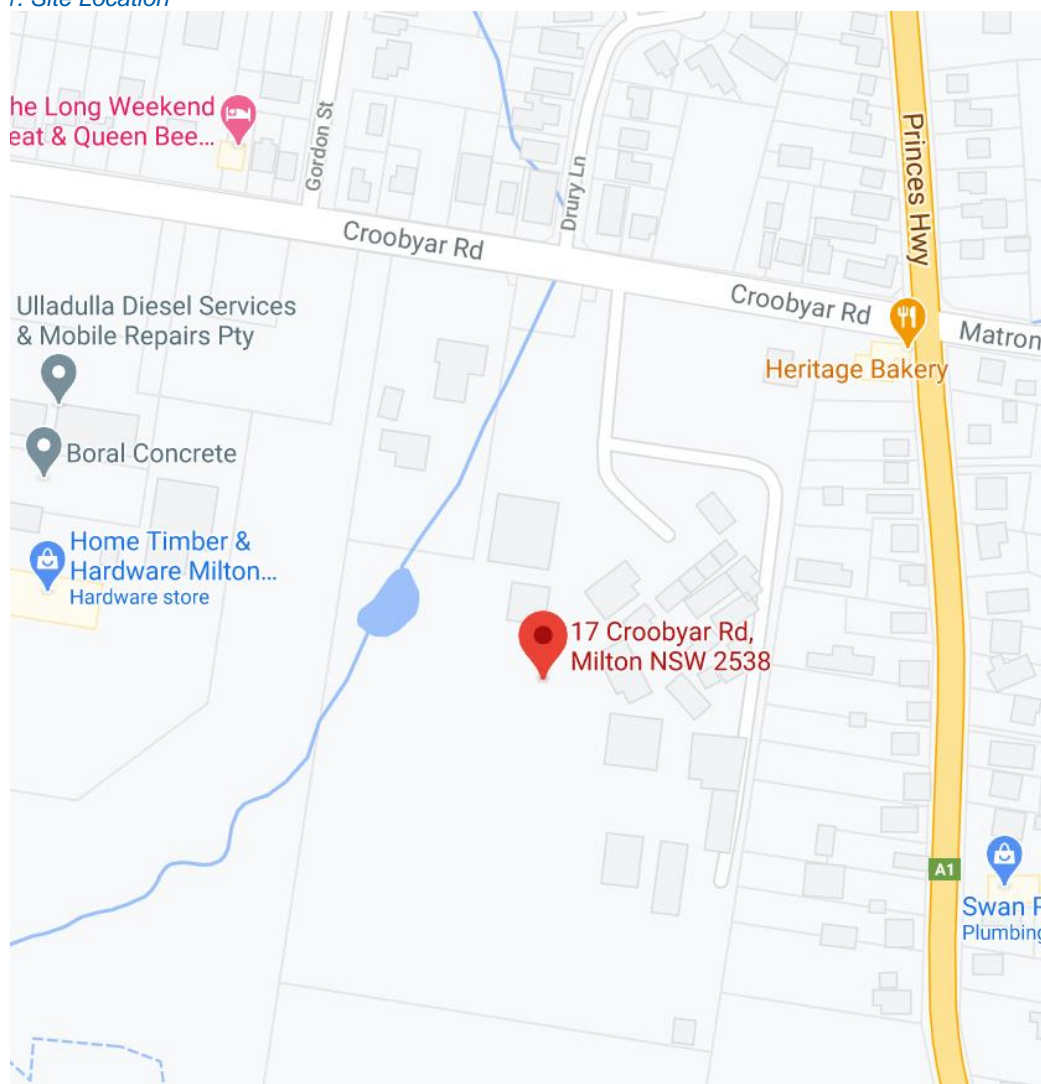

Source: Google Maps

WASTE MANAGEMENT

The following section outlines best practice waste management for the primary school, including waste generation estimates and waste disposal and collection procedures.

WASTE GENERATION ESTIMATES

It is understood that the extent of the school operation will be maintained with the relocation (i.e, the school will have the same number of students). Therefore, data regarding the waste generated weekly at the currently operating site has been used to calculate the number of bins required for the relocated. For full calculations please see 0. Calculations are based on circumstantial figures; waste generation may differ according to the waste management practice of the site in operation.

The following table shows the estimated volume (L) of general waste and recyclables that will be generated by the primary school. The following estimates are based on a five-day operating week.

Table 1: Estimated Waste and Recycling Volumes

	# Classrooms	General Waste Generation Rates (L/classroom/week)	Generated Garbage (L/week)	Recycling Generation Rate (L/classroom/week)	Generated Recycling (L/week)	Sanitary Generation Rate (L/classroom/week)	Generated Sanitary (L/week)
Budawang School	10	144	1440	72	720	72	720
TOTAL	10		1440		720		720
Bins and Collections	Bin Size (L)		240	Bin Size (L)		240	240
	General Waste Bins Per Week		6	Recycling Bins Per Week		3	3
	Collections per Week		1	Collections per Week		1	1
	Total Waste Bins Required		6	Total Recycling Bins Required		3	3

BIN SUMMARY

Based on the estimated waste generated, the recommended bin quantities and collection frequencies are as follows:

General Waste: 6 x 240L MGBs collected **1 x weekly**

Recycling: 3 x 240L MGBs collected **1 x weekly**

Sanitary Waste: 3 x 240L MGBs collected **1 x weekly**

Bin sizes, quantities, and/or collection frequencies may be modified by the building manager once the proposed development is operational. Building management will be required to negotiate any changes to bins or collections with the collection service provider. Seasonal peak periods such as school terms should also be considered.

WASTE MANAGEMENT PROCEDURES

Suitably labelled waste and recycling bin will be placed in each room throughout the campus. Garbage and recycling receptacles should be provided in convenient locations and areas of high waste generation.

The students, staff and visitors will be responsible for placing their waste and recycling into the correct receptacle. The fullness of the source separation bins will be monitored by building management and cleaners.

The cleaners will circulate throughout the campus after hours and empty the waste and recycling receptacles situated throughout the school. The cleaners will then transport the waste and recycling to the bulk bins in the Bin Room and dispose of the waste and recycling into the appropriate bins.

Sanitary waste bins will be placed through the school where required. When full, the bins will be transported to the waste area to await collection or collected from their operational locations, pending the agreement with the collection contractor.

WASTE COLLECTION PROCEDURES

A private waste collection contractor (or Council's commercial collection service) will be engaged to service the waste, recycling and sanitary bins per an agreed schedule. This report assumes that waste will be collected weekly and recycling fortnightly.

On the day of service, a private waste collection vehicle will enter the site from Croobyar Rd and park in the loading bay, adjacent to the Bin Room.

The waste collection staff will collect the bins directly from the Bin Room. The groundskeeper will provide the driver with access to the Bin Room.

Once the bins are serviced, the collection vehicle will exit the site onto Croobyar Rd in a forward direction.

Collections should occur outside of school hours to minimise conflicts with operations on site including school drop off and pick ups.

OTHER WASTE MANAGEMENT CONSIDERATIONS

Based on the types of tenancies anticipated for this development, the following waste management practices are recommended.

KITCHENS, OFFICE TEA ROOMS AND FOOD PREPARATION AREAS

Any food preparation area, including kitchens and office tea rooms will be provided with dedicated source separation bins including a general waste bin and a recycling bin. Cleaners or nominated staff will be responsible for monitoring these bins and emptying them as required.

BATHROOMS

Washroom facilities should be supplied with collection bins for paper towels (if used). Sanitary bins for female restroom facilities must also be arranged with an appropriate contractor.

PRINTING & PHOTOCOPYING AREAS

It is recommended that printing and photocopying areas are supplied with bins for the collection of paper, as well as separate receptacles for ink toner cartridges for recycling. The cleaners or nominated staff are responsible for monitoring these bins and ensuring the items are collected and recycled by an appropriate contractor.

LIQUID WASTE

Liquid wastes such as pool chemicals, cleaning products, other chemicals, paints, and cooking oil, etc., should be stored in a secure space that is bunded and drained to a grease trap in accordance with State government authorities and legislation.

PROBLEM WASTE

The building manager is responsible for making arrangements for the disposal and recycling of problem waste streams with an appropriate contractor. Problem wastes cannot be placed in general waste as they can have adverse impacts to human health and the environment if disposed of in landfill. Staff will need to liaise with the groundskeeper when disposing of problem waste streams.

Problem waste streams include:

- Chemical Waste
- Liquid wastes
- Toner cartridges
- Lightbulbs
- eWaste
- Batteries

STAKEHOLDER ROLES & RESPONSIBILITIES

The following table demonstrates the primary roles and responsibilities of the respective stakeholders:

Table 2: Stakeholder Roles and Responsibilities

Roles	Responsibilities
School Management	<ul style="list-style-type: none"> Ensuring that all waste service providers submit monthly reports on all equipment movements and waste quantities/weights; Organising internal waste audits/visual assessments on a regular basis; and Manage any non-compliances/complaints reported through waste audits.
School Management/ Groundskeeper	<ul style="list-style-type: none"> Ensuring effective signage, communication and education is provided to students, staff and cleaners; Providing staff/contractors with equipment manuals, training, health and safety procedures, risk assessments, and PPE to control hazards associated with all waste management activities; Ensuring site safety for students, visitors, staff and contractors; Abiding by all relevant OH&S legislation, regulations, and guidelines; Assessing any manual handling risks and prepare a manual handling control plan for waste and bin transfers; Preventing storm water pollution by taking necessary precautions (securing bin rooms, preventing overfilling of bins) Cleaning and transporting of bins as required; Organising, maintaining and cleaning the general and recycled waste holding area; Organising both garbage and recycled waste pick-ups as required; Organising replacement or maintenance requirements for bins; Organising bulky goods collection when required; and Investigating and ensuring prompt clean-up of illegally dumped waste materials.
Staff, Students and cleaners	<ul style="list-style-type: none"> Dispose of all garbage and recycling in the allocated MGBs provided; Ensure adequate separation of garbage and recycling; and Compliance with the provisions of Council and the WMP.
Waste Contractor	<ul style="list-style-type: none"> Provide a reliable and appropriate waste collection service; Provide feedback to School Caretaker in regards to contamination of recyclables; and Work with building managers to customise waste systems where possible.
Gardening/Landscaping Contractor	<ul style="list-style-type: none"> Removal of all garden organic waste generated during gardening maintenance activities for recycling at an offsite location.
Building Contractors	<ul style="list-style-type: none"> Removing all construction related waste offsite in a manner that meets all authority requirements.

SOURCE SEPARATION

Better practice waste management includes the avoidance, reuse, and recovery of unwanted items, which can be achieved through source separation. The table below outlines what is typically included in various waste streams and how they can be managed. Refer to your local council for a list of accepted materials. Planet Ark can be accessed online to find other facilities that recover unwanted items.

Table 3: Operational Waste Streams

Waste Stream	Description	Typical Destination	Waste Stream Management
General Waste	The remaining portion of the waste stream that is not recovered for re-use, processing, or recycling. May include soft plastics, food scraps, polystyrene, etc.	Landfill	Waste should be bagged before placing in the designated waste bins.
Recycling	A mixture of items that are commonly recycled usually segregated through a MRF. Typically include food and beverage containers (e.g. aluminium, glass, steel, hard plastics, cartons). Also includes cardboard and paper products.	Resource Recovery Centre	Recycling must not be bagged, and instead should be placed loosely in the designated recycling bins. Cardboard should be flattened before placing in the designated cardboard bin.
Secure Documents	Secure documents are printed paper materials that contain sensitive information.	Recycling Facility	Secure documents are placed in allocated secure document bins. Private contractor removes bins from site.
Green Waste	Green waste consists of unwanted organic materials that are easily biodegradable and/or compostable (e.g. lawn clippings, branches)	Resource Recovery Centre	Landscape Maintenance Contractors will remove the green waste from site during scheduled maintenance.
Electronic Waste	Discarded e-waste, electronic components and materials such as computers, mobile phones, keyboards, etc.	Resource Recovery Centre	Building manager arranges collection for e-waste recycling as needed.
Bulky Items	Items that are too large to place into general rubbish collection. This includes disused and/or broken furniture, mattresses, white goods, etc.	Resource Recovery Centre or Landfill	Bulky items are to be managed by the building manager. A private contractor will be engaged to collect the bulky waste with an appropriate contractor as required.
Sanitary Waste	Feminine hygiene waste generated from female bathrooms.	Incineration or Landfill	Sanitary bins are serviced by sanitary waste contractor.
Other	Other recyclable items that require special recovery may include ink cartridges, batteries, chemical waste, fluorescent tubes, etc.	Resource Recovery Facility	Building manager arranges collection by appropriate recycling services when required.

EDUCATION

The school management is responsible for creating and implementing the waste management education process.

Educational material encouraging the correct separation of garbage and recycling items must be provided to each staff member, cleaners and students to ensure the correct disposal of waste and minimise the possibility of contamination in the waste and recycling bins.

It is recommended that the school investigates programs to teach students about recycling and resource recovery. These programs can be implemented into the operation of the school to reduce overall waste generation.

SIGNAGE

Signage and education are essential components to support best practice waste management including resource recovery, source separation, and diversion of waste from landfill.

Signage should include:

- Clear and correctly labelled waste and recycling bins,
- Instructions for separating and disposing of waste items. Different languages should be considered,
- Locations of, and directions to, the waste storage areas with directional signs, arrows, or lines,
- The identification of all hazards or potential dangers associated with the waste facilities, and
- Emergency contact information should there be issues with the waste systems or services in the building.

The building manager is responsible for waste room signage including safety signage. Appropriate signage must be prominently displayed on doors, walls and above all bins, clearly stating what type of waste or recyclables is to be placed in each bin.

All signage should conform to the relevant Australian Standards.

POLLUTION PREVENTION

Building management shall be responsible for the following to minimise dispersion of site litter and prevent stormwater pollution to avoid impact to the environment and local amenity:

- Promoting adequate waste disposal into the bins
- Securing all bin rooms (whilst affording access to staff/contractors)
- Prevent overfilling of bins, keep all bin lids closed and bungs leak-free
- Taking action to prevent dumping or unauthorised use of waste areas
- Require collection contractor/s to clean up any spillage when clearing bins

WASTE ROOMS

The areas allocated for waste storage and collection areas are detailed in the table below, and are estimates only. Final areas will depend on room and bin layouts.

Table 4: Waste Room Areas

Level	Waste Room Type	Equipment	Estimated Area Required (m ²)
G	Bin Room	6x 240L MGBs (waste) 3x 240L MGBs (recycling) 3 x 240L MGBs (sanitary waste)	>15

The waste room areas have been calculated based on equipment requirements and/or bin dimensions with an additional 70% of bin GFA factored in for manoeuvrability.

In addition, all doorways and passageways facilitating the movement of bins and/or bulky waste items must be at least 1500mm wide. The following table provides further waste room requirements.

Table 5: Waste Room Requirements

Waste Room Type	Waste Room Requirements
Bin Room	<ul style="list-style-type: none"> Bins should be arranged so that all bins are accessible. Bins are not be placed in front another or in such away as to restrict access to the other bins for use.

BIN MOVING PATHS

The building manager and cleaners are responsible for the transportation of bins as required from their designated operational locations to the bin holding room as required and returning them once emptied to resume operational use.

Transfer of bins should minimise manual handling where possible, as bins become heavy when full. The building manager must assess manual handling risks and provide any relevant documentation to key personal.

The routes along the bin moving path should;

- Allow for a continuous route that is wholly within the property boundary.
- Be free from obstruction and obstacles such as steps and kerbs.
- Be constructed of solid materials with a non-slip surface
- Be A minimum of 300mm wider than the largest bin used onsite.
- If bins are moved manually, the route must not exceed a grade of 1:14.
- If a bin moving device is used, the route cannot exceed the maximum operating grade of the device. This is typically a grade of 1:4, however this will vary depending on the model of bin moving device acquired for the site.

CONSTRUCTION REQUIREMENTS

Waste room construction must comply with the minimum standards as outlined in the *Shoalhaven Development Control Plan 2014*, in order to minimise odours, deter vermin, protect surrounding areas, and make it a user-friendly and safe area.

The *NSW Better Practice Guide for Resource Recovery in Residential Developments (2019)* also states that better practice bin storage areas should achieve more than the minimum compliance requirements, which are as follows:

- Ensuring BCA compliance, including ventilation. Where required, ventilation system must comply with AS1668.4-2012 The use of ventilation and air conditioning in buildings.
- Ensuring storage areas are well lit (sensor lighting preferred) and have lighting available 24 hours a day.
- Provision of bin washing facilities, including taps for hot and cold water provided through a centralised mixing valve. The taps must be protected from bins and be located where they can be easily accessed even when the area is at bin capacity.
- Floor constructed of concrete at least 75mm thick.
- Floor graded so that any water is directed to a sewer authority approved drainage connection to ensure washing bins and/or waste storage areas do not discharge flow into the stormwater drain.
- Provision of smooth, cleanable and durable floor and wall surfaces that extend up the wall to a height equivalent to any bins held in the area.
- Ensuring ceilings are finished with a smooth-faced non-absorbent material capable of being cleaned.
- All surfaces (walls, ceiling and floors) finished in a light colour.

ADDITIONAL CONSIDERATIONS

- Waste room floor to be sealed with a two-pack epoxy;
- All corners coved and sealed 100mm up, this is to eliminate build-up of dirt;
- Tap height and light switch height of 1.6m;
- Storm water access preventatives (grate);
- All walls painted with light colour and washable paint;
- Equipment electric outlets to be installed 1700mm above finished floor level;
- Optional automatic odour and pest control system installed
- If 660L or 1100L bins are utilised, 2 x 820mm (minimum) double-doors must be used;
- All personnel doors are hinged, lockable and self-closing;
- Conform to the Building Code of Australia, Australian standards and local laws; and
- Childproofing and public/operator safety shall be assessed and ensured
- Waste and recycling rooms must have their own exhaust ventilation system either;
 - Mechanically - exhausting at a rate of 5L/m² floor area, with a minimum rate of 100L/s minimum; Mechanical exhaust systems shall comply with AS1668.4.2012 and not cause any inconvenience, noise or odour problem or
 - Naturally - permanent, unobstructed, and opening direct to the external air, not less than one-twentieth (1/20) of the floor area.

USEFUL CONTACTS

EFRS does not warrant or make representation for goods or services provided by suppliers.

LOCAL COUNCIL

Shoalhaven Customer Service Ph: (02) 4429 5377 E: council@shoalhaven.nsw.gov.au

PRIVATE WASTE COLLECTION PROVIDER

Capital City Waste Services	Ph: 02 9599 9999	E: service@ccws.net.au
Remondis	Ph: 02 9032 7100	
Suez Environmental	Ph: 13 13 35	
Wastewise NSW	Ph: 1300 550 408	E: admin@wastewise.com.au

BIN MOVING DEVICE SUPPLIERS

Electrodrive	Ph: 1800 333 002	E: sales@electrodrive.com.au
Sitecraft	Ph: 1300 363 152	E: sales@sitecraft.com.au
Spacepac	Ph: 1300 763 444	

ORGANIC DIGESTERS AND DEHYDRATORS

Closed Loop	Ph: 1300 762 166	
Orca		E: contact.australia@feedtheorca.com
Soil Food	Ph: 1300 556 628	
Waste Master	Ph: 1800 614 272	E: hello@wastemasterpacific.com.au

COOKING OIL CONTAINERS AND DISPOSAL

Auscol	Ph: 1800 629 476	E: sales@auscol.com
--------	------------------	---

ODOUR CONTROL

Purifying Solutions	Ph: 1300 636 877	E: sales@purifyingsolutions.com.au
---------------------	------------------	---

SOURCE SPERATION BINS

Source Separation Systems	Ph: 1300 739 913	E: info@sourceseparationsystems.com.au
---------------------------	------------------	---

MOBILE GARBAGE BINS, BULK BINS AND BIN EQUIPMENT


SULO	Ph: 1300 364 388	E: sales@sulo.com.au
OTTO Australia	Ph: 02 9153 6999	

CHUTES, COMPACTORS AND EDIVERTER SYSTEMS

Elephants Foot Recycling Solutions	Ph: 1800 025 073	E: info@elephantsfoot.com.au
------------------------------------	------------------	---


APPENDIX A: ARCHITECTURAL PLANS

APPENDIX A.1 GROUND FLOOR PLAN – WASTE FACILITIES

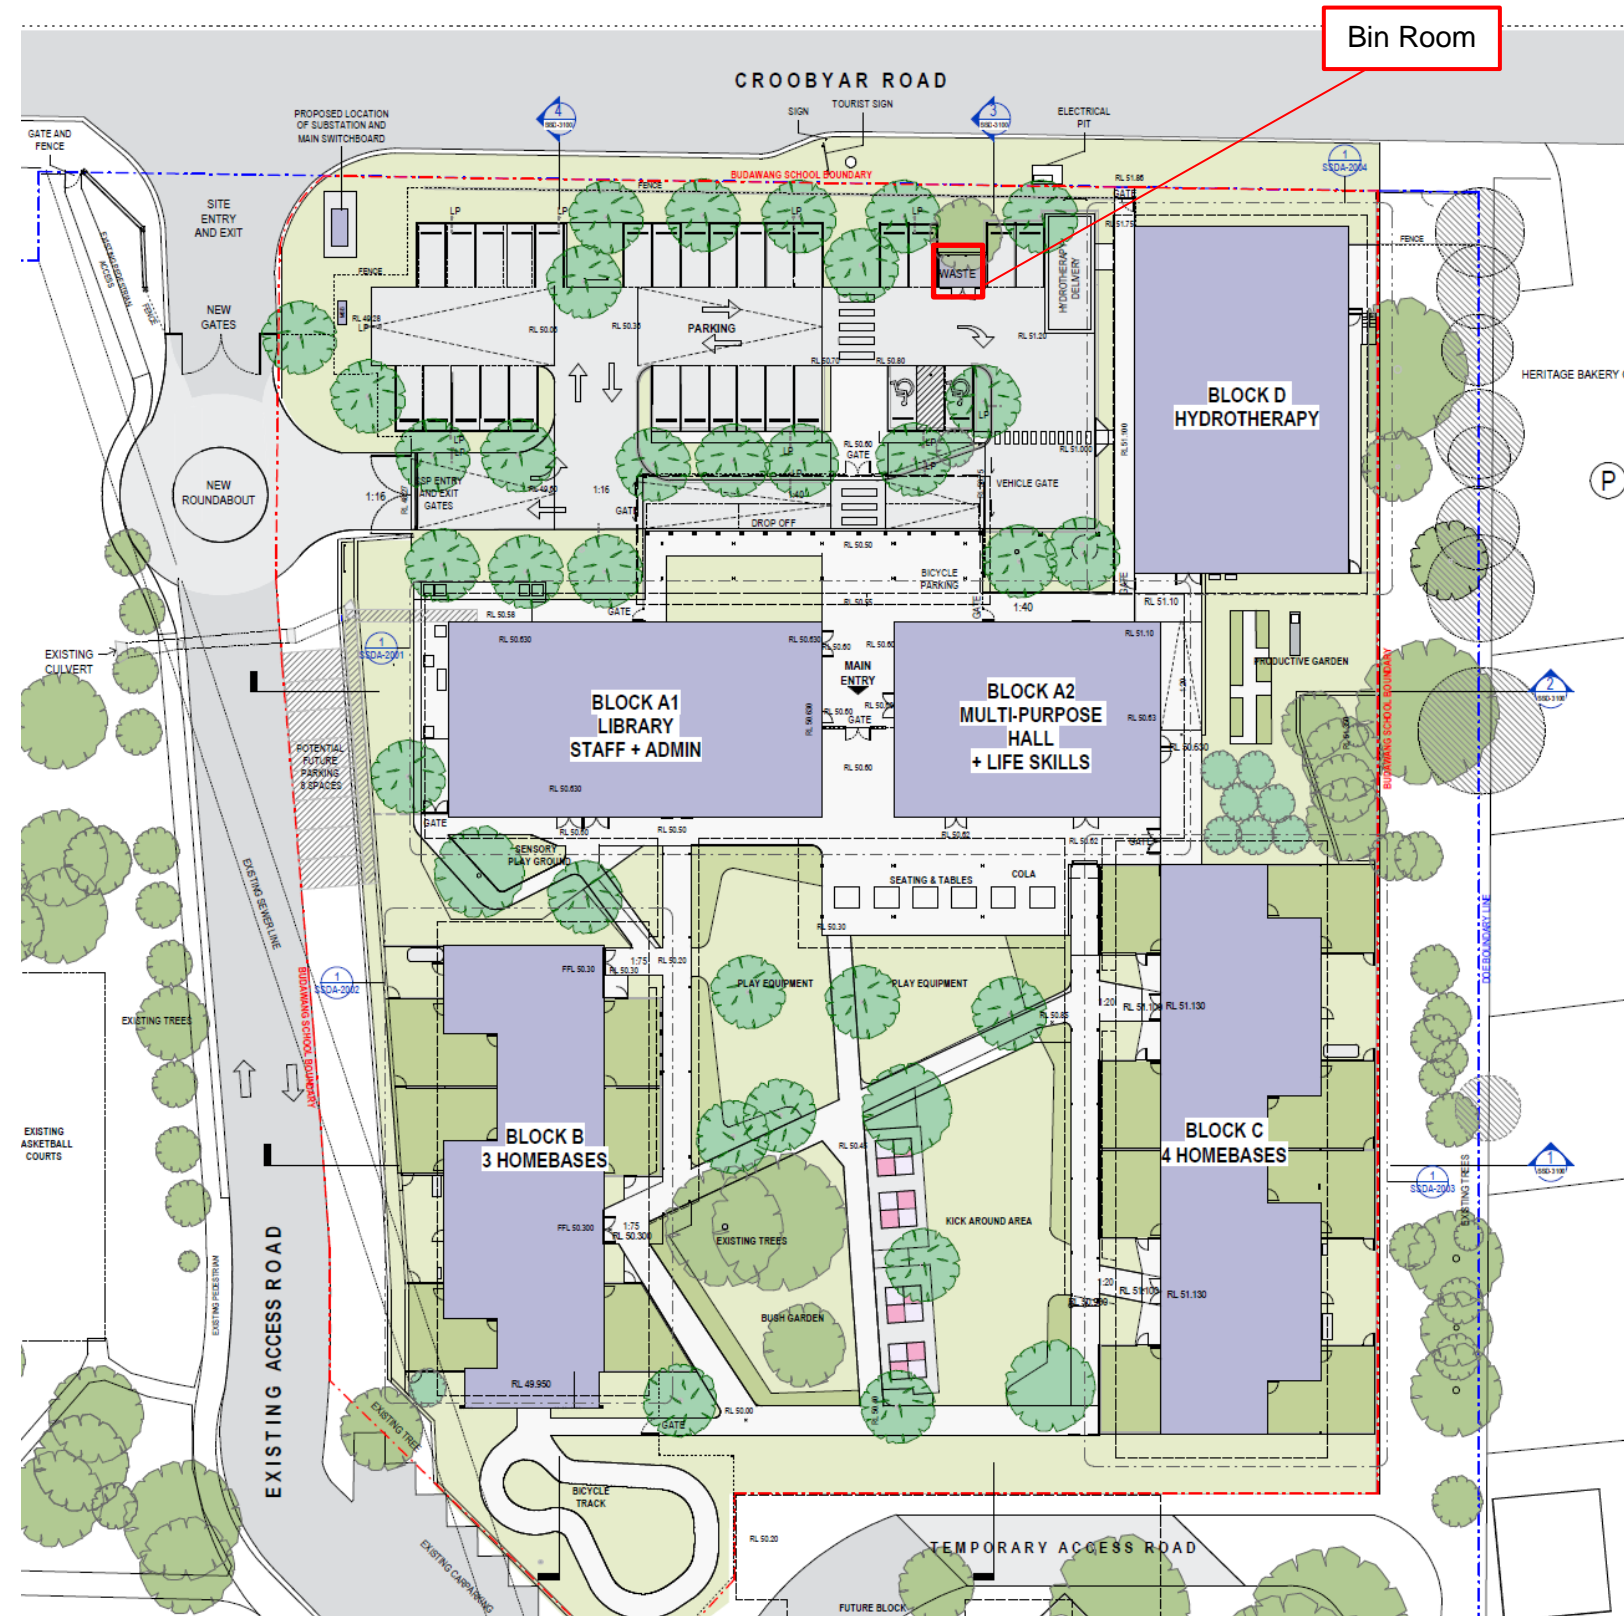

Source: Group GSA, Budawang School Relocation, Drawing No SSDA-2000, Rev D – Site Plan

APPENDIX A.1 WASTE AREA LAYOUT

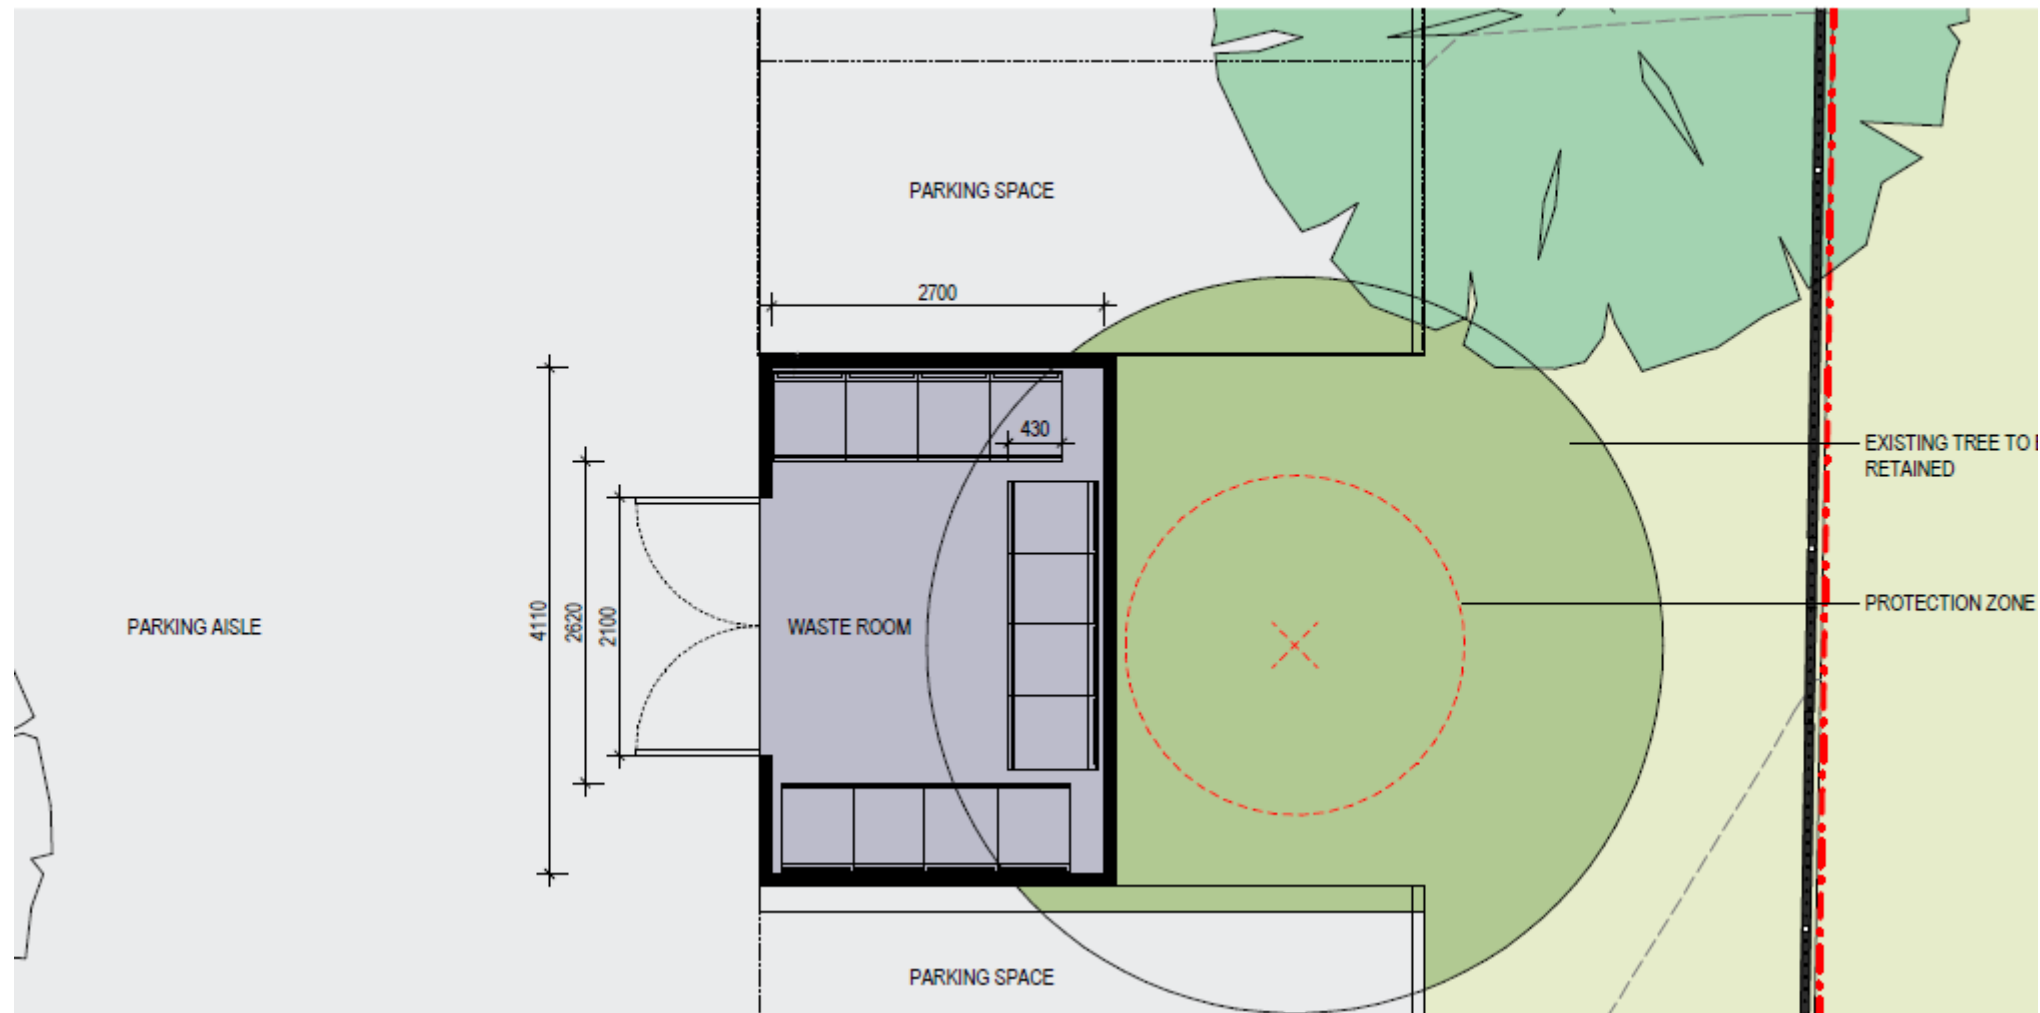

Source: Group GSA, Budawang School Relocation, Waste Store Sketch 1

APPENDIX B CALCULATIONS FOR WASTE GENERATION RATES

The waste generation rates use to project the volume of each waste stream generated by the relocated site has been based on the number of bins and collections for the currently operating facility. The process to convert the data from the current site to a waste generation rate is outlined below. The operational information has been provided by the NSW Department of Education.

Bin Numbers and Collection Frequency Data of Existing Site

The data represents the bins for 5 classrooms. The number of students in the school will stay the same with the relocation.

Elephants Foot has been informed that bins and collection frequencies for the existing site is as follows.

- 3x 240L MGBs for general waste collected once weekly
- 3x 240L MGBs for recycling (co-mingled) collected fortnightly
- 3x 240L MGBs for sanitary waste collected fortnightly by Sanokil

Converting Data to Volume (litres per week)

Formula:

Number of bins x bin size x collection frequency per week = Volume of waste generated per week

Waste stream	Number of Bins	Bin Size (L)	Collection Frequency (per week)	Volume (litres per week)
General Waste	3	240	1	720
Recycling (co-mingled)	3	240	0.5 (fortnightly)	360
Sanitary Waste	3	240	0.5 (fortnightly)	360

Converting Data to a Waste Generation Rate:

Formula:

Volume / number of classrooms data represents = waste generation per classroom per week

Waste stream	Volume (litres per week)	Waste Generation Rate (per classroom/ week)
General Waste	720	144
Recycling (co-mingled)	360	72
Sanitary Waste	360	72

APPENDIX C: PRIMARY WASTE MANAGEMENT PROVISIONS

APPENDIX C.1 TYPICAL BIN SPECIFICATIONS


Mobile bins

Mobile bins come in a variety of sizes and are designed for lifting and emptying by purpose-built equipment.

Mobile bins with capacities of up to 1700L must comply with *AS4123.6-2006 Mobile waste containers* which specifies standard sizes and sets out the colour designations for the bodies and lids of mobile waste containers indicating the type of materials they are used to collect.

The most common bin sizes are provided below, although not all sizes are shown. The dimensions are a guide only and differ slightly between manufacturers. Some bins have flat or domed lids and are used with different lifting devices. Refer to *AS4123.6-2006* for further details.

Table G1.1: Average dimension ranges for two-wheel mobile bins




Bin capacity	80L	120L	140L	240L	360L
Height (mm)	870	940	1065	1080	1100
Depth (mm)	530	530	540	735	820
Width (mm)	450	485	500	580	600
Approximate footprint (m ²)	0.24	0.26–0.33	0.27–0.33	0.41–0.43	0.49
Approximate weight (kg)	8.5	9.5	10.4	15.5	23
Approximate maximum load (kg)	32	48	56	96	Not known

Wheelie bin

Sources include Sulo, Single Waste, Cleanaway, SUEZ, just wheelie bins and Perth Waste for two-wheel mobile bins

Table G1.2: Average dimension ranges for four-wheel bulk bins



Bin capacity	660L	770L	1100L	1300L	1700L
Height (mm)	1250	1425	1470	1480	1470
Depth (mm)	850	1100	1245	1250	1250
Width (mm)	1370	1370	1370	1770	1770
Approx footprint (m ²)	0.86–1.16	1.51	1.33–1.74	2.21	2.21
Approx weight (kg)	45	Not known	65	Not known	Not known
Approx maximum load (kg)	310	Not known	440	Not known	Not known

Dome or flat lid container

Sources include Sulo, Signal Waste, Cleanaway, SUEZ, Just Wheelie Bins and Perth Waste

SOURCE: *Better Practice Guide For Resource Recovery In Residential Developments 2019*, NSW Environmental Protection Authority

APPENDIX C.2 SIGNAGE FOR WASTE & RECYCLING BINS

Waste signs

Signs and educational materials perform several functions including:

- informing residents why it is important to recover resources and protect the environment
- providing clear instructions on how to use the bins and services provided
- alerting people to any dangers or hazards within the bin storage areas.

All waste, recycling and organic bins should be Australian Standard colours and clearly and correctly labelled, such as by a sticker on the lid and/or the body of the bin.

Communal bin storage areas should be clearly signposted with signs outlining how to correctly separate waste into the bins provided. The local council responsible for waste services may be a good source of signs and posters and can advise on what signs are suitable.

Information on who to contact to find out more about the recycling and/or other resource recovery services in the building should also be displayed in communal areas, such as on a noticeboard.

The Planet Ark website also has resources available free of charge for use by businesses and councils. These signs can be found at businessrecycling.com.au/research/signage.cfm

Figure I1.1: Examples of waste wall posters (EPA supplied)



Figure I1.2: Examples of bin lid stickers (EPA supplied)



SOURCE: *Better Practice Guide For Resource Recovery In Residential Developments 2019*, NSW Environmental Protection Authority

Problem waste signs

The EPA has also produced a range of images and signs that can be used for problem wastes, such as fluoro globes and tubes, household and car batteries, e-waste and smoke detectors. To access these resources, contact the NSW EPA. Some examples are shown below.

Figure I2.1: Problem waste signs



Safety signs

The use of safety signs for waste resource recovery rooms must comply with *AS1319 Safety signs for occupational environments*. Safety signs must be used to regulate and control safety related to behaviour, warn of hazards and provide emergency information, including fire protection information. Suitable signs should be decided for each development as required.

Figure I3.1: Example safety signs



SOURCE: *Better Practice Guide For Resource Recovery In Residential Developments 2019*, NSW Environmental Protection Authority

APPENDIX C.3 TYPICAL COLLECTION VEHICLE INFORMATION

General

Appropriate heavy rigid vehicle standards should be incorporated into the road and street designs in new developments where onsite collections are proposed. Road and street designs must comply with relevant Acts, regulations, guidelines, and codes administered by Austroads, Standards Australia, NSW Roads and Maritime Services, WorkSafe NSW and any local council traffic requirements.

Applicants and building designers should consult with councils and other relevant authorities before designing new roads or streets and access points for waste collection vehicles to establish specific design requirements.

Table H4.1: Australian Standards for turning circles for medium and heavy rigid class vehicles

Vehicle class	Overall length (m)	Design width (m)	Design turning radius (m)	Swept circle (m)	Clearance (travel) height (m)
Medium rigid vehicle	8.80	2.5	10.0	21.6	4.5
Heavy rigid vehicle	12.5	2.5	12.5	27.8	4.5

SOURCE: Better Practice Guide For Resource Recovery In Residential Developments 2019, NSW Environmental Protection Authority

Large collection vehicles

Waste collection vehicles may be side-loading, rear-loading, front-lift-loading, hook or crane lift trucks. Vehicle dimensions vary by collection service, manufacturer, make and model. It is not possible to provide definitive dimensions, so architects and developers should consult with the local council and/or contractors.

The following characteristics represent typical collection vehicles and are provided for guidance only. Reference to *AS2890.2 Parking facilities: off-street commercial vehicle facilities* for detailed requirements, including vehicle dimensions, is recommended.

Table B2.1: Collection vehicle dimensions


Vehicle type	Rear-loading	Side-loading*	Front-lift-loading	Hook truck	Crane truck
Length overall (m)	10.5	9.6	11.8	10.0	10.0
Width overall (m)	2.5	2.5	2.5	3.0	2.5
Travel height (m)	3.9	3.6	4.8	4.7	3.8
Operational height for loading (m)	3.9	4.2	6.5	3.0	8.75
Vehicle tare weight (t)	13.1	11.8	16.7	13.0	13.0
Maximum payload (t)	10.0	10.8	11.0	14.5	9.5
Turning circle (m)	25.0	21.4	25.0	25.0	18

* The maximum reach of a side arm is 3 m.

Sources: JJ Richards, SUEZ, MacDonald Johnson, Cleanaway, Garwood, Ros Roca, Bingo and Edbro. Figures shown represent the maximum dimensions for each vehicle type.

Rear-loading collection vehicles

These vehicles are commonly used for domestic waste collections from MUDs and RFBs and sometimes for recycling. They can be used to collect waste stored in mobile bins or bulk bins, particularly where bins are not presented at the kerbside. They are also used for collecting bulky waste.

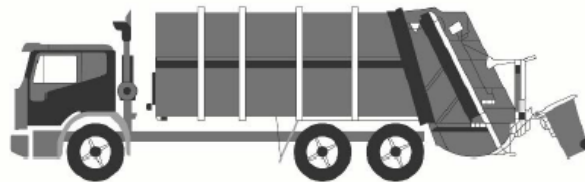

Rear-loading waste collection vehicle

Side-loading collection vehicles

This is the most commonly used vehicle for domestic waste, recycling and organics collections. It is only suitable for collecting mobile bins up to 360L in capacity.



Side-loading waste collection vehicle

Front-lift-loading collection vehicles

These vehicles are commonly used for collecting commercial and industrial waste. They can only collect specially designed front-lift bulk bins and not mobile bins.



Front-lift-loading waste collection vehicle

Small collection vehicles

Typically, councils and their contractors operate with large collection vehicles (heavy rigid class vehicles) because they carry greater payloads and allow for more cost-effective collection services. Some councils, or their contractors, may have smaller collection vehicles in their fleet. Early discussion with the council is important to confirm this, but it should not be assumed that the council will have access to small collection vehicles.

The waste management systems and the location of the collection point should always be designed so that the council can provide the standard domestic waste service.

SOURCE: Better Practice Guide For Resource Recovery In Residential Developments 2019, NSW Environmental Protection Authority