

5-9 Cowan Road

St Ives, NSW

Copyright remains the property of Arcadia Design Group Pty Ltd. Use only figured dimensions. Any other required dimensions are to be referred to and supplied by the landscape architect. All discrepancies to be referred to the project manager and Arcadia Design Group Pty Ltd prior to construction. Ensure compliance with the Building Code of Australia and all relevant Australian Standards and Authority requirements.


Legend

DRAWING SCHEDULE

DRAWING NO.	DRAWING TITLE
000	COVER SHEET
001	LEGEND
100	LANDSCAPE MASTERPLAN
400	PLANTING SCHEDULE
401	SOFTWARES PLAN 1 - GROUND FLOOR
402	SOFTWARES PLAN 2 - LEVEL 1-2
403	SOFTWARES PLAN 3 - LEVEL 3-4
404	SOFTWARES PLAN 4 - LEVEL 5-6
405	SOFTWARES PLAN 5 - LEVEL 7
406	SOFTWARES PLAN 6 - LEVEL 8
601	LANDSCAPE DETAILS
700	SPECIFICATION
ALL DRAWINGS TO BE READ IN CONJUNCTION WITH LANDSCAPE SPECIFICATION NOTES	

KEY PLAN

SCALE: 1:500@A1

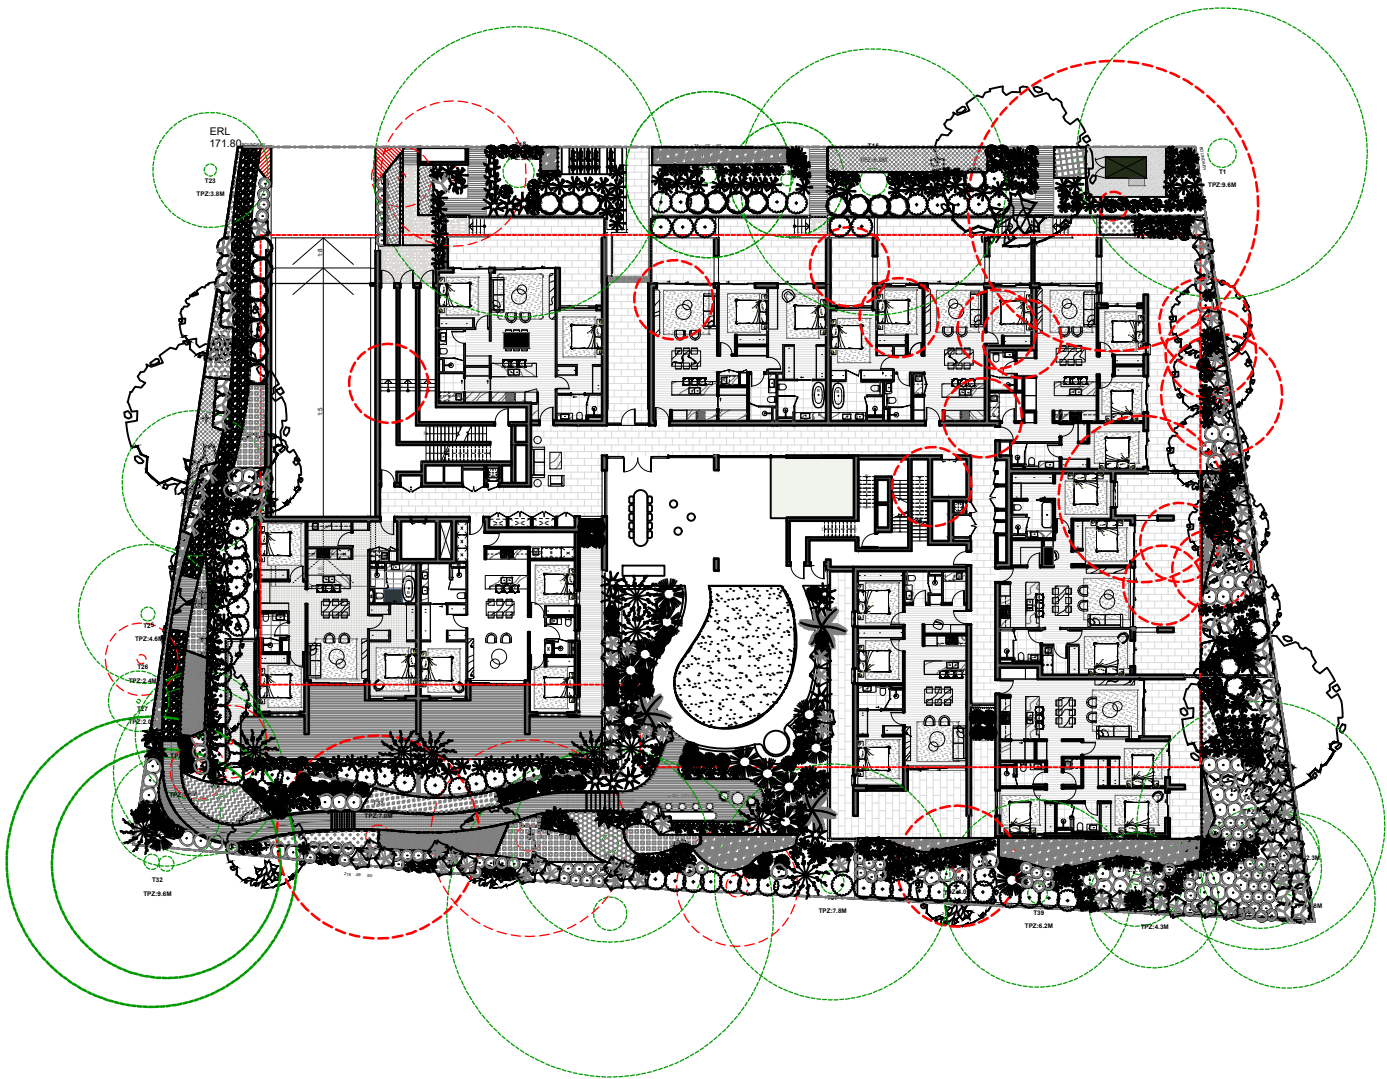

DRAFT FOR COORDINATION

G	ISSUE FOR RIS	LLFO	MB	05.06.26
F	ISSUE FOR RIS	LLFO	MB	10.04.26
E	ISSUE FOR RIS	LLFO	MB	13.02.26
E	ISSUE FOR RIS	LLFO	MB	09.02.26
D	ISSUE FOR RIS	LLFO	MB	19.12.25
C	ISSUE FOR RIS	LLFO	MB	16.12.25
B	ISSUE FOR SSDA	LLFO	MB	08.09.25
A	ISSUE FOR SSDA	LLFO	MB	03.09.25

Issue	Revision	Drawn	Check	Date
-------	----------	-------	-------	------

Not for Construction

Project

5-9 Cowan Road
St Ives, NSW

Development Approval

Prosper

PROSPER

Drawing No. L-000
Drawing Name Cover Sheet

Job No.

25-1142

Issue

G

Scale



Sydney, Suite 70, Jones Bay
Wharf, 26-32 Pirrama Road,
Pyrmont NSW 2009
E sydney@arcadiala.com.au
T 02 8571 2900

ARCADIA

HARDSCAPE

- TIMBER DECKING
- UNIT PAVEMENT
- PERMEABLE PAVEMENT
- PROPOSED WALL

TREES

- EXISTING TREES TO BE REMOVED
- EXISTING TREES TO BE RETAINED
- PROPOSED TREE PLANTING

SHRUBS AND ACCENTS

- Sw - Spathiphyllum Wallisii
- Prc - philodendron tatei ssp melanochlorum 'rojo congo'
- Sn - Strelitzia Nicolai
- Dc - Dianella caerulea
- Fe -Ficus elastica 'burgundy'
- De - Doryanthes excelsa
- Dt - Dracaena trifasciata
- Px - Philodendron 'Xanadu'
- Am - Alpinia mutica
- Hedge shrub 1.5m (Bm/Cci/Lp)
- small shrub 1.0m (Gs/HI)
- Syzygium australe 'Select'
- Mv - Melaleuca viminalis

Ferns & Cycads

- Ali - Alcantarea imperialis
- Cr - Cycas revoluta
- Bsl - Blechnum 'Silver Lady'
- Cc - Cyathea cooperi
- Hf -Howea forsteriana

GRASSES & GROUND COVERS

- Matrix 01
- Matrix 02
- Matrix 03
- Matrix 04
- Dr - Dianella revoluta
- En - Einadia nutans
- Hv - Hardenbergia violacea 'Meema'
- Ta - Themeda australis
- Mp - Myoporum parvifolium'Yareena'
- Pp - Poa poliformis
- Oj - Ophiopogan japonicas
- TJ - Trachelospermum jasminoides
- Vh - Viola hederacea

GRADING

- EXISTING LEVEL
ERL 96.36
- PROPOSED LEVEL
+RL 95.40
- TOP OF WALL LEVEL
+TW 95.80
- FINISH FLOOR LEVEL
FFL 92.30

Copyright remains the property of Arcadia Design Group Pty Ltd. Use only figured dimensions. Any other required dimensions are to be referred to and supplied by the landscape architect. All discrepancies to be referred to the project manager and Arcadia Design Group Pty Ltd prior to construction. Ensure compliance with the Building Code of Australia and all relevant Australian Standards and Authority requirements.

Legend

DRAFT FOR COORDINATION

G	ISSUE FOR RIS	LLFO	MB	05.06.26
F	ISSUE FOR RIS	LLFO	MB	10.04.26
E	ISSUE FOR RIS	LLFO	MB	13.02.26
E	ISSUE FOR RIS	LLFO	MB	09.02.26
D	ISSUE FOR RIS	LLFO	MB	19.12.25
C	ISSUE FOR RIS	LLFO	MB	16.12.25
B	ISSUE FOR SSDA	LLFO	MB	08.09.25
A	ISSUE FOR SSDA	LLFO	MB	03.09.25

Issue	Revision	Drawn	Check	Date
Not for Construction				

Project

5-9 Cowan Road
St Ives, NSW

Development Approval

Prosper


PROSPER

Drawing No. L-001
Drawing Name Legend

Job No. 25-1142
Issue G
Scale

Sydney, Suite 70, Jones Bay
Wharf, 25-32 Pirrama Road,
Pyrmont NSW 2009
E sydney@arcadiala.com.au
T 02 8571 2900

ARCADIA

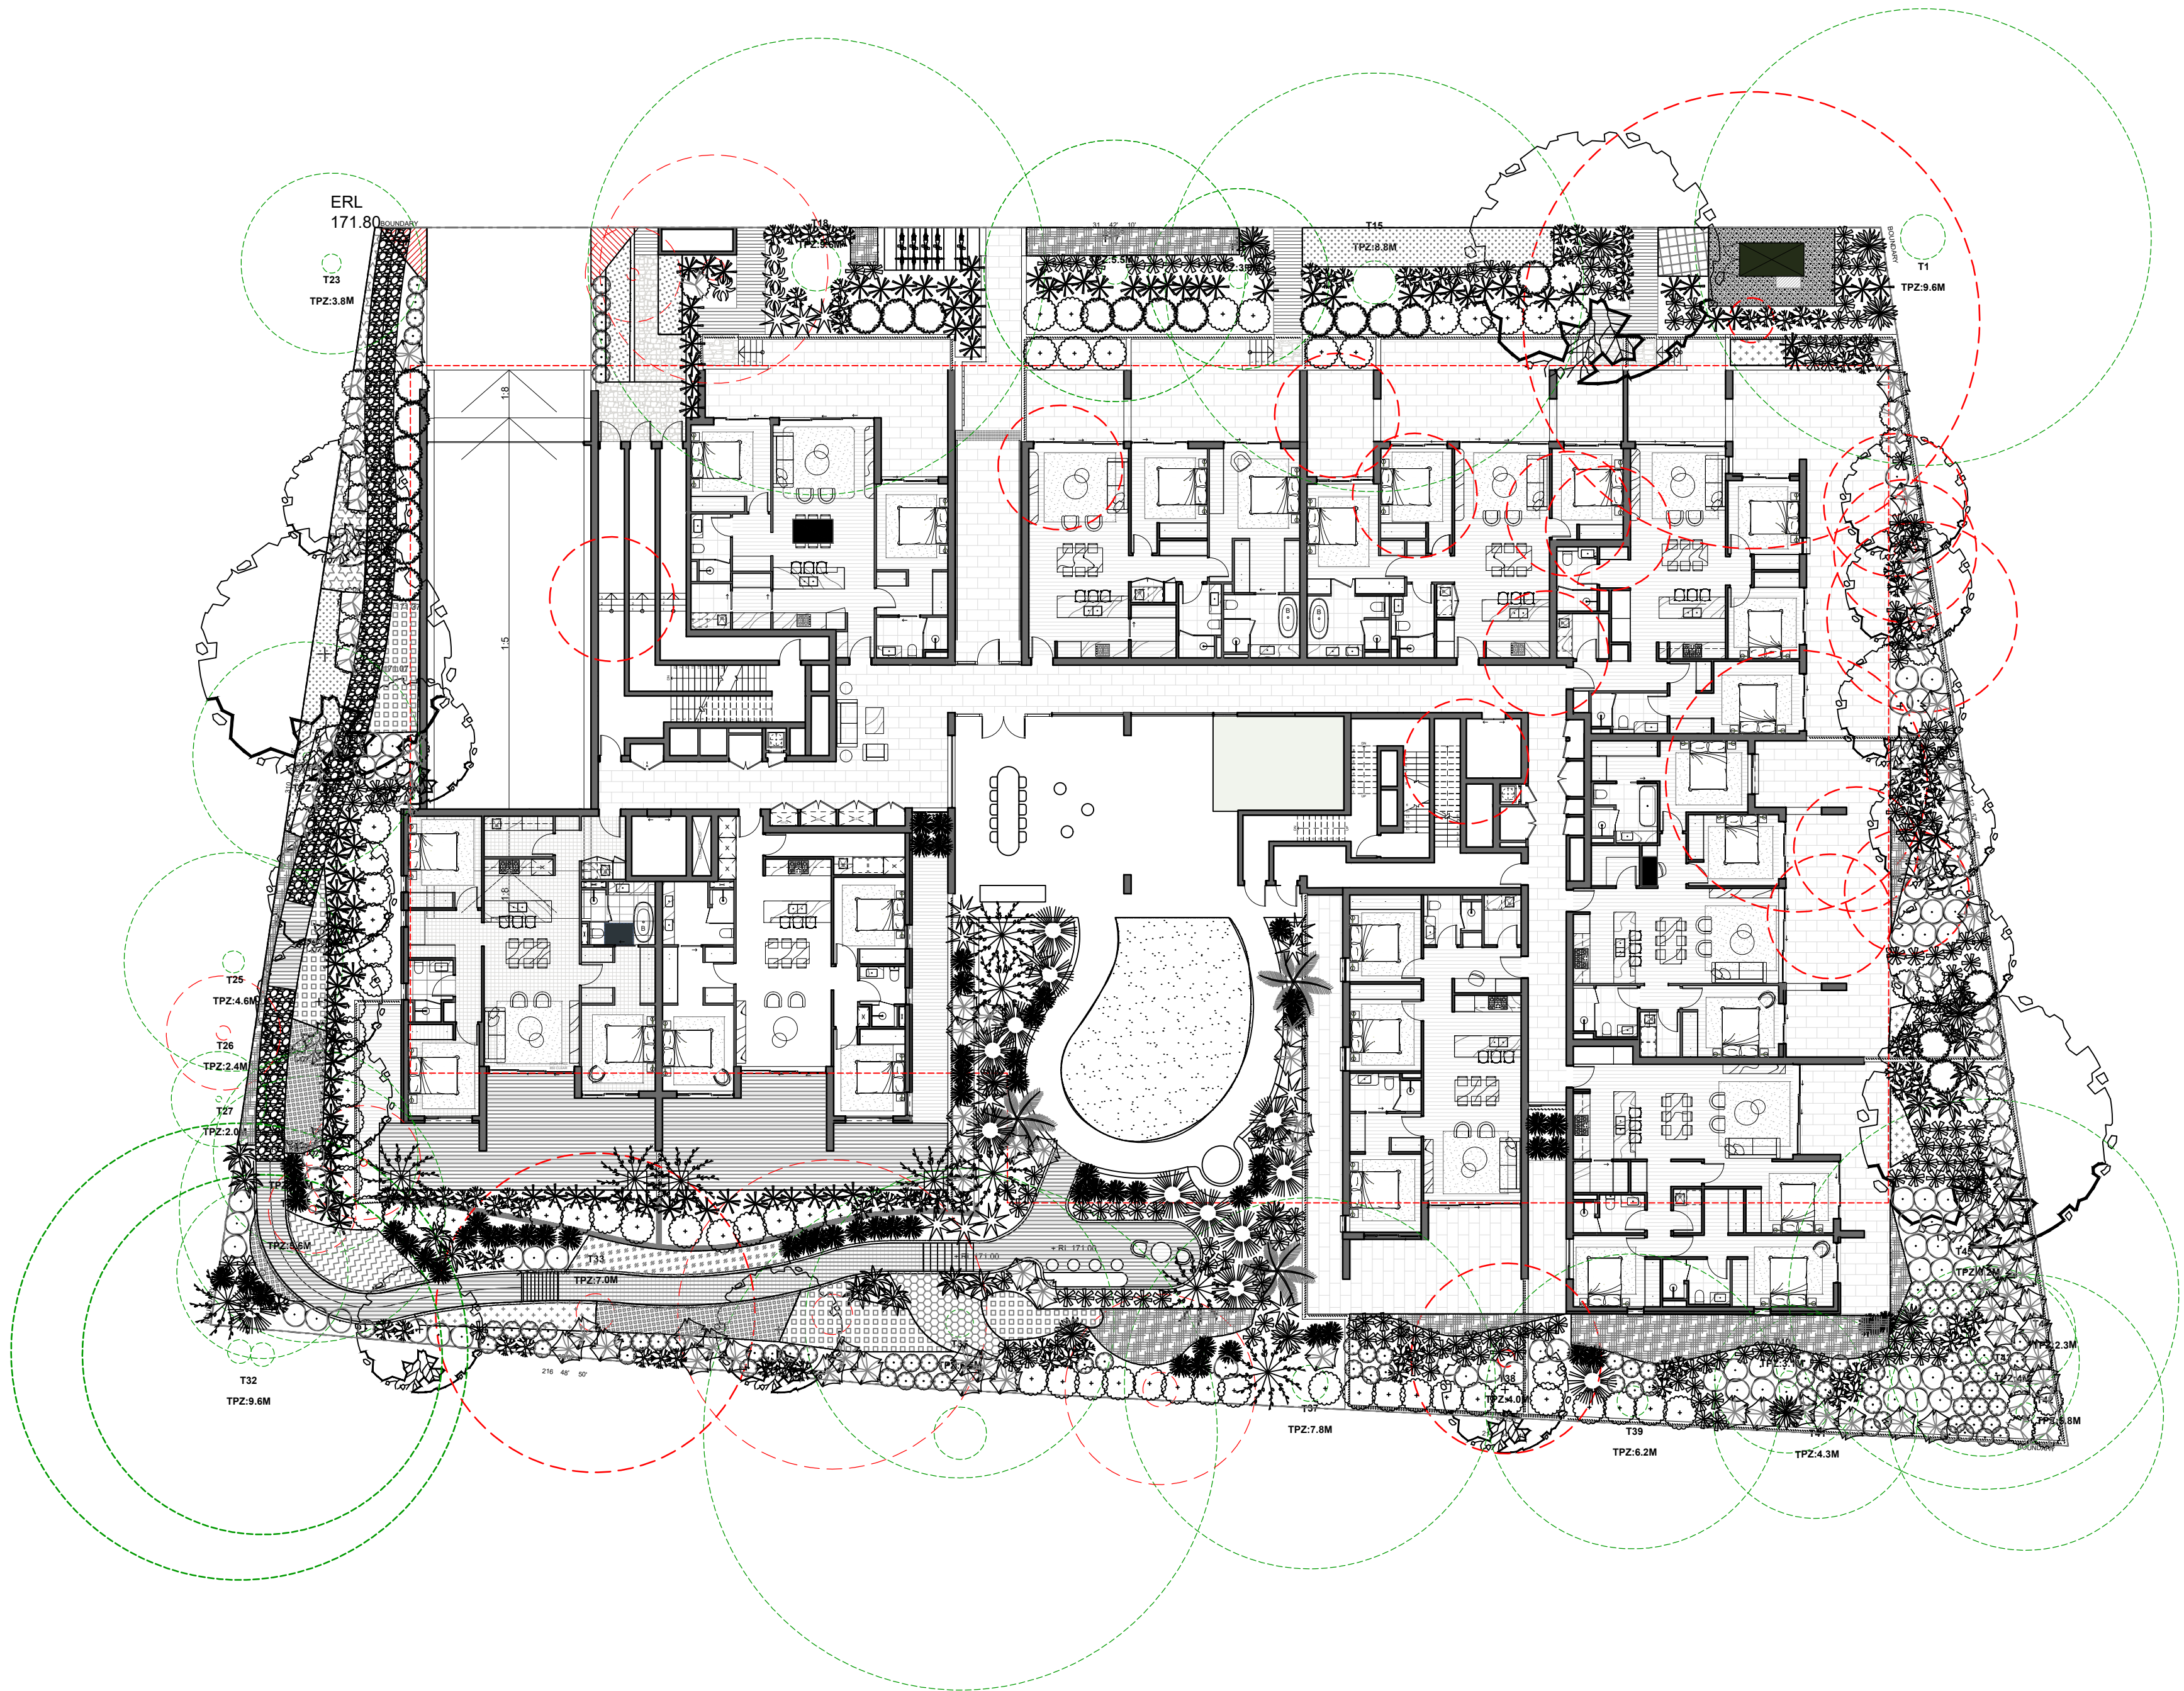

DRAFT FOR COORDINATION

G	ISSUE FOR RIS	LLFO	MB	05.06.26
F	ISSUE FOR RIS	LLFO	MB	10.04.26
E	ISSUE FOR RIS	LLFO	MB	13.02.26
D	ISSUE FOR RIS	LLFO	MB	09.02.26
C	ISSUE FOR RIS	LLFO	MB	19.12.25
B	ISSUE FOR RIS	LLFO	MB	16.12.25
A	ISSUE FOR SSDA	LLFO	MB	08.09.25
A	ISSUE FOR SSDA	LLFO	MB	03.09.25

Issue	Revision	Drawn	Check	Date
-------	----------	-------	-------	------

Not for Construction

Project

5-9 Cowan Road
St Ives, NSW

Development Approval

Prosper

PROSPER

Drawing No.

L-100

Drawing Name

Landscape Masterplan
Ground Level

Job No.

25-1142

Issue

G

Scale

1:200 @ A1

0 1 2 4 6 10m

Sydney, Suite 70, Jones Bay
Wharf, 26-32 Pirrama Road,
Pyrmont NSW 2009
E sydney@arcadiadesign.com.au
T 02 8571 2900

ARCADIA

25- 1142 5-9 Cowan Road PLANT SCHEDULE

CODE	BOTANIC NAME	COMMON NAME	NATURAL SIZE (h x w) (m)	PROPOSED POT SIZE	DENSITY	TOTAL QUANTITY
TREES						
AS	<i>Acmena smithii</i>	Lilly Pilly	10 x 5	200L	as shown	3
BM	<i>Backhousia myrtifolia</i>	Cinnamon Myrtle	7 x 4	200L	as shown	6
ER	<i>Elaeocarpus reticulatus</i>	Blueberry Ash	5 x 3	200L	as shown	2
ES	<i>Eucalyptus saligna</i>	Sydney blue gum	16 x 10	200L	as shown	1
Li	<i>Lagerstroemia indica</i>	Crepe Myrtle	7 x 4	200L	as shown	2
Sg	<i>Syncarpia glomulifera</i>	Turpentine	20 x 10	200L	as shown	2
SHRUBS + ACCENTS						
Sa	<i>Syzygium australe 'Select'</i>	Lilly Pilly 'Select'	5 x 2	400mm	as shown	28
Am	<i>Alpinia mutica</i>	False Cardmom Ginger	1.5 x 1	400mm	as shown	67
Cci	<i>Callistemon citrinus</i>	Bottlebrush	3 x 1.5	400mm	as shown	26
Dc	<i>Dianella caerulea</i>	Blue Flax Lily	0.5 x 0.5	300mm	as shown	95
De	<i>Doryanthes excelsa</i>	Gynea Lily	2 x 3	300mm	as shown	13
Dt	<i>Dracaena trifasciata</i>	Mother in Laws Tounge	0.9 x 0.6	300mm	as shown	112
Fe	<i>Ficus elastica 'burgundy'</i>	Rubber Plant	2 x 1	400mm	as shown	39
Gs	<i>Grevillea sericea</i>	Pink Spider Flower	1 x 1	400mm	as shown	71
Hl	<i>Hibbertia linearis</i>	Showy Guinea Flower	0.5 x 1	300mm	as shown	36
Lp	<i>Leptospermum polygalifolium</i>	Lemon-scented Tea Tree	1.5 x 1.5	400mm	as shown	41
Mv	<i>Melaleuca viminalis</i>	Little John	1 x 1	400mm	as shown	65
Prc	<i>philodendron tatei ssp melanochlorum 'rojo congo'</i>	Rojo congo	1.5 x 0.9	400mm	as shown	4
Px	<i>Philodendron 'Xanadu'</i>	Xanadu	1 x 0.8	400mm	as shown	207
Sn	<i>Strelitzia Nicolai</i>	Bird of Paradise	3 x 1.5	300mm	as shown	16
Sw	<i>Spathiphyllum Wallisii</i>	Peace Lily	1 x 1.1	400mm	as shown	75
FERN + PALM						
Ali	<i>Alcantarea imperialis</i>	Imperial Brombeliad	1.5 x 1.5	400mm	as shown	24
Bsl	<i>Blechnum 'Silver Lady'</i>		1.2 x 1	300mm	as shown	63
Cc	<i>Cyathea cooperi</i>	Australian Tree Fern	5 x 3	45lt (2m clear trunk)	as shown	10
Cr	<i>Cycas revoluta</i>	Sago Cycad	3 x 2	500mm	as shown	13
Hf	<i>Howea forsteriana (trimmed)</i>	Kentia Palm	4-15 x 3	300mm	as shown	3
GROUNCOVERS + GRASSES						
En	<i>Einadia nutans</i>	Climbing Saltbush	1 x 1	150mm	4/m2	40
Hv	<i>Hardenbergia violacea 'Meema'</i>	Purple Coral	0.2 x spreading	150mm	4/m2	54
Mp	<i>Myoporum parvifolium 'Yareena'</i>	Creeping Boobialla	0.2 x spreading	150mm	4/m2	46
Pp	<i>Poa poiiformis</i>	Coast Tussock-grass	0.5 x 0.5	150mm	4/m2	90
Ta	<i>Themeda australis</i>	Kangaroo Grass	1 x 1	150mm	4/m2	86
Tj	<i>Trachelospermum jasminoides</i>	Star Jasmine	0.5 x 2	150mm	4/m2	42
Vhe	<i>Viola hederacea</i>	Native Violet	0.2 x 0.8	200mm	4/m2	17
MATRIX 01						
Ln	<i>Lomandra 'Nyalla'</i>	Matt Rush	0.5 x 1	150mm	4/m2	36
Li	<i>Lomandra longifolia 'Tanika'</i>	Tanika Mat Rush	1 x 1	150mm	4/m2	36
Wf	<i>Westringia fruticosa</i>	Coastal Rosemary	1 x 1	150mm	4/m2	36
MATRIX 02						
Ln	<i>Lomandra 'Nyalla'</i>	Mat Rush	0.2 x spreading	150mm	4/m2	144
Bj	<i>Baumea juncea</i>	Bare Twigrush	1 x 1	150mm	4/m2	144
Fn	<i>Ficinia nodosa</i>	Club-rush	0.3 x 0.3	150mm	4/m2	144
MATRIX 03						
Cg	<i>Carpobrotus glaucescens</i>	Pigface	0.2 x spreading	150mm	6/m2	1836
Ca	<i>Correa alba</i>	White Correa	0.2 x spreading	150mm	6/m2	1836
Dcr	<i>Disphyma crassifolium</i>	Round-leaved Pigface	0.2 x spreading	150mm	6/m2	1836
Ln	<i>Lomandra 'Nyalla'</i>	Mat Rush	0.5 x 1	150mm	6/m2	1836
MATRIX 04						
Cum	<i>Crassula undulatifolia Max Cook</i>	Silver Dollar Plant	0.6 x 0.6	150mm	4/m2	160
LLV	<i>Lomandra longifolia "Verday"</i>	Lomandra	0.6 x 0.6	150mm	4/m2	160
Mpa	<i>Myoporum parvifolium</i>	Creeping Boobialla	0.3 x 2	150mm	4/m2	160
Sal	<i>Scaevola albida</i>	Fan Flower	0.2 x 2	150mm	4/m2	160

Copyright remains the property of Arcadia Design Group Pty Ltd. Use only figured dimensions. Any other required dimensions are to be referred to and supplied by the landscape architect. All discrepancies to be referred to the project manager and Arcadia Design Group Pty Ltd prior to construction. Ensure compliance with the Building Code of Australia and all relevant Australian Standards and Authority requirements.

Legend

DRAFT FOR COORDINATION

G	ISSUE FOR RIS	LLFO	MB	05.06.26
F	ISSUE FOR RIS	LLFO	MB	10.04.26
E	ISSUE FOR RIS	LLFO	MB	13.02.26
E	ISSUE FOR RIS	LLFO	MB	09.02.26
D	ISSUE FOR RIS	LLFO	MB	19.12.25
C	ISSUE FOR RIS	LLFO	MB	16.12.25
B	ISSUE FOR SSDA	LLFO	MB	08.09.25
A	ISSUE FOR SSDA	LLFO	MB	03.09.25
Issue		Revision	Drawn	Check Date

Not for Construction

Project

5-9 Cowan Road
St Ives, NSW

Development Approval

Prosper

PROSPER

Drawing No. L-400
Drawing Name Plant Schedule

Job No. 25-1142
Issue G
Scale

Sydney, Suite 70, Jones Bay Wharf, 26-32 Pirrama Road, Pyrmont NSW 2009
E sydney@arcadiala.com.au
T 02 8571 2900

ARCADIA



Not for Construction

Project


Development Approval

Prosper


Drawing No.	Drawing Name
L-401	Softworks Plan 1 Groundfloor



ARCADIA

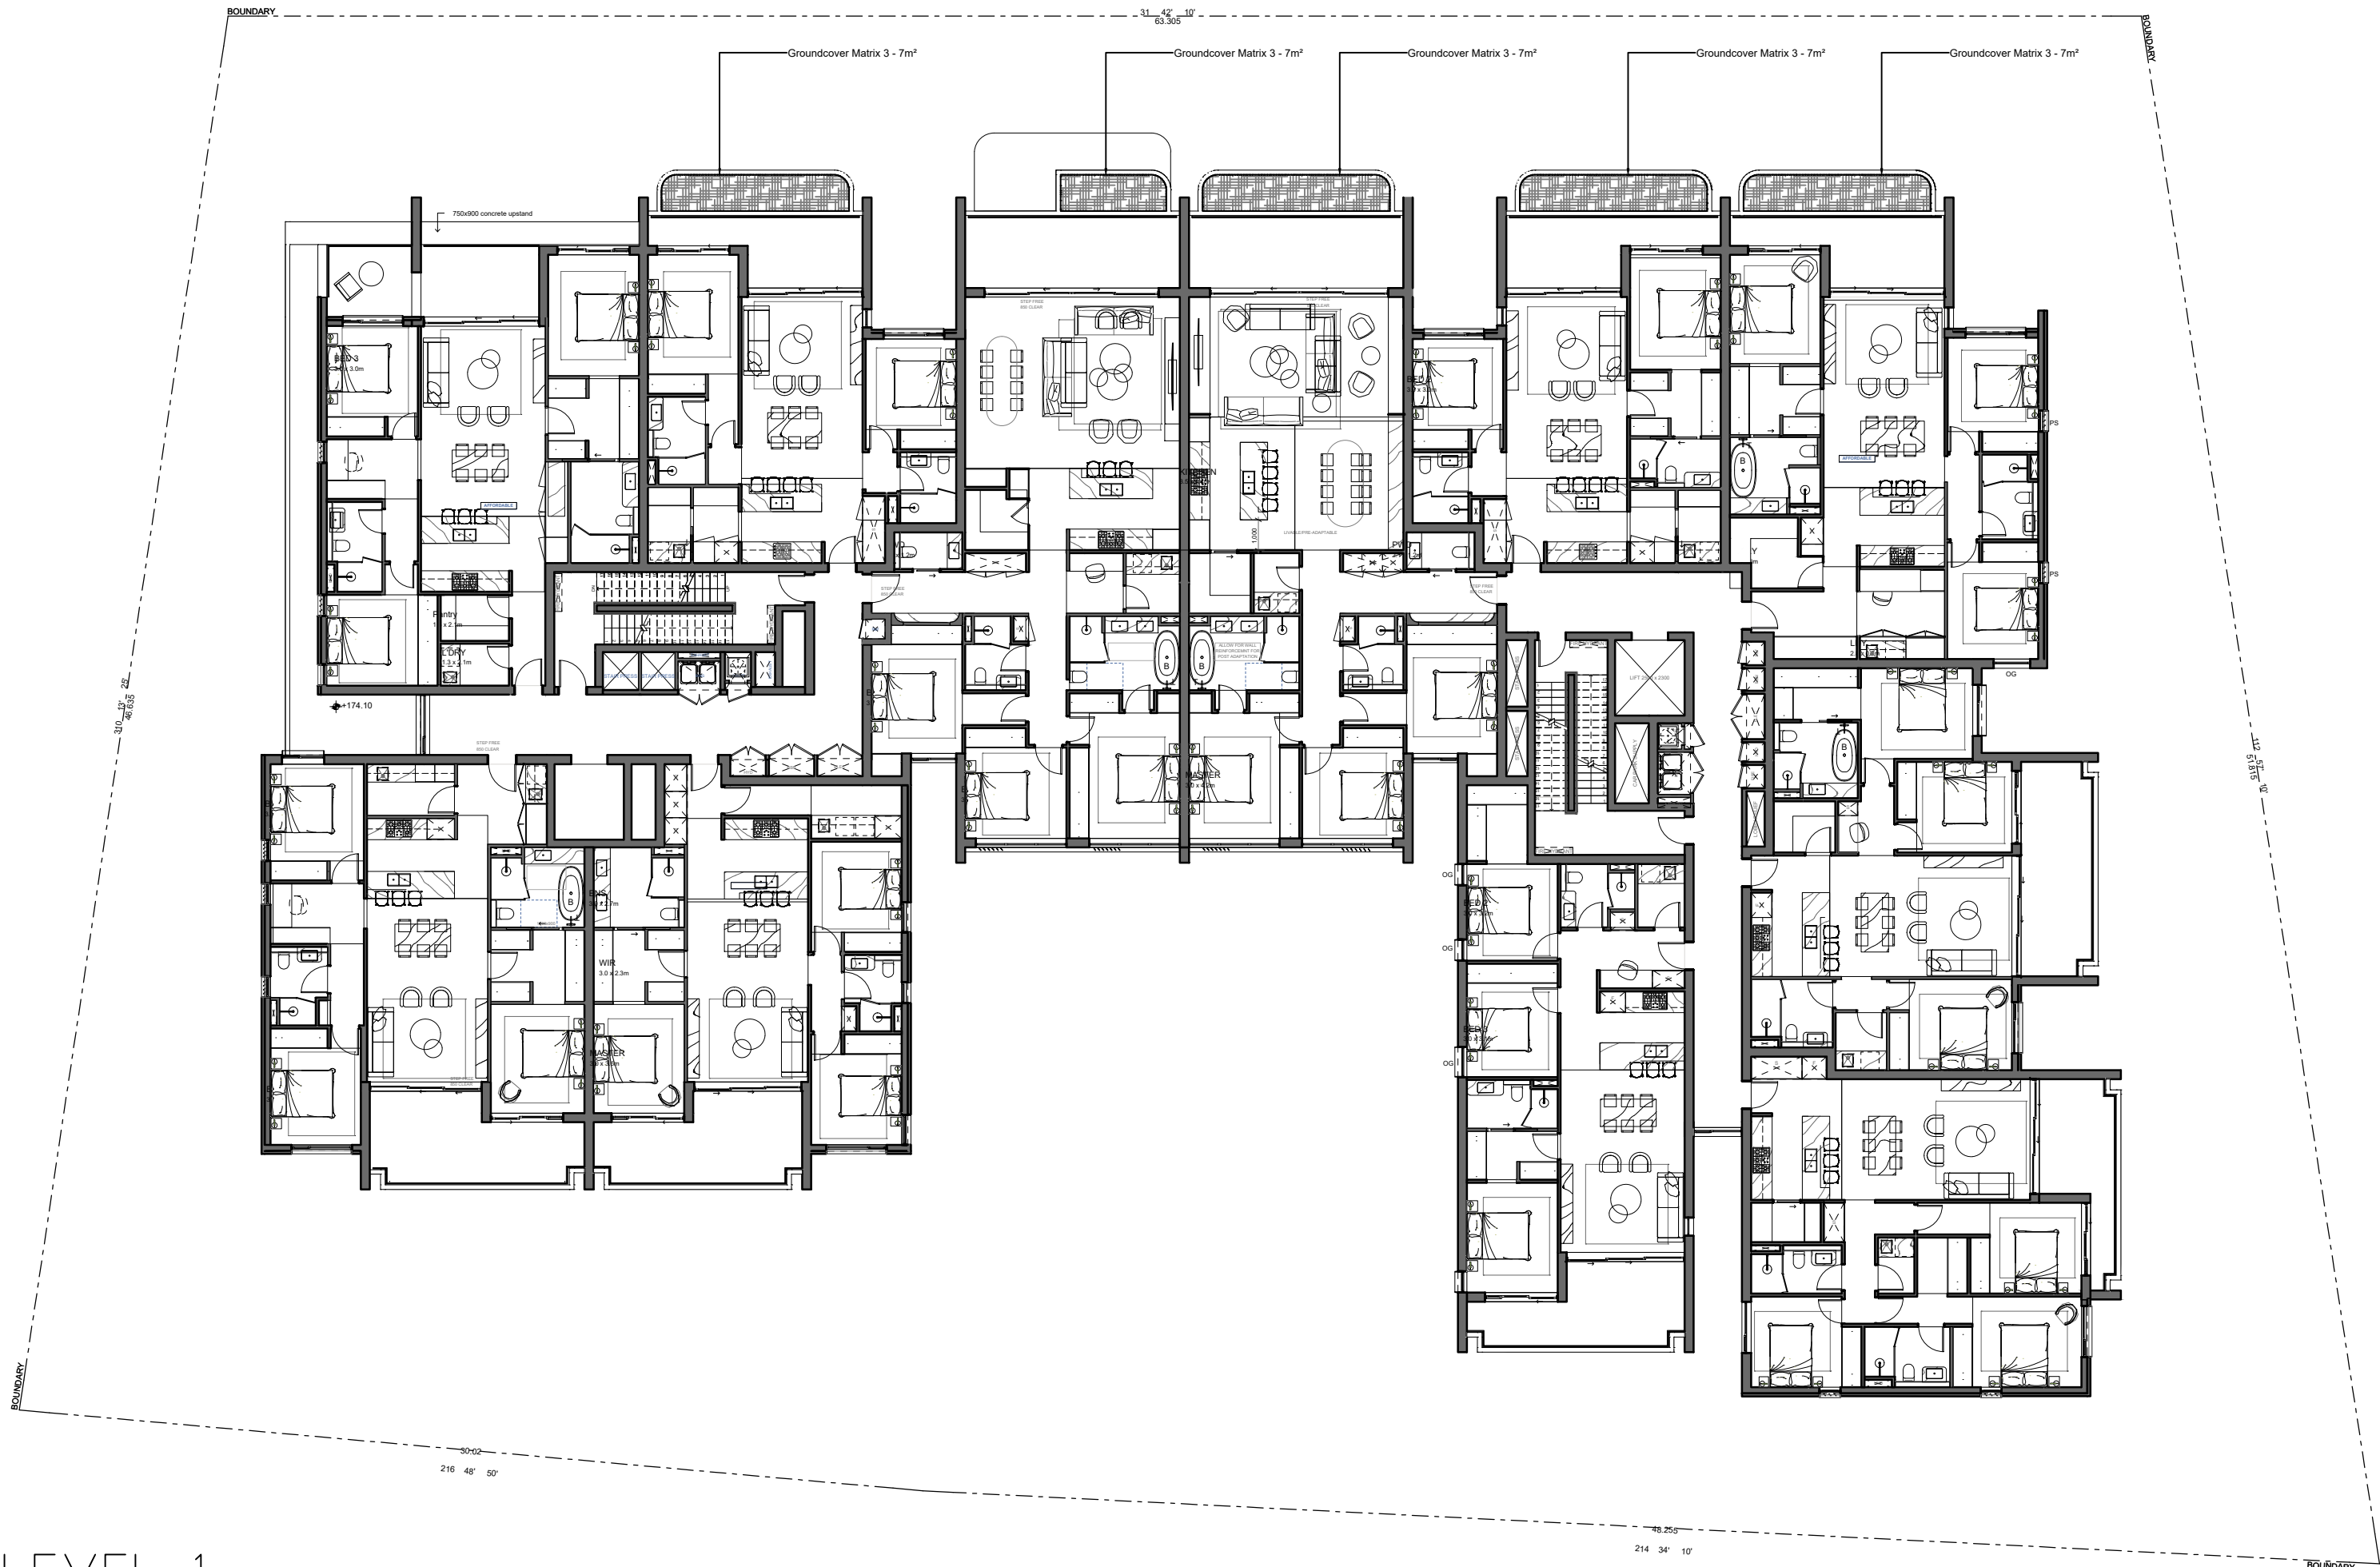

LEVEL 1

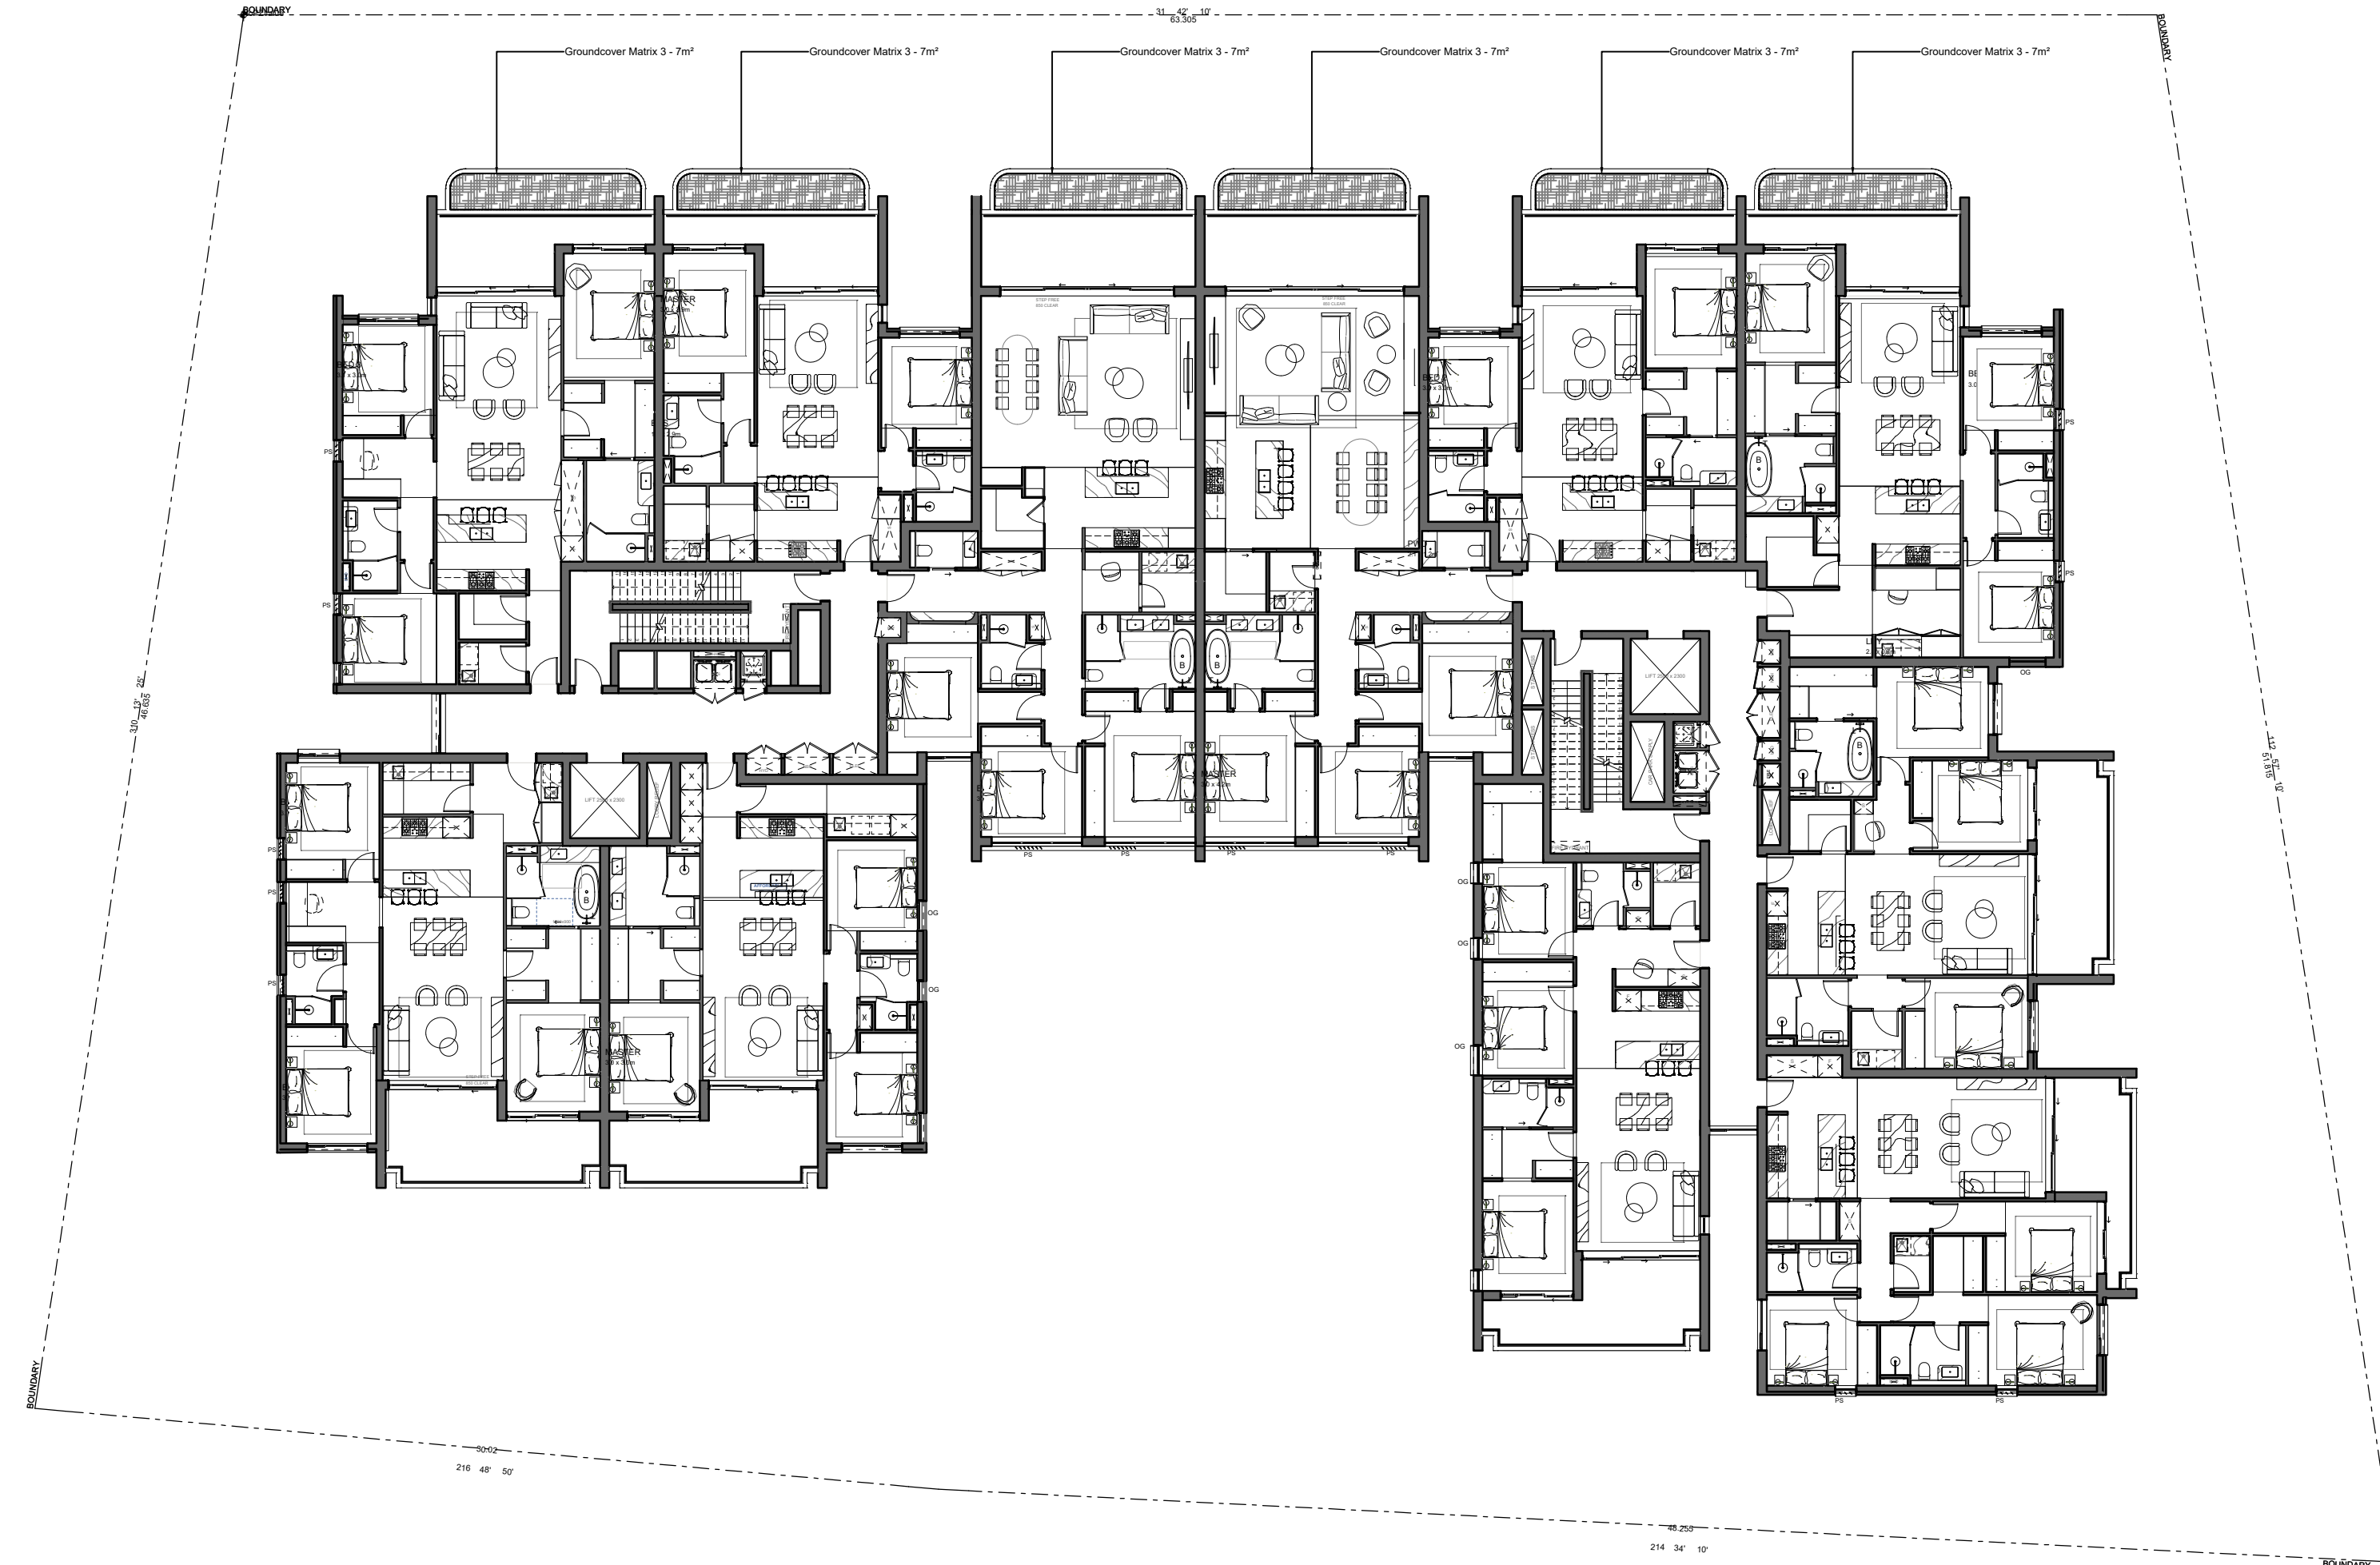

LEVEL 2

DRAFT FOR COORDINATION

G	ISSUE FOR RIS	LLFO	MB	05.06.26
F	ISSUE FOR RIS	LLFO	MB	10.04.26
E	ISSUE FOR RIS	LLFO	MB	13.02.26
E	ISSUE FOR RIS	LLFO	MB	09.02.26
D	ISSUE FOR RIS	LLFO	MB	19.12.25
C	ISSUE FOR RIS	LLFO	MB	16.12.25
B	ISSUE FOR SSDA	LLFO	MB	08.09.25
A	ISSUE FOR SSDA	LLFO	MB	03.09.25

Issue Revision Drawn Check Date

Not for Construction

Project

5-9 Cowan Road
St Ives, NSW

Development Approval

Prosper

PROSPER

Drawing No.

L-402

Drawing Name

Softworks Plan 2
Levels 1-2

Job No.

25-1142

Issue

G


Scale

1:200 @ A1


0 2 4 6 8 10m

Sydney, Suite 70, Jones Bay
Wharf, 26-32 Pirrama Road,
Pyrmont NSW 2009
E sydney@arcadia.com.au
T 02 8571 2900

ARCADIA

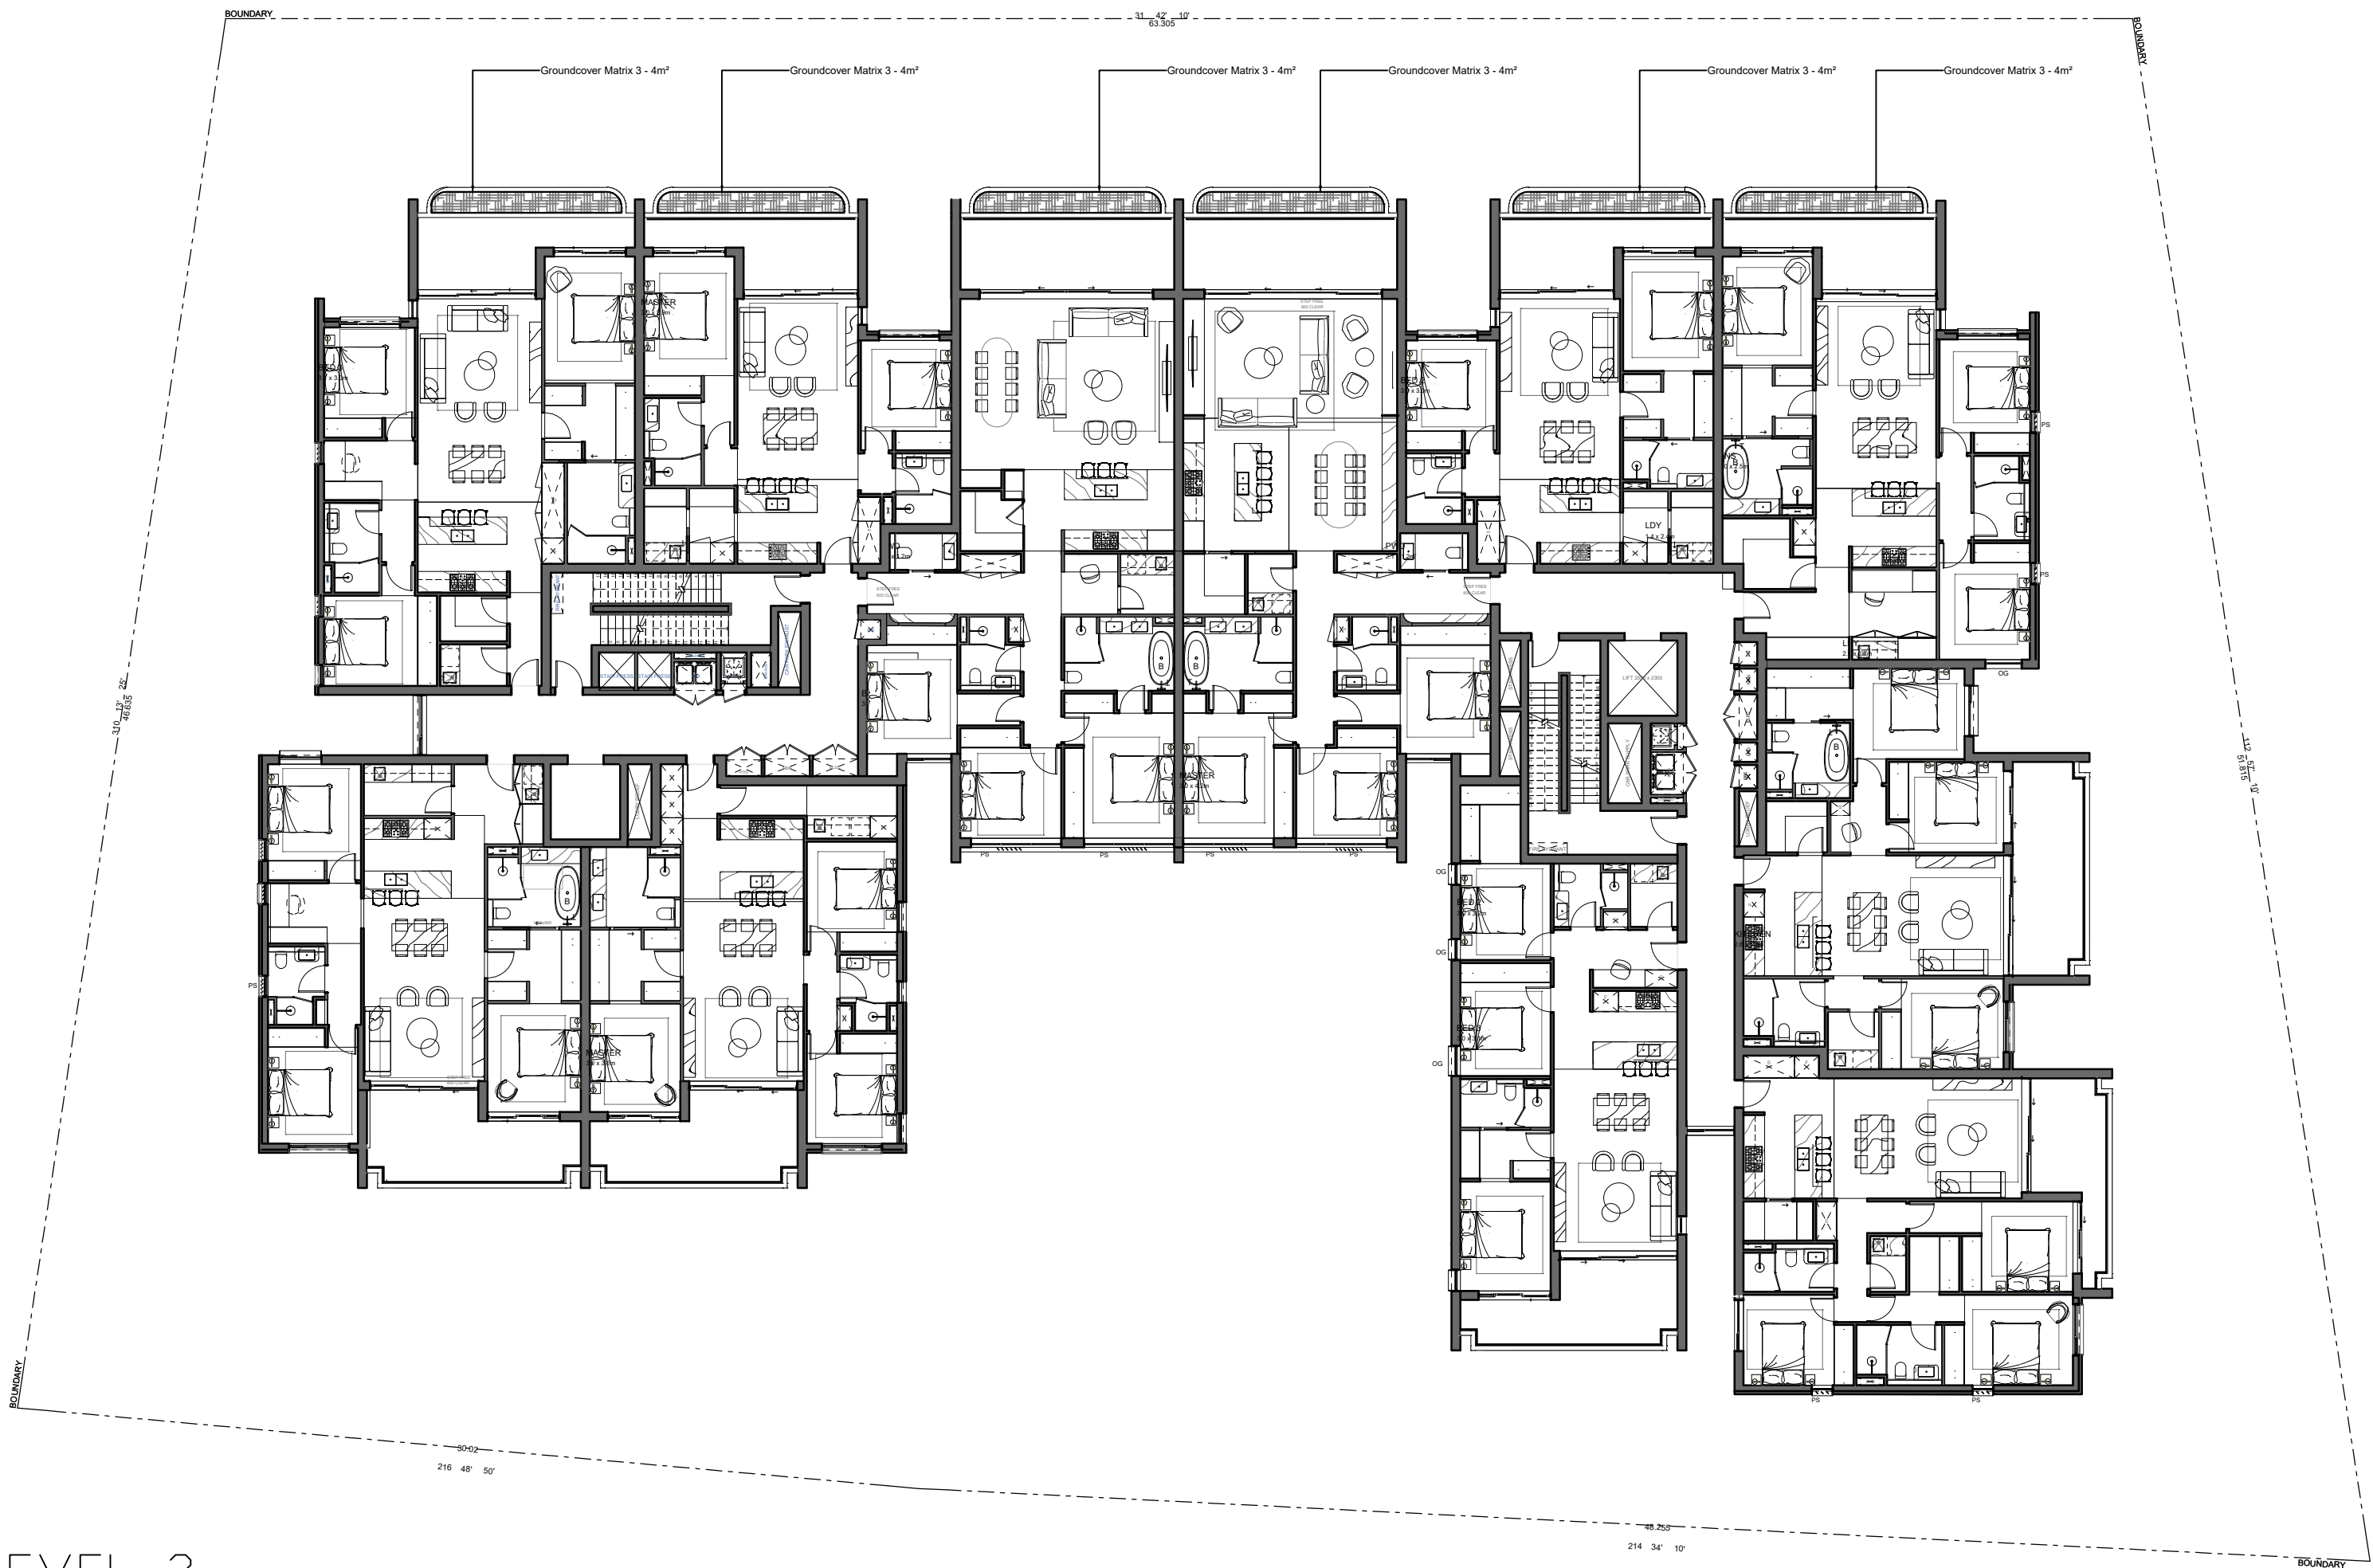

LEVEL 3

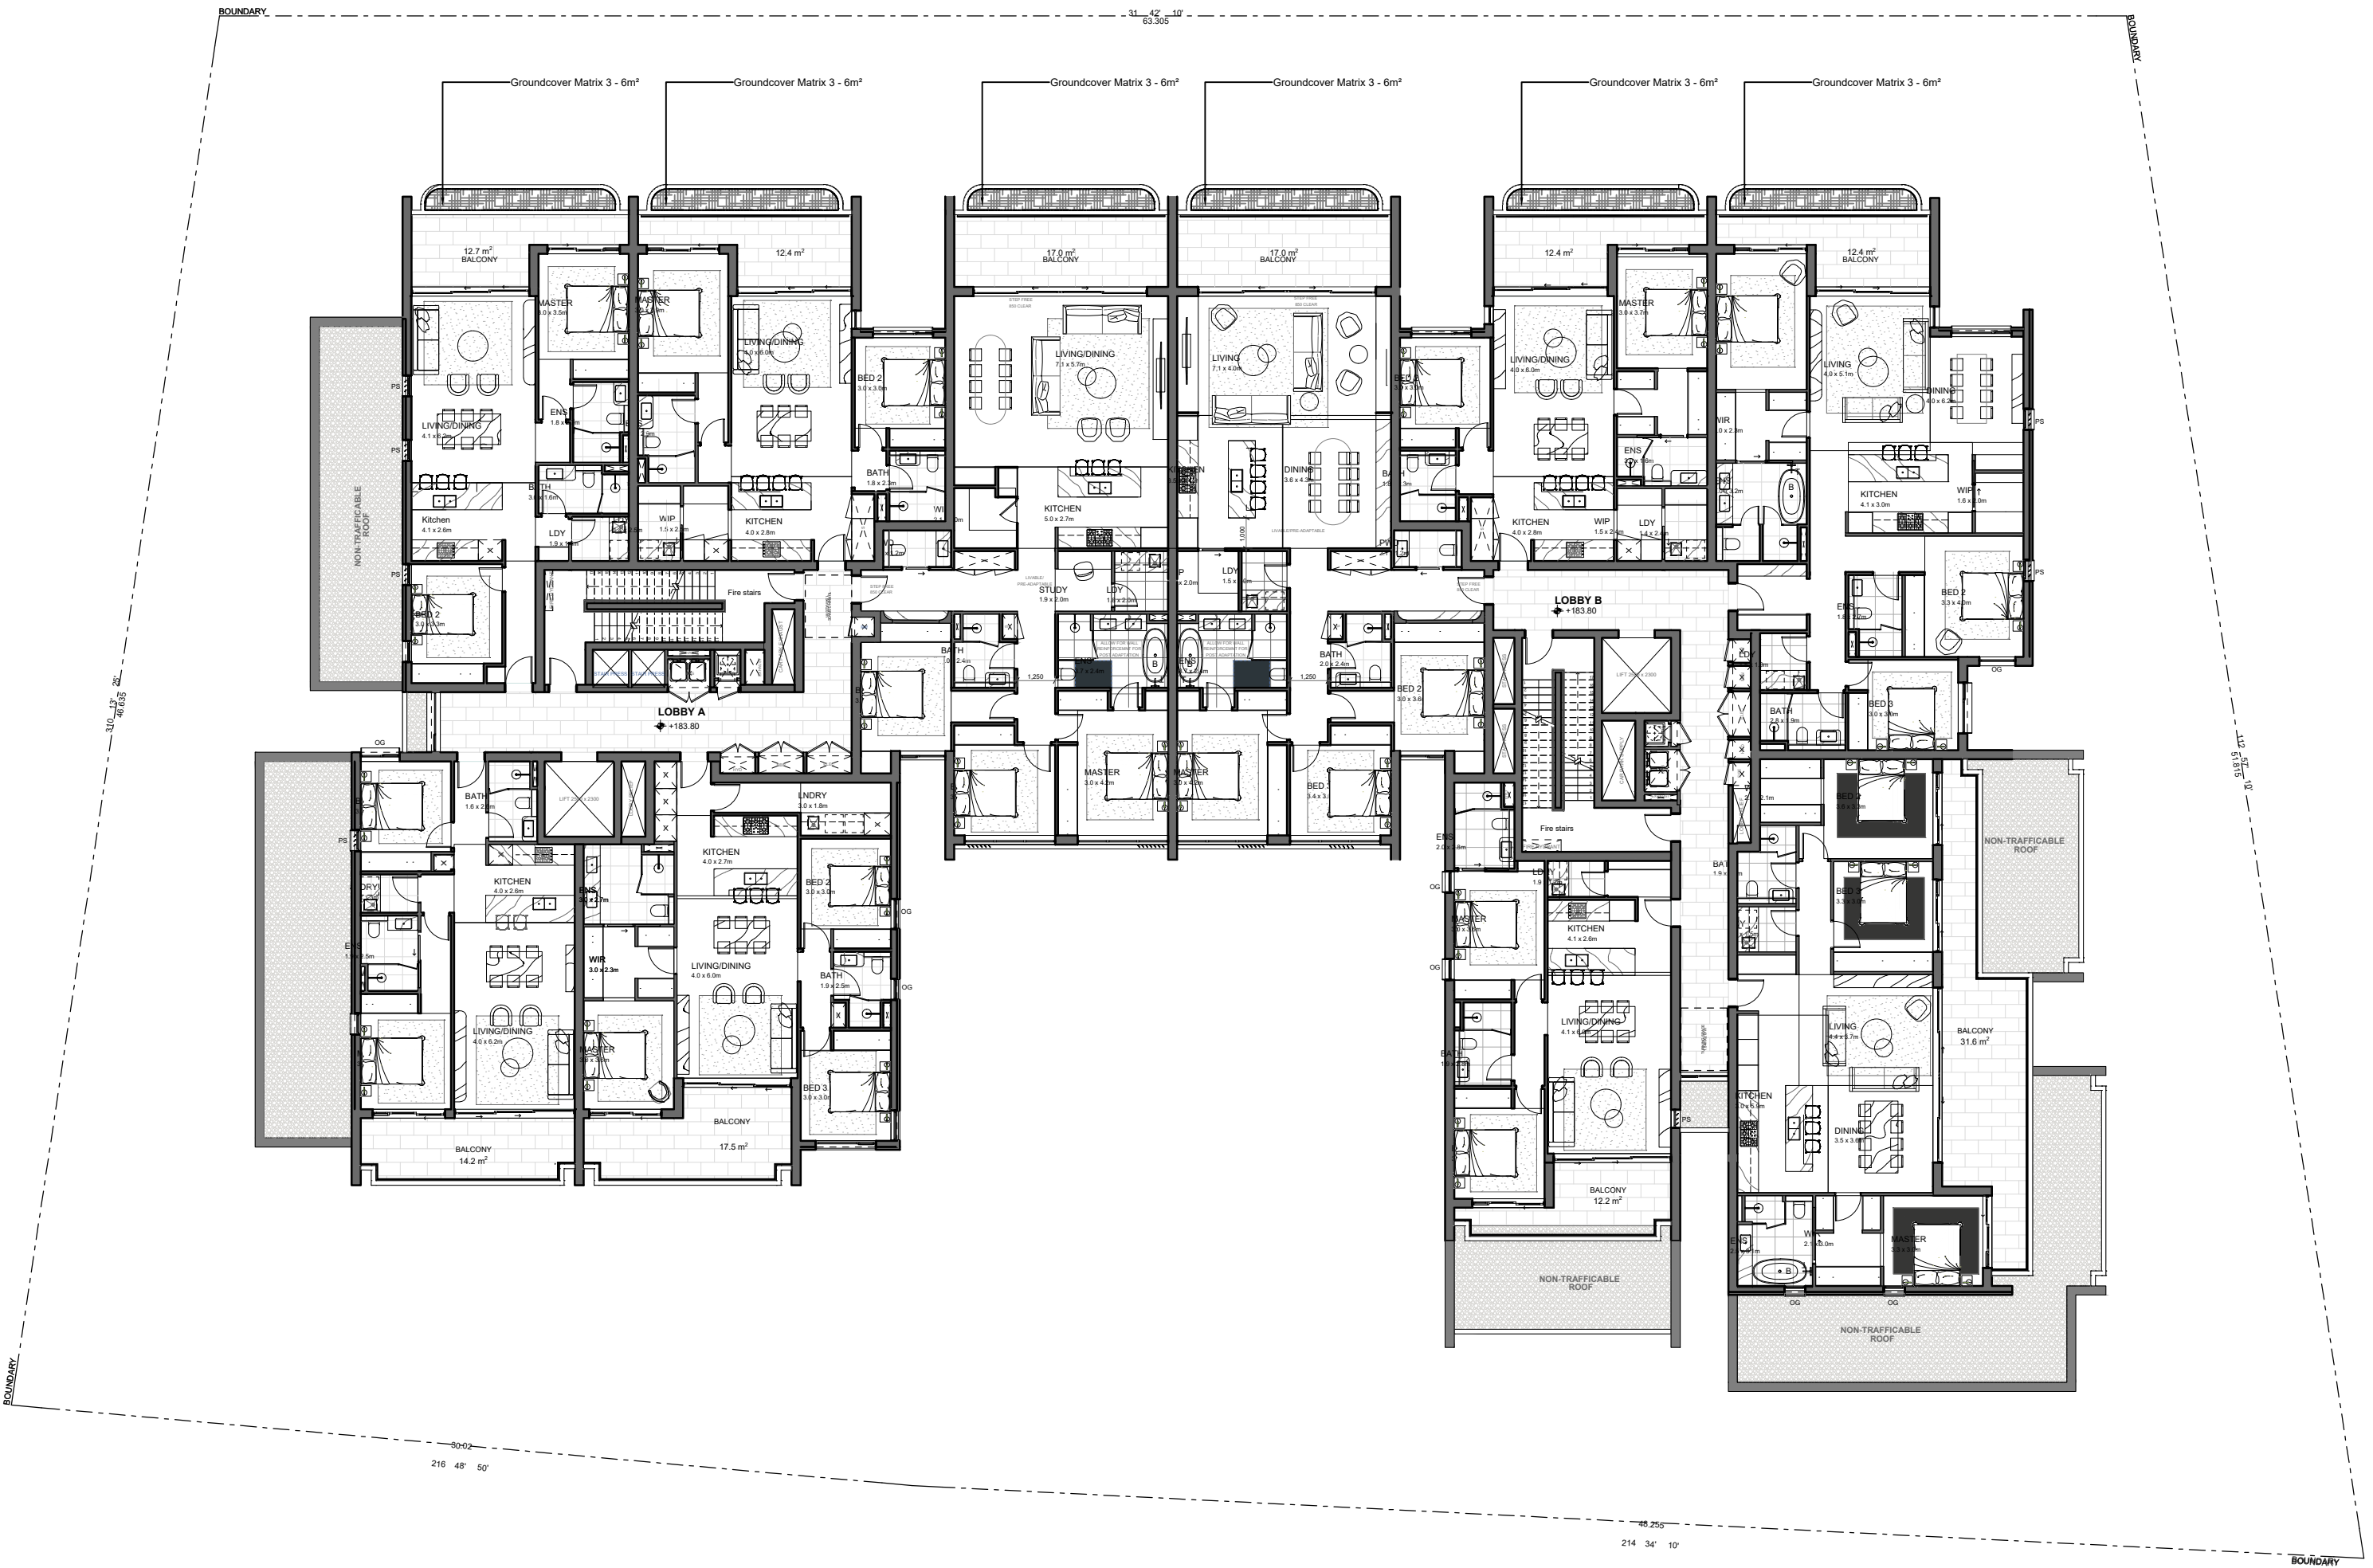

LEVEL 4

DRAFT FOR COORDINATION

G	ISSUE FOR RIS	LLFO	MB	05.06.26
F	ISSUE FOR RIS	LLFO	MB	10.04.26
E	ISSUE FOR RIS	LLFO	MB	13.02.26
E	ISSUE FOR RIS	LLFO	MB	09.02.26
D	ISSUE FOR RIS	LLFO	MB	19.12.25
C	ISSUE FOR RIS	LLFO	MB	16.12.25
B	ISSUE FOR SSDA	LLFO	MB	08.09.25
A	ISSUE FOR SSDA	LLFO	MB	03.09.25

Issue Revision Drawn Check Date

Not for Construction

Project

5-9 Cowan Road
St Ives, NSW

Development Approval

Prosper

PROSPER

Drawing No.

L-403

Drawing Name

Softworks Plan 3
Level 3-4

Job No.

25-1142

Issue

G

Scale


1:200 @ A1

0 2 4 6 8 10m


Sydney, Suite 70, Jones Bay
Wharf, 25-32 Pirrama Road,
Pyrmont NSW 2009
E sydney@arcadia.com.au
T 02 8571 2900

ARCADIA

Legend

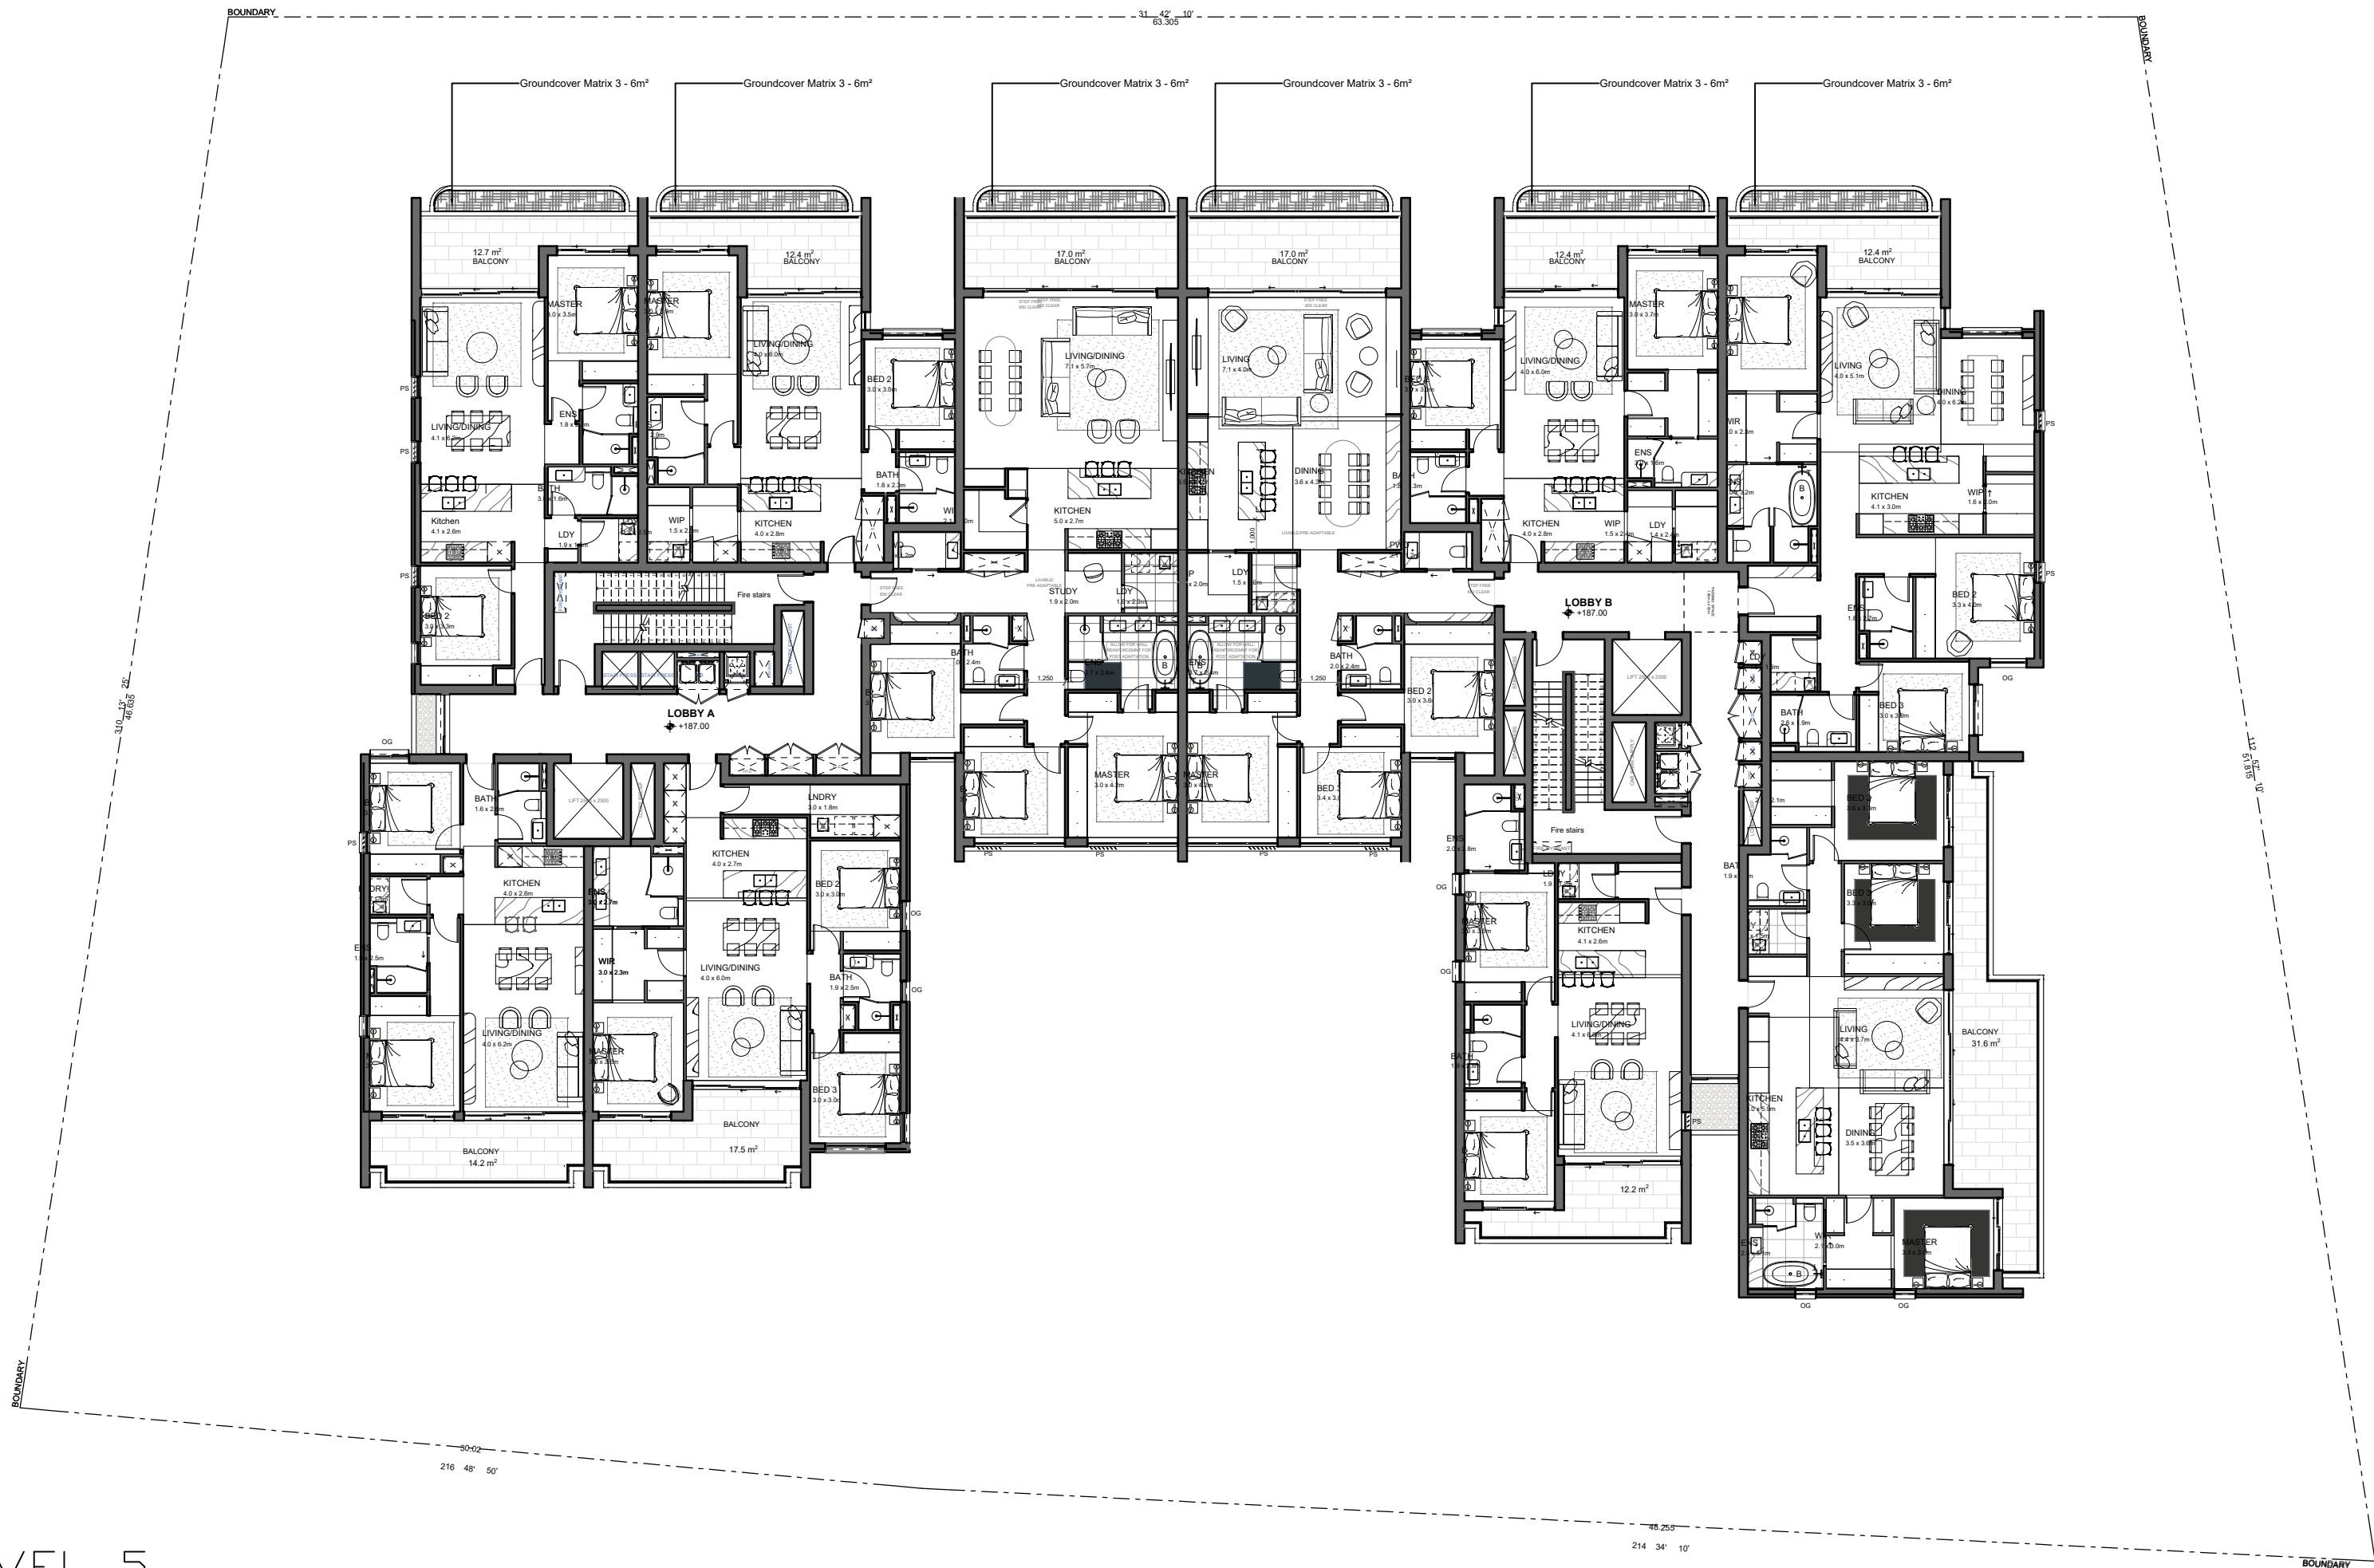

LEVEL 5

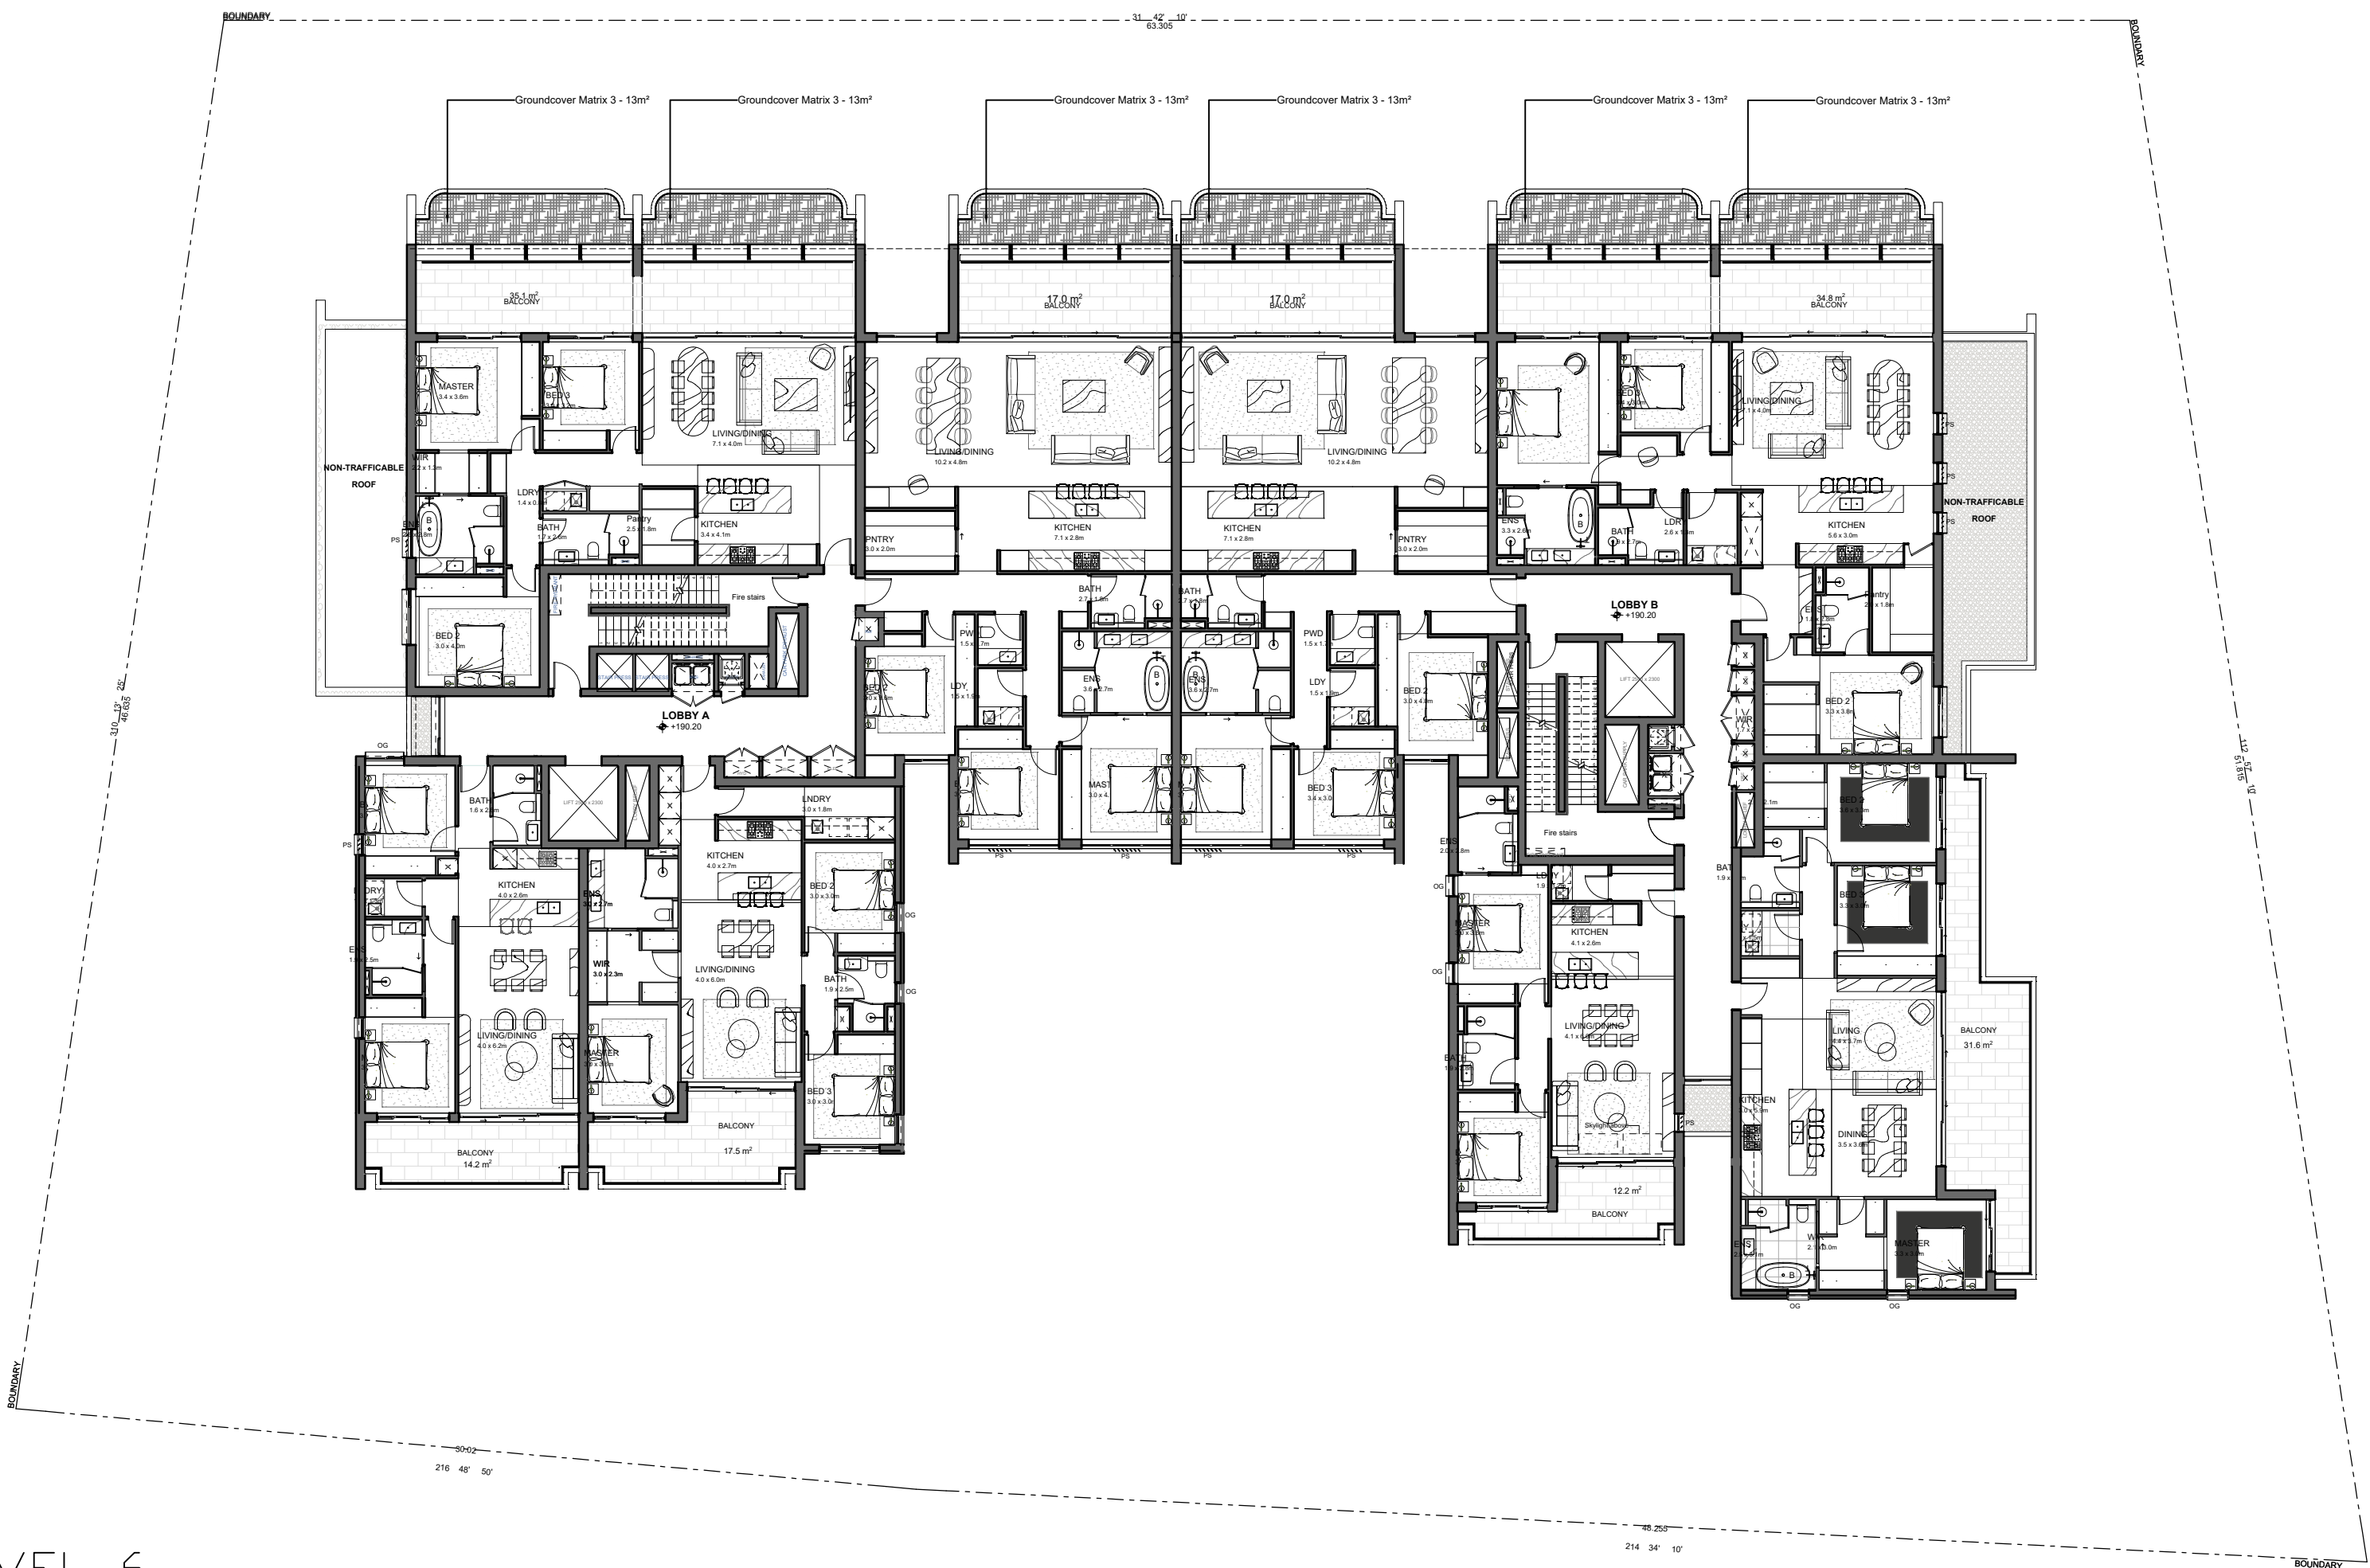

LEVEL 6

DRAFT FOR COORDINATION

G	ISSUE FOR RIS	LLFO	MB	05.06.26
F	ISSUE FOR RIS	LLFO	MB	10.04.26
E	ISSUE FOR RIS	LLFO	MB	13.02.26
E	ISSUE FOR RIS	LLFO	MB	09.02.26
D	ISSUE FOR RIS	LLFO	MB	19.12.25
C	ISSUE FOR RIS	LLFO	MB	16.12.25
B	ISSUE FOR SSDA	LLFO	MB	08.09.25
A	ISSUE FOR SSDA	LLFO	MB	03.09.25

Issue Revision Drawn Check Date

Not for Construction

Project

5-9 Cowan Road
St Ives, NSW

Development Approval

Prosper

PROSPER

Drawing No.

L-404

Drawing Name

Softworks Plan 4
Level 5-6

Job No.

25-1142

Issue

G


Scale

1:200 @ A1

0 2 4 6 8 10m

Sydney, Suite 70, Jones Bay
Wharf, 26-32 Pirrama Road,
Pyrmont NSW 2009
E sydney@arcadia.com.au
T 02 8571 2900

ARCADIA

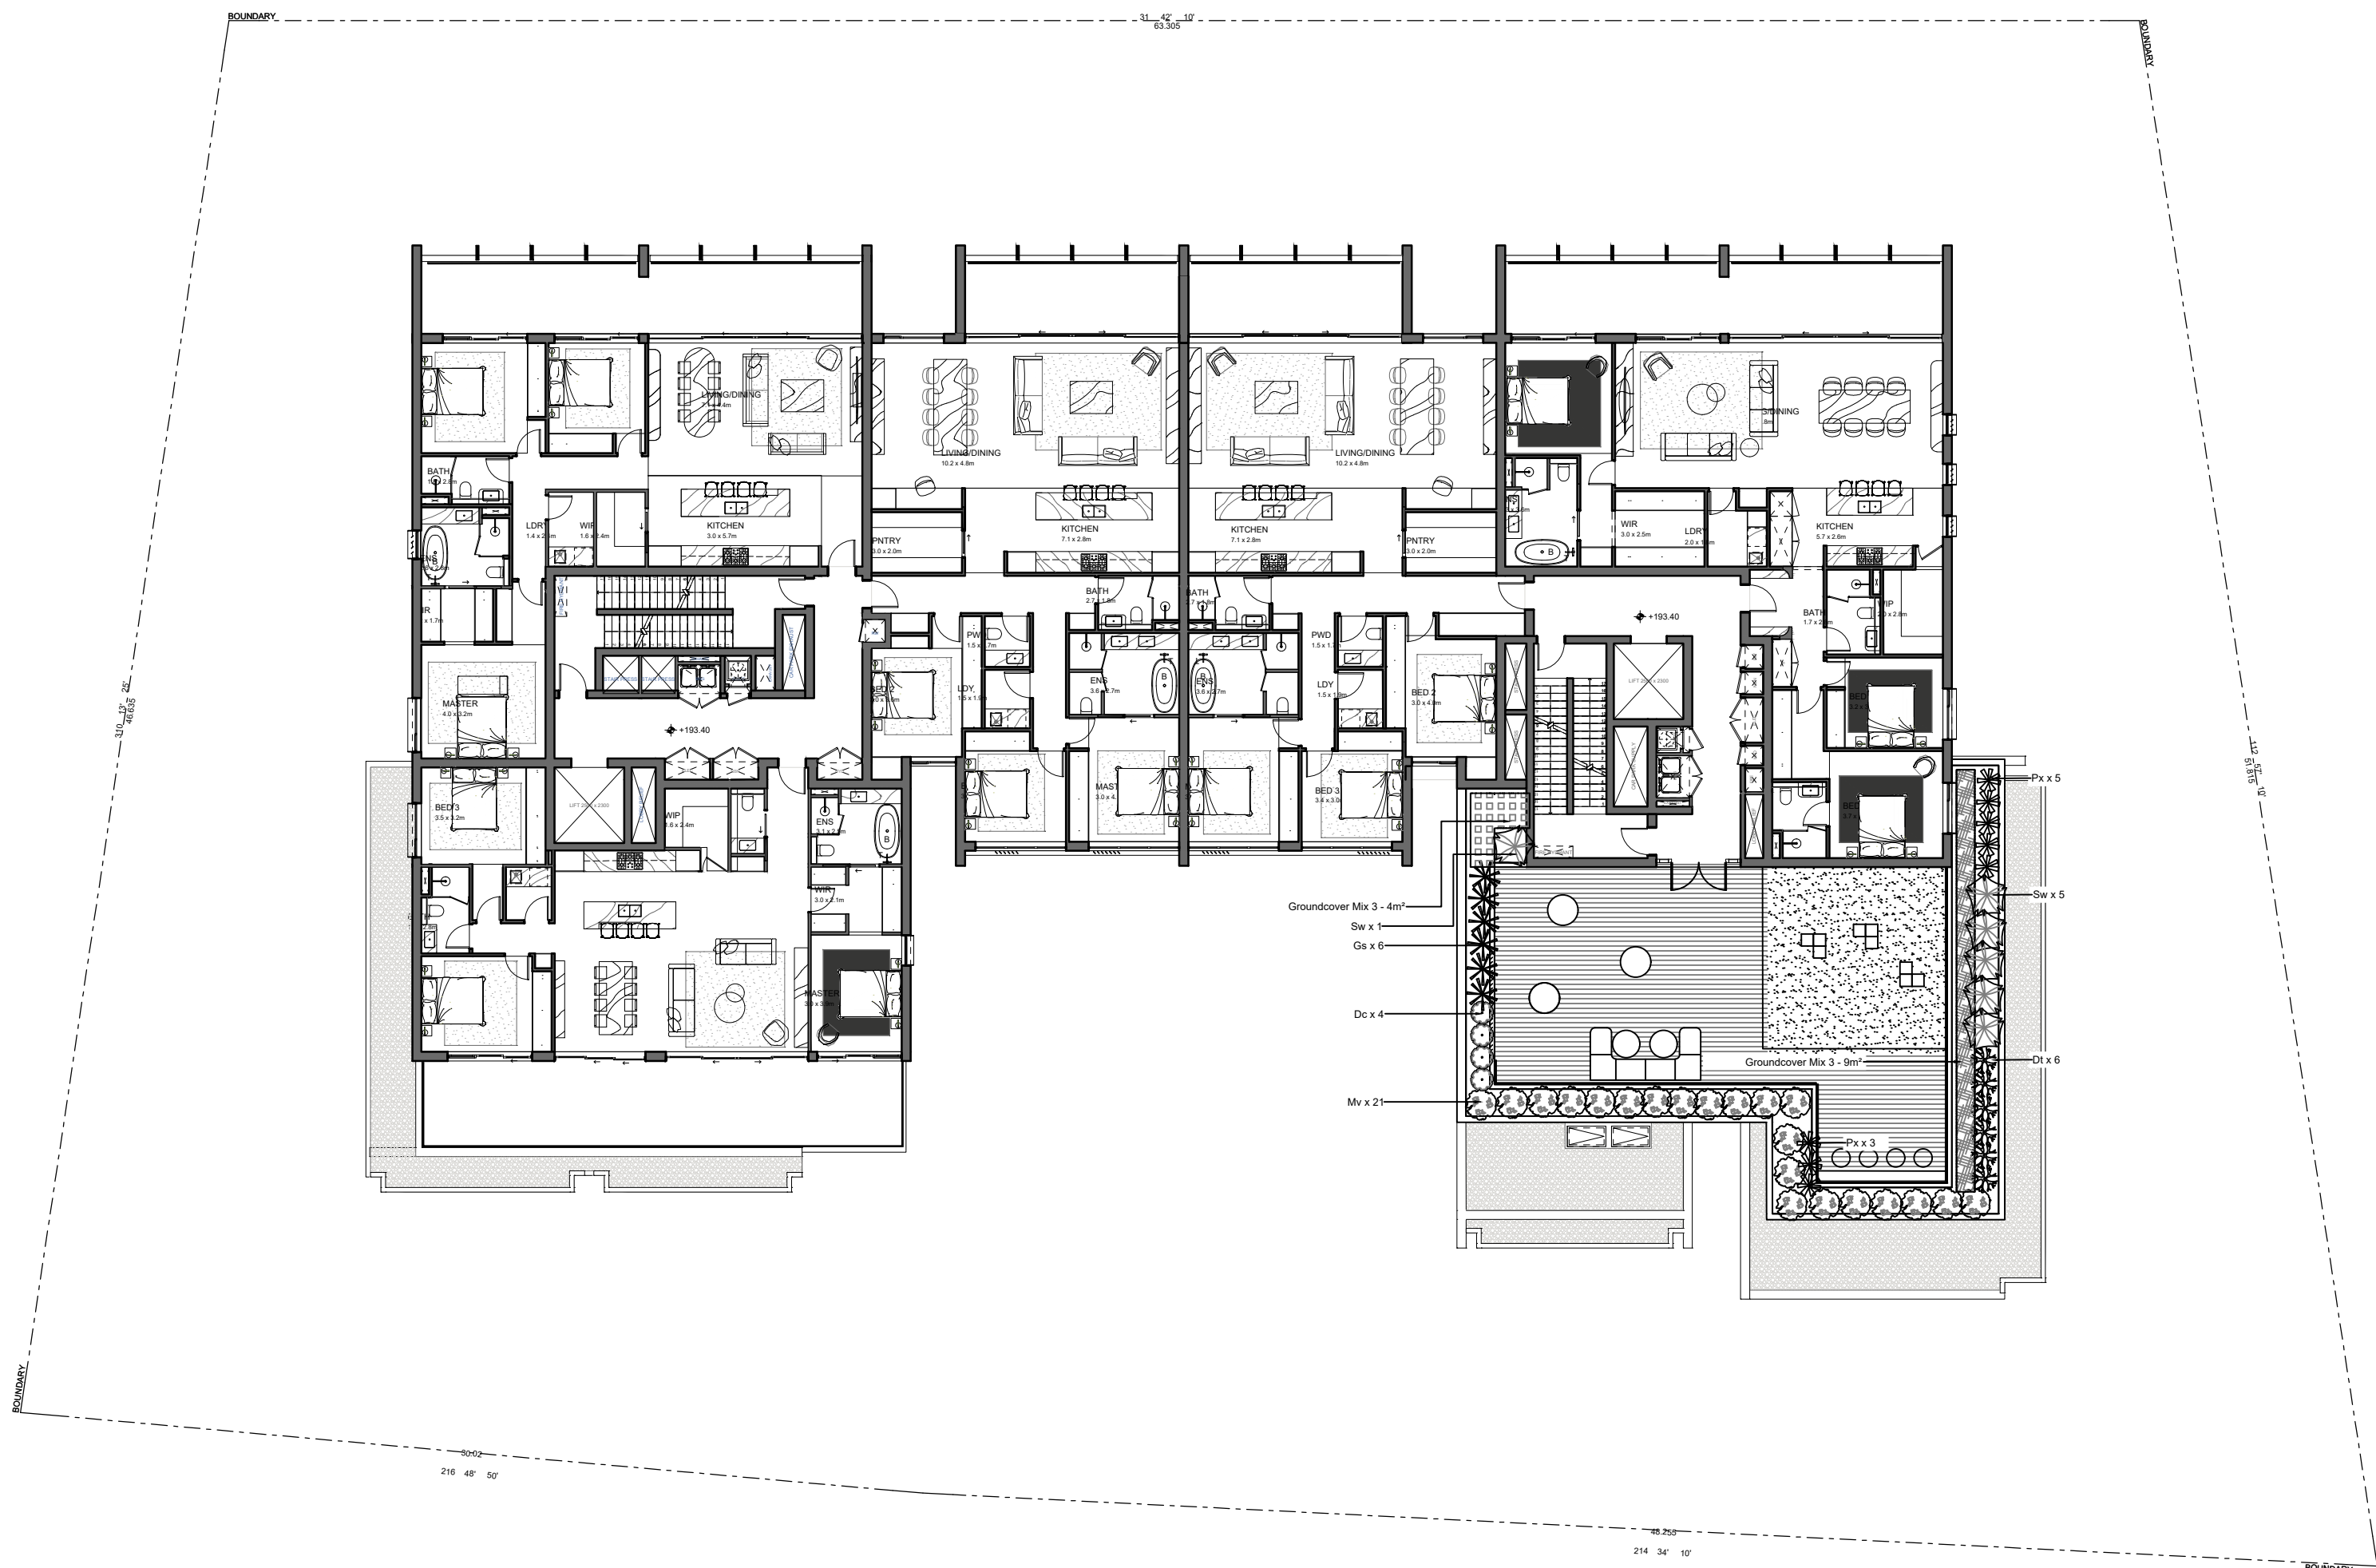

DRAFT FOR COORDINATION

G	ISSUE FOR RIS	LLFO	MB	05.06.26
F	ISSUE FOR RIS	LLFO	MB	10.04.26
E	ISSUE FOR RIS	LLFO	MB	13.02.26
E	ISSUE FOR RIS	LLFO	MB	09.02.26
D	ISSUE FOR RIS	LLFO	MB	19.12.25
C	ISSUE FOR RIS	LLFO	MB	16.12.25
B	ISSUE FOR SSDA	LLFO	MB	08.09.25
A	ISSUE FOR SSDA	LLFO	MB	03.09.25

Issue	Revision	Drawn	Check	Date
-------	----------	-------	-------	------

Not for Construction

Project

5-9 Cowan Road
St Ives, NSW

Development Approval

Prosper

PROSPER

Drawing No.

L-405

Drawing Name

Softworks Plan 5
Level 7

Job No.

25-1142

Issue

G


Scale

1:200 @ A1

0 1 2 4 8 10m

Sydney, Suite 70, Jones Bay
Wharf, 25-32 Pirrama Road,
Pyrmont NSW 2009
E sydney@arcadiala.com.au
T 02 8571 2900

ARCADIA

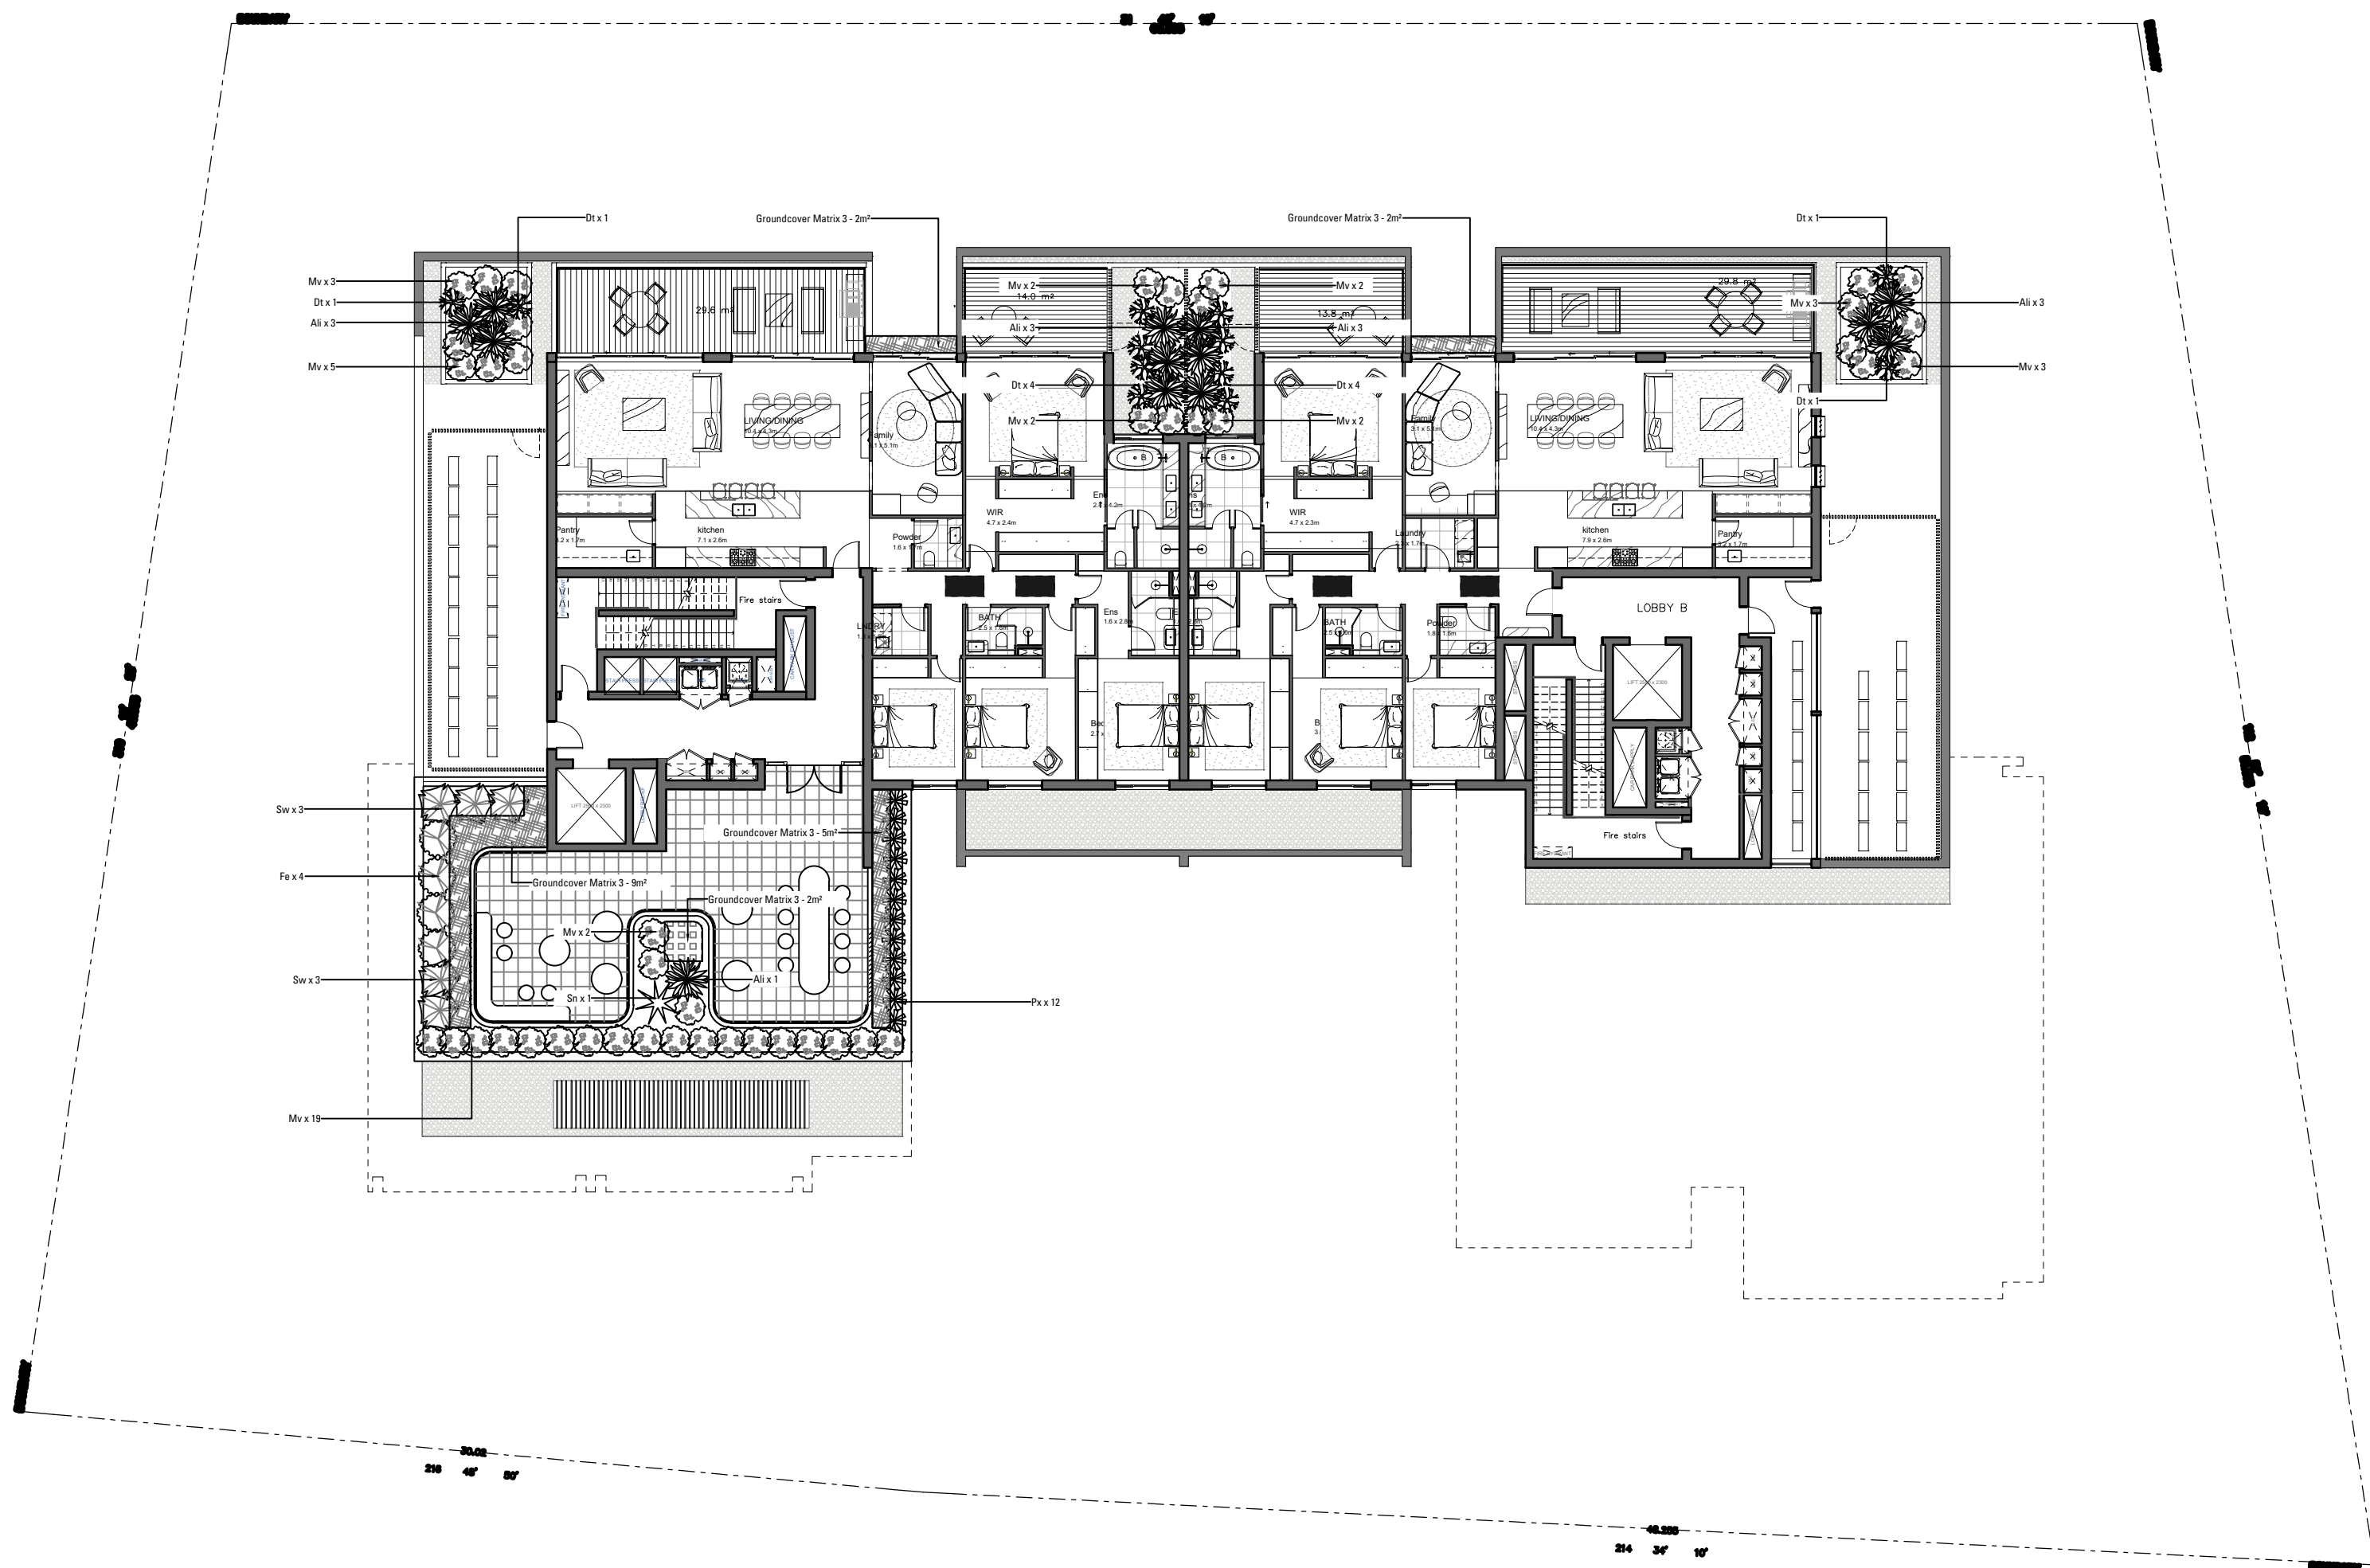

DRAFT FOR COORDINATION

G	ISSUE FOR RIS	LL/FO	MB	05.06.26
F	ISSUE FOR RIS	LL/FO	MB	10.04.26
E	ISSUE FOR RIS	LL/FO	MB	13.02.26
E	ISSUE FOR RIS	LL/FO	MB	09.02.26
D	ISSUE FOR RIS	LL/FO	MB	19.12.25
C	ISSUE FOR RIS	LL/FO	MB	16.12.25
B	ISSUE FOR SSDA	LL/FO	MB	08.09.25
A	ISSUE FOR SSDA	LL/FO	MB	03.09.25

Issue Revision Drawn Check Date

Not for Construction

Project

5-9 Cowan Road
St Ives, NSW

Development Approval

Prosper





PROSPER

Drawing No. L-406 Drawing Name Softworks Plan 6 Level 8

Job No. 25-1142 Issue G Scale 1:200 @ A1

Sydney, Suite 70, Jones Bay
Wharf, 26-32 Pirrama Road,
Pyrmont NSW 2009
E sydney@arcadiala.com.au
T 02 8571 2900

ARCADIA

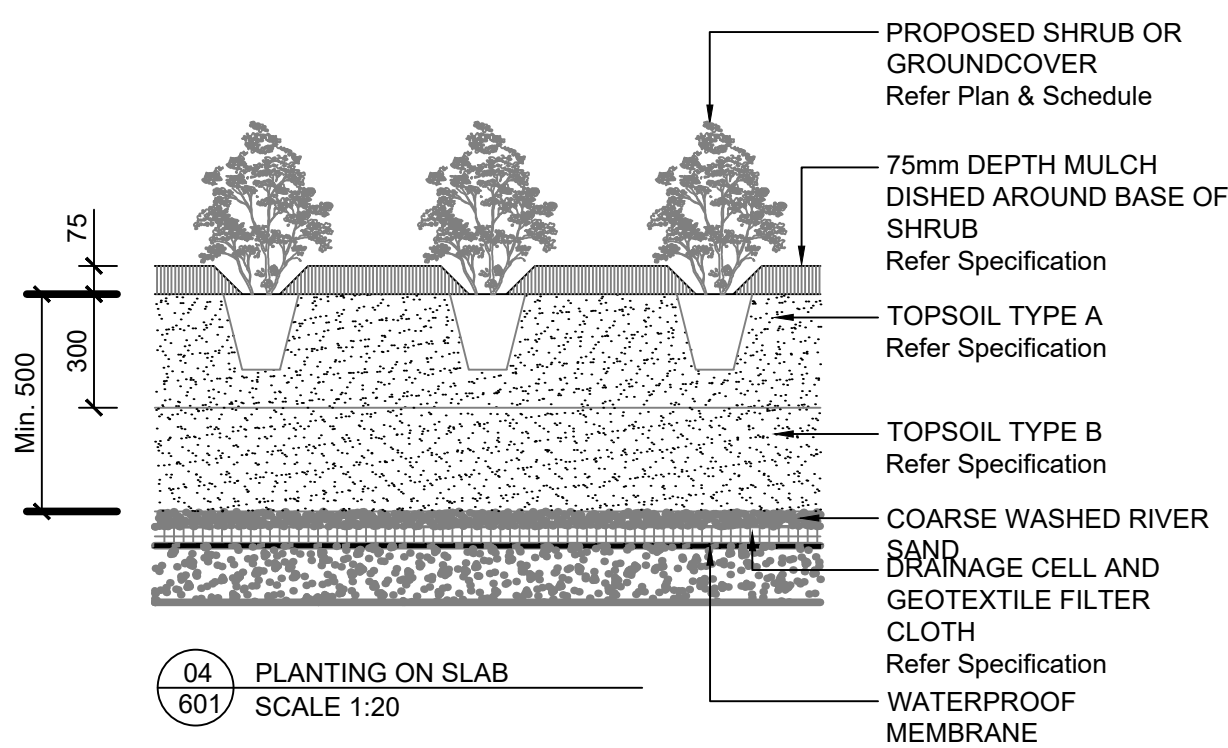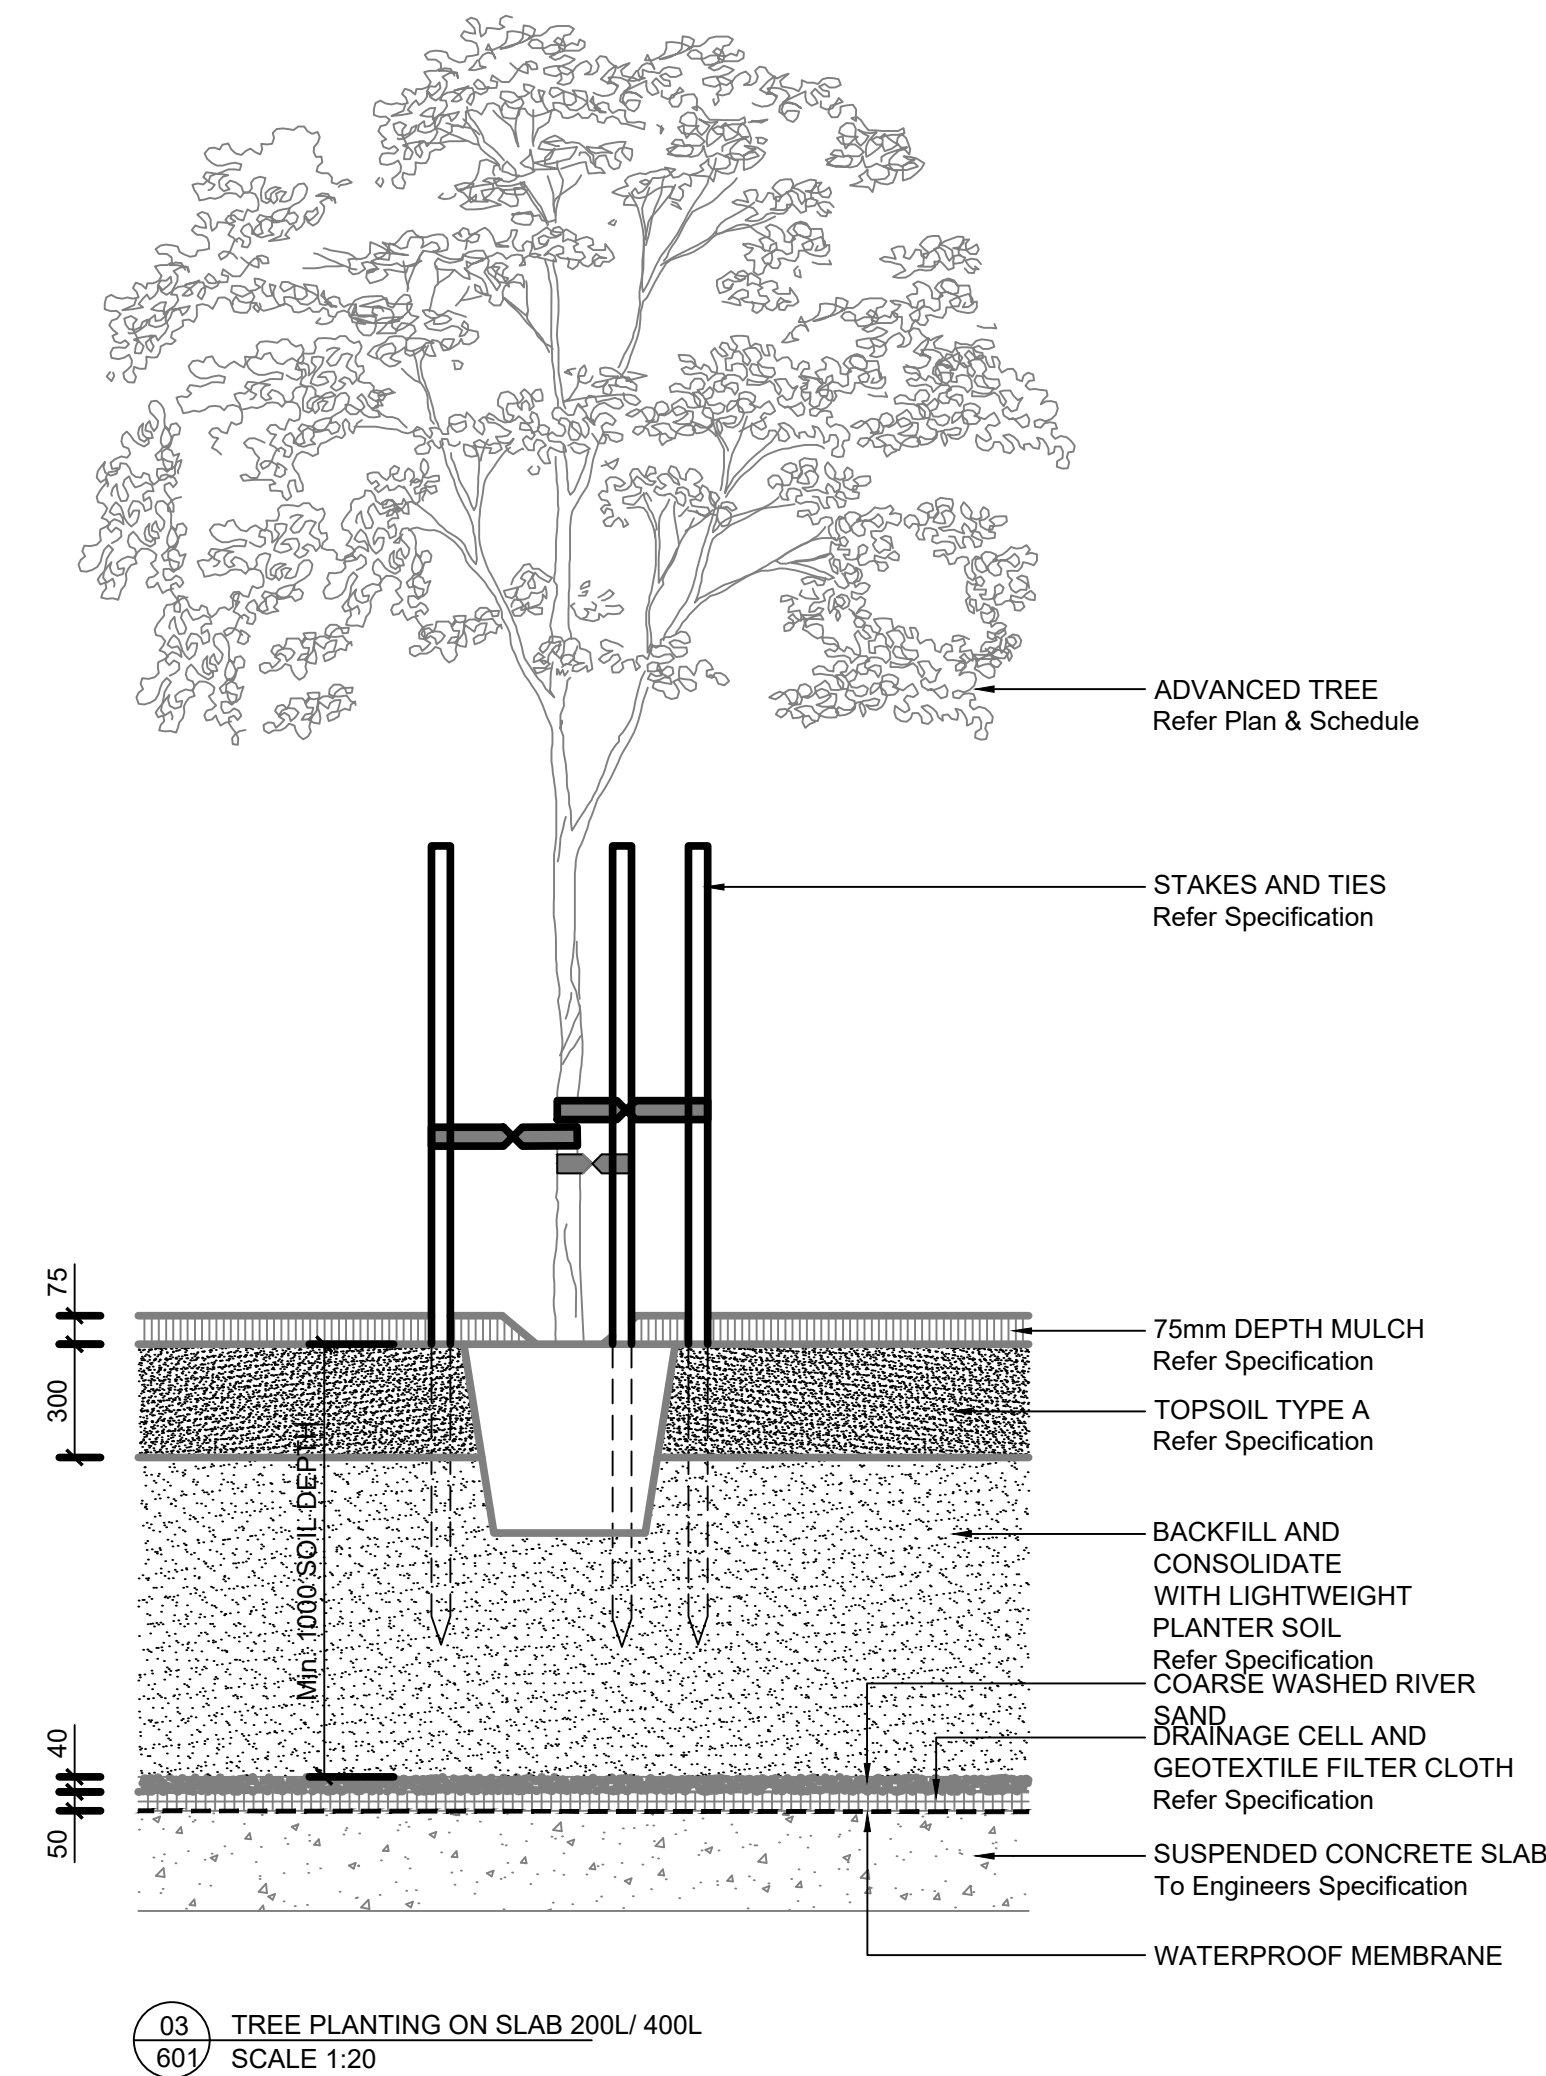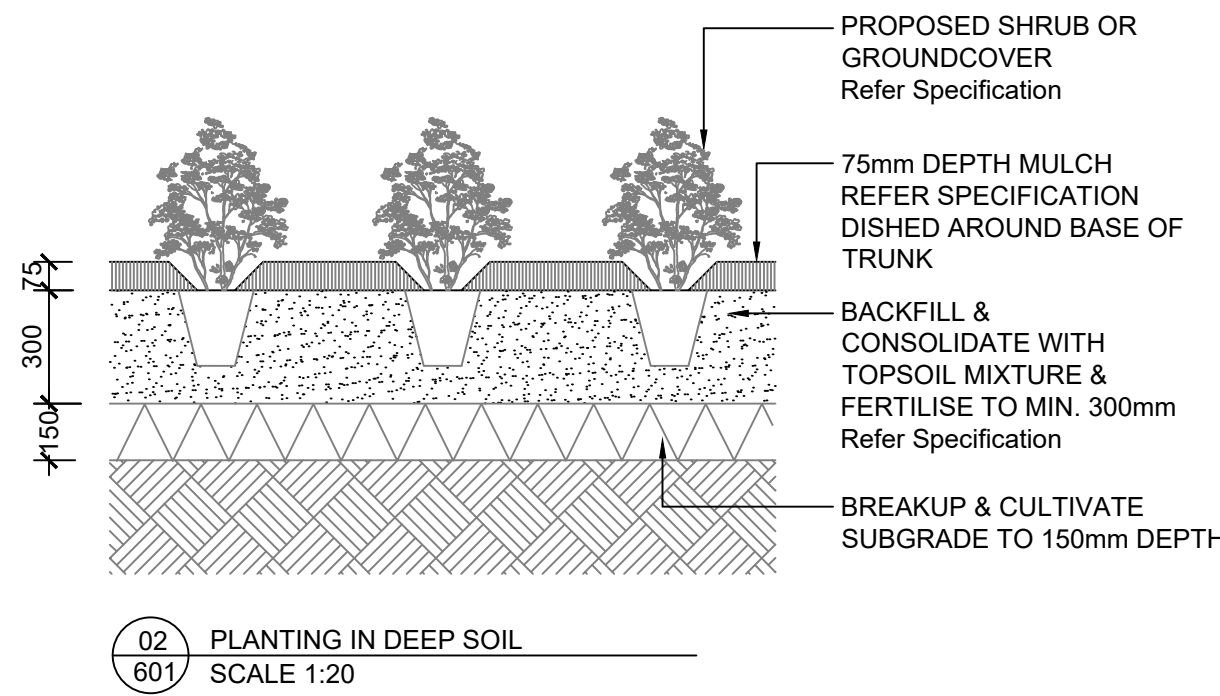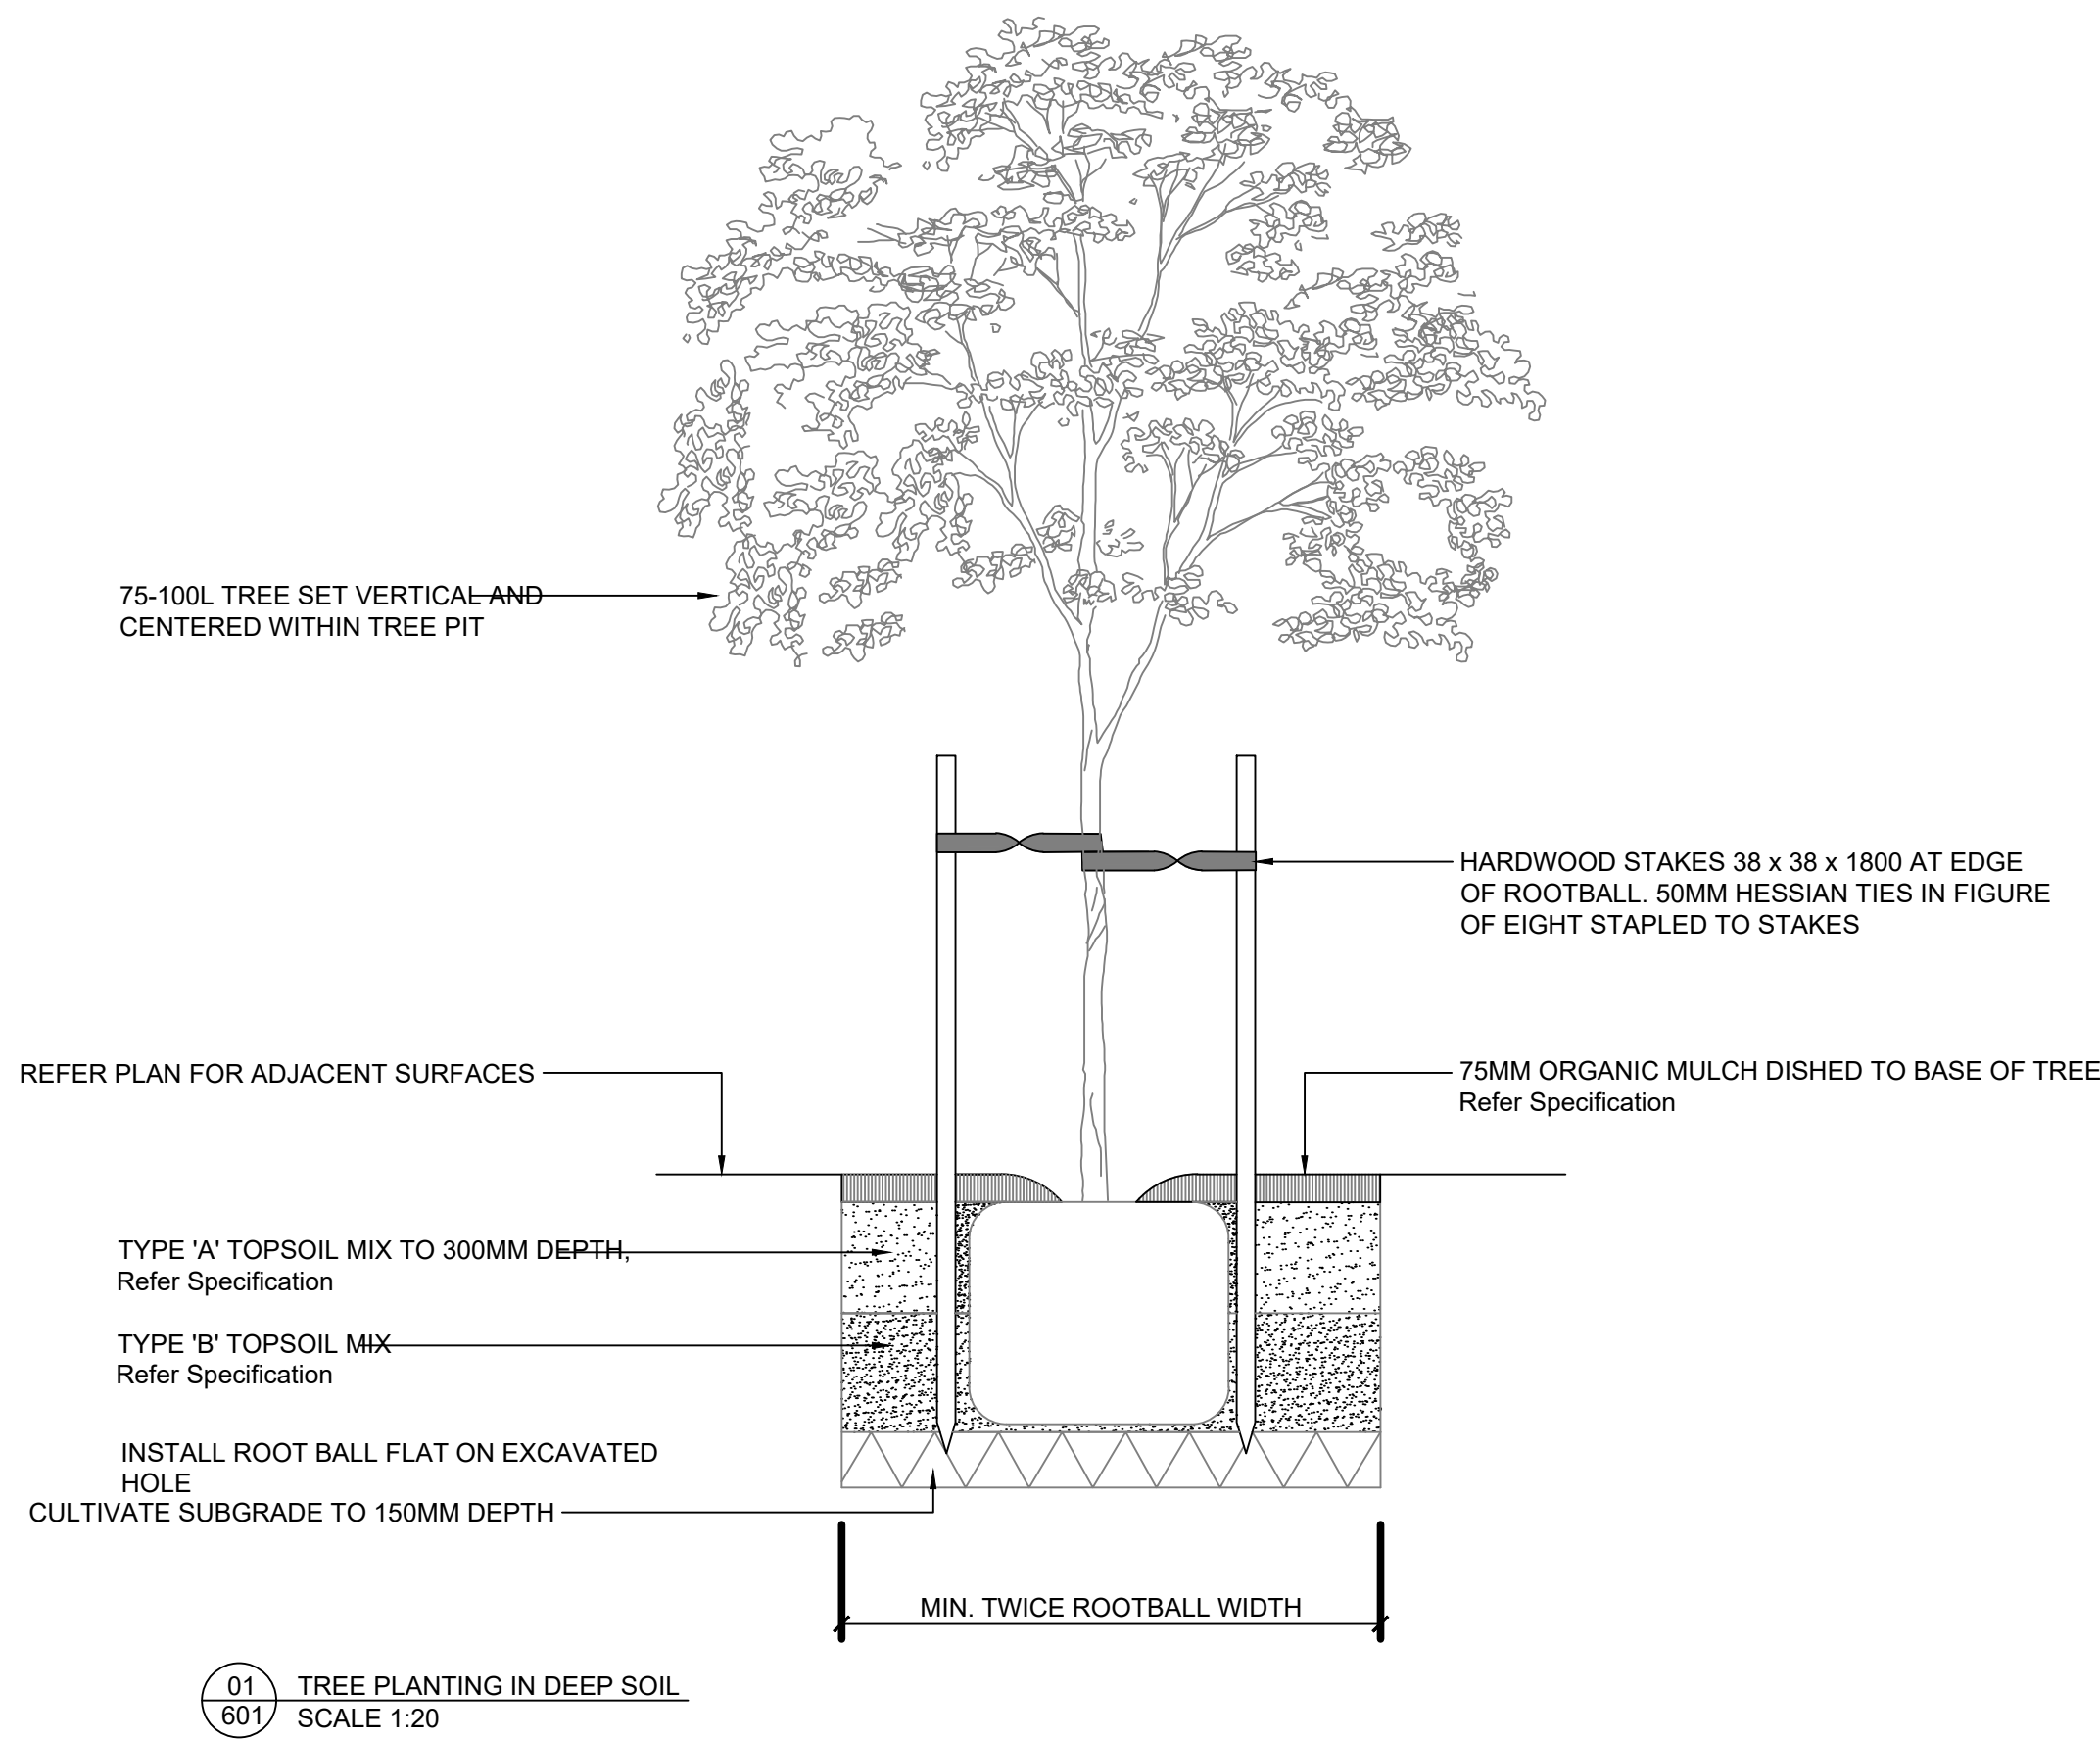

DRAFT FOR COORDINATION

G	ISSUE FOR RIS	LUFO	MB	05.06.26
F	ISSUE FOR RIS	LUFO	MB	10.04.26
E	ISSUE FOR RIS	LUFO	MB	13.02.26
E	ISSUE FOR RIS	LUFO	MB	09.02.26
D	ISSUE FOR RIS	LUFO	MB	19.12.25
C	ISSUE FOR RIS	LUFO	MB	16.12.25
B	ISSUE FOR SSDA	LUFO	MB	08.09.25
A	ISSUE FOR SSDA	LUFO	MB	03.09.25

Issue Revision Drawn Check Date

Not for Construction

Project

5-9 Cowan Road
St Ives, NSW

Development Approval

Prosper

PROSPER

Drawing No. Drawing Name
L-601 Details

Job No. 25-1142
Issue G
Scale AS SHOWN

Sydney, Suite 70, Jones Bay
Wharf, 26-32 Pirrama Road,
Pyrmont NSW 2009
E: sydney@arcadiaa.com.au
T: 02 8571 2900

ARCADIA

LANDSCAPE SPECIFICATION NOTES

SERVICES
BEFORE LANDSCAPE WORK IS COMMENCED THE LANDSCAPE CONTRACTOR IS TO ESTABLISH THE POSITION OF ALL SERVICE LINES AND ENSURE TREE PLANTING IS CARRIED OUT AT LEAST 3 METRES AWAY FROM THESE SERVICES. SERVICE LIDS, VENTS AND HYDRANTS SHALL BE LEFT EXPOSED AND NOT COVERED BY ANY LANDSCAPE FINISHES (TURFING, PAVING, GARDEN BEDS ETC.) FINISH ADJOINING SURFACES FLUSH WITH PIT LIDS.

ABORIST MANAGEMENT OF TREE PROTECTION
A QUALIFIED AND APPROVED ABORIST IS TO BE CONTRACTED TO UNDERTAKE OR MANAGE THE INSTALLATION OF PROTECTIVE FENCING, AND TO UNDERTAKE SUCH MEASURES AS HE DEEMS APPROPRIATE TO PRESERVE THE SUBJECT TREES TO BE RETAINED. THE ARBORIST IS TO BE RETAINED FOR THE ENTIRE CONTRACT PERIOD TO UNDERTAKE ONGOING MANAGEMENT AND REVIEW OF THE TREES.

DRAINAGE CELL AND FILTER FABRIC
FOR ON-SLAB AREAS INSTALL AN APPROVED 'DRAINAGE CELL' PRODUCT TO COMPREHENSIVELY COVER THE BOTTOM OF ALL PLANTERS. OVER DRAINAGE CELL TO ON-SLAB AREAS, A POLYFELT GEOTEXTILE LINING (AS SUPPLIED BY 'POLYFELT TS' OR APPROVED EQUIVALENT) IS TO BE INSTALLED TO COVER THE BOTTOM OF ALL PLANTERS, TURNED UP 300MM AND TAPED TO THE PLANTER SIDES TO ENSURE SOIL MIX DOES NOT ESCAPE INTO DRAINAGE OUTLETS/HOLES. INSTALL MIN. 50MM COARSE RIVER SAND OVER ALL GEOTEXTILE LINING PRIOR TO INSTALLATION OF SOIL MIX.

PLANTING MIXTURE
SHALL BE HOMOGENOUS BLEND OF SOIL AND ADDITIVES IN THE FOLLOWING PROPORTIONS:
EXISTING SITE SOIL IF SUITABLE OR
IMPORTED TOPSOIL 50%
COMPOST 30%
D/W SAND 20%
SOIL TESTING OF EXISTING SITE SOIL IS TO BE UNDERTAKEN TO ASSESS SUITABILITY OF USE AS PLANTING TOPSOIL AND COMPLIANCE WITH AUSTRALIAN STANDARDS.

MULCH APPLICATION
PLACE MULCH TO THE REQUIRED DEPTH, (REFER TO DRAWINGS) CLEAR OF PLANT STEMS, AND RAKE TO AN EVEN SURFACE FINISHING 25MM BELOW ADJOINING LEVELS. ENSURE MULCH IS WATERED IN AND TAMPED DOWN DURING INSTALLATION.

MULCH TYPE
PINE BARK: FROM MATURE TREES, GRADED IN SIZE FROM 15MM TO 30MM, FREE FROM WOOD SLIVERS. DARK BROWN IN COLOUR AND TEXTURE.

COMPOST
SHALL BE WELL ROTTED VEGETATIVE MATERIAL OR ANIMAL MANURE, OR OTHER APPROVED MATERIAL, FREE FROM HARMFUL CHEMICALS, GRASS AND WEED GROWTH AND WITH NEUTRAL PH. PROVIDE A CERTIFICATE OF PROOF OF PH UPON REQUEST.

PLANT MATERIAL
ALL PLANTS SUPPLIED ARE TO CONFORM WITH THOSE SPECIES LISTED IN THE PLANT SCHEDULE ON THE DRAWINGS. GENERALLY PLANTS SHALL BE VIGOROUS, WELL ESTABLISHED, HARDENED OFF, OF GOOD FORM CONSISTENT WITH SPECIES OR VARIETY, NOT SOFT OR FORCED, FREE FROM DISEASE OR INSECT PESTS WITH LARGE HEALTHY ROOT SYSTEMS AND NO EVIDENCE OF HAVING BEEN RESTRICTED OR DAMAGED. TREES SHALL HAVE A LEADING SHOOT. IMMEDIATELY REJECT DRIED OUT, DAMAGED OR UNHEALTHY PLANT MATERIAL BEFORE PLANTING. ALL STOCK IS TO BE CONTAINER GROWN FOR A MINIMUM OF SIX (6) MONTHS PRIOR TO DELIVERY TO SITE

FERTILISER MASS PLANTING AREAS:
FERTILISER SHALL BE 'NUTRICOTE' OR APPROVED EQUIVALENT IN GRANULE FORM INTENDED FOR SLOW RELEASE OF PLANT NUTRIENTS OVER A PERIOD OF APPROXIMATELY NINE MONTHS. THOROUGHLY MIX FERTILISER WITH PLANTING MIXTURE AT THE RECOMMENDED RATE, PRIOR TO INSTALLING PLANTS.

STAKING AND TYING
STAKES SHALL BE STRAIGHT HARDWOOD, FREE FROM KNOTS AND TWISTS, POINTED AT ONE END AND SIZED ACCORDING TO SIZE OF PLANTS TO BE STAKED.
A. 5-15 LITRE SIZE PLANT 1X(1200X25X25MM)
B. 35-75 LITRE SIZE PLANT 2X(1500X38X38MM)
C. 100-GREATER THAN 200LITRE 3X(1800X50X50MM)
TIES SHALL BE 50MM WIDE HESSIAN WEBBING OR APPROVED EQUIVALENT NAILED OR STAPLED TO STAKE. DRIVE STAKES A MINIMUM ONE THIRD OF THEIR LENGTH, AVOIDING DAMAGE TO THE ROOT SYSTEM, ON THE WINDWARD SIDE OF THE PLANT.

IRRIGATION SYSTEM
SUPPLY AN AUTOMATIC WATERING SYSTEM USING 'TORO IRRIGATION SYSTEM' OR SIMILAR APPROVED, WITH MICRO-JET SPRINKLER HEADS AND LOW DENSITY, RUBBER MODIFIED POLYPROPYLENE RETICULATION, TO INCLUDE FILTERS, BENDS JUNCTIONS, ENDS AND OTHER ANCILLARY EQUIPMENT. THE LANDSCAPER SHALL NOMINATE HIS SOURCE OF SUPPLY FOR THE WATERING SYSTEM AND OBTAIN APPROVAL FROM THE SUPERINTENDENT BEFORE PLACING ORDERS FOR EQUIPMENT OR SUPPLY.

A SCHEMATIC PLAN OF THE PROPOSED IRRIGATION SYSTEM IS TO BE PREPARED BY THE CONTRACTOR, SHOWING SOLENOIDS, PIPE DIAMETERS, AND ALL NOZZLE AND TRICKLE ATTACHMENT TYPES (INCLUDING

SPRAY/HEAD ANGLE), FOR REVIEW BY THE SUPERINTENDENT PRIOR TO INSTALLATION

THE CONTRACTOR IS TO LIASE WITH THE HYDRAULIC ENGINEER AND COUNCIL AS NECESSARY, TO ENSURE THE THE IRRIGATION SYSTEM CONFORMS WITH ALL THE COUNCIL AND WATER BOARD CODES AND REQUIREMENTS.

PROVIDE AN AUTOMATIC CONTROLLER THAT PROVIDES FOR TWO WEEK SCHEDULING AND HOURLY MULTI-CYCLE OPERATION. THE CONTROLLER SHALL MANUAL OVERRIDE. PROGRAMMING SHALL BE UNDERTAKEN BY THE CONTRACTOR WHO SHALL ADVISE ON THE OPERATION OF THE SYSTEM.

PROVISION OF SECURE HOUSING FOR THE AUTOMATIC IRRIGATION CONTROLLER TO BE LOCATED IN ASSOCIATION WITH THE LANDSCAPE CONTRACTOR AND LOCATION CONFIRMED BY THE SUPERINTENDENT. WIRING TO CONNECT REMOTE SOLENOID LOCATIONS IS TO BE PROVIDED. THE CONTROLLER SHALL BE LOCATED IN A DRY PLACE, PROTECTED FROM THE WEATHER, AND ALL CABLE CONNECTIONS SHALL BE MADE WITH WATERPROOF CONNECTORS.

WATER SUPPLY POINTS TO BE SUPPLIED BY BUILDER.

IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO ENSURE AND GUARANTEE SATISFACTORY OPERATION OF THE IRRIGATION SYSTEM.

AFTER THE SYSTEM HAS BEEN INSTALLED TO THE SATISFACTION OF THE SUPERINTENDENT, THE INSTALLATION SHALL BE TESTED UNDER KNOWN WORKING CONDITIONS. ACCEPTANCE OF THE INSTALLED PLANT AND EQUIPMENT SHALL BE SUBJECT TO THESE BEING SATISFACTORY.

TREATED PINE TIMBER EDGING
TIMBER EDGE: 100 X 25MM CCA TREATED RADIATA PINE TIMBER STAKES: 50 X 50 X 500MM CCA TREATED RADIATA PINE-SHARPENED AT ONE END. INSTALL IN LOCATIONS SHOWN ON THE DRAWINGS FLUSH TO FINISHED SURFACE LEVELS.

LANDSCAPE MAINTENANCE PROGRAM

MAINTENANCE SHALL MEAN THE CARE AND MAINTENANCE OF THE LANDSCAPE WORKS BY ACCEPTED HORTICULTURAL PRACTICE AS RECTIFYING ANY DEFECTS THAT BECOME APPARENT IN THE LANDSCAPE WORKS UNDER NORMAL USE. THIS SHALL INCLUDE, BUT SHALL NOT BE LIMITED TO, WATERING, MOWING, FERTILISING, RESEEDING, RETURFING, WEEDING, PEST AND DISEASE CONTROL, STAKING AND TYING, REPLANTING, CULTIVATION, PRUNING, AERATING, RENOVATING, TOP DRESSING, MAINTAINING THE SITE IN A NEAT AND TIDY CONDITION AS FOLLOWS:-

GENERAL
THE LANDSCAPE CONTRACTOR SHALL MAINTAIN THE LANDSCAPE WORKS FOR THE TERM OF THE MAINTENANCE (OR PLANT ESTABLISHMENT) PERIOD TO THE SATISFACTION OF THE COUNCIL. THE LANDSCAPE CONTRACTOR SHALL ATTEND TO THE SITE ON A WEEKLY BASIS. THE MAINTENANCE PERIOD SHALL COMMENCE AT PRACTICAL COMPLETION AND CONTINUE FOR A PERIOD OF TWENTY SIX (26) WEEKS.

WATERING
GRASS, TREES AND GARDEN AREAS SHALL BE WATERED REGULARLY SO AS TO ENSURE CONTINUOUS HEALTHY GROWTH.

RUBBISH REMOVAL
DURING THE TERM OF THE MAINTENANCE PERIOD THE LANDSCAPE CONTRACTOR SHALL REMOVE RUBBISH THAT MAY OCCUR AND REOCCUR THROUGHOUT THE MAINTENANCE PERIOD. THIS WORK SHALL BE CARRIED OUT REGULARLY SO THAT AT WEEKLY INTERVALS THE AREA MAY BE OBSERVED IN A COMPLETELY CLEAN AND TIDY CONDITION.

REPLACEMENTS
THE LANDSCAPE CONTRACTOR SHALL REPLACE ALL PLANTS THAT ARE MISSING, UNHEALTHY OR DEAD AT THE LANDSCAPE CONTRACTOR'S COST. REPLACEMENTS SHALL BE OF THE SAME SIZE, QUALITY AND SPECIES AS THE PLANT THAT HAS FAILED UNLESS OTHERWISE DIRECTED BY THE LANDSCAPE ARCHITECT. REPLACEMENTS SHALL BE MADE ON A CONTINUING BASIS NOT EXCEEDING TWO (2) WEEKS AFTER THE PLANT HAS DIED OR IS SEEN TO BE MISSING.

STAKES AND TIES
THE LANDSCAPE CONTRACTOR SHALL REPLACE OR ADJUST PLANT STAKES, AND TREE GUARDS AS NECESSARY OR AS DIRECTED BY THE LANDSCAPE ARCHITECT. REMOVE STAKES AND TIES AT THE END OF THE MAINTENANCE PERIOD IF SO DIRECTED.

PRUNING
TREES AND SHRUBS SHALL BE PRUNED AS DIRECTED BY THE LANDSCAPE ARCHITECT. PRUNING WILL BE DIRECTED AT THE MAINTENANCE OF THE DENSE FOLIAGE OR MISCELLANEOUS PRUNING AND BENEFICIAL TO THE CONDITION OF THE PLANTS. ANY DAMAGED GROWTH SHALL BE PRUNED. ALL PRUNED MATERIAL SHALL BE REMOVED FROM THE SITE.

MULCHED SURFACES
ALL MULCHED SURFACES SHALL BE MAINTAINED IN A CLEAN AND TIDY CONDITION AND BE REINSTATED IF NECESSARY TO ENSURE THAT A DEPTH OF 75MM IS MAINTAINED. ENSURE MULCH IS KEPT CLEAR OF PLANT STEMS AT ALL TIMES.

PEST AND DISEASED CONTROL
THE LANDSCAPE CONTRACTOR SHALL SPRAY AGAINST INSECT AND FUNGUS INFESTATION WITH ALL SPRAYING TO BE CARRIED OUT IN ACCORDANCE WITH THE MANUFACTURER'S DIRECTIONS. REPORT ALL INSTANCES OF PESTS AND DISEASES (IMMEDIATELY THAT THEY ARE DETECTED) TO THE LANDSCAPE ARCHITECT.

WEED ERADICATION
ERADICATE WEEDS BY ENVIRONMENTALLY ACCEPTABLE METHODS USING A NON-RESIDUAL GLYPHOSATE HERBICIDE (EG. 'ROUNDUP') IN ANY OF ITS REGISTERED FORMULAE, AT THE RECOMMENDED MAXIMUM RATE. REGULARLY REMOVE BY HAND, WEED GROWTH THAT MAY OCCUR OR RECUR THROUGHOUT GRASSED, PLANTED AND MULCHED AREAS. REMOVE WEED GROWTH FROM AN AREA 750MM DIAMETER AROUND THE BASE OF TREES IN GRASSED AREAS. CONTINUE ERADICATION THROUGHOUT THE COURSE OF THE WORKS AND DURING THE MAINTENANCE PERIOD.

SOIL SUBSIDENCE
ANY SOIL SUBSIDENCE OR EROSION WHICH MAY OCCUR AFTER THE SOIL FILLING AND PREPARATION OPERATIONS SHALL BE MADE GOOD BY THE LANDSCAPE CONTRACTOR AT NO COST TO THE CLIENT.

DRAFT FOR COORDINATION

G	ISSUE FOR RIS	LUFO	MB	05.06.26
F	ISSUE FOR RIS	LUFO	MB	10.04.26
E	ISSUE FOR RIS	LUFO	MB	13.02.26
E	ISSUE FOR RIS	LUFO	MB	09.02.26
D	ISSUE FOR RIS	LUFO	MB	19.12.25
C	ISSUE FOR RIS	LUFO	MB	16.12.25
B	ISSUE FOR SSDA	LUFO	MB	08.09.25
A	ISSUE FOR SSDA	LUFO	MB	03.09.25

Not for Construction

Project

5-9 Cowan Road
St Ives, NSW

Development Approval

Prosper

PROSPER

Drawing No. L-700
Drawing Name Specification Note

Job No. 25-1142
Issue G
Scale

Sydney, Suite 70, Jones Bay
Wharf, 26-32 Pirrama Road,
Pyrmont NSW 2009
E sydney@arcadiala.com.au
T 02 8571 2900

ARCADIA