

100



1. IT HAS BEEN ASSUMED THAT HOARDINGS/SILT FENCING WILL BE PROVIDED TO THE STAGE BOUNDARY SUFFICIENT TO PREVENT SEDIMENT RUNOFF FROM LEAVING SITE (EXCEPT IN THE CASE OF ENTRY/EXIT LOCATIONS WHERE TEMPORARY CONSTRUCTION ENTRY/EXIT SEDIMENT TRAP ARE PROVIDED). IF THIS IS NOT THE CASE, PROVIDE SEDIMENT FENCE TO STANDARD DETAIL BELOW AS REQUIRED TO PREVENT SEDIMENT FROM LEAVING SITE, DIRECT RUNOFF TO SEDIMENT BASIN.
2. ALL SEDIMENT CONTROL MEASURES TO BE INSTALLED IN ACCORDANCE WITH LANDCOM MANAGING URBAN STORMWATER "BLUE BOOK".
3. SEDIMENT CONTROL FOR LANDSCAPED WORKS DOWNSTREAM OF THE BUILDING TO INCLUDE A SILT FENCE AND SANDBAGS AS REQUIRED. INSTALL BUND TO DIVERT UPSTREAM CATCHMENT AHEAD FROM DISTURBED SOIL AREA. TO BE MANAGED AT A RATE OF  $\times \times \times \times \times$  LPS PER HA BY THE CONTRACTOR ON SITE

1. SEDIMENT FENCE WILL BE INSTALLED AS SHOWN AND ELSEWHERE AT THE DISCRETION OF THE SITE MANAGER TO OBTAIN COARSEST SEDIMENT FRACTIONS (INCLUDING AGGREGATED FINE) AS NEAR AS POSSIBLE TO THEIR SOURCE.
2. SEDIMENT REMOVED FROM ANY TRAPPING DEVICE WILL BE RELOCATED WHERE FURTHER POLLUTION TO DOWNWIND LANDS & WATERWAYS CANNOT OCCUR.
3. STOCKPILES WILL BE PLACED WHERE SHOWN ON DRAWING OR ELSEWHERE AT THE DISCRETION OF THE SITE MANAGER AND NOT WITHIN OR ON HAZARDOUS AREAS INCLUDING LIKELY AREAS OF HIGH-VELOCITY FLOODS SUCH AS WATERWAYS, PAVED AREAS & DRIVEWAYS.
4. WATER WILL BE PREVENTED FROM DIRECTLY ENTERING THE PERMANENT DRAINAGE SYSTEM WITH INLET FILTERS (SEE DETAILS) UNLESS IT IS SEDIMENT FREE.
5. TEMPORARY SEDIMENT TRAPS WILL BE RETAINED UNTIL AFTER THE LANDS THEY ARE PROTECTING ARE COMPLETELY REHABILITATED.
6. CONTRACTOR TO DESIGN/SIZE/CONSTRUCT TEMPORARY SEDIMENT BASIN, WATER SHOULD BE ALLOWED TO SETTLE BEFORE DISCHARGE. CONTRACTOR MUST VERIFY THAT WATER QUALITY MEETS ALL APPLICABLE REQUIREMENTS. IF NOT, CONTRACTOR TO ACCUMULATE SEDIMENT SHOULD THEN BE REMOVED & DISPOSED OF IN ACCORDANCE WITH ENVIRONMENTAL MANAGEMENT PROCEDURES.

1. THE SITE MANAGER WILL INSPECT THE SITE AT LEAST WEEKLY AND WILL:
  1. ENSURE THAT DRAINS OPERATE PROPERLY & TO EFFECT ANY NECESSARY REPAIRS
  2. REMOVE SPILLED SAND OR OTHER MATERIALS FROM HAZARD AREAS; INCLUDING LANDS CLOSER THAN 5m FROM AREAS OF LIKELY CONCENTRATED OR HIGH VELOCITY FLOWS ESPECIALLY WATERWAYS & PAVED AREAS.
  3. REMOVE TRAPPED SEDIMENT WHENEVER LESS THAN DESIGN CAPACITY REMAINS WITHIN THE STRUCTURE
  4. ENSURE REHABILITATED LANDS HAVE EFFECTIVELY REDUCED THE EROSION HAZARD AND TO INITIATE UPGRADING OR REPAIR AS APPROPRIATE
  5. CONSTRUCT ADDITIONAL EROSION AND/OR SEDIMENT CONTROL WORKS AS MIGHT BECOME NECESSARY TO ENSURE THE DESIRED PROTECTION IS GIVEN TO DOWNWIND LANDS AND WATERWAYS
  6. MAINTAIN EROSION & SEDIMENT CONTROL MEASURES IN A FULLY FUNCTIONING CONDITION UNTIL ALL EARTHWORK ACTIVITIES ARE COMPLETED AND THE SITE IS REHABILITATED
  7. REMOVE TEMPORARY SOIL CONSERVATION STRUCTURES AS THE LAST ACTIVITY IN THE REHABILITATION PROGRAM

1. THE VOLUME & INTENSITY OF ANY RAINFALL EVENTS
2. THE CONDITION OF ANY SOIL & WATER MANAGEMENT WORKS
3. THE CONDITION OF VEGETATION & ANY NEED TO IRRIGATE
4. THE NEED FOR DUST PREVENTION STRATEGIES
5. ANY REMEDIAL WORKS TO BE UNDERTAKEN

THE BOOK WILL BE KEPT ONSITE & MADE AVAILABLE TO ANY AUTHORISED PERSON ON REQUEST. IT WILL BE GIVEN TO THE PROJECT MANAGER AT THE CONCLUSION OF WORKS.

## PRELIMINARY





SCALE:	DRAWN:	DESIGNED:	QA:	APPROVED:	ISSUE DATE:
1:200	JF	JF			
PROJECT NUMBER:		DRAWING NUMBER:			ISSUE:
10578		C0005			02





**COPYRIGHT** All rights reserved.  
These drawings, plans and specifications and the copyright therein are the property of the Bonacci Group and must not be used, reproduced or copied wholly or in part without the written permission of the Bonacci Group.



100

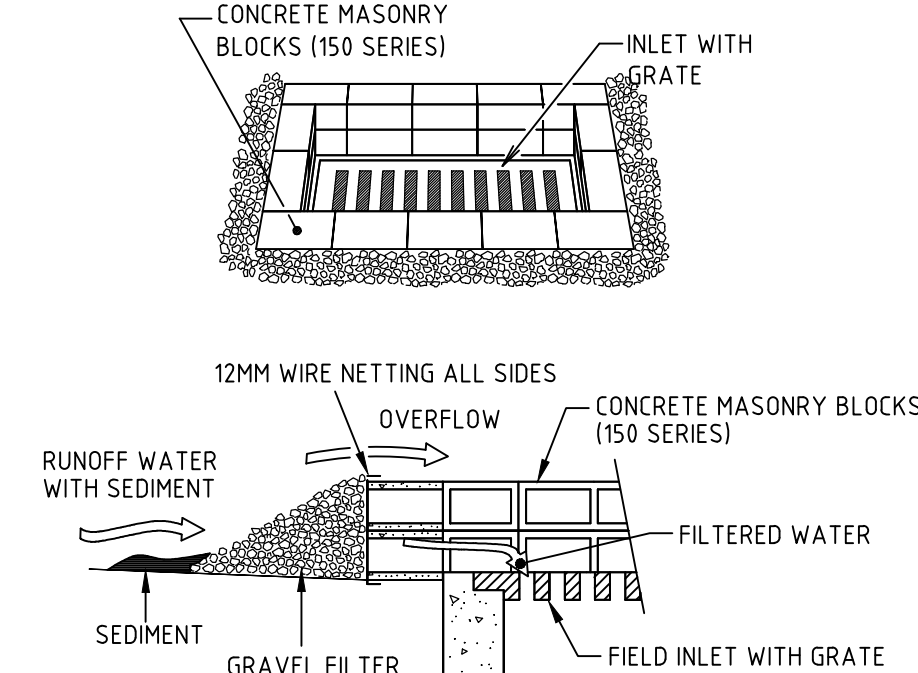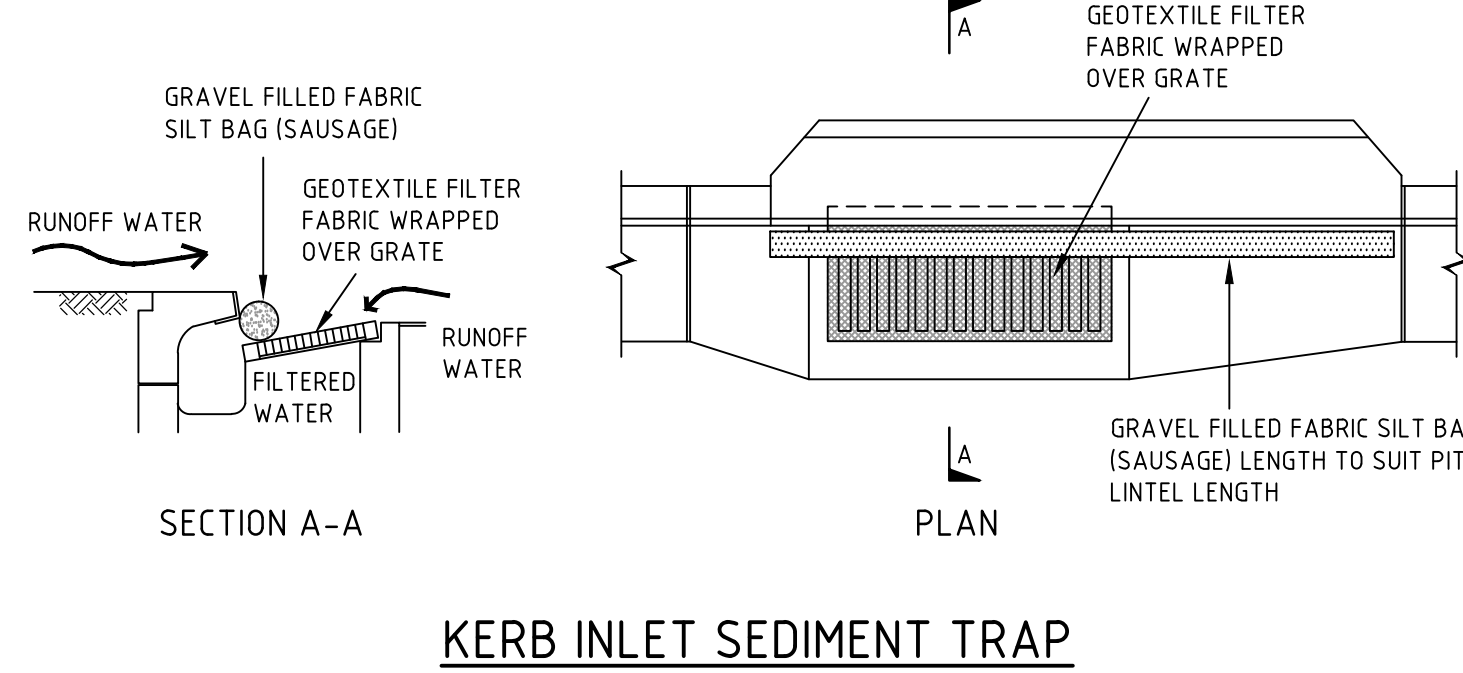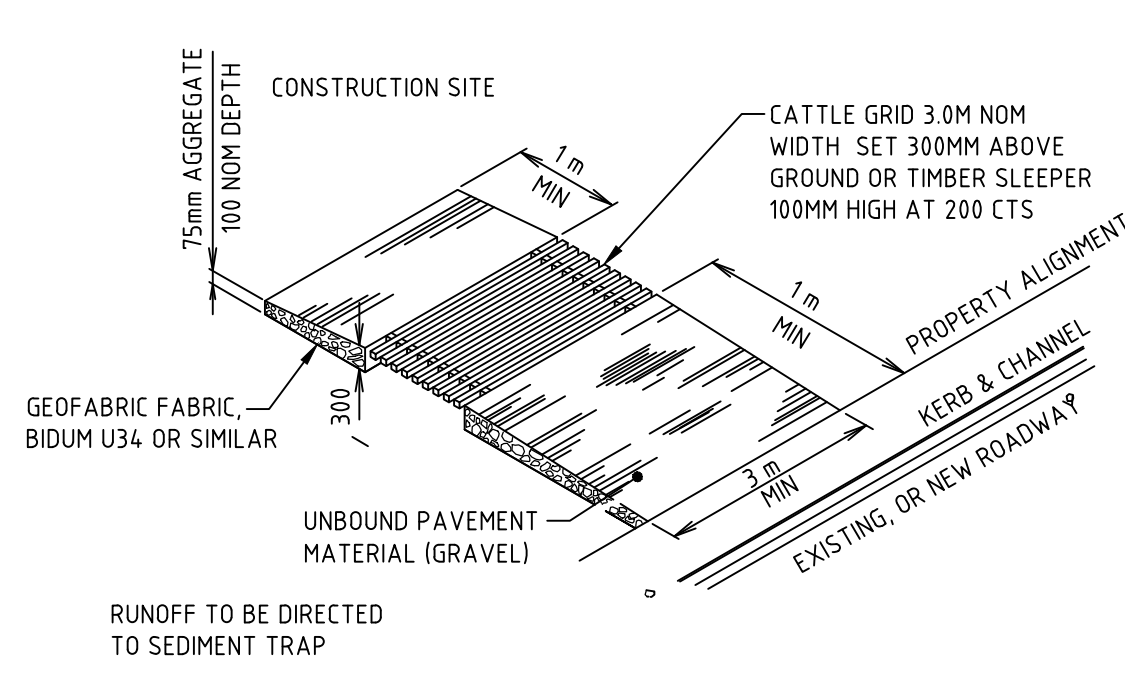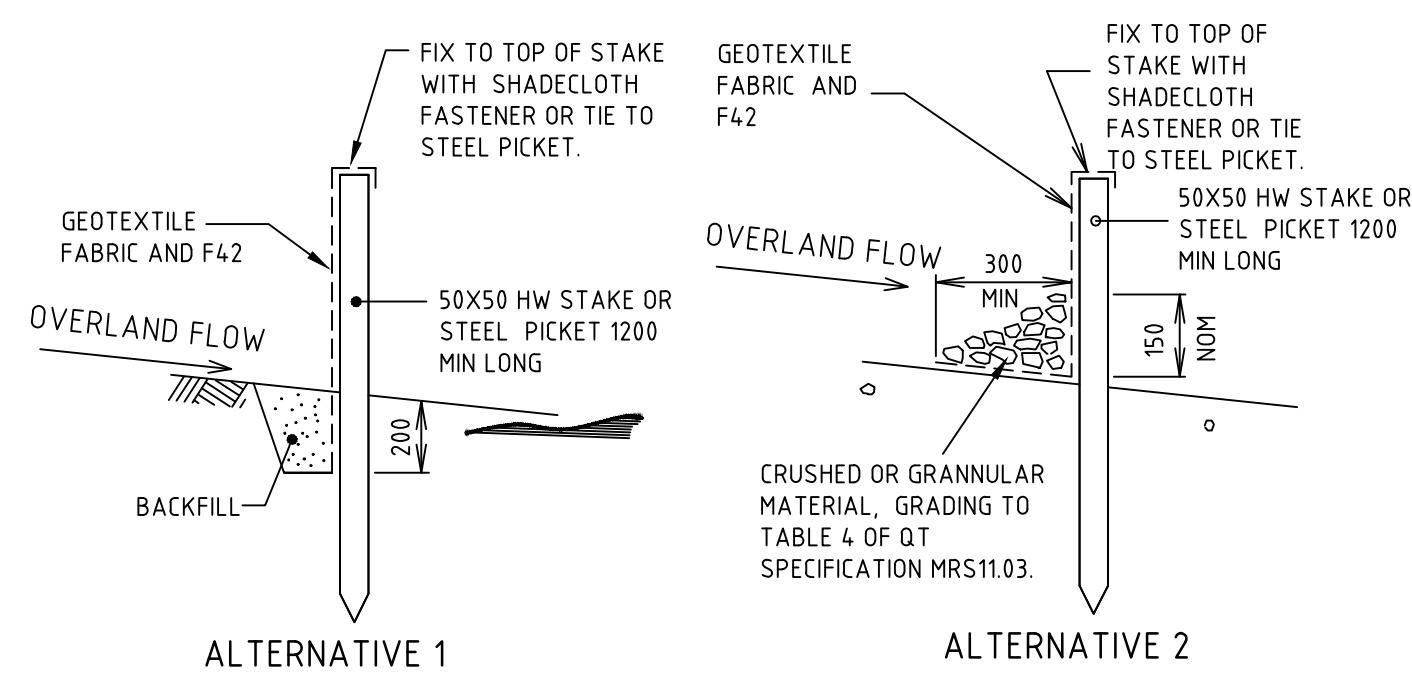


TEMPORARY CONSTRUCTION VEHICLE  
ENTRY/EXIT SEDIMENT TRAP

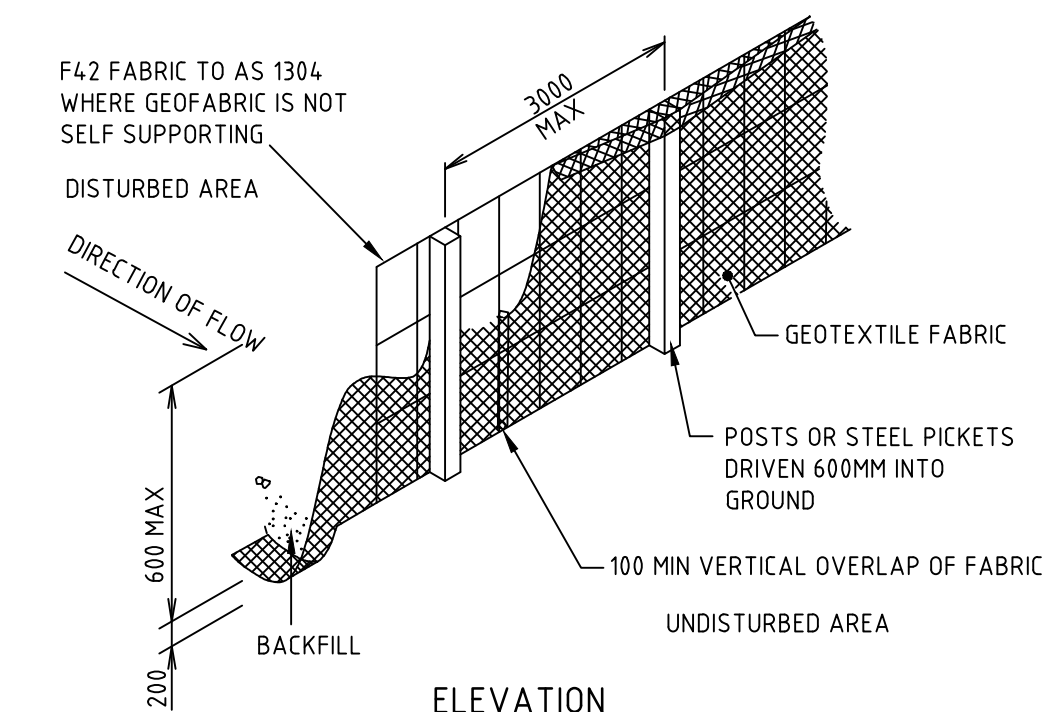


## SEDIMENT FENCE

NOT TO SCALE

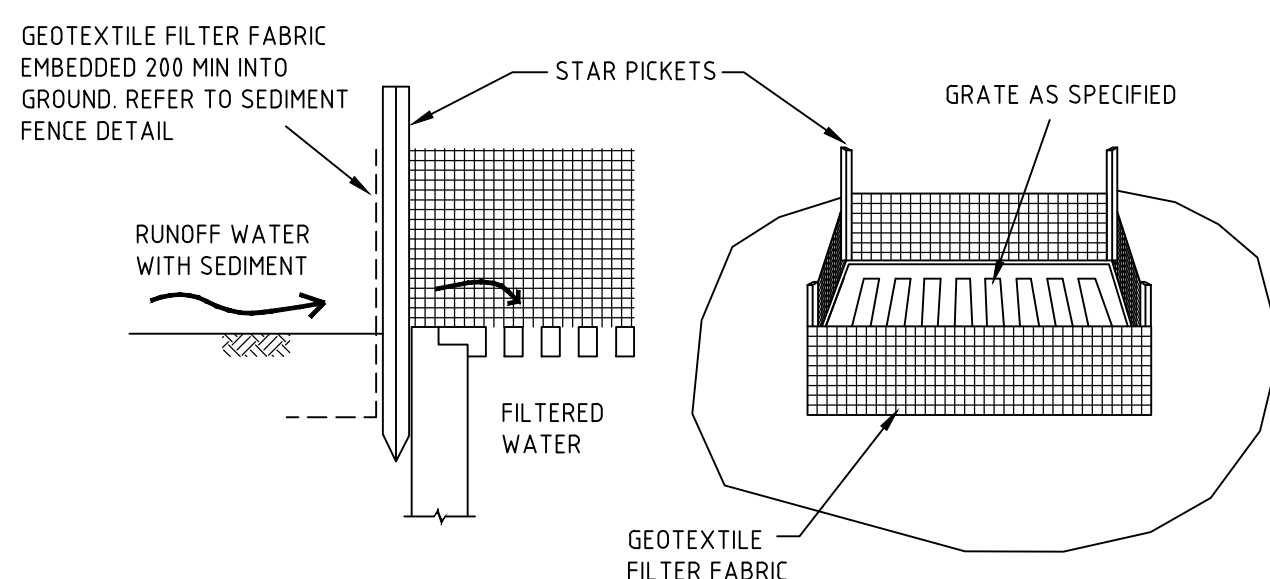


### GEOTEXTILE PIT FILTER 1

NOT TO SCALE

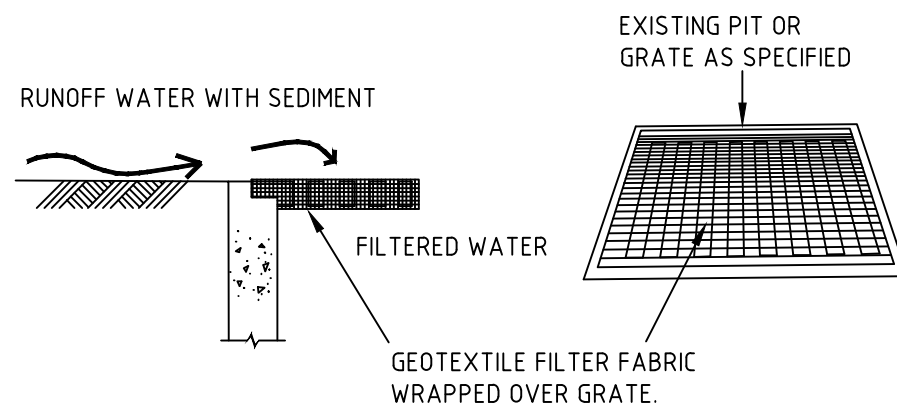

## GEOTEXTILE PIT FILTER 2

NOT TO SCALE

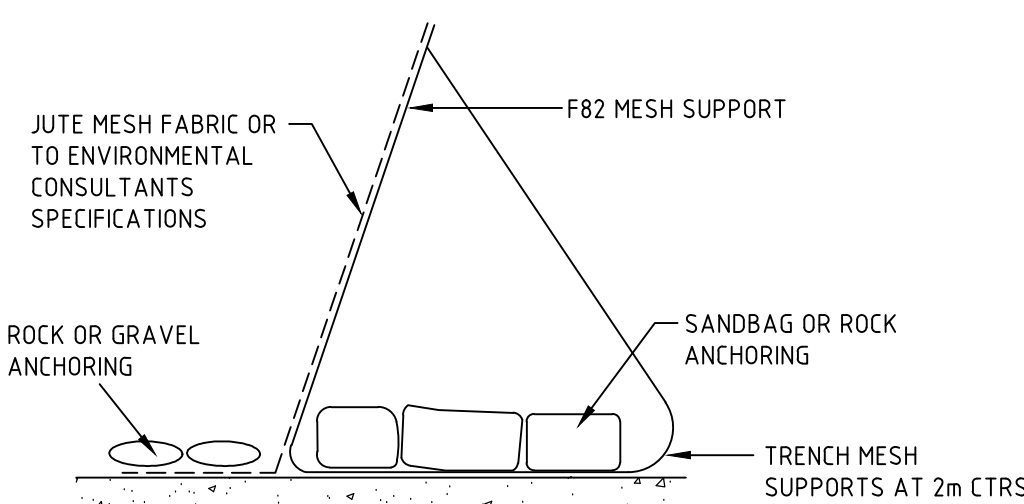


### ALTERNATIVE SEDIMENT FENCE


NOT TO SCALE

ALTERNATIVE SEDIMENT FENCE NOTES

1. INSTALL THIS TYPE OF SEDIMENT FENCE WHEN USE OF SUPPORT POSTS IS NOT DESIRABLE OR NOT POSSIBLE. SUCH CONDITIONS MIGHT APPLY, FOR EXAMPLE, WHERE APPROVAL IS GRANTED FROM THE APPROPRIATE AUTHORITIES TO PLACE THESE FENCES IN HIGHLY SENSITIVE ESTUARINE AREAS.
2. USE BENT TRENCH MESH TO SUPPORT THE F82 WELDED MESH FACING AS SHOWN ON THE DRAWING ABOVE. ATTACH THE JUTE MESH TO THE WELDED MESH FACING USING UV-RESISTANT CABLE TIES.
3. STABILISE THE WHOLE STRUCTURE WITH SANDBAGS OR ROCK ANCHORING OVER THE TRENCH MESH. THE LEADING EDGE OF THE JUTE MESH, THE ANCHORING SHOULD BE SUFFICIENTLY LARGE TO ENSURE STABILITY OF THE STRUCTURE IN THE DESIGN STORM EVENT, USUALLY THE 10 YEAR EVENT.

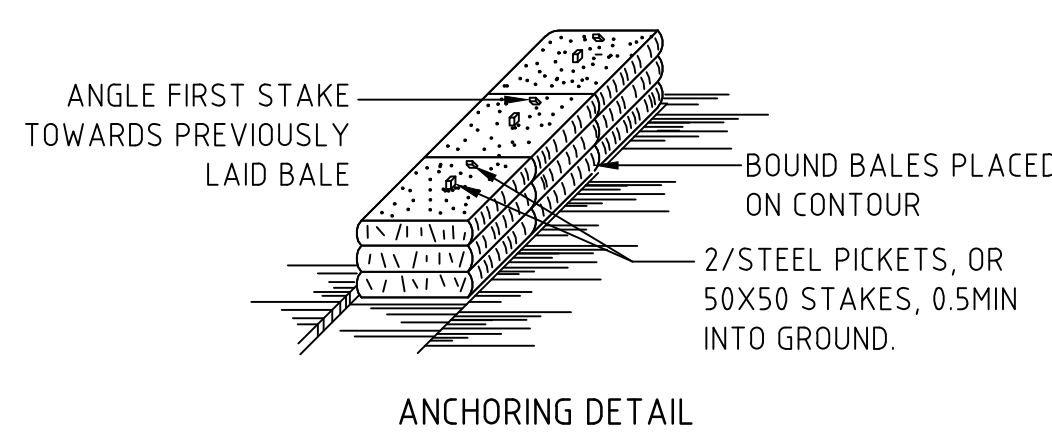


### ANCHORING DETAIL

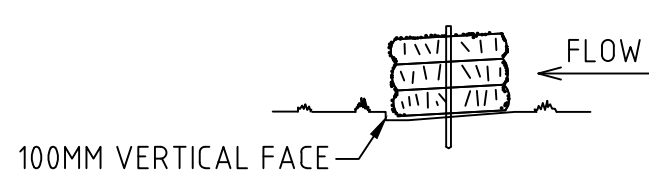

### BEDDING DETAIL

## STRAW BALE BANK SEDIMENT CONTROL

NOT TO SCALE

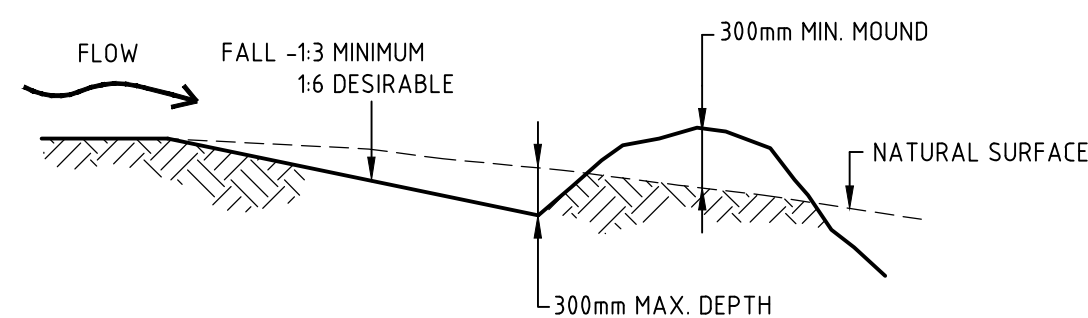

CATCH DRAIN

NOT TO SCALE

[illegible]

02	JF	12.08.18	ISSUED FOR SSD SUBMISSION
01	JF	14.02.18	PRELIMINARY ISSUE
No.	Initial	DATE	REVISION DETAILS

CIV

**BONACCI**

**Bonacini Group (NSW) Pty Ltd**  
 ABN 29 102 716 352  
 Consulting Engineers, Structural - Civil - Infrastructure  
 Level 6, 37 York Street, Sydney, NSW 2000, Australia  
 Tel: +61 2 8247 8400 Fax: +61 2 8247 8444  
 sydney@bonacini.com  
 www.bonacini.com

CLIENT

 **NSW**  
GOVERNMENT

**Health  
Infrastructure**

14/77 PACIFIC HIGHWAY  
NORTH SYDNEY NSW 2060

email: h...

PROJECT:  **WAGGA WAGGA HEALTH SERVICE  
REDEVELOPMENT**  
*Changing more than the buildings*

**WAGGA WAGGA HEALTH SERVICE**  
WAGGA WAGGA NSW 2650  
STAGE 3 REDEVELOPMENT

## SOIL AND WATER MANAGEMENT DETAILS

SCALE:	DRAWN:	DESIGNED:	QA:	APPROVED:	ISSUE DATE:
NTS	JF	JF			

PROJECT NUMBER:	DRAWING NUMBER:	ISSUE:
10578	C0006	0
File: G:\SUBSTATION_Civil\Issued\Drawings\ACB-0006-SOL AND WATER MANAGEMENT DETAILS CAD(2).dwg		

# PRELIMINARY





THIS DRAWING MAY BE PREPARED IN COLOUR AND MAY BE INCOMPLETE IF COPIED



