

JOHN HUNTER HEALTH & INNOVATION PRECINCT

SCHEMATIC DESIGN LANDSCAPE ARCHITECTURE



LANDSCAPE PACKAGE / DRAWING REGISTER		
DRAWING NUMBER	DRAWING TITLE	REVISION
LD_C0-A00 XX-00	COVER SHEET	B
LD_C0-A10 XX-01	LEGEND SHEET	B
LD_C0-A10 XX-02	PLANTING SCHEDULE STREETScape	B
LD_C0-A10 XX-03	PLANTING SCHEDULE ARRIVAL & ROOFTOPS	B
LD_C0-A10-XX-04	PLANTING SCHEDULE COURTYARDS & INTERNAL	B
LD_C0-B01 NL-01	SHEET SPLIT	B
LD_C0-B20 NL-00	JHH ARRIVAL FORECOURT	B
LD_C0-B20 NL-X0	OVERALL ZONAL PLAN	B
LD_C0-B20 NL-X1	TREE REMOVAL PLAN	B
LD_C0-B60 NL-X1	SIDE WIDE LANDSCAPE PLAN	B
LD_C0-B61 NL-01	ARRIVAL FORECOURT SECTIONS	B
LD_CA-B20 00-20	ASB BUILDING LEVEL 00	B
LD_CA-B20 01-20	ASB BUILDING LEVEL 01	B
LD_CA-B20 02-20	ASB BUILDING LEVEL 02	B
LD_CA-B20 03-20	ASB BUILDING LEVEL 03	B
LD_CA-B20 04-20	ASB BUILDING LEVEL 04	B
LD_CA-B20 05-20	ASB BUILDING LEVEL 05	B
LD_CA-B20 06-20	ASB BUILDING LEVEL 06	B
LD_CA-B20 B1-20	ASB BUILDING LEVEL B1	B
LD_CA-B20 B2-20	ASB BUILDING LEVEL B2	B
LD_CA-B20 B3-20	ASB BUILDING LEVEL B3	B
LD_CA-B20 B4-20	ASB BUILDING LEVEL B4	B
LD_CA-B61 00-01	ASB BUILDING LEVEL 00 COURTYARD SECTIONS	B
LD_CA-B61 00-02	ASB BUILDING LEVEL 00 ED ARRIVAL SECTION	B
LD_CA-B61 01-01	ASB BUILDING LEVEL 01 COURTYARD SECTIONS	B
LD_CA-B61 01-02	ASB BUILDING LEVEL 01 ELEVATED GARDEN SECTIONS	B
LD_CA-B61 04-01	ASB BUILDING LEVEL 04 COURTYARD SECTIONS	B
LD_CJ-B20 02-30	JHH BUILDING LEVEL 02	B
LD_CJ-B20 03-30	JHH BUILDING LEVEL 03	B
LD_CJ-B61 03-01	JHH BUILDING LEVEL 03 COURTYARD 1 SECTIONS	B
LD_CJ-B61 03-02	JHH BUILDING LEVEL 03 COURTYARD 2 SECTIONS	B
LD_CJ-B61 03-03	JHH BUILDING LEVEL 03 COURTYARD 3 SECTIONS	B



Level 8, Angel Place, 123 Pitt Street | Sydney NSW 2000
Australia | +61 2 8233 9900
URBIS Pty Ltd | ABN 50 105 256 228

CLIENT



KEY PLAN

DISCLAIMER
Copyright by Urbis Pty Ltd. This drawing or parts thereof may not be reproduced for any purpose or used for another project without the consent of Urbis other than reproduction for the purposes of actual ordering, supply, installation or construction. This drawing must be read in conjunction with all relevant contracts, schedules, specifications, drawings and any other issued written instructions. Do not scale from drawings. Written figured dimensions take preference to scaled dimension and must be verified on site before proceeding with any work. All discrepancies must be referred to the superintendent for a written decision prior to ordering, supply or installation. Urbis must be notified in writing of any discrepancies.

GENERAL NOTES

- THE PLAN MUST BE READ IN CONJUNCTION WITH THE SPECIFICATION WHICH ALSO CONTAINS THE SCHEDULE OF LANDSCAPE WORKS AND PLANT SCHEDULE.
- ALL DRAWINGS ARE TO BE READ IN CONJUNCTION WITH THE ASSOCIATED DRAWINGS BY OTHER CONSULTANTS, e.g. ENGINEERS.
- DO NOT SCALE FROM DRAWING PACKAGE, USE NOMINATED DIMENSIONS AND LEVELS
- REFER TO THE TREE PROTECTION PLAN (AND POTENTIAL TREE ASSESSMENT REPORT) FOR DETAILS OF EXISTING TREES TO BE REMOVED, RETAINED OR TRANSPLANTED
- THE CONTRACTOR MUST REFER ANY DISCREPANCIES TO THE SUPERINTENDENTS REPRESENTATIVE BEFORE PROCEEDING WITH WORKS
- LOCATE AND PROTECT ALL UNDERGROUND SERVICES PRIOR TO EXCAVATION. MAKE GOOD ALL DAMAGE
- THESE DRAWINGS ARE TO BE PRINTED IN COLOUR
- FOR LEGEND REFER TO LEGEND SHEET LD_00-A10 XX-01
- FOR DETAILED DESCRIPTION OF EACH LANDSCAPE AREA REFER TO LANDSCAPE AREAS SCHEDULE
- NUMBERS ON LANDSCAPE AREAS ARE REFERRING TO THE LANDSCAPE SPACE INDEX
- IRRIGATION DESIGN TO BE DEVELOPED AND COORDINATED AT DESIGN DEVELOPMENT

B	100% SSDA ISSUE	MK	PJ	13/05/2021
A	100% SSDA ISSUE	MK	PJ	23/04/2021

REV\ DESCRIPTION DWN\ CHK\ DATE

PROJECT NAME & ADDRESS
**JOHN HUNTER
HEALTH &
INNOVATION
PRECINCT**
Lookout Rd, New Lambton Heights, NSW 2305

PROJECT DIRECTOR:

DRAWING TITLE
COVER SHEET

ISSUE PROJECT NO.
SSDA P0012689
SCALE
N.T.S

DRAWING NO. REVISION
LD_C0-A00 XX-00 B

PLOT DATE: 12/05/2021 7:34:59 AM

PATH: C:\1 Revit Local\20072609_John Hunter Hospital_SSDA_RV720(Local).rvt

GENERAL LEGEND

EXTENT OF WORKS LINE

SITE BOUNDARY

EXPANSION JOINT

FINISHED FLOOR LEVEL

TOP OF WALL LEVEL

TOP OF MOUND LEVEL

STEPS & CONCRETE SEATING

TABLE & BENCH SEATING

GARDEN WALL

KERB PLANTER WALL

CORTEN WALL

PROPOSED SMALL SIZED TREE (6-8m MATURE HEIGHT)

PROPOSED MEDIUM SIZED TREE (8-12m MATURE HEIGHT)

SITEWIDE LEGEND

NATIVE BUSHLAND PLANTING

SMOOTH-BARKED APPLE - RED BLOODWOOD OPEN FOREST SEEDING MIX A - SEEDING (100%)

SMOOTH-BARKED APPLE SYDNEY PEPPERMINT TURPENTINE FOREST SEEDING MIX A1 - SEEDING (75%) - TUBE STOCK (25%) AND SCATTERED TREES AS SHOWN

SMOOTH-BARKED APPLE SYDNEY PEPPERMINT TURPENTINE FOREST SEEDING MIX A2 - SEEDING (65%) - TUBE STOCK (35%) AND SCATTERED TREES AS SHOWN

APZ BUFFER PLANTING

APZ PLANTING SMOOTH-BARKED APPLE - RED BLOODWOOD OPEN FOREST - SEEDING (100%) - GRASSES ONLY

APZ PLANTING SMOOTH-BARKED APPLE - RED BLOODWOOD OPEN FOREST - SEEDING (90%) - SHRUB TUBESTOCK (10%) AND SCATTERED TREES AS SHOWN

BIORETENTION PLANTING TREES, SEEDING AND TUBESTOCK TO BASIN, SCATTERED SHRUBS AND TREES E.G. EUCALYPTUS UMBRA, CAREX APPRESSA, ISOLEPSIS NODOSA

EXTENT OF SELECTIVE TREE CLEARANCE FOR APZ REFER TO BUSHFIRE REPORT

ARRIVAL FORECOURT, ED ARRIVAL, NORTHERN ARRIVAL LEGEND

INSITU CONCRETE PAVEMENT

INSITU CONCRETE PAVEMENT (COLOURED)

FORECOURT PRECAST CONCRETE PAVER 50mm THICK REINFORCED PAVER, 80mm THICK TO RAISED THRESHOLDS/ CROSSING FINISH, 50% SHOT-BLASTED, 50% EXFOLIATED, 4 COLOURS TO PATTERNED LAYOUT, TYPE TBC.

BASALT ROCK 100mm THICK BASALT ROCK WITH 20% (min) CRUSHED GREEN GLASS TO STAINLESS STEEL EDGE, ALLOW LARGE AND MEDIUM AGGREGATE, COLOUR AND TYPE TBC

EXISTING CONCRETE PAVEMENT

GRASSCRETE PAVERS REINFORCED CELLULAR IN-SITU CONCRETE WITH SOIL AND GRASS SEEDING

GARDEN BED (SHADE TOLERANT) SHADE TOLERANT PLANTING IN BASALT ROCK GRAVEL MULCH - REFER TO PLANT SCHEDULE MIN. 350mm MOUNDING TO 600mm SOIL DEPTH, PREMIUM GARDEN SOIL MIX, GEOFABRIC FILTER AND DRAINAGE LAYER ON WATER PROOFING MEMBRANE WHERE APPLICABLE

GARDEN BED MASS PLANTING TO GARDEN BED AREAS - REFER TO PLANT SCHEDULE, MIN 500mm TO 1200mm SOIL DEPTH, PREMIUM GARDEN SOIL MIX, GEOFABRIC FILTER AND DRAINAGE LAYER ON WATER PROOFING MEMBRANE WHERE APPLICABLE

EXISTING PLANTING

ELEVATED GARDEN & COURTYARDS

GARDEN BED MASS PLANTING TO GARDEN BED AREAS - REFER TO PLANT SCHEDULE, MIN 500mm TO 1200mm SOIL DEPTH, PREMIUM GARDEN SOIL MIX, GEOFABRIC FILTER AND DRAINAGE LAYER ON WATER PROOFING MEMBRANE WHERE APPLICABLE.

TURF MIN. 300mm SOIL DEPTH, PREMIUM GARDEN SOIL MIX, GEOFABRIC FILTER AND DRAINAGE LAYER ON WATER PROOFING MEMBRANE.

CONCOURSE PRECAST CONCRETE PAVER 70mm THICK REINFORCED PEDESTAL PAVER, FINISH: SHOT-BLASTED, COLOURS AND TYPE TBC

COURTYARD PRECAST CONCRETE PAVER 70mm THICK REINFORCED PEDESTAL PAVER, FINISH: SHOT-BLASTED, 4 COLOURS TO PATTERNED LAYOUT AND TYPE TBC

TIMBER DECK FSC HARDWOOD CERTIFIED TIMBER

CONCOURSE PRECAST CONCRETE SMALL PAVER 40mm THICK PAVER TO PEDESTAL PANEL SUPPORT TILES, FINISH: SHOT-BLASTED, COLOURS AND TYPE TBC

CONCOURSE BOUND GRAVEL PAVING 25mm THICK RESIN BOUND STONE PAVING TO PEDESTAL PANEL SUPPORT TILES, COLOUR AND TYPE TBC

COURTYARD EXPOSED AGGREGATE PAVING 70mm THICK REINFORCED PEDESTAL PAVER EXPOSED AGGREGATE LOOK, FINISH: SHOT-BLASTED, COLOURS AND TYPE TBC

FLAGSTONE PAVER 50mm BLUESTONE CRAZY PAVE, FINISH: SAW CUT, COLOURS AND TYPE TBC

FLAGSTONE IN GRAVEL 50mm BLUESTONE PAVE, FINISH: SAW CUT, COLOURS AND TYPE TBC, GRAVEL: BASALT ROCK

BASALT ROCK 100mm THICK BASALT ROCK WITH 20% (min) CRUSHED GREEN GLASS TO STAINLESS STEEL EDGE, ALLOW LARGE AND MEDIUM AGGREGATE, COLOUR AND TYPE TBC

ARTIFICIAL TURF PRESTIGE 40mm THICK

POT PLANTERS VARIOUS SIZES

ROOFS & FACADES

SEDUM GREEN ROOF 100mm SOIL DEPTH, GEOFABRIC FILTER AND DRAINAGE CELL TO WATER PROOFING MEMBRANE

PATTERNED GRAVEL ROOF GRAVELS TO BE PROVIDED IN DIFFERENT SIZES AND COLOURS TO PROVIDE DISTINCT PATTERNS

FACADE PLANTER 500mm SOIL DEPTH, GEOFABRIC FILTER AND DRAINAGE CELL TO WATER PROOFING MEMBRANE




Level 8, Angel Place, 123 Pitt Street | Sydney NSW 2000
Australia | +61 2 8233 9900
URBIS Pty Ltd | ABN 50 105 256 228

CLIENT



KEY PLAN

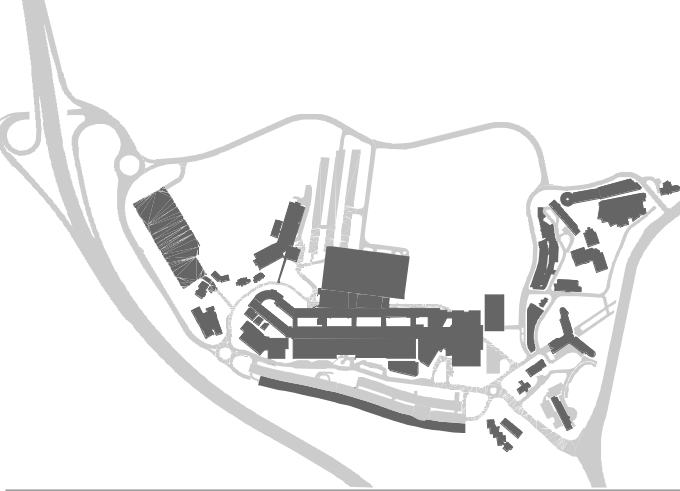

DISCLAIMER
Copyright by Urbis Pty Ltd. This drawing or parts thereof may not be reproduced for any purpose or used for another project without the consent of Urbis other than reproduction for the purposes of actual ordering, supply, installation or construction. This drawing must be read in conjunction with all relevant contracts, schedules, specifications, drawings and any other issued written instructions. Do not scale from drawings. Written figured dimensions take preference to scaled dimension and must be verified on site before proceeding with any work. All discrepancies must be referred to the superintendent for a written decision prior to ordering, supply or installation. Urbis must be notified in writing of any discrepancies.

GENERAL NOTES

- THE PLAN MUST BE READ IN CONJUNCTION WITH THE SPECIFICATION WHICH ALSO CONTAINS THE SCHEDULE OF LANDSCAPE WORKS AND PLANT SCHEDULE.
- ALL DRAWINGS ARE TO BE READ IN CONJUNCTION WITH THE ASSOCIATED DRAWINGS BY OTHER CONSULTANTS, e.g. ENGINEERS.
- DO NOT SCALE FROM DRAWING PACKAGE, USE NOMINATED DIMENSIONS AND LEVELS
- REFER TO THE TREE PROTECTION PLAN (AND POTENTIAL TREE ASSESSMENT REPORT) FOR DETAILS OF EXISTING TREES TO BE REMOVED, RETAINED OR TRANSPLANTED
- THE CONTRACTOR MUST REFER ANY DISCREPANCIES TO THE SUPERINTENDENTS REPRESENTATIVE BEFORE PROCEEDING WITH WORKS
- LOCATE AND PROTECT ALL UNDERGROUND SERVICES PRIOR TO EXCAVATION. MAKE GOOD ALL DAMAGE
- THESE DRAWINGS ARE TO BE PRINTED IN COLOUR
- FOR LEGEND REFER TO LEGEND SHEET LD_00-A10 XX-01
- FOR DETAILED DESCRIPTION OF EACH LANDSCAPE AREA REFER TO LANDSCAPE AREAS SCHEDULE
- NUMBERS ON LANDSCAPE AREAS ARE REFERRING TO THE LANDSCAPE SPACE INDEX
- IRRIGATION DESIGN TO BE DEVELOPED AND COORDINATED AT DESIGN DEVELOPMENT

B	100% SSDA ISSUE	MK	PJ	13/05/2021
A	100% SSDA ISSUE	MK	PJ	23/04/2021
REV	DESCRIPTION	DWN	CHK	DATE

PROJECT NAME & ADDRESS
JOHN HUNTER HEALTH & INNOVATION PRECINCT
Lookout Rd, New Lambton Heights, NSW 2305

PROJECT DIRECTOR:

DRAWING TITLE
LEGEND SHEET

ISSUE PROJECT NO.
SSDA P0012689
SCALE
N.T.S

DRAWING NO. REVISION
LD_C0-A10 XX-01 B

PLANTING SCHEDULE SITEWIDE & ASB ARRIVAL

SITE WIDE NORTHERN ARRIVAL LANDSCAPE						
SEEDING MIX A1 & A2 - SMOOTH-BARKED APPLE - SYDNEY PEPPERMINT - TURPENTINE FOREST						
AREA- 8256.30 m2						
PLANT CODE	BOTANICAL NAME	COMMON NAME	MATURE HEIGHT AND SPREAD	CONTAINER SIZE	PLANTS PER M2	
TREES						
ANG cos	Angophora costata	Smooth-Barked Apple	25m x 15m	100L, 200L, 400L	as shown	
EUC gla	Eucalyptus globulus	White Stringybark	20m x 10m	100L, 200L	as shown	
EUC pip	Eucalyptus pipera	Sydney Peppermint	20m x 10m	100L, 200L, 400L	as shown	
SYN glo	Syncaesia glomulifera	Turpentine	10m x 8m	100L, 200L	as shown	
ALL ter	Allocasuarina teretifolia	Forest Oak	10m x 7m	100L, 200L	as shown	
SHRUBS						
ACA myr	Acacia myrtifolia	Red-Stemmed Wattle	3m x 3.0m	300mm	0.5	
BAN spi	Banksia spinulosa	Hairpin Banksia	3m x 2.0m	300mm	0.5	
BRE ubi	Beyrinia oblongifolia	Coffee Bush	3m x 3m	300mm	1	
DAV uli	Daviesia ulicifolia	Gorse Bitter Pea	2m x 1m	300mm	0.3	
DOO hi	Dodonaea integrata	Large-Leaf Hop Bush	3m x 2m	300mm	1	
LEP pol	Leptospermum polygalifolium	Lemon Scented Tea Tree	3m x 2m	300mm	1	
LEU ten	Leucopogon tenaxoides	Lance-leaved bearded heath	2m x 1m	300mm	0.5	
ZIE uni	Zieria unguis subsp. unguis	Sandfly Zieria	2m x 1m	300mm	0.1	
GRASSES & GROUNDCOVERS						
DIA cos	Dianella caerulea var. produrata	Blue Flax Lily	1m x 2m	100mm	4	
DIC rap	Dichondra repens	Kidney Weed	0.10m x 1.8m	150mm	4	
ENT ur	Entolasia stricta	Wiry Panic	0.50m x 0.30m	150mm	2	
IMP cyl	Imperata cylindrica	Blady grass	1.0m x 0.3m	150mm	1	
MIC al	Microlaena stipoides	Weeping Rice Grass	0.30m x 0.50m	150mm	2	
PHA pur	Phala paupurascens	Whiteland	0.20m x 2m	150mm	1	
VIO hed	Viola hederacea	Ivy-leaved Violet	0.10m x 1m	150mm	4	
XAN lat	Xanthorrhoea latifolia	Grass Tree	2m x 1.5m	150mm	2	

SITE WIDE WESTERN ROAD LANDSCAPE						
SEEDING MIX A2 - SEEDING (65%), TUBESTOCK (35%) & TREES SMOOTH-BARKED APPLE - SYDNEY PEPPERMINT - TURPENTINE FOREST						
AREA- 6521.04 m2						
PLANT CODE	BOTANICAL NAME	COMMON NAME	MATURE HEIGHT AND SPREAD	CONTAINER SIZE	PLANTS PER M2	
TREES						
ANG cos	Angophora costata	Smooth-Barked Apple	25m x 10m	100L, 200L	as shown	
EUC gla	Eucalyptus globulus	White Stringybark	20m x 10m	100L	as shown	
EUC pip	Eucalyptus pipera	Sydney Peppermint	20m x 10m	100L, 200L	as shown	
SYN glo	Syncaesia glomulifera	Turpentine	10m x 8m	100L	as shown	
ALL ter	Allocasuarina teretifolia	Forest Oak	10m x 7m	100L	as shown	
SHRUBS						
ACA myr	Acacia myrtifolia	Red-Stemmed Wattle	3m x 3.0m	300mm	0.5	
BAN spi	Banksia spinulosa	Hairpin Banksia	3m x 2.0m	300mm	0.5	
BRE ubi	Beyrinia oblongifolia	Coffee Bush	3m x 3m	300mm	1	
DAV uli	Daviesia ulicifolia	Gorse Bitter Pea	2m x 1m	300mm	0.3	
DOO hi	Dodonaea integrata	Large-Leaf Hop Bush	3m x 2m	300mm	1	
LEP pol	Leptospermum polygalifolium	Lemon Scented Tea Tree	3m x 2m	300mm	1	
LEU ten	Leucopogon tenaxoides	Lance-leaved bearded heath	2m x 1m	300mm	0.5	
ZIE uni	Zieria unguis subsp. unguis	Sandfly Zieria	2m x 1m	300mm	0.1	
GRASSES & GROUNDCOVERS						
DIA cos	Dianella caerulea var. produrata	Blue Flax Lily	1m x 2m	100mm	4	
DIC rap	Dichondra repens	Kidney Weed	0.10m x 1.8m	150mm	4	
ENT ur	Entolasia stricta	Wiry Panic	0.50m x 0.30m	150mm	2	
IMP cyl	Imperata cylindrica	Blady grass	1.0m x 0.3m	150mm	1	
MIC al	Microlaena stipoides	Weeping Rice Grass	0.30m x 0.50m	150mm	2	
PHA pur	Phala paupurascens	Whiteland	0.20m x 2m	150mm	1	
VIO hed	Viola hederacea	Ivy-leaved Violet	0.10m x 1m	150mm	4	
XAN lat	Xanthorrhoea latifolia	Grass Tree	2m x 1.5m	150mm	2	

SITE WIDE NORTHERN ROAD AND FIRE ACCESS LANDSCAPE						
SEEDING MIX A - SEEDING 100% - SMOOTH-BARKED APPLE - RED BLOODWOOD OPEN FOREST						
AREA- 26712.20 m2						
PLANT CODE	BOTANICAL NAME	COMMON NAME	MATURE HEIGHT AND SPREAD	CONTAINER SIZE	PLANTS PER M2	
SHRUBS						
ACA ter	Acacia terminalis	Sunshine Wattle	3m x 2m	Seeding	0.01 grams	
ACA uli	Acacia ulicifolia	Prickly Moses	2m x 2m	Seeding	0.01 grams	
BAN spi	Banksia spinulosa	Hairpin Banksia	3m x 2.5m	Seeding	0.01 grams	
LEP hi	Leptospermum trinervium	Slender Tea-tree	6m x 1.6m	Seeding	0.01 grams	
LOM ul	Lomelia ulicifolia	Wild Parsley	6m x 3m	Seeding	0.01 grams	
PER lev	Persea leveis	Broad-Leaved Geebung	3m x 1m	Seeding	0.01 grams	
PER lin	Persea linearis	Narrow-Leaved Geebung	3m x 0.7m	Seeding	0.01 grams	
PUL euc	Pullenaea eucifolia	Large-flower Bush-pea	1.5m x 2m	Seeding	0.01 grams	
PTT und	Ptilotopus undulatum	Sweet Pittosporum	12m x 7m	Seeding	0.01 grams	
XAN lat	Xanthorrhoea latifolia	Grass Tree	2m x 1.5m	Seeding	0.01 grams	
TET jun	Tetradlea juncea	Black-eyed Susan	0.5m x 0.3m	Seeding	0.01 grams	
GRASSES & GROUNDCOVERS						
ENT ur	Entolasia stricta	Wiry Panic	0.50m x 0.30m	Seeding	0.01 grams	
IMP cyl	Imperata cylindrica	Blady grass	1.0m x 0.3m	Seeding	0.01 grams	
THE aus	Themeda australis	Kangaroo Grass	1m x 0.5m	Seeding	0.01 grams	
PTE uni	Pteridium esculentum	Bracken Fern	2m x 1.2m	Seeding	0.01 grams	
LOM ul	Lomelia ulicifolia	Twisted Matrush	0.50m x 0.50m	Seeding	0.01 grams	
NOTE: Trees as shown - Large tree pot sizes to be dispoused evenly throughout the area.						

SITE WIDE BIO RETENTION LANDSCAPE						
TREES, SEEDING (75%) & TUBESTOCK (25%)						
AREA- 3067.63 m2						
PLANT CODE	BOTANICAL NAME	COMMON NAME	MATURE HEIGHT AND SPREAD	CONTAINER SIZE	PLANTS PER M2	
TREES						
ANG cos	Angophora costata	Smooth-Barked Apple	25m x 15m	400L	as shown	
CDR gum	Corymbia gumifera	Red Bloodwood	20m x 10m	400L	as shown	
EUC gla	Eucalyptus globulus	Brown Stringybark	20m x 10m	100L	as shown	
EUC pip	Eucalyptus pipera	White Stringybark	20m x 15m	400L	as shown	
EUC jun	Eucalyptus punctata	Grey Gum	25m x 10m	100L	as shown	
SYN glo	Syncaesia glomulifera	Turpentine	10m x 8m	100L	as shown	
ALL ter	Allocasuarina teretifolia	Forest Oak	10m x 7m	400L	as shown	
GRASSES & GROUNDCOVERS						
BAL jun	Baumea juncea	Bark Twig Rush	1.0m x 1.0m	Seeding and 50mm Tubestock	0.01 grams / 6	
CAR app	Carex appressa	Burdock	1.0m x 1.0m	Seeding and 50mm Tubestock	0.01 grams / 6	
GAH sse	Galinia sibiriana	Red-fruit side-sedge	2.0m x 2.0m	Seeding and 50mm Tubestock	0.01 grams / 0.5	
IMP cyl	Imperata cylindrica	Blady Grass	1.0m x 0.3m	Seeding and 50mm Tubestock	0.01 grams / 4	
NOB nod	Nodopis nodosa	Kooby Club Rush	1.0m x 2m	Seeding and 50mm Tubestock	0.01 grams / 0.5	
AUN var	Juncus ustulatus	Tassel Sedge	1.0m x 1.0m	Seeding and 50mm Tubestock	0.01 grams / 1	
LOM lon	Lomandra longifolia	Spiry-head-mat-rush	1.3m x 1.0m	Seeding and 50mm Tubestock	0.01 grams / 1	

APZ PLANTING						
TREES, SEEDING & TUBESTOCK - SMOOTH-BARKED APPLE - RED BLOODWOOD OPEN FOREST						
AREA- 27240.5 m2						
PLANT CODE	BOTANICAL NAME	COMMON NAME	MATURE HEIGHT AND SPREAD	CONTAINER SIZE	PLANTS PER M2	
TREES						
ANG cos	Angophora costata	Smooth-Barked Apple	25m x 15m	100L	as shown	
CDR gum	Corymbia gumifera	Red Bloodwood	20m x 10m	100L	as shown	
EUC gla	Eucalyptus globulus	Brown Stringybark	20m x 10m	100L	as shown	
EUC pip	Eucalyptus pipera	White Stringybark	20m x 15m	100L	as shown	
EUC jun	Eucalyptus punctata	Grey Ironbark	25m x 10m	100L	as shown	
SYN glo	Syncaesia glomulifera	Turpentine	10m x 8m	100L	as shown	
ALL ter	Allocasuarina teretifolia	Forest Oak	10m x 7m	100L	as shown	
SHRUBS						
ACA ter	Acacia terminalis	Sunshine Wattle	3m x 2m	Seeding and 50mm Tubestock	0.01 grams / 0.5	
ACA uli	Acacia ulicifolia	Prickly Moses	2m x 2m	Seeding and 50mm Tubestock	0.01 grams / 0.5	
BAN spi	Banksia spinulosa	Hairpin Banksia	3m x 2.5m	Seeding and 50mm Tubestock	0.01 grams / 0.5	
LEP hi	Leptospermum trinervium	Slender Tea-tree	6m x 1.6m	Seeding and 50mm Tubestock	0.01 grams / 1	
LOM ul	Lomelia ulicifolia	Wild Parsley	6m x 3m	Seeding and 50mm Tubestock	0.01 grams / 0.3	
PER lev	Persea leveis	Broad-Leaved Geebung	3m x 1m	Seeding and 50mm Tubestock	0.01 grams / 1	
PER lin	Persea linearis	Narrow-Leaved Geebung	3m x 0.7m	Seeding and 50mm Tubestock	0.01 grams / 1	
PUL euc	Pullenaea eucifolia	Large-flower Bush-pea	1.5m x 2m	Seeding and 50mm Tubestock	0.01 grams / 0.5	
PTT und	Ptilotopus undulatum	Sweet Pittosporum	12m x 7m	Seeding and 50mm Tubestock	0.01 grams / 0.1	
XAN lat	Xanthorrhoea latifolia	Grass Tree	2m x 1.5m	Seeding and 50mm Tubestock	0.01 grams / 0.8	
TET jun	Tetradlea juncea	Black-eyed Susan	0.5m x 0.3m	Seeding and 50mm Tubestock	0.01 grams / 4	
GRASSES & GROUNDCOVERS						
ACA ter	Acacia terminalis	Sunshine Wattle	3m x 2m	Seeding and 50mm Tubestock	0.01 grams / 0.5	
ACA uli	Acacia ulicifolia	Prickly Moses	2m x 2m	Seeding and 50mm Tubestock	0.01 grams / 0.5	
BAN spi	Banksia spinulosa	Hairpin Banksia	3m x 2.5m	Seeding and 50mm Tubestock	0.01 grams / 0.5	
LEP hi	Leptospermum trinervium	Slender Tea-tree	6m x 1.6m	Seeding and 50mm Tubestock	0.01 grams / 1	
LOM ul	Lomelia ulicifolia	Wild Parsley	6m x 3m	Seeding and 50mm Tubestock	0.01 grams / 0.3	
PER lev	Persea leveis	Broad-Leaved Geebung	3m x 1m	Seeding and 50mm Tubestock	0.01 grams / 1	
PER lin	Persea linearis	Narrow-Leaved Geebung	3m x 0.7m	Seeding and 50mm Tubestock	0.01 grams / 1	
PUL euc	Pullenaea eucifolia	Large-flower Bush-pea	1.5m x 2m	Seeding and 50mm Tubestock	0.01 grams / 0.5	
PTT und	Ptilotopus undulatum	Sweet Pittosporum	12m x 7m	Seeding and 50mm Tubestock	0.01 grams / 0.1	
XAN lat	Xanthorrhoea latifolia	Grass Tree	2m x 1.5m	Seeding and 50mm Tubestock	0.01 grams / 0.8	
TET jun	Tetradlea juncea	Black-eyed Susan	0.5m x 0.3m	Seeding and 50mm Tubestock	0.01 grams / 4	
The schedule should be read in conjunction with landscape drawings. The drawings take precedence over the schedule. The quantities set out in this schedule are provided as a guide only, it is the Contractors responsibility to confirm all quantities						

ASB ED ARRIVAL						
AREA- 4,497m2						
PLANT CODE	BOTANICAL NAME	COMMON NAME	MATURE HEIGHT AND SPREAD	CONTAINER SIZE	PLANTS PER M2	
SHRUBS						
ACA myr	Acacia myrtifolia	Red-Stemmed Wattle	3m x 3.0m	300mm	0.15	
ACA ter	Acacia terminalis	Sunshine Wattle	3m x 2m	300mm	0.25	
ACA uli	Acacia ulicifolia	Prickly Moses	2m x 2m	300mm	0.25	
ACM uni	Acrotena unguis	Common Lily Pilly	5m x 2m	300mm	0.15	
BAN spi	Banksia spinulosa	Hairpin Banksia	3m x 2.5m	300mm	0.2	
CAL hi	Callistemon 'Little Jewel'	Bottlebrush	0.80m x 1.5m	300mm	0.75	
DAV uli	Daviesia ulicifolia	Gorse Bitter Pea	2m x 1m	300mm	1	
DOE sec	Doryanthes aequalis	Cornet Lily	4m x 2m	300mm	0.35	
EPH pul	Epacris pulchella	NSW Coral Heath	1.5m x 1m	300mm	1	
ORE OC	Oreocallis 'Gold Cluster'	Gold Cluster Oreocallis	0.3m x 1m	300mm	1	
LEP hi	Leptospermum trinervium	Slender Tea-tree	6m x 1.6m	300mm	0.5	
LEU ten	Leucopogon tenaxoides	Lance-leaved bearded heath	2m x 1m	300mm	1	
LIC ram	Licuala ramsayi	Fair Palm	15m High	300mm	1	
LOM ul	Lomelia ulicifolia	Wild Parsley	6m x 3m	300mm	0.15	
MAC com	Macrozamia communis	Burraewang	2.0m x 2.0m	300mm	0.25	
PER lin	Persea linearis	Narrow-Leaved Geebung	3m x 0.7m	300mm	1.25	
PUL euc	Pullenaea eucifolia	Hairy Pea Bush	2m x 2m	300mm	0.15	
TEL spe	Telopea speciosissima	Waratah	3m x 3m	300mm	0.2	
XAN lat	Xanthorrhoea latifolia	Grass Tree	2m x 1.5m	150mm	0.15	
SHADE TOLERANT SHRUBS, GRASSES & GROUNDCOVERS						
AOE lev	Agavea commutatum Red Carpet	Chinese evergreen	0.6m x 0.80m	150mm	5	
CHL com	Chionochloa comosum	Spider Plant	0.6m x 0.25	150mm	5	
DRA in	Drosera inflexata	Mother in Law's Tongue	1.2m x 0.5m	300mm	4	
MON del	Monarda deltoidea	Spit-Leaf Phloxendron	2.5m x 2m	300mm	4	
MON ada	Monarda adamsii	Swiss Cheese Plant	8m x 1m	300mm	4	
EPH sur	Epigeanum sursum	Devil's Ivy	1m x 1m	300mm	4	
ANT and	Anthurium andraeanum	Flamingo Lily	0.6m x 0.4m	150mm	5	
ASP ala	Aspidistra alata	Cast Iron Plant	1.2m x 1.5m	300mm	4	
CAL seb	Catappa sebina	Zebra Plant	1m x 2m	300mm	4	
CAL mah	Catappa malayana	Peacock Plant	0.8m x 0.5m	300mm	4	
SPH uli	Sparganium ulicifolia	Peace Lily	1.0m x 1.0m	300mm	4	
PIL pep	Pilea peperomioides	Chinese Money Plant	0.3m x 0.3m	300mm	4	
PHI san	Philodendron scandu	Philodendron	1m x 1m	300mm	4	
KAC mus	Kalanchoe musciformis	Crocodile Fern	1.5m x 1.5m	300mm	4	
ZAM zom	Zamioculcas zamiifolia	ZZ Plant	0.8m x 0.8m	300mm	4	
GRASSES & GROUNDCOVERS						
AUS M	Austrosternon fulva	Woolly Grass	0.10m x 0.8m	150mm	5	
COP rps	Carex appressa	Flat Sedge	0.5m x 0.80m	150mm	5	
DBL msc	Dichotria micrantha	Blue Jointed Pume Grass	1m x 1m	150mm	5	
LRI msc	Liriope muscar	Lily Turf	0.5m x 0.5m	150mm	5	
LOR nja	Lomandra longiloba 'Najala'	Spear-Pointed Mat-Rush	0.8m x 0.7m	150mm	5	
MYO par	Myoporum parvifolium 'Yarema'	Yarema Creeping Bookbait	0.10m x 1m	300mm	4	
POA lab	Poa labillardieri	Common Tussock Grass	1m x 0.5m	150mm	5	
THE aca	Theandrea australis	Kangaroo Grass	1m x 0.5m	150mm	5	
VOJ vad	Vojtechia hederacea	Joy-Jeweled Vase	0.10m x 1m	150mm	5	
FERNS						
ASP aca	Asplenium australasicum	Brown Nod Fern	1.2m x 1.2m	200mm	1	
BLU car	Blachium cartwrightii	Soft Water Fern	1.5m x 1.5m	300mm	0.8	
ODO asp	Ondia aspera	Prickly Rasp Fern	0.4m x 0.6m	150mm	2	
CAL dub	Calochortus dubius	Faint Bracken	2m x 1.5m	300mm	0.8	

PLANTING ELEVATED GARDEN, SCHEDULE ARRIVAL, JHH INTERNAL STREET & ASB CAR PARK FACADE

ELEVATED GARDEN					
AREA- 2,970m2					
PLANT CODE	BOTANICAL NAME	COMMON NAME	MATURE HEIGHT AND SPREAD	CONTAINER SIZE	PLANTS PER M2
TREES					
ALL ter	Albizia leonensis	Forest Oak	10m x 7m	100L	as shown
TRB ter	Tristania laurina	Water Gum	15m x 6m	100L	as shown
WAT fo	Waterhousea floribunda	Weeping Lily Pilly	10m x 8m	100L	as shown
ELA ter	Elaeocarpus reticulatus	Blueberry Ash	12m x 5m	100L	as shown
ELC ml	Eucalyptus meluocarpa	Grey Box	15m x 5m	100L	as shown
CUP ana	Cupaniopsis anacardioides	Tuckeroo	12m x 5m	100L	as shown
BAN vt	Banksia integrifolia	Coastal Banksia	15m x 6m	200L	as shown
GRA vt	Brachychiton Jarkiana Red	Jarkiana Red	8m x 7m	100L	as shown
OLE eur	Olea europaea	Common Olive	7m x 4m	200L	as shown
PYR sou	Pyrus 'Southwest Dancer'	Southwest Dancer	7m x 4.5m	200L	as shown
LAG nat	Lagerströmia indica x L. Martii 'Natchez'	Natchez	8m x 6m	100L	as shown
SHRUBS					
ACA myr	Acacia myrtifolia	Red-Stemmed Wattle	3m x 3.0m	300mm	0.15
ACA ter	Acacia terminalis	Sunshine Wattle	3m x 2m	300mm	0.25
ACA ul	Acacia ulicifolia	Prickly Moses	2m x 2m	300mm	0.25
ACM ara	Acmena smithii	Common Lily Pilly	5m x 3m	300mm	0.15
BAN vt	Banksia spinulosa	Harpin Banksia	3m x 2.5m	300mm	0.3
CAL il	Callistemon 'Little John'	Butcherbush	0.50m x 1.5m	300mm	0.75
DAV ul	Davasia ulicifolia	Gorse Bitter Pea	2m x 1m	300mm	1
DOR exc	Dorythraea excelsa	Gymea Lily	4m x 2m	300mm	0.25
EPA pul	Epacris pulchella	NSW Coral Heath	1.5m x 1m	300mm	1
GRE GC	Grevillea 'Gold Cluster'	Gold Cluster Grevillea	0.3m x 1m	300mm	1
LEP tr	Leptospermum trinervium	Slender Tea-tree	6m x 1.4m	300mm	0.5
LEU nat	Leucopogon lanceolatus	Lance-leaved heath	2m x 1m	300mm	1
LUC nam	Luculia namagii	Fair Palm	15m High	300mm	1
LOR ul	Lomatia ularifolia	Wild Panicle	6m x 3m	300mm	0.15
MAC com	Macozamia communis	Burnswag	2.0m x 2.0m	300mm	0.25
PER in	Persea linearis	Narrow-Leaved Guebung	3m x 0.7m	300mm	1.25
PUL ul	Pultenaea villosa	Hairy Pea Bush	2m x 3m	300mm	0.15
TAL spe	Talopea speciosa	Wandari	3m x 3m	300mm	0.2
XAN lat	Xanthorrhoea latifolia	Grass Tree	2m x 1.5m	150mm	0.15
GRASSES & GROUNCOVERS					
ANI vel	Angiostemum hybrid 'Velvet'	Angiostemum Amber Velvet	0.50m x 0.40m	150mm	5
ANI gel	Angiostemum hybrid 'Everlasting Gold'	Angiostemum Everlasting Gold	0.50m x 0.40m	150mm	5
AUS ful	Austrodorhiza fulva	Wallaby Grass	0.10m x 0.5m	150mm	3
BAU rut	Baumea articulata	Jointed Twig Rush	2.5m x 2m	150mm	0.5
CAR app	Carex appressa	Tall Sedge	1m x 0.80m	150mm	3
CHB app	Chrysocarpum apiculatum	Yellow Buttons	0.3m x 0.5m	150mm	5
CHL ml	Cynthopygon reticulata	Barbed Wire Grass	150mm	3	
DAV ul	Davasia ulicifolia var. 'insulata'	Blue Flax Lily	1m x 2m	150mm	0.5
DOR exc	Dorythraea excelsa	Short Haired Plume Grass	150mm	5	
EDC cas	Echtopogon canaliculatus	Hedgehog Grass	150mm	5	
ENT ar	Entolasia atrata	Wry Pinks	0.50m x 0.30m	150mm	5
HIB sca	Hibbertia scandens	Snake Vine	3m x 5m	150mm	0.5
IMP cy	Impatiens cylindrica	Sticky grass	1.0m x 0.3m	150mm	5
ISO rosl	Isoplepis rostrata	Kodjody Club Rush	1m x 1m	150mm	3
JUN ul	Juncus ulmifolius	Tussock Rush	1.2m x 0.5m	150mm	5
LIR mus	Liriope muscari	Lily Tuft	0.5m x 0.5m	150mm	5
LOR lon	Lomatia longifolia	Spiry-Headed Mat-Rush	1.2m x 1.0m	150mm	2
MFO gar	Myoporum paniculatum 'Yarensal'	Yarensa Creeping Boobialla	0.10m x 1m	150mm	2
POA lat	Poa labillardieri	Common Tussock Grass	1m x 0.5m	150mm	5
PPA pur	Phala purpurascens	Whitewort	0.20m x 2m	150mm	1
THE aus	Themeda australis	Kangaroo Grass	1m x 0.5m	150mm	5
VID hea	Viola hederacea	Native Violet	0.15m x 1m	150mm	5
ZIE ara	Zieria verticillata subsp. amthii	Sandfly Zieria	2m x 1m	300mm	2
SENSORY PLANTING					
ALL ach	Allium schoenoprasum	Chives	0.6m x 0.1m	150mm	10
ALO ver	Aloe vera barbadensis	Aloe	0.6m x 0.90m	150mm	3
BRA pac	Brachyscome 'Pacific Reef'	Native Daisy	0.2m x 0.3m	150mm	5
BRI max	Brixa maxima	Greater Quaking Grass	0.6m x 0.3m	150mm	5
CAL off	Calandula officinalis	Pot Marigold	0.6m x 0.6m	150mm	5
COS ar	Cosmos atrosanguineus	Chocolate cosmos	0.75m x 0.45m	150mm	5
HEL ita	Helichrysum italicum	Curry Plant	0.90m x 0.50m	150mm	5
HOU cor	Houttuynia cordata 'Chameleon'	Chameleon Plant	0.30m x 0.30m	150mm	5
LAV ap	Lavandula angustifolia	Lavender	0.90m x 0.90m	150mm	3
MIS ol	Miscanthus oligostachyus 'Nanus Variegatus'	Miscanthus	150mm	5	
PEL on	Penstemon crispum	Lemon Scented Geranium	150mm	5	
PER ar	Persea linearis	Franklin Grass	150mm	5	
PHL fu	Phoritis frutescens	Jerusalem Sage	150mm	5	
ROS off	Rosmarinus officinalis	Rosemary	150mm	5	
SAL arg	Salvia argentea	Silver Sage	150mm	5	
STA hyp	Stachys byzantina	Lamb's Ears	150mm	5	
FERNS					
ASP aus	Asplenium australasicum	Bird's Nest Fern	1.2m x 1.2m	300mm	1
BLC car	Becheum cartilagineum	Soft Water Fern	1.5m x 1.5m	300mm	0.75
DOO asp	Doodia aspera	Prickly Rasp Fern	0.4m x 0.6m	150mm	5
CAL dub	Calochortus dubius	False Bracken	2m x 1.5m	300mm	0.75

SOUTHERN ARRIVAL FORECOURT					
AREA- 6,335 m2					
PLANT CODE	BOTANICAL NAME	COMMON NAME	MATURE HEIGHT AND SPREAD	CONTAINER SIZE	PLANTS PER M2
TREES					
ANG cos	Angophora costata	Smooth-Barked Apple	25m x 15m	400L	as shown
ANG fo	Angophora floribunda	Rough-Barked Apple	25m x 20m	200L	as shown
BAG ul	Banksia integrifolia	Lemon Scented Myrtle	20m x 5m	400L	as shown
ELC glo	Eucalyptus globulus	White Stringybark	20m x 12m	200L	as shown
ELC sap	Eucalyptus sapida	Sydney Paperbark	20m x 15m	200L	as shown
ELC mel	Eucalyptus melanocoma	Grey Box	15m x 5m	400L	as shown
STY glo	Syncepsis glaucescens	Turpentine	10m x 8m	200L	as shown
ALL ter	Albizia leonensis	Flower Oak	10m x 7m	200L	as shown
TRB ter	Tristania laurina	Water Gum	15m x 6m	200L	as shown
CUP ana	Cupaniopsis anacardioides	Tuckeroo	12m x 5m	200L	as shown
BAN vt	Banksia integrifolia	Coastal Banksia	15m x 6m	200L	as shown
GRA vt	Brachychiton Jarkiana Red	Jarkiana Red	8m x 7m	100L	as shown
OLE eur	Olea europaea	Common Olive	7m x 4m	200L	as shown
PYR sou	Pyrus 'Southwest Dancer'	Southwest Dancer	7m x 4.5m	200L	as shown
LAG nat	Lagerströmia indica x L. Martii 'Natchez'	Natchez	8m x 6m	100L	as shown
SHRUBS					
ACA myr	Acacia myrtifolia	Red-Stemmed Wattle	3m x 3.0m	300mm	0.3
ACA ter	Acacia terminalis	Sunshine Wattle	3m x 2m	300mm	0.5
ACM ara	Acmena smithii	Common Lily Pilly	5m x 3m	300mm	0.3
BAN vt	Banksia spinulosa	Harpin Banksia	3m x 2.5m	300mm	0.3
CAL il	Callistemon 'Little John'	Butcherbush	0.50m x 1.5m	300mm	1
DAV ul	Davasia ulicifolia	Gorse Bitter Pea	2m x 1m	300mm	1
DOR exc	Dorythraea excelsa	Gymea Lily	4m x 2m	300mm	0.5
EPA pul	Epacris pulchella	NSW Coral Heath	1.5m x 1m	300mm	1
GRE GC	Grevillea 'Gold Cluster'	Gold Cluster Grevillea	0.3m x 1m	300mm	1
LEP tr	Leptospermum trinervium	Slender Tea-Tree	6m x 1.4m	300mm	1
LUC nam	Luculia namagii	Fair Palm	15m High	300mm	1
LOR ul	Lomatia ularifolia	Wild Panicle	6m x 3m	300mm	0.2
MAC com	Macozamia communis	Burnswag	2.0m x 2.0m	300mm	0.5
PER in	Persea linearis	Narrow-Leaved Guebung	3m x 0.7m	300mm	1
TAL spe	Talopea speciosa/cornuta	Wandari	3m x 3m	300mm	0.3
XAN lat	Xanthorrhoea latifolia	Grass Tree	2m x 1.5m	150mm	0.8
GRASSES & GROUNCOVERS					
ANI vel	Angiostemum hybrid	Angiostemum Amber Velvet	0.50m x 0.40m	150mm	3
ANI gel	Angiostemum hybrid	Angiostemum Everlasting	0.50m x 0.40m	150mm	3
AUS ful	Austrodorhiza fulva	Wallaby Grass	0.10m x 0.5m	150mm	1
BAU rut	Baumea articulata	Jointed Twig Rush	2.5m x 2m	150mm	0.5
CAR app	Carex appressa	Tall Sedge	1m x 0.80m	150mm	1
CHB app	Chrysocarpum apiculatum	Yellow Buttons	0.3m x 0.5m	150mm	2
CHL ml	Cynthopygon reticulata	Red-Flr Wren	150mm	0.5	
DAV ul	Davasia ulicifolia var. 'insulata'	Blue Flax Lily	1m x 2m	150mm	0.5
ENT ar	Entolasia atrata	Wry Pinks	0.50m x 0.30m	150mm	0.2
HIB sca	Hibbertia scandens	Snake Vine	3m x 5m	150mm	0.2
IMP cy	Impatiens cylindrica	Sticky grass	1.0m x 0.3m	150mm	0.4
ISO rosl	Isoplepis rostrata	Kodjody Club Rush	1m x 1m	150mm	1
JUN ul	Juncus ulmifolius	Tussock Rush	1.2m x 0.5m	150mm	2
LEP lat	Leptopogon latens	Variable Sword Sedge	1.0m x 1.0m	150mm	1
LIR mus	Liriope muscari	Lily Tuft	0.5m x 0.5m	150mm	2
LOR lon	Lomatia longifolia	Spiry-Headed Mat-Rush	1.2m x 1.0m	150mm	1
MFO gar	Myoporum paniculatum 'Yarensal'	Yarensa Creeping Boobialla	0.10m x 1m	150mm	1
POA lat	Poa labillardieri	Common Tussock Grass	1m x 0.5m	150mm	2
PPA pur	Phala purpurascens	Whitewort	0.20m x 2m	150mm	0.5
THE aus	Themeda australis	Kangaroo Grass	1m x 0.5m	150mm	2
VID hea	Viola hederacea	ivy-leaved Violet	0.15m x 1m	150mm	1
ZIE ara	Zieria verticillata subsp. amthii	Sandfly Zieria	2m x 1m	300mm	1
SENSORY PLANTING					
ALL ach	Allium schoenoprasum	Chives	0.6m x 0.1m	150mm	10
ALO ver	Aloe vera barbadensis	Aloe	0.6m x 0.90m	150mm	3
BRA pac	Brachyscome 'Pacific Reef'	Native Daisy	0.2m x 0.3m	150mm	5
BRI max	Brixa maxima	Greater Quaking Grass	0.6m x 0.3m	150mm	5
CAL off	Calandula officinalis	Pot Marigold	0.6m x 0.6m	150mm	5
COS ar	Cosmos atrosanguineus	Chocolate cosmos	0.75m x 0.45m	150mm	5
HEL ita	Helichrysum italicum	Curry Plant	0.90m x 0.50m	150mm	5
HOU cor	Houttuynia cordata 'Chameleon'	Chameleon Plant	0.30m x 0.30m	150mm	5
LAV ap	Lavandula angustifolia	Lavender	0.90m x 0.90m	150mm	5
MIS ol	Miscanthus oligostachyus 'Nanus Variegatus'	Miscanthus	150mm	5	
PEL on	Penstemon crispum	Lemon Scented Geranium	150mm	5	
PER ar	Persea linearis	Franklin Grass	150mm	5	
PHL fu	Phoritis frutescens	Jerusalem Sage	150mm	5	
ROS off	Rosmarinus officinalis	Rosemary	150mm	5	
SAL arg	Salvia argentea	Silver Sage	150mm	5	
STA hyp	Stachys byzantina	Lamb's Ears	150mm	5	
FERNS					
ASP aus	Asplenium australasicum	Bird's Nest Fern	1.2m x 1.2m	300mm	1
BLC car	Becheum cartilagineum	Soft Water Fern	1.5m x 1.5m	300mm	0.75
DOO asp	Doodia aspera	Prickly Rasp Fern	0.4m x 0.6m	150mm	5
CAL dub	Calochortus dubus	False Bracken	2m x 1.5m	300mm	0.75


JHH INTERNAL STREET					
AREA- 1,316m2					
PLANT CODE	BOTANICAL NAME	COMMON NAME	MATURE HEIGHT AND SPREAD	CONTAINER SIZE	PLANTS PER M2
SHADE TOLERANT SHRUBS, GRASSES & GROUNDCOVERS					
AGL red	Agrostemma commutatum 'Red Lobeloid'	Chinese evergreen	0.6m x 0.60m	150mm	1
CHL com	Chromophyllum comosum	Spider Plant	0.6m x 0.25	150mm	1
DRA in	Draena infundata	Mother in Law's Tongue	1.2m x 0.5m	300mm	1
MON del	Monstera delavayi	Split-Leaf Philodendron	2.5m x 2m	300mm	1
MON ada	Monstera adansonii	Swiss Cheese Plant	8m x 1m	300mm	1
EPI aur	Eupatorium aureum	Devils Ivy	1m x 1m	300mm	1
ANT and	Anthurium andraeanum	Flamingo Lily	0.8m x 0.4m	150mm	1
ASP ela	Aspidistra elatior	Cast Iron Plant	1.2m x 1.5m	300mm	1
CAL zeb	Calathea zebra	Zebra Plant	1m x 2m	300mm	1
CAL mak	Calathea makoyana	Peacock Plant	0.8m x 0.8m	300mm	1
SPL wal	Spatheiphyllum wallisii	Peace Lily	1.0m x 1.0m	300mm	1
PHL pep	Phala peperomioides	Chinese Money Plant	0.3m x 0.3m	300mm	1
PHL ara	Philodendron arndtii	Philodendron	1m x 1m	300mm	1
MUS mus	Microsorum muscicola	Crocodile Fern	1.5m x 1.5m	300mm	1
ZAM zam	Zamioculcas zamiifolia	ZZ Plant	0.8m x 0.9m	300mm	1

JHH COURTYARDS					
AREA- 774 m2					
PLANT CODE	BOTANICAL NAME	COMMON NAME	MATURE HEIGHT AND SPREAD	CONTAINER SIZE	PLANTS PER M2
SHADE TOLERANT SHRUBS, GRASSES & GROUNDCOVERS					
AGL red	Agrostemma commutatum 'Red Lobeloid'	Chinese evergreen	0.6m x 0.60m	150mm	5
CHL com	Chlorophyllum comosum	Spider Plant	0.6m x 0.25	150mm	5
EPI aur	Eupatorium aureum	Devils Ivy	1m x 1m	300mm	4
ANT and	Anthurium andraeanum	Flamingo Lily	0.8m x 0.4m	150mm	5
CAL zeb	Calathea zebra	Zebra Plant	1m x 2m	300mm	4
CAL mak	Calathea makoyana	Peacock Plant	0.8m x 0.8m	300mm	4
SPL wal	Spathiphyllum wallisii	Peace Lily	1.0m x 1.0m	300mm	4
PHL pep	Phala peperomioides	Chinese Money Plant	0.3m x 0.3m	300mm	4
ZAM zam	Zamioculcas zamiifolia	ZZ Plant	0.8m x 0.9m	300mm	4
GRASSES & GROUNDCOVERS					
AUS ful	Austrodorhiza fulva	Wallaby Grass	0.10m x 0.5m	150mm	5
CAR app	Carex appressa	Tall Sedge	1m x 0.80m	150mm	5
DIC mco	Dichelachne micrantha	Short Haired Plume Grass	150mm	5	
LIR mus	Liriope muscari	Lily Tuft	0.5m x 0.5m	150mm	5
LOR nys	Lomatia longifolia 'Nyala'	Spiry-Headed Mat-Rush	0.5m x 0.7m	150mm	5
MFO gar	Myoporum paniculatum 'Yarensal'	Yarensa Creeping Boobialla	0.10m x 1m	150mm	5
POA lab	Poa labillardieri	Common Tussock Grass	1m x 0.5m	150mm	5
THE aus	Themeda australis	Kangaroo Grass	1m x 0.5m	150mm	5
VOA hea	Vicia hederacea	Ivy-leafed Vetch	0.10m x 1m	150mm	5
SENSORY PLANTING					
ALI sch	Allium schoenoprasum	Chives	0.6m x 0.1m	150mm	5
ALO ver	Aloe vera barbadensum	Aloe	0.8m x 0.90m	150mm	5
BRA pac	Brachycome 'Pacific Reef'	Native Daisy	0.2m x 0.3m	150mm	5
BRI ma	Briar maxima	Greater Quaking Grass	0.5m x 0.3m	150mm	5
CAL off	Calceolaria officinalis	Pot Marigold	0.5m x 0.5m	150mm	5
COS air	Cosmos atromarginatus	Chicotee cosmos	0.75m x 0.45m	150mm	5
HEL ita	Heliophyllum italicum	Curry Plant	0.90m x 0.50m	150mm	5
HOU cor	Houttuynia cordata 'Chameleon'	Chameleon Plant	0.30m x 0.30m	150mm	5
LAV ay	Lavandula angustifolia	Lavender	1.20m x 0.90m	150mm	5
MIS oil	Miscanthus sinensis 'Nanpa Monobata'	Miscanthus	1.50m x 0.90m	150mm	5
PEL cit	Peperomia crispum	Leaves Scented Geranium	150mm	5	
PEN air	Pennisetum alopecuroides	Fountain Grass	150mm	5	
PHL ju	Phorbia holzbooga	Jerusalem Sage	150mm	5	
ROS off	Rosmarinus officinalis	Rosemary	150mm	5	
SAL arg	Salvia argentea	Silver Sage	150mm	5	
STA typ	Stachys byzantina	Lamb's Ear's	150mm	5	

PLANTING SCHEDULE ASB COURTYARDS

ASB COURTYARDS					
AREA- 1,701.52m2					
PLANT CODE	BOTANICAL NAME	COMMON NAME	MATURE HEIGHT AND SPREAD	CONTAINER SIZE	PLANTS PER M2
SHADE TOLERANT SPECIES					
LEVEL 00 COURTYARD- 60-70%					
LEVEL 01 COURTYARD- 50%					
LEVEL 04 COURTYARD- 0%					
TREES					
ALL tr	Alnus incana torulosa	Forest Oak	10m x 7m	100L	as shown
TRF sap	Tristanopsis laurina	Water Gum	15m x 6m	100L	as shown
WAT fo	Waterhousea bartramia	Weeping Lily Pilly	10m x 8m	100L	as shown
BLA ml	Eleocharis microstachya	Blueberry Ash	12m x 5m	100L	as shown
EUC ml	Eucalyptus melaleuca	Grey Box	15m x 5m	100L	as shown
CUP ana	Cupressus anacardioidea	Tuckeroo	12m x 5m	100L	as shown
CYA sap	Cyathia scoparia	Lacy Tree Fern	15m x 5m	100L	as shown
BAN ml	Banksia integrifolia	Coastal Banksia	15m x 6m	200L	as shown
BPA pr	Brachyotum jarrahiae	Jarrahia Reed	8m x 7m	100L	as shown
OLE sap	Olea europaea	Common Olive	7m x 4m	200L	as shown
PYR ana	Pyrus 'Southwest Dancer'	Southwest Dancer	7m x 4.5m	200L	as shown
LIG ml	Ligustrum lucidum	Hedgehog	8m x 6m	100L	as shown
SPOTTED GUM - GREY IRONBARK OPEN FOREST - SHRUBS					
ACA ul	Acacia ulicifolia	Prickly Moses	2m x 2m	100mm	0.5
BAN sap	Banksia spinulosa	Hedge Banksia	3m x 2.5m	100mm	0.5
BRE ul	Bryonia oblongifolia	Coffee Bush	3m x 3m	100mm	0.3
DAV ul	Davallia ulicifolia	Gorse Bitter Pea	2m x 1m	100mm	1
DOO tr	Dodonaea repens	Large-Leaf Hop Bush	3m x 2m	100mm	0.5
EPH sap	Epacris pulchella	NSW Coral Heath	1.5m x 1m	100mm	1
MAG com	Macrozamia communis	Burrowing	2.0m x 2.0m	150mm	0.5
PLA sap	Platanus acerifolia	Large-Flower Bush-osa	1.5m x 2m	100mm	0.5
SMOOTH-BARKED APPLE - RED BLOODWOOD OPEN FOREST - SHRUBS					
ACA lar	Acacia terminalia	Surahmoe Wattle	3m x 2m	100mm	0.5
ACA ul	Acacia ulicifolia	Prickly Moses	2m x 2m	100mm	0.5
BAN sap	Banksia spinulosa	Hedge Banksia	3m x 2.5m	100mm	0.5
LEP tr	Leptospermum trinervium	Slender Tea Tree	6m x 1.4m	100mm	1
LOM ul	Lomandra strobilata	Wild Pincushion	8m x 3m	100mm	0.3
PER sap	Persea laevis	Broad-Leaved Goshawk	3m x 1m	100mm	1
PER tr	Persea laevis	Narrow-Leaved Goshawk	3m x 0.7m	100mm	1
PLA sap	Platanus acerifolia	Large-Flower Bush-osa	1.5m x 2m	100mm	0.5
TET sap	Tanacetum officinale	Black-eyed Susan	0.5m x 0.5m	100mm	4
SMOOTH BARKED APPLE - SYDNEY PEPPERMINT -TURPENTINE FOREST SHRUBS					
ACA ml	Acacia myrtifolia	Red-Stemmed Wattle	3m x 3.0m	100mm	0.15
BAN sap	Banksia spinulosa	Hedge Banksia	3m x 2.5m	100mm	0.25
BRE ul	Bryonia oblongifolia	Coffee Bush	3m x 3m	100mm	0.25
DAV ul	Davallia ulicifolia	Gorse Bitter Pea	2m x 1m	100mm	0.15
DOO tr	Dodonaea repens	Large-Leaf Hop Bush	3m x 2m	100mm	0.2
LEP sap	Leptospermum polygalifolium	Lemon Scented Tea Tree	3m x 2m	100mm	0.75
LEU sap	Leucopogon lanceolatus	Lance-leaved heath	2m x 1m	100mm	1
KAN lat	Kanthonia latifolia	Grass Tree	2m x 1.5m	100mm	0.25
ZIE sap	Zamia integrifolia	Sanicella plant	2m x 1m	100mm	1
ENDEMIC SHRUBS					
ACA ml	Acacia myrtifolia	Red-Stemmed Wattle	3m x 3.0m	100mm	0.3
ACA lar	Acacia terminalia	Surahmoe Wattle	3m x 2m	100mm	0.5
ACM ml	Acmena smithii	Common Lily Pilly	5m x 3m	100mm	0.3
CAL ul	Callistemon 'Little John'	Boobybrush	0.90m x 1.5m	100mm	0.8
DOO sap	Dodonaea repens	Synsea Lily	4m x 2m	100mm	0.5
SPOTTED GUM - GREY IRONBARK OPEN FOREST - GRASSES & GROUNDCOVERS					
BLA sap	Banksia laurina	Apple-berry	1.5m x 3m	150mm	0.3
ENT sap	Eriosema stricta	Winy Plant	0.50m x 0.30m	150mm	4
IMP sap	Imperata cylindrica	Brady grass	1.0m x 0.3m	150mm	4
LEP sap	Leptospermum laurina	Narrow-leaved heath	1.0m x 1.0m	150mm	1
LOM ml	Lomandra longifolia	Spry-Heated Mat-Rush	1.2m x 1.0m	150mm	1
LOM ml	Lomandra multiflora subsp. multiflora	Many Flowered Mat-Rush	0.5m x 0.5m	150mm	2
MAG sap	Macrozamia communis	Weeping Rice Grass	0.30m x 0.50m	150mm	2
ORE sap	Oreocarya stricta	Winy Plant	2m x 1m	150mm	1
ORE sap	Oreocarya stricta	Winy Plant	0.3m x 1m	150mm	1
LEP sap	Leptospermum polygalifolium	Lemon Scented Tea Tree	3m x 2m	150mm	0.5
LEP sap	Leptospermum trinervium	Slender Tea Tree	6m x 1.4m	150mm	1
LEU sap	Leucopogon lanceolatus	Lance-leaved heath	2m x 1m	150mm	1
LIG sap	Ligustrum lucidum	Fat Palm	15m High	150mm	1
LOM ml	Lomandra strobilata	Wild Pincushion	8m x 3m	100mm	0.3
PER sap	Persea laevis	Broad-Leaved Goshawk	3m x 1m	100mm	1
PER sap	Persea laevis	Narrow-Leaved Goshawk	3m x 0.7m	100mm	1
PLA sap	Platanus acerifolia	Large-Flower Bush	2m x 3m	100mm	0.3
TET sap	Tanacetum officinale	Wandoo	3m x 3m	100mm	0.3
TET sap	Tanacetum officinale	Black-eyed Susan	0.5m x 0.5m	100mm	4
KAN lat	Kanthonia latifolia	Grass Tree	2m x 1.5m	150mm	0.8
SMOOTH-BARKED APPLE - RED BLOODWOOD OPEN FOREST - GRASSES & GROUNDCOVERS					
ENT sap	Eriosema stricta	Winy Plant	0.50m x 0.30m	150mm	4
IMP sap	Imperata cylindrica	Brady grass	1.0m x 0.3m	150mm	4
LOM ml	Lomandra obliqua	Twisted Matrush	0.50m x 0.50m	150mm	2
THE sap	Themeda australis	Kangaroo Grass	1m x 0.5m	150mm	2
PTE sap	Plantain acuminatum	Blacken Fern	2m x 1.2m	150mm	1
SMOOTH BARKED APPLE - SYDNEY PEPPERMINT -TURPENTINE FOREST GRASSES & GROUNDCOVERS					
DAV sap	Davallia caerulea var. producta	Blue Flax Lily	1m x 2m	150mm	0.5
DIC sap	Dichondra repens	Kidney Weed	0.15m x 1.8m	150mm	0.5
ENT sap	Eriosema stricta	Winy Plant	0.50m x 0.30m	150mm	4
IMP sap	Imperata cylindrica	Brady grass	1.0m x 0.3m	150mm	4
MAG sap	Macrozamia communis	Weeping Rice Grass	0.30m x 0.50m	150mm	2
ORE sap	Oreocarya stricta	Winy Plant	0.30m x 1.2m	150mm	0.5
VID sap	Viola hederacea	Ivy-leaved Violet	0.15m x 1m	150mm	1

ENDEMIC GRASSES & GROUNDCOVERS					
ANL sap	Angioanthus hybrid	Angioanthus Amber Velvet	0.50m x 0.40m	150mm	4
ANL sap	Angioanthus hybrid	Angioanthus Everlasting	0.50m x 0.40m	150mm	4
AUS sap	Austroanthus hybrid	Woolly Grass	0.10m x 0.9m	150mm	4
BAU sap	Baumea articulata	Jointed Twig Rush	2.5m x 2m	150mm	1
CAR sap	Carex appressa	Tail Sedge	1m x 0.80m	150mm	0.5
CHR sap	Chrysanthemum apiculatum	Yellow Buttons	0.3m x 0.5m	150mm	1
CYM sap	Cymbopogon refractus	Barked Wire Grass	1m x 0.8m	150mm	3
DAV sap	Davallia caerulea var. producta	Blue Flax Lily	1m x 2m	150mm	5
DIC sap	Dichondra repens	Short Haired Plum Grass	0.5m x 0.2m	150mm	5
ECH sap	Echinopogon caespitosus	Hedgehog Grass	0.3m x 0.2m	150mm	5
HB sap	Hibbertia scandens	Snake Vine	3m x 5m	150mm	0.2
ISO sap	Isoplepis nudicaulis	Kidney Club Rush	1m x 1m	150mm	1
JAN sap	Juncus verticillatus	Tussock Rush	1.2m x 0.5m	150mm	3
LR sap	Liriodendron hybrid	Lily Turf	0.5m x 0.5m	150mm	1
MYO sap	Myoporum parvifolium 'Yarewari'	Yarewari Creeping Bocklaria	0.10m x 1m	150mm	2
POA sap	Poa latifolia	Common Tussock Grass	1m x 0.5m	150mm	1
PPA sap	Phala purpurascens	Whitewort	0.20m x 2m	150mm	1
THE sap	Themeda australis	Kangaroo Grass	1m x 0.5m	150mm	3
VID sap	Viola hederacea	Ivy-leaved Violet	0.15m x 1m	150mm	3
ZIE sap	Zamia integrifolia subsp. smithii	Sanicella plant	2m x 1m	150mm	1
FERNS					
ASP sap	Asplenium australasicum	Bird's Nest Fern	1.2m x 1.2m	150mm	1
BLE sap	Blechnum cartilagineum	Soft Water Fern	1.5m x 1.5m	150mm	0.75
DOO sap	Doodia aspera	Prickly Rasp Fern	0.4m x 0.8m	150mm	1
CAL sap	Cebotrichia dubia	False Brodiaea	2m x 1.5m	150mm	0.75
SENSORY PLANTING					
ALL sap	Allium schoenoprasum	Chives	0.8m x 0.1m	150mm	5
ALO sap	Aloe vera barbadensis	Aloe	0.5m x 0.90m	150mm	1
BPA sap	Brachyotum 'Pacific Reef'	Native Daisy	0.2m x 0.3m	150mm	5
BRI sap	Briza media	Greater Quaking Grass	0.8m x 0.3m	150mm	5
CAL sap	Calendula officinalis	Pot Marigold	0.8m x 0.6m	150mm	2
COG sap	Cosmos atropurpureus	Chicotele cosmos	0.75m x 0.45m	150mm	3
HEL sap	Helichrysum italicum	Curry Plant	0.90m x 0.50m	150mm	2
HOU sap	Houttuynia cordata 'Chameleon'	Chameleon Plant	0.30m x 0.30m	150mm	4
LAV sap	Lavandula angustifolia	Lavender	0.90m x 0.90m	150mm	1
MBS sap	Macarthuria oligostachya 'Nana'	Macarthuria	1.5m x 1m	150mm	5
PEL sap	Penstemon crispus	Lemon Scented Geranium	0.8m x 0.8m	150mm	5
PER sap	Persea laevis	Fourteen Grass	1.5m x 1m	150mm	5
PLA sap	Platanus acerifolia	Jessamine Sage	1m x 1m	150mm	5
ROS sap	Rosmarinus officinalis	Rosemary	2.4m x 1.2m	150mm	5
SAL sap	Salvia argentea	Silver Sage	0.8m x 0.6m	150mm	5
STA sap	Stachys byzantina	Lamb's Ears	0.3m x 1m	150mm	5




Level 8, Angel Place, 123 Pitt Street | Sydney NSW 2000
Australia | +61 2 9233 9900
URBIS Pty Ltd | ABN 50 105 256 228

CLIENT



KEY PLAN

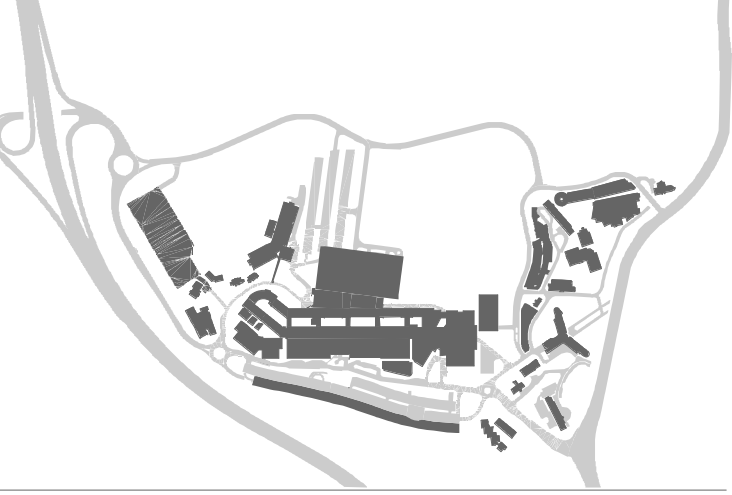

DISCLAIMER
Copyright by Urbis Pty Ltd. This drawing or parts thereof may not be reproduced for any purpose or used for another project without the consent of Urbis other than reproduction for the purposes of actual ordering, supply, installation or construction. This drawing must be read in conjunction with all relevant contracts, schedules, specifications, drawings and any other issued written instructions. Do not scale from drawings. Written figured dimensions take preference to scaled dimension and must be verified on site before proceeding with any work. All discrepancies must be referred to the superintendent for a written decision prior to ordering, supply or installation. Urbis must be notified in writing of any discrepancies.

GENERAL NOTES

1. THE PLAN MUST BE READ IN CONJUNCTION WITH THE SPECIFICATION WHICH ALSO CONTAINS THE SCHEDULE OF LANDSCAPE WORKS AND PLANT SCHEDULE.
1. ALL DRAWINGS ARE TO BE READ IN CONJUNCTION WITH THE ASSOCIATED DRAWINGS BY OTHER CONSULTANTS, e.g. ENGINEERS.
2. DO NOT SCALE FROM DRAWING PACKAGE, USE NOMINATED DIMENSIONS AND LEVELS
3. REFER TO THE TREE PROTECTION PLAN (AND POTENTIAL TREE ASSESSMENT REPORT) FOR DETAILS OF EXISTING TREES TO BE REMOVED, RETAINED OR TRANSPLANTED
5. THE CONTRACTOR MUST REFER ANY DISCREPANCIES TO THE SUPERINTENDENTS REPRESENTATIVE BEFORE PROCEEDING WITH WORKS
6. LOCATE AND PROTECT ALL UNDERGROUND SERVICES PRIOR TO EXCAVATION. MAKE GOOD ALL DAMAGE
7. THESE DRAWINGS ARE TO BE PRINTED IN COLOUR
8. FOR LEGEND REFER TO LEGEND SHEET LD_00-A10-XX-01
9. FOR DETAILED DESCRIPTION OF EACH LANDSCAPE AREA REFER TO LANDSCAPE AREAS SCHEDULE
10. NUMBERS ON LANDSCAPE AREAS ARE REFERRING TO THE LANDSCAPE SPACE INDEX
11. IRRIGATION DESIGN TO BE DEVELOPED AND COORDINATED AT DESIGN DEVELOPMENT

B	100% SSDA ISSUE	MK	PJ	13/05/2021
A	100% SSDA ISSUE	MK	PJ	23/04/2021
REV DESCRIPTION		DWN CHK DATE		

PROJECT NAME & ADDRESS
JOHN HUNTER HEALTH & INNOVATION PRECINCT
Lookout Rd, New Lambton Heights, NSW 2305

PROJECT DIRECTOR: Approver

DRAWING TITLE
PLANTING SCHEDULE COURTYARDS & INTERNAL
ISSUE PROJECT NO.

SSDA P0012689
SCALE
N.T.S

DRAWING NO. LD_C0-A10-XX-04 REVISION B



DISCLAIMER
Copyright by Urbis Pty Ltd. This drawing or parts thereof may not be reproduced for any purpose or used for another project without the consent of Urbis other than reproduction for the purposes of actual ordering, supply, installation or construction. This drawing must be read in conjunction with all relevant contracts, schedules, specifications, drawings and any other issued written instructions. Do not scale from drawings. Written figured dimensions take preference to scaled dimension and must be verified on site before proceeding with any work. All discrepancies must be referred to the superintendent for a written decision prior to ordering, supply or installation. Urbis must be notified in writing of any discrepancies.

- GENERAL NOTES**
1. THE PLAN MUST BE READ IN CONJUNCTION WITH THE SPECIFICATION WHICH ALSO CONTAINS THE SCHEDULE OF LANDSCAPE WORKS AND PLANT SCHEDULE.
 1. ALL DRAWINGS ARE TO BE READ IN CONJUNCTION WITH THE ASSOCIATED DRAWINGS BY OTHER CONSULTANTS, e.g. ENGINEERS.
 2. DO NOT SCALE FROM DRAWING PACKAGE, USE NOMINATED DIMENSIONS AND LEVELS
 3. REFER TO THE TREE PROTECTION PLAN (AND POTENTIAL TREE ASSESSMENT REPORT) FOR DETAILS OF EXISTING TREES TO BE REMOVED, RETAINED OR TRANSPLANTED
 5. THE CONTRACTOR MUST REFER ANY DISCREPANCIES TO THE SUPERINTENDENTS REPRESENTATIVE BEFORE PROCEEDING WITH WORKS
 6. LOCATE AND PROTECT ALL UNDERGROUND SERVICES PRIOR TO EXCAVATION. MAKE GOOD ALL DAMAGE
 7. THESE DRAWINGS ARE TO BE PRINTED IN COLOUR
 8. FOR LEGEND REFER TO LEGEND SHEET LD_00-A10 XX-01
 9. FOR DETAILED DESCRIPTION OF EACH LANDSCAPE AREA REFER TO LANDSCAPE AREAS SCHEDULE
 10. NUMBERS ON LANDSCAPE AREAS ARE REFERRING TO THE LANDSCAPE SPACE INDEX
 11. IRRIGATION DESIGN TO BE DEVELOPED AND COORDINATED AT DESIGN DEVELOPMENT

B	100% SSDA ISSUE	MK	PJ	13/05/2021
A	100% SSDA ISSUE	MK	PJ	23/04/2021
REV	DESCRIPTION	DWN	CHK	DATE

PROJECT NAME & ADDRESS
**JOHN HUNTER
HEALTH &
INNOVATION
PRECINCT**
Lookout Rd, New Lambton Heights, NSW 2305

PROJECT DIRECTOR:


DRAWING TITLE
SHEET SPLIT

ISSUE PROJECT NO.
SSDA P0012689
SCALE
1 : 2000 @A1

DRAWING NO.
LD_C0-B01 NL-01



REVISION
B

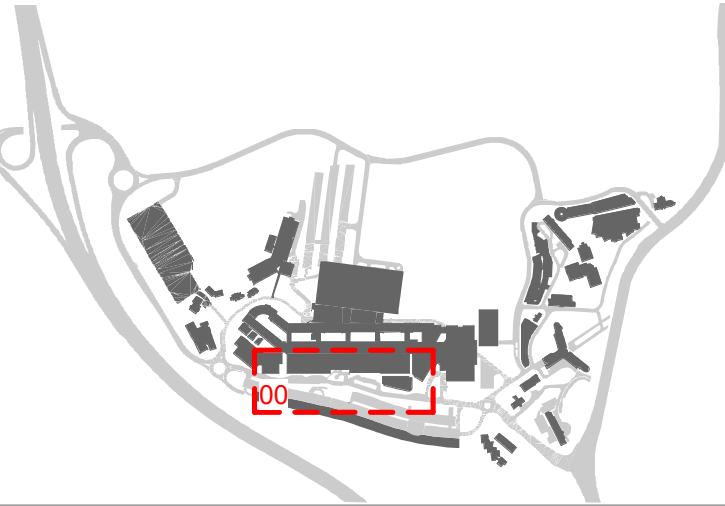

DISCLAIMER
Copyright by Urbis Pty Ltd. This drawing or parts thereof may not be reproduced for any purpose or used for another project without the consent of Urbis other than reproduction for the purposes of actual ordering, supply, installation or construction. This drawing must be read in conjunction with all relevant contracts, schedules, specifications, drawings and any other issued written instructions. Do not scale from drawings. Written figured dimensions take preference to scaled dimension and must be verified on site before proceeding with any work. All discrepancies must be referred to the superintendent for a written decision prior to ordering, supply or installation. Urbis must be notified in writing of any discrepancies.

GENERAL NOTES

1. THE PLAN MUST BE READ IN CONJUNCTION WITH THE SPECIFICATION WHICH ALSO CONTAINS THE SCHEDULE OF LANDSCAPE WORKS AND PLANT SCHEDULE.
2. ALL DRAWINGS ARE TO BE READ IN CONJUNCTION WITH THE ASSOCIATED DRAWINGS BY OTHER CONSULTANTS, e.g. ENGINEERS.
3. DO NOT SCALE FROM DRAWING PACKAGE, USE NOMINATED DIMENSIONS AND LEVELS
4. REFER TO THE TREE PROTECTION PLAN (AND POTENTIAL TREE ASSESSMENT REPORT) FOR DETAILS OF EXISTING TREES TO BE REMOVED, RETAINED OR TRANSPLANTED
5. THE CONTRACTOR MUST REFER ANY DISCREPANCIES TO THE SUPERINTENDENTS REPRESENTATIVE BEFORE PROCEEDING WITH WORKS
6. LOCATE AND PROTECT ALL UNDERGROUND SERVICES PRIOR TO EXCAVATION. MAKE GOOD ALL DAMAGE
7. THESE DRAWINGS ARE TO BE PRINTED IN COLOUR
8. FOR LEGEND REFER TO LEGEND SHEET LD_00-A10 XX-01
9. FOR DETAILED DESCRIPTION OF EACH LANDSCAPE AREA REFER TO LANDSCAPE AREAS SCHEDULE
10. NUMBERS ON LANDSCAPE AREAS ARE REFERRING TO THE LANDSCAPE SPACE INDEX
11. IRRIGATION DESIGN TO BE DEVELOPED AND COORDINATED AT DESIGN DEVELOPMENT

B	100% SSDA ISSUE	MK	PJ	13/05/2021
A	100% SSDA ISSUE	MK	PJ	23/04/2021
REV	DESCRIPTION	DWN	CHK	DATE

PROJECT NAME & ADDRESS
JOHN HUNTER HEALTH & INNOVATION PRECINCT
Lookout Rd, New Lambton Heights, NSW 2305

PROJECT DIRECTOR:

DRAWING TITLE
JHH ARRIVAL FORECOURT

ISSUE PROJECT NO.

SSDA P0012689


SCALE
1:400

DRAWING NO.

LD_C0-B20 NL-00

REVISION

B

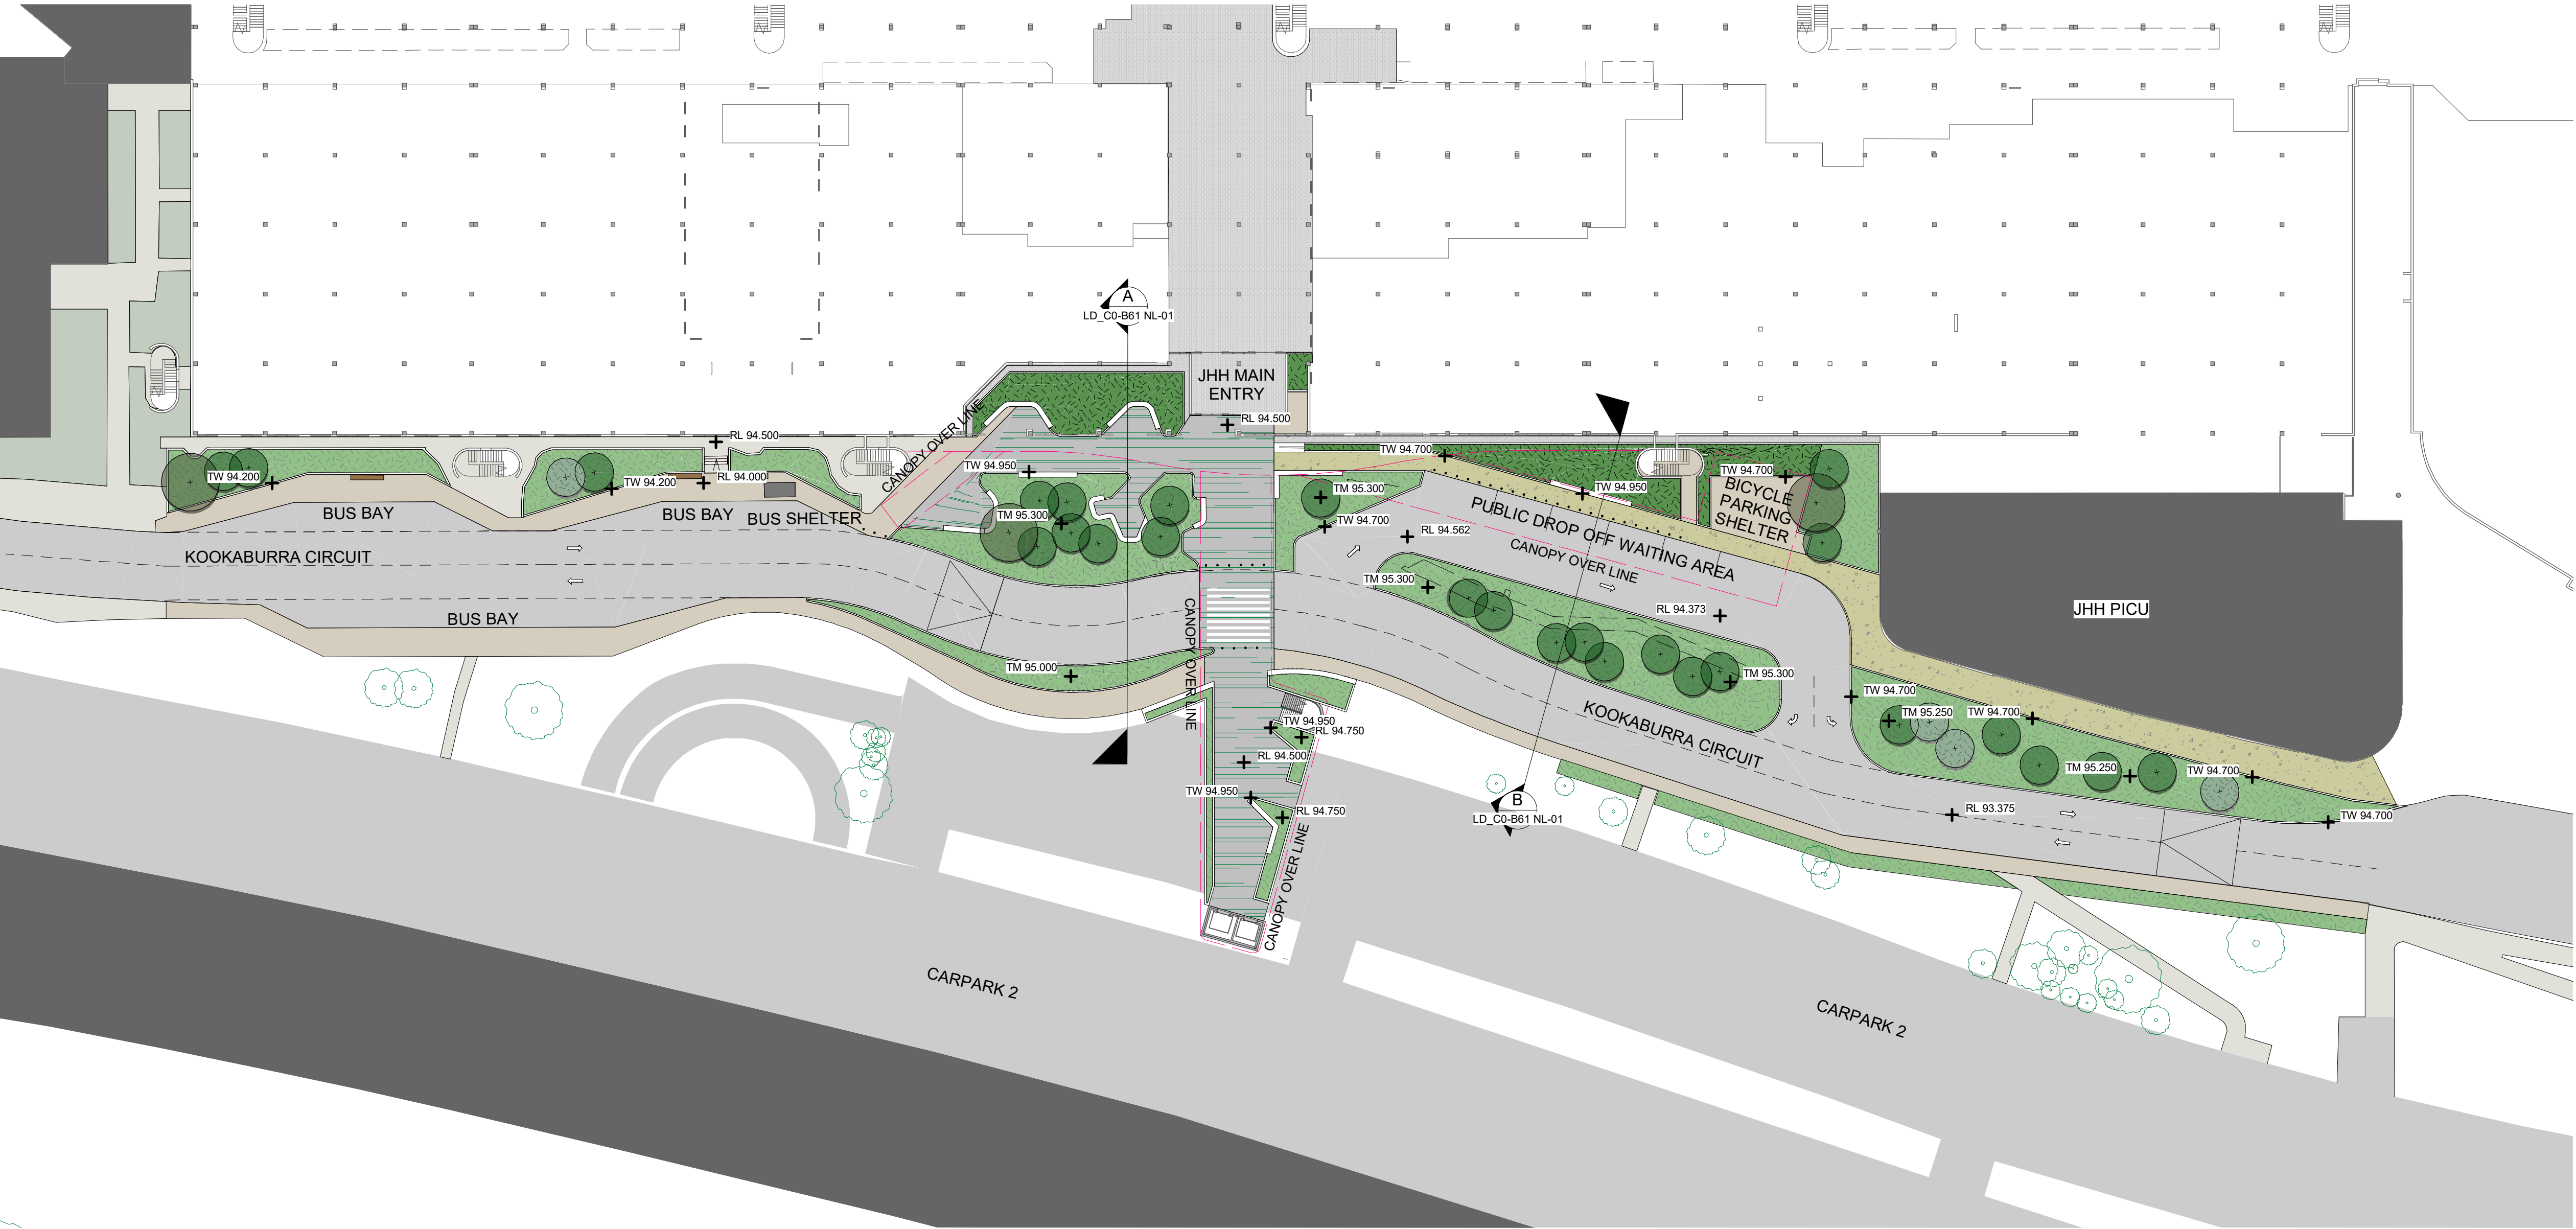

GENERAL LEGEND

INSITU CONCRETE PAVEMENT	FLAGSTONE PAVER	ARTIFICIAL TURF	TURF	STEPS & CONCRETE SEATING
FORECOURT PRECAST CONCRETE PAVER	FLAGSTONE IN GRAVEL	SEDUM GREEN ROOF	PROPOSED SMALL SIZED TREE (6-8m MATURE HEIGHT)	TABLE & BENCH SEATING
COURTYARD EXPOSED AGGREGATE PAVING	CONCOURSE BOUND GRAVEL PAVING	PATTERNED GRAVEL ROOF	PROPOSED MEDIUM SIZED TREE (8-12m MATURE HEIGHT)	GARDEN WALL
CONCOURSE PRECAST CONCRETE PAVER	BASALT ROCK	FACADE PLANTER	POT PLANTERS	KERB PLANTER WALL
COURTYARD PRECAST CONCRETE PAVER	INSITU CONCRETE PAVEMENT (COLOURED)	GARDEN BED		CORTEN WALL
CONCOURSE PRECAST CONCRETE SMALL PAVER	GRASSCORETE PAVERS	GARDEN BED (SHADE TOLERANT)		

DISCLAIMER
Copyright by Urbis Pty Ltd. This drawing or parts thereof may not be reproduced for any purpose or used for another project without the consent of Urbis other than reproduction for the purposes of actual ordering, supply, installation or construction. This drawing must be read in conjunction with all relevant contracts, schedules, specifications, drawings and any other issued written instructions. Do not scale from drawings. Written figured dimensions take preference to scaled dimension and must be verified on site before proceeding with any work. All discrepancies must be referred to the superintendent for a written decision prior to ordering, supply or installation. Urbis must be notified in writing of any discrepancies.

- GENERAL NOTES**
1. THE PLAN MUST BE READ IN CONJUNCTION WITH THE SPECIFICATION WHICH ALSO CONTAINS THE SCHEDULE OF LANDSCAPE WORKS AND PLANT SCHEDULE.
 1. ALL DRAWINGS ARE TO BE READ IN CONJUNCTION WITH THE ASSOCIATED DRAWINGS BY OTHER CONSULTANTS, e.g. ENGINEERS.
 2. DO NOT SCALE FROM DRAWING PACKAGE, USE NOMINATED DIMENSIONS AND LEVELS
 3. REFER TO THE TREE PROTECTION PLAN (AND POTENTIAL TREE ASSESSMENT REPORT) FOR DETAILS OF EXISTING TREES TO BE REMOVED, RETAINED OR TRANSPLANTED
 5. THE CONTRACTOR MUST REFER ANY DISCREPANCIES TO THE SUPERINTENDENTS REPRESENTATIVE BEFORE PROCEEDING WITH WORKS
 6. LOCATE AND PROTECT ALL UNDERGROUND SERVICES PRIOR TO EXCAVATION. MAKE GOOD ALL DAMAGE
 7. THESE DRAWINGS ARE TO BE PRINTED IN COLOUR
 8. FOR LEGEND REFER TO LEGEND SHEET LD_00-A10 XX-01
 9. FOR DETAILED DESCRIPTION OF EACH LANDSCAPE AREA REFER TO LANDSCAPE AREAS SCHEDULE
 10. NUMBERS ON LANDSCAPE AREAS ARE REFERRING TO THE LANDSCAPE SPACE INDEX
 11. IRRIGATION DESIGN TO BE DEVELOPED AND COORDINATED AT DESIGN DEVELOPMENT

B	100% SSDA ISSUE	MK	PJ	13/05/2021
A	100% SSDA ISSUE	MK	PJ	23/04/2021
REV	DESCRIPTION	DWN	CHK	DATE

PROJECT NAME & ADDRESS
**JOHN HUNTER
HEALTH &
INNOVATION
PRECINCT**
Lookout Rd, New Lambton Heights, NSW 2305

PROJECT DIRECTOR:

DRAWING TITLE
OVERALL ZONAL PLAN

ISSUE PROJECT NO.
SSDA P0012689
SCALE
1 : 2000 @A1

DRAWING NO.
LD_C0-B20 NL-X0



DISCLAIMER
Copyright by Urbis Pty Ltd. This drawing or parts thereof may not be reproduced for any purpose or used for another project without the consent of Urbis other than reproduction for the purposes of actual ordering, supply, installation or construction. This drawing must be read in conjunction with all relevant contracts, schedules, specifications, drawings and any other issued written instructions. Do not scale from drawings. Written figured dimensions take preference to scaled dimension and must be verified on site before proceeding with any work. All discrepancies must be referred to the superintendent for a written decision prior to ordering, supply or installation. Urbis must be notified in writing of any discrepancies.

GENERAL NOTES

1. THE PLAN MUST BE READ IN CONJUNCTION WITH THE SPECIFICATION WHICH ALSO CONTAINS THE SCHEDULE OF LANDSCAPE WORKS AND PLANT SCHEDULE.
1. ALL DRAWINGS ARE TO BE READ IN CONJUNCTION WITH THE ASSOCIATED DRAWINGS BY OTHER CONSULTANTS, e.g. ENGINEERS.
2. DO NOT SCALE FROM DRAWING PACKAGE, USE NOMINATED DIMENSIONS AND LEVELS
3. REFER TO THE TREE PROTECTION PLAN (AND POTENTIAL TREE ASSESSMENT REPORT) FOR DETAILS OF EXISTING TREES TO BE REMOVED, RETAINED OR TRANSPLANTED
5. THE CONTRACTOR MUST REFER ANY DISCREPANCIES TO THE SUPERINTENDENTS REPRESENTATIVE BEFORE PROCEEDING WITH WORKS
6. LOCATE AND PROTECT ALL UNDERGROUND SERVICES PRIOR TO EXCAVATION. MAKE GOOD ALL DAMAGE
7. THESE DRAWINGS ARE TO BE PRINTED IN COLOUR
8. FOR LEGEND REFER TO LEGEND SHEET LD_00-A10 XX-01
9. FOR DETAILED DESCRIPTION OF EACH LANDSCAPE AREA REFER TO LANDSCAPE AREAS SCHEDULE
10. NUMBERS ON LANDSCAPE AREAS ARE REFERRING TO THE LANDSCAPE SPACE INDEX
11. IRRIGATION DESIGN TO BE DEVELOPED AND COORDINATED AT DESIGN DEVELOPMENT

B	100% SSDA ISSUE	MK	PJ	13/05/2021
A	100% SSDA ISSUE	MK	PJ	23/04/2021
REV	DESCRIPTION	DWN	CHK	DATE

PROJECT NAME & ADDRESS
JOHN HUNTER HEALTH & INNOVATION PRECINCT
Lookout Rd, New Lambton Heights, NSW 2305

PROJECT DIRECTOR: Approver

DRAWING TITLE
TREE REMOVAL PLAN

ISSUE PROJECT NO.

SSDA P0012689

SCALE As indicated @A1

DRAWING NO.

LD_C0-B20 NL-X1




REVISION

B



TREE REMOVAL PLAN LEGEND

- JOHN HUNTER HEALTH CAMPUS BOUNDARY
- AREA OF DISTURBANCE
- ASSET PROTECTION ZONE
- NEW BUILDING AND STRUCTURES
- TNSW EXTENT OF WORKS LINE
- SITE BOUNDARY
- EXISTING TREE TO BE REMOVED DUE TO TNSW BYPASS WORKS
- PROPOSED TREE PLANTING
- EXISTING TREE TO BE RETAINED
- EXISTING TREE TO BE REMOVED
- MATURE TREE SIZE WITHIN APZ

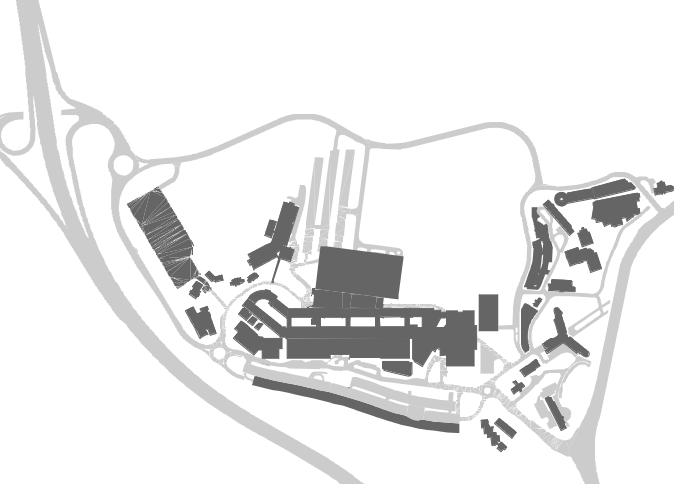

DISCLAIMER
Copyright by Urbis Pty Ltd. This drawing or parts thereof may not be reproduced for any purpose or used for another project without the consent of Urbis other than reproduction for the purposes of actual ordering, supply, installation or construction. This drawing must be read in conjunction with all relevant contracts, schedules, specifications, drawings and any other issued written instructions. Do not scale from drawings. Written figured dimensions take preference to scaled dimension and must be verified on site before proceeding with any work. All discrepancies must be referred to the superintendent for a written decision prior to ordering, supply or installation. Urbis must be notified in writing of any discrepancies.

GENERAL NOTES

1. THE PLAN MUST BE READ IN CONJUNCTION WITH THE SPECIFICATION WHICH ALSO CONTAINS THE SCHEDULE OF LANDSCAPE WORKS AND PLANT SCHEDULE.
1. ALL DRAWINGS ARE TO BE READ IN CONJUNCTION WITH THE ASSOCIATED DRAWINGS BY OTHER CONSULTANTS, e.g. ENGINEERS.
2. DO NOT SCALE FROM DRAWING PACKAGE, USE NOMINATED DIMENSIONS AND LEVELS
3. REFER TO THE TREE PROTECTION PLAN (AND POTENTIAL TREE ASSESSMENT REPORT) FOR DETAILS OF EXISTING TREES TO BE REMOVED, RETAINED OR TRANSPLANTED
5. THE CONTRACTOR MUST REFER ANY DISCREPANCIES TO THE SUPERINTENDENTS REPRESENTATIVE BEFORE PROCEEDING WITH WORKS
6. LOCATE AND PROTECT ALL UNDERGROUND SERVICES PRIOR TO EXCAVATION. MAKE GOOD ALL DAMAGE
7. THESE DRAWINGS ARE TO BE PRINTED IN COLOUR
8. FOR LEGEND REFER TO LEGEND SHEET LD_00-A10 XX-01
9. FOR DETAILED DESCRIPTION OF EACH LANDSCAPE AREA REFER TO LANDSCAPE AREAS SCHEDULE
10. NUMBERS ON LANDSCAPE AREAS ARE REFERRING TO THE LANDSCAPE SPACE INDEX
11. IRRIGATION DESIGN TO BE DEVELOPED AND COORDINATED AT DESIGN DEVELOPMENT

B	100% SSDA ISSUE	MK	PJ	13/05/2021
A	100% SSDA ISSUE	MK	PJ	23/04/2021
REV	DESCRIPTION	DWN	CHK	DATE

PROJECT NAME & ADDRESS

JOHN HUNTER HEALTH & INNOVATION PRECINCT

Lookout Rd, New Lambton Heights, NSW 2305

PROJECT DIRECTOR: Approver

DRAWING TITLE
SIDE WIDE LANDSCAPE PLAN

ISSUE PROJECT NO.

SSDA P0012689

SCALE
As indicated @A1

DRAWING NO.

LD_C0-B60 NL-X1

REVISION

B



SIDE WIDE VEGETATION TYPE DIAGRAM LEGEND

NATIVE BUSHLAND PLANTING


- SMOOTH-BARKED APPLE - RED BLOODWOOD OPEN FOREST SEEDING MIX A - SEEDING (100%)
- SMOOTH-BARKED APPLE SYDNEY PEPPERMINT TURPENTINE FOREST SEEDING MIX A1 - SEEDING (75%) - TUBE STOCK (25%) AND SCATTERED TREES AS SHOWN
- SMOOTH-BARKED APPLE SYDNEY PEPPERMINT TURPENTINE FOREST SEEDING MIX A2 - SEEDING (65%) - TUBE STOCK (35%) AND SCATTERED TREES AS SHOWN

APZ BUFFER PLANTING

- APZ PLANTING SMOOTH-BARKED APPLE - RED BLOODWOOD OPEN FOREST - SEEDING (100%) - GRASSES ONLY
- APZ PLANTING SMOOTH-BARKED APPLE - RED BLOODWOOD OPEN FOREST- SEEDING (90%) - SHRUB TUBESTOCK (10%) AND SCATTERED TREES AS SHOWN
- BIORETENTION PLANTING TREES, SEEDING AND TUBESTOCK TO BASIN. SCATTERED SHRUBS AND TREES E.G. EUCALYPTUS UMBRA, CAREX APPRESSA, ISOLEPSIS NODOSA

EXTENT OF SELECTIVE TREE CLEARANCE FOR APZ REFER TO BUSHFIRE REPORT

- PROPOSED TREE PLANTING
- EXISTING TREE TO BE RETAINED
- TINSW EXTENT OF WORKS LINE
- JOHN HUNTER HEALTH CAMPUS BOUNDARY
- SITE BOUNDARY

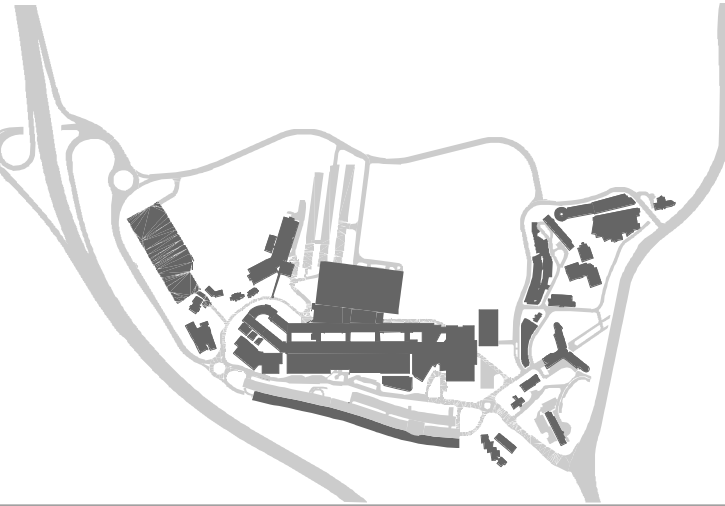

DISCLAIMER
Copyright by Urbis Pty Ltd. This drawing or parts thereof may not be reproduced for any purpose or used for another project without the consent of Urbis other than reproduction for the purposes of actual ordering, supply, installation or construction. This drawing must be read in conjunction with all relevant contracts, schedules, specifications, drawings and any other issued written instructions. Do not scale from drawings. Written figured dimensions take preference to scaled dimension and must be verified on site before proceeding with any work. All discrepancies must be referred to the superintendent for a written decision prior to ordering, supply or installation. Urbis must be notified in writing of any discrepancies.

GENERAL NOTES

1. THE PLAN MUST BE READ IN CONJUNCTION WITH THE SPECIFICATION WHICH ALSO CONTAINS THE SCHEDULE OF LANDSCAPE WORKS AND PLANT SCHEDULE.
1. ALL DRAWINGS ARE TO BE READ IN CONJUNCTION WITH THE ASSOCIATED DRAWINGS BY OTHER CONSULTANTS, e.g. ENGINEERS.
2. DO NOT SCALE FROM DRAWING PACKAGE, USE NOMINATED DIMENSIONS AND LEVELS
3. REFER TO THE TREE PROTECTION PLAN (AND POTENTIAL TREE ASSESSMENT REPORT) FOR DETAILS OF EXISTING TREES TO BE REMOVED, RETAINED OR TRANSPLANTED
5. THE CONTRACTOR MUST REFER ANY DISCREPANCIES TO THE SUPERINTENDENTS REPRESENTATIVE BEFORE PROCEEDING WITH WORKS
6. LOCATE AND PROTECT ALL UNDERGROUND SERVICES PRIOR TO EXCAVATION. MAKE GOOD ALL DAMAGE
7. THESE DRAWINGS ARE TO BE PRINTED IN COLOUR
8. FOR LEGEND REFER TO LEGEND SHEET LD_00-A10 XX-01
9. FOR DETAILED DESCRIPTION OF EACH LANDSCAPE AREA REFER TO LANDSCAPE AREAS SCHEDULE
10. NUMBERS ON LANDSCAPE AREAS ARE REFERRING TO THE LANDSCAPE SPACE INDEX
11. IRRIGATION DESIGN TO BE DEVELOPED AND COORDINATED AT DESIGN DEVELOPMENT

B	100% SSDA ISSUE	MK	PJ	13/05/2021
A	100% SSDA ISSUE	MK	PJ	23/04/2021
REV	DESCRIPTION	DWN	CHK	DATE

PROJECT NAME & ADDRESS
JOHN HUNTER HEALTH & INNOVATION PRECINCT
Lookout Rd, New Lambton Heights, NSW 2305

PROJECT DIRECTOR: Phil James

DRAWING TITLE
ARRIVAL FORECOURT SECTIONS

ISSUE PROJECT NO.

SSDA P0012689


SCALE
1 : 100 @A1

DRAWING NO. REVISION

LD_C0-B61 NL-01 B



A SECTION A - ARRIVAL FORECOURT (1 : 100)
LD_B0-B20 NL-02

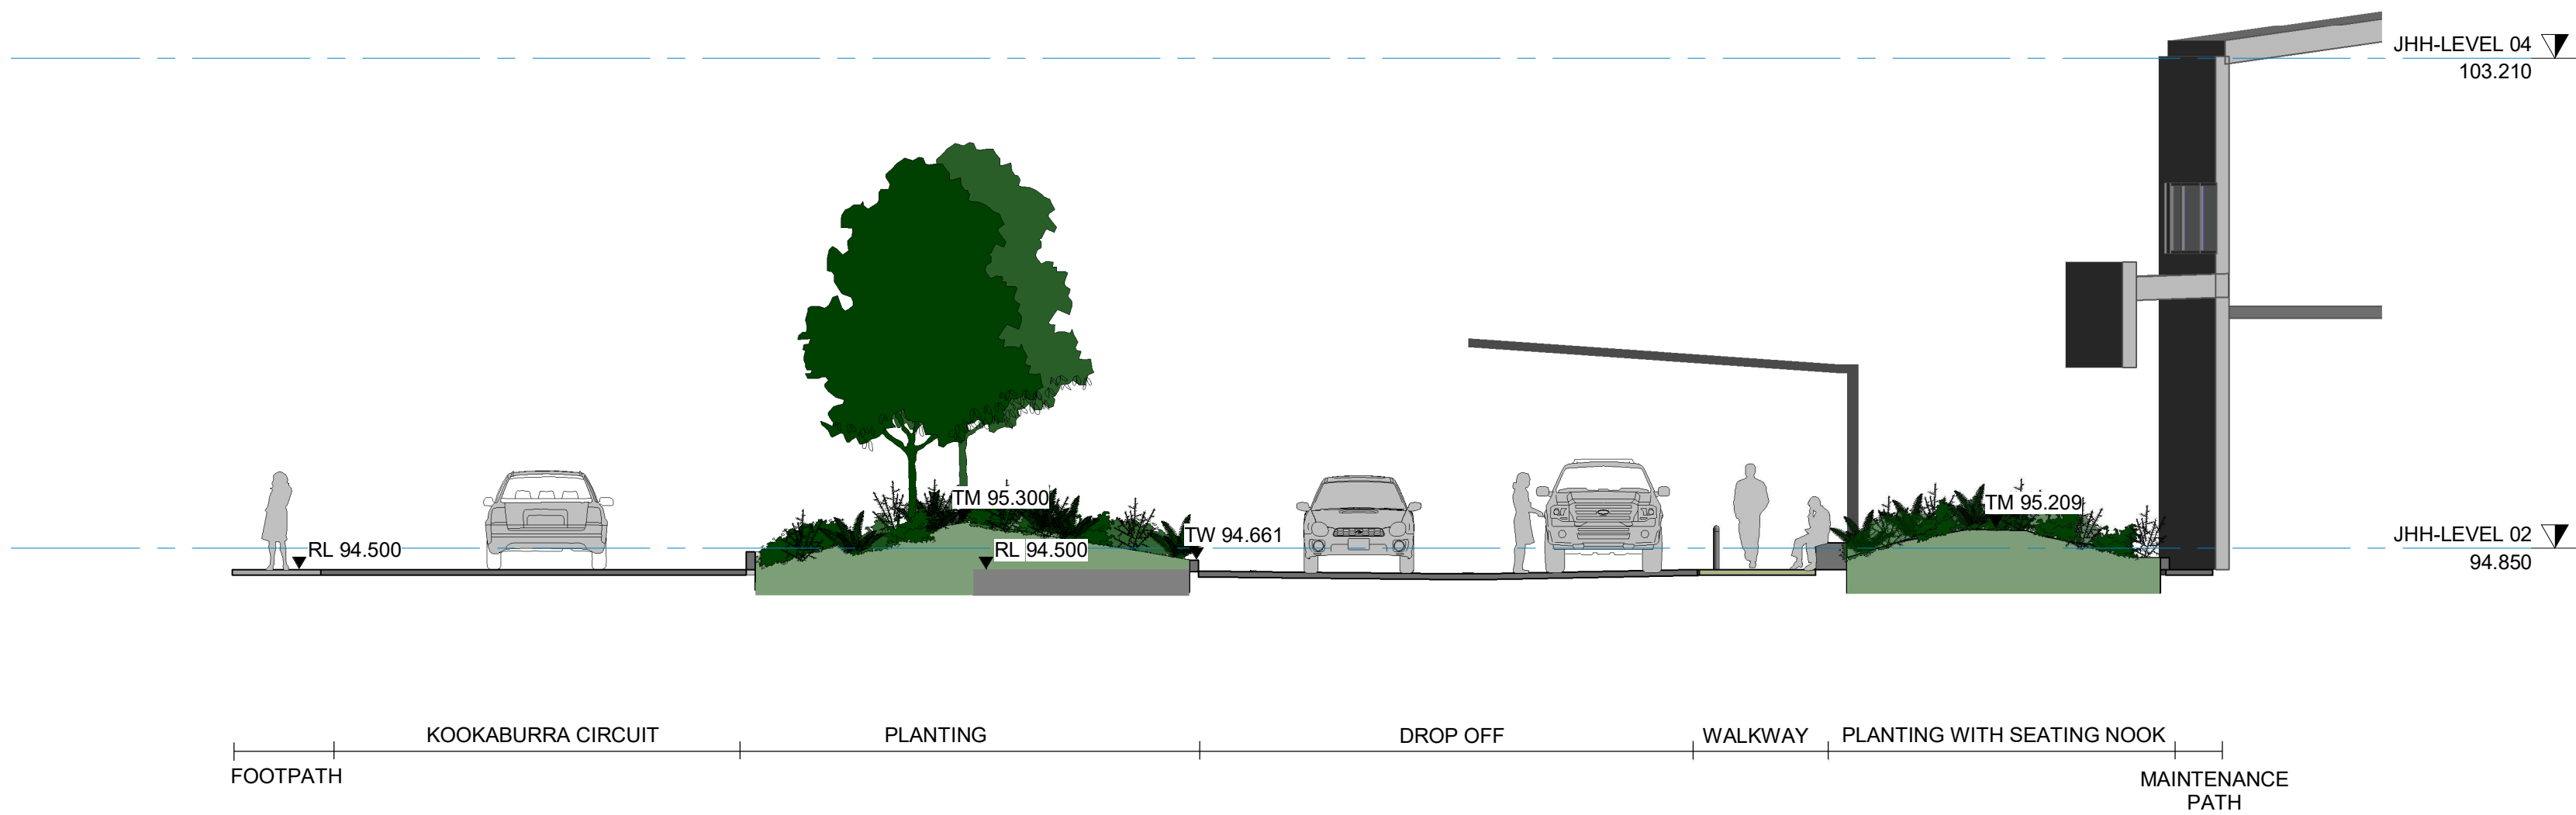

B 800 Arrival Forecourt - Section 2 (1 : 100)
LD_B0-B20 NL-02