

Development Application and Planning Proposal Review NSW Planning Portal Concurrence and Referral



Authority	Authority's Reference	Agency Concurrence and Referral	Authority Contact	Authority Notification	Submission Due	Submission Made
NSW Dept. of Planning, Housing & Infrastructure	SSD-98407710		Media Hakim	10/06/2026	9/07/2026	3/07/2026

Address	Land Title
99 Berriwerri Drive, Kemps Creek	Lot 104 DP 1305965

Scope of Development Application or Planning Proposal

Environmental Impact Statement (EIS) for the Aspect Industrial Estate Stage 6 Development (WH4).
Construction and operation of Warehouse 4 in the Aspect Industrial Estate.

Endeavour Energy's HxGN NetWorks Core NetViewer Master Facility Model indicates:

Within or adjacent to the property the electrical network used in the distribution / supply of electricity owned and operated by Endeavour Energy appear to be but may not be limited to:

Electricity Infrastructure / Apparatus	Statutory allocation (road verge / roadway*)	Easement (or other form of property tenure**)	Protected works***	Freehold (adjoining or nearby)
Overhead Power Lines				
Low voltage	☐	☐	☐	☐
High voltage	☐	☐	☐	☐
Transmission voltage	☐	☐	☐	☐
Pole / tower	☐	☐	☐	☐
Underground Cables				
Low voltage	☒	☐	☐	☐
High voltage	☒	☐	☐	☐
Transmission voltage	☐	☐	☐	☐
Streetlight / pillar	☒	☐	☐	☐
Substation				
Pole mounted/overhead	☐	☐	☐	☐
Padmount/underground	☐	☐	☐	☐
Indoor	☐	☐	☐	☐
Zone	☐	☐	☐	☐
Transmission	☐	☐	☐	☐
Switch	☐	☒	☐	☐
Other: Underground earth cables	☒	☐	☐	☐

Low voltage extra low voltage up to 1,000 volts alternating current (a.c.).

High voltage above 1,000 volts a.c and less than 33,000 volts a.c. [33 kilovolts (kV)].

Transmission voltage 33 kV up to 132,000 volts a.c. (132 kV).

*Rights provided in a public road or reserve. The allocation depends on the classification and date of roadway dedication.

** Other form of property tenure includes but is not limited to restriction, covenant, lease, licence etc.

***Protected works under Section 53 'Protection of certain electricity works' of the *Electricity Supply Act 1995* (NSW).

Other: provide detail of electricity infrastructure / apparatus.

Relevant / applicable clause numbers from Endeavour Energy's Standard Conditions for Development Applications and Planning Proposals indicated by ☒ .

Objection	Condition	Advice	Clause No.	Issue	Detail
☐	☐	☐	1	Adjoining Sites	Adjoining or nearby development / use should be compatible with the use of Endeavour Energy's sites.
☐	☐	☐	2	Asbestos	Area identified or suspected of having asbestos or asbestos containing materials (ACM) present in the electricity network.
☐	☐	☒	3	Asset Planning	Applicants should not assume adequate supply is immediately available to facilitate their proposed development.
☐	☐	☒	4	Asset Relocation	Application must be made for an asset relocation / removal to determine possible solutions to the developer's requirements.
☐	☒	☐	5	Before You Dig	Before commencing any underground activity the applicant must obtain advice from the Before You Dig service.
☐	☐	☒	6	Bush Fire	Risk needs to be managed to maintain the safety of customers and the communities served by the network.
☐	☐	☐	7	Construction Management	Integrity of electricity infrastructure must be maintained and not impacted by vehicle / plant operation, excessive / high / unsecured loads, vibration, dust or moisture penetration.
☐	☐	☐	8	Contamination	Remediation may be required of soils or surfaces impacted by various forms of electricity infrastructure.
☐	☐	☐	9	Demolition	All electricity infrastructure shall be regarded as live and care must be taken to not interfere with any part of the electricity network.
☐	☐	☐	10	Dispensation	If a proposal is not compliant with Endeavour Energy's engineering documents or standards, the applicant must request a dispensation.
☐	☒	☐	11	Driveways	For public / road safety and to reduce the risk of vehicle impact, the distance of driveways from electricity infrastructure should be maximised.
☐	☒	☐	12	Earthing	The construction of any building or structure connected to or in close proximity to the electrical network must be properly earthed.
☐	☒	☐	13	Easement Management	Preference is for no activities to occur in easements and they must adhere to minimum safety requirements.
☐	☐	☒	14	Easement Release	No easement is redundant or obsolete until it is released having regard to risks to its network, commercial and community interests.
☐	☐	☐	15	Easement Subdivision	The incorporation of easements into multiple / privately owned lots is generally not supported.
☐	☐	☒	16	Emergency Contact	Endeavour Energy's emergency contact number 131 003 should be included in any relevant risk and safety management plan.
☐	☐	☐	17	Excavation	The integrity of the nearby electricity infrastructure shall not be placed at risk by the carrying out of excavation work.
☐	☐	☒	18	Flooding	Electricity infrastructure should not be subject to flood inundation or stormwater runoff.

Objection	Condition	Advice	Clause No.	Issue	Detail
☐	☐	☐	19	Hazardous Environment	Electricity infrastructure can be susceptible to hazard sources or in some situations be regarded as a hazardous source.
☐	☐	☐	20	Look up and Live	Before commencing any activity near overhead power lines the applicant must obtain advice from the Look Up and Live service.
☐	☒	☐	21	Modifications	Amendments can impact on electricity load and the contestable works required to facilitate the proposed development.
☐	☐	☒	22	Network Access	Access to the electricity infrastructure may be required at any time particularly in the event of an emergency.
☐	☐	☒	23	Network Asset Design	Design electricity infrastructure for safety and environmental compliance consistent with safe design lifecycle principles.
☐	☒	☐	24	Network Connection	Applicants will need to submit an appropriate application based on the maximum demand for electricity for connection of load.
☐	☐	☐	25	Protected Works	Electricity infrastructure without an easement is deemed to be lawful for all purposes under Section 53 'Protection of certain electricity works' of the <i>Electricity Supply Act 1995</i> (NSW).
☐	☐	☒	26	Prudent Avoidance	Development should avert the possible risk to health from exposure to emissions from electricity infrastructure such as electric and magnetic fields (EMF) and noise.
☐	☐	☒	27	Public Safety	Public safety training resources are available to help general public / workers understand the risk and how to work safely near electricity infrastructure.
☐	☐	☐	28	Removal of Electricity	Permission is required to remove service / metering and must be performed by an Accredited Service Provider.
☐	☐	☒	29	Renewable Energy	The performance of solar, generation or battery systems and effects on the network and other connected customers needs to be assessed.
☐	☐	☐	30	Safety Clearances	Any building or structure must comply with the minimum safe distances / clearances for the applicable voltage/s of the overhead power lines. No works or loads must occur within the zone of influence of underground cables.
☐	☐	☐	31	Security / Climb Points	Minimum buffers appropriate to the electricity infrastructure being protected need to be provided to avoid the creation of climb points.
☐	☒	☐	32	Service Conductors	Low voltage service conductors and customer connection points must comply with the current 'Service and Installation Rules of NSW'.
☐	☐	☒	33	Street Infrastructure	Streetlighting should be reviewed and if necessary upgraded to suit any increase in both vehicular and pedestrian traffic. Existing electricity infrastructure must have adequate access and not be left stranded in public areas.
☐	☐	☒	34	Sustainability	Reducing greenhouse gas emissions and helping customers save on their energy consumption and costs through new initiatives and projects to adopt sustainable energy technologies.

Objection	Condition	Advice	Clause No.	Issue	Detail
☐	☐	☐	35	Swimming Pools	Whenever water and electricity are in close proximity, extra care and awareness is required.
☐	☐	☐	36	Tele - communications	Address the risks associated with poor communications services to support the vital electricity supply network Infrastructure.
☐	☐	☒	37	Vegetation Management	Landscaping that interferes with electricity infrastructure is a potential safety risk and may result in the interruption of supply.
Decision					Approve (with conditions)

Environmental Services Team

P 133 718

E Property.Development@endeavourenergy.com.au



Endeavour Energy respectfully acknowledges the Traditional Custodians on whose lands we live, work, and operate and their Elders past and present.

Reason(s) for Conditions or Objection (If applicable)

- All encroachments, activities and / or works (including subdivision and even if not part of the Development Application) whether temporary or permanent within or affecting an easement, restriction, statutory right, right of access or protected works (other than those approved / certified by Endeavour Energy's Customer Network Solutions Branch as part of an enquiry / application for load or asset relocation project) need to be referred to Endeavour Energy's Easements Officers for assessment and possible approval if they meet the minimum safety requirements and controls. However please note that this does not constitute or imply the granting of approval by Endeavour Energy to any or all of the proposed encroachments and / or activities.

For further information please refer to the attached copy of Endeavour Energy's Mains Design Instruction MDI 0044 'Easements and Property Tenure Rights' which deals with activities / encroachments within easements.

- For situations when network assets have to be removed or relocated to facilitate a proposed development, the applicant will need to make an application to Endeavour Energy's Customer Network Solutions Branch. The design and construction works will generally need to be funded by and arranged by the applicant under the contestable works framework by an Accredited Service Provider (ASP). However please note that this does not constitute or imply the granting of approval by Endeavour Energy to any or all of the proposed works. From the below copy of the Site and Warehouse Plan it appears existing switch station no. 95869 is proposed to be removed from the site.
- No easement is considered to be redundant or obsolete until it is released. Even if there is no 'Inservice' electricity distribution infrastructure, Endeavour Energy may continue to manage the easement as if network assets are in place. Endeavour Energy will assess applications for the release of easements to identify and manage risks to its network, commercial and community interests. The company may seek compensation for the extinguishment of property tenure.
- To ensure an adequate connection, the applicant will need to engage an Accredited Service Provider (ASP) of an appropriate level and class of accreditation to assess the electricity load and the proposed method of supply for the development.
- An extension or augmentation of the existing electricity distribution network will be required. Whilst there are distribution substations in the area which are likely to have some spare capacity, it is not unlimited and will not be sufficient to provide for the additional load from the proposed development.

Other factors such as the size and rating / load on the conductors and voltage drop (which can affect the quality of supply particularly with long conductor runs) etc. need to be assessed. However the extent of any works required will not be determined until the final load assessment is completed.

- Any required padmount substation/s will need to be located within the property (in a suitable and accessible location) and be protected (including any associated cabling not located within a public road / reserve) with an appropriate form of property tenure as detailed in the attached copy of Endeavour Energy's 'Land Interest Guidelines for Network Connection'.

Generally it is the Level 3 Accredited Service Provider's (ASP) responsibility (engaged by the developer) to make sure substation location and design complies with Endeavour Energy's standards the suitability of access, safety clearances, fire ratings, flooding etc. If the substation does not comply with Endeavour Energy's standards, the applicant must request a dispensation.

For further information please also refer to the attached copies of Endeavour Energy's:

- Mains Design Instruction MDI 0044 'Easements and Property Tenure Rights'.
 - Guide to Fencing, Retaining Walls and Maintenance Around Padmount Substations.
- Endeavour Energy's network asset design policy is generally to progressively underground all new urban developments. All new cabling / reticulation infrastructure must be of an underground construction type.
- The low voltage service conductor and customer connection point must comply with the current 'Service and Installation Rules of NSW'.

- The Site Plan from Endeavour Energy's HxGN NetWorks Core NetViewer Master Facility Model shows the site is in a 'Developer Area' with the proposed subdivision / road layout indicating enquiries and applications for contestable works projects for electricity supply with Endeavour Energy's Customer Network Solutions Branch who are responsible for managing the conditions of supply with the proponent and their Accredited Service Provider (ASP).

The applicant will need to contact Endeavour Energy's Customer Network Solutions Branch if this Development Application:

- Includes any contestable works projects that are outside of any existing approved / certified works.
 - Results in an electricity load that is outside of any existing Supply / Connection Offer requiring the incorporation of the additional load for consideration.
- The Services Infrastructure Assessment prepared by AT&L, Issue 02 dated 19-01-2026 includes the following addressing whether electricity services are available and adequate for the proposed development.

2.4. Electrical

Existing electrical conduits and HV cabling are present within Berriwerri Drive (Road 03). The electrical conduits and HV cabling were constructed under the Endeavour Energy case UIS0978 for Berriwerri Drive (Road 03). An existing switching station (no. 95869) was constructed under the same case south-west corner of Lot 4 adjacent to the proposed car park within Lot 4. The existing electrical conduits are consistent with the existing assets shown on Endeavour Energy's BYDA plans (refer to **Appendix A**).

Lot 4 site will connect to the existing electrical feeder SK2242 (Mirvac Estate No2) which has approximately 3.7MVA capacity. An electrical design for the proposed Warehouse 4 will be developed by a Level 3 ASP and submitted to Endeavour Energy for approval. However, it is anticipated that the HV electrical feeders in the estate have sufficient residual capacity to service Lot 4. The location of the future substation is not shown on the Architectural Site and Warehouse Plan, however, is anticipated to be located near to the proposed office for Lot 4. The location of the substation will be confirmed during detailed design.

- The construction of any building or structure (including fencing, signage, flag poles, hoardings etc.) whether temporary or permanent that is connected to or in close proximity to Endeavour Energy's electrical network is required to comply with Australian/New Zealand Standard AS/NZS 3000:2018 'Electrical installations'.
- Onsite wastewater and stormwater management areas should not encroach easements or be located near electricity distribution infrastructure (or any electrical installation). This may affect the integrity of any electricity infrastructure and cause difficulty for access for electricity workers. Although not likely to be a significant issue / risk, during network fault conditions, ponding water, puddles or wet soil as good conductors of electricity can increase the area the fault voltage is dissipated to.
- Irrespective of the class / division and the quantities, any dangerous goods whether combustible and / or flammable should not be stored near electricity infrastructure and increasing the separation distance as far as reasonably possible is recommended.
- Driveways should be designed to increase the separation to the any electricity infrastructure on the road verge as much as reasonably possible, with the following clearances required.
 - Endeavour Energy's Lighting Design Instruction LDI 0001 'Public lighting design' indicates that for new lighting installations 'The minimum clearance to any driveway shall be 1500 mm'.
 - Low voltage pillars is 500 mm.
- The planting of large / deep rooted trees near electricity infrastructure is opposed by Endeavour Energy. Landscaping must not interfere with electricity infrastructure as it may become a potential safety risk, cause of bush fire, restrict access, require ongoing vegetation management / trimming, reduce light levels from streetlights by having a shadowing effect etc. Existing trees which are of low ecological significance in proximity of electricity infrastructure should be removed and if necessary replaced by an alternative smaller planting. The landscape designer will need to ensure any planting near electricity infrastructure achieves Endeavour Energy's vegetation management requirements.

No planting of trees is allowed in the easement for a padmount substation. Screening vegetation around a padmount substation should be planted a minimum distance of 800mm plus half of the mature canopy width from the substation easement and have shallow / non-invasive roots. This is to avoid trees growing over the easement as falling branches may damage the cubicle and tree roots the underground cables. All vegetation is to be maintained in such a manner that it will allow unrestricted access by electrical workers to the substation easement all times.

Endeavour Energy's HxGN NetWorks Core Master Facility Model

The advice provided regarding the extent of the electricity network within or adjacent to the property is based on a desk top review of Endeavour Energy's HxGN NetWorks Core Master Facility Model. This is a computer based geospatial data system which holds the data on and is used to map the electricity network but is indicative only and based on the data available at the time. It only shows the Endeavour Energy electricity network.

Please note Endeavour Energy's responsibility / ownership of the network usually terminates at the connection point / point of supply but there may be unusual connections or situations with legacy assets as a result of alterations to legislation and codes. Other customer owned / private electricity distribution assets may be present on the site eg. from the connection point to the main service equipment enclosure, which are not owned or operated by Endeavour Energy (or shown on the Site Plan from Endeavour Energy's Endeavour Energy's HxGN NetWorks Core Master Facility Model and may include underground assets). These assets will need to be identified by the applicant and to which the relevant clauses / safety advice also applies.

Due to privacy and security requirements, certain aspects of Endeavour Energy's geospatial data are protected information. Additional plans and details of the electricity network within or adjacent to the property are available by the arrangements provided to the relevant referral services in accordance with the applicable legislation, licences, regulations and codes of practice etc.

Easement (or other form of property tenure)

Title searches will confirm the current owners of a property and shows any registered interests affecting the property such as an easement. Not all interests eg. short term leases and licences are registered on the title. Not all easements for electricity infrastructure will necessarily benefit Endeavour Energy eg. there may be interallotment / easements appurtenant to the land particularly for low voltage service conductors / customer connections. For further advice please refer to Endeavour Energy's:

- Land Interest Guidelines for Network Connection Works.
- Mains Design Instruction MDI 0044 'Easements and Property Tenure Rights'.

Standard Conditions

Due to the high number of notifications / referrals received by Endeavour Energy, the use of the 'Standard Conditions' is needed to enable responses / submissions to be made with the reasonably available resource allocation and within the statutory / requested time frames. The ability to provide more specific and detailed individual consideration to every notification / referral is limited.

Whilst all reasonable care and effort has been made to address the matters affecting the Development Application or Planning Proposal related to the electricity distribution network, the determining authority / applicant will need to consider their own specific knowledge, needs or circumstances, objectives and requirements in consideration of the response / submission to take appropriate corrective action.

This may require the determining authority / applicant to review the information provided for the application / proposal to verify the issue / risk included as either a 'Condition' or 'Advice' in the response / submission. For example, if Clause 37 'Vegetation Management' is marked as a 'Condition', the landscape plans / planting schedule should be referred to and reviewed to validate the risk associated with the matter as described in the 'Standard Conditions' eg. the mature height and /or spread of the proposed plantings may interfere with overhead power lines and require the use of smaller alternative planting.

Objection, Condition or Advice

With Endeavour Energy's Development Application and Planning Proposal Review process / system the intent of the 'Standard Conditions' being indicated as either, 'Objection', 'Condition' or 'Advice' depends on the risk associated with the matter and will be marked as:

- 'Objection' if it may substantially impact the proposed development or is a significant risk to the electricity distribution network that must be addressed by the applicant eg. significant encroachment of an easement, restriction or safety clearances.
- 'Condition' if it is likely or very likely to be an issue / needed to be addressed by the applicant and may require corrective action that can be reasonably rectified.
- 'Advice' if it requires consideration but is less likely to be an issue and the consequences of the applicant not addressing it are lower or can be readily rectified.

If the matter is not applicable / relevant then it is not marked.

For example, if the breaching of safety clearances to overhead power lines requires significant modifications to or redesign of the proposed building or structure or an asset removal / location it will be marked as 'Object'. If there is no issue with the safety clearances to the building or structure, but ordinary persons need to maintain a minimum safe approach distance, it will be marked as 'Condition'. If there are any overhead power lines within or adjacent to the property but they are unlikely to be directly impacted, it will be marked as 'Advice'. If there are no overhead power lines, it is not marked.

If indicated as 'Object' or 'Condition', to resolve the matter/s the applicant will need to make direct contact with the relevant Endeavour Energy Contact (who do not have access to the NSW Planning Portal) via the contact details provided below. Re-referral via the NSW Planning Portal is not required and the matters can rest on the further correspondence.

In most instances even if the submission has been marked as 'Object', Endeavour Energy is not necessarily opposed to the Development Application. Whilst the determining authority may appropriately condition or defer these matters, Endeavour Energy recommends that whenever reasonably possible they be resolved before rather than as conditions of any development consent. This can assist in avoiding the need to later seek modification of an approved Development Application. Subject to the satisfactory resolution of the matter/s, Endeavour Energy will have no further objection to the Development Application.

Not all the matters may be directly or immediately relevant or significant to the Development Application or Planning Proposal. However, Endeavour Energy's preference is to alert proponents / applicants of the potential matters that may arise should development within closer proximity of the existing and/or required electricity infrastructure needed to facilitate the proposed development on or in the vicinity of the site occur. Even if a matter is not marked, applicants are encouraged to review all of the 'Standard Conditions' as some matters may not have been evident from the information provided with the Development Application and of which the applicant may have additional knowledge.

Submission Decision / Agency Response

The decision on the outcome of the assessment essentially correspond to the NSW Planning Portal 'Agency response', but as Endeavour Energy is not a concurring authority under the provision of the *Environmental Planning and Assessment Act 1979* (NSW), it does not 'Approve' or 'Refuse' a Development Application in the Portal ie. under the provisions of *State Environmental Planning Policy (Transport and Infrastructure) 2021* (NSW), Councils must take into consideration any response.

If any matter in the submission is marked as 'Objection', the outcome of the assessment will be 'Object' but in the NSW Planning Portal the 'Agency response' will be 'Approve (with conditions)'.

If any matter is marked as 'Condition', the outcome of the assessment and the 'Agency response' in the Portal will both be 'Approve (with conditions)'.

If all the matters in the submission are marked for 'Advice', the outcome of the assessment and the 'Agency response' in the Portal will both be 'Advice'.

Information Provided

Please note Endeavour Energy can only assess the Development Application or Planning Proposal based on the information provided by the applicant and determining authority. Due to time and resource constraints it is not possible to refer all development application notifications to the relevant internal stakeholders for review and advice or to request additional information from the applicant or determining authority. Applicants should be providing proper detailed plans of the electricity infrastructure / easements on or near the site (including current photographs) and address the potential impacts of the proposed development thereon in the Statement of Environmental Effects / Environmental Impact Statements. The provision of inadequate detail may result in Endeavour Energy objecting to the Development Application or Planning Proposal.

Applicants should also provide details of any early engagement or consultation undertaken with Endeavour Energy eg. Technical Review Requests, Connection of Load Applications, approval from Easements Officers etc. as this will assist in expediting the submission.

Accredited Service Providers


The Accredited Service Provider (ASP) scheme accredits organisations to perform contestable work on the NSW electricity distribution network. Contestable works are works that are required for the electricity distribution network provider to supply the load in the power lines where a new or altered connection is being requested.

Endeavour Energy is urging applicants / customers to engage with an ASP prior to finalising plans to assess and incorporate any required electricity infrastructure as well as addressing safety issues such as safety clearances. In so doing the consideration can also be given to its impact on the other aspects of the proposed development. This can assist in avoiding the making of amendments to the plan or possibly the need to later seek modification of an approved development application.

Details of the ASP Scheme which accredits organisations to perform contestable work on the NSW electricity distribution network are available via the following link to the NSW Climate and Energy Action website at <https://www.energy.nsw.gov.au/nsw-plans-and-progress/regulation-and-policy/asp-scheme-and-contestable-works> .

Further Advice

The 'Standard Conditions' include additional advice and contact details and further information is also available on Endeavour Energy's website at <https://www.endeavourenergy.com.au/> .

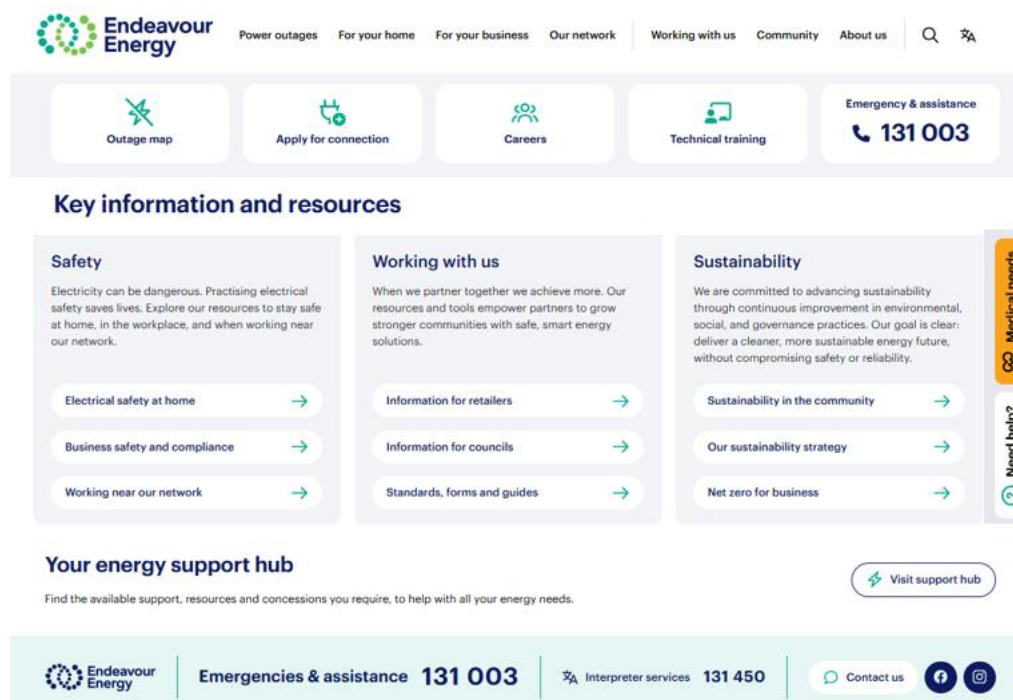

To resolve any objection or to seek further advice the following are the main contacts and can be reached by calling Endeavour Energy via General Enquiries on business days from 9am - 4:30pm on telephone: 133 718. For other matters the contact details are included in Endeavour Energy's standard conditions for Development Application and Planning Proposal Review. Whilst the Environmental Services Team can provide the initial assessment and general advice or guidance, the resolution / approval of any matter/s rests with the relevant contact related to the matter/s and is not subject to the usual statutory notice requirements and response times.

Branch / Section	Matters	Email / Portal
Customer Network Solutions	Electricity supply or asset relocation who are responsible for managing the conditions of supply with the applicant and their Accredited Service Provider (ASP).	Connect Online
Easements Officers	Easement management or protected works / assets.	Easements@endeavourenergy.com.au
Property	Property tenure eg. the creation or release of easements.	network_property@endeavourenergy.com.au
Construction Works Team	Safety advice for building or working near the electricity network / street infrastructure in public areas (including zone and transmission substations).	Connect Online

Please note Endeavour Energy's above contacts do not have access to the NSW Planning Portal. To resolve any matters direct contact should be made with the responsible contact. This will avoid double handling and possible delays in responding to the applicant / Council.

In some circumstances further advice or guidance may need to be obtained by the applicant from an independent and appropriately qualified and / or experienced person / consultant before making any determination / decisions.

Connections Portal

Requests can be submitted to Endeavour Energy's Connections Portal through [Connect Online](#) which provides details on the application types and from which the Connections Portal can be launched. Once registered, you will have access to a range of connection services, including real time visibility of your application status through a dashboard. Applicants can sign in and submit requests by clicking on the relevant tile for the following matters:

- Connect supply or move assets.

Connect load or generation to a new or existing supply. You can also apply to relocate electricity assets or attach third party assets on Endeavour Energy assets

- Work near infrastructure.

Request support when working on or near our electricity network typically for building or construction sites.

- Electrical installation inspection.

Request for a switchboard review, low voltage isolation and energise appointment, high voltage or hazardous inspection, or a dispensation request.

- Make an enquiry.


Make a preliminary enquiry for a connection service or request technical information.

For further details of the services provided please refer to the quick reference guides available via the following link to [Portal support](#) .

Duty of Care


All individuals have a duty of care they must observe when working in the vicinity of electricity infrastructure. Before you do anything:

- 1) Contact Before You Dig and Look Up and Live to obtain the details of the electricity infrastructure on or near the site noting they are a guide only to what might be in the area and may not be entirely accurate.
- 2) Comply with the conditions and consider the advice provided above.
- 3) If needed contact Endeavour Energy General Enquiries on 133 718 or the contacts provided above for assistance. For Emergency Assistance call 131 003.
- 4) **DO NOT** attempt any work near electricity infrastructure until all required approvals and safety measures are in place.
- 5) Proceed only if you have satisfied yourself it is safe.
- 6) Always remember, even the briefest contact with electricity at any voltage can have serious consequences to a person's health and safety and can be fatal.


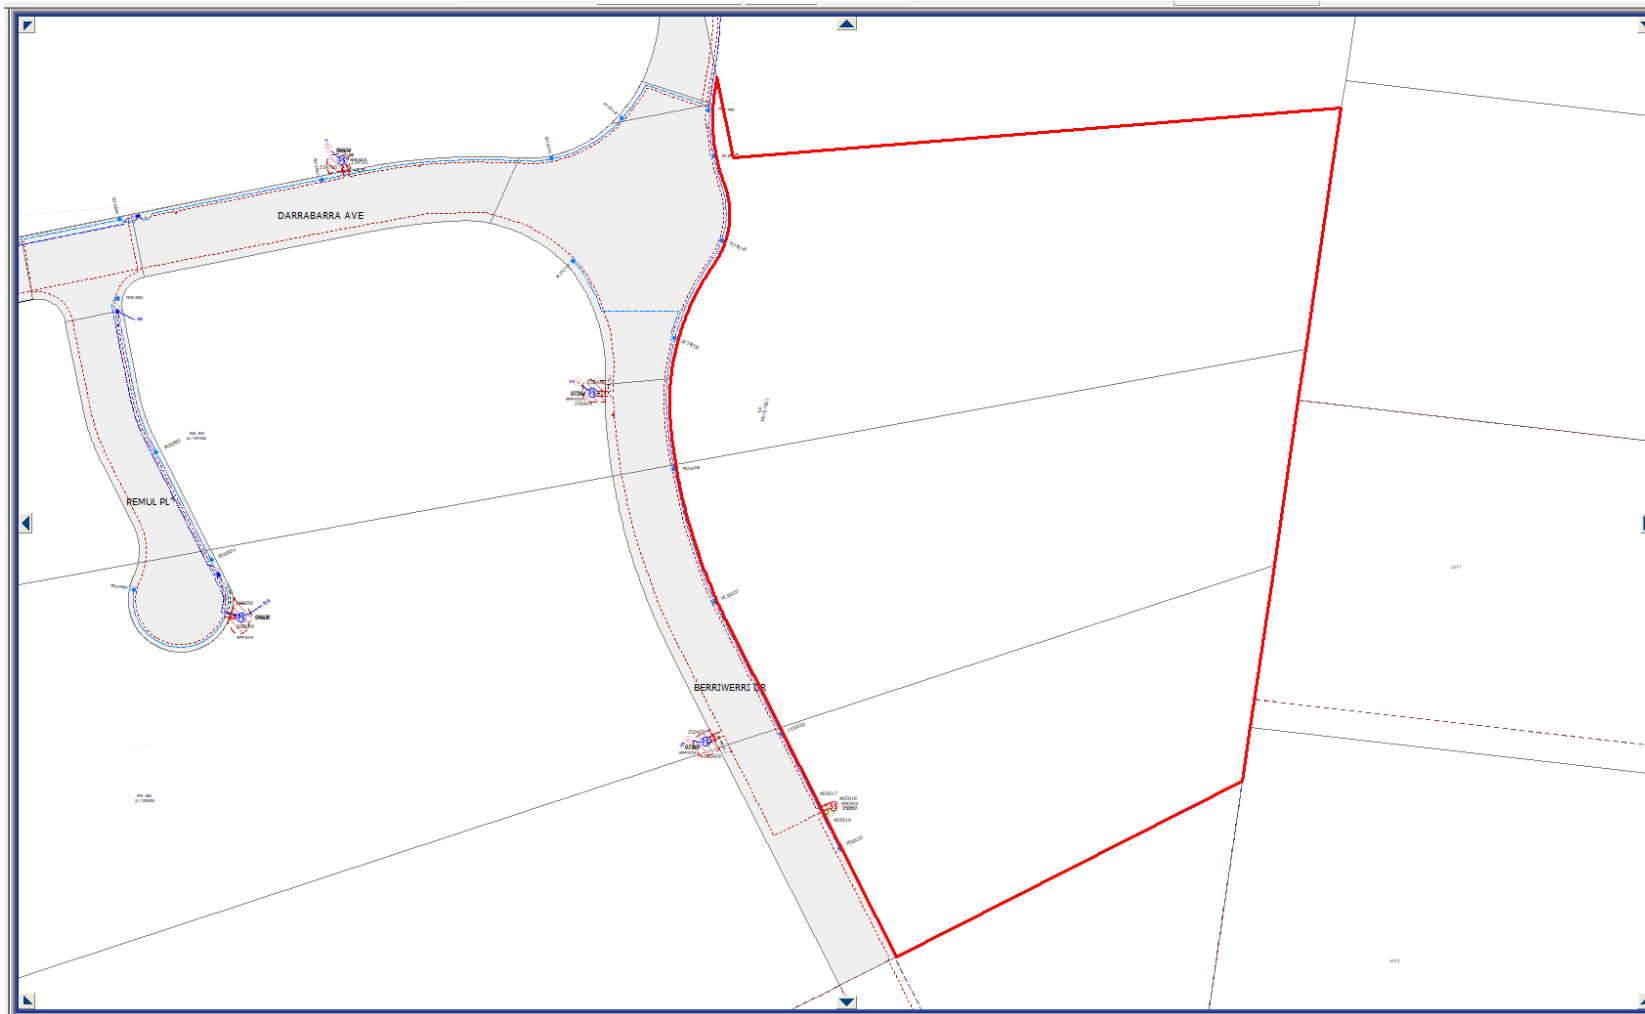


Please note the location, extent and type of any electricity infrastructure, boundaries etc. shown on the plan is indicative only. In addition it must be recognised that the electricity network is constantly extended, augmented and modified and there is a delay from the completion and commissioning of these works until their capture in the model. Easements benefitting Endeavour Energy are indicated by red hatching. Generally (depending on the scale and/or features selected), low voltage (normally not exceeding 1,000 volts) is indicated by blue lines and high voltage (normally exceeding 1,000 volts but for Endeavour Energy's network not exceeding 132,000 volts / 132 kV) by red lines (these lines can appear as solid or dashed and where there are multiple lines / cables only the higher voltage may be shown). This plan only shows the Endeavour Energy network and does not show electricity infrastructure belonging to other authorities or customers owned electrical equipment beyond the customer connection point / point of supply to the property. This plan does not constitute the provision of information on underground electricity power lines by network operators under Part 5E 'Protection of underground electricity power lines' of the *Electricity Supply Act 1995* (NSW).

Site Plan from Endeavour Energy's HxGN NetWorks Core NetViewer Master Facility Model

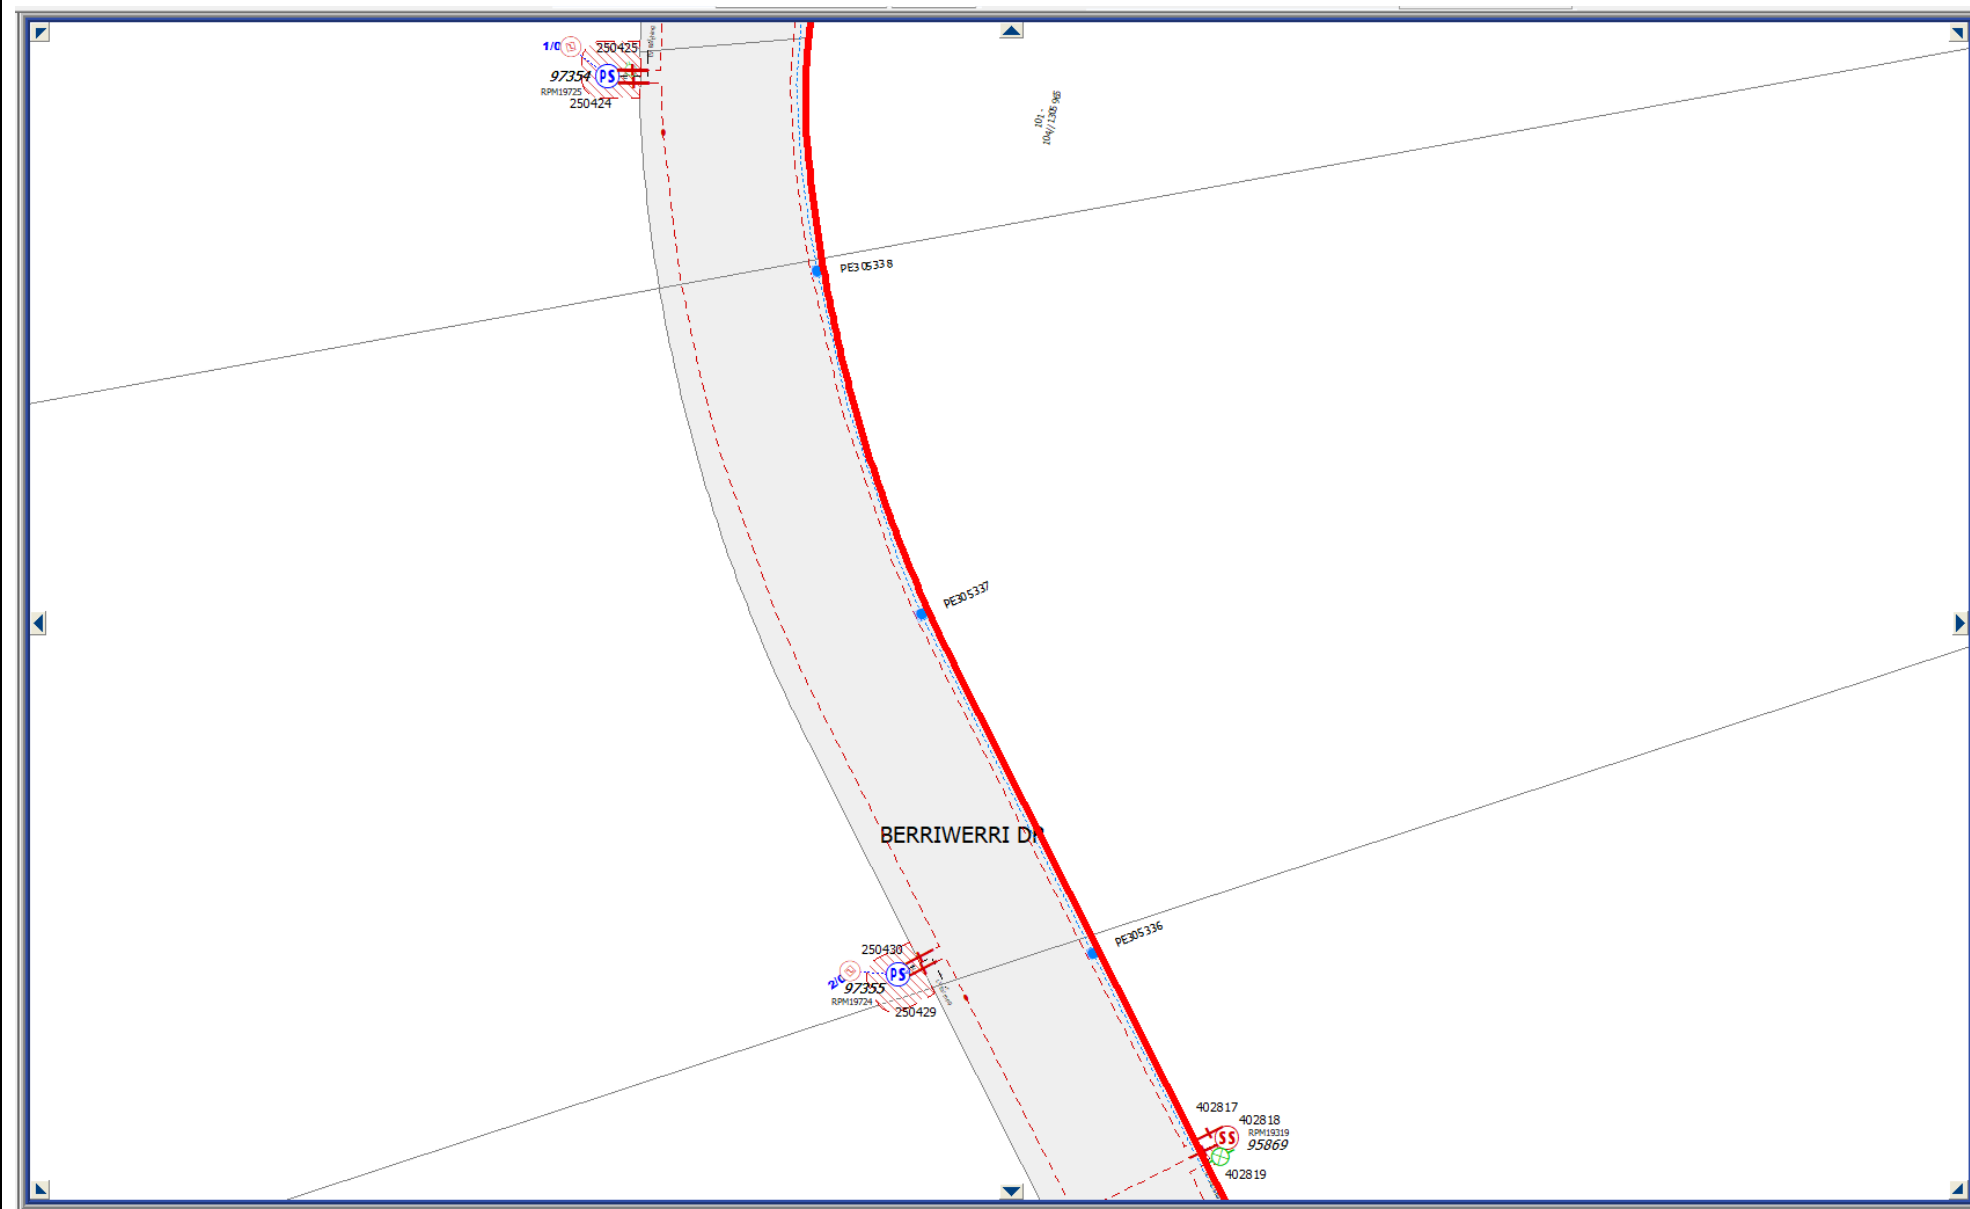


LEGEND	
	Padmount substation
	Indoor substation
	Ground substation
	Kiosk substation
	Cottage substation
	Padmount high voltage plugboard
	Pole mounted substation
	Overhead battery substation
	Underground battery substation
	Low voltage static compensator
	High voltage customer substation
	Metering unit
	Switch station
	Indoor switch station
	Voltage regulator
	Customer connection point
	Low voltage pillar
	Streetlight column
	Life support customer
	Tower
	Pole
	Pole with streetlight
	Customer owned / private pole
	Cable pit
	Service pit
	Load break switch
	Recloser
	Proposed removed
	Easement active
	Statutory rights
	Easement proposed
	Licence active
	Subject site

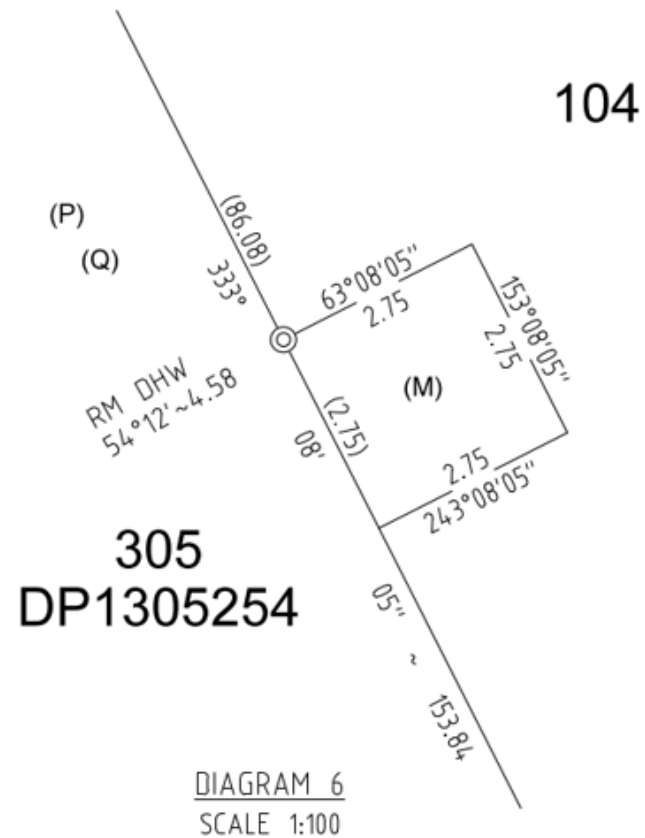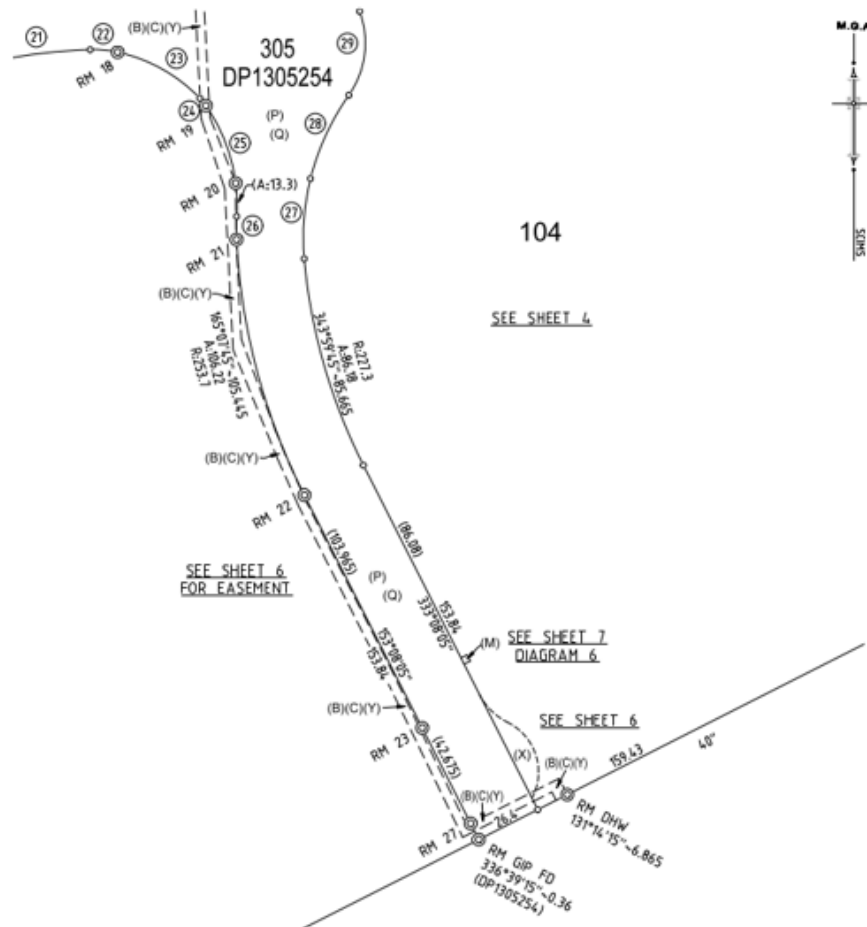

(M) EASEMENT FOR SWITCHING STATION 2.75 WIDE (NO.11)

Site and Warehouse Plan

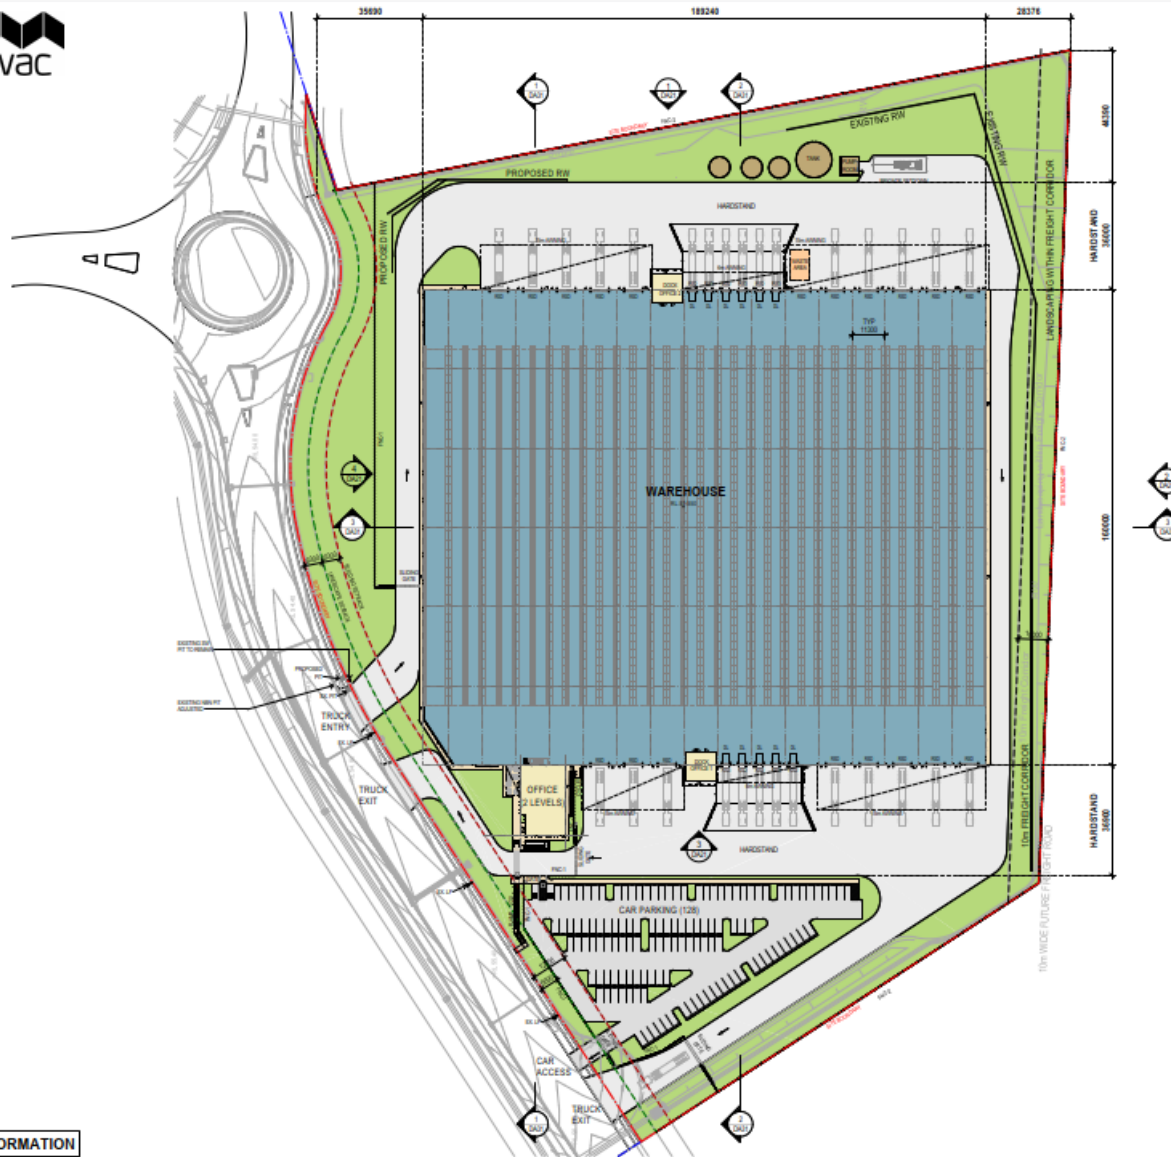


REVISION	DESCRIPTION	DATE
1	PROPOSED FACILITY	20/08/2024
A	FOR INFORMATION	20/08/2024
B	FOR INFORMATION	20/08/2024
C	FOR INFORMATION	20/08/2024
D	FOR INFORMATION	20/08/2024
E	FOR INFORMATION	20/08/2024
F	FOR INFORMATION	20/08/2024
G	FOR INFORMATION	20/08/2024
H	FOR INFORMATION	20/08/2024
I	FOR INFORMATION	20/08/2024
J	FOR INFORMATION	20/08/2024

DEVELOPMENT SCHEDULE	
SITE AREA	69,755 m ²
SITE COVERAGE	45%
WAREHOUSE GFA	30,000 m ²
OFFICE (2 LEVELS)	700 m ²
DOCK OFFICE GFA (2 OFF)	200 m ²
TOTAL GFA	30,900 m²
BUILDING AREA: 20%	
20% BUILDING AREA: 13,950 m ² (10% of 139,500 m ² and 10% of 139,500 m ²)	
WAREHOUSE AWNINGS	4,015 m ²
HEAVY DUTY PAVING	17,345 m ²
LIGHT DUTY PAVING	4,605 m ²
LANDSCAPING (24%)	16,860 m ²
(INCLUDES OF LANDSCAPING SETBACKS)	
PARKING	
CAR PARKING: 128	
CYCLE PARKING: 30	
CAR PARK REQUIRED: 124	
CAR PARK PROVIDED: 128	
(INCLUDES OF DOCKED AND OFF-ROAD)	
CYCLE PARKING: 30	
GENERAL LEGEND:	
BH	BOLLARD TYPE 1
COL-C	CONCRETE COLUMN
COL-S	STEEL COLUMN
RSD	ROLLER SHUTTER DOOR
FCC	FIRE CONTROL CENTRE
FCC-1	FIRE CONTROL CENTRE 1
THC-1	THUNDERBOLT CONTROL 1
THC-2	THUNDERBOLT CONTROL 2
THC-3	THUNDERBOLT CONTROL 3
THC-4	THUNDERBOLT CONTROL 4
THC-5	THUNDERBOLT CONTROL 5
THC-6	THUNDERBOLT CONTROL 6
THC-7	THUNDERBOLT CONTROL 7
THC-8	THUNDERBOLT CONTROL 8
THC-9	THUNDERBOLT CONTROL 9
THC-10	THUNDERBOLT CONTROL 10
THC-11	THUNDERBOLT CONTROL 11
THC-12	THUNDERBOLT CONTROL 12
THC-13	THUNDERBOLT CONTROL 13
THC-14	THUNDERBOLT CONTROL 14
THC-15	THUNDERBOLT CONTROL 15
THC-16	THUNDERBOLT CONTROL 16
THC-17	THUNDERBOLT CONTROL 17
THC-18	THUNDERBOLT CONTROL 18
THC-19	THUNDERBOLT CONTROL 19
THC-20	THUNDERBOLT CONTROL 20
THC-21	THUNDERBOLT CONTROL 21
THC-22	THUNDERBOLT CONTROL 22
THC-23	THUNDERBOLT CONTROL 23
THC-24	THUNDERBOLT CONTROL 24
THC-25	THUNDERBOLT CONTROL 25
THC-26	THUNDERBOLT CONTROL 26
THC-27	THUNDERBOLT CONTROL 27
THC-28	THUNDERBOLT CONTROL 28
THC-29	THUNDERBOLT CONTROL 29
THC-30	THUNDERBOLT CONTROL 30
THC-31	THUNDERBOLT CONTROL 31
THC-32	THUNDERBOLT CONTROL 32
THC-33	THUNDERBOLT CONTROL 33
THC-34	THUNDERBOLT CONTROL 34
THC-35	THUNDERBOLT CONTROL 35
THC-36	THUNDERBOLT CONTROL 36
THC-37	THUNDERBOLT CONTROL 37
THC-38	THUNDERBOLT CONTROL 38
THC-39	THUNDERBOLT CONTROL 39
THC-40	THUNDERBOLT CONTROL 40
THC-41	THUNDERBOLT CONTROL 41
THC-42	THUNDERBOLT CONTROL 42
THC-43	THUNDERBOLT CONTROL 43
THC-44	THUNDERBOLT CONTROL 44
THC-45	THUNDERBOLT CONTROL 45
THC-46	THUNDERBOLT CONTROL 46
THC-47	THUNDERBOLT CONTROL 47
THC-48	THUNDERBOLT CONTROL 48
THC-49	THUNDERBOLT CONTROL 49
THC-50	THUNDERBOLT CONTROL 50
THC-51	THUNDERBOLT CONTROL 51
THC-52	THUNDERBOLT CONTROL 52
THC-53	THUNDERBOLT CONTROL 53
THC-54	THUNDERBOLT CONTROL 54
THC-55	THUNDERBOLT CONTROL 55
THC-56	THUNDERBOLT CONTROL 56
THC-57	THUNDERBOLT CONTROL 57
THC-58	THUNDERBOLT CONTROL 58
THC-59	THUNDERBOLT CONTROL 59
THC-60	THUNDERBOLT CONTROL 60
THC-61	THUNDERBOLT CONTROL 61
THC-62	THUNDERBOLT CONTROL 62
THC-63	THUNDERBOLT CONTROL 63
THC-64	THUNDERBOLT CONTROL 64
THC-65	THUNDERBOLT CONTROL 65
THC-66	THUNDERBOLT CONTROL 66
THC-67	THUNDERBOLT CONTROL 67
THC-68	THUNDERBOLT CONTROL 68
THC-69	THUNDERBOLT CONTROL 69
THC-70	THUNDERBOLT CONTROL 70
THC-71	THUNDERBOLT CONTROL 71
THC-72	THUNDERBOLT CONTROL 72
THC-73	THUNDERBOLT CONTROL 73
THC-74	THUNDERBOLT CONTROL 74
THC-75	THUNDERBOLT CONTROL 75
THC-76	THUNDERBOLT CONTROL 76
THC-77	THUNDERBOLT CONTROL 77
THC-78	THUNDERBOLT CONTROL 78
THC-79	THUNDERBOLT CONTROL 79
THC-80	THUNDERBOLT CONTROL 80
THC-81	THUNDERBOLT CONTROL 81
THC-82	THUNDERBOLT CONTROL 82
THC-83	THUNDERBOLT CONTROL 83
THC-84	THUNDERBOLT CONTROL 84
THC-85	THUNDERBOLT CONTROL 85
THC-86	THUNDERBOLT CONTROL 86
THC-87	THUNDERBOLT CONTROL 87
THC-88	THUNDERBOLT CONTROL 88
THC-89	THUNDERBOLT CONTROL 89
THC-90	THUNDERBOLT CONTROL 90
THC-91	THUNDERBOLT CONTROL 91
THC-92	THUNDERBOLT CONTROL 92
THC-93	THUNDERBOLT CONTROL 93
THC-94	THUNDERBOLT CONTROL 94
THC-95	THUNDERBOLT CONTROL 95
THC-96	THUNDERBOLT CONTROL 96
THC-97	THUNDERBOLT CONTROL 97
THC-98	THUNDERBOLT CONTROL 98
THC-99	THUNDERBOLT CONTROL 99
THC-100	THUNDERBOLT CONTROL 100

FOR INFORMATION



PROPOSED INDUSTRIAL FACILITY
ASPECT INDUSTRIAL ESTATE - LOT 4



SITE AND WAREHOUSE PLAN

Date: 20/08/2024, Sheet: 1/10, Project No: DA82 J

Google Maps Street View



Google Maps Street View

