


14. Public Domain

28. A Public Domain Report has been supplied. This report solely addresses works occurring in the courtyard, which is publicly accessible private space. A diagram is to be submitted outlining the area of works proposed within the Public Domain (i.e. outside the property boundary). Works area may include works to roadways, laneways & footways. If more information is required contact the project officer named above





VEHICLE CROSSING
50mm Flagstone pavers to C of S specification on
30mm Cement mortar on
250mm Thickness concrete (f'c=32MPa)
reinforced with SL82 mesh top & bottom on
Compacted sub base CBR4

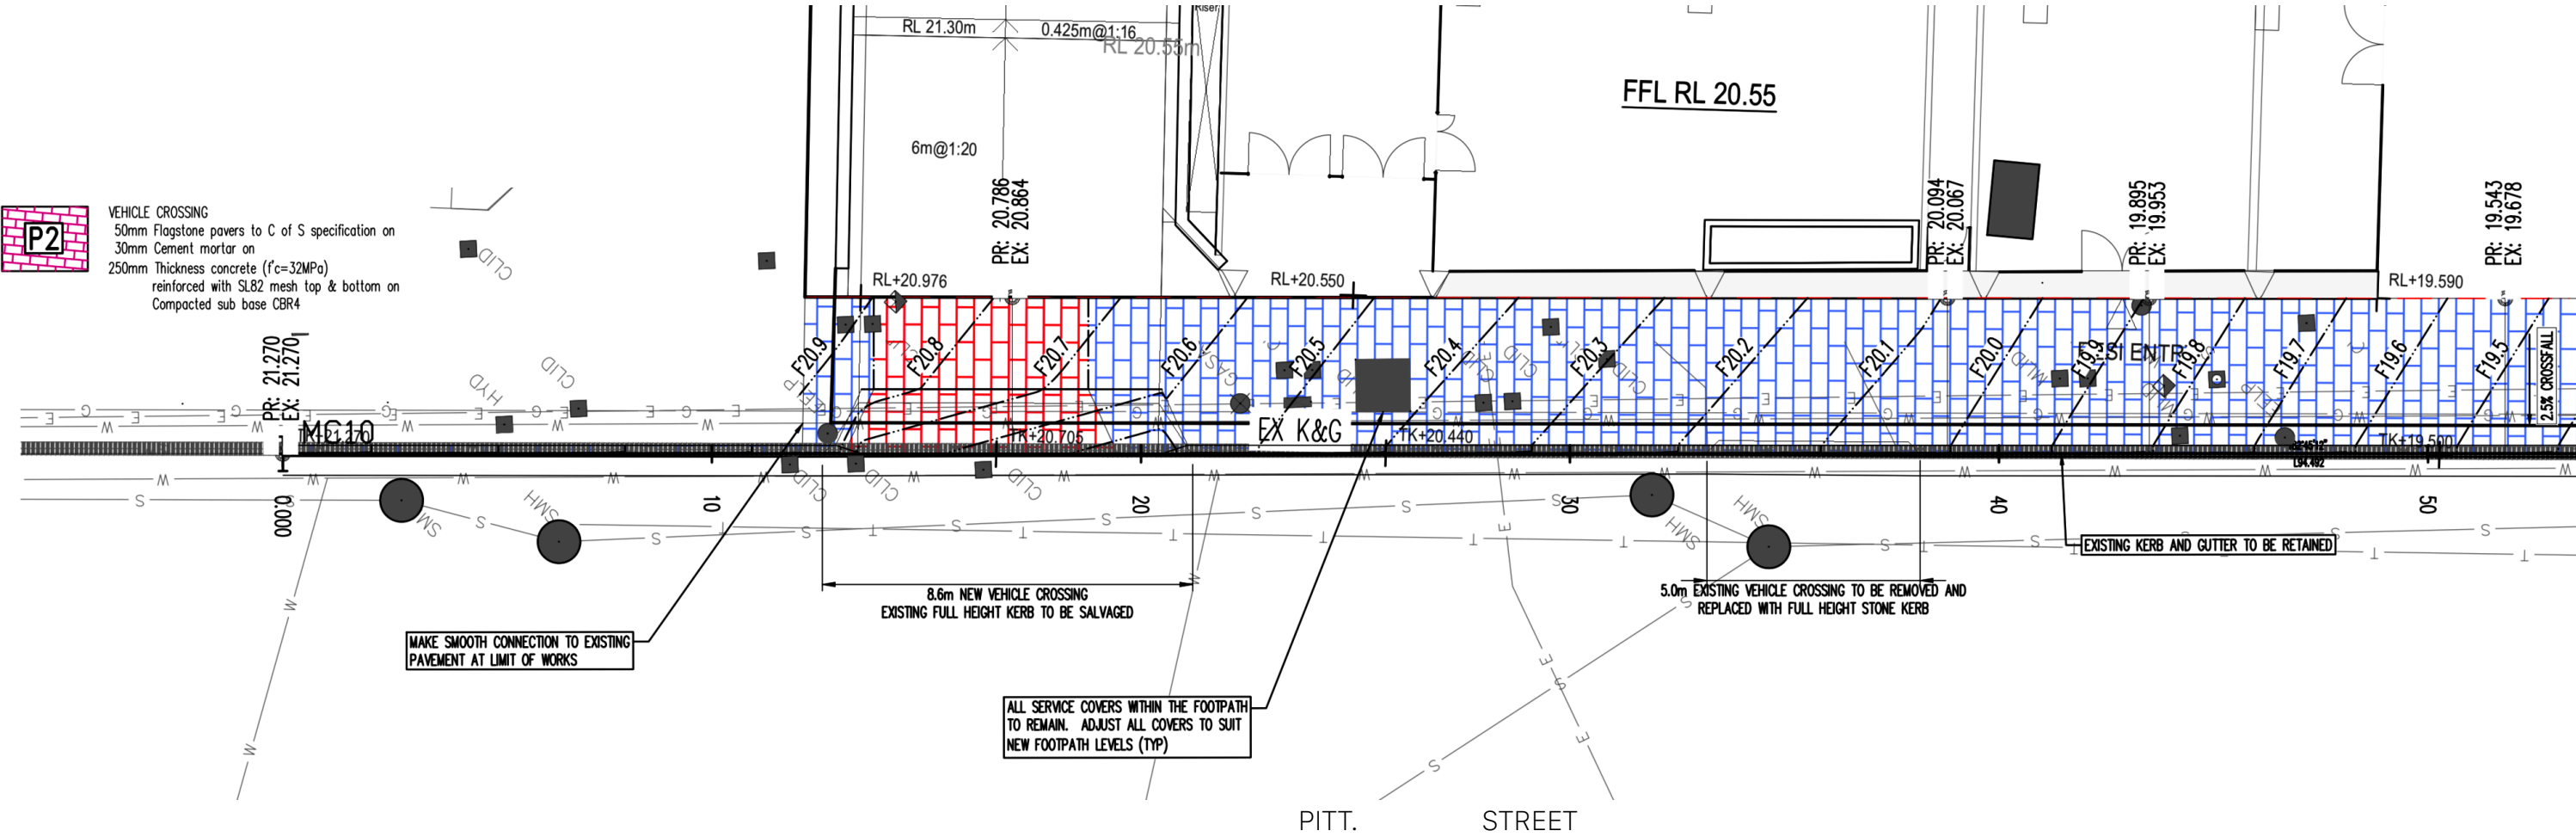

DETAIL A