

INDICATIVE SCHEDULE OF PLANT MATERIAL

(predominantly selected from the North City Council Native Plant List Port Jackson Catchment)

		SIZE	PLANTING
Trees			
Sydney Red Gum	Angophora costata	10lr pot	as indicated
Cabbage Palm	Livistonia australis	var. trunk sizes	as indicated
Coachwood	Ceraropetalum apetalum	200mm pot	2.0m approx
Lilypill	Acemena smithii	300mm pot	2.0m approx
Yellow Pittosporum	Pittosporum revolutum	200mm pot	1.5m approx
Black wattle	Callicoma serratafolia	200mm pot	2.0m approx
Blueberry Ash	Elaeocarpus reticulatus	300mm pot	2.0m approx
Coastal Banksia	Banksia integrifolia	200mm pot	1.5m approx
Water Gum	Tristanopsis laurina	200mm pot	1.5m approx
Shrubs / Understorey			
Broadleaf Grass Tree	Xanthorrhoea arborea	300mm pot	as indicated
Lantern banksias	Banksia ericifolia	300mm pot	900mm approx
Kunzea	Kunzea ambigua	200mm pot	900mm approx
NSW Christmas Bush	Ceratopetalum gummiiferum	200mm pot	2m approx
Long leaved Wax Flower	Eriostemon myrsinoides	200mm pot	50mm approx
Camellia	Camellia spp	200mm pot	90mm approx
Ground Covers			
Plax Lily	Dianella caerulea	150mm pot	500mm approx
Mat Rush	Lomandra longifolia	150mm pot	500mm approx
Native Violet	Viola hederacea	tube	scattered
Ferns			
Rough treefern	Cyathea australis	300mm pot	2.0m approx
Burrawang, Cycad	Macrozamia communis	300mm pot	800mm approx
Madenhair Fern	Adiantum aethiopicum	150mm pot	500mm approx
Vines and Climbers			
Clematis	Clematis aristata	150mm pot	as indicated
Climbing Guinea Flower	Hibbertia scandens	150mm pot	as indicated
Wonga Wonga Vine	Pandorea pandorana	150mm pot	as indicated

LEGEND


EXISTING TREES TO BE RETAINED AND PROTECTED DURING CONSTRUCTION. REFER DETAIL ARBORISTS REPORT. PROTECT CRITICAL ROOT ZONES. PROTECTION DURING CONSTRUCTION AS PER ARBORISTS RECOMMENDATIONS AND ARCHITECTURAL DEMOLITION DRAWING.

SYDNEY RED GUMS (Angophora costata) TO FRAME VIEW FROM THE BUILDING AND TO ENHANCE THE GILLIES STREET STREETScape

LIVISTONA PALM ACCENTS WITH VARYING TRUNK HEIGHTS TO PROVIDE ACCENT AND THE INTRODUCTION OF NATIVE GULLY SPECIES CONTINUING THROUGH THE SITE AS A THEMATIC ELEMENT.

BOUNDARY SCREEN PLANTING(5 - 7M) BLUEBERRY ASH, LILYPILLY

TURF TO WESTERN TERRACE & GILLIES STREET

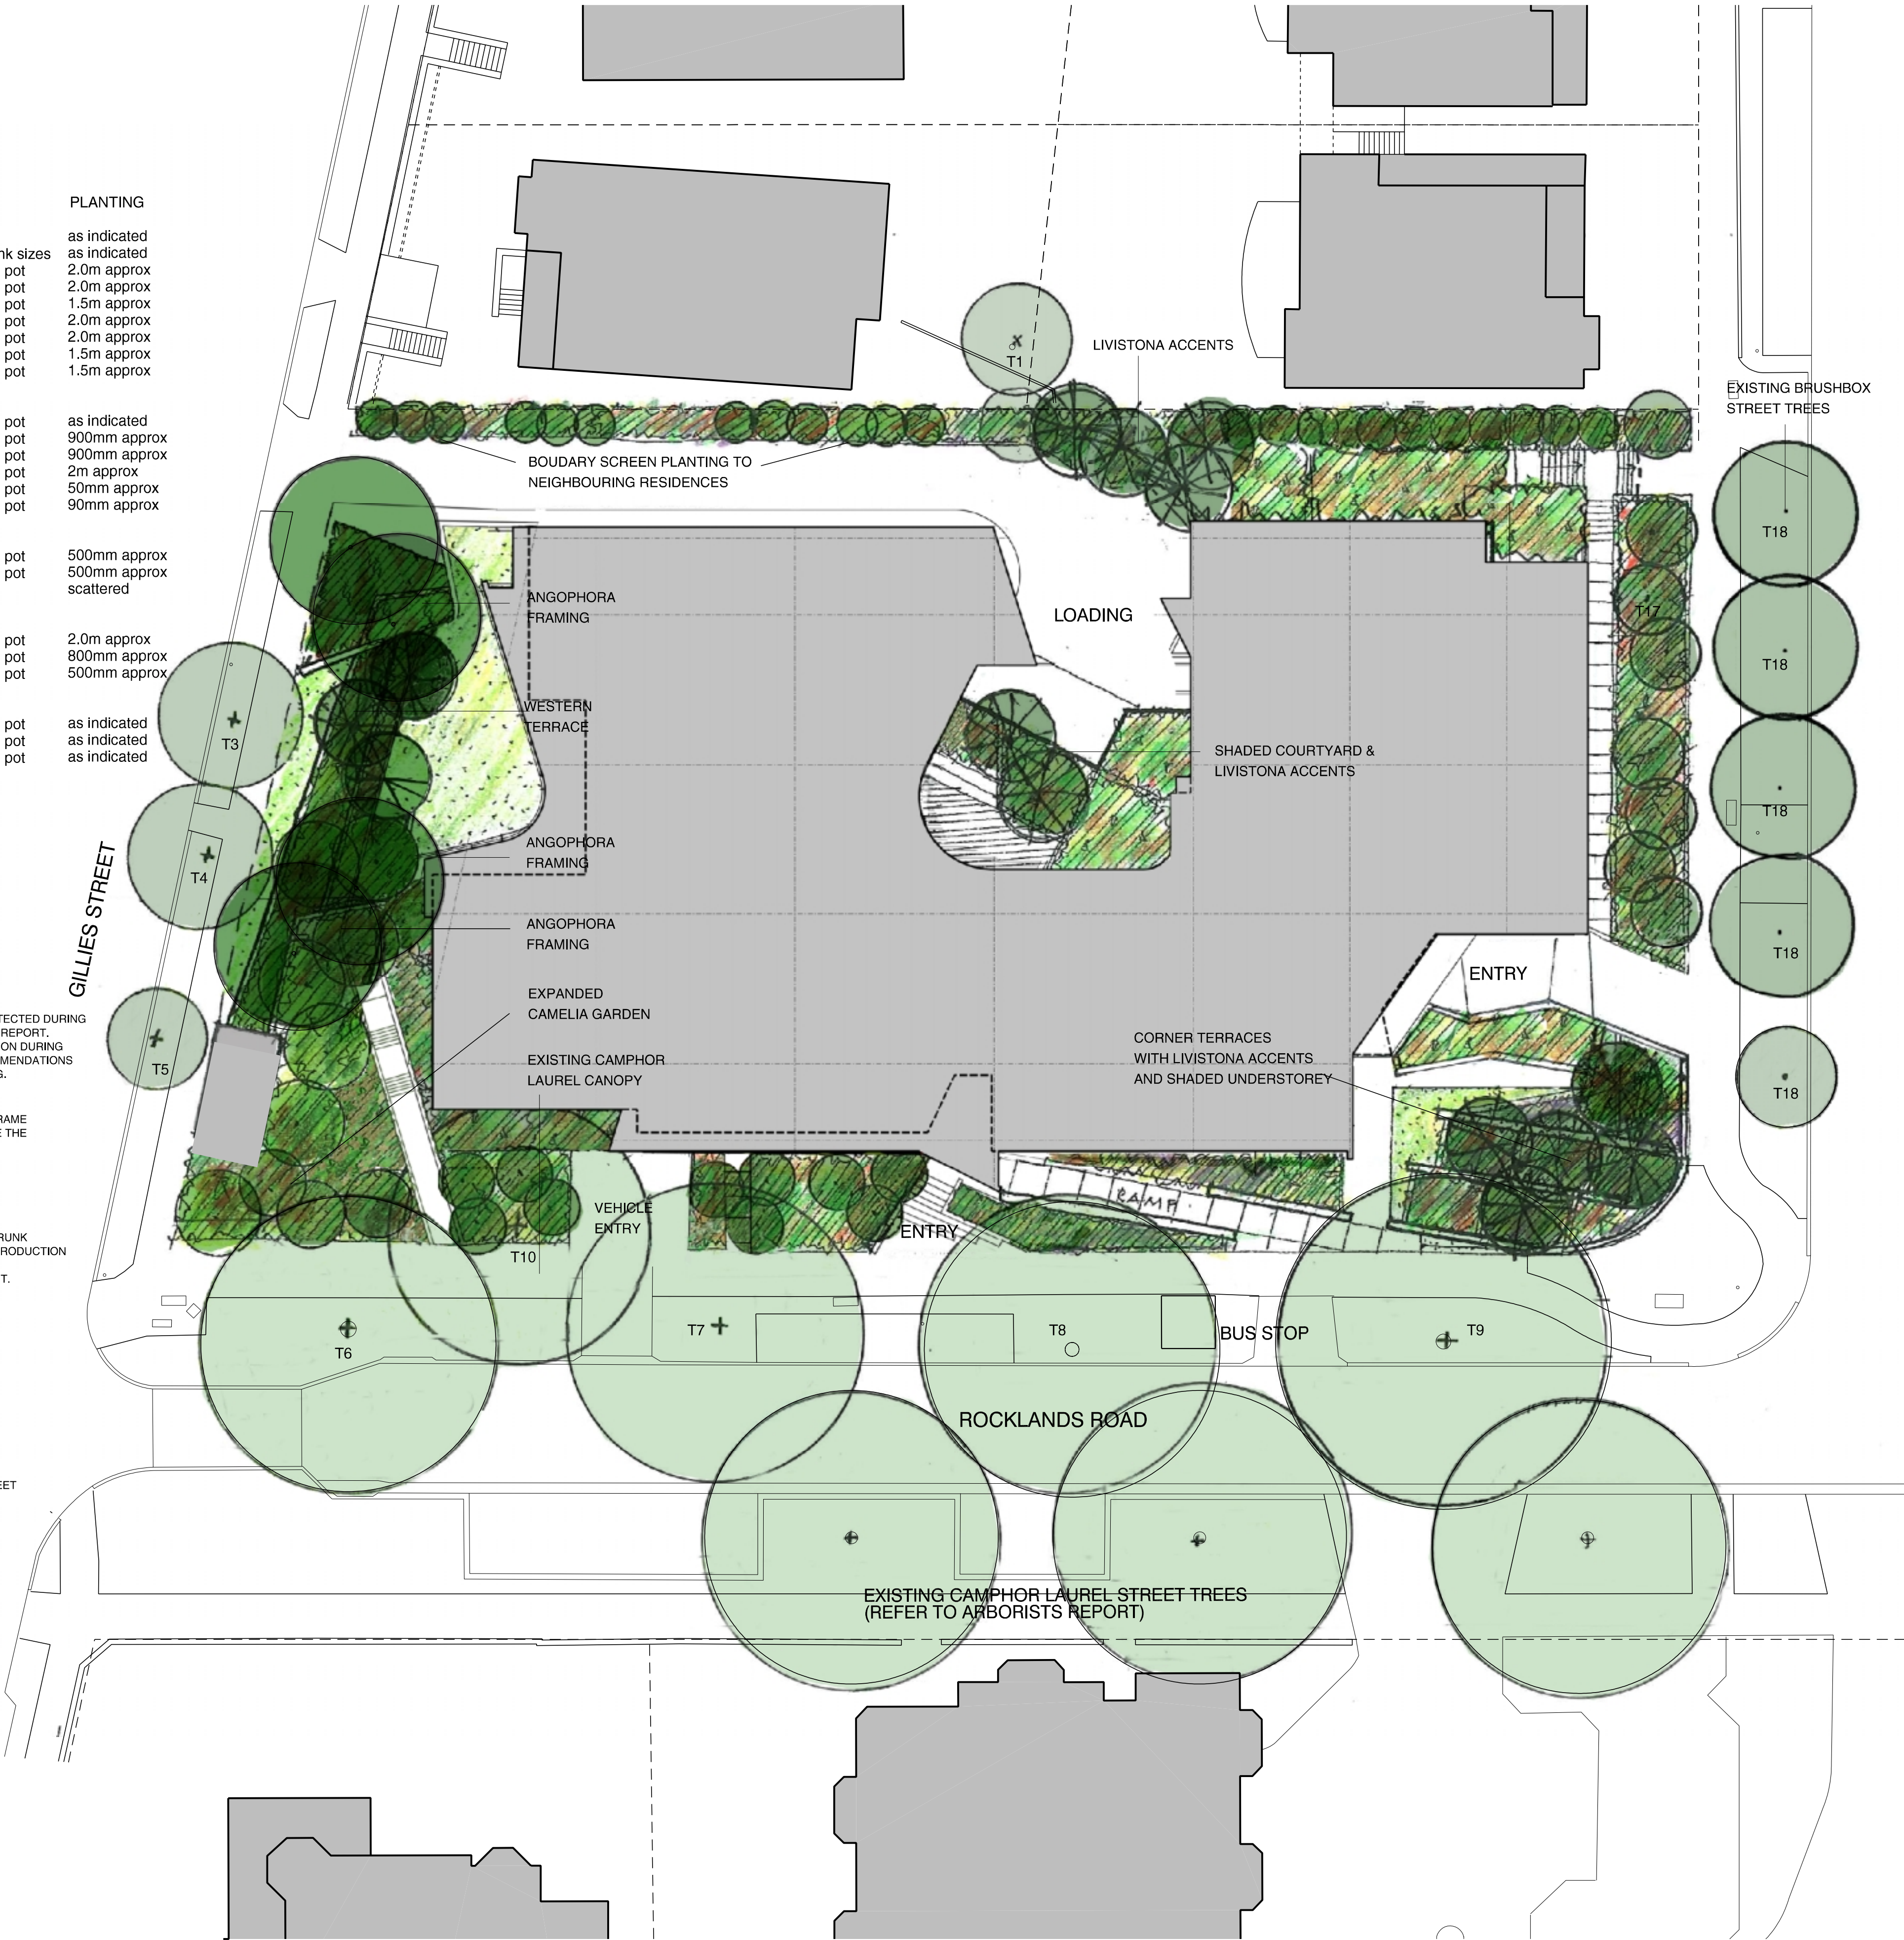

Livistona accent



Angophora feature to western boundary



Lilypill screening



Western terraces



Shaded Courtyard



Gully species understorey

WORK NEAR TREES

PROTECT EXISTING TREES TO BE RETAINED.
(REFER TO ARBORIST'S RECOMMENDATIONS)

GENERALLY;
* DO NOT ADD OR REMOVE TOPSOIL WITHIN THE DRIPLINE OF THE TREES, IF NECESSARY TO EXCAVATE IN THIS AREA SEEK ARBORISTS DIRECTION, GENERALLY USE HAND METHODS SUCH THAT ROOT SYSTEMS ARE UNDAUNGED, OPEN EXCAVATIONS UNDER TREE CANOPIES FOR MINIMUM TIME ONLY, BACKFILL WITH SITE OR IMPORTED TOPSOIL AS DIRECTED BY ARBORIST.
* AVOID COMPACTION OF GROUND UNDER TREES, ENSURE EXISTING LEVELS RETAINED WITHIN THE DRIPLINE WHERE POSSIBLE.
* PROVIDE TEMPORAY PROTECTIVE ENCLOSURES OR INDIVIDUAL BATTENING AS REQUIRED TO PROTECT TREES FROM DAMAGE.
* PREVENT DAMAGE TO TREE BARK AND TRUNKS, DO NOT ATTACH STAYS, GUYS AND THE LIKE TO TREES.
* CONSULT AN ARBORIST IF TREES REQUIRE PRUNING OF DEAD WOOD, CLEARANCE FOR PROPOSED BUILDING ENVELOPE OR IF ROOTS EXCEEDING 50MM DIAMETER REQUIRE CUTTING.

Client



Project Manager
Savills
Level 7
AMP Centre 50 Bridge St
Sydney NSW 2000
T 8215 8888 F 8215 8899
www.savills.com.au



Architects
Daryl Jackson Robin Dyke Pty Ltd Architects
64 Rose Street Chippendale NSW 2008
T +612 9319 2955 F +612 9698 1116
www.djrd.com.au



B	19/11/07	Part 3A Major Project Application
A	19/10/07	Initial Issue
Rev	Date	Amendment

AK
AK
Author

Project

JUSTINIAN HOUSE REDEVELOPMENT
Sydney Melanoma Unit - Mercy Foundation

18 - 22 Sinclair Street
Wollstonecraft NSW 2065

07 422

project number
**LANDSCAPE
CONCEPT PLAN**

drawing title

1 : 200 @ A1

0 2 4 6 8 10 12

11/19/2007

DA 0201
drawing no.

B
revision