

(3512) Southern Schools Cluster (SSC)  
79-81 Hoxton Park Road Liverpool  
Forbes St Liverpool  
Liverpool  
NSW 2170 Australia



MAIL TYPE  
General Correspondence

MAIL NUMBER  
BM+G-GCOR-000066

REFERENCE NUMBER  
ADCO Con-GCOR-000839

## Re: GANSW Comment on Booster for NLPS SSD

From Mr Antonio Canuto - Blakett Maguire + Goldsmith Pty Ltd  
To Elizabeth Creswell - ADCO CONSTRUCTIONS PTY LIMITED  
Cc (5) Ms Philippa Walker - Blakett Maguire + Goldsmith Pty Ltd (+4 more...)  
Sent Friday, 17 December 2021

### MESSAGE

Hi Elizabeth,

My understand is that the only method of concealing a fire brigade booster assembly permitted by AS 2419.1 - 2005 is via a cabinet designed in accordance with this standard (50mm high signage, clear space in front of the assembly maintained, cabinet generally painted red, etc.).

There would be no opportunity to provide any further shielding or screening as this would obstruct the clear space between the booster and the hardstand (the road). Further noting that providing any form of landscaping in front of the booster would not meet FRNSWs operational requirements (based on past experience of having to concrete areas in front of booster assemblies where FRNSW has picked this up as an issue on site).

Note that this is more of a fire services designer question so they should also review and provide any further comment if necessary.

Regards,

**Antonio Canuto**

Senior Building Surveyor



M: 0472 722 160 T: 02 9211 7777 E: [antonio@bmplusg.com.au](mailto:antonio@bmplusg.com.au) W: [bmplusg.com.au](http://bmplusg.com.au) L: Connect on LinkedIn



This e-mail and attachments (if any) is intended only for the addressee(s) and is subject to copyright. This e-mail contains information which may be confidential or privileged. If you are not the intended recipient please advise the sender by return e-mail, do not use, or disclose the contents and delete message and any attachments from your system. Unless specifically stated, this e-mail does not constitute formal advice or commitment by the sender or Blakett Maguire + Goldsmith Pty Ltd or any of its subsidiaries.


210557

**From:** E Creswell  
**Sent:** 17/12/2021 10:49:37 AM AEDT (GMT +11:00)  
**To:** Antonio Canuto, Bree Jachin, Philippa Walker  
**Cc:** Andrew Healy, Jon Kane, James Kim, Paulo Ruiz  
**Mail Number:** ADCO Con-GCOR-000839  
**Subject:** GANSW Comment on Booster for NLPS SSD

Hi Antonio,

We have received the below comment on the NLPS SSD from the Government Architect's Office.

the booster near the main entrance, should be concealed to improve the amenity of this public zone.	S
---	---

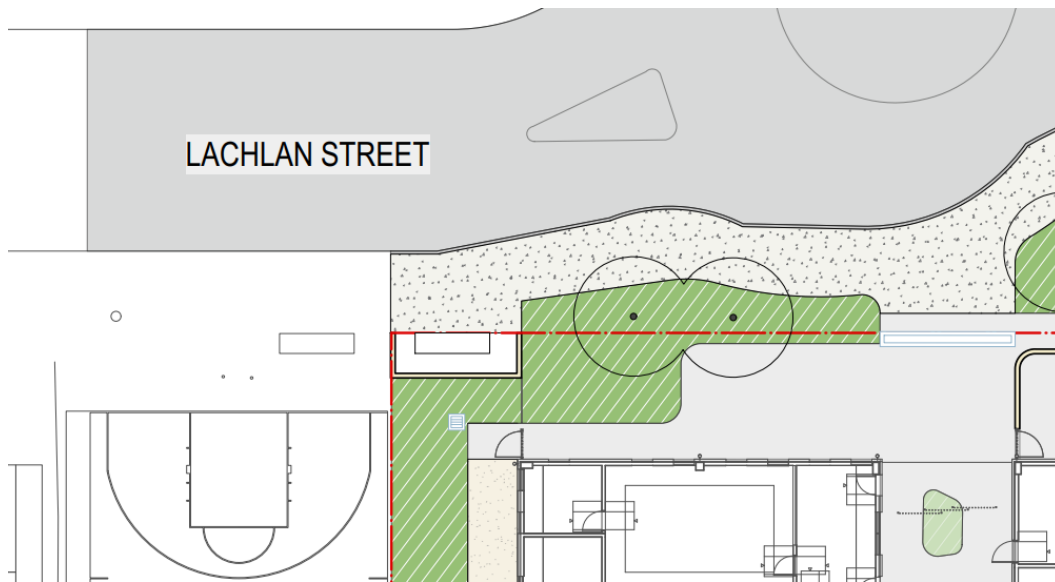

Are you able to provide a very brief statement today explaining to GANSW that, from a compliance perspective, we cannot screen the front of the booster?

Thanks

**Elizabeth Creswell**

Senior Design Manager

**ADCO Constructions Pty Ltd**

Level 2, 7-9 West Street, North Sydney NSW 2060

**T** 02 8437 5000 **M** 0418 592 825

**W** [www.adcoconstruct.com.au](http://www.adcoconstruct.com.au)

