

4293 NGS Park Campus Stage 1

Finishes Schedule

Revision A – Concept Draft

1 GENERAL



1.1 CROSS REFERENCES






General requirements




General: Conform to the *General requirements* worksection and matching worksections noted for each type of finish.





2 SELECTIONS

2.1 INTERIOR FINISHES SCHEDULE





Code/image	Item	Location	Description	Spec ref and notes	Rev
AP01 (Includes TRIM01) Refer to TRIM01  & TRIM01 	Acoustic panel – Pin-board	Generally Throughout Refer to drawings	Brand: Autex Contact: Simon Grove Mobile: 0414 507 434 Product: Composition Dimensions: Roll 1.22 x 25M, 10-12mm thick NRC value – 0.40 (with no air) Finish: 100% PET (60% recycled) Colour: Myst Note: Refer to manufacturers trimming guidelines and installation instruction.	0511	A





Code/image	Item	Location	Description	Spec ref and notes	Rev
AP02  +  +  +  + 	Suspended Acoustic - Baffle	Second Floor: Camp Fire Refer to drawings	Supplier Woven Image Contact: Ida Traagstad Mobile: 0420 421 768 Product: Array Acoustic ceiling System & Hardware Range: Array Viaduct Dimensions: 2400 x 297 x 12mm Finish: 100% PET & Powder Coated Alloy 6060 Colour: <ul style="list-style-type: none"> - 500 - 454 - 908 Hardware: Array White Fire Rating: Group 1 Note: Install to Manufacturers Instruction	0511	A




Code/image	Item	Location	Description	Spec ref and notes	Rev
BAT01 	Batten - Aluminium	First Floor: Design/Make Second Floor: Design/Make Refer to drawings	Brand: Deco Batten Contact: Trish Nicholls Ph: 02 9748 1800 Product: Timber-look aluminium battens Dimensions: 50 x 25mm x 6.5m Colour: Natural Curly Birch Lead-time: XXX	0191	A
CPT01 	Carpet tile	First Floor: Camp Fire Second Floor: Camp Fire Refer to Floor Finishes drawings	Brand: Miliken Ontera Contact: Deepak Chopra Ph: 0401 538 810 Collection: Momentum, Figment Details: Tufted, textured loop Wear-On® Nylon Type 6,6. 16 ounce backing to comply with EFSG Dimensions: 500 x 500 x 8.8mm Colour: Scent Code: FIG172 Underlay: CushionbacRE Lead-time: 2-3 weeks - Installation: Monolithic  - Note: 39.3% Recycled Content Reaction to Fire Rating Mean: AS/NZS9239.1-2003 CRF: 6.1kW/m2 Smk Dvp: 262 %.min	0652 15 year Warranty	A



Code/image	Item	Location	Description	Spec ref and notes	Rev
CPT02 	Carpet tile	First Floor: T/S Second Floor: T/S Refer to Floor Finishes drawings	Brand: Miliken Ontera Contact: Deepak Chopra Ph: 0401 538 810 Collection: Momentum, Figment Details: Tufted, textured loop Wear-On® Nylon Type 6,6. 16 ounce backing to comply with EFSG Dimensions: 500 x 500 x 8.8 mm Colour: Imagine Code: FIG55 Underlay: CushionbacRE Lead-time: 2-3 weeks - Installation: Monolithic  - Note: 39.3% Recycled Content Reaction to Fire Rating Mean: AS/NZS9239.1-2003 CRF: 6.1kW/m2 Smk Dvlp: 262 %.min	0652 15 year Warranty	A
CPT03 	Carpet tile	First Floor: Support, Staff, Withdrawal Second Floor: Support, Staff, Withdrawal Refer to Floor Finishes drawings	Brand: Miliken Ontera Contact: Deepak Chopra Ph: 0401 538 810 Collection: Momentum, Figment Details: Tufted, textured loop Wear-On® Nylon Type 6,6. 16 ounce backing to comply with EFSG Dimensions: 500 x 500 x 8.8 mm Colour: Facade Code: FIG41 Underlay: CushionbacRE Lead-time: 2-3 weeks - Installation: Monolithic  - Note: 39.3% Recycled Content Reaction to Fire Rating Mean: AS/NZS9239.1-2003 CRF: 6.1kW/m2 Smk Dvlp: 262 %.min	0652 15 year Warranty	A






Code/image	Item	Location	Description	Spec ref and notes	Rev
FAB01 	Upholstery	Refer to drawings	Brand: Instyle Contact: Alvin Cruz Mobile: 0422 373 033 Product: Uber Width: 137cm Pattern Repeat: 14.4cmH ,12cmV Fire Rating: AS/NZS 1530.3 Finishes: 57% cotton, 43% polyester Ecopolyester Colour: Famous Lead time: 4-5 weeks - Abrasion: 25,000 Martindale 46,500 Wyzenbeek	0551	A
FAB02 	Upholstery	Refer to drawings	Brand: Instyle Contact: Alvin Cruz Mobile: 0422 373 033 Product: Uber Width: 137cm Pattern Repeat: 14.4cmH ,12cmV Fire Rating: AS/NZS 1530.3 Finishes: 57% cotton, 43% polyester Ecopolyester Colour: Cool Lead time: 4-5 weeks - Abrasion: 25,000 Martindale 46,500 Wyzenbeek	0551	A
FAB03 	Upholstery	Refer to drawings	Brand: Instyle Contact: Alvin Cruz Mobile: 0422 373 033 Product: Uber Width: 137cm Pattern Repeat: 14.4cmH ,12cmV Fire Rating: AS/NZS 1530.3 Finishes: 57% cotton, 43% polyester Ecopolyester Colour: Rich Lead time: 4-5 weeks - Abrasion: 25,000 Martindale 46,500 Wyzenbeek	0551	A
FBT04 	Upholstery	Refer to drawings	Brand: Woven Image Contact: Ida Traagstad Mobile: 0420 421 768 Range: Focus HP with BIOAM, Nanotex & Durablock protection Width: 140cm Finishes: 100% polyester Colour: 621 Lead time: 11 calendar days - Abrasion: 100,000 Martindale.	0551 0572 Compliance: Fire - in accordance with AS1530.3	A




Code/image	Item	Location	Description	Spec ref and notes	Rev
FBT05 	Upholstery	Refer to drawings	Brand: Woven Image Contact: Ida Traagstad Mobile: 0420 421 768 Range: Focus HP with BIOAM, Nanotex & Durablock protection Width: 140cm Finishes: 100% polyester Colour: 540 Lead time: 11 calendar days - Abrasion: 100,000 Martindale.	0551 0572 Compliance: Fire - in accordance with AS1530.3	A
LAM01 	Laminate finish	First Floor: Design /Make, Bag Storage, T/S Second Floor: Design/Make, T/S Joinery Item: Refer to drawings	Brand: Surteco Product: Lamitak Contact: Marjolaine Weibel M: 0435 888 436 Product: Prefinished Board Dimensions: Panel 2400 x 1200, 18mm thick Colour: Celadon Finish: Dri-matt Code: SCX 1159D ABS: Matching Lead time: 2 weeks	0551	A
LAM02 	Laminate finish	First Floor: T/S Second Floor: T/S Joinery Item: Refer to drawings	Brand: Laminex Contact: Neil MacLaine M: 0407750460 Product: Lamiwood EO MR MDF Dimensions: Panel 2400 x 1200, 32mm thick Colour: Oyster Grey Finish: Natural Code: 327 ABS: Matching	0551	A
LAM03 	Laminate finish-kick	First Floor: Design /Make, T/S Second Floor: Design /Make, T/S Joinery Item: Refer to drawings	Brand: Laminex Contact: Neil MacLaine M: 0407750460 Product: Laminate Dimensions: Panel 2400 x 1200, 32mm thick Colour: Oyster Grey Finish: Natural Code: 327 ABS: Matching	0551	A



Code/image	Item	Location	Description	Spec ref and notes	Rev
MAT01 		Generally - entry doors Refer to drawings	Supplier: Spectrum Floors Contact: Genevieve Smith, M: 0437 991 086 Product: Nuway Tuftiguard Speciguard Details: Module 2 closed, buffed wiper strips Size: Refer to drawings, depth 12mm – internal use only Finish: Clear anodised aluminium frame and structure, PVC scraper bars Colour: Charcoal inserts	065.	00
PFI01 	Paint finish – Interior Feature Ceiling	First Floor: Design/Make, Bag Storage Second Floor: Design/Make Refer to drawings	Brand: Dulux Contact: Jess Lindsay, Specification & Project Services Consultant NSW, M. 0434 864 114 Finish: - Walls: Low sheen - Ceiling : Flat Colour: Mystified Code: S23D1 - LRV: 70.00	0671p	A
PFI02 	Paint finish – Interior, Feature Wall	Ground Floor: Store First Floor: Design/Make / WCs Second Floor: Design/Make / WCs Refer to drawings	Brand: Dulux Contact: Jess Lindsay, Specification & Project Services Consultant NSW, M. 0434 864 114 Finish: DuSpec AU_SD12758, 3 coat system for dark feature colours - Walls: Satin (Dulux recommended undercoat + Porter's Aqua Enamel Satin) Colour: Dilly Blue Code: S36B8 - LRV: 9.00	0671p	A
PFI03 	Paint finish – Interior	Walls – Generally (unless otherwise stated) Refer to drawings	Brand: Dulux Contact: Jess Lindsay, Specification & Project Services Consultant NSW, M. 0434 864 114 Finish: - Walls: Low sheen Colour: Fair Bianca Half Code: PN1G1 - LRV: 92.00	0671p	A

Code/image	Item	Location	Description	Spec ref and notes	Rev
PFI04 	Paint finish – Interior	Skirting - SK01 Refer to drawings	Brand: Dulux Contact: Jess Lindsay, Specification & Project Services Consultant NSW, M. 0434 864 114 Finish: - Anodised Aluminium: Weathermax HBR Two Pack Gloss Spec Sheet AU_SC11835 Colour: Fair Bianca Half Code: PN1G1 - LRV: 92.00	0671p	A
PFI05 	Paint finish – Interior Solid Core Doors	Refer to Door & Window Schedule	Brand: Dulux Contact: Jess Lindsay, Specification & Project Services Consultant NSW, M. 0434 864 114 Finish: - Doors: Gloss Colour: Grey Pail Code: SG6G1 - LRV: 56.00	0671p	A
PFI06 	Paint finish – Interior Set Ceilings	Generally throughout unless otherwise specified Refer to drawings	Brand: Dulux Contact: Jess Lindsay, Specification & Project Services Consultant NSW, M. 0434 864 114 Finish: - Non-wet areas: Flat & - Wet areas: Low gloss with anti-microbial additive as recommended fit for purpose by painter Colour: Vivid White Code: 1W - LRV: 94.00	0671p	A

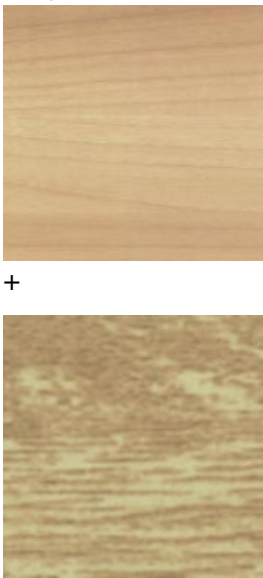
Code/image	Item	Location	Description	Spec ref and notes	Rev
PFI07 - Clear	Painted finish – sealer & anti-slip coating	TMB01 – timber flooring Refer to drawings	Brand: Gripguard Finish: Duragrip PU Anti-Slip Sealer Details: R10 slip resistance Colour: Clear - Note: Anti-slip sealer is self-sacrificing and requires re-application consistent with level of use and foot traffic. Client to follow floor cleaning & maintenance regime as supplied by product manufacturer. To meet anti-slip requirements for the lifetime of the timber floor, SHAC recommend professional surface testing and re-application of floor coating in accordance with manufacturer's recommendation.	0671p	A
RF01 	Resilient finish – Floor vinyl	First Floor: Design/Make Second Floor: Design/Make Refer to Floor Finishes drawings	Supplier: Gerflor Contact: Kelcie Davies Ph: 1800 060 785 Product: Premium Comfort Range: Indiana Details: Heterogeneous compact Slip Rating: P4/R10 Dimensions: 210 lm x 2m x 3-3.3mm Colour: Nauru Code: 3788 Welding: 05852599 Lead Time: 10 weeks LRV: 42 Reaction to Fire Rating Mean: AS/ISO 9239.1-2003 CHF: 6.5 kW/m2 Smk Dvlp: 339%min	0651	A
SK01 	Skirting – Flush	Generally Refer to drawings	Brand: Alubase Product: Alubase Shadowline Details: Concealed screw fixed Dimensions: 100 H (to shadow line) x 10D x 3600Lmm Code: SLS1090-36 Finish/colour: PFI02 Note: 100mm shadowline align with skirting and kick	0511	A

Code/image	Item	Location	Description	Spec ref and notes	Rev
SLS01 	Solid Surface – benchtop	First Floor: Design/Make Second Floor: Design/Make Joinery Item: Refer to drawings	Brand: Dupont Product: Corian Contact: Rachel Polidano M. 0418 578 363 Dimensions: 3658 x 760 x 12mm Finish: Everest Note: Work must be carried out by a DuPont Certified fabricator installer	0551	A
TIL01  +  Grout Colour	Floor Tile	WC's Generally Refer to drawings	Supplier: Earp Bros Contact: Sophie March, M: 0411 253 315 Product: Dolmix Light Dimensions: 600 x 600 x 9mm Finish: Slip resistant Code: TFA24DLS Lead-time: 14 weeks Details: Pendulum P5 + Epoxy Grout: Mapei Kerapoxy CQ Colour: 110/ Manhattan 2000	0631	A
TIL02  +  Grout Colour	Skirting Tile	WC's Generally Refer to drawings	Refer to TIL01 above Dimensions: 100 x 600 x 9mm	0631	A

Code/image	Item	Location	Description	Spec ref and notes	Rev
TIL03 - +  Grout Colour	Wall Tile	WC's Generally Refer to drawings	Brand: Earp Brothers Contact: Sophie March Ph: 0411 253 315 Product: Manhattan Colour: White Finish: Matt Dimensions: 100 x 605 x 8mm Lead-time: 8-10 weeks + Epoxy - To 1500(H)mm on walls around toilets and basins Grout: Mapei Kerapoxy CQ Colour: 110/ Manhattan 2000 + Grout: Mapei Ultracolor Plus Colour: 110/ Manhattan 2000 Installation note: Tile set out to be approved by architect prior to installation. Grout lines to align with floor tile.	0631	A
TMB01 	Timber - Stair	First Floor: Camp Fire Second Floor: Camp Fire Refer to drawings	Brand: Britton Timbers Product: Tasmanian Oak Dimensions: XXX	0551	A
TRIM01 	Tile Capping – exposed edges & Acoustic wall lining trim	WC's & Cleaners Generally + AP01 Joinery Item: Refer to Drawings	Brand: DTA Architectural Trims Product: L-Shape Trim Dimensions: 2.5mm thick leading edge, internal depth nom. 10 - 12mm to suit tile thickness Finish: Aluminium, brushed finish Code: ALA3.(10/12)BF Notes: - TIL01 trim to cap exposed edges & WC skirting tile - Trim to sides of each panel of AP01, Mitred edges / cuts to be finished, ensuring no sharp edges. Trim to exposed edges PLY01 (Black) Mitred edges / cuts to be finished, ensuring no sharp edges	0631	A

Code/image	Item	Location	Description	Spec ref and notes	Rev
TRIM02 	Edge Treatment	Between Carpet Tile / Resilient Flooring Refer to drawings	Brand: MJS Floorcoverings (or equal) Contact: 07 3347 7300 Item: Aluminium Vinyl Ramp Details: Angle Floor Trim Dimensions: 3.3m long, 2.5mm leading edge, depth/length to suit vinyl / carpet thickness + vinyl / rubber thickness (size as determined by flooring contractor) Finish/Colour: Clear anodised aluminium Code: (TBC) - Installation method: Install to manufacturers recommendation. For concrete installation use Maxbond SLS as recommended. All floor finishes to be flush - Note: Trim to transition between flooring finishes. Flooring contractor to confirm trim type and product code as required to suit installation requirements	0191 0651 0652	A
TRIM03 Angle - Aluminium 	Threshold strip trim	Between Resilient Floorings and Tiles Refer to Floor Finishes drawings	Brand: MJS Floorcoverings, Ph. 07 3347 7300 (or approved equal) Product: Aluminium Angle Floor Trim Finish: Clear anodised aluminium Size: 21mm W x 3m L, to suit 10mm thick tile (tiler to confirm) Refer TIL01 Code: ALA310 Installation method: Install to manufacturers recommendation. For concrete installation use Maxbond SLS as recommended - Note: Carpet tile and TIL01 to be flush. Resilient flooring to be flush	0191 0631 0652	A

2.2 EXTERIOR FINISHES SCHEDULE

Code/image	Item	Location	Description	Spec ref and notes	Rev
BAT01	Refer to Interior Finishes				
BAT02 	Batten - Aluminium	Refer to drawings	Brand: Deco Batten Contact: Trish Nicholls Ph: 02 9748 1800 Product: Timber-look aluminium battens Dimensions: XXX Colour: Natural Curly Birch + Natural Tasmanian Oak Lead-time: XXX	0191	A