



# **APPENDIX C LANDSCAPE PLANS**

Minto Resource Recovery Facility Response to Submissions



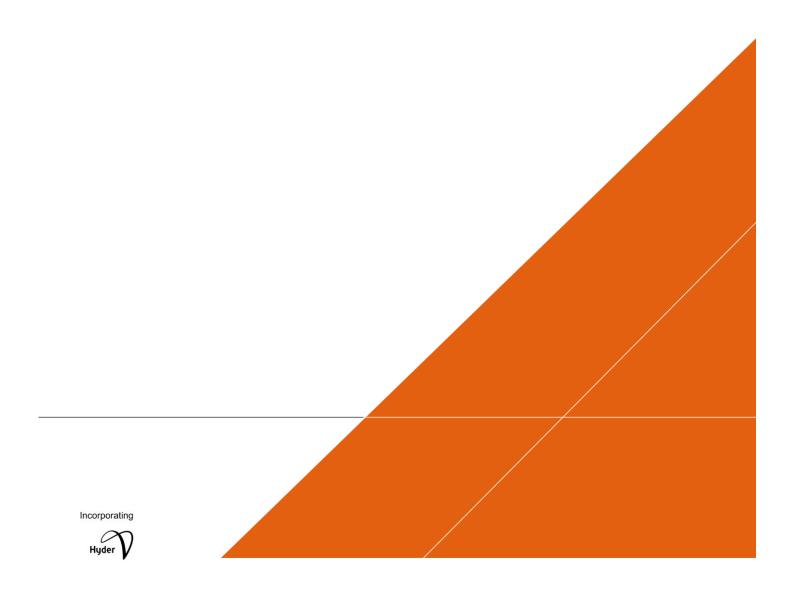

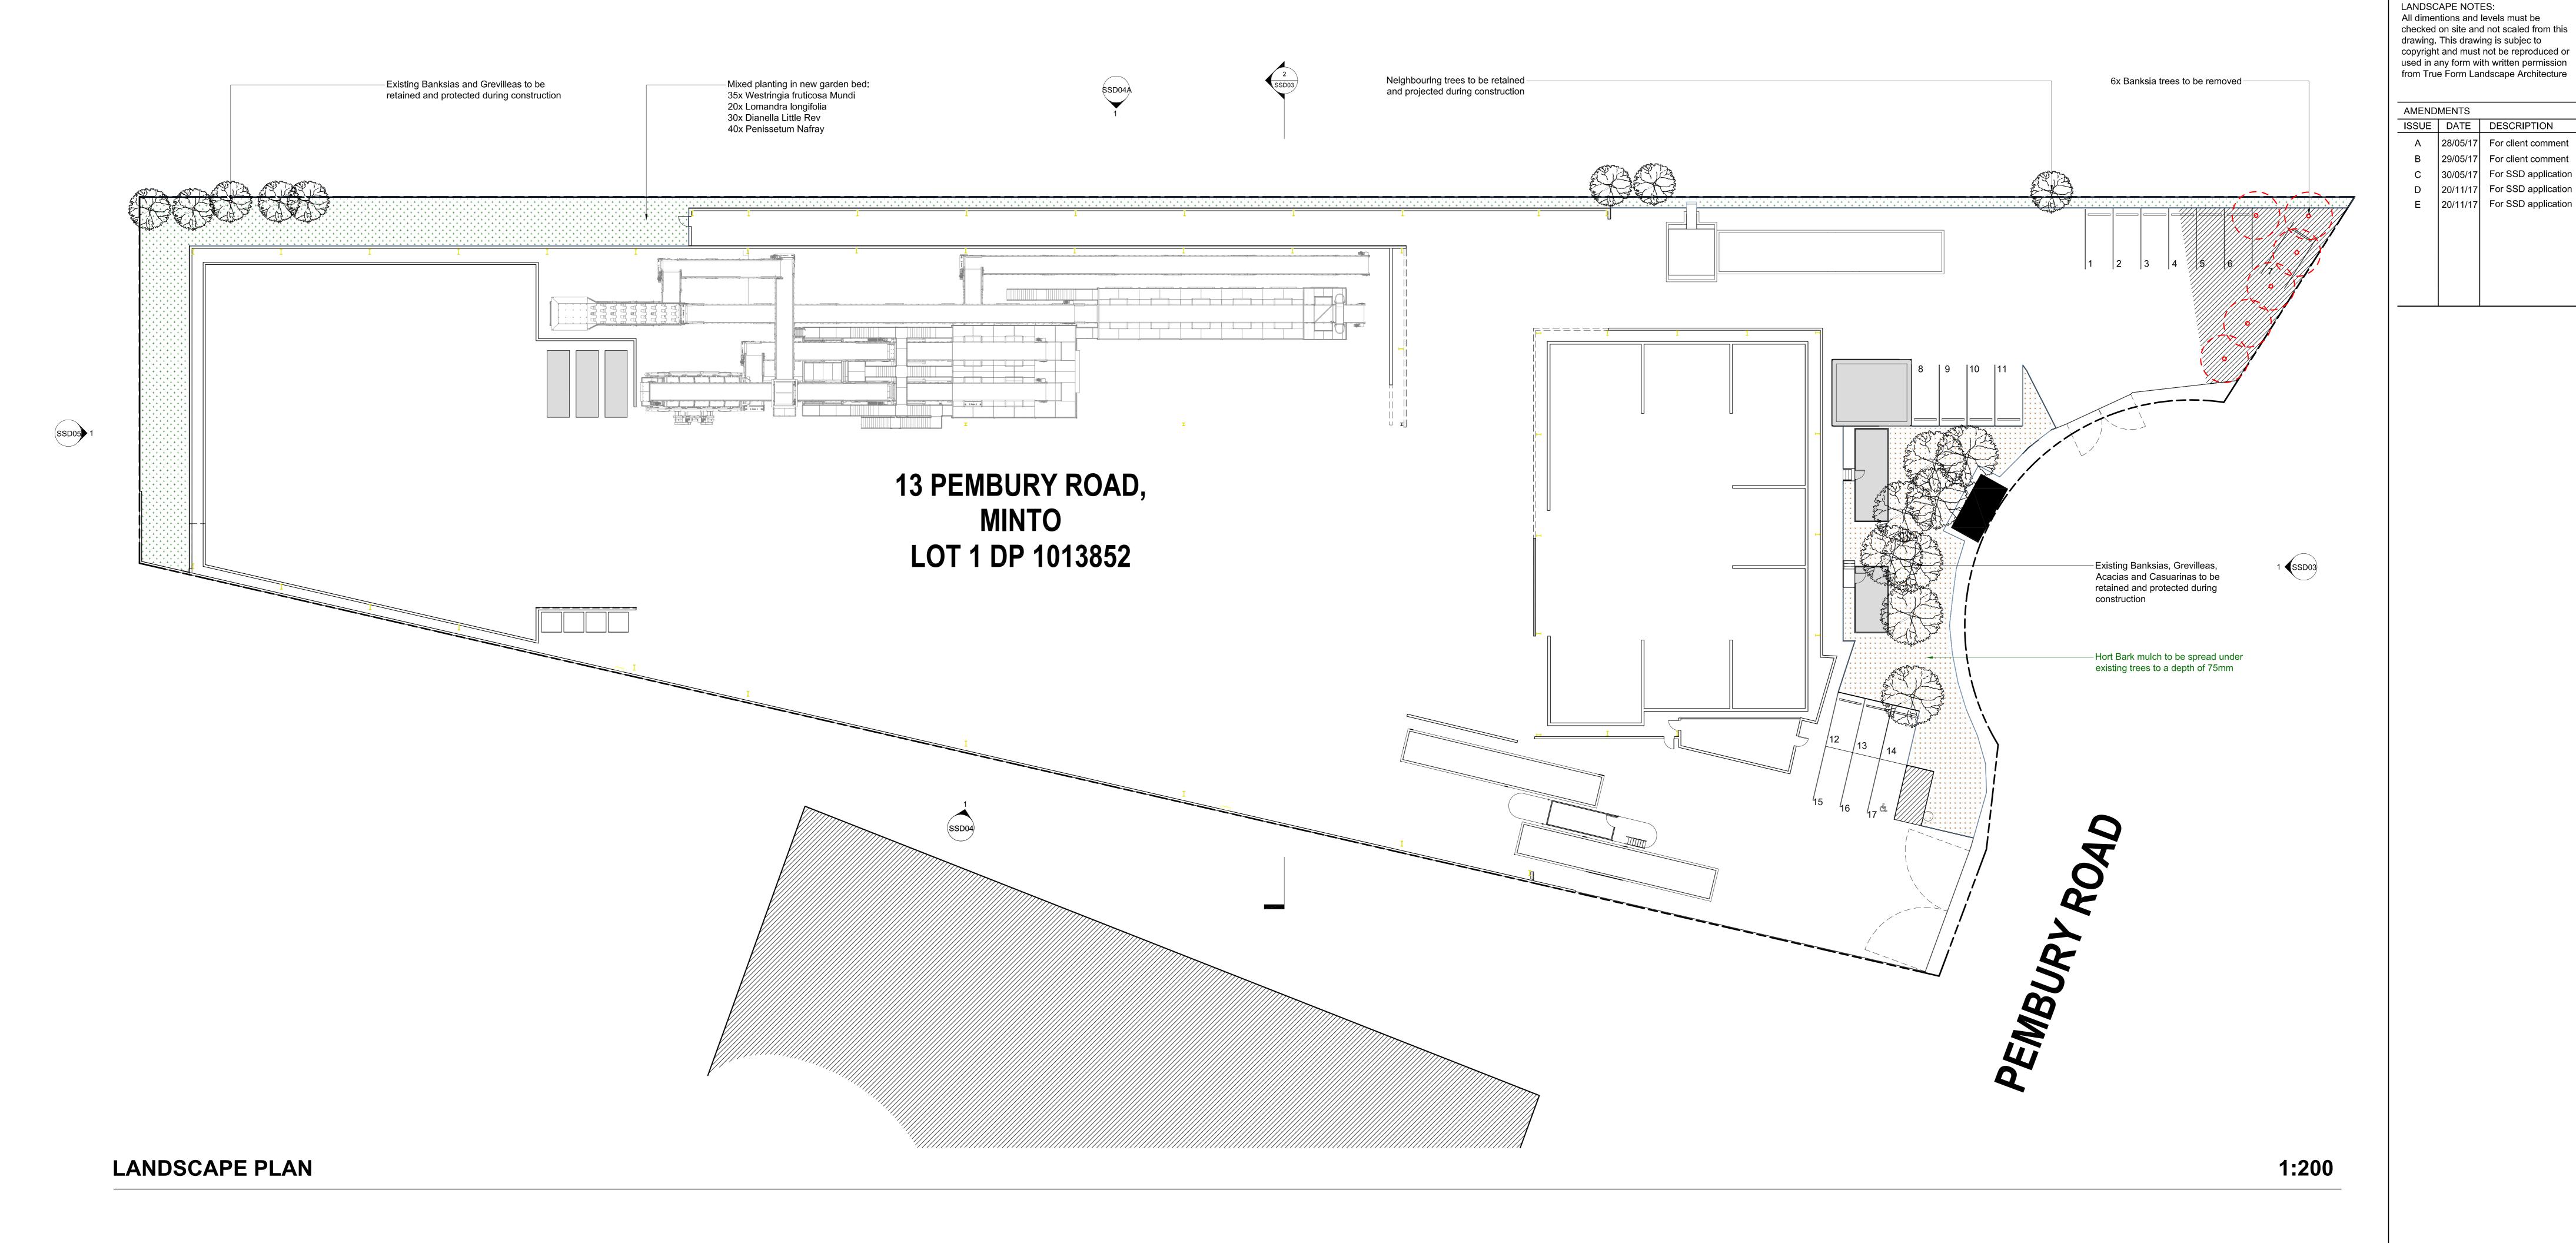

Pennisetum Nafray



Dianella Little Rev





Planting as specified

clear of plant stems

100mm layer of mulch placed -

Excavate planting hole 100mm wider and 100mm deeper than plant container. Backfill and

Detail 1 - General planting

1:20

consolidate topsoil mixture. Fertilise as specified

Lomandra longifolia


# PLANTING SCHEDULE

			INDICATIVE	CONTAINER	MATURE
CODE	BOTANIC NAME	COMMON NAME	QUANTITY	SIZE	HEIGHT
SHRUBS					
Wm	Westringia Mundi	Coastal Rosemary	35	140mm	0.6m
GROUND	OCOVERS AND GRASSES				
Dr	Dianella Little Rev	Flax Lilly	30	140mm	0.4m
Ll	Lomandra longifolia	Lomandra	20	140mm	0.7m
Pn	Pennisetum Nafray	Sw amp Fox Tail Grass	40	140mm	0.8m



Westringia Mundi



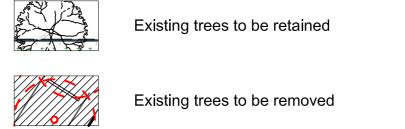

# SPECIFICATION

Any existing trees and vegetation to be retained shall be preserved and protected from damage of any sort during the execution of landscape work. In particular, root systems of plants must not be disturbed. Any nearby site works should be carried out carefully using hand tools. Trees shall not be removed or lopped unless specific written permission to do so is given or is indicated on plan. Storage of materials, vehicle parking, disposal of liquids, machinery repars and refuelling, site office and sheds, and the lighting of fires shall not occur within (3) metres of any existing or new trees. Do not stockpile soil, rubble or other debris cleared from the site, or building materials within the drip line of existing or new trees.

# 2. SOIL PREPARATION

All proposed planting areas are to be deep ripped to 300mm. 75mm depth of A.N.L Organic Garden Mix to be imported and combined with 25mm Greenlife compost or approved equivalent. Care to be taken to hand cultivate in any area where existing

# tree roots exist to preserve health of trees.

3. NEW PLANTINGS Holes for plants are to be large enough to take the root ball with additional space for back fill with soil prepared as in 2.

# 4. MULCHING

All planted areas to be mulched with Hort Bark to a depth of 75mm with catchment dish to be left around base of plants. 5. FERTILISER

On completion of work all planting areas are to be fertilised with a slow release fertiliser (Scotts Sierrablen Flora) which is to be sufficiently watered.

# 6. IRRIGATION

Automatic watering system to be selected and installed to extend to all landscaped areas included in the works. The Landscape Contractor is to liase with Council as necessary to ensure that the irrigation system conforms with all Water Board, Council and Australian rules.

Turf to be Kykuyu. To be laid on 50mm topsoil over 200mm deep rotary hoed prepared area. Area to be turfed to be evenly graded. Adequate drainage to be provided under lawn area.

# 8. RETAINING WALLS

All retaining walls over 900mm to be to engineers specifications.

All civil, structural and hydraulic work associated with this project shall be to consulting engineers details. All external stairs to be constructed in accordance with Clause D2.13 of the Building Code of Australia.

Unless supplied, installed and maintained by True Form Landscape Architecture, no responsibility will be taken for the vigor, condition or life span of any plant material.

# 11. TREE PROTECTION NOTES

Tree protection fences, preferably using galvanised pipe at 2.4m spacings and connected by securely attached chain mesh fencing to a min. 1.8m height. The fence should be located as close as practically possible to the drip line of the trees. Installing trunk protection where fencing if impossible by placement of 2m lengths of 50 x 100mm hardwood timbers spaced at 150mm CTS and secured by 2mm wire at 300mmm spacing. The protection is to be maintained in good condition for the duration of the works.

# 12. COPYRIGHT

The design of this project is copyright and shall not be copied or reproduced in any way without the prior written permission of True Form Landscape Architecture.



20/11/17 For SSD application

www.trueformlandscapes.com.au

CLIENT:

DEWCAPE PTY LTD

ADDRESS:

13 Pembury Rd Minto NSW 2566

DRAWING TITLE:

LANDSCAPE PLAN

SCALE: 1:200 @ AO DESIGNED: RH CHECKED: RH

START DATE: 21/09/17

JOB NUMBER 2017-026 ISSUE