

1. THIS SEDIMENT AND EROSION CONTROL WORKS FOR THE SITE SHALL BE CARRIED OUT IN ACCORDANCE WITH THE REQUIREMENTS OF "MANAGING URBAN STORMWATER - SOILS AND CONSTRUCTION, 4TH EDITION (2004)" BY LANDCOM.

2. AS REQUIRED BY BLACKMOUNT CITY COUNCILS, EROSION CONTROL MEASURES WILL BE REQUIRED DURING THE CONSTRUCTION OF ALL IDEAL OPENPITS/BUILDING WORKS. IT SHALL BE THE CONTRACTORS RESPONSIBILITY THAT THE WORKS ARE CARRIED OUT IN ACCORDANCE WITH THE SEDIMENT AND EROSION CONTROL PLAN AND COUNCILS REQUIREMENTS.
3. THE CONTRACTOR SHALL ENSURE THAT ALL SUBCONTRACTORS ARE INFORMED OF THEIR RESPONSIBILITIES IN MINIMISING THE POTENTIAL FOR SOIL EROSION AND POLLUTION TO DOWNSLOPE AREAS.
4. THE NON-DISTURBED PORTION OF THE CATCHMENT OUTSIDE OF OPERATING AREA IS TO BYPASS THE BASINS BY MEANS OF LINED CATCH DRAINS.
5. WHERE PRACTICABLE, THE SOIL EROSION HAZARD SHALL BE KEPT AS LOW AS POSSIBLE. LIMITATIONS TO ACCESS ARE TO BE VIA THE SEALED ACCESS ROAD OF CAPTAIN COOK DRIVE UNLESS OTHERWISE APPROVED BY COUNCIL.
6. ENSURE THAT ALL DRAINS ARE OPERATING EFFECTIVELY AND SHALL IMPLEMENT ANY NECESSARY REPAIRS. REMOVE TRAPPED SEDIMENT WHERE THE CAPACITY OF THE TRAPPING DEVICE FALLS BELOW 80%.
7. CONSTRUCT ADDITIONAL EROSION OR SEDIMENT CONTROL WORKS AS MAY BE APPROPRIATE TO ENSURE THE PROTECTION OF DOWNSLOPE LANDS AND WATERWAYS.
8. MAINTAIN EROSION AND SEDIMENT CONTROL MEASURES IN A FULLY FUNCTIONING CONDITION AT ALL TIMES UNTIL THE SITE IS REHABILITATED.
9. REMOVE TEMPORARY SOIL CONSERVATION STRUCTURES AS THE LAST ACTIVITY IN THE REHABILITATION PROGRAM.

1. CLEARLY VISIBLE BARRIER FENCING SHALL BE INSTALLED AT THE DISCRETION OF THE SITE SUPERINTENDENT TO ENSURE TRAFFIC CONTROL AND PROHIBIT UNNECESSARY SITE DISTURBANCE. VEHICULAR ACCESS TO THE SITE SHALL BE LIMITED TO ONLY THAT ESSENTIAL FOR CONSTRUCTION WORK AND SHALL ENTER THE SITE ONLY THROUGH THE STABILIZED ACCESS POINT.


2. SOIL MATERIALS SHALL BE REPLACED IN THE SAME LAYERS THEY WERE REMOVED FROM THE SHOULDER, *IF* ALL SUBSOLUS ARE TO BE BURNED AND TOPSOIL IS TO BE REAPPLIED ON THE SURFACE AFTER THE COMPLETION OF WORKS.
3. ALL DISTURBED AREAS ARE TO BE STABILIZED WITHIN SEVEN WORKING DAYS OF THE COMPLETION OF LAND SHAPING. ALL DISTURBED AREAS ARE TO BE PROTECTED SO THAT THE LAND IS PERMANENTLY RECOVERED WITHIN SIX MONTHS. TOPSOIL SHALL BE REAPPLIED OVER THE SITE OTHER THAN TOPOGRAPHICALLY PROTECTED AREAS. TOPSOIL SHALL BE REAPPLIED TO TOPSOIL SURFACES AND THE SITE SHALL BE REGENERATED IN ACCORDANCE WITH THE FOLLOWING:

WORKS SHALL BE UNDERTAKEN IN THE FOLLOWING SEQUENCE

WORKS SHALL BE UNDERTAKEN IN THE FOLLOWING SEQUENCE

1. INSTALLED SEDIMENT FENCING AND CUT GRASS TO MEET THE REQUIREMENTS OF THE SEDIMENT AND EROSION CONTROL PLAN. WASTE COLLECTION BINS SHALL BE INSTALLED ADJACENT TO SITE OFFICE.
2. CONSTRUCTION STABILISED SITE ACCESS IN ACCORDANCE WITH INTERVALL **CONTRACT'S** REQUIREMENTS.
3. REDIRECT CLEAN WATER AROUND THE CONSTRUCTION SITE.
4. INSTALL SEDIMENT CONTROL PROTECTION MEASURES AT ALL NATURAL AND MAN-MADE DRAINAGE STRUCTURES, MAINTAIN UNTIL ALL THE DISTURBED AREAS ARE STABILIZED.
5. CLEAR AND STRIP THE WORK AREAS, MINIMISE THE DAMAGE TO THE GRASS AND LOW GROUND COVER OF NON-DISTURBED AREAS.
6. ANY DISTURBED AREAS OTHER THAN BUILDING WORK AREAS SHALL IMMEDIATELY BE COVERED WITH SITE GRASSING. WINDY DAYS OF CARRYING BUILDING PPA AREAS SHALL BE COVERED WITH BITUMEN EMULSION AS SPECIFIED.
7. APPLY PERMANENT STABILISATION TO SITE (LANDSCAPING).

CD → CD → CATCH DIVERSION DRAIN

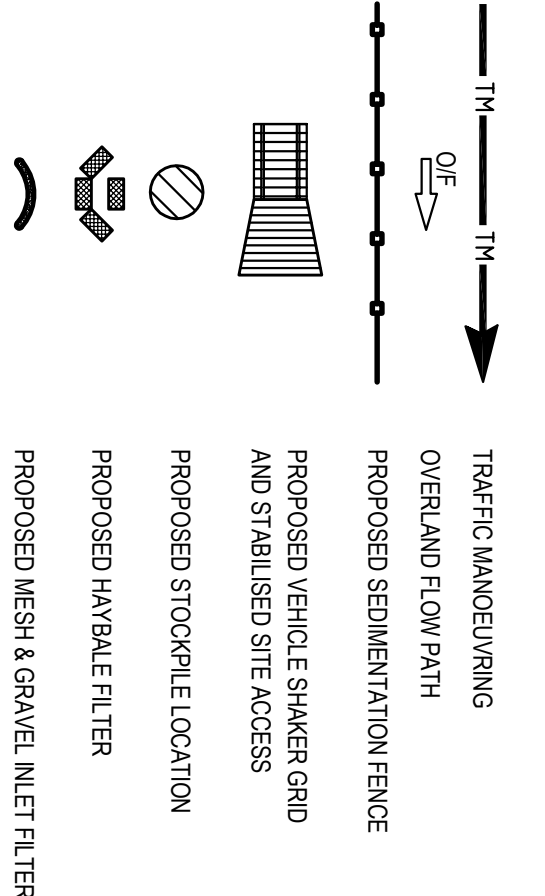

FOR DA ONLY

[illegible]