





© FRANCIS-JONES MOREHEN THORP PTY LTD 2020 ABN 28 101 197 219 NOMINATED ARCHITECT: RICHARD FRANCIS-JONES (REG NO 5301)





Agonis flexuosa



LEGEND

legend

0 2.5 5

- GENERAL NOTES ALL DIMENSIONS AND EXISTING CONDITIONS
- SHALL BE CHECKED AND VERIFIED BY THE CONTRACTOR BEFORE PROCEEDING WITH THE WORK.
- ALL LEVELS RELATIVE TO 'AUSTRALIAN HEIGHT DATUM'.
- DO NOT SCALE DRAWINGS.
 USE FIGURED DIMENSIONS ONLY.

TREE PROTECTION

In order to ensure the retention of the trees to be retained the following measures are to be taken: All detailed architectural, building, engineering (structural, stormwater and drainage, services) and landscape documentation submitted for the construction certificate application shall show the retention of these trees, with the position of their trunks and full diameter of their canopies clearly shown on all drawings.

All detailed documentation submitted for the construction certificate application shall show no alteration in the existing soil levels, cutting or battering of the existing soil profile as per the Arboricultural Assessment. A qualified site arborist is to be engaged for the duration of the works to administer compliance with those conditions relating to trees on the site, with all the site staff to adhere to the arborists instructions.


The trees are to be physically protected by the installation of a steel mesh/chainwire as specified by the site arborist. This fencing shall be installed prior to the commencement of construction works, and shall remain in place until all works are completed, with signage containing the following words: 'tree protection zone, do not enter, clearly displayed and permanently attached. Within this zone there is to be no storage of materials or machinery or site office/sheds, nor is cement to be mixed or chemicals spilt/disposed of and no stockpiling of soil or rubble. Any works required within this zone (only as approved on the construction certificate) shall be under the direction of, and to the satisfaction of, the site arborist.


All site services shall be located as far as practically possible from the trunks of all these trees, with any excavations within 5 metres of either trunk for footings, structures, services, pipes, stormwater infiltration systems etc. to be performed by hand, with any roots encountered to be cut cleanly by hand and the affected area backfilled as soon as practically possible. Composted organic material (vitagrow landcure or similar equivalent) shall be provided to a depth of 100mm within the fenced off protection area, and shall be maintained for the duration of the works.


Irrigation shall be supplied to the trees, within the fenced off area, for the duration of the works to ensure adequate moisture levels are maintained.

NOTE

Arboricultural Assessment - refer report by Moore Trees Arboricultural Services 04/2019

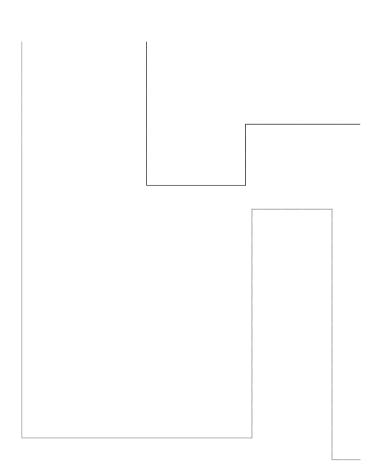



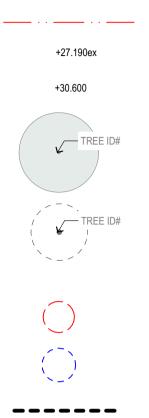

EXISTING SPOT LEVEL

PROPOSED SPOT LEVEL

EXISTING TREE TO BE RETAINED IN ACCORDANCE WITH ARBORICULTURAL ASSESSMENT

EXISTING TREE TO BE REMOVED

STRUCTURAL ROOT ZONE

TREE PROTECTION ZONE

HOLDING LINE DURING EARLY WORKS

_	03	28/4/20	SSDA Submission	CD	
	02	17/4/20	SSDA Submission	CD	
	01	9/4/20	For 70% Schematic Design	IL	
	rev	date	name	by	chk

fjmt studio architecture interiors landscape urban co sydney melbourne uk Level 5, 70 King Street **t** +61 2 9251 7077 **w** fjmtstudio.com

project

Darlington Public School Golden Grove Street Darlington NSW 2008

title

Landscape Plans Tree Management Plan SSDA

scale 1:250 @ A1 first issued

project code sheet no. DTPS 8003

revision 03

9/4/20

fjmt